

FCC Part 15B Compliance Test Report

Test Report no.:	Salo_FCC_0619_01.doc	Date of Report:	09.05.2006
Number of pages:	11	Customer's Contact person:	Juha Lahti
Testing laboratory:	TCC Nokia Salo Laboratory P.O. Box 86 Joensuunkatu 7H / Kiila 1B FIN-24101 SALO, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 45220	Client:	Nokia Corporation P.O. Box 86 Joensuunkatu 7 FIN-24101 SALO, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 44277
FCC listing no.:	533467		
IC recognition no.:	5385		
Tested devices/ accessories:	BT-Headset HS-50W / AC- Charger AC-3		
FCC ID:	PYAWEO3M	IC:	661V-WE03M
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart B, ANSI C63.4 (2003), ICES-003, CISPR 22 and IC standards RSS-132, RSS-133 and RSS-210. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Sami Lehtonen, System Manager

1. Summary for FCC Part 15B Compliance Test Report

Date of receipt	25.04.2006
Testing completed	27.04.2006
The customer's contact person	Juha Lahti
Test Plan referred to	T:\Projects\accessor\BT_Headset\HS-50W_51W_52W\HS-50W_51W_52W.xls
Notes	-
Document name	T:\Projects\accessor\BT_Headset\HS-50W_51W_52W\EMC\Results\FCC\Salo_FCC_0619_01.doc

1.1. EUT and Accessory Information

The EUT is a Bluetooth device. WCDMA band is tested in idle mode. Bluetooth is tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
BT-Headset	HS-50W	000154	B2 28 4	2.2	RC16.60	11200
BT Headset	HS-50W	Lillan-086-B2.3b4	B2.28.4	2.2	16.63	11134
AC- Charger	AC-3E	3943495211040200962;0675370	2.2	2.1	-	11201

1.2. Summary of Test Results

Bluetooth:

Section in CFR 47	Section in ICES-003	Name of the test	Result
15.107, a	5.3	AC powerline conducted emissions	PASSED
15.109, a	5.5	Radiated emissions	PASSED

PASSED
FAILED
NP

The EUT complies with the essential requirements in the standard.
The EUT does not comply with the essential requirements in the standard.
The test was not performed by the TCC Nokia Salo Laboratory.


CONTENTS

1. Summary for FCC Part 15B Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results.....	2
2. AC powerline conducted emissions (FCC §15.107, ICES-003 section 5.3).....	4
2.1. Test setup	4
2.2. Test method and limit.....	4
2.3. Bluetooth Test results	5
3. Radiated emissions (FCC §15.109, ICES-003 section 5.5, RSS-132 6.6, RSS-133 9) 6	6
3.1. Test setup	6
3.2. Test method and limit.....	6
3.3. Bluetooth Test results	7
4. Test Equipment.....	10
4.1. Conducted measurements	10
4.2. Radiated measurements	10

2. AC powerline conducted emissions (FCC §15.107, ICES-003 section 5.3)

EUT with DUT number	HS-50W, DUT 11133
Accessories with DUT numbers	AC-3E, DUT 11129
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21 / 42 / 101.3
Date of measurements	26.04.2006
Measured by	Sami Lehtonen

2.1. Test setup



2.2. Test method and limit

The measurement is made according to ANSI C63.4-2003 as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [dB\mu V] = U_{RX} + A_{TOT}$$


Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable and pulse limiter attenuations.

CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

2.3. Bluetooth Test results

Channel 40 / 2442 MHz

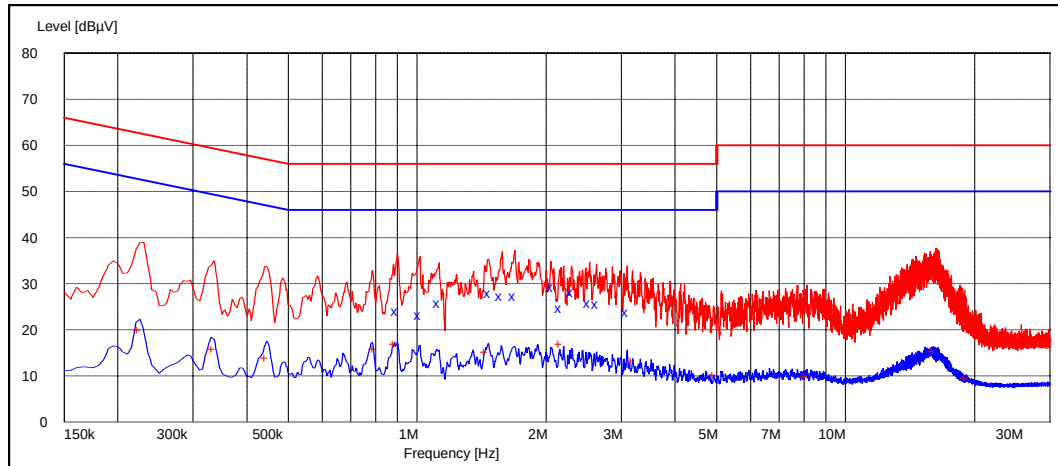

Quasi peak (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.900000	24.00	N	PASSED
1.015000	23.20	L1	PASSED
1.125000	25.80	L1	PASSED
1.480000	28.00	L1	PASSED
1.575000	27.20	L1	PASSED
1.690000	27.20	L1	PASSED
2.070000	29.30	L1	PASSED
2.170000	24.80	L1	PASSED
2.310000	28.10	L1	PASSED
2.530000	25.90	L1	PASSED
2.635000	25.50	L1	PASSED
3.105000	23.80	L1	PASSED


Average (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.225000	20.00	L1	PASSED
0.335000	15.80	N	PASSED
0.445000	13.80	N	PASSED
0.795000	15.90	N	PASSED
0.890000	16.80	N	PASSED
1.450000	15.20	L1	PASSED
2.160000	16.80	L1	PASSED
3.190000	13.30	L1	PASSED
4.945000	10.20	L1	PASSED
8.100000	10.00	L1	PASSED
16.075000	15.50	L1	PASSED
19.145000	9.50	L1	PASSED

3. Radiated emissions (FCC §15.109, ICES-003 section 5.5, RSS-132 6.6, RSS-133 9)

EUT with DUT number	HS-50W, DUT 11200
Accessories with DUT numbers	AC-3E, DUT 11201
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 50 / 102.3
Date of measurements	27.04.2006
Measured by	Tomi Lipponen / Sami Lehtonen

3.1. Test setup

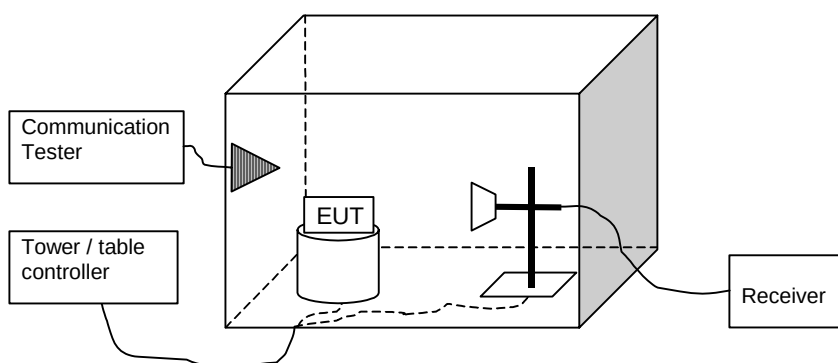

3.2. Test method and limit

The measurement is made according to ANSI C63.4-2003as follows:

The measurement is performed in the Semi-Anechoic Chamber with conducting metal floor.

The measurement distance is 3 m.

The EUT is placed on a nonconductive plate at 80 cm height.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [\mu\text{V/m}] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + AF - G_{PREAMP}$).

CISPR 22 and FCC Part 15 Class B limits (3 m measurement distance)

Frequency range [MHz]	Quasi peak limit [dBμV/m]	Average limit [dBμV/m]	Peak limit [dBμV/m]
30 – 230	40	-	-
230 – 1000	47	-	-
Above 1000	-	54	74

3.3. Bluetooth Test results

RX mode, channel 0 / 2402 MHz

Quasi peak (RBW: 120 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
37.935872	18.20	8.13	37.00	-18.80	VERTICAL	PASSED
62.583968	16.50	6.68	47.30	-30.80	VERTICAL	PASSED

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4883.769539	58.80	870.96	57.10	1.70	HORIZONTAL	PASSED
12088.684369	50.80	346.74	39.00	11.80	VERTICAL	PASSED
15397.799599	53.50	473.15	34.40	19.10	VERTICAL	PASSED
15868.235471	55.10	568.85	34.70	20.40	VERTICAL	PASSED
16198.892786	56.20	645.65	34.40	21.80	VERTICAL	PASSED
17712.418838	56.00	630.96	33.60	22.40	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4883.769539	46.80	218.78	45.10	1.70	HORIZONTAL	PASSED
12089.184369	38.10	80.35	26.30	11.80	VERTICAL	PASSED
15401.799599	40.40	104.71	21.30	19.10	VERTICAL	PASSED
15863.735471	41.90	124.45	21.50	20.40	VERTICAL	PASSED
16193.392786	43.00	141.25	21.40	21.60	VERTICAL	PASSED
17710.918838	43.30	146.22	20.90	22.40	VERTICAL	PASSED

RX mode, channel 40 / 2442 MHz

Quasi peak (RBW: 120 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
38.235872	18.20	8.13	37.20	-19.00	VERTICAL	PASSED
62.443487	16.60	6.76	47.40	-30.80	VERTICAL	PASSED

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4959.921844	61.40	1 174.90	60.80	0.60	HORIZONTAL	PASSED
12518.044088	51.50	375.84	39.60	11.90	VERTICAL	PASSED
15474.945892	54.50	530.88	34.90	19.60	VERTICAL	PASSED
15892.777555	55.00	562.34	34.50	20.50	VERTICAL	PASSED
16188.880762	56.00	630.96	34.50	21.50	VERTICAL	PASSED
17721.448898	56.80	691.83	34.40	22.40	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4959.921844	49.70	305.49	49.10	0.60	HORIZONTAL	PASSED
12523.544088	39.00	89.13	27.10	11.90	VERTICAL	PASSED
15475.445892	41.30	116.14	21.70	19.60	VERTICAL	PASSED
15887.777555	42.10	127.35	21.60	20.50	VERTICAL	PASSED
16186.880762	43.20	144.54	21.70	21.50	VERTICAL	PASSED
17725.448898	43.90	156.68	21.50	22.40	VERTICAL	PASSED

RX mode, channel 78 / 2480 MHz

Quasi peak (RBW: 120 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
37.576353	17.80	7.76	36.40	-18.60	VERTICAL	PASSED
62.064930	15.50	5.96	46.30	-30.80	VERTICAL	PASSED

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4883.769539	58.90	881.05	57.20	1.70	HORIZONTAL	PASSED
12492.483968	51.70	384.59	39.60	12.10	VERTICAL	PASSED
15492.477956	55.00	562.34	35.30	19.70	VERTICAL	PASSED
15897.799599	54.80	549.54	34.20	20.60	VERTICAL	PASSED
16160.314629	55.80	616.60	34.80	21.00	VERTICAL	PASSED
17718.930862	56.70	683.91	34.30	22.40	VERTICAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4883.769539	46.80	218.78	45.10	1.70	HORIZONTAL	PASSED
12488.483968	39.10	90.16	27.10	12.00	VERTICAL	PASSED
15491.477956	41.50	118.85	21.80	19.70	VERTICAL	PASSED
15896.799599	42.10	127.35	21.50	20.60	VERTICAL	PASSED
16160.814629	42.70	136.46	21.70	21.00	VERTICAL	PASSED
17713.930862	43.90	156.68	21.50	22.40	VERTICAL	PASSED

4. Test Equipment

4.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
1742	EMI Test Receiver	ESMI	R&S	15C, 15B
1759	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
1872	Thermo- Hygrograph	00.02520.150700	Lambrecht	15C, 15B
1916	Radio Communication tester	CMTA84	R&S	15C, 15B
2039	Power Supply	PL330QMD	THURLBY	15C, 15B
2060	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
2068	CDN-Antenna line	S1	NMP	15C, 15B
2097	Pulse Limiter	ESH3-Z2	R&S	15C, 15B
2111	Multimeter	TX3	Tektronix	15C, 15B
2156	Digital Radio Communication Tester	CMU200	R&S	15C, 15B
2206	Signal generator	SMX	R&S	15C, 15B
2335	GPIB Switch 2 to 1	-	National Instruments	15C, 15B
2347	Digital Radio Communication Tester	CMU200	R&S	22/24, 15C, 15B
2352	Spectrum Analyzer	FSP	R&S	22/24, 15C
2359	Temperature Test system	VT4002	Vötsch Industrietechnik	22/24
2360	Serial Bus Converter	Serial 488A	IO Tech	22/24
2362	Power Supply	NGPX 70/5	R&S	22/24
-	RF Emission Software	ES-K1 v.1.60	R&S	15C, 15B

4.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
1748	Log. per. Antenna	HL025	R&S	22/24, 15C
1749	Log. per. Antenna	HL025	R&S	22/24, 15C
1875	Thermo- Hygrograph	00.02520.150700	Lambrecht	22/24, 15C, 15B
1917	Radio Communication tester	CMTA84	R&S	22/24, 15C, 15B
1933	Precision half-wave dipole antennas	HZ-13	R&S	22/24, 15C
1938	Precision half-wave dipole antennas	HZ-12	R&S	22/24, 15C
2006	Radiation Reference Source	VSQ	MEB	22/24, 15C, 15B
2009	Signal generator	SMP 22	R&S	22/24, 15C, 15B
2019	Multimeter	34401A	HP	22/24, 15C, 15B
2027	Coupling and Decoupling Network	M2 (modified) DC1	MEB	22/24, 15C, 15B
2028	Coupling and Decoupling Network	M3 (modified) DC2	MEB	22/24, 15C, 15B
2029	Power Supply	PL330	THURLBY	22/24, 15C
2043	Band Reject Filter	WRCA824/849-0,2-6SS	Wainwright	22/24, 15C, 15B
2047	Band Reject Filter	WRCC1800/2000-0.2-10SS	Wainwright	22/24, 15C, 15B
2051	High Pass Filter	4HC1700-1-KK	R&S	22/24, 15C
2057	Log. per. Antenna	HL025	R&S	22/24, 15C
2109	Power Supply	PL330QMD	THURLBY	22/24, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
2110	Multimeter	34401A	HP	22/24, 15C, 15B
2112	Multimeter	TX3	Tektronix	22/24, 15C, 15B
2116	Controller	EMCO MODEL 2090	ETS	22/24, 15C, 15B
2133	Power Meter	NRVS	R&S	22/24, 15C
2134	Power Sensor	NRV-Z32	R&S	22/24, 15C
2135	Coupling and Decoupling Network	CDN 801-M3	LÜTHI	22/24, 15C, 15B
2138	Ultra Broadband Antenna	HL562	R&S	22/24, 15C, 15B
2140	Biconical Antenna	EMCO93110B	EMCO	22/24, 15C
2142	Log.-per.-dipol Antenna	3146	EMCO	22/24, 15C
2144	Attenuator	6803.17B	Huber-Suhner	22/24, 15C, 15B
2150	High Pass Filter	F-15041	RLC ELECTRONICS	22/24, 15C
2176	Coupling and Decoupling Network	CDN 801-M3	LÜTHI	22/24, 15C, 15B
2180	Digital Radio Communication Tester	CMU200	R&S	22/24, 15C, 15B
2188	Preamplifier	AFS4-00100300-20-23P-6	MITEQ	22/24, 15C, 15B
2330	EMI Test receiver	ESIB26	R&S	22/24, 15C, 15B
2334	GPB Switch 2 to 1	-	National Instruments	22/24, 15C, 15B
2348	Yaesu controller	G-1000DXC	YAESU	22/24, 15C, 15B
2349	Computer controller (Yaesu)	GS-232B	YAESU	22/24, 15C, 15B
2350	Preamplifier	AMF-6D-020180-29-20P	MITEQ	22/24, 15C
2361	Anechoic chamber	3 meter semi/full anechoic chamber	Euroshield	22/24, 15C, 15B
2398	Horn antenna	HF906	R&S	22/24, 15C
2363	Band Reject Filter	WRCG 832/838-825/845/5SS	Wainwright	22/24
2364	Band Reject Filter	WRCG1877/1883 - 1870/1890-40/6SS	Wainwright	22/24
2365	Relay Switch Unit	TS-RSP	R&S	22/24, 15C, 15B
2366	Relay Switch Unit	TS-RSP	R&S	22/24, 15C, 15B
-	RF Emission Software	ES-K1 v.1.71	R&S	22/24, 15C, 15B