



FCC TEST REPORT

REPORT NO.: RF941110L07

MODEL NO.: WIP300

RECEIVED: Nov. 28, 2005

TESTED: Nov. 28 ~ Dec. 12, 2005

ISSUED: Dec. 13, 2005

APPLICANT: Cisco-Linksys LLC

ADDRESS: 121 Theory Drive Irvine, CA 92617 (USA)

ISSUED BY: Advance Data Technology Corporation

LAB ADDRESS: 47 14th Lin, Chiapau Tsun, Linko, Taipei,
Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd., Kueishan, Taoyuan,
Taiwan, R.O.C.

This test report consists of 65 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample.



No. 2177-01



0528
ILAC MRA

Table of Contents


1	CERTIFICATION.....	4
2	SUMMARY OF TEST RESULTS	5
2.1	MEASUREMENT UNCERTAINTY	5
3	GENERAL INFORMATION.....	6
3.1	GENERAL DESCRIPTION OF EUT.....	6
3.2	DESCRIPTION OF TEST MODES.....	7
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST	7
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	8
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS.....	10
3.4	DESCRIPTION OF SUPPORT UNITS	10
4	TEST TYPES AND RESULTS	11
4.1	CONDUCTED EMISSION MEASUREMENT	11
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	11
4.1.2	TEST INSTRUMENTS.....	11
4.1.3	TEST PROCEDURES	12
4.1.4	DEVIATION FROM TEST STANDARD	12
4.1.5	TEST SETUP	13
4.1.6	EUT OPERATING CONDITIONS	13
4.1.7	TEST RESULTS	14
4.2	RADIATED EMISSION MEASUREMENT	20
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	20
4.2.2	TEST INSTRUMENTS.....	21
4.2.3	TEST PROCEDURES	22
4.2.4	DEVIATION FROM TEST STANDARD	22
4.2.5	TEST SETUP	23
4.2.6	EUT OPERATING CONDITIONS	23
4.2.7	TEST RESULTS	24
4.3	6dB BANDWIDTH MEASUREMENT	32
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT.....	32
4.3.2	TEST INSTRUMENTS.....	32
4.3.3	TEST PROCEDURE.....	33
4.3.4	DEVIATION FROM TEST STANDARD	33
4.3.5	TEST SETUP	33
4.3.6	EUT OPERATING CONDITIONS	33
4.3.7	TEST RESULTS	34
4.4	MAXIMUM PEAK OUTPUT POWER	40
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	40
4.4.2	TEST INSTRUMENTS.....	40
4.4.3	TEST PROCEDURES	41
4.4.4	DEVIATION FROM TEST STANDARD	41
4.4.5	TEST SETUP	41
4.4.6	EUT OPERATING CONDITIONS	41


4.4.7 TEST RESULTS	42
4.5 POWER SPECTRAL DENSITY MEASUREMENT	43
4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	43
4.5.2 TEST INSTRUMENTS.....	43
4.5.3 TEST PROCEDURE.....	44
4.5.4 DEVIATION FROM TEST STANDARD	44
4.5.5 TEST SETUP	44
4.5.6 EUT OPERATING CONDITIONS	44
4.5.7 TEST RESULTS	45
4.6 BAND EDGES MEASUREMENT	51
4.6.1 LIMITS OF BAND EDGES MEASUREMENT	51
4.6.2 TEST INSTRUMENTS.....	51
4.6.3 TEST PROCEDURE.....	51
4.6.4 DEVIATION FROM TEST STANDARD	51
4.6.5 EUT OPERATING CONDITION	51
4.6.6 TEST RESULTS	52
4.7 ANTENNA REQUIREMENT	60
4.7.1 STANDARD APPLICABLE	60
4.7.2 ANTENNA CONNECTED CONSTRUCTION.....	60
5 PHOTOGRAPHS OF THE TEST CONFIGURATION.....	61
6 INFORMATION ON THE TESTING LABORATORIES	64
APPENDIX-A.....	A-1

1 CERTIFICATION

PRODUCT : Wireless-G IP Phone
MODEL NO.: WIP300
BRAND: Linksys
APPLICANT : Cisco-Linksys LLC
TESTED: Nov. 28 ~ Dec. 12, 2005
TEST SAMPLE: ENGINEERING SAMPLE
STANDARDS : FCC Part 15, Subpart C (Section 15.247),
ANSI C63.4-2003

The above equipment (model: WIP300) have been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : 
Jessie Wang , **DATE:** Dec. 13, 2005

**TECHNICAL
ACCEPTANCE** : 
Gary Chang , **DATE:** Dec. 13, 2005
Responsible for RF

APPROVED BY : 
Cody Chang / Deputy Manager , **DATE:** Dec. 13, 2005

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -15.90dB at 0.603MHz.
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit : min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -1.71dB at 2390.00MHz.
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.73 dB
	200MHz ~1000MHz	3.74 dB
	1GHz ~ 18GHz	2.20 dB
	18GHz ~ 40GHz	1.88 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Wireless-G IP Phone
MODEL NO.	WIP300
POWER SUPPLY	4.0Vdc from battery 5.0Vdc from AC adapter
MODULATION TYPE	CCK, QPSK, BPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11
MAXIMUM OUTPUT POWER	56.885mW
ANTENNA TYPE	Main antenna: Chip antenna with 0.48 dBi gain Auxiliary antenna: Chip antenna with -0.86 dBi gain
DATA CABLE	NA
I/O PORTS	NA
ASSOCIATED DEVICES	NA

NOTE:

1. The EUT was powered by the following adapter and battery:

Adapter:

Brand:	Ktec
Model:	KSAFB0500100W1US
Input:	100-240Vac, 50/60Hz, 0.15A
Output:	5Vdc, 1A
Power Line:	DC 1.8m non-shielded cable with one core

Battery:

Brand:	NA
Model:	LP053450AH
Input:	3.7Vdc, 900mAh
Output:	4.0Vdc, 600mAh

2. The EUT complies with IEEE 802.11g standards and backwards compatible with IEEE 802.11b products.
3. The EUT operates in the 2.4GHz frequency spectrum with throughput of up to 54Mbps.
4. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES


Eleven channels are provided to this EUT for normal mode.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST


TEST MODE A

EUT (Power from AC adapter)

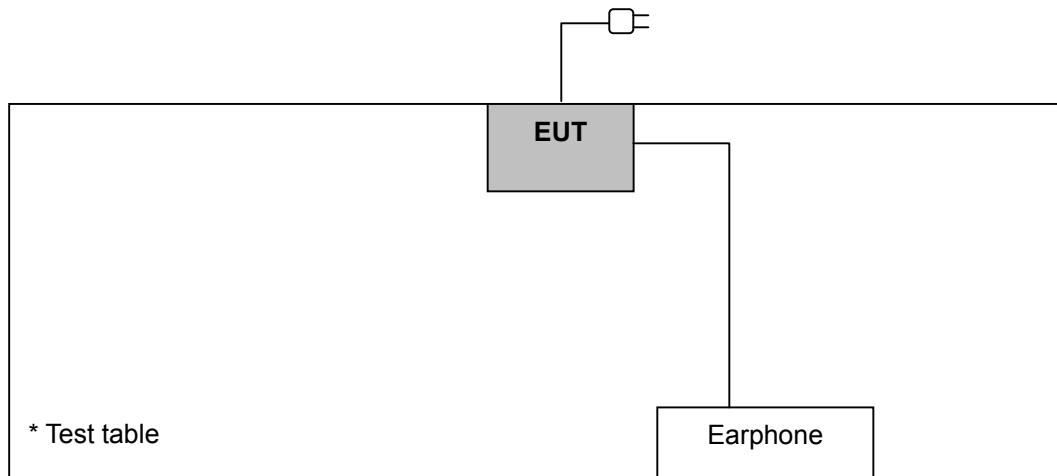

TEST MODE B

EUT (Power from battery)

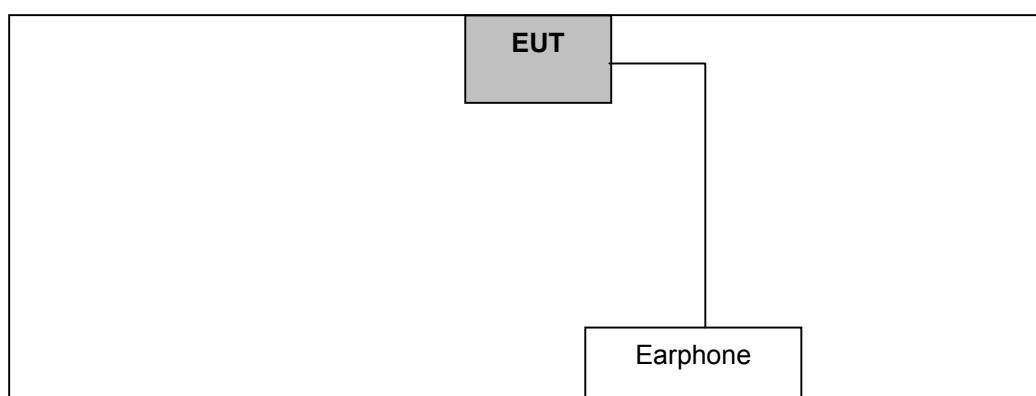

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT configure mode	Applicable to				Description
	PLC	RE<1G	RE≥1G	APCM	
A	√	√	√	√	Charge Mode
B	-	√	-	-	Battery Mode

Where PLC: Power Line Conducted Emission

RE<1G RE: Radiated Emission below 1GHz

RE≥1G: Radiated Emission above 1GHz

APCM: Antenna Port Conducted Measurement

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6

Radiated Emission Test (Below 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates , XYZ Axis of the antenna and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT configure mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)	Axis
A	802.11g	1 to 11	11	OFDM	BPSK	6	Z
B	802.11g	1 to 11	11	OFDM	BPSK	6	Z

Radiated Emission Test (Above 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates , XYZ Axis of the antenna and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)	Axis
802.11b	1 to 11	1, 6, 11	DSSS	BPSK	1	Z
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6	Z

Bandedge Measurement:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 11	DSSS	BPSK	1
802.11g	1 to 11	1, 11	OFDM	BPSK	6

Antenna Port Conducted Measurement:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	BPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product, according to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)
ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	EARPHONE	Cotron	CHM-201STV01007	NA	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA

NOTE: All power cords of the above support units are non shielded (1.8m).

4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
0.15-0.5 0.5-5 5-30	Quasi-peak	Average
	66 to 56	56 to 46
	56	46
	60	50

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100291	Nov. 11, 2006
RF signal cable Woken	5D-FB	Cable-HYC01-01	Jan. 09, 2006
LISN SCHWARZBECK	NNBL 8226-2	8226-142	May. 02, 2006
LISN ROHDE & SCHWARZ	ESH2-Z5	100104	Feb. 15, 2006
Software ADT	ADT_Cond_V3	NA	NA

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Shielded Room 1.
3. The VCCI Site Registration No. is C-2040.


4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under Limit - 20dB was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

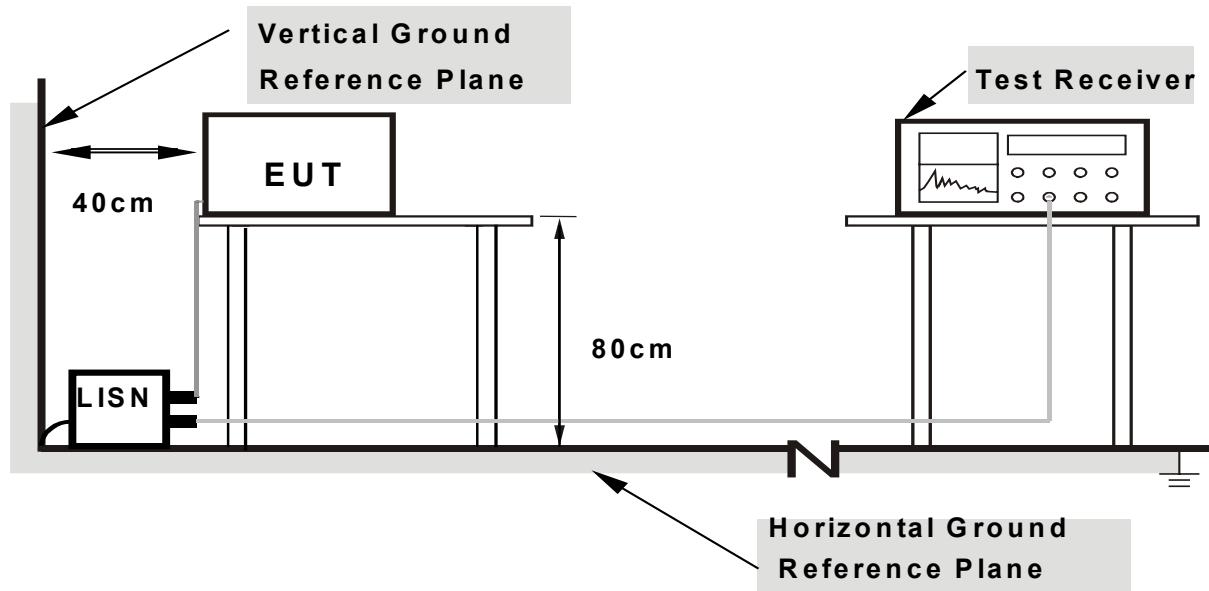

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

- a. Placed EUT on the test table.
- b. Run a test program (provided by manufacturer) to enable EUT under transmission/receiving condition continuously at specific channel frequency.

4.1.7 TEST RESULTS


CONDUCTED WORST-CASE DATA

EUT	Wireless-G IP Phone	MEASUREMENT DETAIL	
MODEL	WIP300	PHASE	Line 1
CHANNEL	Channel 1	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Jay Hsu		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	(dB)	(dB)	Q.P.	AV.
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.181	0.11	46.53	-	46.64	-	64.43	54.43	-17.79	-
2	0.240	0.11	42.30	-	42.41	-	62.10	52.10	-19.69	-
3	0.423	0.12	40.98	-	41.10	-	57.38	47.38	-16.29	-
4	0.603	0.15	38.40	-	38.55	-	56.00	46.00	-17.45	-
5	2.105	0.27	35.00	-	35.27	-	56.00	46.00	-20.73	-
6	12.219	0.54	23.84	-	24.38	-	60.00	50.00	-35.62	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

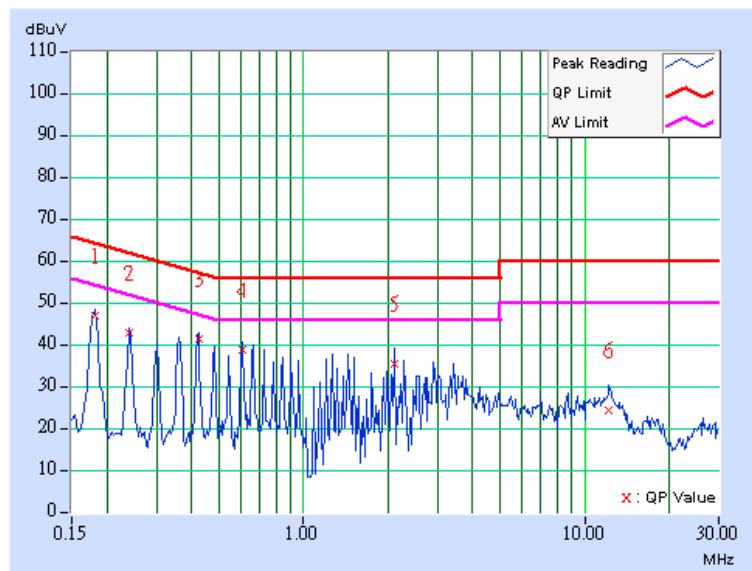


EUT	Wireless-G IP Phone	MEASUREMENT DETAIL	
MODEL	WIP300	PHASE	Line 2
CHANNEL	Channel 1	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Jay Hsu		

No	Freq. [MHz]	Corr. Factor	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.
1	0.181	0.11	46.59	-	46.70	-	64.43	54.43	-17.73	-
2	0.240	0.11	42.52	-	42.63	-	62.10	52.10	-19.47	-
3	0.361	0.11	41.70	-	41.81	-	58.71	48.71	-16.90	-
4	0.603	0.15	39.95	-	40.10	-	56.00	46.00	-15.90	-
5	1.383	0.25	37.50	-	37.75	-	56.00	46.00	-18.25	-
6	3.367	0.35	32.38	-	32.73	-	56.00	46.00	-23.27	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

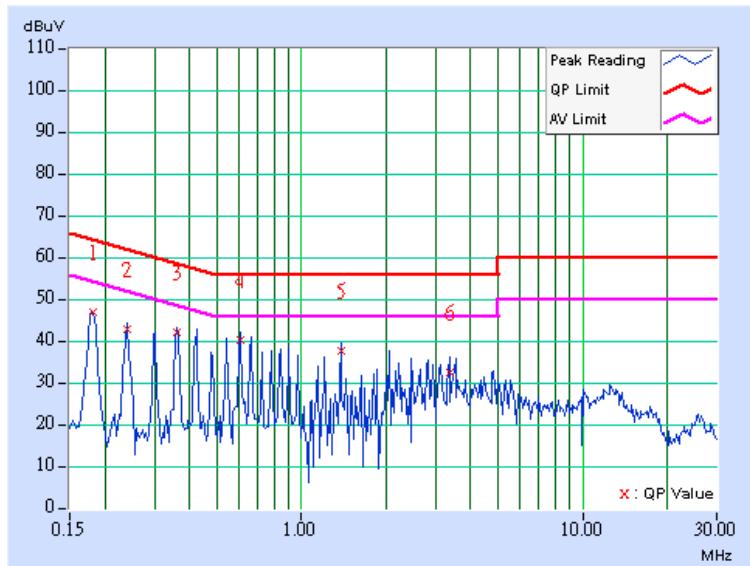


EUT	Wireless-G IP Phone	MEASUREMENT DETAIL	
MODEL	WIP300	PHASE	Line 1
CHANNEL	Channel 6	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Jay Hsu		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.181	0.11	45.24	-	45.35	-	64.43	54.43	-19.08	-
2	0.240	0.11	41.35	-	41.46	-	62.10	52.10	-20.64	-
3	0.423	0.12	40.37	-	40.49	-	57.38	47.38	-16.90	-
4	0.841	0.21	34.74	-	34.95	-	56.00	46.00	-21.05	-
5	2.047	0.26	36.67	-	36.93	-	56.00	46.00	-19.07	-
6	12.270	0.54	23.65	-	24.19	-	60.00	50.00	-35.81	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

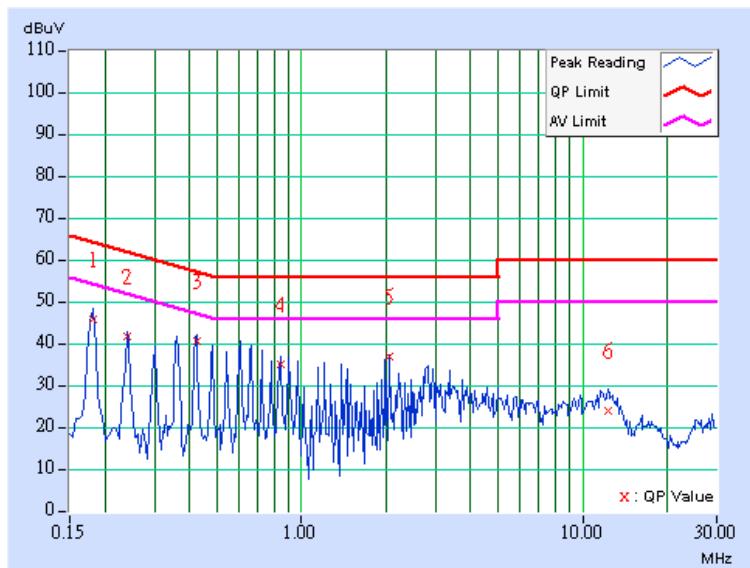


EUT	Wireless-G IP Phone	MEASUREMENT DETAIL	
MODEL	WIP300	PHASE	Line 2
CHANNEL	Channel 6	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Jay Hsu		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.181	0.11	46.04	-	46.15	-	64.43	54.43	-18.28	-
2	0.240	0.11	42.16	-	42.27	-	62.10	52.10	-19.83	-
3	0.423	0.12	40.96	-	41.08	-	57.38	47.38	-16.31	-
4	0.603	0.15	39.71	-	39.86	-	56.00	46.00	-16.14	-
5	1.207	0.24	37.12	-	37.36	-	56.00	46.00	-18.64	-
6	3.488	0.36	33.19	-	33.55	-	56.00	46.00	-22.45	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

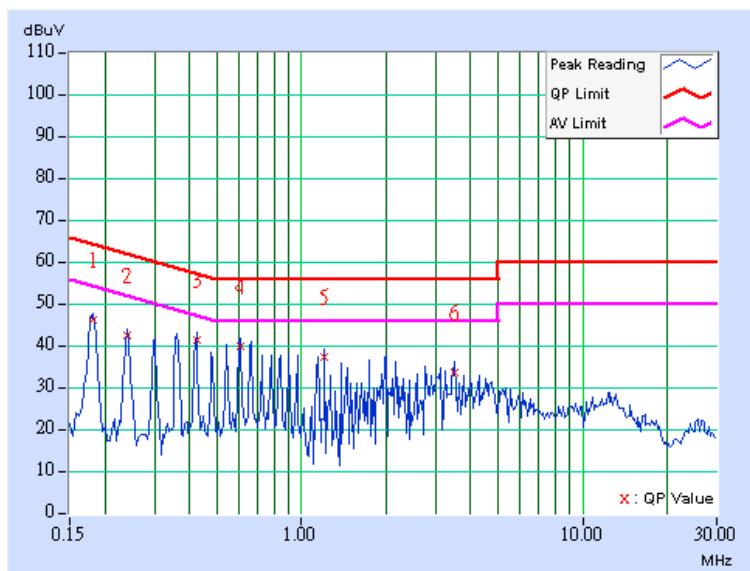


EUT	Wireless-G IP Phone	MEASUREMENT DETAIL			
MODEL	WIP300	PHASE		Line 1	
CHANNEL	Channel 11	6dB BANDWIDTH		9 kHz	
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH, 991hPa	
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)		120Vac, 60 Hz	
TESTED BY	Jay Hsu				

No	Freq. [MHz]	Corr. Factor	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.
1	0.177	0.11	43.17	-	43.28	-	64.61	54.61	-21.33	-
2	0.240	0.11	41.15	-	41.26	-	62.10	52.10	-20.84	-
3	0.420	0.11	40.70	-	40.81	-	57.46	47.46	-16.64	-
4	0.662	0.17	38.29	-	38.46	-	56.00	46.00	-17.54	-
5	2.047	0.26	36.63	-	36.89	-	56.00	46.00	-19.11	-
6	2.945	0.32	32.62	-	32.94	-	56.00	46.00	-23.06	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

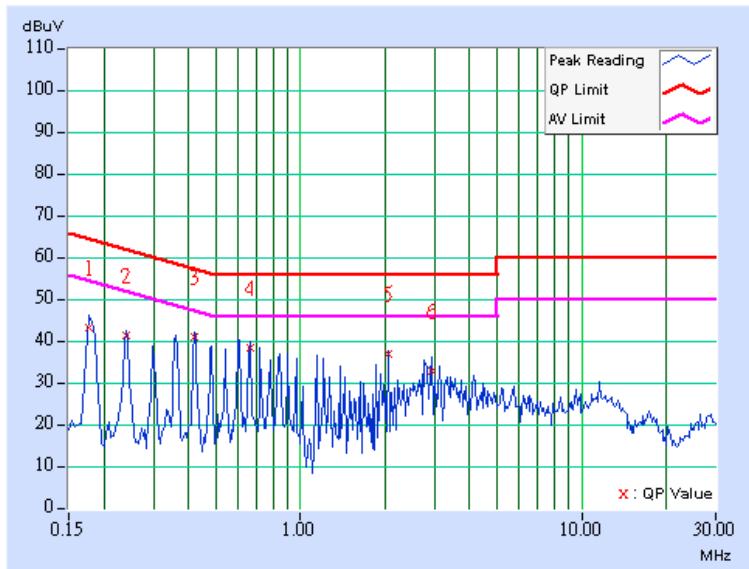


EUT	Wireless-G IP Phone	MEASUREMENT DETAIL	
MODEL	WIP300	PHASE	Line 2
CHANNEL	Channel 11	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Jay Hsu		

No	Freq. Factor	Corr. [MHz]	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.177	0.11	43.70	-	43.81	-	64.61	54.61	-20.80	-
2	0.240	0.11	41.59	-	41.70	-	62.10	52.10	-20.40	-
3	0.420	0.11	41.14	-	41.25	-	57.46	47.46	-16.20	-
4	0.603	0.15	39.51	-	39.66	-	56.00	46.00	-16.34	-
5	1.445	0.25	37.13	-	37.38	-	56.00	46.00	-18.62	-
6	3.430	0.35	34.65	-	35.00	-	56.00	46.00	-21.00	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

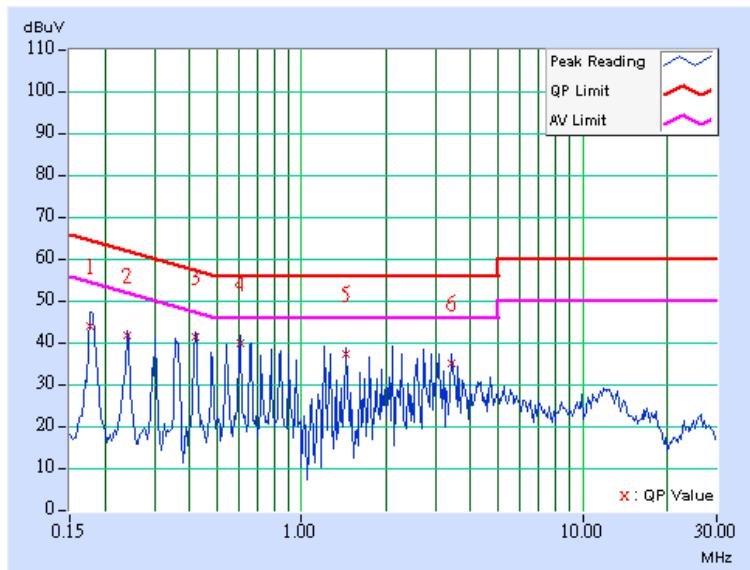

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB_uV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESIB7	100188	Dec. 19, 2005
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Nov. 27, 2006
BILOG Antenna SCHWARZBECK	VULB9168	9168-157	Jan. 22, 2006
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-407	Jan. 16, 2006
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA 9170241	Feb. 23, 2006
Preamplifier Agilent	8449B	3008A01961	Oct. 23, 2006
Preamplifier Agilent	8447D	2944A10629	Oct. 27, 2006
RF signal cable HUBER+SUHNER	SUCOFLEX 104	218182/4	Feb. 17, 2006
RF signal cable HUBER+SUHNER	SUCOFLEX 104	218194/4	Feb. 17, 2006
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower ADT.	AT100	AT93021702	NA
Turn Table ADT.	TT100.	TT93021702	NA
Controller ADT.	SC100.	SC93021702	NA

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 1.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The IC Site Registration No. is IC4924-2.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1kHz or 10kHz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

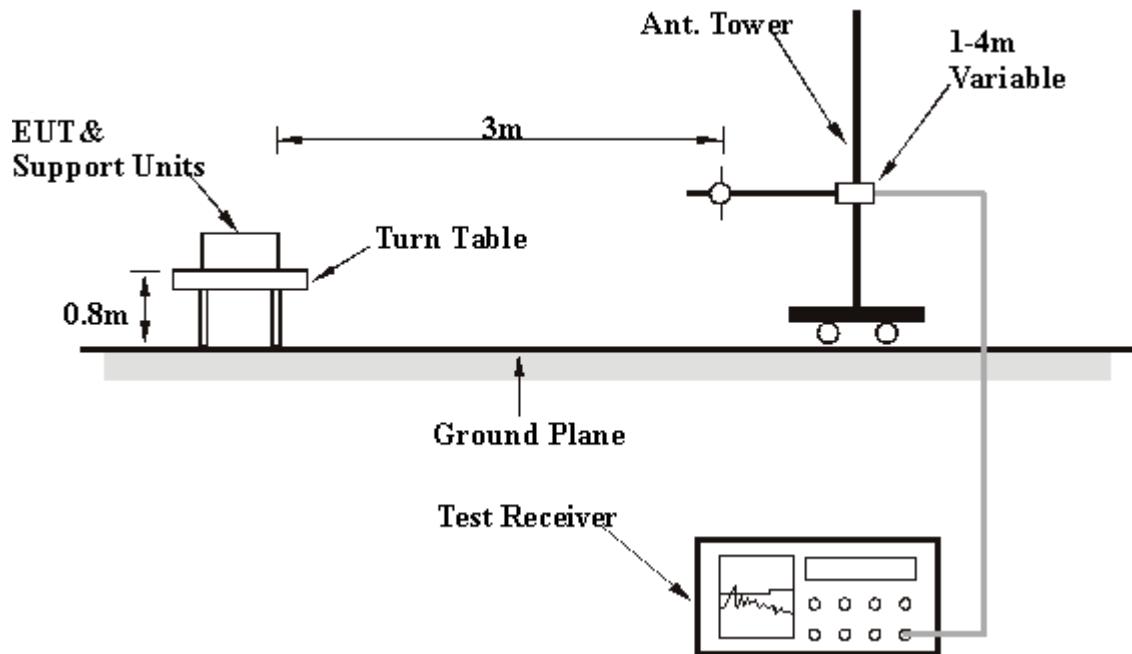

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

4.2.7 TEST RESULTS

RADIATED WORST-CASE DATA: BELOW 1GHz

EUT		Wireless-G IP Phone	MEASUREMENT DETAIL		
MODEL		WIP300	FREQUENCY RANGE		Below 1000MHz
CHANNEL		Channel 11	DETECTOR FUNCTION		Quasi-Peak
MODULATION TYPE		BPSK	ENVIRONMENTAL CONDITIONS		20deg. C, 62%RH, 991hPa
TRANSFER RATE		6Mbps	INPUT POWER (SYSTEM)		120Vac, 60 Hz
TEST MODE		A	TESTED BY		Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	127.19	24.20 QP	43.50	-19.30	1.50 H	298	10.89	13.31
2	154.41	29.41 QP	43.50	-14.09	1.00 H	238	14.88	14.53
3	191.34	28.67 QP	43.50	-14.83	2.00 H	106	16.85	11.81
4	218.56	32.37 QP	46.00	-13.63	2.00 H	25	20.78	11.59
5	232.16	28.60 QP	46.00	-17.40	1.00 H	256	16.19	12.41
6	780.34	24.11 QP	46.00	-21.89	1.00 H	151	0.52	23.59
7	826.99	24.33 QP	46.00	-21.67	1.50 H	25	0.40	23.93
8	860.04	25.24 QP	46.00	-20.76	1.00 H	67	0.92	24.32
9	877.54	24.68 QP	46.00	-21.32	1.50 H	229	0.02	24.66
10	924.19	25.39 QP	46.00	-20.61	1.00 H	286	0.04	25.35

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.00	23.23 QP	40.00	-16.77	1.00 V	229	9.88	13.35
2	70.82	26.11 QP	40.00	-13.89	1.00 V	271	13.98	12.12
3	99.98	22.26 QP	43.50	-21.24	1.00 V	253	11.51	10.74
4	150.52	30.05 QP	43.50	-13.45	2.00 V	13	15.60	14.45
5	218.56	27.71 QP	46.00	-18.29	1.50 V	79	16.12	11.59
6	440.16	26.01 QP	46.00	-19.99	1.00 V	202	8.35	17.66
7	922.24	24.56 QP	46.00	-21.44	1.00 V	202	-0.77	25.33
8	951.40	24.66 QP	46.00	-21.34	1.00 V	289	-0.95	25.61

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

EUT		Wireless-G IP Phone	MEASUREMENT DETAIL		
MODEL	WIP300	FREQUENCY RANGE			Below 1000MHz
CHANNEL	Channel 11	DETECTOR FUNCTION			Quasi-Peak
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS			20deg. C, 62%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)			120Vac, 60 Hz
TEST MODE	B	TESTED BY			Match Tsui

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	98.04	21.17 QP	43.50	-22.33	1.50 H	94	10.58	10.59
2	751.18	23.11 QP	46.00	-22.89	1.50 H	58	-0.31	23.42
3	780.34	27.05 QP	46.00	-18.95	1.50 H	250	3.46	23.59
4	799.78	25.70 QP	46.00	-20.30	1.50 H	241	2.00	23.70
5	823.11	25.33 QP	46.00	-20.67	2.00 H	133	1.44	23.90
6	858.10	25.80 QP	46.00	-20.20	1.00 H	109	1.52	24.28
7	904.75	26.12 QP	46.00	-19.88	1.50 H	250	0.96	25.15
8	937.80	26.82 QP	46.00	-19.18	1.50 H	58	1.34	25.49

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	37.78	19.03 QP	40.00	-20.97	1.00 V	238	4.41	14.62
2	92.20	21.52 QP	43.50	-21.98	1.00 V	133	11.40	10.12
3	99.98	21.38 QP	43.50	-22.12	1.00 V	244	10.64	10.74
4	758.96	23.67 QP	46.00	-22.33	1.00 V	1	0.20	23.47
5	788.12	24.03 QP	46.00	-21.97	1.00 V	244	0.40	23.63
6	815.33	24.18 QP	46.00	-21.82	1.50 V	160	0.35	23.83
7	856.15	24.38 QP	46.00	-21.62	1.00 V	268	0.14	24.24
8	898.92	24.54 QP	46.00	-21.46	2.00 V	223	-0.54	25.08
9	910.58	25.29 QP	46.00	-20.71	1.50 V	91	0.07	25.21

REMARKS: 1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)

2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)

3. The other emission levels were very low against the limit.

4. Margin value = Emission level – Limit value.

802.11b DSSS MODULATION

EUT		Wireless-G IP Phone	MEASUREMENT DETAIL			
MODEL		WIP300	FREQUENCY RANGE			
CHANNEL		Channel 1	DETECTOR FUNCTION			
MODULATION TYPE		BPSK	ENVIRONMENTAL CONDITIONS			
TRANSFER RATE		1Mbps	INPUT POWER (SYSTEM)			
TESTED BY		Match Tsui				

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	41.27 PK	74.00	-32.73	1.57 H	268	12.49	28.78
1	1608.00	35.86 AV	54.00	-18.14	1.57 H	268	7.08	28.78
2	2390.00	58.93 PK	74.00	-15.07	1.23 H	171	26.89	32.04
2	2390.00	52.29 AV	54.00	-1.71	1.23 H	171	20.25	32.04
3	*2412.00	105.84 PK			1.23 H	163	73.71	32.13
3	*2412.00	102.86 AV			1.23 H	163	70.73	32.13
4	3216.00	46.75 PK	85.84	-39.09	1.27 H	172	12.82	33.93
4	3216.00	40.57 AV	82.86	-42.29	1.27 H	172	6.64	33.93
5	4824.00	48.20 PK	74.00	-25.80	1.16 H	351	10.00	38.20
5	4824.00	38.62 AV	54.00	-15.38	1.16 H	351	0.42	38.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	43.03 PK	74.00	-30.97	1.00 V	126	14.25	28.78
1	1608.00	38.90 AV	54.00	-15.10	1.00 V	126	10.12	28.78
2	2390.00	55.76 PK	74.00	-18.24	1.21 V	277	23.72	32.04
2	2390.00	48.99 AV	54.00	-5.01	1.21 V	277	16.95	32.04
3	*2412.00	102.70 PK			1.21 V	277	70.57	32.13
3	*2412.00	99.58 AV			1.21 V	277	67.45	32.13
4	3216.00	44.96 PK	82.70	-37.74	1.02 V	360	11.03	33.93
4	3216.00	37.22 AV	79.58	-42.36	1.02 V	360	3.29	33.93
5	4824.00	48.60 PK	74.00	-25.40	1.00 V	360	10.40	38.20
5	4824.00	42.05 AV	54.00	-11.95	1.00 V	360	3.85	38.20

RMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “*”: Fundamental frequency.

EUT	Wireless-G IP Phone	MEASUREMENT DETAIL		
MODEL	WIP300	FREQUENCY RANGE		1 ~ 25GHz
CHANNEL	Channel 6	DETECTOR FUNCTION		Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS		23deg. C, 62%RH, 991hPa
TRANSFER RATE	1Mbps	INPUT POWER (SYSTEM)		120Vac, 60 Hz
TESTED BY	Match Tsui			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.00	42.15 PK	74.00	-31.85	1.17 H	76	13.34	28.81
1	1624.00	35.25 AV	54.00	-18.75	1.17 H	76	6.44	28.81
2	*2437.00	105.62 PK			1.25 H	168	73.37	32.25
2	*2437.00	102.26 AV			1.25 H	168	70.01	32.25
3	3248.00	48.62 PK	85.62	-37.00	1.25 H	346	14.64	33.98
3	3248.00	40.36 AV	82.26	-41.90	1.25 H	346	6.38	33.98
4	4874.00	47.88 PK	74.00	-26.12	1.10 H	357	9.56	38.32
4	4874.00	35.70 AV	54.00	-18.30	1.10 H	357	-2.62	38.32

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.00	42.74 PK	74.00	-31.26	1.00 V	53	13.93	28.81
1	1624.00	38.33 AV	54.00	-15.67	1.00 V	53	9.52	28.81
2	*2437.00	102.74 PK			1.00 V	286	70.49	32.25
2	*2437.00	99.15 AV			1.00 V	286	66.90	32.25
3	4874.00	51.36 PK	74.00	-22.64	1.09 V	16	13.04	38.32
3	4874.00	43.65 AV	54.00	-10.35	1.09 V	16	5.33	38.32

RMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “*”: Fundamental frequency.

EUT		Wireless-G IP Phone	MEASUREMENT DETAIL			
MODEL		WIP300	FREQUENCY RANGE		1 ~ 25GHz	
CHANNEL		Channel 11	DETECTOR FUNCTION		Peak(PK) Average (AV)	
MODULATION TYPE		BPSK	ENVIRONMENTAL CONDITIONS		23deg. C, 62%RH, 991hPa	
TRANSFER RATE		1Mbps	INPUT POWER (SYSTEM)		120Vac, 60 Hz	
TESTED BY		Match Tsui				

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.00	41.30 PK	85.55	-44.25	1.09 H	207	12.45	28.85
1	1641.00	36.18 AV	82.01	-45.83	1.09 H	207	7.33	28.85
2	*2462.00	105.55 PK			1.20 H	162	73.19	32.36
2	*2462.00	102.01 AV			1.20 H	162	69.65	32.36
3	2483.50	56.57 PK	74.00	-17.43	1.20 H	162	24.11	32.46
3	2483.50	49.07 AV	54.00	-4.93	1.20 H	162	16.61	32.46
4	3282.00	45.88 PK	85.55	-39.67	1.28 H	1	11.85	34.03
4	3282.00	37.71 AV	82.01	-44.30	1.28 H	1	3.68	34.03
5	4924.00	48.16 PK	74.00	-25.84	1.25 H	349	9.70	38.46
5	4924.00	38.08 AV	54.00	-15.92	1.25 H	349	-0.38	38.46

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.00	43.84 PK	82.85	-39.01	1.00 V	232	14.99	28.85
1	1641.00	39.48 AV	79.35	-39.87	1.00 V	232	10.63	28.85
2	*2462.00	102.85 PK			1.14 V	319	70.49	32.36
2	*2462.00	99.35 AV			1.14 V	319	66.99	32.36
3	2483.50	57.06 PK	74.00	-16.94	1.14 V	319	24.60	32.46
3	2483.50	48.51 AV	54.00	-5.49	1.14 V	319	16.05	32.46
4	4924.00	50.03 PK	74.00	-23.97	1.18 V	39	11.57	38.46
4	4924.00	43.69 AV	54.00	-10.31	1.18 V	39	5.23	38.46

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “*”: Fundamental frequency.

802.11g OFDM MODULATION

EUT		Wireless-G IP Phone	MEASUREMENT DETAIL		
MODEL		WIP300	FREQUENCY RANGE		1 ~ 25GHz
CHANNEL		Channel 1	DETECTOR FUNCTION		Peak(PK) Average (AV)
MODULATION TYPE		BPSK	ENVIRONMENTAL CONDITIONS		23deg. C, 62%RH, 991hPa
TRANSFER RATE		6Mbps	INPUT POWER (SYSTEM)		120Vac, 60 Hz
TESTED BY		Match Tsui			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	43.39 PK	74.00	-30.61	1.54 H	97	14.61	28.78
1	1608.00	38.95 AV	54.00	-15.05	1.54 H	97	10.17	28.78
2	2390.00	59.71 PK	74.00	-14.29	1.44 H	208	27.67	32.04
2	2390.00	47.59 AV	54.00	-6.41	1.44 H	208	15.55	32.04
3	*2412.00	104.15 PK			1.44 H	208	72.02	32.13
3	*2412.00	95.39 AV			1.44 H	208	63.26	32.13
4	3216.00	47.07 PK	84.15	-37.08	1.29 H	341	13.14	33.93
4	3216.00	41.43 AV	75.39	-33.96	1.29 H	341	7.50	33.93

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	42.49 PK	74.00	-31.51	1.00 V	123	13.71	28.78
1	1608.00	39.97 AV	54.00	-14.03	1.00 V	123	11.19	28.78
2	2390.00	55.62 PK	74.00	-18.38	1.25 V	285	23.58	32.04
2	2390.00	46.49 AV	54.00	-7.51	1.25 V	285	14.45	32.04
3	*2412.00	98.78 PK			1.25 V	285	66.65	32.13
3	*2412.00	91.06 AV			1.25 V	285	58.93	32.13
4	3216.00	45.23 PK	78.78	-33.55	1.35 V	61	11.30	33.93
4	3216.00	37.10 AV	71.06	-33.96	1.35 V	61	3.17	33.93

RMARKS: 1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)

2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)

3. The other emission levels were very low against the limit.

4. Margin value = Emission level – Limit value.

5. “*”: Fundamental frequency.

EUT		Wireless-G IP Phone	MEASUREMENT DETAIL			
MODEL		WIP300	FREQUENCY RANGE		1 ~ 25GHz	
CHANNEL		Channel 6	DETECTOR FUNCTION		Peak(PK) Average (AV)	
MODULATION TYPE		BPSK	ENVIRONMENTAL CONDITIONS		23deg. C, 62%RH, 991hPa	
TRANSFER RATE		6Mbps	INPUT POWER (SYSTEM)		120Vac, 60 Hz	
TESTED BY		Match Tsui				

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.00	43.89 PK	74.00	-30.11	1.16 H	303	15.08	28.81
1	1624.00	39.60 AV	54.00	-14.40	1.16 H	303	10.79	28.81
2	*2437.00	104.27 PK			1.21 H	168	72.02	32.25
2	*2437.00	96.35 AV			1.21 H	168	64.10	32.25
3	3249.00	46.33 PK	84.27	-37.94	1.27 H	1	12.35	33.98
3	3249.00	40.81 AV	76.35	-35.54	1.27 H	1	6.83	33.98

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.00	45.10 PK	74.00	-28.90	1.00 V	204	16.29	28.81
1	1624.00	42.67 AV	54.00	-11.33	1.00 V	204	13.86	28.81
2	*2437.00	99.71 PK			1.28 V	259	67.46	32.25
2	*2437.00	90.98 AV			1.28 V	259	58.73	32.25

RMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “*”: Fundamental frequency.

EUT		Wireless-G IP Phone	MEASUREMENT DETAIL			
MODEL		WIP300	FREQUENCY RANGE		1 ~ 25GHz	
CHANNEL		Channel 11	DETECTOR FUNCTION		Peak(PK) Average (AV)	
MODULATION TYPE		BPSK	ENVIRONMENTAL CONDITIONS		23deg. C, 62%RH, 991hPa	
TRANSFER RATE		6Mbps	INPUT POWER (SYSTEM)		120Vac, 60 Hz	
TESTED BY		Match Tsui				

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.00	44.10 PK	84.37	-40.27	1.11 H	306	15.25	28.85
1	1641.00	40.44 AV	75.94	-35.50	1.11 H	306	11.59	28.85
2	*2462.00	104.37 PK			1.18 H	164	72.01	32.36
2	*2462.00	95.94 AV			1.18 H	164	63.58	32.36
3	2483.50	58.54 PK	74.00	-15.46	1.18 H	164	26.08	32.46
3	2483.50	49.33 AV	54.00	-4.67	1.18 H	164	16.87	32.46
4	3282.00	46.49 PK	84.37	-37.88	1.28 H	1	12.46	34.03
4	3282.00	38.48 AV	75.94	-37.46	1.28 H	1	4.45	34.03

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.00	43.12 PK	79.76	-36.64	1.51 V	345	14.27	28.85
1	1641.00	40.63 AV	72.44	-31.81	1.51 V	345	11.78	28.85
2	*2462.00	99.76 PK			1.22 V	257	67.40	32.36
2	*2462.00	92.44 AV			1.22 V	257	60.08	32.36
3	2483.50	57.99 PK	74.00	-16.01	1.22 V	257	25.53	32.46
3	2483.50	47.13 AV	54.00	-6.87	1.22 V	257	14.67	32.46

RMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “*”: Fundamental frequency.

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

FCC ID: Q87-WIP300




4.3.7 TEST RESULTS

802.11b DSSS MODULATION


EUT	Wireless-G IP Phone	MODEL	WIP300
MODULATION TYPE	BPSK	TRANSFER RATE	1Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg.C, 62%RH, 991hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	10.12	0.5	PASS
6	2437	10.12	0.5	PASS
11	2462	10.04	0.5	PASS


CH1

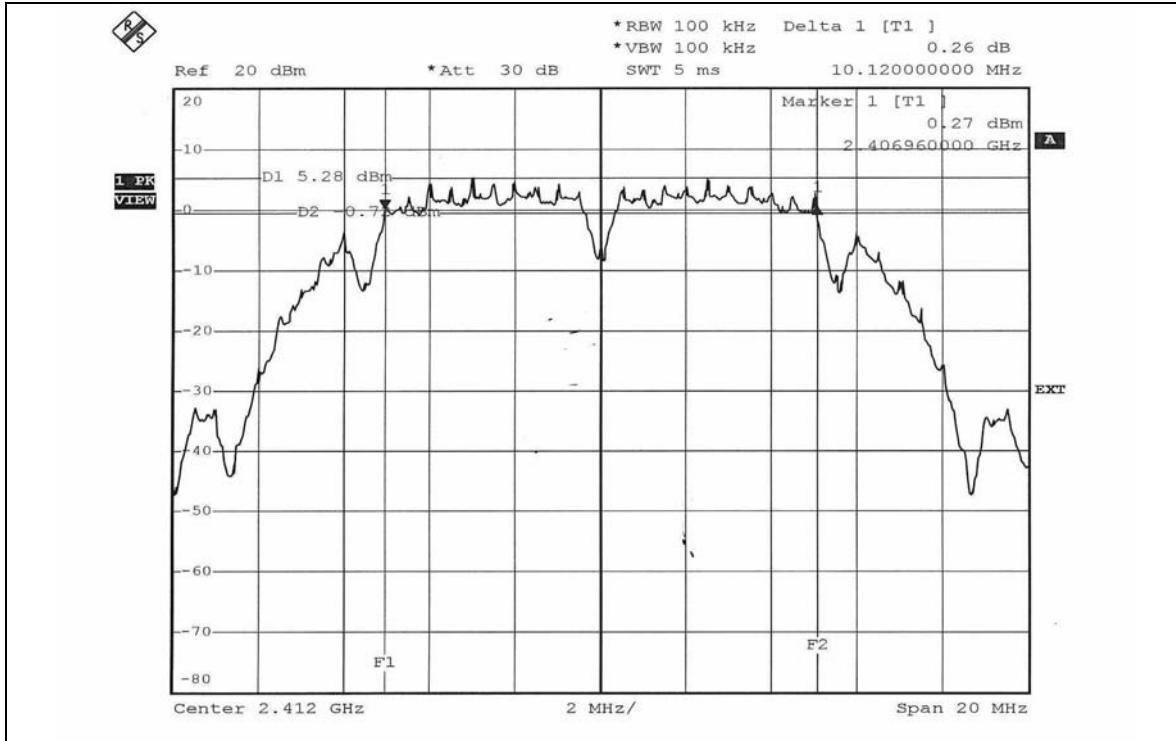

CH6

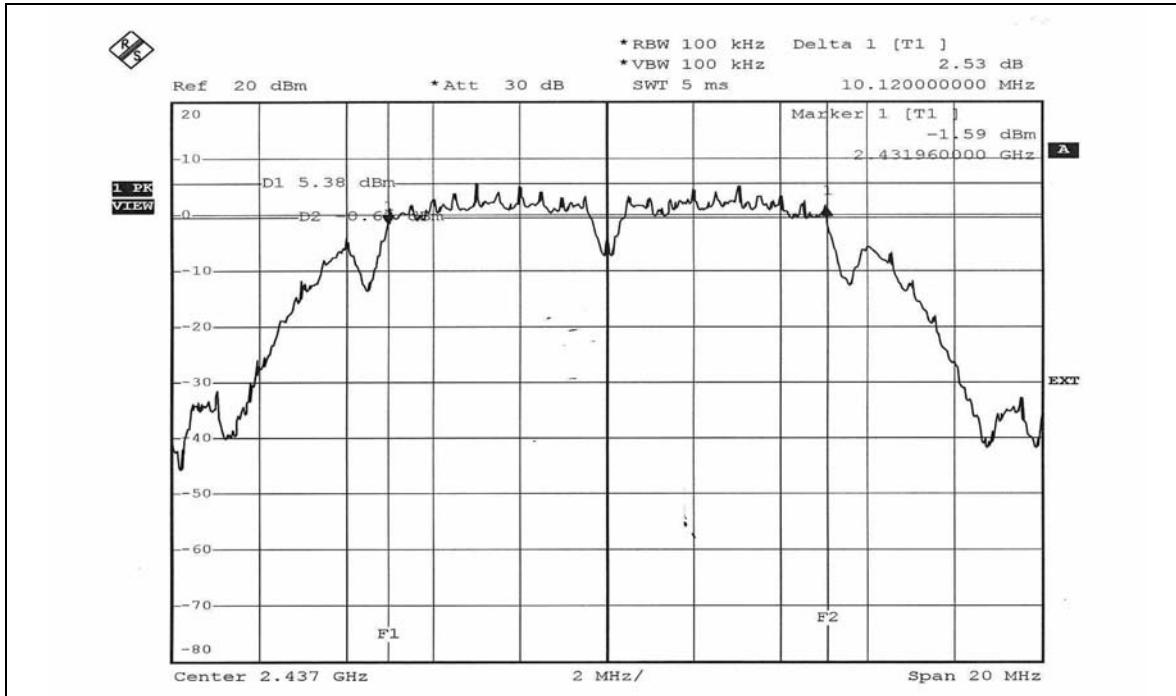

CH11

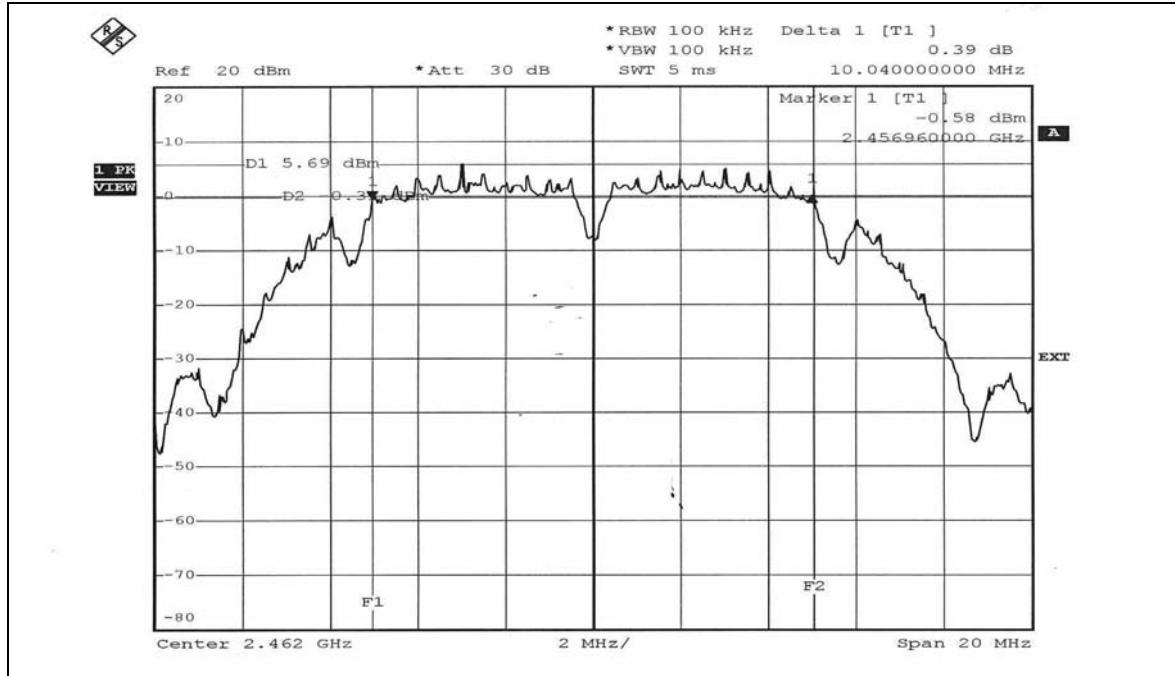

FCC ID: Q87-WIP300




802.11g OFDM MODULATION


EUT	Wireless-G IP Phone	MODEL	WIP300
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg.C, 62%RH, 991hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.40	0.5	PASS
6	2437	16.40	0.5	PASS
11	2462	16.40	0.5	PASS


CH1

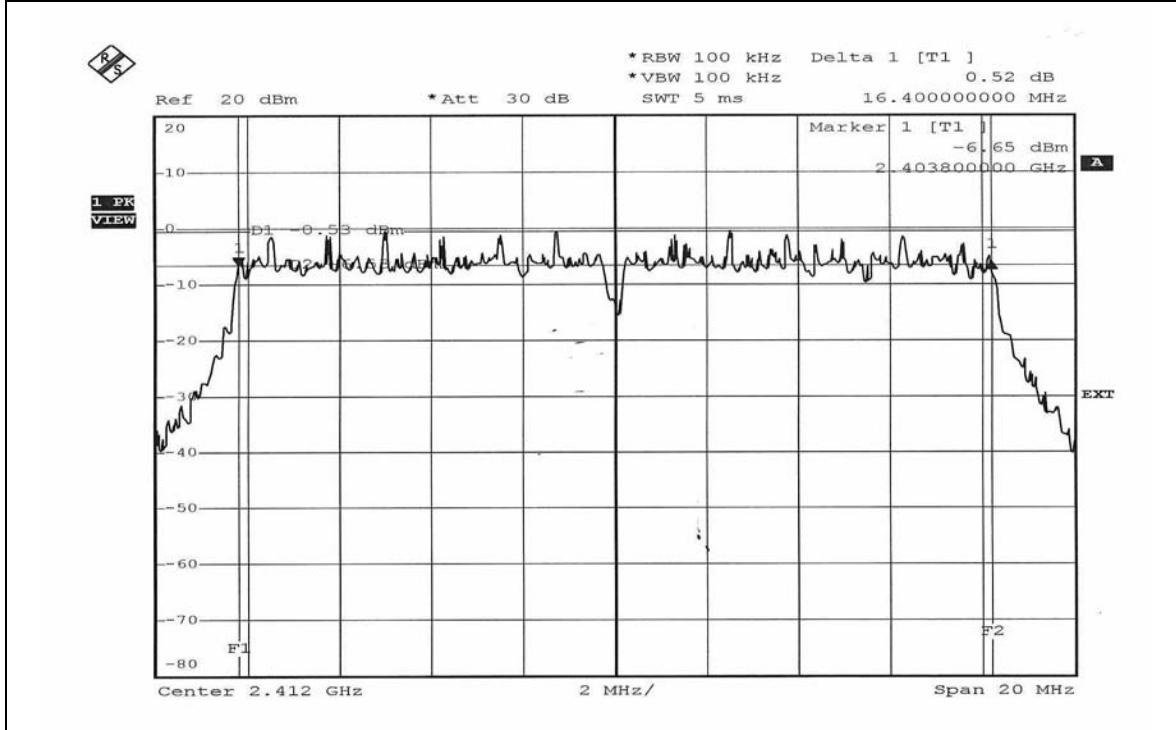

CH6

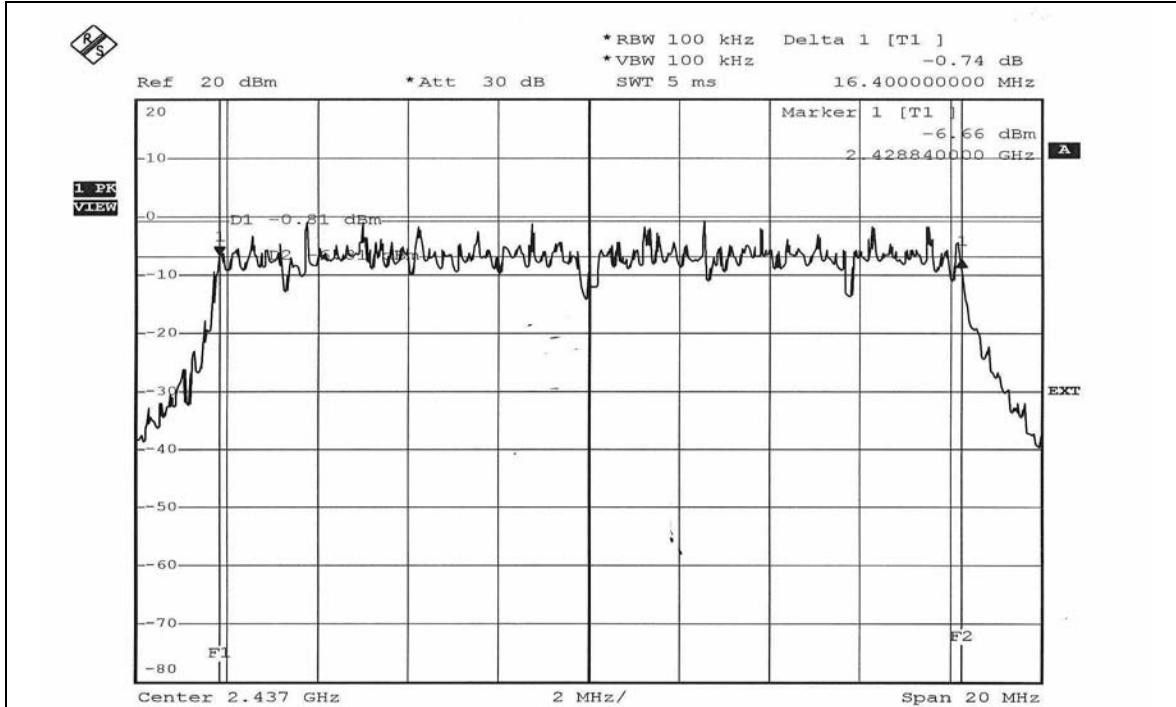

CH11

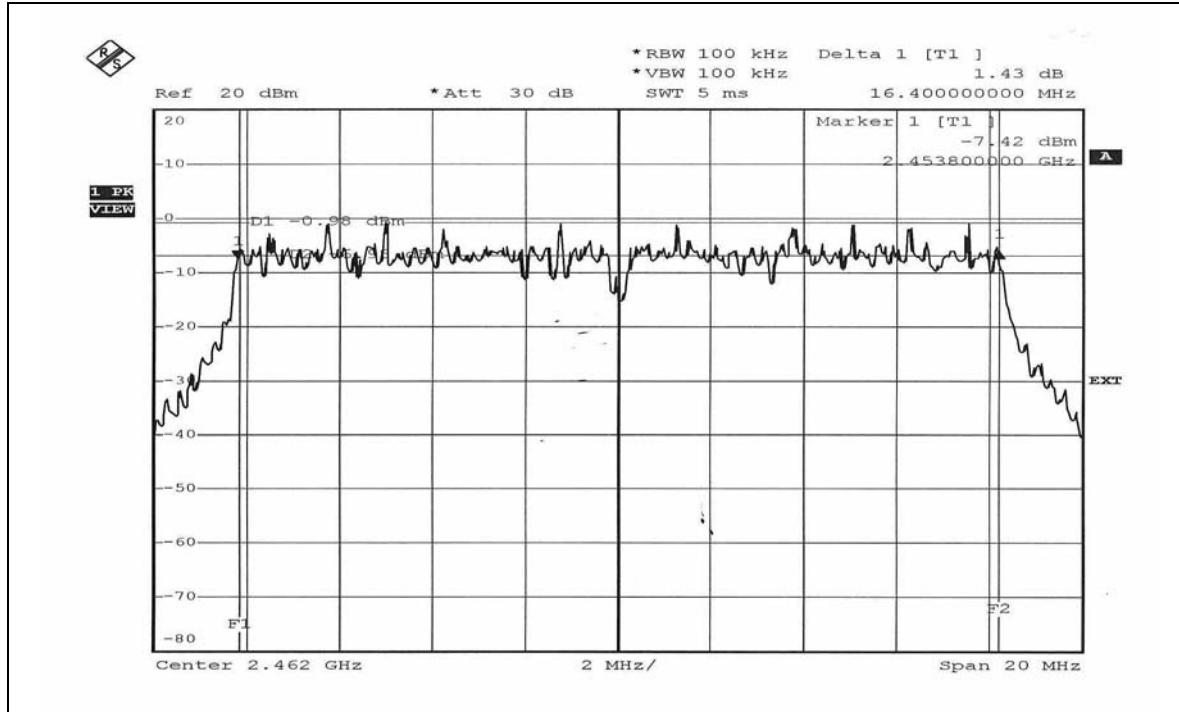

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm. .

4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006
AGILENT SIGNAL GENERATOR	E8257C	MY43320668	Dec. 06, 2006
DIGITAL RT OSCILLOSCOPE	TDS1012	C037299	Dec. 07, 2006
NARDA DETECTOR	4503A	FSCM99899	NA

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to peak the response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same peak reading on oscilloscope. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6

4.4.7 TEST RESULTS

802.11b DSSS MODULATION

EUT	Wireless-G IP Phone	MODEL	WIP300
MODULATION TYPE	BPSK	TRANSFER RATE	1Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg.C, 62%RH, 991hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	56.364	17.51	30	PASS
6	2437	56.754	17.54	30	PASS
11	2462	56.885	17.55	30	PASS

802.11g OFDM MODULATION

EUT	Wireless-G IP Phone	MODEL	WIP300
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg.C, 62%RH, 991hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	28.576	14.56	30	PASS
6	2437	28.510	14.55	30	PASS
11	2462	28.510	14.55	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITIONS

Same as 4.3.6

FCC ID: Q87-WIP300




4.5.7 TEST RESULTS

802.11b DSSS MODULATION


EUT	Wireless-G IP Phone	MODEL	WIP300
MODULATION TYPE	BPSK	TRANSFER RATE	1Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg.C, 62%RH, 991hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-8.22	8	PASS
6	2437	-8.75	8	PASS
11	2462	-8.07	8	PASS


CH1

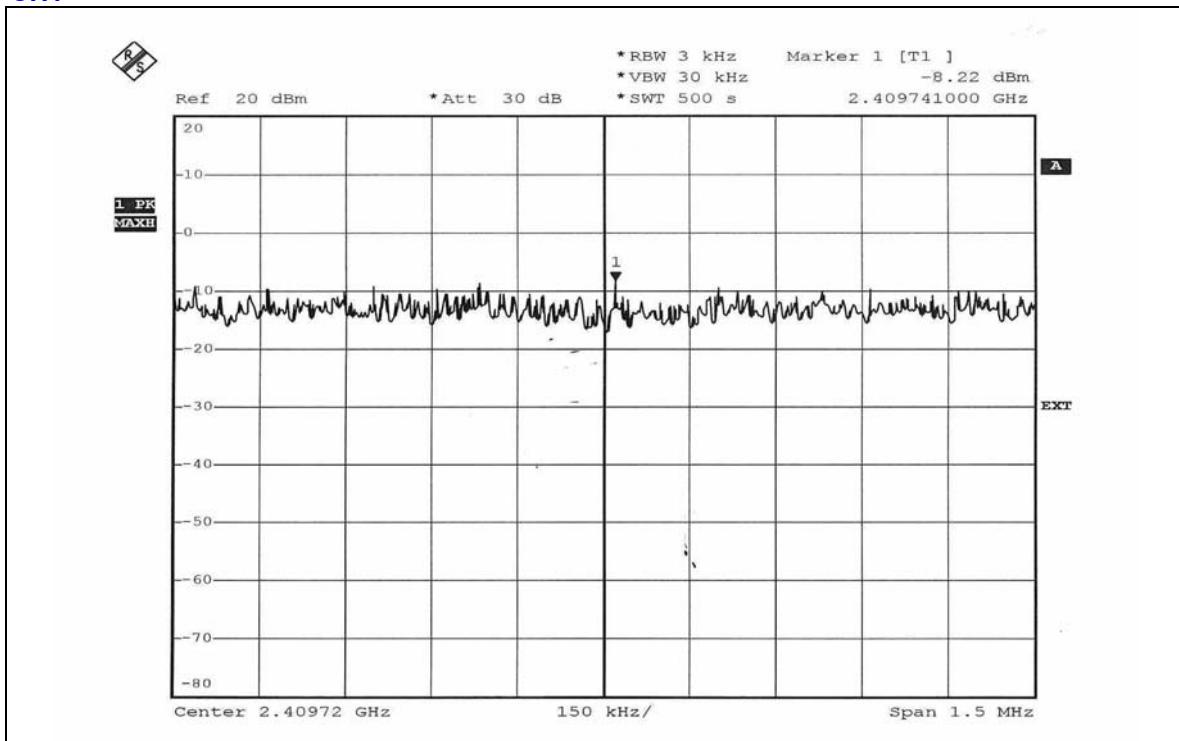

CH6

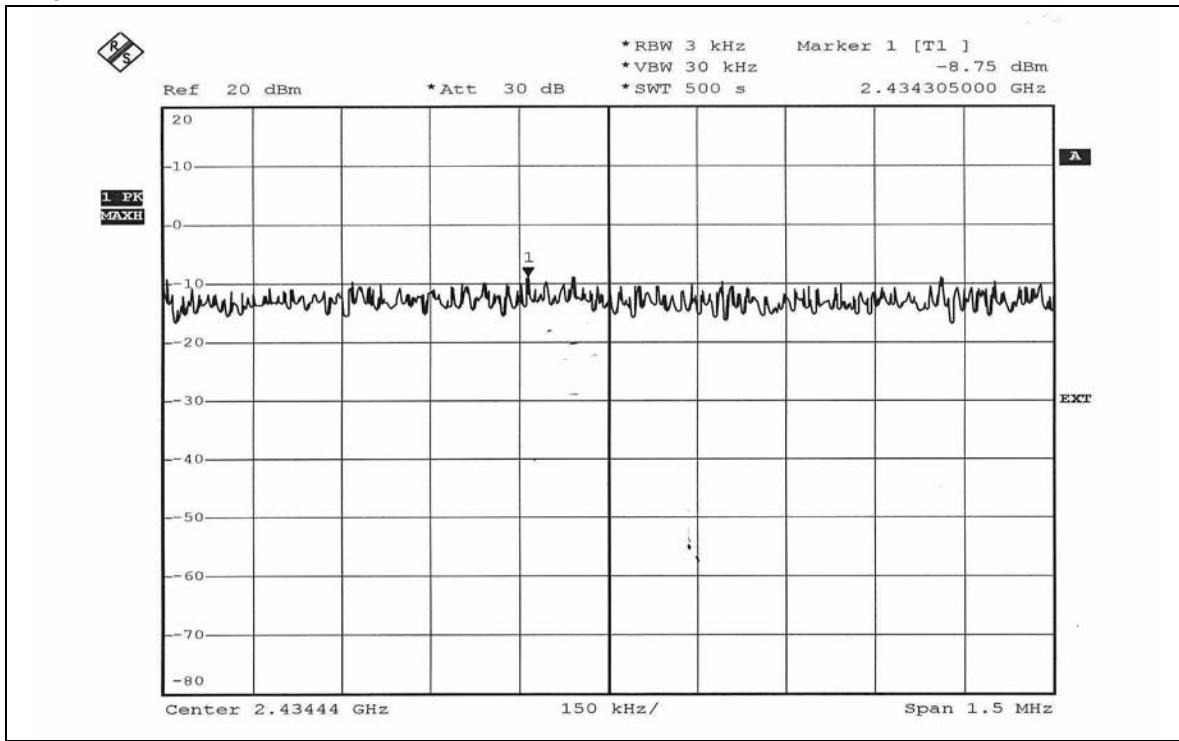

CH11

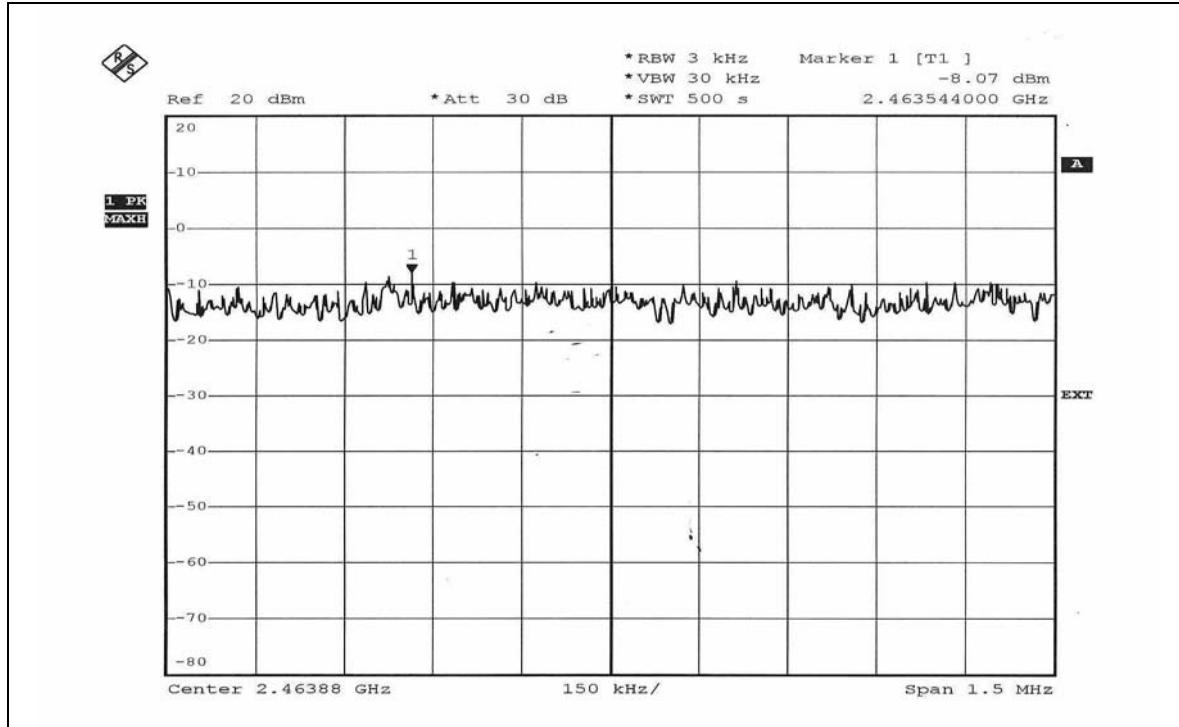

FCC ID: Q87-WIP300




802.11g OFDM MODULATION


EUT	Wireless-G IP Phone	MODEL	WIP300
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg.C, 62%RH, 991hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-15.22	8	PASS
6	2437	-15.14	8	PASS
11	2462	-15.83	8	PASS


CH1

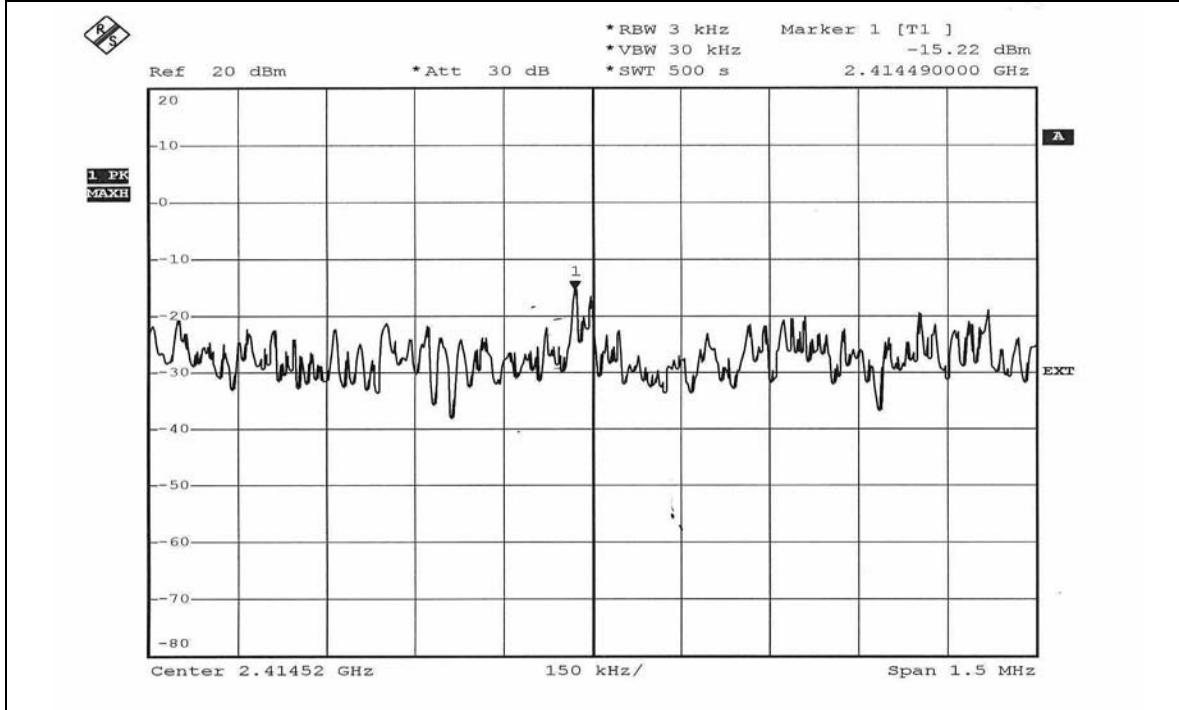

CH6

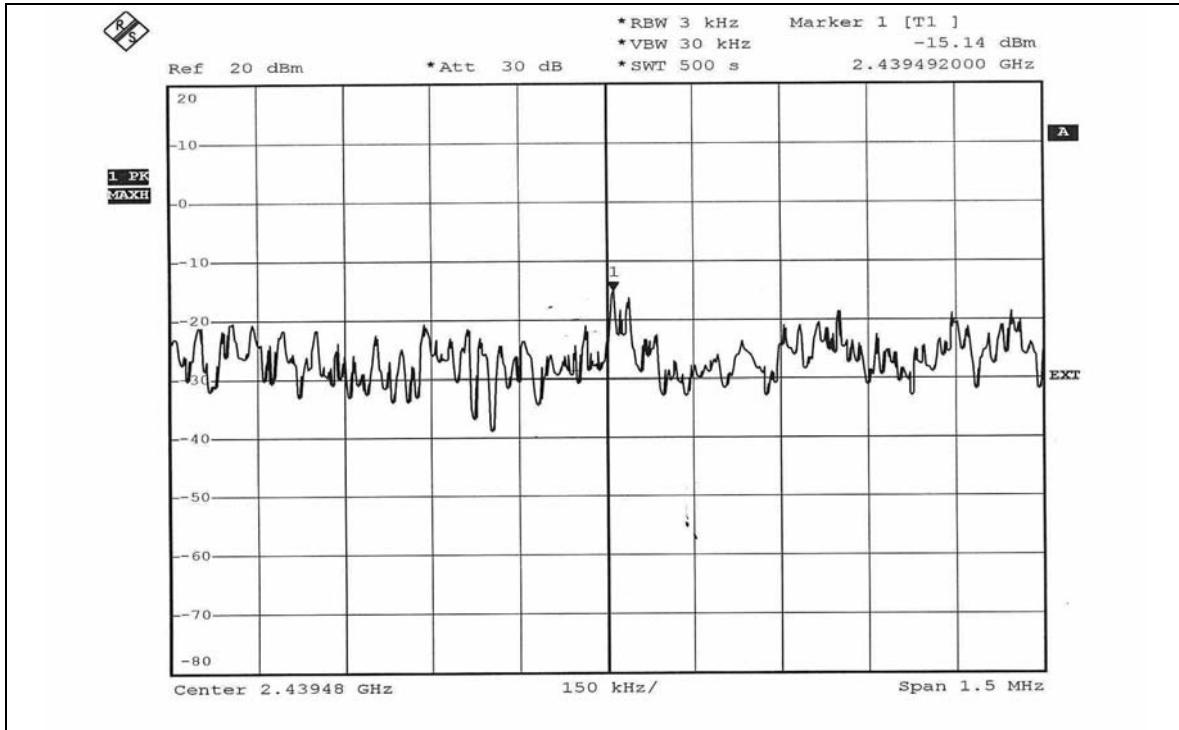

CH11

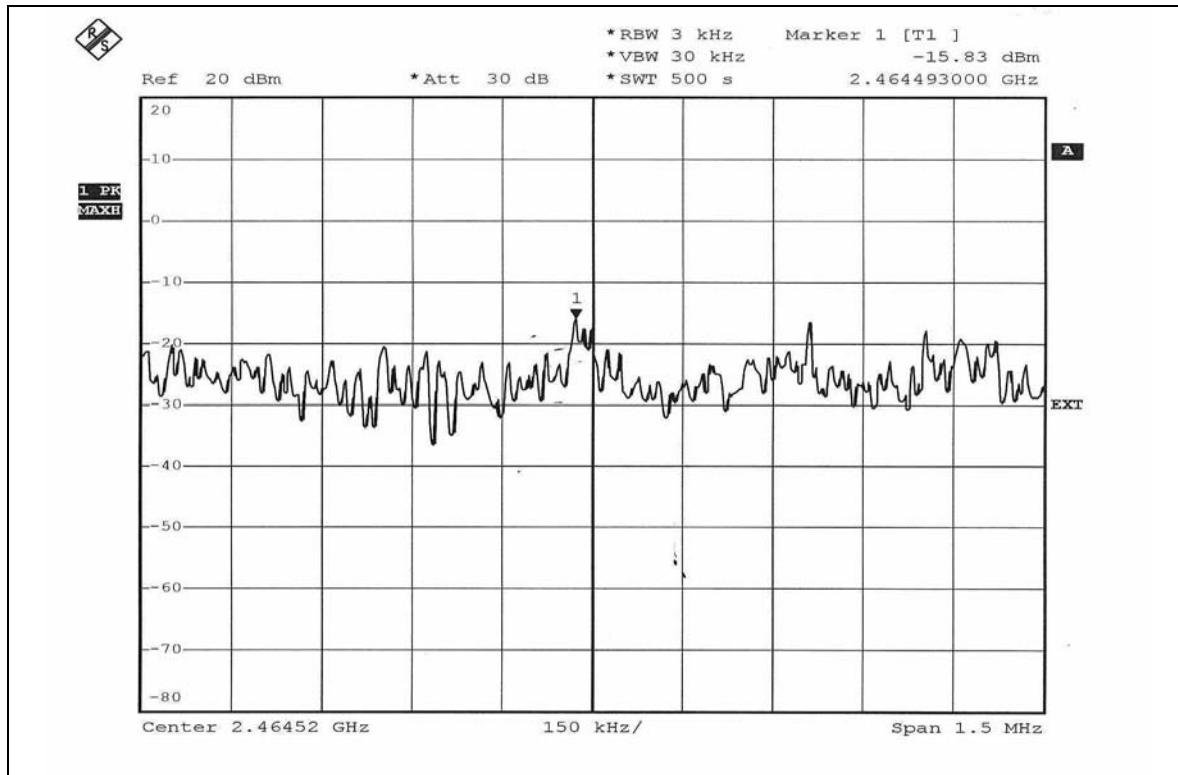

4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100MHz bandwidth from band edge. The band edges was measured and recorded. The spectrum plots (Peak RBW=VBW=100kHz; Average RBW=1MHz, VBW=1kHz or 10kHz) are attached on the following pages.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6

4.6.6 TEST RESULTS

The spectrum plots are attached on the following 12 images. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

802.11b DSSS MODULATION



NOTE 1: The band edge emission plot of DSSS technique on page 53 shows 51.46dBc between carrier maximum power and local maximum emission in restrict band (2.3891GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 105.84dBuV/m (Peak), so the maximum field strength in restrict band is $105.84 - 51.46 = 54.38$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot of DSSS technique on page 53 shows 53.46dBc between carrier maximum power and local maximum emission in restrict band (2.3894GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 102.86dBuV/m (Average), so the maximum field strength in restrict band is $102.86 - 53.46 = 49.40$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot of DSSS technique on page 54 shows 51.24dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 105.55dBuV/m (Peak), so the maximum field strength in restrict band is $105.55 - 51.24 = 54.31$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot of DSSS technique on page 55 shows 53.08dBc between carrier maximum power and local maximum emission in restrict band (2.4848GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 102.01dBuV/m (Average), so the maximum field strength in restrict band is $102.01 - 53.08 = 48.93$ dBuV/m which is under 54dBuV/m limit.

802.11b DSSS MODULATION

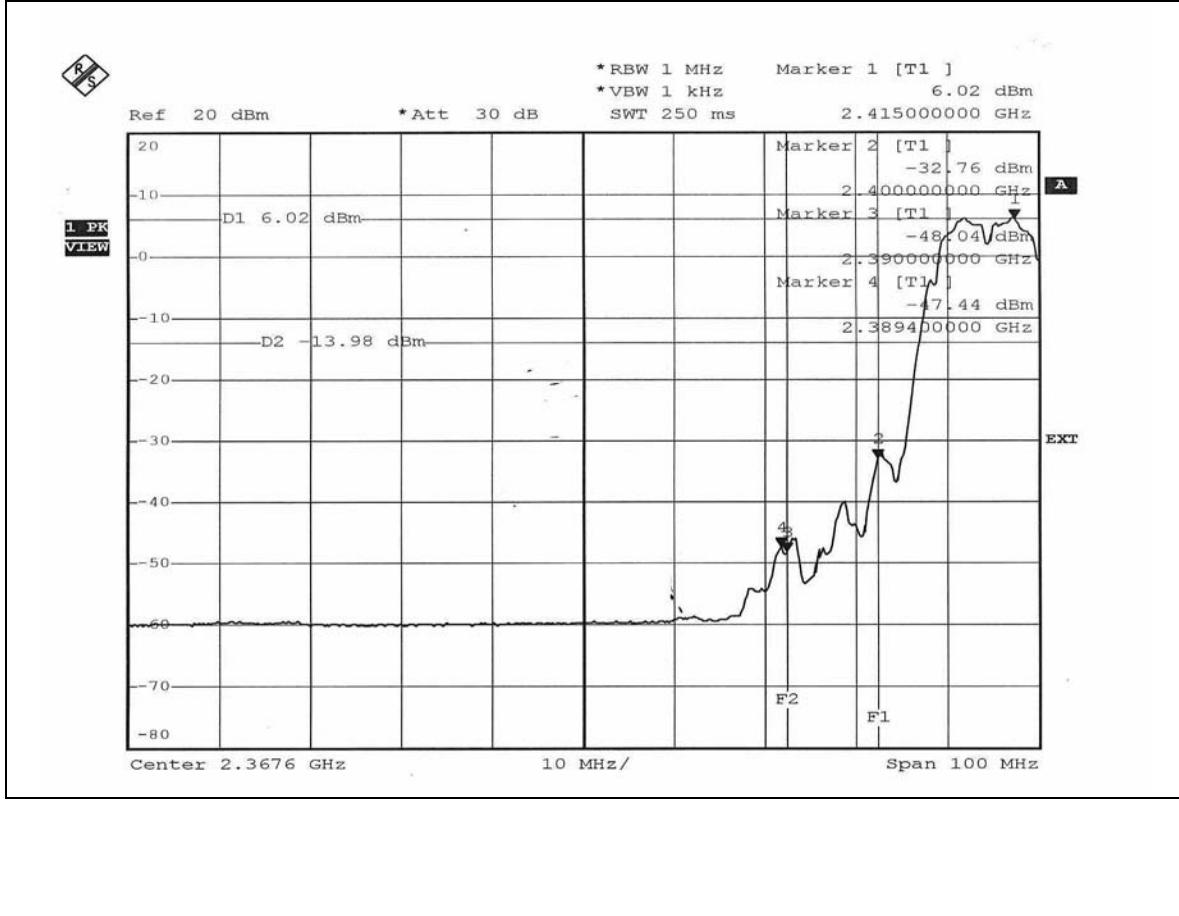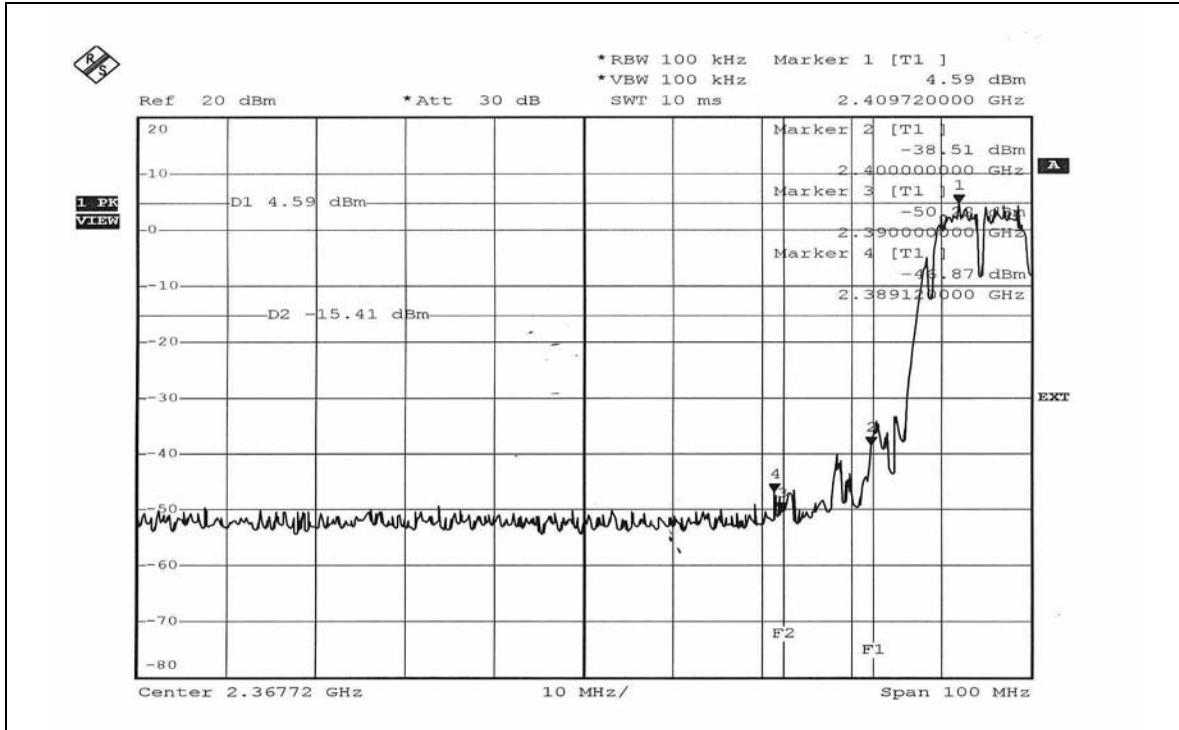

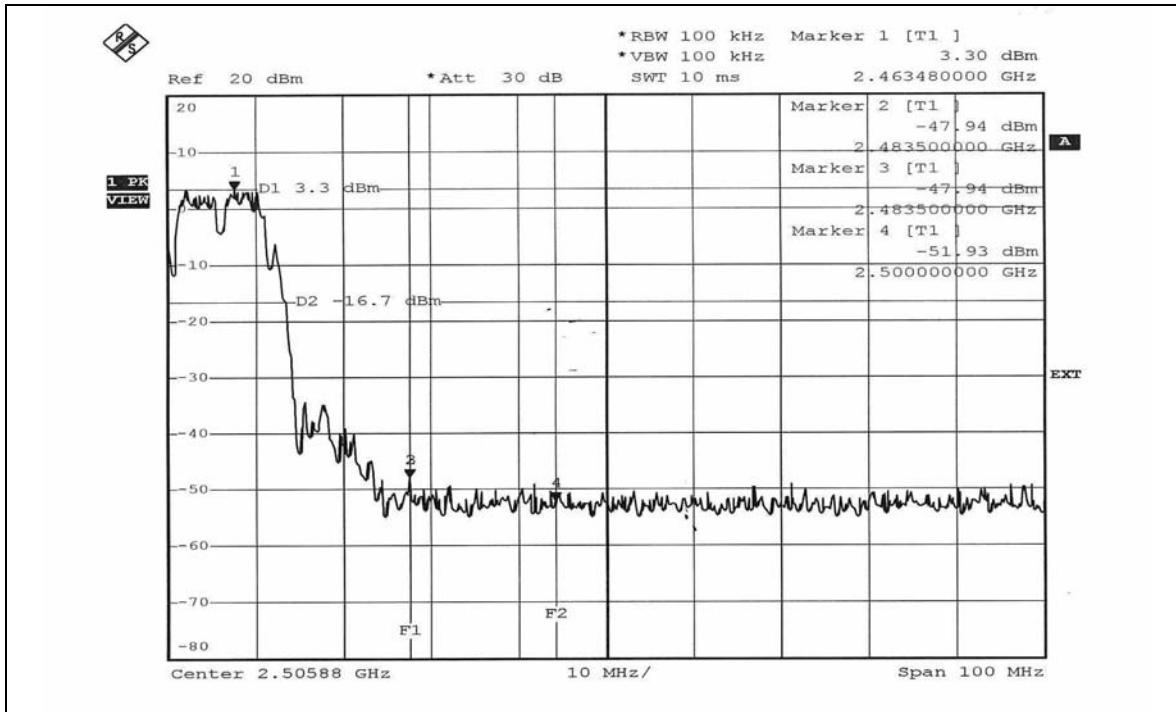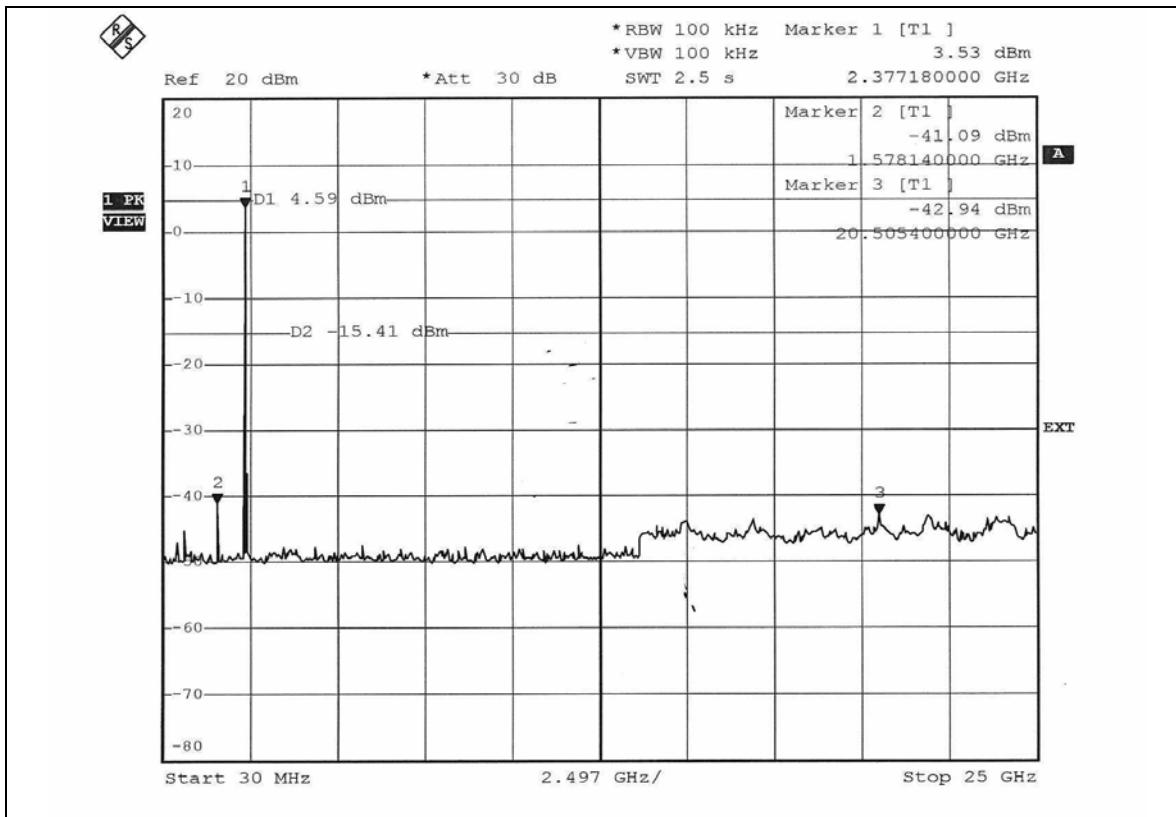

FCC ID: Q87-WIP300

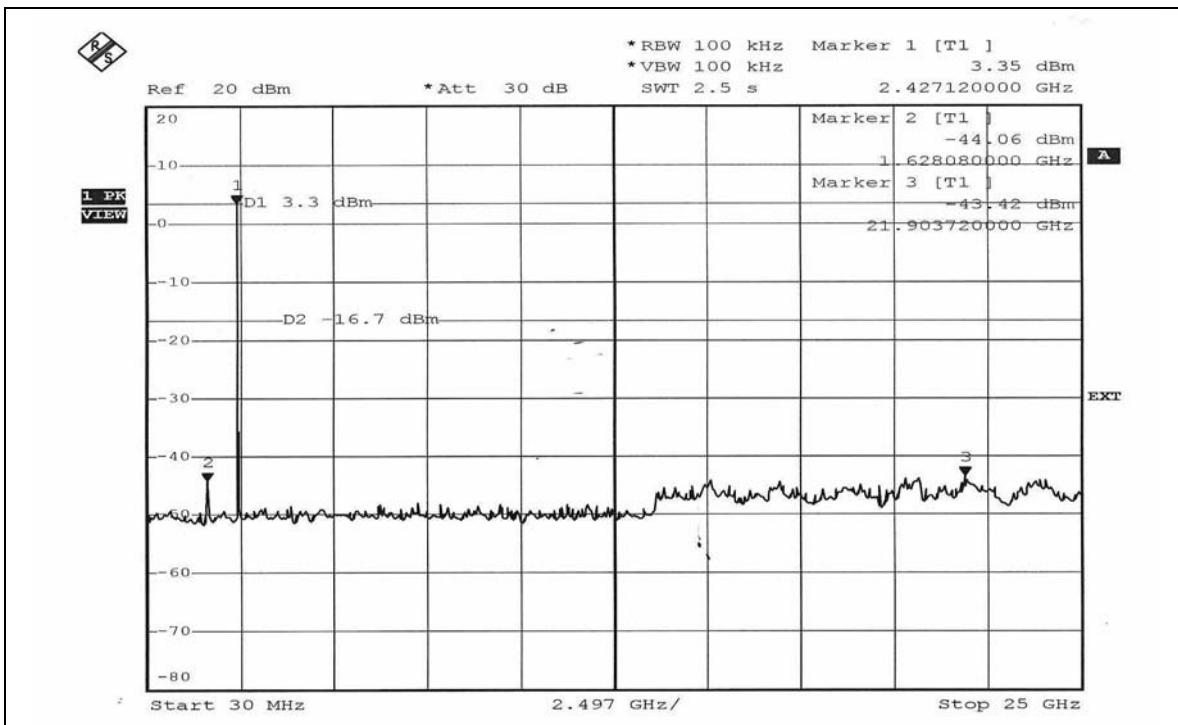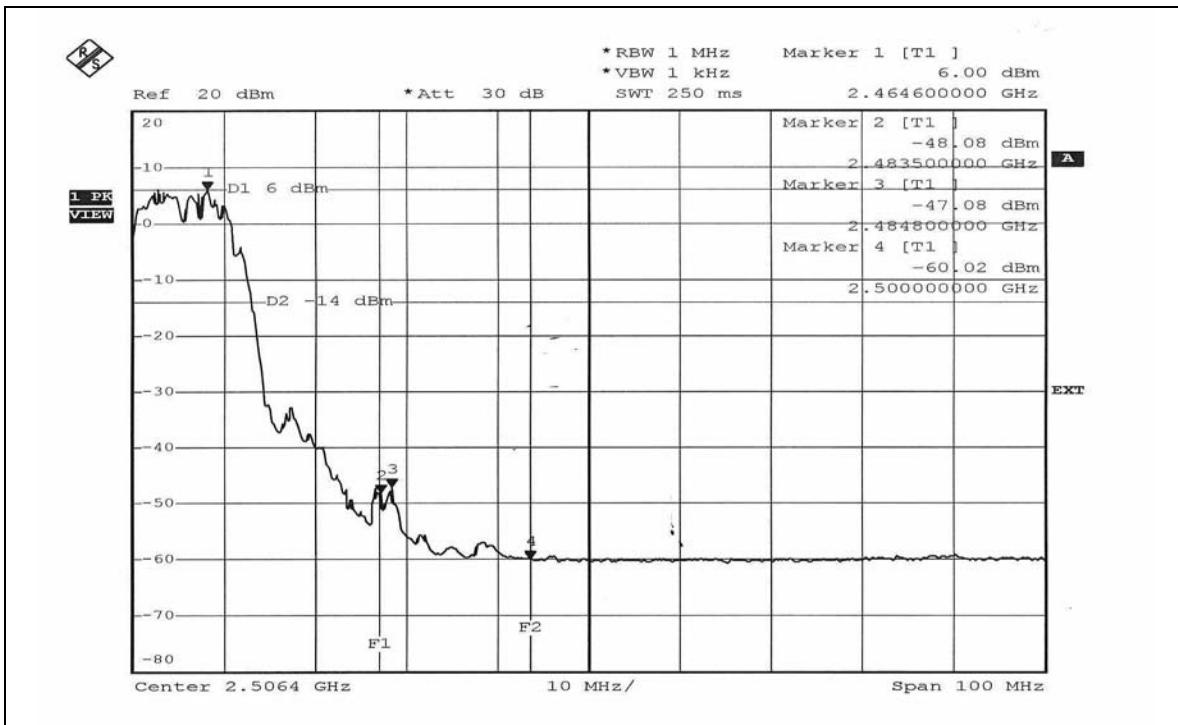

802.11g OFDM MODULATION



NOTE 1: The band edge emission plot of OFDM technique on page 57 shows 48.08dBc between carrier maximum power and local maximum emission in restrict band (2.3722GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 104.15dBuV/m (Peak), so the maximum field strength in restrict band is $104.15 - 48.08 = 56.07$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot of OFDM technique on page 57 shows 51.42dBc between carrier maximum power and local maximum emission in restrict band (2.3894GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 95.39dBuV/m (Average), so the maximum field strength in restrict band is $95.39 - 51.42 = 43.97$ dBuV/m which is under 54dBuV/m limit.



NOTE 2: The band edge emission plot of OFDM technique on page 58 shows 48.57dBc between carrier maximum power and local maximum emission in restrict band (2.4949GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 104.37dBuV/m (Peak), so the maximum field strength in restrict band is $104.37 - 48.57 = 55.80$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot of OFDM technique on page 59 shows 51.29dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 95.94dBuV/m (Average), so the maximum field strength in restrict band is $95.94 - 51.29 = 44.65$ dBuV/m which is under 54dBuV/m limit.

802.11g OFDM MODULATION

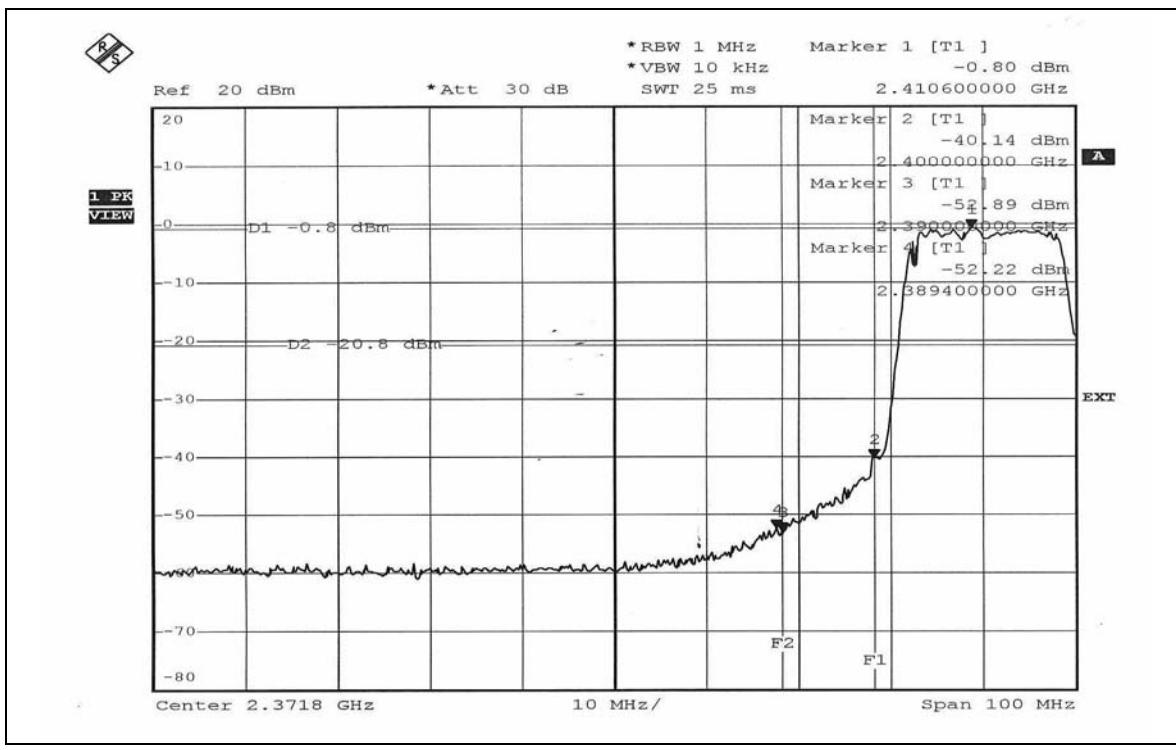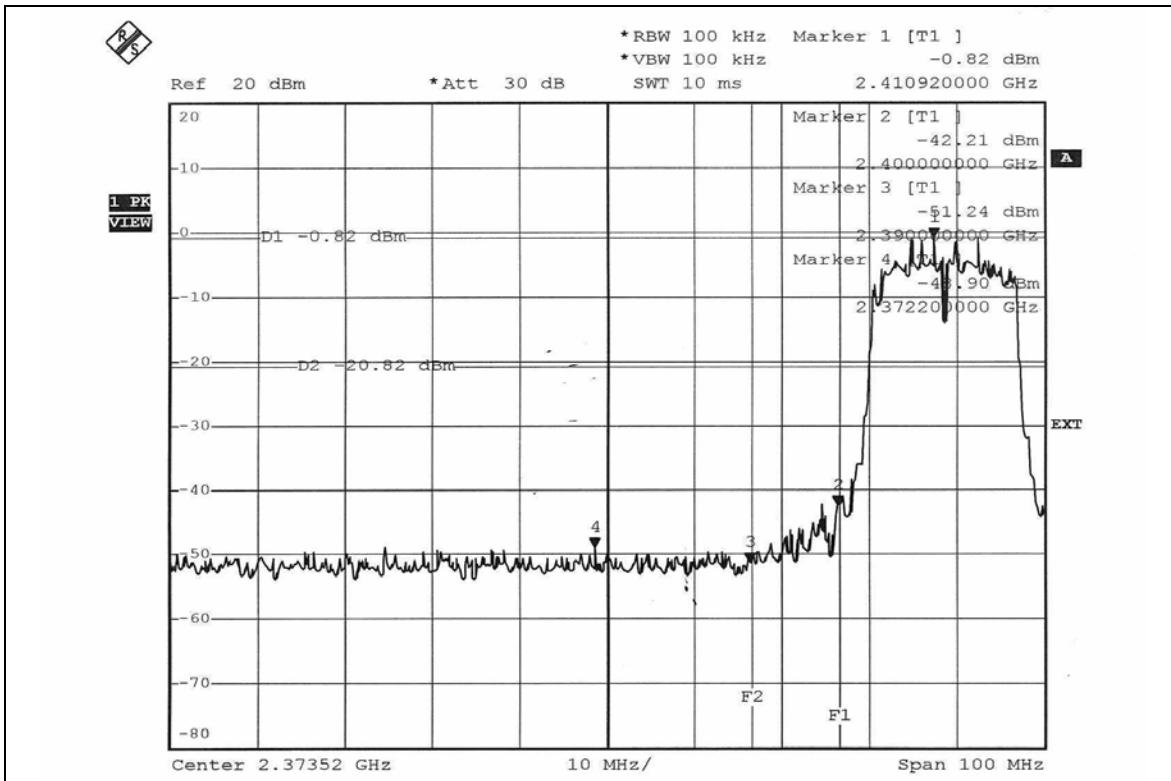

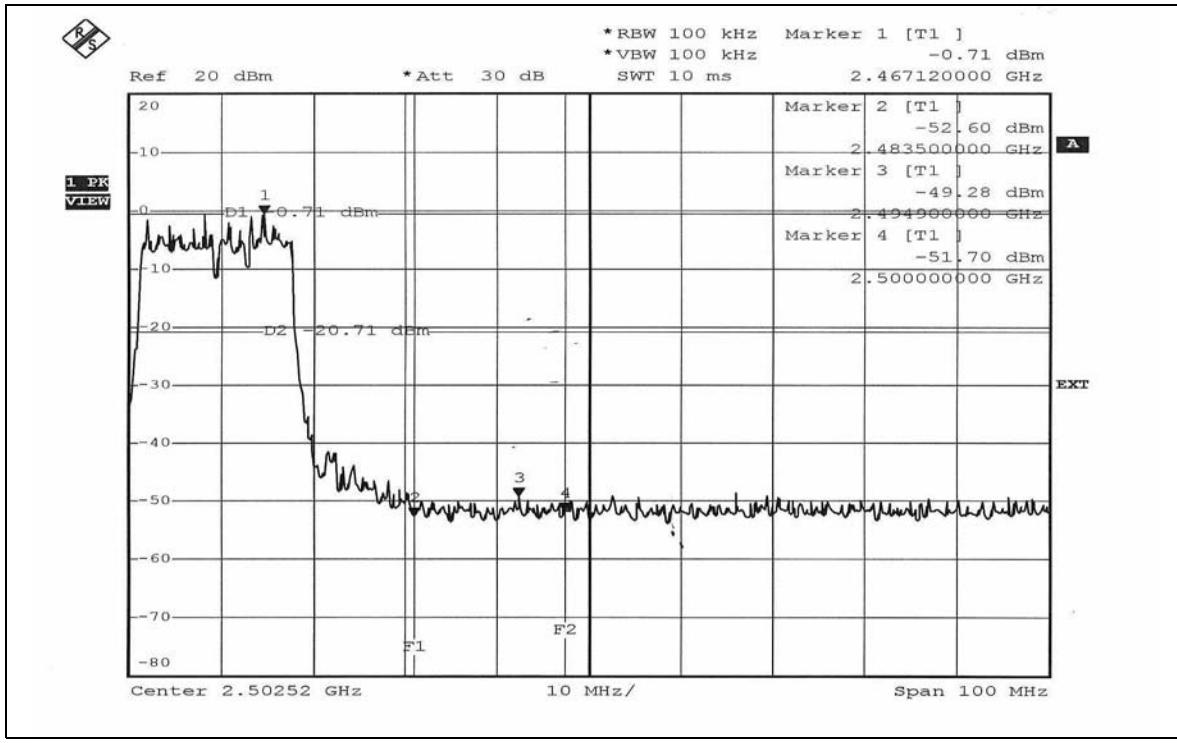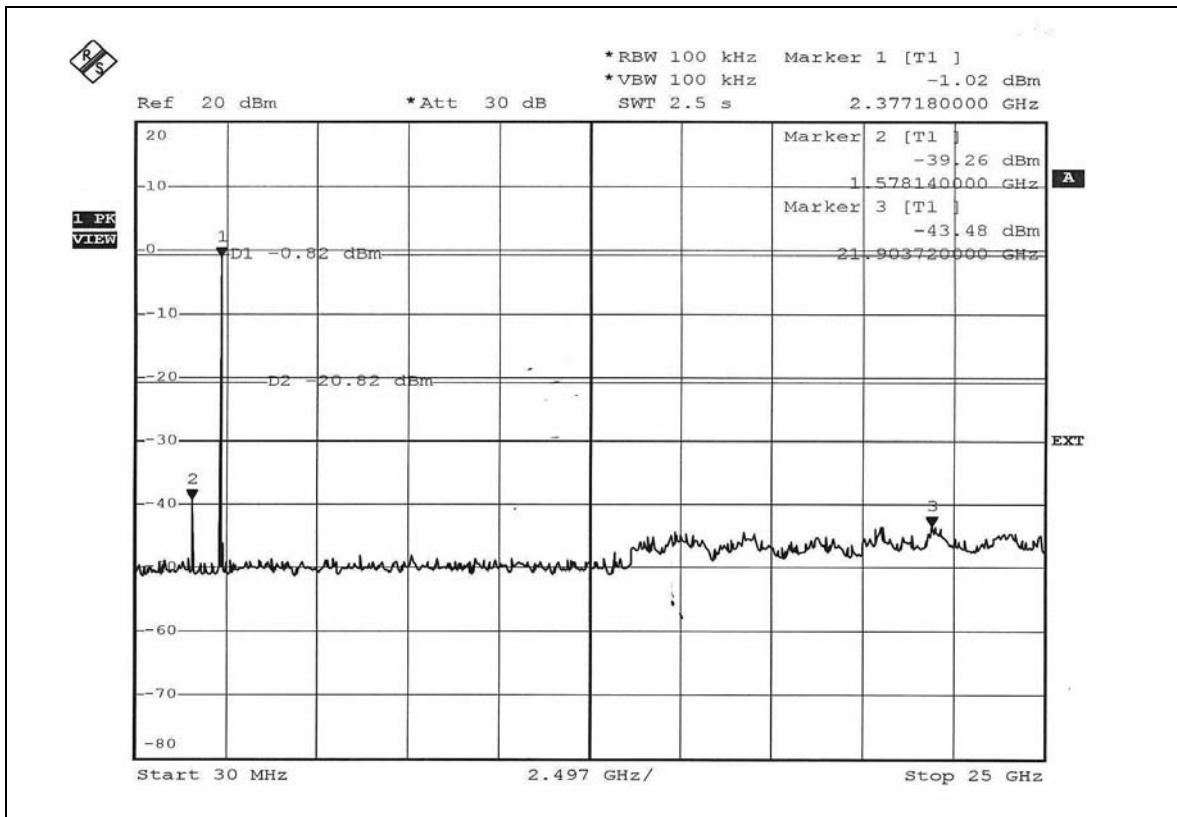

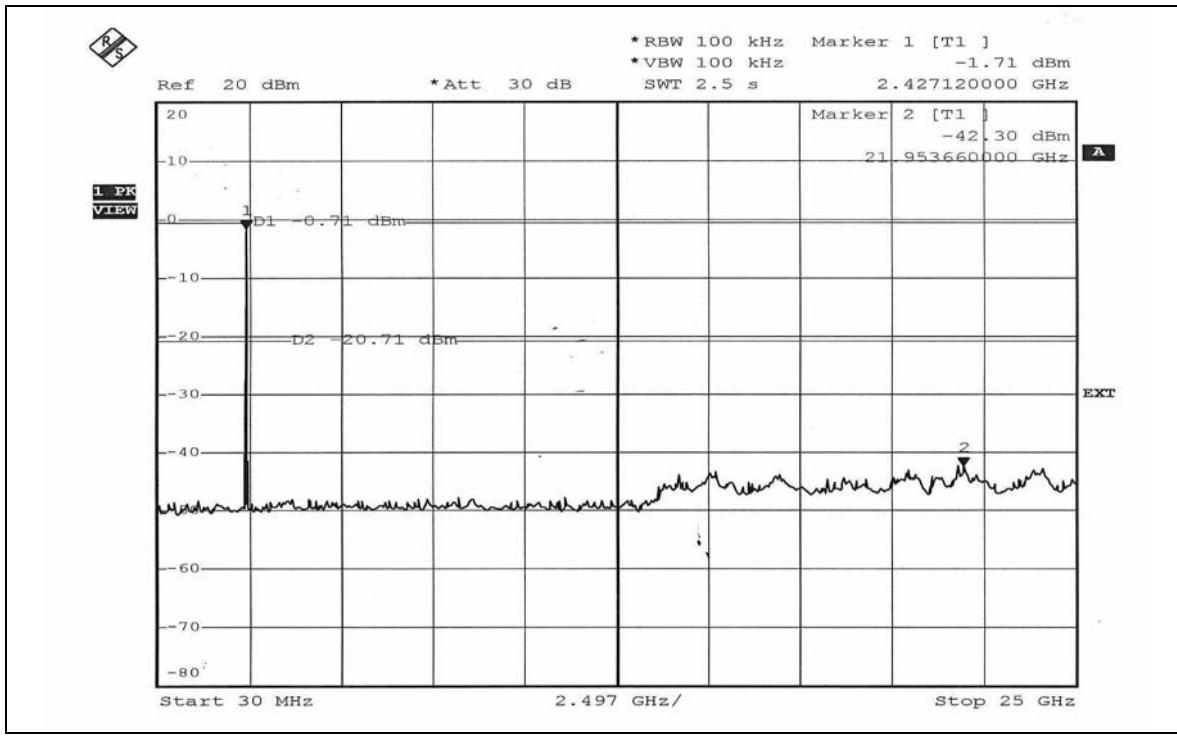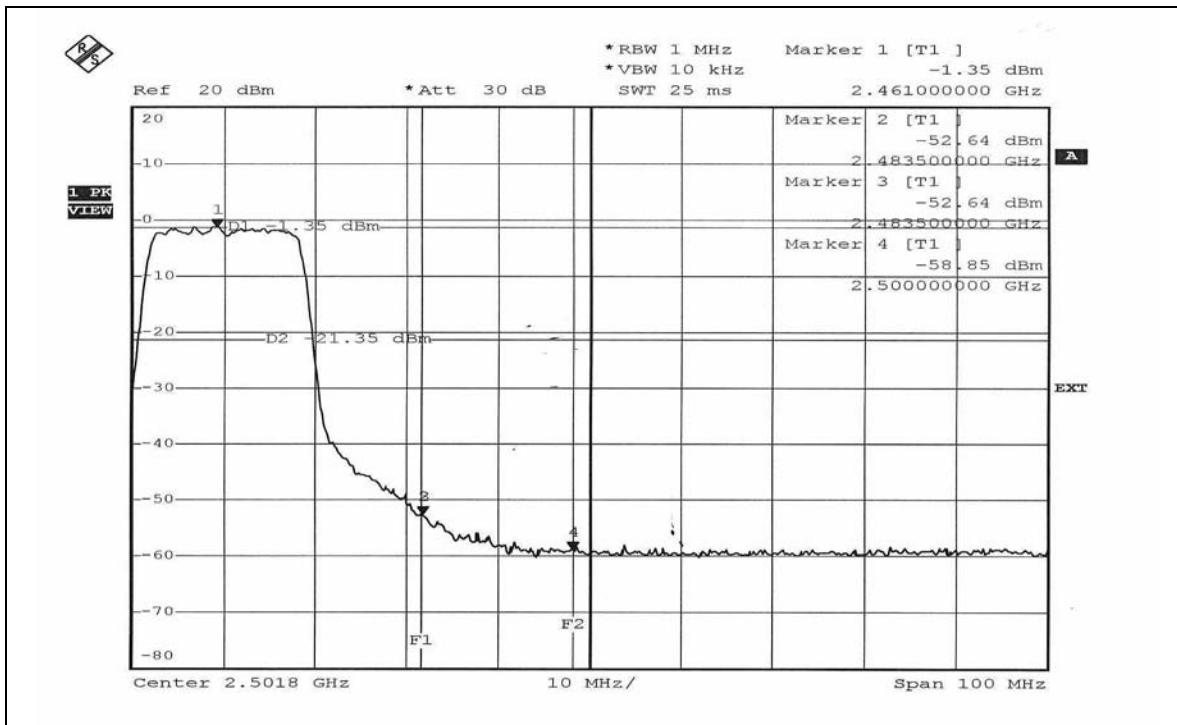

4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION


The antenna used in this product is Chip antenna without connector. The maximum Gain of the antenna is 0.48dBi.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION



CONDUCTED EMISSION TEST



RADIATED EMISSION TEST
TEST MODE A

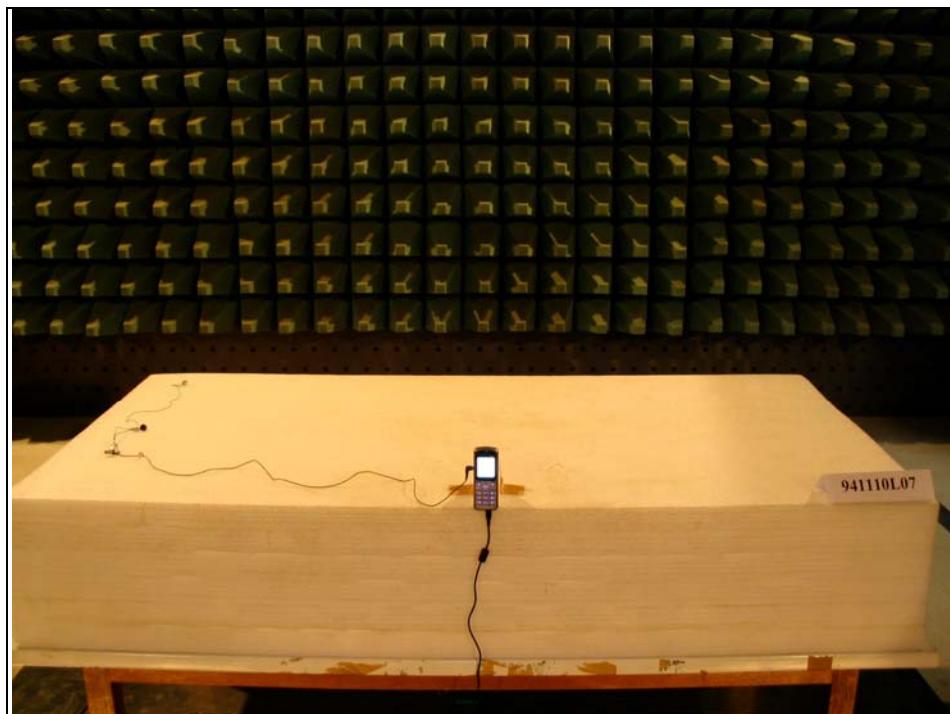

RADIATED EMISSION TEST
TEST MODE B

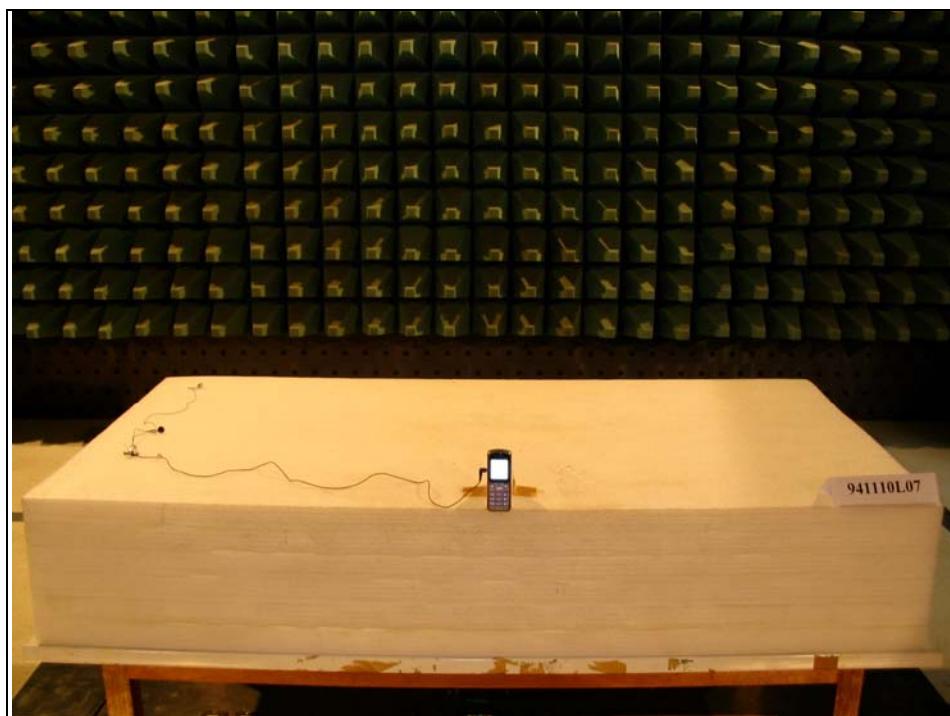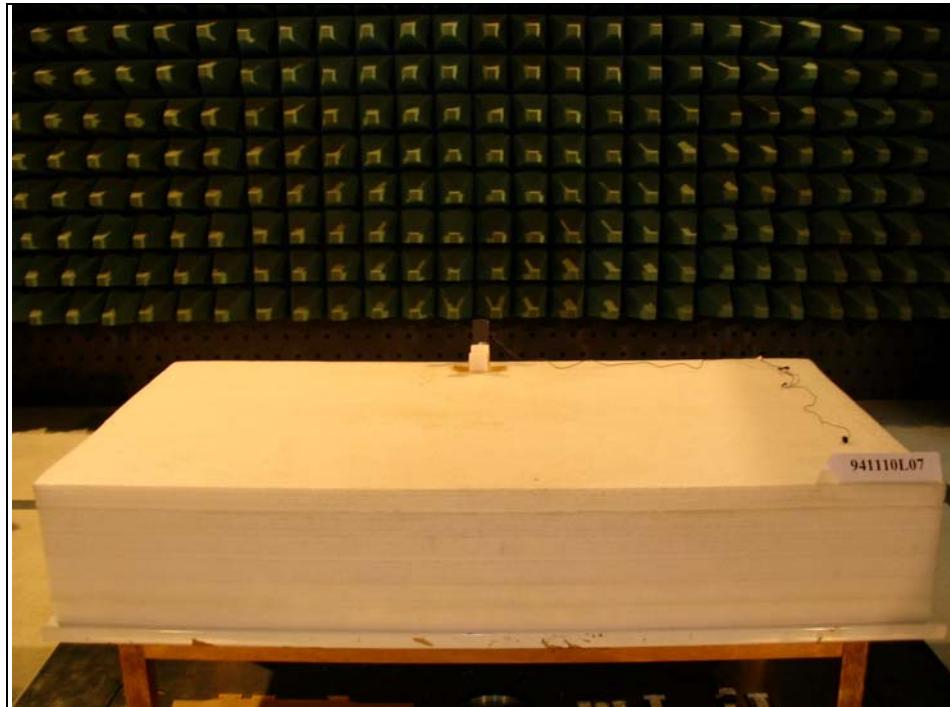

6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025

USA	FCC, NVLAP, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	CNLA, BSMI, DGT
Netherlands	Telefication
Singapore	PSB , GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180
Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343
Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232
Fax: 886-3-3185050

Linko RF Lab.

Tel: 886-3-3270910
Fax: 886-3-3270892

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

APPENDIX-A

MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.