



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRK54G
Report No. : ER03-12-069FRF
Page 1 of 68



TEST REPORT

Product Name : Wireless-G Broadband Router With 4-Port Switch

Model Number : WRK54G

Brand Name : Cisco-Linksys, LLC

Applicant : Cisco-Linksys, LLC

Address : 17401 Armstrong Ave., Irvine, CA 92614 USA

Received Date : Dec. 30, 2003

Tested Date : Dec. 31, 2003 ~ Jan. 19, 2004

Notes :

1. This report will be invalid if duplicated or photocopied in part.
2. This report refers only to the specimen(s) submitted to testing, and be invalid as separately used.
3. This report is invalid without examination stamp and signature of this institute.
4. The tested specimen(s) will be preserved for thirty days from the data issued.
5. The report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.



**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRK54G

Report No. : ER03-12-069FRF

Page 2 of 68

Test Report Certification

Product Name : Wireless-G Broadband Router With 4-Port Switch**Model Number** : WRK54G**Applicant** : Cisco-Linksys, LLC**Measurement Standard :**

47 CFR Part 15, Subpart B and Subpart C (Section 15.247),
ANSI C63.4-2001

Tested By	: <u>K. P. Pang</u> (K. P. Pang)	Date	: <u>Jan. 19, 2004</u>
Reviewed By	: <u>Roger Sheng</u> (Roger Sheng)	Date	: <u>Jan. 19, 2004</u>
Approved By	: <u>Chieh-De Tsai</u> (Chieh-De Tsai, Manager)	Date	: <u>Jan. 19, 2004</u>



WE HEREBY CERTIFY THAT: The measurements shown in the attachment were made in accordance with the procedures indicated, and the energy emitted by the equipment was found to be within the limits applicable. We assume full responsibility for the accuracy and completeness of these measurements and vouch for the qualifications of all persons taking them.



TABLE OF CONTENTS

TITLE	PAGE NO.
1. GENERAL INFORMATION.....	5
1.1 General Statement.....	5
1.2 General Description of EUT & Power.....	5
1.3 Description of Peripherals.....	6
1.4 EUT & Peripherals Setup Diagram.....	7
1.5 EUT Operating Condition.....	8
1.6 Description of Test Site	8
1.7 Summary of Test Results	8
2. CONDUCTED POWERLINE TEST	9
2.1 Test Equipments	9
2.2 Test Setup	9
2.3 Conducted Power Line Emission Limit.....	10
2.4 Test Procedure	10
2.5 Uncertainty of Conducted Emission	10
2.6 Conducted RF Voltage Measurement	11-16
2.7 Photos of Conduction Test.....	17
3. RADIATED EMISSION TEST.....	18
3.1 Test Equipments	18
3.2 Test Setup	18
3.3 Radiation Limit.....	19
3.4 Test Procedures.....	20
3.5 Uncertainty of Radiated Emission	20
3.6 Radiated RF Noise Measurement	21-46
3.7 Photos of Open Site	47-48
4. 6dB BANDWIDTH MEASUREMENT.....	49
4.1 Test Equipments	49
4.2 Test Setup	49
4.3 Limits of 6dB Bandwidth Measurement.....	49
4.4 Test Procedure	49
4.5 Uncertainty of Conducted Emission	49
4.6 Test Results.....	50
4.7 Photo of 6db Bandwidth Measurement.....	51-52
5. MAXIMUM PEAK OUTPUT POWER.....	53
5.1 Test Equipments	53
5.2 Test Setup	53
5.3 Limits of Maximum Peak Output Power	53
5.4 Test Procedure	54
5.5 Uncertainty of Conducted Emission	54
5.6 Test Results.....	54
6. POWER SPECTRAL DENSITY MEASUREMENT	55
6.1 Test Equipments	55
6.2 Test Setup	55
6.3 Limits of Power Spectral Density Measurement	55
6.4 Test Procedure	56
6.5 Uncertainty of Conducted Emission	56
6.6 Test Results.....	56
6.7 Photo of Power Spectral Density Measurement	57-58



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRK54G
Report No. : ER03-12-069FRF
Page 4 of 68

TABLE OF CONTENTS

TITLE	PAGE NO.
7. BANDEDGE MEASUREMENT.....	59
7.1 Test Equipments	59
7.2 Test Setup	59
7.3 Limits of Out of Band Emissions Measurement	59
7.4 Test Procedure	60
7.5 Uncertainty of Conducted Emission	60
7.6 Test Results	60-61
7.7 Photo of Out of Bandedge Measurement	62-65
8. ANTENNA REQUIREMENT	66
8.1 Standard Applicable	66
8.2 Antenna Connected Construction	66
9. RF EXPOSURE EVALUATION	67
9.1 Friis Formula	67
9.2 EUT Operating Condition	67
9.3 Test Result of RF Exposure Evaluation	68
9.3.1 Antenna Gain	68
9.3.2 Output Power into Antenna & RF Exposure Evaluation Distance	68



1. GENERAL INFORMATION

1.1 General Statement

MEASUREMENT DEVIATION : Comply with standard in full

TRACEABILITY : This test result is traceable to national or international std.

1.2 General Description of EUT & Power

MANUFACTURER : Cisco-Linksys, LLC
SAMPLE NAME : Wireless-G Broadband Router With 4-Port Switch
MODEL NAME : WRK54G
FREQUENCY RANGE : 2412 MHz to 2462MHz
CHANNEL NUMBER : 11
AIR DATA RATE : 54Mbps (802.11g Mode), 11Mbps(802.11b Mode)
TYPE OF MODULATION : Orthogonal Frequency Division Multiplex
and Direct Sequence Spread Spectrum
FREQUENCY SELECTION : BY SOFTWARE
EUT DESCRIPTION : 2.4GHz (Orthogonal Frequency Division Multiplex
and Direct Sequence Spread Spectrum) data transceiver for
Wireless-G Broadband Router With 4-Port Switch
ANTENNA TYPE : Dipole Antenna Soldered on PCB , Antenna Gain : 3.3dBi.
POWER SOURCE : 12VDC (From Adapter)

Power Adapter (1) :

MANUFACTURER : HON-KWANG ELECTRIC CO., LTD.
MODEL NUMBER : D12-1A
INPUT POWER : 120VAC
OUTPUT POWER : 12VDC, 1A

Power Adapter (2) :

MANUFACTURER : Global Yeou Diann Elec. Ind. co., Ltd.
MODEL NUMBER : AM-1201000D41
INPUT POWER : 120VAC
OUTPUT POWER : 12VDC, 1A

Power Adapter (3) :

MANUFACTURER : LEADER ELECTRONICS INC.
MODEL NUMBER : 411210003CT
INPUT POWER : 120VAC
OUTPUT POWER : 12VDC, 1A



1.3 Description of Peripherals

(1) PC

MANUFACTURER : HP CORP.
MODEL NUMBER : t123d
SERIAL NUMBER : TW31720190
FCC ID : DOC

(2) PC

MANUFACTURER : HP CORP.
MODEL NUMBER : t123d
SERIAL NUMBER : TW31720220
FCC ID : DOC

(3) Notebook PC

MANUFACTURER : COMPAQ CORP.
MODEL NUMBER : N800V
SERIAL NUMBER : 5Y3EKSQZD1TJ
FCC ID : DOC
POWER CORD : Unshielded, Detachable, 1.8m

(4) Notebook PC

MANUFACTURER : COMPAQ CORP.
MODEL NUMBER : N800V
SERIAL NUMBER : 5Y33KAQZM0YL
FCC ID : DOC
POWER CORD : Unshielded, Detachable, 1.8m

(5) Monitor

MANUFACTURER : HP CORP.
MODEL NUMBER : D8894A
SERIAL NUMBER : CN00905269
FCC ID : ARSCM356N
POWER CORD : Unshielded , Detachable , 1.8m

(6) Keyboard

MANUFACTURER : HP CORP.
MODEL NUMBER : 5219
SERIAL NUMBER : BN31206451
FCC ID : E5XKB5209
SIGNAL CABLE : Shielded , Undetachable , 1.8m
POWER SOURCE : 5VDC (from PC)

(7) Mouse

MANUFACTURER : HP CORP.
MODEL NUMBER : N3+ Optical
SERIAL NUMBER : K030804651
FCC ID : DOC
SIGNAL CABLE : Shielded , Undetachable , 1.8m
POWER SOURCE : 5VDC (from PC)

(8) Monitor

MANUFACTURER : HP CORP.
 MODEL NUMBER : D8894A
 SERIAL NUMBER : CN00905251
 FCC ID : ARSCM356N
 POWER CORD : Unshielded , Detachable , 1.8m

(9) Keyboard

MANUFACTURER : HP CORP.
 MODEL NUMBER : 5219
 SERIAL NUMBER : BN31016769
 FCC ID : E5XKB5209
 SIGNAL CABLE : Shielded , Undetachable , 1.8m
 POWER SOURCE : 5VDC (from PC)


(10) Mouse

MANUFACTURER : HP CORP.
 MODEL NUMBER : N3+ Optical
 SERIAL NUMBER : K03084372
 FCC ID : DOC
 SIGNAL CABLE : Shielded , Undetachable , 1.8m
 POWER SOURCE : 5VDC (from PC)

(11) CABLE

	Type	Connector	shielded	Length
(A)	Cat5 twisted-pair	RJ-45, Plastic	NO	15m

1.4 EUT & Peripherals Setup Diagram

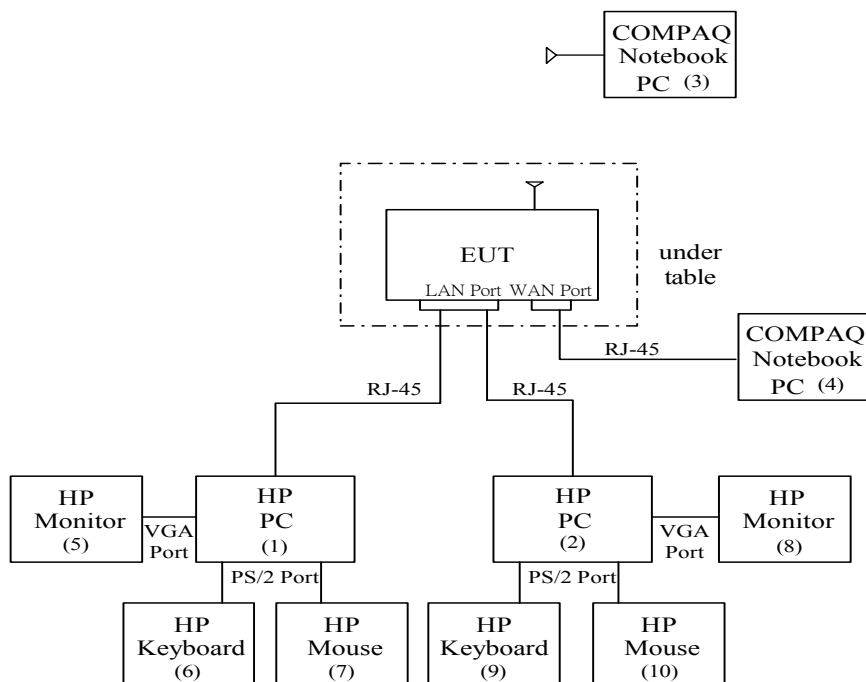



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRK54G
Report No. : ER03-12-069FRF
Page 8 of 68

1.5 EUT Operating Condition

1. Set up all computers like the setup diagram.
2. Notebook PC (4) ping 192.168.1.1 -t -l 5000 to EUT.
3. PC (1) connected EUT ping 192.168.1.80 -t -l 5000 to PC (2).
4. Notebook PC (3) ping 192.168.1.70 -t -l 5000 to PC (1).
5. All of the function are under run.
6. Start test.

1.6 Description of Test Site

SITE DESCRIPTION : FCC Certificate NO. : 90585
BSMI Certificate NO. : SL2-IN-E-0002
NVLAP Lab code : 200118-0
CNLA Certificate NO. : CNLA-ZL97018
VCCI Certificate NO. : R-1189, C-1250
NAME OF SITE : Ecom Sertech Corp. Hsinchu
(Spin-off from ITRI / ERSO on Apr. 01, 2003)
SITE LOCATION : Rm.258, Bldg.17, NO.195, Sec. 4, Chung Hsing Rd.,
Chu-Tung Chen. Hsin-Chu, Taiwan 310 R.O.C.

1.7 Summary of Test Results

The EUT has been tested according to the following specifications :

APPLIED STANDARD : 47 CFR Part 15, Subpart B and Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.107 15.207	AC Power Conducted Emission Limit : 15.107	PASS	Meet the requirement of limit
15.247(a)(2)	Spectrum Bandwidth of a Orthogonal Frequency Division Multiplex System Limit : 6dB bandwidth > 500KHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit : max. 30dBm	PASS	Meet the requirement of limit
15.109 15.205 15.209	Transmitter Radiated Emissions Limit : Table 15.209	PASS	Meet the requirement of limit
15.247(d)	Power Spectral Density Limit : max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Out of Band Emission and Restricted Band Radiation Limit: 20dB less than peak value of fundamental frequency Restricted band Limit: Table 15.209	PASS	Meet the requirement of limit



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRK54G

Report No. : ER03-12-069FRF

Page 9 of 68


2. CONDUCTED POWERLINE TEST

2.1 Test Equipments

The following test equipments are used during the conducted powerline tests :

Manufacturer or Type	Model No.	Serial No.	Date of Calibration	Calibration Period	Remark
HP SPECTRUM ANALYZER & DISPLAY	8568A	2235A02320	NOV. 14, 2003	1 Year	PRETEST
HP QUASI-PEAK ADAPTER	85650 A	2341A00672	NOV. 14, 2003	1 Year	PRETEST
SOLAR ISOLATION TRANSFORMER	7032-1	N/A	N/A	N/A	FINAL
EMCO L.I.S.N.	3850/2	9311-1025 9401-1028	JAN. 08, 2004 For Characteristic impedance MAY 18, 2003 For Insertion loss	1 Year	FINAL
R & S TEST RECEIVER	ESHS 30	838550/003	JAN. 22, 2003	1 Year	FINAL
KEENE SHIELDED ROOM	5983	No.1	N/A	N/A	FINAL
R & S PULSE LIMIT	EHS3Z2	357.8810.52	JUL. 10, 2003	1 Year	FINAL
N TYPE COAXIAL CABLE	-----	-----	JUL. 10, 2003	1 Year	FINAL
50Ω TERMINATOR	-----	-----	JUL. 10, 2003	1 Year	FINAL

2.2 Test Setup

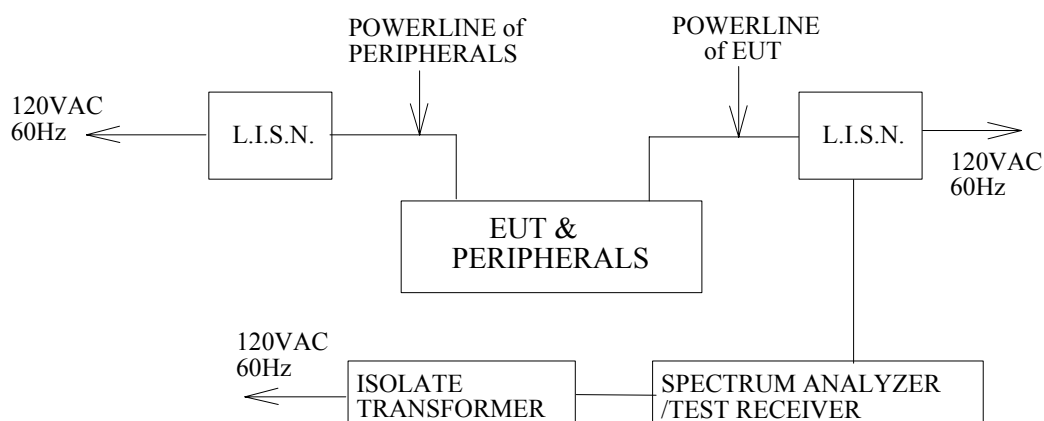

2.3 Conducted Power Line Emission Limit

For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following :

Frequency (MHz)	Maximum RF Line Voltage (dB μ v)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56	56-46
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

For intentional device, according to § 15.207(a) Line Conducted Emission Limit is same as above table.

2.4 Test Procedure

The test procedure is performed in a 12ft×12ft×8ft(L×W×H) shielded room. the EUT along with its peripherals were placed on a 1.0m(W)×1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chasis ground was bounded to the horizontal ground plane of shielded room. All peripherals were connected to the second LISN and the chasis ground also bounded to the horizontal ground plane of shielded room. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

2.5 Uncertainty of Conducted Emission

The uncertainty of conducted emission is ± 1.36 dB.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRK54G

Report No. : ER03-12-069FRF

Page 11 of 68

2.6 Conducted RF Voltage Measurement

The frequency spectrum from 0.15 MHz to 30 MHz was investigated. All emissions not reported below are more than 50 dB below the prescribed limits.

Temperature : 26 °C

Humidity : 65 % RH

Frequency (MHz)	Loss(dB)		Measurewment				L1 Emission (dBμV)		L2 Emission (dBμV)		Limits (dBμV)	
			L1(dBμV)		L2(dBμV)							
	L1	L2	Q.P.	Ave.	Q.P.	Ave.	Q.P.	Ave.	Q.P.	Ave.	Q.P.	Ave.
0.150	0.10	0.20	*	*	*	*	*	*	*	*	66.00	56.00
0.168	0.10	0.20	*	*	57.40	25.80	*	*	57.60	26.00	65.06	55.06
0.201	0.10	0.20	55.50	24.80	*	*	55.60	24.90	*	*	63.57	53.57
0.330	0.10	0.20	*	*	42.90	17.90	*	*	43.10	18.10	59.45	49.45
0.495	0.20	0.20	46.40	16.30	*	*	46.60	16.50	*	*	56.08	46.08
0.510	1.20	1.21	*	*	42.20	14.60	*	*	43.41	15.81	56.00	46.00
0.590	0.10	0.20	44.00	14.70	*	*	44.10	14.80	*	*	56.00	46.00
1.100	0.20	0.20	*	*	35.40	*	*	*	35.60	*	56.00	46.00
1.220	0.20	0.20	35.30	*	*	*	35.50	*	*	*	56.00	46.00
2.170	0.10	0.20	23.60	*	*	*	23.70	*	*	*	56.00	46.00
2.320	1.40	1.74	*	*	24.90	*	*	*	26.64	*	56.00	46.00
4.420	0.50	0.50	10.30	*	*	*	10.80	*	*	*	56.00	46.00
4.470	0.20	0.20	*	*	13.40	*	*	*	13.60	*	56.00	46.00
15.250	0.10	0.20	36.40	*	33.80	*	36.50	*	34.00	*	60.00	50.00
16.900	1.20	1.21	39.70	*	33.00	*	40.90	*	34.21	*	60.00	50.00
30.000	1.40	1.80	*	*	*	*	*	*	*	*	60.00	50.00

REMARKS : 1. * Undetectable or the Q.P. value is lower than the limits of Ave.

2. Mode : 802.11b mode.

3. The EUT can be operated in transmitting, stand-by and receiving mode.

After preliminary scan, EUT in transmitting mode has highest emission.

The EUT was set in transmitting mode at final test to get the worst case test results.

4. For Adapter (1).

The frequency spectrum from 0.15 MHz to 30 MHz was investigated. All emissions not reported below are more than 50 dB below the prescribed limits.

Temperature : 26 °C

Humidity : 65 % RH

Frequency (MHz)	Loss(dB)		Measurement				L1 Emission (dBμV)		L2 Emission (dBμV)		Limits (dBμV)	
			L1(dBμV)		L2(dBμV)							
	L1	L2	Q.P.	Ave.	Q.P.	Ave.	Q.P.	Ave.	Q.P.	Ave.	Q.P.	Ave.
0.150	0.10	0.20	*	*	*	*	*	*	*	*	66.00	56.00
0.165	0.10	0.20	*	*	58.30	25.60	*	*	58.50	25.80	65.21	55.21
0.189	0.10	0.20	56.40	24.00	*	*	56.50	24.10	*	*	64.08	54.08
0.441	0.10	0.20	*	*	44.90	20.90	*	*	45.10	21.10	57.04	47.04
0.477	0.20	0.20	46.60	18.70	*	*	46.80	18.90	*	*	56.39	46.39
0.510	1.20	1.21	*	*	39.10	13.70	*	*	40.31	14.91	56.00	46.00
0.550	0.10	0.20	43.90	13.60	*	*	44.00	13.70	*	*	56.00	46.00
1.100	0.20	0.20	*	*	31.50	*	*	*	31.70	*	56.00	46.00
1.220	0.20	0.20	35.10	*	*	*	35.30	*	*	*	56.00	46.00
2.240	1.40	1.74	*	*	22.00	*	*	*	23.74	*	56.00	46.00
2.250	0.10	0.20	21.00	*	*	*	21.10	*	*	*	56.00	46.00
4.160	0.20	0.20	*	*	13.30	*	*	*	13.50	*	56.00	46.00
4.290	0.50	0.50	17.90	*	*	*	18.40	*	*	*	56.00	46.00
15.250	0.10	0.20	35.70	*	33.70	*	35.80	*	33.90	*	60.00	50.00
16.900	0.20	0.20	*	*	33.40	*	*	*	33.60	*	60.00	50.00
18.300	1.20	1.21	40.70	*	*	*	41.90	*	*	*	60.00	50.00
30.000	1.40	1.80	*	*	*	*	*	*	*	*	60.00	50.00

REMARKS : 1. * Undetectable or the Q.P. value is lower than the limits of Ave.

2. Mode : 802.11g mode.

3. The EUT can be operated in transmitting, stand-by and receiving mode.

After preliminary scan, EUT in transmitting mode has highest emission.

The EUT was set in transmitting mode at final test to get the worst case test results.

4. For Adapter (1).

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRK54G

Report No. : ER03-12-069FRF

Page 13 of 68

The frequency spectrum from 0.15 MHz to 30 MHz was investigated. All emissions not reported below are more than 50 dB below the prescribed limits.

Temperature : 26 °C

Humidity : 65 % RH

Frequency (MHz)	Loss(dB)		Measurement				L1 Emission (dBμV)		L2 Emission (dBμV)		Limits (dBμV)	
			L1(dBμV)		L2(dBμV)							
	L1	L2	Q.P.	Ave.	Q.P.	Ave.	Q.P.	Ave.	Q.P.	Ave.	Q.P.	Ave.
0.150	0.10	0.20	56.60	24.30	*	*	56.70	24.40	*	*	66.00	56.00
0.174	1.20	1.21	*	*	56.90	24.80	*	*	58.11	26.01	64.77	54.77
0.294	0.10	0.20	*	*	48.80	19.40	*	*	49.00	19.60	60.41	50.41
0.333	0.10	0.20	47.30	19.60	*	*	47.40	19.70	*	*	59.38	49.38
0.670	0.20	0.20	40.10	16.10	*	*	40.30	16.30	*	*	56.00	46.00
0.710	0.10	0.20	*	*	42.30	10.60	*	*	42.50	10.80	56.00	46.00
1.110	0.10	0.20	27.20	*	*	*	27.30	*	*	*	56.00	46.00
1.290	1.20	1.21	*	*	34.40	*	*	*	35.61	*	56.00	46.00
2.150	0.20	0.20	20.50	*	*	*	20.70	*	*	*	56.00	46.00
2.160	0.20	0.20	*	*	26.30	*	*	*	26.50	*	56.00	46.00
4.810	1.40	1.74	*	*	12.30	*	*	*	14.04	*	56.00	46.00
4.980	0.10	0.20	12.10	*	*	*	12.20	*	*	*	56.00	46.00
14.700	0.20	0.20	*	*	29.70	*	*	*	29.90	*	60.00	50.00
15.350	0.50	0.50	31.10	*	*	*	31.60	*	*	*	60.00	50.00
16.900	0.10	0.20	38.60	*	38.60	*	38.70	*	38.80	*	60.00	50.00
30.000	1.40	1.80	*	*	*	*	*	*	*	*	60.00	50.00

REMARKS : 1. * Undetectable or the Q.P. value is lower than the limits of Ave.

2. Mode : 802.11b mode.

3. The EUT can be operated in transmitting, stand-by and receiving mode.

After preliminary scan, EUT in transmitting mode has highest emission.

The EUT was set in transmitting mode at final test to get the worst case test results.

4. For Adapter (2).

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRK54G

Report No. : ER03-12-069FRF

Page 14 of 68

The frequency spectrum from 0.15 MHz to 30 MHz was investigated. All emissions not reported below are more than 50 dB below the prescribed limits.

Temperature : 26 °C

Humidity : 65 % RH

Frequency (MHz)	Loss(dB)		Measurement				L1 Emission (dBμV)		L2 Emission (dBμV)		Limits (dBμV)	
			L1(dBμV)		L2(dBμV)							
	L1	L2	Q.P.	Ave.	Q.P.	Ave.	Q.P.	Ave.	Q.P.	Ave.	Q.P.	Ave.
0.150	0.10	0.20	*	*	56.20	25.60	*	*	56.40	25.80	66.00	56.00
0.165	1.20	1.21	56.30	22.60	*	*	57.50	23.80	*	*	65.21	55.21
0.318	0.20	0.20	*	*	47.00	20.30	*	*	47.20	20.50	59.76	49.76
0.405	0.10	0.20	43.20	19.50	*	*	43.30	19.60	*	*	57.75	47.75
0.500	0.10	0.20	41.90	14.30	*	*	42.00	14.40	*	*	56.00	46.00
0.640	1.40	1.74	*	*	35.60	*	*	*	37.34	*	56.00	46.00
1.100	0.20	0.20	26.60	*	*	*	26.80	*	*	*	56.00	46.00
1.150	0.10	0.20	*	*	37.20	*	*	*	37.40	*	56.00	46.00
2.130	0.10	0.20	20.60	*	*	*	20.70	*	*	*	56.00	46.00
2.280	0.20	0.20	*	*	25.00	*	*	*	25.20	*	56.00	46.00
4.200	0.50	0.50	*	*	16.10	*	*	*	16.60	*	56.00	46.00
4.860	0.10	0.20	17.40	*	*	*	17.50	*	*	*	56.00	46.00
15.000	0.10	0.20	*	*	29.70	*	*	*	29.90	*	60.00	50.00
15.250	1.20	1.21	35.20	*	*	*	36.40	*	*	*	60.00	50.00
16.600	0.10	0.20	*	*	33.00	*	*	*	33.20	*	60.00	50.00
16.900	0.20	0.20	37.30	*	*	*	37.50	*	*	*	60.00	50.00
30.000	1.40	1.80	*	*	*	*	*	*	*	*	60.00	50.00

REMARKS : 1. * Undetectable or the Q.P. value is lower than the limits of Ave.

2. Mode : 802.11g mode.

3. The EUT can be operated in transmitting, stand-by and receiving mode.

After preliminary scan, EUT in transmitting mode has highest emission.

The EUT was set in transmitting mode at final test to get the worst case test results.

4. For Adapter (2).

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRK54G

Report No. : ER03-12-069FRF

Page 15 of 68

The frequency spectrum from 0.15 MHz to 30 MHz was investigated. All emissions not reported below are more than 50 dB below the prescribed limits.

Temperature : 26 °C

Humidity : 65 % RH

Frequency (MHz)	Loss(dB)		Measurement				L1 Emission (dBμV)		L2 Emission (dBμV)		Limits (dBμV)	
			L1(dBμV)		L2(dBμV)							
	L1	L2	Q.P.	Ave.	Q.P.	Ave.	Q.P.	Ave.	Q.P.	Ave.	Q.P.	Ave.
0.150	0.10	0.20	*	*	*	*	*	*	*	*	66.00	56.00
0.219	1.20	1.21	52.90	23.60	*	*	54.10	24.80	*	*	62.86	52.86
0.285	0.20	0.20	*	*	52.00	25.10	*	*	52.20	25.30	60.67	50.67
0.297	0.20	0.20	49.30	19.20	*	*	49.50	19.40	*	*	60.33	50.33
0.306	0.50	0.50	*	*	52.00	19.80	*	*	52.50	20.30	60.08	50.08
0.580	0.10	0.20	35.30	*	*	*	35.40	*	*	*	56.00	46.00
0.720	0.10	0.20	*	*	44.90	14.60	*	*	45.10	14.80	56.00	46.00
1.110	0.10	0.20	24.90	*	*	*	25.00	*	*	*	56.00	46.00
1.310	0.10	0.20	*	*	37.40	*	*	*	37.60	*	56.00	46.00
2.130	1.20	1.21	*	*	26.00	*	*	*	27.21	*	56.00	46.00
2.430	1.40	1.74	23.00	*	*	*	24.40	*	*	*	56.00	46.00
4.390	0.10	0.20	*	*	15.00	*	*	*	15.20	*	56.00	46.00
4.560	0.20	0.20	11.90	*	*	*	12.10	*	*	*	56.00	46.00
15.100	0.20	0.20	*	*	34.50	*	*	*	34.70	*	60.00	50.00
15.250	0.10	0.20	33.10	*	*	*	33.20	*	*	*	60.00	50.00
17.050	0.20	0.20	*	*	33.10	*	*	*	33.30	*	60.00	50.00
18.300	0.10	0.20	38.00	*	*	*	38.10	*	*	*	60.00	50.00
30.000	1.40	1.80	*	*	*	*	*	*	*	*	60.00	50.00

REMARKS : 1. * Undetectable or the Q.P. value is lower than the limits of Ave.

2. Mode : 802.11b mode.

3. The EUT can be operated in transmitting, stand-by and receiving mode.

After preliminary scan, EUT in transmitting mode has highest emission.

The EUT was set in transmitting mode at final test to get the worst case test results.

4. For Adapter (3).



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRK54G

Report No. : ER03-12-069FRF

Page 16 of 68

The frequency spectrum from 0.15 MHz to 30 MHz was investigated. All emissions not reported below are more than 50 dB below the prescribed limits.

Temperature : 26 °C

Humidity : 65 % RH

Frequency (MHz)	Loss(dB)		Measurement				L1 Emission (dBμV)		L2 Emission (dBμV)		Limits (dBμV)	
			L1(dBμV)		L2(dBμV)							
	L1	L2	Q.P.	Ave.	Q.P.	Ave.	Q.P.	Ave.	Q.P.	Ave.	Q.P.	Ave.
0.150	0.10	0.20	*	*	*	*	*	*	*	*	66.00	56.00
0.186	1.20	1.21	54.30	25.10	*	*	55.50	26.30	*	*	64.21	54.21
0.285	1.20	1.21	*	*	53.20	24.60	*	*	54.41	25.81	60.67	50.67
0.300	1.40	1.74	*	*	52.90	19.30	*	*	54.64	21.04	60.24	50.24
0.333	0.20	0.20	48.30	20.30	*	*	48.50	20.50	*	*	59.38	49.38
0.620	0.20	0.20	33.70	*	*	*	33.90	*	*	*	56.00	46.00
0.670	0.10	0.20	*	*	46.00	13.30	*	*	46.20	13.50	56.00	46.00
1.140	0.50	0.50	23.70	*	*	*	24.20	*	*	*	56.00	46.00
1.270	0.20	0.20	*	*	37.90	*	*	*	38.10	*	56.00	46.00
2.230	0.10	0.20	20.20	*	22.10	*	20.30	*	22.30	*	56.00	46.00
4.120	0.10	0.20	*	*	15.50	*	*	*	15.70	*	56.00	46.00
4.400	0.10	0.20	12.60	*	*	*	12.70	*	*	*	56.00	46.00
15.150	0.10	0.20	31.20	*	*	*	31.30	*	*	*	60.00	50.00
15.350	0.20	0.20	*	*	42.00	*	*	*	42.20	*	60.00	50.00
16.900	0.10	0.20	38.90	*	33.10	*	39.00	*	33.30	*	60.00	50.00
30.000	1.40	1.80	*	*	*	*	*	*	*	*	60.00	50.00

REMARKS : 1. * Undetectable or the Q.P. value is lower than the limits of Ave.

2. Mode : 802.11g mode.

3. The EUT can be operated in transmitting, stand-by and receiving mode.

After preliminary scan, EUT in transmitting mode has highest emission.

The EUT was set in transmitting mode at final test to get the worst case test results.

4. For Adapter (3).

2.7 Photos of Conduction Test



3. RADIATED EMISSION TEST


3.1 Test Equipments

The following test equipments are utilized in making the measurements contained in this report.

Manufacturer or Type	Model No	Serial No	Date of Calibration	Calibration Period	Remark
CHASE BI-LOG ANTENNA	CBL6112B	2421	MAY 07, 2003	1 Year	FINAL
OPEN SITE	-----	No.2	MAY 09, 2003	1 Year	FINAL
N TYPE COAXIAL CABLE	CHA9525	4	JUL. 13, 2003	1 Year	FINAL
Horn Antenna	AH-118	10089	FEB. 25, 2003	1 Year	FINAL
HP Pre-amplifier	8449B	3008A01471	OCT. 11, 2003	1 Year	FINAL
HP High pass filter	84300/80038	011	cal. on use	1 Year	FINAL
Horn Antenna	AH-840	03077	FEB. 25, 2003	1 Year	FINAL


3.2 Test Setup

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 to 1GHz.

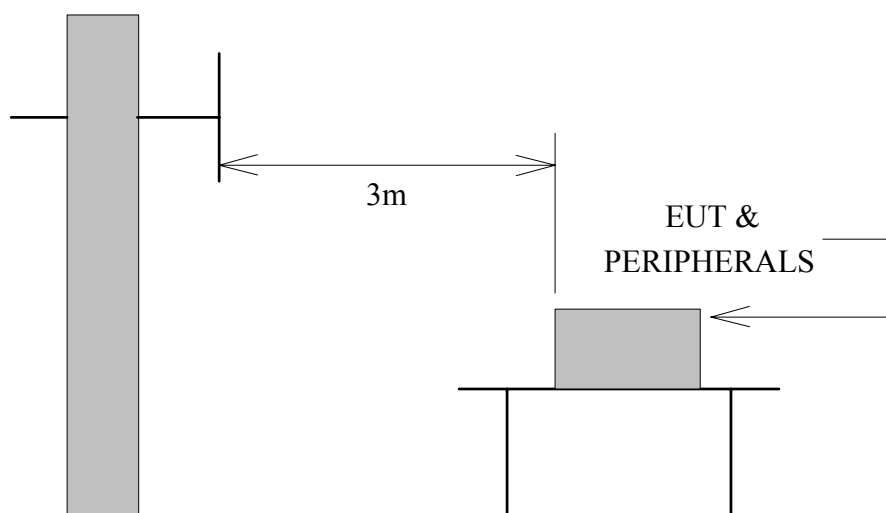

Antenna Elevation Variable

The diagram below shows the test setup that is utilized to make the measurements for emission above 1GHz.

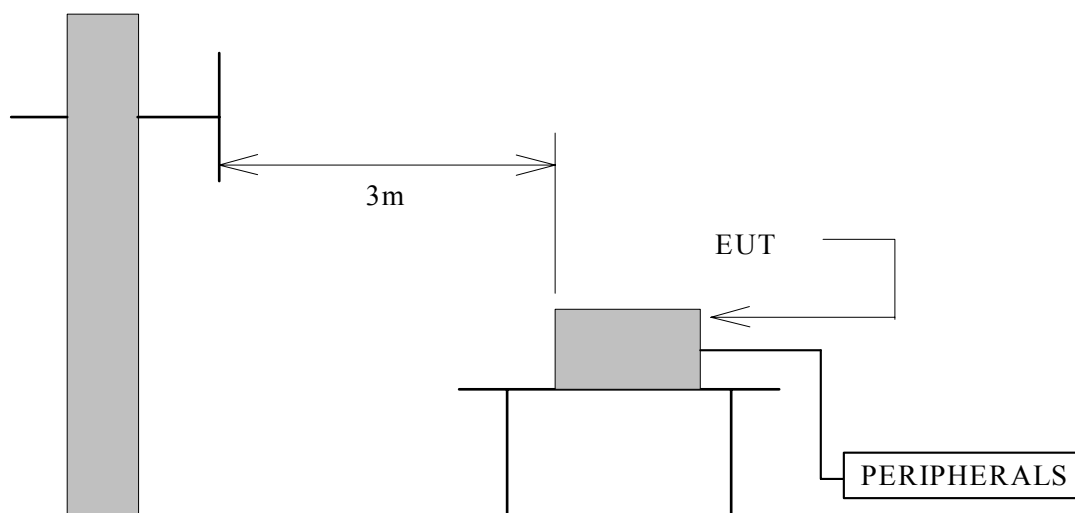

Antenna Elevation Variable

3.3 Radiation Limit

For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values :

Frequency (MHz)	Distance (Meters)	Radiated (dB μ V/M)	Radiated (μ V/M)
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.



3.4 Test Procedures

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarization of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE :

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

3.5 Uncertainty of Radiated Emission

The uncertainty of radiated emission is ± 2.72 dB.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRK54G

Report No. : ER03-12-069FRF

Page 21 of 68

3.6 Radiated RF Noise Measurement

Test Requirement: 15.109, 15.209

The frequency spectrum from 30 MHz to 1000 MHz was investigated. All emissions not reported below are more than 20 dB below the prescribed limits.

All readings are quasi-peak values.

Temperature : 19.9 °C

Humidity : 65 % RH

Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)	Meter Reading at 3m(dB μ V/M)		Limits at 3m (dB μ V/M)	Emission Level at 3m(dB μ V/M)	
			Horizontal	Vertical		Horizontal	Vertical
30.00	21.39	0.90	*	*	40.00	*	*
125.00	13.33	2.10	9.60	13.60	43.50	25.03	29.03
200.00	10.39	2.80	11.80	12.80	43.50	24.99	25.99
250.00	13.09	3.20	25.70	20.40	46.00	41.99	36.69
320.00	14.25	3.72	20.80	12.80	46.00	38.77	30.77
399.99	17.24	4.20	8.70	9.80	46.00	30.14	31.24
480.00	18.10	4.76	16.70	20.30	46.00	39.56	43.16
639.99	19.50	5.60	12.10	13.40	46.00	37.20	38.50
799.99	20.53	6.40	10.40	13.20	46.00	37.33	40.13
960.00	21.36	6.84	10.10	12.00	46.00	38.30	40.20
1000.00	21.58	7.00	*	*	54.00	*	*

REMARKS : 1. * Undetectable

2. Emission level (dB μ V/M) = Antenna Factor (dB/m) + Cable loss (dB)
+ Meter Reading (dB μ V).

3. According to technical experiences, all spurious emission at channel 1,6,11 are almost the same below 1GHz, so that the channel 1 was chosen as representative in final test.

4. Mode : Wireless 802.11b Transmitting test.

5. The spurious radiated emission test results of the EUT with three adapters are almost the same, so the adapter (1) was chosen as representative in final test.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRK54G

Report No. : ER03-12-069FRF

Page 22 of 68

Test Requirement: 15.109, 15.209

The frequency spectrum from 30 MHz to 1000 MHz was investigated. All emissions not reported below are more than 20 dB below the prescribed limits.

All readings are quasi-peak values.

Temperature : 19.9 °C

Humidity : 65 % RH

Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)	Meter Reading at 3m(dB μ V/M)		Limits at 3m (dB μ V/M)	Emission Level at 3m(dB μ V/M)	
			Horizontal	Vertical		Horizontal	Vertical
30.00	21.39	0.90	*	*	40.00	*	*
125.00	13.33	2.10	10.40	13.80	43.50	25.83	29.23
200.00	10.39	2.80	12.30	13.20	43.50	25.49	26.39
250.00	13.09	3.20	26.30	21.20	46.00	42.59	37.49
320.00	14.25	3.72	21.10	13.40	46.00	39.07	31.37
399.99	17.24	4.20	9.20	10.30	46.00	30.64	31.74
480.00	18.10	4.76	17.10	20.90	46.00	39.96	43.76
639.99	19.50	5.60	12.70	13.90	46.00	37.80	39.00
799.99	20.53	6.40	10.90	13.70	46.00	37.83	40.63
960.00	21.36	6.84	10.10	12.20	46.00	38.30	40.40
1000.00	21.58	7.00	*	*	54.00	*	*

REMARKS : 1. * Undetectable

2. Emission level (dB μ V/M) = Antenna Factor (dB/m) + Cable loss (dB)
+ Meter Reading (dB μ V).

3. According to technical experiences, all spurious emission at channel 1,6,11 are almost the same below 1GHz, so that the channel 1 was chosen as representative in final test.

4. Mode : Wireless 802.11g Transmitting test.

5. The spurious radiated emission test results of the EUT with three adapters are almost the same, so the adapter (1) was chosen as representative in final test.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRK54G

Report No. : ER03-12-069FRF

Page 23 of 68

Test Requirement: 15.109, 15.209

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date :	2004/1/16
Product Name	Wireless-G Broadband Router With 4-Port Switch	Test By:	K. P. Pang
Model Name	WRK54G	TEMP&Humidity :	18.9°C , 71%

CH1 RX				Measurement Distance at 1m				Horizontal polarity			
Freq.	Reading	AF	Cable	Pre-amp	Dist	Filter	Level	Limit	Margin	Mark	Height
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	dB	dB	(dBuV/m)	(dBuV/m)	(dB)	(P/Q/A)	(Meter)
4075.86	50.03	32.55	3.32	34.90	9.50	0.00	41.50	74	-32.50	P	1.00
4075.86	44.89	32.55	3.32	34.90	9.50	0.00	36.36	54	-17.64	A	1.00
6113.95	44.86	37.33	4.61	34.30	9.50	0.00	43.00	74	-31.00	P	1.00
6113.95	33.55	37.33	4.61	34.30	9.50	0.00	31.69	54	-22.31	A	1.00
8151.90	46.53	39.45	5.68	35.95	9.50	0.00	46.21	74	-27.79	P	1.00
8151.90	34.61	39.45	5.68	35.95	9.50	0.00	34.29	54	-19.71	A	1.00
10190.00	----	----	----	----	9.50	0.48	----	----	----	----	----
*12228.00	----	----	----	----	9.50	0.80	----	----	----	----	----
14266.00	----	----	----	----	0.00	0.42	----	----	----	----	----
16304.00	----	----	----	----	0.00	0.24	----	----	----	----	----
*18342.00	----	----	----	----	0.00	1.17	----	----	----	----	----
*20380.00	----	----	----	----	0.00	3.94	----	----	----	----	----

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
5. The test limit is 3M limit.
6. The other emission levels were very low against the limit.
7. For 802.11b mode at 11Mbps.
8. The spurious radiated emission test results of the EUT with three adapters are almost the same, so the adapter (1) was chosen as representative in final test.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRK54G

Report No. : ER03-12-069FRF

Page 24 of 68

Test Requirement: 15.109, 15.209

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date :	2004/1/16
Product Name	Wireless-G Broadband Router With 4-Port Switch	Test By:	K. P. Pang
Model Name	WRK54G	TEMP&Humidity :	18.9°C , 71%

CH1 RX				Measurement Distance at 1m					Vertical polarity		
Freq.	Reading	AF	Cable	Pre-amp	Dist	Filter	Level	Limit	Margin	Mark	Height
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	dB	dB	(dBuV/m)	(dBuV/m)	(dB)	(P/Q/A)	(Meter)
4075.88	51.10	32.55	3.32	34.90	9.50	0.00	42.57	74	-31.43	P	1.00
4075.88	45.68	32.55	3.32	34.90	9.50	0.00	37.15	54	-16.85	A	1.00
6114.05	44.51	37.33	4.61	34.30	9.50	0.00	42.65	74	-31.35	P	1.00
6114.05	33.52	37.33	4.61	34.30	9.50	0.00	31.66	54	-22.34	A	1.00
8151.93	46.12	39.45	5.68	35.95	9.50	0.00	45.80	74	-28.20	P	1.00
8151.93	34.46	39.45	5.68	35.95	9.50	0.00	34.14	54	-19.86	A	1.00
10190.00	----	----	----	----	9.50	0.48	----	----	----	----	----
*12228.00	----	----	----	----	9.50	0.80	----	----	----	----	----
14266.00	----	----	----	----	0.00	0.42	----	----	----	----	----
16304.00	----	----	----	----	0.00	0.24	----	----	----	----	----
*18342.00	----	----	----	----	0.00	1.17	----	----	----	----	----
*20380.00	----	----	----	----	0.00	3.94	----	----	----	----	----

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
5. The test limit is 3M limit.
6. The other emission levels were very low against the limit.
7. For 802.11b mode at 11Mbps.
8. The spurious radiated emission test results of the EUT with three adapters are almost the same, so the adapter (1) was chosen as representative in final test.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRK54G

Report No. : ER03-12-069FRF

Page 25 of 68

Test Requirement: 15.109, 15.209

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date :	2004/1/16
Product Name	Wireless-G Broadband Router With 4-Port Switch	Test By:	K. P. Pang
Model Name	WRK54G	TEMP&Humidity :	18.9°C , 71%

CH6 RX				Measurement Distance at 1m				Horizontal polarity			
Freq.	Reading	AF	Cable	Pre-amp	Dist	Filter	Level	Limit	Margin	Mark	Height
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	dB	dB	(dBuV/m)	(dBuV/m)	(dB)	(P/Q/A)	(Meter)
4125.89	49.09	32.52	3.33	34.90	9.50	0.00	40.54	74	-33.46	P	1.00
4125.89	42.92	32.52	3.33	34.90	9.50	0.00	34.37	54	-19.63	A	1.00
6188.93	45.02	37.48	4.69	34.30	9.50	0.00	43.39	74	-30.61	P	1.00
6188.93	33.84	37.48	4.69	34.30	9.50	0.00	32.21	54	-21.79	A	1.00
8251.92	46.25	39.35	5.60	35.19	9.50	0.00	46.51	74	-27.49	P	1.00
8251.92	34.26	39.35	5.60	35.19	9.50	0.00	34.52	54	-19.48	A	1.00
10315.00	----	----	----	----	9.50	0.53	----	----	----	----	----
*12378.00	----	----	----	----	9.50	0.80	----	----	----	----	----
14441.00	----	----	----	----	0.00	0.63	----	----	----	----	----
16504.00	----	----	----	----	0.00	0.20	----	----	----	----	----
*18567.00	----	----	----	----	0.00	1.25	----	----	----	----	----
*20630.00	----	----	----	----	0.00	4.75	----	----	----	----	----

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The other emission levels were very low against the limit.
7. For 802.11b mode at 11Mbps.
8. The spurious radiated emission test results of the EUT with three adapters are almost the same, so the adapter (1) was chosen as representative in final test.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRK54G
Report No. : ER03-12-069FRF
Page 26 of 68

Test Requirement: 15.109, 15.209

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date :	2004/1/16
Product Name	Wireless-G Broadband Router With 4-Port Switch	Test By:	K. P. Pang
Model Name	WRK54G	TEMP&Humidity :	18.9°C , 71%

CH6 RX				Measurement Distance at 1m					Vertical polarity		
Freq.	Reading	AF	Cable	Pre-amp	Dist	Filter	Level	Limit	Margin	Mark	Height
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	dB	dB	(dBuV/m)	(dBuV/m)	(dB)	(P/Q/A)	(Meter)
4125.94	50.53	32.52	3.33	34.90	9.50	0.00	41.98	74	-32.02	P	1.00
4125.94	44.99	32.52	3.33	34.90	9.50	0.00	36.44	54	-17.56	A	1.00
6188.98	45.37	37.48	4.69	34.30	9.50	0.00	43.74	74	-30.26	P	1.00
6188.98	33.89	37.48	4.69	34.30	9.50	0.00	32.26	54	-21.74	A	1.00
8251.96	46.52	39.35	5.60	35.19	9.50	0.00	46.78	74	-27.22	P	1.00
8251.96	34.44	39.35	5.60	35.19	9.50	0.00	34.70	54	-19.30	A	1.00
10315.00	----	----	----	----	9.50	0.53	----	----	----	----	----
*12378.00	----	----	----	----	9.50	0.80	----	----	----	----	----
14441.00	----	----	----	----	0.00	0.63	----	----	----	----	----
16504.00	----	----	----	----	0.00	0.20	----	----	----	----	----
*18567.00	----	----	----	----	0.00	1.25	----	----	----	----	----
*20630.00	----	----	----	----	0.00	4.75	----	----	----	----	----

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
5. The test limit is 3M limit.
6. The other emission levels were very low against the limit.
7. For 802.11b mode at 11Mbps.
8. The spurious radiated emission test results of the EUT with three adapters are almost the same, so the adapter (1) was chosen as representative in final test.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRK54G

Report No. : ER03-12-069FRF

Page 27 of 68

Test Requirement: 15.109, 15.209

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date :	2004/1/16
Product Name	Wireless-G Broadband Router With 4-Port Switch	Test By:	K. P. Pang
Model Name	WRK54G	TEMP&Humidity :	18.9°C , 71%

CH11 RX				Measurement Distance at 1m				Horizontal polarity			
Freq.	Reading	AF	Cable	Pre-amp	Dist	Filter	Level	Limit	Margin	Mark	Height
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	dB	dB	(dBuV/m)	(dBuV/m)	(dB)	(P/Q/A)	(Meter)
4176.18	48.26	32.49	3.34	34.90	9.50	0.00	39.69	74	-34.31	P	1.00
4176.18	40.88	32.49	3.34	34.90	9.50	0.00	32.31	54	-21.69	A	1.00
6263.96	44.50	37.63	4.76	34.30	9.50	0.00	43.09	74	-30.91	P	1.00
6263.96	33.21	37.63	4.76	34.30	9.50	0.00	31.80	54	-22.20	A	1.00
8351.99	46.41	39.25	5.52	34.42	9.50	0.00	47.25	74	-26.75	P	1.00
8351.99	34.44	39.25	5.52	34.42	9.50	0.00	35.28	54	-18.72	A	1.00
10440.00	----	----	----	----	9.50	0.58	----	----	----	----	----
*12528.00	----	----	----	----	9.50	0.78	----	----	----	----	----
14616.00	----	----	----	----	0.00	0.61	----	----	----	----	----
16704.00	----	----	----	----	0.00	0.32	----	----	----	----	----
*18792.00	----	----	----	----	0.00	1.43	----	----	----	----	----
*20880.00	----	----	----	----	0.00	5.56	----	----	----	----	----

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
5. The test limit is 3M limit.
6. The other emission levels were very low against the limit.
7. For 802.11b mode at 11Mbps.
8. The spurious radiated emission test results of the EUT with three adapters are almost the same, so the adapter (1) was chosen as representative in final test.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRK54G

Report No. : ER03-12-069FRF

Page 28 of 68

Test Requirement: 15.109, 15.209

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date :	2004/1/16
Product Name	Wireless-G Broadband Router With 4-Port Switch	Test By:	K. P. Pang
Model Name	WRK54G	TEMP&Humidity :	18.9°C , 71%

CH11 RX				Measurement Distance at 1m					Vertical polarity		
Freq.	Reading	AF	Cable	Pre-amp	Dist	Filter	Level	Limit	Margin	Mark	Height
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	dB	dB	(dBuV/m)	(dBuV/m)	(dB)	(P/Q/A)	(Meter)
4175.97	50.01	32.49	3.34	34.90	9.50	0.00	41.44	74	-32.56	P	1.00
4175.97	44.58	32.49	3.34	34.90	9.50	0.00	36.01	54	-17.99	A	1.00
6263.91	44.57	37.63	4.76	34.30	9.50	0.00	43.16	74	-30.84	P	1.00
6263.91	33.31	37.63	4.76	34.30	9.50	0.00	31.90	54	-22.10	A	1.00
8351.93	46.39	39.25	5.52	34.43	9.50	0.00	47.23	74	-26.77	P	1.00
8351.93	34.37	39.25	5.52	34.43	9.50	0.00	35.21	54	-18.79	A	1.00
10440.00	----	----	----	----	9.50	0.58	----	----	----	----	----
*12528.00	----	----	----	----	9.50	0.78	----	----	----	----	----
14616.00	----	----	----	----	0.00	0.61	----	----	----	----	----
16704.00	----	----	----	----	0.00	0.32	----	----	----	----	----
*18792.00	----	----	----	----	0.00	1.43	----	----	----	----	----
*20880.00	----	----	----	----	0.00	5.56	----	----	----	----	----

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The test limit is 3M limit.
6. The other emission levels were very low against the limit.
7. For 802.11b mode at 11Mbps.
8. The spurious radiated emission test results of the EUT with three adapters are almost the same, so the adapter (1) was chosen as representative in final test.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRK54G

Report No. : ER03-12-069FRF

Page 29 of 68

Test Requirement: 15.109, 15.209

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date :	2004/1/16
Product Name	Wireless-G Broadband Router With 4-Port Switch	Test By:	K. P. Pang
Model Name	WRK54G	TEMP&Humidity :	18.9°C , 71%

CH1 RX				Measurement Distance at 1m				Horizontal polarity			
Freq.	Reading	AF	Cable	Pre-amp	Dist	Filter	Level	Limit	Margin	Mark	Height
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	dB	dB	(dBuV/m)	(dBuV/m)	(dB)	(P/Q/A)	(Meter)
4076.03	50.41	32.55	3.32	34.90	9.50	0.00	41.88	74	-32.12	P	1.00
4076.03	45.01	32.55	3.32	34.90	9.50	0.00	36.48	54	-17.52	A	1.00
6113.93	45.56	37.33	4.61	34.30	9.50	0.00	43.70	74	-30.30	P	1.00
6113.93	33.71	37.33	4.61	34.30	9.50	0.00	31.85	54	-22.15	A	1.00
8151.91	46.66	39.45	5.68	35.95	9.50	0.00	46.34	74	-27.66	P	1.00
8151.91	34.50	39.45	5.68	35.95	9.50	0.00	34.18	54	-19.82	A	1.00
10190.00	----	----	----	----	9.50	0.48	----	----	----	----	----
*12228.00	----	----	----	----	9.50	0.80	----	----	----	----	----
14266.00	----	----	----	----	0.00	0.42	----	----	----	----	----
16304.00	----	----	----	----	0.00	0.24	----	----	----	----	----
*18342.00	----	----	----	----	0.00	1.17	----	----	----	----	----
*20380.00	----	----	----	----	0.00	3.94	----	----	----	----	----

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow : Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
5. The test limit is 3M limit.
6. The other emission levels were very low against the limit.
7. For 802.11g mode at 6Mbps.
8. The spurious radiated emission test results of the EUT with three adapters are almost the same, so the adapter (1) was chosen as representative in final test.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRK54G

Report No. : ER03-12-069FRF

Page 30 of 68

Test Requirement: 15.109, 15.209

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date :	2004/1/16
Product Name	Wireless-G Broadband Router With 4-Port Switch	Test By:	K. P. Pang
Model Name	WRK54G	TEMP&Humidity :	18.9°C , 71%

CH1 RX				Measurement Distance at 1m					Vertical polarity		
Freq.	Reading	AF	Cable	Pre-amp	Dist	Filter	Level	Limit	Margin	Mark	Height
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	dB	dB	(dBuV/m)	(dBuV/m)	(dB)	(P/Q/A)	(Meter)
4076.01	51.25	32.55	3.32	34.90	9.50	0.00	42.72	74	-31.28	P	1.00
4076.01	47.20	32.55	3.32	34.90	9.50	0.00	38.67	54	-15.33	A	1.00
6113.88	44.97	37.33	4.61	34.30	9.50	0.00	43.11	74	-30.89	P	1.00
6113.88	33.58	37.33	4.61	34.30	9.50	0.00	31.72	54	-22.28	A	1.00
8151.93	46.44	39.45	5.68	35.95	9.50	0.00	46.12	74	-27.88	P	1.00
8151.93	35.20	39.45	5.68	35.95	9.50	0.00	34.88	54	-19.12	A	1.00
10190.00	----	----	----	----	9.50	0.48	----	----	----	----	----
*12228.00	----	----	----	----	9.50	0.80	----	----	----	----	----
14266.00	----	----	----	----	0.00	0.42	----	----	----	----	----
16304.00	----	----	----	----	0.00	0.24	----	----	----	----	----
*18342.00	----	----	----	----	0.00	1.17	----	----	----	----	----
*20380.00	----	----	----	----	0.00	3.94	----	----	----	----	----

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
5. The test limit is 3M limit.
6. The other emission levels were very low against the limit.
7. For 802.11g mode at 6Mbps.
8. The spurious radiated emission test results of the EUT with three adapters are almost the same, so the adapter (1) was chosen as representative in final test.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRK54G

Report No. : ER03-12-069FRF

Page 31 of 68

Test Requirement: 15.109, 15.209

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date :	2004/1/16
Product Name	Wireless-G Broadband Router With 4-Port Switch	Test By:	K. P. Pang
Model Name	WRK54G	TEMP&Humidity :	18.9°C , 71%

CH6 RX				Measurement Distance at 1m				Horizontal polarity			
Freq.	Reading	AF	Cable	Pre-amp	Dist	Filter	Level	Limit	Margin	Mark	Height
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	dB	dB	(dBuV/m)	(dBuV/m)	(dB)	(P/Q/A)	(Meter)
4126.04	49.83	32.52	3.33	34.90	9.50	0.00	41.28	74	-32.72	P	1.00
4126.04	43.18	32.52	3.33	34.90	9.50	0.00	34.63	54	-19.37	A	1.00
6188.97	45.02	37.48	4.69	34.30	9.50	0.00	43.39	74	-30.61	P	1.00
6188.97	33.48	37.48	4.69	34.30	9.50	0.00	31.85	54	-22.15	A	1.00
8251.94	46.71	39.35	5.60	35.19	9.50	0.00	46.97	74	-27.03	P	1.00
8251.94	34.65	39.35	5.60	35.19	9.50	0.00	34.91	54	-19.09	A	1.00
10315.00	----	----	----	----	9.50	0.53	----	----	----	----	----
*12378.00	----	----	----	----	9.50	0.80	----	----	----	----	----
14441.00	----	----	----	----	0.00	0.63	----	----	----	----	----
16504.00	----	----	----	----	0.00	0.20	----	----	----	----	----
*18567.00	----	----	----	----	0.00	1.25	----	----	----	----	----
*20630.00	----	----	----	----	0.00	4.75	----	----	----	----	----

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)

2. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz

3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB

4. The result basic equation calculation as follow :

$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$

5. The test limit is 3M limit.

6. The other emission levels were very low against the limit.

7. For 802.11g mode at 6Mbps.

8. The spurious radiated emission test results of the EUT with three adapters are almost the same, so the adapter (1) was chosen as representative in final test.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRK54G

Report No. : ER03-12-069FRF

Page 32 of 68

Test Requirement: 15.109, 15.209

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date :	2004/1/16
Product Name	Wireless-G Broadband Router With 4-Port Switch	Test By:	K. P. Pang
Model Name	WRK54G	TEMP&Humidity :	18.9°C , 71%

CH6 RX				Measurement Distance at 1m					Vertical polarity		
Freq.	Reading	AF	Cable	Pre-amp	Dist	Filter	Level	Limit	Margin	Mark	Height
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	dB	dB	(dBuV/m)	(dBuV/m)	(dB)	(P/Q/A)	(Meter)
4125.96	51.28	32.52	3.33	34.90	9.50	0.00	42.73	74	-31.27	P	1.00
4125.96	46.83	32.52	3.33	34.90	9.50	0.00	38.28	54	-15.72	A	1.00
6188.94	44.18	37.48	4.69	34.30	9.50	0.00	42.55	74	-31.45	P	1.00
6188.94	33.58	37.48	4.69	34.30	9.50	0.00	31.95	54	-22.05	A	1.00
8251.93	46.33	39.35	5.60	35.19	9.50	0.00	46.59	74	-27.41	P	1.00
8251.93	34.76	39.35	5.60	35.19	9.50	0.00	35.02	54	-18.98	A	1.00
10315.00	----	----	----	----	9.50	0.53	----	----	----	----	----
*12378.00	----	----	----	----	9.50	0.80	----	----	----	----	----
14441.00	----	----	----	----	0.00	0.63	----	----	----	----	----
16504.00	----	----	----	----	0.00	0.20	----	----	----	----	----
*18567.00	----	----	----	----	0.00	1.25	----	----	----	----	----
*20630.00	----	----	----	----	0.00	4.75	----	----	----	----	----

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)

2. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz

3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB

4. The result basic equation calculation as follow :

Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

5. The test limit is 3M limit.

6. The other emission levels were very low against the limit.

7. For 802.11g mode at 6Mbps.

8. The spurious radiated emission test results of the EUT with three adapters are almost the same, so the adapter (1) was chosen as representative in final test.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRK54G

Report No. : ER03-12-069FRF

Page 33 of 68

Test Requirement: 15.109, 15.209

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date :	2004/1/16
Product Name	Wireless-G Broadband Router With 4-Port Switch	Test By:	K. P. Pang
Model Name	WRK54G	TEMP&Humidity :	18.9°C , 71%

CH11 RX				Measurement Distance at 1m				Horizontal polarity			
Freq.	Reading	AF	Cable	Pre-amp	Dist	Filter	Level	Limit	Margin	Mark	Height
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	dB	dB	(dBuV/m)	(dBuV/m)	(dB)	(P/Q/A)	(Meter)
4175.84	48.70	32.49	3.34	34.90	9.50	0.00	40.13	74	-33.87	P	1.00
4175.84	40.97	32.49	3.34	34.90	9.50	0.00	32.40	54	-21.60	A	1.00
6263.89	45.06	37.63	4.76	34.30	9.50	0.00	43.65	74	-30.35	P	1.00
6263.89	33.30	37.63	4.76	34.30	9.50	0.00	31.89	54	-22.11	A	1.00
8351.89	46.35	39.25	5.52	34.43	9.50	0.00	47.19	74	-26.81	P	1.00
8351.89	35.27	39.25	5.52	34.43	9.50	0.00	36.11	54	-17.89	A	1.00
10440.00	----	----	----	----	9.50	0.58	----	----	----	----	----
*12528.00	----	----	----	----	9.50	0.78	----	----	----	----	----
14616.00	----	----	----	----	0.00	0.61	----	----	----	----	----
16704.00	----	----	----	----	0.00	0.32	----	----	----	----	----
*18792.00	----	----	----	----	0.00	1.43	----	----	----	----	----
*20880.00	----	----	----	----	0.00	5.56	----	----	----	----	----

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
5. The test limit is 3M limit.
6. The other emission levels were very low against the limit.
7. For 802.11g mode at 6Mbps.
8. The spurious radiated emission test results of the EUT with three adapters are almost the same, so the adapter (1) was chosen as representative in final test.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRK54G

Report No. : ER03-12-069FRF

Page 34 of 68

Test Requirement: 15.109, 15.209

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date :	2004/1/16
Product Name	Wireless-G Broadband Router With 4-Port Switch	Test By:	K. P. Pang
Model Name	WRK54G	TEMP&Humidity :	18.9°C , 71%

CH11 RX				Measurement Distance at 1m					Vertical polarity		
Freq.	Reading	AF	Cable	Pre-amp	Dist	Filter	Level	Limit	Margin	Mark	Height
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	dB	dB	(dBuV/m)	(dBuV/m)	(dB)	(P/Q/A)	(Meter)
4175.84	50.37	32.49	3.34	34.90	9.50	0.00	41.80	74	-32.20	P	1.00
4175.84	45.02	32.49	3.34	34.90	9.50	0.00	36.45	54	-17.55	A	1.00
6263.84	45.13	37.63	4.76	34.30	9.50	0.00	43.72	74	-30.28	P	1.00
6263.84	33.32	37.63	4.76	34.30	9.50	0.00	31.91	54	-22.09	A	1.00
8351.88	46.59	39.25	5.52	34.43	9.50	0.00	47.43	74	-26.57	P	1.00
8351.88	34.90	39.25	5.52	34.43	9.50	0.00	35.74	54	-18.26	A	1.00
10440.00	----	----	----	----	9.50	0.58	----	----	----	----	----
*12528.00	----	----	----	----	9.50	0.78	----	----	----	----	----
14616.00	----	----	----	----	0.00	0.61	----	----	----	----	----
16704.00	----	----	----	----	0.00	0.32	----	----	----	----	----
*18792.00	----	----	----	----	0.00	1.43	----	----	----	----	----
*20880.00	----	----	----	----	0.00	5.56	----	----	----	----	----

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation as follow :
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
5. The test limit is 3M limit.
6. The other emission levels were very low against the limit.
7. For 802.11g mode at 6Mbps.
8. The spurious radiated emission test results of the EUT with three adapters are almost the same, so the adapter (1) was chosen as representative in final test.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRK54G

Report No. : ER03-12-069FRF

Page 35 of 68

Test Requirement: 15.205

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date :	2004/1/16
Product Name	Wireless-G Broadband Router With 4-Port Switch	Test By:	K. P. Pang
Model Name	WRK54G	TEMP&Humidity :	21.6°C , 60%

CH1 TX				Measurement Distance at 1m				Horizontal polarity			
Freq.	Reading	AF	Cable	Pre-amp	Dist	Filter	Level	Limit	Margin	Mark	Height
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	dB	dB	(dBuV/m)	(dBuV/m)	(dB)	(P/Q/A)	(Meter)
* 2376.62	17.90	31.82	3.94	0.00	9.50	0.00	44.16	74	-29.84	P	1.00
* 2376.62	8.20	31.82	3.94	0.00	9.50	0.00	34.46	54	-19.54	A	1.00
2411.12	75.35	31.79	3.68	0.00	9.50	0.00	101.31	Fundamental Frequency		P	1.00
2411.12	68.84	31.79	3.68	0.00	9.50	0.00	94.80			A	1.00
* 4823.86	42.40	34.44	2.82	35.16	9.50	2.00	37.00	74	-37.00	P	1.00
* 4823.86	31.78	34.44	2.82	35.16	9.50	2.00	26.38	54	-27.62	A	1.00
7236.00	43.97	39.81	4.79	35.65	9.50	2.00	45.42	74	-28.58	P	1.00
7236.00	34.29	39.81	4.79	35.65	9.50	2.00	35.74	54	-18.26	A	1.00
9648.00	45.10	38.54	5.90	36.44	9.50	0.61	44.21	74	-29.79	P	1.00
9648.00	33.79	38.54	5.90	36.44	9.50	0.61	32.90	54	-21.10	A	1.00
* 12055.60	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14466.72	-----	-----	-----	-----	0.00	0.66	-----	-----	-----	-----	1.00
16877.84	-----	-----	-----	-----	0.00	0.43	-----	-----	-----	-----	1.00
* 19288.96	-----	-----	-----	-----	0.00	1.95	-----	-----	-----	-----	1.00
21700.08	-----	-----	-----	-----	0.00	0.82	-----	-----	-----	-----	1.00
24111.20	-----	-----	-----	-----	0.00	2.92	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark “*” means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For 802.11b mode at 11Mbps.
10. The spurious radiated emission test results of the EUT with three adapters are almost the same, so the adapter (1) was chosen as representative in final test.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRK54G

Report No. : ER03-12-069FRF

Page 36 of 68

Test Requirement: 15.205

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date :	2004/1/16
Product Name	Wireless-G Broadband Router With 4-Port Switch	Test By:	K. P. Pang
Model Name	WRK54G	TEMP&Humidity :	21.6°C , 60%

CH1 TX				Measurement Distance at 1m				Vertical polarity			
Freq.	Reading	AF	Cable	Pre-amp	Dist	Filter	Level	Limit	Margin	Mark	Height
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	dB	dB	(dBuV/m)	(dBuV/m)	(dB)	(P/Q/A)	(Meter)
* 2376.62	23.30	31.82	3.94	0.00	9.50	0.00	49.56	74	-24.44	P	1.00
* 2376.62	12.60	31.82	3.94	0.00	9.50	0.00	38.86	54	-15.14	A	1.00
2413.25	92.43	31.79	3.66	0.00	9.50	0.00	118.38	Fundamental Frequency		P	1.00
2413.25	85.21	31.79	3.66	0.00	9.50	0.00	111.16			A	1.00
* 4823.89	42.78	34.44	2.82	35.16	9.50	2.00	37.38	74	-36.62	P	1.00
* 4823.89	31.44	34.44	2.82	35.16	9.50	2.00	26.04	54	-27.96	A	1.00
7235.72	43.88	39.81	4.79	35.65	9.50	2.00	45.33	74	-28.67	P	1.00
7235.72	33.99	39.81	4.79	35.65	9.50	2.00	35.44	54	-18.56	A	1.00
9647.71	44.32	38.54	5.90	36.44	9.50	0.61	43.43	74	-30.57	P	1.00
9647.71	33.39	38.54	5.90	36.44	9.50	0.61	32.50	54	-21.50	A	1.00
* 12066.25	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
* 14479.50	-----	-----	-----	-----	0.00	0.68	-----	-----	-----	-----	1.00
16892.75	-----	-----	-----	-----	0.00	0.44	-----	-----	-----	-----	1.00
* 19306.00	-----	-----	-----	-----	0.00	1.97	-----	-----	-----	-----	1.00
21719.25	-----	-----	-----	-----	0.00	0.81	-----	-----	-----	-----	1.00
24132.50	-----	-----	-----	-----	0.00	2.89	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark “*” means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For 802.11b mode at 11Mbps.
10. The spurious radiated emission test results of the EUT with three adapters are almost the same, so the adapter (1) was chosen as representative in final test.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRK54G

Report No. : ER03-12-069FRF

Page 37 of 68

Test Requirement: 15.205

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date :	2004/1/16
Product Name	Wireless-G Broadband Router With 4-Port Switch	Test By:	K. P. Pang
Model Name	WRK54G	TEMP&Humidity :	21.6°C , 60%

CH6 TX				Measurement Distance at 1m				Horizontal polarity			
Freq.	Reading	AF	Cable	Pre-amp	Dist	Filter	Level	Limit	Margin	Mark	Height
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	dB	dB	(dBuV/m)	(dBuV/m)	(dB)	(P/Q/A)	(Meter)
2438.13	79.94	31.76	3.47	0.00	9.50	0.00	105.67	Fundamental Frequency		P	1.00
2438.13	72.72	31.76	3.47	0.00	9.50	0.00	98.45			A	1.00
* 4874.68	43.83	34.77	2.73	35.20	9.50	1.80	38.43	74	-35.57	P	1.00
* 4874.68	33.03	34.77	2.73	35.20	9.50	1.80	27.63	54	-26.37	A	1.00
* 7311.77	45.12	39.78	4.82	35.64	9.50	2.00	46.58	74	-27.42	P	1.00
* 7311.77	35.29	39.78	4.82	35.64	9.50	2.00	36.75	54	-17.25	A	1.00
9747.61	46.04	38.53	5.90	36.60	9.50	0.55	44.92	74	-29.08	P	1.00
9747.61	34.87	38.53	5.90	36.60	9.50	0.55	33.75	54	-20.25	A	1.00
* 12190.65	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14628.78	-----	-----	-----	-----	0.00	0.60	-----	-----	-----	-----	1.00
17066.91	-----	-----	-----	-----	0.00	0.53	-----	-----	-----	-----	1.00
* 19505.04	-----	-----	-----	-----	0.00	2.21	-----	-----	-----	-----	1.00
21943.17	-----	-----	-----	-----	0.00	0.72	-----	-----	-----	-----	1.00
24381.30	-----	-----	-----	-----	0.00	2.49	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark “*” means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For 802.11b mode at 11Mbps.
10. The spurious radiated emission test results of the EUT with three adapters are almost the same, so the adapter (1) was chosen as representative in final test.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRK54G

Report No. : ER03-12-069FRF

Page 38 of 68

Test Requirement: 15.205

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date :	2004/1/16
Product Name	Wireless-G Broadband Router With 4-Port Switch	Test By:	K. P. Pang
Model Name	WRK54G	TEMP&Humidity :	21.6°C , 60%

CH6 TX				Measurement Distance at 1m				Vertical polarity			
Freq.	Reading	AF	Cable	Pre-amp	Dist	Filter	Level	Limit	Margin	Mark	Height
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	dB	dB	(dBuV/m)	(dBuV/m)	(dB)	(P/Q/A)	(Meter)
2438.37	95.58	31.76	3.47	0.00	9.50	0.00	121.31	Fundamental Frequency		P	1.00
2438.37	88.45	31.76	3.47	0.00	9.50	0.00	114.18			A	1.00
* 4874.07	44.02	34.77	2.73	35.20	9.50	1.80	38.62	74	-35.38	P	1.00
* 4874.07	33.69	34.77	2.73	35.20	9.50	1.80	28.29	54	-25.71	A	1.00
* 7311.26	48.19	39.78	4.82	35.64	9.50	2.00	49.65	74	-24.35	P	1.00
* 7311.26	36.39	39.78	4.82	35.64	9.50	2.00	37.85	54	-16.15	A	1.00
9747.98	46.40	38.53	5.90	36.60	9.50	0.55	45.28	74	-28.72	P	1.00
9747.98	36.21	38.53	5.90	36.60	9.50	0.55	35.09	54	-18.91	A	1.00
* 12191.85	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14630.22	-----	-----	-----	-----	0.00	0.60	-----	-----	-----	-----	1.00
17068.59	-----	-----	-----	-----	0.00	0.53	-----	-----	-----	-----	1.00
* 19506.96	-----	-----	-----	-----	0.00	2.21	-----	-----	-----	-----	1.00
21945.33	-----	-----	-----	-----	0.00	0.72	-----	-----	-----	-----	1.00
24383.70	-----	-----	-----	-----	0.00	2.49	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark “*” means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For 802.11b mode at 11Mbps.
10. The spurious radiated emission test results of the EUT with three adapters are almost the same, so the adapter (1) was chosen as representative in final test.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRK54G

Report No. : ER03-12-069FRF

Page 39 of 68

Test Requirement: 15.205

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date :	2004/1/16
Product Name	Wireless-G Broadband Router With 4-Port Switch	Test By:	K. P. Pang
Model Name	WRK54G	TEMP&Humidity :	21.6°C , 60%

CH11 TX				Measurement Distance at 1m				Horizontal polarity			
Freq.	Reading	AF	Cable	Pre-amp	Dist	Filter	Level	Limit	Margin	Mark	Height
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	dB	dB	(dBuV/m)	(dBuV/m)	(dB)	(P/Q/A)	(Meter)
2463.30	79.35	31.74	3.28	0.00	9.50	0.00	104.87	Fundamental Frequency		P	1.00
2463.30	72.13	31.74	3.28	0.00	9.50	0.00	97.65			A	1.00
* 2484.16	30.14	31.72	3.12	0.00	9.50	0.00	55.48	74	-18.52	P	1.00
* 2484.16	17.00	31.72	3.12	0.00	9.50	0.00	42.34	54	-11.66	A	1.00
* 4923.51	43.54	35.10	2.64	35.24	9.50	1.61	38.14	74	-35.86	P	1.00
* 4923.51	33.98	35.10	2.64	35.24	9.50	1.61	28.58	54	-25.42	A	1.00
* 7386.33	42.91	39.75	4.85	35.62	9.50	2.00	44.39	74	-29.61	P	1.00
* 7386.33	32.65	39.75	4.85	35.62	9.50	2.00	34.13	54	-19.87	A	1.00
9847.68	45.23	38.52	5.90	36.76	9.50	0.49	43.88	74	-30.12	P	1.00
9847.68	34.62	38.52	5.90	36.76	9.50	0.49	33.27	54	-20.73	A	1.00
* 12316.50	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14779.80	-----	-----	-----	-----	0.00	0.48	-----	-----	-----	-----	1.00
17243.10	-----	-----	-----	-----	0.00	0.60	-----	-----	-----	-----	1.00
* 19706.40	-----	-----	-----	-----	0.00	2.41	-----	-----	-----	-----	1.00
* 22169.70	-----	-----	-----	-----	0.00	0.70	-----	-----	-----	-----	1.00
24633.00	-----	-----	-----	-----	0.00	2.11	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark “*” means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For 802.11b mode at 11Mbps.
10. The spurious radiated emission test results of the EUT with three adapters are almost the same, so the adapter (1) was chosen as representative in final test.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRK54G

Report No. : ER03-12-069FRF

Page 40 of 68

Test Requirement: 15.205

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date :	2004/1/16
Product Name	Wireless-G Broadband Router With 4-Port Switch	Test By:	K. P. Pang
Model Name	WRK54G	TEMP&Humidity :	21.6°C , 60%

CH11 TX				Measurement Distance at 1m				Vertical polarity			
Freq.	Reading	AF	Cable	Pre-amp	Dist	Filter	Level	Limit	Margin	Mark	Height
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	dB	dB	(dBuV/m)	(dBuV/m)	(dB)	(P/Q/A)	(Meter)
2463.23	93.57	31.74	3.28	0.00	9.50	0.00	119.09	Fundamental Frequency		P	1.00
2463.23	86.43	31.74	3.28	0.00	9.50	0.00	111.95			A	1.00
* 2484.16	35.10	31.72	3.12	0.00	9.50	0.00	60.44	74	-13.56	P	1.00
* 2484.16	23.20	31.72	3.12	0.00	9.50	0.00	48.54	54	-5.46	A	1.00
* 4923.78	42.93	35.10	2.64	35.24	9.50	1.60	37.53	74	-36.47	P	1.00
* 4923.78	33.76	35.10	2.64	35.24	9.50	1.60	28.36	54	-25.64	A	1.00
* 7386.05	45.26	39.75	4.85	35.62	9.50	2.00	46.74	74	-27.26	P	1.00
* 7386.05	34.85	39.75	4.85	35.62	9.50	2.00	36.33	54	-17.67	A	1.00
9847.81	46.43	38.52	5.90	36.76	9.50	0.49	45.08	74	-28.92	P	1.00
9847.81	35.30	38.52	5.90	36.76	9.50	0.49	33.95	54	-20.05	A	1.00
* 12316.15	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14779.38	-----	-----	-----	-----	0.00	0.48	-----	-----	-----	-----	1.00
17242.61	-----	-----	-----	-----	0.00	0.60	-----	-----	-----	-----	1.00
* 19705.84	-----	-----	-----	-----	0.00	2.41	-----	-----	-----	-----	1.00
* 22169.07	-----	-----	-----	-----	0.00	0.70	-----	-----	-----	-----	1.00
24632.30	-----	-----	-----	-----	0.00	2.11	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark “*” means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For 802.11b mode at 11Mbps.
10. The spurious radiated emission test results of the EUT with three adapters are almost the same, so the adapter (1) was chosen as representative in final test.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRK54G

Report No. : ER03-12-069FRF

Page 41 of 68

Test Requirement: 15.205

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date :	2004/1/15
Product Name	Wireless-G Broadband Router With 4-Port Switch	Test By:	K. P. Pang
Model Name	WRK54G	TEMP&Humidity :	19.9°C , 65%

CH1 TX				Measurement Distance at 1m				Horizontal polarity			
Freq.	Reading	AF	Cable	Pre-amp	Dist	Filter	Level	Limit	Margin	Mark	Height
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	dB	dB	(dBuV/m)	(dBuV/m)	(dB)	(P/Q/A)	(Meter)
* 2389.13	24.70	31.81	3.84	0.00	9.50	0.00	50.85	74	-23.15	P	1.00
* 2389.13	12.40	31.81	3.84	0.00	9.50	0.00	38.55	54	-15.45	A	1.00
2410.19	75.90	31.79	3.68	0.00	9.50	0.00	101.87	Fundamental Frequency		P	1.00
2410.19	68.14	31.79	3.68	0.00	9.50	0.00	94.11			A	1.00
* 4823.86	42.38	34.44	2.82	35.16	9.50	2.00	36.98	74	-37.02	P	1.00
* 4823.86	31.58	34.44	2.82	35.16	9.50	2.00	26.18	54	-27.82	A	1.00
7236.00	43.68	39.81	4.79	35.65	9.50	2.00	45.13	74	-28.87	P	1.00
7236.00	33.16	39.81	4.79	35.65	9.50	2.00	34.61	54	-19.39	A	1.00
9648.00	45.08	38.54	5.90	36.44	9.50	0.61	44.19	74	-29.81	P	1.00
9648.00	33.96	38.54	5.90	36.44	9.50	0.61	33.07	54	-20.93	A	1.00
* 12050.95	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14461.14	-----	-----	-----	-----	0.00	0.65	-----	-----	-----	-----	1.00
16871.33	-----	-----	-----	-----	0.00	0.42	-----	-----	-----	-----	1.00
* 19281.52	-----	-----	-----	-----	0.00	1.94	-----	-----	-----	-----	1.00
21691.71	-----	-----	-----	-----	0.00	0.82	-----	-----	-----	-----	1.00
24101.90	-----	-----	-----	-----	0.00	2.94	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark “*” means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For 802.11g mode at 6Mbps.
10. The spurious radiated emission test results of the EUT with three adapters are almost the same, so the adapter (1) was chosen as representative in final test.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRK54G

Report No. : ER03-12-069FRF

Page 42 of 68

Test Requirement: 15.205

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date :	2004/1/15
Product Name	Wireless-G Broadband Router With 4-Port Switch	Test By:	K. P. Pang
Model Name	WRK54G	TEMP&Humidity :	19.9°C , 65%

CH1 TX				Measurement Distance at 1m				Vertical polarity			
Freq.	Reading	AF	Cable	Pre-amp	Dist	Filter	Level	Limit	Margin	Mark	Height
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	dB	dB	(dBuV/m)	(dBuV/m)	(dB)	(P/Q/A)	(Meter)
* 2389.75	41.50	31.81	3.84	0.00	9.50	0.00	67.65	74	-6.35	P	1.00
* 2389.75	25.70	31.81	3.84	0.00	9.50	0.00	51.85	54	-2.15	A	1.00
2413.25	88.27	31.79	3.66	0.00	9.50	0.00	114.22	Fundamental Frequency		P	1.00
2413.25	80.63	31.79	3.66	0.00	9.50	0.00	106.58			A	1.00
* 4823.99	43.20	34.44	2.82	35.16	9.50	2.00	37.80	74	-36.20	P	1.00
* 4823.99	32.53	34.44	2.82	35.16	9.50	2.00	27.13	54	-26.87	A	1.00
7235.72	44.99	39.81	4.79	35.65	9.50	2.00	46.44	74	-27.56	P	1.00
7235.72	33.50	39.81	4.79	35.65	9.50	2.00	34.95	54	-19.05	A	1.00
9647.85	45.25	38.54	5.90	36.44	9.50	0.61	44.36	74	-29.64	P	1.00
9647.85	35.04	38.54	5.90	36.44	9.50	0.61	34.15	54	-19.85	A	1.00
* 12066.25	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
* 14479.50	-----	-----	-----	-----	0.00	0.68	-----	-----	-----	-----	1.00
16892.75	-----	-----	-----	-----	0.00	0.44	-----	-----	-----	-----	1.00
* 19306.00	-----	-----	-----	-----	0.00	1.97	-----	-----	-----	-----	1.00
21719.25	-----	-----	-----	-----	0.00	0.81	-----	-----	-----	-----	1.00
24132.50	-----	-----	-----	-----	0.00	2.89	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark “*” means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For 802.11g mode at 6Mbps.
10. The test data marked in gray background means the EUT emission data is located in the margin uncertainty range of emission limits.
11. The spurious radiated emission test results of the EUT with three adapters are almost the same, so the adapter (1) was chosen as representative in final test.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRK54G

Report No. : ER03-12-069FRF

Page 43 of 68

Test Requirement: 15.205

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date :	2004/1/15
Product Name	Wireless-G Broadband Router With 4-Port Switch	Test By:	K. P. Pang
Model Name	WRK54G	TEMP&Humidity :	19.9°C , 65%

CH6 TX				Measurement Distance at 1m				Horizontal polarity			
Freq.	Reading	AF	Cable	Pre-amp	Dist	Filter	Level	Limit	Margin	Mark	Height
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	dB	dB	(dBuV/m)	(dBuV/m)	(dB)	(P/Q/A)	(Meter)
2440.24	72.37	31.76	3.45	0.00	9.50	0.00	98.08	Fundamental Frequency		P	1.00
2440.24	64.29	31.76	3.45	0.00	9.50	0.00	90.00			A	1.00
* 4874.68	43.02	34.77	2.73	35.20	9.50	1.80	37.62	74	-36.38	P	1.00
* 4874.68	31.87	34.77	2.73	35.20	9.50	1.80	26.47	54	-27.53	A	1.00
* 7311.77	43.12	39.78	4.82	35.64	9.50	2.00	44.58	74	-29.42	P	1.00
* 7311.77	33.56	39.78	4.82	35.64	9.50	2.00	35.02	54	-18.98	A	1.00
9747.61	44.36	38.53	5.90	36.60	9.50	0.55	43.24	74	-30.76	P	1.00
9747.61	33.81	38.53	5.90	36.60	9.50	0.55	32.69	54	-21.31	A	1.00
* 12201.20	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14641.44	-----	-----	-----	-----	0.00	0.59	-----	-----	-----	-----	1.00
17081.68	-----	-----	-----	-----	0.00	0.53	-----	-----	-----	-----	1.00
* 19521.92	-----	-----	-----	-----	0.00	2.22	-----	-----	-----	-----	1.00
21962.16	-----	-----	-----	-----	0.00	0.72	-----	-----	-----	-----	1.00
24402.40	-----	-----	-----	-----	0.00	2.46	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark “*” means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For 802.11g mode at 6Mbps.
10. The spurious radiated emission test results of the EUT with three adapters are almost the same, so the adapter (1) was chosen as representative in final test.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRK54G

Report No. : ER03-12-069FRF

Page 44 of 68

Test Requirement: 15.205

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date :	2004/1/15
Product Name	Wireless-G Broadband Router With 4-Port Switch	Test By:	K. P. Pang
Model Name	WRK54G	TEMP&Humidity :	19.9°C , 65%

CH6 TX				Measurement Distance at 1m				Vertical polarity			
Freq.	Reading	AF	Cable	Pre-amp	Dist	Filter	Level	Limit	Margin	Mark	Height
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	dB	dB	(dBuV/m)	(dBuV/m)	(dB)	(P/Q/A)	(Meter)
2440.17	88.82	31.76	3.45	0.00	9.50	0.00	114.53	Fundamental Frequency		P	1.00
2440.17	80.68	31.76	3.45	0.00	9.50	0.00	106.39			A	1.00
* 4873.74	43.56	34.77	2.73	35.20	9.50	1.81	38.16	74	-35.84	P	1.00
* 4873.74	32.89	34.77	2.73	35.20	9.50	1.81	27.49	54	-26.51	A	1.00
* 7310.97	42.87	39.78	4.82	35.64	9.50	2.00	44.33	74	-29.67	P	1.00
* 7310.97	32.78	39.78	4.82	35.64	9.50	2.00	34.24	54	-19.76	A	1.00
9747.69	43.58	38.53	5.90	36.60	9.50	0.55	42.46	74	-31.54	P	1.00
9747.69	34.58	38.53	5.90	36.60	9.50	0.55	33.46	54	-20.54	A	1.00
* 12200.85	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14641.02	-----	-----	-----	-----	0.00	0.59	-----	-----	-----	-----	1.00
17081.19	-----	-----	-----	-----	0.00	0.53	-----	-----	-----	-----	1.00
* 19521.36	-----	-----	-----	-----	0.00	2.22	-----	-----	-----	-----	1.00
21961.53	-----	-----	-----	-----	0.00	0.72	-----	-----	-----	-----	1.00
24401.70	-----	-----	-----	-----	0.00	2.46	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark “*” means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For 802.11g mode at 6Mbps.
10. The spurious radiated emission test results of the EUT with three adapters are almost the same, so the adapter (1) was chosen as representative in final test.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRK54G

Report No. : ER03-12-069FRF

Page 45 of 68

Test Requirement: 15.205

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date :	2004/1/15
Product Name	Wireless-G Broadband Router With 4-Port Switch	Test By:	K. P. Pang
Model Name	WRK54G	TEMP&Humidity :	19.9°C , 65%

CH11 TX				Measurement Distance at 1m				Horizontal polarity			
Freq.	Reading	AF	Cable	Pre-amp	Dist	Filter	Level	Limit	Margin	Mark	Height
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	dB	dB	(dBuV/m)	(dBuV/m)	(dB)	(P/Q/A)	(Meter)
2463.30	75.86	31.74	3.28	0.00	9.50	0.00	101.38	Fundamental Frequency		P	1.00
2463.30	68.16	31.74	3.28	0.00	9.50	0.00	93.68			A	1.00
* 2488.50	33.58	31.71	3.09	0.00	9.50	0.00	58.88	74	-15.12	P	1.00
* 2488.50	20.52	31.71	3.09	0.00	9.50	0.00	45.82	54	-8.18	A	1.00
* 4923.51	42.97	35.10	2.64	35.24	9.50	1.61	37.57	74	-36.43	P	1.00
* 4923.51	32.39	35.10	2.64	35.24	9.50	1.61	26.99	54	-27.01	A	1.00
* 7386.33	43.96	39.75	4.85	35.62	9.50	2.00	45.44	74	-28.56	P	1.00
* 7386.33	33.40	39.75	4.85	35.62	9.50	2.00	34.88	54	-19.12	A	1.00
9847.68	45.11	38.52	5.90	36.76	9.50	0.49	43.76	74	-30.24	P	1.00
9847.68	34.19	38.52	5.90	36.76	9.50	0.49	32.84	54	-21.16	A	1.00
* 12316.50	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14779.80	-----	-----	-----	-----	0.00	0.48	-----	-----	-----	-----	1.00
17243.10	-----	-----	-----	-----	0.00	0.60	-----	-----	-----	-----	1.00
* 19706.40	-----	-----	-----	-----	0.00	2.41	-----	-----	-----	-----	1.00
* 22169.70	-----	-----	-----	-----	0.00	0.70	-----	-----	-----	-----	1.00
24633.00	-----	-----	-----	-----	0.00	2.11	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark “*” means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For 802.11g mode at 6Mbps.
10. The spurious radiated emission test results of the EUT with three adapters are almost the same, so the adapter (1) was chosen as representative in final test.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRK54G

Report No. : ER03-12-069FRF

Page 46 of 68

Test Requirement: 15.205

The frequency spectrum above 1 GHz was investigated. All emissions not reported below are more than 40 dB below the prescribed limits. Readings are both peak and average values.

Company	Cisco-Linksys, LLC	Test Date :	2004/1/15
Product Name	Wireless-G Broadband Router With 4-Port Switch	Test By:	K. P. Pang
Model Name	WRK54G	TEMP&Humidity :	19.9°C , 65%

CH11 TX				Measurement Distance at 1m				Vertical polarity			
Freq.	Reading	AF	Cable	Pre-amp	Dist	Filter	Level	Limit	Margin	Mark	Height
(MHz)	(dBuV)	(dBuV)	(dB)	(dB)	dB	dB	(dBuV/m)	(dBuV/m)	(dB)	(P/Q/A)	(Meter)
2463.30	86.49	31.74	3.28	0.00	9.50	0.00	112.01	Fundamental Frequency		P	1.00
2463.30	78.26	31.74	3.28	0.00	9.50	0.00	103.78			A	1.00
* 2483.94	42.80	31.72	3.12	0.00	9.50	0.00	68.14	74	-5.86	P	1.00
* 2483.94	28.40	31.72	3.12	0.00	9.50	0.00	53.74	54	-0.26	A	1.00
* 4923.78	42.53	35.10	2.64	35.24	9.50	1.60	37.13	74	-36.87	P	1.00
* 4923.78	32.42	35.10	2.64	35.24	9.50	1.60	27.02	54	-26.98	A	1.00
* 7386.05	43.89	39.75	4.85	35.62	9.50	2.00	45.37	74	-28.63	P	1.00
* 7386.05	33.24	39.75	4.85	35.62	9.50	2.00	34.72	54	-19.28	A	1.00
9847.81	45.08	38.52	5.90	36.76	9.50	0.49	43.73	74	-30.27	P	1.00
9847.81	34.38	38.52	5.90	36.76	9.50	0.49	33.03	54	-20.97	A	1.00
* 12316.50	-----	-----	-----	-----	9.50	0.80	-----	-----	-----	-----	1.00
14779.80	-----	-----	-----	-----	0.00	0.48	-----	-----	-----	-----	1.00
17243.10	-----	-----	-----	-----	0.00	0.60	-----	-----	-----	-----	1.00
* 19706.40	-----	-----	-----	-----	0.00	2.41	-----	-----	-----	-----	1.00
* 22169.70	-----	-----	-----	-----	0.00	0.70	-----	-----	-----	-----	1.00
24633.00	-----	-----	-----	-----	0.00	2.11	-----	-----	-----	-----	1.00

Note :

1. The measurement was searched to 10th harmonic, Remark “---” means that the emissions level is too low to be measured.
2. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
3. Analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
4. Remark “*” means that Restricted band.
5. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
6. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit
7. The other emission levels were very low against the limit
8. The test limit distance is 3M limit.
9. For 802.11g mode at 6Mbps.
10. The test data marked in gray background means the EUT emission data is located in the margin uncertainty range of emission limits.
11. The spurious radiated emission test results of the EUT with three adapters are almost the same, so the adapter (1) was chosen as representative in final test.

3.7 Photos of Open Site





Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX : 886-3-5825720

FCC ID : Q87-WRK54G

Report No. : ER03-12-069FRF

Page 48 of 68



4. 6dB BANDWIDTH MEASUREMENT


4.1 Test Equipments

Description & Manufacturer	Model No.	Serial No.	Date Of Calibration
ROHDE & SCHWARZ SPECTRUM ANALYZER	FSEK30	835253/002	JUN. 17, 2003
HP ATTENUATOR	8496B	3247A18505	Cal. on use
HP PLOTTER	7750A	725A 852141	N/A

Note : 1. The measurement uncertainty is less than $\pm 2.6\text{dB}$, which is calculated as per the NAMAS document NIS81.

2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.2 Test Setup



4.3 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is $>500\text{KHz}$

4.4 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 100 KHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.5 Uncertainty of Conducted Emission

The uncertainty of conducted emission is $\pm 200\text{KHz}$.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRK54G

Report No. : ER03-12-069FRF

Page 50 of 68

4.6 Test Results

Input Power (System)	12VDC (From Adapter)	Environmental Conditions	20.4°C, 52%RH
Tested By	K. P. Pang		

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	9.57	0.5	PASS
6	2437	9.53	0.5	PASS
11	2462	9.57	0.5	PASS

Note: For 802.11b Mode

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	16.39	0.5	PASS
6	2437	16.39	0.5	PASS
11	2462	16.39	0.5	PASS

Note: For 802.11g Mode



Ecom Sertech Corp.


Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRK54G


Report No. : ER03-12-069FRF

Page 51 of 68


4.7 Photo of 6db Bandwidth Measurement

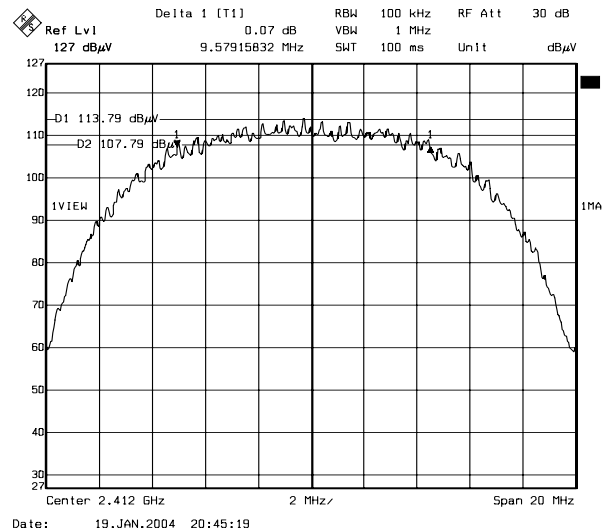

Channel 1

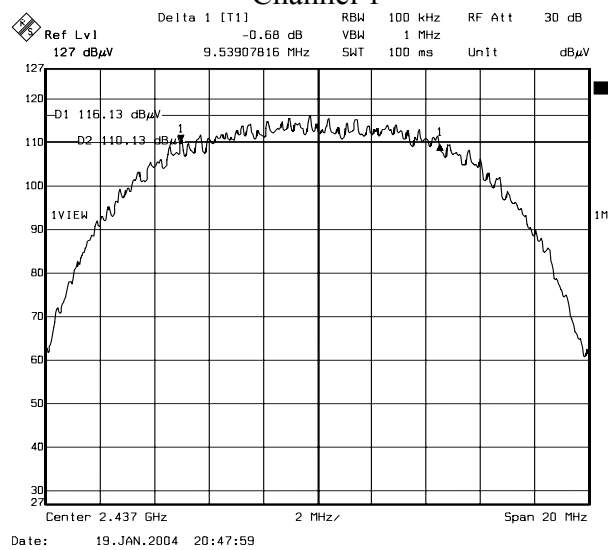

Channel 6

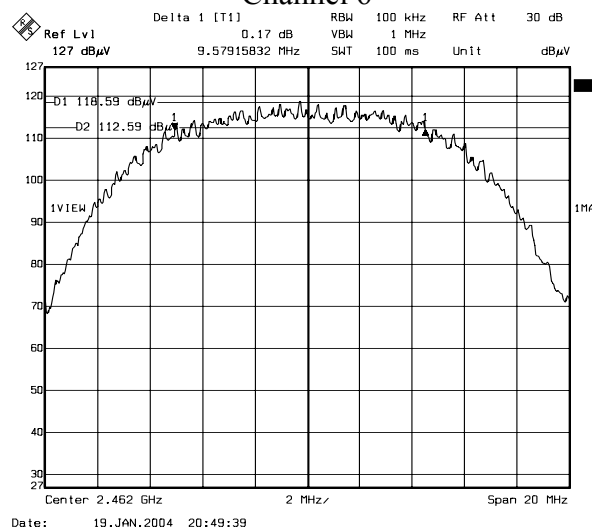

Channel 11

Note: For 802.11b Mode




Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720


FCC ID : Q87-WRK54G

Report No. : ER03-12-069FRF


Page 52 of 68

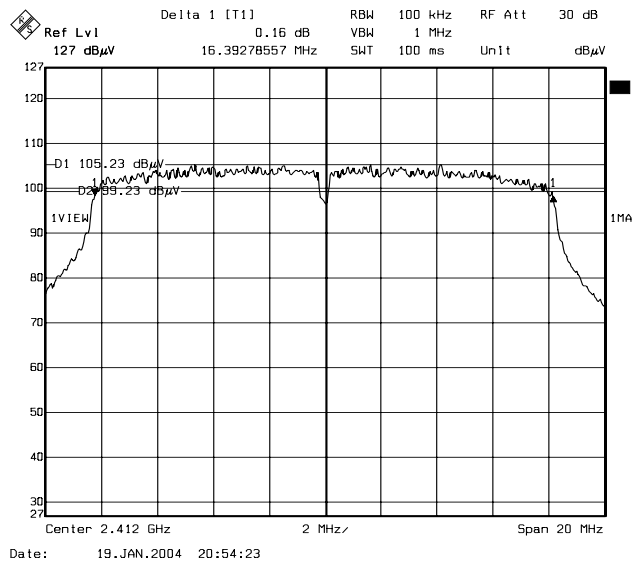

Channel 1

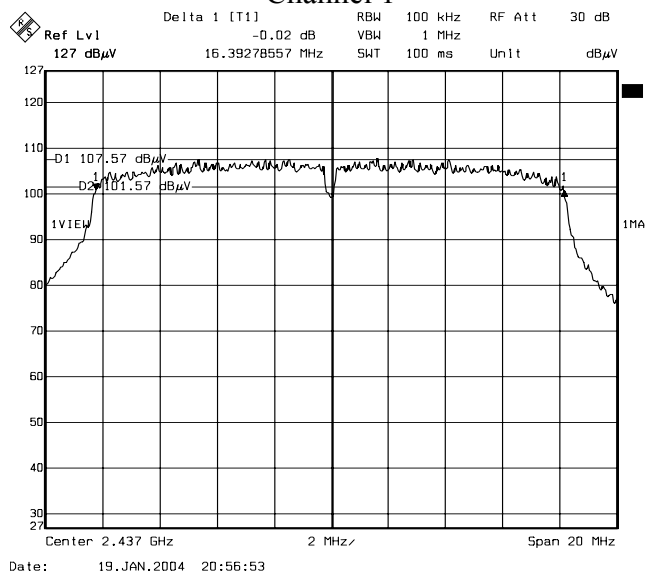

Channel 6

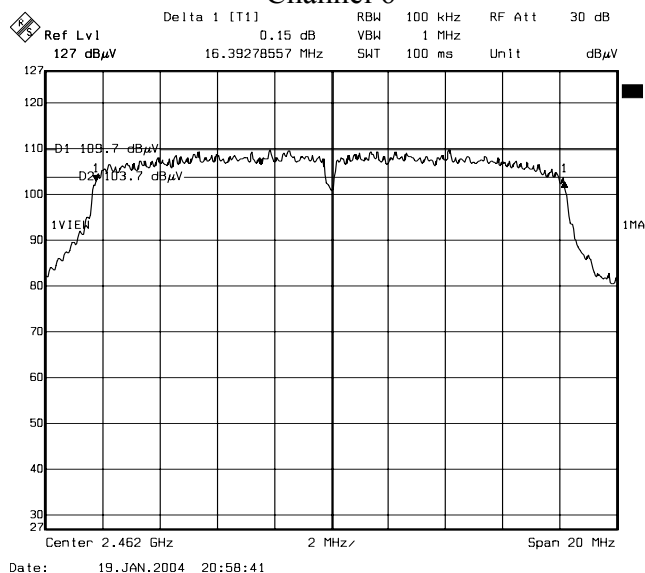

Channel 11

Note: For 802.11g Mode



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRK54G
Report No. : ER03-12-069FRF
Page 53 of 68

5. MAXIMUM PEAK OUTPUT POWER


5.1 Test Equipments

Description & Manufacturer	Model No.	Serial No.	Date Of Calibration
ROHDE & SCHWARZ SPECTRUM ANALYZER	FSEK30	835253/002	JUN. 17, 2003
HP ATTENUATOR	8496B	3247A18505	Cal. on use
HP PLOTTER	7750A	725A 852141	N/A
GIGASTRONICS POWER METER	8542	1828329	SEPT.19, 2003

Note : 1. The measurement uncertainty is less than $\pm 2.6\text{dB}$, which is calculated as per the NAMAS document NIS81.

2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

5.2 Test Setup



5.3 Limits of Maximum Peak Output Power

The Maximum Peak Output Power Measurement is 30dBm.

5.4 Test Procedure

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency.

5.5 Uncertainty of Conducted Emission

The uncertainty of conducted emission is $\pm 1.82\text{dB}$.

5.6 Test Results

Input Power (System)	12VDC (From Adapter)	Environmental Conditions	20.4°C, 52%RH
Tested By	K. P. Pang		

Channel	Channel Frequency (MHz)	Peak Power Output (dBm)	Peak Power Limit (dBm)	Pass / Fail
1	2412	19.50	30	PASS
6	2437	20.19	30	PASS
11	2462	19.55	30	PASS

Note : 1. For 802.11b Mode.

2. At final test to get the worst-case emission at 11Mbps.

3. The result basic equation calculation as follow :

Peak Power Output = Peak Power Reading + Cable loss + Attenuator

Channel	Channel Frequency (MHz)	Peak Power Output (dBm)	Peak Power Limit (dBm)	Pass / Fail
1	2412	17.03	30	PASS
6	2437	17.52	30	PASS
11	2462	19.83	30	PASS

Note : 1. For 802.11g Mode.

2. At final test to get the worst-case emission at 54Mbps.

3. The result basic equation calculation as follow :

Peak Power Output = Peak Power Reading + Cable loss + Attenuator

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRK54G

Report No. : ER03-12-069FRF

Page 55 of 68

6. POWER SPECTRAL DENSITY MEASUREMENT


6.1 Test Equipments

Description & Manufacturer	Model No.	Serial No.	Date Of Calibration
ROHDE & SCHWARZ SPECTRUM ANALYZER	FSEK30	835253/002	JUN. 17, 2003
HP ATTENUATOR	8496B	3247A18505	Cal. on use
HP PLOTTER	7750A	725A 852141	N/A

Note : 1. The measurement uncertainty is less than $\pm 2.6\text{dB}$, which is calculated as per the NAMAS document NIS81.

2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

6.2 Test Setup



6.3 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density Measurement is 8dBm.



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRK54G
Report No. : ER03-12-069FRF
Page 56 of 68

6.4 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3KHz RBW and 30KHz VBW, set sweep time=span / 3KHz.

The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span / 3KHz for a full response of the mixer in the spectrum analyzer.

6.5 Uncertainty of Conducted Emission

The uncertainty of conducted emission is $\pm 1.82\text{dB}$.

6.6 Test Results

Input Power (System)	12VDC (From Adapter)	Environmental Conditions	20.4°C, 52%RH
Tested By	K. P. Pang		

Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)	Maximum Limit (dBm)	Pass / Fail
1	2412	-5.89	8	PASS
6	2437	-4.00	8	PASS
11	2462	-3.56	8	PASS

Note: For 802.11b mode at final test to get the worst-case emission at 11Mbps.

Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)	Maximum Limit (dBm)	Pass / Fail
1	2412	-11.92	8	PASS
6	2437	-12.21	8	PASS
11	2462	-12.47	8	PASS

Note: For 802.11g mode at final test to get the worst-case emission at 6Mbps.



Ecom Sertech Corp.


Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRK54G


Report No. : ER03-12-069FRF

Page 57 of 68


6.7 Photo of Power Spectral Density Measurement

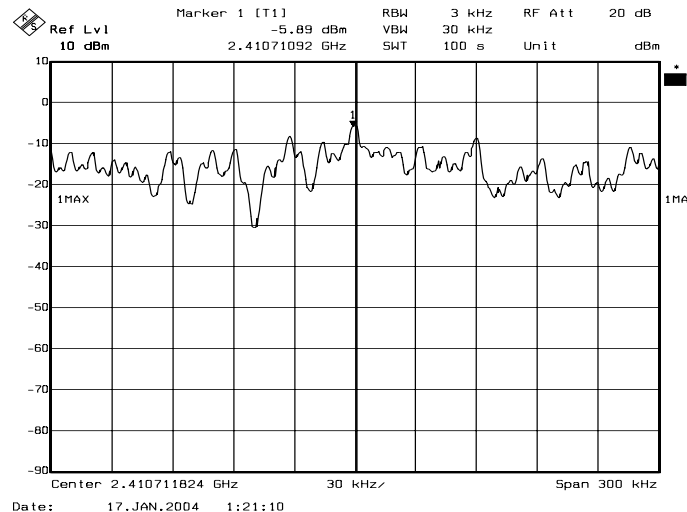

Channel 1

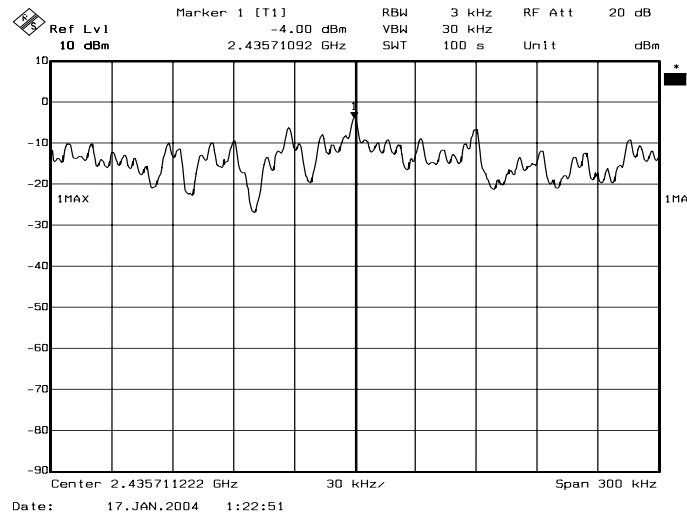

Channel 6

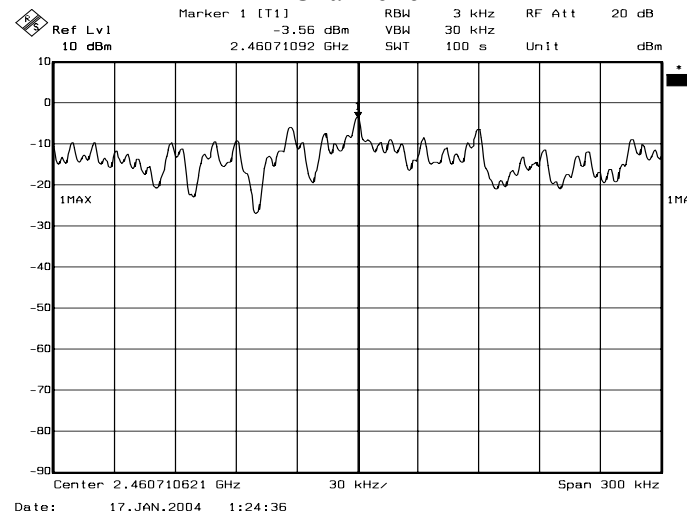

Channel 11

Note: For 802.11b Mode




Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing
Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720


FCC ID : Q87-WRK54G

Report No. : ER03-12-069FRF


Page 58 of 68

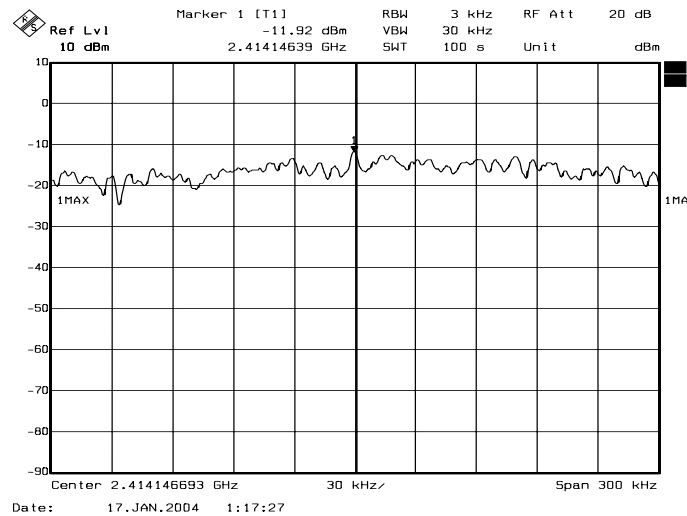

Channel 1

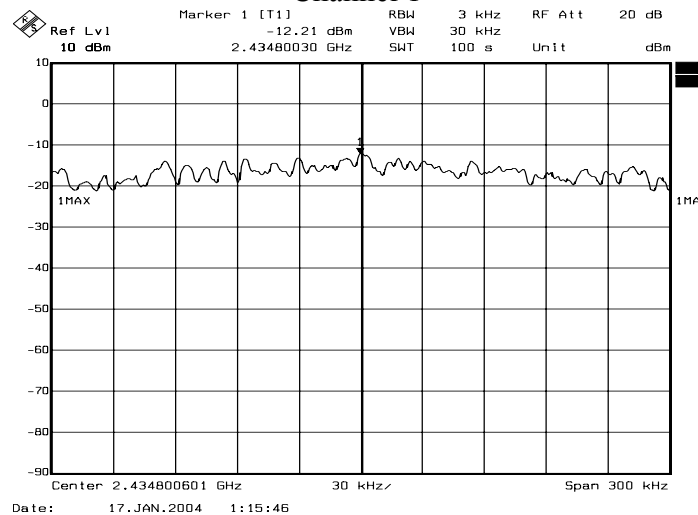

Channel 6

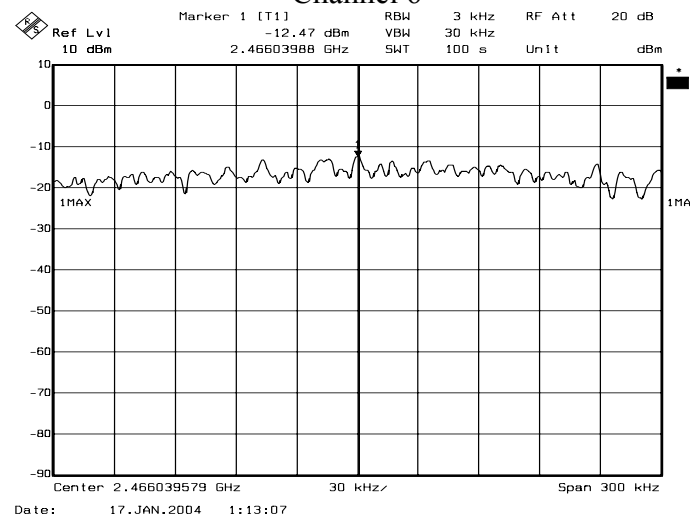

Channel 11

Note: For 802.11g Mode



Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRK54G

Report No. : ER03-12-069FRF

Page 59 of 68

7. BANDEDGE MEASUREMENT


7.1 Test Equipments

Description & Manufacturer	Model No.	Serial No.	Date Of Calibration
ROHDE & SCHWARZ SPECTRUM ANALYZER	FSEK30	835253/002	JUN. 17, 2003
HP ATTENUATOR	8496B	3247A18505	Cal. on use
HP PLOTTER	7750A	725A 852141	N/A

Note : 1. The measurement uncertainty is less than $\pm 2.6\text{dB}$, which is calculated as per the NAMAS document NIS81.

2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

7.2 Test Setup



7.3 Limits of Out of Band Emissions Measurement

1. Below -20dB of the highest emission level of operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

7.4 Test Procedure

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer with suitable frequency span including 100KHz bandwidth from band edge. The band edges were measured and recorded.

7.5 Uncertainty of Conducted Emission

The uncertainty of conducted emission is $\pm 1.82\text{dB}$.

7.6 Test Results

A. Conducted

Refer to 7.7 photo of bandedge Emission measurement

B. Radiated

For 802.11b Mode

Refer to the section 3.6, the measured radiated band edge emissions are listed below :

Input Power (System)	12VDC (From Adapter)	Environmental Conditions	20.4°C, 52%RH
Tested By	K. P. Pang		

Band edge		Measured radiated band edge field strength (dBuV/m)		Radiated band edge field strength limit (dBuV/m)		Test result
		Horizontal	Vertical	Horizontal	Vertical	
2399.90	PK	50.63	67.70	81.31	98.38	pass
	AVG	43.63	59.99	74.80	91.16	
2483.50	PK	49.73	63.95	74.00	74.00	pass
	AVG	39.23	53.53	54.00	54.00	

Note :

1. Radiated band edge field strength is measured with FCC recommended mark-delta method.
2. Measured radiated band edge field strength Test Results = Radiated fundamental emission field strength - DELTA.
3. DELTA = Relative measurement between conducted measured peak level of fundamental emission and relevant band edge emission. Please refer to 7.7 photo of bandedge Measurement.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRK54G

Report No. : ER03-12-069FRF

Page 61 of 68

For 802.11g Mode

Refer to the section 3.6, the measured radiated band edge emissions are listed below :

Input Power (System)	12VDC (From Adapter)	Environmental Conditions	20.4°C, 52%RH
Tested By	K. P. Pang		

Band edge		Measured radiated band edge field strength (dBuV/m)		Radiated band edge field strength limit (dBuV/m)		Test result
		Horizontal	Vertical	Horizontal	Vertical	
2399.90	PK	72.33	84.68	81.87	94.22	pass
	AVG	52.19	64.66	74.11	86.58	
2483.50	PK	56.73	67.36	74.00	74.00	pass
	AVG	43.23	53.33	54.00	54.00	

Note :

1. Radiated band edge field strength is measured with FCC recommended mark-delta method.
2. Measured radiated band edge field strength Test Results = Radiated fundamental emission field strength - DELTA.
3. DELTA = Relative measurement between conducted measured peak level of fundamental emission and relevant band edge emission. Please refer to 7.7 photo of bandedge Measurement.



Ecom Sertech Corp.


Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRK54G

Report No. : ER03-12-069FRF


Page 62 of 68

7.7 Photo of Bandedge Measurement

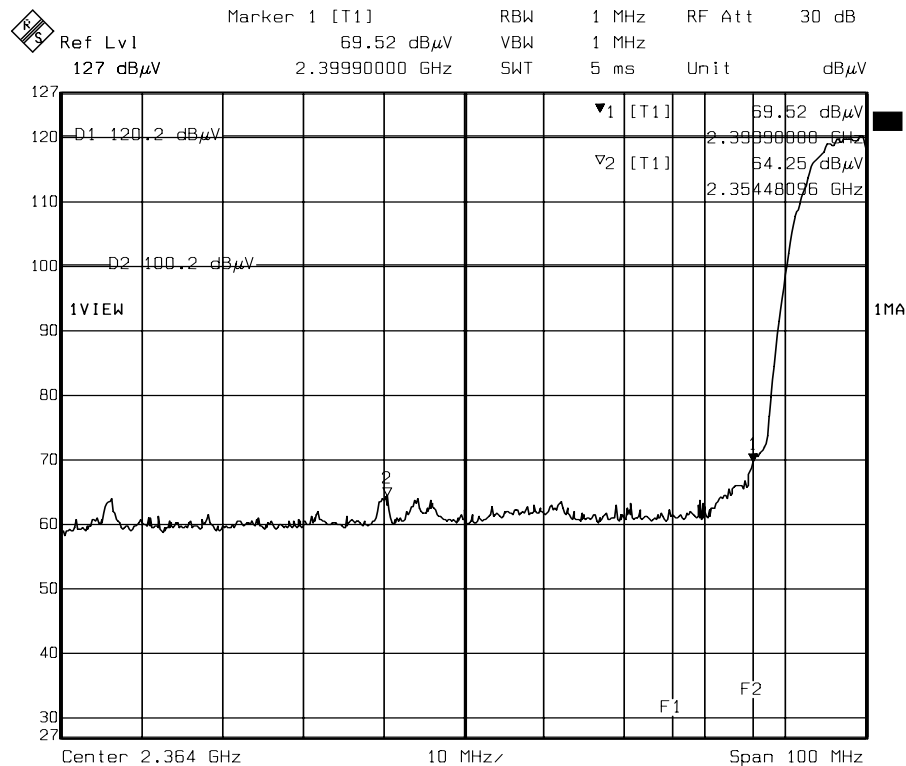

Date: 17.JAN.2004 1:32:16

FRONT (Peak)

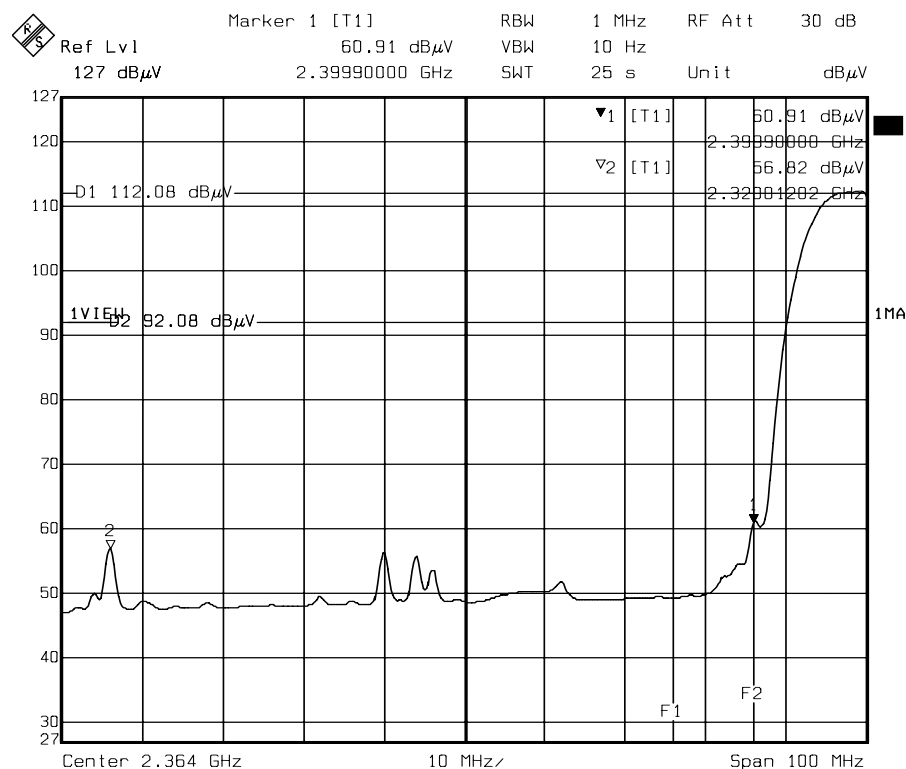

Date: 17.JAN.2004 1:37:34

FRONT (AVG)

Note: For 802.11b Mode




Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRK54G


Report No. : ER03-12-069FRF

Page 63 of 68

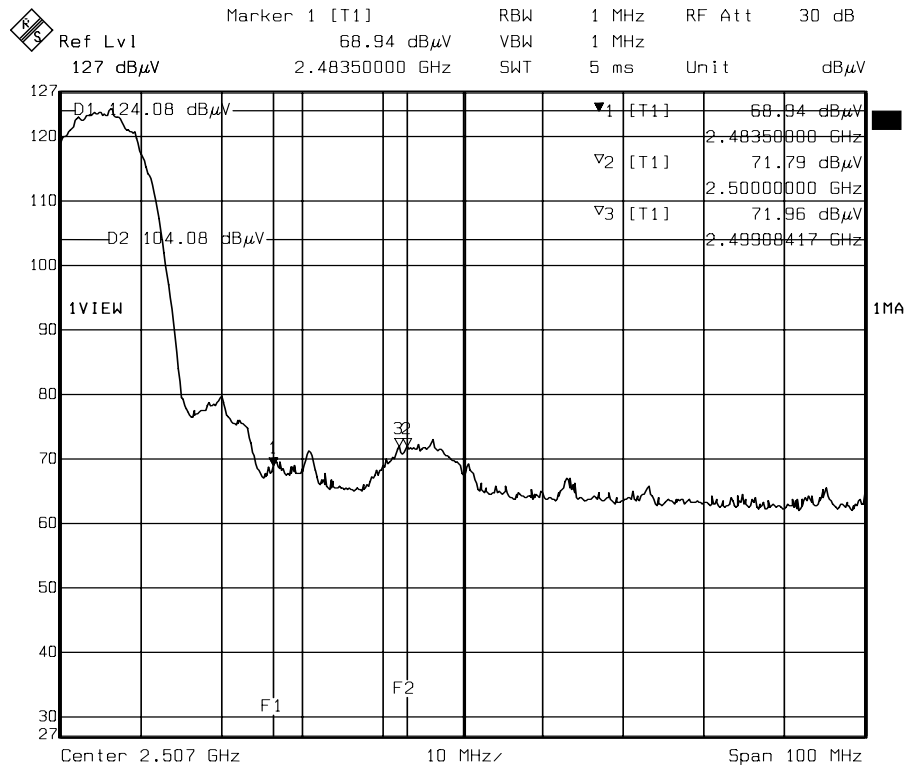

Date: 17.JAN.2004 1:45:05

BACK (Peak)

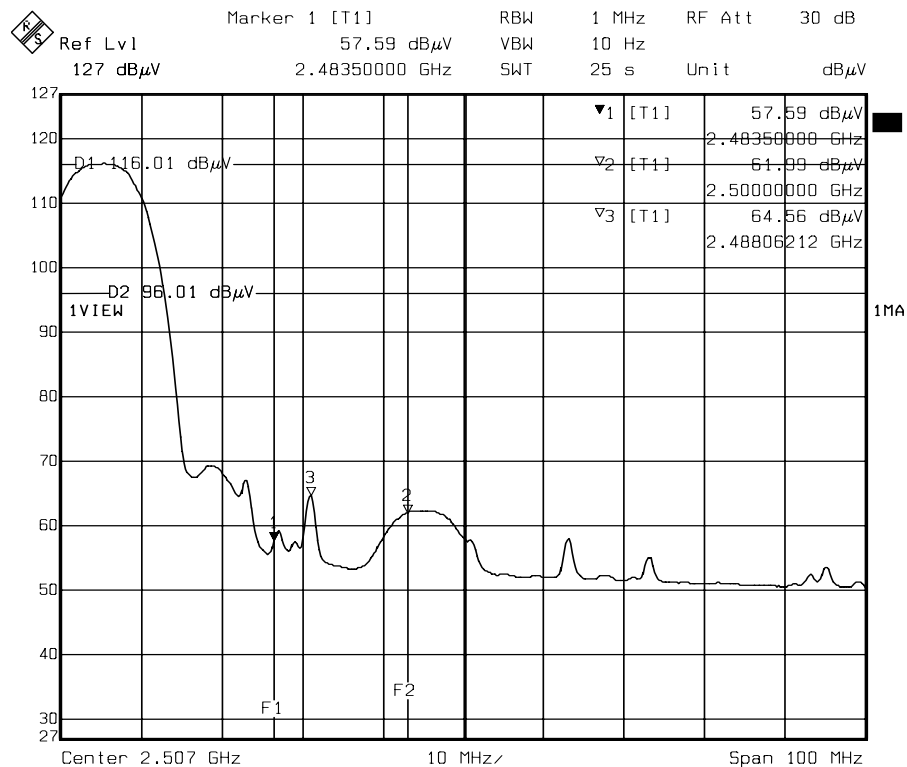

Date: 17.JAN.2004 1:41:51

BACK (AVG)

Note: For 802.11b Mode




Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRK54G


Report No. : ER03-12-069FRF

Page 64 of 68

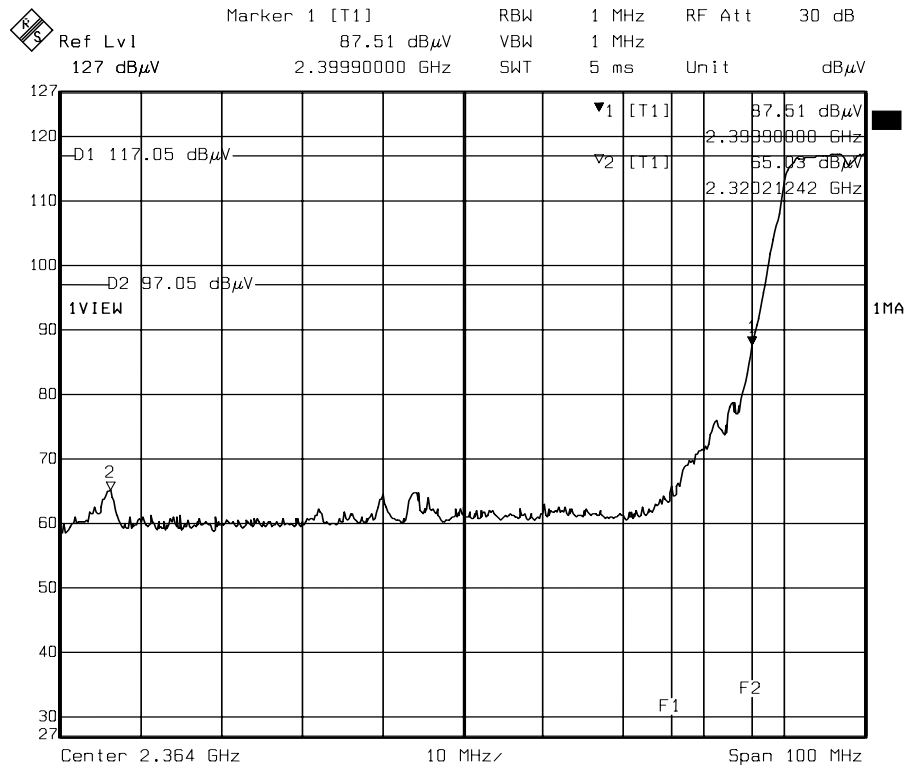

Date: 17.JAN.2004 2:11:14

FRONT (Peak)

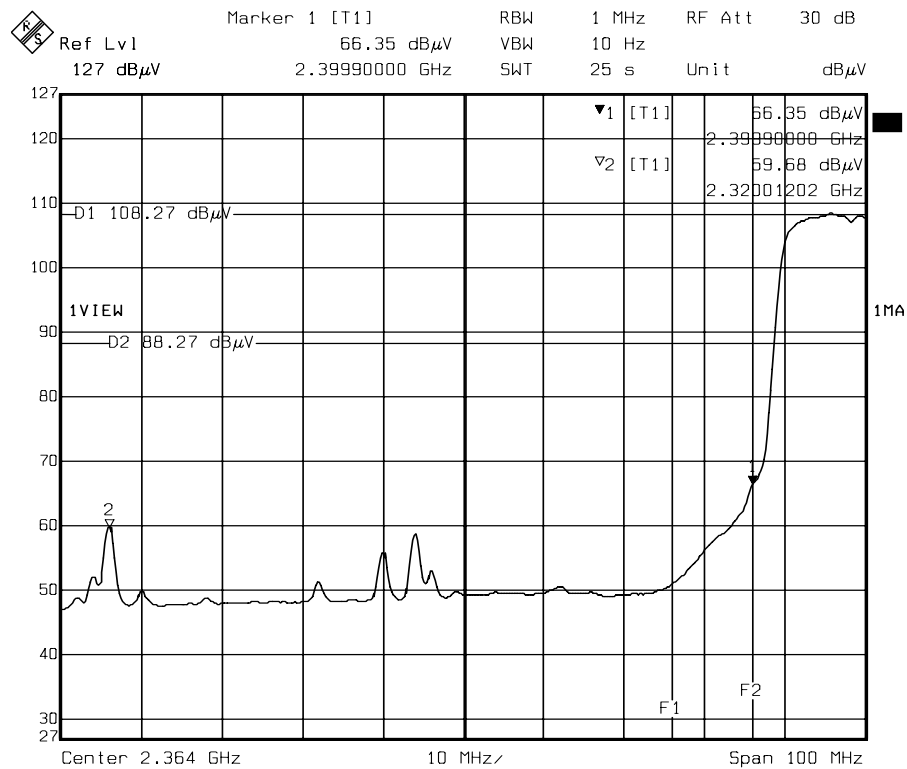

Date: 17.JAN.2004 2:08:40

FRONT (AVG)

Note: For 802.11g Mode




Ecom Sertech Corp.

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., Chu Tung Chen, Hsinchu, Taiwan 310, R.O.C
TEL: 886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRK54G


Report No. : ER03-12-069FRF

Page 65 of 68

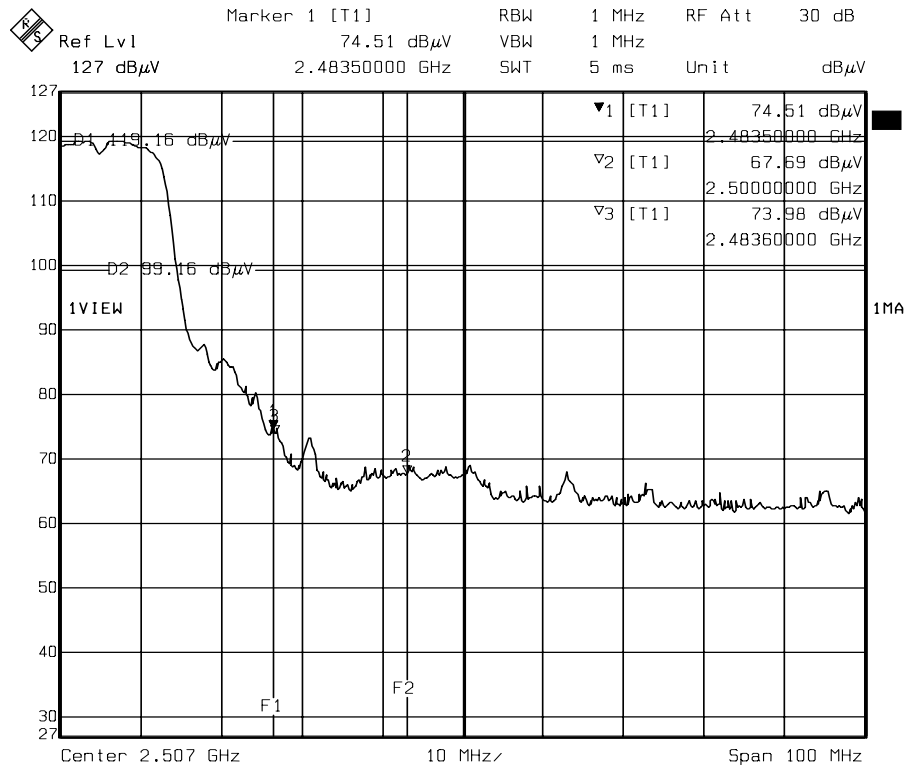

Date: 17.JAN.2004 2:02:55

BACK (Peak)

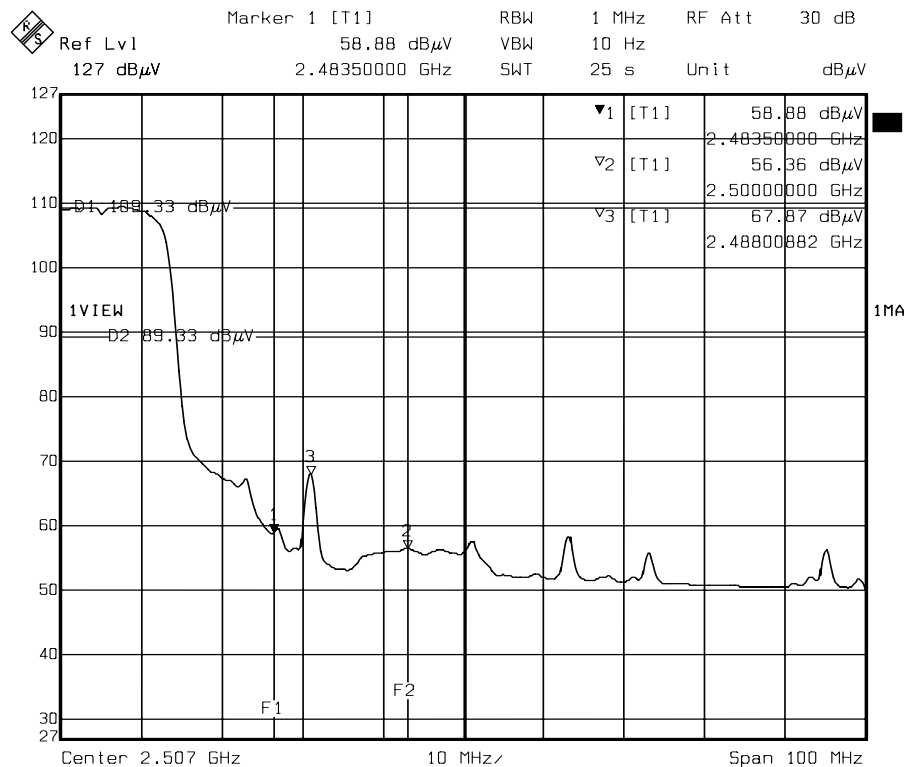

Date: 17.JAN.2004 2:05:25

BACK (AVG)

Note: For 802.11g Mode



8. ANTENNA REQUIREMENT

8.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

8.2 Antenna Connected Construction

The antenna used in this product is one Dipole Antenna soldered on PCB. The maximum Gain of this antenna is only 3.3dBi and there is no internal connector.



9. RF EXPOSURE EVALUATION

According to FCC 1.1310 : The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in 1.1307(b) LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Average Time
(A) Limits for Occupational / Control Exposures				
300-1,500	--	--	F/300	6
1,500-100,000	--	--	5	6
(B) Limits for General Population / Uncontrol Exposures				
300-1,500	--	--	F/1500	6
1,500-100,000	--	--	1	30

9.1 Friis Formula

Friis transmission formula : $P_d = (P_{out} * G) / (4 * \pi * r^2)$

Where

P_d = power density in mW/cm²

P_{out} = output power to antenna in mW

G = gain of antenna in linear scale

π = 3.1416

R = distance between observation point and center of the radiator in cm

P_d is the limit of MPE, 1 mW/cm². If we know the maximum gain of the antenna and the total power input to the antenna, through the calculation, we will know the distance r where the MPE limit is reached.

9.2 EUT Operating Condition

A software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel individually.

**Ecom Sertech Corp.**

Rm. 258, Bldg. 17, NO.195, Sec. 4 Chung Hsing Rd., ChuTung Chen, Hsinchu, Taiwan 310, R.O.C
TEL:886-3-5918012 FAX: 886-3-5825720

FCC ID : Q87-WRK54G

Report No. : ER03-12-069FRF

Page 68 of 68

9.3 Test Result of RF Exposure Evaluation

Test Item : RF Exposure Evaluation Data

Test Mode : Normal Operation

9.3.1 Antenna Gain

Antenna Gain : The maximum Gain measured in fully anechoic chamber is 3.3dBi linear scale.

9.3.2 Output Power into Antenna & RF Exposure Evaluation Distance

Channel	Channel Frequency (MHz)	Output Power to Antenna (dBm)	Power Density at 20cm (mW/cm ²)	LIMITS (mW/cm ²)
CH1	2412.00	22.80	0.081046	1
CH6	2437.00	23.49	0.095001	1
CH11	2462.00	22.85	0.081984	1

Note : 1. For Antenna 1 802.11b Mode (11Mbps).

2. The power density Pd (4th column) at a distance of 20cm calculated from the Friis transmission formula is far below the limit of 1 mW/cm². The EUT is classified as mobile product. So, RF exposure limit warning or SAR test are not required.

Channel	Channel Frequency (MHz)	Output Power to Antenna (dBm)	Power Density at 20cm (mW/cm ²)	LIMITS (mW/cm ²)
CH1	2412.00	20.33	0.045891	1
CH6	2437.00	20.82	0.051372	1
CH11	2462.00	23.13	0.087444	1

Note : 1. For Antenna 1 802.11g Mode (54Mbps).

2. The power density Pd (4th column) at a distance of 20cm calculated from the Friis transmission formula is far below the limit of 1 mW/cm². The EUT is classified as mobile product. So, RF exposure limit warning or SAR test are not required.