

FCC Test Report

FCC ID : QIS-IPP7960
Equipment : IP Phone
Brand Name : HUAWEI
Model Name : HUAWEI IP Phone 7960
Applicant/
Manufacturer : Huawei Technologies Co.,Ltd.
Administration Building, Headquarters of Huawei
Technologies Co., Ltd., Bantian, Longgang District,
Shenzhen, 518129, P.R.C
Standard : 47 CFR FCC Part 15.247

The product was received on Aug. 13, 2018, and testing was started from Aug. 16, 2018 and completed on Aug. 21, 2018. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Allen Lin

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

HISTORY OF THIS TEST REPORT3

SUMMARY OF TEST RESULT4

1 GENERAL DESCRIPTION5

1.1 Information.....5

1.2 Testing Applied Standards6

1.3 Testing Location Information6

1.4 Measurement Uncertainty6

2 TEST CONFIGURATION OF EUT.....7

2.1 Test Condition7

2.2 Test Channel Mode7

2.3 The Worst Case Measurement Configuration.....8

2.4 Accessories and Support Equipment9

2.5 Test Setup Diagram10

3 TRANSMITTER TEST RESULT12

3.1 AC Power-line Conducted Emissions12

3.2 DTS Bandwidth14

3.3 Maximum Conducted Output Power15

3.4 Power Spectral Density17

3.5 Emissions in Non-restricted Frequency Bands18

3.6 Emissions in Restricted Frequency Bands.....19

4 TEST EQUIPMENT AND CALIBRATION DATA.....22

APPENDIX A. TEST RESULTS OF AC POWER-LINE CONDUCTED EMISSIONS

APPENDIX B. TEST RESULTS OF DTS BANDWIDTH

APPENDIX C. TEST RESULTS OF MAXIMUM CONDUCTED OUTPUT POWER

APPENDIX D. TEST RESULTS OF POWER SPECTRAL DENSITY

APPENDIX E. TEST RESULTS OF EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS

APPENDIX F. TEST RESULTS OF EMISSIONS IN RESTRICTED FREQUENCY BANDS

APPENDIX G. TEST PHOTOS

PHOTOGRAPHS OF EUT V01

Summary of Test Result

Report Clause	Ref. Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	FCC 15.203
3.1	15.207	AC Power-line Conducted Emissions	PASS	FCC 15.207
3.2	15.247(a)	DTS Bandwidth	PASS	≥500kHz
3.3	15.247(b)	Maximum Conducted Output Power	PASS	Power [dBm]:30
3.4	15.247(e)	Power Spectral Density	PASS	PSD [dBm/3kHz]:8
3.5	15.247(d)	Emissions in Non-restricted Frequency Bands	PASS	Non-Restricted Bands: >30 dBc
3.6	15.247(d)	Emissions in Restricted Frequency Bands	PASS	Restricted Bands: FCC 15.209

Reviewed by: Jackson Tsai

Report Producer: Jenny Yang

1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	Bluetooth Mode	Ch. Frequency (MHz)	Channel Number
2400-2483.5	LE	2402-2480	0-39 [40]

Band	Mode	BWch (MHz)	Nant
2.4-2.4835GHz	BT-LE(1Mbps)	1.0	1TX

Note:

- ◆ Bluetooth LE uses a GFSK (1Mbps) modulation for DSSS.
- ◆ BWch is the nominal channel bandwidth.

1.1.2 Antenna Information

Ant.	Port	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	1	-	-	PCB Antenna	mini Murata	4.47

For BT function:

For IEEE 802.15.1 Bluetooth mode (1TX/1RX)

Only Ant. 1 (port 1) can be used as transmitting/receiving antenna.

1.1.3 EUT Information

Operational Condition	
EUT Power Type	From AC Adapter
EUT Function	<input type="checkbox"/> Point-to-multipoint <input checked="" type="checkbox"/> Point-to-point
Type of EUT	
<input checked="" type="checkbox"/>	Stand-alone
<input type="checkbox"/>	Combined (EUT where the radio part is fully integrated within another device)
	Combined Equipment - Brand Name / Model No.: ...
<input type="checkbox"/>	Plug-in radio (EUT intended for a variety of host systems)
	Host System - Brand Name / Model No.: ...
<input type="checkbox"/>	Other:

1.1.4 Mode Test Duty Cycle

Mode	DC	DCF(dB)	T(s)	VBW(Hz) ≥ 1/T
BT-LE(1Mbps)	0.627	2.027	392.5u	3k

1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2013
- ♦ KDB 558074 D01 v05

1.3 Testing Location Information

Testing Location		
<input checked="" type="checkbox"/>	HWA YA	ADD : No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL : 886-3-327-3456 FAX : 886-3-327-0973
Test site Designation No. TW1190 with FCC.		
<input type="checkbox"/>	JHUBEI	ADD : No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County, Taiwan (R.O.C.) TEL : 886-3-656-9065 FAX : 886-3-656-9085
Test site Designation No. TW0006 with FCC.		

Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
AC Conduction	CO04-HY	Jerry	24.5°C / 55.5%	21/Aug/2018
RF Conducted	TH01-HY	Barry	23.3°C / 62%	16/Aug/2018
Radiated	03CH03-HY	Jeff	24.2°C / 59%	19/Aug/2018

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	3.0 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	4.3 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.9 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.3 dB	Confidence levels of 95%
Temperature	0.7 °C	Confidence levels of 95%
Humidity	4 %	Confidence levels of 95%

2 Test Configuration of EUT

2.1 Test Condition

RF Conducted	Abbreviation	Remark
TnomVnom	Tnom	20°C
-	Vnom	120V

2.2 Test Channel Mode

Test Software	Dos

Mode	Power Setting
BT-LE(1Mbps)	-
2402MHz	default
2440MHz	default
2480MHz	default

2.3 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral
Operating Mode	CTX
1	Adapter mode

The Worst Case Mode for Following Conformance Tests	
Tests Item	DTS Bandwidth Maximum Conducted Output Power Power Spectral Density Emissions in Non-restricted Frequency Bands
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests			
Tests Item	Emissions in Restricted Frequency Bands		
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.		
Operating Mode < 1GHz	CTX		
1	Adapter mode		
Operating Mode > 1GHz	CTX		
Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			
Worst Planes of EUT			V

2.4 Accessories and Support Equipment

Accessories		
RJ45 Cable	In/Out door	In door
	Power Cord	1.46 meter, non-shielded cable, w/o ferrite core


Reminder: Regarding to more detail and other information, please refer to user manual.


Support Equipment – AC Conduction				
No.	Equipment	Brand Name	Model Name	FCC ID
1	AC Adapter	HUAWEL	HKA02412020-1K	-

Support Equipment – RF Conducted				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Notebook	DELL	E5410	DoC
2	Adapter for NB	DELL	HA65NM130	DoC
3	Bluetooth Tester	ROHDE & SCHWARZ	CBT	DoC
4	AC Power Source	GW	APS-9102	DoC

Support Equipment – Radiated Emission				
No.	Equipment	Brand Name	Model Name	FCC ID
1	AC Adapter	HUAWEL	HKA02412020-1K	-

2.5 Test Setup Diagram

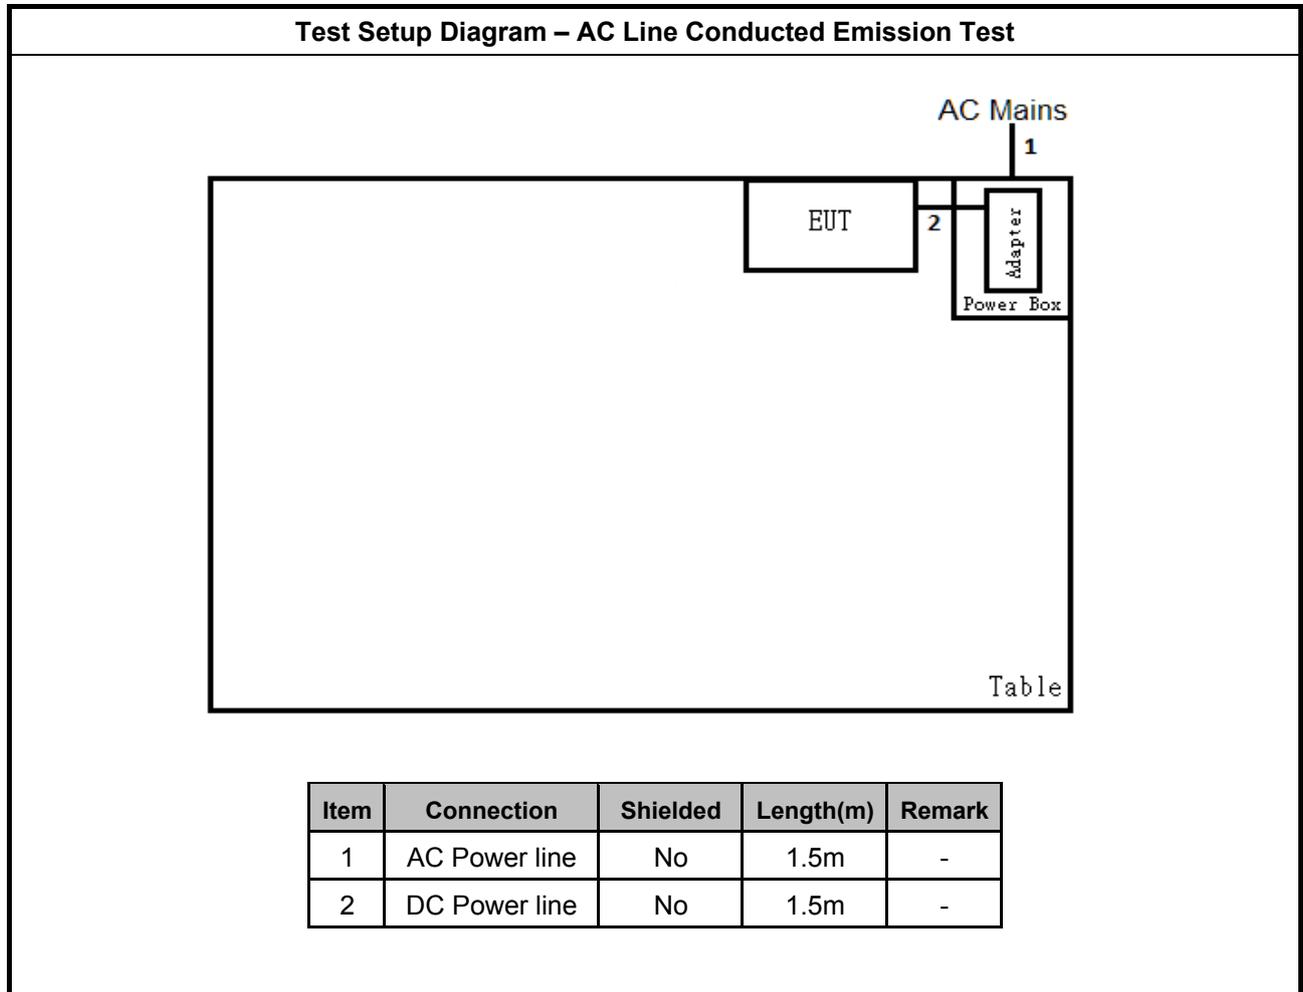

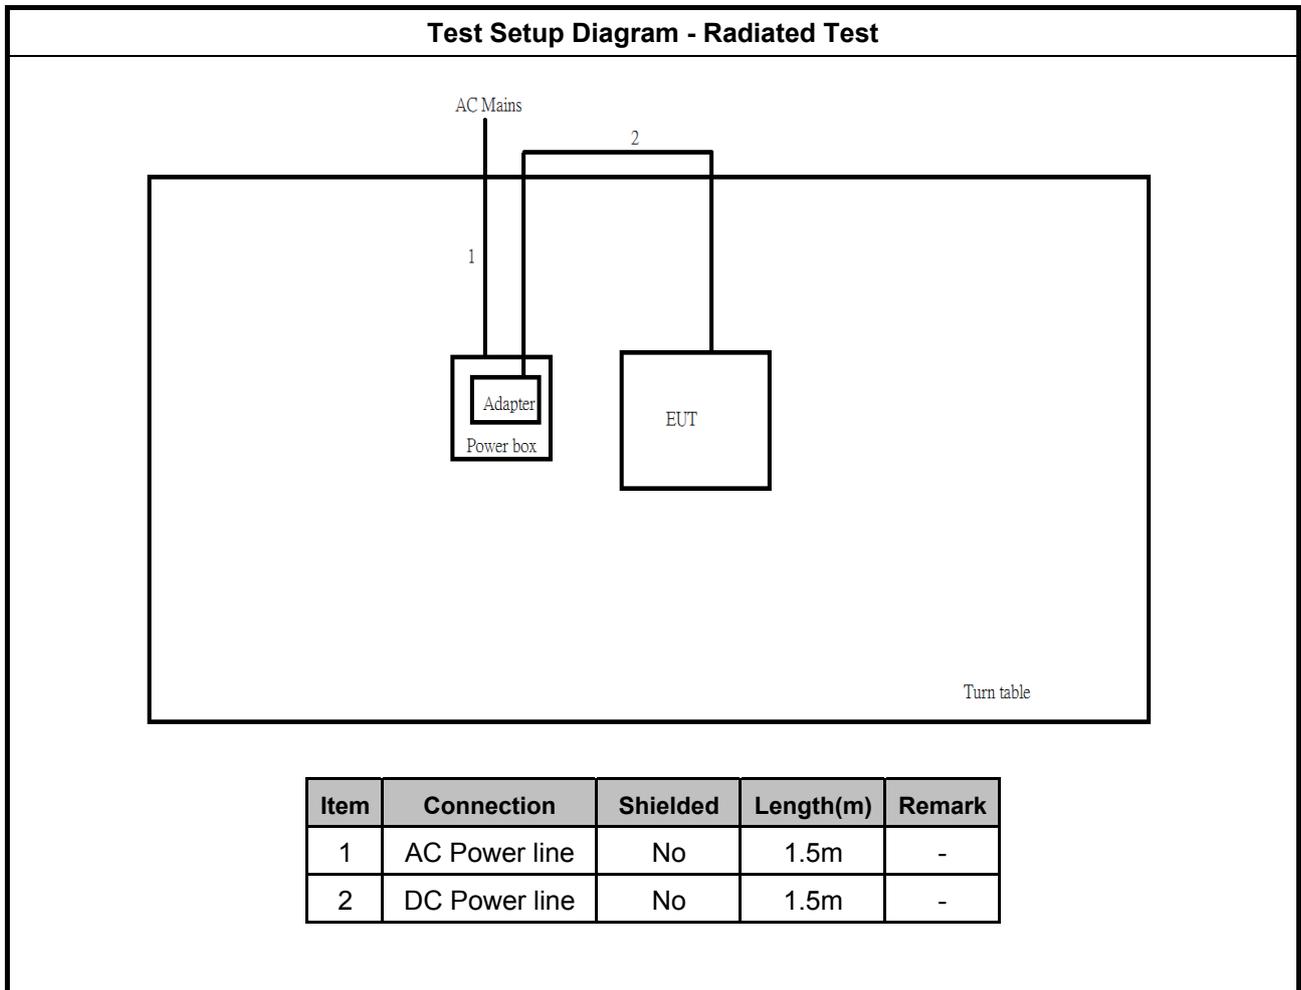



3.1.5 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 DTS Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit
Systems using digital modulation techniques:
<ul style="list-style-type: none"> ▪ 6 dB bandwidth \geq 500 kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method
<ul style="list-style-type: none"> ▪ For the emission bandwidth shall be measured using one of the options below:
<input checked="" type="checkbox"/> Refer as KDB 558074, clause 8.2 (11.9.2.2 of ANSI C63.10) DTS bandwidth measurement.
<input type="checkbox"/> Refer as RSS-Gen, clause 6.7 for for occupied bandwidth testing.
<input type="checkbox"/> Refer as ANSI C63.10, clause 6.9.3 for occupied bandwidth testing.

3.2.4 Test Setup

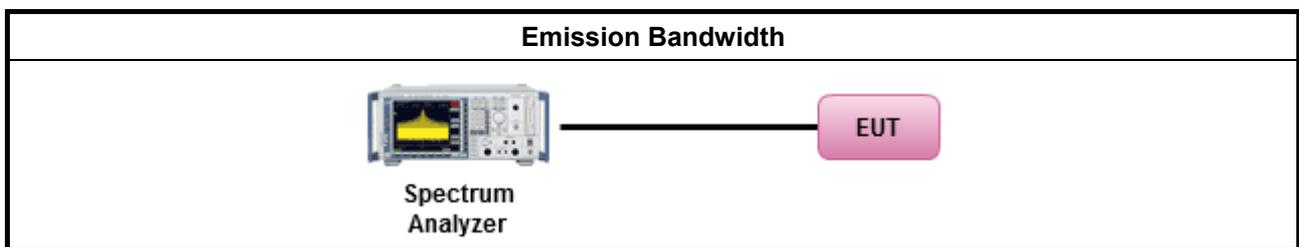

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B

3.3 Maximum Conducted Output Power

3.3.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit	
	<ul style="list-style-type: none"> ▪ If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
	<ul style="list-style-type: none"> ▪ Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
	<ul style="list-style-type: none"> ▪ Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	<ul style="list-style-type: none"> ▪ Smart antenna system (SAS):
	<ul style="list-style-type: none"> - Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	<ul style="list-style-type: none"> - Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	<ul style="list-style-type: none"> - Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm
e.i.r.p. Power Limit:	
	<ul style="list-style-type: none"> ▪ 2400-2483.5 MHz Band
	<ul style="list-style-type: none"> ▪ Point-to-multipoint systems (P2M): $P_{eirp} \leq 36$ dBm (4 W)
	<ul style="list-style-type: none"> ▪ Point-to-point systems (P2P): $P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX}])$ dBm
	<ul style="list-style-type: none"> ▪ Smart antenna system (SAS)
	<ul style="list-style-type: none"> - Single beam: $P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})$ dBm
	<ul style="list-style-type: none"> - Overlap beam: $P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})$ dBm
	<ul style="list-style-type: none"> - Aggregate power on all beams: $P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX} + 8])$ dBm
<p>P_{Out} = maximum peak conducted output power or maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.</p>	


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
<ul style="list-style-type: none"> ▪ Maximum Peak Conducted Output Power 	
<input type="checkbox"/>	Refer as KDB 558074, clause 8.3.1.1 (11.9.1.1 of ANSI C63.10) RBW ≥ EBW method.
<input type="checkbox"/>	Refer as KDB 558074, clause 8.3.1.2 (11.9.1.2 of ANSI C63.10) integrated band power method.
<input type="checkbox"/>	Refer as KDB 558074, clause 8.3.1.3 (11.9.1.3 of ANSI C63.10) peak power meter.
<ul style="list-style-type: none"> ▪ Maximum Average Conducted Output Power 	
<input type="checkbox"/>	Refer as KDB 558074, clause 8.3.2.2 (11.9.2.2 of ANSI C63.10) using a spectrum analyzer.
<input checked="" type="checkbox"/>	Refer as KDB 558074, clause 8.3.2.3 (11.9.2.3 of ANSI C63.10) using a power meter.
<ul style="list-style-type: none"> ▪ For conducted measurement. 	
<ul style="list-style-type: none"> ▪ If the EUT supports multiple transmit chains using options given below: Refer as KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them. 	
<ul style="list-style-type: none"> ▪ If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$ 	

3.3.4 Test Setup

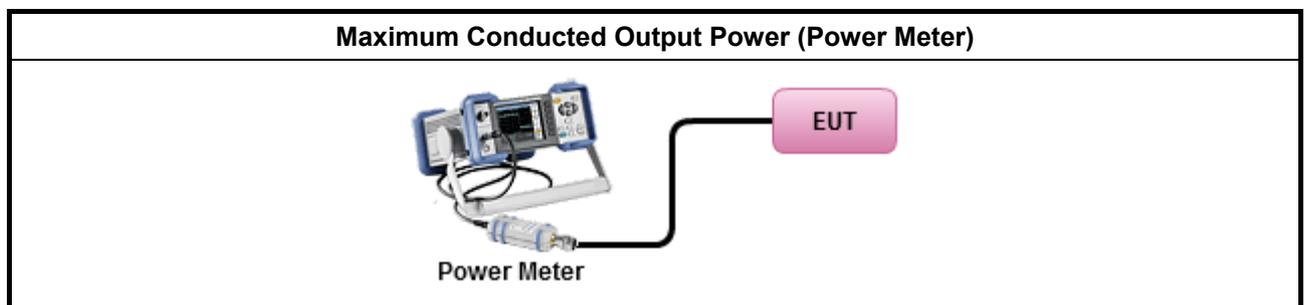

3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C

3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

Power Spectral Density Limit
<ul style="list-style-type: none"> Power Spectral Density (PSD) ≤ 8 dBm/3kHz


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method
<ul style="list-style-type: none"> Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).
<input checked="" type="checkbox"/> Refer as KDB 558074, clause 8.4 (11.10 of ANSI C63.10) Method PKPSD.
<ul style="list-style-type: none"> For conducted measurement. <ul style="list-style-type: none"> If The EUT supports multiple transmit chains using options given below: <ul style="list-style-type: none"> Measure and sum the spectra across the outputs. Refer as KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.

3.4.4 Test Setup

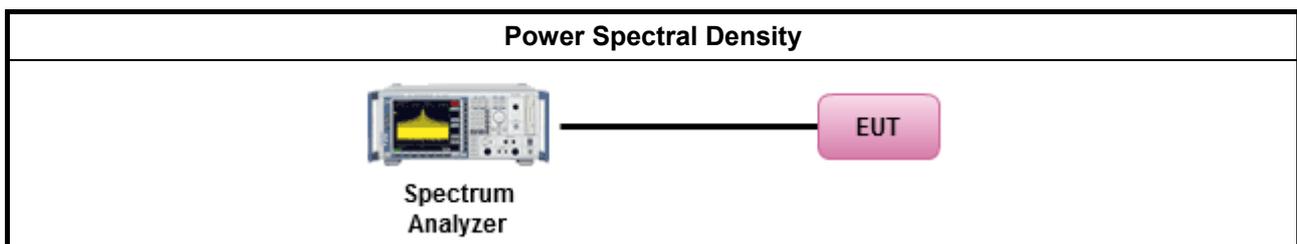

3.4.5 Test Result of Power Spectral Density

Refer as Appendix D

3.5 Emissions in Non-restricted Frequency Bands

3.5.1 Emissions in Non-restricted Frequency Bands Limit

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20
Average output power procedure	30

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method
<ul style="list-style-type: none"> Refer as KDB 558074, clause 8.5 (11.11 of ANSI C63.10) for non-restricted frequency bands.

3.5.4 Test Setup

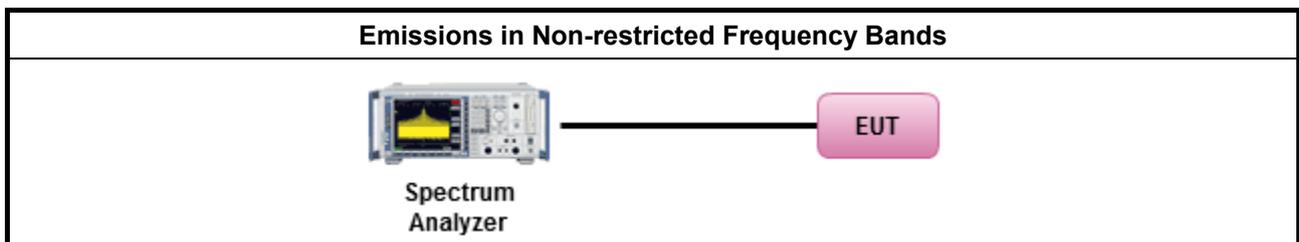

3.5.5 Test Result of Emissions in Non-restricted Frequency Bands

Refer as Appendix E

3.6 Emissions in Restricted Frequency Bands

3.6.1 Emissions in Restricted Frequency Bands Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB / decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.


3.6.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures

Test Method	
	<ul style="list-style-type: none"> The average emission levels shall be measured in [duty cycle \geq 98 or duty factor].
	<ul style="list-style-type: none"> Refer as ANSI C63.10, clause 6.10.3 band-edge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.
	<ul style="list-style-type: none"> For the transmitter unwanted emissions shall be measured using following options below: <ul style="list-style-type: none"> Refer as KDB 558074, clause 8.6 (11.12 of ANSI C63.10) for restricted frequency bands.
	<ul style="list-style-type: none"> For the transmitter band-edge emissions shall be measured using following options below: <ul style="list-style-type: none"> Refer as KDB 558074 clause 8.7.1, When the performing peak or average radiated measurements, emissions within 2 MHz of the authorized band edge may be measured using the marker-delta method described below. Refer as KDB 558074, clause 8.7.2 (6.10.6 of ANSI C63.10) for marker-delta method for band-edge measurements. Refer as KDB 558074, clause 8.7.3 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).

3.6.4 Test Setup

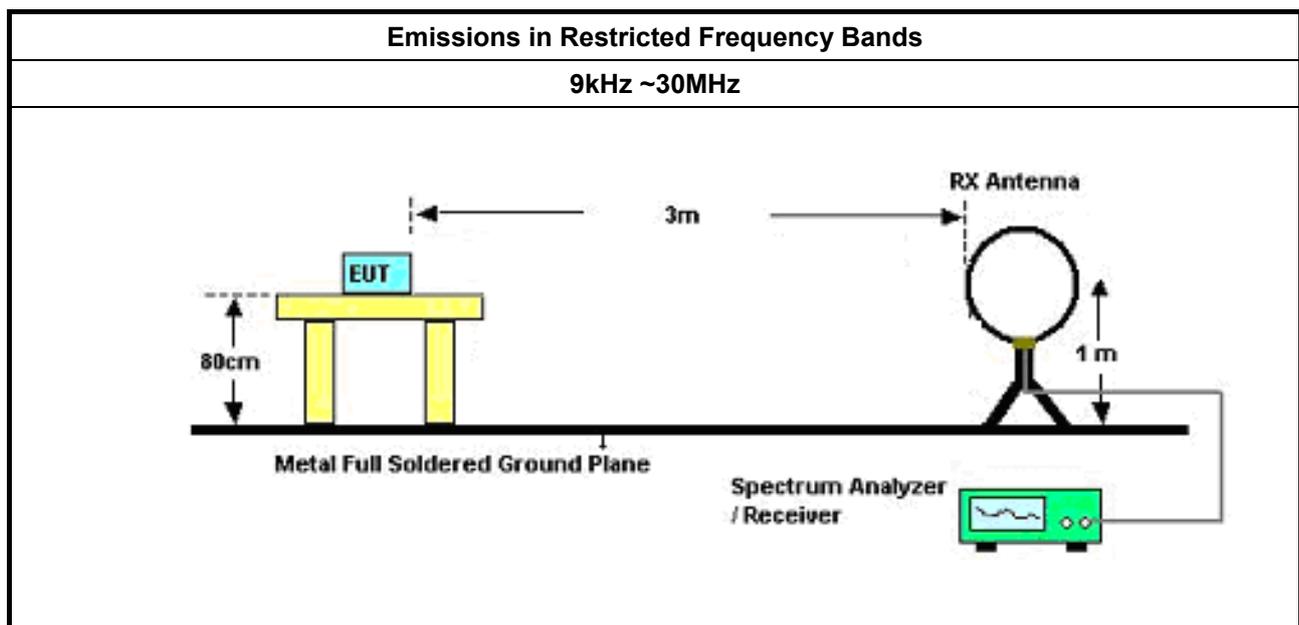

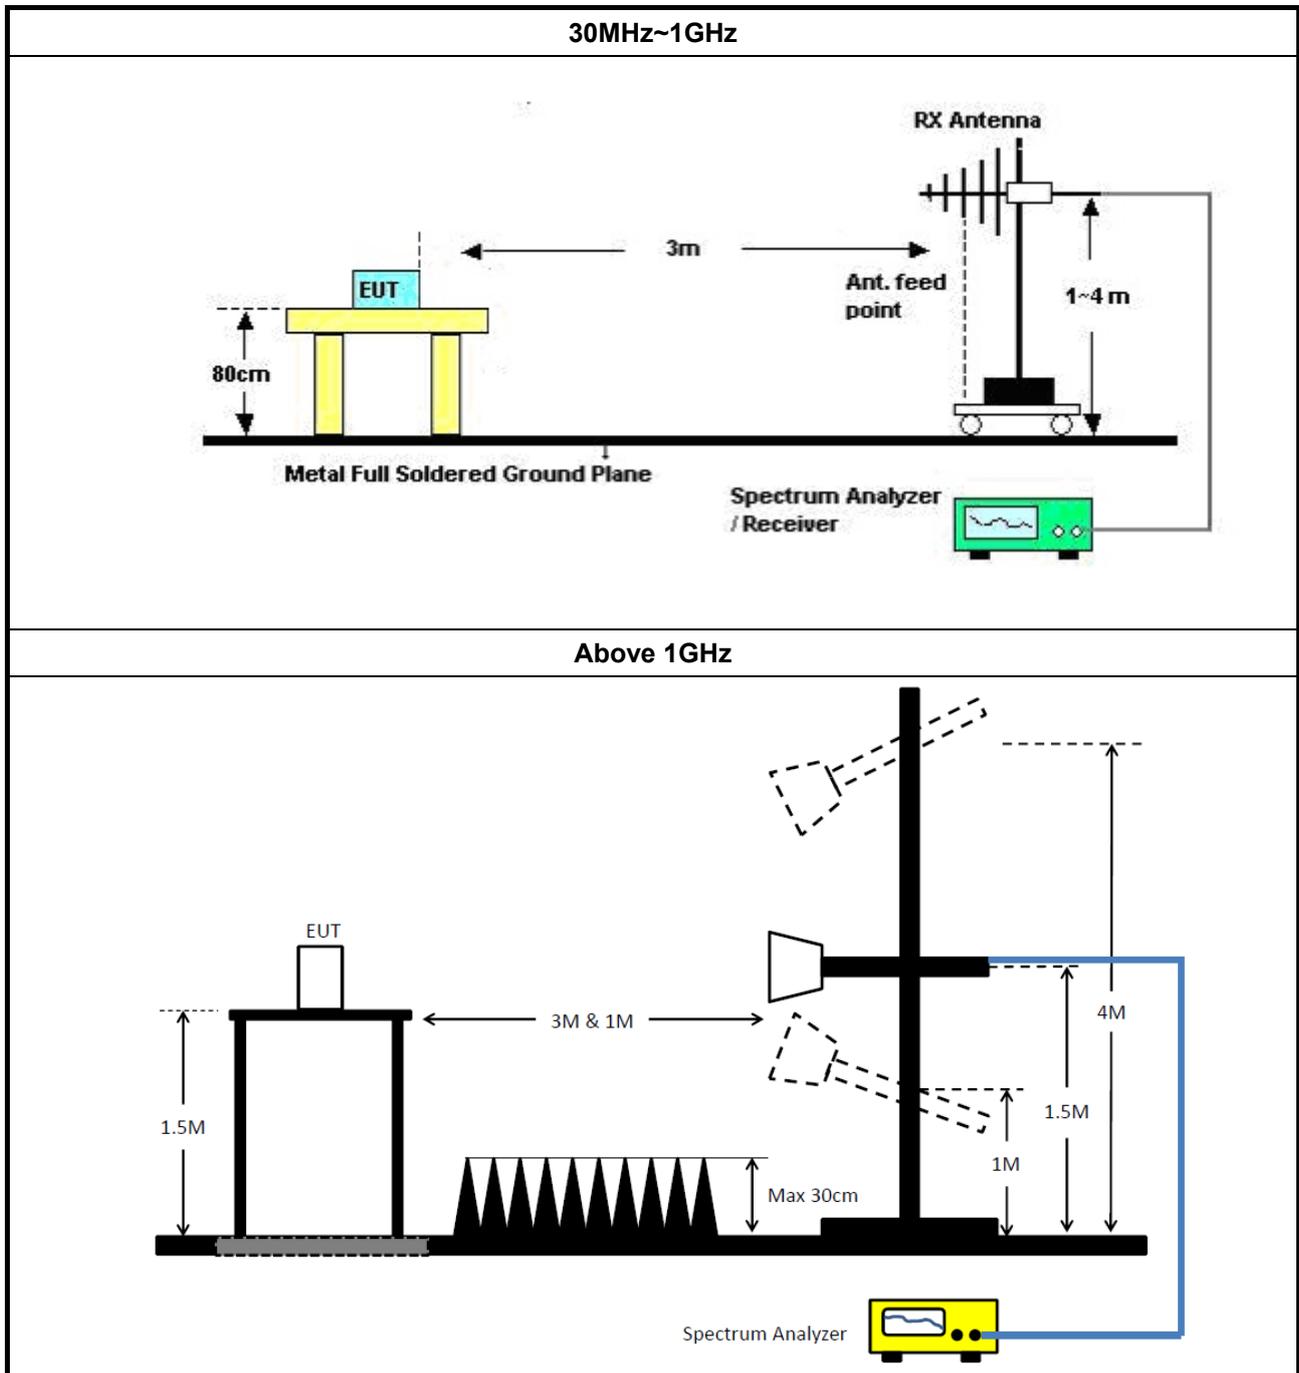

3.6.5 Test Result of Emissions in Restricted Frequency Bands (Below 30MHz)

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

3.6.6 Test Result of Emissions in Restricted Frequency Bands

Refer as Appendix F

4 Test Equipment and Calibration Data

Instrument for AC Conduction

Instrument	Manufacturer	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
EMC Receiver	R&S	ESR	102051	9KHz ~ 3.6GHz	03/May/2018	02/May/2019
LISN	R&S	ENV216	101295	9kHz ~ 30MHz	17/Nov/2017	16/Nov/2018
RF Cable-CON	HUBER+ SUHNER	RG213/U	07611832020001	9kHz ~ 30MHz	06/Oct/2017	05/Oct/2018
AC POWER	APC	AFC-11005G	F310050055	47Hz~63Hz 5~300V	NCR	NCR
Impuls Begrenzer Pulse Limiter	SCHWARZBECK	VTSD 9561-F	9561-F041	9 kHz ~ 30 MHz	12/Oct/2017	11/Oct/2018

NCR : Non-Calibration Require

Instrument for Conducted Test

Instrument	Manufacturer	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
Spectrum Analyzer	R&S	FSV 40	101013	9kHz~40GHz	29/Dec/2017	28/Dec/2018
Power Sensor	Anritsu	MA2411B	0917017	300MHz ~ 40GHz	05/Feb/2018	04/Feb/2019
Power Meter	Anritsu	ML2495A	0949003	300MHz ~ 40GHz	05/Feb/2018	04/Feb/2019
RF Cable-0.2m	HUBER+ SUHNER	SUCOFLEX_104	MY10710/4	30MHz ~ 26.5GHz	17/Jan/2018	16/Jan/2019
RF Cable-0.2m	HUBER+ SUHNER	SUCOFLEX_104	MY10709/4	30MHz ~ 26.5GHz	17/Jan/2018	16/Jan/2019
RF Cable-0.5m	HUBER+ SUHNER	SUCOFLEX_104	MY10713/4	30MHz ~ 26.5GHz	17/Jan/2018	16/Jan/2019
Signal Generator	R&S	SMB100A	175727	100kHz~40GHz	26/Oct/2017	25/Oct/2018



Instrument for Radiated Test

Instrument	Manufacturer	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz ~ 1GHz 3m	31/Oct/2017	30/Oct/2018
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	1GHz ~ 18GHz 3m	01/Nov/2017	31/Oct/2018
Amplifier	HP	8447D	2944A08033	10kHz ~ 1.3GHz	23/Apr/2018	19/Apr/2019
Microwave System Preamplifier	KEYSIGHT	83017A	MY53270196	1GHz ~ 26.5GHz	31/Aug/2017	30/Aug/2018
Signal Analyzer	R&S	FSP40	100305	10Hz ~ 40GHz	04/Jan/2018	03/Jan/2019
RF Cable-R03m	Jye Bao	RG142	CB021	9kHz ~ 1GHz	29/Jan/2018	28/Jan/2019
RF Cable-high	SUHNER	SUCOFLEX 106	CB222	1GHz ~ 40GHz	29/Jan/2018	28/Jan/2019
Bilog Antenna	SCHAFFNER	CBL 6112B	2723	30MHz ~ 1GHz	09/Sep/2017	08/Sep/2018
Receiver	R&S	ESCS 30	100354	9kHz ~ 2.75GHz	08/Dec/2017	07/Dec/2018
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA 9170154	18GHz ~ 40GHz	06/Feb/ 2018	05/Feb/2019
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1531	1GHz ~ 18GHz	18/Apr/ 2018	17/Apr/2019
Loop Antenna	TESEQ	HLA 6120	31244	9kHz ~ 30MHz	28/Mar/2018	27/Mar/2019



AC Power-line Conducted Emissions Result																																																																																																																																	
Operating Mode	1	Power Phase	Line																																																																																																																														
Operating Function	Adapter Mode																																																																																																																																
Date: 2018-08-21																																																																																																																																	
<table border="1" style="width:100%; border-collapse: collapse;"> <thead> <tr> <th></th> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>Limit Line</th> <th>Read Level</th> <th>LISN Factor</th> <th>Cable Loss</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV</th> <th>dB</th> <th>dBuV</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>0.16</td><td>26.33</td><td>-29.27</td><td>55.60</td><td>16.67</td><td>9.62</td><td>0.04</td><td>Average</td></tr> <tr><td>2</td><td>0.16</td><td>44.55</td><td>-21.05</td><td>65.60</td><td>34.89</td><td>9.62</td><td>0.04</td><td>QP</td></tr> <tr><td>3</td><td>0.23</td><td>21.85</td><td>-30.76</td><td>52.61</td><td>12.21</td><td>9.62</td><td>0.02</td><td>Average</td></tr> <tr><td>4</td><td>0.23</td><td>35.70</td><td>-26.91</td><td>62.61</td><td>26.06</td><td>9.62</td><td>0.02</td><td>QP</td></tr> <tr><td>5</td><td>0.44</td><td>24.25</td><td>-22.82</td><td>47.07</td><td>14.55</td><td>9.61</td><td>0.09</td><td>Average</td></tr> <tr><td>6</td><td>0.44</td><td>30.03</td><td>-27.04</td><td>57.07</td><td>20.33</td><td>9.61</td><td>0.09</td><td>QP</td></tr> <tr><td>7</td><td>1.14</td><td>18.82</td><td>-27.18</td><td>46.00</td><td>9.21</td><td>9.61</td><td>0.00</td><td>Average</td></tr> <tr><td>8</td><td>1.14</td><td>23.18</td><td>-32.82</td><td>56.00</td><td>13.57</td><td>9.61</td><td>0.00</td><td>QP</td></tr> <tr><td>9</td><td>4.11</td><td>21.07</td><td>-24.93</td><td>46.00</td><td>11.35</td><td>9.63</td><td>0.09</td><td>Average</td></tr> <tr><td>10</td><td>4.11</td><td>25.82</td><td>-30.18</td><td>56.00</td><td>16.10</td><td>9.63</td><td>0.09</td><td>QP</td></tr> <tr style="border: 2px solid black;"><td>11 MAX</td><td>19.53</td><td>32.85</td><td>-17.15</td><td>50.00</td><td>23.05</td><td>9.62</td><td>0.18</td><td>Average</td></tr> <tr><td>12</td><td>19.53</td><td>36.86</td><td>-23.14</td><td>60.00</td><td>27.06</td><td>9.62</td><td>0.18</td><td>QP</td></tr> </tbody> </table>					Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark		MHz	dBuV	dB	dBuV	dBuV	dB	dB		1	0.16	26.33	-29.27	55.60	16.67	9.62	0.04	Average	2	0.16	44.55	-21.05	65.60	34.89	9.62	0.04	QP	3	0.23	21.85	-30.76	52.61	12.21	9.62	0.02	Average	4	0.23	35.70	-26.91	62.61	26.06	9.62	0.02	QP	5	0.44	24.25	-22.82	47.07	14.55	9.61	0.09	Average	6	0.44	30.03	-27.04	57.07	20.33	9.61	0.09	QP	7	1.14	18.82	-27.18	46.00	9.21	9.61	0.00	Average	8	1.14	23.18	-32.82	56.00	13.57	9.61	0.00	QP	9	4.11	21.07	-24.93	46.00	11.35	9.63	0.09	Average	10	4.11	25.82	-30.18	56.00	16.10	9.63	0.09	QP	11 MAX	19.53	32.85	-17.15	50.00	23.05	9.62	0.18	Average	12	19.53	36.86	-23.14	60.00	27.06	9.62	0.18	QP
	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark																																																																																																																									
	MHz	dBuV	dB	dBuV	dBuV	dB	dB																																																																																																																										
1	0.16	26.33	-29.27	55.60	16.67	9.62	0.04	Average																																																																																																																									
2	0.16	44.55	-21.05	65.60	34.89	9.62	0.04	QP																																																																																																																									
3	0.23	21.85	-30.76	52.61	12.21	9.62	0.02	Average																																																																																																																									
4	0.23	35.70	-26.91	62.61	26.06	9.62	0.02	QP																																																																																																																									
5	0.44	24.25	-22.82	47.07	14.55	9.61	0.09	Average																																																																																																																									
6	0.44	30.03	-27.04	57.07	20.33	9.61	0.09	QP																																																																																																																									
7	1.14	18.82	-27.18	46.00	9.21	9.61	0.00	Average																																																																																																																									
8	1.14	23.18	-32.82	56.00	13.57	9.61	0.00	QP																																																																																																																									
9	4.11	21.07	-24.93	46.00	11.35	9.63	0.09	Average																																																																																																																									
10	4.11	25.82	-30.18	56.00	16.10	9.63	0.09	QP																																																																																																																									
11 MAX	19.53	32.85	-17.15	50.00	23.05	9.62	0.18	Average																																																																																																																									
12	19.53	36.86	-23.14	60.00	27.06	9.62	0.18	QP																																																																																																																									
<p>Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit. Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)</p>																																																																																																																																	



Summary


Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-LE(1Mbps)	723.75k	1.058M	1M06F1D	707.5k	1.053M

Max-N dB = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	500k	707.5k	1.053M
2440MHz	Pass	500k	723.75k	1.058M
2480MHz	Pass	500k	717.5k	1.056M

Port X-N dB = Port X 6dB down bandwidth; **Port X-OBW** = Port X 99% occupied bandwidth;

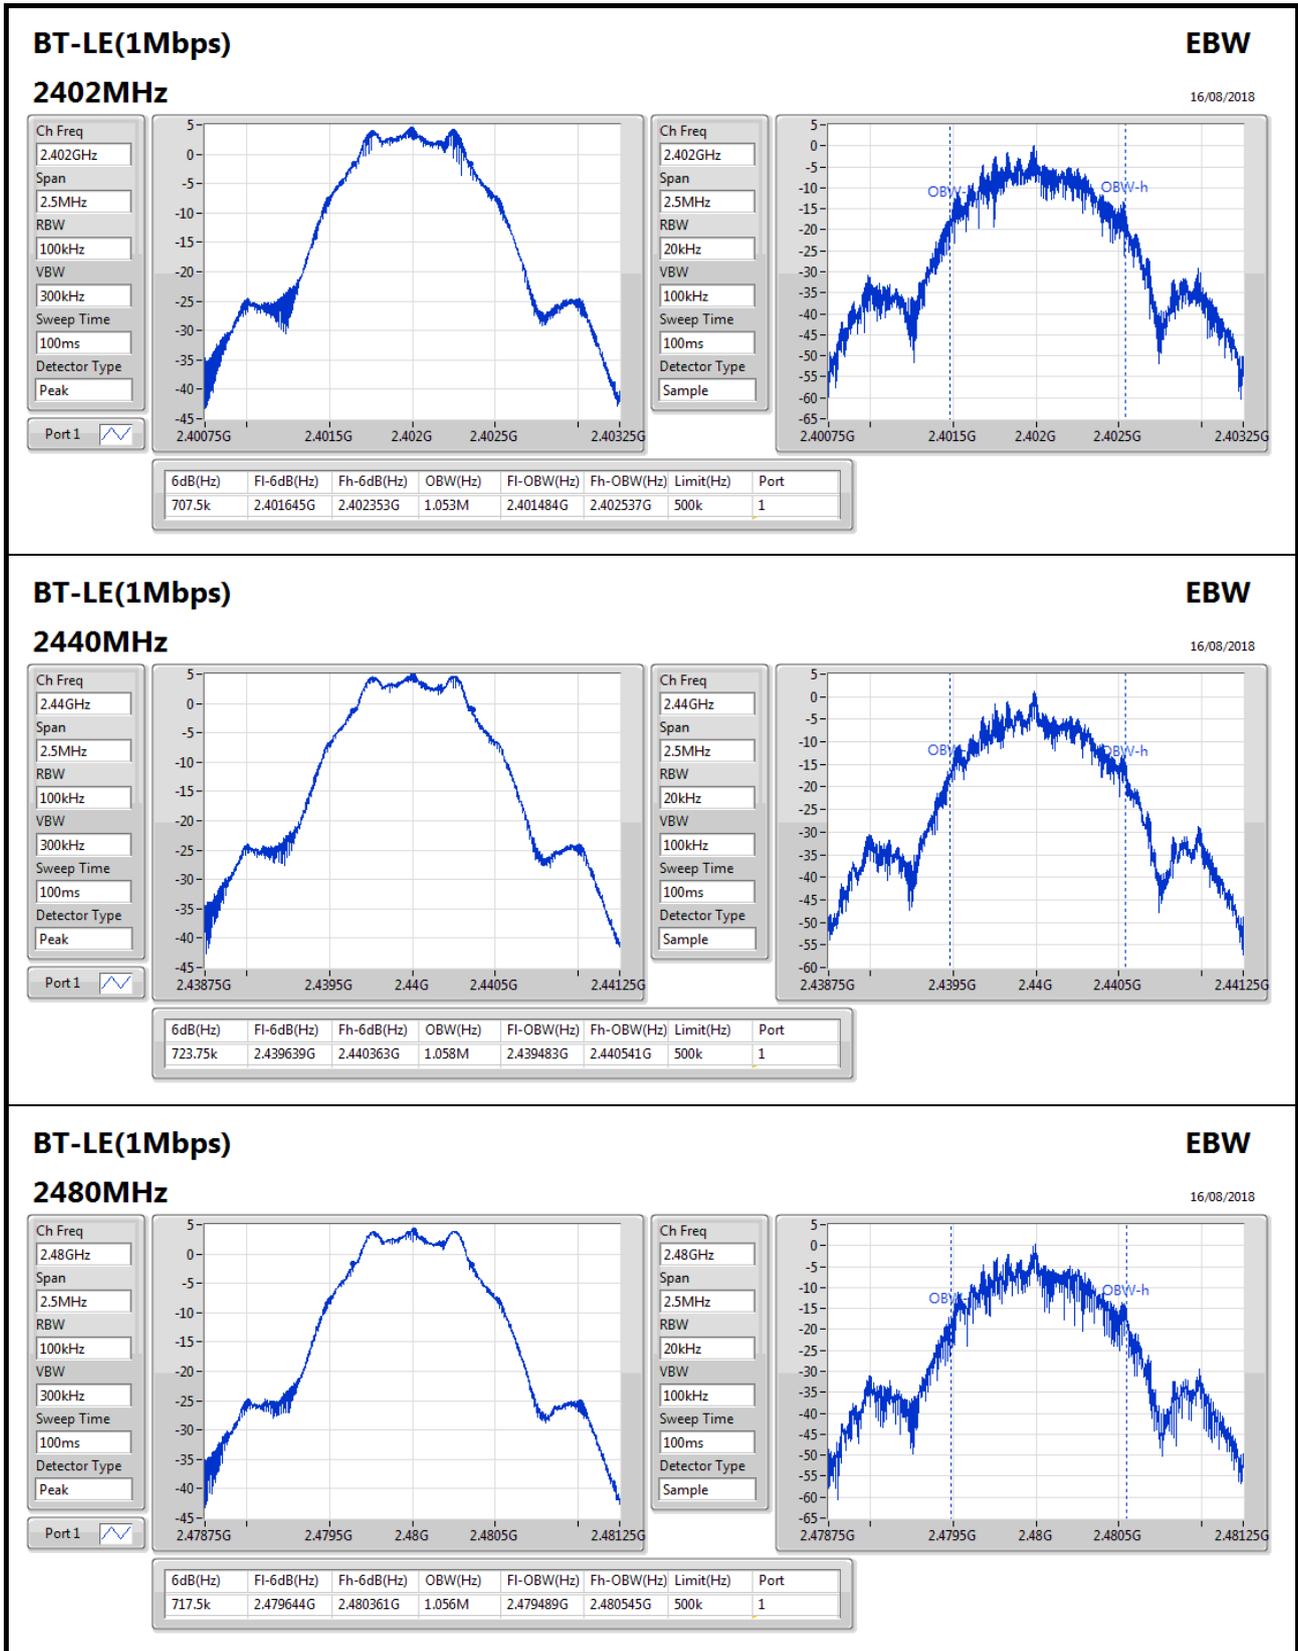
BT-LE(1Mbps)
EBW

16/08/2018

2480MHz

Ch Freq: 2.48GHz
Span: 2.5MHz
RBW: 100kHz
VBW: 300kHz
Sweep Time: 100ms
Detector Type: Peak

Port 1

Ch Freq: 2.48GHz
Span: 2.5MHz
RBW: 20kHz
VBW: 100kHz
Sweep Time: 100ms
Detector Type: Sample



Summary

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	4.77	0.00300

Result

Mode	Result	Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	4.47	4.39	30.00
2440MHz	Pass	4.47	4.77	30.00
2480MHz	Pass	4.47	4.08	30.00



Summary


Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
BT-LE(1Mbps)	-8.45

RBW=3kHz.

Result

Mode	Result	Gain (dBi)	PD (dBm/RBW)	PD Limit (dBm/RBW)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	4.47	-11.43	8.00
2440MHz	Pass	4.47	-8.45	8.00
2480MHz	Pass	4.47	-11.41	8.00

RBW=3kHz.

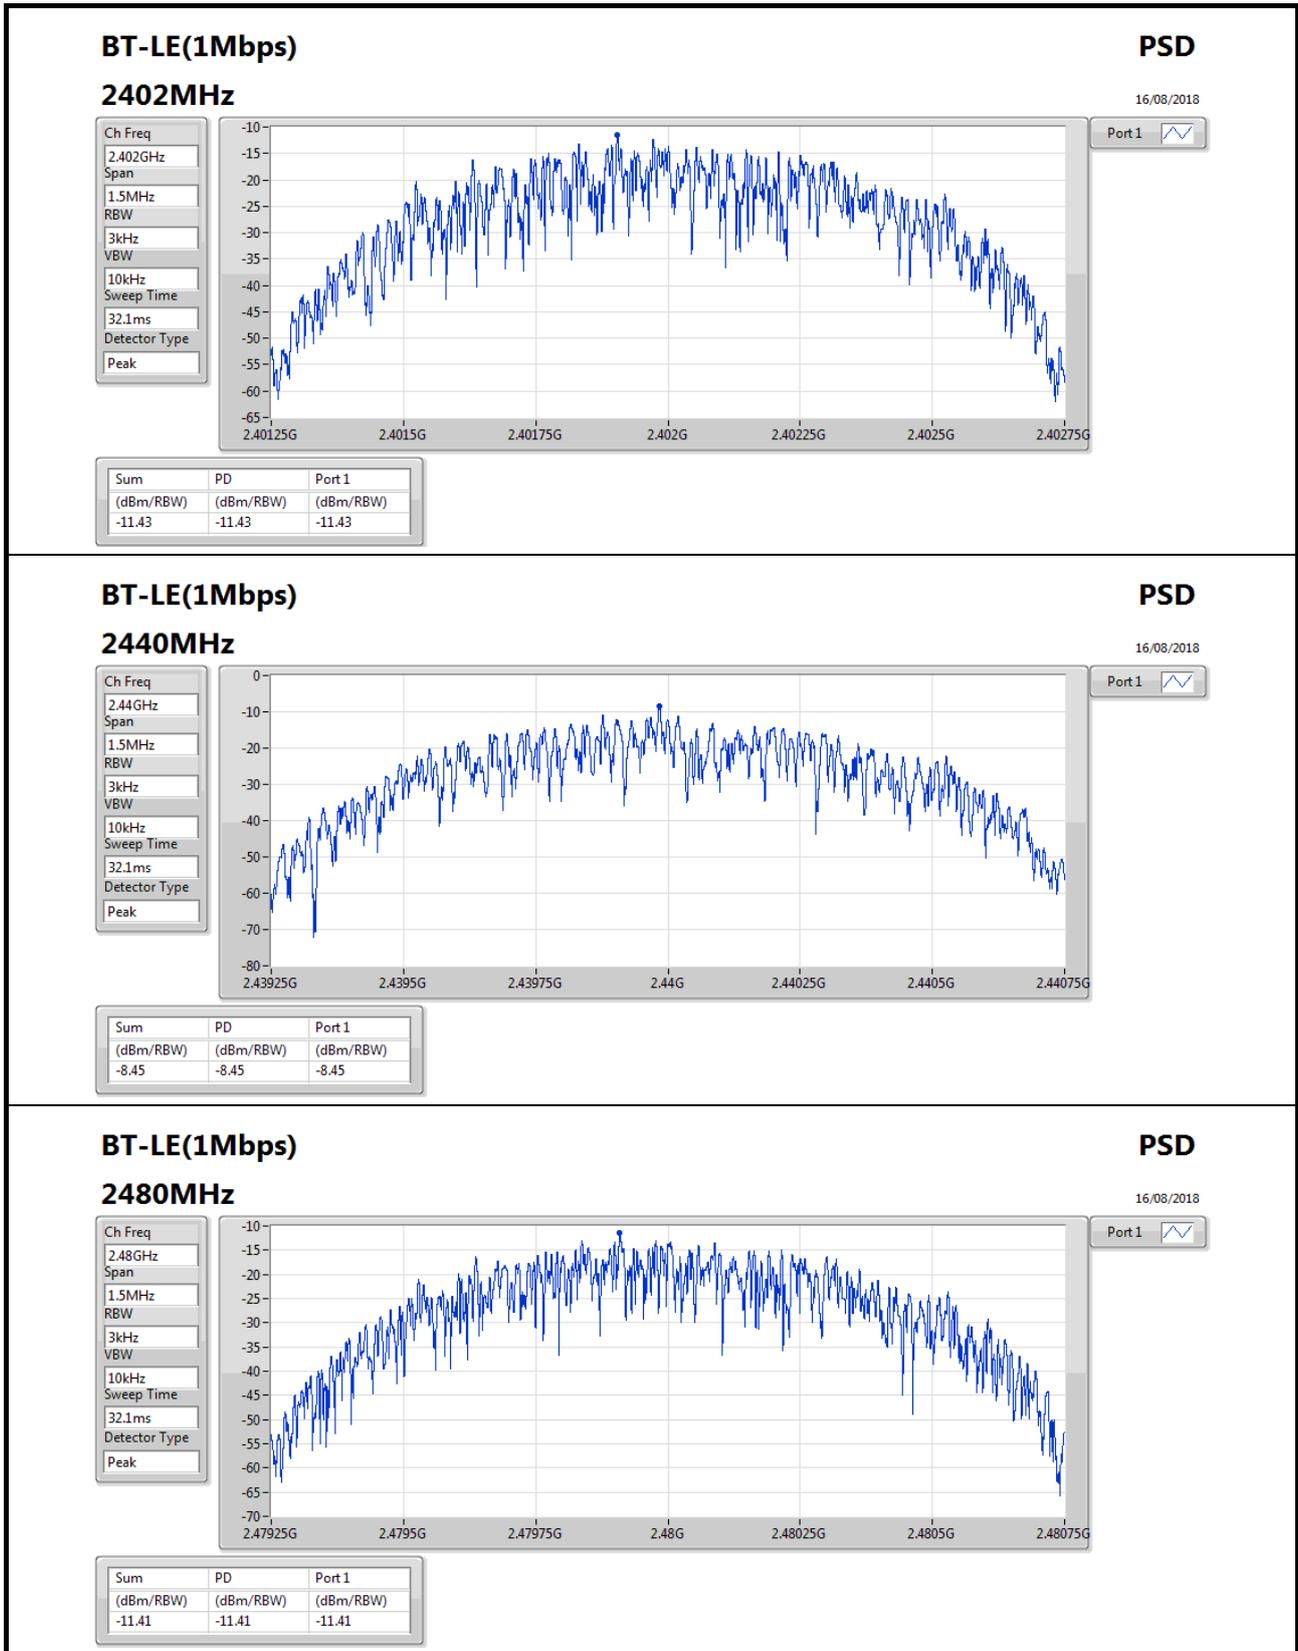




Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-
BT-LE(1Mbps)	Pass	2.439913G	3.53	-26.47	2.00136G	-60.38	2.399944G	-54.58	2.483956G	-60.43	17.460457G	-50.81	1

Result

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
BT-LE(1Mbps)	-	-	-	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	2.439913G	3.53	-26.47	2.00136G	-60.38	2.399944G	-54.58	2.483956G	-60.43	17.460457G	-50.81	1
2440MHz	Pass	2.439913G	3.53	-26.47	2.033328G	-57.96	2.399368G	-60.22	2.484108G	-60.64	16.233417G	-51.67	1
2480MHz	Pass	2.439913G	3.53	-26.47	2.067664G	-58.25	2.398424G	-60.86	2.483904G	-58.10	16.233417G	-51.87	1

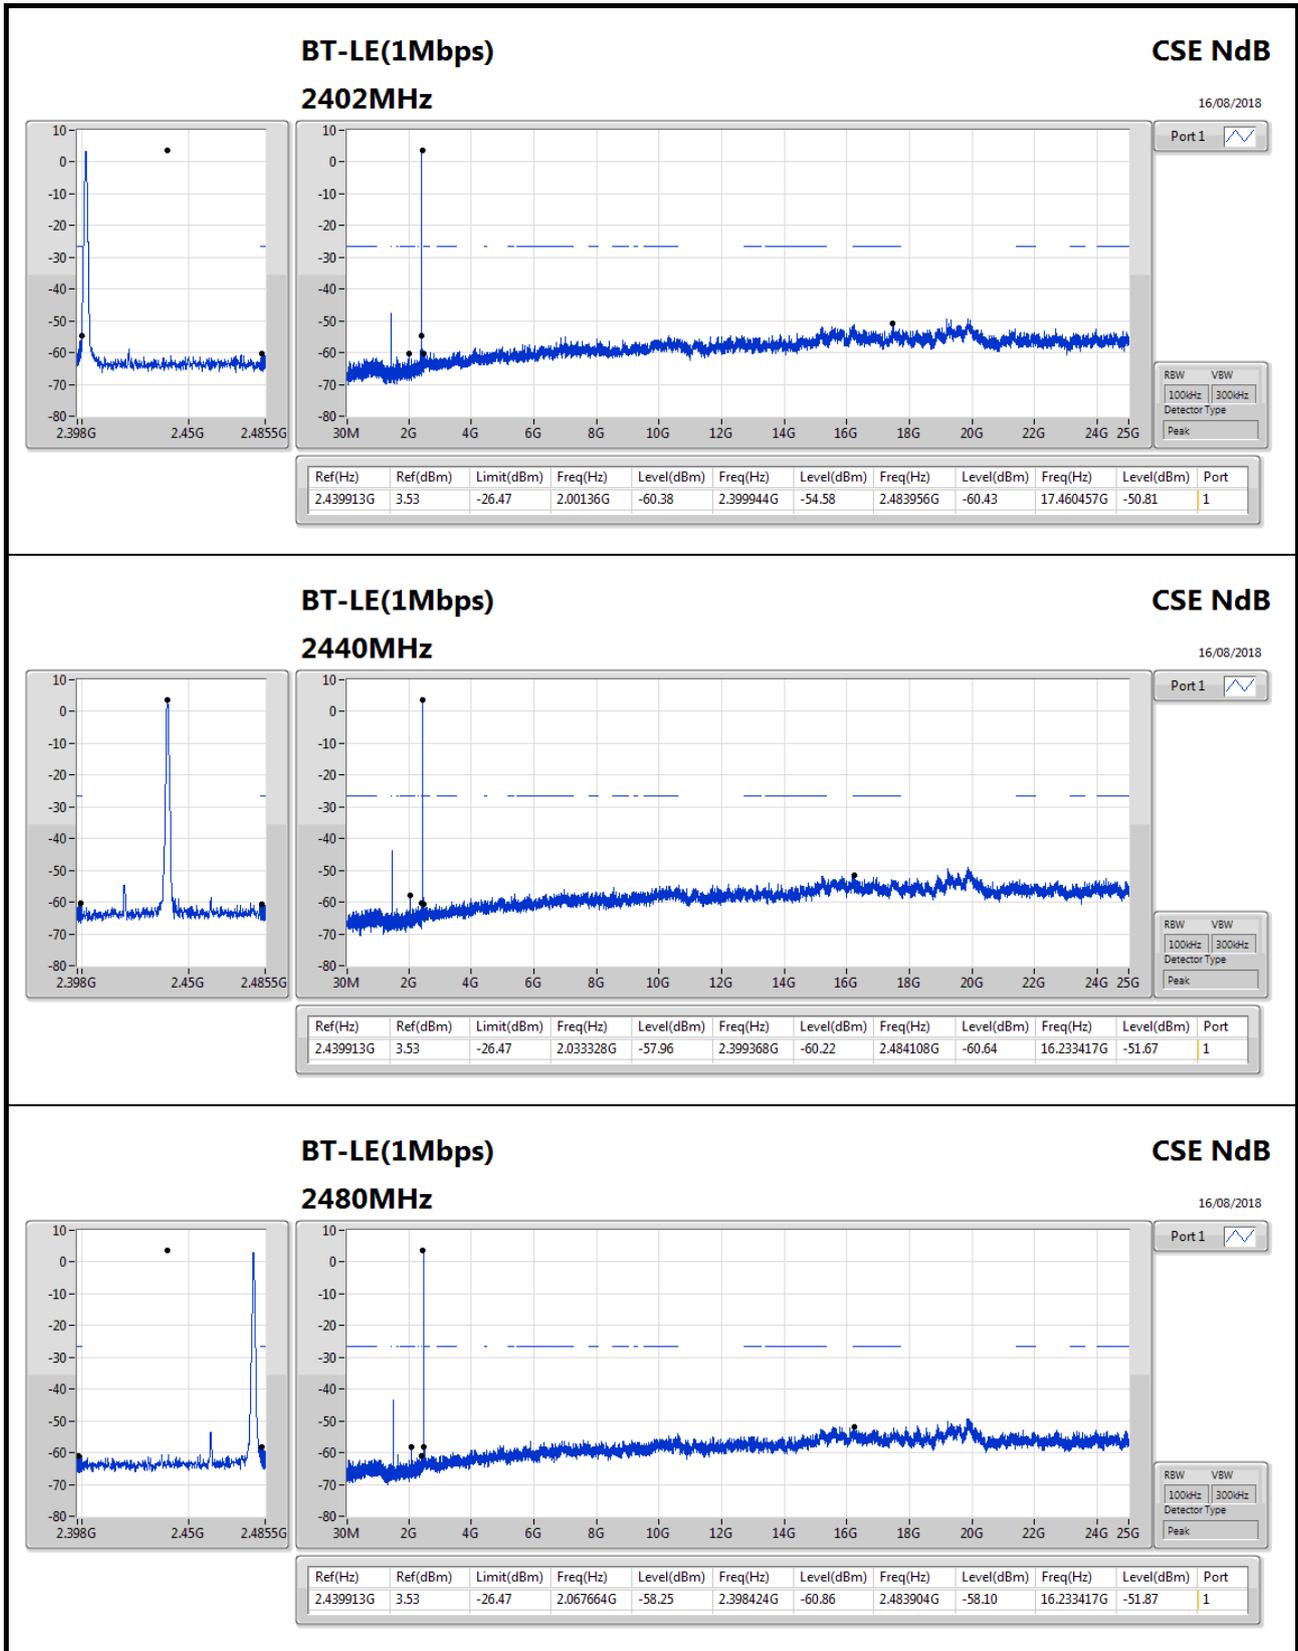

BT-LE(1Mbps)

2480MHz

CSE NdB
16/08/2018



Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-
BT-LE(1Mbps)	Pass	PK	350.1M	42.13	46.00	-3.87	-4.61	3	Vertical	360	1.00	-




Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
BT-LE(1Mbps)	-	-	-	-	-	-	-	-	-	-	-	-
2440MHz	Pass	PK	30M	34.28	40.00	-5.72	-2.38	3	Vertical	360	1.00	-
2440MHz	Pass	PK	53.28M	32.95	40.00	-7.05	-13.44	3	Vertical	360	1.00	-
2440MHz	Pass	PK	92.08M	34.61	43.50	-8.89	-10.99	3	Vertical	360	1.00	-
2440MHz	Pass	PK	350.1M	42.13	46.00	-3.87	-4.61	3	Vertical	360	1.00	-
2440MHz	Pass	PK	524.7M	31.28	46.00	-14.72	-1.39	3	Vertical	360	1.00	-
2440MHz	Pass	PK	957.32M	39.34	46.00	-6.66	3.91	3	Vertical	360	1.00	-
2440MHz	Pass	PK	30M	33.01	40.00	-6.99	-2.38	3	Horizontal	0	1.00	-
2440MHz	Pass	PK	92.08M	35.28	43.50	-8.22	-10.99	3	Horizontal	0	1.00	-
2440MHz	Pass	PK	278.32M	38.13	46.00	-7.87	-6.01	3	Horizontal	0	1.00	-
2440MHz	Pass	PK	350.1M	40.71	46.00	-5.29	-4.61	3	Horizontal	0	1.00	-
2440MHz	Pass	PK	710.94M	31.60	46.00	-14.40	0.50	3	Horizontal	0	1.00	-
2440MHz	Pass	PK	957.32M	37.02	46.00	-8.98	3.91	3	Horizontal	0	1.00	-

BT-LE(1Mbps)
2440MHz_Adapter

19/08/2018

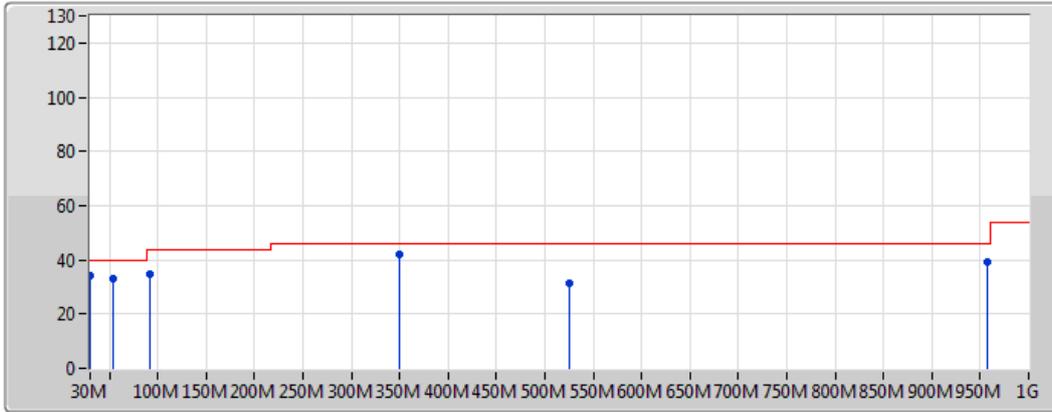


Legend:

- Lim.PK 
- PK 
- Lim.AV 
- AV 

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	30M	34.28	40.00	-5.72	-2.38	3	Vertical	360	1.00	-
PK	53.28M	32.95	40.00	-7.05	-13.44	3	Vertical	360	1.00	-
PK	92.08M	34.61	43.50	-8.89	-10.99	3	Vertical	360	1.00	-
PK	350.1M	42.13	46.00	-3.87	-4.61	3	Vertical	360	1.00	-
PK	524.7M	31.28	46.00	-14.72	-1.39	3	Vertical	360	1.00	-
PK	957.32M	39.34	46.00	-6.66	3.91	3	Vertical	360	1.00	-

BT-LE(1Mbps)
2440MHz_Adapter

19/08/2018

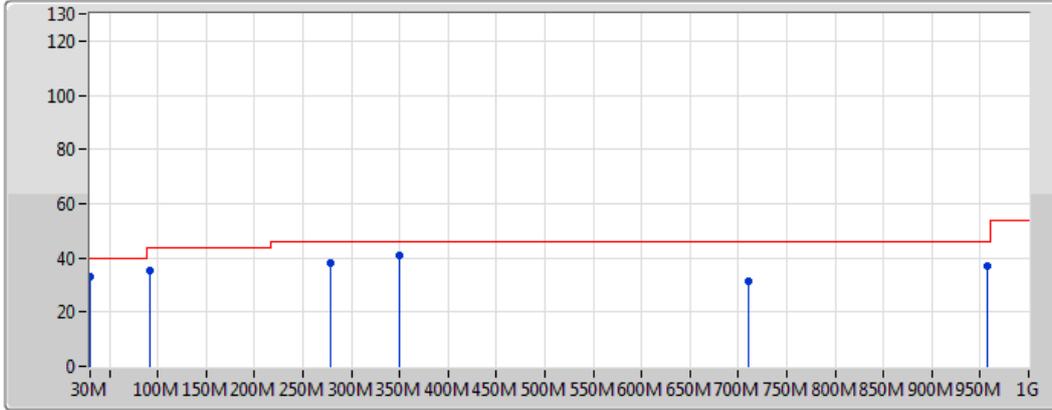

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
PK	30M	33.01	40.00	-6.99	-2.38	3	Horizontal	0	1.00	-
PK	92.08M	35.28	43.50	-8.22	-10.99	3	Horizontal	0	1.00	-
PK	278.32M	38.13	46.00	-7.87	-6.01	3	Horizontal	0	1.00	-
PK	350.1M	40.71	46.00	-5.29	-4.61	3	Horizontal	0	1.00	-
PK	710.94M	31.60	46.00	-14.40	0.50	3	Horizontal	0	1.00	-
PK	957.32M	37.02	46.00	-8.98	3.91	3	Horizontal	0	1.00	-



Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-
BT-LE(1Mbps)	Pass	AV	2.499998G	46.37	54.00	-7.63	30.75	3	Horizontal	38	2.47	-




Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
BT-LE(1Mbps)	-	-	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	AV	2.3878G	45.18	54.00	-8.82	30.37	3	Vertical	321	3.19	-
2402MHz	Pass	AV	2.402G	95.46	Inf	-Inf	30.41	3	Vertical	321	3.19	-
2402MHz	Pass	PK	2.3798G	58.35	74.00	-15.65	30.34	3	Vertical	321	3.19	-
2402MHz	Pass	PK	2.4022G	96.56	Inf	-Inf	30.42	3	Vertical	321	3.19	-
2402MHz	Pass	AV	2.366G	45.14	54.00	-8.86	30.30	3	Horizontal	40	2.17	-
2402MHz	Pass	AV	2.402G	100.06	Inf	-Inf	30.41	3	Horizontal	40	2.17	-
2402MHz	Pass	PK	2.3574G	58.28	74.00	-15.72	30.27	3	Horizontal	40	2.17	-
2402MHz	Pass	PK	2.4022G	101.17	Inf	-Inf	30.42	3	Horizontal	40	2.17	-
2402MHz	Pass	AV	4.803102G	31.13	54.00	-22.87	5.78	3	Vertical	68	1.50	-
2402MHz	Pass	PK	4.807413G	44.95	74.00	-29.05	5.79	3	Vertical	68	1.50	-
2402MHz	Pass	AV	4.804419G	31.05	54.00	-22.95	5.79	3	Horizontal	204	1.76	-
2402MHz	Pass	PK	4.805976G	46.10	74.00	-27.90	5.79	3	Horizontal	204	1.76	-
2440MHz	Pass	AV	2.3896G	45.16	54.00	-8.84	30.38	3	Vertical	242	3.05	-
2440MHz	Pass	AV	2.44G	94.30	Inf	-Inf	30.55	3	Vertical	242	3.05	-
2440MHz	Pass	AV	2.49G	46.32	54.00	-7.68	30.72	3	Vertical	242	3.05	-
2440MHz	Pass	PK	2.342G	57.85	74.00	-16.15	30.22	3	Vertical	242	3.05	-
2440MHz	Pass	PK	2.4396G	95.40	Inf	-Inf	30.55	3	Vertical	242	3.05	-
2440MHz	Pass	PK	2.49G	58.68	74.00	-15.32	30.72	3	Vertical	242	3.05	-
2440MHz	Pass	AV	2.3828G	45.24	54.00	-8.76	30.35	3	Horizontal	38	2.47	-
2440MHz	Pass	AV	2.44G	100.83	Inf	-Inf	30.55	3	Horizontal	38	2.47	-
2440MHz	Pass	AV	2.499998G	46.37	54.00	-7.63	30.75	3	Horizontal	38	2.47	-
2440MHz	Pass	PK	2.388G	57.75	74.00	-16.25	30.37	3	Horizontal	38	2.47	-
2440MHz	Pass	PK	2.4396G	101.90	Inf	-Inf	30.55	3	Horizontal	38	2.47	-
2440MHz	Pass	PK	2.4884G	58.66	74.00	-15.34	30.71	3	Horizontal	38	2.47	-
2440MHz	Pass	AV	4.884112G	31.02	54.00	-22.98	5.96	3	Vertical	297	1.50	-
2440MHz	Pass	PK	4.881677G	45.23	74.00	-28.77	5.95	3	Vertical	297	1.50	-
2440MHz	Pass	AV	4.889301G	30.89	54.00	-23.11	5.97	3	Horizontal	77	1.50	-
2440MHz	Pass	PK	4.889261G	45.80	74.00	-28.20	5.96	3	Horizontal	77	1.50	-
2480MHz	Pass	AV	2.48G	96.34	Inf	-Inf	30.68	3	Vertical	352	1.05	-
2480MHz	Pass	AV	2.4906G	46.31	54.00	-7.69	30.72	3	Vertical	352	1.05	-
2480MHz	Pass	PK	2.4802G	97.40	Inf	-Inf	30.68	3	Vertical	352	1.05	-
2480MHz	Pass	PK	2.499G	58.77	74.00	-15.23	30.75	3	Vertical	352	1.05	-
2480MHz	Pass	AV	2.48G	101.01	Inf	-Inf	30.68	3	Horizontal	35	1.72	-
2480MHz	Pass	AV	2.4836G	46.20	54.00	-7.80	30.69	3	Horizontal	35	1.72	-
2480MHz	Pass	PK	2.4798G	102.15	Inf	-Inf	30.68	3	Horizontal	35	1.72	-
2480MHz	Pass	PK	2.4836G	58.91	74.00	-15.09	30.69	3	Horizontal	35	1.72	-
2480MHz	Pass	AV	4.954052G	31.50	54.00	-22.50	6.11	3	Vertical	44	1.50	-
2480MHz	Pass	PK	4.951257G	45.97	74.00	-28.03	6.10	3	Vertical	44	1.50	-
2480MHz	Pass	AV	4.952774G	31.25	54.00	-22.75	6.10	3	Horizontal	265	1.50	-
2480MHz	Pass	PK	4.959042G	45.65	74.00	-28.35	6.11	3	Horizontal	265	1.50	-

BT-LE(1Mbps)

2402MHz_TX

19/08/2018

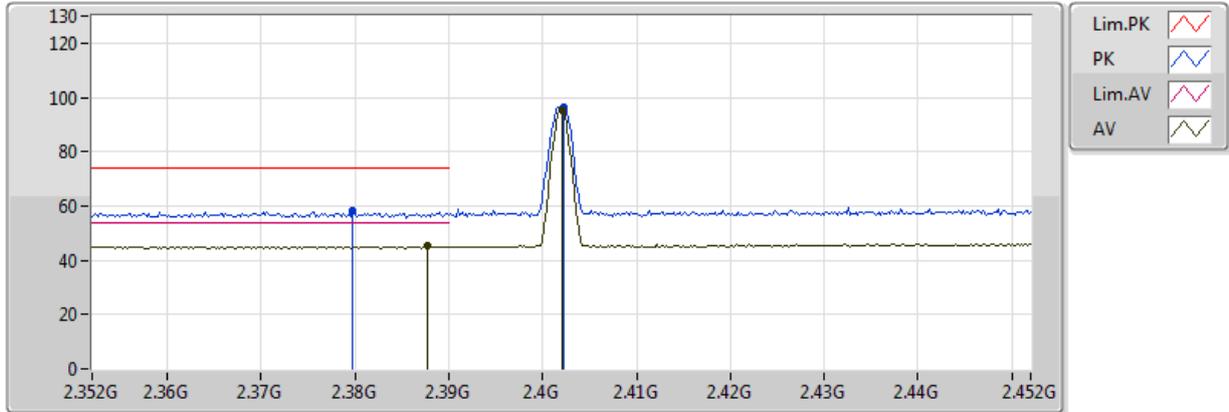


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
AV	2.3878G	45.18	54.00	-8.82	30.37	3	Vertical	321	3.19	-
AV	2.402G	95.46	Inf	-Inf	30.41	3	Vertical	321	3.19	-
PK	2.3798G	58.35	74.00	-15.65	30.34	3	Vertical	321	3.19	-
PK	2.4022G	96.56	Inf	-Inf	30.42	3	Vertical	321	3.19	-

BT-LE(1Mbps)

2402MHz_TX

19/08/2018

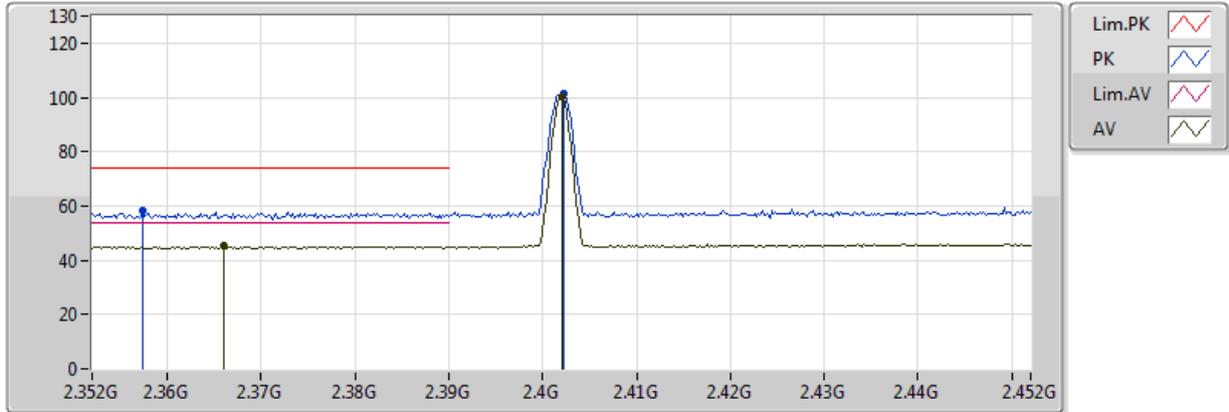


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
AV	2.366G	45.14	54.00	-8.86	30.30	3	Horizontal	40	2.17	-
AV	2.402G	100.06	Inf	-Inf	30.41	3	Horizontal	40	2.17	-
PK	2.3574G	58.28	74.00	-15.72	30.27	3	Horizontal	40	2.17	-
PK	2.4022G	101.17	Inf	-Inf	30.42	3	Horizontal	40	2.17	-

BT-LE(1Mbps)

2402MHz_TX

19/08/2018

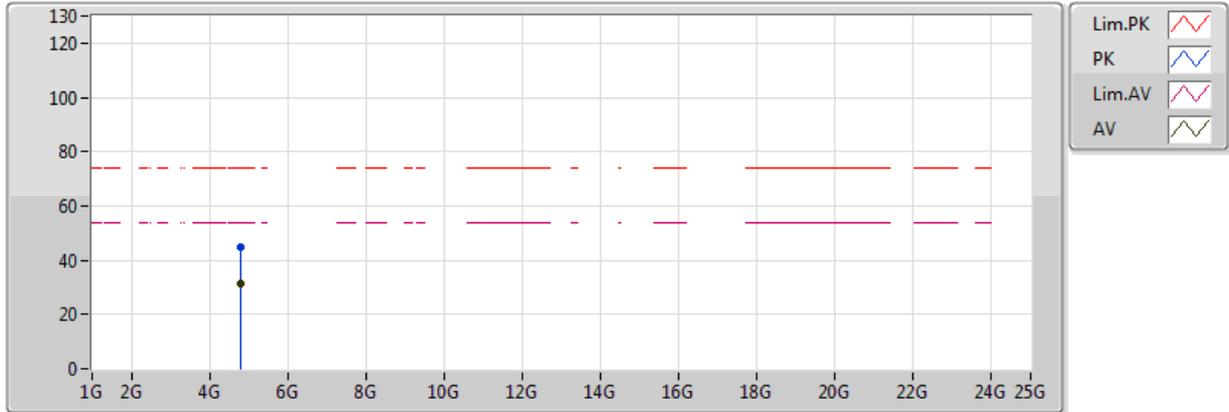


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
AV	4.803102G	31.13	54.00	-22.87	5.78	3	Vertical	68	1.50	-
PK	4.807413G	44.95	74.00	-29.05	5.79	3	Vertical	68	1.50	-

BT-LE(1Mbps)

2402MHz_TX

19/08/2018

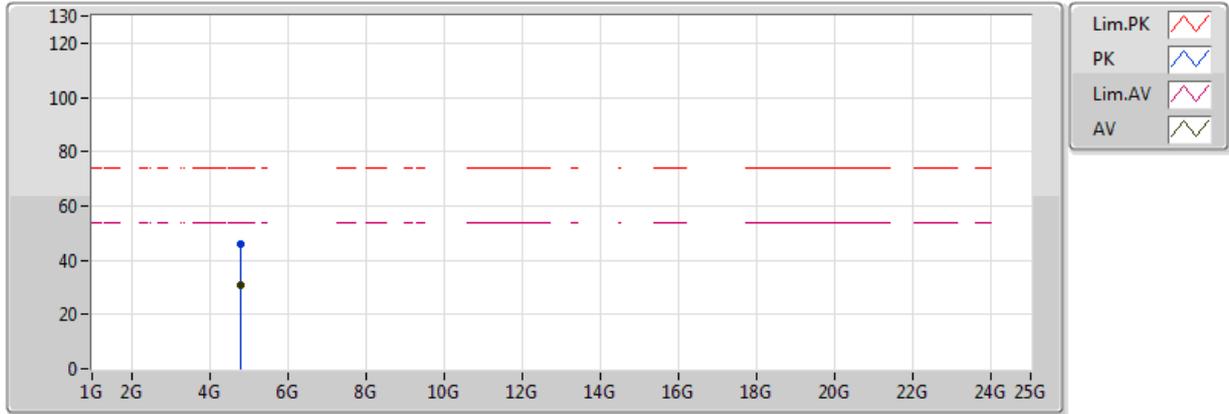


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
AV	4.804419G	31.05	54.00	-22.95	5.79	3	Horizontal	204	1.76	-
PK	4.805976G	46.10	74.00	-27.90	5.79	3	Horizontal	204	1.76	-

BT-LE(1Mbps)

2440MHz_TX

19/08/2018

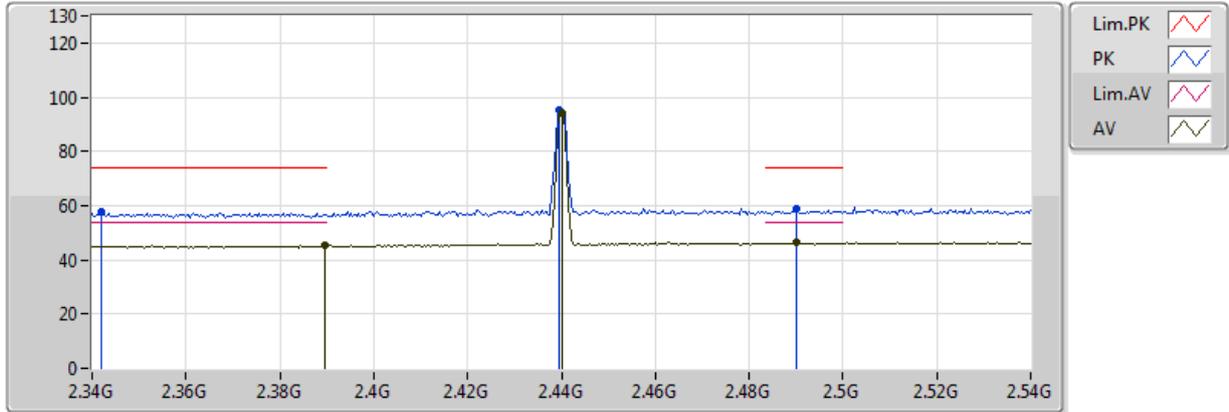


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
AV	2.3896G	45.16	54.00	-8.84	30.38	3	Vertical	242	3.05	-
AV	2.44G	94.30	Inf	-Inf	30.55	3	Vertical	242	3.05	-
AV	2.49G	46.32	54.00	-7.68	30.72	3	Vertical	242	3.05	-
PK	2.342G	57.85	74.00	-16.15	30.22	3	Vertical	242	3.05	-
PK	2.4396G	95.40	Inf	-Inf	30.55	3	Vertical	242	3.05	-
PK	2.49G	58.68	74.00	-15.32	30.72	3	Vertical	242	3.05	-

BT-LE(1Mbps)

2440MHz_TX

19/08/2018

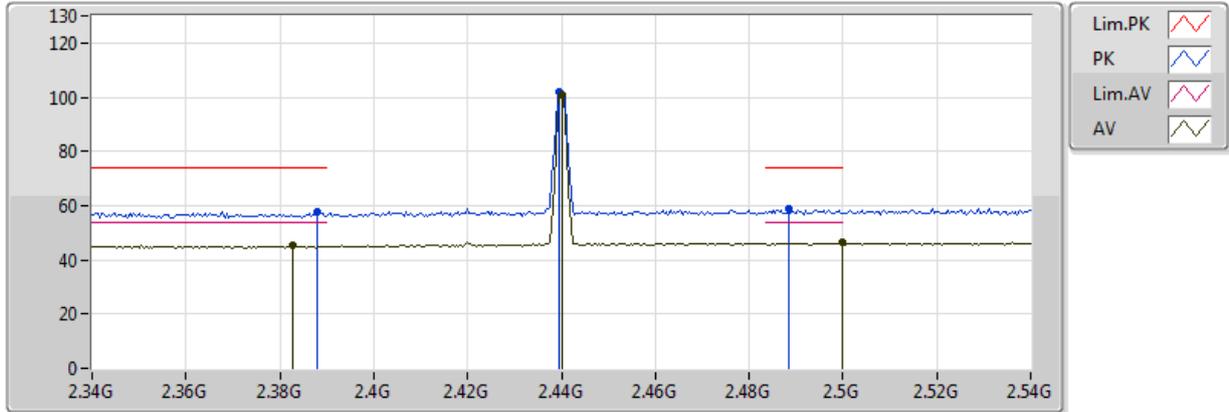


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
AV	2.3828G	45.24	54.00	-8.76	30.35	3	Horizontal	38	2.47	-
AV	2.44G	100.83	Inf	-Inf	30.55	3	Horizontal	38	2.47	-
AV	2.499998G	46.37	54.00	-7.63	30.75	3	Horizontal	38	2.47	-
PK	2.388G	57.75	74.00	-16.25	30.37	3	Horizontal	38	2.47	-
PK	2.4396G	101.90	Inf	-Inf	30.55	3	Horizontal	38	2.47	-
PK	2.4884G	58.66	74.00	-15.34	30.71	3	Horizontal	38	2.47	-

BT-LE(1Mbps)

2440MHz_TX

19/08/2018

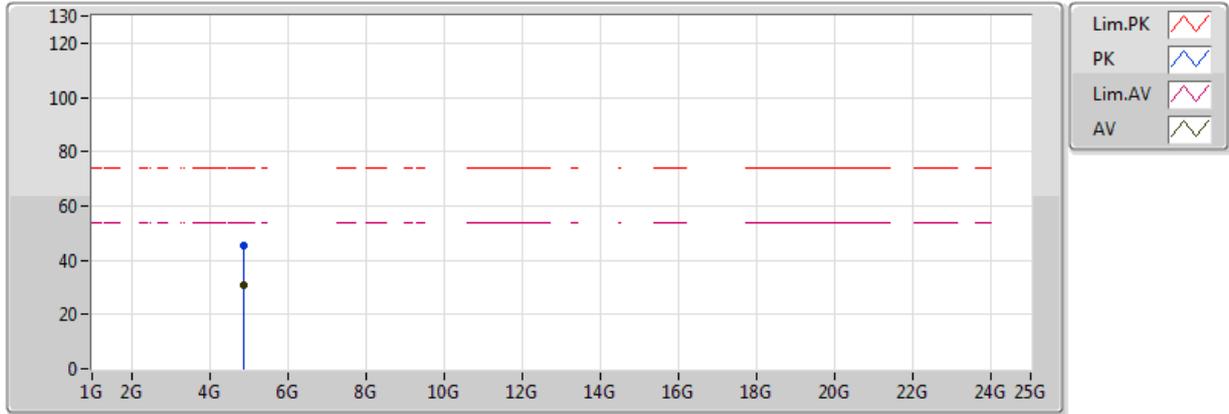


Type	Freq (Hz)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
AV	4.884112G	31.02	54.00	-22.98	5.96	3	Vertical	297	1.50	-
PK	4.881677G	45.23	74.00	-28.77	5.95	3	Vertical	297	1.50	-

BT-LE(1Mbps)

2440MHz_TX

19/08/2018

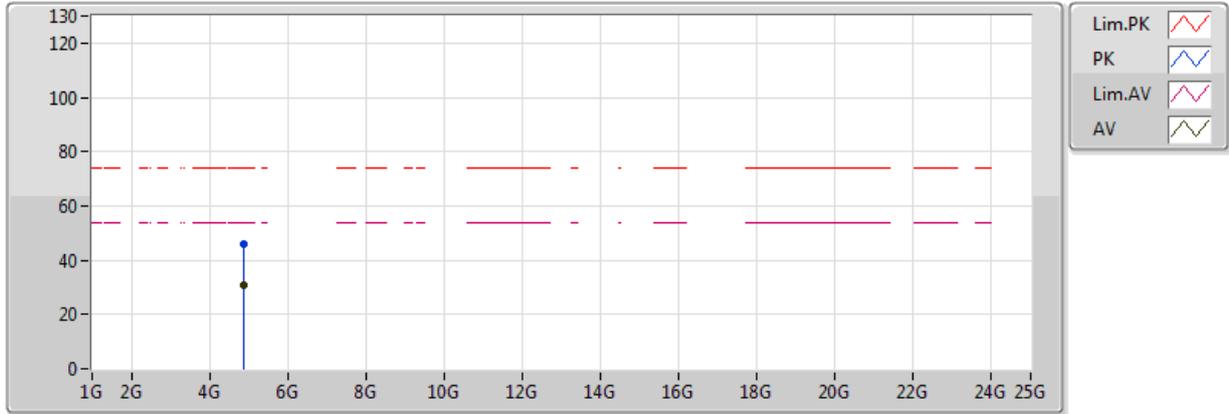


Type	Freq (Hz)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
AV	4.889301G	30.89	54.00	-23.11	5.97	3	Horizontal	77	1.50	-
PK	4.889261G	45.80	74.00	-28.20	5.96	3	Horizontal	77	1.50	-

BT-LE(1Mbps)

2480MHz_TX

19/08/2018

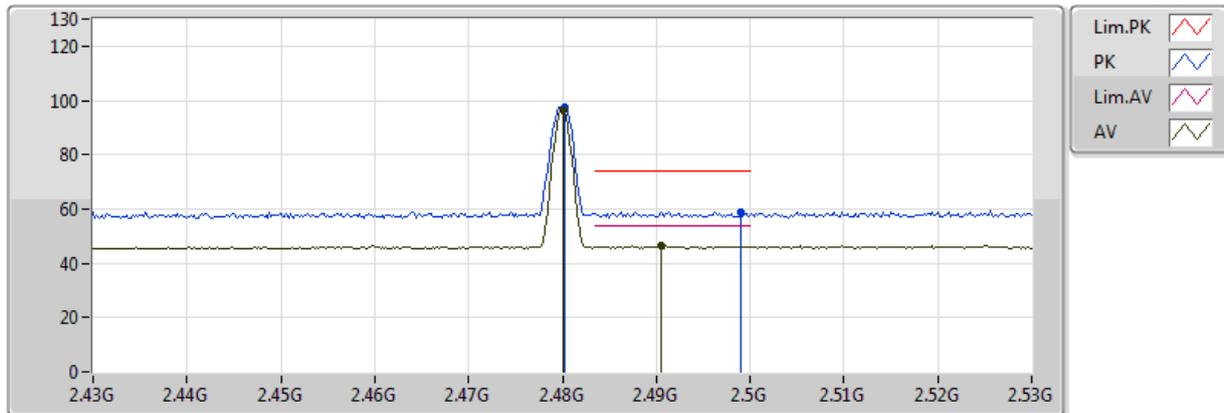


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
AV	2.48G	96.34	Inf	-Inf	30.68	3	Vertical	352	1.05	-
AV	2.4906G	46.31	54.00	-7.69	30.72	3	Vertical	352	1.05	-
PK	2.4802G	97.40	Inf	-Inf	30.68	3	Vertical	352	1.05	-
PK	2.499G	58.77	74.00	-15.23	30.75	3	Vertical	352	1.05	-

BT-LE(1Mbps)

2480MHz_TX

19/08/2018

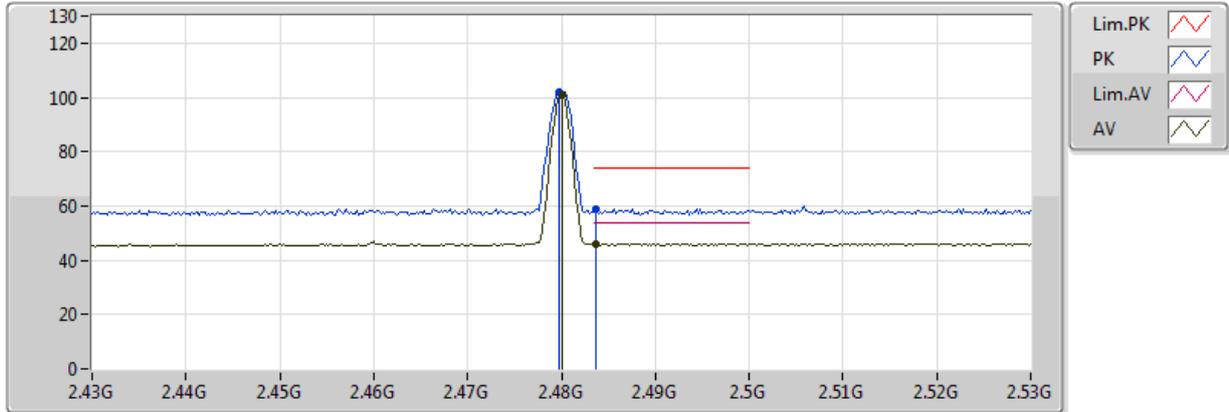


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
AV	2.48G	101.01	Inf	-Inf	30.68	3	Horizontal	35	1.72	-
AV	2.4836G	46.20	54.00	-7.80	30.69	3	Horizontal	35	1.72	-
PK	2.4798G	102.15	Inf	-Inf	30.68	3	Horizontal	35	1.72	-
PK	2.4836G	58.91	74.00	-15.09	30.69	3	Horizontal	35	1.72	-

BT-LE(1Mbps)

2480MHz_TX

19/08/2018

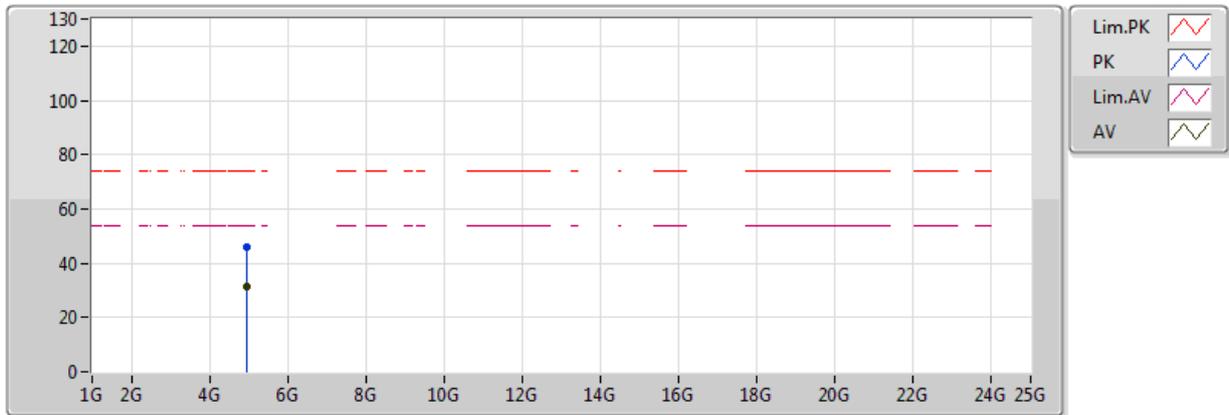


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
AV	4.954052G	31.50	54.00	-22.50	6.11	3	Vertical	44	1.50	-
PK	4.951257G	45.97	74.00	-28.03	6.10	3	Vertical	44	1.50	-

BT-LE(1Mbps)

2480MHz_TX

19/08/2018

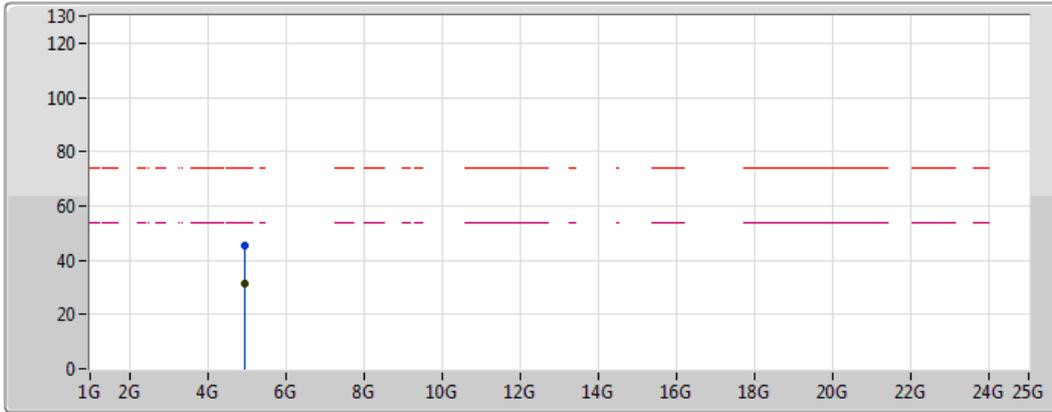

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
AV	4.952774G	31.25	54.00	-22.75	6.10	3	Horizontal	265	1.50	-
PK	4.959042G	45.65	74.00	-28.35	6.11	3	Horizontal	265	1.50	-