



FCC&IC RF Test Report

Product Name: LTE Wireless Gateway

Model Number: B890-66

Report No: SYBH(Z-RF)016112013-2001

FCC ID: QISB890

IC: 6369A-B890

Reliability Laboratory of Huawei Technologies Co., Ltd.

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District,
Shenzhen, 518129, P.R.C

Tel: +86 755 28780808 Fax: +86 755 89652518

Notice

1. The laboratory has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS), and accreditation number: L0310.
2. The laboratory has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements. The site recognition number is 97456.
3. The laboratory has been listed by industry Canada to perform electromagnetic emission measurement. The site recognition number is 6369A-2.
4. The test report is invalid if not marked with "exclusive stamp for the test report".
5. The test report is invalid if not marked with the stamps or the signatures of the persons responsible for performing, revising and approving the test report.
6. The test report is invalid if there is any evidence of erasure and/or falsification.
7. If there is any dissidence for the test report, please file objection to the test centre within 15 days from the date of receiving the test report.
8. Normally, the test report is only responsible for the samples that have undergone the test.
9. Context of the test report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of the laboratory.



Applicant: Huawei Technologies Co., Ltd.
Address: Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C
Date of Receipt Test Item: Aug.24, 2012
Start Date of Test: Aug.27, 2012
End Date of Test: Sept.10, 2012
Test Result: Pass

Approved By Senior Engineer Dec.20, 2013 Dai Linjun *Dai Linjun*
 Date Name Signature

Reviewed By Dec.20, 2013 Cousy Xu *Cousy XU*
 Date Name Signature

Operated By Dec.20, 2013 Zhu Mingjing *Zhu Mingjing*
 Date Name Signature



Contents

1	<u>General Information</u>	5
1.1	APPLIED STANDARD.....	5
1.2	TEST LOCATION.....	5
1.3	TEST ENVIRONMENTAL CONDITION.....	5
2	<u>Summary</u>	6
3	<u>Product Description</u>	7
3.1	PRODUCT INFORMATION	7
4	<u>Test Description</u>	8
4.1	SUPPORTED FREQUENCY RANGE	8
4.2	TRANSMITTER / RECEIVER CHARACTERISTICS.....	8
4.3	ANTENNA GAIN.....	8
4.4	POWER SUPPLY	8
5	<u>General Test Conditions / Configurations</u>	9
5.1	RF CHANNELS UNDER TEST.....	9
5.2	TEST MODES.....	9
5.3	TEST ENVIRONMENT	10
5.4	TEST SETUP.....	11
5.5	TEST CONDITIONS	15
6	<u>Main Test Instruments</u>	17
7	<u>Test Results</u>	17
8	<u>Measurement Uncertainty</u>	18




1 General Information

1.1 Applied Standard	
Applied Rules:	47 CFR FCC Part 2:2011, Subpart J 47 CFR FCC Part 27:2011, Subpart C&M IC RSS-Gen Issue 3 IC RSS-130 Issue 1 ANSI/TIA 603C:2004
1.2 Test Location	
Test Location 1:	Reliability Laboratory of Huawei Technologies Co., Ltd.
Address:	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C
1.3 Test Environmental Condition	
Ambient Temperature:	20 – 25 °C
Ambient Relative Humidity:	45 – 55 %
Atmospheric Pressure:	101 kPa

2 Summary

Table 1 Summary of Band 12 results

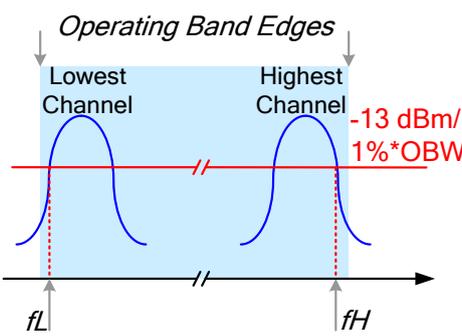Test Case	FCC Part No.	IC Part No.	Requirements	Result
699 – 716MHz Band (LTE Band 12)				
Transmitter Output Power	2.1046 & 27.50(c)	RSS-Gen,§4.8; RSS-130,§4.4	FCC: Avg ERP not exceed 3 W IC: Avg ERP not exceed 5 W PARP ≤ 13 dB	Pass
Modulation Characteristics	2.1047	RSS-130,§4.1	Digital modulation	Pass
Occupied Bandwidth	2.1049	RSS-Gen,§4.6	(Not specified)	Pass
Band Edges Compliance	2.1051 & 27.53(g)	RSS-Gen,§4.9; RSS-130,§4.6	Below -13 dBm/30 kHz, in 100 kHz range	Pass
Spurious Emission at Antenna Terminals	2.1051 & 27.53(g)	RSS-Gen,§4.9; RSS-130,§4.6	Below -33 dBm/1 kHz, 9 kHz to 150 kHz Below -23 dBm/10 kHz, 150 kHz to 30 MHz Below -13 dBm/100 kHz, 30 MHz to 10 th harmonics	Pass
Field Strength of Spurious Radiation	2.1053 & 27.53(g)	RSS-Gen,§4.9; RSS-130,§4.6	Below -13 dBm/100 kHz	Pass
Frequency Stability	2.1055 & 27.54	RSS-Gen,§4.7; RSS-130,§4.3	FCC: Within authorized bands of operation/frequency block. IC: f(offset): no limit. $fL - f(\text{offset}) > \text{Operating Band Left Edge}$, $fH + f(\text{offset}) < \text{Operating Band Right Edge}$. 	Pass

NOTE:

The Band 4 (1710 – 1755MHz) test data refer to **NO.SYBH(Z-RF)004092012-2002** of B890-66 RF report.

The Band 7 (2500 – 2570MHz) test data refer to **NO.SYBH(Z-RF)004092012-2004** of B890-66 RF report.

3 Product Description

3.1 Product Information

3.1.1 General Description

HUAWEI LTE Wireless Gateway–B890-66 is subscriber equipment in the WCDMA/LTE system, also supports wireless Internet accessing function, routing function, network address translation (NAT) function. The HSPA+/WCDMA frequency band is Band 2/4/5. The LTE frequency band includes Band 2/4/5/7/12/13/17. And the TX/RX band is 2400MHz~2483MHz for WLAN. B890-66 implements such functions as RF signal receiving/sending, WCDMA and LTE protocol processing, voice and data service etc. Externally it provides USB port interface, SIM card interface, four auto-sensing Ethernet interfaces and external antenna interface.

3.1.2 Board Information

Table 2 Board Information

LTE Wireless Gateway		
B890-66		
Board and Module		
Hardware Version	Software Version	Description
WL1B890I	V100R001	Board

3.1.3 Adapter Technical Data

AC/DCAdapter Model	HW-120200U6W
Input Voltage	~100-240V 50/60Hz
Output Voltage	12V  2A
Rated Power	24W

4 Test Description

4.1 Supported Frequency Range

Characteristics	Description
Downlink	729 to 746 MHz
Uplink	699 to 716 MHz

4.2 Transmitter / Receiver Characteristics

Characteristics	Description
System Type	LTE
TX Output Power (per Antenna Port)	LTE system: 23dBm
Channel Spacing(s) / Bandwidth(s)	LTE system: 1.4 MHz, 3 MHz 5 MHz, 10 MHz
Designation of Emissions	LTE system: 1M09G7D (1.4 MHz ,QPSK modulation), 1M09W7D (1.4 MHz ,16QAM modulation), 2M69G7D (3 MHz QPSK modulation), 2M68W7D (3 MHz 16QAM modulation), 4M48G7D (5MHz QPSK modulation), 4M48W7D (5MHz 16QAM modulation), 8M95G7D (10 MHz QPSK modulation), 8M96W7D (10 MHz 16QAM modulation),

4.3 Antenna Gain

Antenna Gain(dBi)	-1
Antenna Gain(dBd)	-3.15

4.4 Power Supply

Specification	Description
Power Supply Type	Directly Connected to DC /AC Power Supply
Input to EUT (DC power)	DC Voltage Nominal: \equiv 12 V DC Voltage Range: \equiv 10.8 V to 13.2 V
Input to EUT (AC power)	AC Voltage Nominal: ~ 120 V (50/60 Hz) AC Voltage Range: ~100-240V

5 General Test Conditions / Configurations

5.1 RF Channels under Test

Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
LTE Band 12	TX (1.4M)	Channel 23017	Channel 23095	Channel 23173
		699.7 MHz	707.5 MHz	715.3 MHz
	RX (1.4M)	Channel 5017	Channel 5095	Channel 5173
		729.7 MHz	737.5 MHz	745.3 MHz
	TX (3M)	Channel 23025	Channel 23095	Channel 23165
		700.5 MHz	707.5 MHz	714.5 MHz
	RX (3M)	Channel 5025	Channel 5095	Channel 5165
		730.5 MHz	737.5 MHz	744.5 MHz
	TX (5M)	Channel 23035	Channel 23095	Channel 23155
		701.5 MHz	707.5 MHz	713.5 MHz
	RX (5M)	Channel 5035	Channel 5095	Channel 5155
		731.5 MHz	737.5 MHz	743.5 MHz
	TX (10M)	Channel 23060	Channel 23095	Channel 23130
		704 MHz	707.5 MHz	711 MHz
	RX (10M)	Channel 5060	Channel 5095	Channel 5130
		734 MHz	737.5 MHz	741 MHz

5.2 Test Modes

Test Mode	Test Modes Description
TM1	LTE QPSK modulation
TM2	LTE 16QAM modulation



5.3 Test Environment

Environment Parameter	Selected Values During Tests	
Relative Humidity	Ambient	
Temperature	TN	Ambient
Voltage	VL	10.8V
	VN	12.0V
	VH	13.2V


NOTE: VL= lower extreme test voltage
VN= nominal voltage
VH= upper extreme test voltage
TN= normal temperature

5.4 Test Setup


5.4.1 General Test Setup Configurations

Configuration	Description
Test Antenna Ports	Until otherwise declared, all TX tests are ONLY performed at the main Transmitter antenna port (e.g. TRXA, TXA and so on) of the EUT, and all RX tests are ONLY performed at the main Receiver antenna port (e.g. TRXA, RXA and so on) of the EUT.
Multiple RF Sources	Other than the tested RF source of the EUT, other RF source(s) are disabled or shutdown during measurements.

5.4.2 Test Setup 1

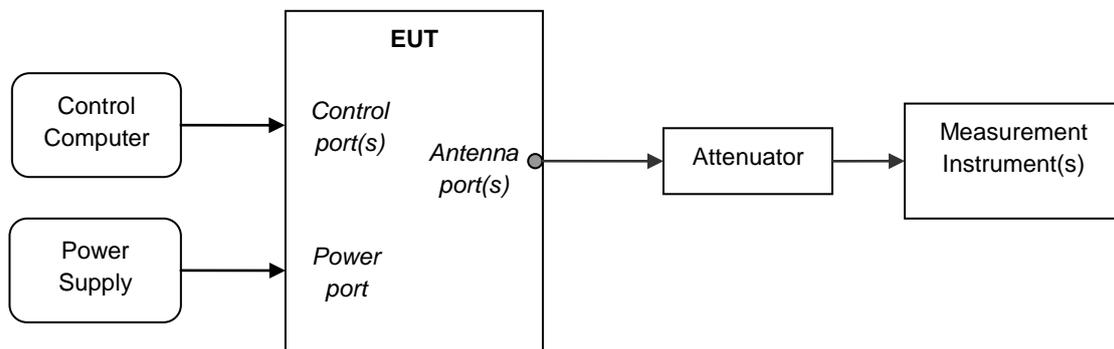

5.4.3 Test Setup 2

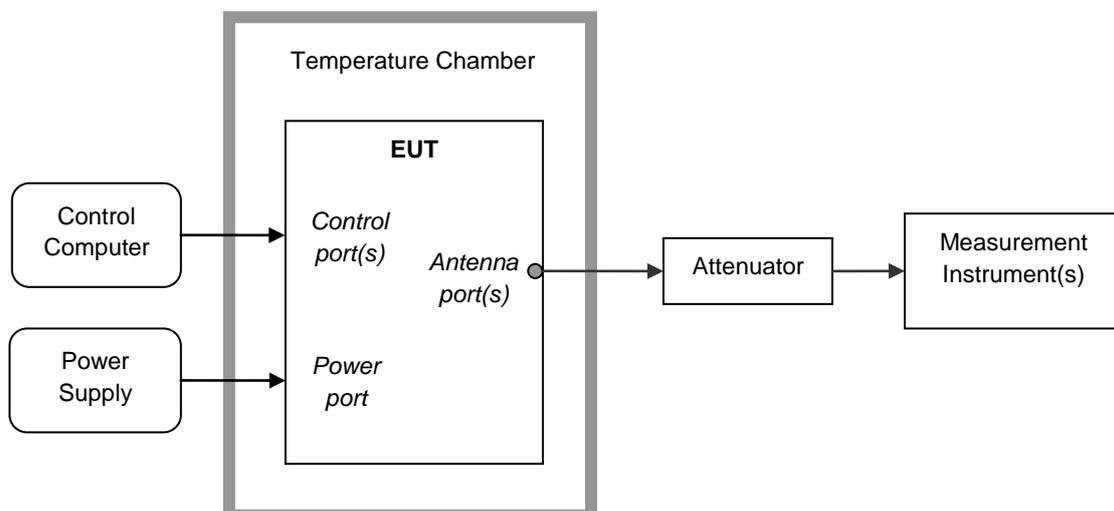


5.4.4 Test Setup 3

NOTE1: Effective radiated power (ERP) or Effective Isotropic radiated power (EIRP) refers to the EUT radiation power output, assuming all emissions are radiated from half-wave dipole antennas or horn antennas.

NOTE2: The EUT was set on insulator 80cm above the Ground Plane. The setup and test methods were according to ANSI-TIA-603C 2004. The measurements were carried through with a Rohde and Schwarz Test Receiver and control software.


Step 1: Pre-test to find the Maximum ERP or EIRP

1. Connect the test system according to the following figure. EUT is running for 30 minutes before test, and measurement instruments are warming-up for 30 minutes.
2. Set up communication link between Universal radio communication tester and EUT, set EUT working frequency, and control EUT to transmit at maximum power.
3. Set the center frequency of the signal analyzer or receiver to the EUT's operating frequency, the RBW is equal to the emission bandwidth of the signal. Set RMS detector for the test, and the span is equal to 2 times of emission bandwidth, the other settings should remain automatic. Normally, the height range of antenna was 1m to 4m, the azimuth range of turntable was 0° to 360°. The receiver antenna has two polarizations V and H. A portable or small unlicensed wireless device shall be placed on a non-metallic test fixture or other non-metallic support during testing. The supporting fixture shall permit orientation of the EUT in each of three orthogonal (x, y, z) axis positions such that emissions from the EUT are maximized. Measure the EUT maximum RF power and record the result.
4. Changing EUT working frequency and measuring the RF power at channel L, M, H respectively. Complete the test data.

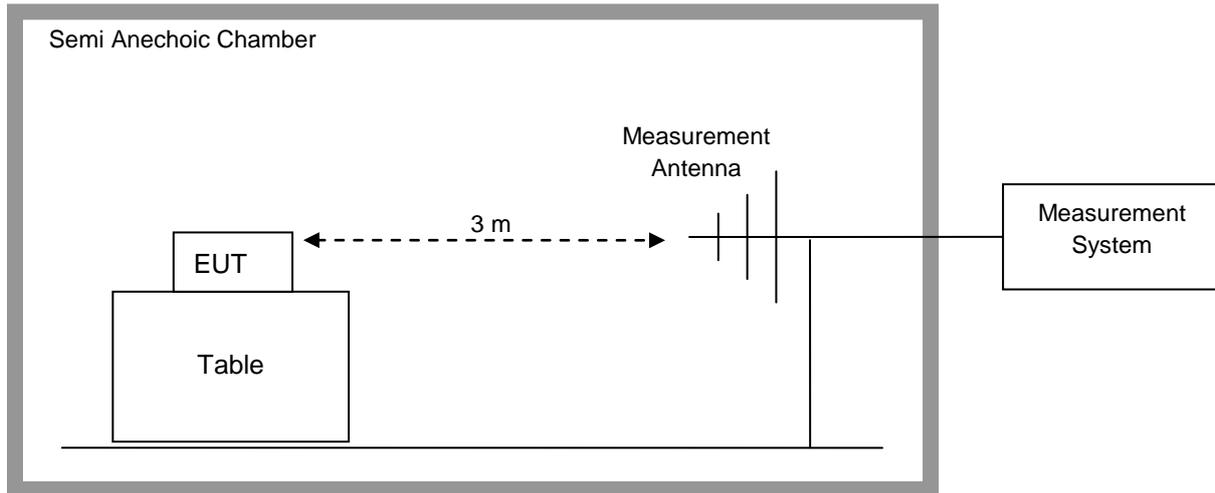

Step 2: Substitution method to verify the maximum ERP or EIRP

1. Measurement setup is according to the following figure. EUT was substituted by antenna, and the polarization is identical with the test antenna; the signal generator was connected to the substitution antenna.
2. The radiated output power, measured by signal analyzer set, is the same as recorded in above. Then this power level is matched by a signal from a calibrated signal generator which is substituted for EUT. The power supplied by the generator is then equal to the ERP or EIRP after corrected by the antenna gain and cable loss.

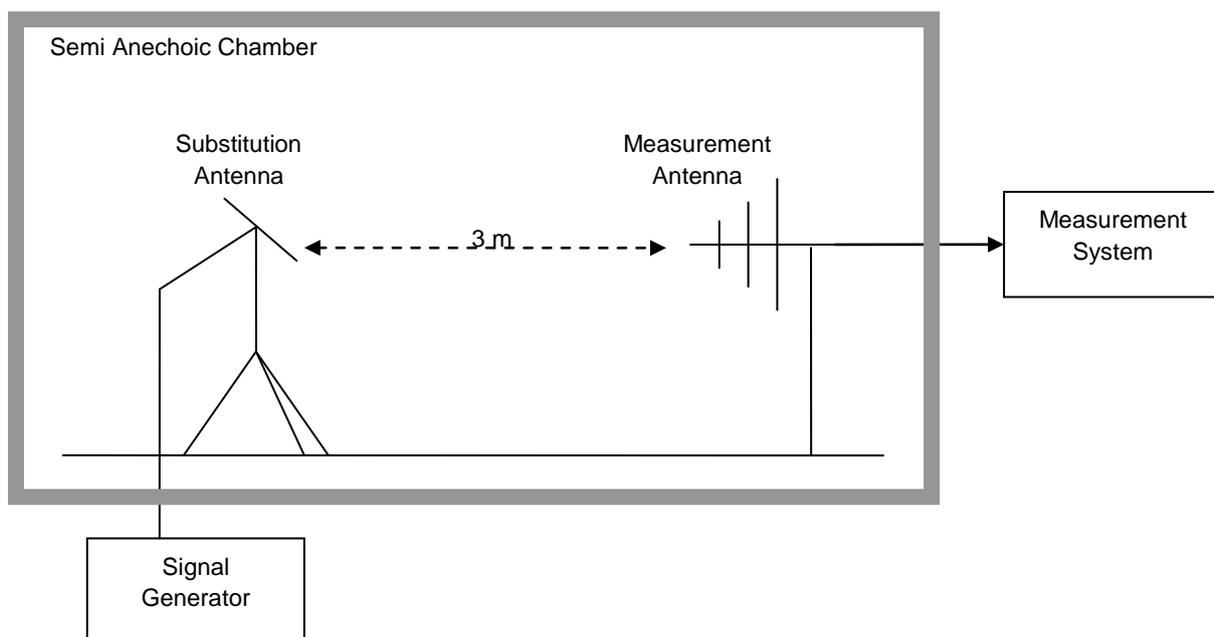

5.5 Test Conditions

Test Case	Test Conditions	
Transmitter Output Power	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1 & Test Setup 3
	Detector	RMS
	RF Channels (TX)	B, M, T
	Test Mode	TM1/TM2
Modulation Characteristics	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	RF Channels (TX)	M
	Test Mode	TM1/TM2
Occupied Bandwidth	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	Detector	RMS
	RF Channels (TX)	B, M, T
	Test Mode	TM1/TM2
Band Edges Compliance	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	Detector	RMS
	RF Channels (TX)	B ,T
	Test Mode	TM1/TM2
Spurious Emission at Antenna Terminals	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	Detector	PK
	RF Channels (TX)	B, M, T
	Test Mode	TM1/TM2
Field Strength of Spurious Radiation	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 3
	Detector	PK
	RF Channels (TX)	M
	Test Mode	TM1/TM2
Frequency Stability	Test Configuration	(1) -30 °C to +50 °C with step 10 °C at Rated Voltage; (2) VL, VN and VH of Rated Voltage at Ambient Temperature.
	Test Setup	Test Setup 2
	RF Channels (TX)	M



Test Case	Test Conditions	
	Test Mode	TM1

6 Main Test Instruments

Table 3 Main Test Equipments

Equipment Name	Manufacturer	Model	Serial Number	Cal Date	Cal- Due
Power supply	KEITHLEY	2303	1288003	2012-11-19	2014-11-18
Wireless Communication Test set	Agilent	N4010A	MY49081592	2013-10-29	2014-10-28
Universal Radio Communication Tester	R&S	CMU200	113164	2013-07-18	2014-07-17
Universal Radio Communication Tester	R & S	CMW500	126855	2013-08-08	2015-08-09
Spectrum Analyzer	Agilent	E4440A	MY48250119	2013-08-09	2014-08-08
Signal Analyzer	R&S	FSQ31	200021	2013-10-29	2014-10-28
Spectrum Analyzer	Agilent	N9030A	MY49431698	2013-10-29	2014-10-28
Temperature Chamber	WEISS	WKL64	56246002940010	2013-01-29	2014-01-28
Signal generator	Agilent	E8257D	MY51500314	2013-04-15	2014-04-14
Vector Signal Generator	R&S	SMU200A	104162	2013-10-29	2014-10-28
Test receiver	R&S	ESU26	100150	2013-05-15	2014-05-14
Spectrum analyzer	R&S	FSU3	200474	2013-01-29	2014-01-28
Spectrum analyzer	R&S	FSU43	100144	2013-01-29	2014-01-28
Double-Ridged Waveguide Horn Antenna (1G~18GHz)	R&S	HF907	100304	2013-02-02	2015-02-01
Trilog Broadband Antenna (30M~3GHz)	SCHWARZ BECK	VULB 9163	9163-490	2013-02-02	2015-02-01
LOOP Antennas(9kHz-30MHz)	R&S	HFH2-Z2	100262	2013-03-23	2015-03-22
Pyramidal Horn Antenna(18GHz-26-5GHz)	ETS-LINDGREN	3160-09	5140299	2013-03-05	2015-03-04
Artificial Mains Network	R&S	ENV4200	100134	2013-01-28	2014-01-28
Artificial Mains Network	R&S	ENV216	100382	2013-01-28	2014-01-28

7 Test Results

No.	Test Item	Test Result
1	Transmitter Output Power	Appendix A
2	Modulation Characteristics	Appendix B
3	Occupied Bandwidth	Appendix C
4	Band Edges Compliance	Appendix D
5	Spurious Emission at Antenna Terminals	Appendix E
6	Field Strength of Spurious Radiation	Appendix F
7	Frequency Stability	Appendix G

8 Measurement Uncertainty

For a 95% confidence level ($k=2$), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

Test Item		Extended Uncertainty
Transmitter Output Power	Power (dBm)	U =0.39 dB
Occupied Bandwidth	Magnitude (%)	U=0.2%
Band Edge Compliance	Disturbance Power (dBm)	U=2.0 dB
Conducted Spurious Emissions	Disturbance Power (dBm)	U=2.0 dB
Field Strength of Spurious Radiation	ERP (dBm)	U=4.6 dB (30 MHz – 1GHz) U=3.0 dB (above 1 GHz)
Frequency Stability	Frequency Accuracy (ppm)	U=0.21 ppm

-----The END-----