



NO.: RZA2008-0295



(No. CNAS L2264)

# OET 65

## TEST REPORT

<b>Test name</b>	Electromagnetic Field (Specific Absorption Rate)
<b>Product</b>	CDMA 1X Digital Mobile Telephone
<b>Model</b>	HUAWEI C2901
<b>FCC ID</b>	QISC2901
<b>Client</b>	HUAWEI Technologies Co., Ltd.

**TA Technology (Shanghai) Co., Ltd.**



## **GENERAL TERMS**

1. The test report is invalid if not marked with “exclusive stamp for the data report” or the stamp of the TA.
2. Any copy of the test report is invalid if not re-marked with the “exclusive stamp for the test report” or the stamp of TA.
3. The test report is invalid if not marked with the stamps or the signatures of the persons responsible for performing, revising and approving the test report.
4. The test report is invalid if there is any evidence of erasure and/or falsification.
5. If there is any dissidence for the test report, please file objection to the test center within 15 days from the date of receiving the test report.
6. Normally, entrust test is only responsible for the samples that have undergone the test.
7. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permissions of TA.

**Address:** Room4,No.399,Cailun Rd,Zhangjiang Hi-Tech Park, Pudong Shanghai,China

**Post code:** 201203

**Telephone:** +86-021-50791141/2/3

**Fax:** +86-021-50791147

**Website:** <http://www.ta-shanghai.com>

**E-mail:** [service@ta-shanghai.com](mailto:service@ta-shanghai.com)

# TA Technology (Shanghai) Co., Ltd. Test Report

No. RZA2008-0295

Page 3 of 81

## GENERAL SUMMARY

<b>Product</b>	CDMA 1X Digital Mobile Telephone	<b>Model</b>	HUAWEI C2901
<b>Client</b>	HUAWEI Technologies Co., Ltd.	<b>Type of test</b>	Entrusted
<b>Manufacturer</b>	HUAWEI Technologies Co., Ltd.	<b>Arrival Date of sample</b>	Mar.11 <sup>th</sup> , 2008
<b>Place of sampling</b>	(Blank)	<b>Carrier of the samples</b>	Yaohui Gu
<b>Quantity of the samples</b>	One	<b>Date of product</b>	(Blank)
<b>Base of the samples</b>	(Blank)	<b>Items of test</b>	SAR
<b>Series number</b>	PK9MAB1812300105		
<b>Standard(s)</b>	<p><b>EN 50360–2001:</b> Product standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones.</p> <p><b>EN 50361–2001:</b> Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones.</p> <p><b>ANSI C95.1–1999:</b> IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.</p> <p><b>IEEE 1528–2003:</b> Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques.</p> <p><b>OET Bulletin 65 (Edition 97-01) and Supplement C (Edition 01-01):</b> Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits.</p> <p><b>IEC 62209-1:</b> Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 1: Procedure to determine the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz).</p>		
<b>Conclusion</b>	<p>Localized Specific Absorption Rate (SAR) of this portable wireless equipment has been measured in all cases requested by the relevant standards cited in Clause 6.2 of this test report. Maximum localized SAR is below exposure limits specified in the relevant standards cited in Clause 6.1 of this test report.</p> <p>General Judgment: <b>Pass</b></p> <p style="text-align: right;">(Stamp) <b>Date of issue: Mar. 17<sup>th</sup>, 2008</b></p>		
<b>Comment</b>	<p>TX Freq. Band: 824–849MHz (CDMA)      Max. Power: 0.25W(CDMA)</p> <p>The test result only responds to the measured sample.</p>		

Approved by   郑晨光  

(Chenguang Zheng)

Revised by   杨伟中  

(Weizhong Yang)

Performed by   凌敏宝  

(Minbao Ling)

## TABLE OF CONTENT

1	COMPETENCE AND WARRANTIES .....	6
2	GENERAL CONDITIONS .....	6
3	DESCRIPTION OF EUT .....	7
3.1	ADDRESSING INFORMATION RELATED TO EUT .....	7
3.2	CONSTITUENTS OF EUT .....	7
3.3	GENERAL DESCRIPTION .....	7
4	OPERATIONAL CONDITIONS DURING TEST .....	8
4.1	TEST TO BE PERFORMED .....	8
4.2	INFORMATION FOR THE MEASUREMENT OF CDMA 1X DEVICES .....	8
4.2.1	<i>Output Power Verification</i> .....	8
4.2.2	<i>Head SAR measurement</i> .....	8
4.2.3	<i>Body SAR measurement</i> .....	9
5	SAR Measurements System Configuration .....	10
5.1	SAR MEASUREMENT SET-UP .....	10
5.2	DASY4 E-FIELD PROBE SYSTEM .....	11
5.3	E-FIELD PROBE CALIBRATION .....	12
5.4	OTHER TEST EQUIPMENT .....	12
5.4.1	<i>Device Holder for Transmitters</i> .....	12
5.4.2	<i>Phantom</i> .....	13
5.5	EQUIVALENT TISSUES .....	14
5.6	SYSTEM SPECIFICATIONS .....	14
5.6.1	<i>Robotic System Specifications</i> .....	14
6	CHARACTERISTICS OF THE TEST .....	15
6.1	APPLICABLE LIMIT REGULATIONS .....	15
6.2	APPLICABLE MEASUREMENT STANDARDS .....	15
7	LABORATORY ENVIRONMENT .....	15
8	CONDUCTED OUTPUT POWER MEASUREMENT .....	16
8.1	SUMMARY .....	16
8.2	POWER DRIFT .....	16
8.3	CONDUCTED POWER .....	16
8.3.1	<i>Measurement Methods</i> .....	16
8.3.2	<i>Measurement result</i> .....	16
9	TEST RESULTS .....	17
9.1	DIELECTRIC PERFORMANCE .....	17
9.2	SYSTEM VALIDATION .....	17
9.3	SUMMARY OF MEASUREMENT RESULTS .....	18
9.4	CONCLUSION .....	19
10	MEASUREMENT UNCERTAINTY .....	20
11	MAIN TEST INSTRUMENTS .....	21
12	TEST PERIOD .....	21

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

No. RZA2008-0295

Page 5 of 81

---

13 TEST LOCATION .....	21
ANNEX A: MEASUREMENT PROCESS .....	22
ANNEX B: TEST LAYOUT .....	23
ANNEX C: GRAPH RESULTS .....	24
ANNEX D: SYSTEM VALIDATION RESULTS .....	62
ANNEX E: PROBE CALIBRATION CERTIFICATE .....	63
ANNEX F: DIPOLE CALIBRATION CERTIFICATE .....	72
ANNEX G: THE EUT APPEARANCES AND TEST CONFIGURATION .....	78

## **1 COMPETENCE AND WARRANTIES**

**TA Technology (Shanghai) Co., Ltd.** is a test laboratory competent to carry out the tests described in this test report.

**TA Technology (Shanghai) Co., Ltd.** guarantees the reliability of the data presented in this test report, which is the results of measurements and tests performed for the items under test on the date and under the conditions stated in this test report and is based on the knowledge and technical facilities available at TA Technology (Shanghai) Co., Ltd. at the time of execution of the test.

**TA Technology (Shanghai) Co., Ltd.** is liable to the client for the maintenance by its personnel of the confidentiality of all information related to the items under test and the results of the test.

## **2 GENERAL CONDITIONS**

This report only refers to the item that has undergone the test.

This report standalone does not constitute or imply by its own an approval of the product by the certification Bodies or competent Authorities. This document is only valid if complete; no partial reproduction can be made without written approval of **TA Technology (Shanghai) Co., Ltd.**

This report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of **TA Technology (Shanghai) Co., Ltd.** and the Accreditation Bodies, if it applies.

### 3 DESCRIPTION OF EUT

#### 3.1 Addressing Information Related to EUT

**Table 1: Applicant (The Client)**

Name or Company	HUAWEI Technologies Co., Ltd.
Address/Post	Bantian, Longgang District
City	Shenzhen
Postal Code	518129
Country	P.R. China
Telephone	0755-28780808
Fax	0755-28780808

**Table 2: Manufacturer**

Name or Company	HUAWEI Technologies Co., Ltd.
Address/Post	Bantian, Longgang District
City	Shenzhen
Postal Code	518129
Country	P.R. China
Telephone	0755-28780808
Fax	0755-28780808

#### 3.2 Constituents of EUT

**Table 3: Constituents of Samples**

Description	Model	Serial Number	Manufacturer
Handset	HUAWEI C2901	PK9MAB1812300105	HUAWEI Technologies Co.,Ltd
Lithium Battery	HBL6A	BYD7A2303763	Shenzhen BYD Co.,Ltd
AC/DC Adapter	HS-050040U1	HKA7C2800014	TECH-POWER Electronics (Shenzhen)Co.,Ltd

Note:

The EUT appearances see ANNEX G.

#### 3.3 General Description

Equipment Under Test (EUT) is a model of CDMA 1X Digital Mobile Telephone with internal antenna. It consists of Handset, Lithium Battery and AC/DC Adapter. The detail about Mobile phone, Lithium Battery and AC/DC Adapter is in Table 3. SAR is tested for CDMA Cellular only.

The sample undergoing test was selected by the Client.

Components list please refer to documents of the manufacturer.

## 4 OPERATIONAL CONDITIONS DURING TEST

### 4.1 Test to be performed

A communication link is set up with a System Simulator (SS) by air link, and a call is established. The Absolute Radio Frequency Channel Number (ARFCN) is allocated to 1013, 384 and 777 respectively in the case of CDMA Cellular. The EUT is commanded to operate at maximum transmitting power.

Under the loop back mode between mobile station and E5515C, the transmitter continuously emits with maximum power more strong than voice mode, so the SAR test was done with loop back mode. To make the mobile emits maximum power; the output power of E5515C would be adjusted to minimum power with the sensitivity of the mobile station to build steady connection with mobile station. The power level control parameter “all up” and it means that requires mobile station to emit with maximum power.

The EUT shall use its internal transmitter. The antenna(s), battery and accessories shall be those specified by the manufacturer. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output. If a wireless link is used, the antenna connected to the output of the base station simulator shall be placed at least 50cm away from the handset. The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the handset by at least 30 dB.

### 4.2 Information for the measurement of CDMA 1x devices

#### 4.2.1 Output Power Verification

Test Parameter setup for maximum RF output power according to section 4.4.5 of 3GPP2

Parameter	Units	Value
I or	dBm/1.23MHz	-104
PilotE c /I or	dB	-7
TrafficE c /I or	dB	-7.4

For SAR test, the maximum power output is very important and essential; it is identical under the measurement uncertainty. It is proper to use typical Test Mode 3 (FW RC3, RVS RC3, SO55) as the worst case for SAR test.

#### 4.2.2 Head SAR measurement

SAR is measured in RC3 with the DUT configured to transmit at full rate using Loopback Service Option SO55. SAR for RC1 is not required because the maximum average output of each channel is less than 0.25 dB higher than that measured in RC3. Otherwise, SAR is measured on the maximum output channel in RC1 using the exposure configuration that results in the highest SAR for that channel in RC3.

#### 4.2.3 Body SAR measurement

SAR is measured in RC3 with the EUT configured to transmit at full rate using TDSO/SO32, transmit at full rate on FCH with all other code channels disabled. SAR for multiple code channels (FCH+SCHn) is not required when the maximum average output of each RF channel is less than 0.25dB higher than measured with FCH only.

Body SAR in RC1 is not required because the maximum average output of each channel is less than 0.25 dB higher than that measured in RC3. Otherwise, SAR is measured on the maximum output channel in RC1; with Loopback Service Option SO55, at full rate using the body exposure configuration that results in the highest SAR for that channel in RC3.

Test communication setup meet as followings:

Communication standard between mobile station and base station simulator	3GPP2 C.S0011-B
Radio configuration	RC3 (Supporting CDMA 1X)
Spreading Rate	SR1
Data Rate	9600bps
Service Options	SO55 (loop back mode)
Service Options	SO32 (test data service mode)
Multiplex Options	The mobile station does not support this service.

## 5 SAR Measurements System Configuration

### 5.1 SAR Measurement Set-up

These measurements were performed with the automated near-field scanning system DASY4 from Schmid & Partner Engineering AG (SPEAG). The system is based on a high precision robot (working range greater than 0.9m) which positions the probes with a positional repeatability of better than  $\pm 0.02\text{mm}$ . Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines (length = 300mm) to the data acquisition unit.

A cell controller system contains the power supply, robot controller, teaches pendant (Joystick) and remote control, is used to drive the robot motors. The PC consists of the Micron Pentium III 800 MHz computer with Windows 2000 system and SAR Measurement Software DASY4, A/D interface card, monitor, mouse, and keyboard. The Stäubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

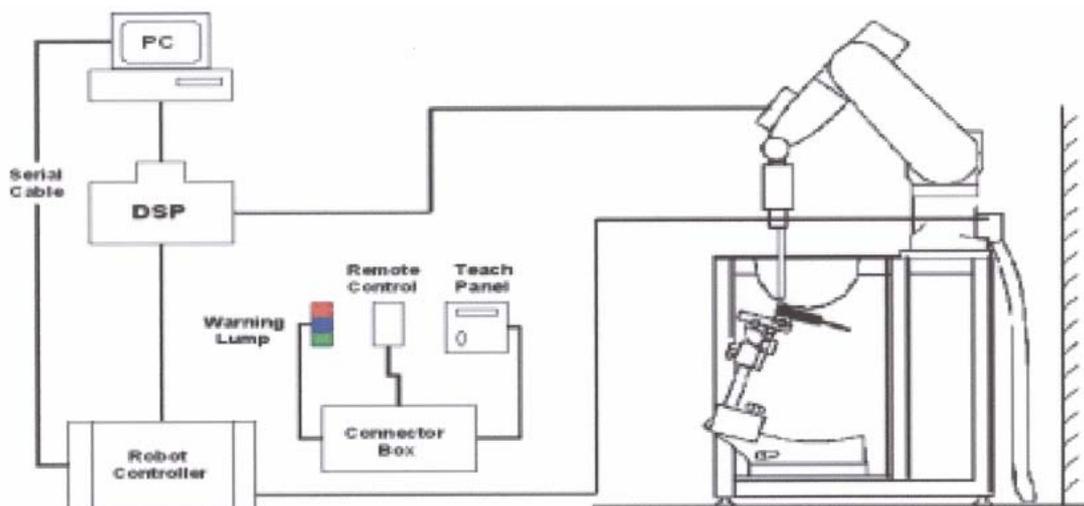


Figure1. SAR Lab Test Measurement Set-up

The DAE3 consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.

## 5.2 Dasy4 E-field Probe System

The SAR measurements were conducted with the dosimetric probe ET3DV6 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe has been calibrated according to the standard procedure with an accuracy of better than  $\pm 10\%$ . The spherical isotropy was evaluated and found to be better than  $\pm 0.25\text{dB}$ .

### ET3DV6 Probe Specification

Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection System(ET3DV6 only) Built-in shielding against static charges PEEK enclosure material(resistant to organic solvents, e.g., glycol)
Calibration	In air from 10 MHz to 2.5 GHz In brain and muscle simulating tissue at frequencies of 450MHz, 900MHz and 1.8GHz (accuracy $\pm 8\%$ ) Calibration for other liquids and frequencies upon request
Frequency	10 MHz to > 6 GHz; Linearity: $\pm 0.2\text{ dB}$ (30 MHz to 3 GHz)
Directivity	$\pm 0.2\text{ dB}$ in brain tissue (rotation around probe axis) $\pm 0.4\text{ dB}$ in brain tissue (rotation normal probe axis)
Dynamic Range	5 $\mu\text{W/g}$ to > 100mW/g; Linearity: $\pm 0.2\text{ dB}$
Surface Detection	$\pm 0.2\text{ mm}$ repeatability in air and clear liquids over diffuse reflecting surface(ET3DV6 only)
Dimensions	Overall length: 330mm Tip length: 16mm Body diameter: 12mm Tip diameter: 6.8mm Distance from probe tip to dipole centers: 2.7mm
Application	General dosimetry up to 3GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms

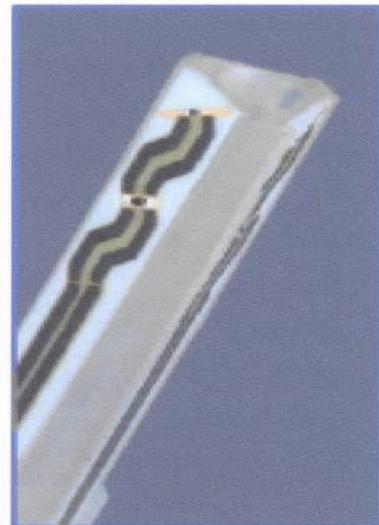


Figure2. ET3DV6 E-field Probe

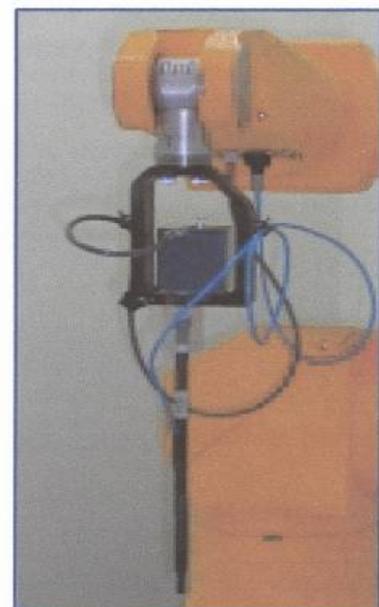


Figure3. ET3DV6 E-field probe

### 5.3 E-field Probe Calibration

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than  $\pm 10\%$ . The spherical isotropy was evaluated and found to be better than  $\pm 0.25\text{dB}$ . The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$\text{SAR} = C \frac{\Delta T}{\Delta t}$$

Where:  $\Delta t$  = Exposure time (30 seconds),  
C = Heat capacity of tissue (brain or muscle),  
 $\Delta T$  = Temperature increase due to RF exposure.

Or

$$\text{SAR} = \frac{|E|^2 \sigma}{\rho}$$

Where:

$\sigma$  = Simulated tissue conductivity,  
 $\rho$  = Tissue density (kg/m<sup>3</sup>).

### 5.4 Other Test Equipment

#### 5.4.1 Device Holder for Transmitters

In combination with the Generic Twin Phantom V3.0, the Mounting Device (POM) enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation points is the ear opening. The devices can be easily, accurately, and repeatedly positioned according to the FCC and CENELEC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).



**Figure4. Device Holder**

#### 5.4.2 Phantom

The Generic Twin Phantom is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

Shell Thickness	2±0.1 mm
Filling Volume	Approx. 20 liters
Dimensions	810 x 1000 x 500 mm (H x L x W)
Available	Special



Figure5. Generic Twin Phantom

## 5.5 Equivalent Tissues

The liquid used for the frequency range of 800-2000 MHz consisted of water, sugar, salt, Preventol and Cellulose. The liquid has previously been proven to be suited for worst-case. The Table 4 and Table 5 show the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by the IEEE 1528.

**Table 4: Composition of the Head Tissue Equivalent Matter**

MIXTURE%	FREQUENCY(Brain) 835MHz
Water	41.45
Sugar	56
Salt	1.45
Preventol	0.1
Cellulose	1.0
Dielectric Parameters Target Value	f=835MHz $\epsilon=41.5$ $\sigma=0.9$

**Table 5: Composition of the Body Tissue Equivalent Matter**

MIXTURE%	FREQUENCY(Body)835MHz
Water	52.5
Sugar	45
Salt	1.4
Preventol	0.1
Cellulose	1.0
Dielectric Parameters Target Value	f=835MHz $\epsilon=55.2$ $\sigma=0.97$

## 5.6 System Specifications

### 5.6.1 Robotic System Specifications

#### Specifications

**Positioner:** Stäubli Unimation Corp. Robot Model: RX90L

**Repeatability:**  $\pm 0.02$  mm

**No. of Axis:** 6

#### Data Acquisition Electronic (DAE) System

##### Cell Controller

**Processor:** Pentium III

**Clock Speed:** 800 MHz

**Operating System:** Windows 2000

##### Data Converter

**Features:** Signal Amplifier, multiplexer, A/D converter, and control logic

**Software:** DASY4 software

**Connecting Lines:** Optical downlink for data and status info.    Optical uplink for commands and clock.

## 6 CHARACTERISTICS OF THE TEST

### 6.1 Applicable Limit Regulations

**EN 50360–2001:** Product standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones.

It specifies the maximum exposure limit of **2.0 W/kg** as averaged over any 10 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

**ANSI C95.1–1999:** IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

It specifies the maximum exposure limit of **1.6 W/kg** as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

### 6.2 Applicable Measurement Standards

**EN 50361–2001:** Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones.

It specifies the measurement method for demonstration of compliance with the SAR limits for such equipments.

**IEEE 1528–2003:** Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques.

**OET Bulletin 65 (Edition 97-01) and Supplement C (Edition 01-01):** Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits.

**IEC 62209-1:** Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 1: Procedure to determine the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)

## 7 LABORATORY ENVIRONMENT

**Table 6: The Ambient Conditions during Test**

Temperature	Min. = 20 °C, Max. = 25 °C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5 $\Omega$
Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

## 8 CONDUCTED OUTPUT POWER MEASUREMENT

### 8.1 Summary

During the process of testing, the EUT was controlled via Digital Radio Communication tester to ensure the maximum power transmission and proper modulation. This result contains conducted output power and ERP for the EUT. In all cases, the measured peak output power should be greater and within 5% than EMI measurement.

### 8.2 Power Drift

To control the output power stability during the SAR test, DASY4 system calculates the power drift by measuring the E-field at the same location at the beginning and at the end of the measurement for each test position. These drift values can be found in Table 11 to Table 13 labeled as: (Power Drift [dB]). This ensures that the power drift during one measurement is within 5%.

### 8.3 Conducted Power

#### 8.3.1 Measurement Methods

The EUT was set up for the maximum output power. The channel power was measured. These measurements were done at 3 channels 1013, 384 and 777 before SAR test and after SAR test.

#### 8.3.2 Measurement result

**Table 7: Conducted Power Measurement Results**

CDMA2000 1X (RC3)	Conducted Power		
	Channel 777 (848.31MHz)	Channel 384 (836.52MHz)	Channel 1013 (824.7MHz)
Before Test (dBm)	24.3	24.2	24.3
After Test (dBm)	24.2	24.1	24.2
CDMA2000 1X (RC1)	Conducted Power		
	Channel 777 (848.31MHz)	Channel 384 (836.52MHz)	Channel 1013 (824.7MHz)
Before Test (dBm)	24.3	24.2	24.3
After Test (dBm)	24.2	24.1	24.2

## 9 TEST RESULTS

### 9.1 Dielectric Performance

**Table 8: Dielectric Performance of Head Tissue Simulating Liquid**

Measurement is made at temperature 22.5 °C and relative humidity 51%. Liquid temperature during the test: 22.3°C					
Frequency (MHz)		Target value	Measurement value	Difference percentage	
<b>835 (Head)</b>	Permittivity $\epsilon_r$	41.50	42.30	1.93	%
	Conductivity $\sigma$	0.90	0.92	2.22	%

**Table 9: Dielectric Performance of Body Tissue Simulating Liquid**

Measurement is made at temperature 22.5 °C and relative humidity 51%. Liquid temperature during the test: 22.3°C					
Frequency (MHz)		Target value	Measurement value	Difference percentage	
<b>835 (Body)</b>	Permittivity $\epsilon_r$	55.20	55.94	1.34	%
	Conductivity $\sigma$	0.97	0.99	2.06	%

### 9.2 System Validation

**Table 10: System Validation**

Measurement is made at temperature 23.2 °C, relative humidity 50%, and input power 250 mW. Liquid temperature during the test: 22.3°C							
Liquid parameters		Frequency	Permittivity $\epsilon$		Conductivity $\sigma$ (S/m)		
		835MHz	40.20		0.89		
Verification results	Frequency	Target value (W/kg)		Measurement value (W/kg)		Difference percentage	
		10g Average	1g Average	10g Average	1g Average	10g Average	1g Average
	835MHz	1.56	2.43	1.53	2.34	-1.92%	-3.70%

Note:

- a. Target Values used derive from the SPEAG calibration certificate and 250 mW is used as feeding power to the validation dipole (SPEAG using).
- b. The graph results see ANNEX D.

# TA Technology (Shanghai) Co., Ltd.

## Test Report

No. RZA2008-0295

Page 18 of 81

### 9.3 Summary of Measurement Results

**Table 11: SAR Values (CDMA Cellular, Head)**

Liquid Temperature: 22.5°C					
Limit of SAR (W/kg)		10 g Average	1 g Average	Power Drift (dB)	Graph Results
		2.0	1.6	± 0.2	
Test Case Of Head		Measurement Result (W/kg)		Power Drift (dB)	
		10 g Average	1 g Average		
Different Test Position	Channel				
Left hand, Touch cheek	High	0.739	1.090	-0.198	Figure7
	Middle	0.684	1.010	0.194	Figure9
	Low	0.714	1.050	0.033	Figure11
Left hand, Tilt 15 Degree	High	0.336	0.475	0.171	Figure13
	Middle	0.326	0.463	0.123	Figure15
	Low	0.376	0.534	-0.150	Figure17
Right hand, Touch cheek	High	0.726	1.060	-0.172	Figure19
	Middle	0.659	0.955	-0.178	Figure21
	Low	0.694	1.010	0.028	Figure23
Right hand, Tilt 15 Degree	High	0.343	0.487	-0.042	Figure25
	Middle	0.362	0.519	-0.087	Figure27
	Low	0.386	0.543	-0.024	Figure29

Remark: The value with blue color is the maximum SAR Value of each test band.

**Table 12: SAR Values (CDMA Cellular, Body, Distance 20mm)**

Liquid Temperature: 22.5°C					
Limit of SAR (W/kg)		10 g Average	1 g Average	Power Drift (dB)	Graph Results
		2.0	1.6	± 0.2	
Test Case Of Body		Measurement Result (W/kg)		Power Drift (dB)	
		10 g Average	1 g Average		
Different Test Position	Channel				
Towards Ground	High	0.495	0.682	0.107	Figure31
	Middle	0.558	0.773	-0.096	Figure33
	Low	0.690	0.955	0.023	Figure35
Towards Phantom	High	0.380	0.530	-0.100	Figure37
	Middle	0.405	0.565	0.038	Figure39
	Low	0.461	0.644	0.184	Figure41

**Table 13: SAR Values (CDMA Cellular, Body with earphone, Distance 20mm)**

Liquid Temperature: 22.5°C					
<b>Limit of SAR (W/kg)</b>		<b>10 g Average</b>	<b>1 g Average</b>	<b>Power Drift (dB)</b>	<b>Graph Results</b>
		2.0	1.6	± 0.2	
<b>Test Case Of Body</b>		<b>Measurement Result (W/kg)</b>		<b>Power Drift (dB)</b>	
		<b>10 g Average</b>	<b>1 g Average</b>		
<b>Different Test Position</b>	<b>Channel</b>				
Towards Ground	Low	0.574	0.792	0.091	Figure43

#### 9.4 Conclusion

Localized Specific Absorption Rate (SAR) of this portable wireless device has been measured in all cases requested by the relevant standards cited in Clause 6.2 of this report. Maximum localized SAR is below exposure limits specified in the relevant standards cited in Clause 6.1 of this test report.

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

No. RZA2008-0295

Page 20 of 81

**10 MEASUREMENT UNCERTAINTY**

No.	a	Type	c	d	e=f(d, k)	f	h=cxf / e	k
	Uncertainty Component		Tol. (±%)	Prob. Dist	Div.	c <sub>1</sub> (1g)	1g u (± %)	v <sub>1</sub>
1	System repetivity	A	0.5	N	1	1	0.5	9
Measurement system								
2	Probe Calibration	B	5	N	2	1	2.5	∞
3	Axial isotropy	B	4.7	R	$\sqrt{3}$	(1-cp) <sup>1/2</sup>	4.3	∞
4	Hemisphere Isotropy	B	9.4	R	$\sqrt{3}$	$\sqrt{C_P}$		∞
5	Boundary Effect	B	0.4	R	$\sqrt{3}$	1	0.23	∞
6	Linearity	B	4.7	R	$\sqrt{3}$	1	2.7	∞
7	System Detection Limits	B	1.0	R	$\sqrt{3}$	1	0.6	∞
8	Readout Electronics	B	1.0	N	1	1	1.0	∞
9	RF Ambient Conditions	B	3.0	R	$\sqrt{3}$	1	1.73	∞
10	Probe Positioner Mechanical Tolerance	B	0.4	R	$\sqrt{3}$	1	0.2	∞
11	Probe Positioning with respect to Phantom Shell	B	2.9	R	$\sqrt{3}$	1	1.7	∞
12	Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	B	3.9	R	$\sqrt{3}$	1	2.3	∞
Test Sample Related								
13	Test Sample Positioning	A	4.9	N	1	1	4.9	N-1
14	Device Holder Uncertainty	A	6.1	N	1	1	6.1	N-1
15	Output Power Variation-SAR drift measurement	B	5.0	R	$\sqrt{3}$	1	2.9	∞
Phantom and Tissue Parameters								
16	Phantom Uncertainty(shape and thickness tolerances)	B	1.0	R	$\sqrt{3}$	1	0.6	∞
17	Liquid Conductivity-deviation from target values	B	5.0	R	$\sqrt{3}$	0.64	1.7	∞
18	Liquid Conductivity-measurement uncertainty	B	5.0	N	1	0.64	1.7	M
19	Liquid Permittivity-deviation from target values	B	5.0	R	$\sqrt{3}$	0.6	1.7	∞
20	Liquid Permittivity- measurement uncertainty	B	5.0	N	1	0.6	1.7	M
Combined Standard Uncertainty				RSS			11.25	
Expanded Uncertainty (95 % CONFIDENCE INTERVAL)				K=2			22.5	

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

No. RZA2008-0295

Page 21 of 81

## 11 MAIN TEST INSTRUMENTS

**Table 14: List of Main Instruments**

No.	Name	Type	Serial Number	Calibration Date	Valid Period
01	Network analyzer	Agilent 8753E	US37390326	September 15, 2007	One year
02	Dielectric Probe Kit	Agilent 85070E	US44020115	No Calibration Requested	
03	Power meter	Agilent E4417A	GB41291714	March 16, 2007	One year
04	Power sensor	Agilent 8481H	MY41091316	March 16, 2007	One year
05	Signal Generator	HP 8341B	2730A00804	September 15, 2007	One year
06	Amplifier	IXA-020	0401	No Calibration Requested	
07	Validation Kit 835MHz	SPEAG D835V2	443	December 9, 2007	One year
08	BTS	E5515C	GB46490218	September 15, 2007	One year
09	E-field Probe	ET3DV6	1530	September 26, 2007	One year
10	DAE	DAE3	452	September 6, 2007	One year

## 12 TEST PERIOD

The test is performed from Mar. 14<sup>th</sup>, 2008 to Mar. 15<sup>th</sup>, 2008.

## 13 TEST LOCATION

The test is performed at TA Technology (Shanghai) Co., Ltd.

**\*\*\*END OF REPORT BODY\*\*\***

## ANNEX A: MEASUREMENT PROCESS

The evaluation was performed with the following procedure:

Step 1: Measurement of the SAR value at a fixed location above the ear point was measured and was used as a reference value for assessing the power drop.

Step 2: The SAR distribution at the exposed side of the head was measured at a distance of 3.9 mm from the inner surface of the shell. The area covered the entire dimension of the head and the horizontal grid spacing was 20 mm x 20 mm. Based on this data, the area of the maximum absorption was determined by spline interpolation.

Step 3: Around this point, a volume of 32 mm x 32 mm x 34 mm was assessed by measuring 7 x 7 x 7 points. On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure:

- a. The data at the surface were extrapolated, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
- b. The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot"-condition (in x ~ y and z-directions). The volume was integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the average.
- c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement the SAR value at the same location as in Step 1. If the value changed by more than 5%, the evaluation is repeated.


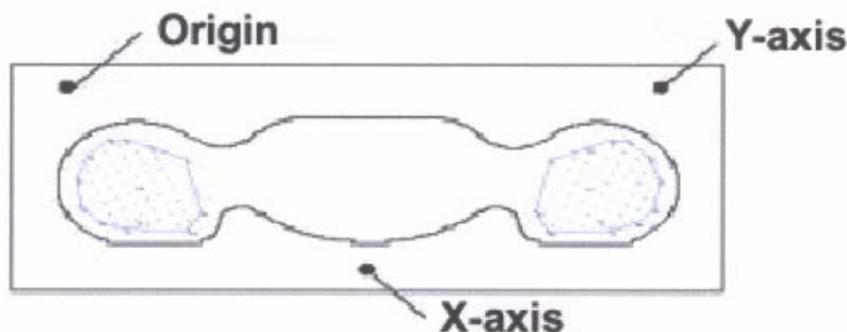


Figure 6 SAR Measurement Points in Area Scan

## ANNEX B: TEST LAYOUT



Picture 1 Specific Absorption Rate Test Layout

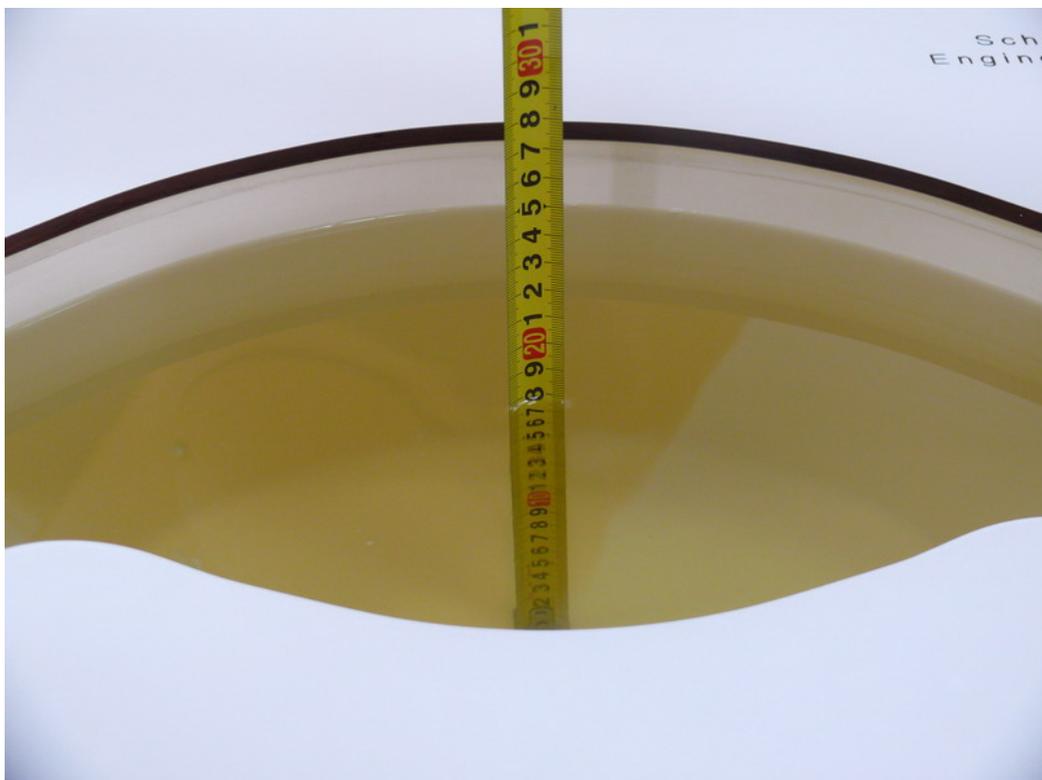

Picture 2 Liquid depth in the Flat Phantom (835 MHz)

## ANNEX C: GRAPH RESULTS

### CDMA Cellular Left Cheek High

Communication System: CDMA Cellular; Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 848.31$  MHz;  $\sigma = 0.935$  mho/m;  $\epsilon_r = 42.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: ET3DV6 - SN1530; ConvF(6.85, 6.85, 6.85);

Electronics: DAE3 Sn452;

**Cheek High/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.19 mW/g

**Cheek High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.4 V/m; Power Drift = -0.198 dB

Peak SAR (extrapolated) = 1.50 W/kg

**SAR(1 g) = 1.09 mW/g; SAR(10 g) = 0.739 mW/g**

Maximum value of SAR (measured) = 1.17 mW/g

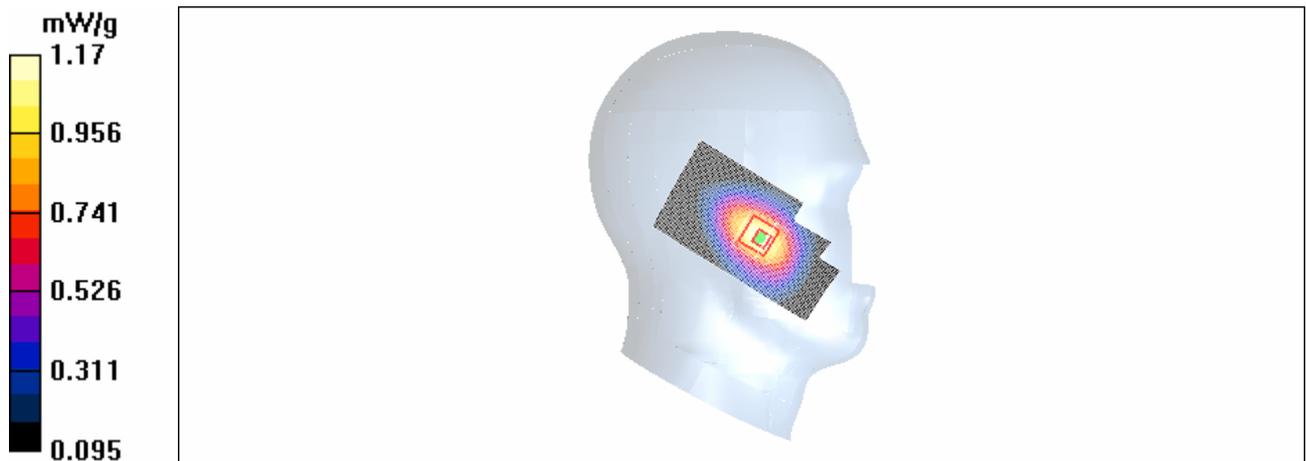


Figure 7 Left Hand Touch Cheek CDMA Cellular Channel 777

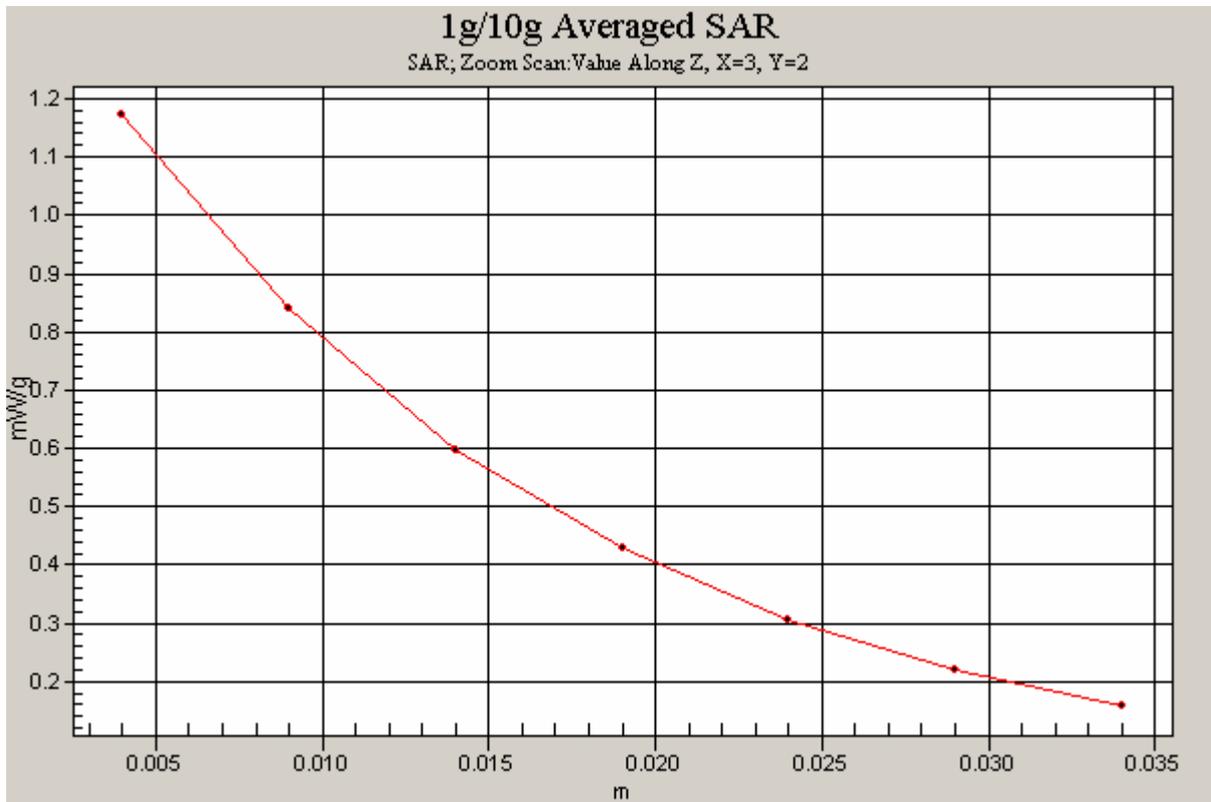


Figure 8 Z-Scan at power reference point (Left Hand Touch Cheek CDMA Cellular Channel 777)

### CDMA Cellular Left Cheek Middle

Communication System: CDMA Cellular; Frequency: 836.52 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.925$  mho/m;  $\epsilon_r = 42.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Probe: ET3DV6 – SN1530; ConvF(6.85, 6.85, 6.85);  
Electronics: DAE3 Sn452;

**Cheek Middle/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 1.01 mW/g

**Cheek Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 13.4 V/m; Power Drift = 0.194 dB  
Peak SAR (extrapolated) = 1.41 W/kg  
**SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.684 mW/g**  
Maximum value of SAR (measured) = 1.09 mW/g

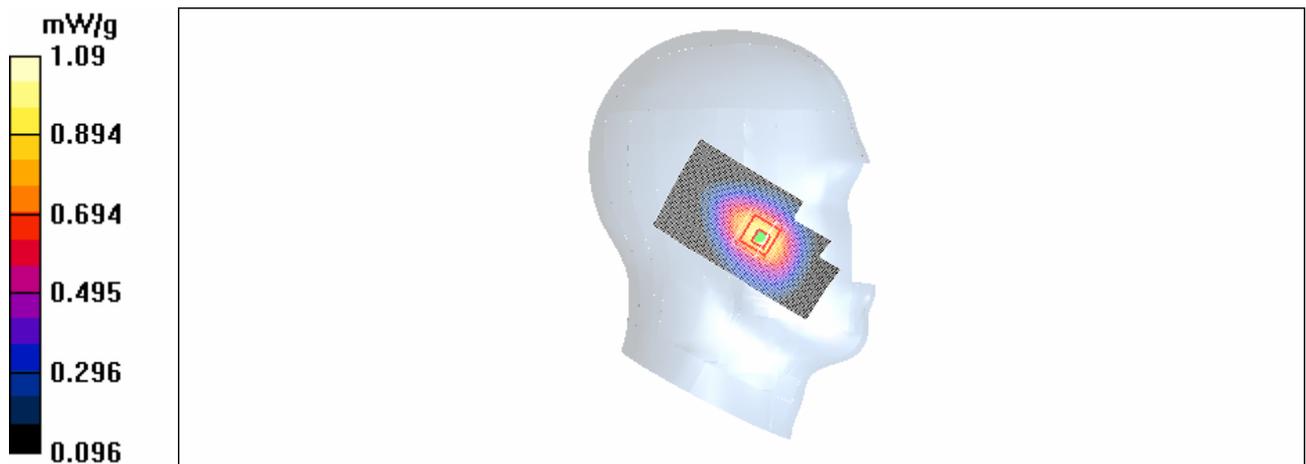


Figure 9 Left Hand Touch Cheek CDMA Cellular Channel 384

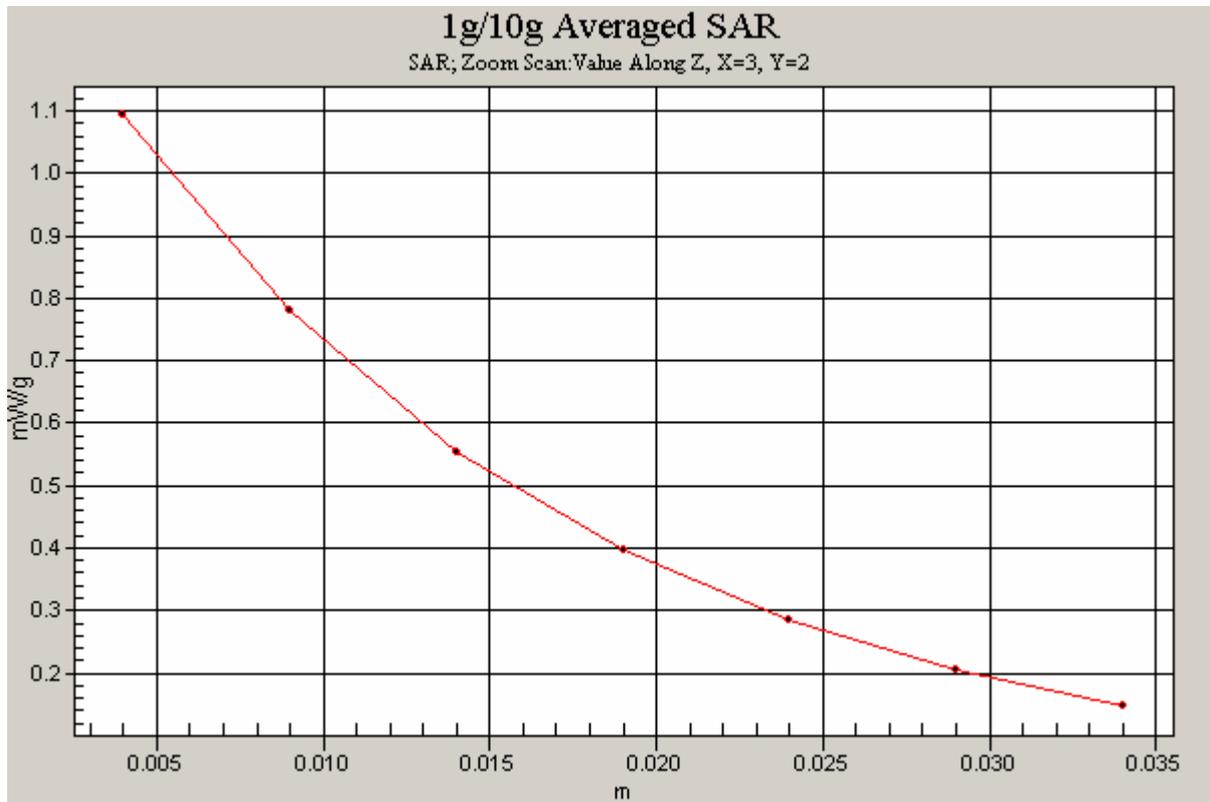


Figure 10 Z-Scan at power reference point (Left Hand Touch Cheek CDMA Cellular Channel 384)

### CDMA Cellular Left Cheek Low

Communication System: CDMA Cellular; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 825$  MHz;  $\sigma = 0.909$  mho/m;  $\epsilon_r = 42.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: ET3DV6 - SN1530; ConvF(6.85, 6.85, 6.85);

Electronics: DAE3 Sn452;

**Cheek Low/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.13 mW/g

**Cheek Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.2 V/m; Power Drift = 0.033 dB

Peak SAR (extrapolated) = 1.44 W/kg

**SAR(1 g) = 1.05 mW/g; SAR(10 g) = 0.714 mW/g**

Maximum value of SAR (measured) = 1.13 mW/g

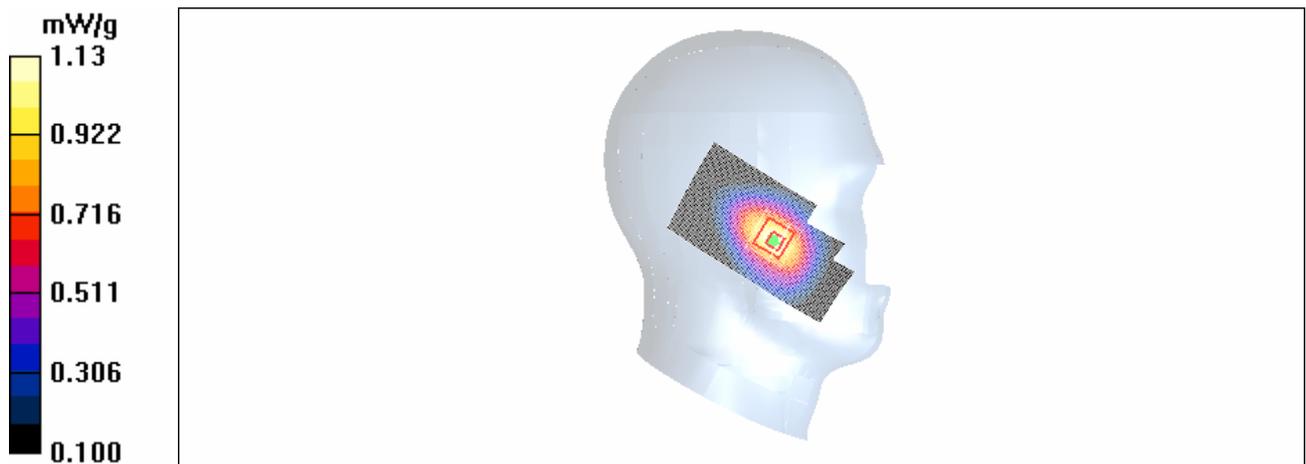


Figure 11 Left Hand Touch Cheek CDMA Cellular Channel 1013

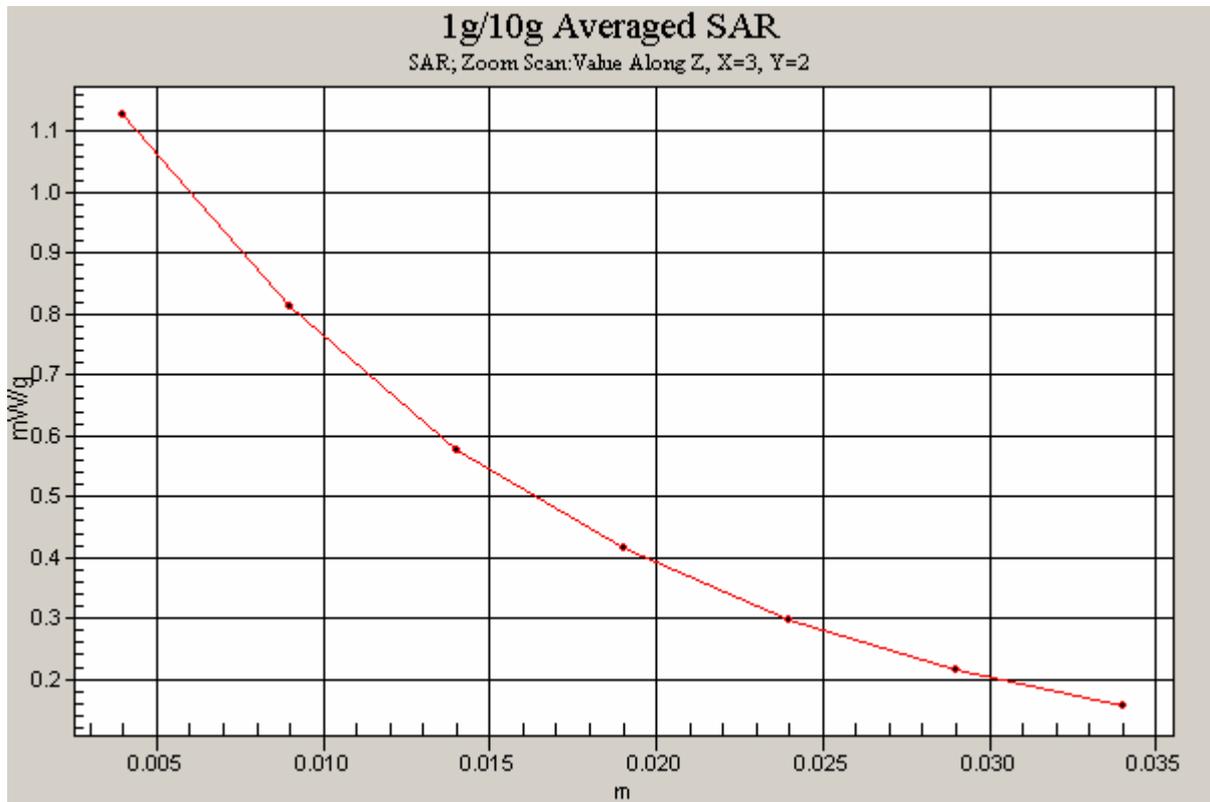


Figure 12 Z-Scan at power reference point (Left Hand Touch Cheek CDMA Cellular Channel 1013)

### CDMA Cellular Left Tilt High

Communication System: CDMA Cellular; Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 848.31$  MHz;  $\sigma = 0.935$  mho/m;  $\epsilon_r = 42.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: ET3DV6 - SN1530; ConvF(6.85, 6.85, 6.85);

Electronics: DAE3 Sn452;

**Tilt High/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.503 mW/g

**Tilt High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.3 V/m; Power Drift = 0.171 dB

Peak SAR (extrapolated) = 0.629 W/kg

**SAR(1 g) = 0.475 mW/g; SAR(10 g) = 0.336 mW/g**

Maximum value of SAR (measured) = 0.509 mW/g

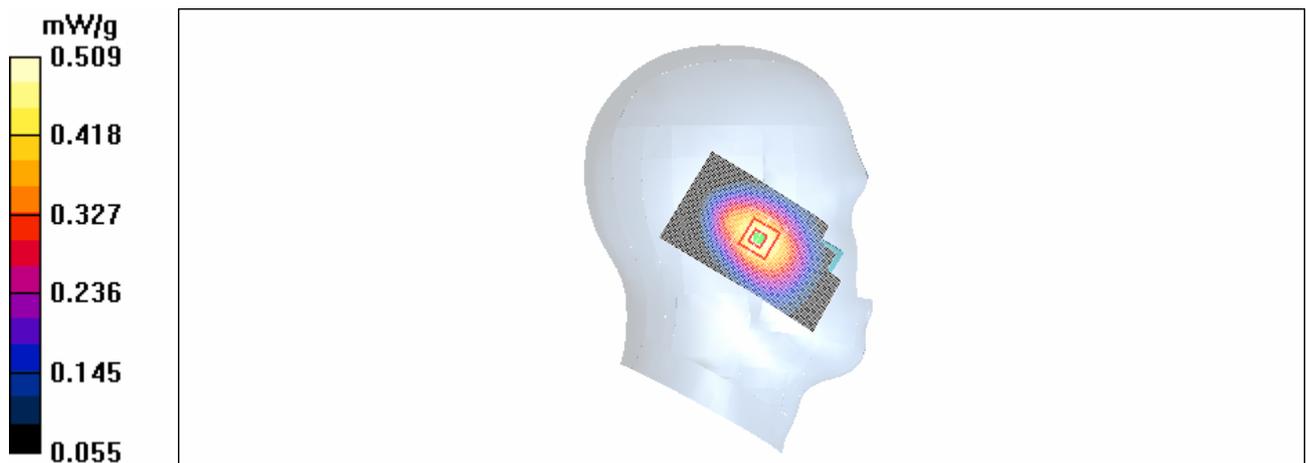


Figure 13 Left Hand Tilt 15° CDMA Cellular Channel 777

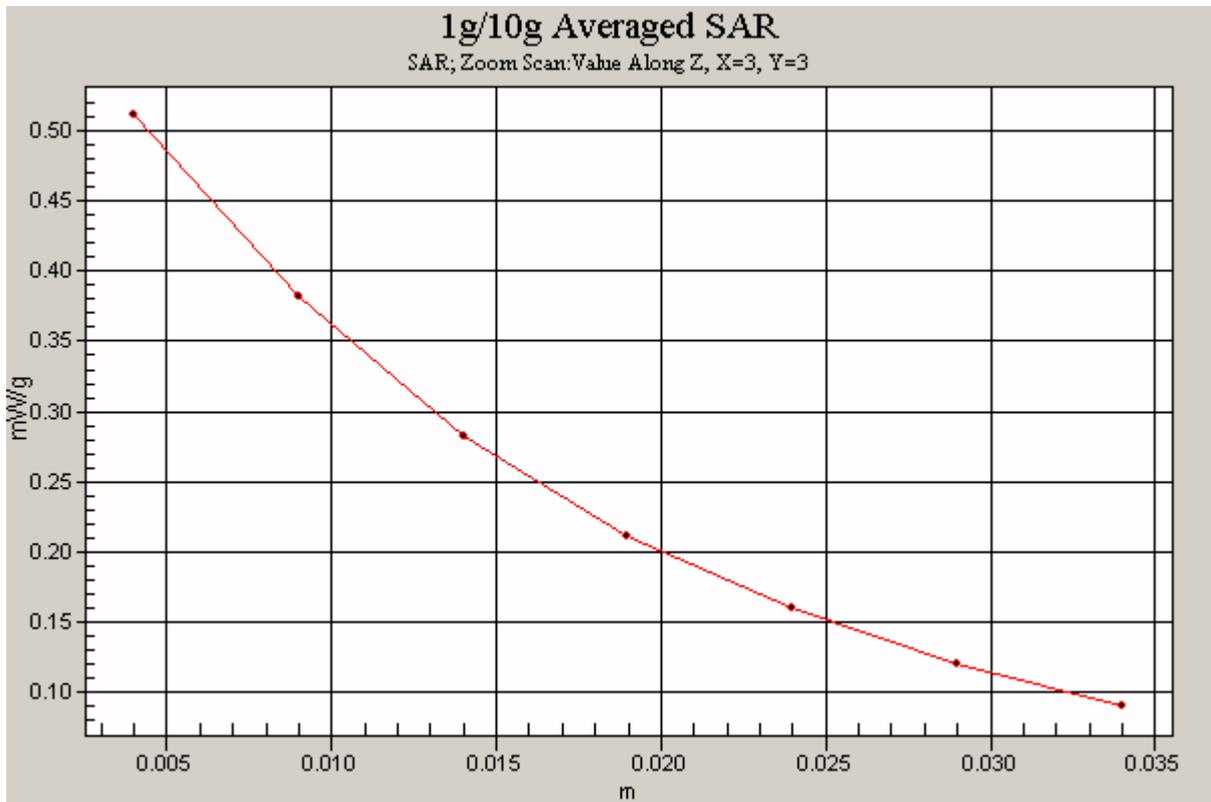


Figure 14 Z-Scan at power reference point (Left Hand Tilt 15° CDMA Cellular Channel 777)

### CDMA Cellular Left Tilt Middle

Communication System: CDMA Cellular; Frequency: 836.52 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.925$  mho/m;  $\epsilon_r = 42.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Probe: ET3DV6 - SN1530; ConvF(6.85, 6.85, 6.85);  
Electronics: DAE3 Sn452;

**Tilt Middle/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 0.508 mW/g

**Tilt Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 16.5 V/m; Power Drift = 0.123 dB  
Peak SAR (extrapolated) = 0.620 W/kg  
**SAR(1 g) = 0.463 mW/g; SAR(10 g) = 0.326 mW/g**  
Maximum value of SAR (measured) = 0.499 mW/g

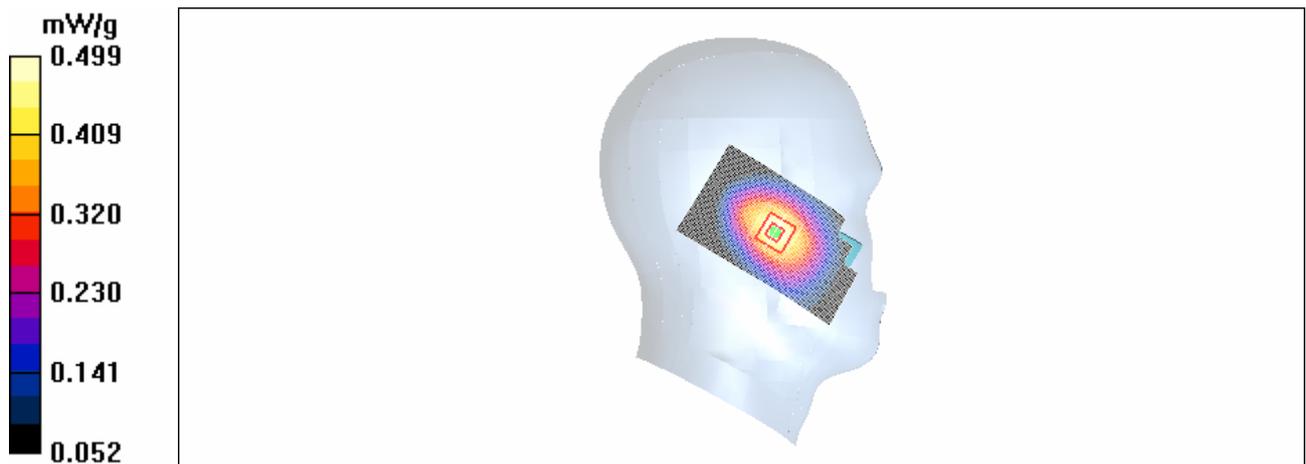


Figure 15 Left Hand Tilt 15° CDMA Cellular Channel 384

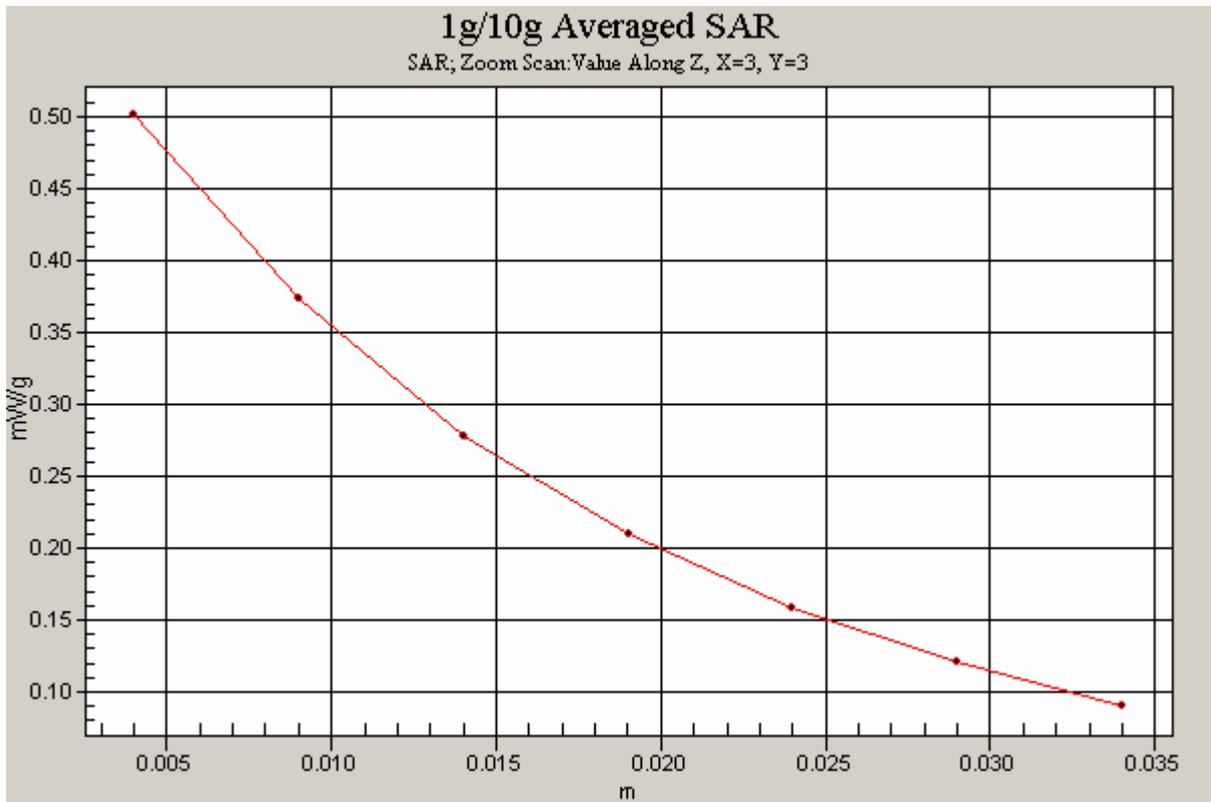


Figure 16 Z-Scan at power reference point (Left Hand Tilt 15° CDMA Cellular Channel 384)

### CDMA Cellular Left Tilt Low

Communication System: CDMA Cellular; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 825$  MHz;  $\sigma = 0.909$  mho/m;  $\epsilon_r = 42.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: ET3DV6 - SN1530; ConvF(6.85, 6.85, 6.85);

Electronics: DAE3 Sn452;

**Tilt Low/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.538 mW/g

**Tilt Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.2 V/m; Power Drift = -0.150 dB

Peak SAR (extrapolated) = 0.713 W/kg

**SAR(1 g) = 0.534 mW/g; SAR(10 g) = 0.376 mW/g**

Maximum value of SAR (measured) = 0.575 mW/g

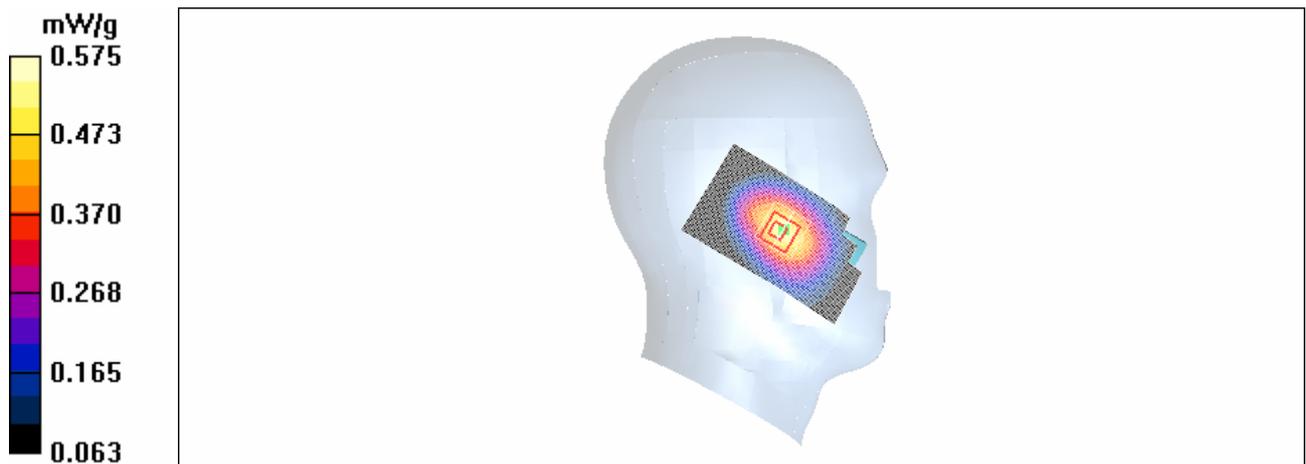


Figure 17 Left Hand Tilt 15° CDMA Cellular Channel 1013

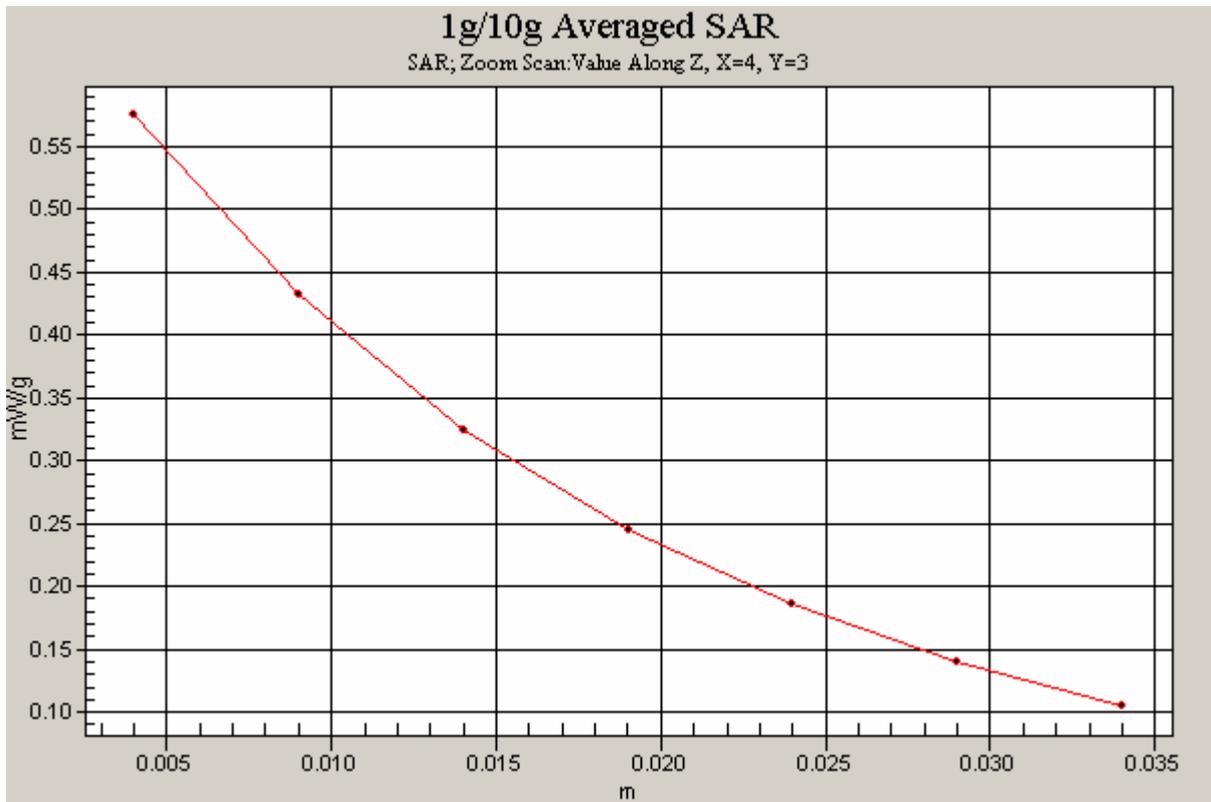


Figure18 Z-Scan at power reference point (Left Hand Tilt 15° CDMA Cellular Channel 1013)

### CDMA Cellular Right Cheek High

Communication System: CDMA Cellular; Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 848.31$  MHz;  $\sigma = 0.935$  mho/m;  $\epsilon_r = 42.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: ET3DV6 - SN1530; ConvF(6.85, 6.85, 6.85);

Electronics: DAE3 Sn452;

**Cheek High/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.19 mW/g

**Cheek High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.9 V/m; Power Drift = -0.172 dB

Peak SAR (extrapolated) = 1.44 W/kg

**SAR(1 g) = 1.06 mW/g; SAR(10 g) = 0.726 mW/g**

Maximum value of SAR (measured) = 1.15 mW/g

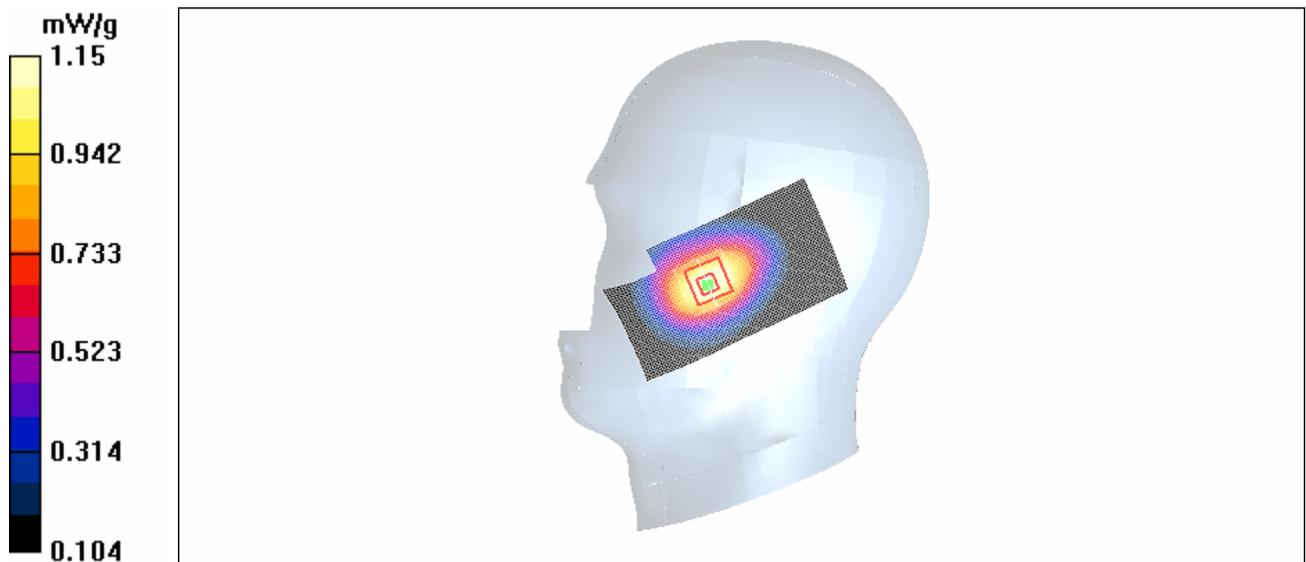


Figure 19 Right Hand Touch Cheek CDMA Cellular Channel 777

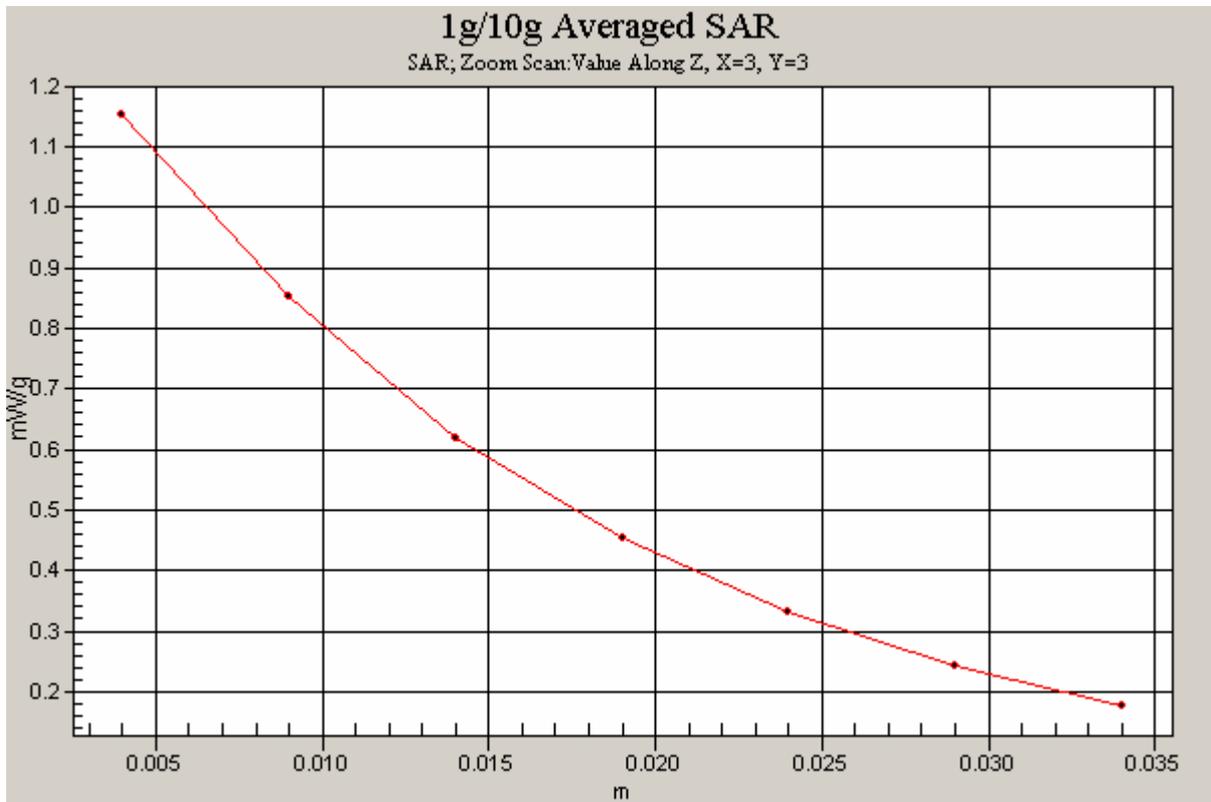


Figure 20 Z-Scan at power reference point (Right Hand Touch Cheek CDMA Cellular Channel 777)

### CDMA Cellular Right Cheek Middle

Communication System: CDMA Cellular; Frequency: 836.52 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.925$  mho/m;  $\epsilon_r = 42.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Probe: ET3DV6 - SN1530; ConvF(6.85, 6.85, 6.85);  
Electronics: DAE3 Sn452;

**Cheek Middle/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 0.957 mW/g

**Cheek Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 12.3 V/m; Power Drift = -0.178 dB  
Peak SAR (extrapolated) = 1.27 W/kg  
**SAR(1 g) = 0.955 mW/g; SAR(10 g) = 0.659 mW/g**  
Maximum value of SAR (measured) = 1.02 mW/g

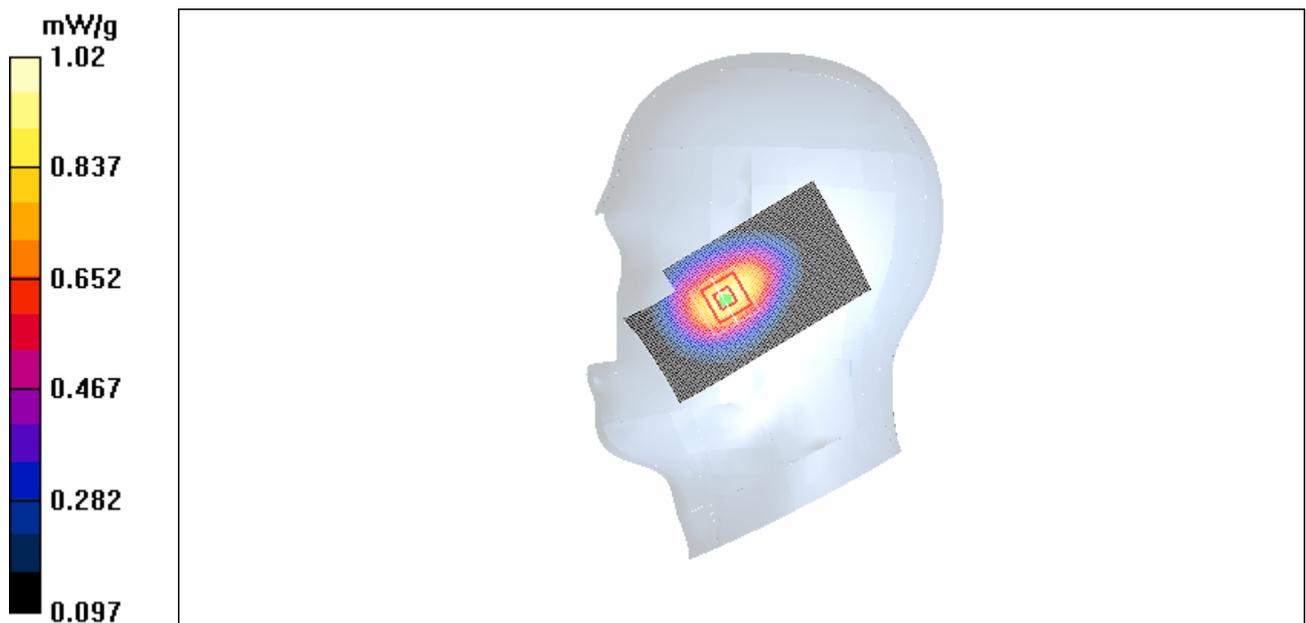


Figure 21 Right Hand Touch Cheek CDMA Cellular Channel 384

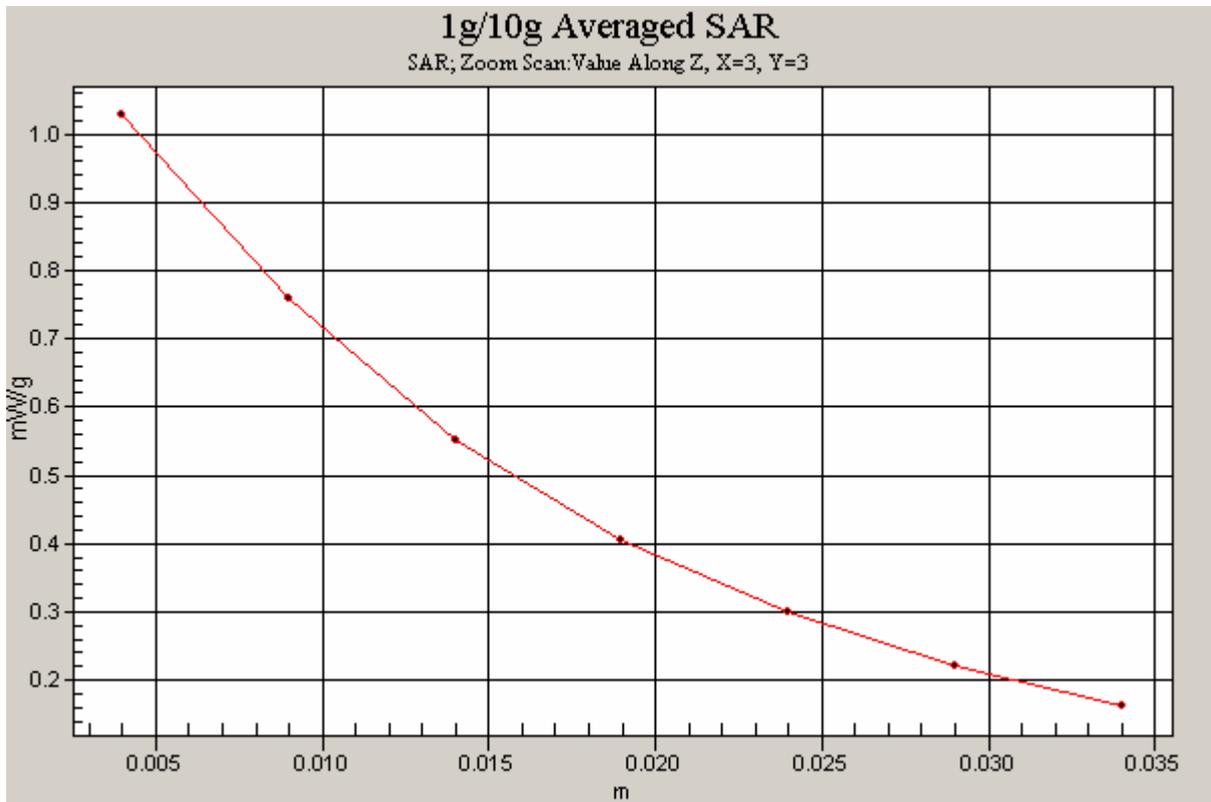


Figure 22 Z-Scan at power reference point (Right Hand Touch Cheek CDMA Cellular Channel 384)

### CDMA Cellular Right Cheek Low

Communication System: CDMA Cellular; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 825$  MHz;  $\sigma = 0.909$  mho/m;  $\epsilon_r = 42.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: ET3DV6 - SN1530; ConvF(6.85, 6.85, 6.85);

Electronics: DAE3 Sn452;

**Cheek Low/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.07 mW/g

**Cheek Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.1 V/m; Power Drift = 0.028 dB

Peak SAR (extrapolated) = 1.34 W/kg

**SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.694 mW/g**

Maximum value of SAR (measured) = 1.08 mW/g

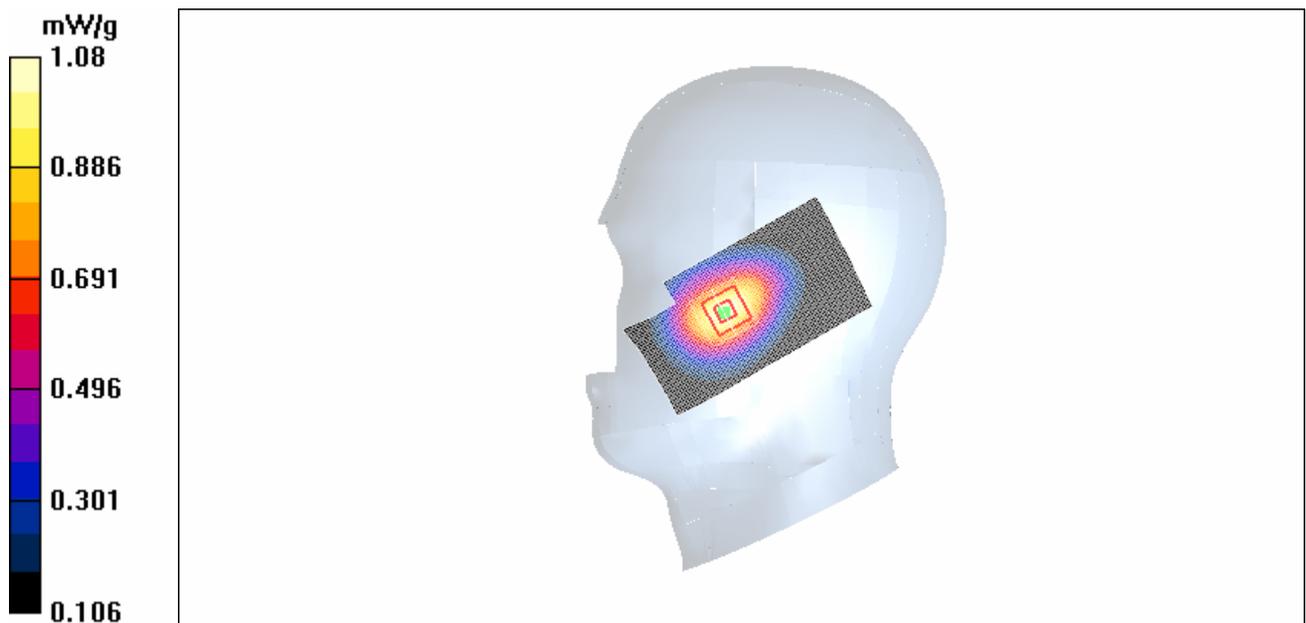


Figure 23 Right Hand Touch Cheek CDMA Cellular Channel 1013

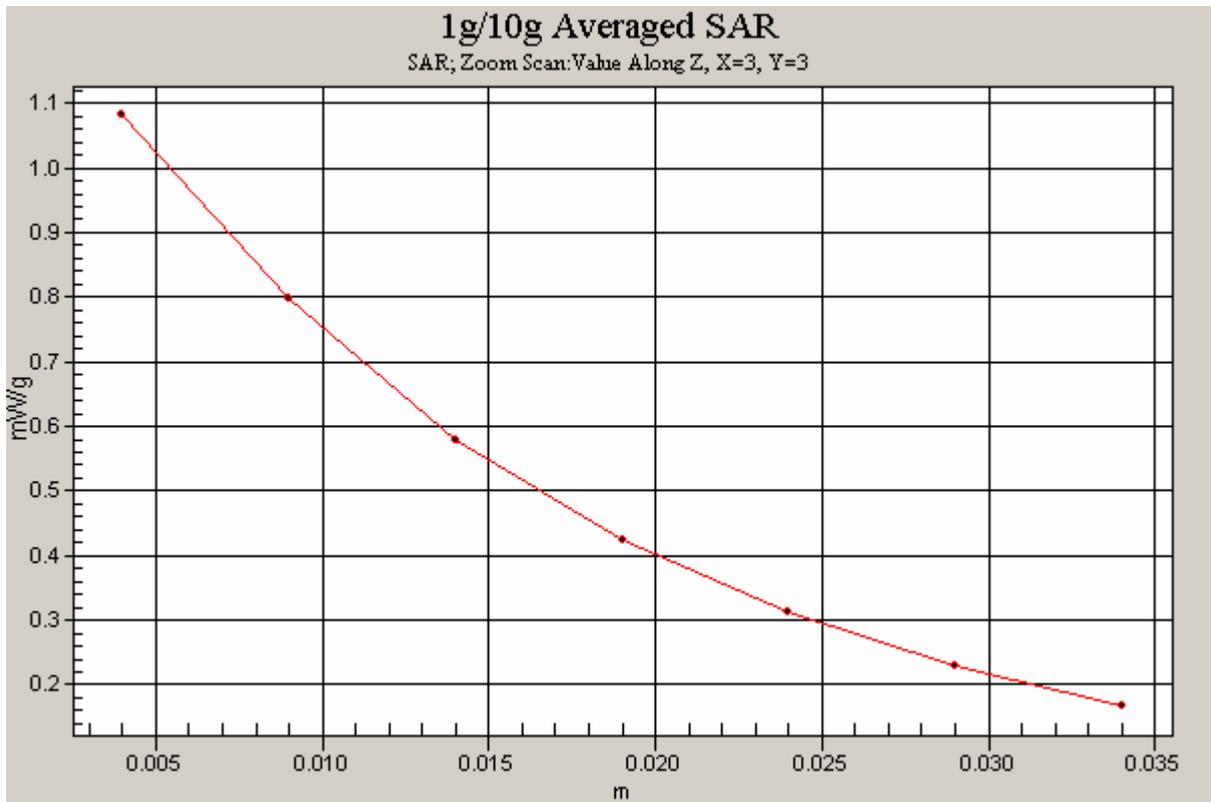


Figure 24 Z-Scan at power reference point (Right Hand Touch Cheek CDMA Cellular Channel 1013)

### CDMA Cellular Right Tilt High

Communication System: CDMA Cellular; Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 848.31$  MHz;  $\sigma = 0.935$  mho/m;  $\epsilon_r = 42.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: ET3DV6 - SN1530; ConvF(6.85, 6.85, 6.85);

Electronics: DAE3 Sn452;

**Tilt High/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.492 mW/g

**Tilt High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.2 V/m; Power Drift = -0.042 dB

Peak SAR (extrapolated) = 0.652 W/kg

**SAR(1 g) = 0.487 mW/g; SAR(10 g) = 0.343 mW/g**

Maximum value of SAR (measured) = 0.522 mW/g

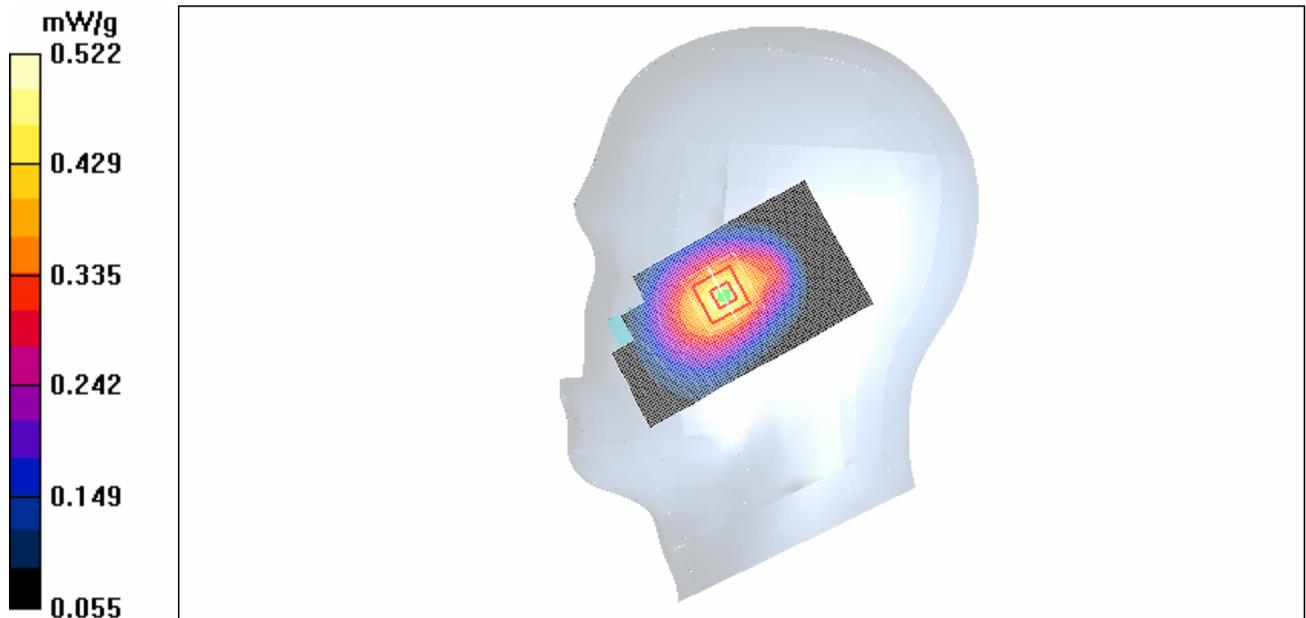


Figure 25 Right Hand Tilt 15° CDMA Cellular Channel 777

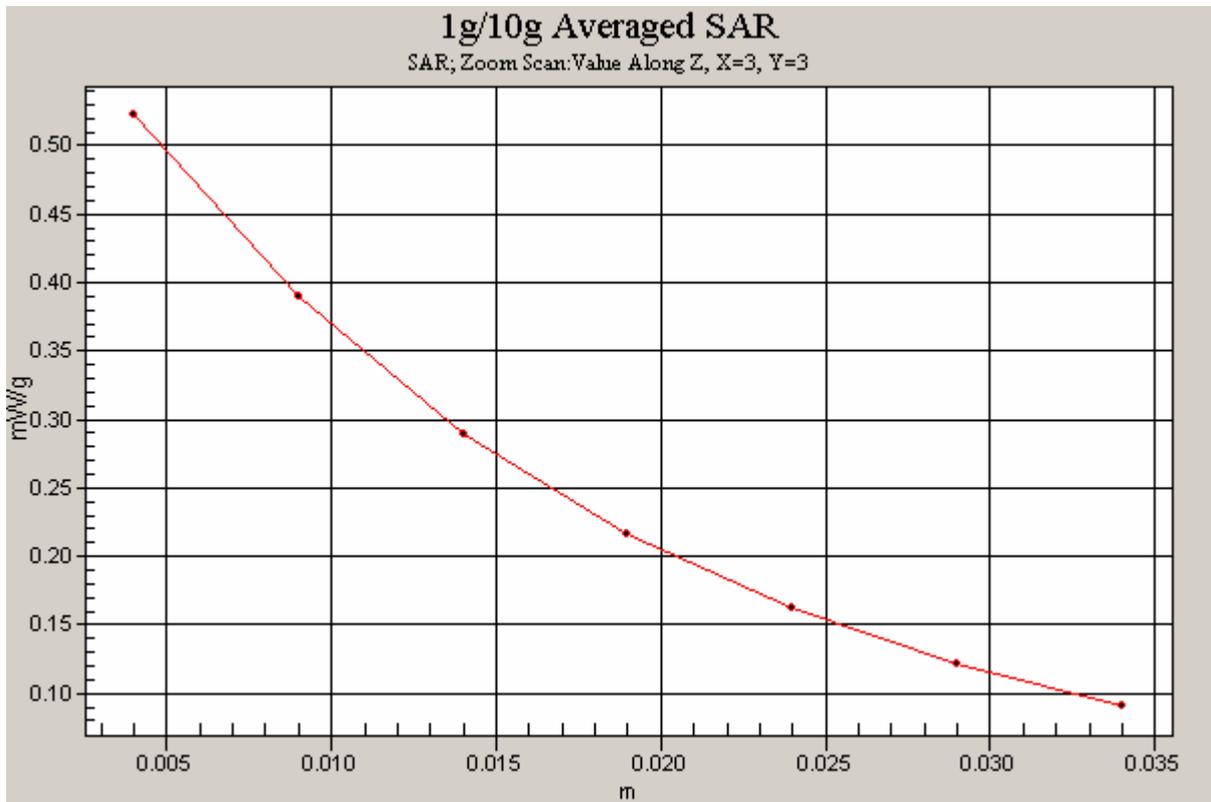


Figure 26 Z-Scan at power reference point (Right Hand Tilt 15° CDMA Cellular Channel 777)

### CDMA Cellular Right Tilt Middle

Communication System: CDMA Cellular; Frequency: 836.52 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.925$  mho/m;  $\epsilon_r = 42.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Probe: ET3DV6 - SN1530; ConvF(6.85, 6.85, 6.85);  
Electronics: DAE3 Sn452;

**Tilt Middle/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 0.551 mW/g

**Tilt Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 18.9 V/m; Power Drift = -0.087 dB  
Peak SAR (extrapolated) = 0.699 W/kg  
**SAR(1 g) = 0.519 mW/g; SAR(10 g) = 0.362 mW/g**  
Maximum value of SAR (measured) = 0.557 mW/g

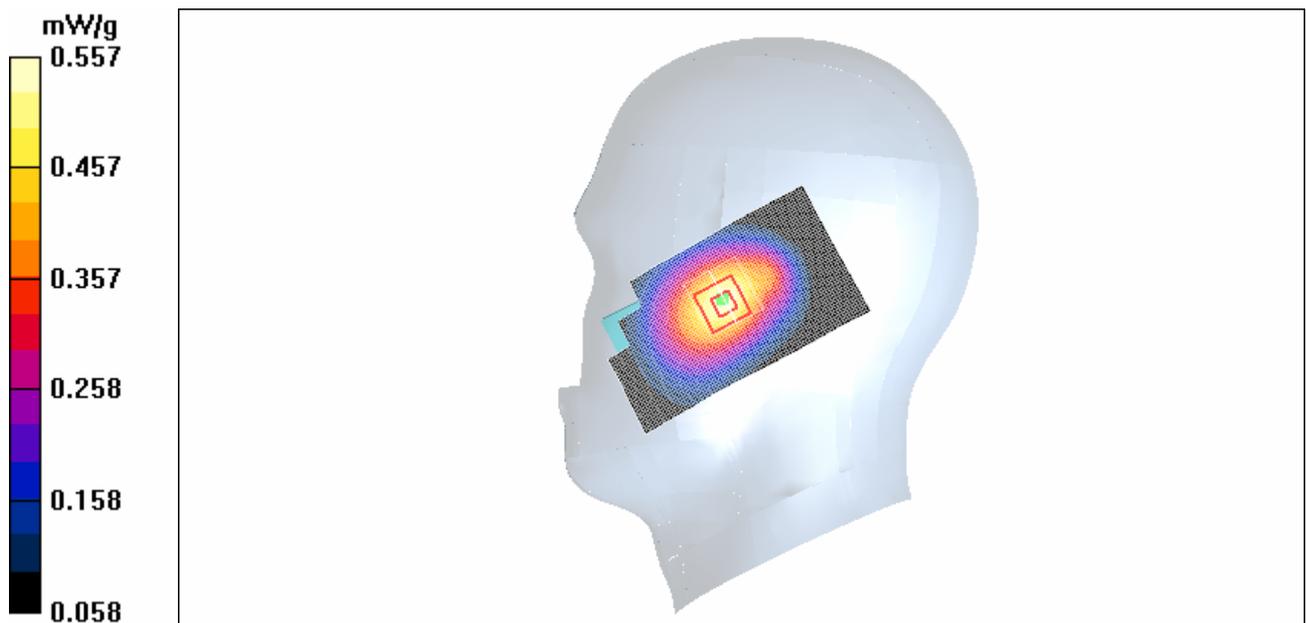


Figure 27 Right Hand Tilt 15° CDMA Cellular Channel 384

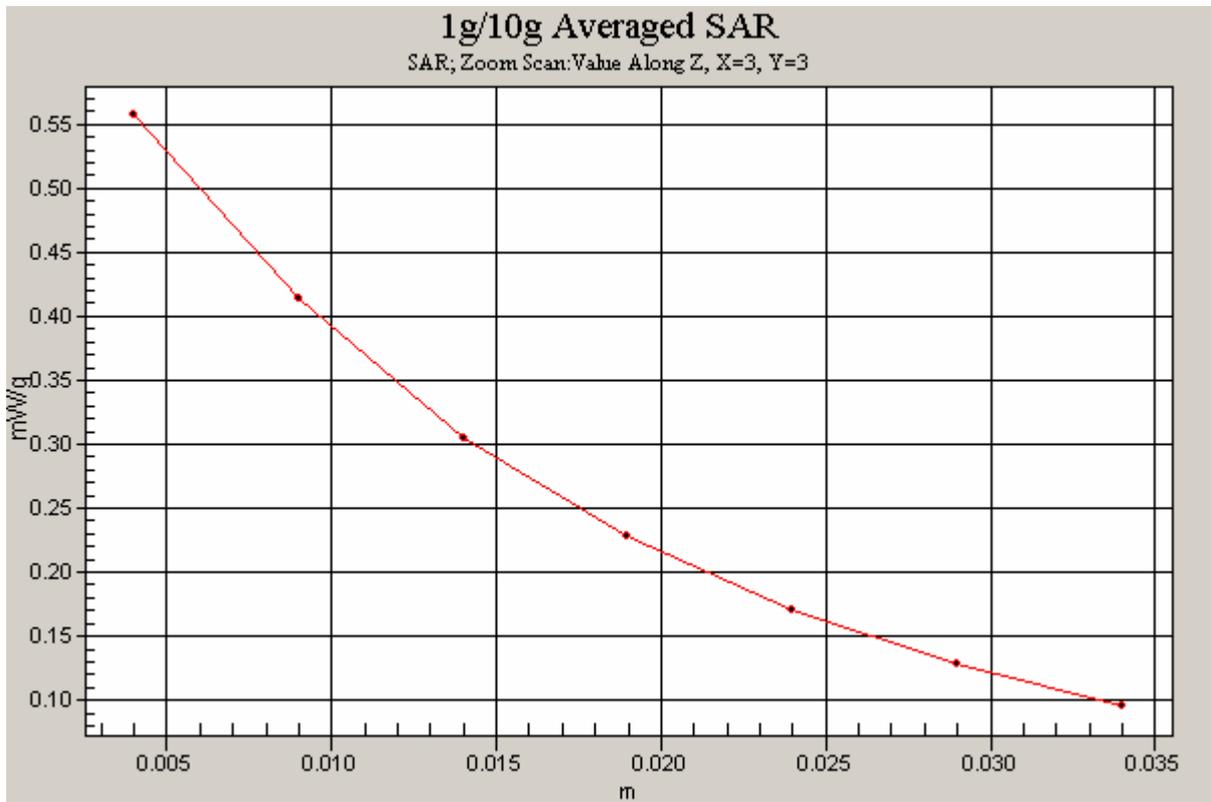


Figure 28 Z-Scan at power reference point (Right Hand Tilt 15° CDMA Cellular Channel 384)

### CDMA Cellular Right Tilt Low

Communication System: CDMA Cellular; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 825$  MHz;  $\sigma = 0.909$  mho/m;  $\epsilon_r = 42.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: ET3DV6 - SN1530; ConvF(6.85, 6.85, 6.85);

Electronics: DAE3 Sn452; 76

**Tilt Low/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.504 mW/g

**Tilt Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.8 V/m; Power Drift = -0.024 dB

Peak SAR (extrapolated) = 0.717 W/kg

**SAR(1 g) = 0.543 mW/g; SAR(10 g) = 0.386 mW/g**

Maximum value of SAR (measured) = 0.582 mW/g

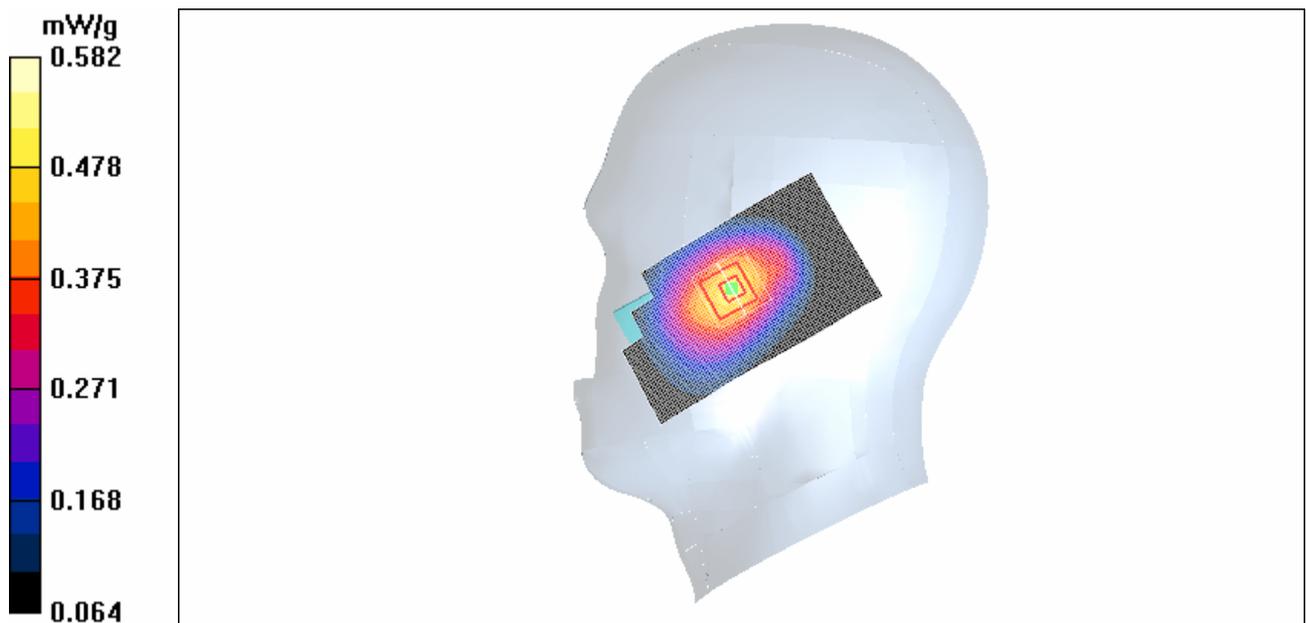


Figure 29 Right Hand Tilt 15° CDMA Cellular Channel 1013

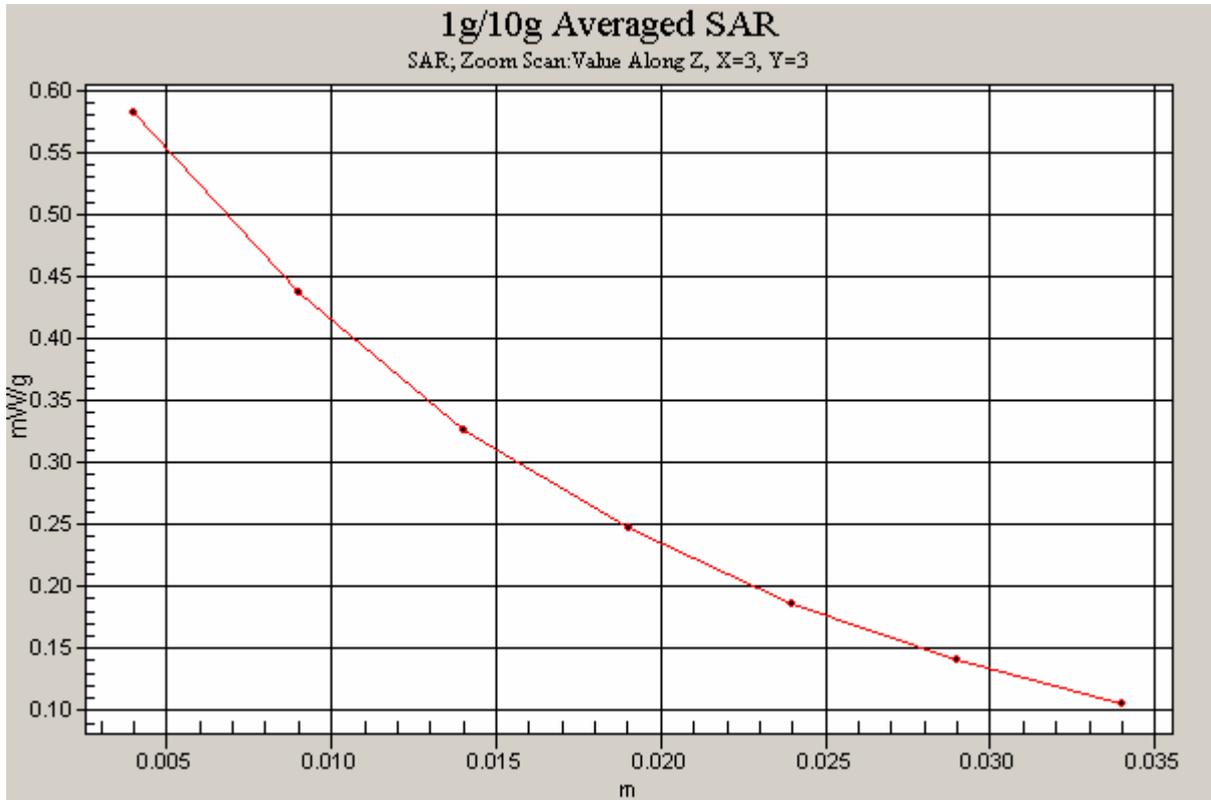


Figure 30 Z-Scan at power reference point (Right Hand Tilt 15° CDMA Cellular Channel 1013)

### CDMA Cellular Towards Ground High

Communication System: CDMA Cellular; Frequency: 848.31 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 848.31$  MHz;  $\sigma = 1.01$  mho/m;  $\epsilon_r = 55.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: ET3DV6 - SN1530; ConvF(6.52, 6.52, 6.52);

Electronics: DAE3 Sn452;

**Towards ground, High frequency /Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.870 mW/g

**Towards ground, High frequency/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.0 V/m; Power Drift = 0.107 dB

Peak SAR (extrapolated) = 1.44 W/kg

**SAR(1 g) = 0.682 mW/g; SAR(10 g) = 0.495 mW/g**

Maximum value of SAR (measured) = 0.724 mW/g

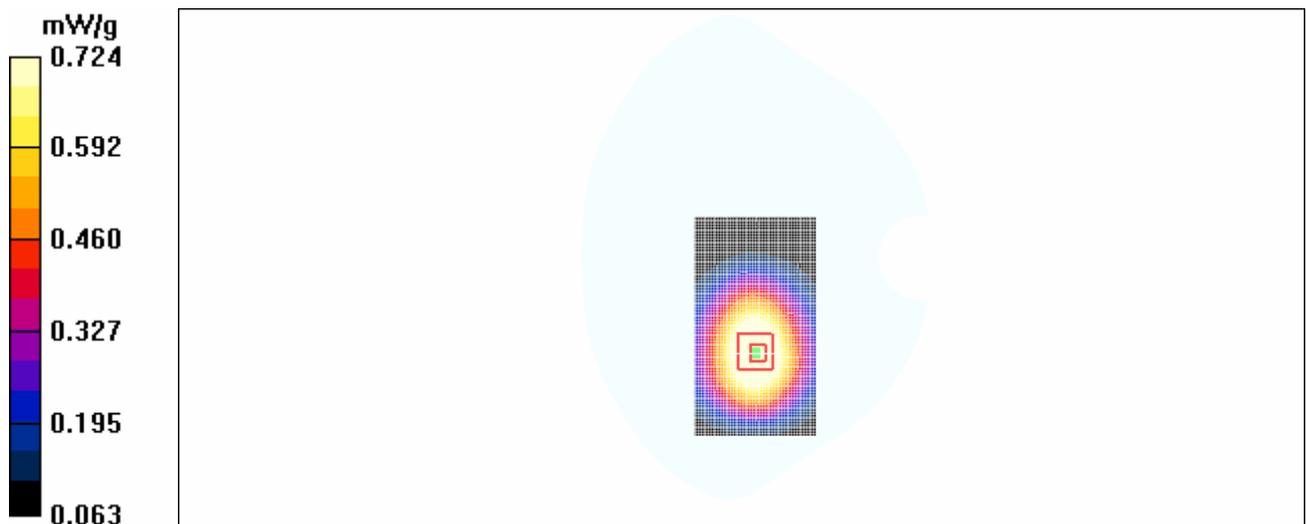


Figure 31 Body, Towards Ground, CDMA Cellular Channel 777

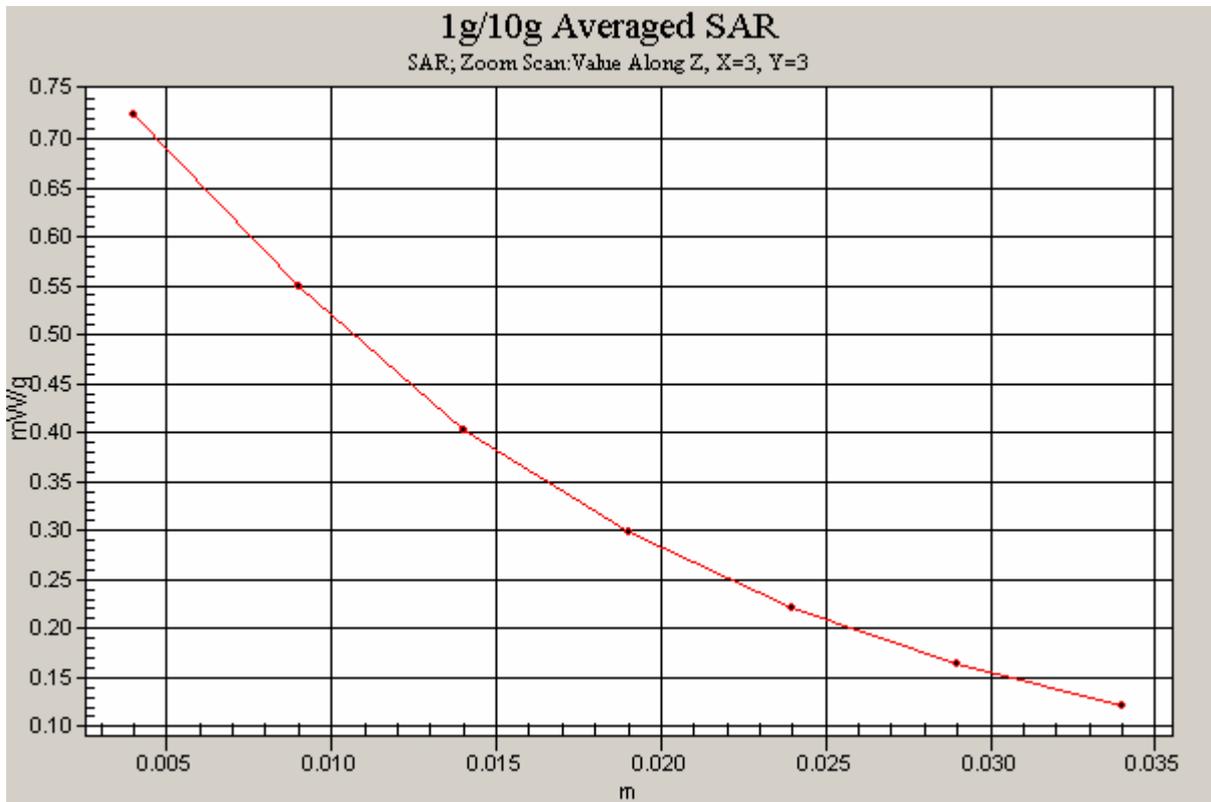


Figure 32 Z-Scan at power reference point (Body, Towards Ground, CDMA Cellular Channel 777)

### CDMA Cellular Towards Ground Middle

Communication System: CDMA Cellular; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.996$  mho/m;  $\epsilon_r = 56$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: ET3DV6 - SN1530; ConvF(6.52, 6.52, 6.52);

Electronics: DAE3 Sn452;

**Towards ground, Middle frequency /Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.820 mW/g

**Towards ground, Middle frequency /Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.7 V/m; Power Drift = -0.096 dB

Peak SAR (extrapolated) = 0.974 W/kg

**SAR(1 g) = 0.773 mW/g; SAR(10 g) = 0.558 mW/g**

Maximum value of SAR (measured) = 0.822 mW/g

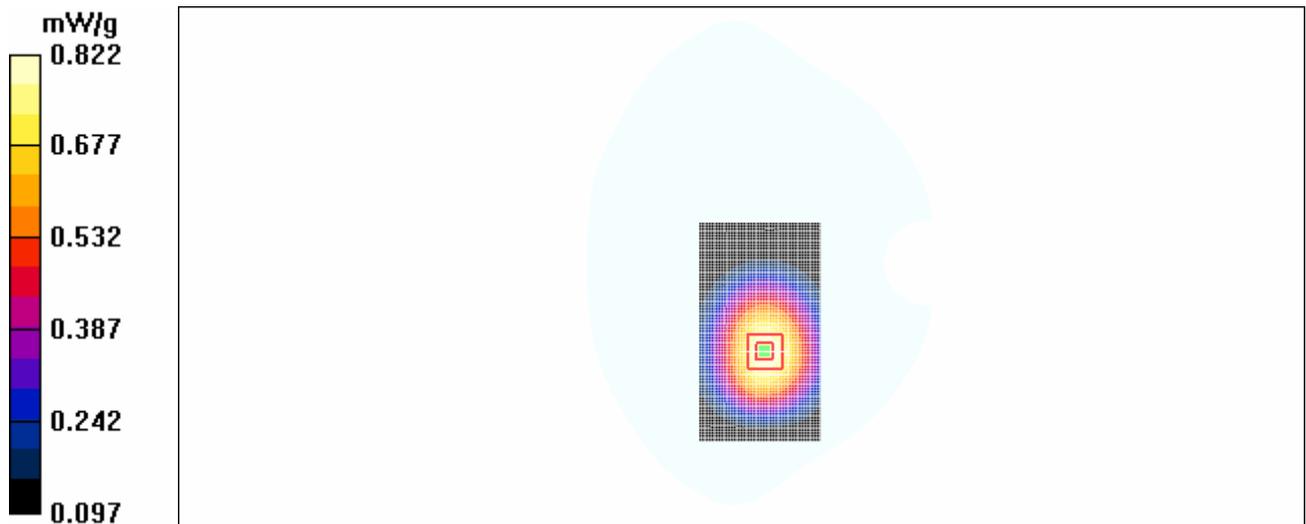


Figure 33 Body, Towards Ground, CDMA Cellular Channel 384

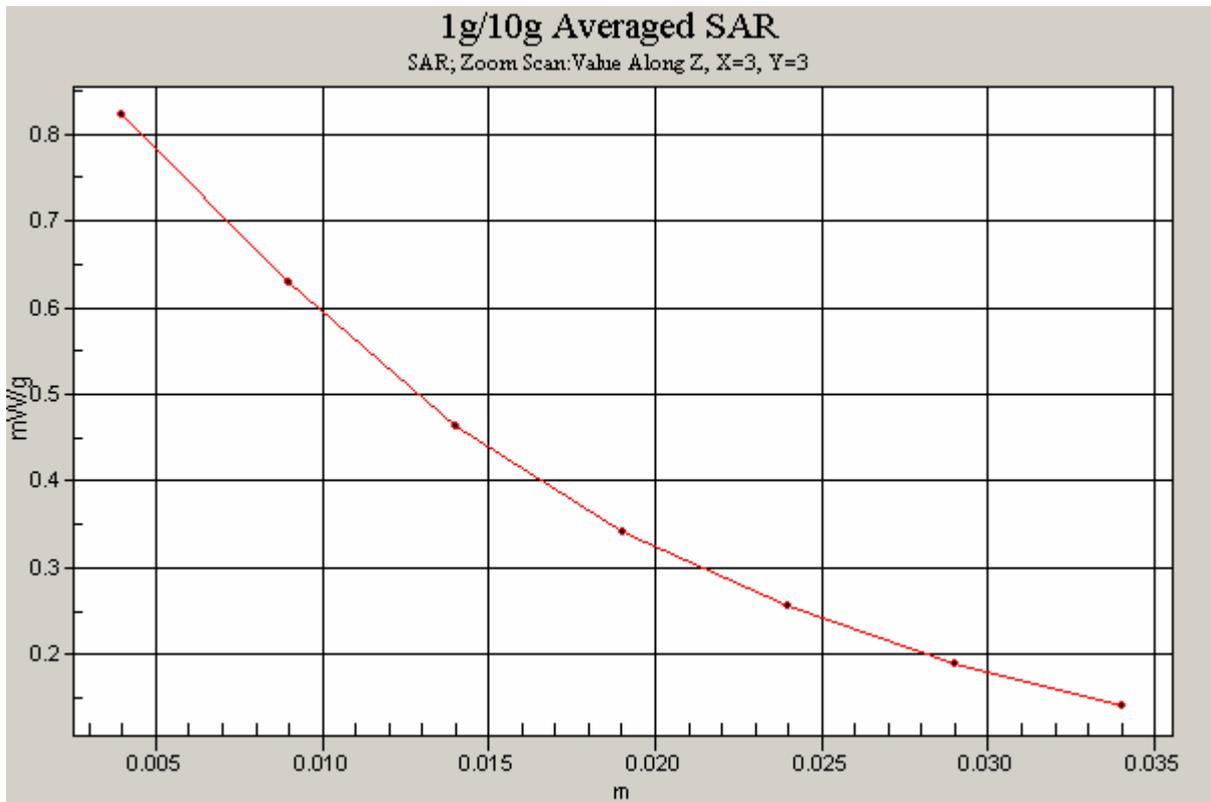


Figure 34 Z-Scan at power reference point (Body, Towards Ground, CDMA Cellular Channel 384)

### CDMA Cellular Towards Ground Low

Communication System: CDMA Cellular; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 825$  MHz;  $\sigma = 0.985$  mho/m;  $\epsilon_r = 56$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: ET3DV6 - SN1530; ConvF(6.52, 6.52, 6.52);

Electronics: DAE3 Sn452;

**Towards ground, Low frequency /Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.09 mW/g

**Towards ground, Low frequency /Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.3 V/m; Power Drift = 0.023 dB

Peak SAR (extrapolated) = 1.22 W/kg

**SAR(1 g) = 0.955 mW/g; SAR(10 g) = 0.690 mW/g**

Maximum value of SAR (measured) = 1.03 mW/g

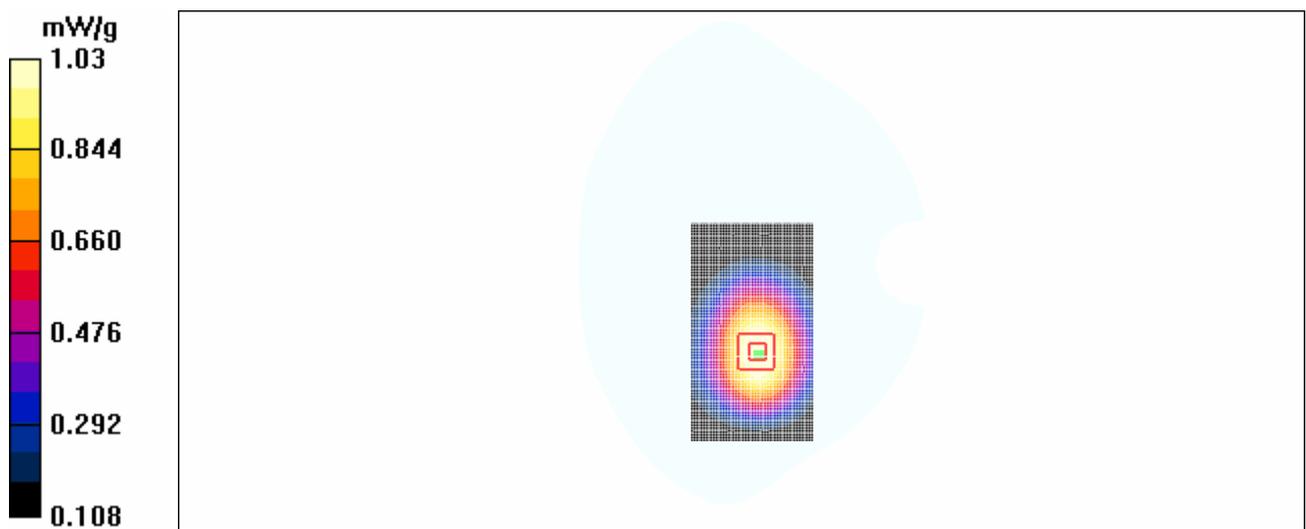


Figure 35 Body, Towards Ground, CDMA Cellular Channel 1013

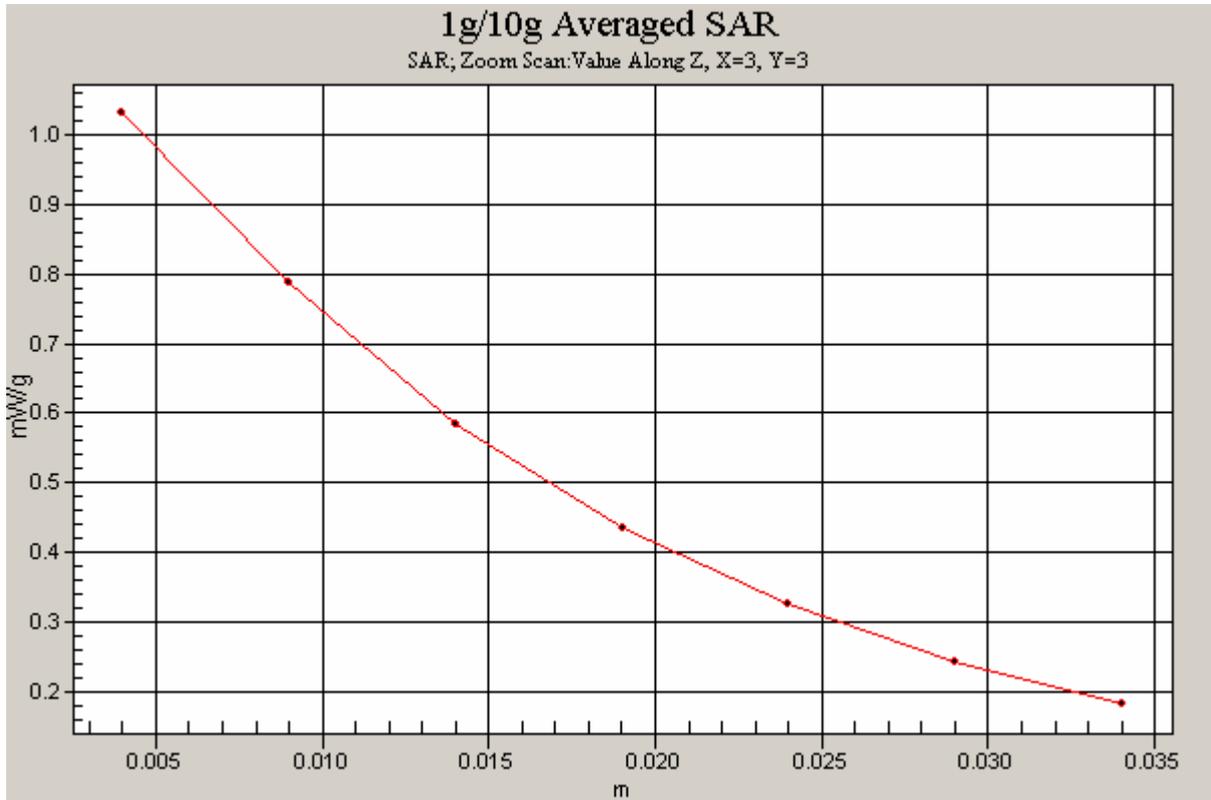


Figure 36 Z-Scan at power reference point (Body, Towards Ground, CDMA Cellular Channel 1013)

### CDMA Cellular Towards Phantom High

Communication System: CDMA Cellular; Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 848.31$  MHz;  $\sigma = 1.01$  mho/m;  $\epsilon_r = 55.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: ET3DV6 - SN1530; ConvF(6.52, 6.52, 6.52);

Electronics: DAE3 Sn452;

**Towards phantom, High frequency /Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.592 mW/g

**Towards phantom, High frequency /Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.2 V/m; Power Drift = -0.100 dB

Peak SAR (extrapolated) = 0.673 W/kg

**SAR(1 g) = 0.530 mW/g; SAR(10 g) = 0.380 mW/g**

Maximum value of SAR (measured) = 0.565 mW/g

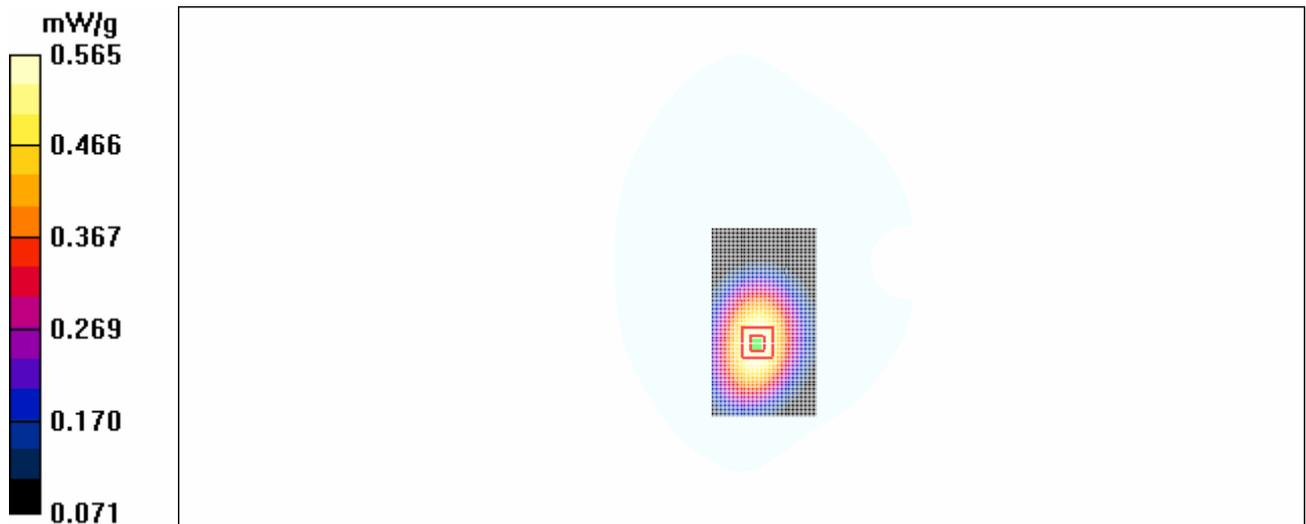


Figure 37 Body, Towards Phantom, CDMA Cellular Channel 777



Figure 38 Z-Scan at power reference point (Body, Towards Phantom, CDMA Cellular Channel 777)

### CDMA Cellular Towards Phantom Middle

Communication System: CDMA Cellular; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.996$  mho/m;  $\epsilon_r = 56$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: ET3DV6 - SN1530; ConvF(6.52, 6.52, 6.52);

Electronics: DAE3 Sn452;

**Towards phantom, Middle frequency /Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.557 mW/g

**Towards phantom, Middle frequency /Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.0 V/m; Power Drift = 0.038 dB

Peak SAR (extrapolated) = 0.714 W/kg

**SAR(1 g) = 0.565 mW/g; SAR(10 g) = 0.405 mW/g**

Maximum value of SAR (measured) = 0.598 mW/g

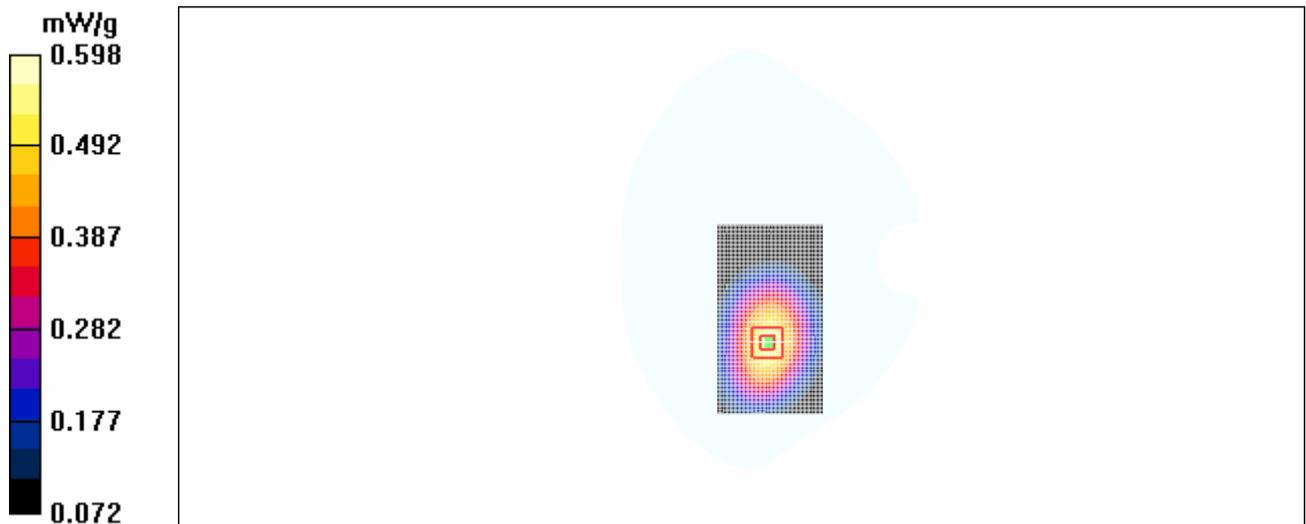


Figure 39 Body, Towards Phantom, CDMA Cellular Channel 384

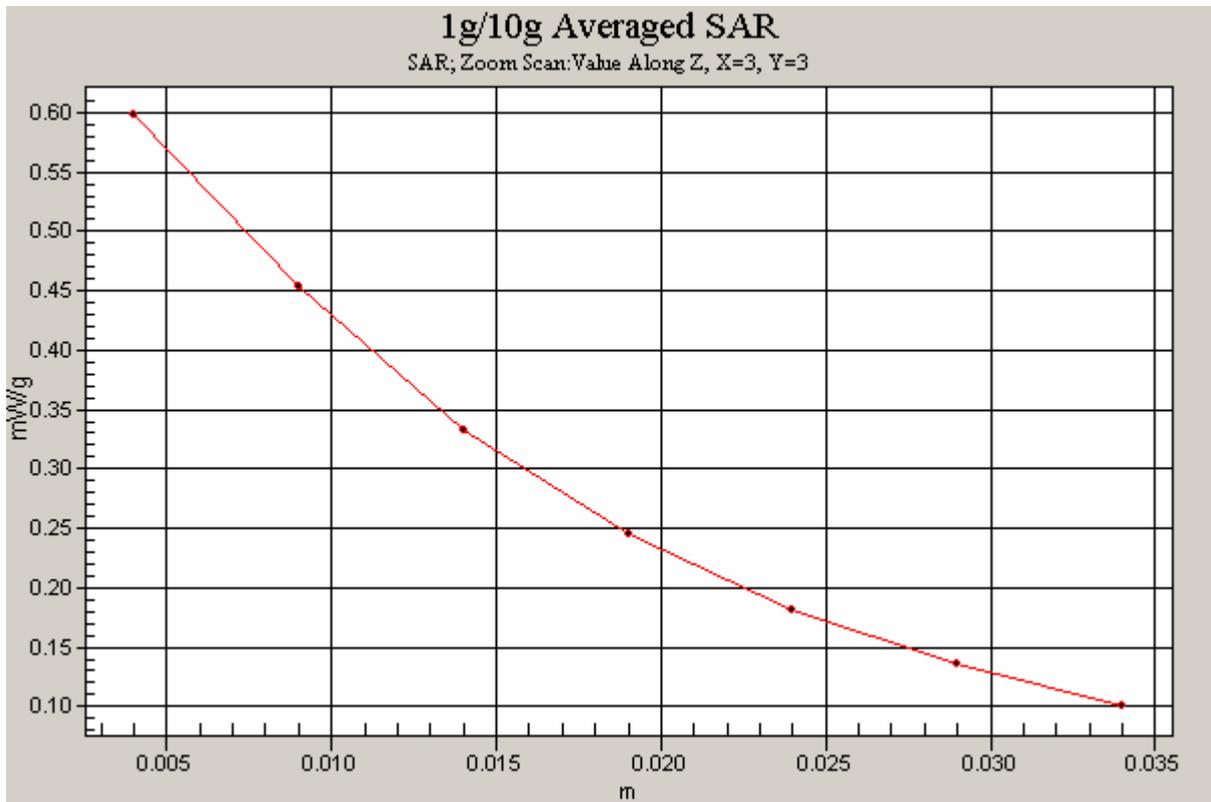


Figure40 Z-Scan at power reference point (Body, Towards Phantom, CDMA Cellular Channel 384)

**CDMA Cellular Towards Phantom Low**

Communication System: CDMA Cellular; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 825$  MHz;  $\sigma = 0.985$  mho/m;  $\epsilon_r = 56$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: ET3DV6 - SN1530; ConvF(6.52, 6.52, 6.52);

Electronics: DAE3 Sn452;

**Towards phantom, Low frequency /Area Scan (61x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.606 mW/g

**Towards phantom, Low frequency /Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.5 V/m; Power Drift = 0.184 dB

Peak SAR (extrapolated) = 0.819 W/kg

**SAR(1 g) = 0.644 mW/g; SAR(10 g) = 0.461 mW/g**

Maximum value of SAR (measured) = 0.686 mW/g

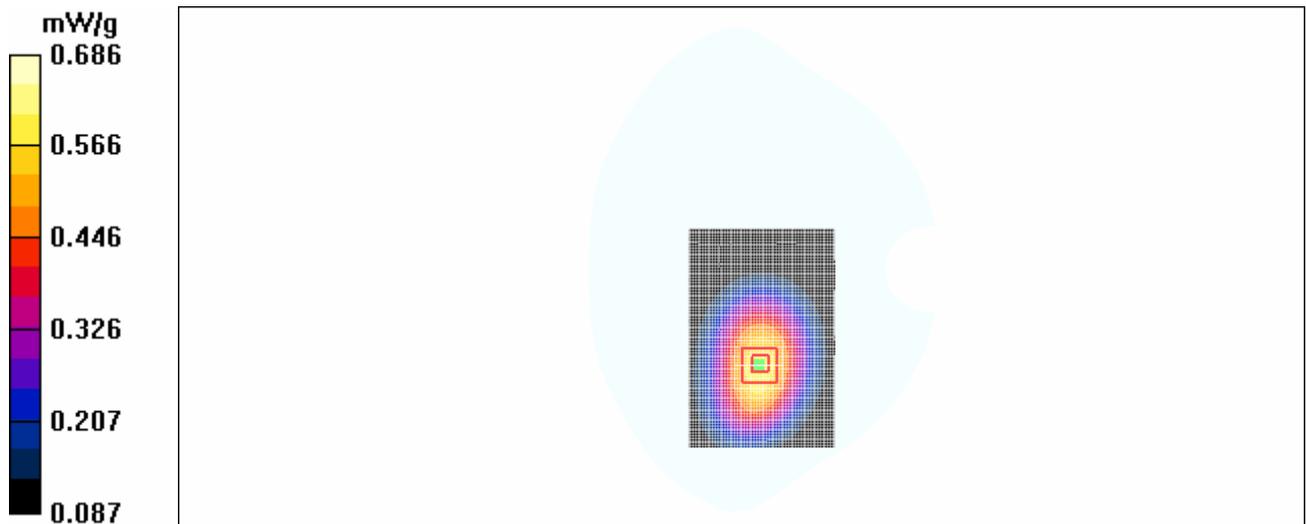


Figure 41 Body, Towards Phantom, CDMA Cellular Channel 1013

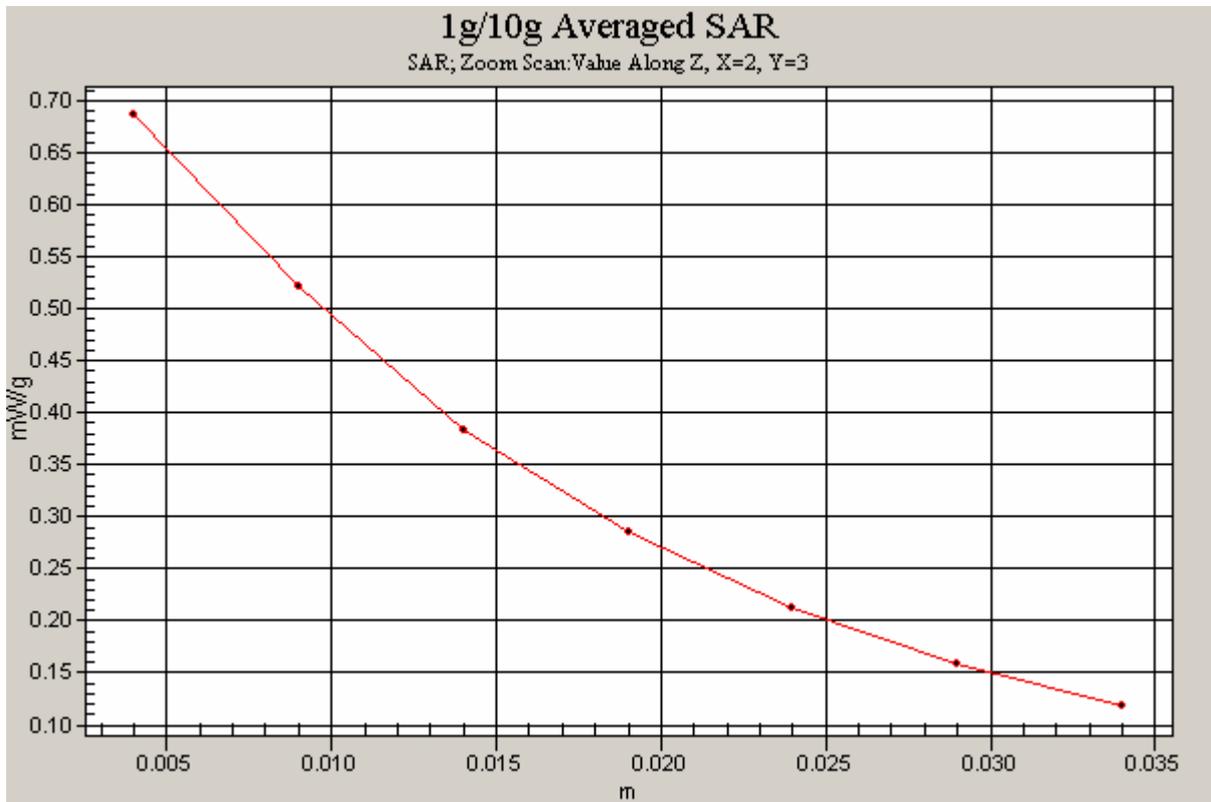


Figure 42 Z-Scan at power reference point (Body, Towards Phantom, CDMA Cellular Channel 1013)

### CDMA Cellular Earphone Towards Ground Low

Communication System: CDMA Cellular; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 825$  MHz;  $\sigma = 0.985$  mho/m;  $\epsilon_r = 56$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Probe: ET3DV6 - SN1530; ConvF(6.52, 6.52, 6.52);

Electronics: DAE3 Sn452;

**Towards phantom, Low frequency /Area Scan (61x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.814 mW/g

**Towards phantom, Low frequency /Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.3 V/m; Power Drift = 0.091 dB

Peak SAR (extrapolated) = 1.00 W/kg

**SAR(1 g) = 0.792 mW/g; SAR(10 g) = 0.574 mW/g**

Maximum value of SAR (measured) = 0.844 mW/g

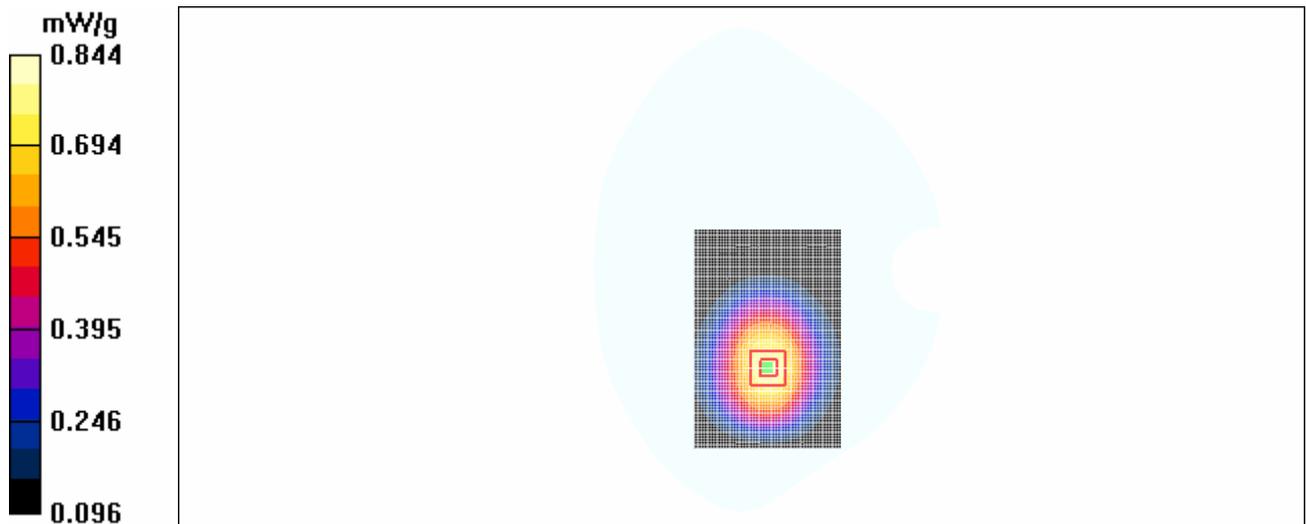


Figure 43 Body with earphone, Towards Ground, CDMA Cellular Channel 1013

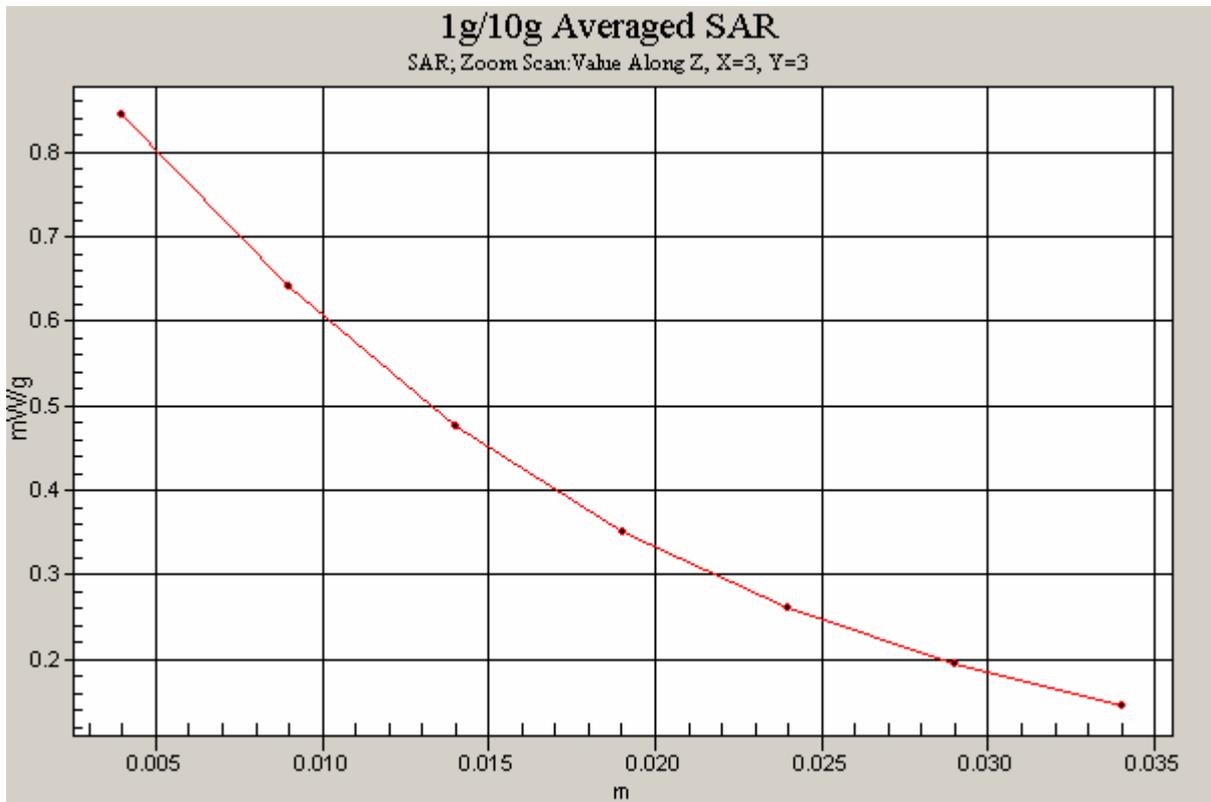


Figure 44 Z-Scan at power reference point (Body with earphone, Towards Ground, CDMA Cellular Channel 1013)

## ANNEX D: SYSTEM VALIDATION RESULTS

### System Performance Check at 835 MHz

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:443

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Head 835MHz

Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.899$  mho/m;  $\epsilon_r = 42.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

- Probe: ET3DV6 - SN1530; ConvF(6.52, 6.52, 6.52);

- Electronics: DAE3 Sn452;

**d=15mm, Pin=250mW/Area Scan (61x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.54 mW/g


**d=15mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.0 V/m; Power Drift = -0.061 dB

Peak SAR (extrapolated) = 3.44 W/kg

**SAR(1 g) = 2.34 mW/g; SAR(10 g) = 1.53 mW/g**

Maximum value of SAR (measured) = 2.52 mW/g

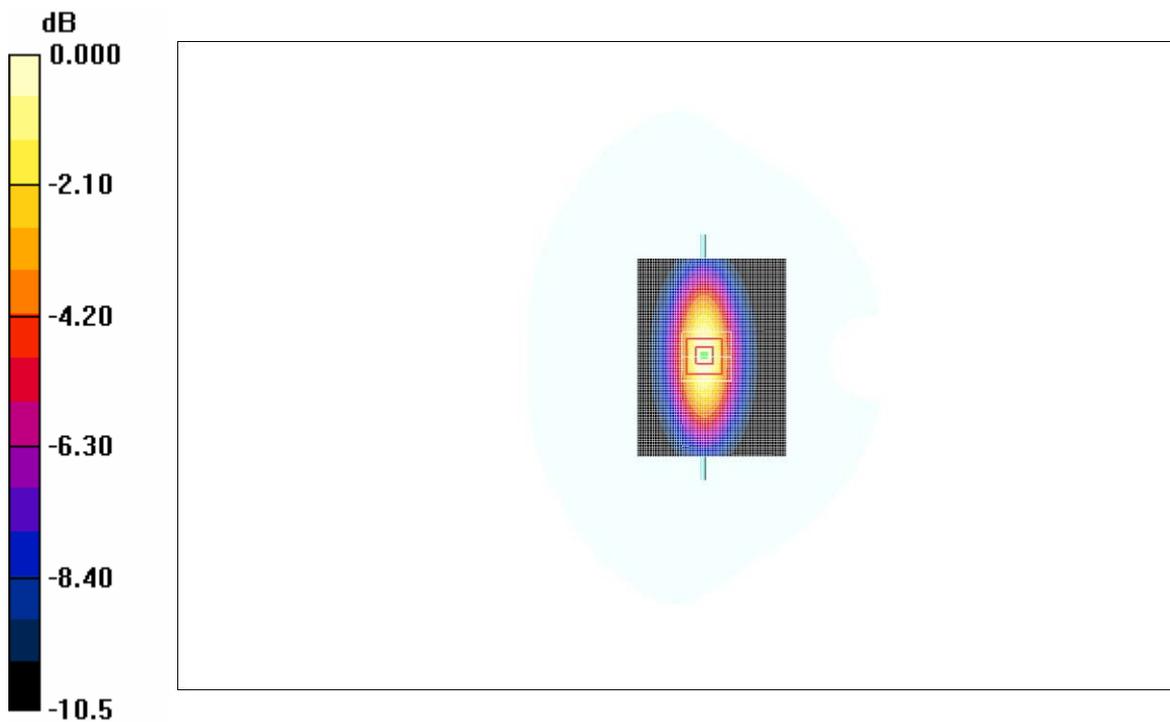

0 dB = 2.52mW/g

Figure 45 System Performance Check 835MHz 250mW

# TA Technology (Shanghai) Co., Ltd. Test Report

No. RZA2008-0295

Page 63of 81

## ANNEX E: PROBE CALIBRATION CERTIFICATE

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **ATL (Auden)**

Certificate No: **ET3-1530\_Sep07**

### CALIBRATION CERTIFICATE

Object: **ET3DV6 - SN:1530**

Calibration procedure(s): **QA CAL-01.v6 and QA CAL-12.v5  
Calibration procedure for dosimetric E-field probes**

Calibration date: **September 26, 2007**

Condition of the calibrated item: **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	29-Mar-07 (METAS, No. 217-00670)	Mar-08
Power sensor E4412A	MY41495277	29-Mar-07 (METAS, No. 217-00670)	Mar-08
Power sensor E4412A	MY41498087	29-Mar-07 (METAS, No. 217-00670)	Mar-08
Reference 3 dB Attenuator	SN: S5054 (3c)	8-Aug-07 (METAS, No. 217-00719)	Aug-08
Reference 20 dB Attenuator	SN: S5086 (20b)	29-Mar-07 (METAS, No. 217-00671)	Mar-08
Reference 30 dB Attenuator	SN: S5129 (30b)	8-Aug-07 (METAS, No. 217-00720)	Aug-08
Reference Probe ES3DV2	SN: 3013	4-Jan-07 (SPEAG, No. ES3-3013_Jan07)	Jan-08
DAE4	SN: 664	20-Apr-07 (SPEAG, No. DAE4-664_Apr07)	Apr-08
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Nov-05)	In house check: Nov-07
Network Analyzer HP 8753E	US37360585	18-Oct-01 (SPEAG, in house check Oct-06)	In house check: Oct-07

	Name	Function	Signature
Calibrated by:	Katja Pokovic	Technical Manager	
Approved by:	Niels Kuster	Quality Manager	

Issued: September 26, 2007

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst  
C Service suisse d'étalonnage  
S Servizio svizzero di taratura  
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

**Glossary:**

TSL	tissue simulating liquid
NORM <sub>x,y,z</sub>	sensitivity in free space
ConF	sensitivity in TSL / NORM <sub>x,y,z</sub>
DCP	diode compression point
Polarization $\phi$	$\phi$ rotation around probe axis
Polarization $\vartheta$	$\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

**Calibration is Performed According to the Following Standards:**

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

**Methods Applied and Interpretation of Parameters:**

- NORM<sub>x,y,z</sub>:** Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not effect the E<sup>2</sup>-field uncertainty inside TSL (see below *ConvF*).
- NORM(f)<sub>x,y,z</sub> = NORM<sub>x,y,z</sub> \* frequency\_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP<sub>x,y,z</sub>:** DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters:** Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* *ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical Isotropy (3D deviation from isotropy):** in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset:** The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

ET3DV6 SN:1530

September 26, 2007

# Probe ET3DV6

## SN:1530

Manufactured:	July 15, 2000
Last calibrated:	September 21, 2006
Recalibrated:	September 26, 2007

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)