

FCC Test Report

APPLICANT : Huawei Technologies Co. Ltd.
EQUIPMENT : cdma2000 Digital Mobile Phone
BRAND NAME : HUAWEI
MODEL NAME : HUAWEI C8100
FCC ID : QISC8100
STANDARD : FCC 47 CFR FCC Part 15 Subpart B
CLASSIFICATION : Certification

The product was received on Apr. 10, 2010 and completely tested on Apr. 20, 2010. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.4-2003 and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



Roy Wu / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.



TABLE OF CONTENTS

REVISION HISTORY 3

SUMMARY OF TEST RESULT 4

1. GENERAL DESCRIPTION 5

 1.1. Applicant 5

 1.2. Manufacturer 5

 1.3. Feature of Equipment Under Test 5

 1.4. Test Site 7

 1.5. Applied Standards 7

 1.6. Ancillary Equipment List 7

2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST 8

 2.1. Test Mode 8

 2.2. Connection Diagram of Test System 10

 2.3. Test Software 12

3. TEST RESULT 13

 3.1. Test of AC Conducted Emission Measurement 13

 3.2. Test of Radiated Emission Measurement 17

4. LIST OF MEASURING EQUIPMENT 21

5. UNCERTAINTY OF EVALUATION 22

APPENDIX A. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.107	7.2.2	AC Conducted Emission	< 15.107 limits < RSS-Gen table 2 limits	PASS	Under limit 8.98 dB at 2.06 MHz
3.2	15.109	7.2.3.2	Radiated Emission	< 15.109 limits or < RSS-Gen table 1 limits (Section 6)	PASS	Under limit 4.32 dB at 30.81 MHz

1. General Description

1.1. Applicant

Huawei Technologies Co. Ltd.

Huawei Industrial Base, Bantian Longgang Shenzhen 518128, P.R. China

1.2. Manufacturer

Huawei Technologies Co. Ltd.

Huawei Industrial Base, Bantian Longgang Shenzhen 518128, P.R. China

1.3. Feature of Equipment Under Test

Product Feature & Specification	
Equipment	cdma2000 Digital Mobile Phone
Brand Name	HUAWEI
Model Name	HUAWEI C8100
FCC ID	QISC8100
Tx Frequency Range	CDMA2000 BC0 : 824 MHz ~ 849 MHz Bluetooth : 2400 MHz ~ 2483.5 MHz WLAN : 2400 MHz ~ 2483.5 MHz
Rx Frequency Range	CDMA2000 BC0 : 869 ~ 894 MHz Bluetooth : 2400 MHz ~ 2483.5 MHz WLAN : 2400 MHz ~ 2483.5 MHz
Antenna Type	Fixed Internal Antenna
HW Version	HC3C8100M Ver.A
SW Version	81002.11.00.01.100
Type of Modulation	CDMA2000 : QPSK Bluetooth (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth EDR (3Mbps) : 8-DPSK 802.11b : DSSS (BPSK / QPSK / CCK) 802.11g : OFDM (BPSK / QPSK / 16QAM / 64QAM)
EUT Stage	Identical Prototype

List of Accessory:

Specification of Accessory		
AC Adapter 1	Brand Name	HUAWEI
	Model Name	HS-050040U6
	S/N	BYXXXXXX
	Power Rating	I/P:100-240Vac, 50-60Hz, 0.2A; O/P: 5.0Vdc, 400mA
AC Adapter 2	Brand Name	HUAWEI
	Model Name	HS-050040U6
	S/N	HKXXXXXX
	Power Rating	I/P:100-240Vac, 50-60Hz, 0.2A; O/P: 5.0Vdc, 400mA
Battery	Brand Name	HUAWEI
	Model Name	HB5A2H
	Power Rating	3.7Vdc, 1150mAh
	Type	Li-ion
Earphone	Brand Name	HUAWEI
	Model Name	EMC179P-YE29
	Signal Line Type	1.55 meter non-shielded cable without ferrite core
USB Cable	Brand Name	HUAWEI
	Model Name	LSA00017
	Signal Line Type	1.03 meter shielded cable without ferrite core

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4. Test Site

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.	
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C. TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958	
Test Site No.	Sporton Site No.	
	CO01-KS	03CH01-KS

1.5. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC 47 CFR FCC Part 15 Subpart B
- ANSI C63.4-2003
- IC RSS-Gen Issue 2

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

1.6. Ancillary Equipment List

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	PC	DELL	MT320	FCC DoC	N/A	Unshielded, 1.8 m
3.	(USB) Mouse	DELL	MO56UC	FCC DoC	Shielded, 1.8 m	N/A
4.	Bluetooth Earphone	Nokia	HS-12W	PYAHS-12W	N/A	N/A
5.	(USB) Keyboard	DELL	L100	FCC DoC	Shielded, 1.8 m	N/A
6.	Print	HP	Laser Jet 1018	FCC DoC	Shielded, 1.8 m	Unshielded, 1.8 m
7.	iPod	Apple	A1199	FCC DoC	Unshielded, 1.2 m	N/A
8.	WLAN AP	D-link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8m

2. Test Configuration of Equipment Under Test

2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

The following tables are showing the test modes as the worst cases and recorded in this report.

Item	EUT Configuration	Test Condition		
		EMI AC	EMI RE<1G	EMI RE≥1G
1.	Operating Mode (EUT with earphone)	Note 1	<input checked="" type="checkbox"/>	Note 1
2.	Charging Mode (EUT with adapter)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
3.	Charging Mode (EUT with PC)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Note 1

Abbreviations:


- EMI AC: AC conducted emissions
- EMI RE ≥ 1G: EUT radiated emissions ≥ 1GHz
- EMI RE < 1G: EUT radiated emissions < 1GHz

Note 1: Testing for this mode is not required or not the worst case.


Test Items	EUT Configure Mode	Function Type
AC Conducted Emission	2/3	Mode 1: CDMA2000 BC0 Idle + Bluetooth Idle + WLAN Idle + Adapter 1 Mode 2: CDMA2000 BC0 Idle + Bluetooth Idle + WLAN Idle + Adapter 2 Mode 3: CDMA2000 BC0 Idle + Bluetooth Idle + WLAN Idle + USB Cable (Link with PC)
Radiated Emissions < 1GHz	1/2/3	Mode 1: CDMA2000 BC0 Idle + Bluetooth Idle + WLAN Idle + Adapter 1 Mode 2: CDMA2000 BC0 Idle + Bluetooth Idle + WLAN Idle + Adapter 2 Mode 3: CDMA2000 BC0 Idle + Bluetooth Idle + WLAN Idle + Earphone Mode 4: CDMA2000 BC0 Idle + Bluetooth Idle + WLAN Idle + USB Cable (Link with PC)
Radiated Emissions ≥ 1GHz	2	Mode 1: CDMA2000 BC0 Idle + Bluetooth Idle + WLAN Idle + Adapter 2
Remark: <ol style="list-style-type: none"> 1. The worst case of AC is mode 2; only the test data of this mode was reported. 2. The worst case of RE < 1G is mode 2; only the test data of this mode was reported. 		

2.2. Connection Diagram of Test System


<EUT with Adapter Mode>

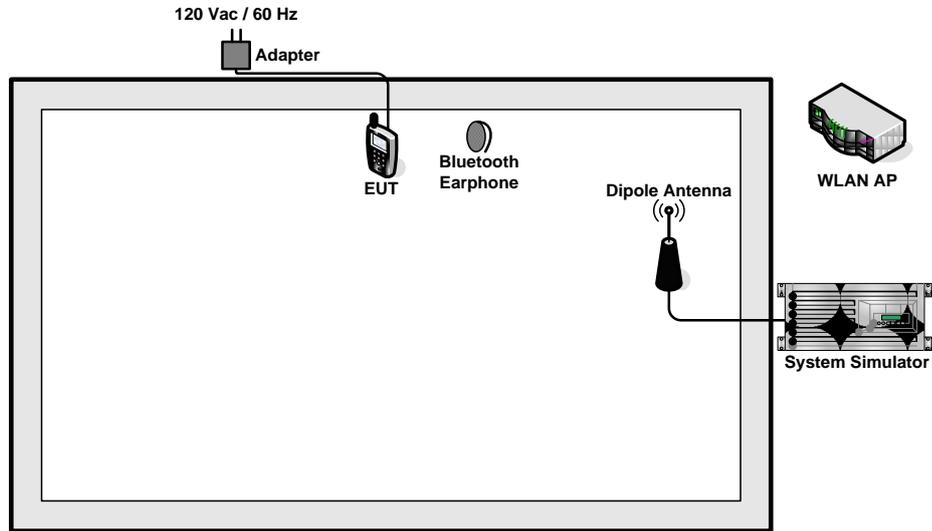

<EUT with Earphone Mode>

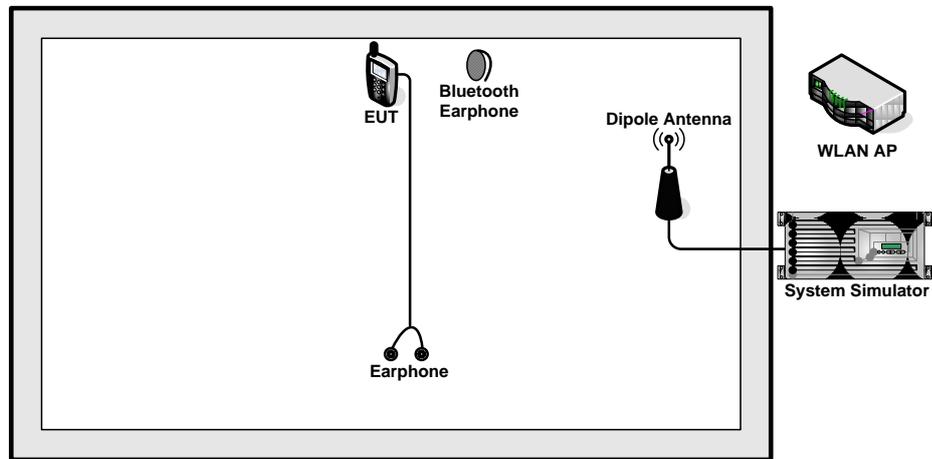

<EUT with USB Cable (Link with PC) Mode>

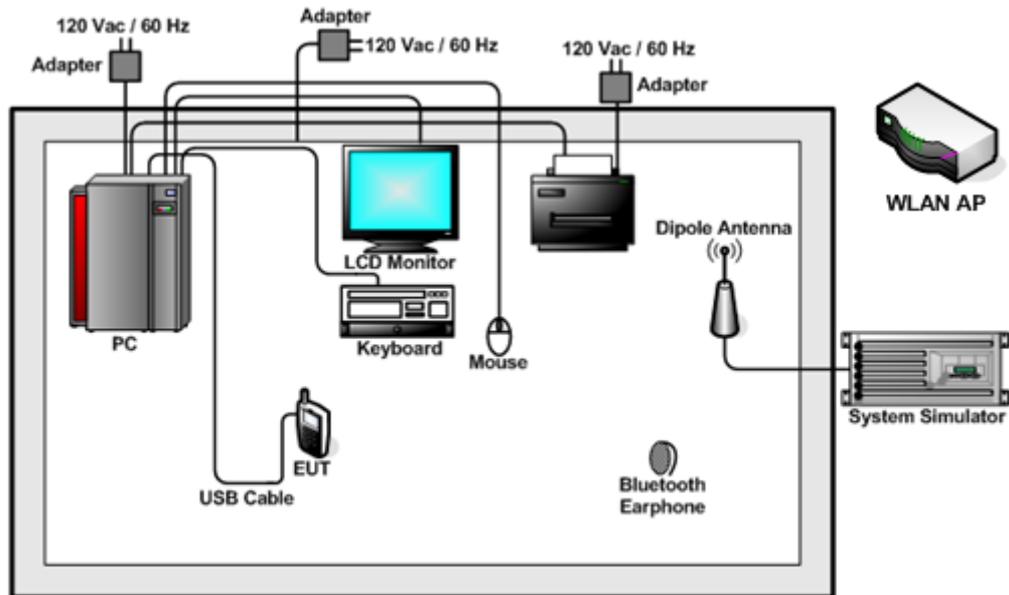



2.3. Test Software

The EUT was in CDMA2000 idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Execute the program, "Winthrax", installed in PC for active sync files transfer with EUT via USB cable.

3. Test Result

3.1. Test of AC Conducted Emission Measurement

3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedure


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.1.4 Test Setup

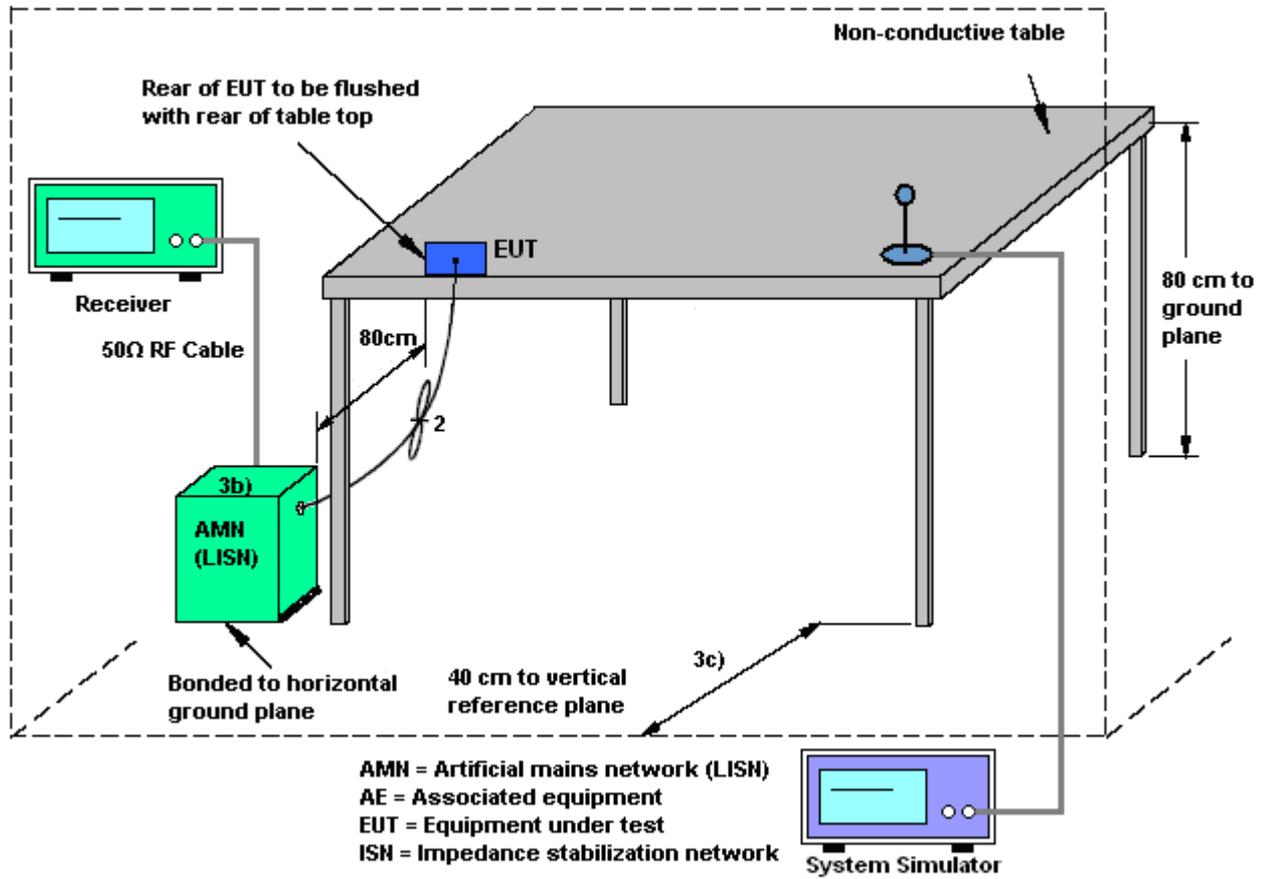

3.1.5 Test Result of AC Conducted Emission

Test Mode :	Mode 2	Temperature :	22~23°C
Test Engineer :	Chao Wang	Relative Humidity :	41~42%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	CDMA2000 BC0 Idle + Bluetooth Idle + WLAN Idle + Adapter 2		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

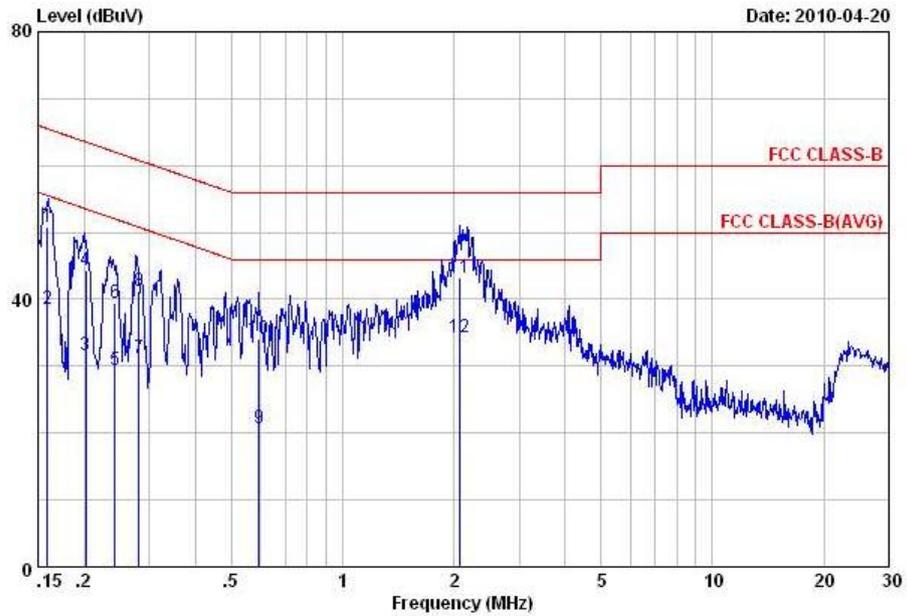


Site : C001-KS
 Condition: FCC CLASS-B LISN-071001 LINE
 EUT : (FD) 040201
 Memo : Mode 2

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.16	50.87	-14.65	65.52	40.80	-0.07	10.14	QP
2	0.16	38.47	-17.05	55.52	28.40	-0.07	10.14	Average
3	0.20	31.68	-21.87	53.55	21.60	-0.07	10.15	Average
4	0.20	44.28	-19.27	63.55	34.20	-0.07	10.15	QP
5	0.24	29.49	-22.55	52.04	19.40	-0.07	10.16	Average
6	0.24	39.39	-22.65	62.04	29.30	-0.07	10.16	QP
7	0.28	31.09	-19.69	50.78	20.99	-0.07	10.17	Average
8	0.28	41.29	-19.49	60.78	31.19	-0.07	10.17	QP
9	0.59	20.74	-25.26	46.00	10.61	-0.09	10.22	Average
10	0.59	34.14	-21.86	56.00	24.01	-0.09	10.22	QP
11	2.07	43.32	-12.68	56.00	33.10	-0.11	10.33	QP
12	2.07	34.42	-11.58	46.00	24.20	-0.11	10.33	Average



Test Mode :	Mode 2	Temperature :	22~23°C
Test Engineer :	Chao Wang	Relative Humidity :	41~42%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	CDMA2000 BC0 Idle + Bluetooth Idle + WLAN Idle + Adapter 2		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

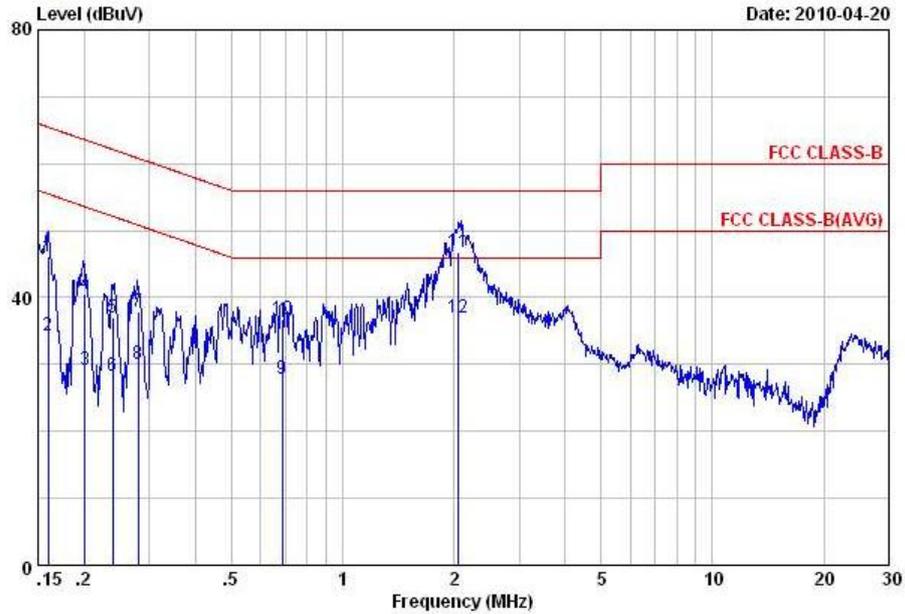

Site : C001-KS
 Condition: FCC CLASS-B LISN-071001 NEUTRAL
 EUT : (FD) 040201
 Memo : Mode 2

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.16	46.16	-19.31	65.47	36.11	-0.09	10.14	QP
2	0.16	34.36	-21.11	55.47	24.31	-0.09	10.14	Average
3	0.20	29.18	-24.39	53.57	19.10	-0.07	10.15	Average
4	0.20	40.58	-22.99	63.57	30.50	-0.07	10.15	QP
5	0.24	37.09	-25.04	62.13	27.00	-0.07	10.16	QP
6	0.24	28.29	-23.84	52.13	18.20	-0.07	10.16	Average
7	0.28	37.79	-23.03	60.82	27.69	-0.07	10.17	QP
8	0.28	30.09	-20.73	50.82	19.99	-0.07	10.17	Average
9	0.69	27.85	-18.15	46.00	17.70	-0.08	10.23	Average
10	0.69	36.85	-19.15	56.00	26.70	-0.08	10.23	QP
11	2.06	46.82	-9.18	56.00	36.60	-0.11	10.33	QP
12	2.06	37.02	-8.98	46.00	26.80	-0.11	10.33	Average

3.2. Test of Radiated Emission Measurement

3.2.1. Limit of Radiated Emission

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3


3.2.2. Measuring Instruments

See list of measuring instruments of this test report.

3.2.3. Test Procedures

1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the quasi-peak method and reported
8. Emission level (dBuV/m) = 20 log Emission level (uV/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level


3.2.4. Test Setup of Radiated Emission

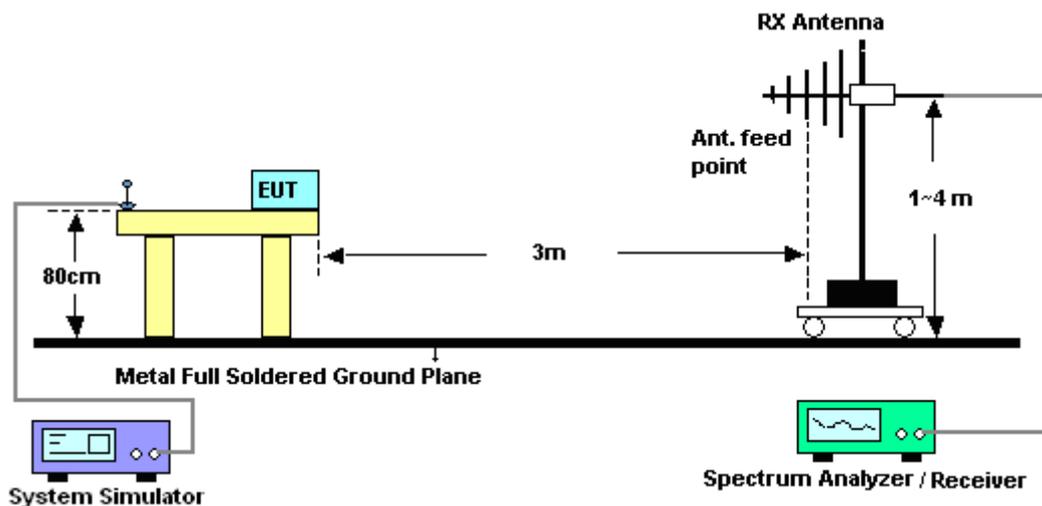



3.2.5. Test Result of Radiated Emission

Test Mode :	Mode 2	Temperature :	21~22°C
Test Engineer :	Haitao Yin	Relative Humidity :	42~43%
Test Distance :	3m	Polarization :	Horizontal
Function Type :	CDMA2000 BC0 Idle + Bluetooth Idle + WLAN Idle + Adapter 2		

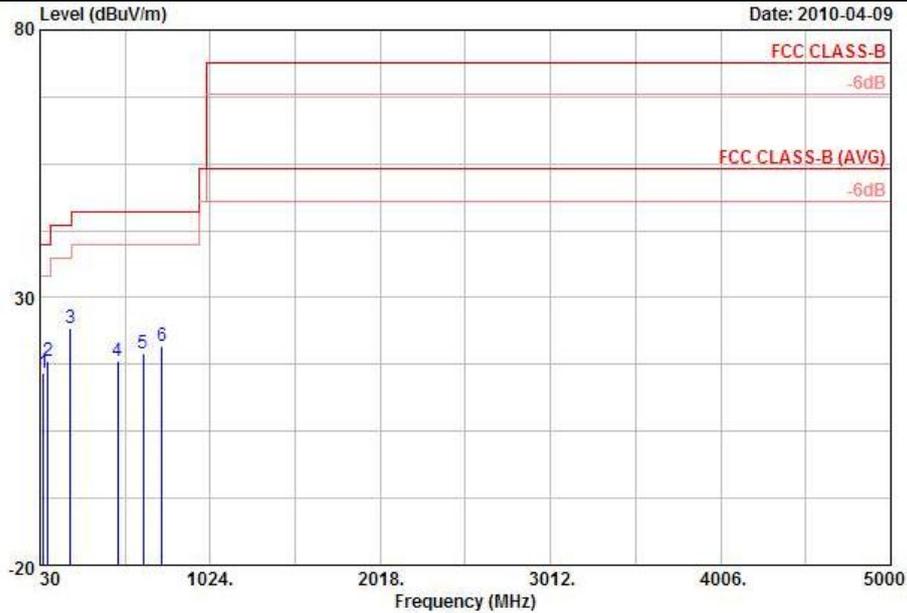


Site : 03CH01-KS
 Condition: FCC CLASS-B 3m LF_ANI_090807 HORIZONTAL
 Project : FD 040201
 Power : 120Vac/60Hz
 Mode : Mode 2

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	Loss	Factor	Pos	Pos	
					dB/m	dB	dB	cm	deg	
1	48.09	16.05	-23.95	40.00	36.25	8.12	0.31	28.63	---	Peak
2	74.28	18.06	-21.94	40.00	40.52	5.80	0.37	28.63	---	Peak
3	208.20	24.27	-19.23	43.50	42.93	9.39	0.67	28.72	---	Peak
4	483.40	18.05	-27.95	46.00	28.96	16.93	0.97	28.81	---	Peak
5	633.20	19.55	-26.45	46.00	28.04	18.81	1.08	28.38	---	Peak
6	743.10	20.97	-25.03	46.00	27.81	19.84	1.17	27.85	---	Peak



Test Mode :	Mode 2	Temperature :	21~22°C
Test Engineer :	Haitao Yin	Relative Humidity :	42~43%
Test Distance :	3m	Polarization :	Vertical
Function Type :	CDMA2000 BC0 Idle + Bluetooth Idle + WLAN Idle + Adapter 2		

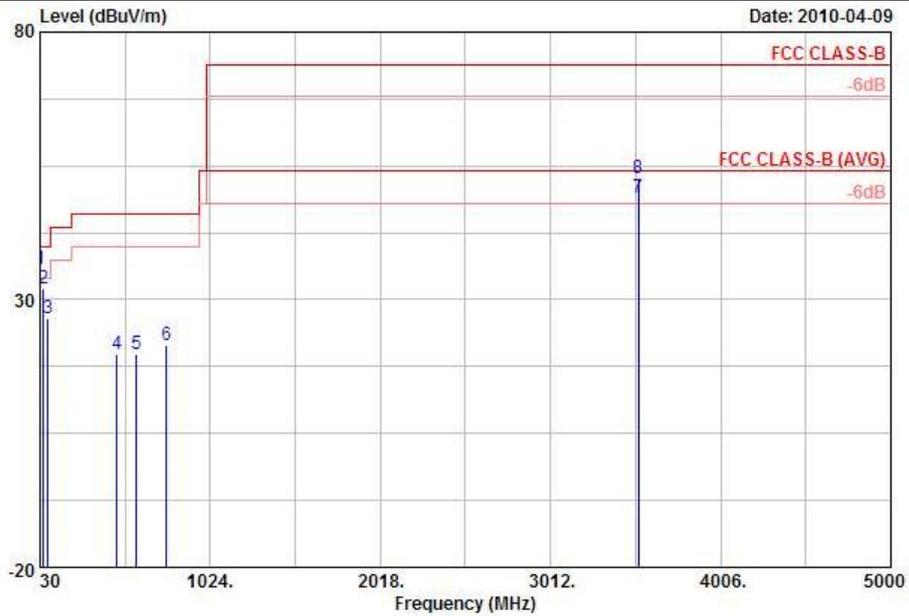

Site : 03CH01-KS
 Condition: FCC CLASS-B 3m LF_ANT_090807 VERTICAL
 Project : FD 040201
 Power : 120Vac/60Hz
 Mode : Mode 2

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	30.81	35.68	-4.32	40.00	46.77	17.29	0.26	28.64	---	Peak
2	47.82	32.20	-7.80	40.00	52.02	8.50	0.31	28.63	---	Peak
3	75.09	26.46	-13.54	40.00	48.93	5.80	0.37	28.64	---	Peak
4	479.90	19.74	-26.26	46.00	30.73	16.87	0.97	28.83	---	Peak
5	591.90	19.71	-26.29	46.00	28.56	18.59	1.06	28.50	---	Peak
6	768.30	21.55	-24.45	46.00	28.24	19.88	1.21	27.78	---	Peak
7	3524.00	49.03	-4.97	54.00	45.26	34.39	3.91	34.53	100	11 Average
8	3524.00	52.58	-21.42	74.00	48.81	34.39	3.91	34.53	---	Peak

4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Due Date	Remark
EMI Receiver	R&S	ESCI	100534	9kHz~3GHz	Nov. 17, 2009	Nov. 16, 2010	Conduction (CO01-KS)
LISN	MessTec	AN3016	60103	9kHz~30MHz	Jan. 18, 2010	Jan. 17, 2011	Conduction (CO01-KS)
LISN	MessTec	AN3016	60105	9kHz~30MHz	Jan. 18, 2010	Jan. 17, 2011	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP0000008 11	N/A	Nov. 26, 2009	Nov. 25, 2010	Conduction (CO01-KS)
EMI Test Receiver	R&S	ESCI	100534	9kHz~3GHz	Nov. 17, 2009	Nov. 16, 2010	Radiation (03CH01-KS)
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Jan. 18, 2010	Jan. 17, 2011	Radiation (03CH01-KS)
Bilog Antenna	SCHAFFNER	CBL6112D	23182	25MHz~2GHz	Jan. 18, 2010	Jan. 17, 2011	Radiation (03CH01-KS)
Double Ridge Horn Antenna	EMCO	3117	75959	1GHz~18GHz	Jan. 18, 2010	Jan. 17, 2011	Radiation (03CH01-KS)
Amplifier	Wireless	FPA6592G	60004	30MHz~2GHz	Feb. 02, 2010	Feb. 01, 2011	Radiation (03CH01-KS)
Amplifier	Agilent	8449B	3008A02370	1GHz~26.5GHz	Jan. 18, 2010	Jan. 17, 2011	Radiation (03CH01-KS)
active hore antenna	com-power	AHA-118	701023	1G-18GHz	Nov. 18, 2009	Nov. 17, 2010	Radiation (03CH01-KS)
Signal Generator	R&S	SMR40	100455	10MHz~40GHz	Jan. 18, 2010	Jan. 17, 2011	Radiation (03CH01-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA170249	15-40GHz	Oct. 22, 2009	Oct. 21, 2010	Radiation (03CH01-KS)
System Simulator	R&S	CMU200	837587/066	Full-Band	Jan. 08, 2009	Jan. 07, 2011	System Simulator

5. Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Contribution	Uncertainty of X_i		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.10	Normal (k=2)	0.05
Cable Loss	0.10	Normal (k=2)	0.05
AMN Insertion Loss	2.50	Rectangular	0.63
Receiver Specification	1.50	Rectangular	0.43
Site Imperfection	1.39	Rectangular	0.80
Mismatch	+0.34 / -0.35	U-Shape	0.24
Combined Standard Uncertainty $U_c(y)$	1.13		
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.26		

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Contribution	Uncertainty of X_i		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.41	Normal (k=2)	0.21
Antenna Factor Calibration	0.83	Normal (k=2)	0.42
Cable Loss Calibration	0.25	Normal (k=2)	0.13
Pre-Amplifier Gain Calibration	0.27	Normal (k=2)	0.14
RCV/SPA Specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site Imperfection	1.43	Rectangular	0.83
Mismatch	+0.39 / -0.41	U-Shape	0.28
Combined Standard Uncertainty $U_c(y)$	1.27		
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.54		

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Contribution	Uncertainty of X_i		$u(X_i)$	C_i	$C_i * u(X_i)$
	dB	Probability Distribution			
Receiver Reading	± 0.10	Normal (k=2)	0.10	1	0.10
Antenna Factor Calibration	± 1.70	Normal (k=2)	0.85	1	0.85
Cable Loss Calibration	± 0.50	Normal (k=2)	0.25	1	0.25
Receiver Correction	± 2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	± 1.50	Rectangular	0.87	1	0.87
Site Imperfection	± 2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20\text{Log}(1-\Gamma_1*\Gamma_2)$	+0.34 / -0.35	U-Shape	0.244	1	0.244
Combined Standard Uncertainty $U_c(y)$	2.36				
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.72				