



# FCC Test Report

**Product Name: HUAWEI IDEOS SERIES;  
cdma2000 Digital Mobile Phone; IDEOS**

**Model Number: C8150**

**Report No: SYBHZ(R)E032062010EB-4  
FCC ID: QISC8150**

**Reliability Laboratory of Huawei Technologies Co., Ltd.**

Huawei Base, Bantian, Longgang District, Shenzhen 518129, P.R. China

Tel: +86 755 28780808

Fax: +86 755 89652518



## Notice

1. The laboratory has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS), and accreditation number: L0310.
2. The laboratory has obtained the accreditation of THE AMERICAN ASSOCIATION FOR LABORATORY ACCREDITATION (A2LA), and Accreditation Council Certificate Number: 2174.01.
3. The laboratory has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements. The site recognition number is 97456.
4. The laboratory has been listed by industry Canada to perform electromagnetic emission measurement. The site recognition number is 6369A-1.
5. The laboratory also has been listed by the VCCI to perform EMC measurements. The accreditation number is R2364, C2583, and T256.
6. The test report is invalid if not marked with "exclusive stamp for the test report".
7. The test report is invalid if not marked with the stamps or the signatures of the persons responsible for performing, revising and approving the test report.
8. The test report is invalid if there is any evidence of erasure and/or falsification.
9. If there is any dissidence for the test report, please file objection to the test centre within 15 days from the date of receiving the test report.
10. Normally, the test report is only responsible for the samples that have undergone the test.
11. Context of the test report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of the laboratory.

---

### REPORT ON

### FCC Test of C8150 HUAWEI IDEOS SERIES; cdma2000



**Digital Mobile Phone; IDEOS**

**M/N: C8150**

**Report No: SYBHZ(R)E032062010EB-4**

**FCC ID: QISC8150**

**REGULATION**

**FCC CFR47 Part 2: Subpart J;**

**FCC CFR47 Part 27: Subpart C & L;**

**CONCLUSION**

**PASS**

**General Manager**

2010.07.01  
Date

张兴海  
Name

signature



**Technical Responsibility  
For Area of Testing**

2010.07.01  
Date

余辉  
Name

signature

**Test Lab Engineer**

2010.07.01  
Date

胡俊  
Name

signature

**Contents**

**1 Summary**.....错误! 未定义书签。



<b>2</b>	<b><u>Product Description</u></b> .....	错误! 未定义书签。
2.1	PRODUCTION INFORMATION.....	错误! 未定义书签。
2.2	MODIFICATION INFORMATION.....	错误! 未定义书签。
<b>3</b>	<b><u>Test Site Description</u></b> .....	错误! 未定义书签。
3.1	TESTING PERIOD .....	错误! 未定义书签。
3.2	GENERAL SET UP DESCRIPTION .....	错误! 未定义书签。
<b>4</b>	<b><u>Product Description</u></b> .....	错误! 未定义书签。
4.1	TECHNICAL CHARACTERISTICS .....	错误! 未定义书签。
4.2	EUT IDENTIFICATION LIST .....	错误! 未定义书签。
<b>5</b>	<b><u>Main Test Instruments</u></b> .....	错误! 未定义书签。
<b>6</b>	<b><u>Transmitter Measurements</u></b> .....	错误! 未定义书签。
6.1	EFFECTIVE ISOTROPIC RADIATED POWER OF TRANSMITTER (EIRP).....	错误! 未定义书签。
6.2	CONDUCTED OUTPUT POWER .....	错误! 未定义书签。
6.3	MODULATION CHARACTERISTICS .....	错误! 未定义书签。
6.4	OCCUPIED BANDWIDTH .....	错误! 未定义书签。
6.5	BAND EDGES COMPLIANCE .....	错误! 未定义书签。
6.6	SPURIOUS EMISSION AT ANTENNA TERMINAL .....	错误! 未定义书签。
6.7	FREQUENCY STABILITY .....	错误! 未定义书签。
<b>7</b>	<b><u>System Measurement Uncertainty</u></b> .....	错误! 未定义书签。
<b>8</b>	<b><u>Appendixes</u></b> .....	错误! 未定义书签。

# 1 Summary



The table below summarizes the measurements and results for the HUAWEI IDEOS SERIES; cdma2000 Digital Mobile Phone; IDEOS C8150. Detailed results and descriptions are shown in the following pages.

Table 1 Summary of results

<b>FCC Measurement Specification</b>	<b>FCC Limits Part(s)</b>	<b>Description</b>	<b>Result</b>
2.1046	27.50(d)	Effective Radiated Power of Transmitter	PASS
2.1046	27.50(d)	Conducted Power of Transmitter	PASS
2.1047		Modulation Characteristics	PASS
2.1049		Occupied Bandwidth	PASS
2.1051	27.53(g)	Band Edges Compliance	PASS
2.1051	27.53(g)	Spurious Emission at Antenna Terminal	PASS
2.1055	27.54	Frequency Stability	PASS

## **2 Product Description**

### **2.1 Production Information**

#### **2.1.1 General Description**

HUAWEI IDEOS SERIES; cdma2000 Digital Mobile Phone; IDEOS-C8150 is subscriber



equipment in the CDMA/EVDO system. The frequency band is US Cellular and N.American PCS and AWS, Their band test data included in this report. The Mobile Phone implements such functions as RF signal receiving/transmitting, CDMA2000 1x and 1XEV-DO protocol processing, voice, MMS service, GPS, AGPS and WIFI etc. Externally it provides micro SD card interface, earphone port(to provide voice service) .

### 2.1.2 Support function and Service

The C8150 HUAWEI IDEOS SERIES; cdma2000 Digital Mobile Phone; IDEOS support the function and service as follows:

Table 2 Service and Test mode List

Service Name	Characteristic	Corresponding Test Mode	Note
voice and data	Modulation: QPSK	TM1*	
voice and data	Modulation: HPSK	TM3*	
Data(EV-DO)	Default Access Channel MAC	Subtype 0*	Modulation: HPSK
data(EV-DO)	Enhanced Access Channel MAC	Subtype 2*	The R-Data packet size determines the modulation format,  R-Data Packet Size: 128, 256, 512, 768 or 1024 Modulation: BPSK  R-Data Packet Size: 1536 , 2048, 3072, 5596, 6144 or 8192 Modulation: QPSK  R-Data Packet Size: 12288 Modulation: 8-PSK

Note: \* Refer to ANSI/TIA-98-E section 1.3 for the information of TM (Test Mode).

### 2.2 Modification Information

For original equipment, following table is not application.

Table 3 Modification Information

Model Number	Board/Module	Original Version	New Version	Modify Information
Not applicable!				

## 3 Test Site Description

The test site of:

**Huawei Technologies Co. Ltd.**  
**P.O. Box 518129**



**Huawei base, bantian,  
Longgang District, Shenzhen, China**

### 3.1 Testing Period

The test have been performed during the period of

**Jun. 24, 2010 — Jun. 25, 2010**

### 3.2 General Set up Description

Huawei HUAWEI IDEOS SERIES; cdma2000 Digital Mobile Phone; IDEOS C8150 can support CDMA mode and US Cellular Band、PCS Band、AWS Band. During this measurement, the Mobile Phone just works in CDMA mode and AWS Band.

**TM1:** Forward Traffic Channel Radio Configuration 1, Reverse Traffic Channel Radio Configuration 1

**TM3:** Forward Traffic Channel Radio Configuration 3, Reverse Traffic Channel Radio Configuration 3

Parameter	Units	Value
$\hat{I}_{or}$	dBm/1.23 MHz	-104
$\frac{\text{Pilot } E_c}{I_{or}}$	dB	-7
$\frac{\text{Traffic } E_c}{I_{or}}$	dB	-7.4

#### EVDO:

Current Physical Layer Subtype:

**Subtype 0** \* indicates that the protocol subtype assigned to the Access Channel MAC protocol is Default Access Channel MAC and its Subtype ID number is 0x0000.

**Subtype 2** \* indicates that the protocol subtype assigned to the Access Channel MAC protocol is Enhanced Access Channel MAC and its Subtype ID number is 0x0002

Note: \*The test settings are defined in 3GPP2C.S0033.

Note: \*The test settings are defined in 3GPP2C.S0033.



## 4 Product Description

### 4.1 Technical Characteristics

#### 4.1.1 Frequency Range

Table 4 Frequency Range

Uplink band:	1710 to 1755 MHz
Downlink band:	2110 to 2155 MHz

#### 4.1.2 Channel Spacing / Separation

Table 5 Channel Spacing / Separation

Channel spacing:	1.23 MHz
Channel raster:	30 KHz

#### 4.1.3 Type of Emission

Table 6 Type of Emission

Emission Designation:	1M23F9W
-----------------------	---------

According to CFR 47 (FCC) part 2, subpart C, section 2.201 and 2.202

#### 4.1.4 Environmental Requirements

Table 7 Environmental Requirements

Minimum temperature:	- 10 °C
Maximum temperature:	+ 55 °C
Relative Humidity:	5%-95%RH

#### 4.1.5 Power Source

Table 8 Power Source

AC voltage nominal:	~ 120 V
AC voltage range	~ 100 V to ~ 240 V
AC current maximal:	1A



### 4.1.6 Tune-up Procedure

According to CFR (FCC) part 2, subpart 2, section 2.1033 (9)

Please reference the document Tune-up Procedure in TCF.

### 4.1.7 Applied DC Voltages and Currents

According to CFR (FCC) part 2, subpart 2, section 2.1033 (8)

The voltage and current in the final RF stage is:

Table 9 Applied RF module DC Voltages and Currents

Voltage:	<b>==</b> 3.7V
Current:	1000mA According to CFR (FCC) part 2, subpart 2, section 2.1033(c) (8)

## 4.2 EUT Identification List

### 4.2.1 Board Information

Table 10 Board Information



HUAWEI IDEOS SERIES; cdma2000 Digital Mobile Phone; IDEOS		
C8150		
Board and Module		
Equipment Designation / Description	Hardware Version	Serial Number
MAINBOARD	HC1C815M	1M2AA11060500022

#### 4.2.2 Battery Technical Data

Type:	Rechargeable Li-ion
Manufacturer:	Huawei Technologies Co., Ltd.
Battery Model:	HB4J1H
Rated capacity:	1200mAh
Nominal Voltage:	=== +3.7V
Charging Voltage:	=== +4.2V

#### 4.2.3 FCC Identification

Grantee Code: QIS  
Product Code: C8150  
FCC Identification: QISC8150

## 5 Main Test Instruments

Main Test Equipments

Equipment Description	Manufacturer	Model	Serial Number	Calibrated until (MM.DD.YYYY)
Receiver	R&S	ESIB 26	100318	04.21.2011



BiLog Antenna	Schaffner	CBL 6112B	2747	11.16.2010
Horn Antenna	ETS-Lindgren	3117	00062553	08.15.2010
Horn Antenna	ETS-Lindgren	3160	00060006	08.03.2010
Dipole	Schwarzbeck	D69250-UHAP/D69250-VHAP	979/917	10.11.2010
Signal Generator	R&S	SMR 40	100325	05.11.2011
Signal Generator	R&S	SMU200A	101717	04.10.2011
Power Supply	Keithley	2306	1045337	05.11.2011
Climate Chamber	WEISS	WK11-180/170	58226049470010	10.23.2010
Universal Radio Communication Tester	R&S	CMU200	112347	03.30.2011
Wireless communication test set	Agilent	8960	GB43461081	05.10.2011
Spectrum Analyzer	R&S	FSU26	200245	08.27.2010
Spectrum Analysis	Agilent	E4440a	MY48250075	07.09.2010
Power Divider	Agilent	11667B	54868	N/A

## 6 Transmitter Measurements

### 6.1 Effective Isotropic Radiated Power of Transmitter (EIRP)

#### 6.1.1 Test Conditions

Table 11 Test Conditions



Preconditioning:	1 hour
Measured at:	enclosure
Ambient temperature:	25.6°C
Relative humidity:	52%
Test Configurations:	CDMA TM1 and TM3 at frequency B,M,T EVDO Mode Subtype 0 and Subtype 2 at frequency B,M,T

## 6.1.2 Test Specifications and Limits

### 6.1.2.1 Specification

CFR 47 (FCC) part 2.1046 and part 27.50(d)

### 6.1.2.2 Supporting Standards

Table 12 Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
ANSI/TIA-98-E: 2003	Recommended Minimum Performance Standards for CDMA2000 Spread Spectrum Mobile Stations

### 6.1.2.3 Limits

Compliance with part 27.50(d), in no any case may the peak power of a Mobile Phone transmitter exceed 2 W. And calculate longitude EIRP by following formula:  $EIRP(dBm) = 10 \cdot \log(EIRP_{in\ mwatts})$ .  $EIRP(dBm) = ERP(dBm) + 2.15dB$ .

Table 13 Limits


Maximum Output Power (Watts)	< 2 Watts
Maximum Output Power (dBm)	< 33 dBm

## 6.1.3 Test Method and Setup

- For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, E.I.R.P. shall be measured when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in 2.1033(c)(8). Connect the Mobile Phone to the wireless communication tester CMU200 via the air interface. The band class is set as AWS band.
- Test the Radiated maximum output power by the CMU200 received from test antenna.
- Use substitution method to verify the Maximum output power. The EUT is substituted by a horn antenna. The horn antenna is connected to a signal generator. And then adjust the output level of the signal generator to get the same received power recorded in step (b) on CMU200, and record the power level of Signal Generator. Of course, the cable loss at the test frequency should be compensated.

### Test setup

**Step 1: Pre-test**

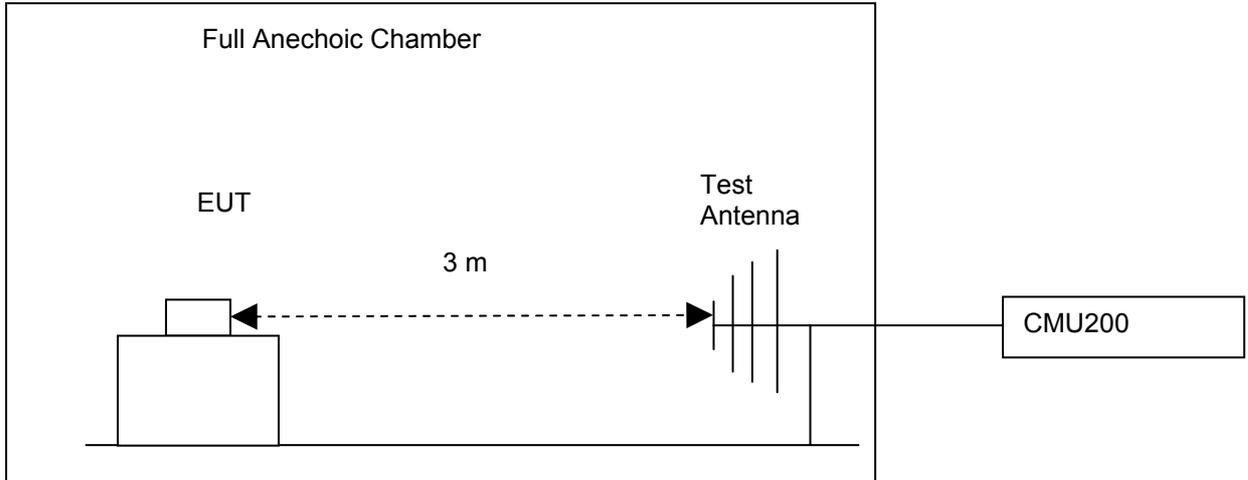

**Step 2: Substitution method to verify the maximum EIRP**

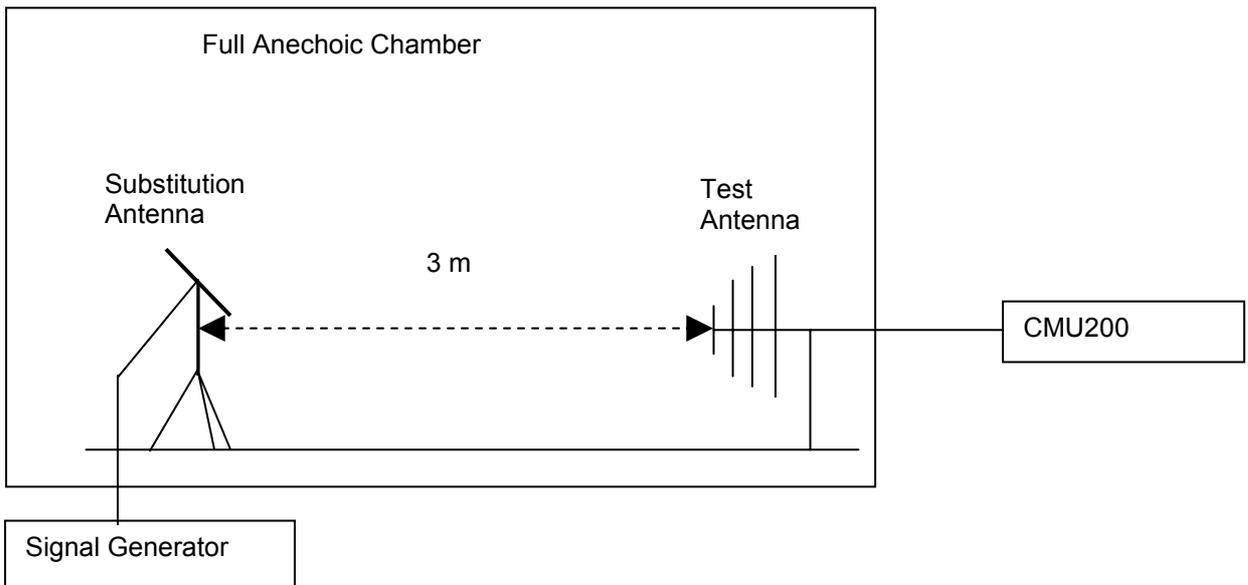


Figure 1. Test Set-up

NOTE: Effective isotropic radiated power (EIRP) refers to the radiation power output of the EUT, assuming all emissions are radiated from horn antennas substitution Results

**6.1.4 Measurement Results**

Table 14 Measurement Results

TEST CONDITIONS	RF Output Power(ERP)		
	Channel25(B) 1711.25MHz	Channel 425(M) 1731.25MHz	Channel 875(T) 1753.75MHz



		dBm		dBm		dBm	
		Measured	Limit	Measured	Limit	Measured	Limit
TM1	T <sub>nom</sub> (25 °C) V <sub>nom</sub> (3.7V)	24.56	33	24.89	33	24.53	33
TM3	T <sub>nom</sub> (25 °C) V <sub>nom</sub> (3.7V)	24.59	33	24.91	33	24.48	33
Subtype 0	T <sub>nom</sub> (25 °C) V <sub>nom</sub> (3.7V)	24.51	33	24.65	33	24.29	33
Subtype 2	T <sub>nom</sub> (25 °C) V <sub>nom</sub> (3.7V)	24.49	33	24.62	33	24.23	33

### 6.1.4.1 Substitution Results

Table 15 Substitution Results

Test Mode	Freq. [MHz]	Meas. Level [dBm]	Substitution Antenna Type	SGP [dBm]	Substitution Gain [dBi]	Cable Loss [dB]	Substitution Level (EIRP) [dBm]	Result
TM1	1711.25	24.56	Dipole Ant..	27.55	-2.18	1.0	24.37	Pass
TM1	1731.25	24.89	Dipole Ant..	28.11	-2.46	1.0	24.65	Pass
TM1	1753.75	24.53	Dipole Ant..	28.49	-2.77	1.0	24.72	Pass
TM3	1711.25	24.59	Dipole Ant..	27.84	-2.18	1.0	24.66	Pass
TM3	1731.25	24.91	Dipole Ant..	27.94	-2.46	1.0	24.48	Pass
TM3	1753.75	24.48	Dipole Ant..	28.30	-2.77	1.0	24.53	Pass
Subtype 0	1711.25	24.51	Dipole Ant..	27.85	-2.18	1.0	24.67	Pass
Subtype 0	1731.25	24.65	Dipole Ant..	27.65	-2.46	1.0	24.19	Pass
Subtype 0	1753.75	24.29	Dipole Ant..	28.05	-2.77	1.0	24.28	Pass
Subtype 2	1711.25	24.49	Dipole Ant..	27.96	-2.18	1.0	24.78	Pass
Subtype 2	1731.25	24.62	Dipole Ant..	28.30	-2.46	1.0	24.54	Pass
Subtype 2	1753.75	24.23	Dipole Ant..	28.18	-2.77	1.0	24.41	Pass

Note: a, For get the EIRP (Efficient Isotropic Radiated Power) in substitution method, the following formula should take to calculate it,

$$\text{EIRP [dBm]} = \text{SGP [dBm]} - \text{Cable Loss [dB]} + \text{Gain [dBi]}$$

SGP: Signal Generator Level

b, A CDMA EVDO with bandwidth of 1.23MHz are created by the vector generator R&S



SMU200A.

c, RBW=10kHz, VBW=300kHz, and integrated by the instrument to 1.23MHz.

### 6.1.5 Conclusion

The equipment **PASSED** the requirement of this clause.

## 6.2 Conducted output power

### 6.2.1 Test Conditions

Table 16 Test Conditions

Preconditioning:	0.5 hour
------------------	----------



Measured at:	Antenna connector
Ambient temperature:	25.6°C
Relative humidity:	52%
Test Configurations:	CDMA TM1 and TM3 at frequency B,M ,T EVDO Subtype 0 and Subtype 2 at frequency B,M ,T

## 6.2.2 Test Specifications and Limits

### 6.2.2.1 Specification

CFR 47 (FCC) part 2.1046 and part 27.50(d)

### 6.2.2.2 Supporting Standards

Table 17 Supporting Standards:

ANSI/TIA-603-C:2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
ANSI/TIA-98-E: 2003	Recommended Minimum Performance Standards for CDMA2000 Spread Spectrum Mobile Stations

### 6.2.2.3 Limits

Compliance with part 27.50(d), in no any case may the peak power of a Mobile Phone transmitter exceed 2 W. The calculated longitude EIRP by following formula:

$$EIRP(dBm) = 10 * \log(EIRP_{in \text{ mwatts}}).$$

And for conducted power, we can use Antenna Gain to calculate the limit. So the conducted power:

$$P_{cod.}(dBm) = EIRP(dBm) - Gain(dBi).$$

$$\text{and Gain (dBi)} = \text{Gain(dBd)} + 2.15dB$$

Table 18 Limits

Maximum Output Power (Watts)	< 7 Watts
Antenna Gain(dBd):	0.6
Maximum Conducted Output Power (dBm)	< 32.4dBm

In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

## 6.2.3 Test Method and Setup

(a)For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, Conducted maximum power shall be measured when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit

elements specified in 2.1033(c)(8). Connect the Mobile Phone to the wireless communication tester CMU200 via the antenna connector. The band class is set as AWS band.  
(b) Test the Conducted maximum output power by the CMU200.  
(c) The mobile was set up for the max output power with pseudo random data modulation. The power was measured with Agilent E4440A (peak and average).

**Test setup**

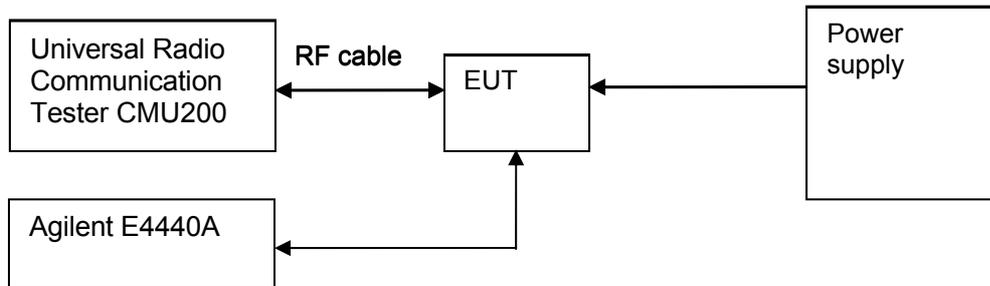


Figure 2. Test Set-up

**6.2.4 Measurement Results**

Table 19 Measurement Results

TEST CONDITIONS		RF Output Power(ERP)					
		Channel 25(B) 1711.25MHz		Channel 425(M) 1731.25MHz		Channel 875(T) 1753.75MHz	
		dBm		dBm		dBm	
		Measured	Limit	Measured	Limit	Measured	Limit
TM1	Tnom (25 °C) Vnom (3.7V)	23.96	32.4	24.29	32.4	23.93	32.4
TM3	Tnom (25 °C) Vnom (3.7V)	23.99	32.4	24.31	32.4	23.88	32.4
Subtype 0	Tnom (25 °C) Vnom (3.7V)	23.91	32.4	24.05	32.4	23.69	32.4
Subtype 2	Tnom (25 °C) Vnom (3.7V)	23.89	32.4	24.02	32.4	23.63	32.4

**6.2.5 Conclusion**

The equipment **PASSED** the requirement of this clause.

## 6.3 Modulation Characteristics

### 6.3.1 Test Conditions

Table 20 Test Conditions

Preconditioning:	1 hour
Measured at:	Antenna connector
Ambient temperature:	25.6 °C
Relative humidity:	52 %
Test Configurations:	CDMA mode TM1 and TM3 at frequency M EVDO mode Subtype 0 and Subtype 2 at frequency M

### 6.3.2 Test Specifications and Limits

#### 6.3.2.1 Specification

CFR 47 (FCC) part 2.1047 and part 27 subpart C&L.

#### 6.3.2.2 Supporting Standards

Table 21 Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
ANSI/TIA-98-E: 2003	Recommended Minimum Performance Standards for CDMA2000 Spread Spectrum Mobile Stations.

#### 6.3.2.3 Limits

No specific modulation characteristics requirement limits in part 2.1047 and part 27.

Table 22 Limits

Limits	Not applicable
--------	----------------

### 6.3.3 Test Method and Setup

Connect the Mobile Phone to the Universal Radio Communication Tester CMU200 via the antenna connector. The band class is set as AWS band; the Mobile Phone's output is matched with 50  $\Omega$  loads. Test method was according to ANSI/TIA-98-E. The waveform quality of the Mobile Phone was tested.

#### Test setup

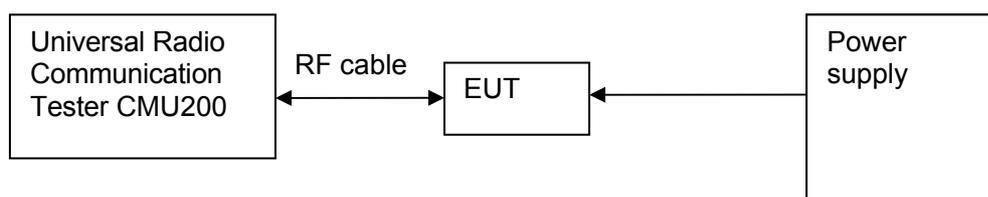


Figure 3. Test Set-up



### 6.3.4 Measurement Results

Table 23 Measurement Results

TEST CONDITIONS		Modulation Characteristic	
		Channel 425(M) 1731.25MHz	
		Measured	
		CDMA Mode TM1 & TM3	EVDO Mode Subtype 0 & Subtype 2
T <sub>nom</sub> (25 °C)	V <sub>nom</sub> (3.7V)	Refer to Appendix A	Refer to Appendix A

### 6.3.5 Conclusion

The equipment **PASSED** the requirement of this clause.

For the measurement results refer to appendix A.



## 6.4 Occupied Bandwidth

### 6.4.1 Test Conditions

Table 24 Test Conditions

Preconditioning:	1 hour
Measured at:	Antenna connector
Ambient temperature:	25.6 °C
Relative humidity:	52 %
Test Configurations:	CDMA TM1 and TM3 at frequency B,M ,T EVDO Mode Subtype 0 and Subtype 2 at frequency B,M ,T

### 6.4.2 Test Specifications and Limits

#### 6.4.2.1 Specification

CFR 47 (FCC) part 2.1049 and part 27 subpart C&L

#### 6.4.2.2 Supporting Standards

Table 25 Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
ANSI/TIA-98-E: 2003	Recommended Minimum Performance Standards for CDMA2000 Spread Spectrum Mobile Stations

#### 6.4.2.3 Limits

No specific occupied bandwidth requirement in part 27 subpart C&L, but the occupied bandwidth was defined in part 2.1049: the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.

Table 26 Limits

Upper /lower frequency limits	0.5% of the mean power
-------------------------------	------------------------

### 6.4.3 Test Method and Setup

Mobile Phone was connected to the wireless communication test set CMU200 and the Spectrum Analyzer E4440A via the divider. The band class is set as AWS band; Mobile Phone was controlled to transmit Maximum power. Measure and record the Occupied Bandwidth of the Mobile Phone by the Spectrum Analyzer E4440A

The OBW, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions as applicable:

Refer to 47CFR part2.1049 section (g)&(h).

(g) Transmitter in which the modulating base band comprises not more than three independent channels - when modulated by the full complement of signals for which the transmitter is rated. The level of modulation for each channel should be set to that prescribed in rule parts applicable to the services for which the transmitter is intended. If specific modulation levels are not set forth in the rules, the tests should provide the manufacturer's maximum rated condition.

(h) Transmitters employing digital modulation techniques - when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudorandom generators or other devices required in normal service. Additionally, the occupied bandwidth shall be shown for operation with any devices used for modifying the spectrum when such devices are optional at discretion of the user.

Measurement bandwidth (RBW): 30 kHz (Resolution bandwidth)  
Video bandwidth (VBW): 300 kHz

**Test Set-up**

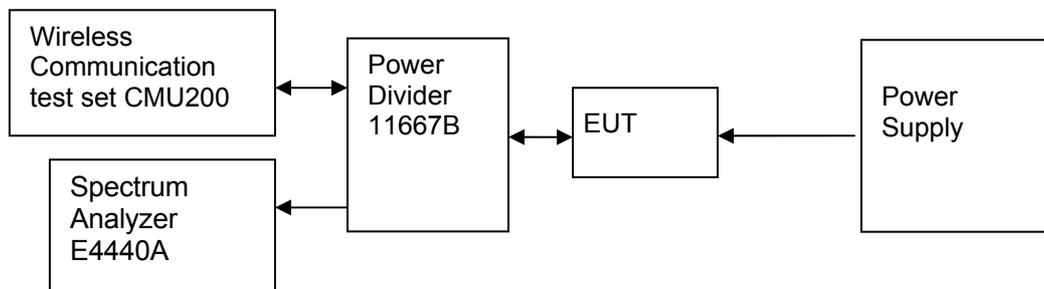


Figure 4. Test Set-up

**6.4.4 Measurement Results**

Table 27 Measurement Results

TEST CONDITIONS		Occupied Bandwidth											
		Channel 25 (B) 1711.25MHz				Channel 425 (B) 1731.25MHz				Channel 875(T) 1753.75MHz			
		Measured (MHz)				Measured (MHz)				Measured (MHz)			
		CDMA		EVDO		CDMA		EVDO		CDMA		EVDO	
		TM1	TM3	Subtype 0	Subtype 2	TM1	TM3	Subtype 0	Subtype 2	TM1	TM3	Subtype 0	Subtype 2
Tnom (25 °C)	Vnom (3.7V)	1.26	1.26	1.28	1.28	1.29	1.30	1.27	1.28	1.29	1.28	1.30	1.27



## 6.4.5 Conclusion

The equipment **PASSED** the requirement of this clause.  
For the measurement results refer to appendix B.



## 6.5 Band Edges Compliance

### 6.5.1 Test Conditions

Table 28 Test Conditions

Preconditioning:	1 hour
Measured at:	Antenna connector
Ambient temperature:	25.6°C
Relative humidity:	52 %
Test Configurations:	CDMA TM1 and TM3 at frequency B,T EVDO Mode Subtype 0 and Subtype 2 at frequency B,T

### 6.5.2 Test Specifications and Limits

#### 6.5.2.1 Specification

CFR 47 (FCC) part 2.1051 and part 27.53(g)

#### 6.5.2.2 Supporting Standards

Table 29 Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
ANSI/TIA-98-E: 2003	Recommended Minimum Performance Standards for CDMA2000 Spread Spectrum Mobile Stations

#### 6.5.2.3 Limits

Compliance with 27.53(g) all spurious emission must be attenuated below the transmitter power by at least  $43 + 10 \log_{10} P$ . (Whereas P is the rated power of the EUT).

Table 30 Limits

Conducted Rated Power:	24.0 dBm
Required attenuation:	$43 + 10 \log_{10} (0.251) = 37.0$ , 24.0 dBm – 37.0 dB
Absolute level	- 13 dBm

### 6.5.3 Test Method and Setup

Mobile Phone was connected to the wireless communication test set CMU200 and the Spectrum Analyzer E4440A via the divider, the band class is set as AWS band. Mobile Phone was controlled to transmit Maximum power. Measure and record Band edge compliance of the Mobile Phone by the E4440A.

Measurement bandwidth (RBW): 13 kHz (Resolution bandwidth)  
Video bandwidth (VBW): 130 kHz

### Test Set-up

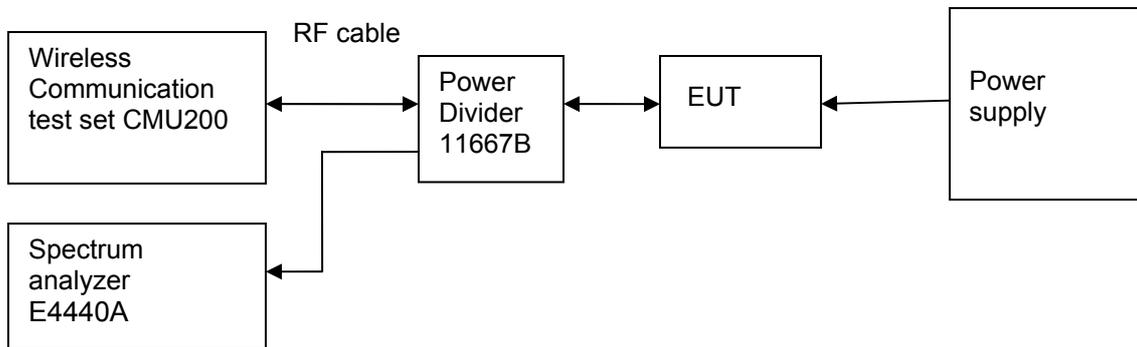


Figure 5. Test Set-up

### 6.5.4 Measurement Results

Table 31 Measurement Results outside Band Edges-- Single Carrier

Band	Frequency of Band edges [MHz]	Channel Number	Test Mode	Power [dBm]	Spurious Level measured [dBm]	FCC limit	Result
Tnom (25 °C), Vnom (3.7V)							
AWS Band	1710	25 (B)	TM1 & TM3	24.0	<-13(See appendix C)	- 13 dBm	Pass
	1755	875(T)	TM1 & TM3	24.0	<-13(See appendix C)	- 13 dBm	Pass
	1710	25 (B)	Subtype 0 & Subtype 2	24.0	<-13(See appendix C)	- 13 dBm	Pass
	1755	875(T)	Subtype 0 & Subtype 2	24.0	<-13(See appendix C)	- 13 dBm	Pass

### 6.5.5 Conclusion

The equipment **PASSED** the requirement of this clause.  
For the measurement results refer to appendix C.



## 6.6 Spurious Emission at Antenna Terminal

### 6.6.1 Test Conditions

Table 32 Test Conditions

Preconditioning:	1 hour
Measured at:	Antenna connector
Ambient temperature:	25.6°C
Relative humidity:	52%
Test Configurations:	CDMA TM1 and TM3 at frequency B,M,T EVDO Mode Subtype 0 and Subtype 2 at frequency B,M,T

### 6.6.2 Test Specifications and Limits

#### 6.6.2.1 Specification

CFR 47 (FCC) part 2.1051 and part 27.53(g)

#### 6.6.2.2 Supporting Standards

Table 33 Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
ANSI/TIA-98-E: 2003	Recommended Minimum Performance Standards for CDMA2000 Spread Spectrum Mobile Stations. Release C

#### 6.6.2.3 Limits

Compliance with part 27.53(g), all spurious emission must be attenuated below the transmitter power by at least  $43 + 10 \log_{10} P$ . (Whereas P is the rated power of the EUT).

Table 34 Limits

Conducted Rated Power:	24 dBm
Required attenuation:	$43 + 10 \log(0.251) = 37$ , 24 dBm – 37 dB
Absolute level	- 13 dBm

### 6.6.3 Test Method and Setup

Mobile Phone was connected to the wireless communication test set CMU200 and the Spectrum Analyzer E4440A via the divider, the band class is set as AWS band. Mobile Phone was controlled to transmit Maximum power. Measure and record the Conducted Spurious Emission of the Mobile Phone by the Spectrum Analyzer E4440A.

According to part 27.53, the defined measurement bandwidth as following:

24.238(b) Measurement procedure: Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater.

Measurement bandwidth (RBW) for 9 kHz up to 150 kHz: 1 kHz;  
Measurement bandwidth (RBW) for 150 kHz up to 30 MHz: 10 kHz;  
Measurement bandwidth (RBW) for 30 MHz up to 20 GHz: 1 MHz;

### Test Set-up

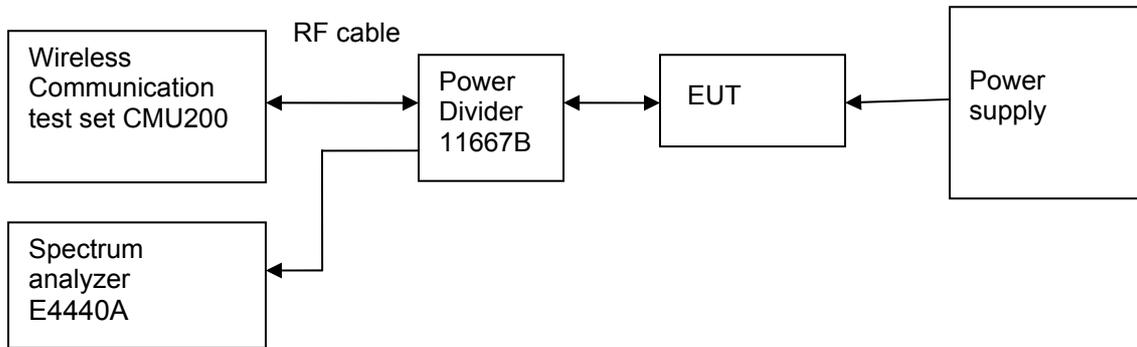


Figure 6. Test Set-up

### 6.6.4 Measurement Results

Table 35 Measurement Results

Channel Number	Test Mode	Test Range (Frequency)	Conducted Rated Power [dBm]	Spurious Level measured [dBm]	FCC limit	Result
Channel 25(B)	TM1	9 kHz ~20GHz	24.00	<- 13 dBm (See appendix D)	- 13 dBm	Pass
	TM3	9 kHz ~20GHz	24.00	<- 13 dBm (See appendix D)	- 13 dBm	Pass
	Subtype 0	9 kHz ~20GHz	24.00	<- 13 dBm (See appendix D)	- 13 dBm	Pass
	Subtype 2	9 kHz ~20GHz	24.00	<- 13 dBm (See appendix D)	- 13 dBm	Pass
Channel 425(M)	TM1	9 kHz ~20GHz	24.00	<- 13 dBm (See appendix D)	- 13 dBm	Pass
	TM3	9 kHz ~20GHz	24.00	<- 13 dBm (See appendix D)	- 13 dBm	Pass
	Subtype 0	9 kHz ~20GHz	24.00	<- 13 dBm (See appendix D)	- 13 dBm	Pass
	Subtype 2	9 kHz ~20GHz	24.00	<- 13 dBm (See appendix D)	- 13 dBm	Pass



Channel 875(T)	TM1	9 kHz ~20GHz	24.00	<- 13 dBm (See appendix D)	- 13 dBm	Pass
	TM3	9 kHz ~20GHz	24.00	<- 13 dBm (See appendix D)	- 13 dBm	Pass
	Subtype 0	9 kHz ~20GHz	24.00	<- 13 dBm (See appendix D)	- 13 dBm	Pass
	Subtype 2	9 kHz ~20GHz	24.00	<- 13 dBm (See appendix D)	- 13 dBm	Pass

### 6.6.5 Conclusion

The equipment **PASSED** the requirement of this clause.  
For the measurement results refer to appendix D.



## 6.7 Frequency Stability

### 6.7.1 Test Conditions

Table 36 Test Conditions

Preconditioning:	1 hour
Measured at:	Antenna connector
Ambient temperature:	See below
Relative humidity:	52 % at 25.6 °C
Test Configurations:	CDMA TM1 and TM3 at frequency M EVDO Mode Subtype 0 and Subtype 2 at frequency M

### 6.7.2 Test Specifications and Limits

#### 6.7.2.1 Specification

CFR 47 (FCC) part 2.1055 and part 27.54

#### 6.7.2.2 Supporting Standards

Table 37 Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
EIA/TIA-98E: 2003	Recommended Minimum Performance Standards for CDMA2000 Spread Spectrum Mobile Stations.

#### 6.7.2.3 Limits

No specific frequency stability requirement in part 2.1055 and part 27.54.

### 6.7.3 Test Method and Setup

The frequency stability shall be measured with variation of ambient temperature as follows:

- (1) From  $-30^{\circ}$  to  $+50^{\circ}$  centigrade for all equipment except that specified in subparagraphs (2) and (3) of paragraph 2.1055

(b) Frequency measurements shall be made at the extremes of the specified temperature range and at intervals of not more than  $10^{\circ}$  centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short-term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stabilizing circuitry need be subjected to the temperature variation test.

(d) The frequency stability shall be measured with variation of primary supply voltage as follows:

- (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
- (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point, which shall be specified by the manufacturer.

(3) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.

(e) When deemed necessary, the Commission may require tests of frequency stability under conditions in addition to those specifically set out in paragraphs (a), (b), (c) and (d) of this section. (For example, measurements showing the effect of proximity to large metal objects, or of various types of antennas, may be required for portable equipment.)

The EUT can only work in such extreme voltage 3.6V and 4.2V, so here the EUT is tested in the 3.6V and 4.2V.

### Test Set up

Connect the Mobile Phone to the Wireless Communication test set CMU200 via the connector. Then measure the frequency error by the Wireless Communication test set CMU200. The Mobile Phone's output is matched with a 50 Ω load.

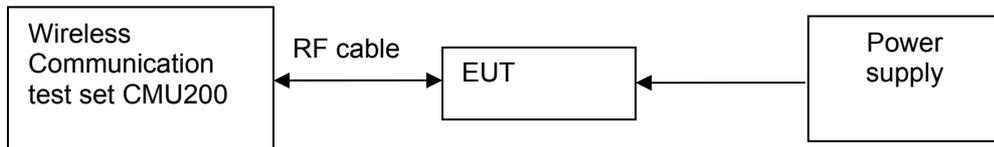


Figure 7. Test Set up

## 6.7.4 Measurement Results

### 6.7.4.1 Measurement Results vs. Variation of Temperature

- AWS, TM1, 3.7V DC Channel No.425(1731.25MHz)

Table 38 Measurement Results vs. Variation of Temperature—TM1

Temperature	Power (dBm)	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
-30 °C	24	1731.25	6	Pass
-20 °C	24	1731.25	-1	Pass
-10 °C	24	1731.25	-8	Pass
0 °C	24	1731.25	-13	Pass
+10 °C	24	1731.25	4	Pass
+20 °C	24	1731.25	12	Pass
+30 °C	24	1731.25	7	Pass
+40 °C	24	1731.25	-4	Pass
+50 °C	24	1731.25	9	Pass



● AWS, TM3, 3.7V DC Channel No.425(1731.25MHz)

Table 39 Measurement Results vs. Variation of Temperature—TM3

Temperature	Power (dBm)	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
-30 °C	24	1731.25	4	Pass
-20 °C	24	1731.25	13	Pass
-10 °C	24	1731.25	-2	Pass
0 °C	24	1731.25	-10	Pass
+10 °C	24	1731.25	6	Pass
+20 °C	24	1731.25	9	Pass
+30 °C	24	1731.25	-1	Pass
+40 °C	24	1731.25	7	Pass
+50 °C	24	1731.25	2	Pass

● Subtype 0, 3.7V DC Channel No.425(1731.25MHz)

Table 40 Measurement Results vs. Variation of Temperature—EVDO

Temperature	Power (dBm)	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
-30 °C	24	1731.25	10	Pass
-20 °C	24	1731.25	7	Pass
-10 °C	24	1731.25	4	Pass
0 °C	24	1731.25	-3	Pass
+10 °C	24	1731.25	-12	Pass
+20 °C	24	1731.25	5	Pass
+30 °C	24	1731.25	11	Pass
+40 °C	24	1731.25	6	Pass
+50 °C	24	1731.25	-2	Pass

● Subtype 2, 3.7V DC Channel No.425(1731.25MHz)

Table 41 Measurement Results vs. Variation of Temperature—EVDO

Temperature	Power (dBm)	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
-30 °C	24	1731.25	-5	Pass

-20 °C	24	1731.25	-12	Pass
-10 °C	24	1731.25	2	Pass
0 °C	24	1731.25	7	Pass
+10 °C	24	1731.25	14	Pass
+20 °C	24	1731.25	6	Pass
+30 °C	24	1731.25	-3	Pass
+40 °C	24	1731.25	8	Pass
+50 °C	24	1731.25	11	Pass

#### 6.7.4.2 Measurement Results vs. Variation of Voltage

- TM1, 25 °C ,Channel No. 425(1731.25MHz)

Table 42 Measurement Results vs. Variation of Voltage—TM1

Voltage	Power (dBm)	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
3.6	24	1731.25	4	Pass
3.7	24	1731.25	-15	Pass
4.2	24	1731.25	7	Pass

- TM3, 25 °C ,Channel No. 425(1731.25MHz)

Table 43 Measurement Results vs. Variation of Voltage—TM3

Voltage	Power (dBm)	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
3.6	24	1731.25	-9	Pass
3.7	24	1731.25	4	Pass
4.2	24	1731.25	-13	Pass

- Subtype 0 , 25 °C ,Channel No. 425(1731.25MHz)

Table 44 Measurement Results vs. Variation of Voltage—EVDO

Voltage	Power (dBm)	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
3.6	24	1731.25	8	Pass
3.7	24	1731.25	2	Pass
4.2	24	1731.25	-10	Pass



- Subtype 2 , 25 °C ,Channel No. 425(1731.25MHz)

Table 45 Measurement Results vs. Variation of Voltage –EVDO

Voltage	Power (dBm)	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
3.6	24	1731.25	6	Pass
3.7	24	1731.25	12	Pass
4.2	24	1731.25	-5	Pass

### 6.7.5 Conclusion

The equipment **PASSED** the requirement of this clause.



## 7 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

Table 46 System Measurement Uncertainty

Items		Extended Uncertainty
Effective Radiated Power of Transmitter	ERP(dBm)	U=3dB; k=2
Band Width	Magnitude (%)	U=0.2%; k=2
Band Edge Compliance	Disturbance Power (dBm)	U=2.0dB; k=2
Conducted Spurious Emission at Antenna Terminal	Disturbance Power (dBm)	U=2.0dB; k=2
Frequency Stability	Frequency Accuracy (ppm)	U=0.21ppm; k=2
Conducted Output Power	Power(dBm)	U=0.39dB; k=2



## **8 Appendixes**

Appendix A	Measurement Results Modulation Characteristics	7 pages
Appendix B	Measurement Results Occupied Bandwidth	13 pages
Appendix C	Measurement Results Band Edges	13 pages
Appendix D	Measurement Results Spurious Emission at Antenna Terminal	73 pages

----- END OF REPORT -----