Appendix A: 20dB Emission Bandwidth (EBW)

1 Result Table

EUT Conf.	EBW [MHz]	Verdict
TM1_DH5_Ch0	0.864	Pass
TM1_DH5_Ch39	0.863	Pass
TM1_DH5_Ch78	0.864	Pass
TM2_2DH5_Ch0	1.276	Pass
TM2_2DH5_Ch39	1.279	Pass
TM2_2DH5_Ch78	1.278	Pass
TM3_3DH5_Ch0	1.278	Pass
TM3_3DH5_Ch39	1.277	Pass
TM3_3DH5_Ch78	1.279	Pass

2 Test Plot

2.1 TM1_DH5_Ch0

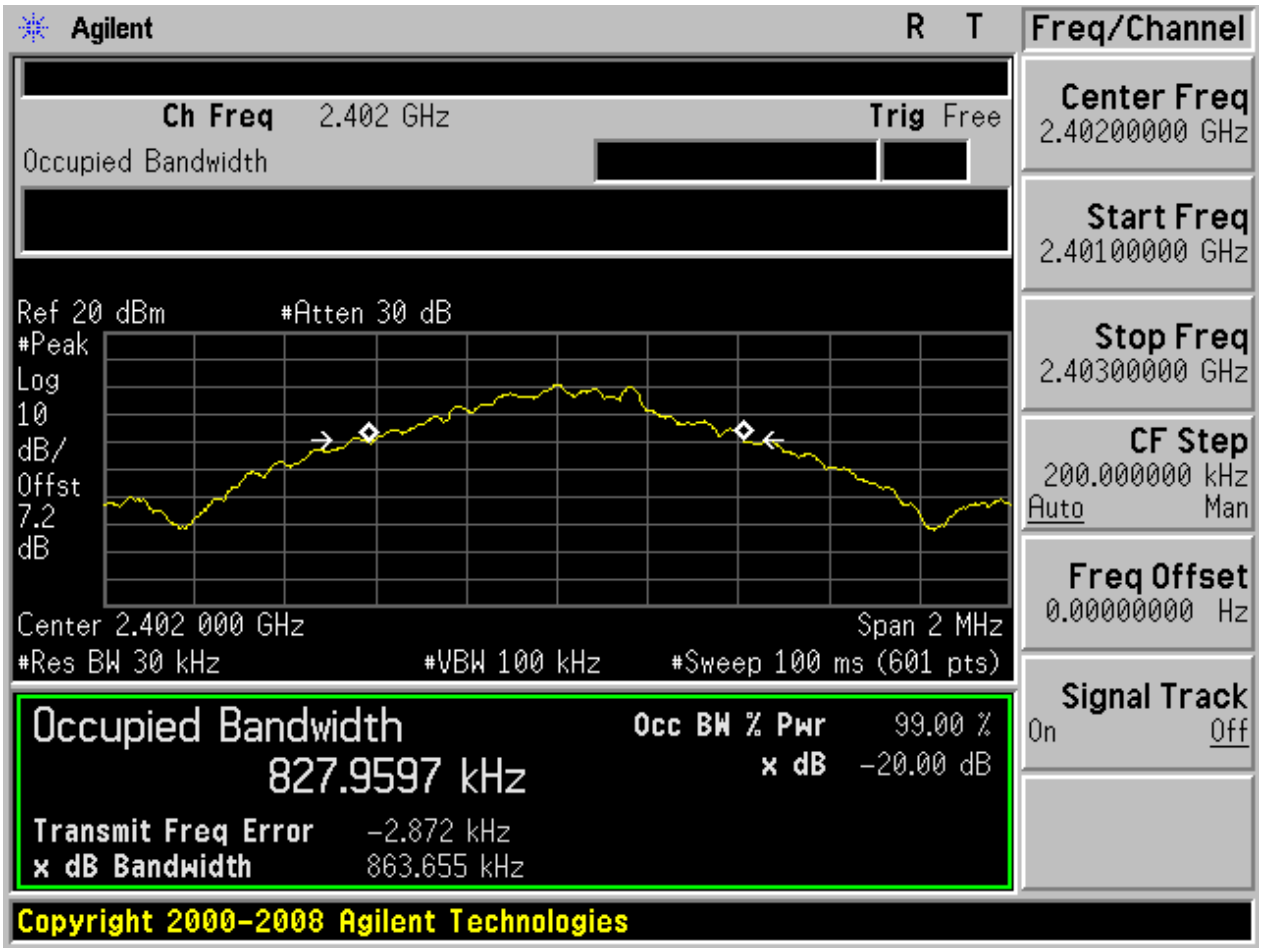

2.2 TM1_DH5_Ch39

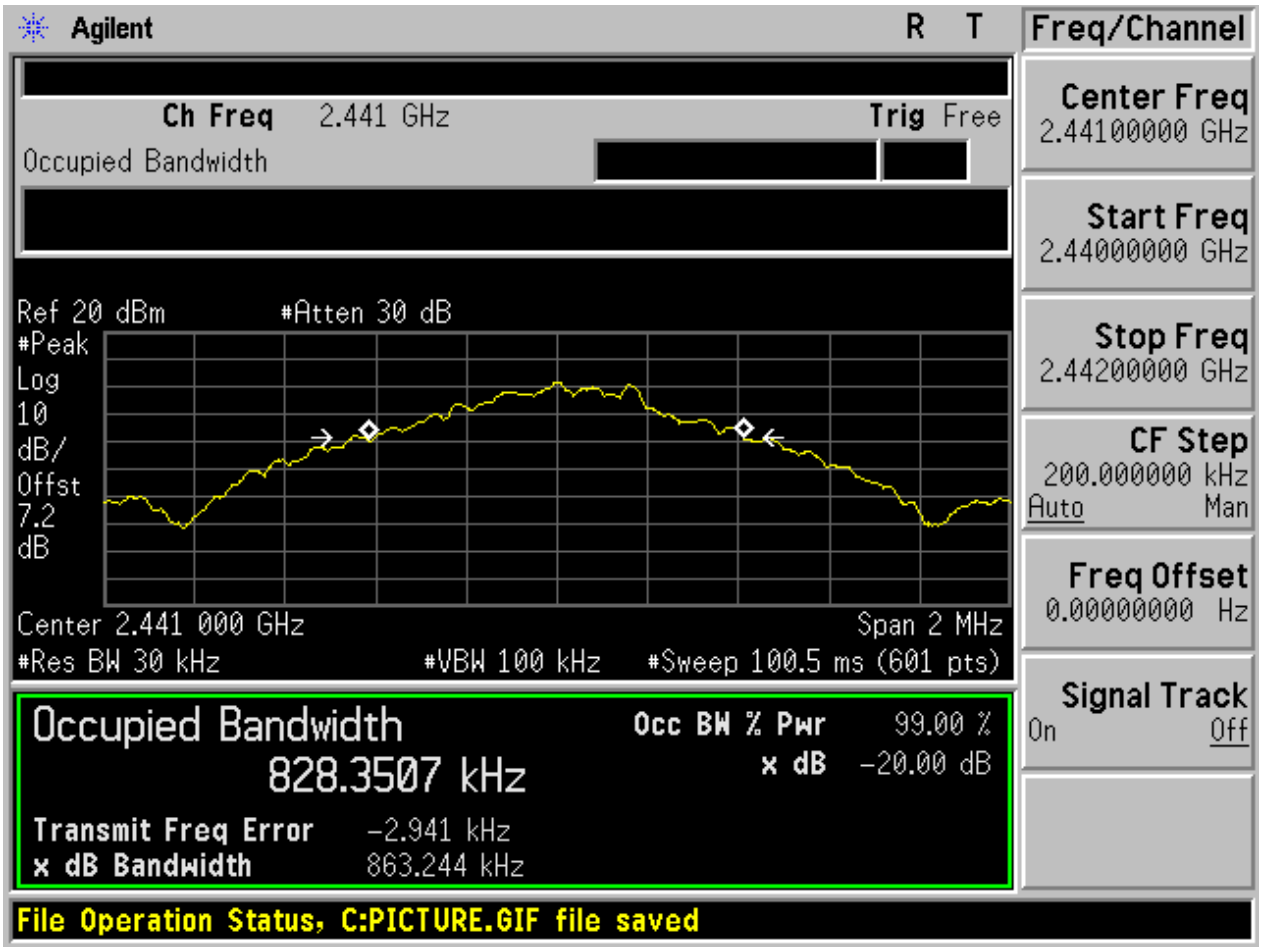

2.3 TM1_DH5_Ch78

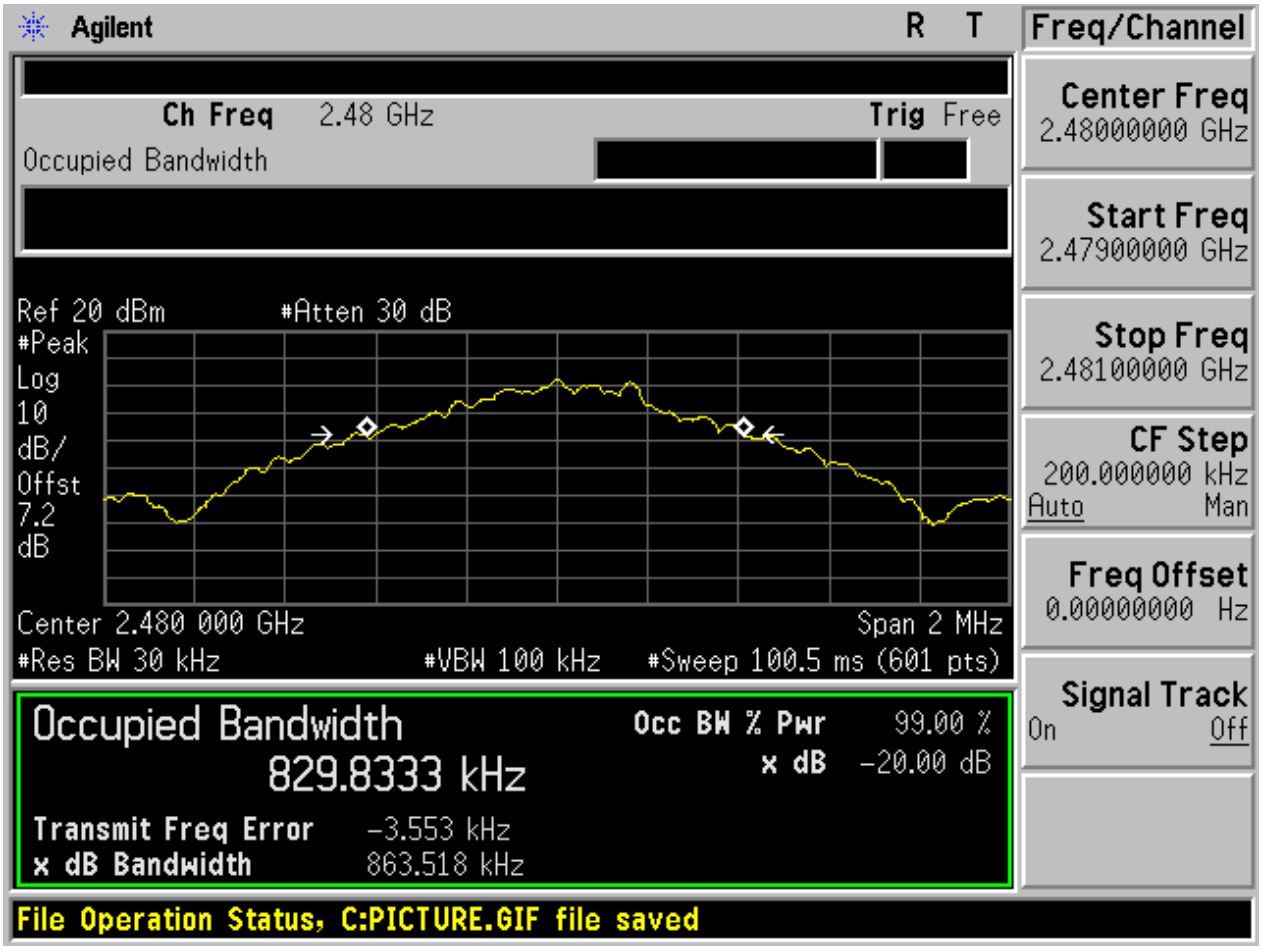

2.4 TM2_2DH5_Ch0

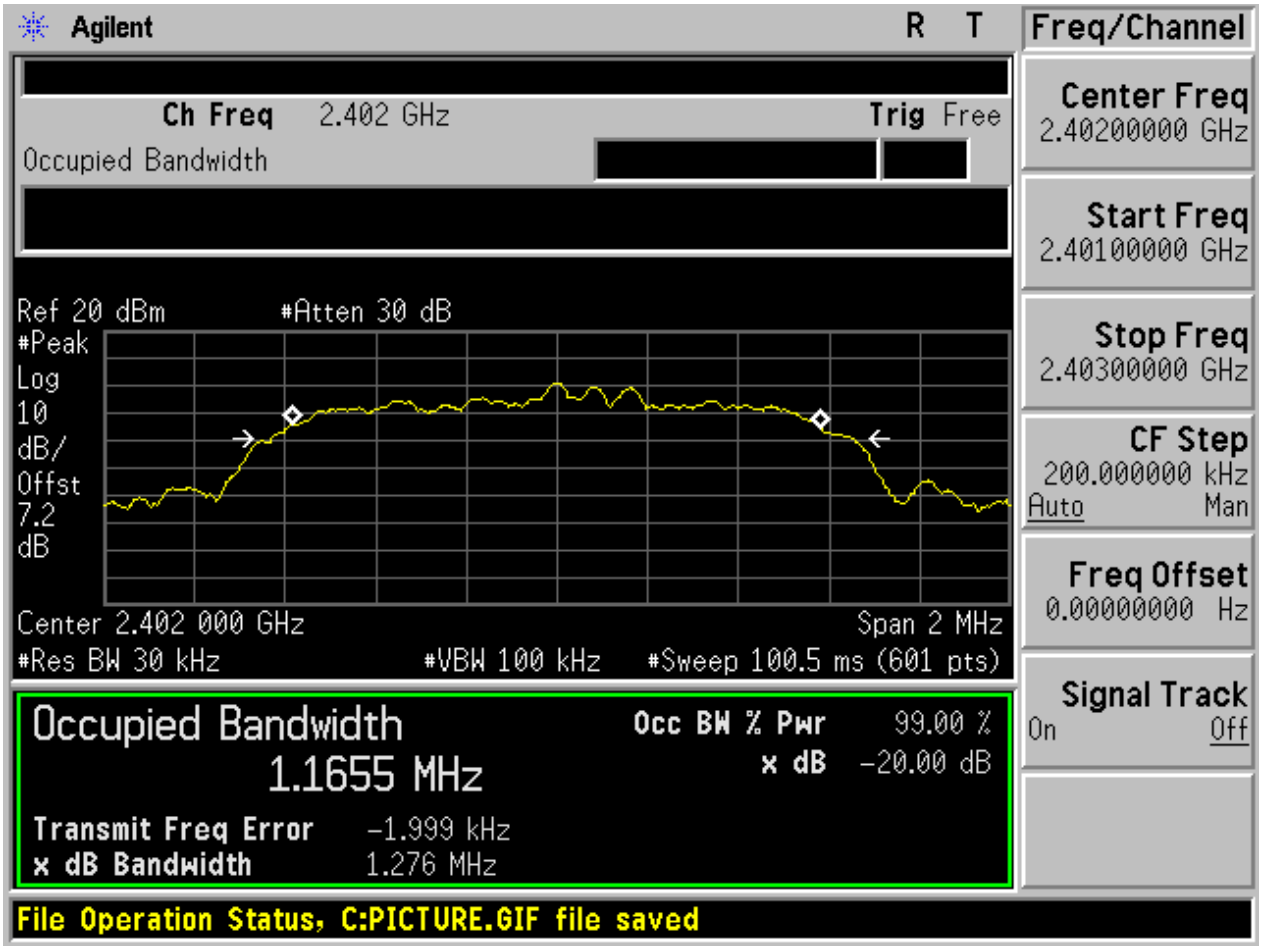

2.5 TM2_2DH5_Ch39

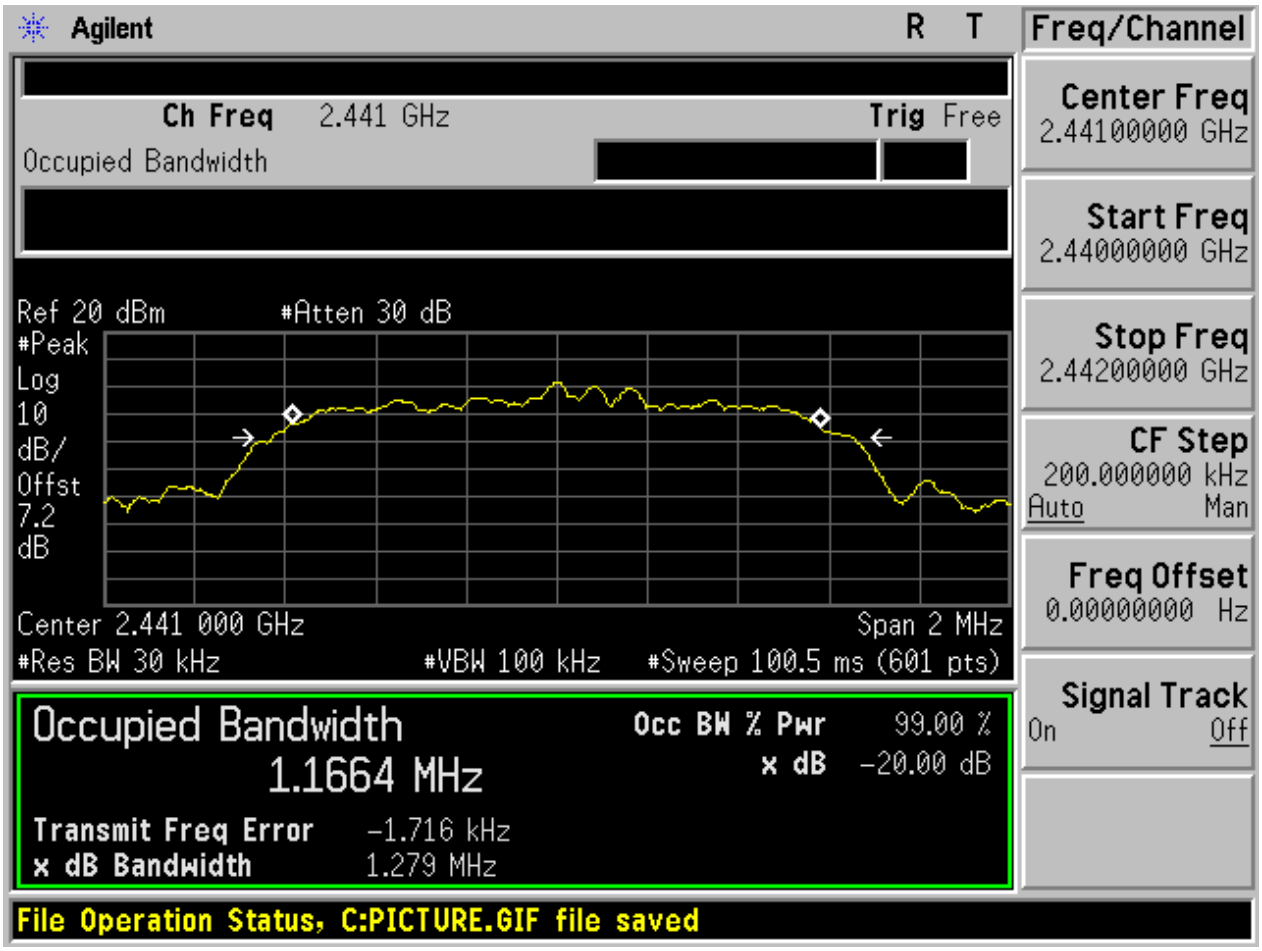

2.6 TM2_2DH5_Ch78

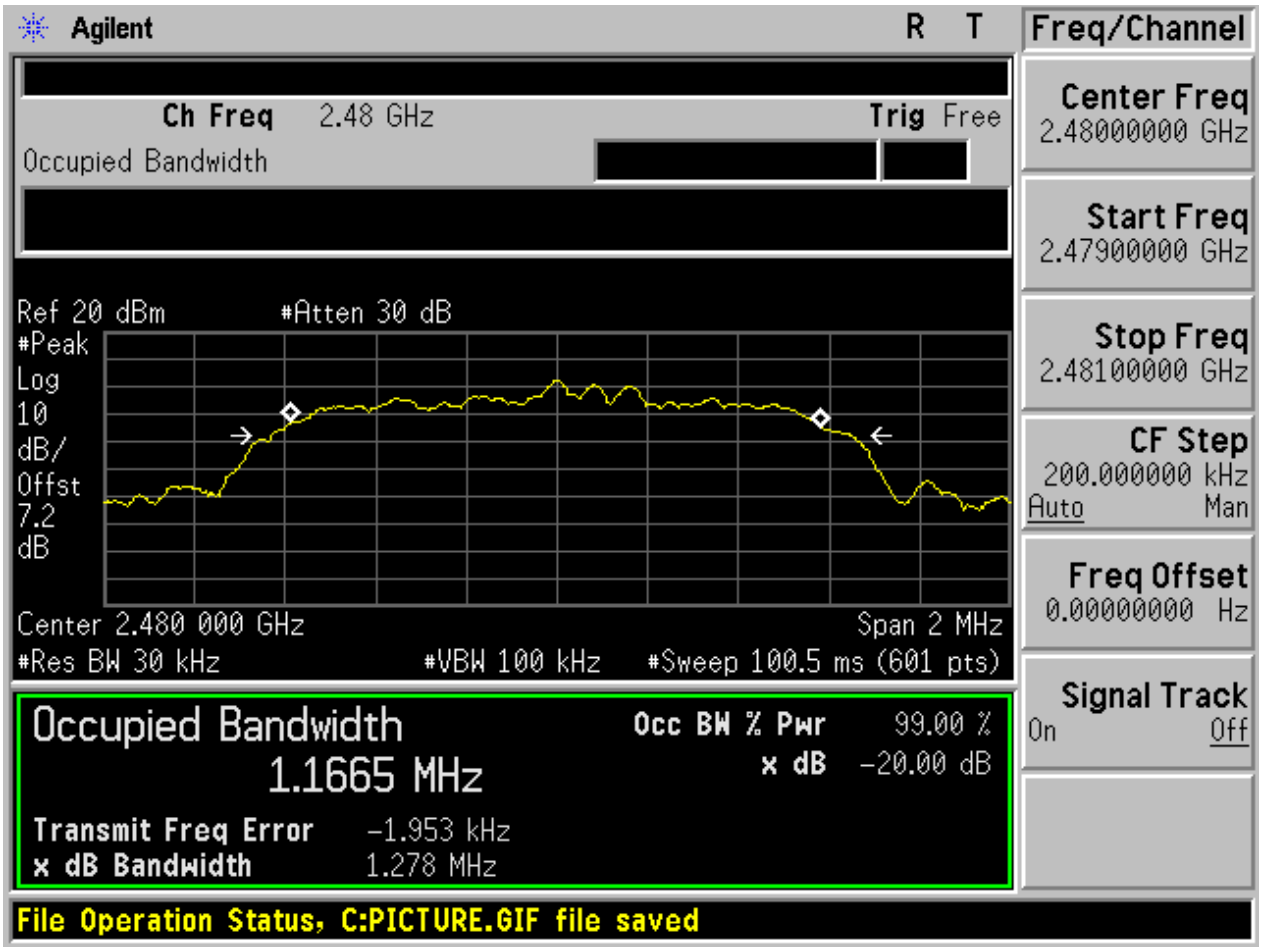

2.7 TM3_3DH5_Ch0

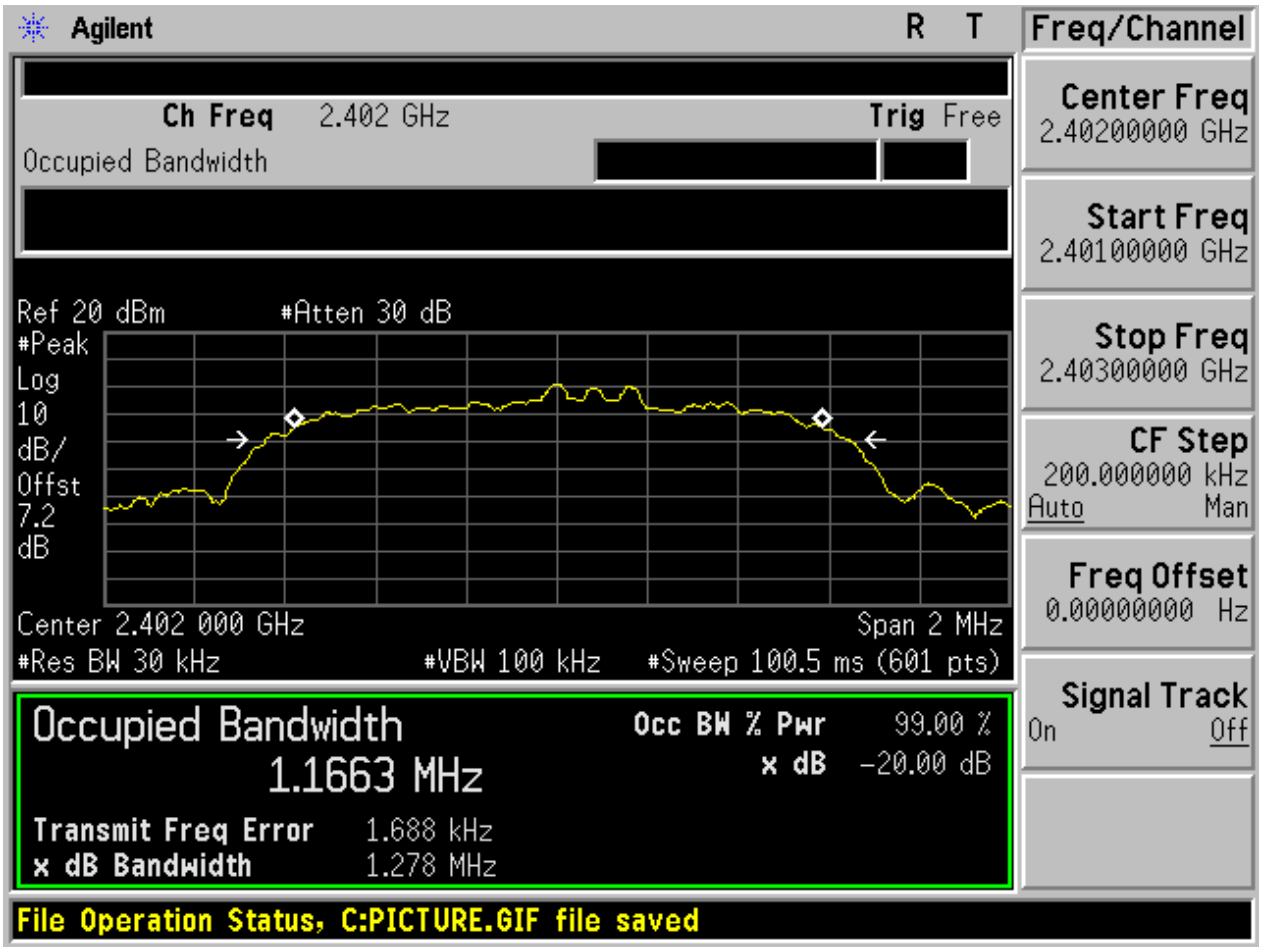

2.8 TM3_3DH5_Ch39

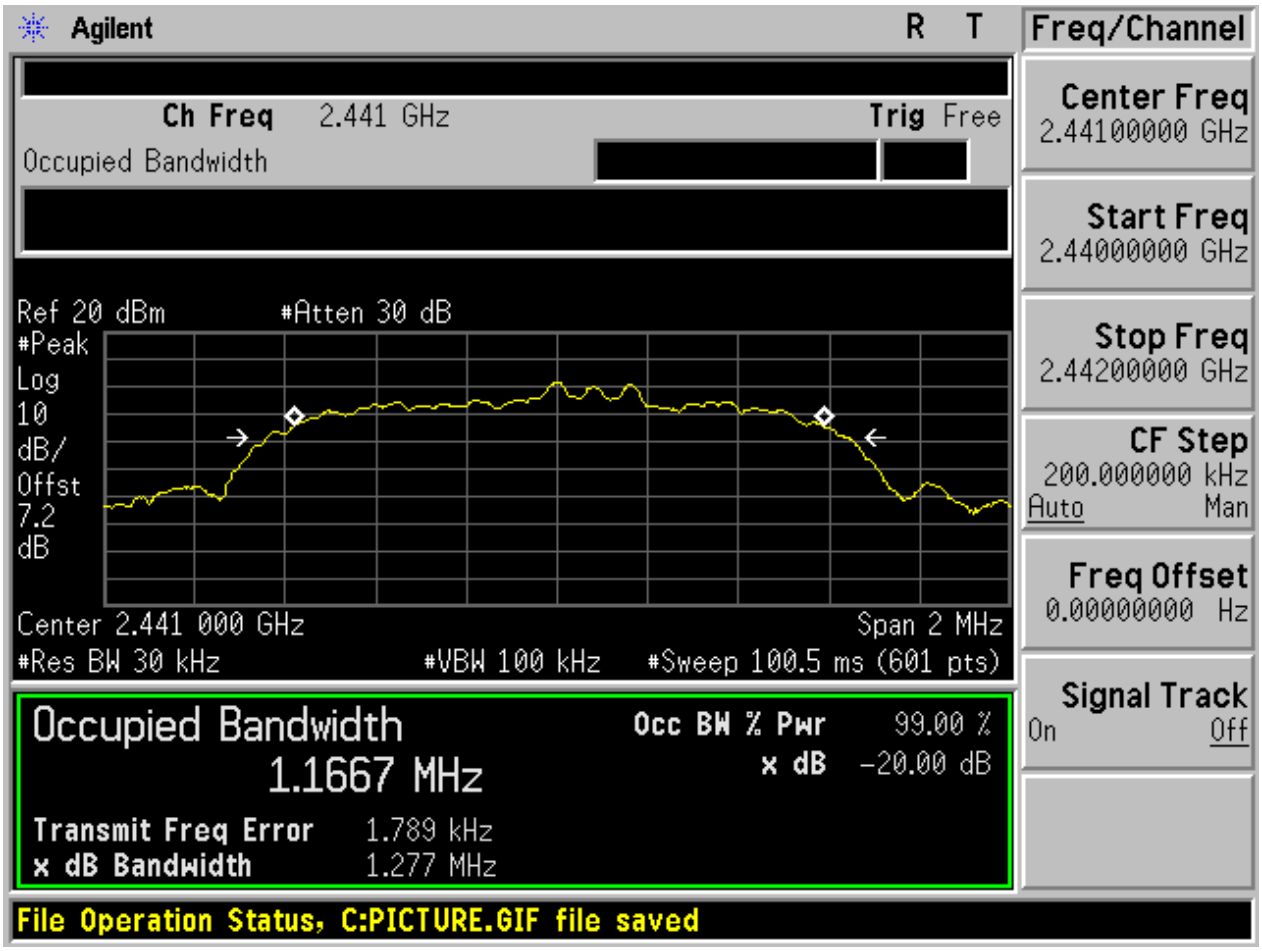

2.9 TM3_3DH5_Ch78

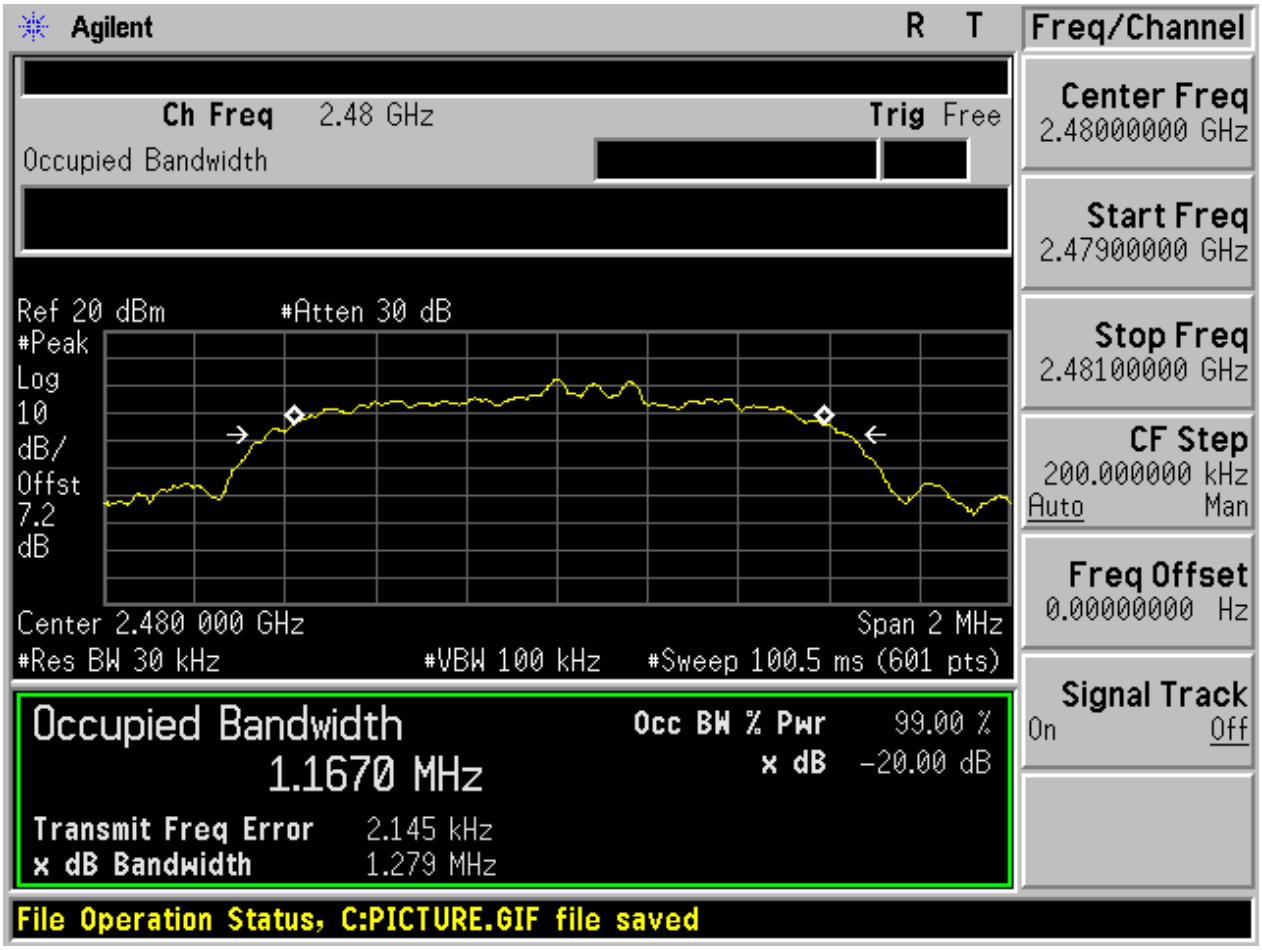

Appendix B: Carrier Frequency Separation

1 Result Table

EUT Conf.	Carrier Frequency Separation [MHz]	Verdict
TM1_DH5_Hop	1.000	Pass
TM2_2DH5_Hop	0.950	Pass
TM3_3DH5_Hop	0.900	Pass

2 Test Plot

2.1 TM1_DH5_Hop

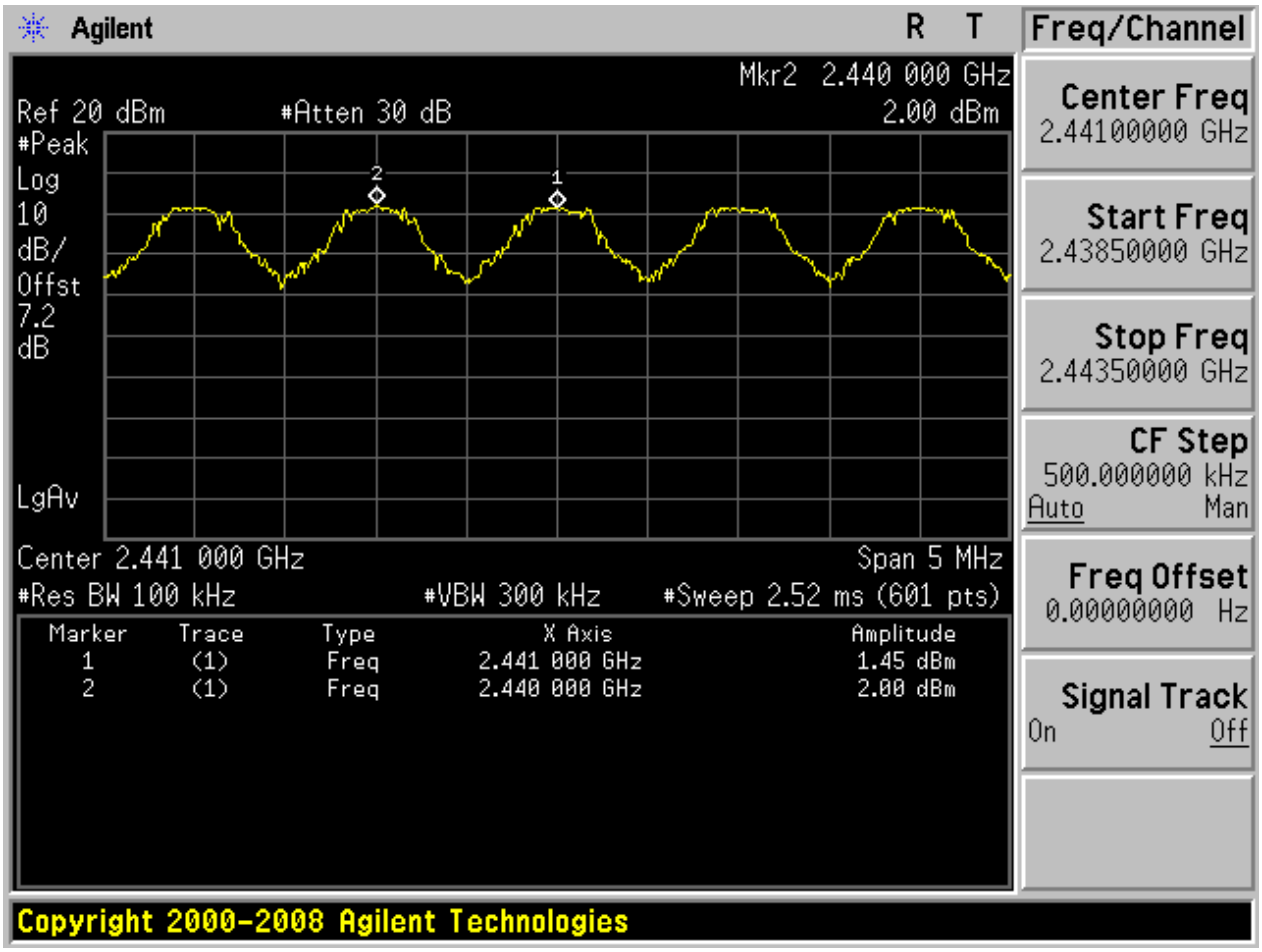

2.2 TM2_2DH5_Hop

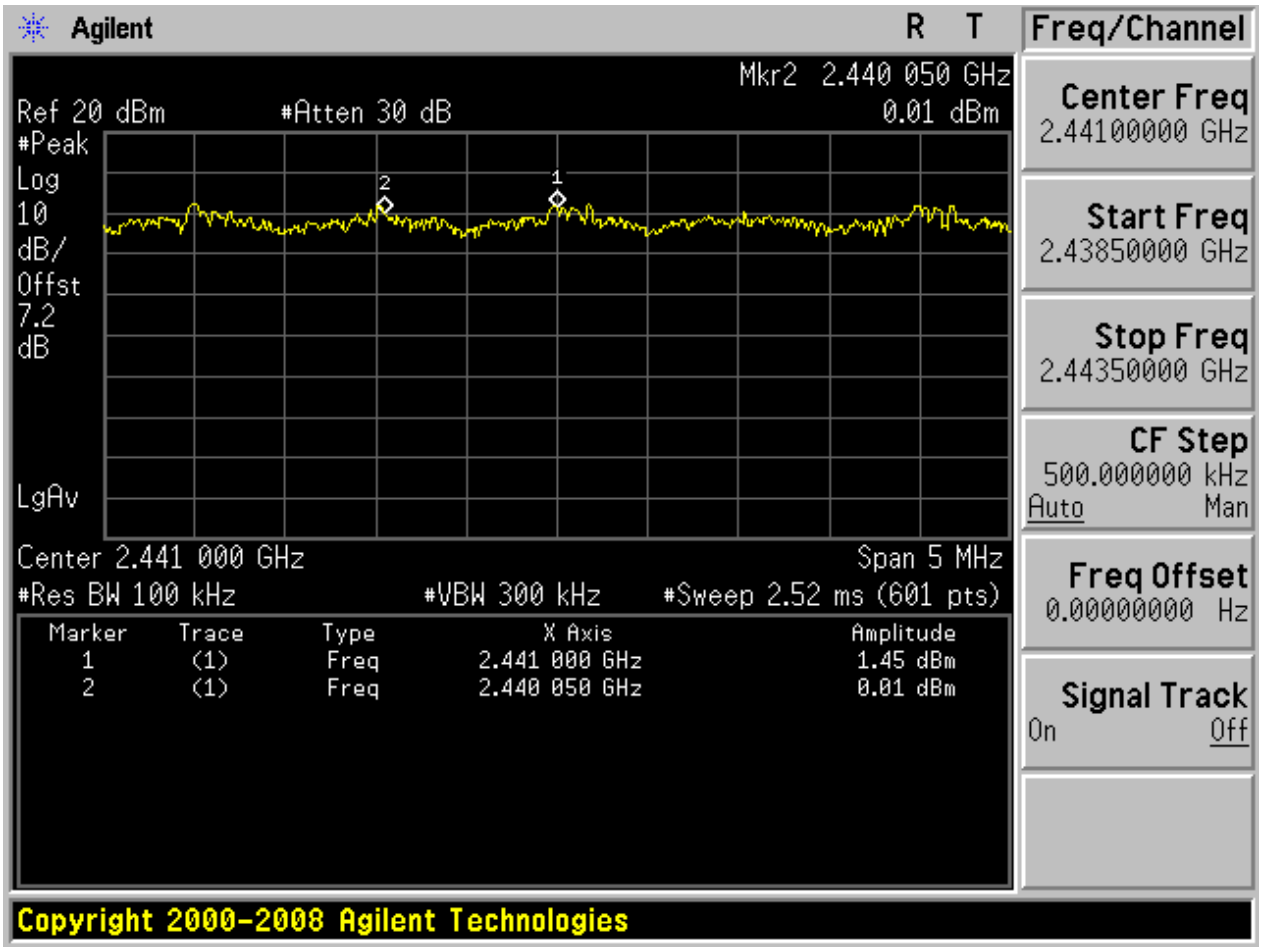

2.3 TM3_3DH5_Hop

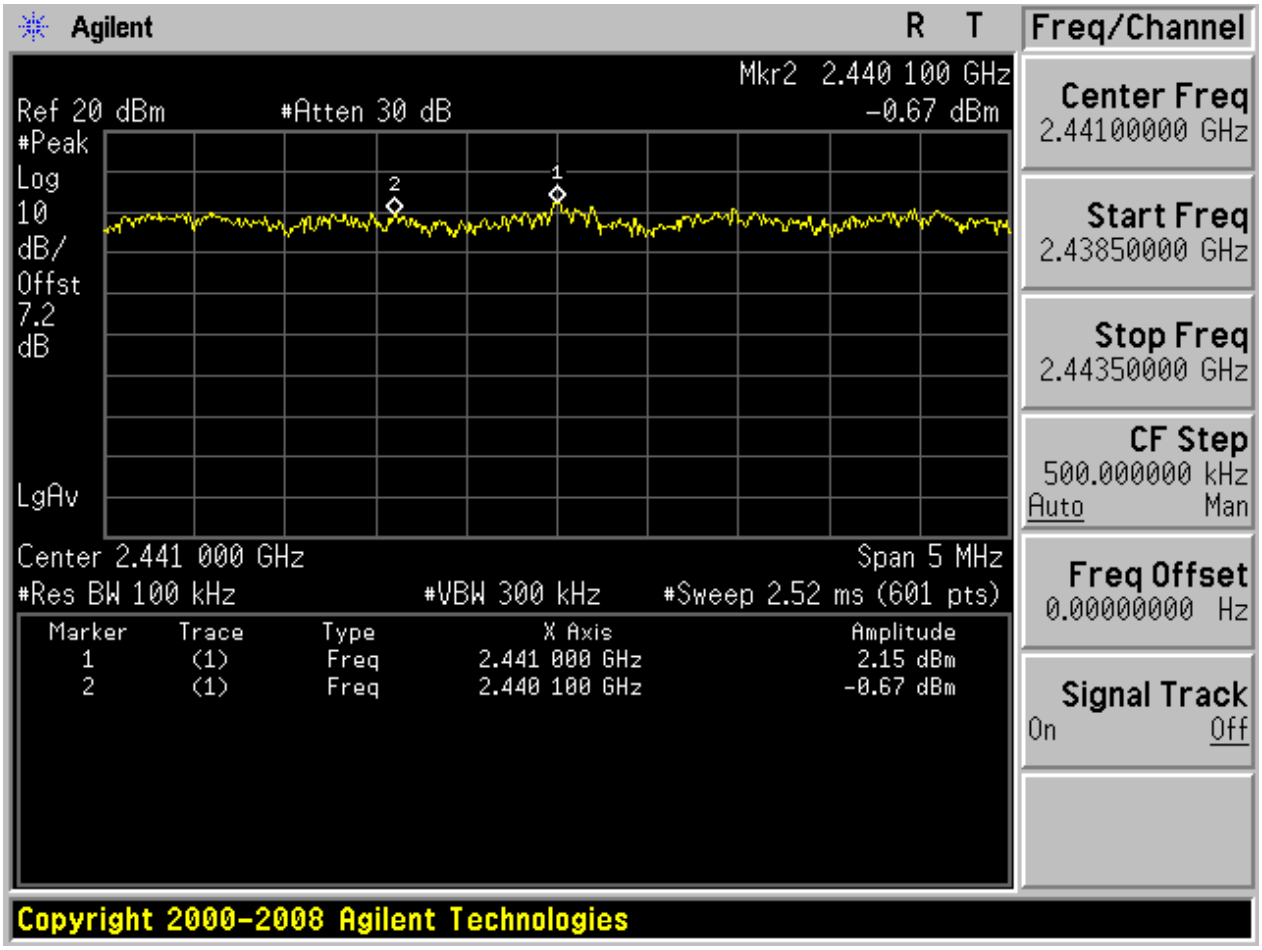

Appendix C: Number of Hopping Channel

1 Result Table

EUT Conf.	Number of Hopping Channel	Verdict
TM1_DH5_Hop	79	Pass
TM2_2DH5_Hop	79	Pass
TM3_3DH5_Hop	79	Pass

2 Test Plot

2.1 TM1_DH5_Hop

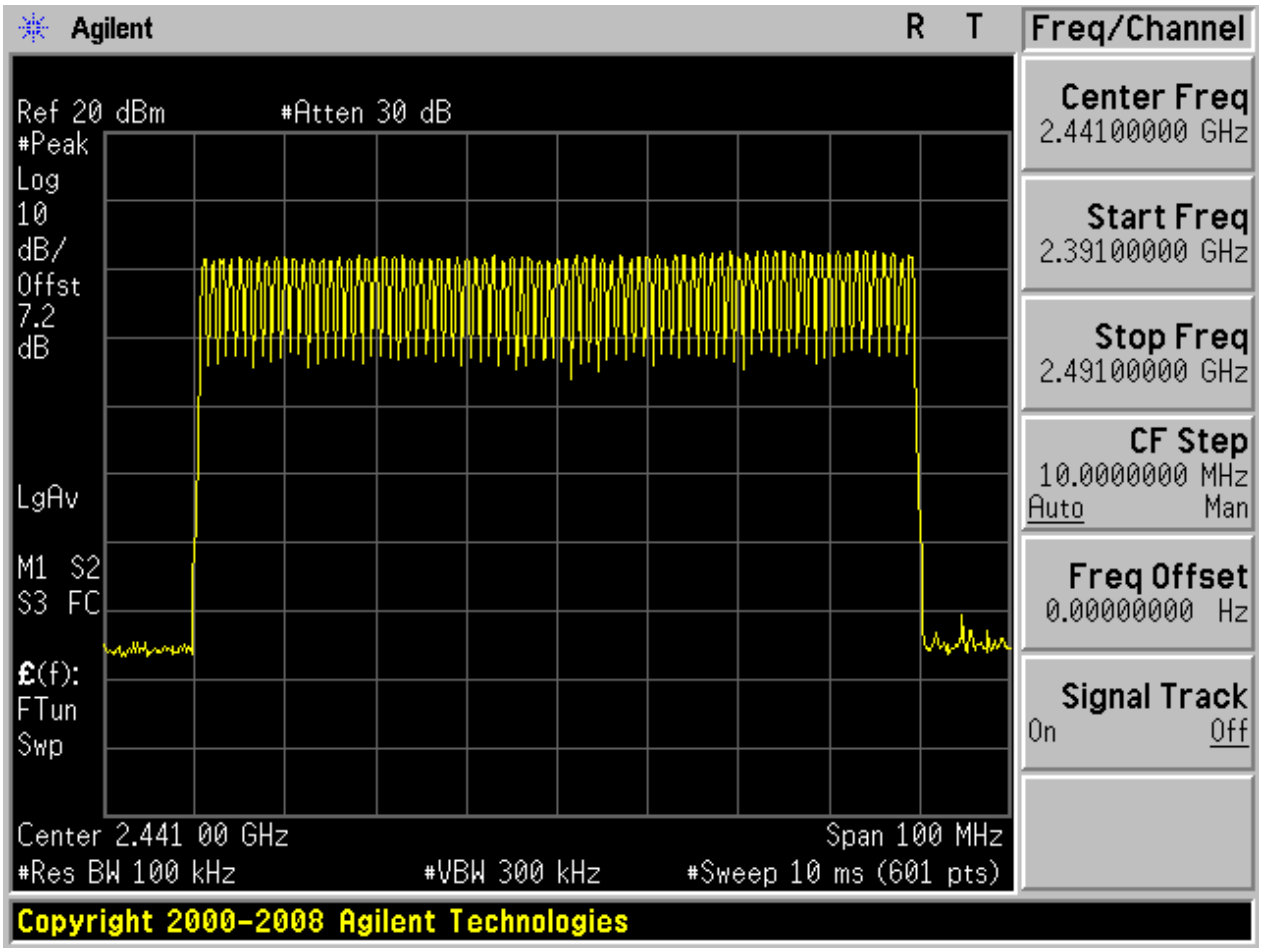

2.2 TM2_2DH5_Hop

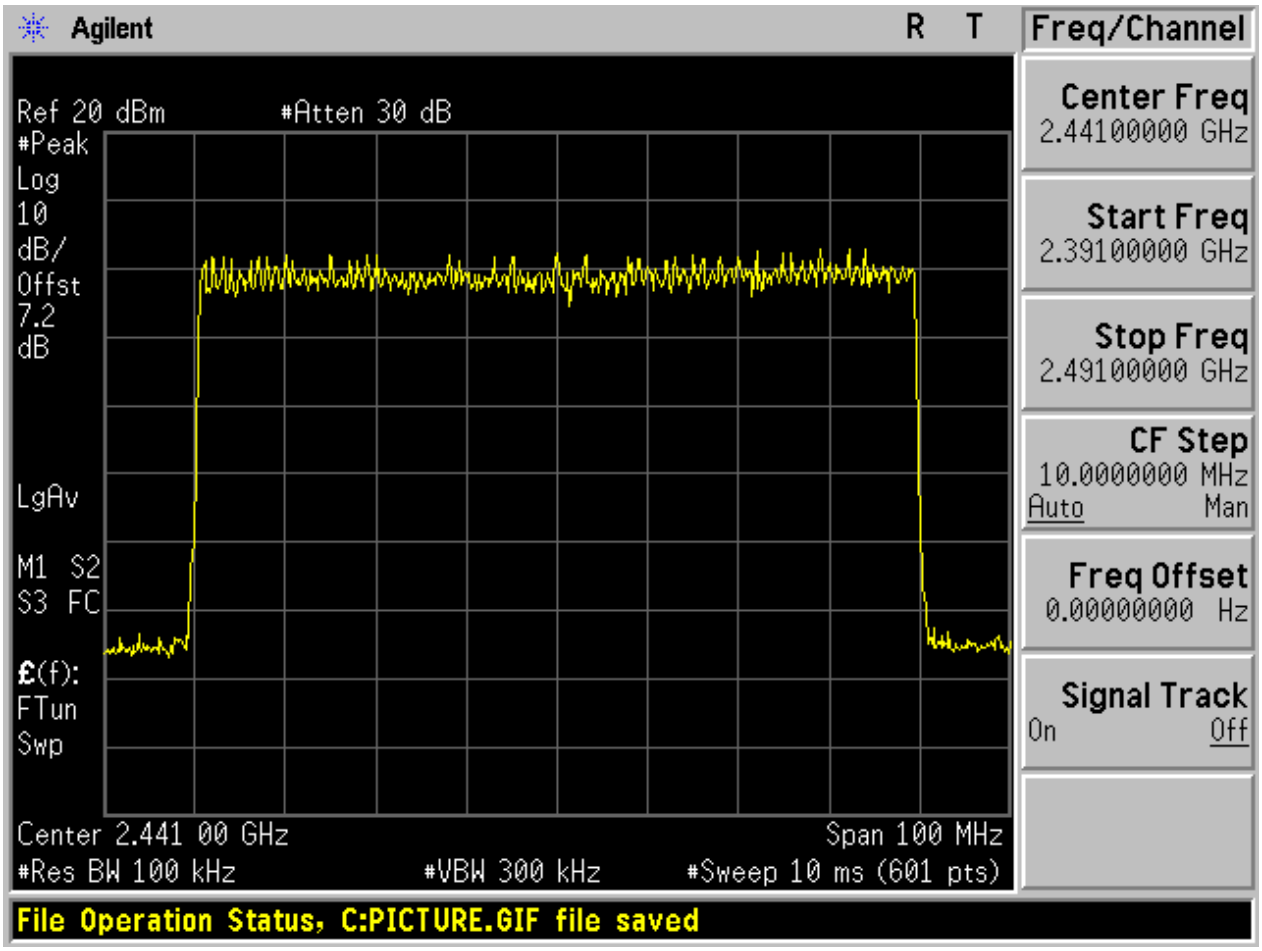

2.3 TM3_3DH5_Hop

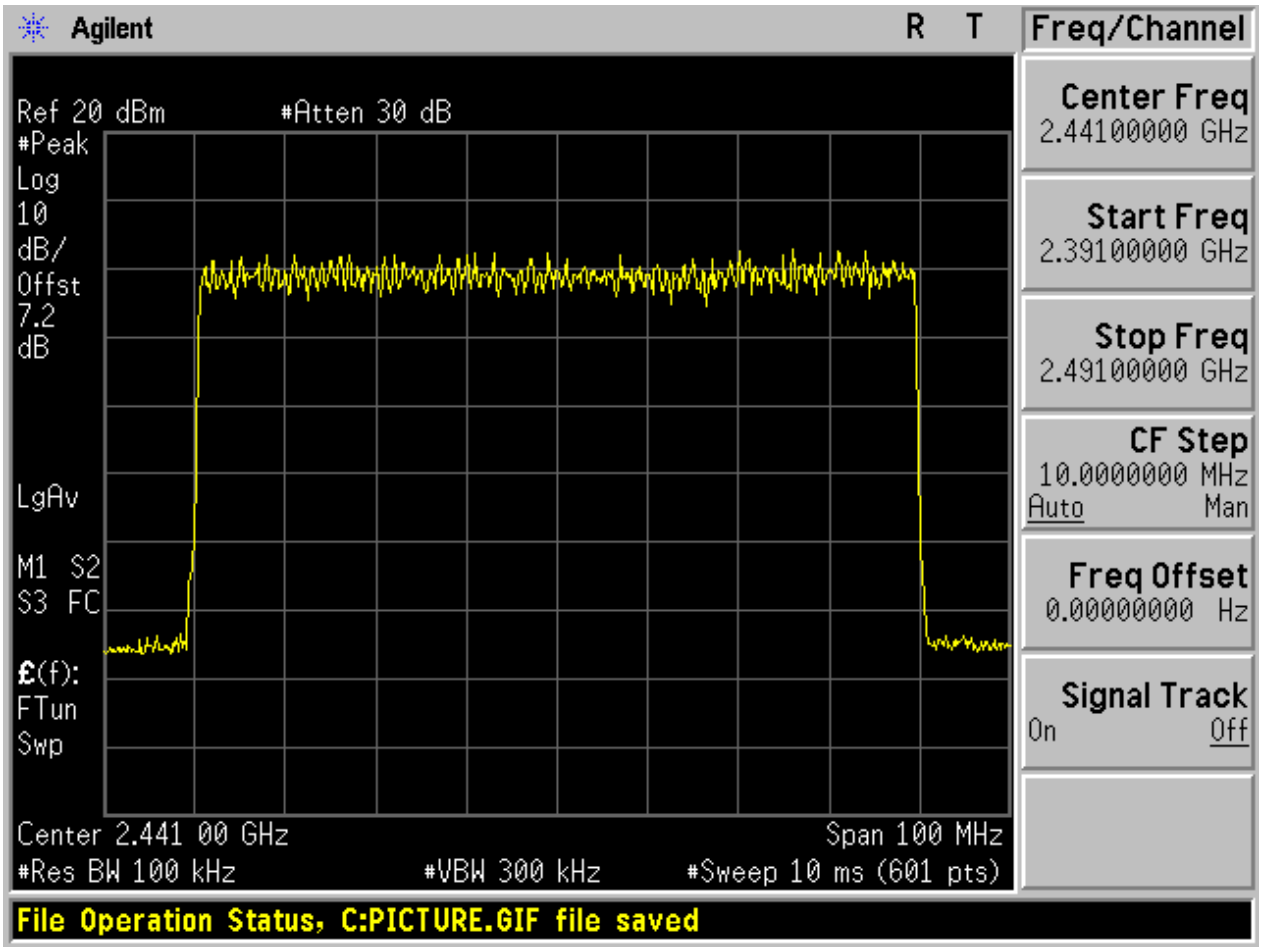

Appendix D: Time of Occupancy (Dwell Time)

1 Result Table

The Dwell Time = Burst Width * Total Hops. The detailed calculations are showed as follows:

- The duration for dwell time calculation: 0.4 [s] * hopping number = 0.4 [s] * 79 [ch] = 31.6 [s*ch];
- The burst width [ms/hop/ch], which is directly measured, refers to the duration on one channel hop.
- The hops per second for all channels: The selected EUT Conf uses a slot type of 5-Tx&1-Rx and a hopping rate of 1600 [ch*hop/s] for all channels. So the final hopping rate for all channels is 1600 / 6 = 266.67 [ch*hop/s];
- The hops per second on one channel: 266.67 [ch*hop/s] / 79 [ch] =3.38 [hop/s];
- The total hops for all channels within the dwell time calculation duration: 3.38 [hop/s] * 31.6 [s*ch] = 106.67 [hop*ch];
- The dwell time for all channels hopping: 106.67 [hop*ch] * Burst Width [ms/hop/ch].

EUT Conf.	Burst Width [ms/hop/ch]	Total Hops [hop*ch]	Dwell Time [ms]	Verdict
TM1_DH5_Ch39	2.900	106.67	0.309	Pass
TM2_2DH5_Ch39	2.900	106.67	0.309	Pass
TM3_3DH5_Ch39	2.900	106.67	0.309	Pass

2 Test Plot

NOTE: The test plots are only for Burst Width measurements.

2.1 TM1_DH5_Ch39

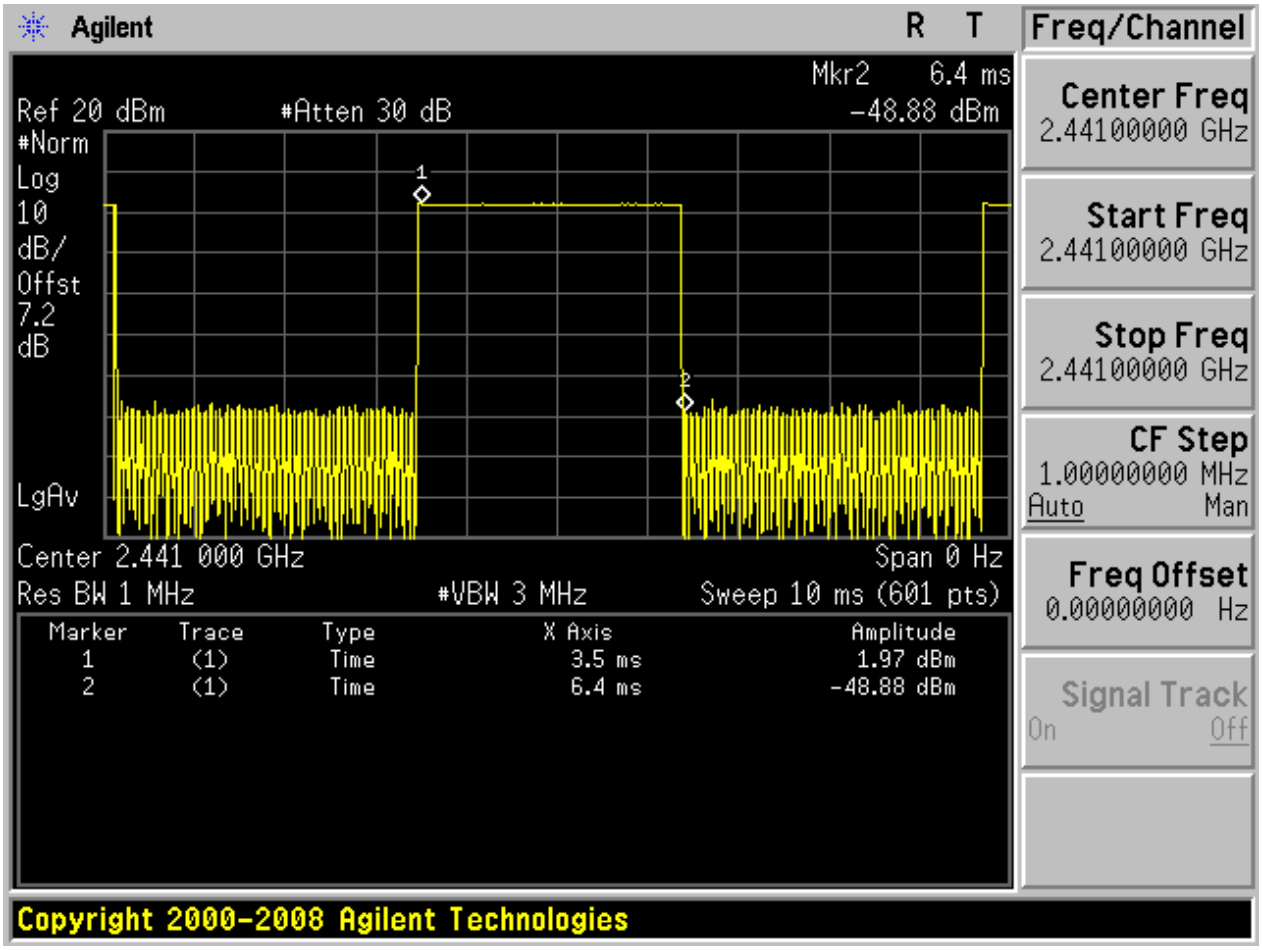

2.2 TM2_2DH5_Ch39

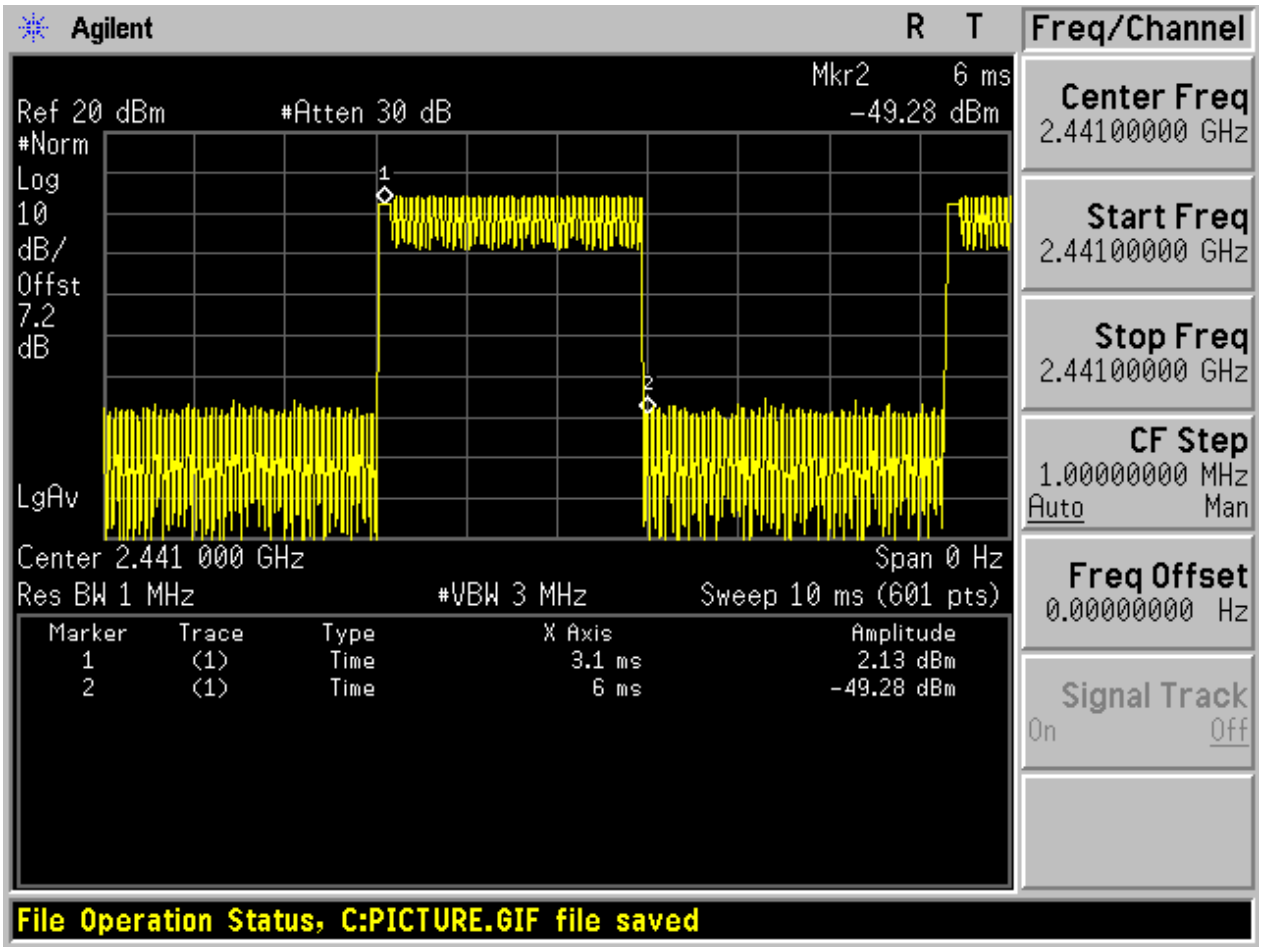

2.3 TM3_3DH5_Ch39

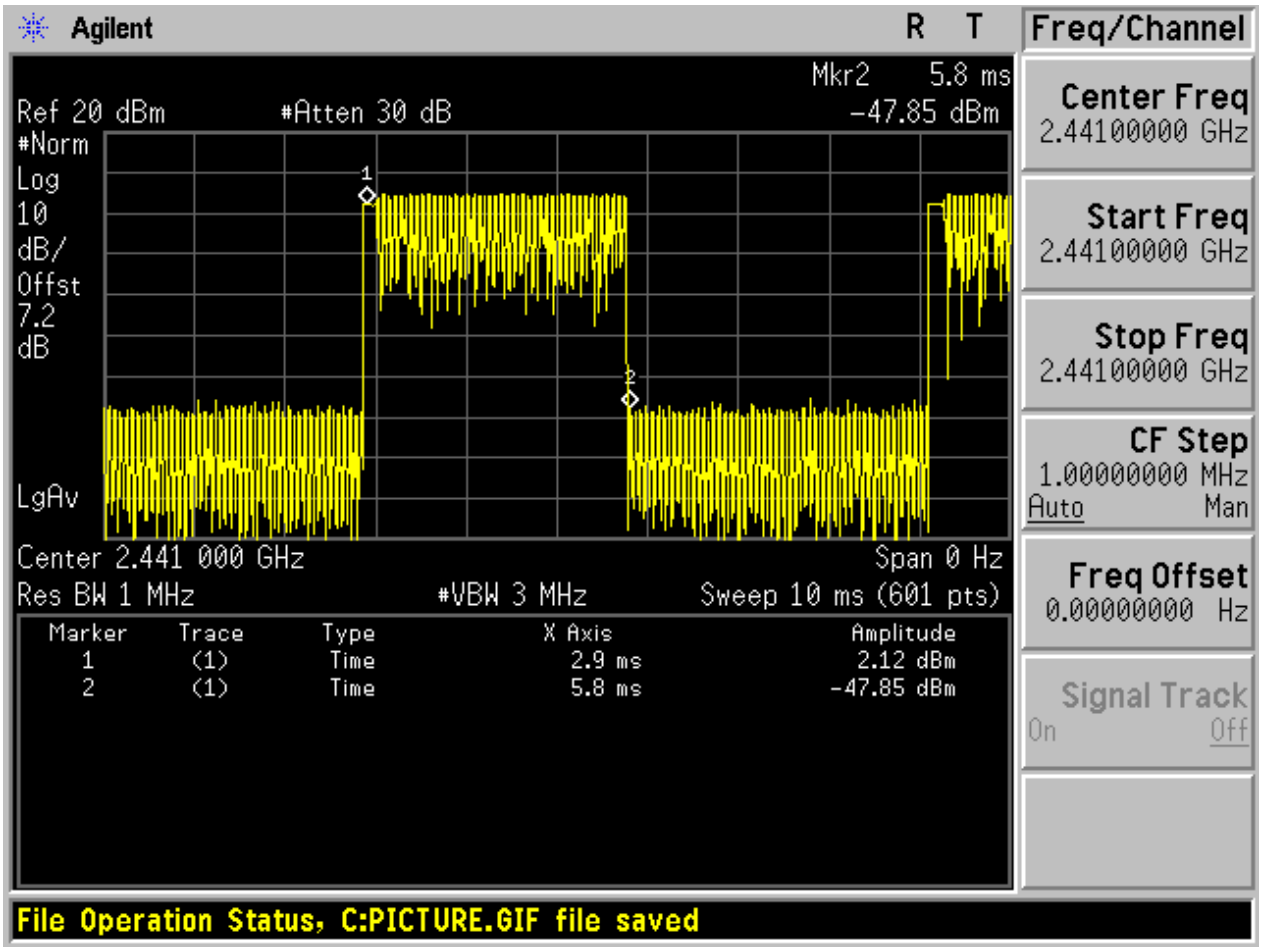

Appendix E: Maximum Peak Conducted Output Power

1 Result Table

EUT Conf.	Max. Peak Power [dBm]	Verdict
TM1_DH5_Ch0	1.30	Pass
TM1_DH5_Ch39	1.86	Pass
TM1_DH5_Ch78	2.46	Pass
TM2_2DH5_Ch0	3.78	Pass
TM2_2DH5_Ch39	4.34	Pass
TM2_2DH5_Ch78	4.84	Pass
TM3_3DH5_Ch0	4.46	Pass
TM3_3DH5_Ch39	5.01	Pass
TM3_3DH5_Ch78	5.46	Pass

2 Test Plot

2.1 TM1_DH5_Ch0

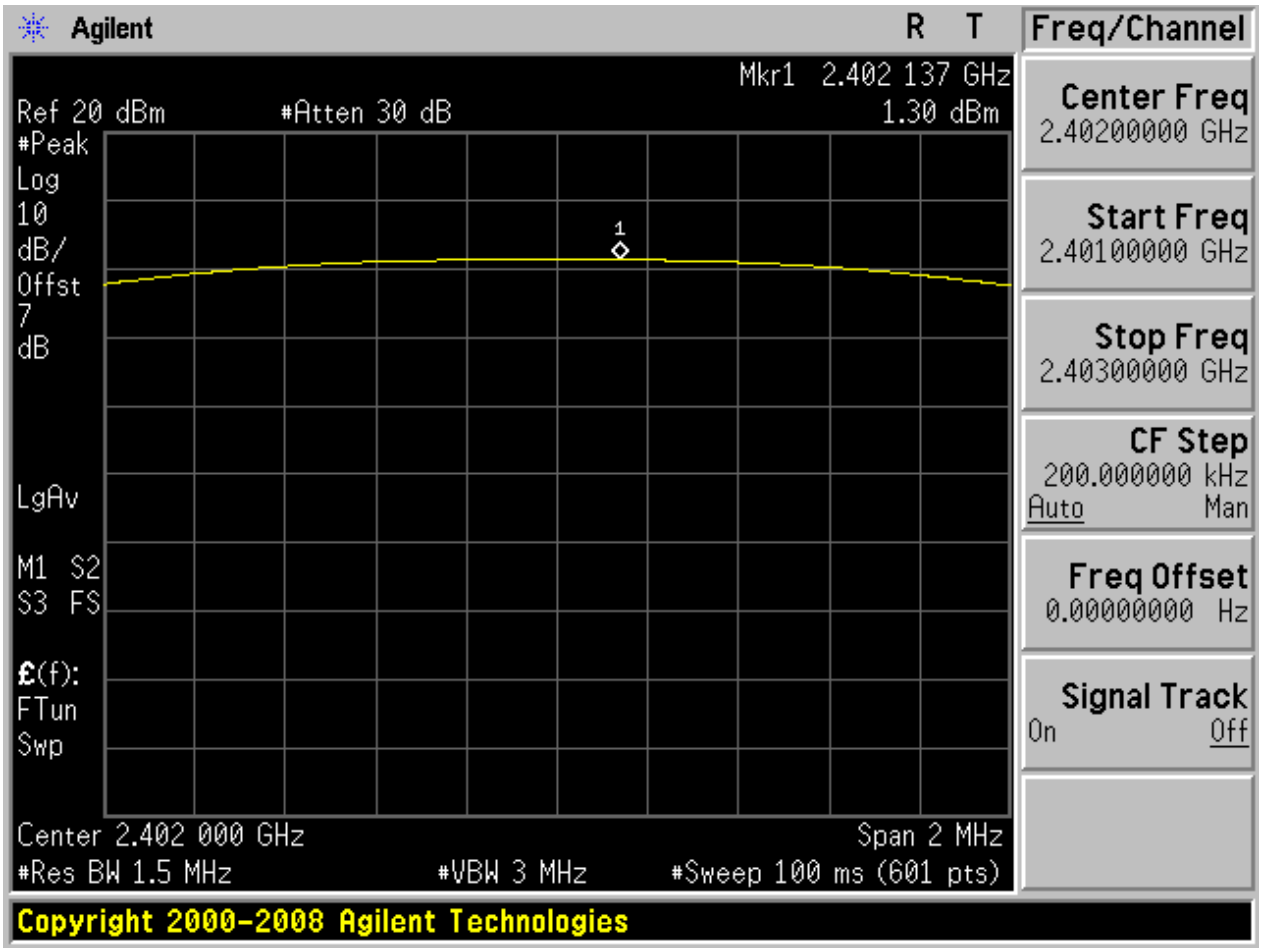

2.2 TM1_DH5_Ch39

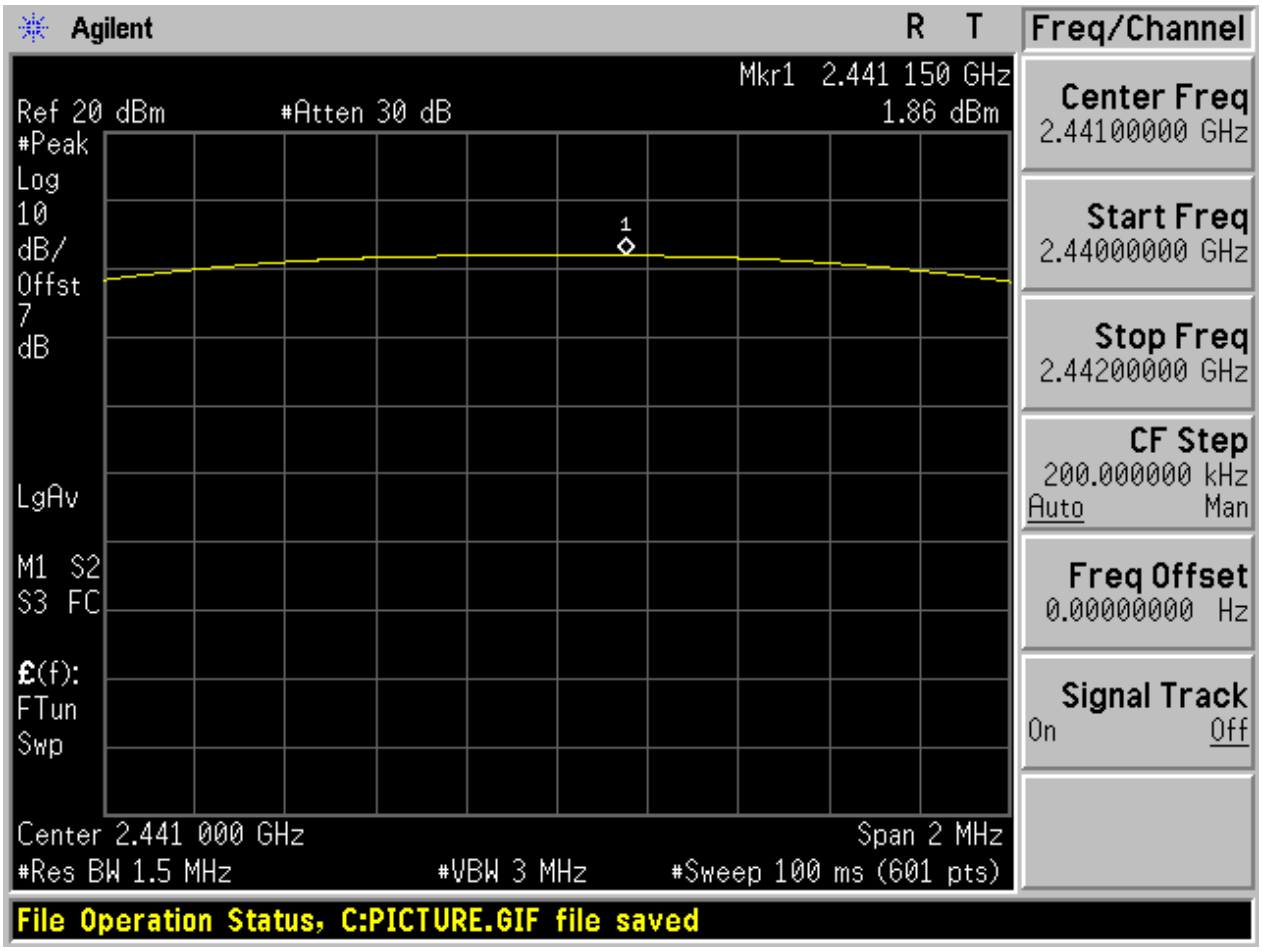

2.3 TM1_DH5_Ch78

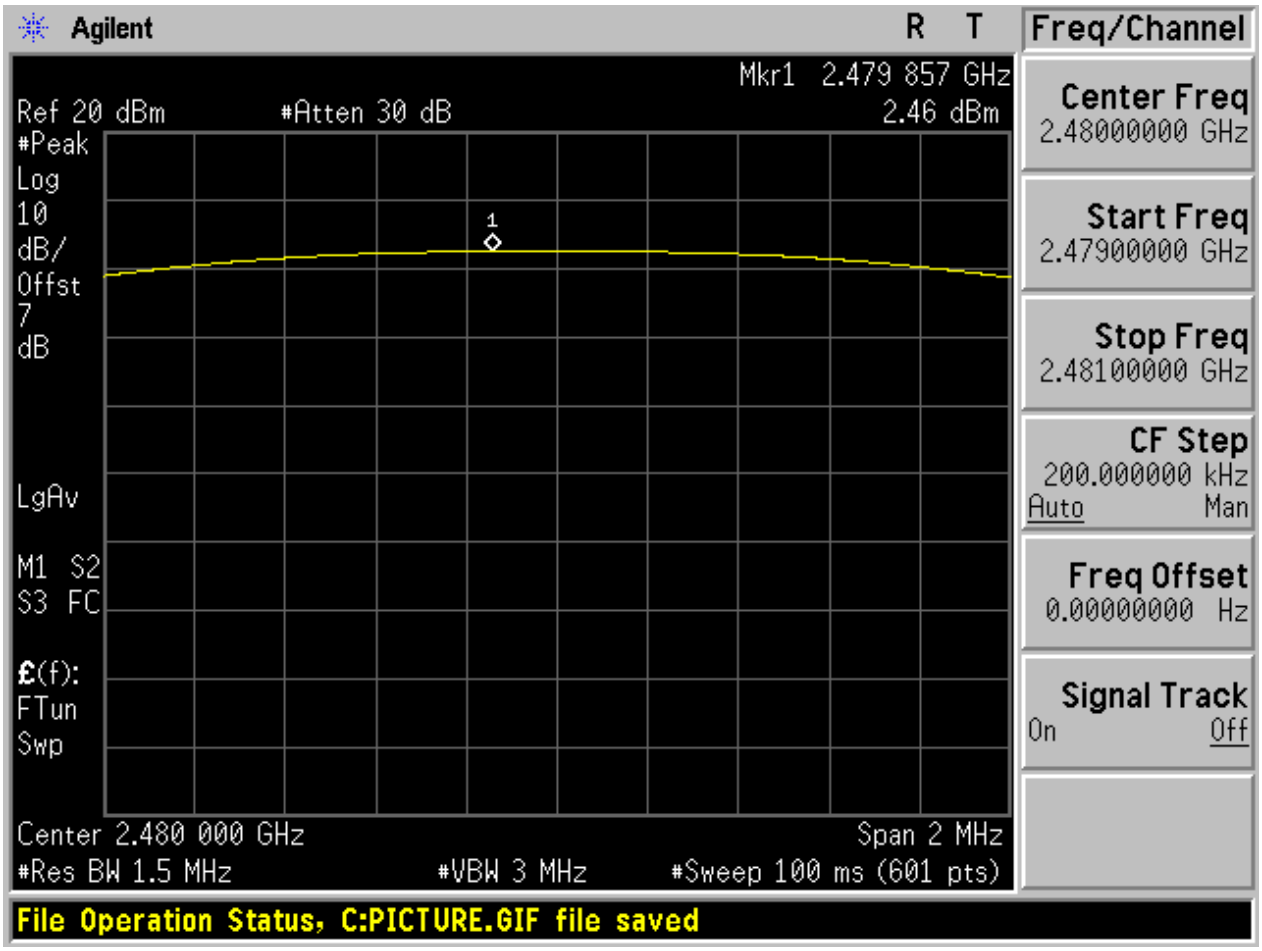

2.4 TM2_2DH5_Ch0

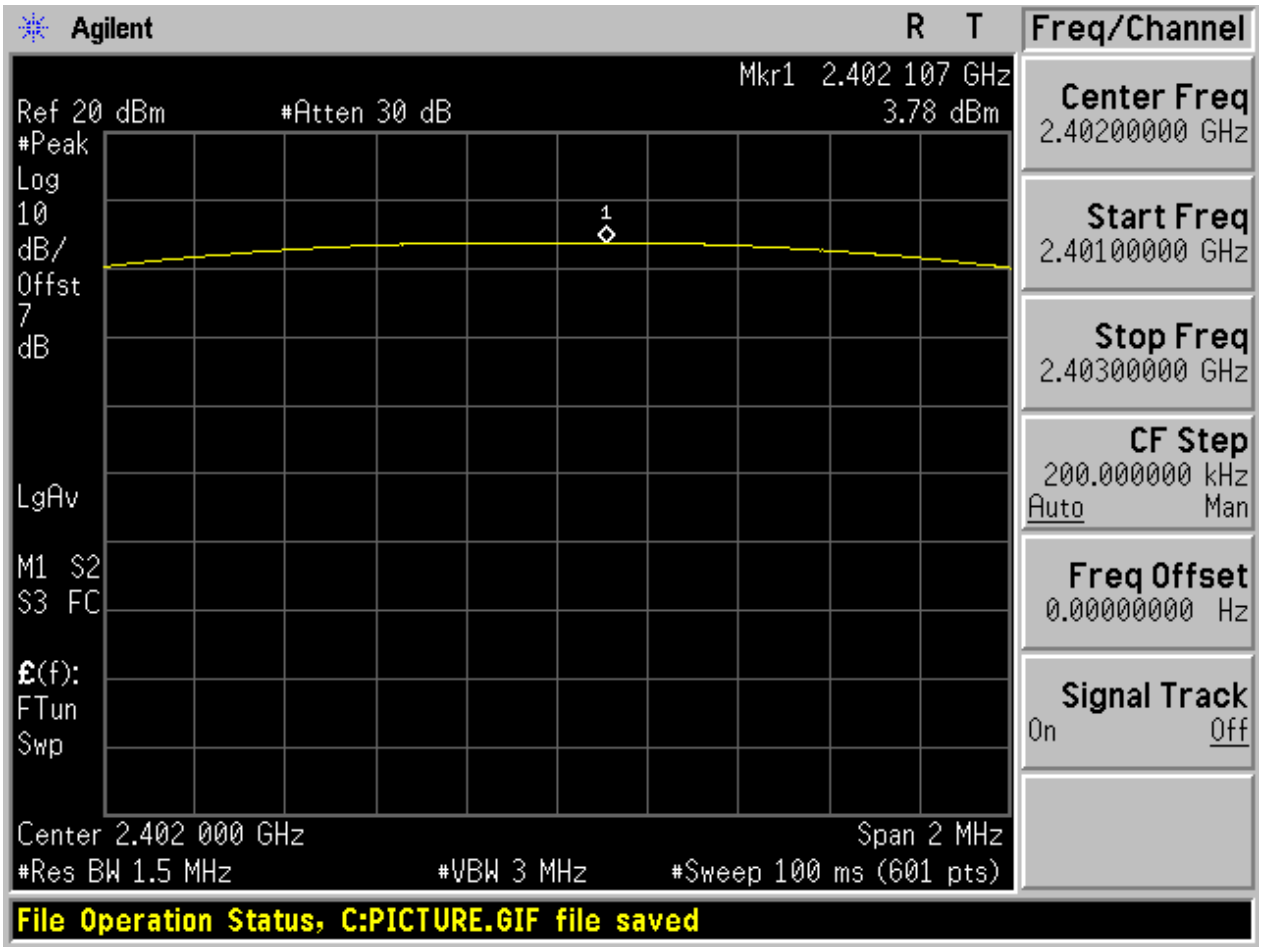

2.5 TM2_2DH5_Ch39

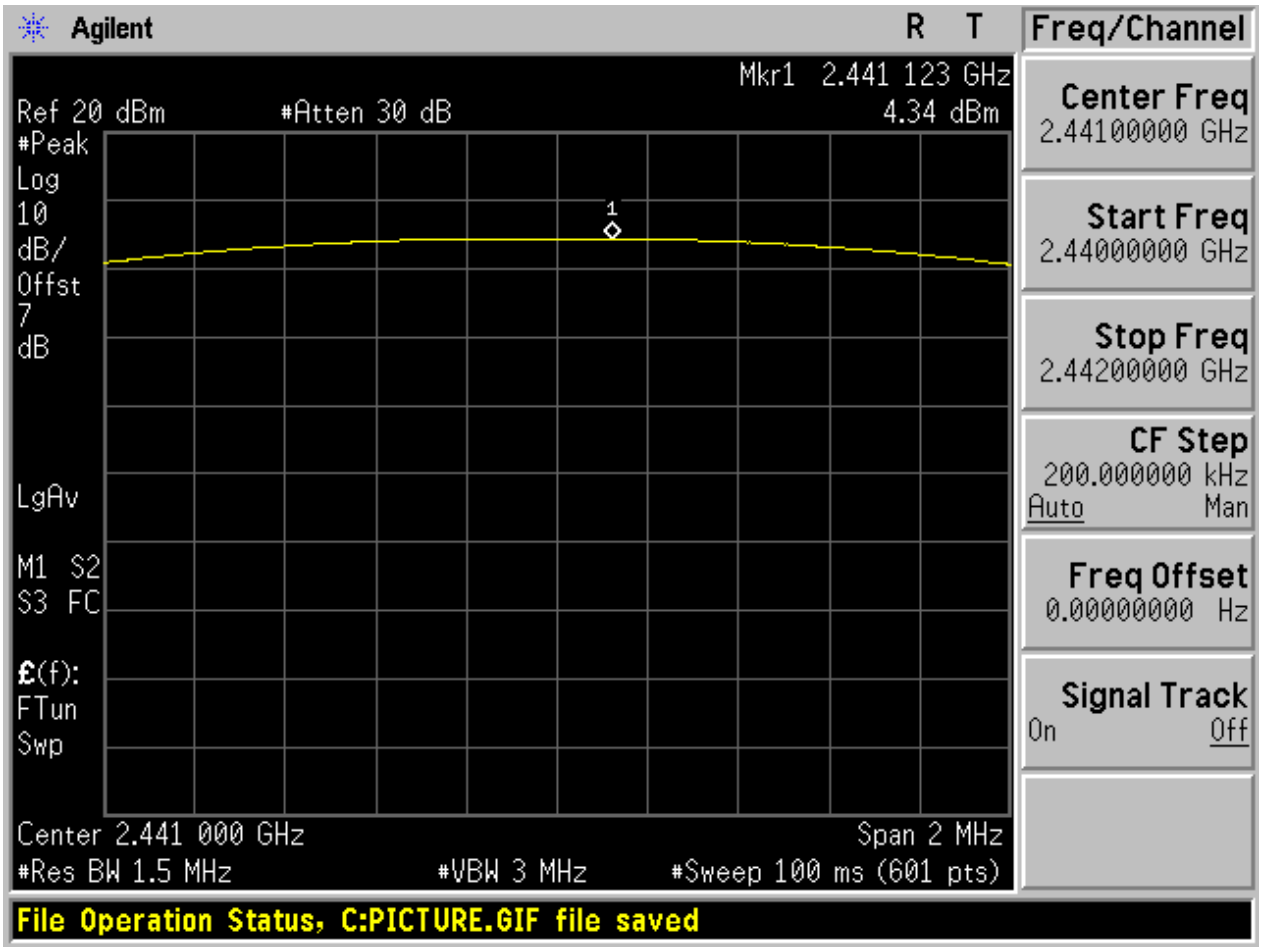

2.6 TM2_2DH5_Ch78

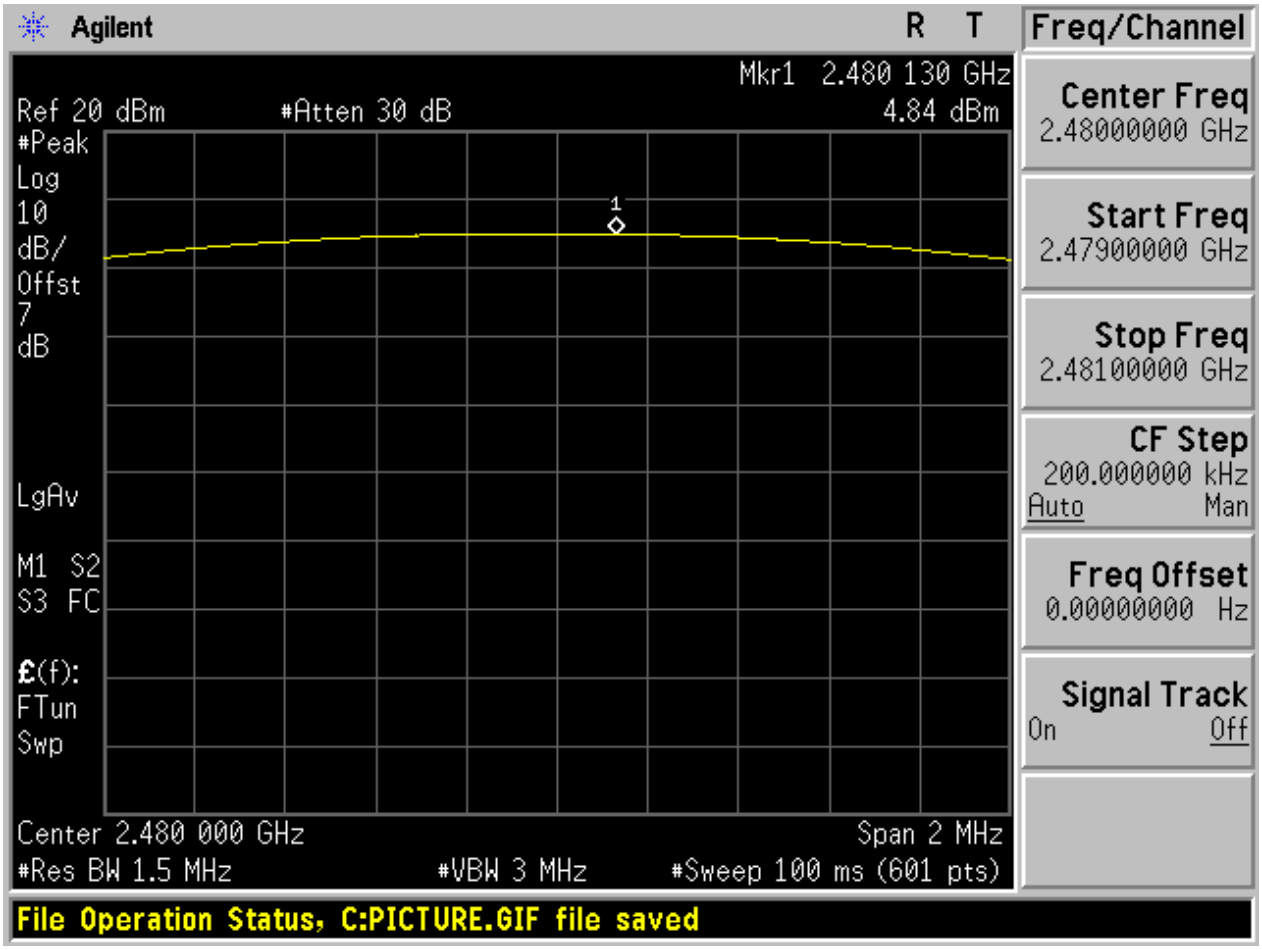

2.7 TM3_3DH5_Ch0

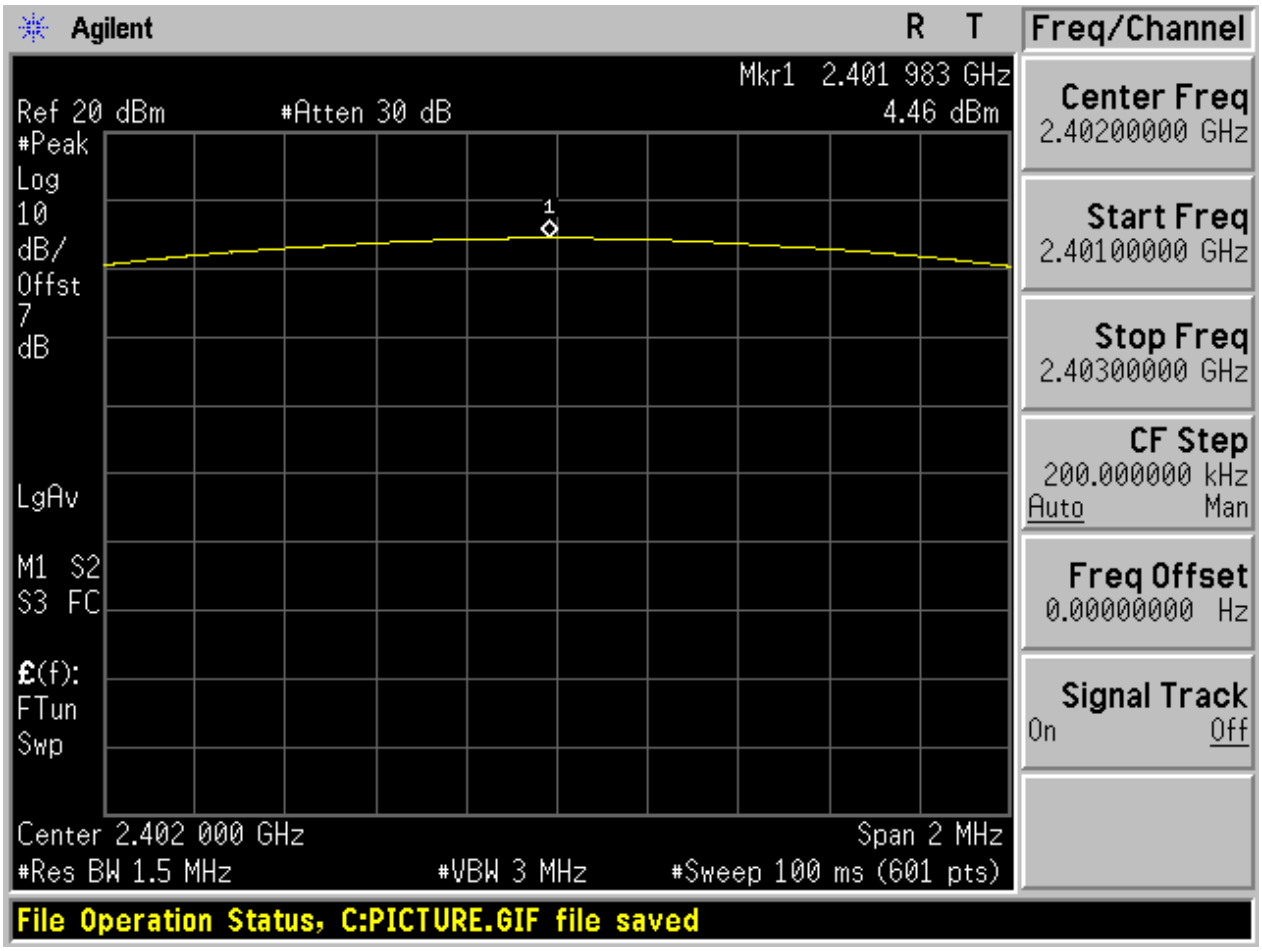

2.8 TM3_3DH5_Ch39

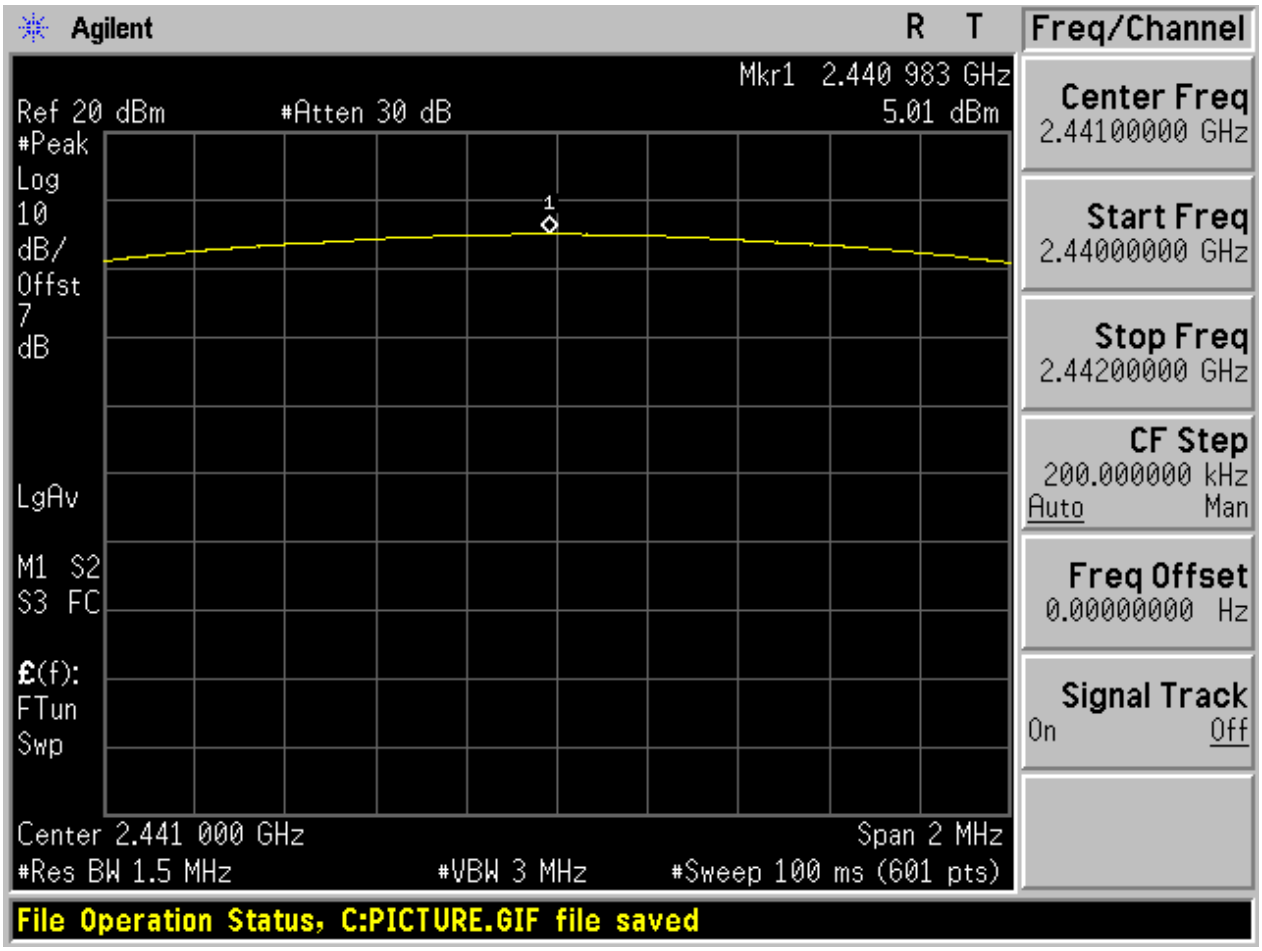

2.9 TM3_3DH5_Ch78

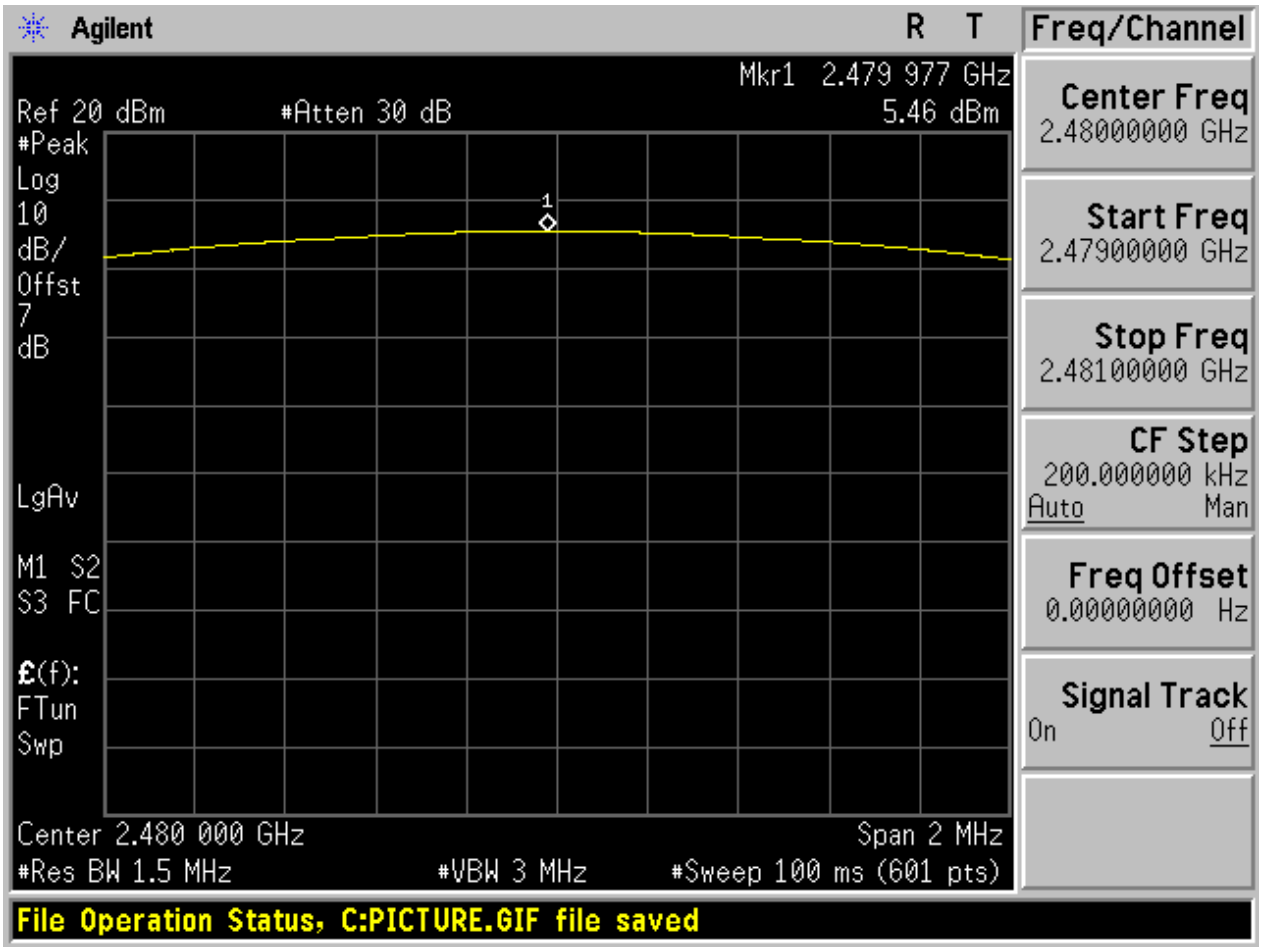

Appendix F: Band edge spurious emission

1 Result Table

EUT Conf.	Channel No.	Carrier Frequency [MHz]	Carrier Power [dBm]	Frequency Hopping	Max. Spurious Level [dBm]	Limit [dBm]	Result
TM1_DH5_Ch0	0	2402	4.16	Off	-52.66	-15.84	Pass
	-	-	3.83	On	-55.07	-16.17	Pass
TM1_DH5_Ch78	78	2480	7.84	Off	-49.08	-12.16	Pass
	-	-	7.47	On	-50.43	-12.53	Pass
TM2_2DH5_Ch0	0	2402	1.40	Off	-50.84	-18.60	Pass
	-	-	1.58	On	-53.07	-18.42	Pass
TM2_2DH5_Ch78	78	2480	5.24	Off	-51.90	-14.76	Pass
	-	-	4.06	On	-48.98	-15.94	Pass
TM3_3DH5_Ch0	0	2402	1.39	Off	-50.22	-18.61	Pass
	-	-	1.43	On	-52.12	-18.57	Pass
TM3_3DH5_Ch78	78	2480	5.33	Off	-50.20	-14.66	Pass
	-	-	3.39	On	-53.58	-16.61	Pass

2 Test Plot

2.1 TM1_DH5_Ch0

No hopping

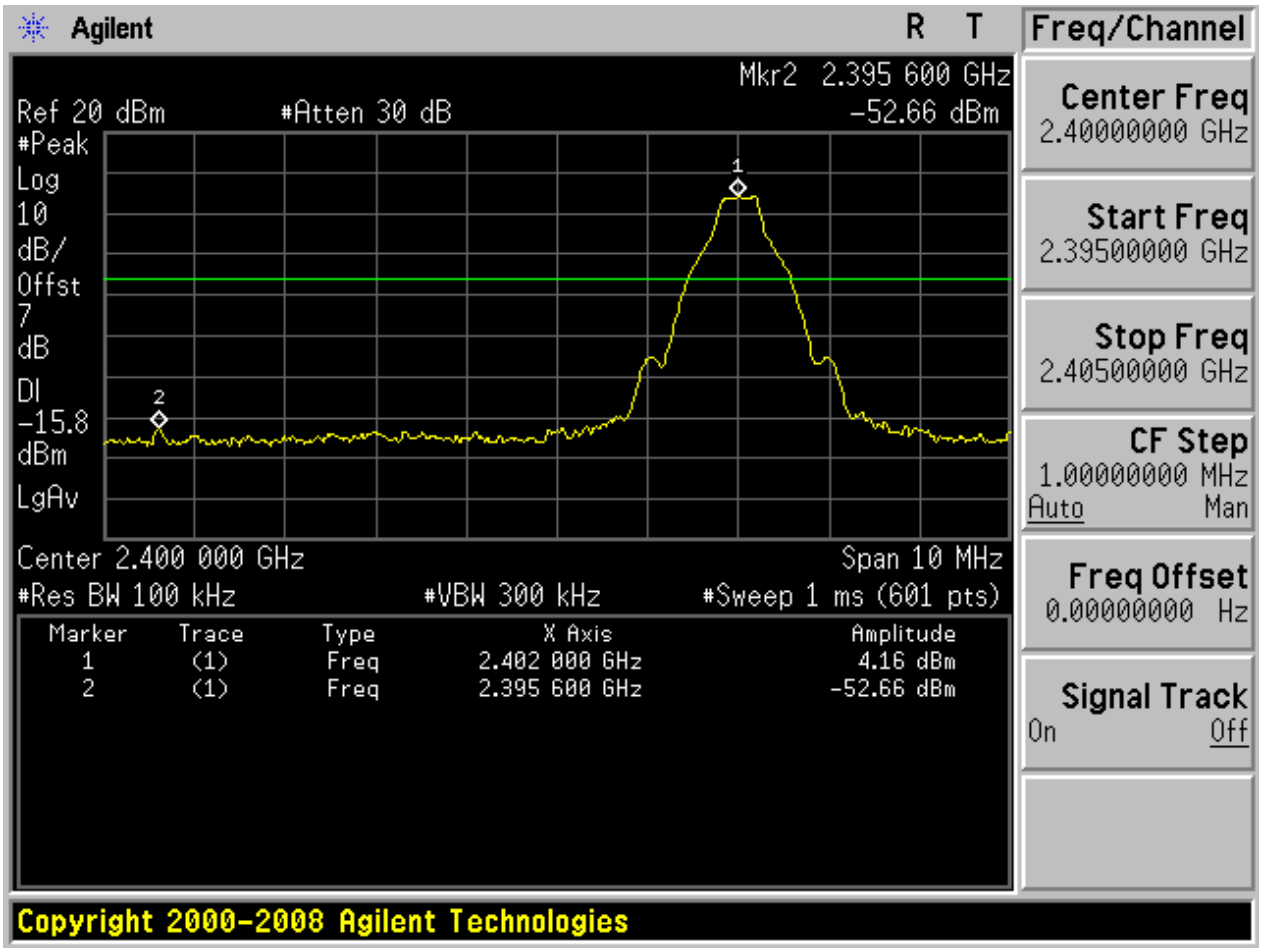

With hopping

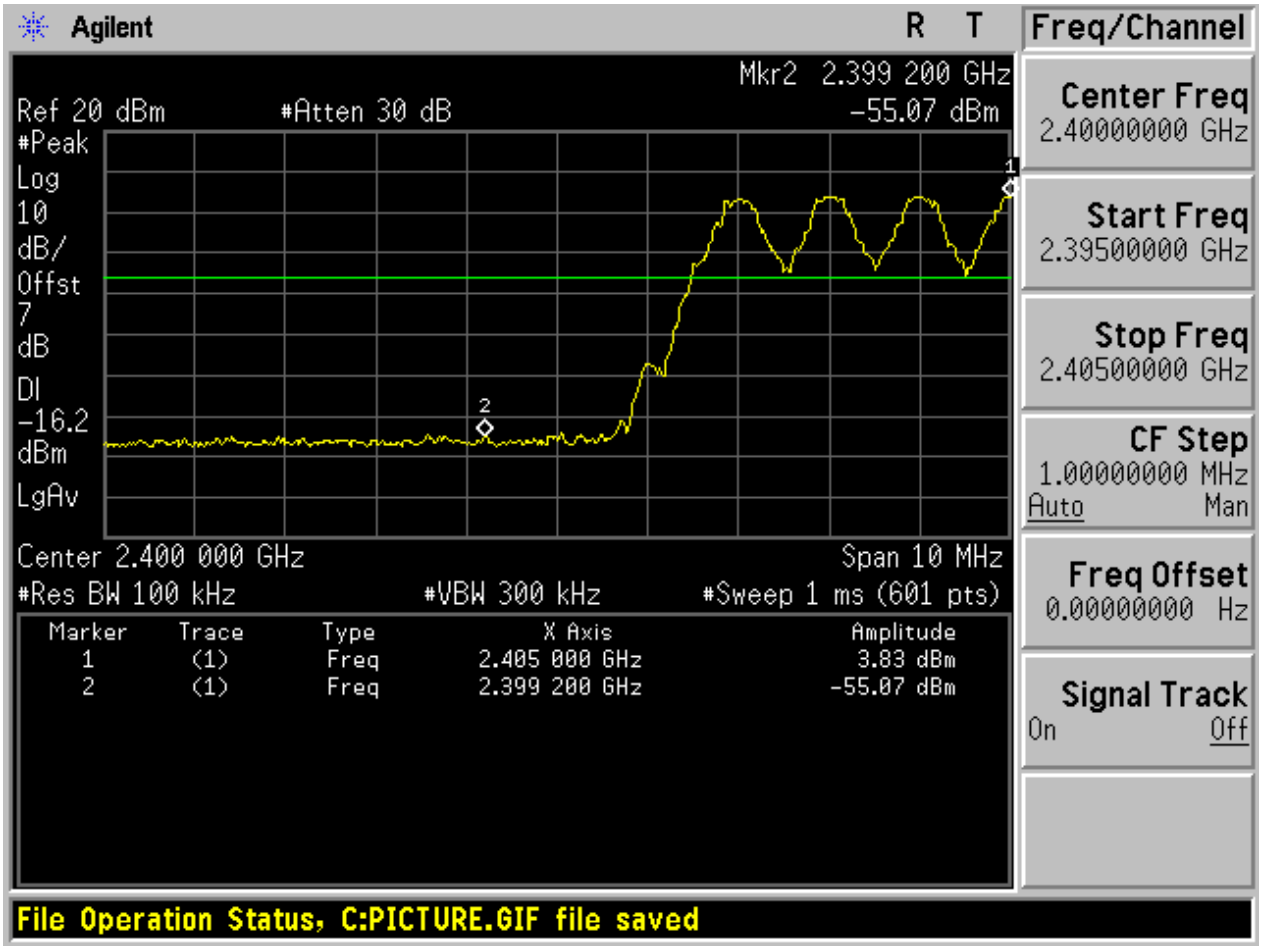

2.2 TM1_DH5_Ch78

No hopping

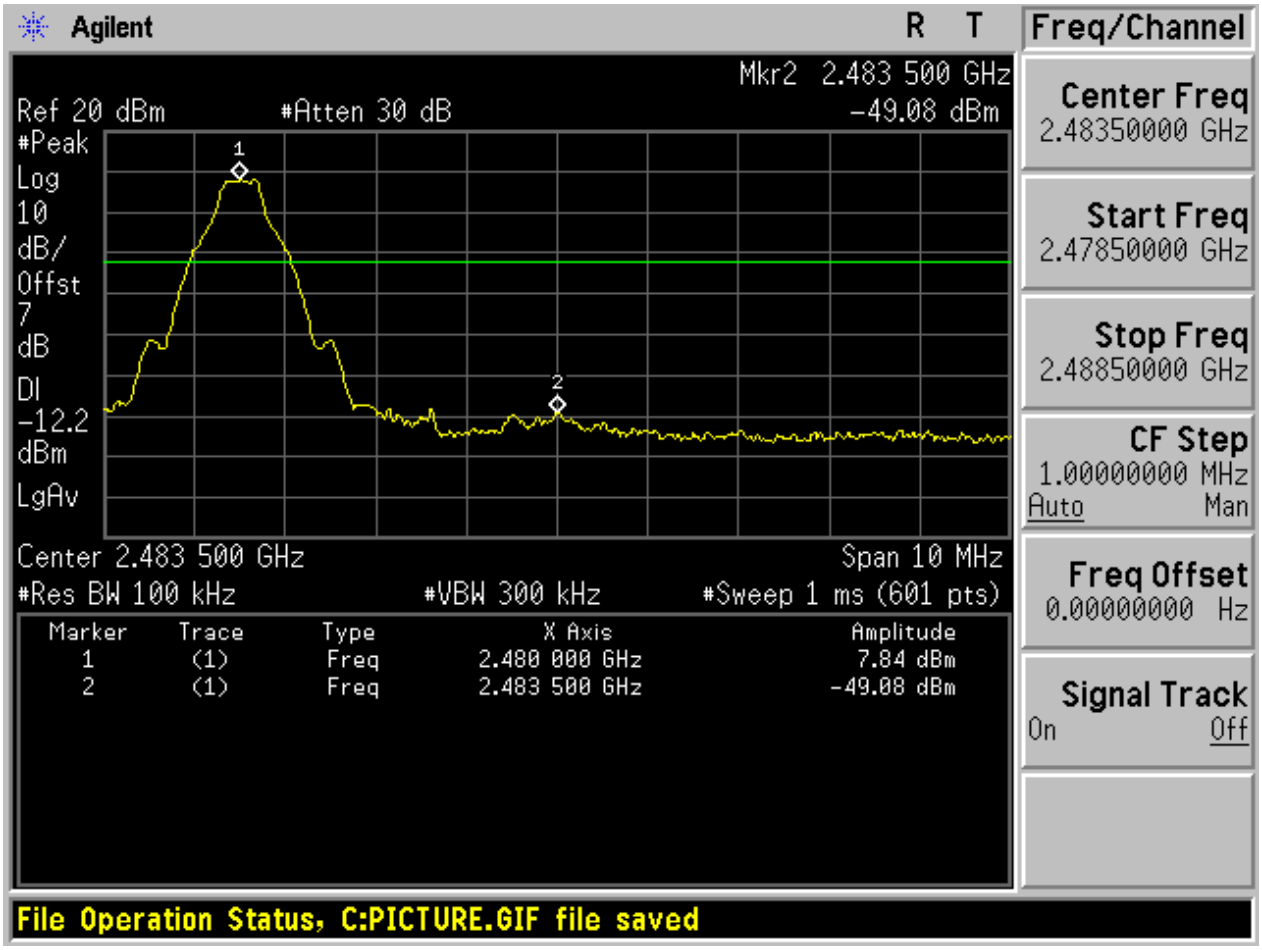

With hopping

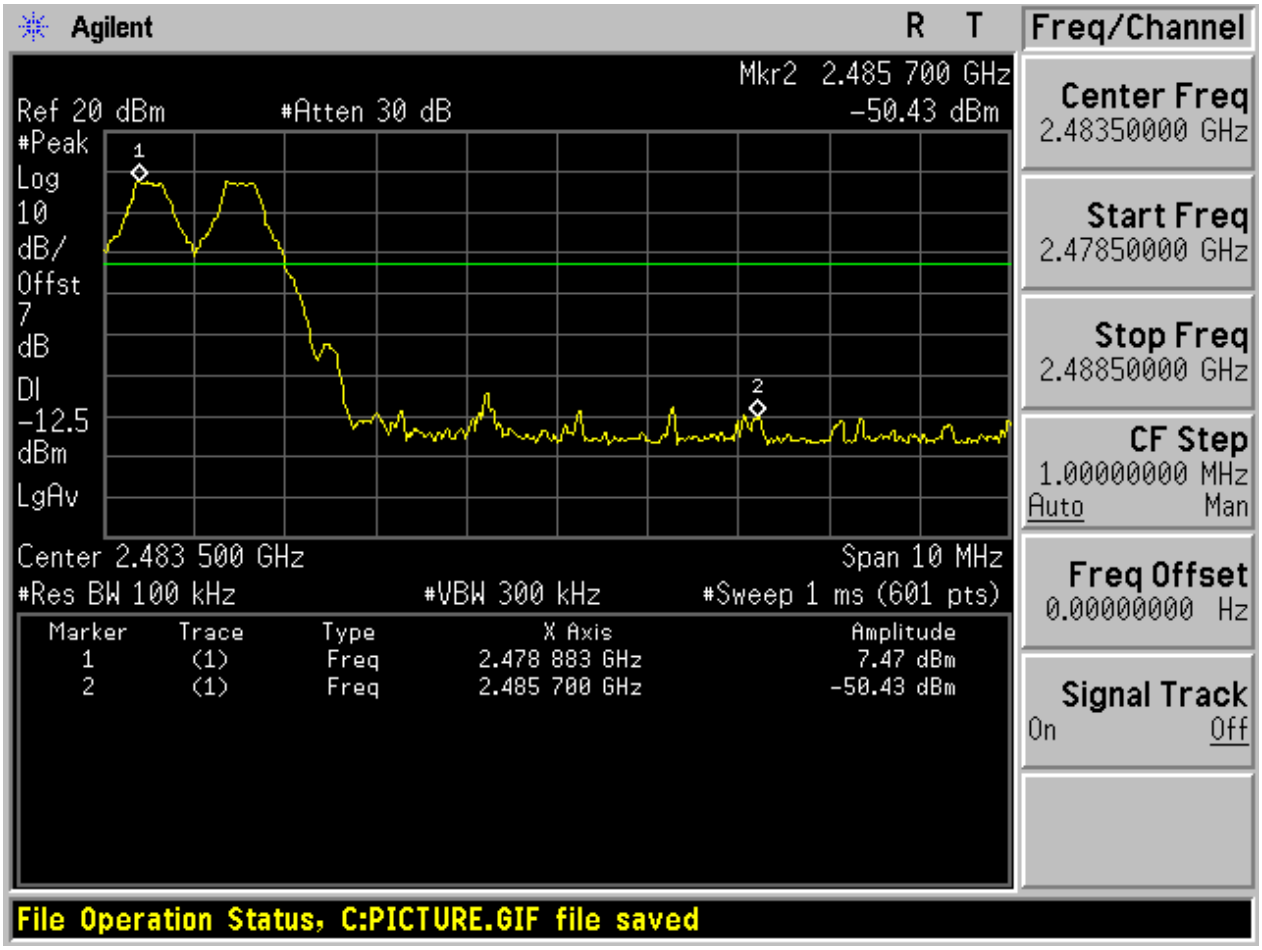

2.3 TM2_2DH5_Ch0

No hopping

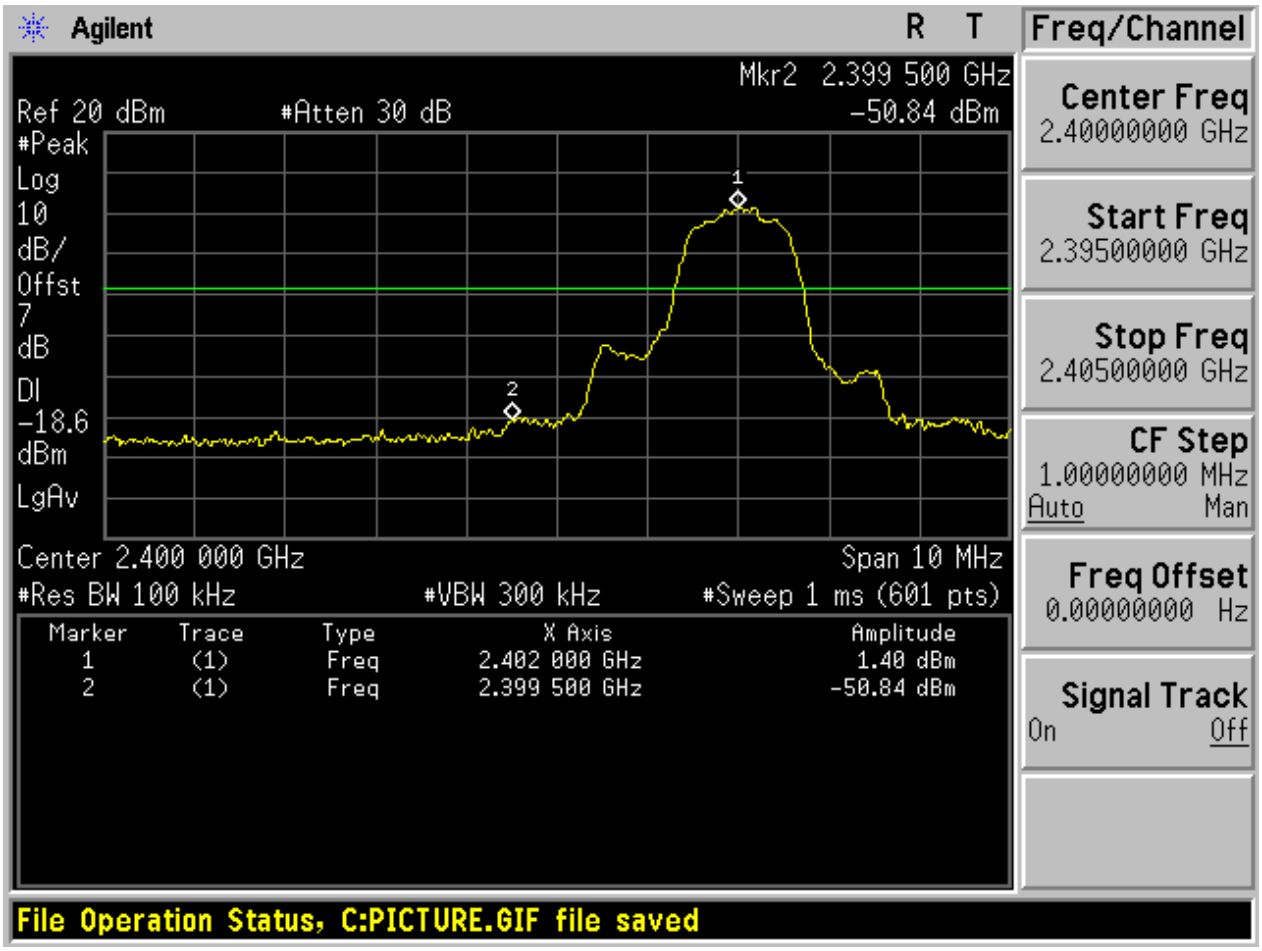

With hopping

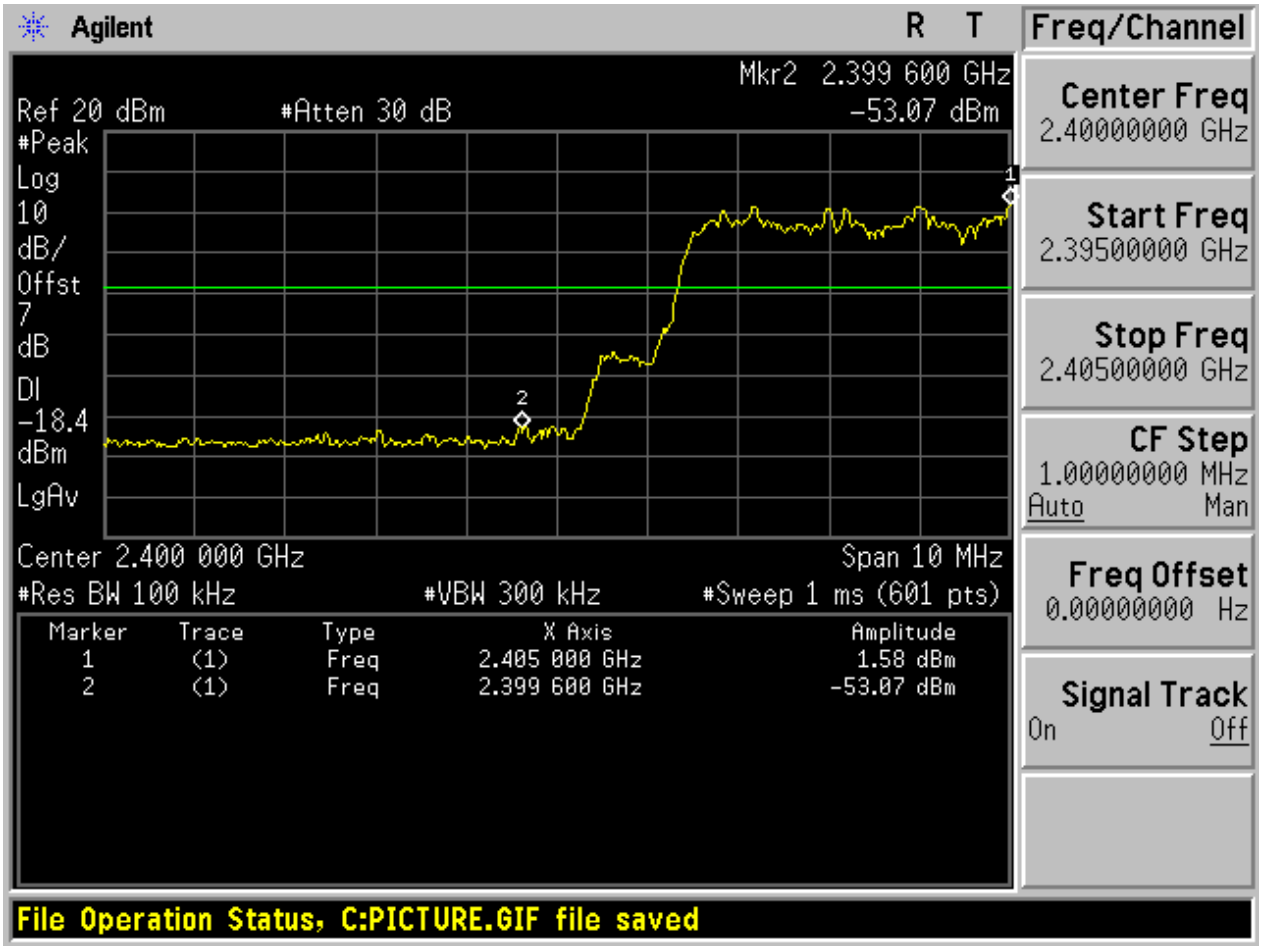

2.4 TM2_2DH5_Ch78

No hopping

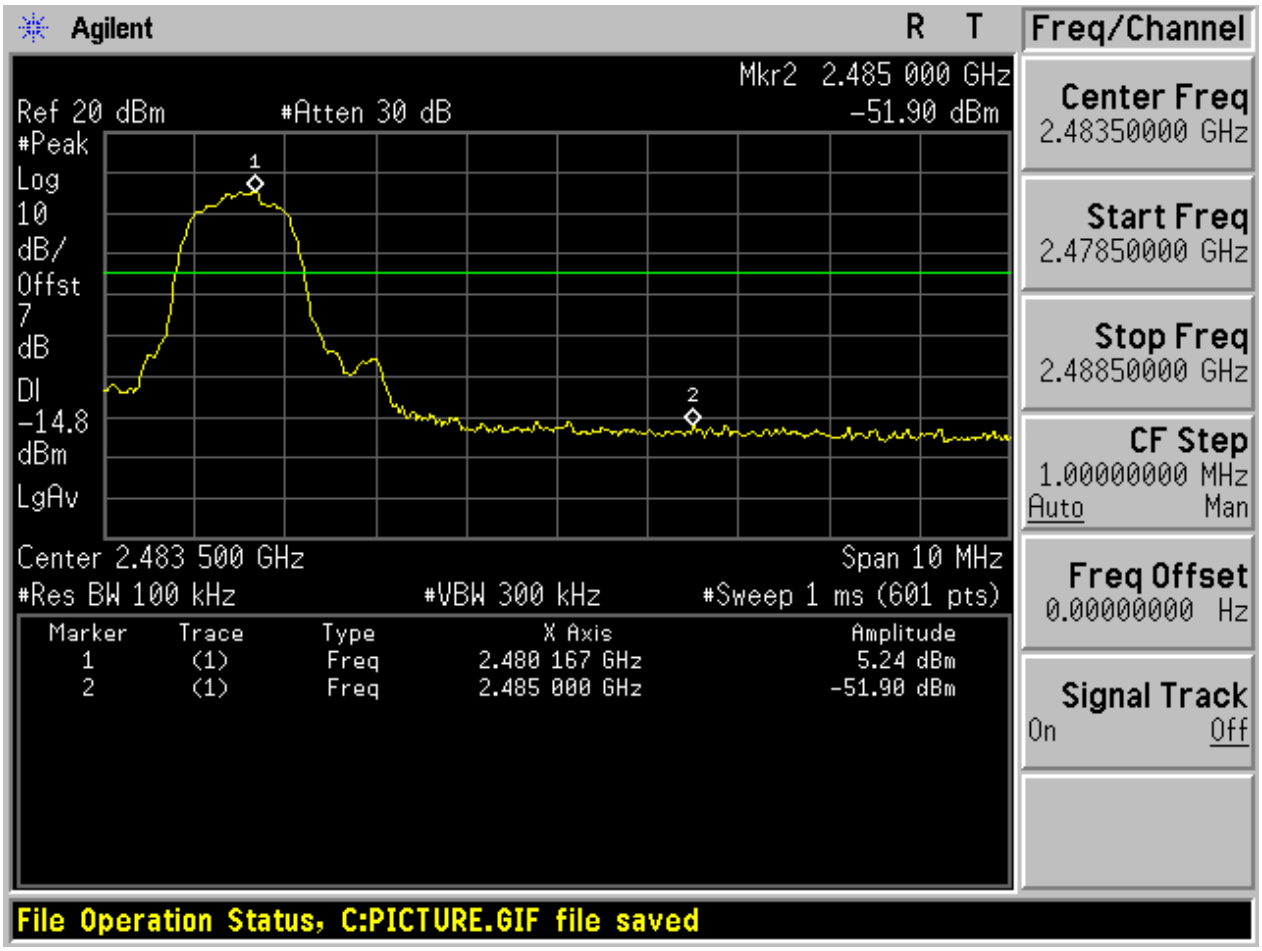

With hopping

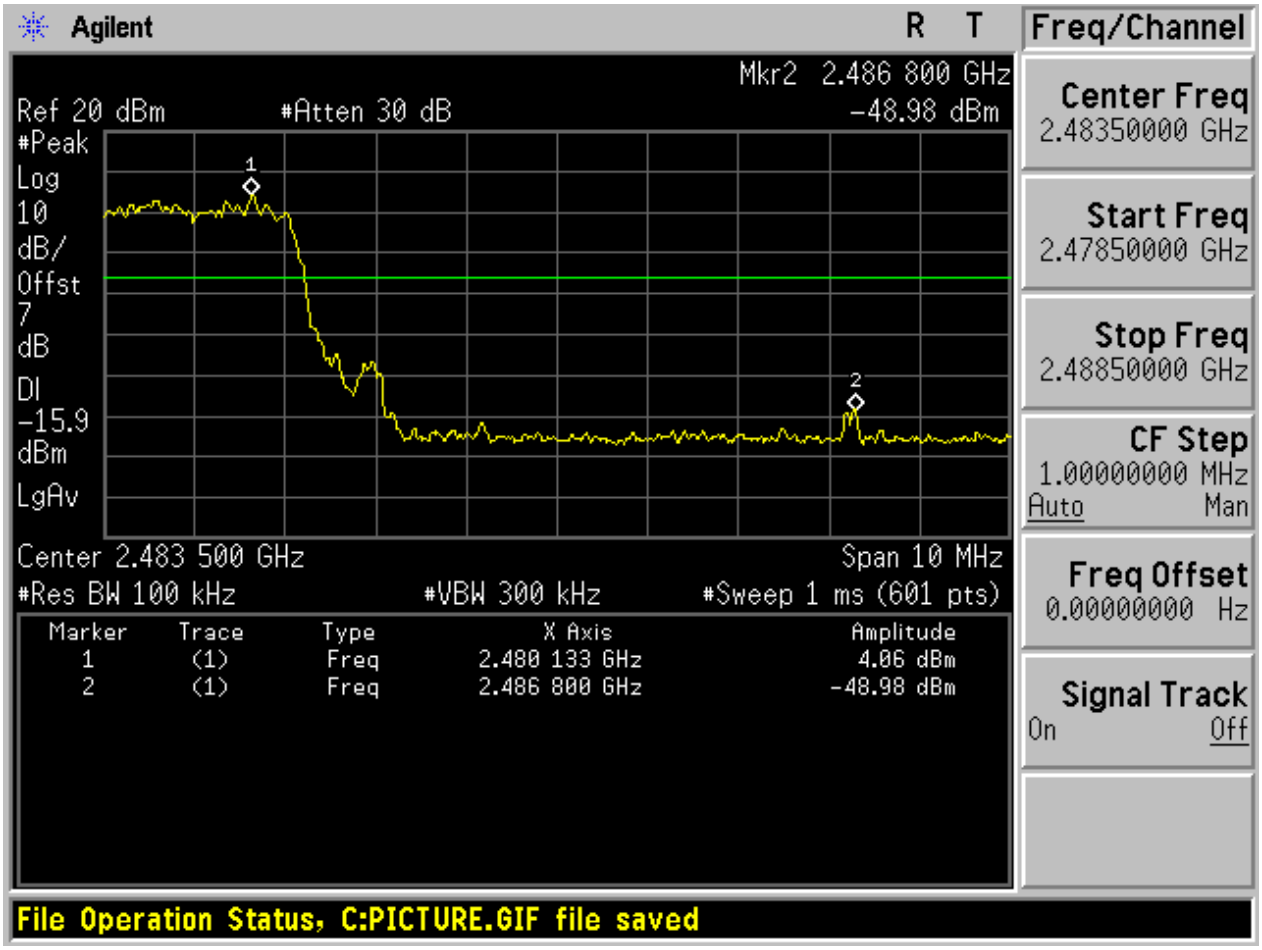

2.5 TM3_3DH5_Ch0

No hopping

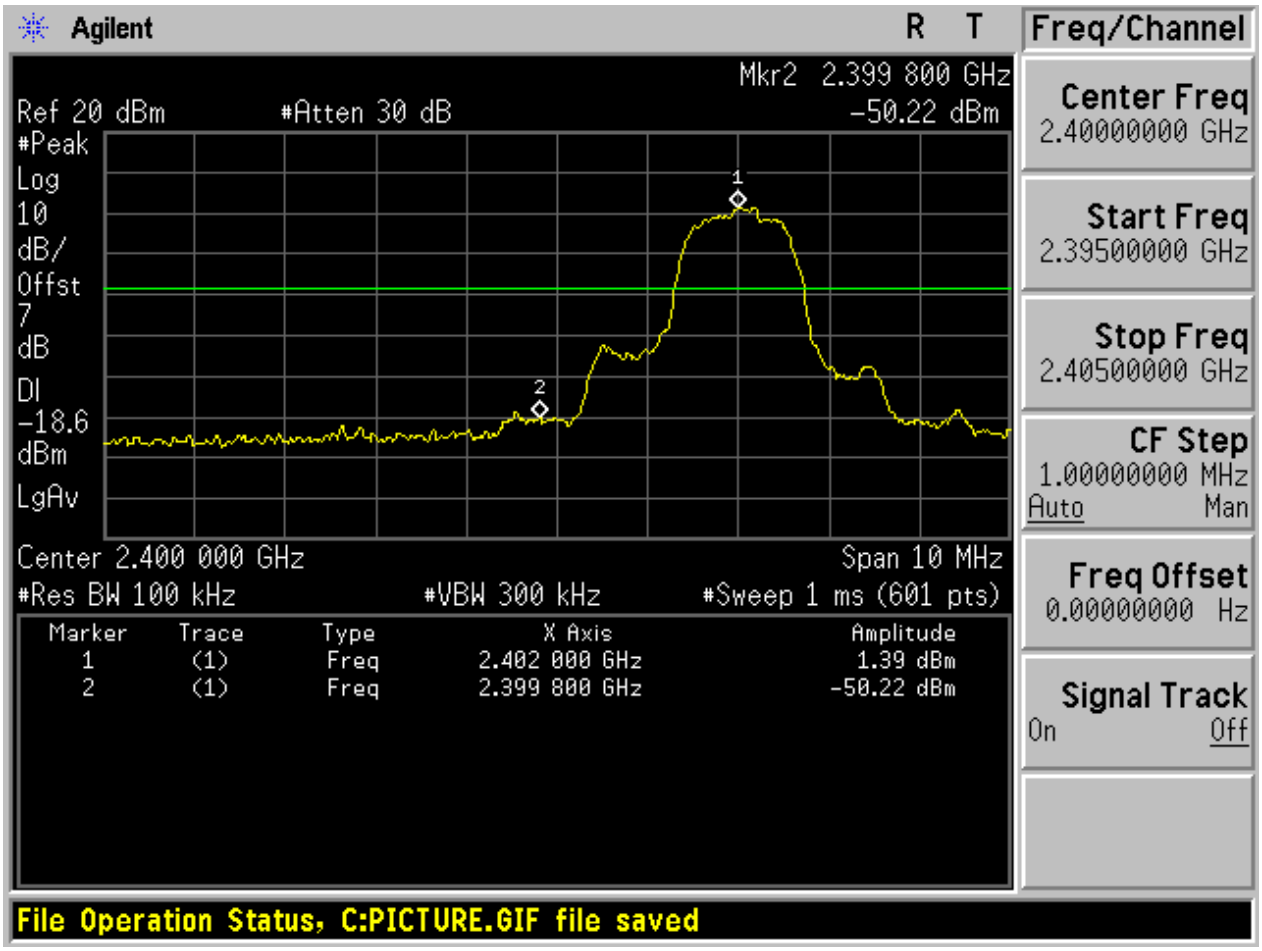

With hopping

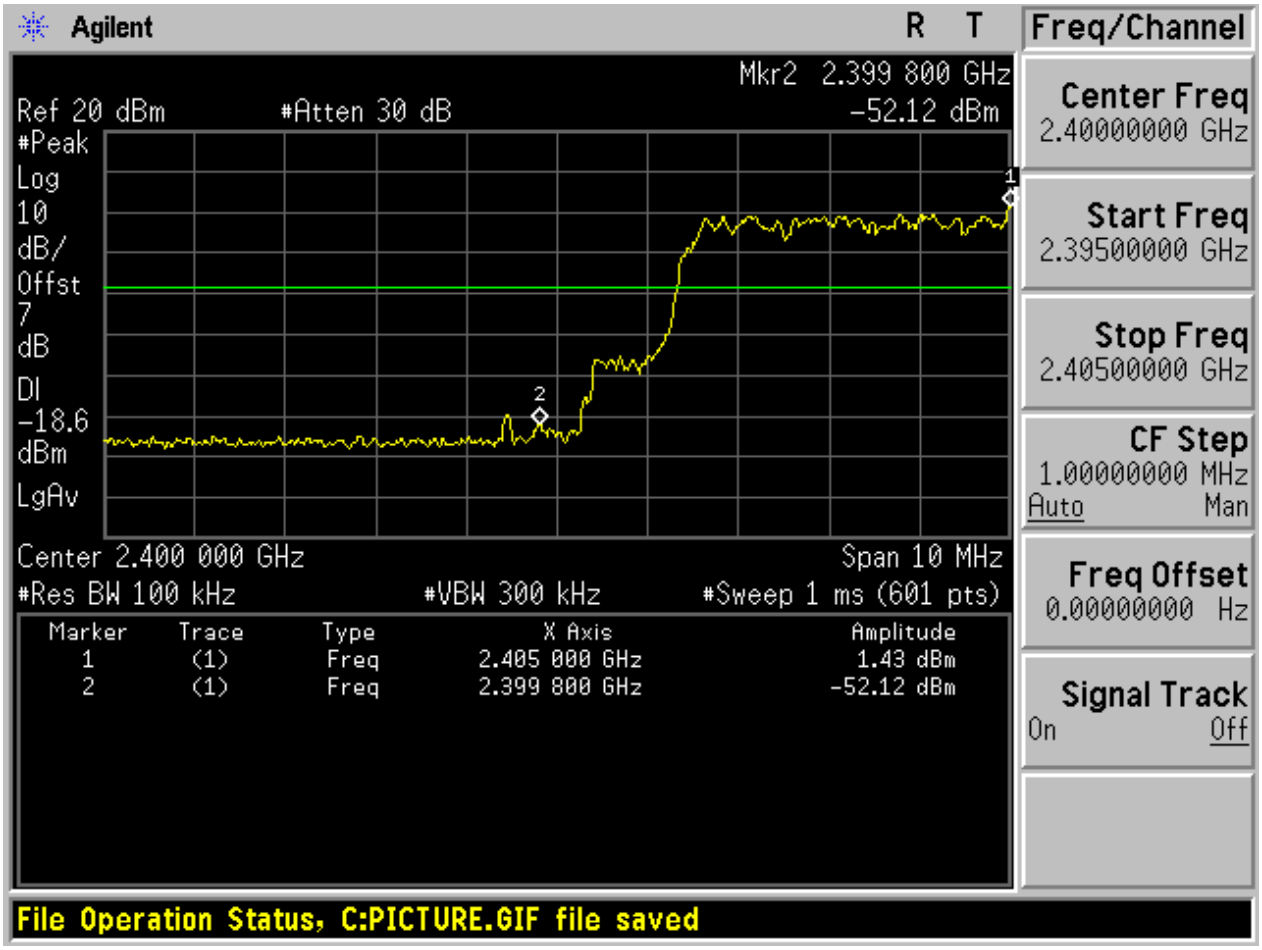

2.6 TM3_3DH5_Ch78

No hopping

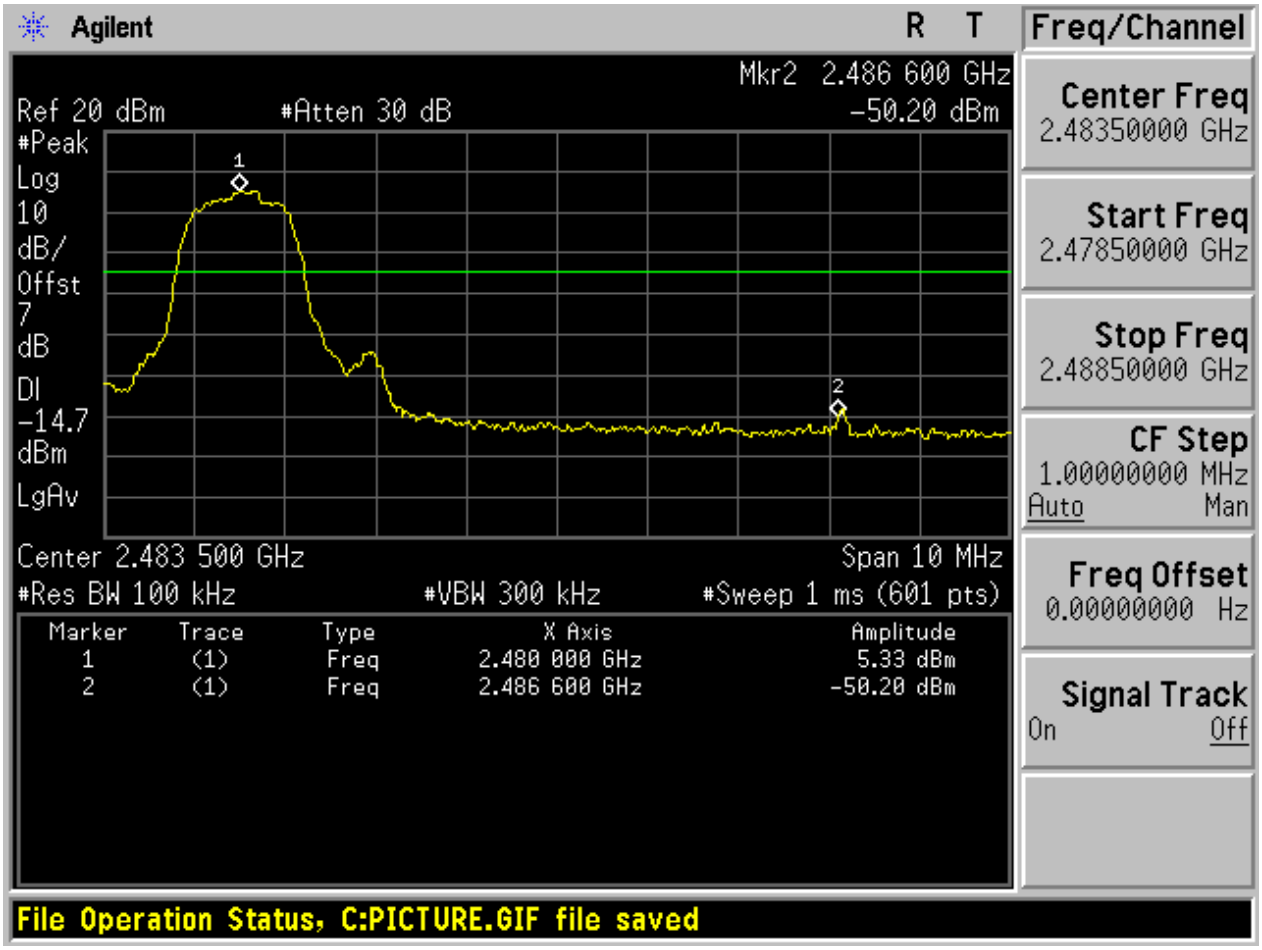

With hopping

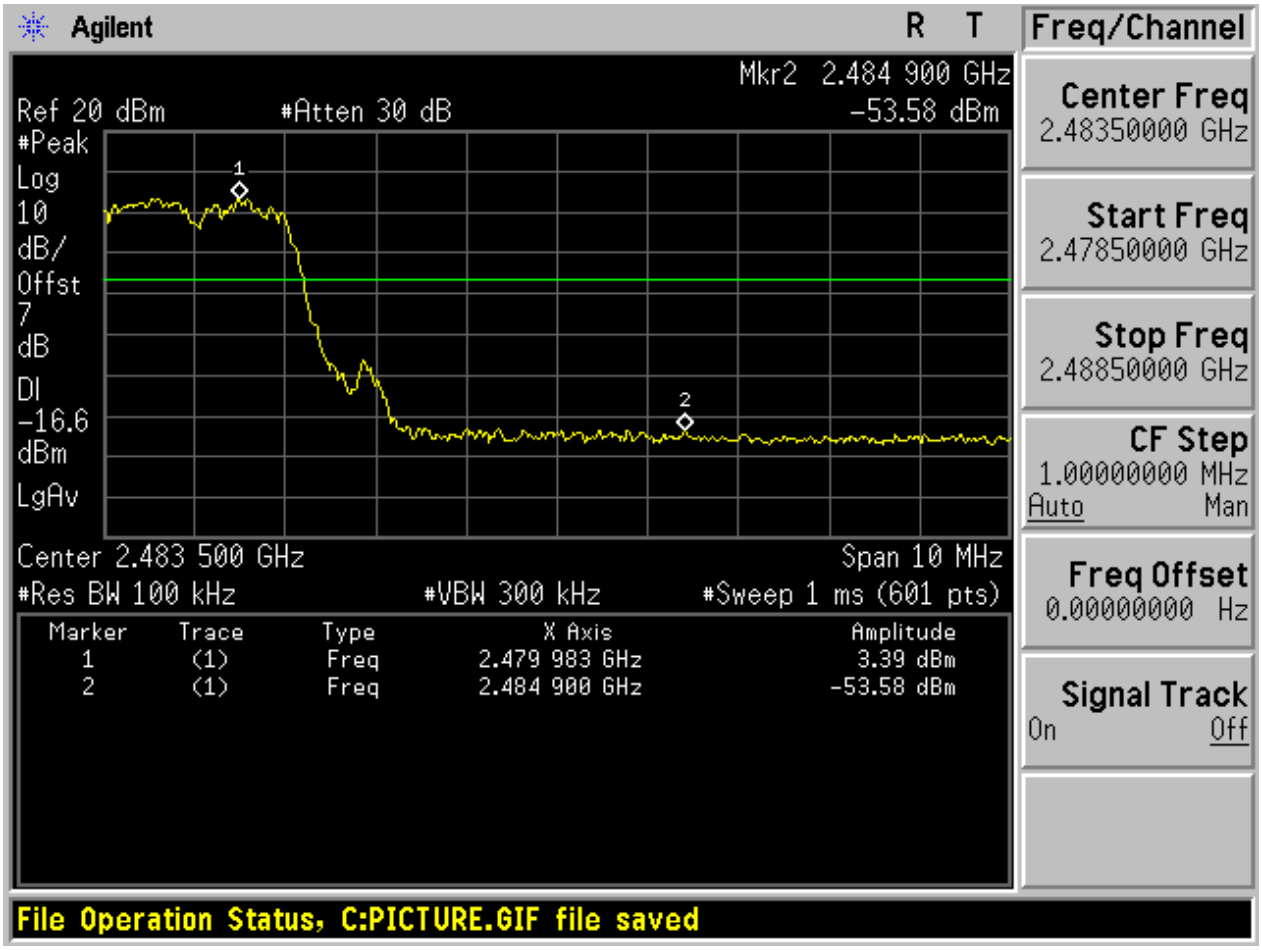

Appendix G: Conducted RF Spurious Emission

1 Result Table

In this Appendix, the “Pref” refers to the peak power level in any 100 kHz bandwidth within the fundamental emission which is used as the reference level, the “Puw” referrers to the maximum emission power in 100 kHz band segments outside of the authorized frequency band.

Considering that the higher ratio of RBW to the span for the frequency ranges below 30 MHz makes the results determination be complicated, a narrower RBW other than 100 kHz is used for these ranges. The measured value should add a RBW correction factor (RBWCF) where RBWCF [dB] = 10 x lg(100 [kHz]/narrower RBW [kHz]). As to this Appendix, the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

In the result table, the “< Limit” denotes that “The Puw [dBm] is less than Pref [dBm] - 20 [dB], see test plots for detailed”.

EUT Conf.	Pref [dBm/100 kHz]	Puw [dBm/100 kHz]	Verdict
TM1_DH5_Ch0	1.45	< Limit	Pass
TM1_DH5_Ch39	2.04	< Limit	Pass
TM1_DH5_Ch78	2.63	< Limit	Pass
TM2_2DH5_Ch0	1.58	< Limit	Pass
TM2_2DH5_Ch39	2.17	< Limit	Pass
TM2_2DH5_Ch78	2.75	< Limit	Pass
TM3_3DH5_Ch0	1.59	< Limit	Pass
TM3_3DH5_Ch39	2.17	< Limit	Pass
TM3_3DH5_Ch78	2.74	< Limit	Pass

2 Test Plot

2.1 TM1_DH5_Ch0

2.1.1 Pref

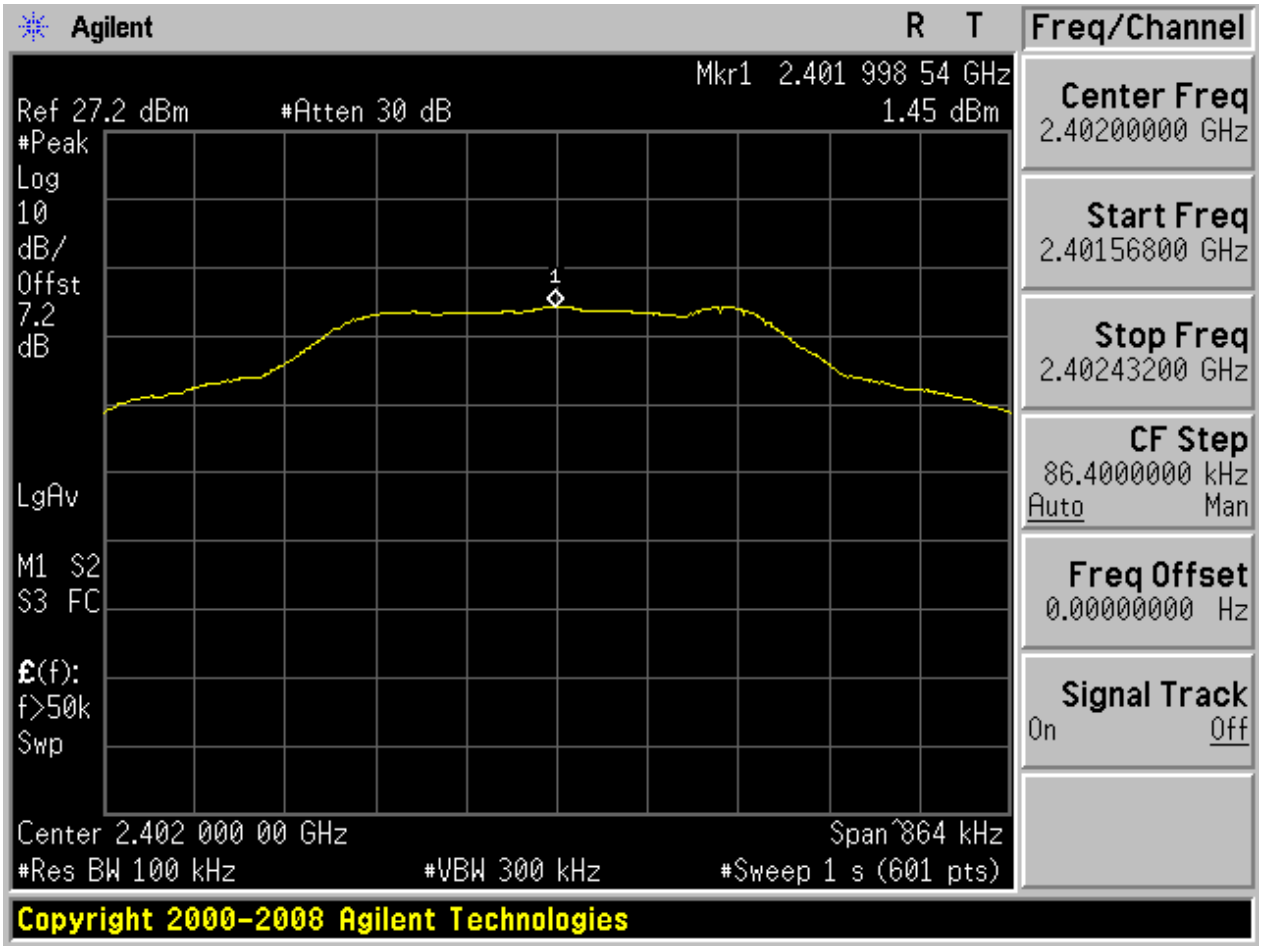

2.1.2 Puw

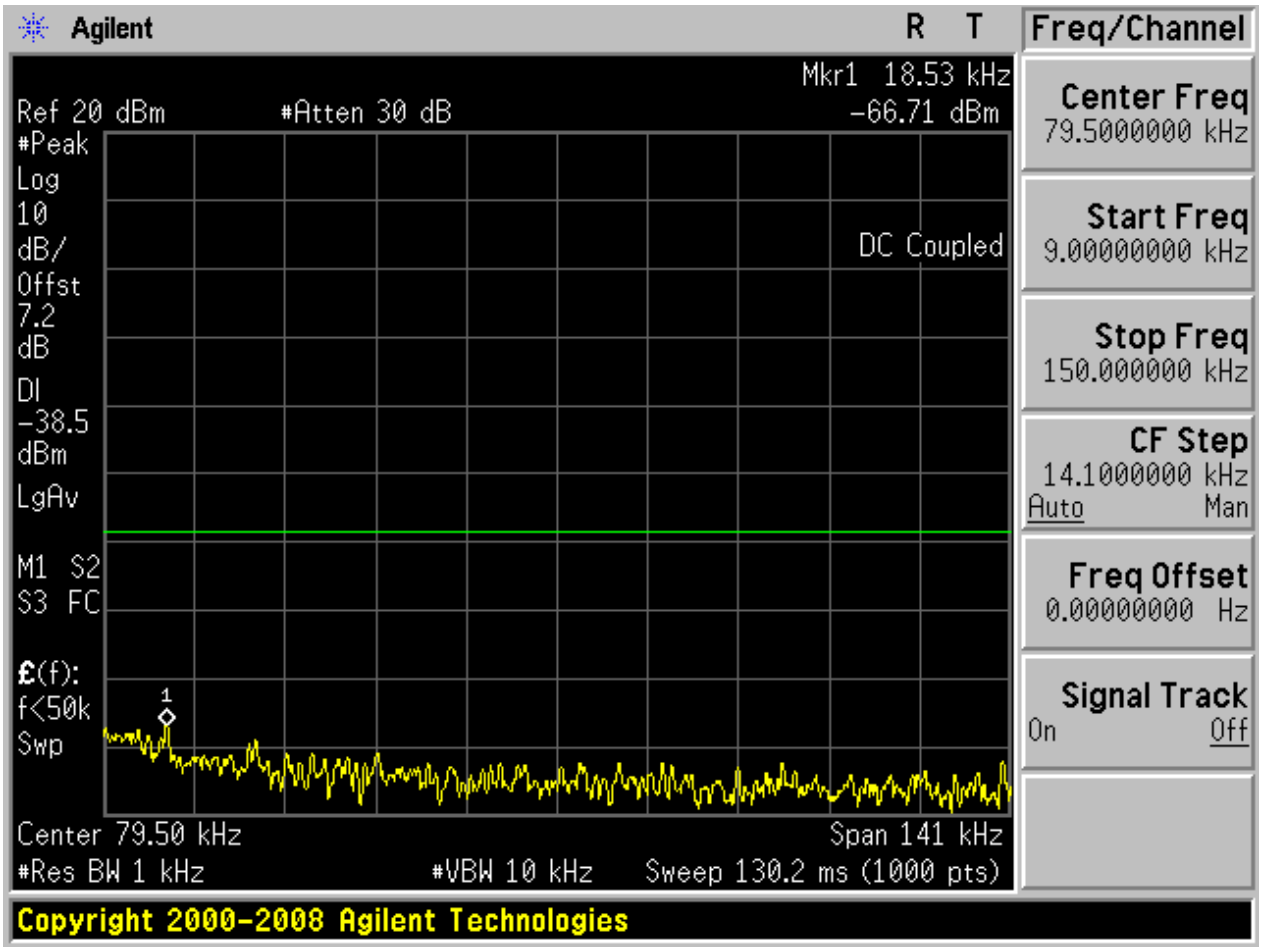

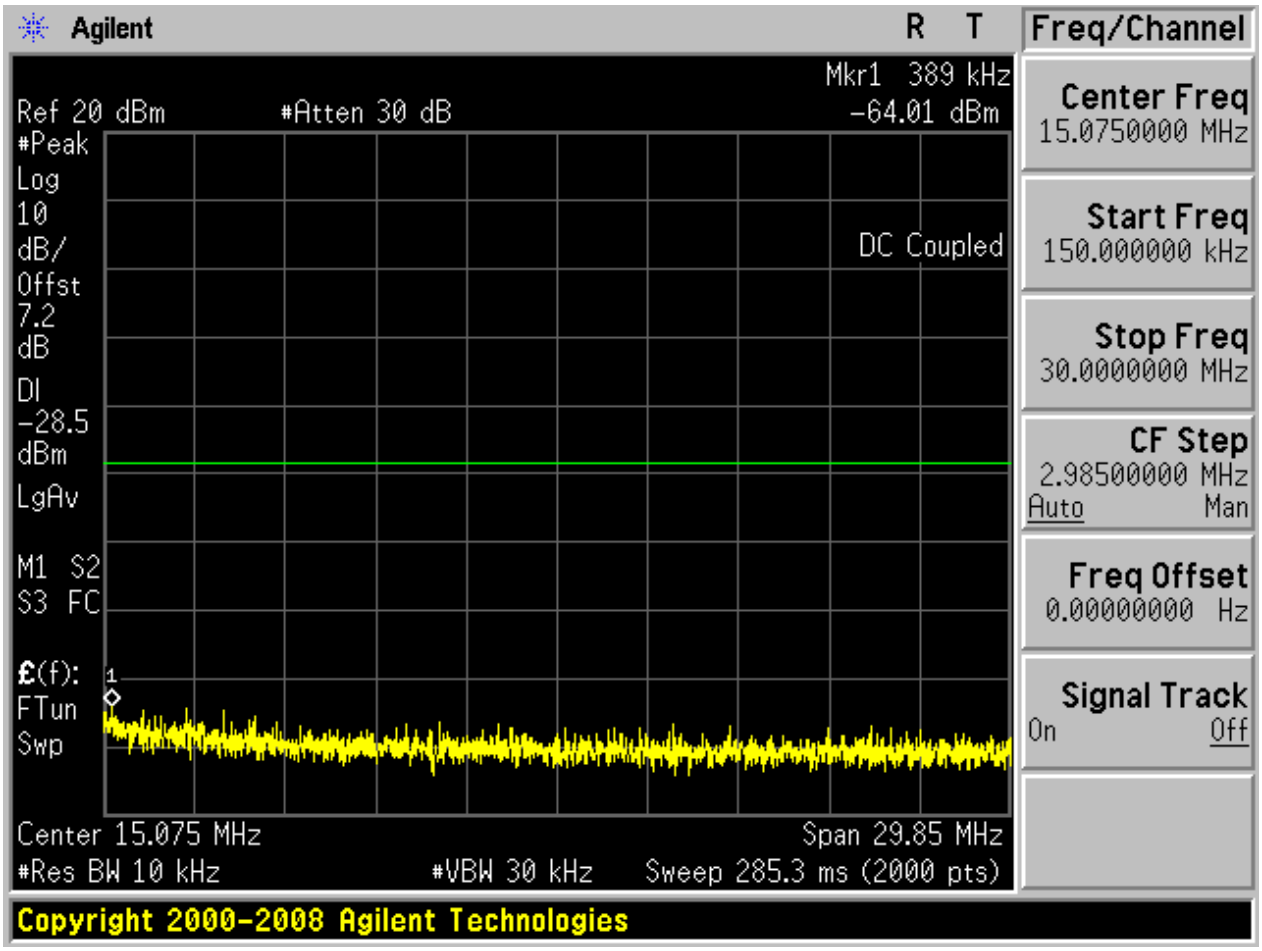

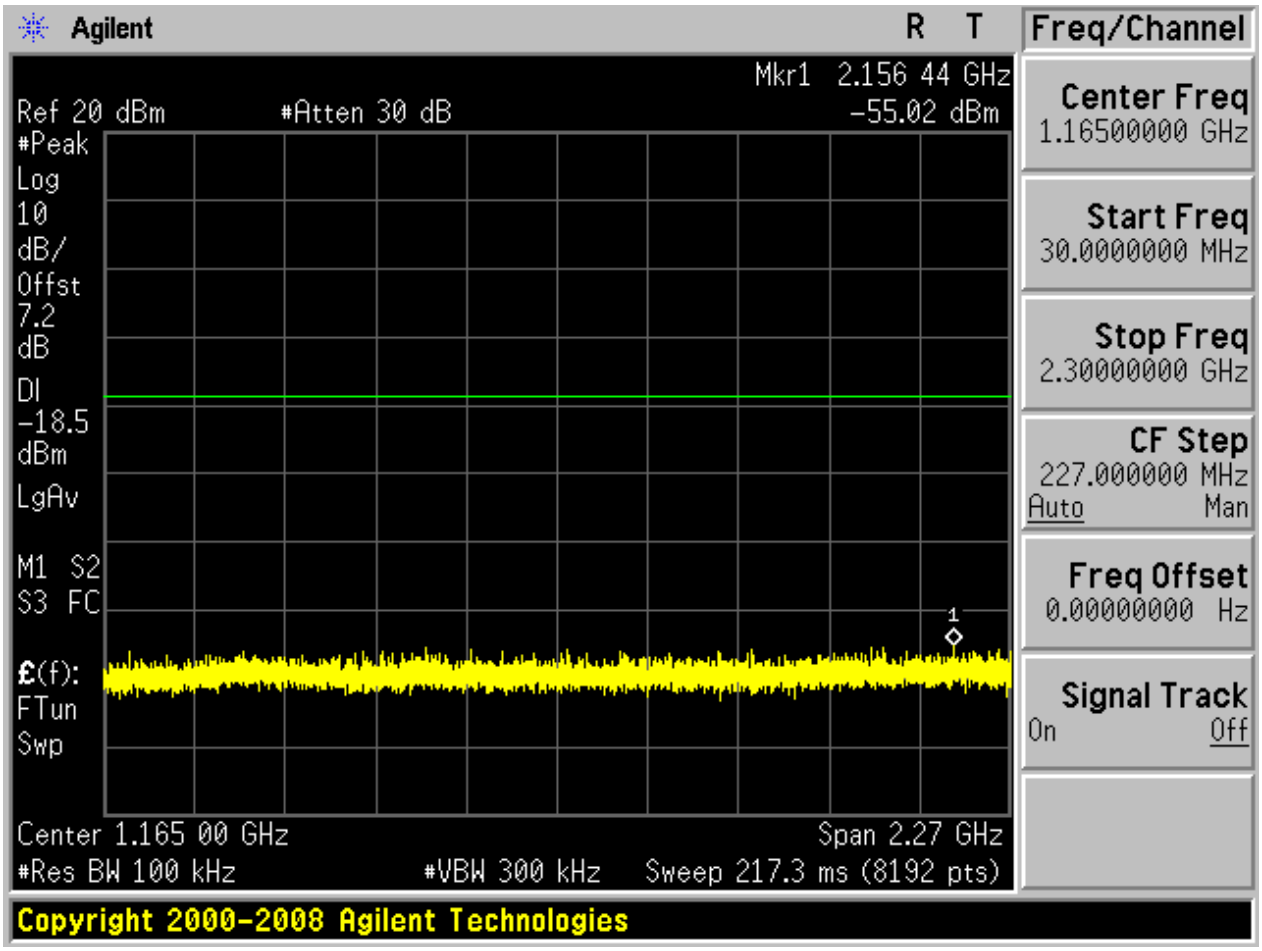

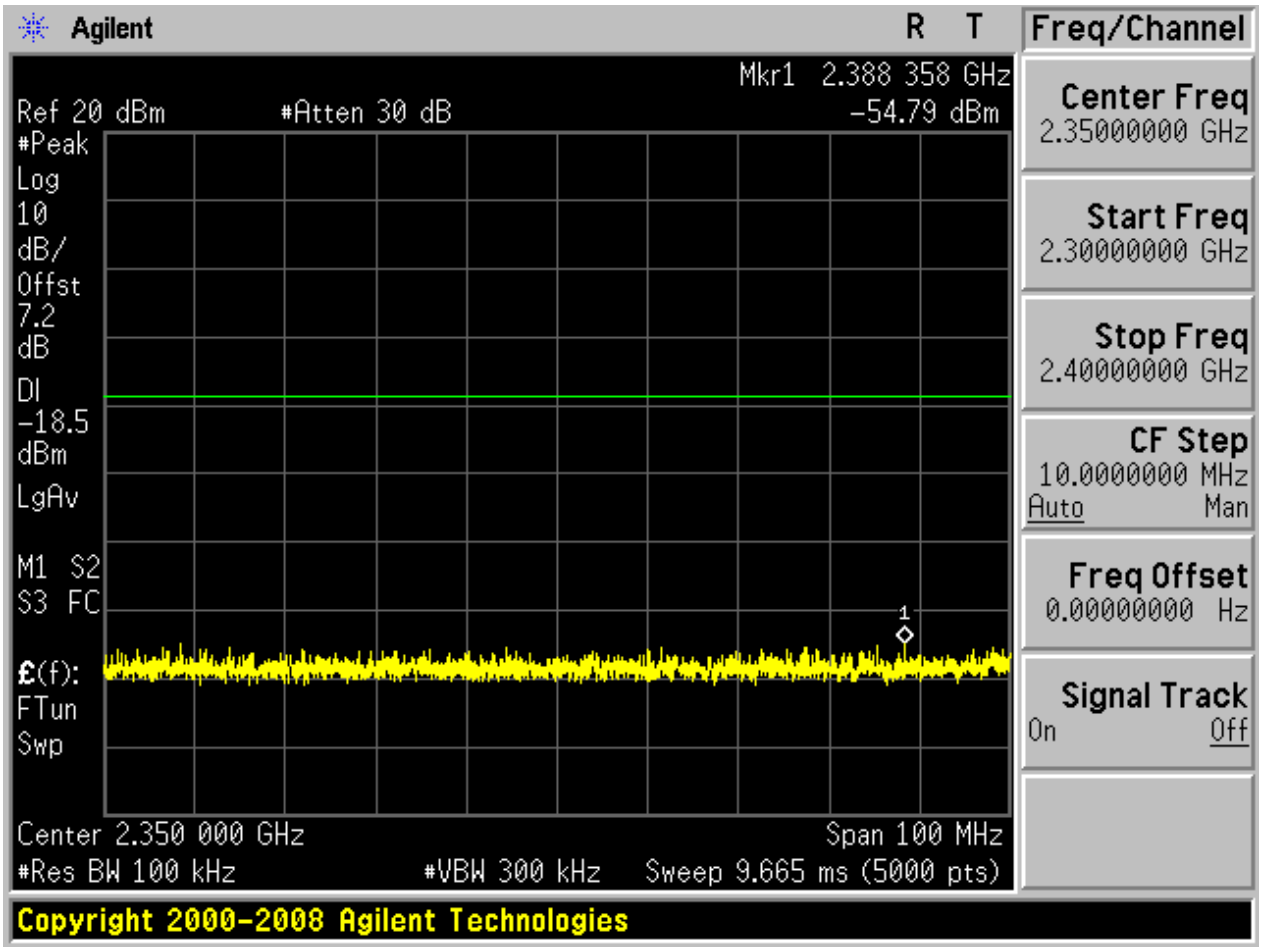

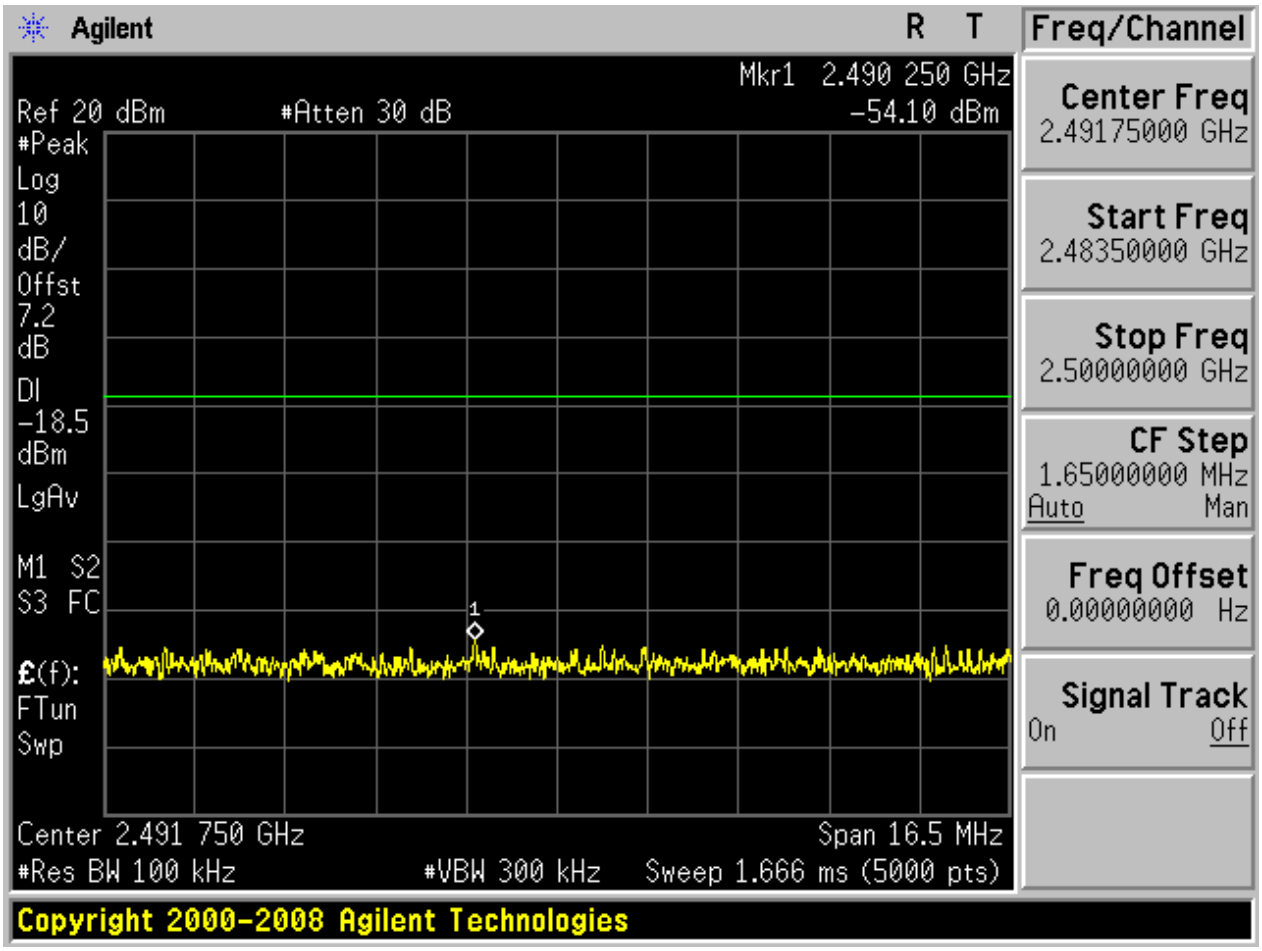

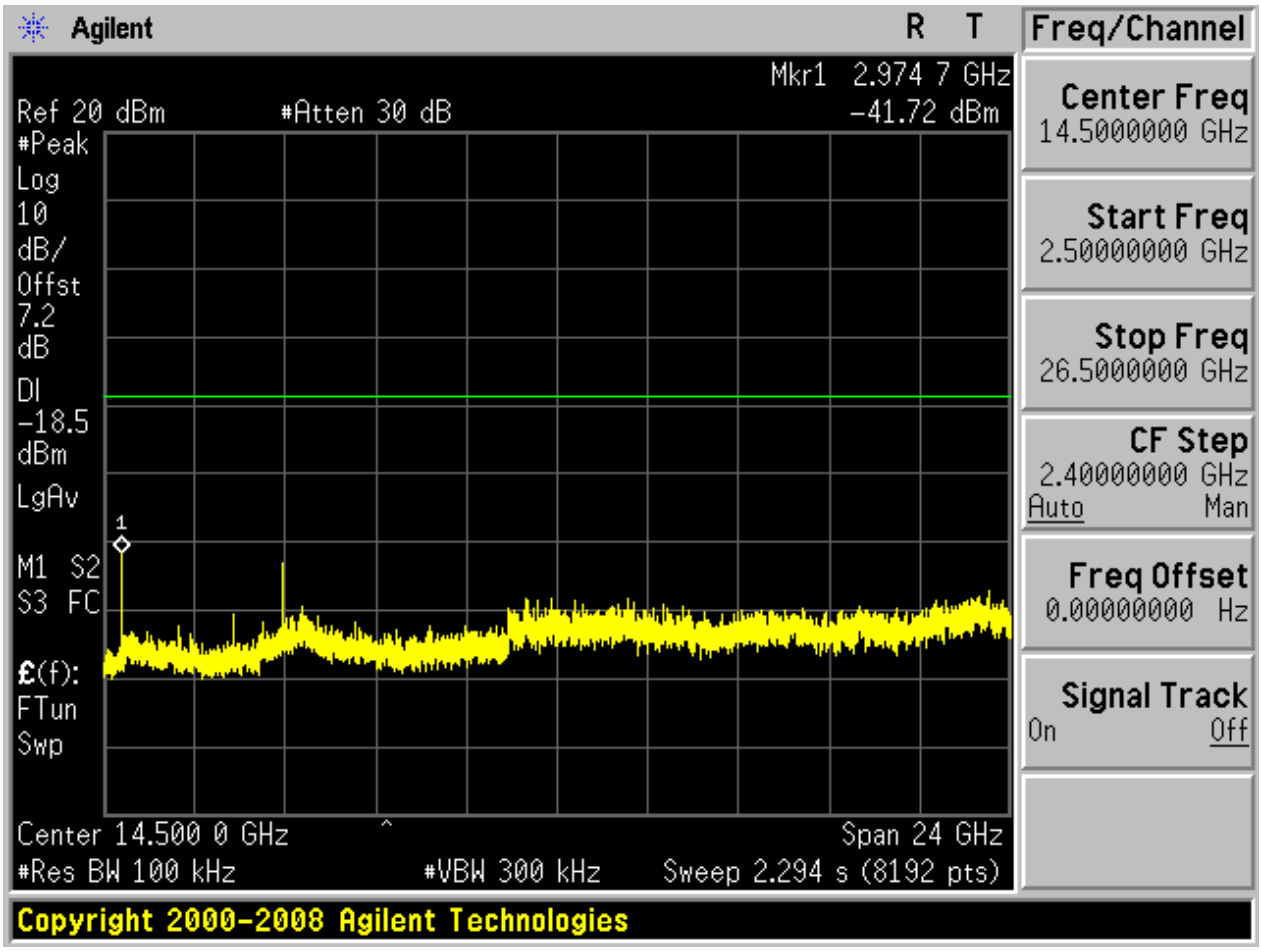

2.2 TM1_DH5_Ch39

2.2.1 Pref

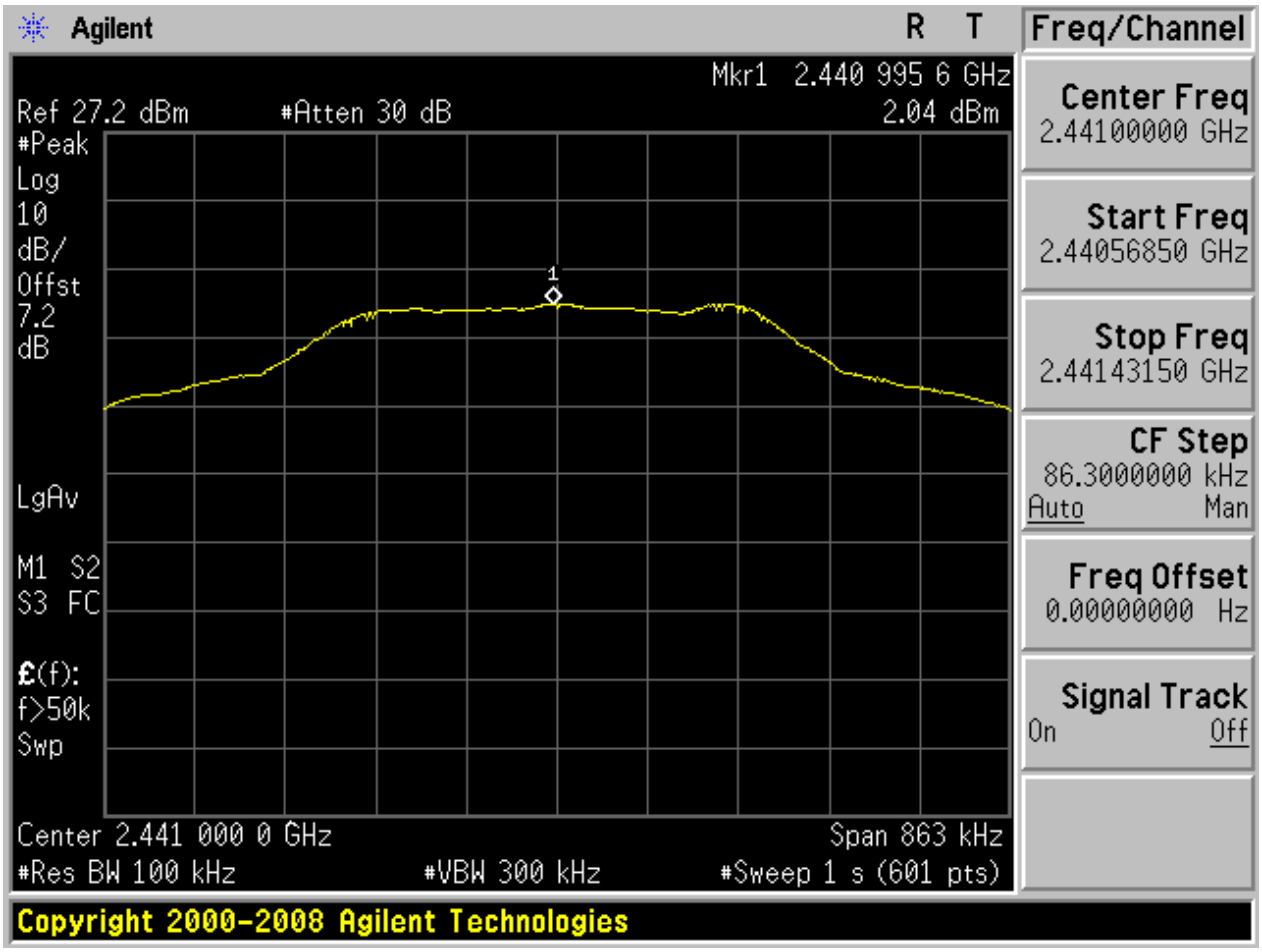

2.2.2 Puw

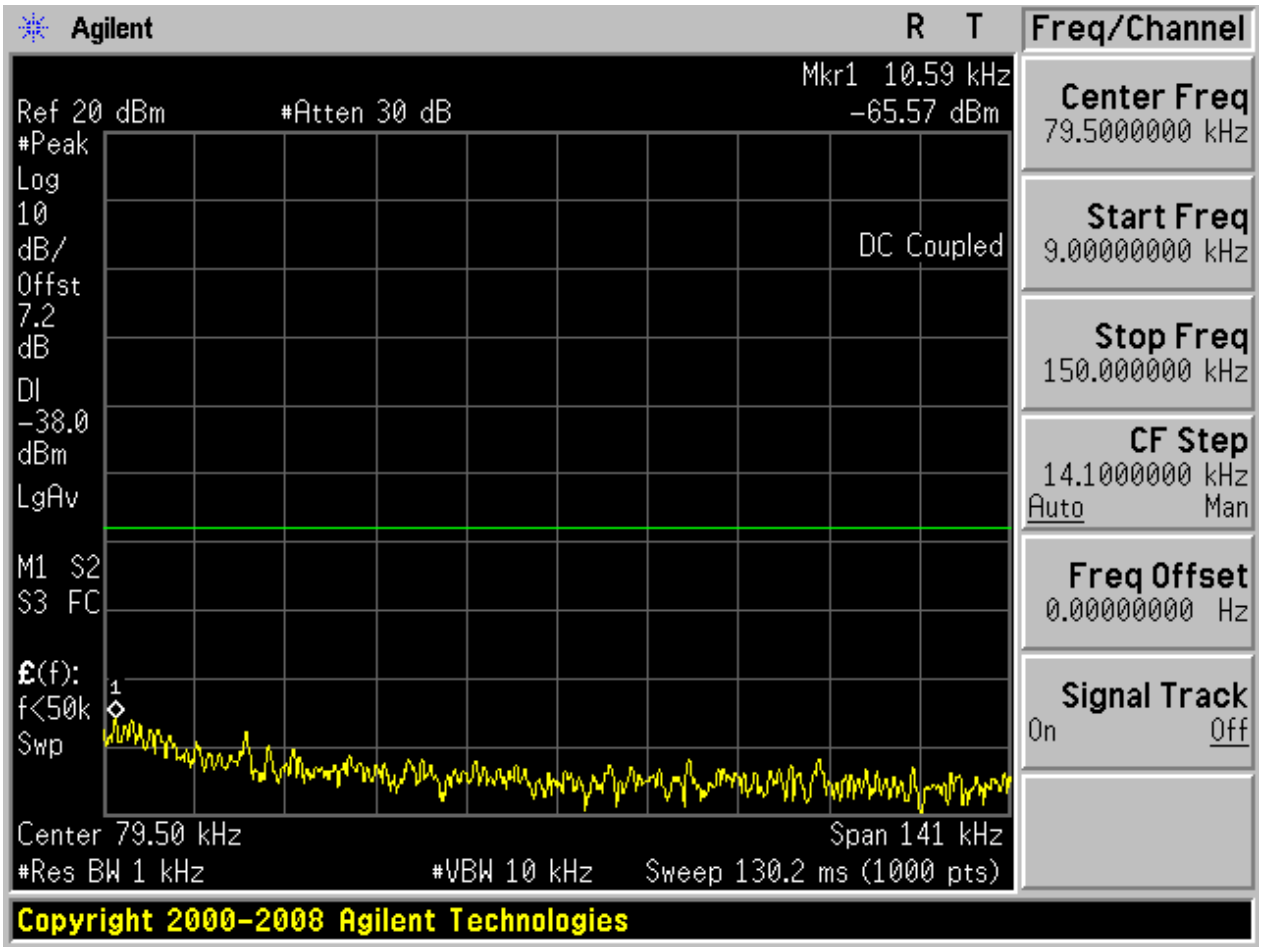

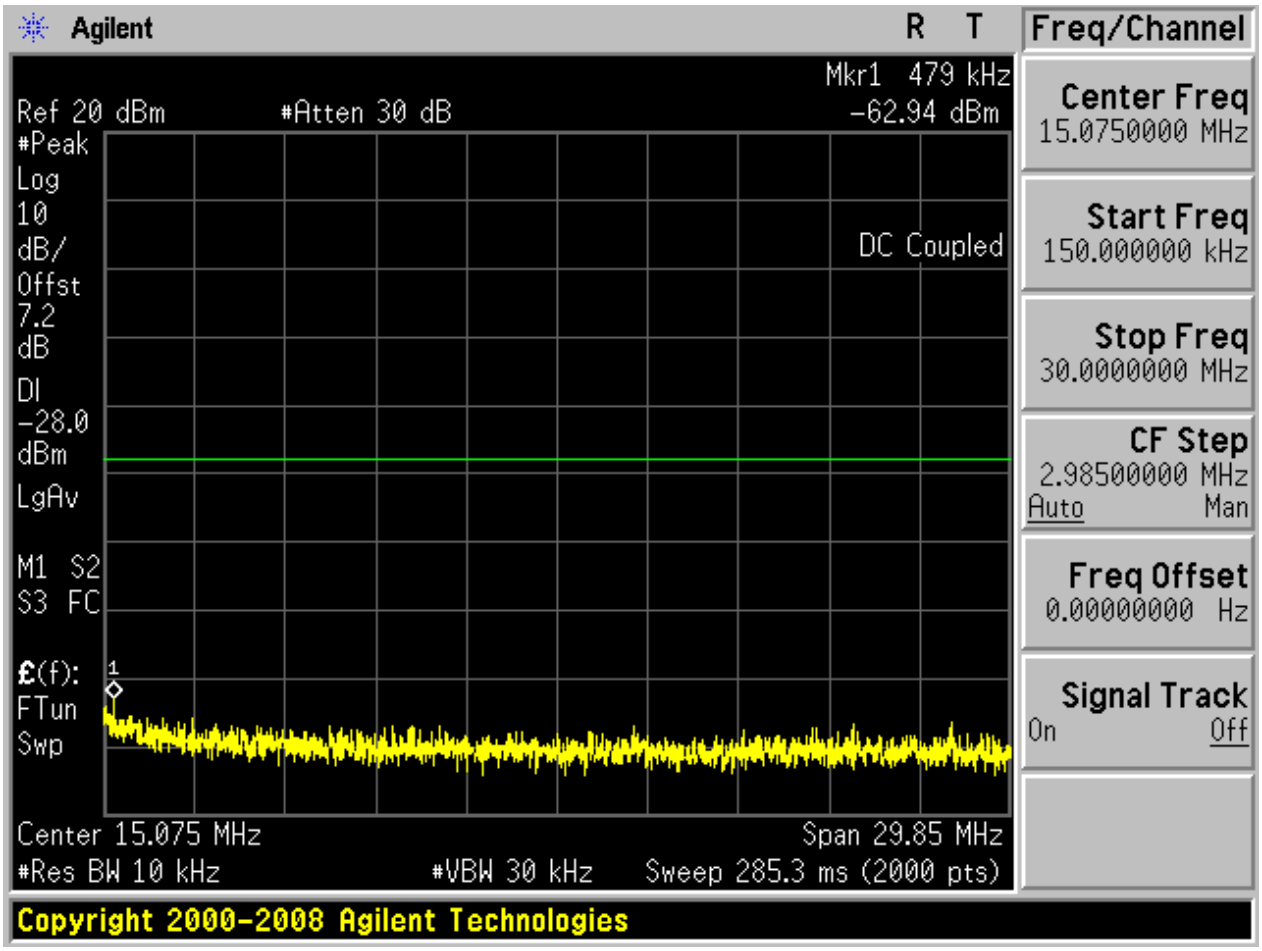

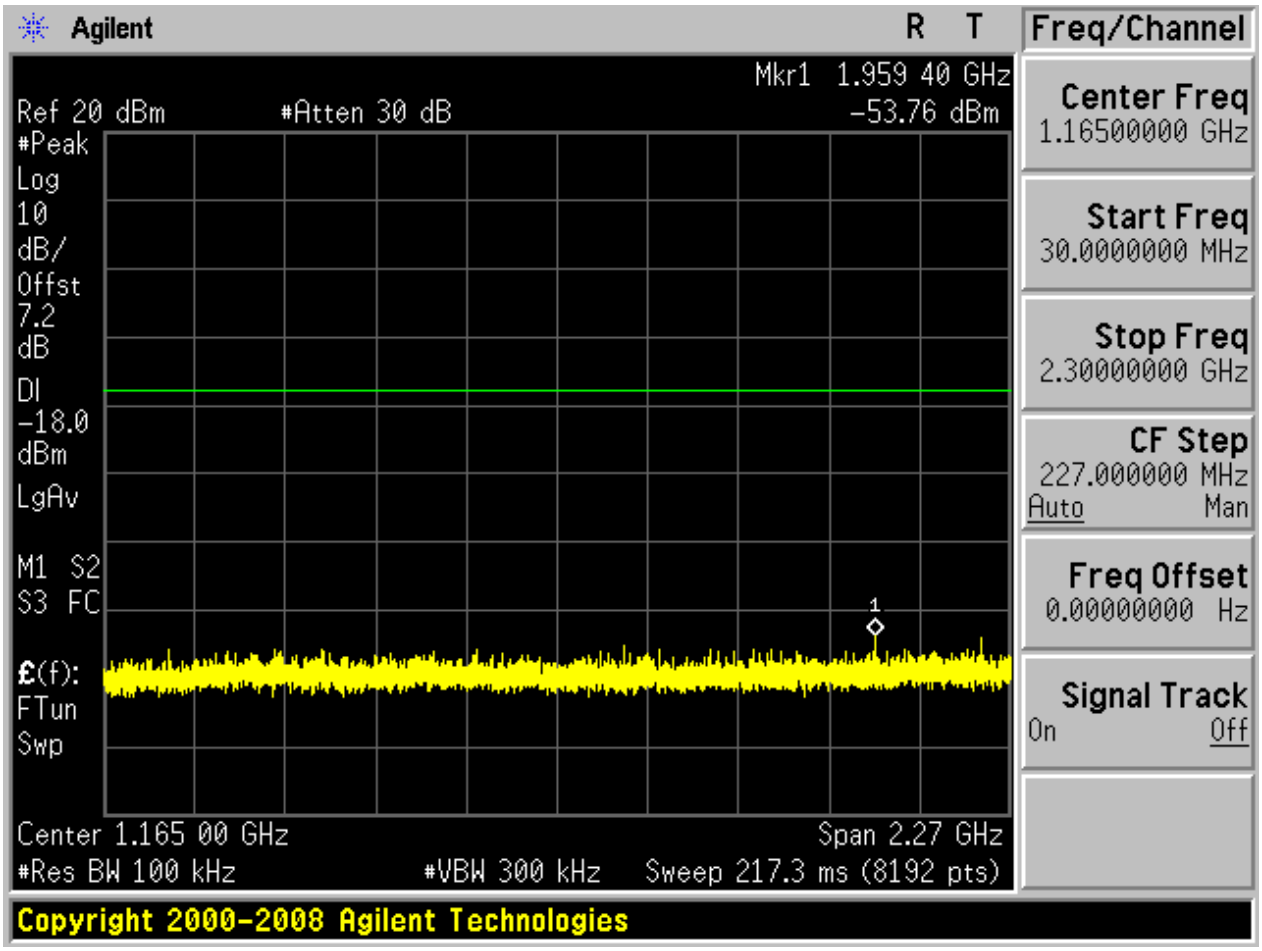

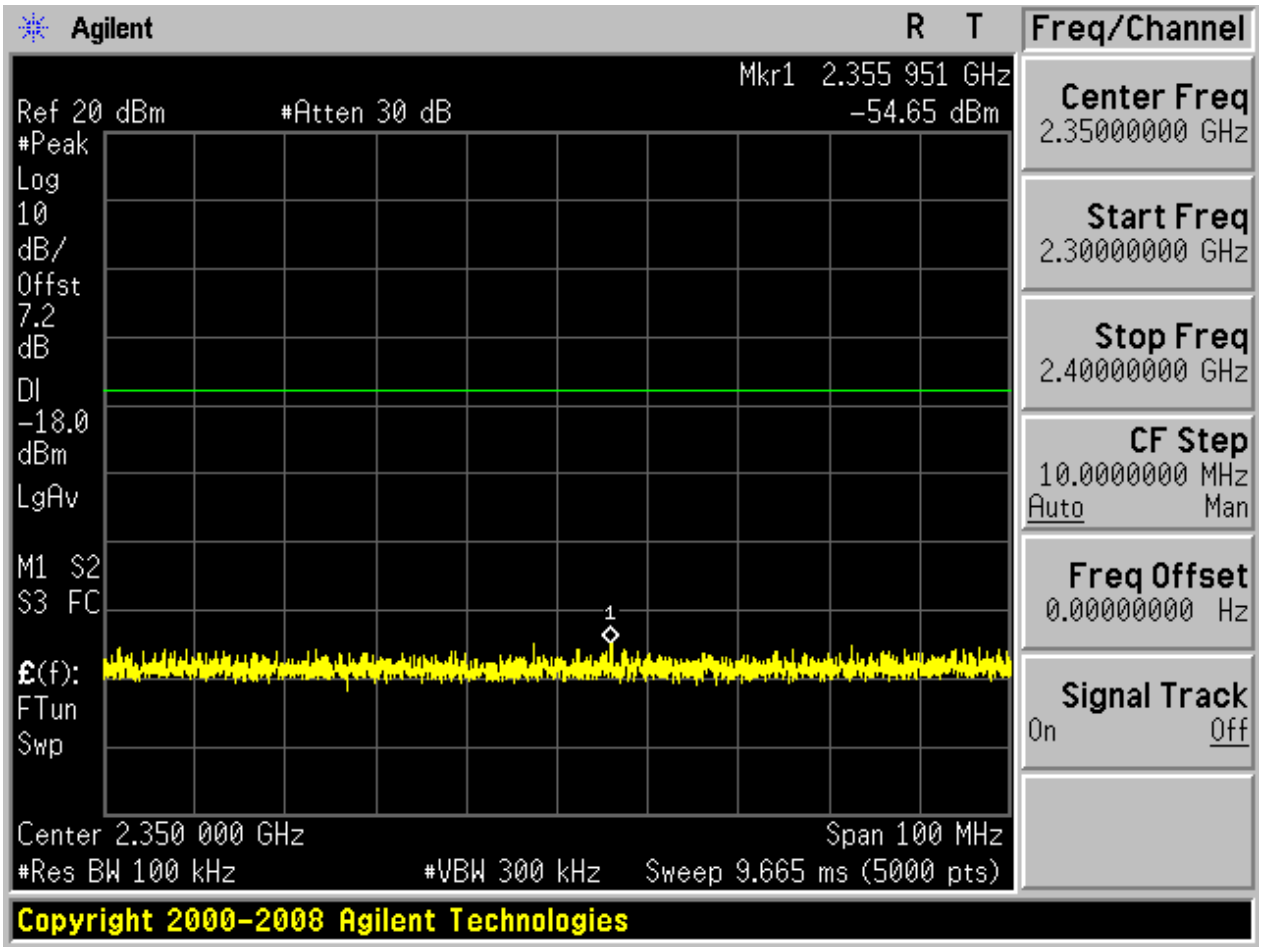

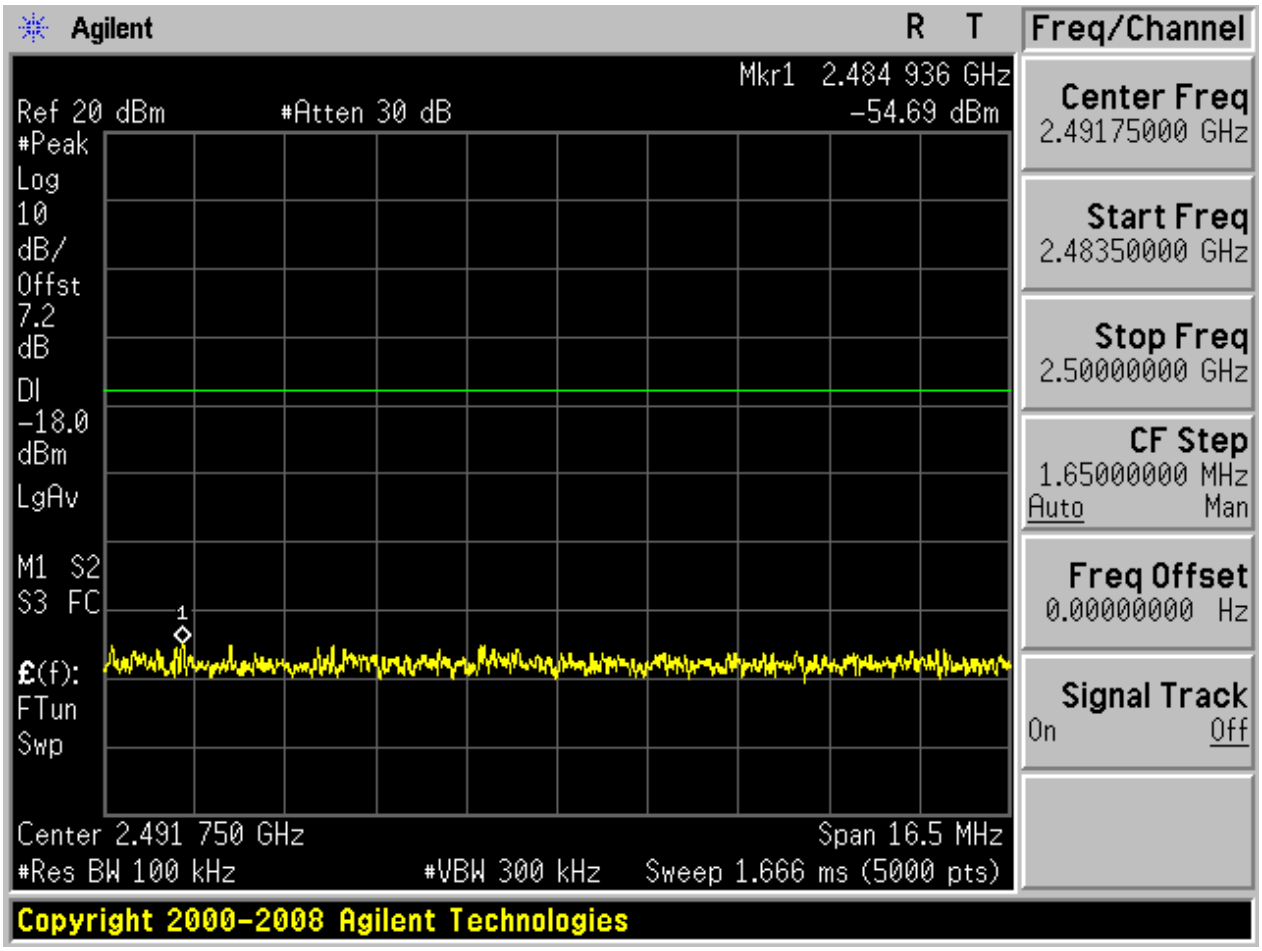

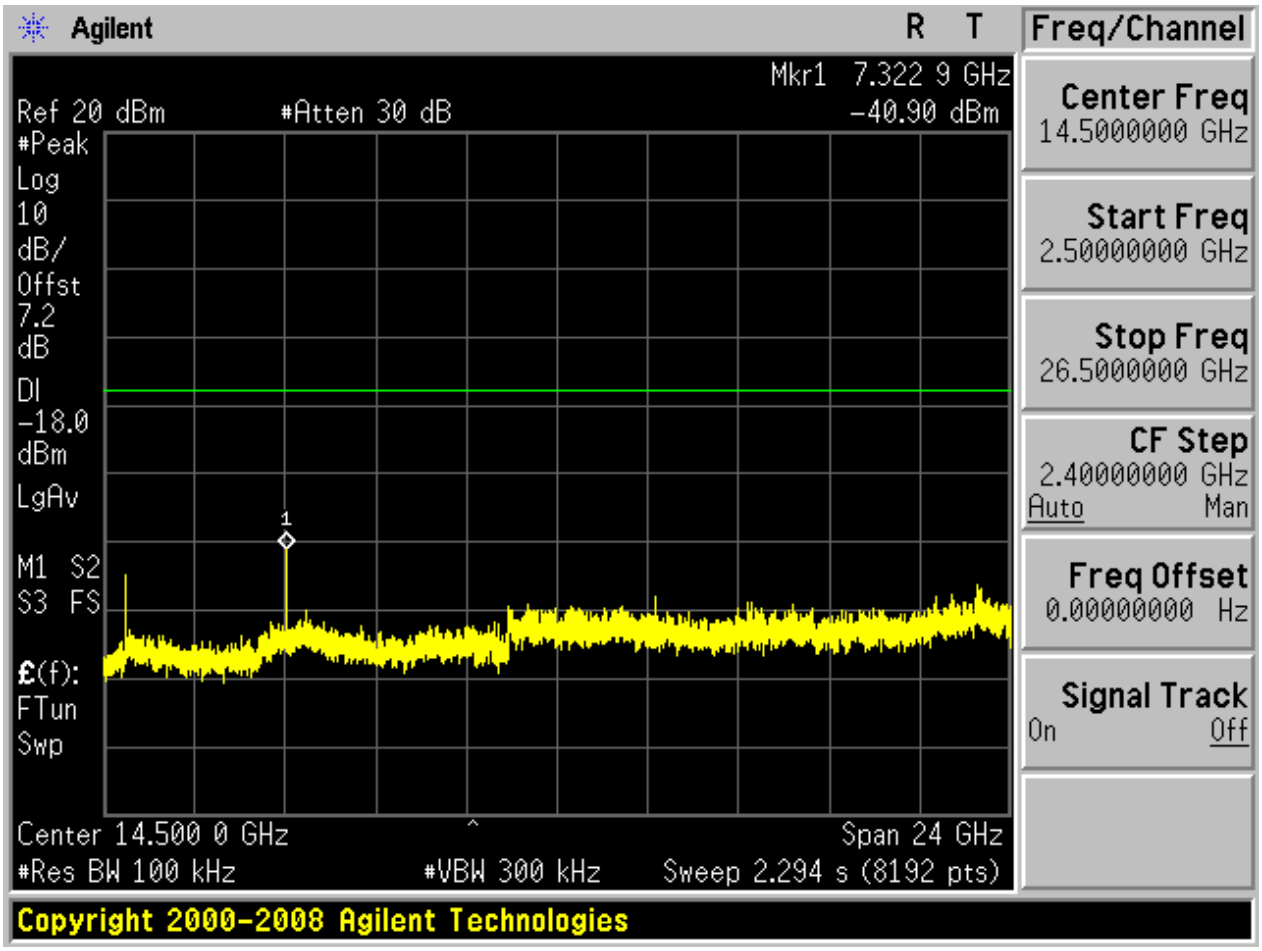

2.3 TM1_DH5_Ch78

2.3.1 Pref

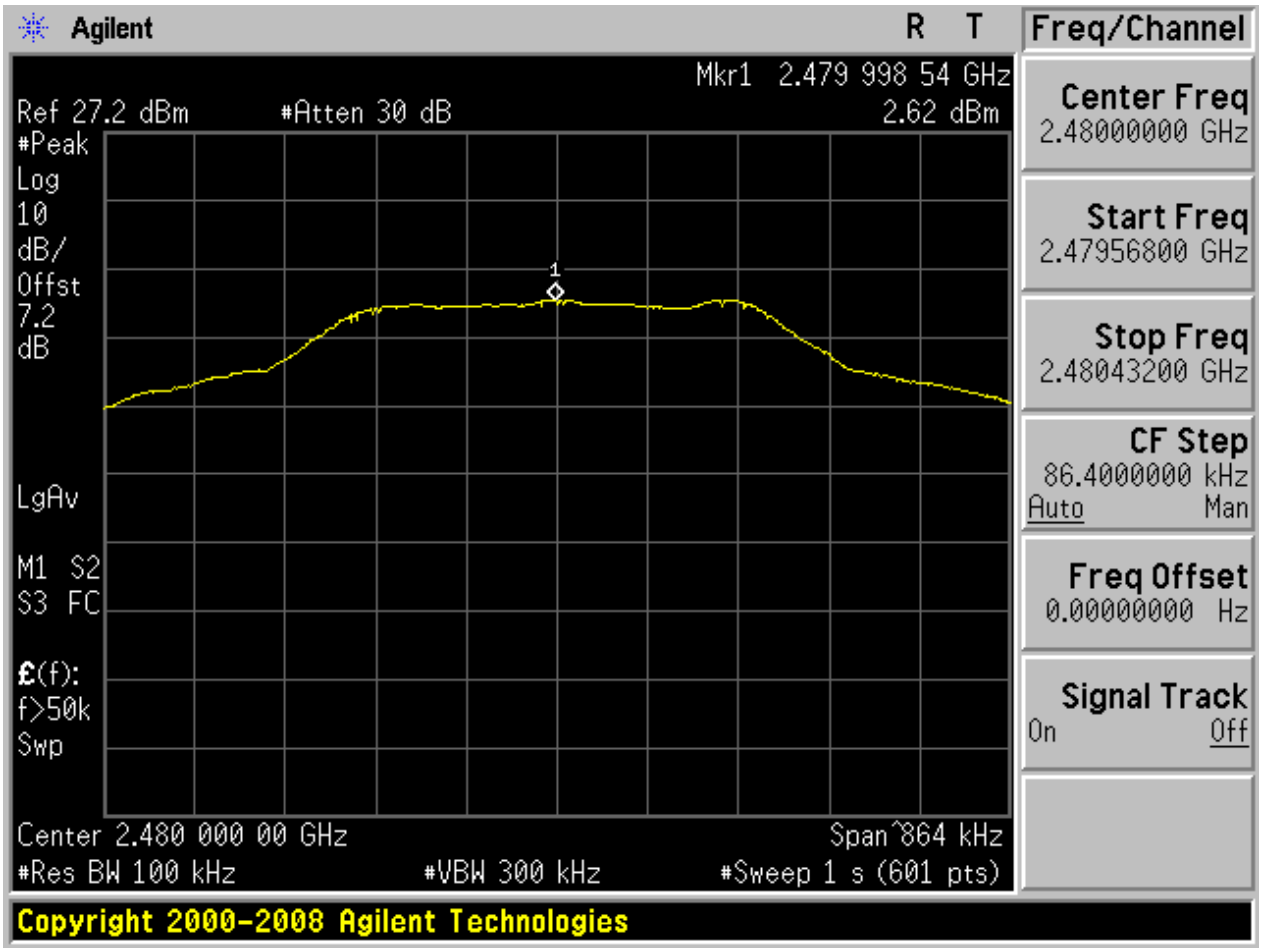

2.3.2 Puw

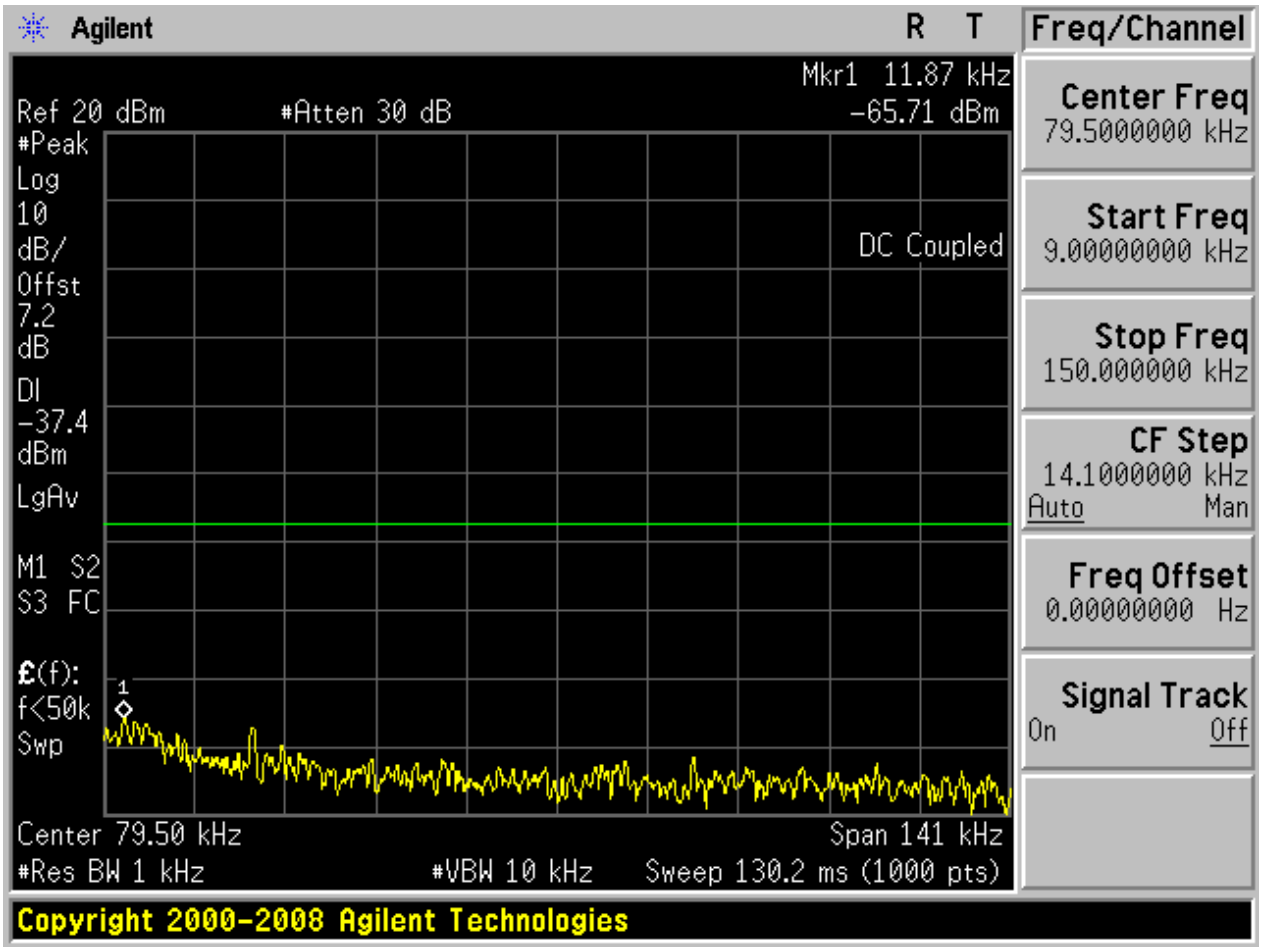

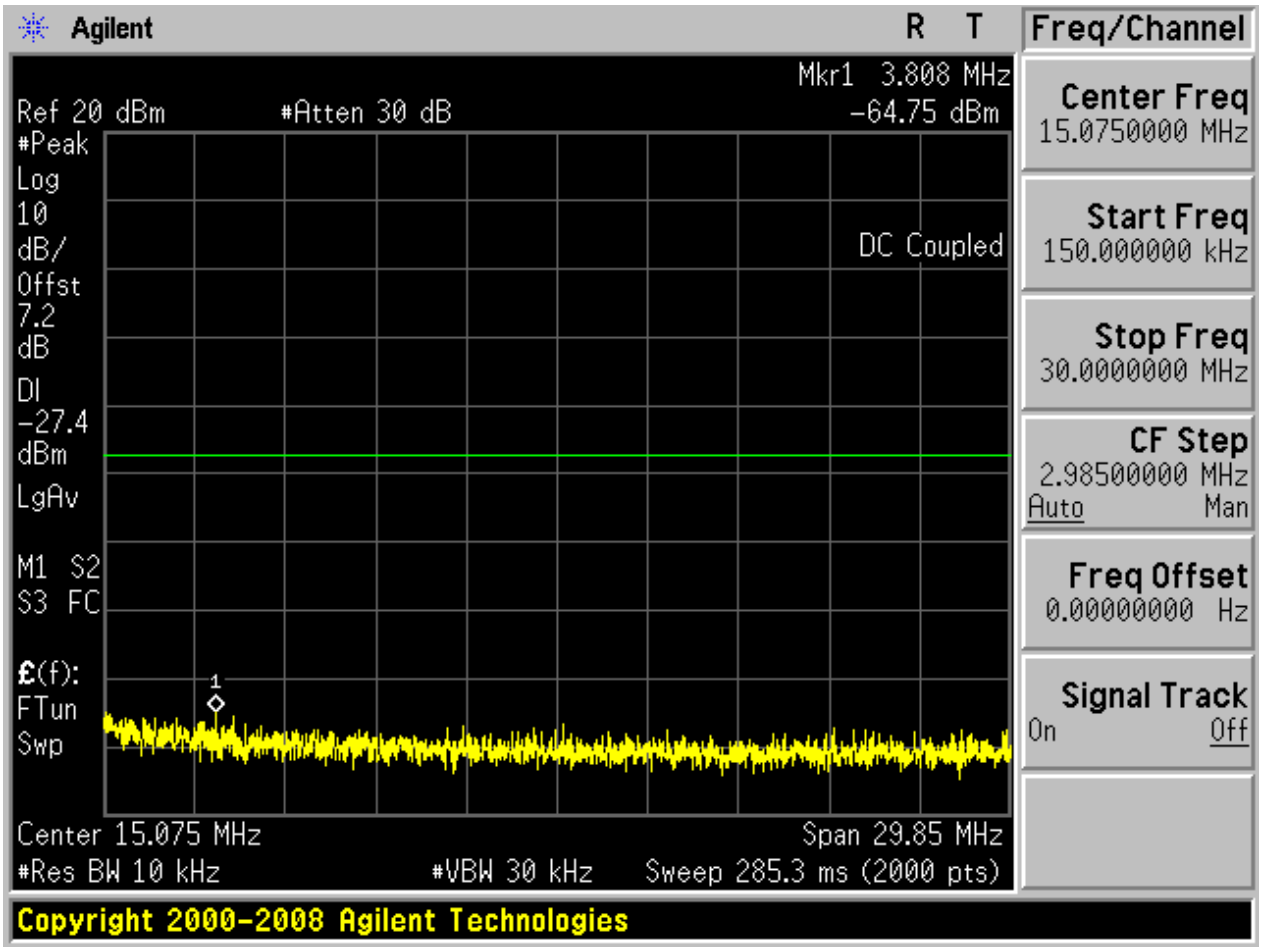

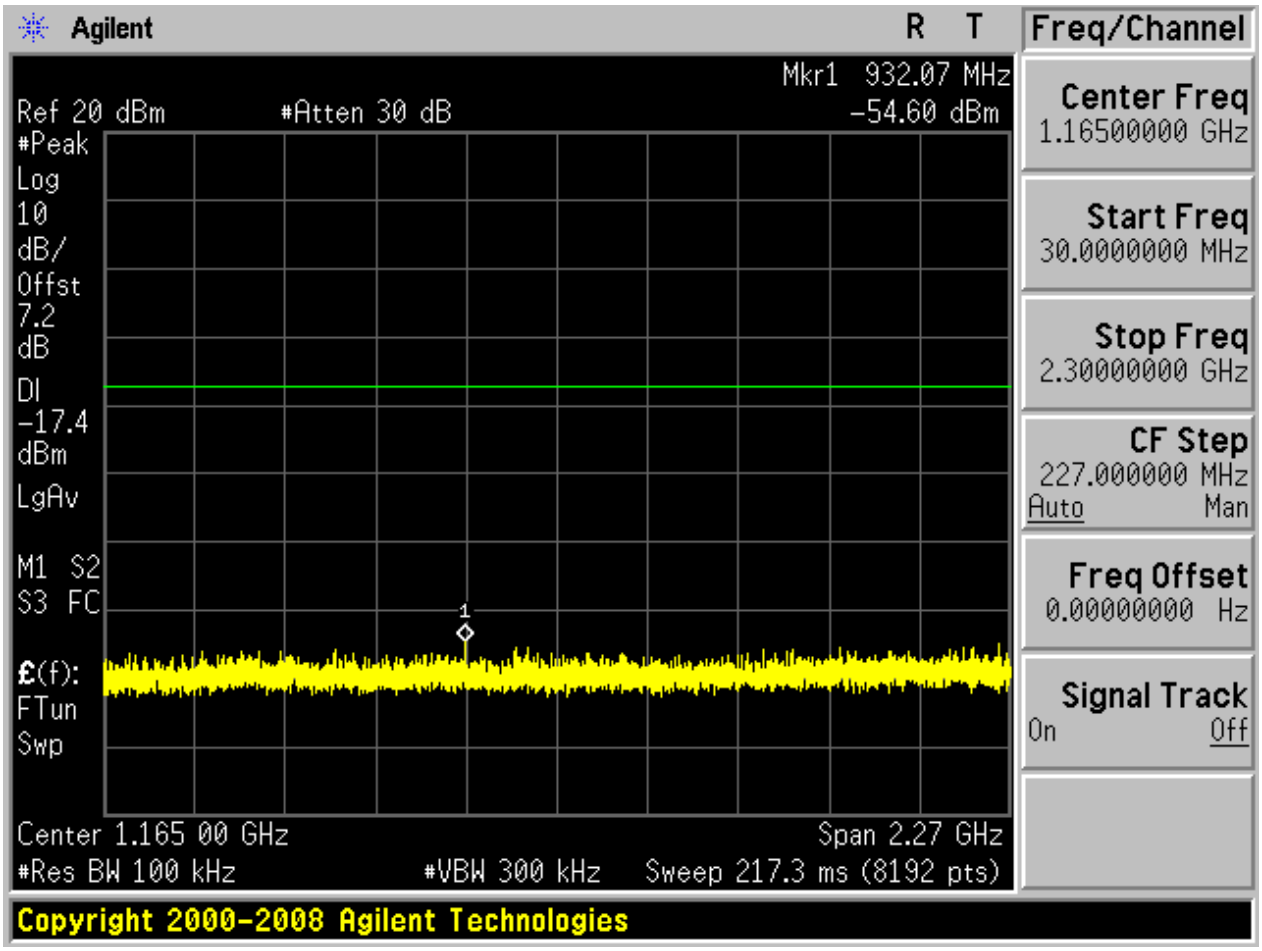

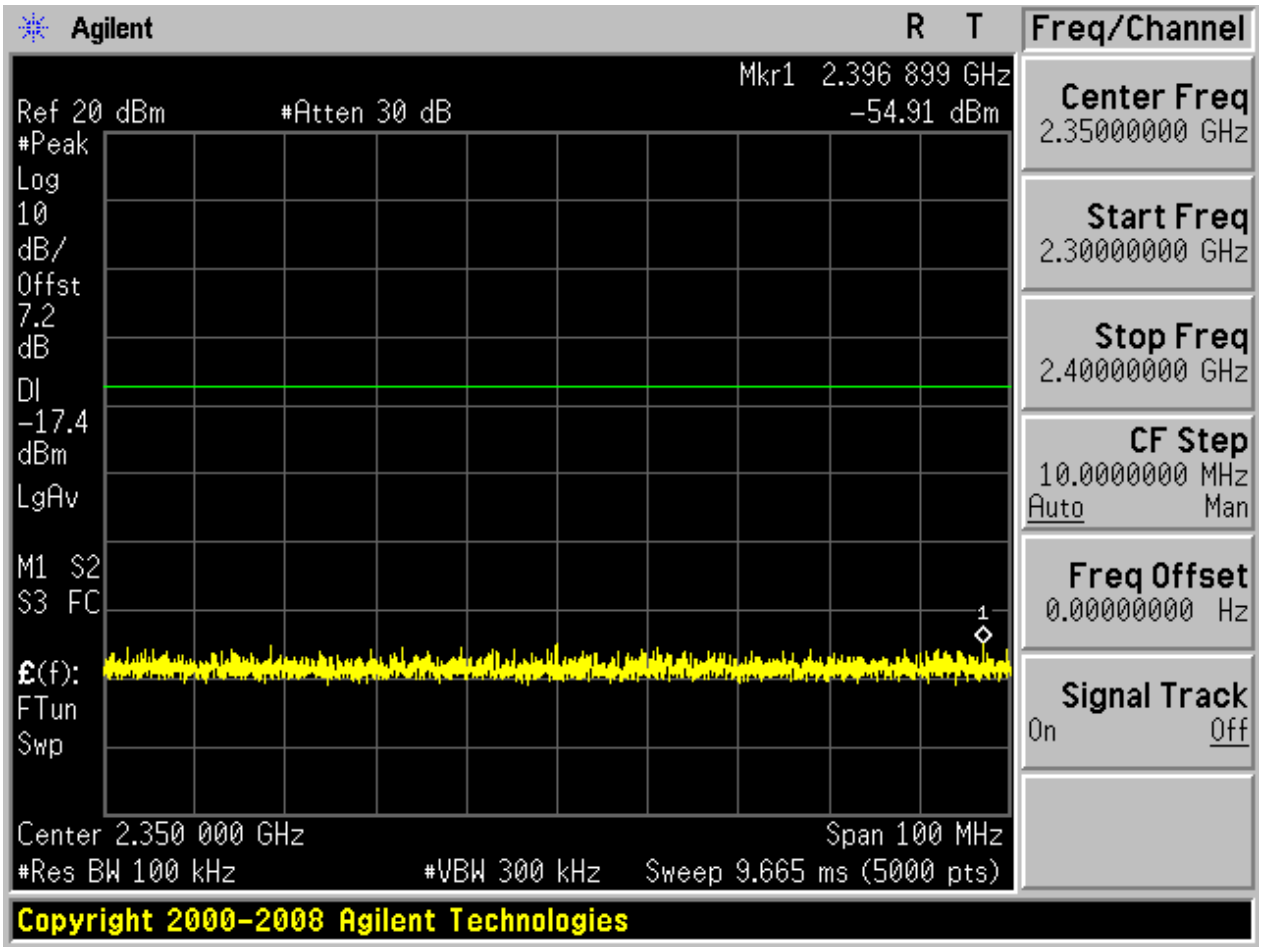

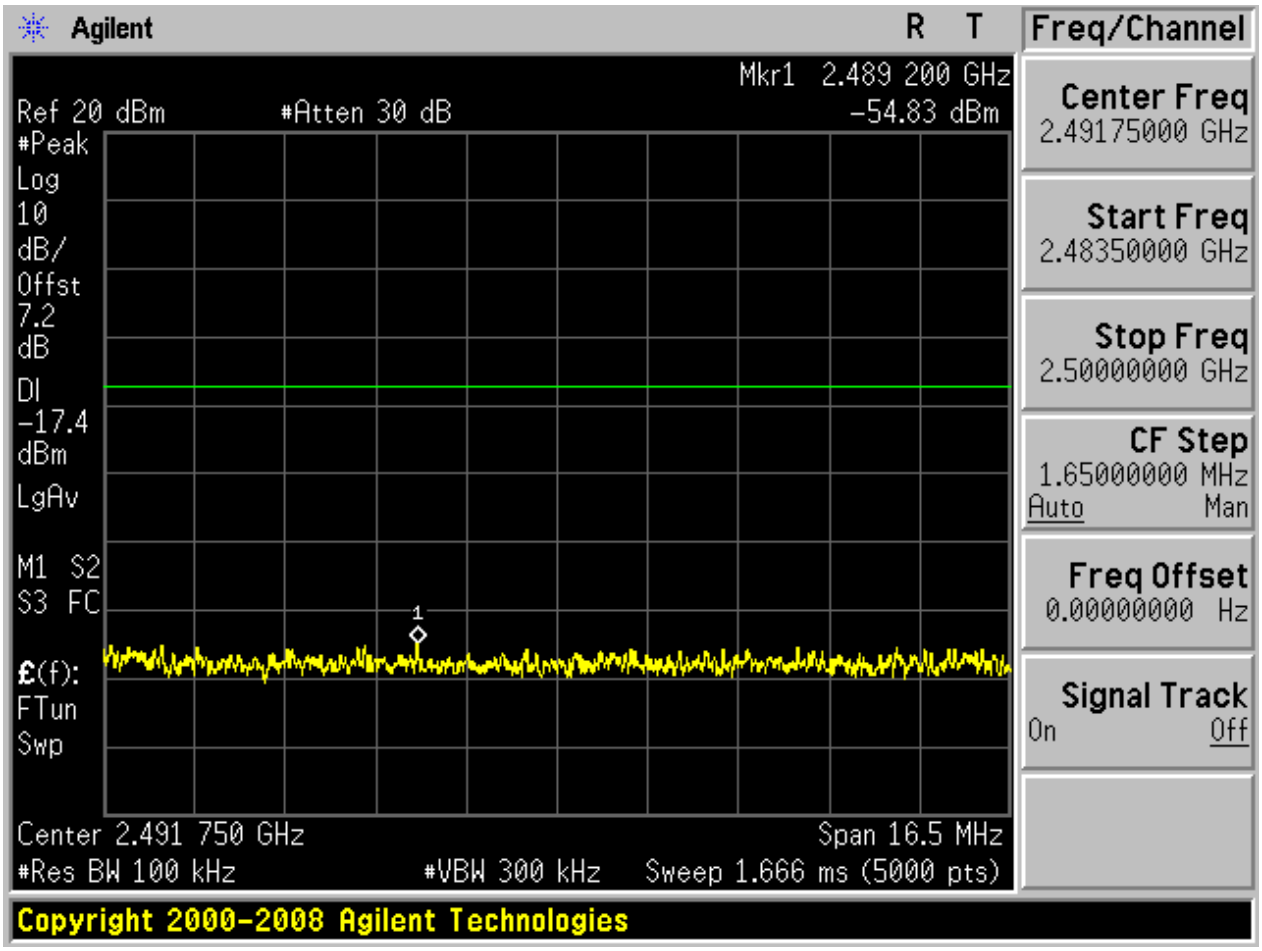

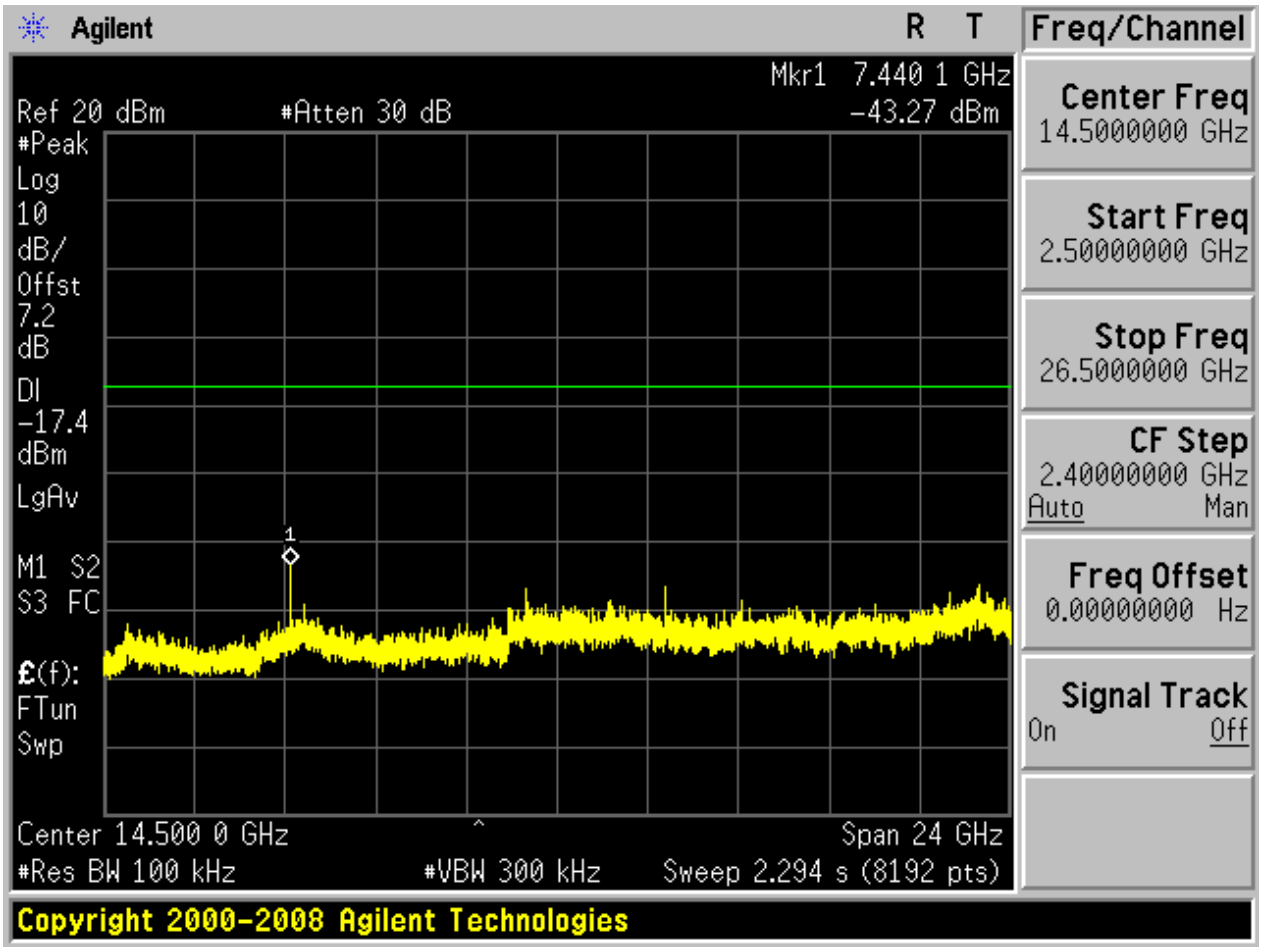

2.4 TM2_2DH5_Ch0

2.4.1 Pref

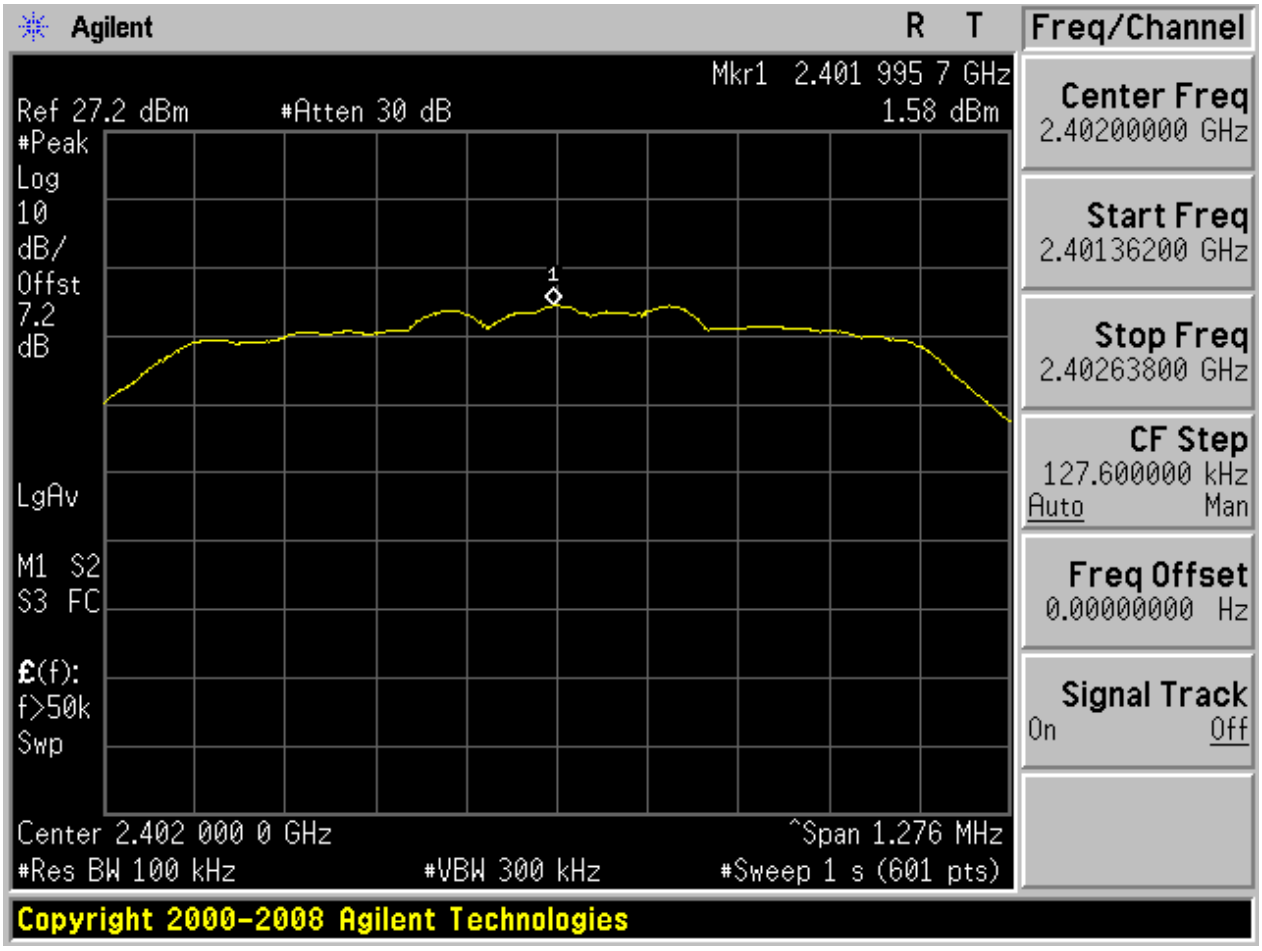

2.4.2 Puw

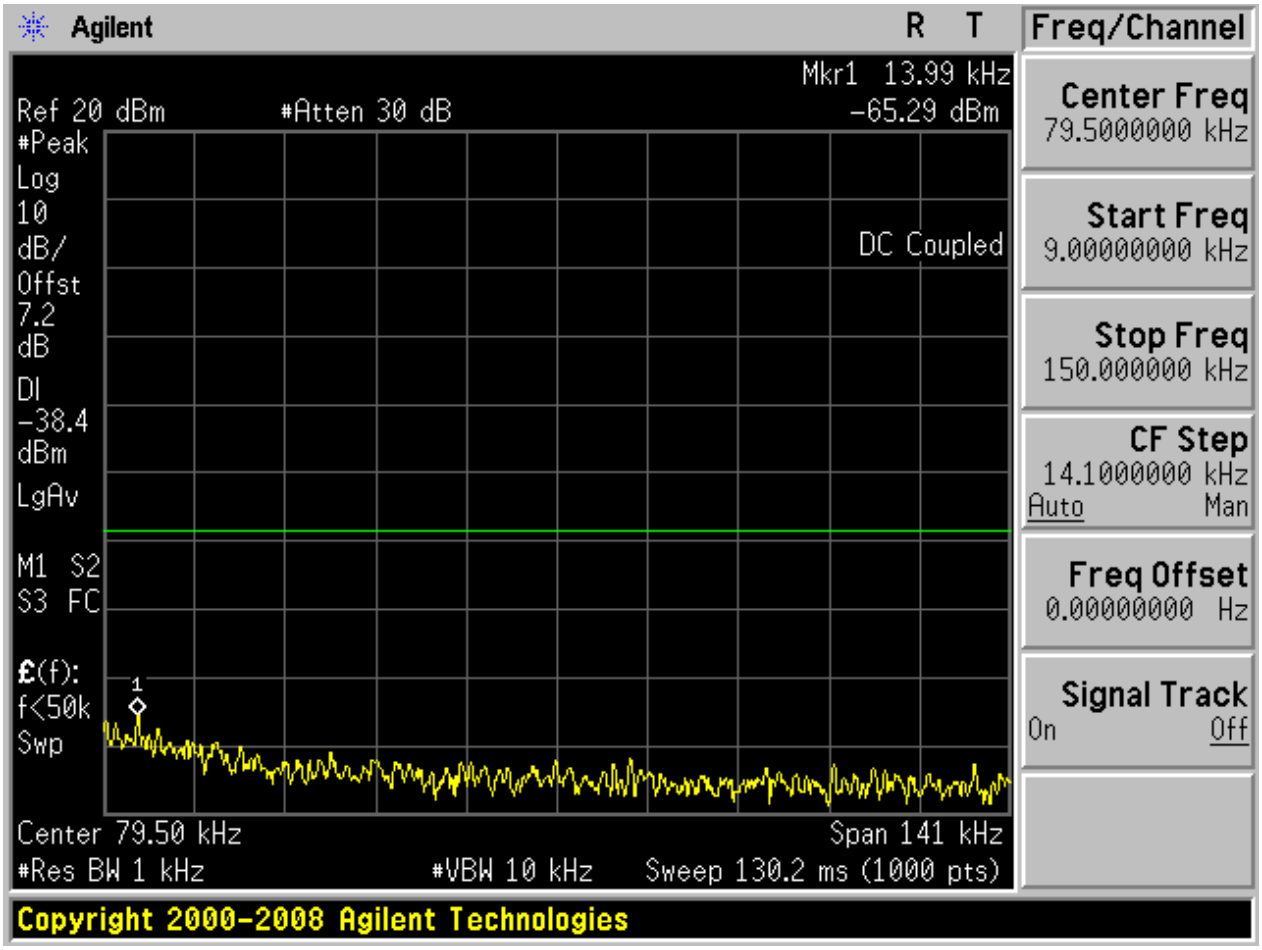

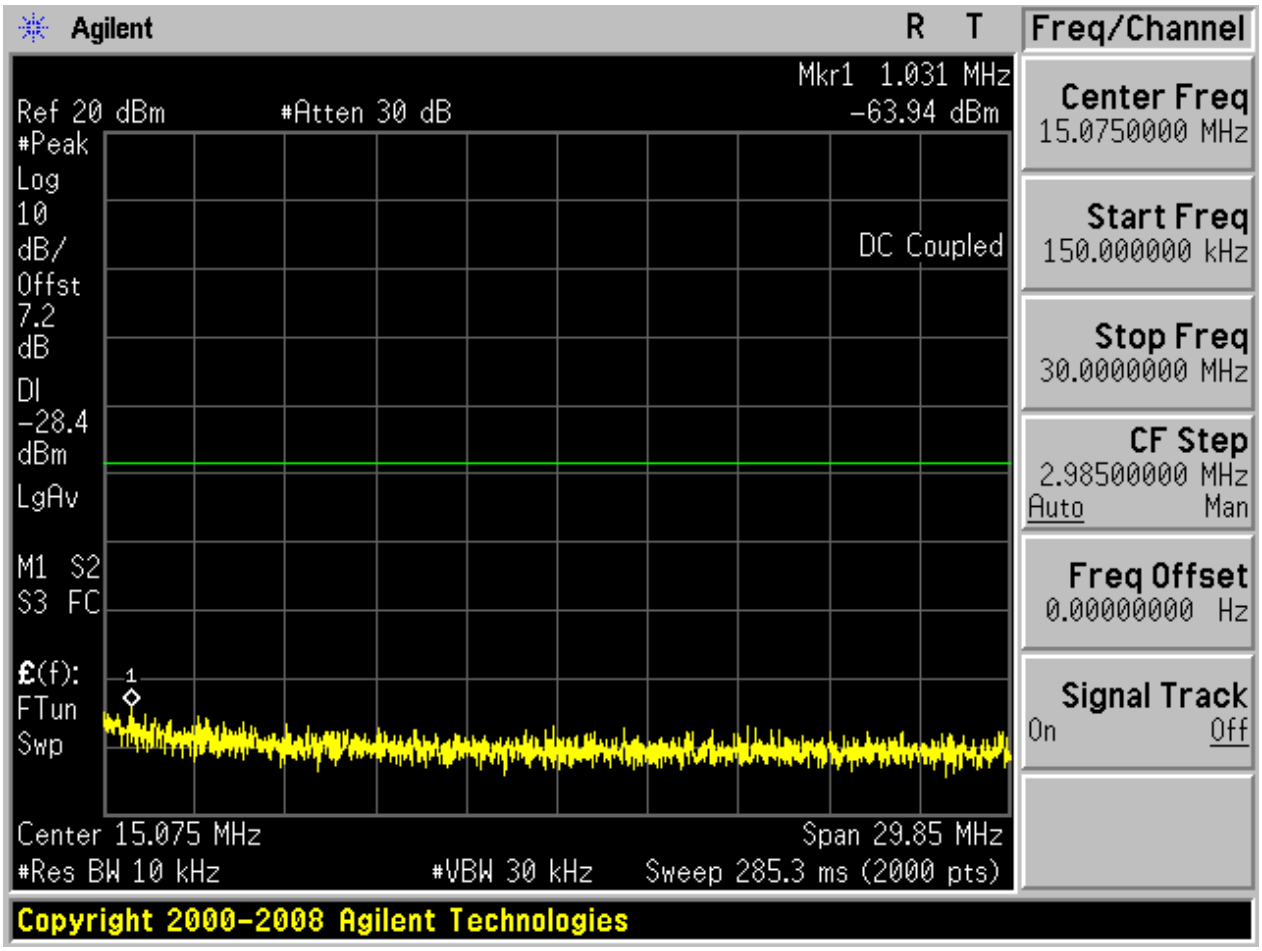

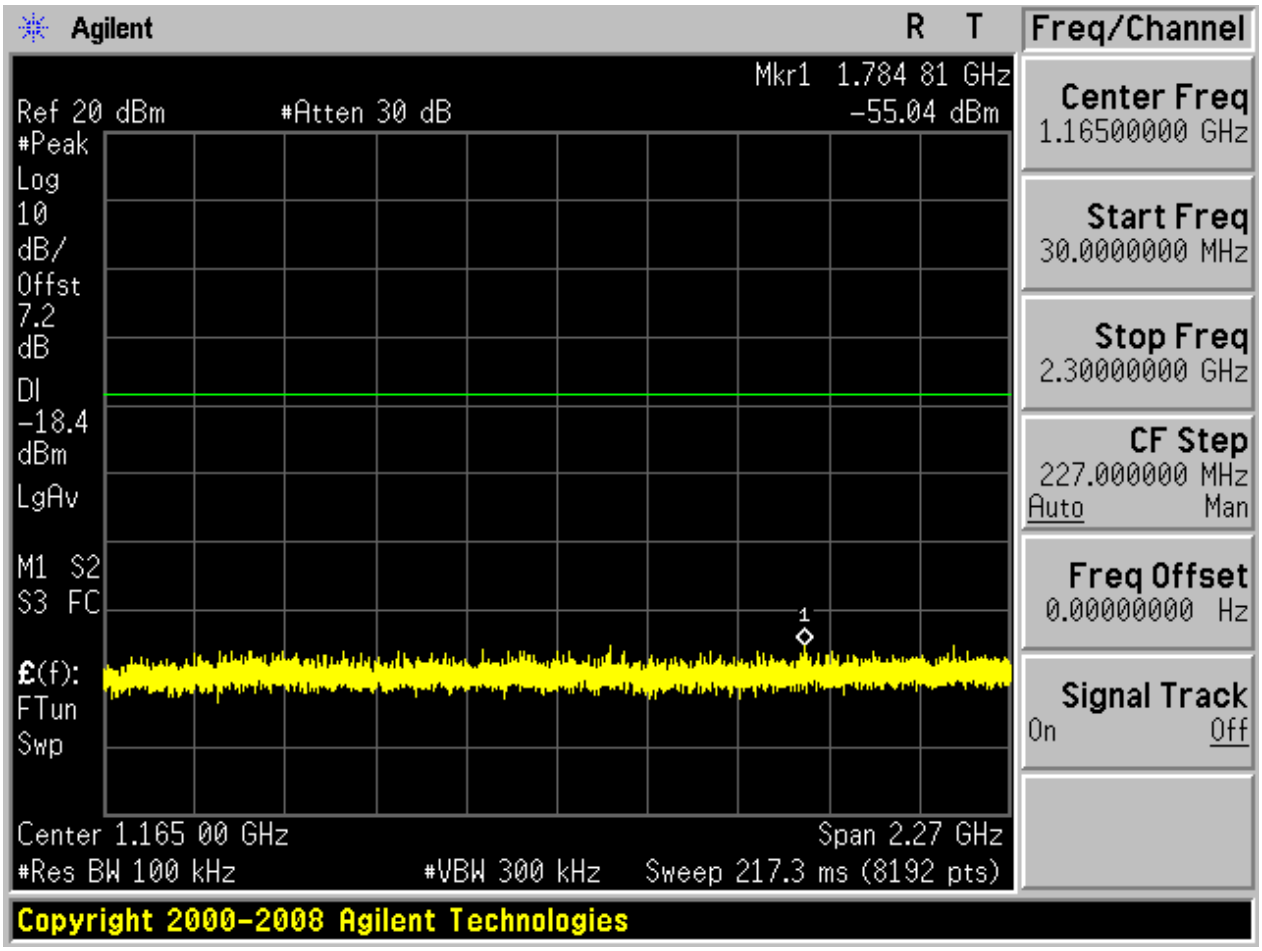

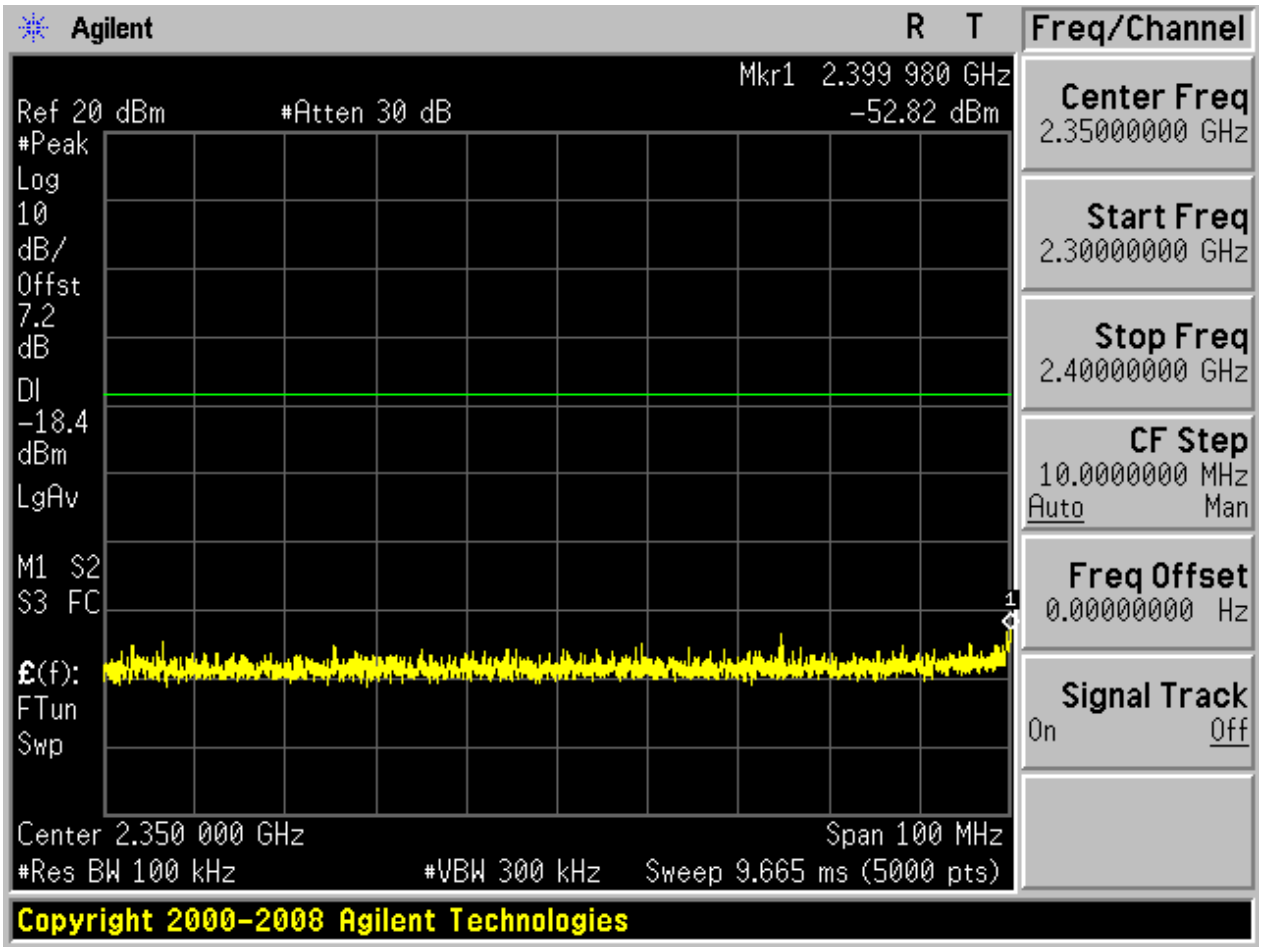

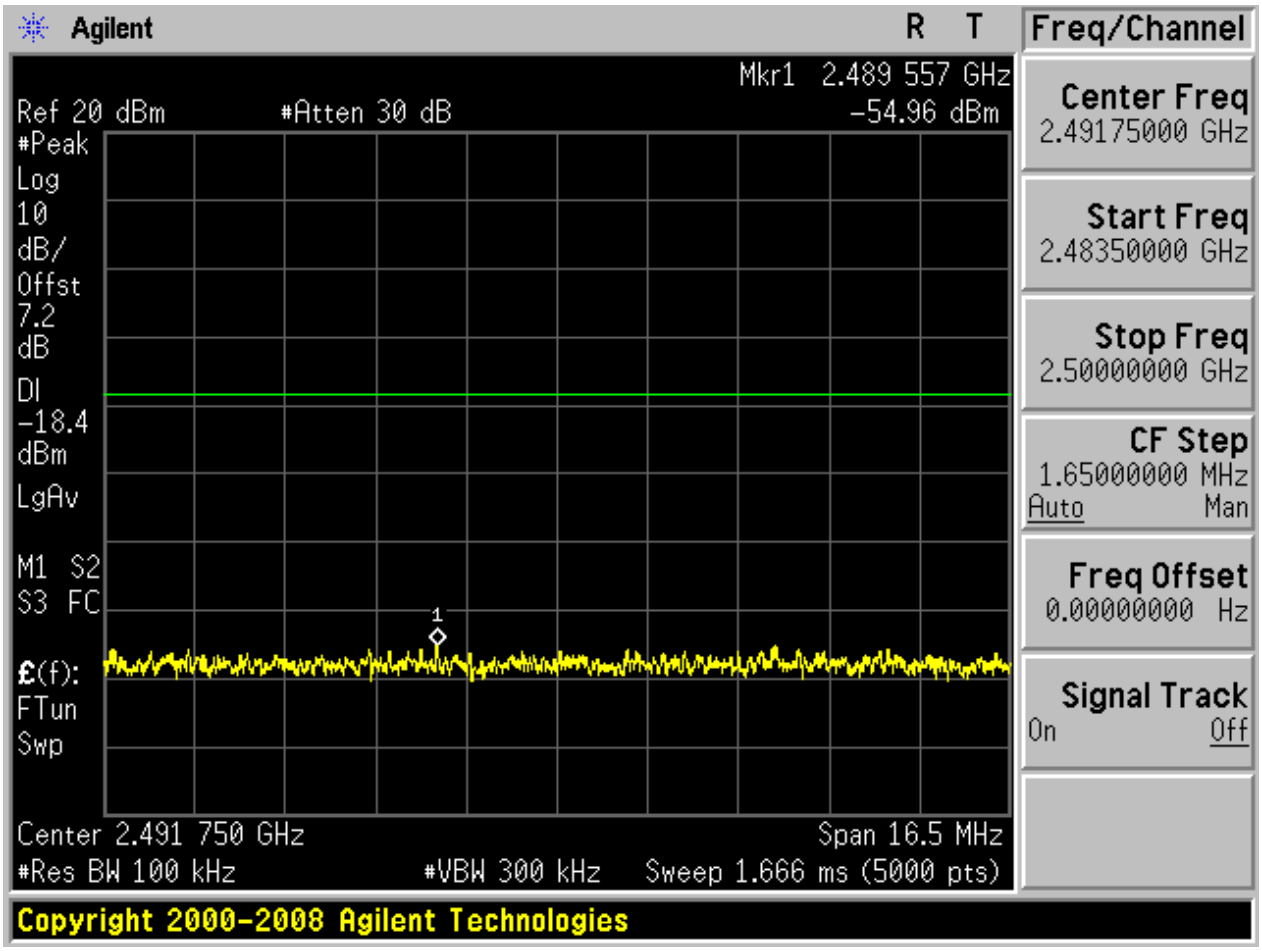

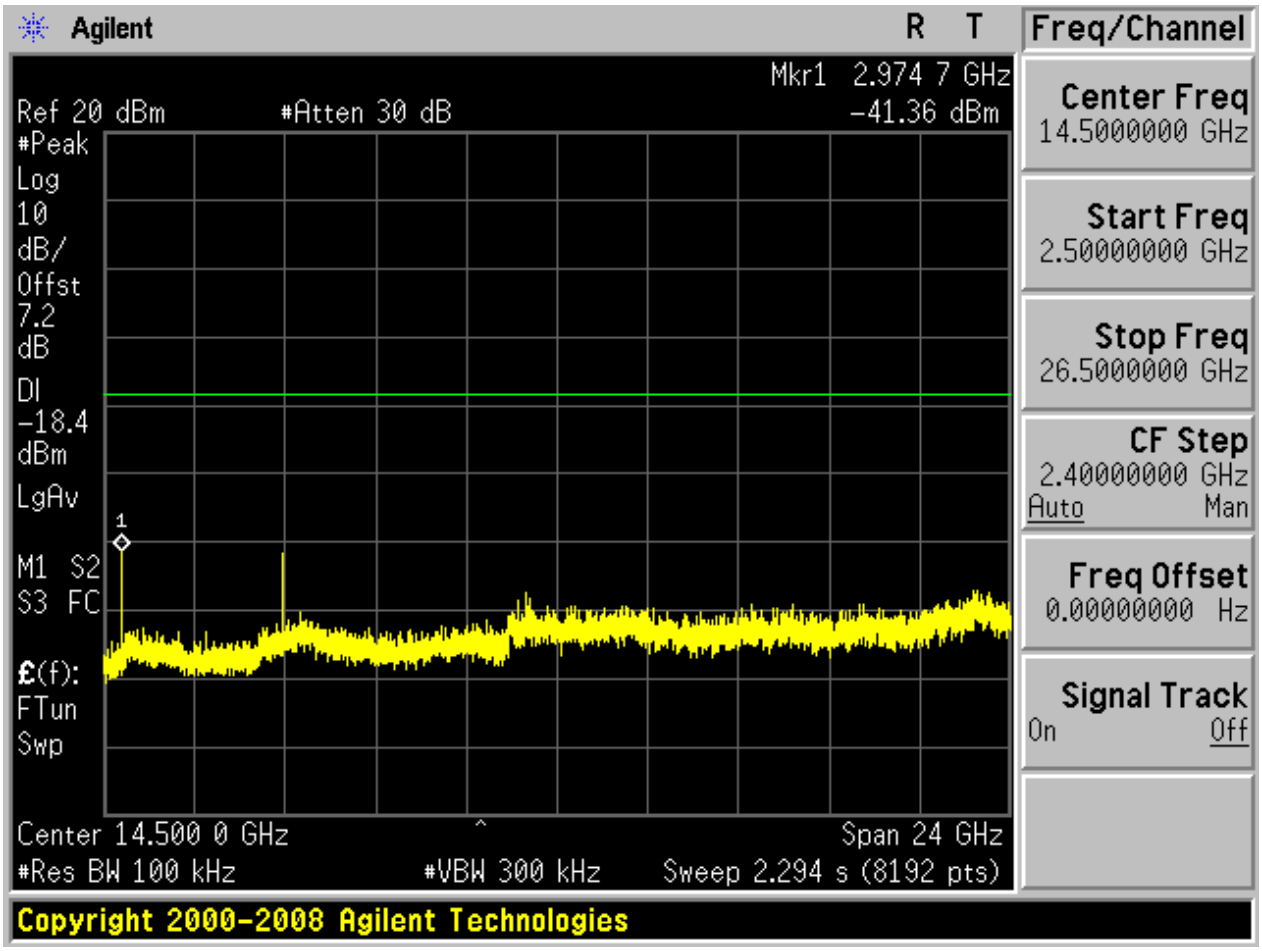

2.5 TM2_2DH5_Ch39

2.5.1 Pref

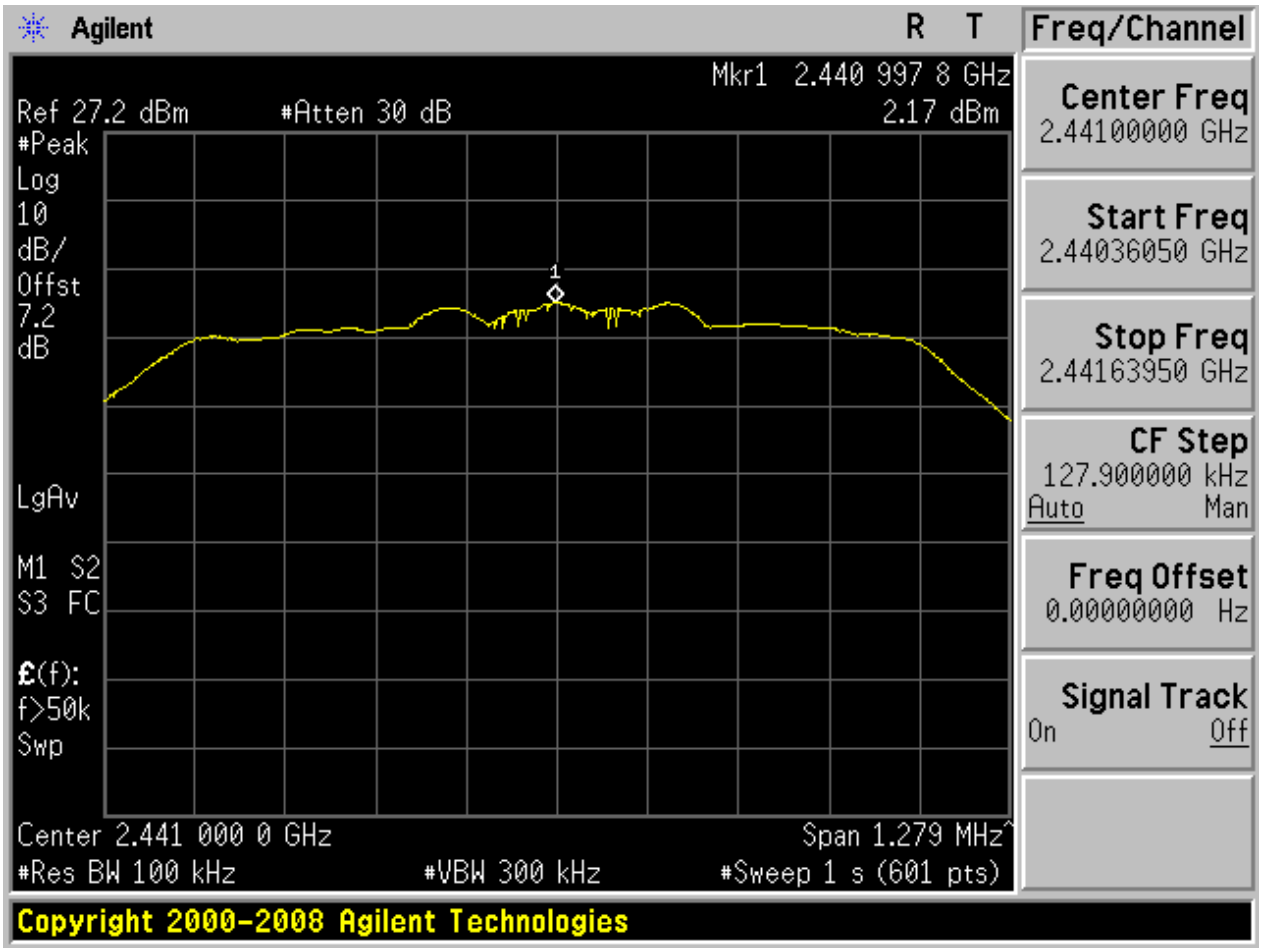

2.5.2 Puw

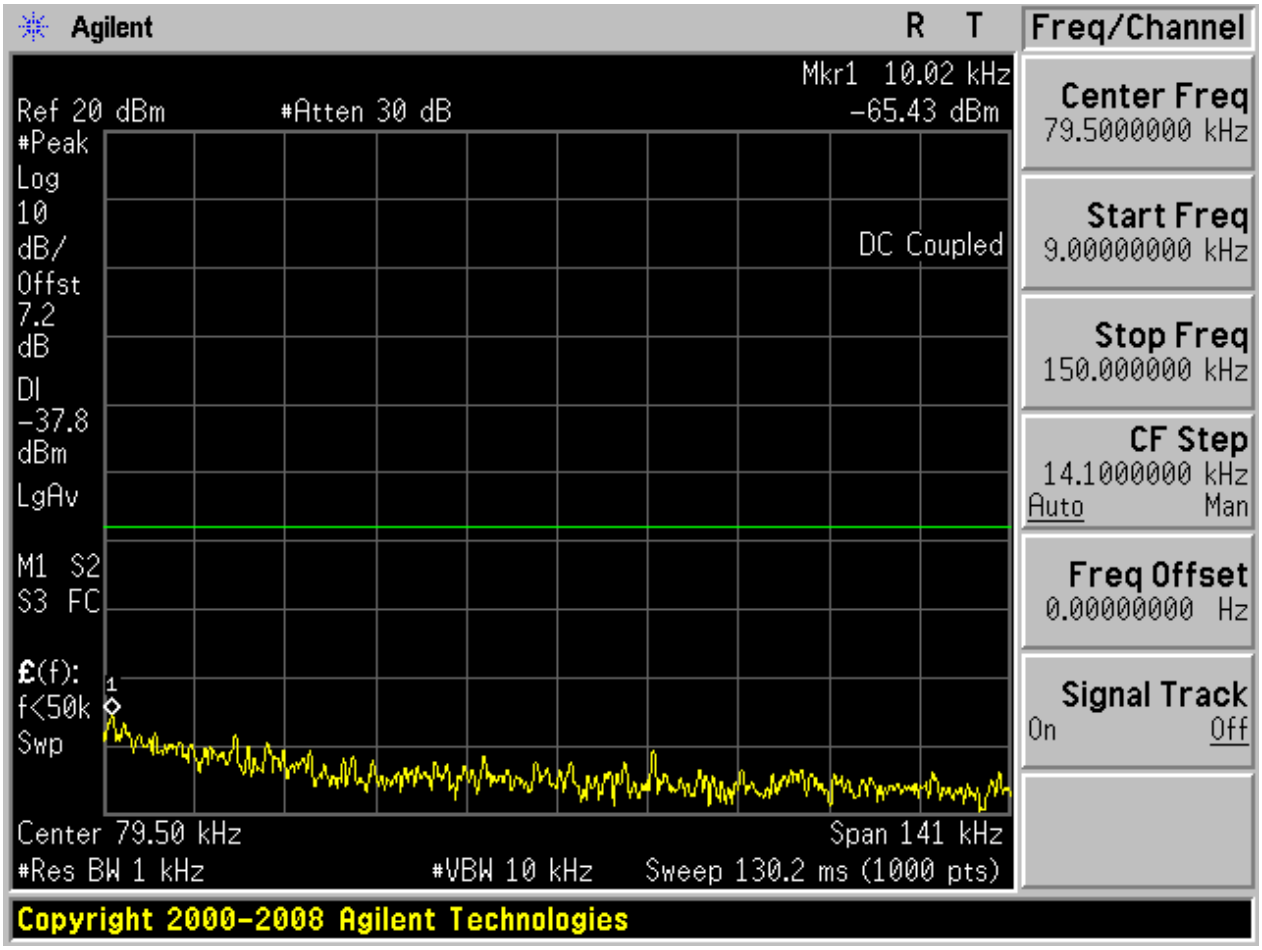

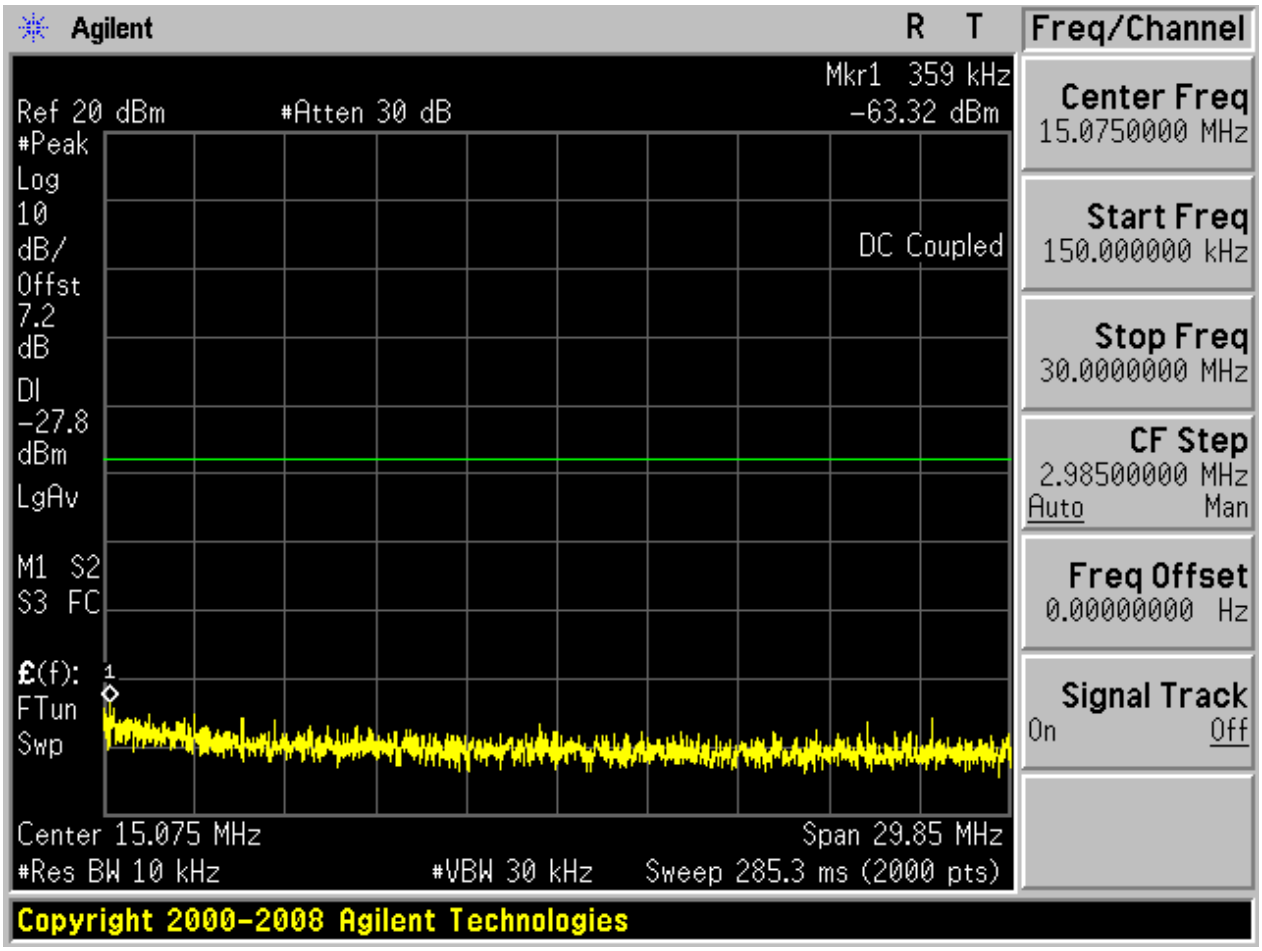

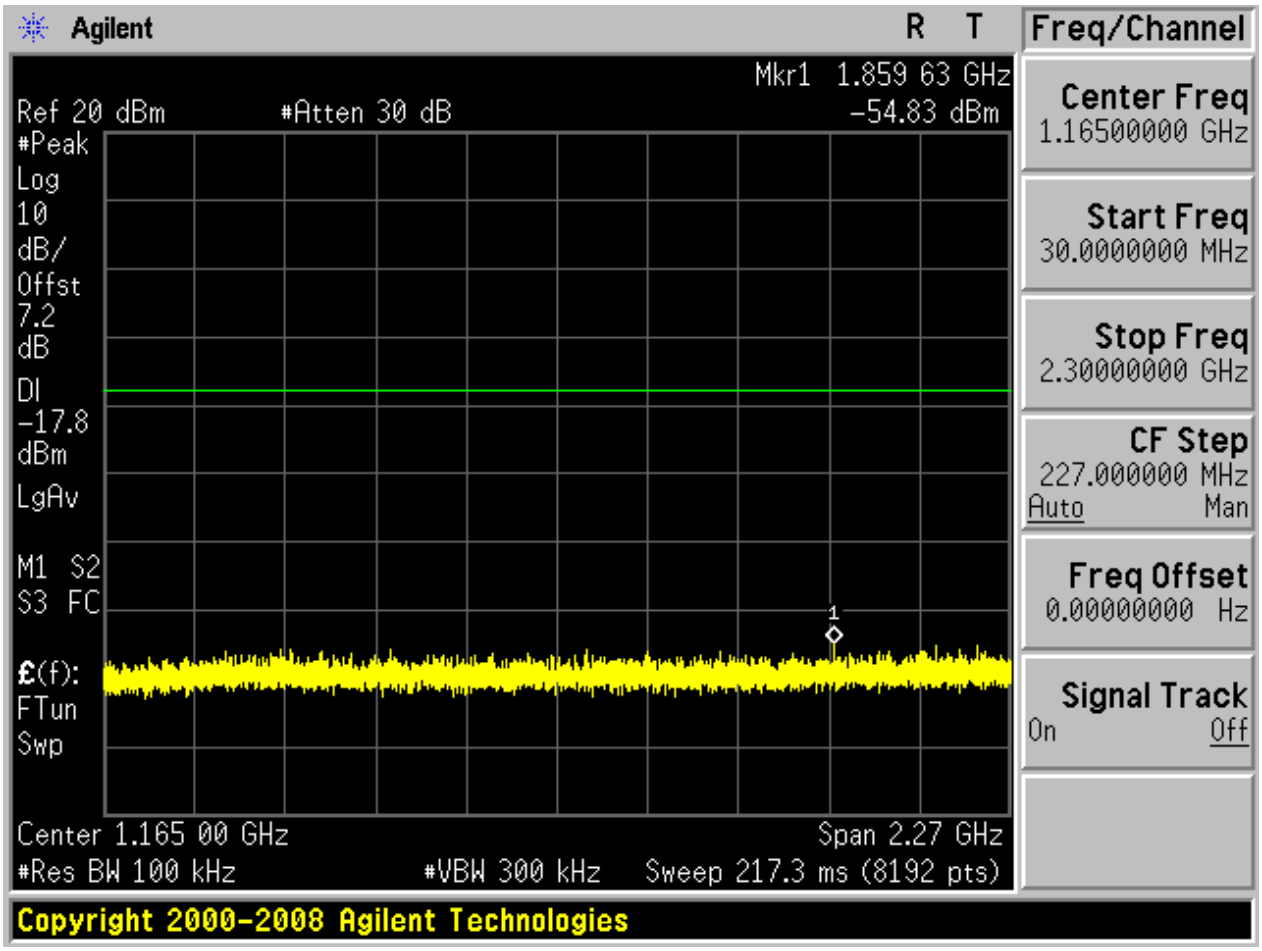

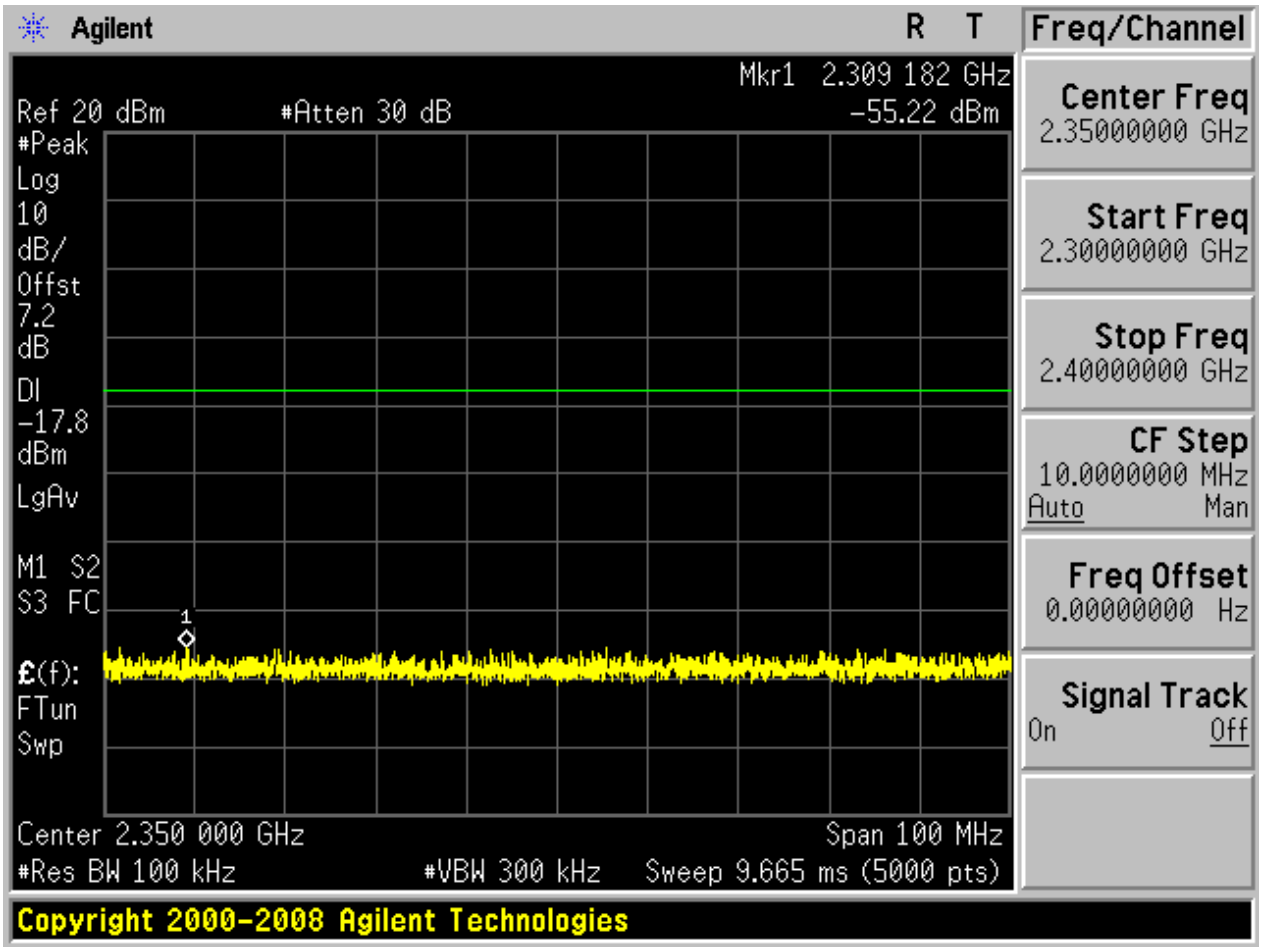

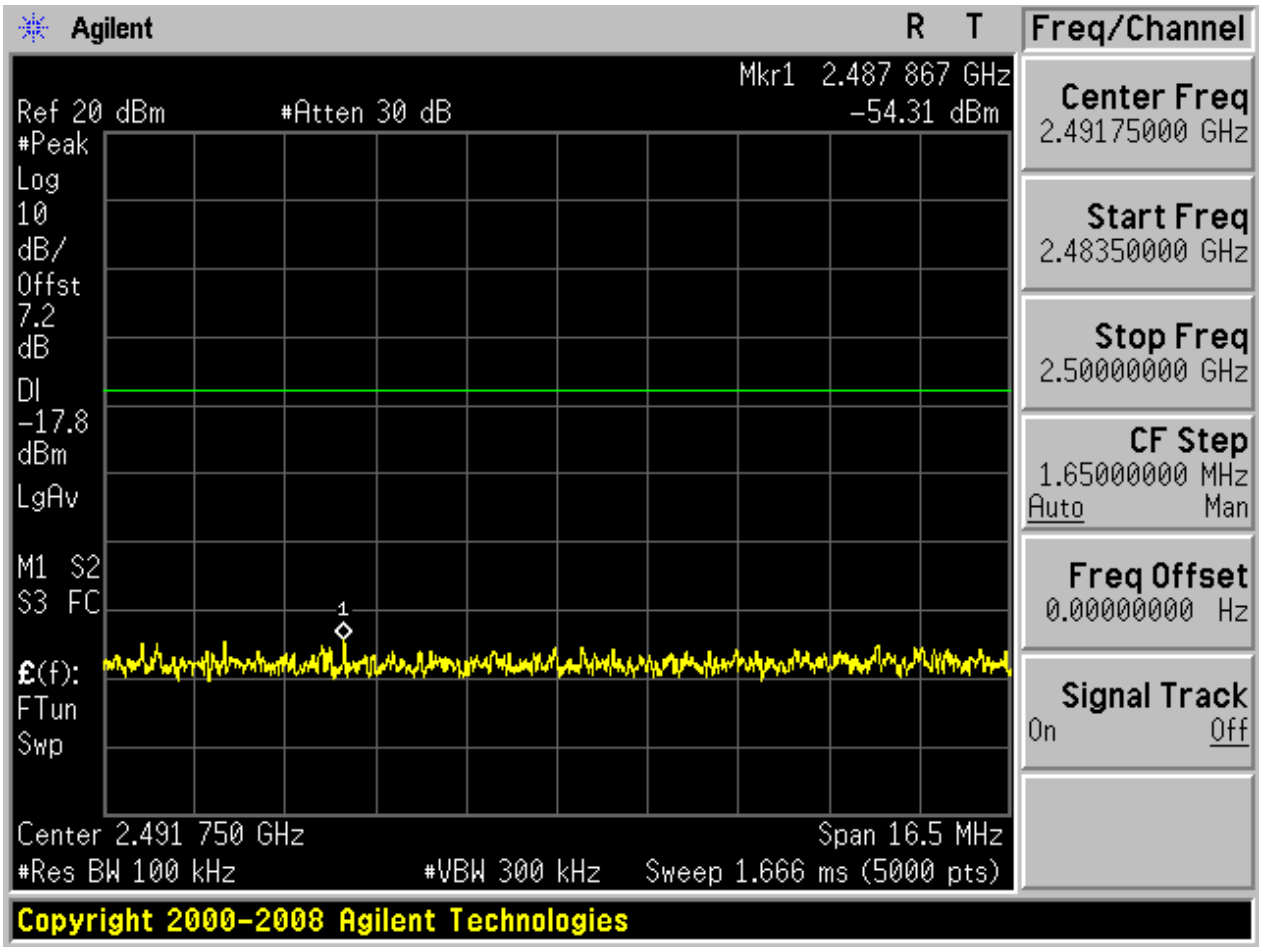

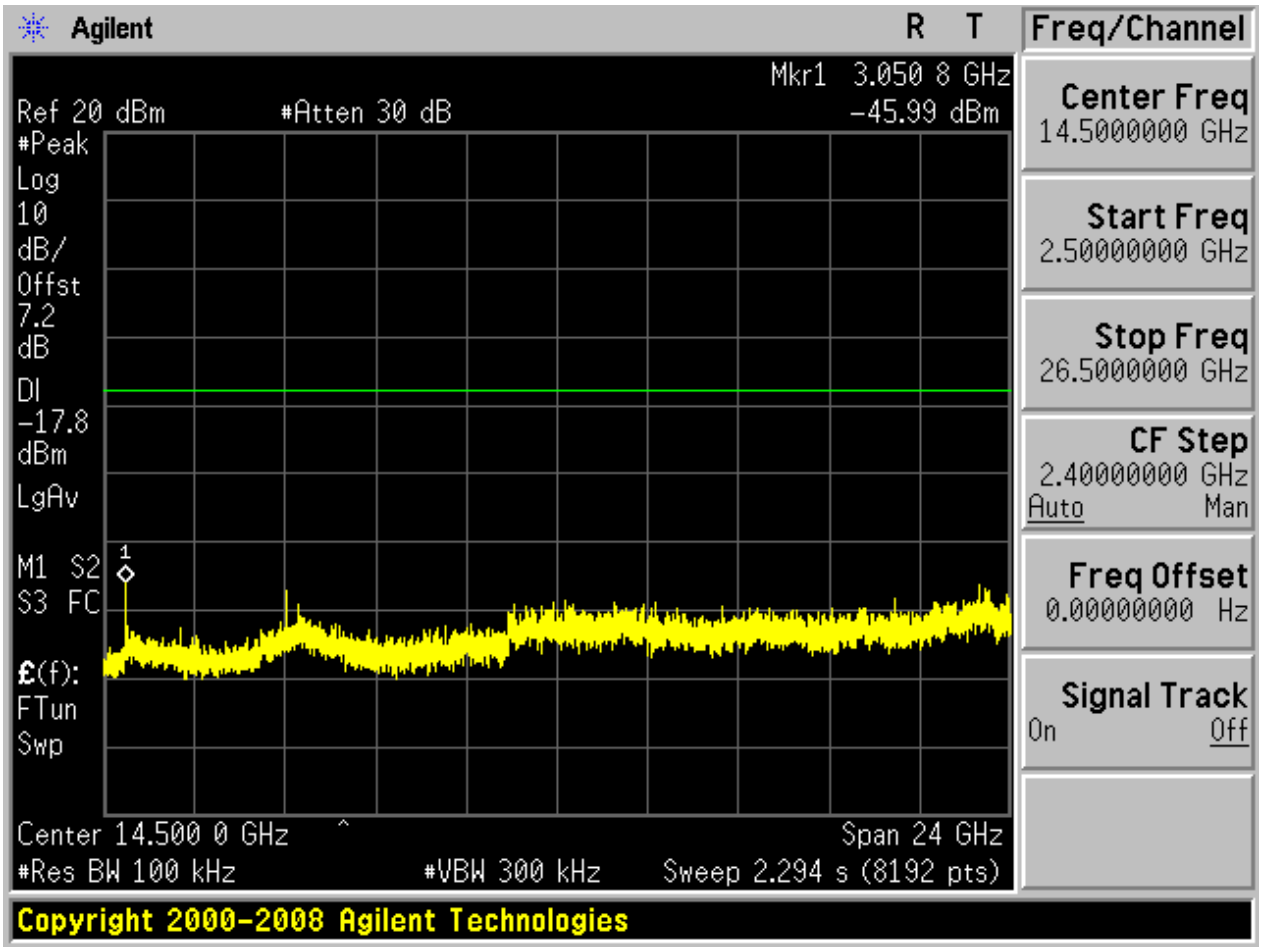

2.6 TM2_2DH5_Ch78

2.6.1 Pref

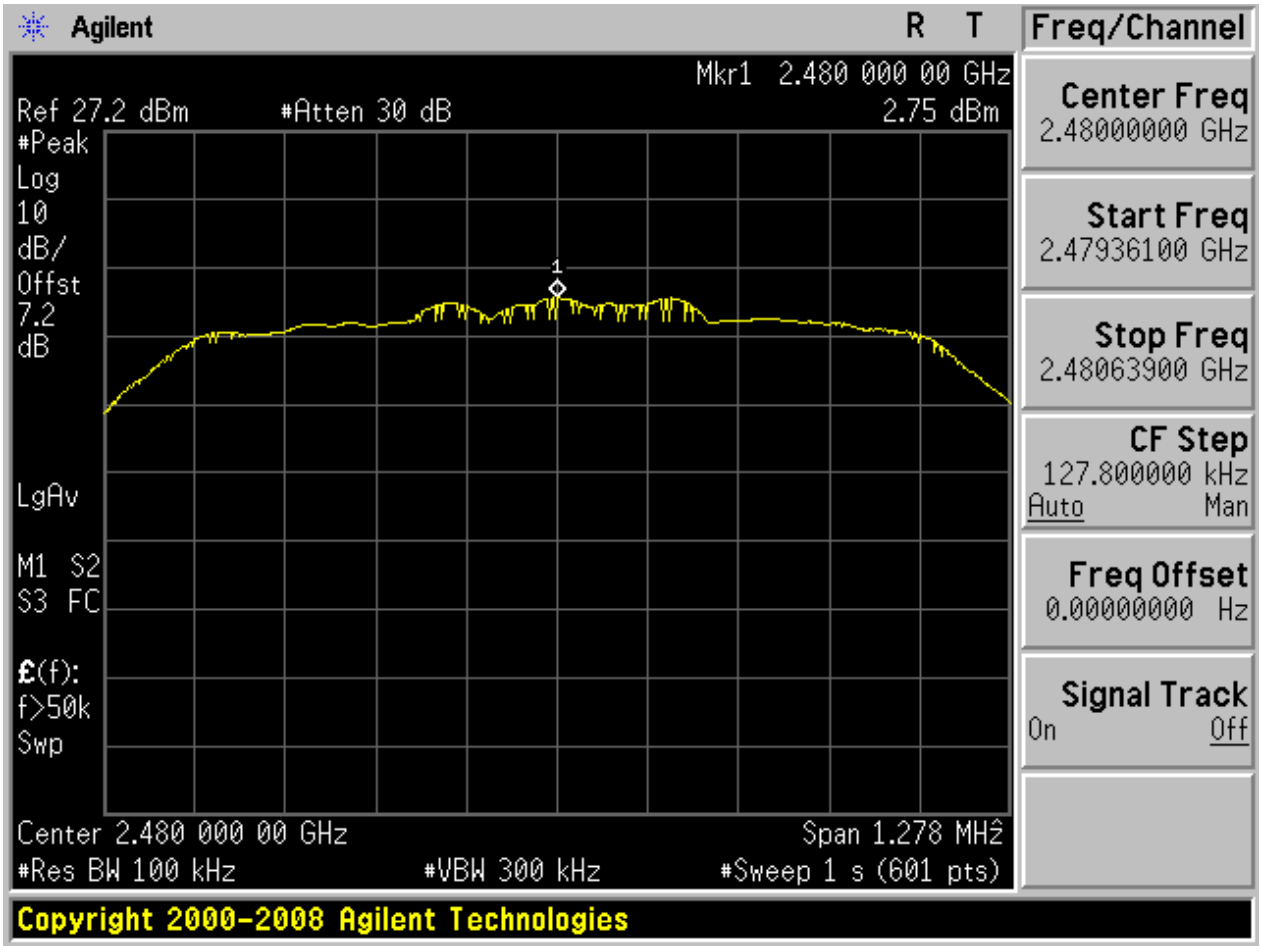

2.6.2 Puw

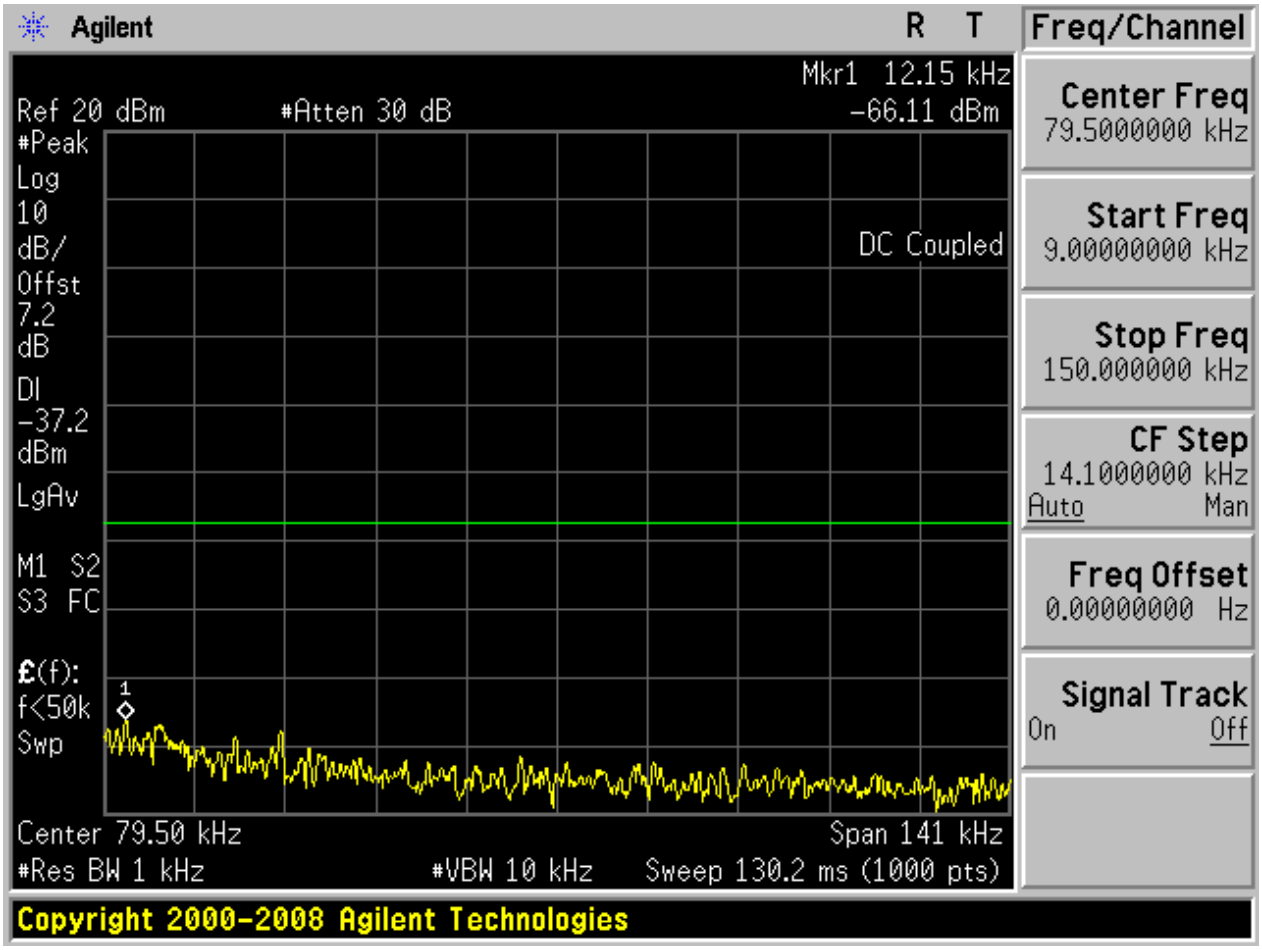

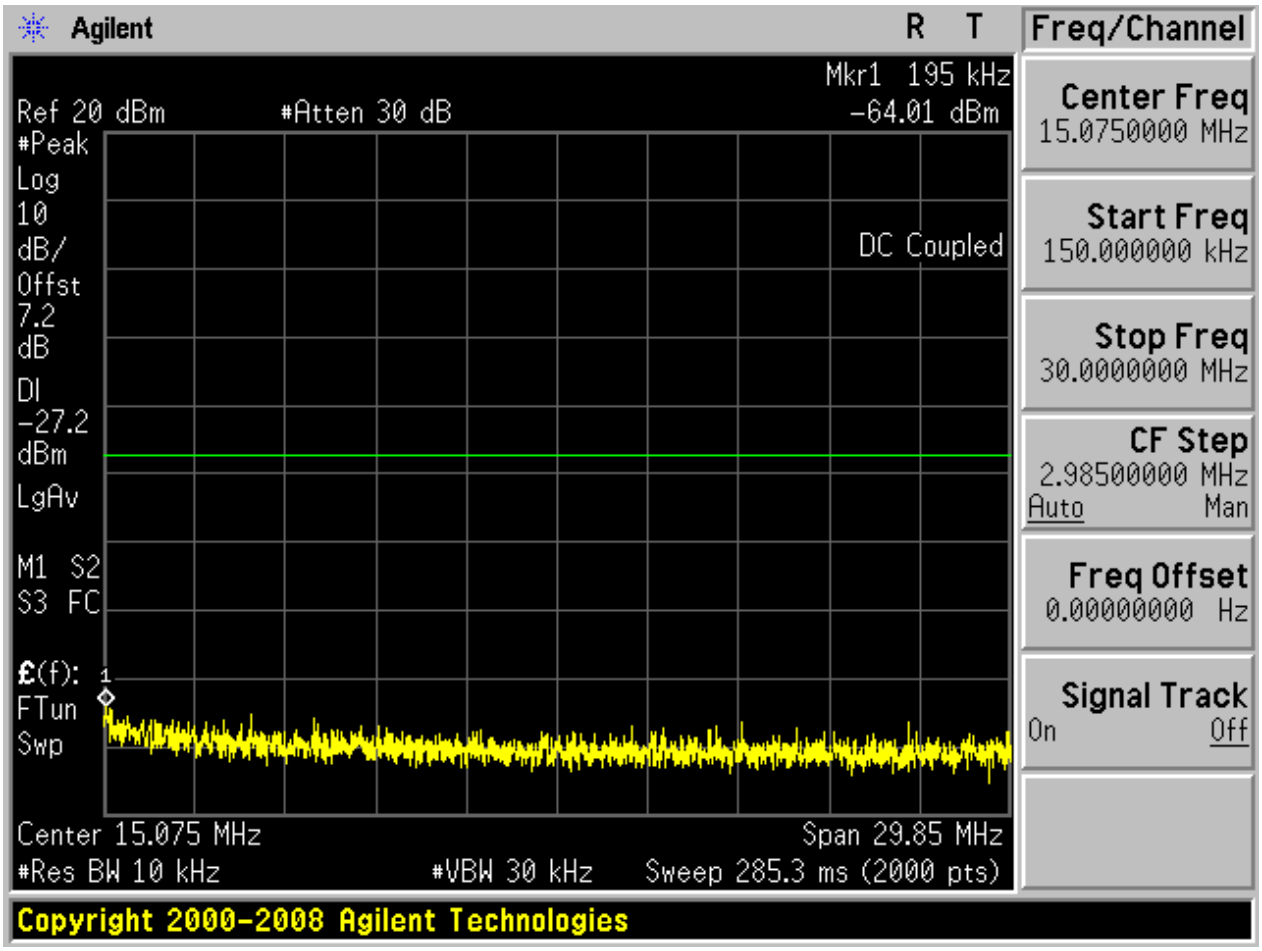

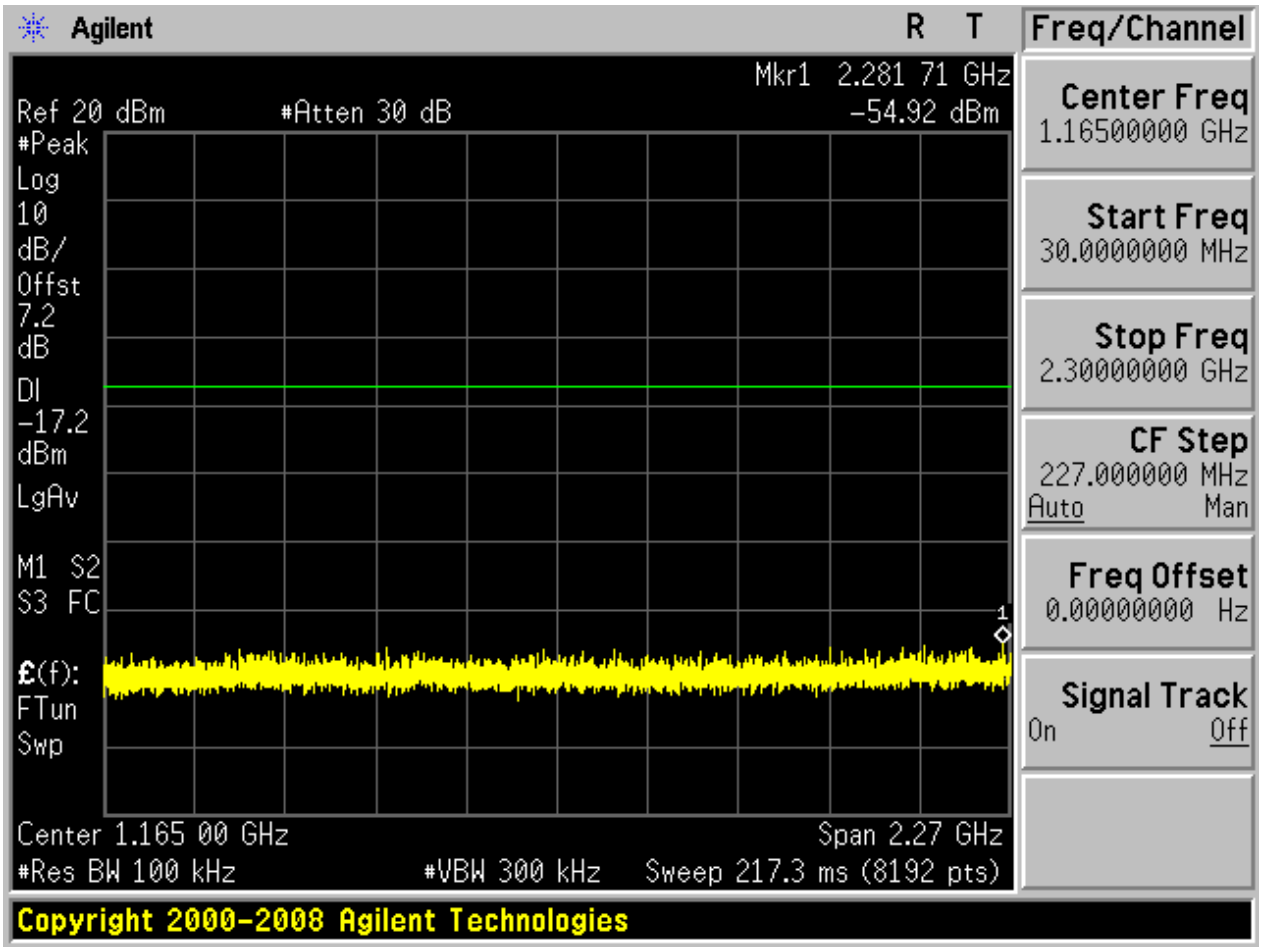

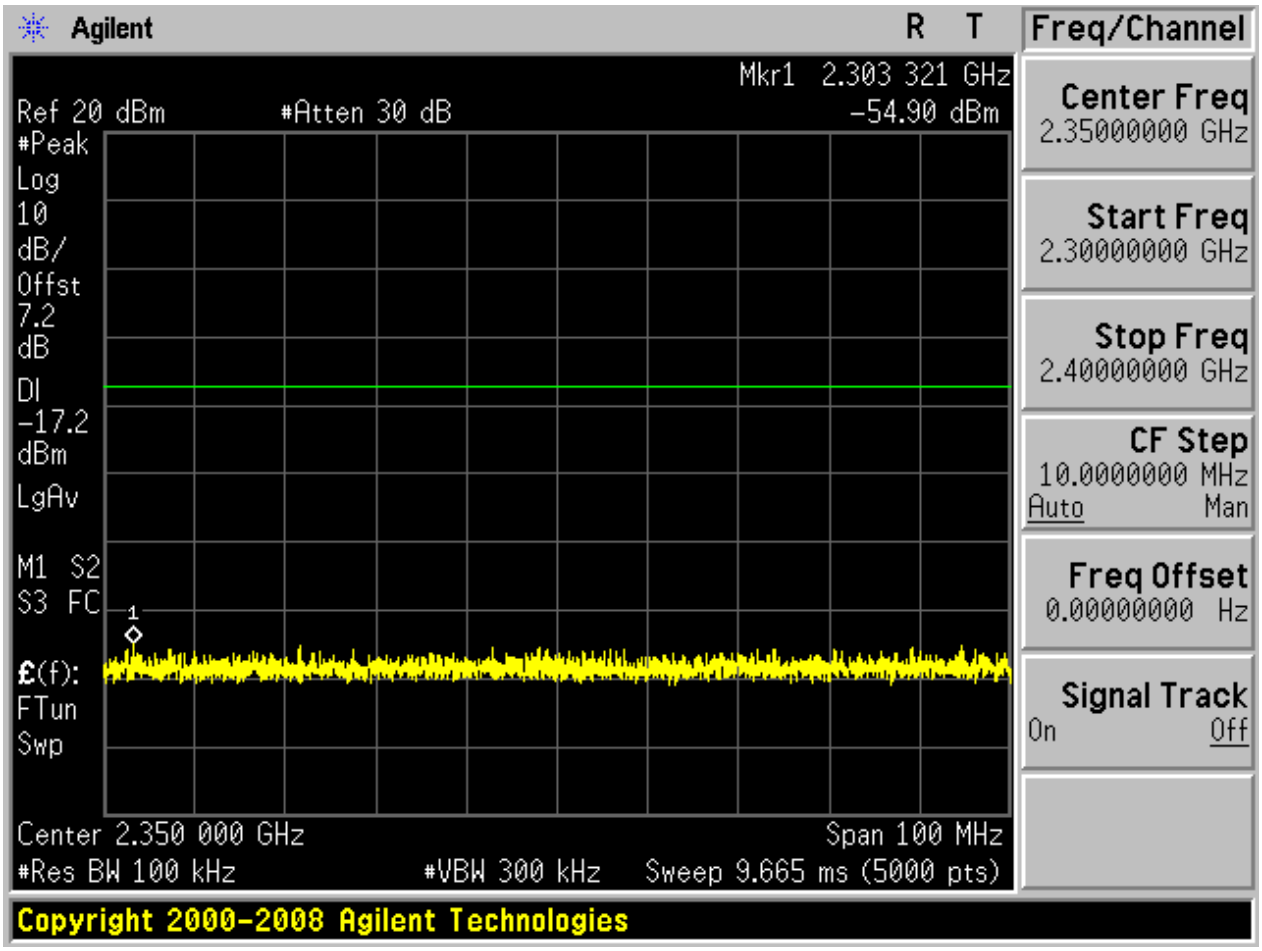

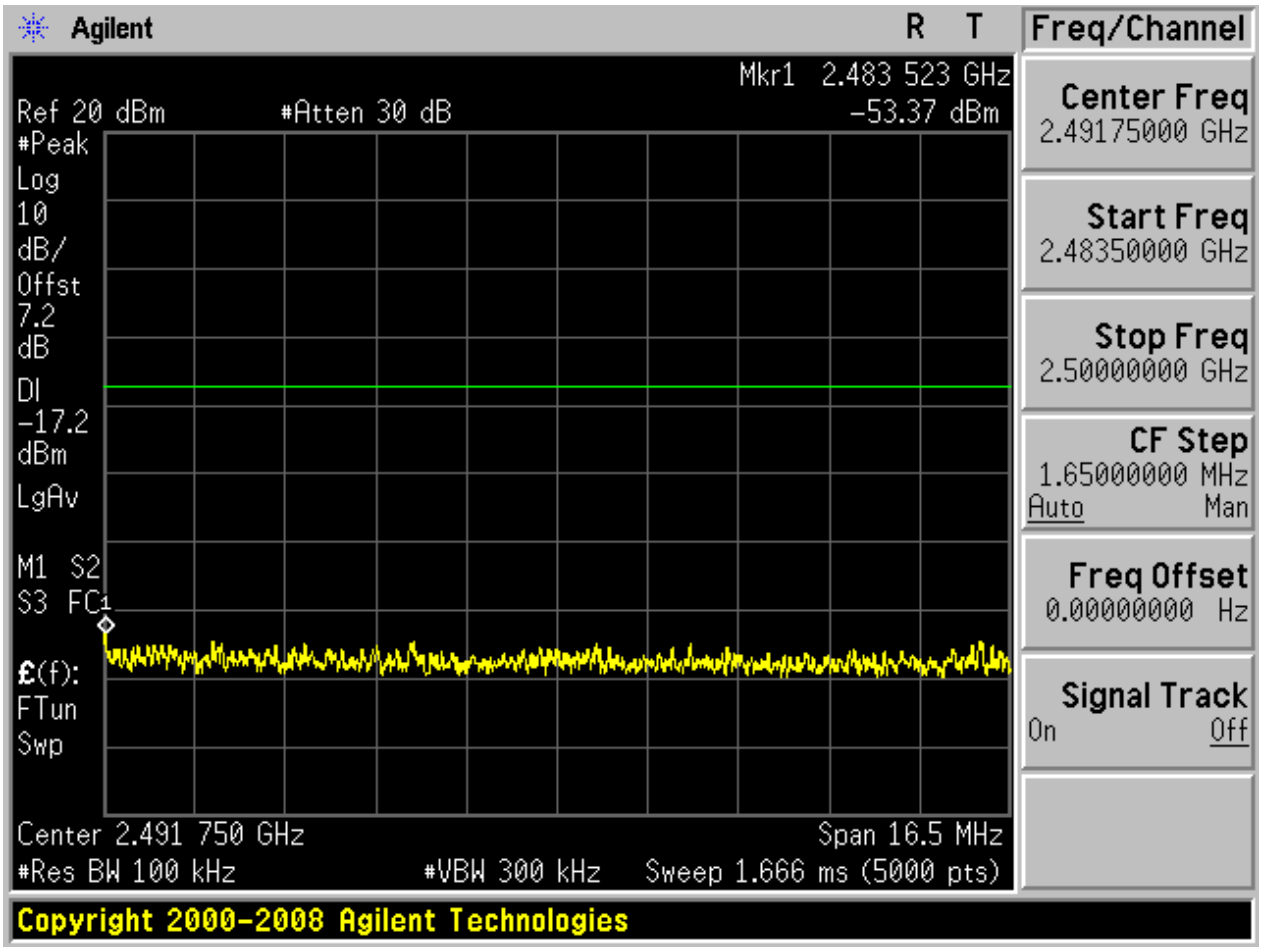

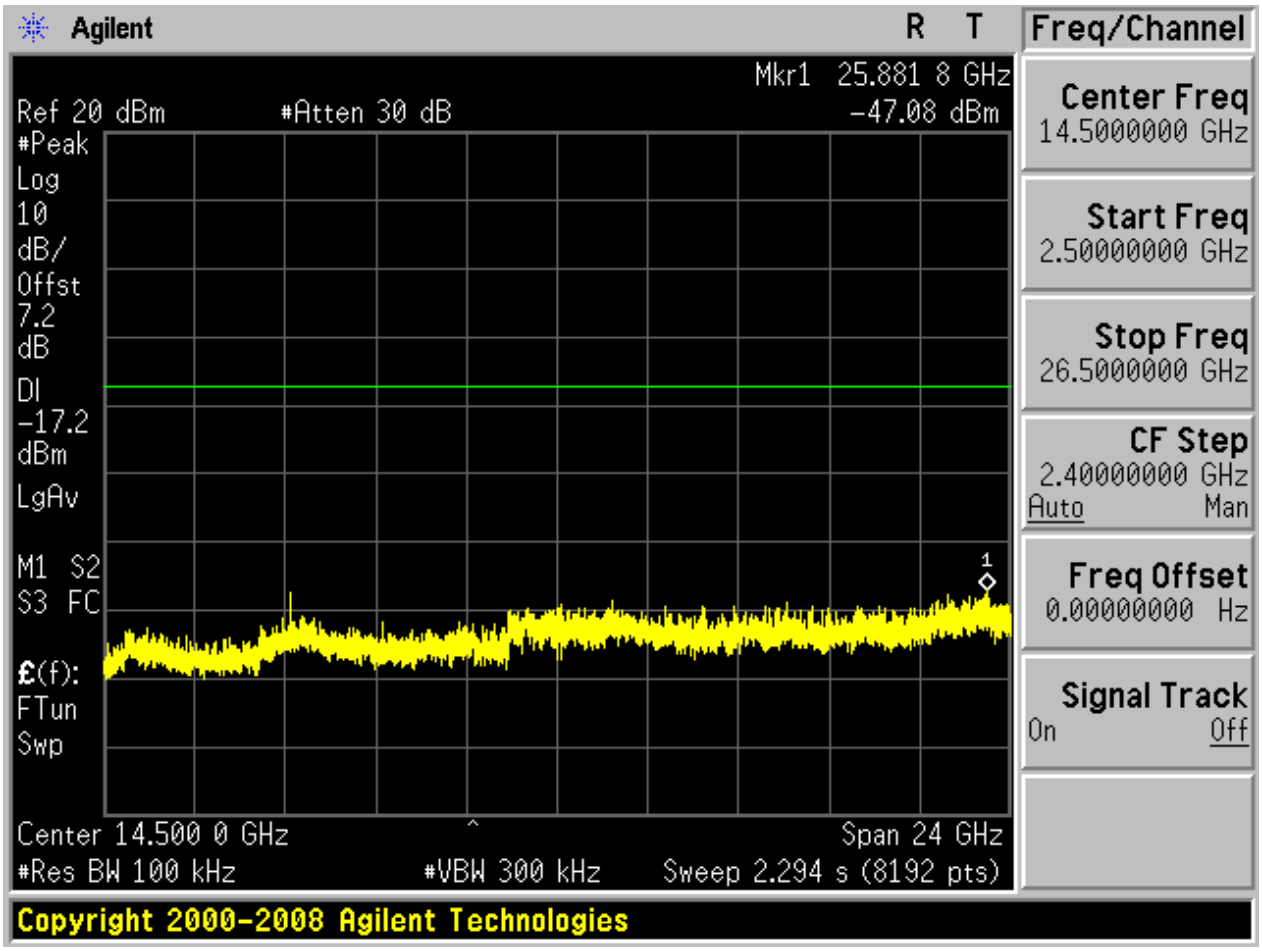

2.7 TM3_3DH5_Ch0

2.7.1 Pref

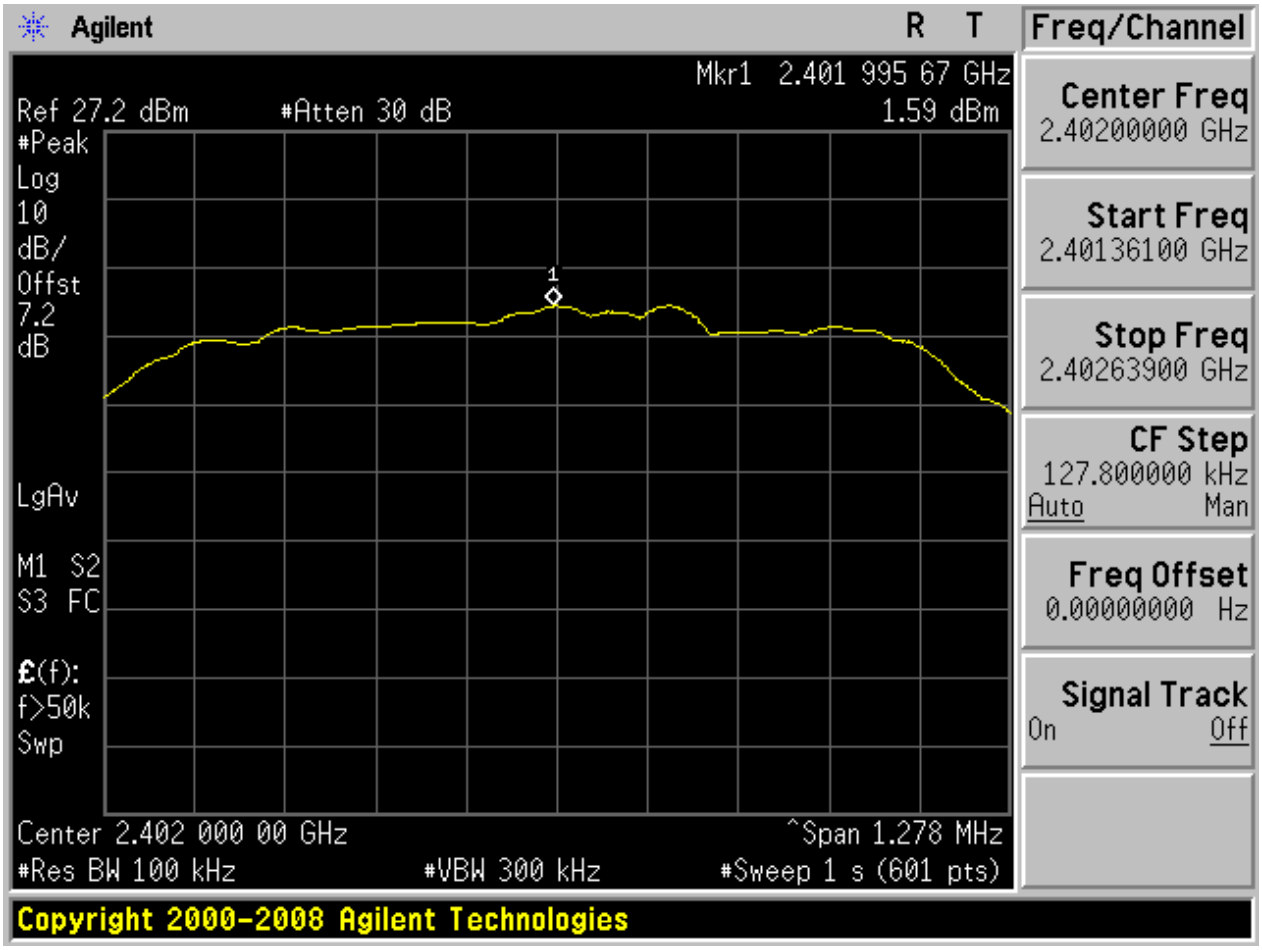

2.7.2 Puw

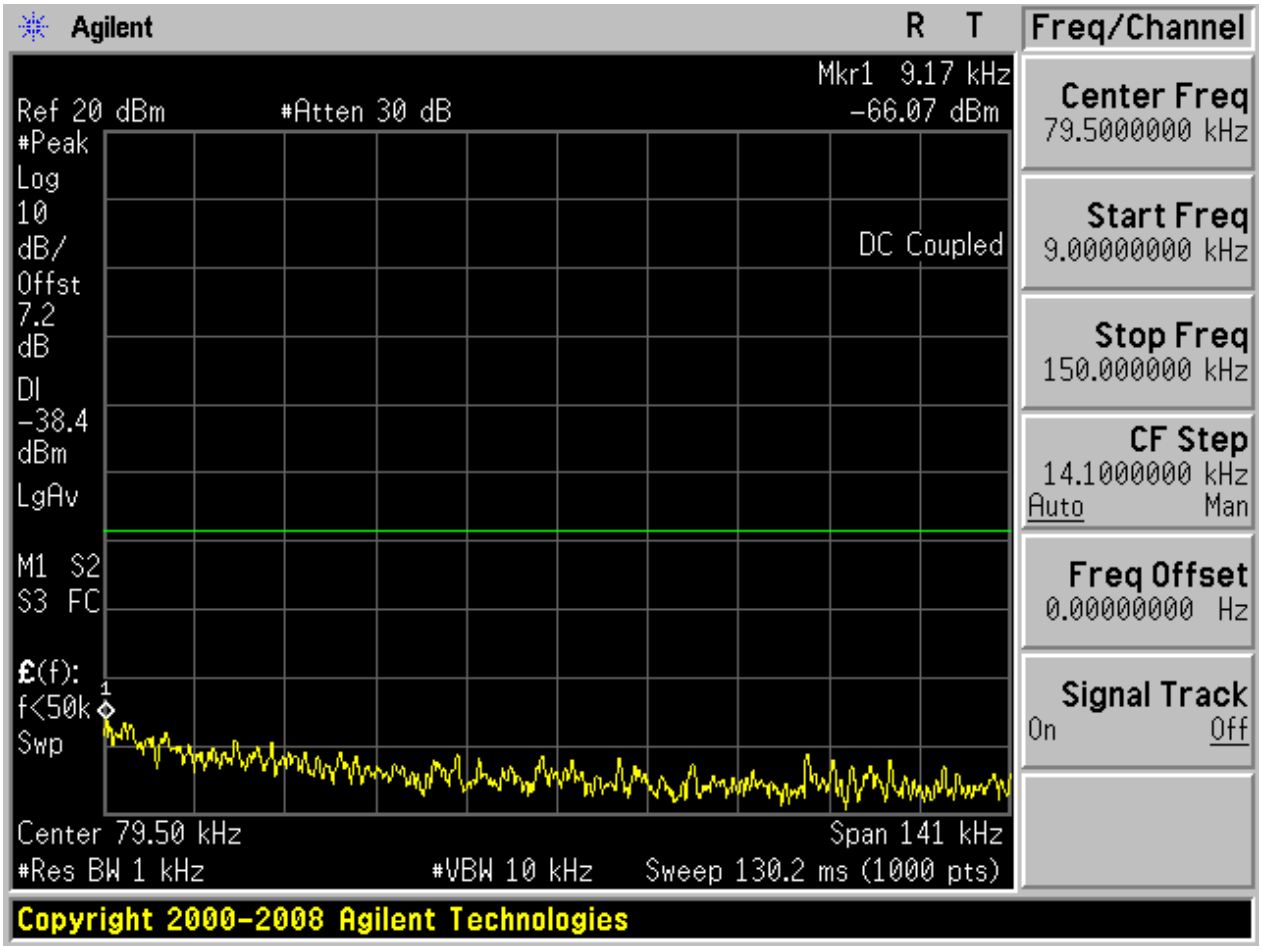

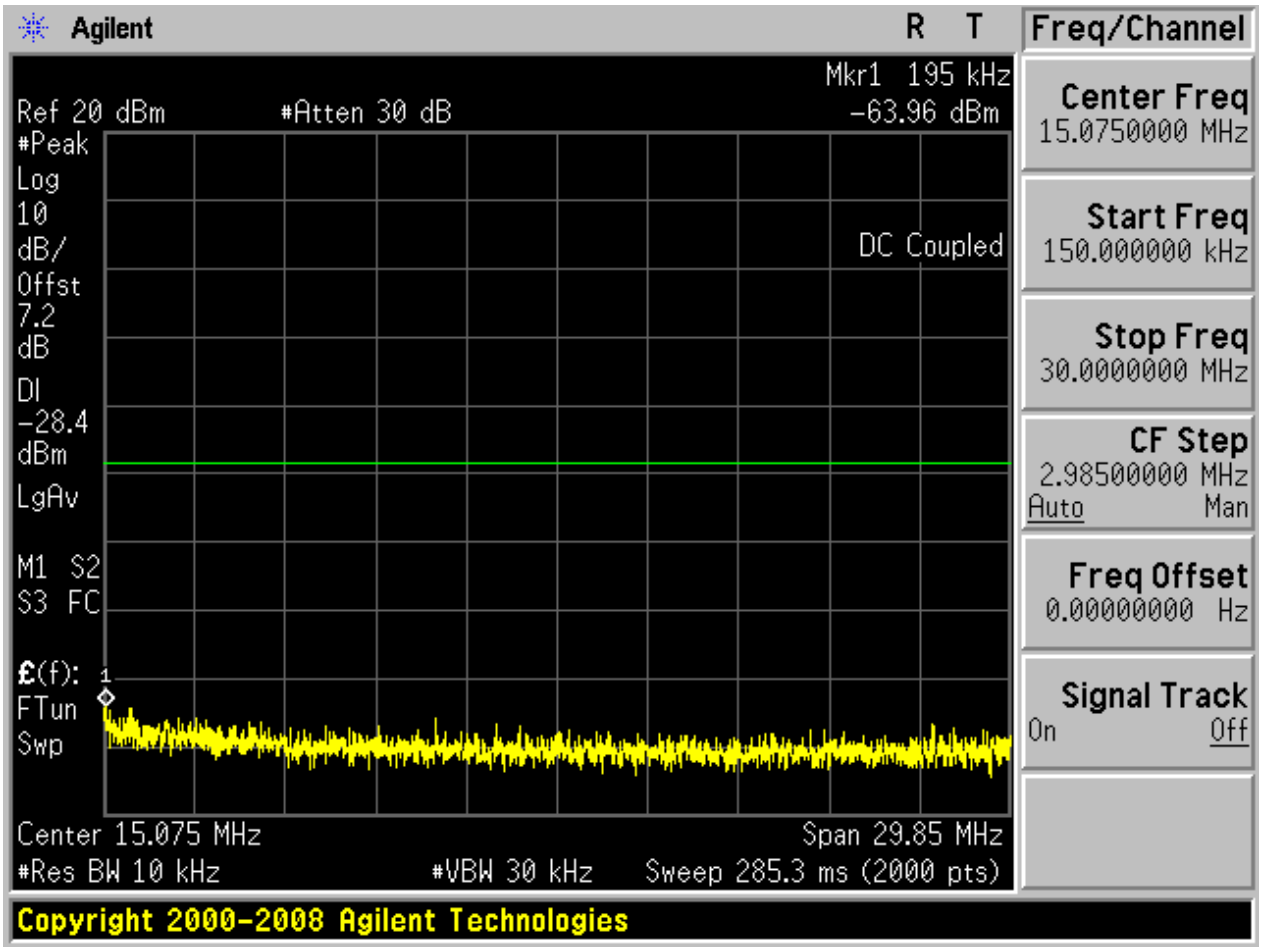

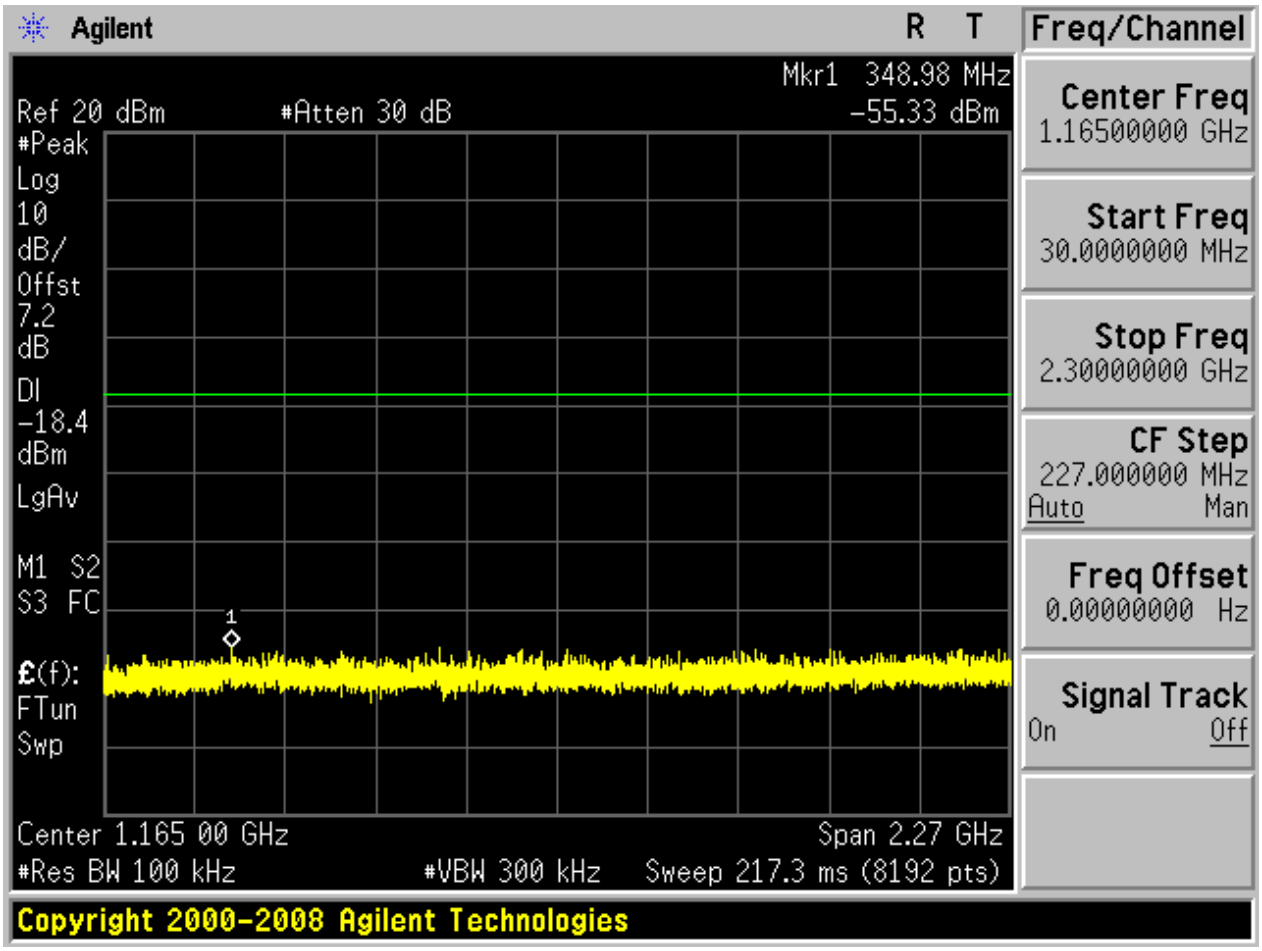

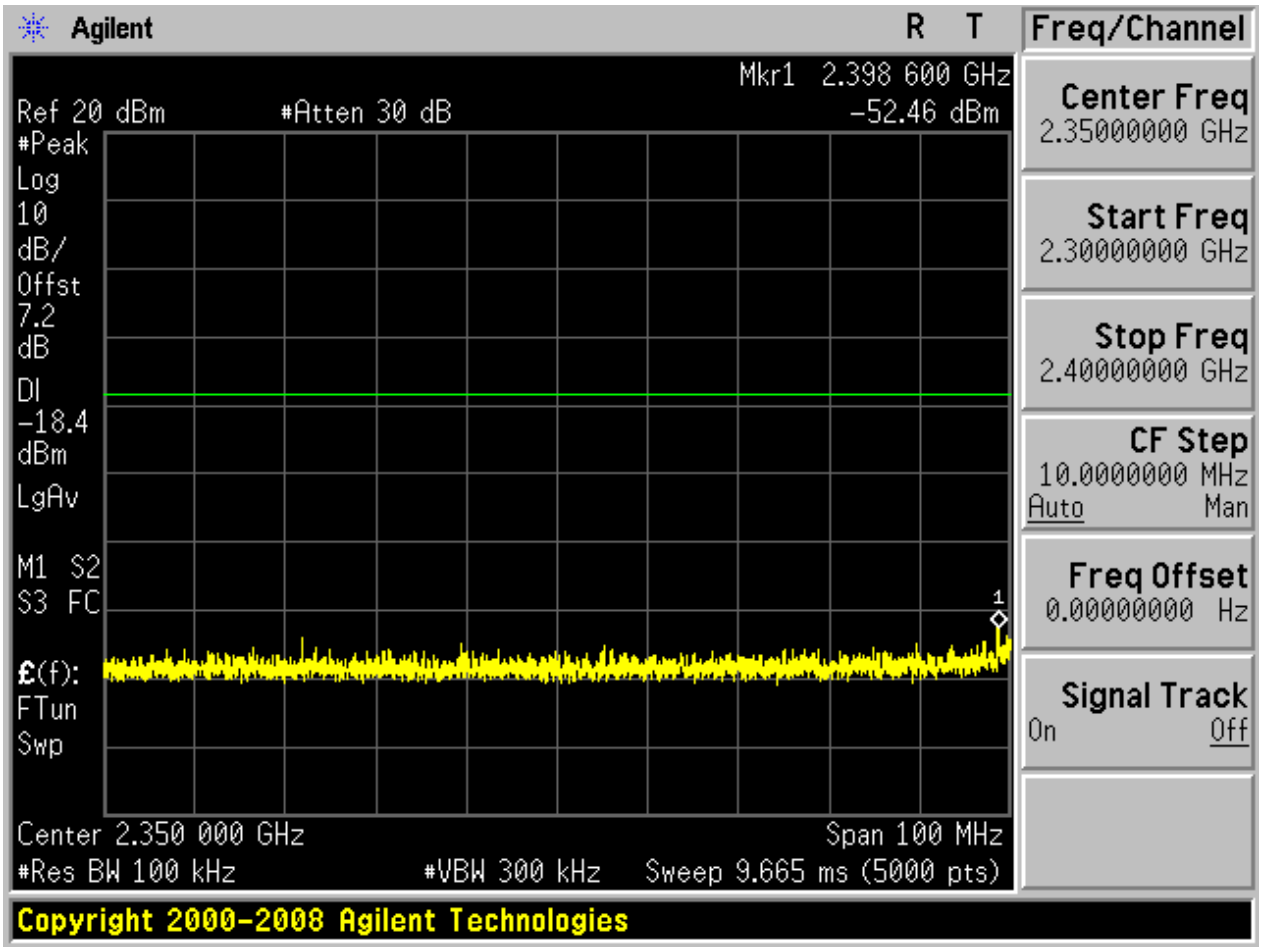

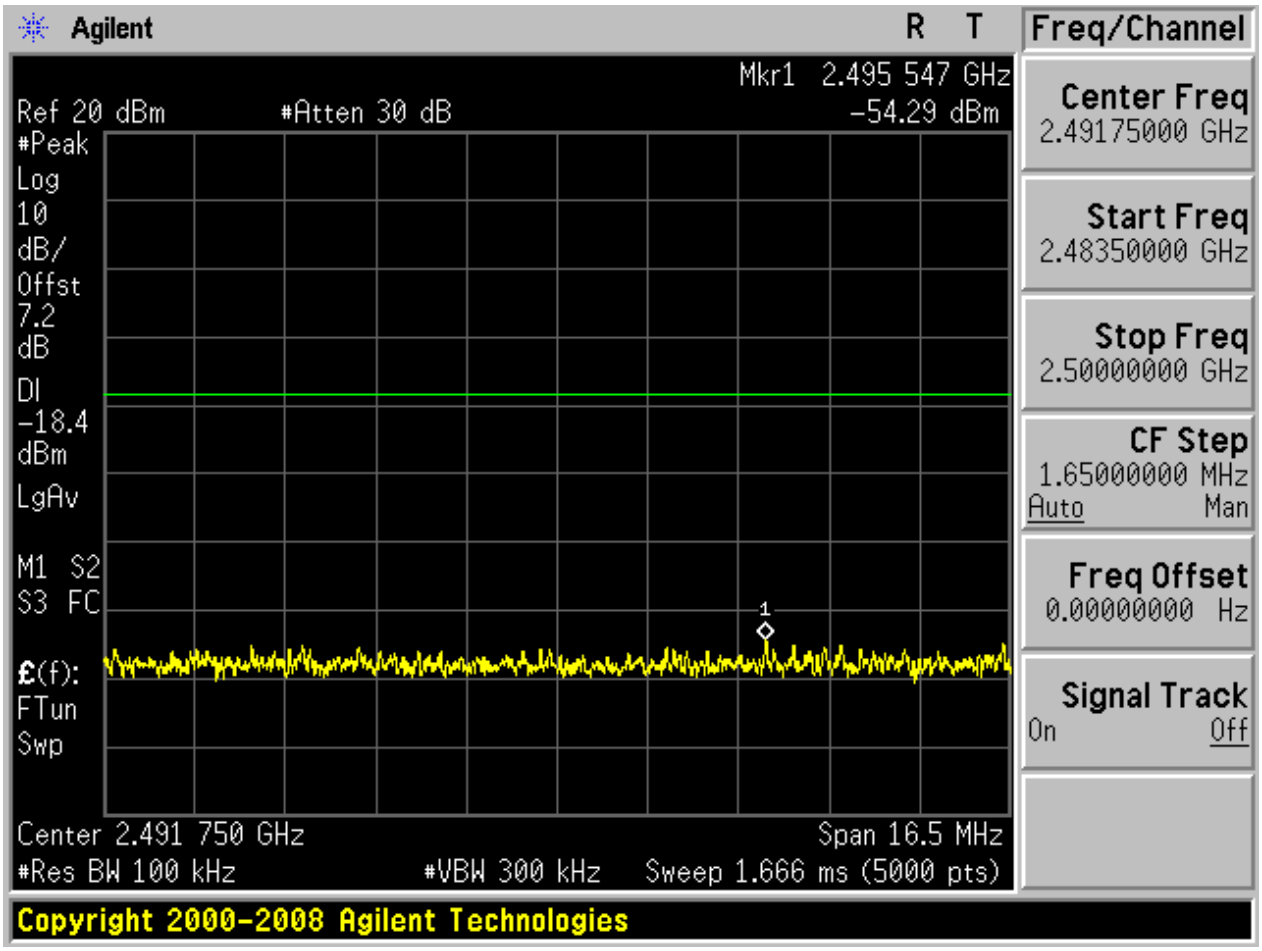

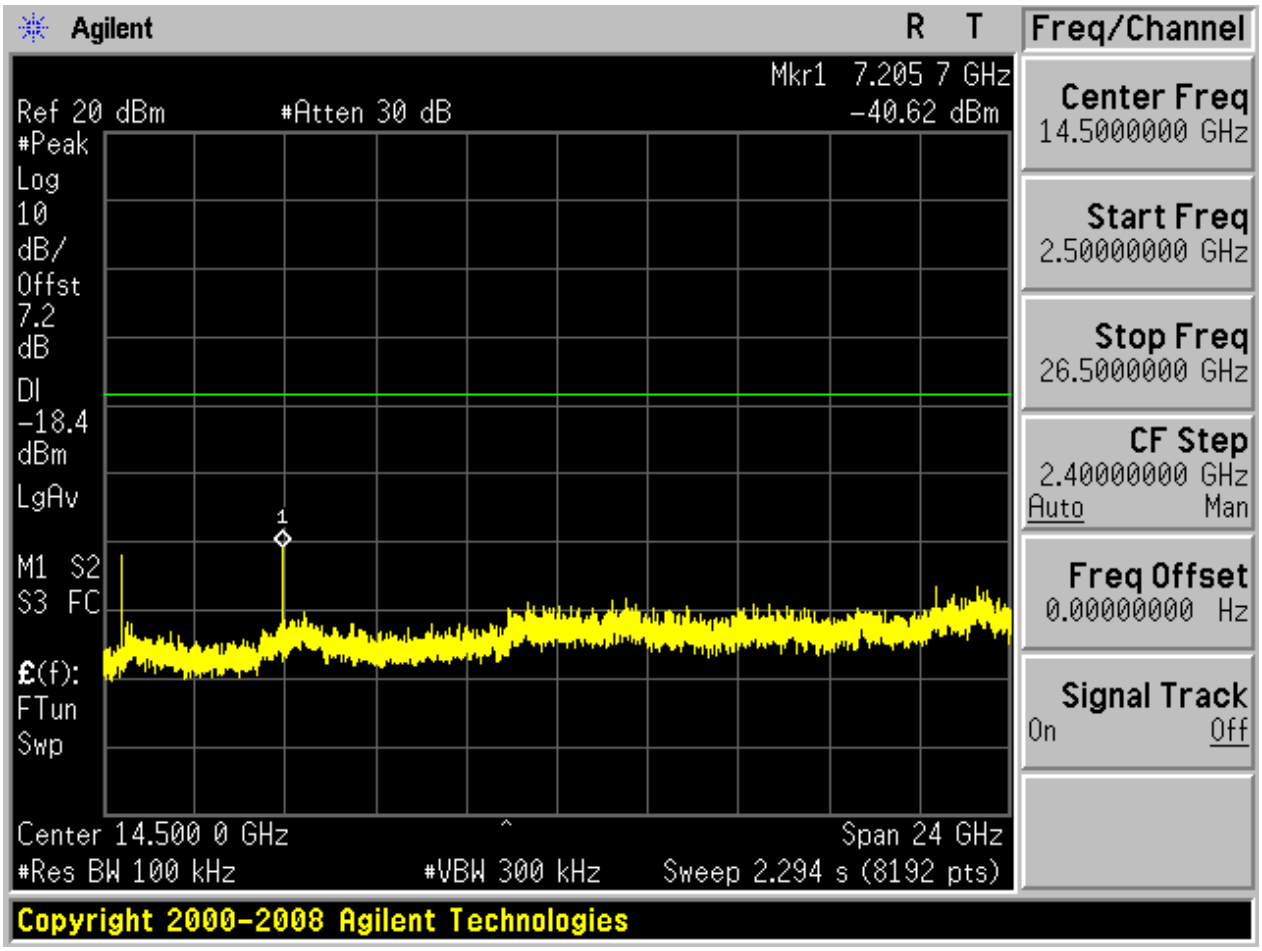

2.8 TM3_3DH5_Ch39

2.8.1 Pref

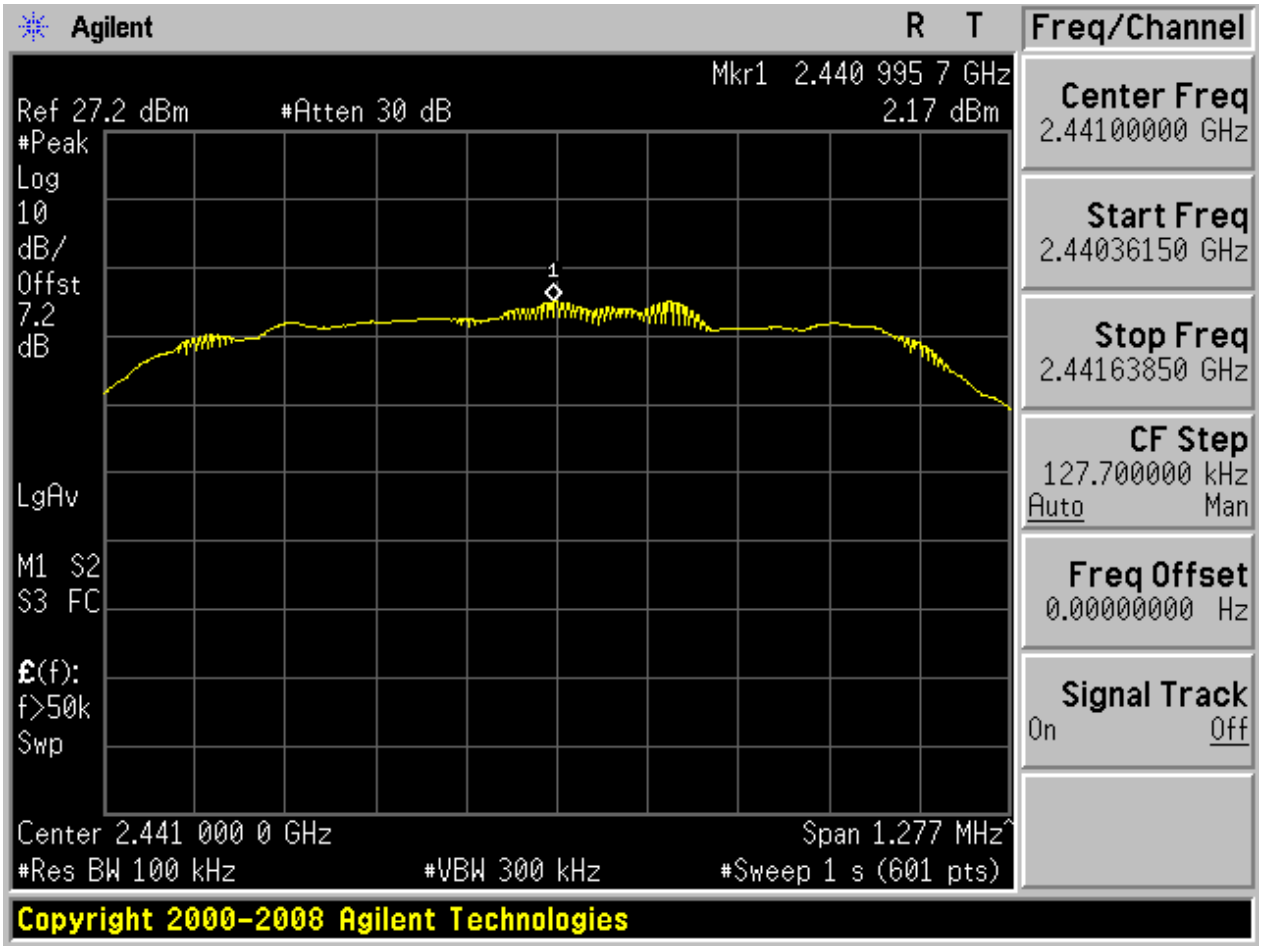

2.8.2 Puw

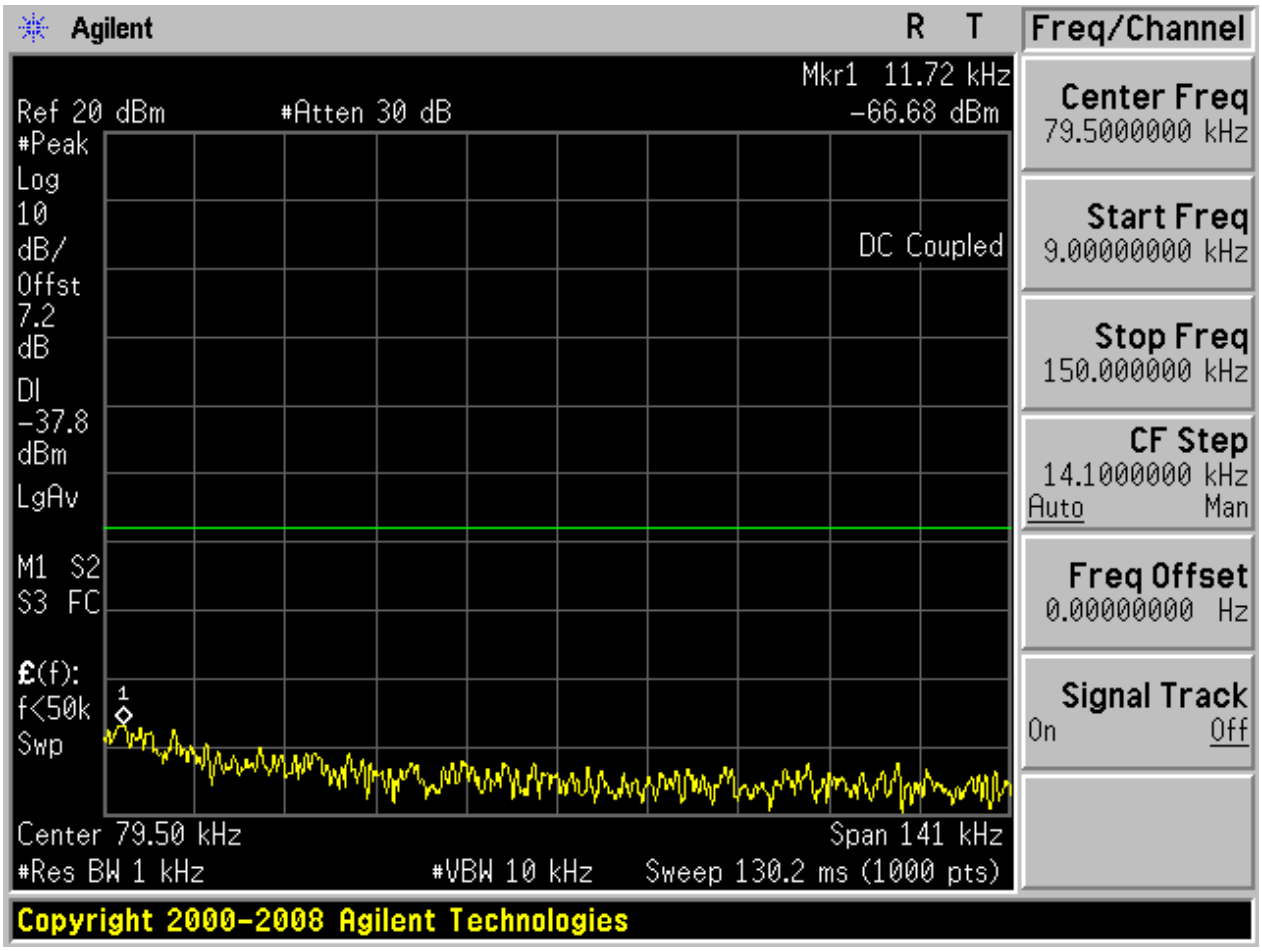

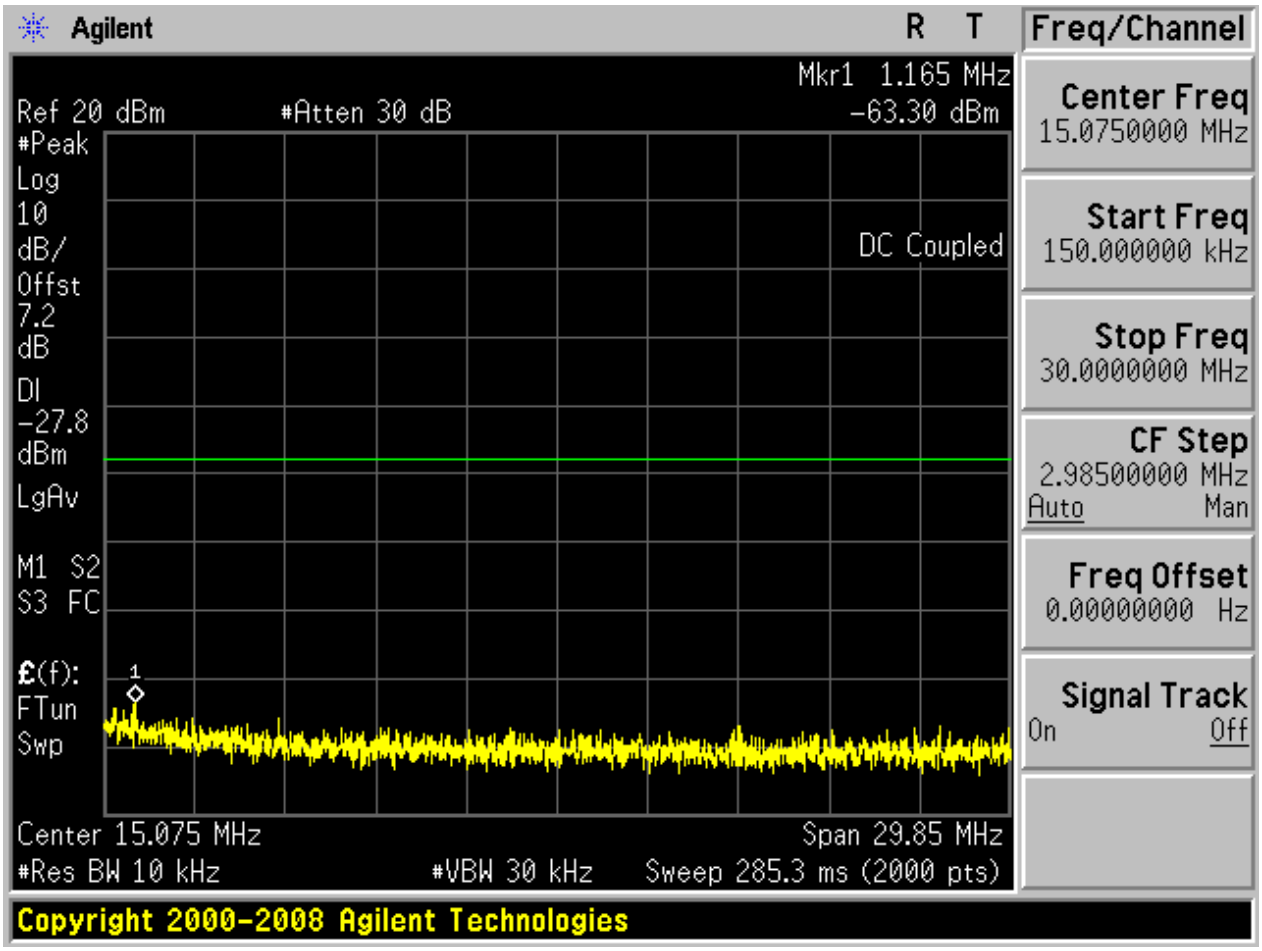

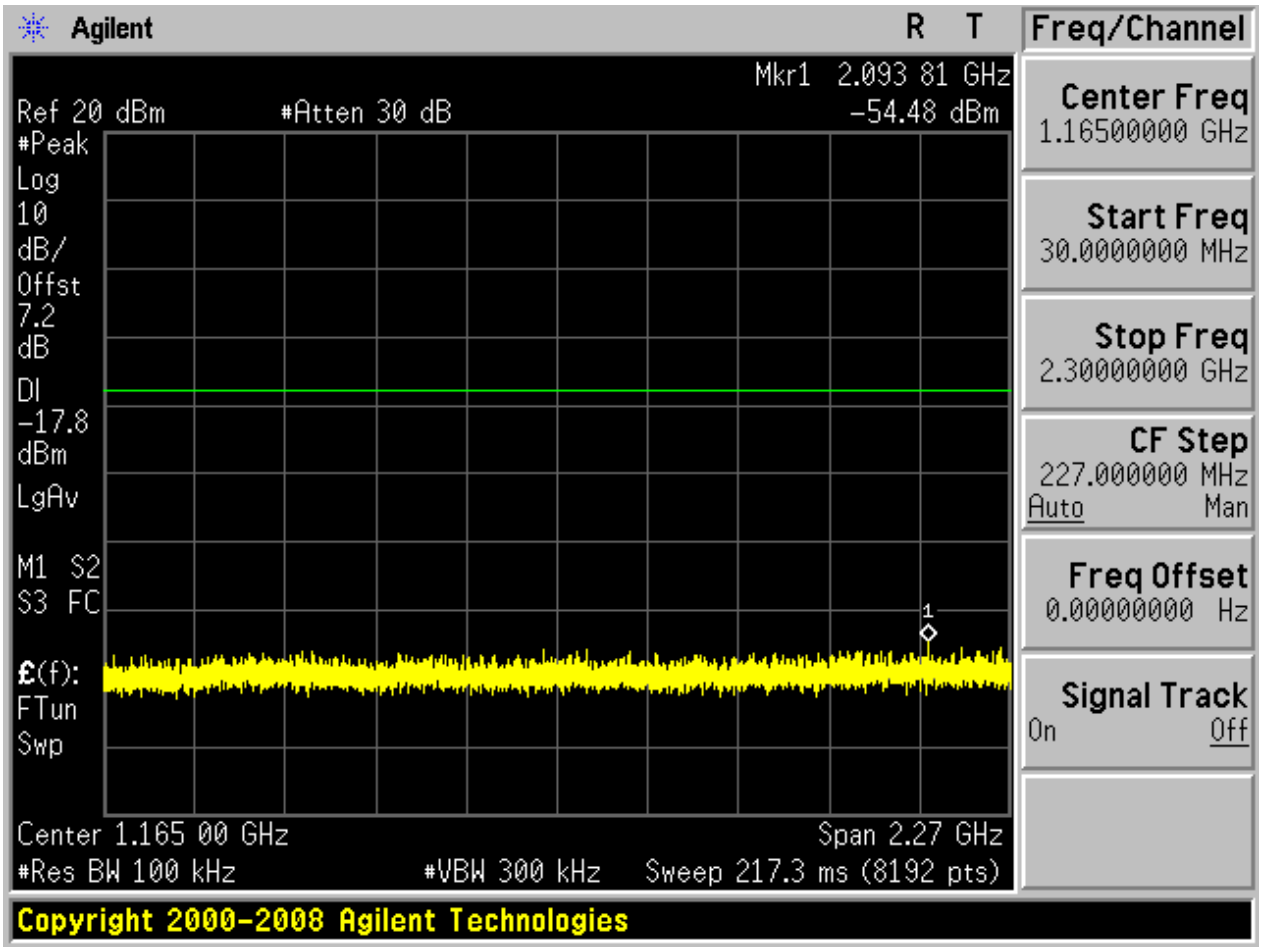

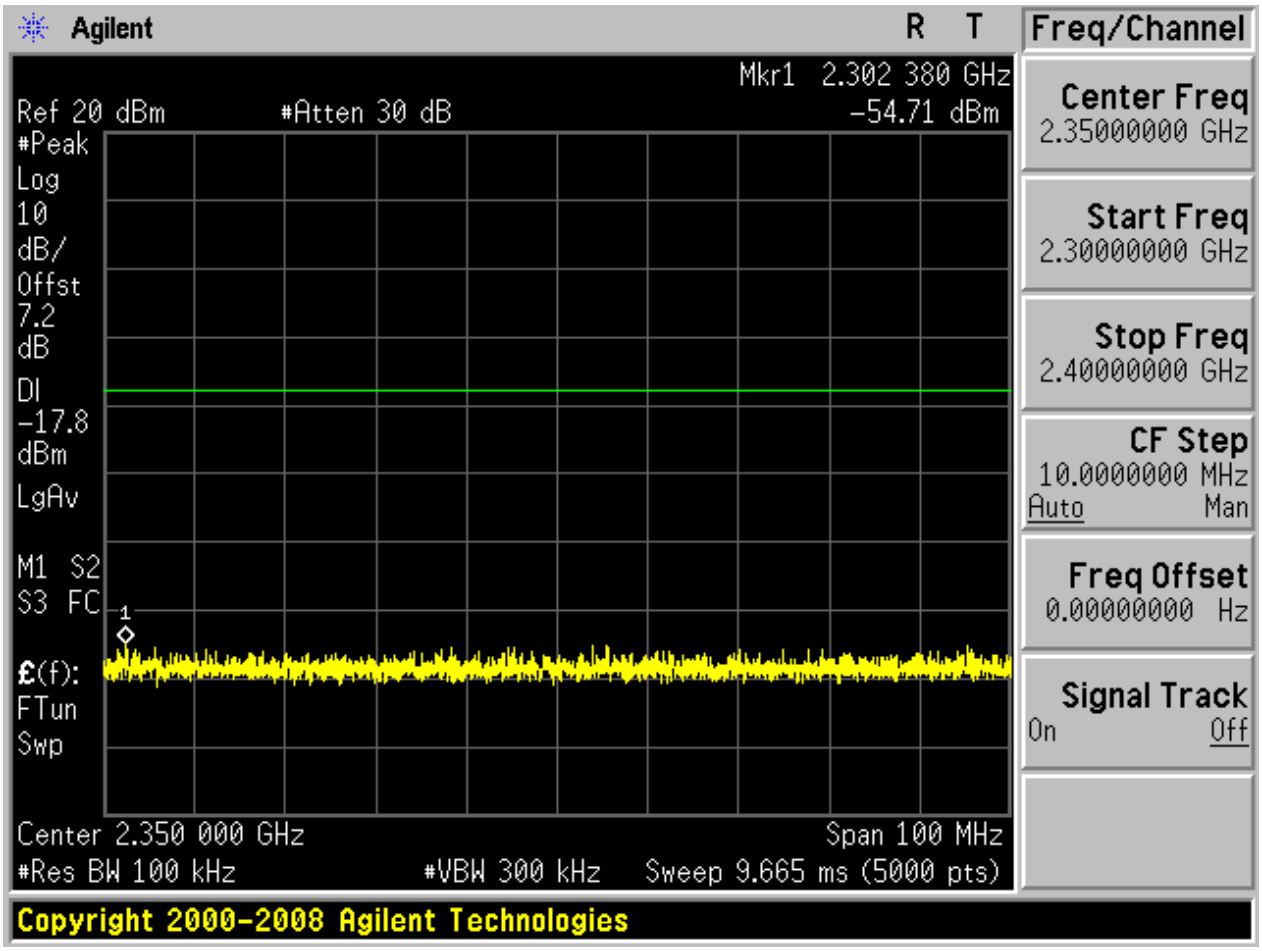

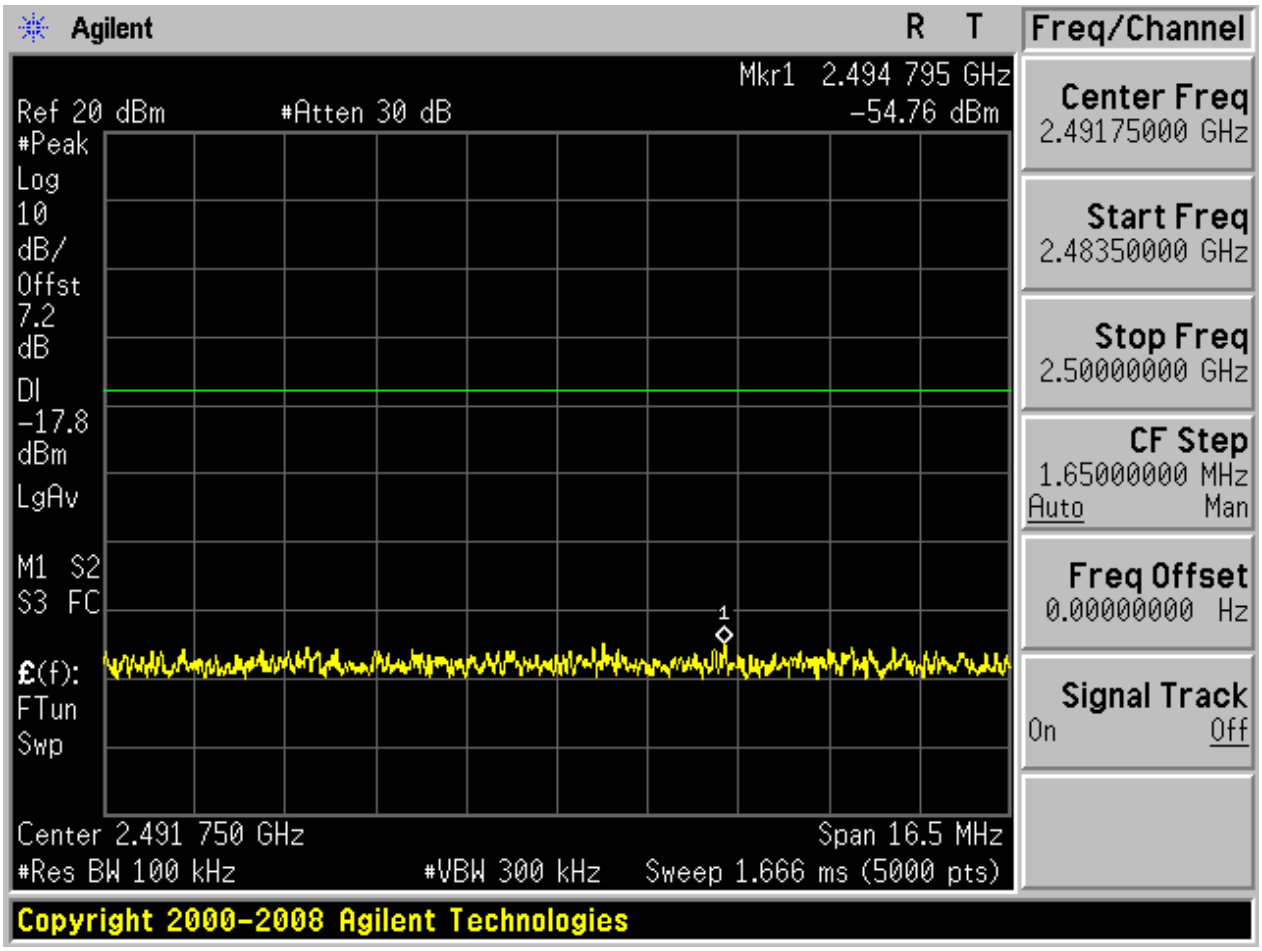

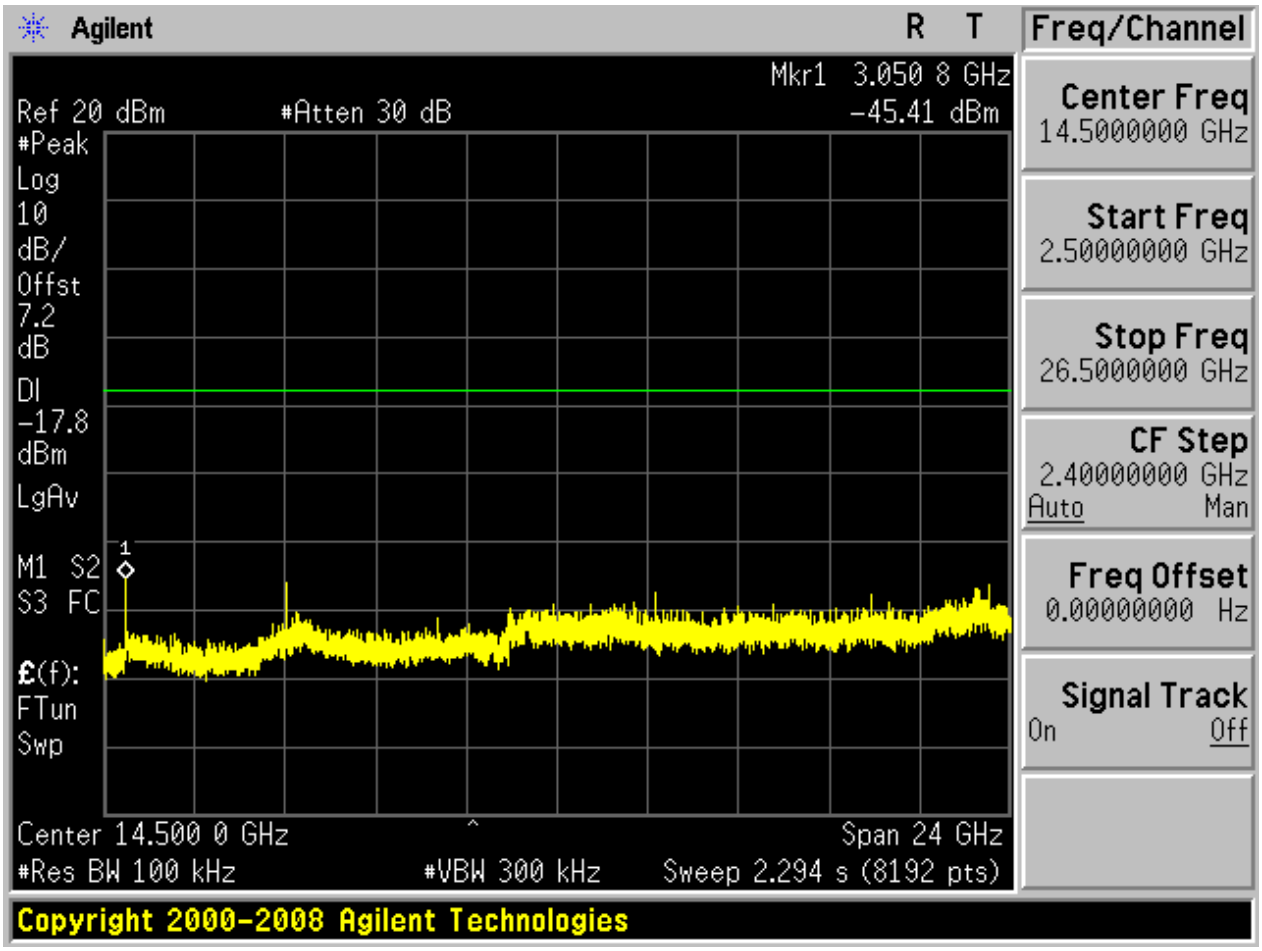

2.9 TM3_3DH5_Ch78

2.9.1 Pref

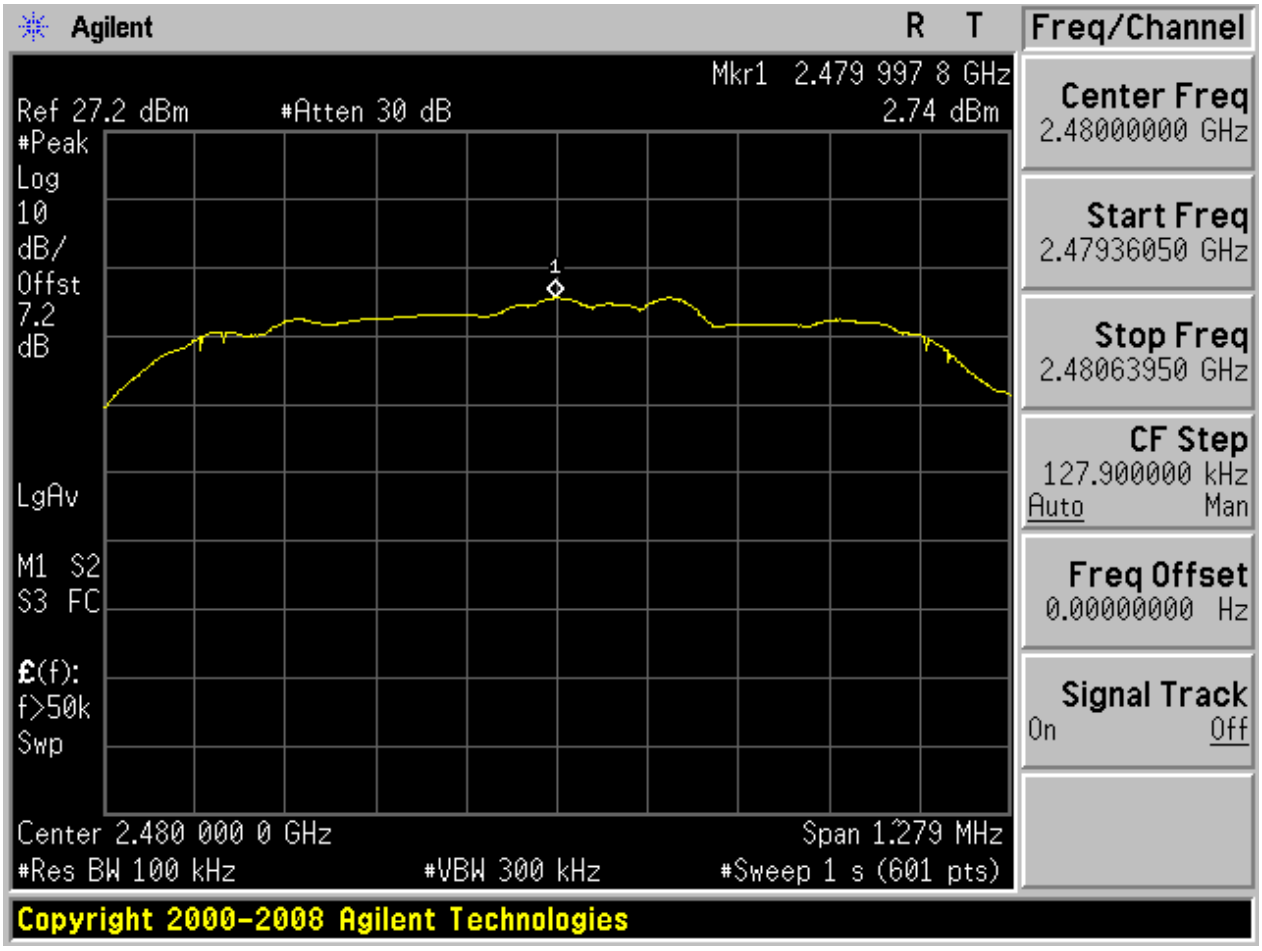

2.9.2 Puw

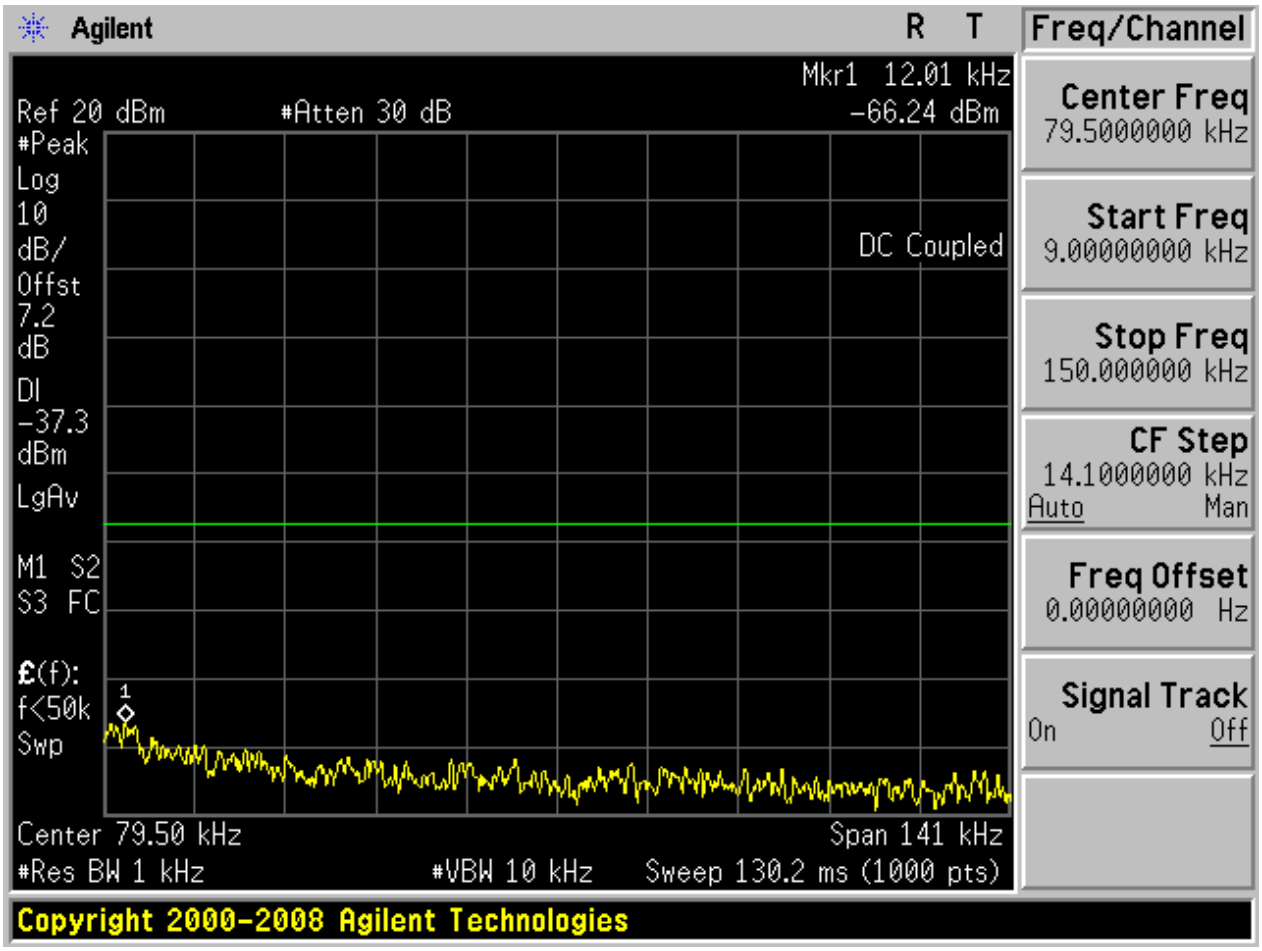

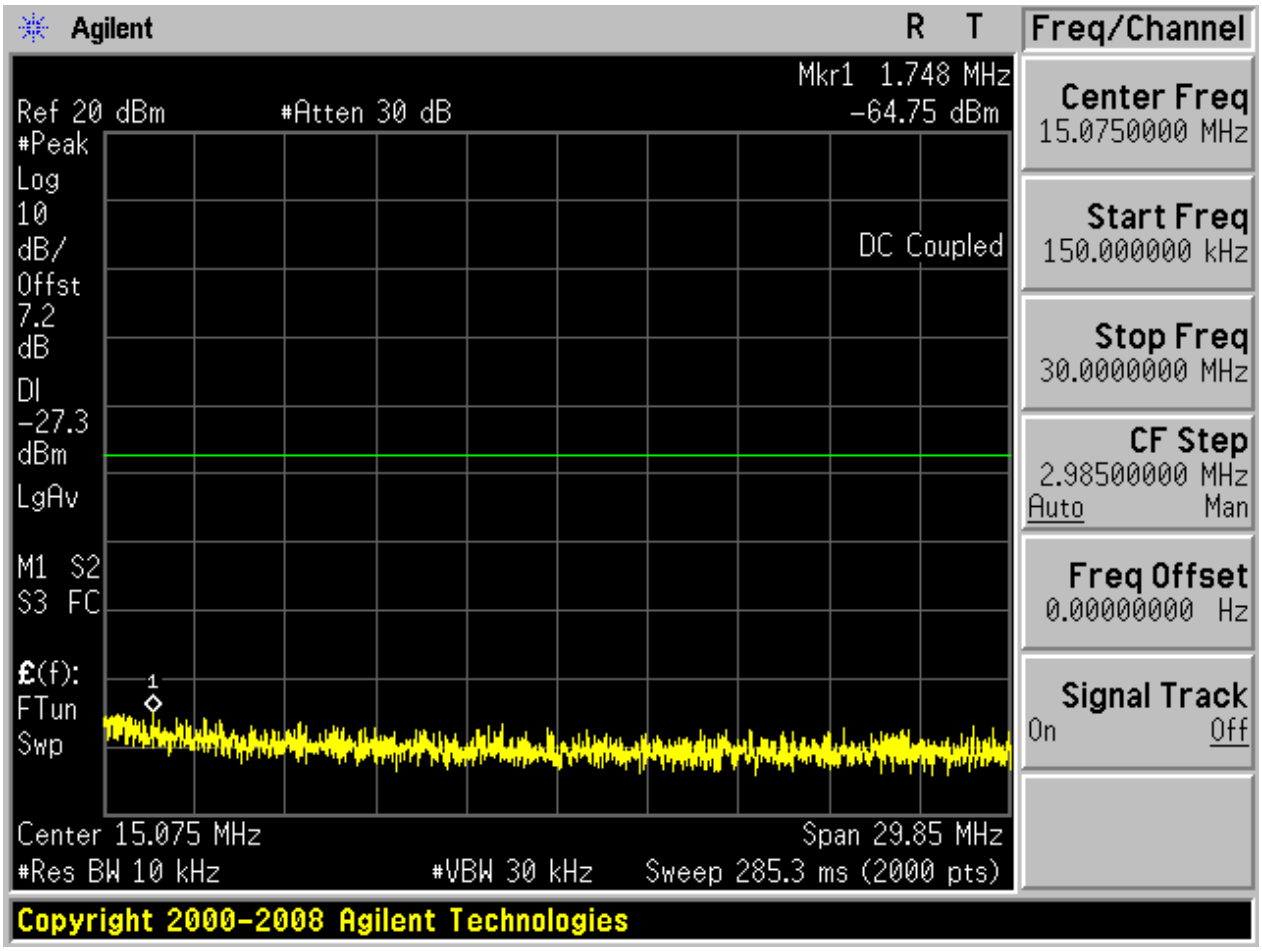

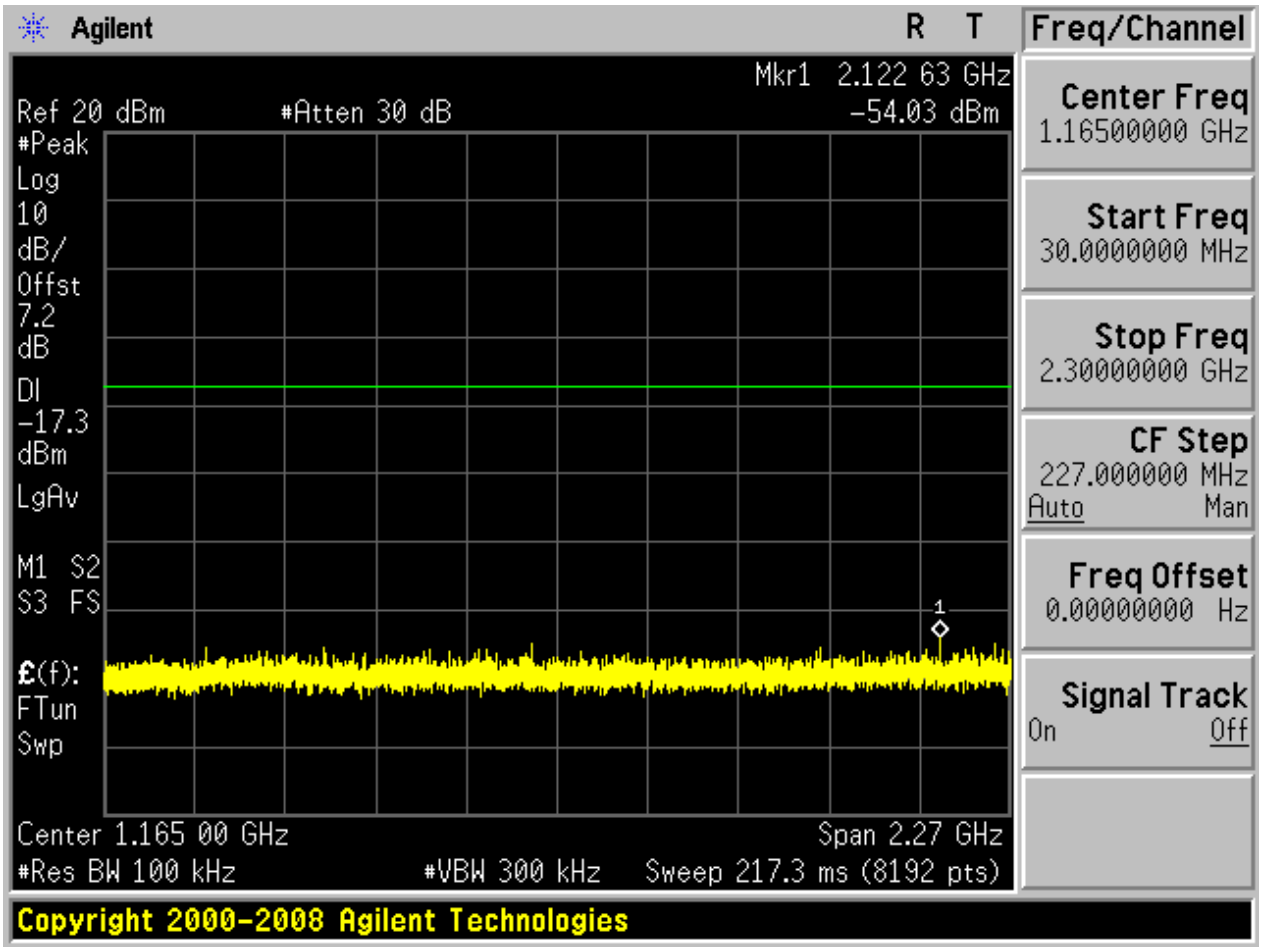

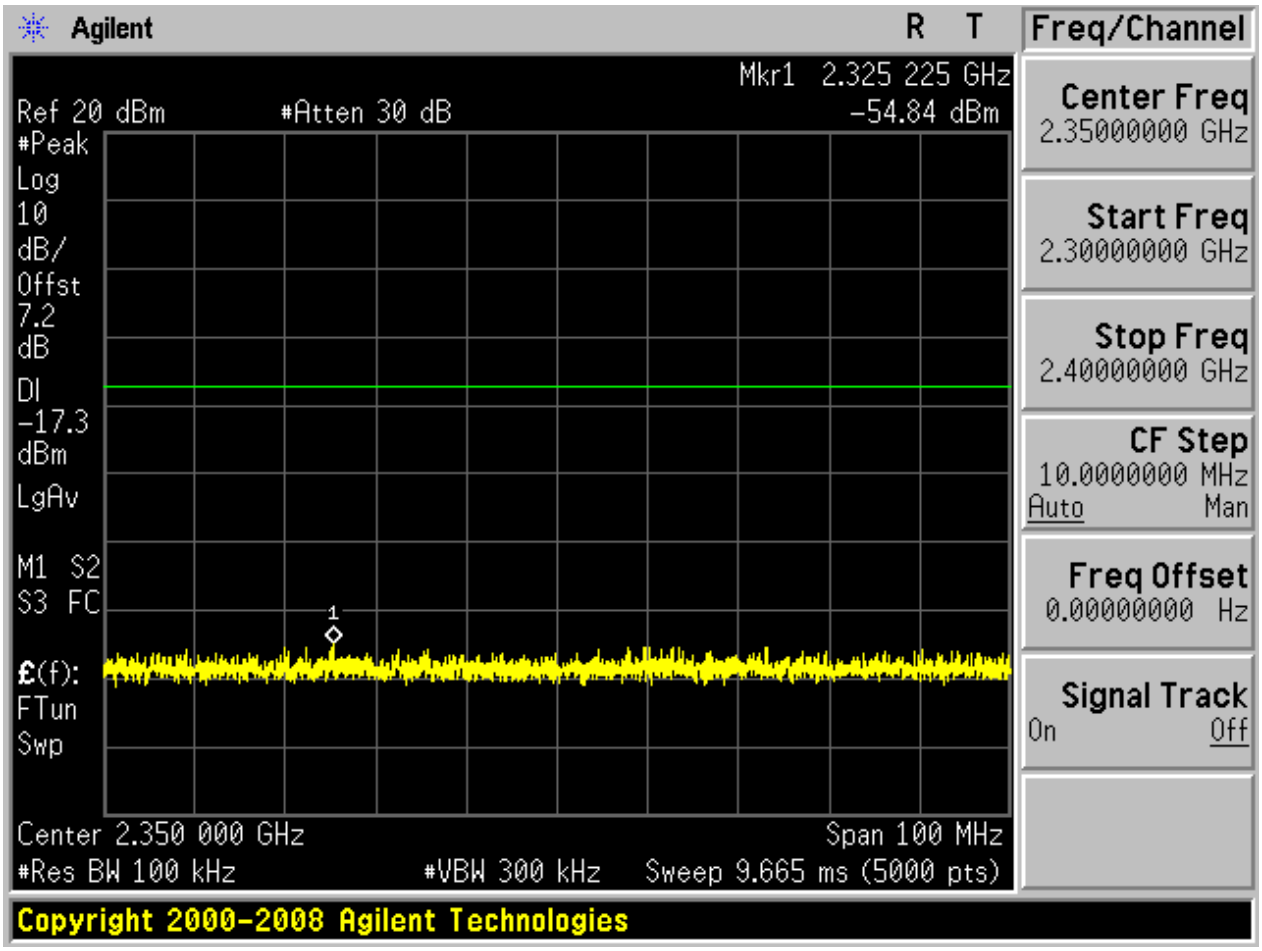

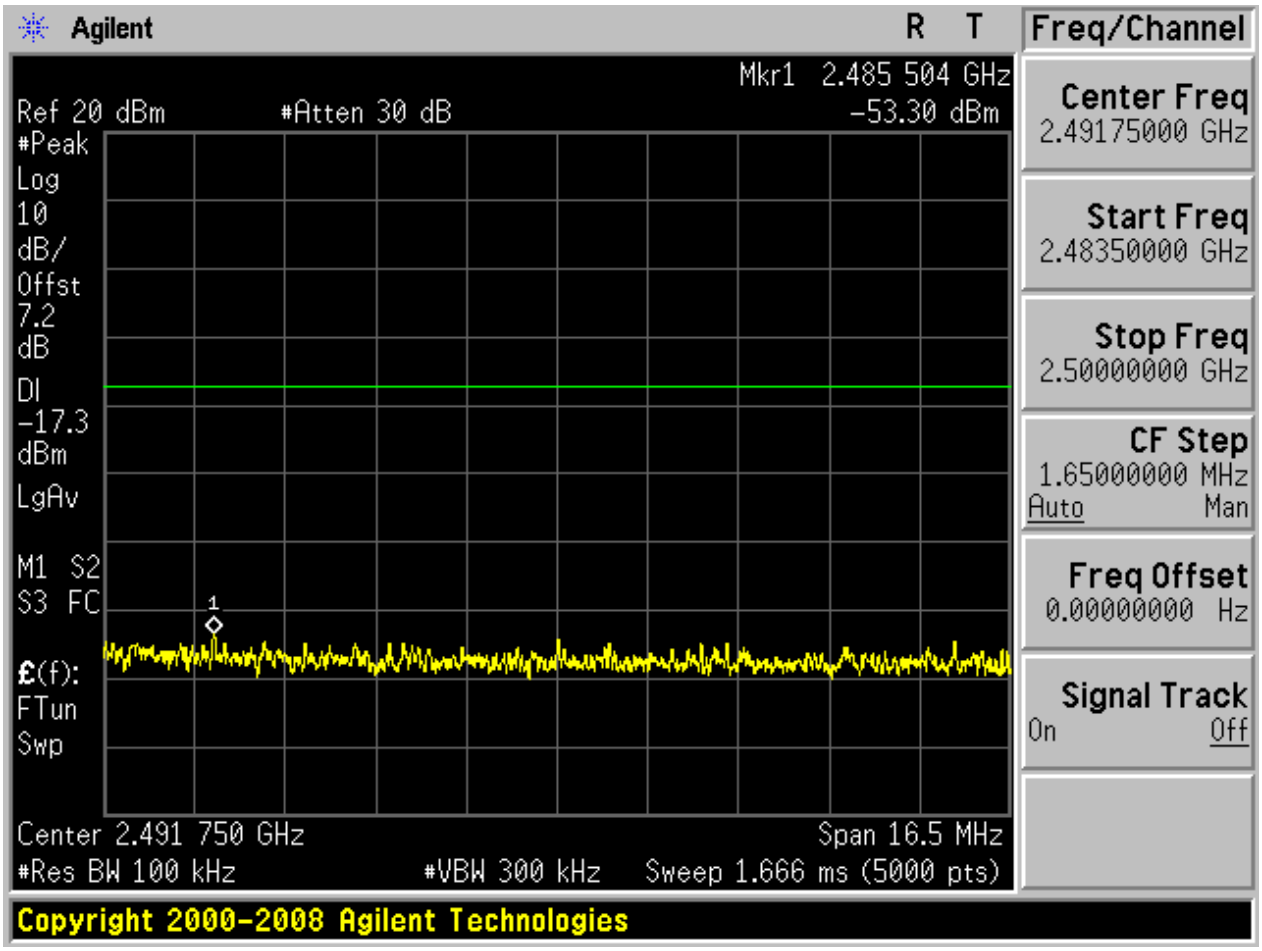

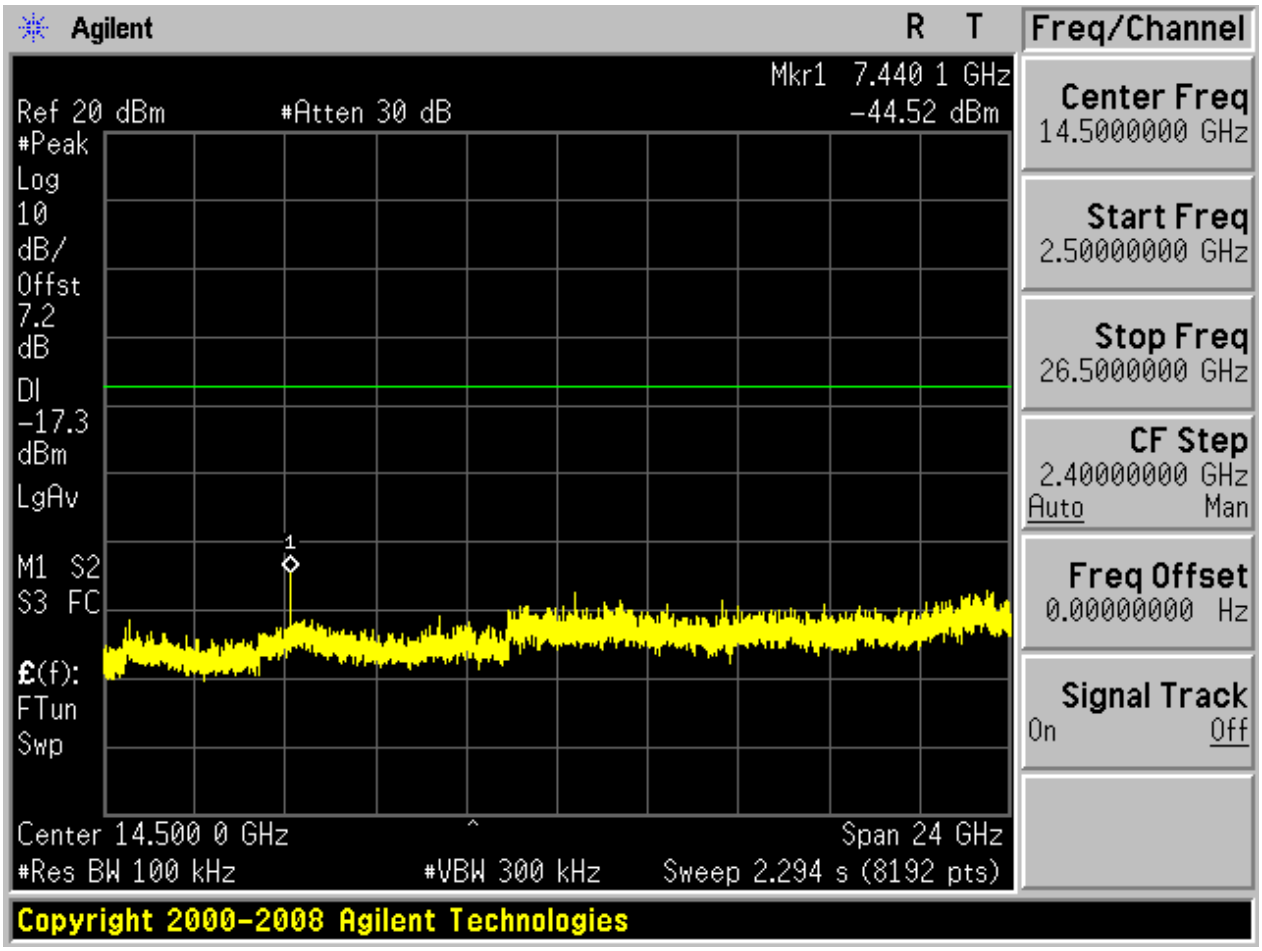

Appendix H: Radiated Emissions in the Restricted Bands

Part 1: Testing Range of "30 MHz to 1 GHz"

Note 1: The test results and plot for testing range of "30 MHz to 1 GHz" showed as below is the WORST case for all Test Modes and Channels. This range will not be presented for each Test Mode and each Channel.

Note 2: The emissions in this range are mainly from the Platform Device (Notepad PC and its ancillary components).

2.9.3 30MHz~1GHz

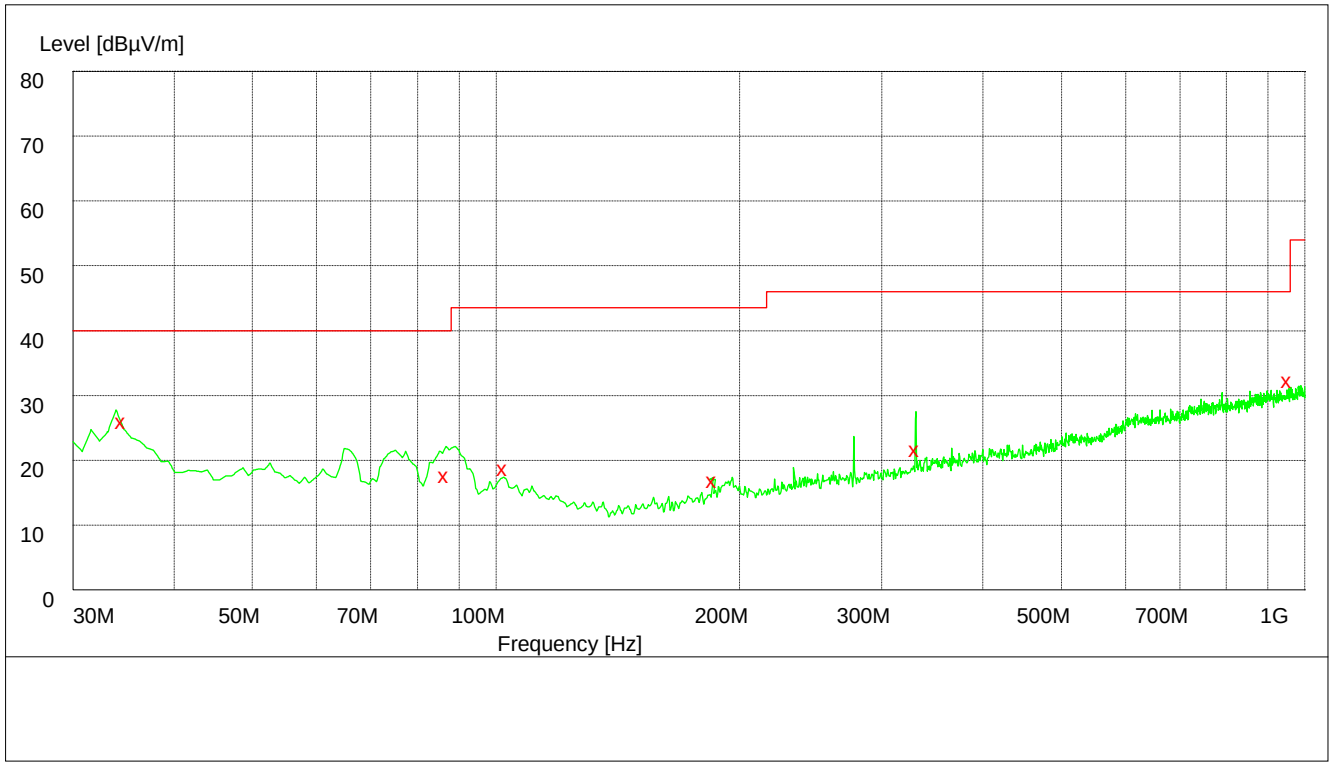

MEASUREMENT RESULT: QP Detector

Frequency MHz	Level dBµV/m	Transducer dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarisation
34.620000	27.00	15.0	40.0	13.0	125.0	151.00	VERTICAL
86.700000	19.10	11.4	40.0	20.9	115.0	77.00	VERTICAL
102.480000	20.10	13.5	43.5	23.4	200.0	69.00	VERTICAL
185.880000	17.60	11.8	43.5	25.9	187.0	249.00	VERTICAL
331.200000	23.20	16.1	46.0	22.8	151.0	295.00	VERTICAL
955.740000	33.80	25.3	46.0	12.2	117.0	308.00	HORIZONTAL

Part 2: Testing Range of "18 GHz to 26.5 GHz"

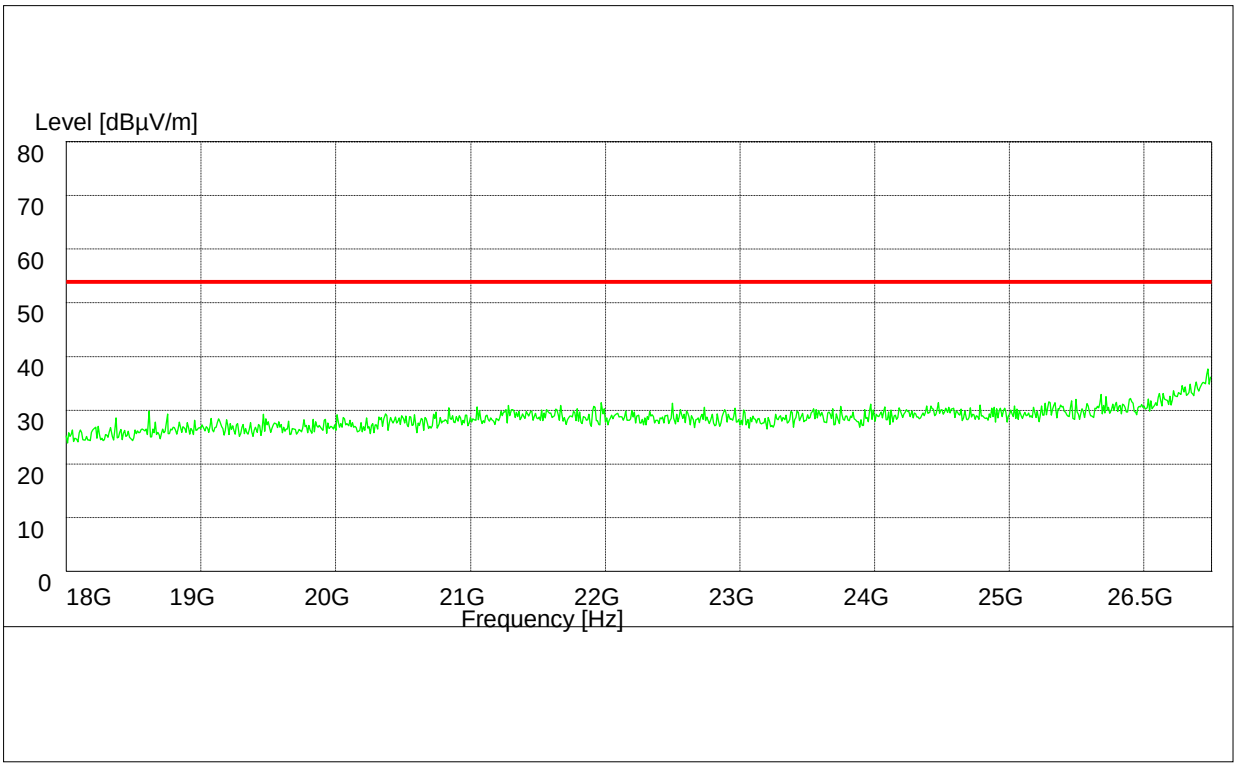

Note: No peak found in pre- test.

Part 3: Testing Range of "2.3GHz to 2.51GHz"

Note 1: The testing range of "2.3 GHz to 2.51 GHz" is for checking radiated emissions located in restricted bands near the EUT operating bands.

Note 2: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dBμV/m) and Average Limit (54 dBμV/m).

Note 3: The peak spike exceeds the limit line is EUT's operating frequency.

3 Test Mode:

3.1 Channel 00

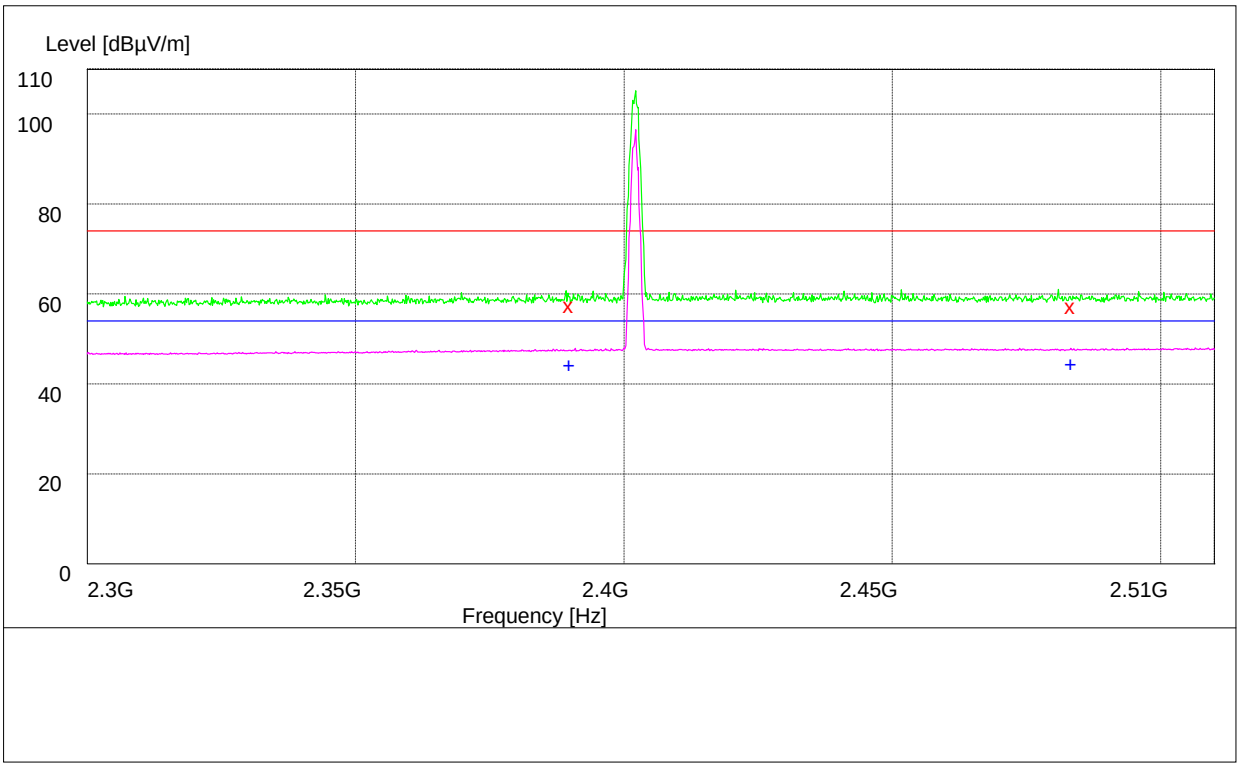

Note: The peak exceeds the limit line is carrier frequency.

MEASUREMENT RESULT: PK Detector

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	59.70	33.5	74.0	14.3	198.0	277.00	VERTICAL
2483.500000	59.50	33.7	74.0	14.5	176.0	258.00	HORIZONTAL

MEASUREMENT RESULT: AVDetector

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	46.40	33.5	54.0	7.6	132.0	248.00	VERTICAL
2483.500000	46.50	33.7	54.0	7.5	100.0	156.00	HORIZONTAL

3.2 Channel 78

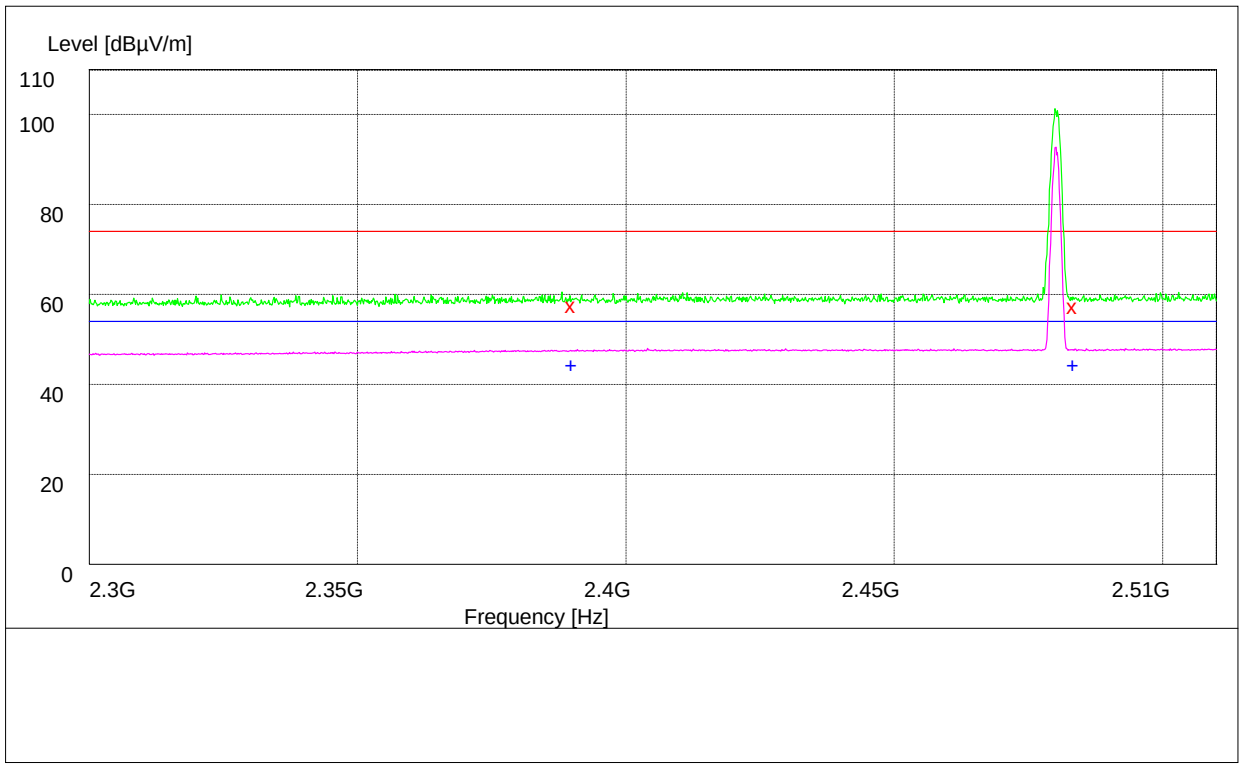

Note: The peak exceeds the limit line is carrier frequency.

MEASUREMENT RESULT: PK Detector

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	59.80	33.5	74.0	14.2	187.0	39.00	VERTICAL
2483.500000	59.70	33.7	74.0	14.3	148.0	269.00	VERTICAL

MEASUREMENT RESULT: AVDetector

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	46.40	33.5	54.0	7.6	198.0	358.00	VERTICAL
2483.500000	46.50	33.7	54.0	7.5	181.0	68.00	VERTICAL

Part 4: Testing Range of "1 GHz to 18 GHz"

Note 1: The test results and plot for testing range of "1 GHz to 18 GHz" showed as below is the WORST case for all Test Modes and Channels**.** This range will not be presented for each Test Mode and each Channel.

Note 2: The testing range of "1 GHz to 18 GHz" is for checking radiated emissions located in restricted bands far away from the EUT operating bands.

Note 3: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dBμV/m) and Average Limit (54 dBμV/m).

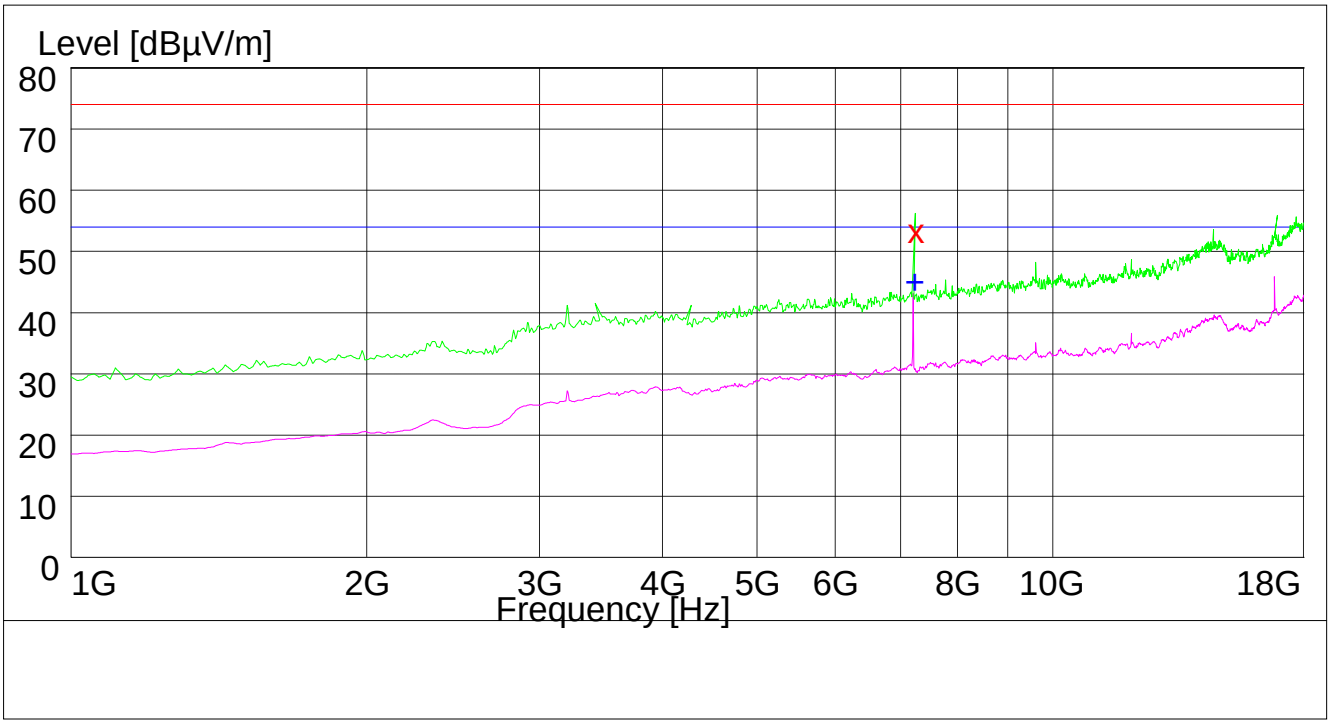

MEASUREMENT RESULT: PK Detector

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Height cm	Azimuth deg	Polarization
7206.200000	53.6	2.4	74.0	20.4	100.0	40.00	HORIZONTAL

MEASUREMENT RESULT: AVDetector

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Height cm	Azimuth deg	Polarization
7206.100000	45.70	2.4	54.0	9.3	101.0	37.00	HORIZONTAL

Appendix I: AC Power Line Conducted Emissions

Channel 40

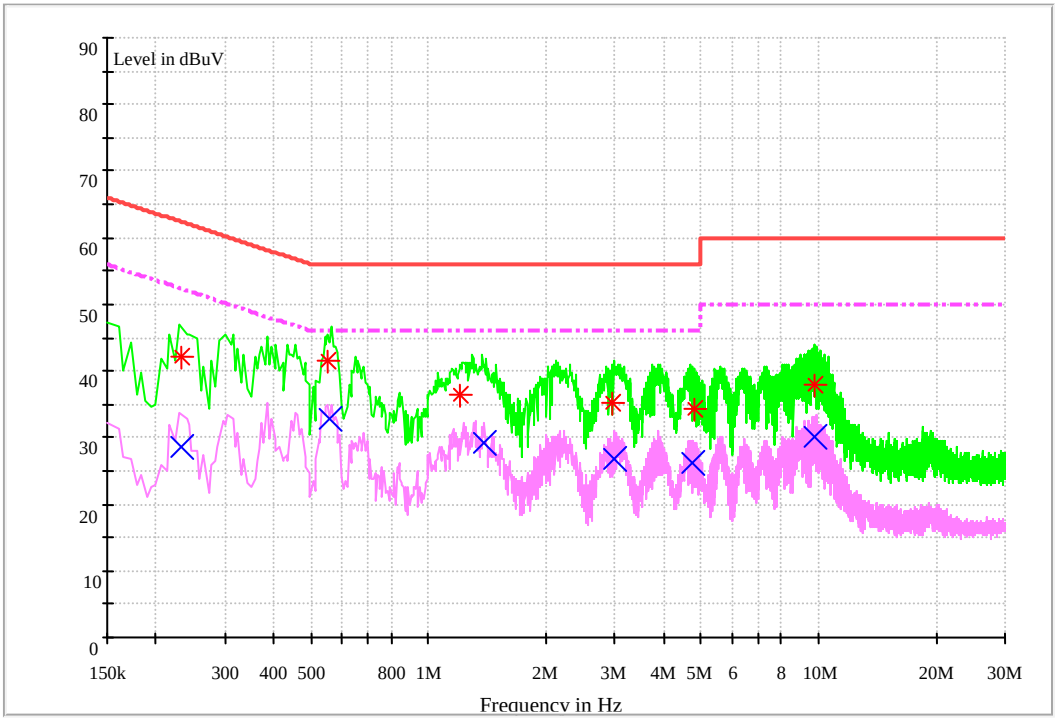

MEASUREMENT RESULT: QP Detector

Frequency MHz	Level dBµV	Line	Transd dB	Margin dB	Limit dBµV	PE
0.231255	42.2	L1	9.7	20.2	62.4	FLO
0.553392	41.4	N	9.7	14.6	56.0	FLO
1.205092	36.3	N	9.7	19.7	56.0	FLO
2.945295	35.3	N	9.7	20.7	56.0	FLO
4.771402	34.2	N	9.8	21.8	56.0	FLO
9.734924	38.0	N	9.9	22.0	60.0	FLO

MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dBµV	Line	Transd dB	Margin dB	Limit dBµV	PE
0.231877	28.5	N	9.7	23.9	52.4	FLO
0.556822	32.9	N	9.7	13.1	46.0	FLO
1.384841	29.1	N	9.7	16.9	46.0	FLO
2.981284	26.8	N	9.7	19.2	46.0	FLO
4.729788	26.3	N	9.8	19.7	46.0	FLO
9.798622	30.1	N	9.9	19.9	50.0	FLO

END