



Report No.: RZA2010-0253



OET 65


TEST REPORT

Product Name	HSPA USB Modem
Model	E2010
FCC ID	QISE2010
Client	HUAWEI Technologies Co., Ltd.

TA Technology (Shanghai) Co., Ltd.



GENERAL SUMMARY

Product Name	HSPA USB Modem	Model	E2010
FCC ID	QISE2010	Report No.	RZA2010-0253
Client	HUAWEI Technologies Co., Ltd.		
Manufacturer	HAUWEI Technologies Co., Ltd.		
Standard(s)	IEEE Std C95.1, 1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 KHz to 300 GHz. Supplement C Edition 01-01 to OET Bulletin 65 Edition 97-01 June 2001 including DA 02-1438, published June 2002: Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields Additional Information for Evaluation Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions. IEC 62209-2 Ed.1(2008-10): Human exposure to radio frequency fields from handheld and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 2: Procedure to determine the Specific Absorption Rate (SAR)for wireless communication devices used in close proximity to the human body-(frequency range of 30MHz to 6GHz).		
Conclusion	Localized Specific Absorption Rate (SAR) of this portable wireless equipment has been measured in all cases requested by the relevant standards cited in Clause 5.2 of this test report. Maximum localized SAR is below exposure limits specified in the relevant standards cited in Clause 5.1 of this test report. General Judgment: Pass  (Stamp) Date of issue: March 19th, 2010		
Comment	The test result only responds to the measured sample.		

Approved by 杨伟中
Yang Weizhong

Revised by 凌敏宝
Ling Minbao

Performed by 李进昌
Li Jinchang

TABLE OF CONTENT

1. General Information	5
1.1. Notes of the test report	5
1.2. Testing laboratory	5
1.3. Applicant Information	6
1.4. Manufacturer Information	6
1.5. Information of EUT	7
1.6. Test Period	8
2. Operational Conditions Test	9
2.1. General description of test procedures	9
2.2. GSM Test Configuration	9
2.3. WCDMA Test Configuration	10
2.4. HSDPA Test Configuration	10
2.5. HSUPA Test Configuration	13
2.6. Position of module in Portable devices	15
2.7. Picture of host product	16
3. SAR Measurements System Configuration	17
3.1. SAR Measurement Set-up	17
3.2. DASY4 E-field Probe System	18
1.1.1. EX3DV4 Probe Specification	18
3.2.1. E-field Probe Calibration	19
3.3. Other Test Equipment	19
3.3.1. Device Holder for Transmitters	19
3.3.2. Phantom	20
3.4. Scanning procedure	20
3.5. Data Storage and Evaluation	22
3.5.1. Data Storage	22
3.5.2. Data Evaluation by SEMCAD	22
3.6. System check	25
3.7. Equivalent Tissues	26
4. Laboratory Environment	26
5. Characteristics of the Test	27
5.1. Applicable Limit Regulations	27
5.2. Applicable Measurement Standards	27
6. Conducted Output Power Measurement	28
6.1. Summary	28
6.2. Conducted Power Results	28
7. Test Results	32
7.1. Dielectric Performance	32
7.2. System Check	32
7.3. Summary of Measurement Results	33
7.3.1. GSM850 (GPRS/EGPRS)	33

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RZA2010-0253

Page 4 of 138

7.3.2.	GSM1900 (GPRS/EGPRS).....	35
7.3.3.	WCDMA Band II (WCDMA/HSDPA/HSUPA)	37
7.3.4.	WCDMA Band V (WCDMA/HSDPA/HSUPA).....	39
7.4.	Conclusion	40
8.	Measurement Uncertainty	41
9.	Main Test Instruments	42
ANNEX A: Test Layout		43
ANNEX B: System Check Results		45
ANNEX C: Graph Results		49
ANNEX D: Probe Calibration Certificate		105
ANNEX E: D835V2 Dipole Calibration Certificate		114
ANNEX F: D1900V2 Dipole Calibration Certificate		123
ANNEX G: DAE4 Calibration Certificate.....		132
ANNEX H: The EUT Appearances and Test Configuration.....		137

1. General Information

1.1. Notes of the test report

TA Technology (Shanghai) Co., Ltd. guarantees the reliability of the data presented in this test report, which is the results of measurements and tests performed for the items under test on the date and under the conditions stated in this test report and is based on the knowledge and technical facilities available at TA Technology (Shanghai) Co., Ltd. at the time of execution of the test.

TA Technology (Shanghai) Co., Ltd. is liable to the client for the maintenance by its personnel of the confidentiality of all information related to the items under test and the results of the test. This report only refers to the item that has undergone the test.

This report standalone dose not constitute or imply by its own an approval of the product by the certification Bodies or competent Authorities. This report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of **TA Technology (Shanghai) Co., Ltd.** and the Accreditation Bodies, if it applies.

1.2. Testing laboratory

Company:	TA Technology (Shanghai) Co., Ltd.
Address:	No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai,China
City:	Shanghai
Post code:	201201
Country:	P. R. China
Contact:	Yang Weizhong
Telephone:	+86-021-50791141/2/3
Fax:	+86-021-50791141/2/3-8000
Website:	http://www.ta-shanghai.com
E-mail:	yangweizhong@ta-shanghai.com

1.3. Applicant Information

Company: HUAWEI Technologies Co., Ltd.
Address: Bantian, Longgang District
City: Shenzhen
Postal Code: 518129
Country: P.R. China
Contact: Zhang Ting
Telephone: 0755-28780808
Fax: 0755-28780808

1.4. Manufacturer Information

Company: HUAWEI Technologies Co., Ltd.
Address: Bantian, Longgang District
City: Shenzhen
Postal Code: 518129
Country: P.R. China
Telephone: 0755-28780808
Fax: 0755-28780808

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No. RZA2010-0253

Page 7 of 138

1.5. Information of EUT

General information

Device type :	portable device		
Exposure category:	uncontrolled environment / general population		
S/N or IMEI:	359891030011034		
Device operating configurations :			
Operating mode(s):	GSM850; (tested) GSM1900; (tested) WCDMA Band II; (tested) WCDMA Band V; (tested)		
Test Modulation:	(GSM) GMSK (WCDMA)QPSK		
GPRS multislots class :	10		
EGPRS multislots class:	12		
HSDPA UE category	5		
HSUPA UE category	8		
Operating frequency range(s)	Band	Tx (MHz)	Rx (MHz)
	GSM850	824.2 ~ 848.8	869.2 ~ 893.8
	GSM1900:	1850.2 ~ 1909.8	1930.2 ~ 1989.8
	WCDMA Band II	1852.4~ 1907.6	1932.4 ~1987.6
	WCDMA Band V;	826.4 ~ 846.6	871.4 ~ 891.6
Power class	GSM 850: 4, tested with power level 5		
	GSM 1900: 1, tested with power level 0		
	WCDMA Band II: 3, tested with maximum output power		
	WCDMA Band V: 3, tested with maximum output power		
Test channel (Low –Middle –High)	128-192-251 (GSM850) 512 - 661-810 (GSM1900) 9262 -9400 -9538 (WCDMA Band II) 4132 -4183 -4233 (WCDMA Band V)		
Hardware version:	CD1E2010M		
Software version:	11.126.08.05.00		
Antenna type:	Internal antenna		
Used host product:	Lenovo Y-450		

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No. RZA2010-0253

Page 8 of 138

Equipment Under Test (EUT) is a model of HSPA USB Modem, During SAR test of the EUT, it was connected to a portable computer. The tests in the band of GSM 850 , GSM 1900, WCDMA Band II and WCDMA Band V are performed in the mode of GPRS, EGPRS, WCDMA, HSDPA and HSUPA .The measurements were performed in combination with a host product (Lenovo Y-450). Lenovo Y-450 laptop has horizontal USB slot.

The sample under test was selected by the Client.

Components list please refer to documents of the manufacturer.

1.6. Test Period

The test is performed from March 16, 2010 to March 18, 2010.

2. Operational Conditions Test

2.1. General description of test procedures

Connection to the EUT is established via air interface with E5515C, and the EUT is set to maximum output power by E5515C. The antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the EUT. The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the EUT by at least 30 dB.

2.2. GSM Test Configuration

For the body SAR tests for GSM 850, GSM 1900, a communication link is set up with a System Simulator (SS) by air link. The EUT is commanded to operate at maximum transmitting power. Since the EUT only has the data transfer function, but does not have the speech transfer function.

The tests in the band of GSM 850, GSM 1900 are performed in the mode of GPRS and EGPRS. The GPRS class is 10 for this EUT; it has at most 2 timeslots in uplink. The EGPRS class is 12 for this EUT; it has at most 4 timeslots in uplink.

According to specification 3GPP TS 51.010, the maximum power of the GSM can do the power reduction for the multi-slot. The allowed power reduction in the multi-slot configuration is as following:

Table 1: The allowed power reduction in the multi-slot configuration

Number of timeslots in uplink assignment	Permissible nominal reduction of maximum output power,(dB)
1	0
2	0 to 3,0
3	1,8 to 4,8
4	3,0 to 6,0

2.3. WCDMA Test Configuration

As the SAR body tests for WCDMA Band II and WCDMA Band V, we established the radio link through call processing. The maximum output power were verified on high, middle and low channels for each test band according to 3GPP TS 34.121 with the following configuration:

- 1) 12.2kbps RMC, 64,144,384 kbps RMC with TPC set to all "all '1's"
- 2) Test loop Mode 1

For the output power, the configurations for the DPCCH and DPDCH₁ are as followed (EUT do not support the DPDCH_{2-n})

Table 2: The configurations for the DPCCH and DPDCH₁

	Channel Bit Rate(kbps)	Channel Symbol Rate(kbps)	Spreading Factor	Spreading Code Number	Bits/Slot
DPCCH	15	15	256	0	10
DPDCH ₁	15	15	256	64	10
	30	30	128	32	20
	60	60	64	16	40
	120	120	32	8	80
	240	240	16	4	160
	480	480	8	2	320
	960	960	4	1	640

SAR is tested with 12.2kps RMC and not required for other spreading codes (64,144, and 384 kbps RMC) and multiple DPDCH_n, because the maximum output power for each of these other configurations<0.25dB higher than 12.2kbps RMC and the multiple DPDCH_n is not applicable for the EUT.

2.4. HSDPA Test Configuration

SAR for body exposure configurations is measured according to the "Body SAR Measurements" procedures of 3G device. In addition, body SAR is also measured for HSDPA when the maximum average output of each RF channel with HSDPA active is at least 1/4 dB higher than that measured without HSDPA using 12.2kbps RMC or the maximum SAR 12.2kbps RMC is above 75% of the SAR limit. Body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2kbps RMC configured in Test Loop Mode 1, using the highest body SAR configuration in 12.2 kbps RMC without HSDPA.

HSDPA should be configured according to the UE category of a test device. The number of HS-DSCH/HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No. RZA2010-0253

Page 11 of 138

stable transmission condition, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4 ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors(β_c, β_d), and HS-DPCCH power offset parameters(Δ_{ACK} , Δ_{NACK} , Δ_{CQI}) should be set according to values indicated in the Table below. The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the H-set.

Table 3: Subtests for UMTS Release 5 HSDPA

Sub-set	β_c	β_d	β_d (SF)	β_c / β_d	β_{hs} (note 1, note 2)	CM (dB) (note 3)	MPR(dB)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (note 4)	15/15 (note 4)	64	12/15 (note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$

Note2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1.A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 8$ ($A_{hs} = 30/15$) with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta_{CQI} = 7$ ($A_{hs} = 24/15$) with $\beta_{hs} = 24/15 * \beta_c$.

Note3: CM=1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TFC1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Table 4: Settings of required H-Set 1 QPSK in HSDPA mode

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	534
Inter-TTI Distance	TTI's	3
Number of HARQ Processes	Processes	2
Information Bit Payload (N_{INF})	Bits	3202
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	4800
Total Available SML's in UE	SML's	19000
Number of SML's per HARQ Proc.	SML's	9600
Coding Rate	/	0.67
Number of Physical Channel Codes	Codes	5
Modulation	/	QPSK

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RZA2010-0253

Page 12 of 138

Table 5: HSDPA UE category

HS-DSCH Category	Maximum HS-DSCH Codes Received	Minimum Inter-TTI Interval	Maximum Transport Bits/HS-DSCH	Total Channel
1	5	3	7298	19000
2	5	3	7298	28800
3	5	2	7298	28800
4	5	2	7298	38400
5	5	1	7298	57600
6	5	1	7298	67200
7	10	1	14411	115200
8	10	1	14411	134400
9	15	1	25251	172800
10	15	1	27952	172800
11	5	2	3630	14400
12	5	1	3630	28800
13	15	1	34800	259200
14	15	1	42196	259200
15	15	1	23370	345600
16	15	1	27952	345600

2.5. HSUPA Test Configuration

Body SAR is also measured for HSPA when the maximum average output of each RF channel with HSPA active is at least ¼ dB higher than that measured without HSPA using 12.2 kbps RMC or the maximum SAR for 12.2 kbps RMC is above 75% of the SAR limit. Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 with power control algorithm 2, according to the highest body SAR configuration in 12.2 kbps RMC without HSPA.⁴⁰

Due to inner loop power control requirements in HSPA, a commercial communication test set should be used for the output power and SAR tests.⁴¹ The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSPA should be configured according to the β values indicated below as well as other applicable procedures described in the 'WCDMA Handset' and 'Release 5 HSDPA Data Devices' sections of 3 G device.

Table 6: Sub-Test 5 Setup for Release 6 HSUPA

Sub-set	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM (2) (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS- DPCCH, E-DPDCH and E-

DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the

signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the

signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Figure 5.1g.

Note 6: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Test Report

Page 14 of 138

Table 7: HSUPA UE category

UE E-DCH Category	Maximum E-DCH Codes Transmitted	Number of HARQ Processes	E-DCH TTI (ms)	Minimum Spreading Factor	Maximum E-DCH Transport Block Bits	Max Rate (Mbps)
1	1	4	10	4	7110	0.7296
2	2	8	2	4	2798	1.4592
	2	4	10	4	14484	
3	2	4	10	4	14484	1.4592
4	2	8	2	2	5772	2.9185
	2	4	10	2	20000	2.00
5	2	4	10	2	20000	2.00
6 (No DPDCH)	4	8	2	2 SF2 & 2 SF4	11484	5.76
	4	4	10		20000	2.00
7 (No DPDCH)	4	8	2	2 SF2 & 2 SF4	22996	?
	4	4	10		20000	?
NOTE: When 4 codes are transmitted in parallel, two codes shall be transmitted with SF2 and two with SF4. UE Categories 1 to 6 supports QPSK only. UE Category 7 supports QPSK and 16QAM. (TS25.306-7.3.0)						

2.6. Position of module in Portable devices

The measurements were performed in combination with a host product (Lenovo Y-450) through a 19 cm USB cable.

For each mode, the EUT is tested at the following 5 test positions (Figure 1). From the results of Test Positions 2, 3 and 5, identify the position with the highest reported SAR. Along a line between the identified test position with the highest SAR and Test Position 4, average pick two new test positions and repeat the SAR test stated above for these two new test positions, they are test position 6 and test position 7.

The EUT is connected to the portable computer through a 19 cm USB cable. The EUT is away from the bottom of the flat phantom 5mm (ANNEX H).

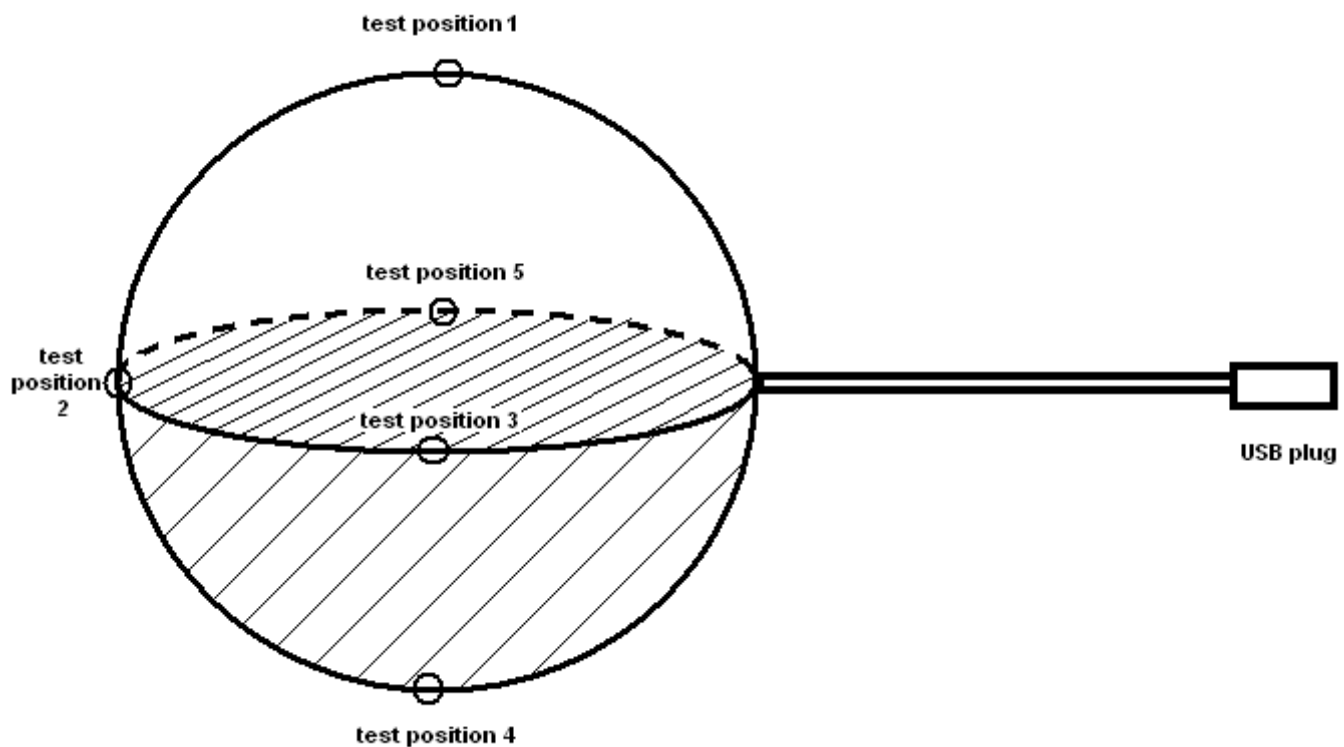


Figure 1. Test Position

2.7. Picture of host product

During the test, Lenovo Y-450 laptop was used as an assistant to help to setup communication. (See Picture 1)



Picture 1-a: Lenovo Y-450 Close



Picture 1-b: Lenovo Y-450 Open



Picture 1-c: Lenovo Y-450 with horizontal USB slot



Picture 1-d: a 19 cm USB cable

Picture 1: Computer as a test assistant

3. SAR Measurements System Configuration

3.1. SAR Measurement Set-up

The DASY4 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- A unit to operate the optical surface detector which is connected to the EOC.
- The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY4 measurement server.
- The DASY4 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 2003
- DASY4 software and SEMCAD data evaluation software.
- Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
- The generic twin phantom enabling the testing of left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- System validation dipoles allowing to validate the proper functioning of the system.

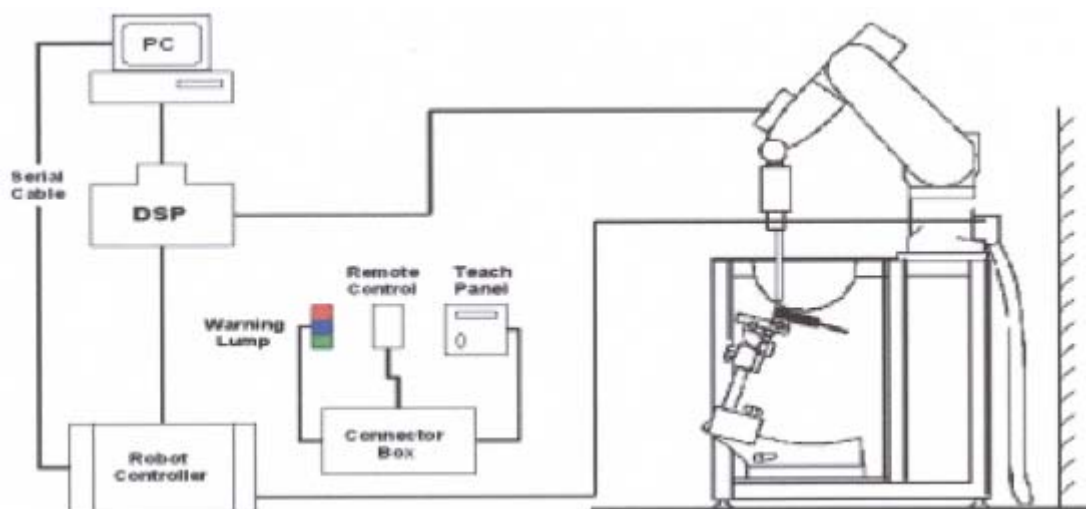


Figure 2. SAR Lab Test Measurement Set-up

3.2. DASY4 E-field Probe System

The SAR measurements were conducted with the dosimetric probe EX3DV4 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

1.1.1. EX3DV4 Probe Specification

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	Basic Broad Band Calibration in air Conversion Factors (CF) for HSL 900 and HSL 1750 Additional CF for other liquids and frequencies upon request
Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.



Figure 3. EX3DV4 E-field Probe



Figure 4. EX3DV4 E-field probe

3.2.1. E-field Probe Calibration

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy was evaluated and found to be better than $\pm 0.25\text{dB}$. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$\text{SAR} = C \frac{\Delta T}{\Delta t}$$

Where: Δt = Exposure time (30 seconds),

C = Heat capacity of tissue (brain or muscle),

ΔT = Temperature increase due to RF exposure.

Or

$$\text{SAR} = \frac{|E|^2 \sigma}{\rho}$$

Where:

σ = Simulated tissue conductivity,

ρ = Tissue density (kg/m^3).

3.3. Other Test Equipment

3.3.1. Device Holder for Transmitters

Construction: Simple but effective and easy-to-use extension for Mounting Device that facilitates the testing of larger devices according to IEC 62209-2 (e.g., laptops, cameras, etc.) It is lightweight and fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin SAM, ELI4 and SAM v6.0 Phantoms.

Material: POM, Acrylic glass, Foam

3.3.2. Phantom

The Generic Twin Phantom is constructed of a fiberglass shell integrated in a wooden Figure. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

Shell Thickness	2±0.1 mm
Filling Volume	Approx. 20 liters
Dimensions	810 x 1000 x 500 mm (H x L x W)
Available	Special



Figure 5. Generic Twin Phantom

3.4. Scanning procedure

The DASY4 installation includes predefined files with recommended procedures for measurements and validation. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

- The "reference" and "drift" measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT's output power and should vary max. $\pm 5\%$.
- The "surface check" measurement tests the optical surface detection system of the DASY4 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above $\pm 0.1\text{mm}$). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within $\pm 30^\circ$.)

- **Area Scan**

The Area Scan is used as a fast scan in two dimensions to find the area of high field values before running a detailed measurement around the hot spot. Before starting the area scan a grid spacing of 10 mm x 10 mm is set. During the scan the distance of the probe to the phantom remains

unchanged.

After finishing area scan, the field maxima within a range of 2 dB will be ascertained.

- **Zoom Scan**

Zoom Scans are used to estimate the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default Zoom Scan is done by 7x7x7 points within a cube whose base is centered around the maxima found in the preceding area scan.

- **Spatial Peak Detection**

The procedure for spatial peak SAR evaluation has been implemented and can determine values of masses of 1g and 10g, as well as for user-specific masses. The DASY4 system allows evaluations that combine measured data and robot positions, such as:

- maximum search
- extrapolation
- boundary correction
- peak search for averaged SAR

During a maximum search, global and local maxima searches are automatically performed in 2-D after each Area Scan measurement with at least 6 measurement points. It is based on the evaluation of the local SAR gradient calculated by the Quadratic Shepard's method. The algorithm will find the global maximum and all local maxima within -2 dB of the global maxima for all SAR distributions.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation. Extrapolation routines require at least 10 measurement points in 3-D space. They are used in the Zoom Scan to obtain SAR values between the lowest measurement points and the inner phantom surface. The routine uses the modified Quadratic Shepard's method for extrapolation. For a grid using 7x7x7 measurement points with 5mm resolution amounting to 343 measurement points, the uncertainty of the extrapolation routines is less than 1% for 1g and 10g cubes.

- A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube 7x7x7 scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 5mm steps.

3.5. Data Storage and Evaluation

3.5.1. Data Storage

The DASY4 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension ".DA4". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

3.5.2. Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Normi, a_{i0} , a_{i1} , a_{i2}
	- Conversion factor	ConvF _i
	- Diode compression point	Dcp _i
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	
	- Density	

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY4 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No. RZA2010-0253

Page 23 of 138

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot c f / d c p_i$$

With V_i = compensated signal of channel i (i = x, y, z)

U_i = input signal of channel i (i = x, y, z)

cf = crest factor of exciting field (DASY parameter)

dcp_i = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes: $E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$

H-field probes: $H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1} f + a_{i2} f^2) / f$

With V_i = compensated signal of channel i (i = x, y, z)

$Norm_i$ = sensor sensitivity of channel i (i = x, y, z)
[mV/(V/m)²] for E-field Probes

$ConvF$ = sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot \rho) / (\cdot 1000)$$

with **SAR** = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

ρ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with **P_{pwe}** = equivalent power density of a plane wave in mW/cm²

E_{tot} = total electric field strength in V/m

H_{tot} = total magnetic field strength in A/m

3.6. System check

The manufacturer calibrates the probes annually. Dielectric parameters of the tissue simulants were measured every day using the dielectric probe kit and the network analyser. A system check measurement was made following the determination of the dielectric parameters of the simulant, using the dipole validation kit. A power level of 250 mW was supplied to the dipole antenna, which was placed under the flat section of the twin SAM phantom. The system check results (dielectric parameters and SAR values) are given in the table 12.

System check results have to be equal or near the values determined during dipole calibration with the relevant liquids and test system ($\pm 10\%$).

System check is performed regularly on all frequency bands where tests are performed with the DASY 4 system.

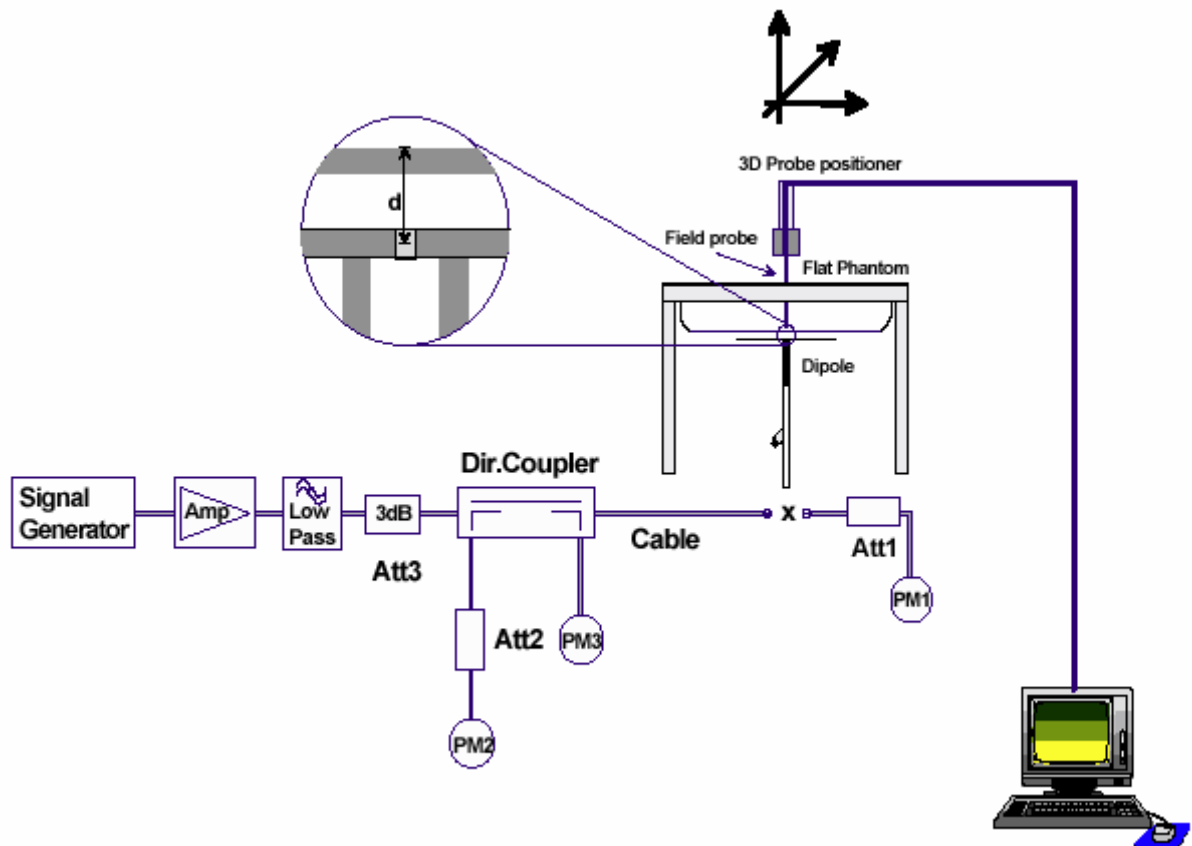


Figure 6. System Check Set-up

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RZA2010-0253

Page 26 of 138

3.7. Equivalent Tissues

The liquid is consisted of water, sugar, salt, Glycol monobutyl, Preventol and Cellulose. The liquid has previously been proven to be suited for worst-case. The Table 8 shows the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by OET 65.

Table 8: Composition of the Body Tissue Equivalent Matter

MIXTURE%	FREQUENCY(Body)835MHz
Water	52.5
Sugar	45
Salt	1.4
Preventol	0.1
Cellulose	1.0
Dielectric Parameters Target Value	f=835MHz $\epsilon=55.2$ $\sigma=0.97$

MIXTURE%	FREQUENCY (Body) 1900MHz
Water	69.91
Glycol monobutyl	29.96
Salt	0.13
Dielectric Parameters Target Value	f=1900MHz $\epsilon=53.3$ $\sigma=1.52$

4. Laboratory Environment

Table 9: The Ambient Conditions during Test

Temperature	Min. = 20°C, Max. = 25 °C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5 Ω
Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

5. Characteristics of the Test

5.1. Applicable Limit Regulations

IEEE Std C95.1, 1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 KHz to 300 GHz.

5.2. Applicable Measurement Standards

Supplement C Edition 01-01 to OET Bulletin 65 Edition 97-01 June 2001 including DA 02-1438, published June 2002: Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields Additional Information for Evaluation Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions.

IEC 62209-2 Ed.1(2008-10): Human exposure to radio frequency fields from handheld and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 2: Procedure to determine the Specific Absorption Rate (SAR)for wireless communication devices used in close proximity to the human body-(frequency rang of 30MHz to 6GHz).

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No. RZA2010-0253

Page 28 of 138

6. Conducted Output Power Measurement

6.1. Summary

The DUT is tested using an E5515C communications tester as controller unit to set test channels and maximum output power to the DUT, as well as for measuring the conducted power.

Conducted output power was measured using an integrated RF connector and attached RF cable.

This result contains conducted output power for the EUT.

6.2. Conducted Power Results

Table 10: Conducted Power Measurement Results

GSM 850+GPRS		Conducted Power		
		Channel 128	Channel 192	Channel 251
		(824.2MHz)	(837MHz)	(848.8MHz)
1 timeslot	Before Test (dBm)	33.05	32.97	32.90
	After Test (dBm)	33.03	32.98	32.92
2 timeslots	Before Test (dBm)	29.99	29.75	29.69
	After Test (dBm)	29.98	29.73	29.70
GSM 850+EGPRS		Conducted Power		
		Channel 128	Channel 192	Channel 251
		(824.2MHz)	(837MHz)	(848.8MHz)
1 timeslot	Before Test (dBm)	26.89	26.62	26.53
	After Test (dBm)	26.87	26.61	26.55
2 timeslots	Before Test (dBm)	24.14	23.88	23.77
	After Test (dBm)	24.17	23.87	23.76
3 timeslots	Before Test (dBm)	21.77	21.61	21.49
	After Test (dBm)	21.75	21.62	21.51
4 timeslots	Before Test (dBm)	19.94	19.72	19.49
	After Test (dBm)	19.95	19.74	19.46
GSM 1900+GPRS		Conducted Power		
		Channel 512	Channel 661	Channel 810
		(1850.2MHz)	(1880MHz)	(1909.8MHz)
1 timeslot	Before Test (dBm)	30.05	30.12	29.74
	After Test (dBm)	30.07	30.13	29.72
2 timeslots	Before Test (dBm)	27.00	27.15	26.84

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No. RZA2010-0253

Page 29 of 138

	After Test (dBm)	27.01	27.14	26.86
GSM 1900+EGPRS		Conducted Power		
		Channel 512	Channel 661	Channel 810
		(1850.2MHz)	(1880MHz)	(1909.8MHz)
1 timeslot	Before Test (dBm)	25.45	25.62	25.33
	After Test (dBm)	25.46	25.63	25.32
2 timeslots	Before Test (dBm)	22.57	23.27	23.02
	After Test (dBm)	22.54	23.28	23.01
3 timeslots	Before Test (dBm)	20.74	20.90	20.70
	After Test (dBm)	20.75	20.92	20.69
4 timeslots	Before Test (dBm)	18.76	18.90	18.70
	After Test (dBm)	18.77	18.92	18.71
WCDMA Band V		Conducted Power		
		Channel 4132	Channel 4183	Channel 4233
		(826.4MHz)	(836.6MHz)	(846.6MHz)
12.2kbps RMC	Before Test (dBm)	21.78	21.61	21.72
	After Test (dBm)	21.79	21.62	21.70
64kbps RMC	Before Test (dBm)	21.73	21.69	21.61
	After Test (dBm)	21.72	21.67	21.63
144kbps RMC	Before Test (dBm)	21.77	21.60	21.75
	After Test (dBm)	21.75	21.62	21.78
384kbps RMC	Before Test (dBm)	21.80	21.66	21.64
	After Test (dBm)	21.80	21.67	21.62
WCDMA Band V+HSDPA		Conducted Power		
		Channel 4132	Channel 4183	Channel 4233
		(826.4MHz)	(836.6MHz)	(846.6MHz)
Sub Test - 1	Before Test (dBm)	21.69	21.70	21.74
	After Test (dBm)	21.70	21.72	21.75
Sub Test - 2	Before Test (dBm)	21.40	21.34	21.41
	After Test (dBm)	21.42	21.32	21.43
Sub Test - 3	Before Test (dBm)	21.29	21.24	21.33
	After Test (dBm)	21.27	21.25	21.34
Sub Test - 4	Before Test (dBm)	21.26	21.19	21.24
	After Test (dBm)	21.25	21.20	21.26
WCDMA Band V+HSUPA		Conducted Power		

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No. RZA2010-0253

Page 30 of 138

		Channel 4132 (826.4MHz)	Channel 4183 (836.6MHz)	Channel 4233 (846.6MHz)
Sub Test - 1	Before Test (dBm)	20.80	20.93	20.72
	After Test (dBm)	20.81	20.92	20.73
Sub Test - 2	Before Test (dBm)	19.66	19.51	19.24
	After Test (dBm)	19.65	19.52	19.26
Sub Test - 3	Before Test (dBm)	20.59	20.94	20.81
	After Test (dBm)	20.57	20.92	20.83
Sub Test - 4	Before Test (dBm)	19.77	20.09	19.88
	After Test (dBm)	19.76	20.07	19.89
Sub Test - 5	Before Test (dBm)	21.28	20.97	20.62
	After Test (dBm)	21.29	20.96	20.65
WCDMA Band II		Conducted Power		
		Channel 9262	Channel 9400	Channel 9538
		(1852.4MHz)	(1880MHz)	(1907.6MHz)
12.2kbps RMC	Before Test (dBm)	21.80	21.79	22.03
	After Test (dBm)	21.81	21.76	22.05
64kbps RMC	Before Test (dBm)	21.77	21.74	22.00
	After Test (dBm)	21.76	21.72	22.03
144kbps RMC	Before Test (dBm)	21.75	21.81	22.05
	After Test (dBm)	21.74	21.80	22.07
384kbps RMC	Before Test (dBm)	21.83	21.88	22.02
	After Test (dBm)	21.82	21.89	22.04
WCDMA Band II+HSDPA		Conducted Power		
		Channel 9262	Channel 9400	Channel 9538
		(1852.4MHz)	(1880MHz)	(1907.6MHz)
Sub Test - 1	Before Test (dBm)	21.71	21.78	22.05
	After Test (dBm)	21.70	21.76	22.03
Sub Test - 2	Before Test (dBm)	21.63	21.56	21.83
	After Test (dBm)	21.65	21.57	21.85
Sub Test - 3	Before Test (dBm)	21.57	21.30	21.66
	After Test (dBm)	21.54	21.32	21.65
Sub Test - 4	Before Test (dBm)	21.55	21.32	21.70
	After Test (dBm)	21.53	21.31	21.71
WCDMA Band II+HSUPA		Conducted Power		

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RZA2010-0253

Page 31 of 138

		Channel 9262 (1852.4MHz)	Channel 9400 (1880MHz)	Channel 9538 (1907.6MHz)
Sub Test - 1	Before Test (dBm)	20.55	20.60	20.29
	After Test (dBm)	20.53	20.62	20.30
Sub Test - 2	Before Test (dBm)	19.72	19.64	19.71
	After Test (dBm)	19.71	19.65	19.73
Sub Test - 3	Before Test (dBm)	20.30	20.54	20.27
	After Test (dBm)	20.31	20.56	20.28
Sub Test - 4	Before Test (dBm)	19.81	20.19	19.97
	After Test (dBm)	19.83	20.20	19.99
Sub Test - 5	Before Test (dBm)	21.12	20.60	20.28
	After Test (dBm)	21.13	20.62	20.29

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No. RZA2010-0253

Page 32 of 138

7. Test Results

7.1. Dielectric Performance

Table 11: Dielectric Performance of Body Tissue Simulating Liquid

Frequency	Description	Dielectric Parameters		Temp ℃
		ϵ_r	$\sigma(\text{s/m})$	
835MHz (body)	Target value $\pm 5\%$ window	55.20 52.44 — 57.96	0.97 0.92 — 1.02	/
	Measurement value 2010-03-17	54.03	1.01	21.5
1900MHz (body)	Target value $\pm 5\%$ window	53.30 50.64 — 55.97	1.52 1.44 — 1.60	/
	Measurement value 2010-03-16	52.41	1.54	21.7

7.2. System Check

Table 12: System Check for Body tissue stimulant

Frequency	Description	SAR(W/kg)		Dielectric Parameters		Temp ℃
		10g	1g	ϵ_r	$\sigma(\text{s/m})$	
835MHz	Target value $\pm 10\%$ window	1.68 1.51 - 1.85	2.56 2.30 - 2.82	53	0.99	/
	Measurement value 2010-03-17	1.68	2.56	54.03	1.01	21.9
1900 MHz	Target value $\pm 10\%$ window	5.52 4.97—6.07	10.50 9.45 — 11.55	54.00	1.55	/
	Measurement value 2010-03-16	5.17	9.73	52.41	1.54	21.7

Note: 1. The graph results see ANNEX B.

2. Target Values used derive from the calibration certificate and 250 mW is used as feeding power to the Calibrated dipole.

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No. RZA2010-0253

Page 33 of 138

7.3. Summary of Measurement Results

7.3.1. GSM850 (GPRS/EGPRS)

Table 13: SAR Values [GSM850 (GPRS/EGPRS)]

Limit of SAR (W/kg)			10 g Average	1g Average	Power Drift(dB)	Graph Results
			2.0	1.6	± 0.21	
Test Case Of Body			Measurement Result (W/kg)		Power Drift(dB)	
Different Test Position	Different Timeslots	Channel	10 g Average	1 g Average		
Lenovo Y-450						
Test Position 4	2 timeslots	Middle	0.150	0.266	-0.028	Figure 9
	1 timeslot	Middle	0.146	0.258	0.105	Figure 10
Test Position 1	2 timeslots	Middle	0.090	0.130	0.093	Figure 11
Test Position 2	2 timeslots	Middle	0.108	0.206	-0.155	Figure 12
Test Position 3	2 timeslots	Middle	0.066	0.094	-0.003	Figure 13
Test Position 5	2 timeslots	Middle	0.068	0.093	0.045	Figure 14
Test Position 6	2 timeslots	Middle	0.270	0.470	-0.121	Figure 15
Test Position 7	2 timeslots	High	0.282	0.501	-0.043	Figure 16
		Middle	0.319	0.553	-0.127	Figure 17
		Low	0.307	0.525	-0.060	Figure 18
Worst case position of GPRS with EGPRS						
Test Position 7	4 timeslots	Middle	0.290	0.494	0.043	Figure 19
	3 timeslots	Middle	0.268	0.503	0.033	Figure 20
	2 timeslots	Middle	0.306	0.530	-0.122	Figure 21
	1 timeslot	Middle	0.298	0.517	-0.179	Figure 22

Note: 1. The value with blue color is the maximum SAR Value of each test band.

- The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB (< 0.8W/kg) lower than the SAR limit, testing at the high and low channels is optional.
- Upper and lower frequencies were measured at the worst case.

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RZA2010-0253

Page 34 of 138

Table 14: SAR Values [GSM850, enhanced energy coupling at increased separation distances]

Different Test Position	Distance of EUT to Phantom	Channel	Measurement Result (W/kg)	50% of initial position SAR (W/kg)	125% of initial position SAR (W/kg)
Test Position 7	initial position	Middle	0.642	0.321	0.802
	5mm		0.389		
	10mm		0.251		

Note: 1. The probe tip location is fixed at the distance of 2mm from the phantom surface.

2. when the device position with the highest point SAR is > 25% of that measured at the initial position, a complete 1-g SAR evaluation is required for this configuration.

3. A single point SAR is measured for each of these device positions until the SAR is less than 50% of that measured at the initial position.

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No. RZA2010-0253

Page 35 of 138

7.3.2. GSM1900 (GPRS/EGPRS)

Table 15: [GSM1900 (GPRS/EGPRS)]

Limit of SAR (W/kg)			10 g Average	1g Average	Power Drift(dB)	Graph Results
			2.0	1.6	± 0.21	
Test Case Of Body			Measurement Result (W/kg)		Power Drift(dB)	
Different Test Position	Different Timeslots	Channel	10 g Average	1 g Average	Power Drift(dB)	
Lenovo Y-450						
Test Position 4	2 timeslots	Middle	0.417	0.745	0.081	Figure 23
	1 timeslot	High	0.455	0.817	0.011	Figure 24
		Middle	0.436	0.778	0.194	Figure 25
		Low	0.396	0.702	0.086	Figure 26
Test Position 1	1 timeslot	Middle	0.046	0.072	-0.089	Figure 27
Test Position 2	1 timeslot	Middle	0.267	0.475	-0.007	Figure 28
Test Position 3	1 timeslot	Middle	0.208	0.382	0.095	Figure 29
Test Position 5	1 timeslot	Middle	0.108	0.187	0.144	Figure 30
Test Position 6	1 timeslot	Middle	0.358	0.618	-0.147	Figure 31
Test Position 7	1 timeslot	Middle	0.328	0.578	0.191	Figure 32
Worst case position of GPRS with EGPRS						
Test Position 4	4 timeslots	High	0.320	0.573	-0.157	Figure 33
	3 timeslots	High	0.352	0.637	-0.196	Figure 34
	2 timeslots	High	0.435	0.789	-0.031	Figure 35
	1 timeslot	High	0.456	0.828	0.038	Figure 36

Note: 1. The value with blue color is the maximum SAR Value of each test band.

- The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB (< 0.8W/kg) lower than the SAR limit, testing at the high and low channels is optional.
- Upper and lower frequencies were measured at the worst case.

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RZA2010-0253

Page 36 of 138

Table 16: SAR Values [GSM1900, enhanced energy coupling at increased separation distances]

Different Test Position	Distance of EUT to Phantom	Channel	Measurement Result (W/kg)	50% of initial position SAR (W/kg)	125% of initial position SAR (W/kg)
Test Position 4	initial position	High	0.782	0.391	0.978
	5mm		0.457		
	10mm		0.313		

Note: 1. The probe tip location is fixed at the distance of 2mm from the phantom surface.

2. when the device position with the highest point SAR is > 25% of that measured at the initial position, a complete 1-g SAR evaluation is required for this configuration.

3. A single point SAR is measured for each of these device positions until the SAR is less than 50% of that measured at the initial position.

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No. RZA2010-0253

Page 37 of 138

7.3.3. WCDMA Band II (WCDMA/HSDPA/HSUPA)

Table 17: SAR Values [WCDMA Band II (WCDMA/HSDPA/HSUPA)]

Limit of SAR (W/kg)		10 g Average	1g Average	Power Drift (dB)	Graph Results
		2.0	1.6	± 0.21	
Test Case Of Body		Measurement Result (W/kg)		Power Drift (dB)	
		10 g Average	1 g Average		
Different Test Position	Channel				
Lenovo Y-450					
Test Position 4	High	0.500	0.904	0.059	Figure 37
	Middle	0.544	0.973	-0.105	Figure 38
	Low	0.450	0.800	0.040	Figure 39
Test Position 1	Middle	0.060	0.095	0.173	Figure 40
Test Position 2	Middle	0.382	0.685	0.063	Figure 41
Test Position 3	Middle	0.242	0.446	0.173	Figure 42
Test Position 5	Middle	0.132	0.230	-0.042	Figure 43
Test Position 6	High	0.435	0.757	0.173	Figure 44
	Middle	0.469	0.809	0.165	Figure 45
	Low	0.416	0.717	0.028	Figure 46
Test Position 7	Middle	0.394	0.692	0.173	Figure 47
Worst case position of RMC with HSDPA					
Test Position 4	Middle	0.483	0.869	-0.104	Figure 48
Worst case position of RMC with HSUPA					
Test Position 4	Middle	0.367	0.654	-0.175	Figure 49

Note: 1. The value with blue color is the maximum SAR Value of each test band.

- The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB (< 0.8W/kg) lower than the SAR limit, testing at the high and low channels is optional.
- Upper and lower frequencies were measured at the worst case.

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RZA2010-0253

Page 38 of 138

Table 18: SAR Values [WCDMA Band II, enhanced energy coupling at increased separation distances]

Different Test Position	Distance of EUT to Phantom	Channel	Measurement Result (W/kg)	50% of initial position SAR (W/kg)	125% of initial position SAR (W/kg)
Test Position 4	initial position	Middle	1.199	0.600	1.499
	5mm		0.681		
	10mm		0.375		

Note: 1. The probe tip location is fixed at the distance of 2mm from the phantom surface.

2. when the device position with the highest point SAR is > 25% of that measured at the initial position, a complete 1-g SAR evaluation is required for this configuration.

3. A single point SAR is measured for each of these device positions until the SAR is less than 50% of that measured at the initial position.

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No. RZA2010-0253

Page 39 of 138

7.3.4. WCDMA Band V (WCDMA/HSDPA/HSUPA)

Table 19: SAR Values [WCDMA Band V (WCDMA/HSDPA/HSUPA)]

Limit of SAR (W/kg)		10 g Average	1g Average	Power Drift (dB)	Graph Results
		2.0	1.6	± 0.21	
Test Case Of Body		Measurement Result (W/kg)		Power Drift (dB)	
		10 g Average	1 g Average		
Different Test Position	Channel				
Lenovo Y-450					
Test Position 4	Middle	0.115	0.204	0.116	Figure 50
Test Position 1	Middle	0.073	0.104	0.094	Figure 51
Test Position 2	Middle	0.074	0.141	0.072	Figure 52
Test Position 3	Middle	0.054	0.076	0.019	Figure 53
Test Position 5	Middle	0.053	0.072	0.020	Figure 54
Test Position 6	Middle	0.179	0.313	-0.006	Figure 55
Test Position 7	High	0.263	0.455	0.050	Figure 56
	Middle	0.234	0.400	0.117	Figure 57
	Low	0.257	0.435	0.014	Figure 58
Worst case position of RMC with HSDPA					
Test Position 7	High	0.228	0.400	0.027	Figure 59
Worst case position of RMC with HSUPA					
Test Position 7	High	0.170	0.297	-0.187	Figure 60

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB (< 0.8W/kg) lower than the SAR limit, testing at the high and low channels is optional.
3. Upper and lower frequencies were measured at the worst case.

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RZA2010-0253

Page 40 of 138

Table 20: SAR Values [WCDMA Band V, enhanced energy coupling at increased separation distances]

Different Test Position	Distance of EUT to Phantom	Channel	Measurement Result (W/kg)	50% of initial position SAR (W/kg)	125% of initial position SAR (W/kg)
Test Position 7	initial position	High	0.277	0.138	0.346
	5mm		0.167		
	10mm		0.107		

Note: 1. The probe tip location is fixed at the distance of 2mm from the phantom surface.

2. when the device position with the highest point SAR is > 25% of that measured at the initial position, a complete 1-g SAR evaluation is required for this configuration.

3. A single point SAR is measured for each of these device positions until the SAR is less than 50% of that measured at the initial position.

7.4. Conclusion

Localized Specific Absorption Rate (SAR) of this portable wireless device has been measured in all cases requested by the relevant standards cited in Clause 5.2 of this report. Maximum localized SAR_{1g} is **0.973** W/kg that is below exposure limits specified in the relevant standards cited in Clause 5.1 of this test report.

No.	source	Type	Uncertainty Value (%)	Probability Distribution	k	c _i	Standard uncertainty u _i ' (%)	Degree of freedom V _{eff} or v _i
1	System repetivity	A	0.5	N	1	1	0.5	9
Measurement system								
2	probe calibration	B	5.9	N	1	1	5.9	∞
3	axial isotropy of the probe	B	4.7	R	√3	√0.5	1.9	∞
4	Hemispherical isotropy of the probe	B	9.4	R	√3	√0.5	3.9	∞
6	boundary effect	B	1.9	R	√3	1	1.1	∞
7	probe linearity	B	4.7	R	√3	1	2.7	∞
8	System detection limits	B	1.0	R	√3	1	0.6	∞
9	readout Electronics	B	1.0	N	1	1	1.0	∞
10	response time	B	0	R	√3	1	0	∞
11	integration time	B	4.32	R	√3	1	2.5	∞
12	noise	B	0	R	√3	1	0	∞
13	RF Ambient Conditions	B	3	R	√3	1	1.73	∞
14	Probe Positioner Mechanical Tolerance	B	0.4	R	√3	1	0.2	∞
15	Probe Positioning with respect to Phantom Shell	B	2.9	R	√3	1	1.7	∞
16	Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	B	3.9	R	√3	1	2.3	∞
Test sample Related								
17	-Test Sample Positioning	A	2.9	N	1	1	2.9	5
18	-Device Holder Uncertainty	A	4.1	N	1	1	4.1	5
19	-Output Power Variation - SAR drift measurement	B	5.0	R	√3	1	2.9	∞
Physical parameter								

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RZA2010-0253

Page 42 of 138

20	-phantom	B	4.0	R	$\sqrt{3}$	1	2.3	∞
21	-liquid conductivity (deviation from target)	B	5.0	R	$\sqrt{3}$	0.6 4	1.8	∞
22	-liquid conductivity (measurement uncertainty)	B	5.0	N	1	0.6 4	3.2	∞
23	-liquid permittivity (deviation from target)	B	5.0	R	$\sqrt{3}$	0.6	1.7	∞
24	-liquid permittivity (measurement uncertainty)	B	5.0	N	1	0.6	3.0	∞
Combined standard uncertainty		$u_c' = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$					12.0	
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$		N	k=2		24.0	


9. Main Test Instruments

Table 21: List of Main Instruments


No.	Name	Type	Serial Number	Calibration Date	Valid Period
01	Network analyzer	Agilent 8753E	US37390326	September 13, 2009	One year
02	Dielectric Probe Kit	Agilent 85070E	US44020115	No Calibration Requested	
03	Power meter	Agilent E4417A	GB41291714	March 13, 2010	One year
04	Signal Generator	HP 8341B	2730A00804	September 13, 2009	One year
05	Amplifier	IXA-020	0401	No Calibration Requested	
06	Validation Kit 835MHz	D835V2	4d082	July 13, 2009	One year
07	Validation Kit 1900MHz	D1900V2	5d018	June 26, 2009	One year
08	BTS	E5515C	MY48360988	December 4, 2009	One year
09	E-field Probe	EX3DV4	3677	September 23, 2009	One year
10	DAE	DAE4	871	November 11, 2009	One year

END OF REPORT BODY

ANNEX A: Test Layout

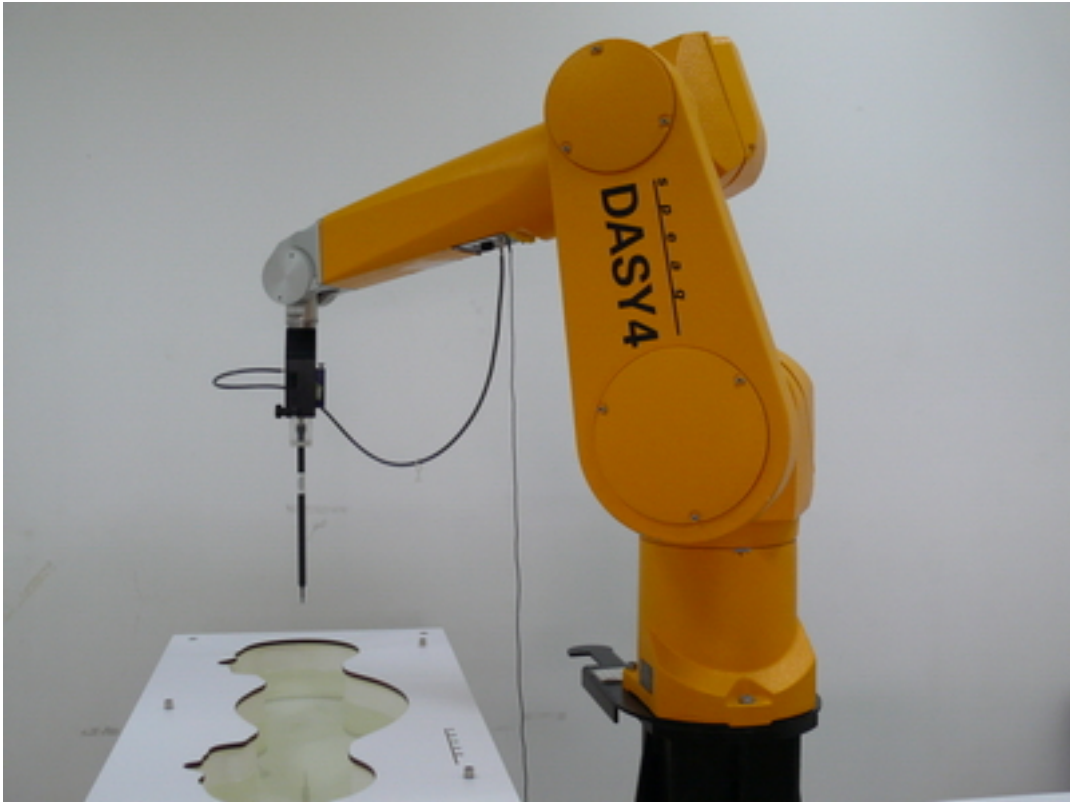

Picture 2: Specific Absorption Rate Test Layout

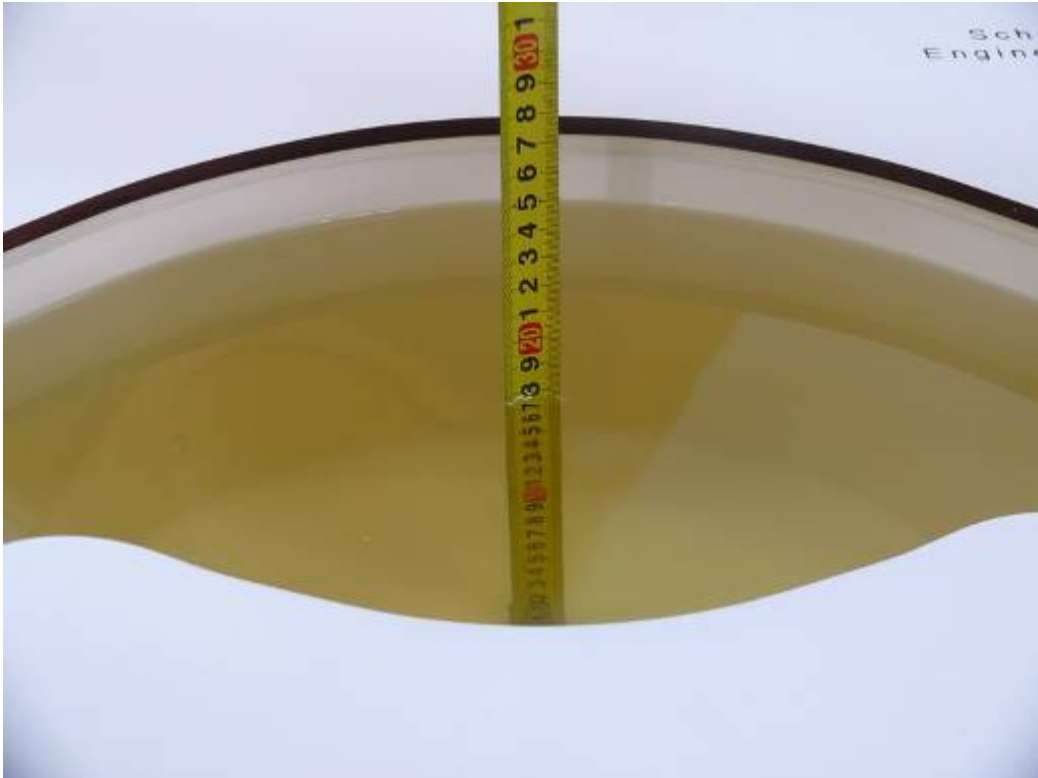

Picture 3: Liquid depth in the Flat Phantom (835 MHz)



Picture 4: Liquid depth in the Flat Phantom (1900 MHz)

ANNEX B: System Check Results

System Performance Check at 835 MHz

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d082

Date/Time: 3/17/2010 11:56:20 AM

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 1.01 \text{ mho/m}$; $\epsilon_r = 54.03$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.3°C Liquid Temperature: 21.5°C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

d=15mm, Pin=250mW/Area Scan (61x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.77 mW/g


d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 50.9 V/m ; Power Drift = 0.023 dB

Peak SAR (extrapolated) = 3.68 W/kg

SAR(1 g) = 2.56 mW/g ; SAR(10 g) = 1.68 mW/g

Maximum value of SAR (measured) = 2.77 mW/g

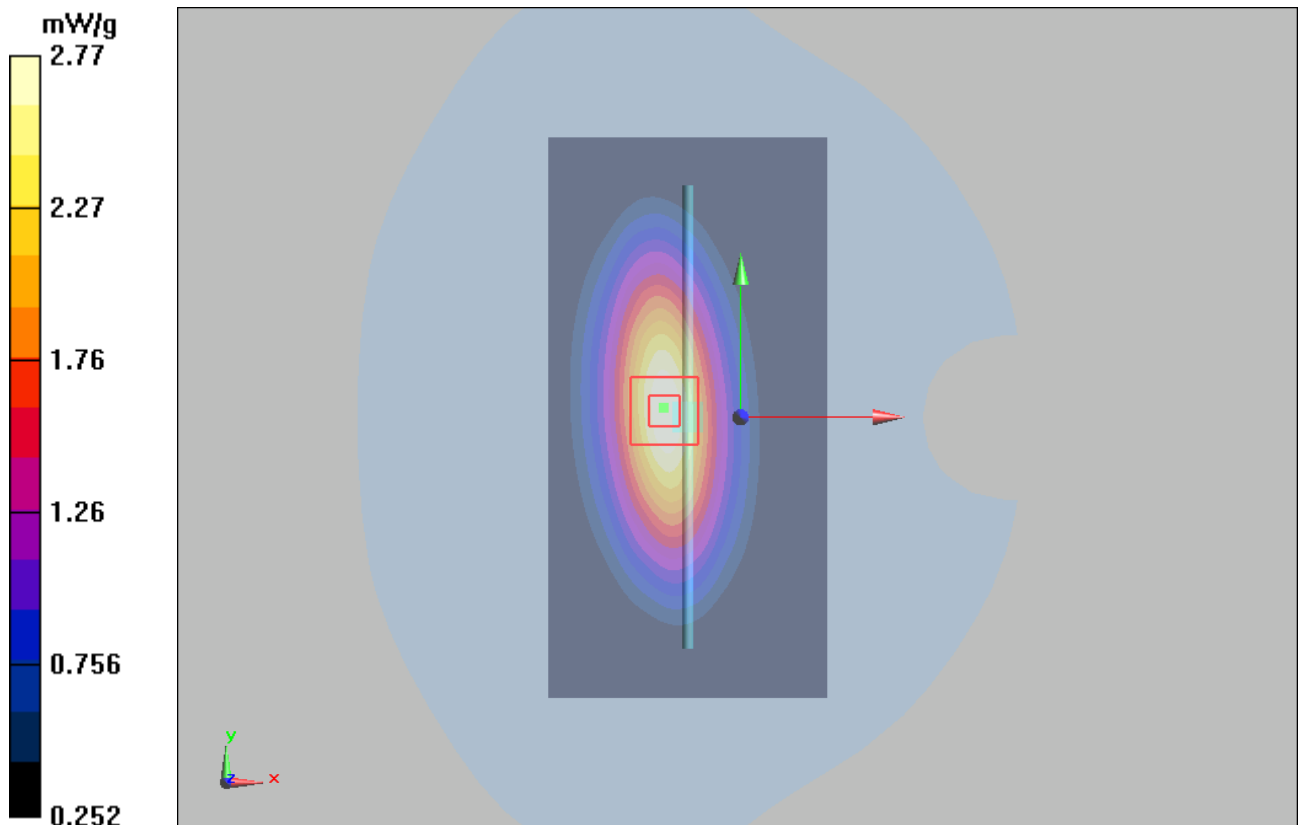

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RZA2010-0253

Page 46 of 138

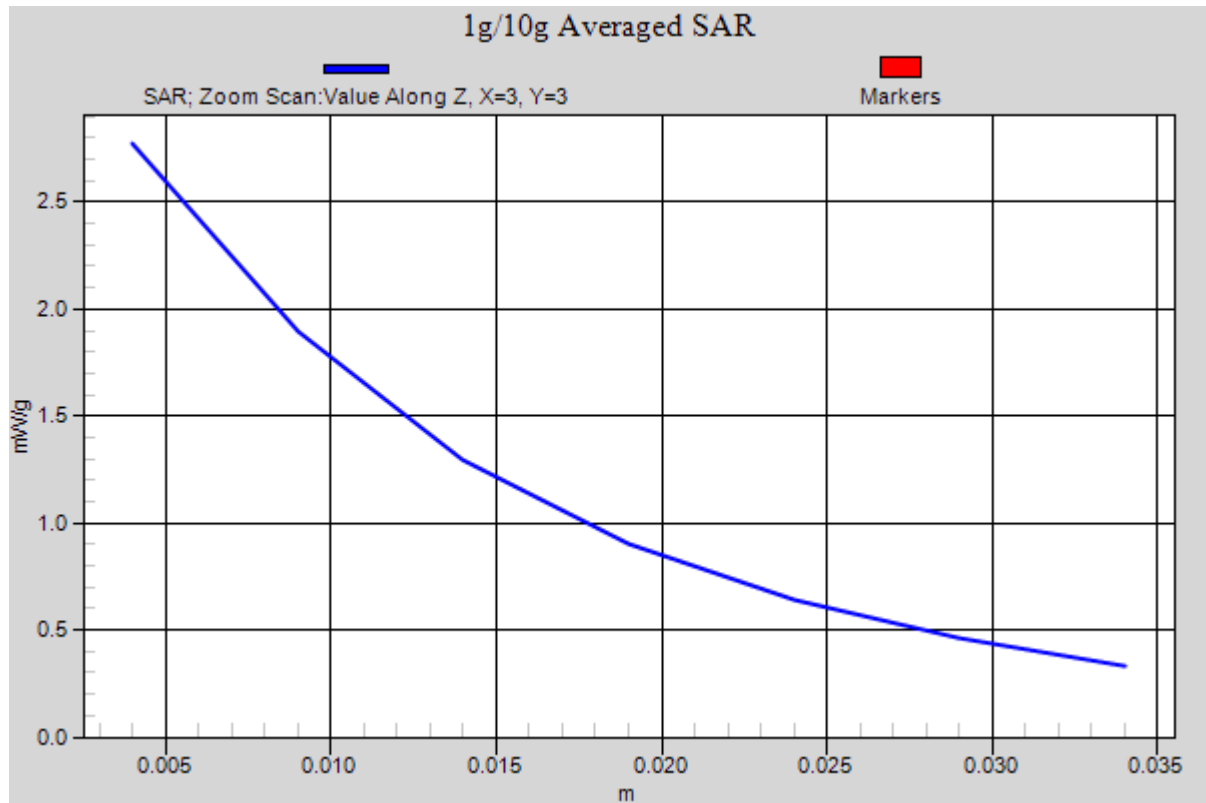


Figure 7 System Performance Check 835MHz 250mW

System Performance Check at 1900 MHz

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d018

Date/Time: 3/16/2010 10:25:19 AM

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 52.41$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

d=10mm, Pin=250mW/Area Scan (41x71x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 12.5 mW/g


d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 75.9 V/m; Power Drift = 0.051 dB

Peak SAR (extrapolated) = 16.8 W/kg

SAR(1 g) = 9.73 mW/g; SAR(10 g) = 5.17 mW/g

Maximum value of SAR (measured) = 11 mW/g

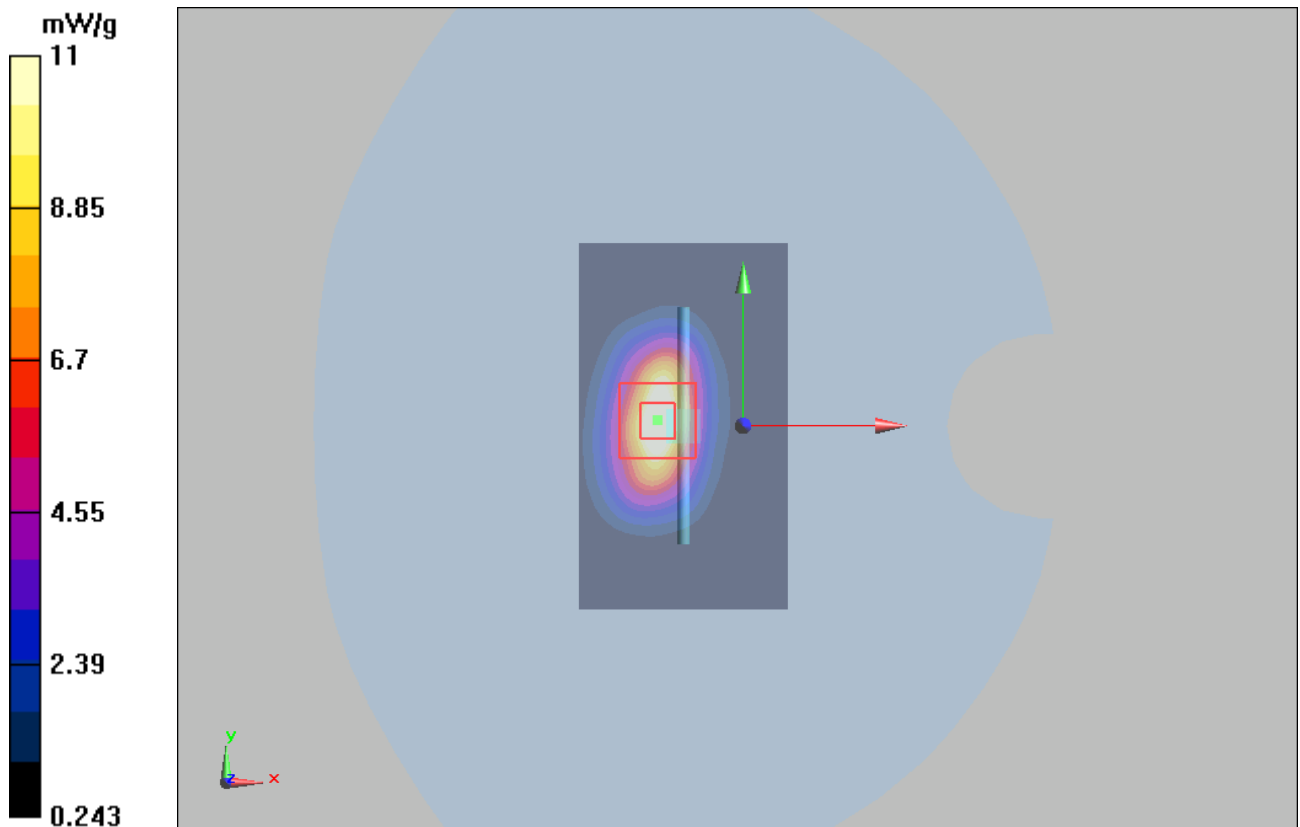

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RZA2010-0253

Page 48 of 138

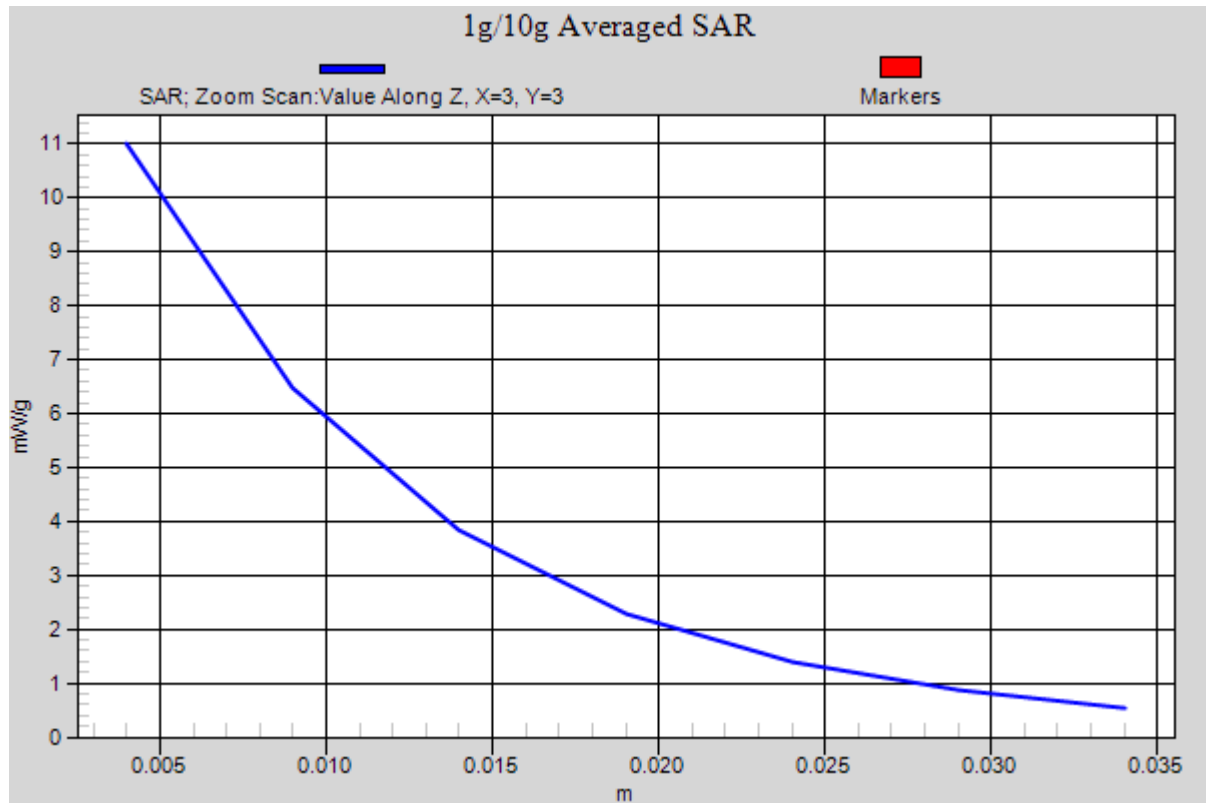


Figure 8 System Performance Check 1900MHz 250mW

ANNEX C: Graph Results

GSM 850 GPRS (2 timeslots in uplink) with Lenovo Y-450 Test Position 4 Middle

Date/Time: 3/17/2010 2:42:06 PM

Communication System: GSM850 + GPRS(2Up); Frequency: 837 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 1.01 \text{ mho/m}$; $\epsilon_r = 54$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.3°C Liquid Temperature: 21.5°C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 4 Middle/Area Scan (91x91x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (interpolated) = 0.298 mW/g

Test Position 4 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$,
 $dz=5\text{mm}$

Reference Value = 17.5 V/m ; Power Drift = -0.028 dB

Peak SAR (extrapolated) = 0.467 W/kg

SAR(1 g) = 0.266 mW/g ; SAR(10 g) = 0.150 mW/g

Maximum value of SAR (measured) = 0.298 mW/g

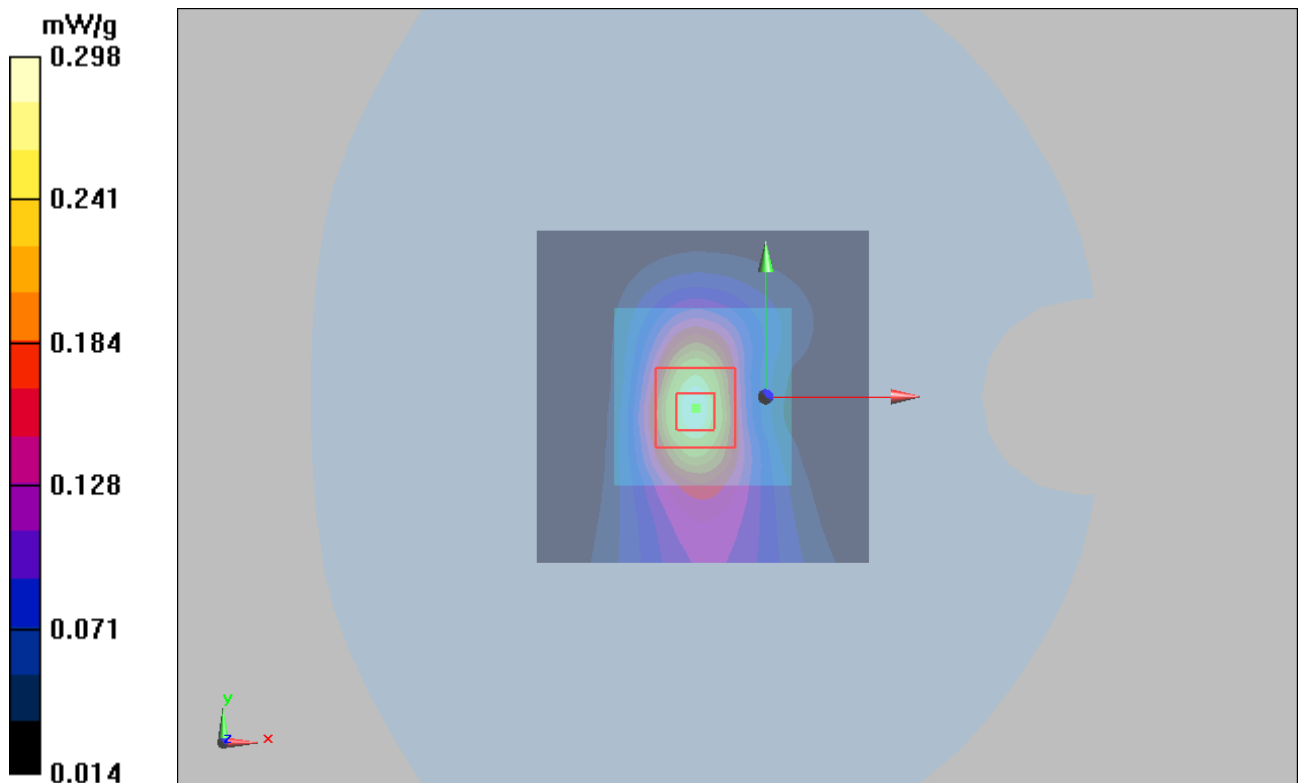


Figure 9 GSM 850 GPRS (2 timeslots in uplink) with Lenovo Y-450 Test Position 4 Channel 192

GSM 850 GPRS (1 timeslot in uplink) with Lenovo Y-450 Test Position 4 Middle

Date/Time: 3/17/2010 2:23:39 PM

Communication System: GSM850 + GPRS(1Up); Frequency: 837 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 1.01 \text{ mho/m}$; $\epsilon_r = 54$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.3°C Liquid Temperature: 21.5°C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 4 Middle/Area Scan (91x91x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (interpolated) = 0.285 mW/g

Test Position 4 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$,
 $dz=5\text{mm}$

Reference Value = 16.8 V/m ; Power Drift = 0.105 dB

Peak SAR (extrapolated) = 0.445 W/kg

SAR(1 g) = 0.258 mW/g ; SAR(10 g) = 0.146 mW/g

Maximum value of SAR (measured) = 0.288 mW/g

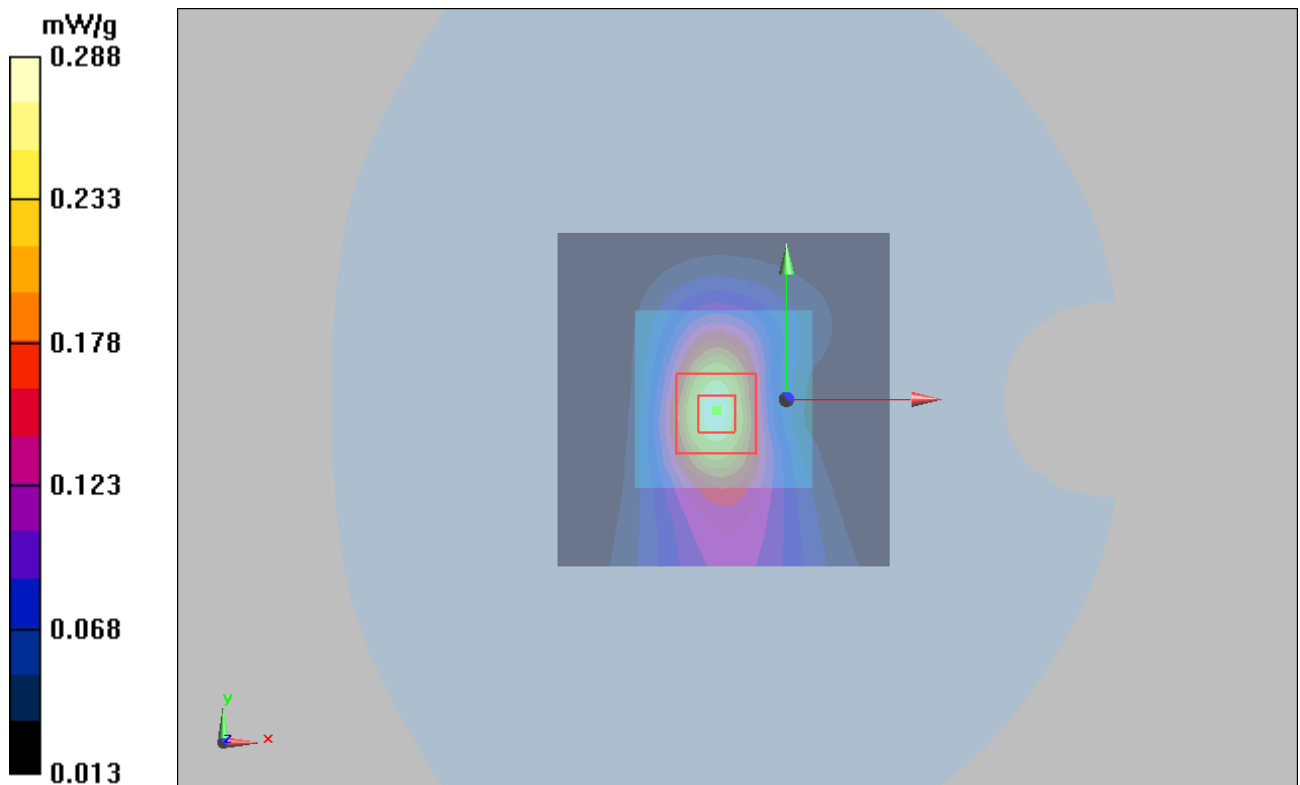


Figure 10 GSM 850 GPRS (1 timeslot in uplink) with Lenovo Y-450 Test Position 4 Channel 192

GSM 850 GPRS (2 timeslots in uplink) with Lenovo Y-450 Test Position 1 Middle

Date/Time: 3/17/2010 2:05:55 PM

Communication System: GSM850 + GPRS(2Up); Frequency: 837 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 1.01 \text{ mho/m}$; $\epsilon_r = 54$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.3°C Liquid Temperature: 21.5°C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 1 Middle/Area Scan (91x91x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (interpolated) = 0.138 mW/g

Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$,
 $dz=5\text{mm}$

Reference Value = 11.5 V/m ; Power Drift = 0.093 dB

Peak SAR (extrapolated) = 0.179 W/kg

SAR(1 g) = 0.130 mW/g ; SAR(10 g) = 0.090 mW/g

Maximum value of SAR (measured) = 0.139 mW/g

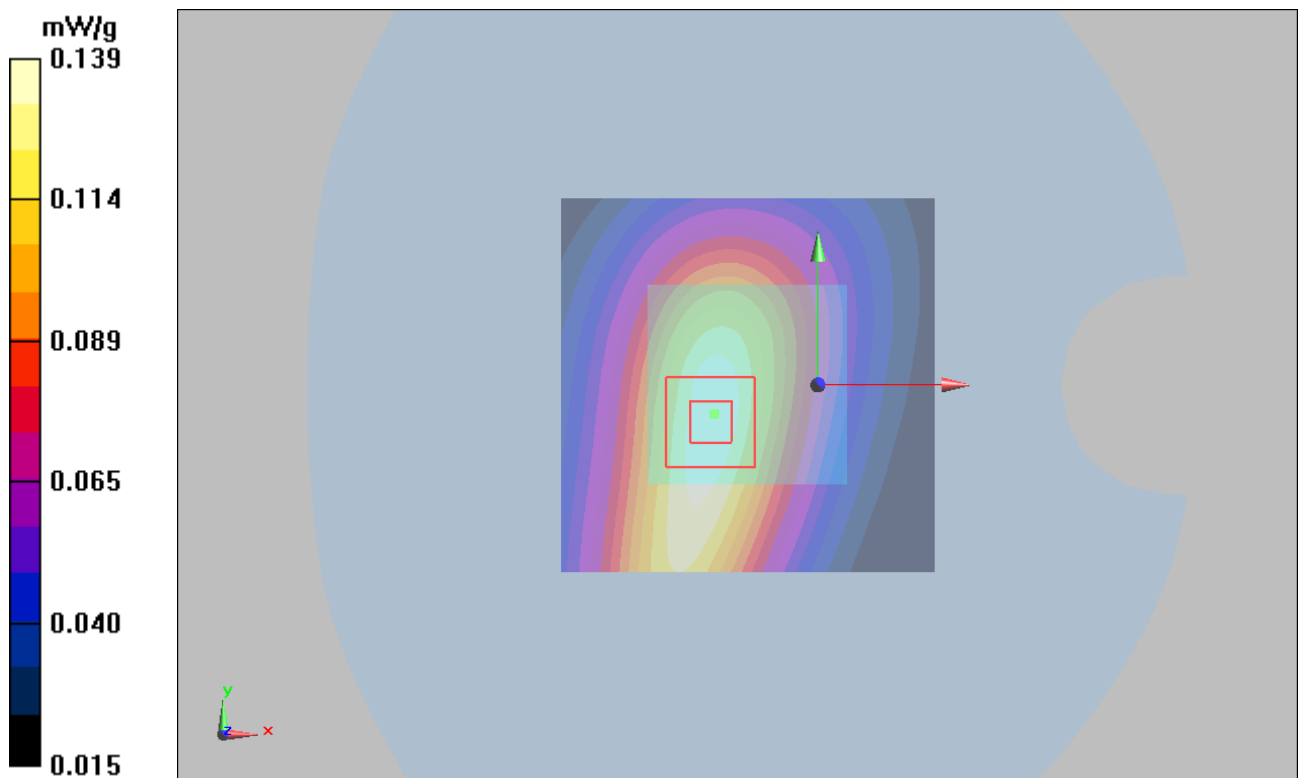


Figure 11 GSM 850 GPRS (2 timeslots in uplink) with Lenovo Y-450 Test Position 1 Channel

GSM 850 GPRS (2 timeslots in uplink) with Lenovo Y-450 Test Position 2 Middle

Date/Time: 3/17/2010 4:58:32 PM

Communication System: GSM850 + GPRS(2Up); Frequency: 837 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 1.01 \text{ mho/m}$; $\epsilon_r = 54$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.3°C Liquid Temperature: 21.5°C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 2 Middle/Area Scan (91x91x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (interpolated) = 0.245 mW/g

Test Position 2 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$,
 $dz=5\text{mm}$

Reference Value = 14.6 V/m ; Power Drift = -0.155 dB

Peak SAR (extrapolated) = 0.380 W/kg

SAR(1 g) = 0.206 mW/g ; SAR(10 g) = 0.108 mW/g

Maximum value of SAR (measured) = 0.232 mW/g

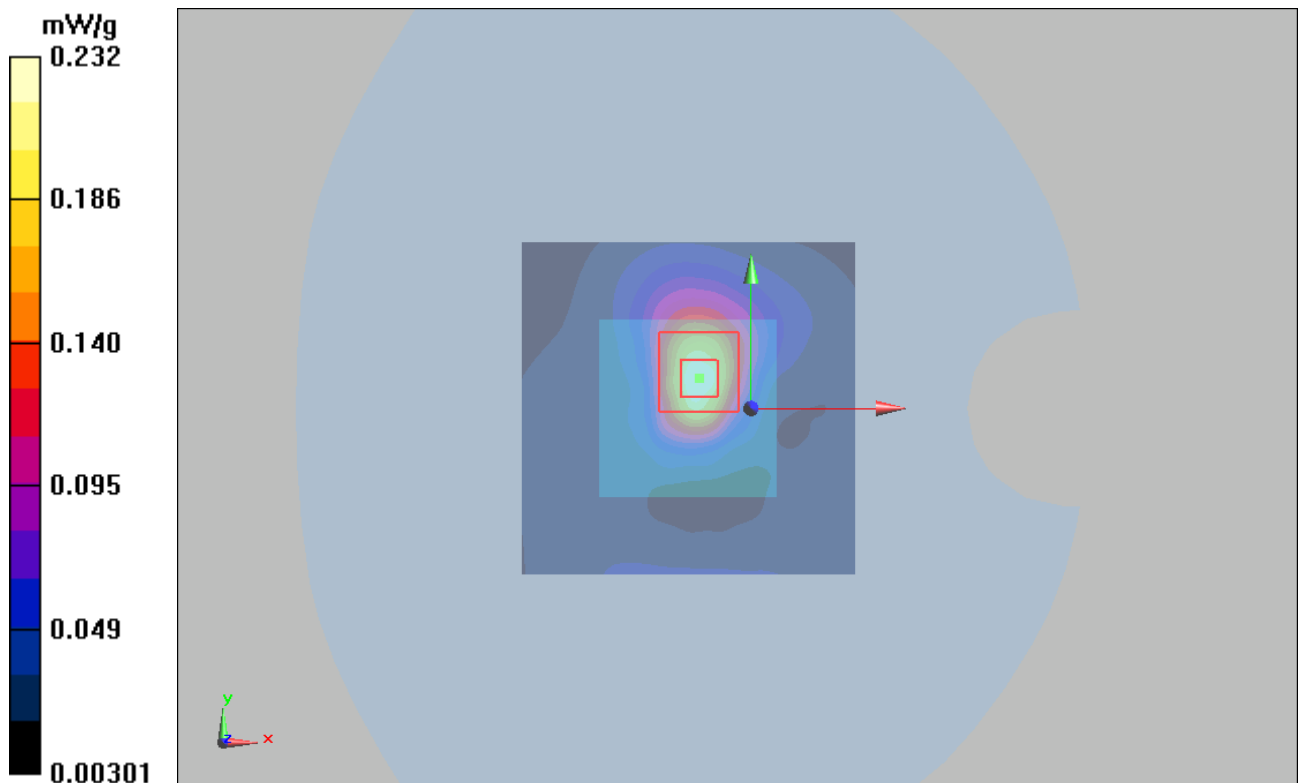


Figure 12 GSM 850 GPRS (2 timeslots in uplink) with Lenovo Y-450 Test Position 2 Channel

GSM 850 GPRS (2 timeslots in uplink) with Lenovo Y-450 Test Position 3 Middle

Date/Time: 3/17/2010 1:43:02 PM

Communication System: GSM850 + GPRS(2Up); Frequency: 837 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 1.01 \text{ mho/m}$; $\epsilon_r = 54$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.3°C Liquid Temperature: 21.5°C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 3 Middle/Area Scan (91x91x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (interpolated) = 0.100 mW/g

Test Position 3 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$,
 $dz=5\text{mm}$

Reference Value = 9.59 V/m ; Power Drift = -0.003 dB

Peak SAR (extrapolated) = 0.126 W/kg

SAR(1 g) = 0.094 mW/g ; SAR(10 g) = 0.066 mW/g

Maximum value of SAR (measured) = 0.099 mW/g

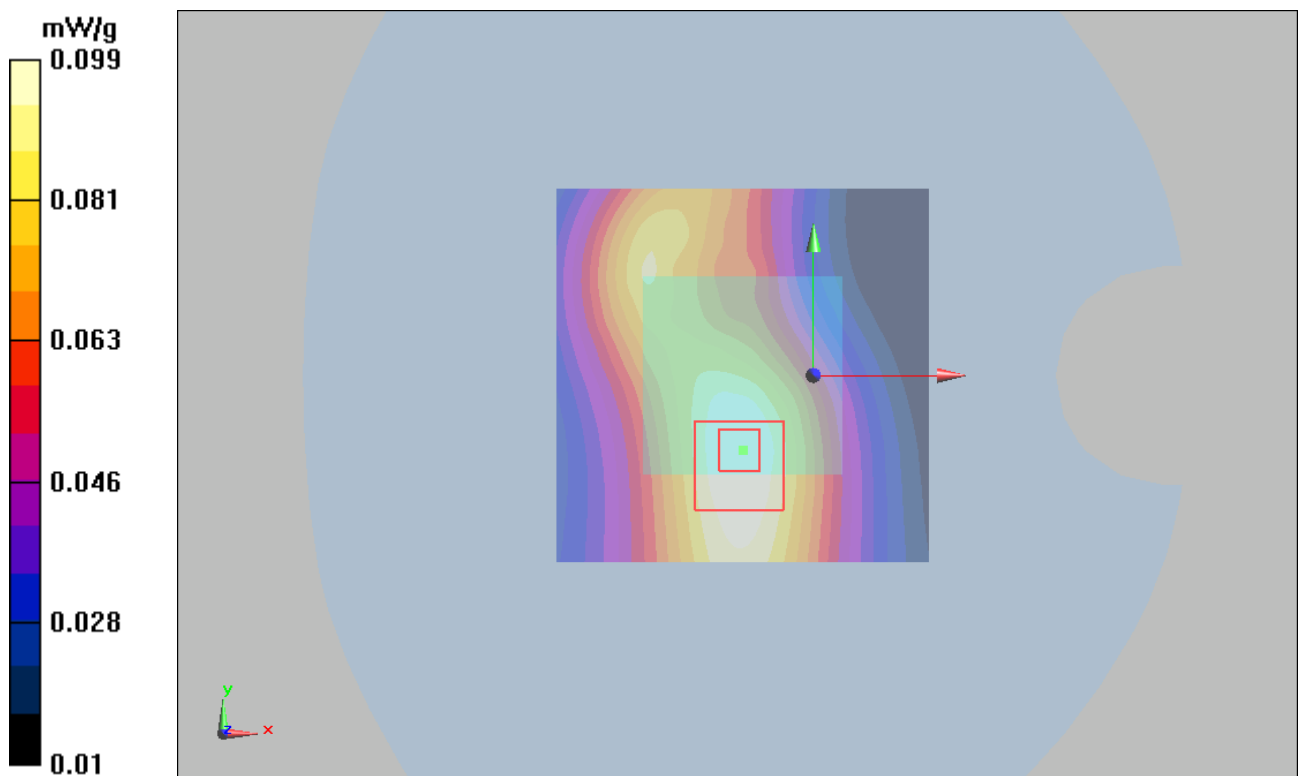


Figure 13 GSM 850 GPRS (2 timeslots in uplink) with Lenovo Y-450 Test Position 3 Channel

GSM 850 GPRS (2 timeslots in uplink) with Lenovo Y-450 Test Position 5 Middle

Date/Time: 3/17/2010 1:22:32 PM

Communication System: GSM850 + GPRS(2Up); Frequency: 837 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 1.01 \text{ mho/m}$; $\epsilon_r = 54$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.3°C Liquid Temperature: 21.5°C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 5 Middle/Area Scan (91x91x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (interpolated) = 0.099 mW/g

Test Position 5 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$,
 $dz=5\text{mm}$

Reference Value = 9.86 V/m ; Power Drift = 0.045 dB

Peak SAR (extrapolated) = 0.122 W/kg

SAR(1 g) = 0.093 mW/g ; SAR(10 g) = 0.068 mW/g

Maximum value of SAR (measured) = 0.098 mW/g

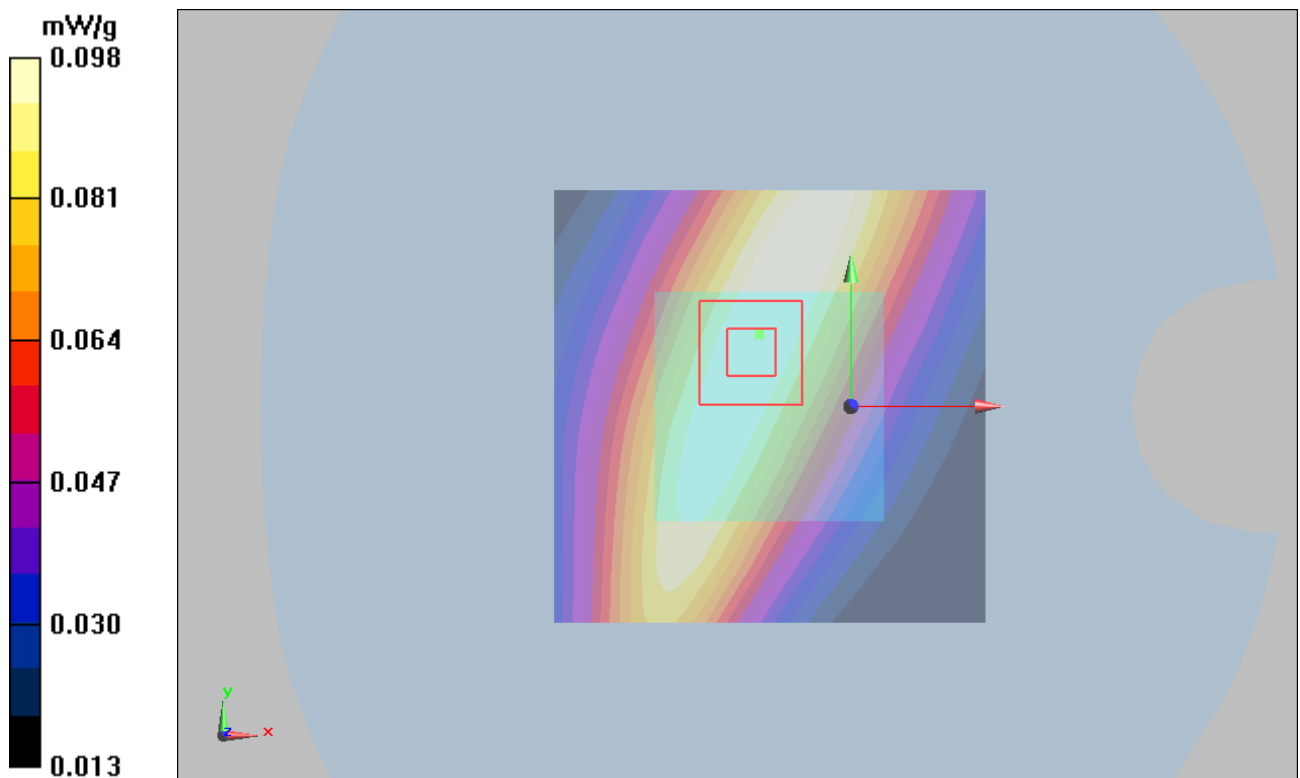


Figure 14 GSM 850 GPRS (2 timeslots in uplink) with Lenovo Y-450 Test Position 5 Channel

GSM 850 GPRS (2 timeslots in uplink) with Lenovo Y-450 Test Position 6 Middle

Date/Time: 3/17/2010 5:35:49 PM

Communication System: GSM850 + GPRS(2Up); Frequency: 837 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 1.01 \text{ mho/m}$; $\epsilon_r = 54$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.3°C Liquid Temperature: 21.5°C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 6 Middle/Area Scan (91x91x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (interpolated) = 0.553 mW/g

Test Position 6 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$,
 $dz=5\text{mm}$

Reference Value = 25.1 V/m ; Power Drift = -0.121 dB

Peak SAR (extrapolated) = 0.766 W/kg

SAR(1 g) = 0.470 mW/g ; SAR(10 g) = 0.270 mW/g

Maximum value of SAR (measured) = 0.528 mW/g

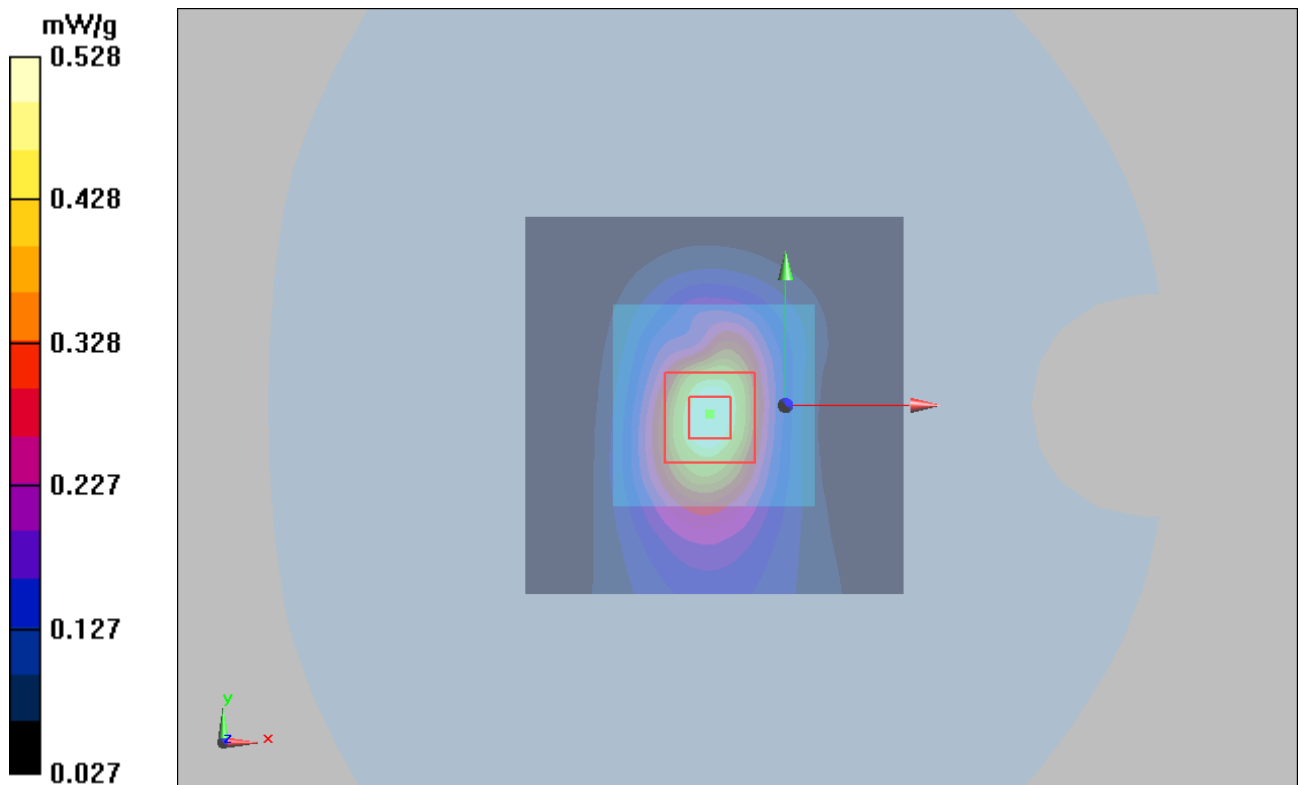


Figure 15 GSM 850 GPRS (2 timeslots in uplink) with Lenovo Y-450 Test Position 6 Channel

GSM 850 GPRS (2 timeslots in uplink) with Lenovo Y-450 Test Position 7 High

Date/Time: 3/17/2010 10:45:14 PM

Communication System: GSM850 + GPRS(2Up); Frequency: 848.8 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 849$ MHz; $\sigma = 1.02$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 7 High/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.563 mW/g

Test Position 7 High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.7 V/m; Power Drift = -0.043 dB

Peak SAR (extrapolated) = 0.861 W/kg

SAR(1 g) = 0.501 mW/g; SAR(10 g) = 0.282 mW/g

Maximum value of SAR (measured) = 0.561 mW/g

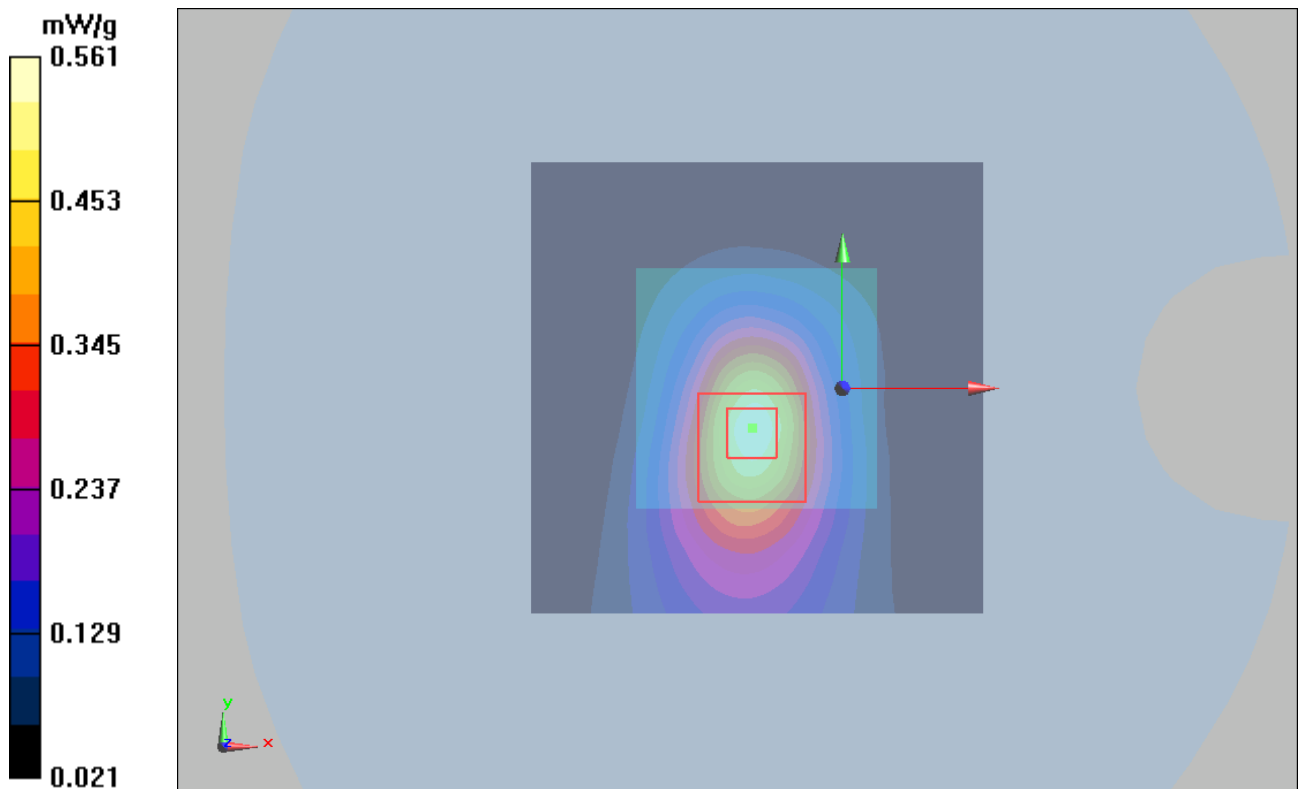


Figure 16 GSM 850 GPRS (2 timeslots in uplink) with Lenovo Y-450 Test Position 7 Channel
251

GSM 850 GPRS (2 timeslots in uplink) with Lenovo Y-450 Test Position 7 Middle

Date/Time: 3/17/2010 9:29:24 PM

Communication System: GSM850 + GPRS(2Up); Frequency: 837 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 1.01 \text{ mho/m}$; $\epsilon_r = 54$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.3°C Liquid Temperature: 21.5°C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 7 Middle/Area Scan (91x91x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (interpolated) = 0.599 mW/g


Test Position 7 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$,
 $dz=5\text{mm}$

Reference Value = 23.8 V/m ; Power Drift = -0.127 dB

Peak SAR (extrapolated) = 0.944 W/kg

SAR(1 g) = 0.553 mW/g ; SAR(10 g) = 0.319 mW/g

Maximum value of SAR (measured) = 0.618 mW/g

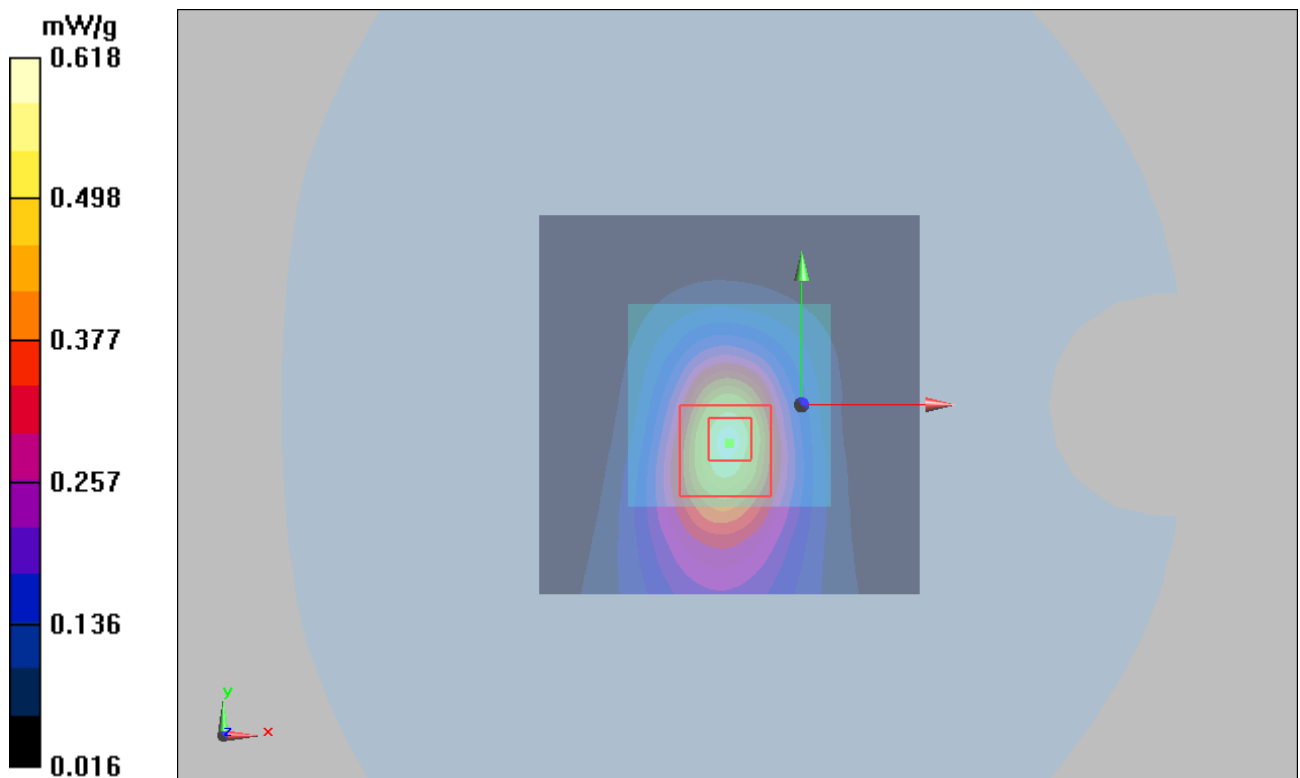

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RZA2010-0253

Page 58 of 138

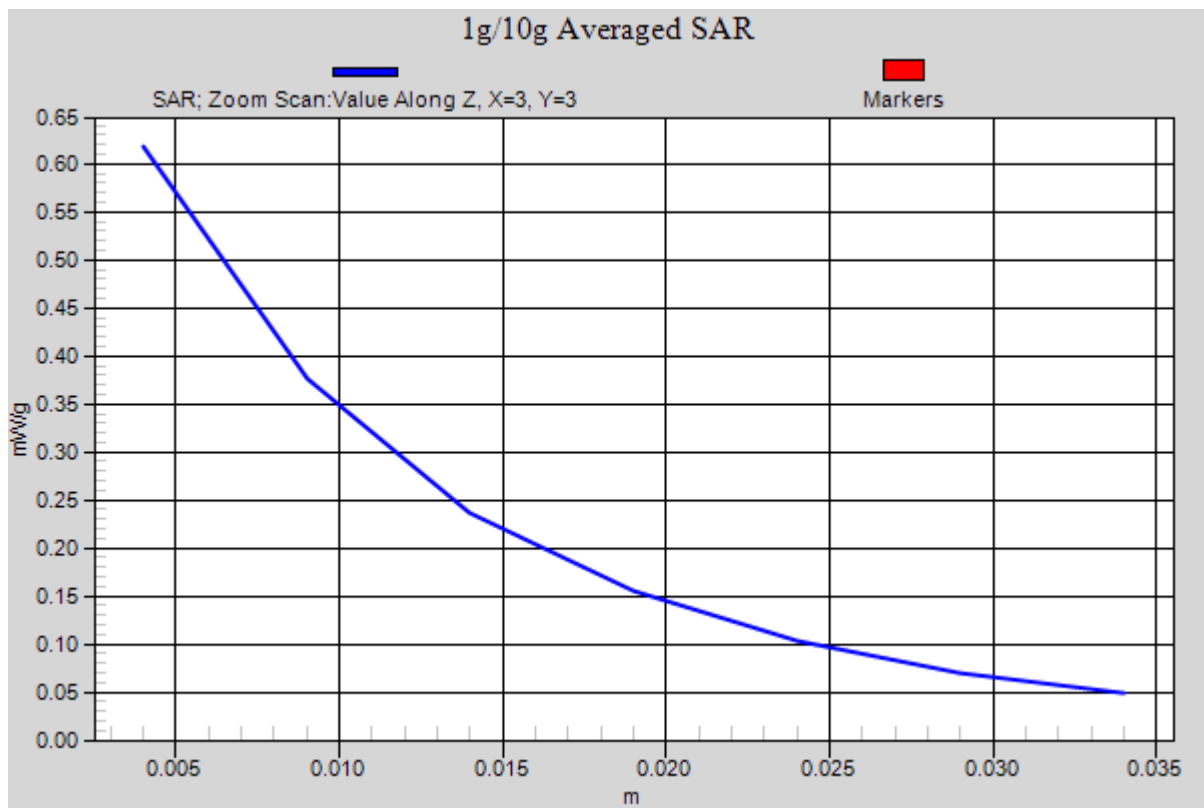


Figure 17 GSM 850 GPRS (2 timeslots in uplink) with Lenovo Y-450 Test Position 7 Channel

GSM 850 GPRS (2 timeslots in uplink) with Lenovo Y-450 Test Position 7 Low

Date/Time: 3/17/2010 11:12:59 PM

Communication System: GSM850 + GPRS(2Up); Frequency: 824.2 MHz; Duty Cycle: 1:4.15

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 1.00$ mho/m; $\epsilon_r = 54.1$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 7 Low/Area Scan (81x81x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.580 mW/g

Test Position 7 Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.4 V/m; Power Drift = -0.060 dB

Peak SAR (extrapolated) = 0.869 W/kg

SAR(1 g) = 0.525 mW/g; SAR(10 g) = 0.307 mW/g

Maximum value of SAR (measured) = 0.582 mW/g

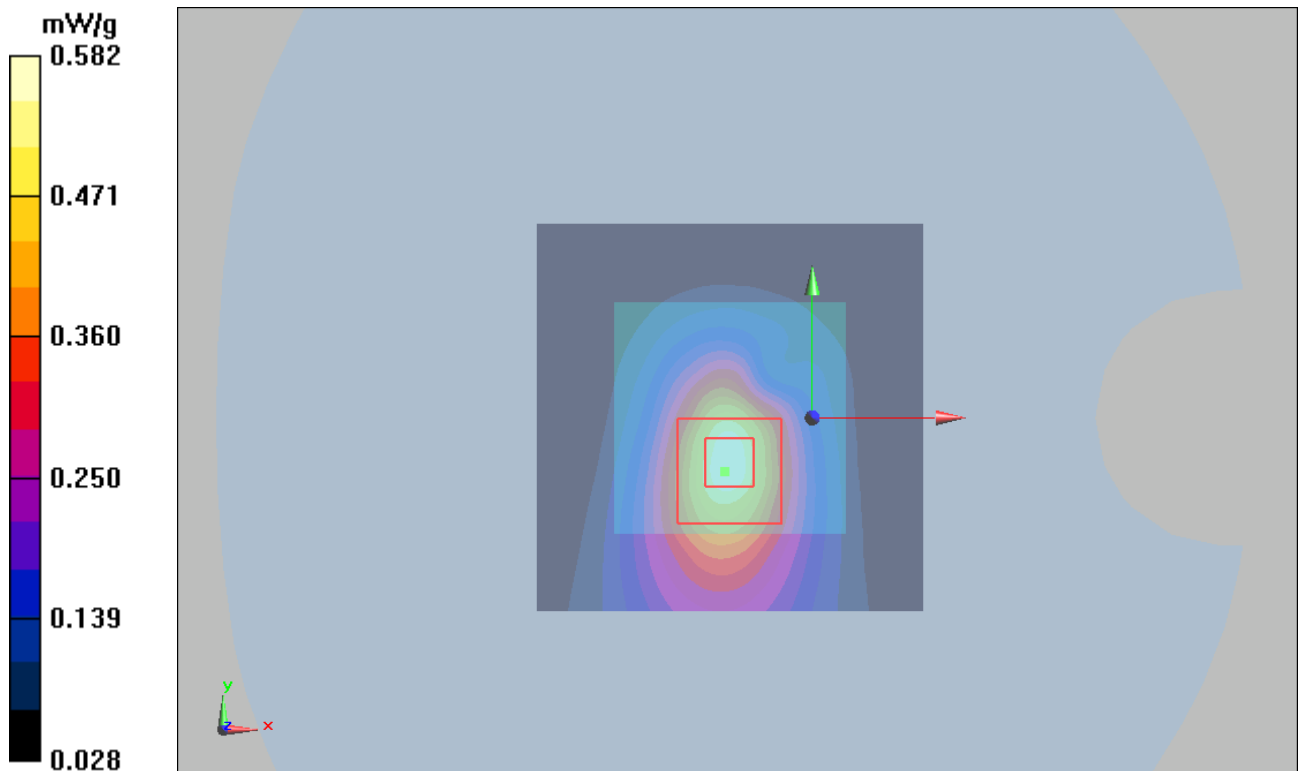


Figure 18 GSM 850 GPRS (2 timeslots in uplink) with Lenovo Y-450 Test Position 7 Channel 128

GSM 850 EGPRS (4 timeslots in uplink) with Lenovo Y-450 Test Position 7 Middle

Date/Time: 3/18/2010 11:06:48 AM

Communication System: GSM 850+EGPRS(4Up); Frequency: 837 MHz; Duty Cycle: 1:2.075

Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 1.01 \text{ mho/m}$; $\epsilon_r = 54$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.3°C Liquid Temperature: 21.5°C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 7 Middle/Area Scan (91x91x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (interpolated) = 0.644 mW/g

Test Position 7 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$,
 $dz=5\text{mm}$

Reference Value = 22.7 V/m ; Power Drift = 0.043 dB

Peak SAR (extrapolated) = 0.796 W/kg

SAR(1 g) = 0.494 mW/g ; SAR(10 g) = 0.290 mW/g

Maximum value of SAR (measured) = 0.545 mW/g

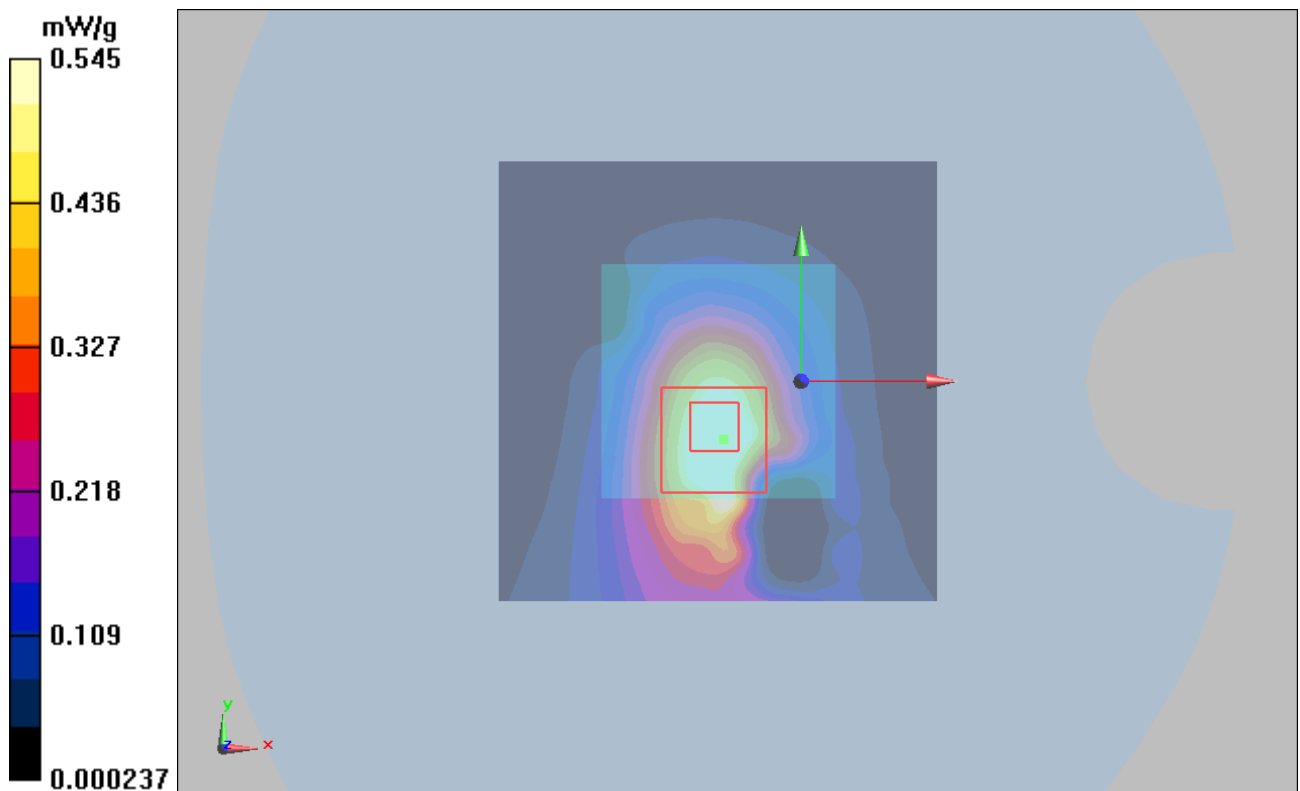


Figure 19 GSM 850 EGPRS (4 timeslots in uplink) with Lenovo Y-450 Test Position 7 Channel

GSM 850 EGPRS (3 timeslots in uplink) with Lenovo Y-450 Test Position 7 Middle

Date/Time: 3/18/2010 10:25:57 AM

Communication System: GSM850 + EGPRS(3Up); Frequency: 837 MHz; Duty Cycle: 1:2.767

Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 1.01 \text{ mho/m}$; $\epsilon_r = 54$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.3°C Liquid Temperature: 21.5°C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 7 Middle/Area Scan (91x91x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (interpolated) = 0.539 mW/g

Test Position 7 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$,
 $dz=5\text{mm}$

Reference Value = 22.2 V/m ; Power Drift = 0.033 dB

Peak SAR (extrapolated) = 0.959 W/kg

SAR(1 g) = 0.503 mW/g ; SAR(10 g) = 0.268 mW/g

Maximum value of SAR (measured) = 0.534 mW/g

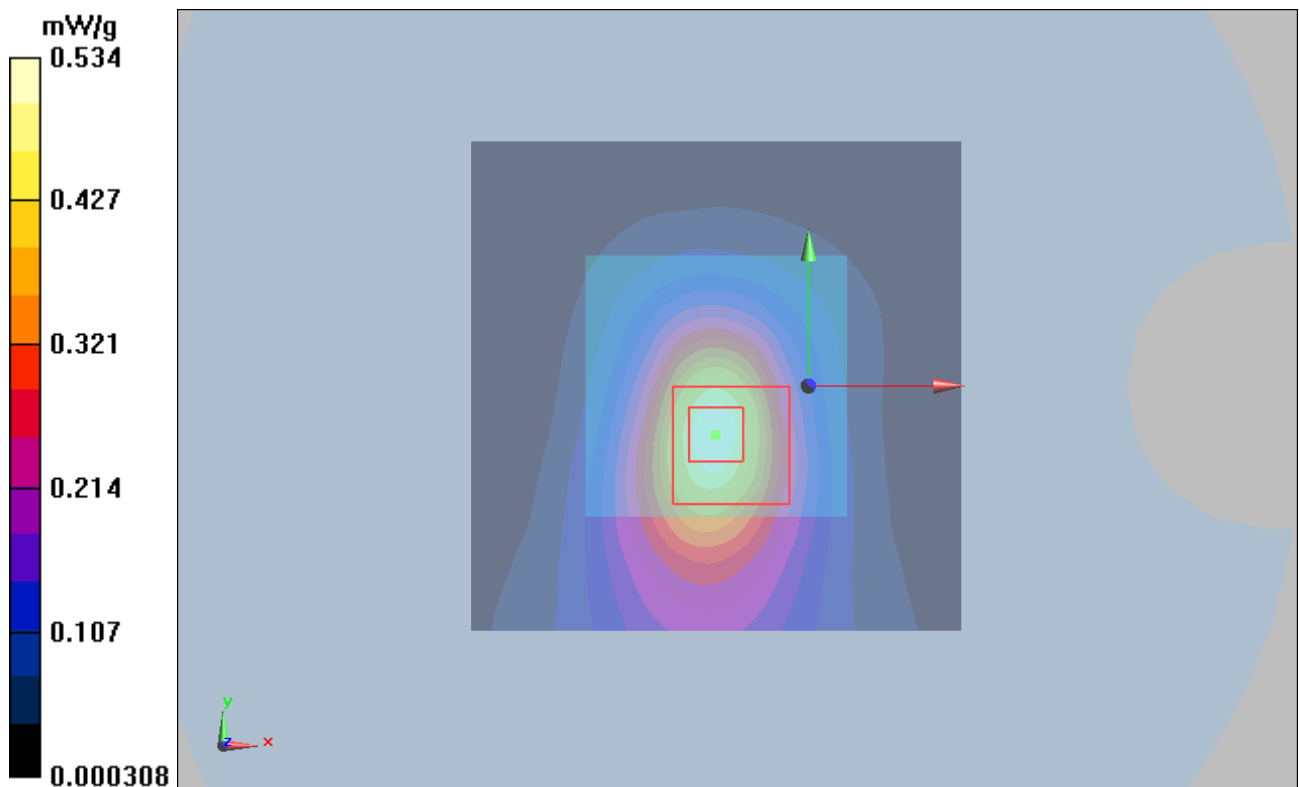


Figure 20 GSM 850 EGPRS (3 timeslots in uplink) with Lenovo Y-450 Test Position 7 Channel

GSM 850 EGPRS (2 timeslots in uplink) with Lenovo Y-450 Test Position 7 Middle

Date/Time: 3/18/2010 9:58:10 AM

Communication System: GSM850 + EGPRS(2Up); Frequency: 837 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 1.01 \text{ mho/m}$; $\epsilon_r = 54$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.3°C Liquid Temperature: 21.5°C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 7 Middle/Area Scan (91x91x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.605 mW/g

Test Position 7 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 23.8 V/m ; Power Drift = -0.122 dB

Peak SAR (extrapolated) = 0.891 W/kg

SAR(1 g) = 0.530 mW/g ; SAR(10 g) = 0.306 mW/g

Maximum value of SAR (measured) = 0.595 mW/g

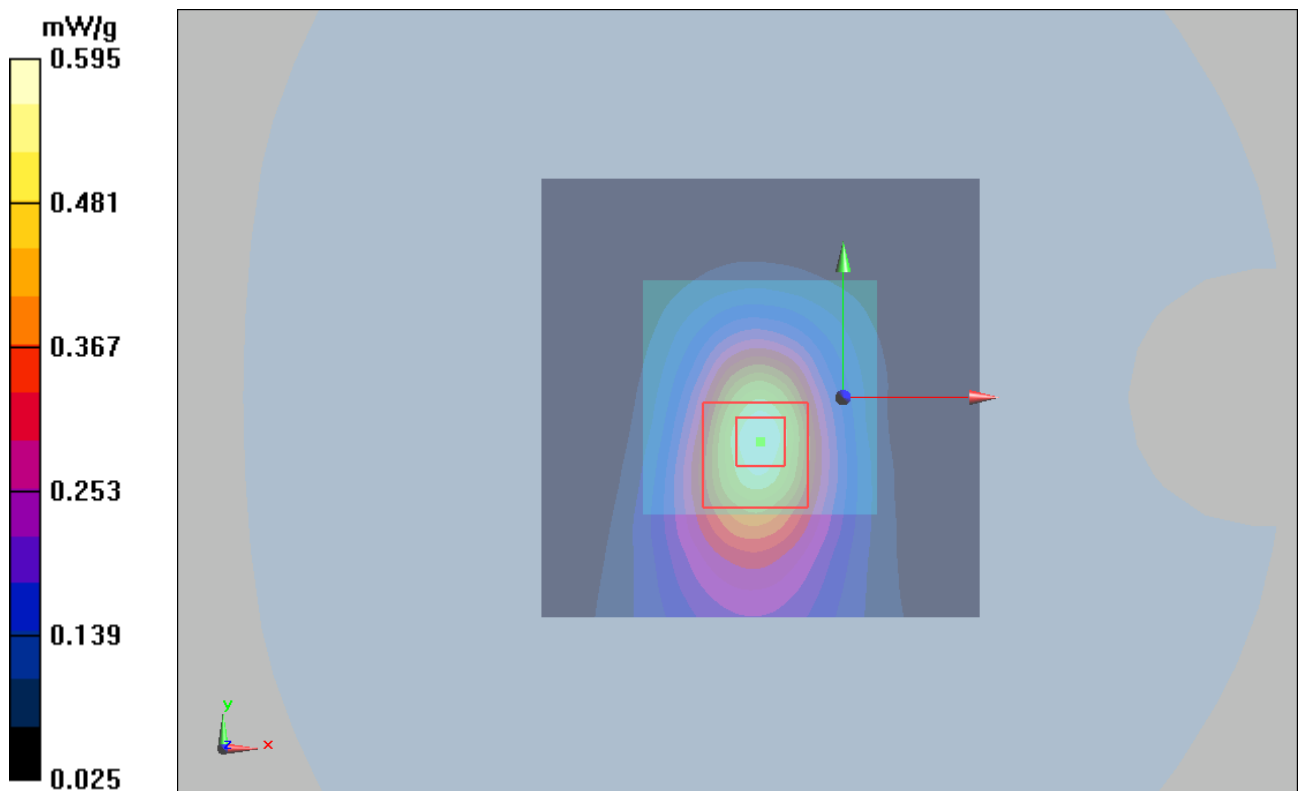


Figure 21 GSM 850 EGPRS (2 timeslots in uplink) with Lenovo Y-450 Test Position 7 Channel

GSM 850 EGPRS (1 timeslot in uplink) with Lenovo Y-450 Test Position 7 Middle

Date/Time: 3/18/2010 9:30:43 AM

Communication System: GSM850 + EGPRS(1Up); Frequency: 837 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 1.01 \text{ mho/m}$; $\epsilon_r = 54$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.3°C Liquid Temperature: 21.5°C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 7 Middle/Area Scan (91x91x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (interpolated) = 0.582 mW/g

Test Position 7 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$,
 $dz=5\text{mm}$

Reference Value = 23.3 V/m ; Power Drift = -0.179 dB

Peak SAR (extrapolated) = 0.865 W/kg

SAR(1 g) = 0.517 mW/g ; SAR(10 g) = 0.298 mW/g

Maximum value of SAR (measured) = 0.579 mW/g

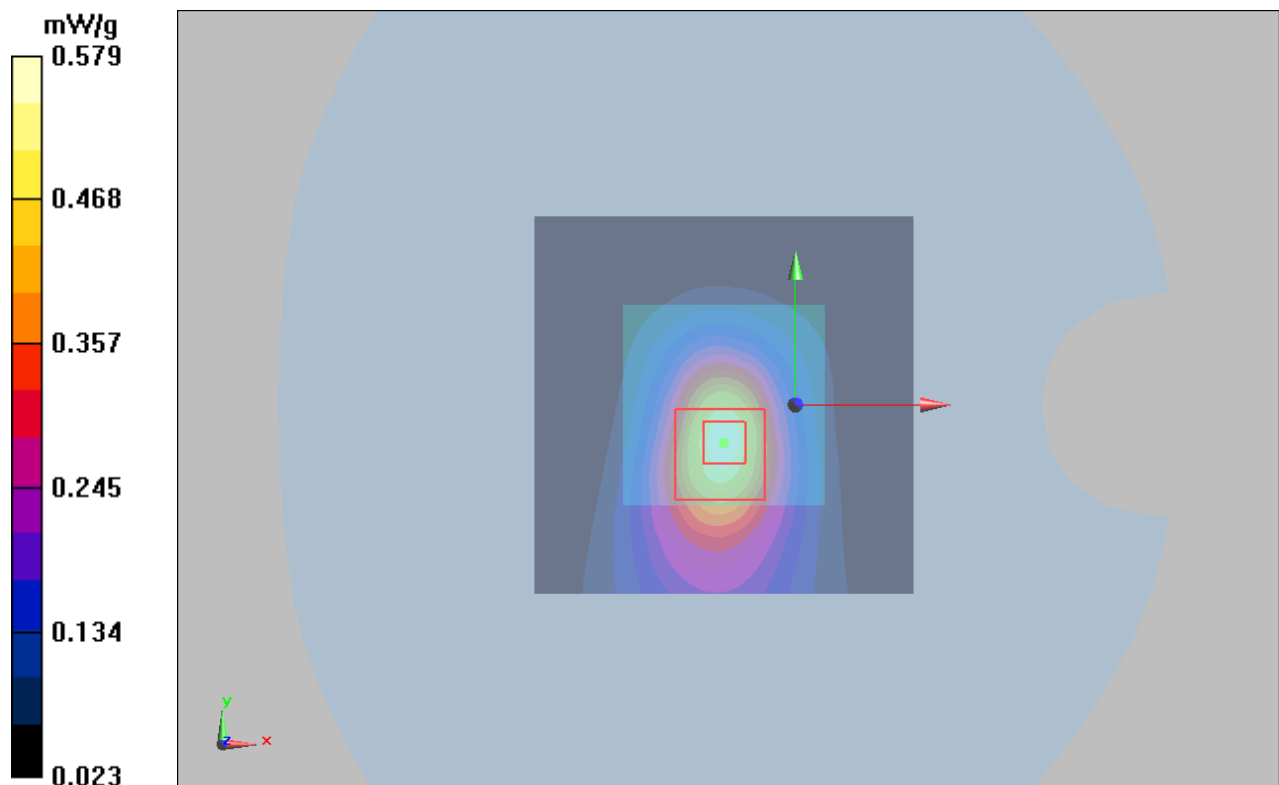


Figure 22 GSM 850 EGPRS (1 timeslot in uplink) with Lenovo Y-450 Test Position 7 Channel

GSM 1900 GPRS (2 timeslots in uplink) with Lenovo Y-450 Test Position 4 Middle

Date/Time: 3/16/2010 11:53:00 AM

Communication System: PCS 1900+GPRS(2Up); Frequency: 1880 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 4 Middle/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.811 mW/g

Test Position 4 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23 V/m; Power Drift = 0.081 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.745 mW/g; SAR(10 g) = 0.417 mW/g

Maximum value of SAR (measured) = 0.815 mW/g

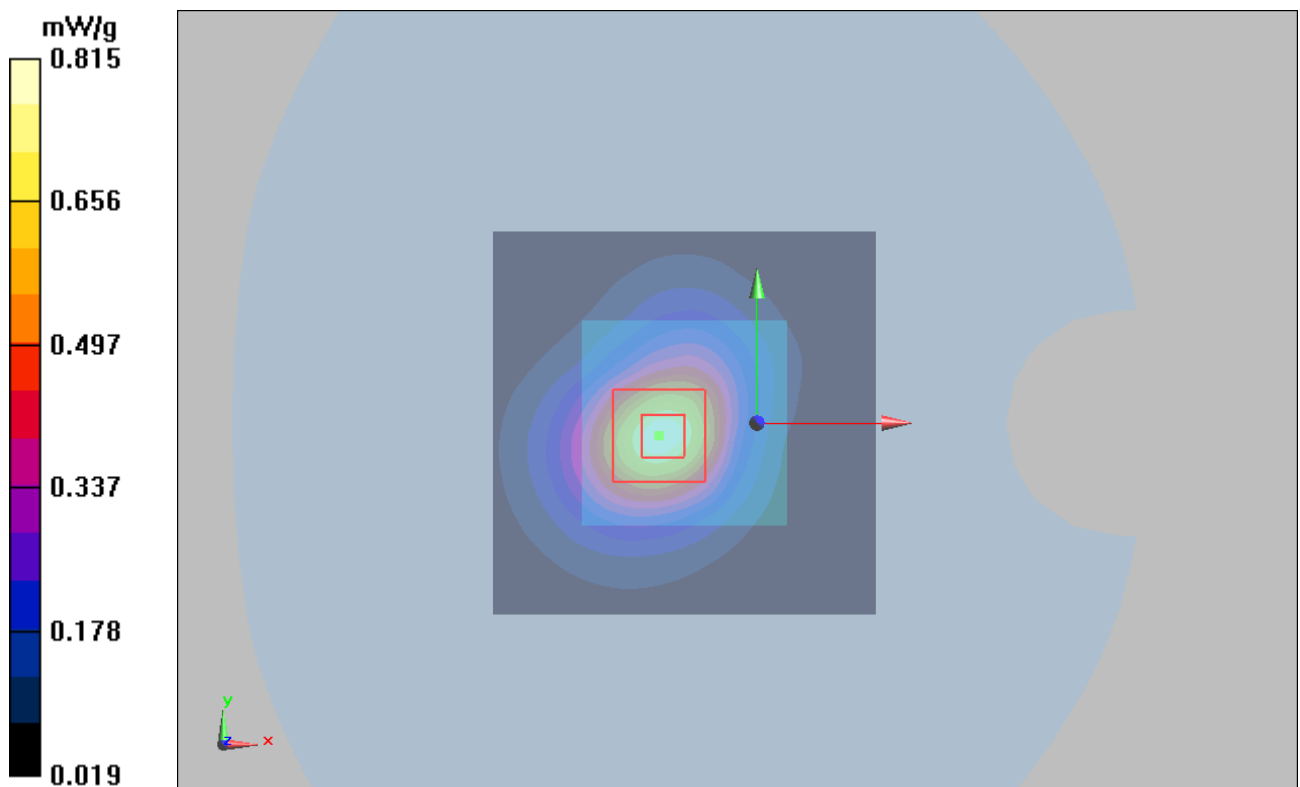


Figure 23 GSM 1900 GPRS (2 timeslots in uplink) with Lenovo Y-450 Test Position 4 Channel

GSM 1900 GPRS (1 timeslot in uplink) with Lenovo Y-450 Test Position 4 High

Date/Time: 3/16/2010 1:10:32 PM

Communication System: PCS 1900+GPRS(1Up); Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 52.4$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 4 High/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.896 mW/g

Test Position 4 High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.9 V/m; Power Drift = 0.011 dB

Peak SAR (extrapolated) = 1.46 W/kg

SAR(1 g) = 0.817 mW/g; SAR(10 g) = 0.455 mW/g

Maximum value of SAR (measured) = 0.891 mW/g

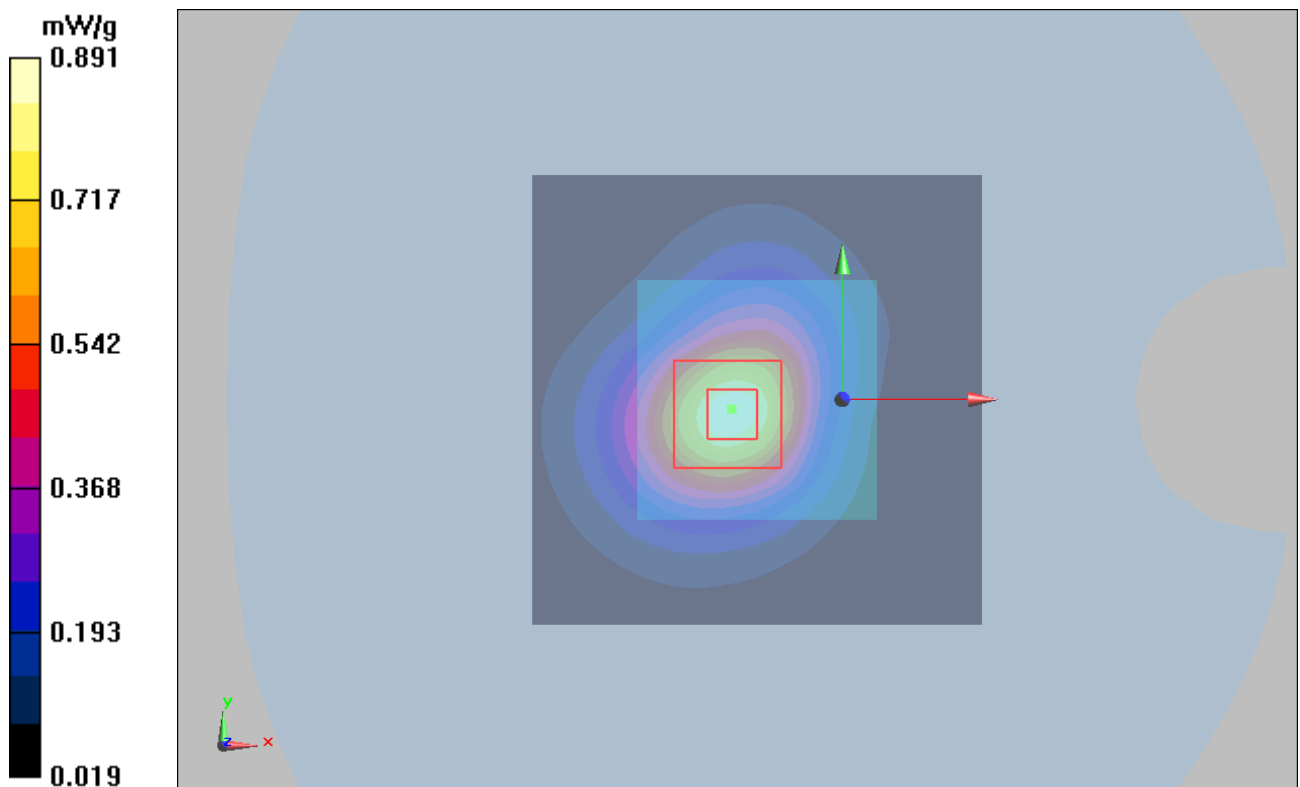


Figure 24 GSM 1900 GPRS (1 timeslot in uplink) with Lenovo Y-450 Test Position 4 Channel

GSM 1900 GPRS (1 timeslot in uplink) with Lenovo Y-450 Test Position 4 Middle

Date/Time: 3/16/2010 12:21:58 PM

Communication System: PCS 1900+GPRS(1Up); Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.5 \text{ mho/m}$; $\epsilon_r = 52.6$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.3°C Liquid Temperature: 21.5°C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 4 Middle/Area Scan (91x91x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (interpolated) = 0.830 mW/g

Test Position 4 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$,
 $dz=5\text{mm}$

Reference Value = 22.6 V/m ; Power Drift = 0.194 dB

Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 0.778 mW/g ; SAR(10 g) = 0.436 mW/g

Maximum value of SAR (measured) = 0.855 mW/g

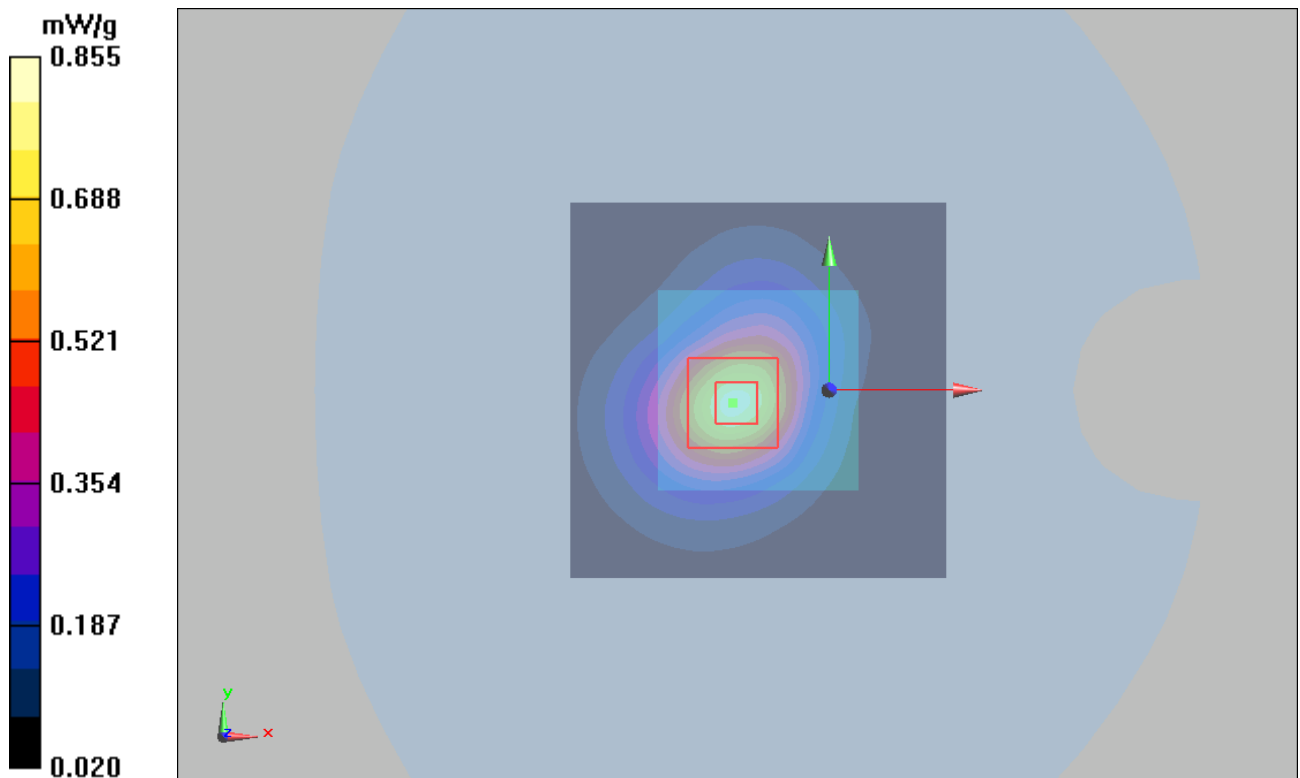


Figure 25 GSM 1900 GPRS (1 timeslot in uplink) with Lenovo Y-450 Test Position 4 Channel

GSM 1900 GPRS (1 timeslot in uplink) with Lenovo Y-450 Test Position 4 Low

Date/Time: 3/16/2010 12:46:16 PM

Communication System: PCS 1900+GPRS(1Up); Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 52.8$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 4 Low/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.776 mW/g

Test Position 4 Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.6 V/m; Power Drift = 0.086 dB

Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.702 mW/g; SAR(10 g) = 0.396 mW/g

Maximum value of SAR (measured) = 0.771 mW/g

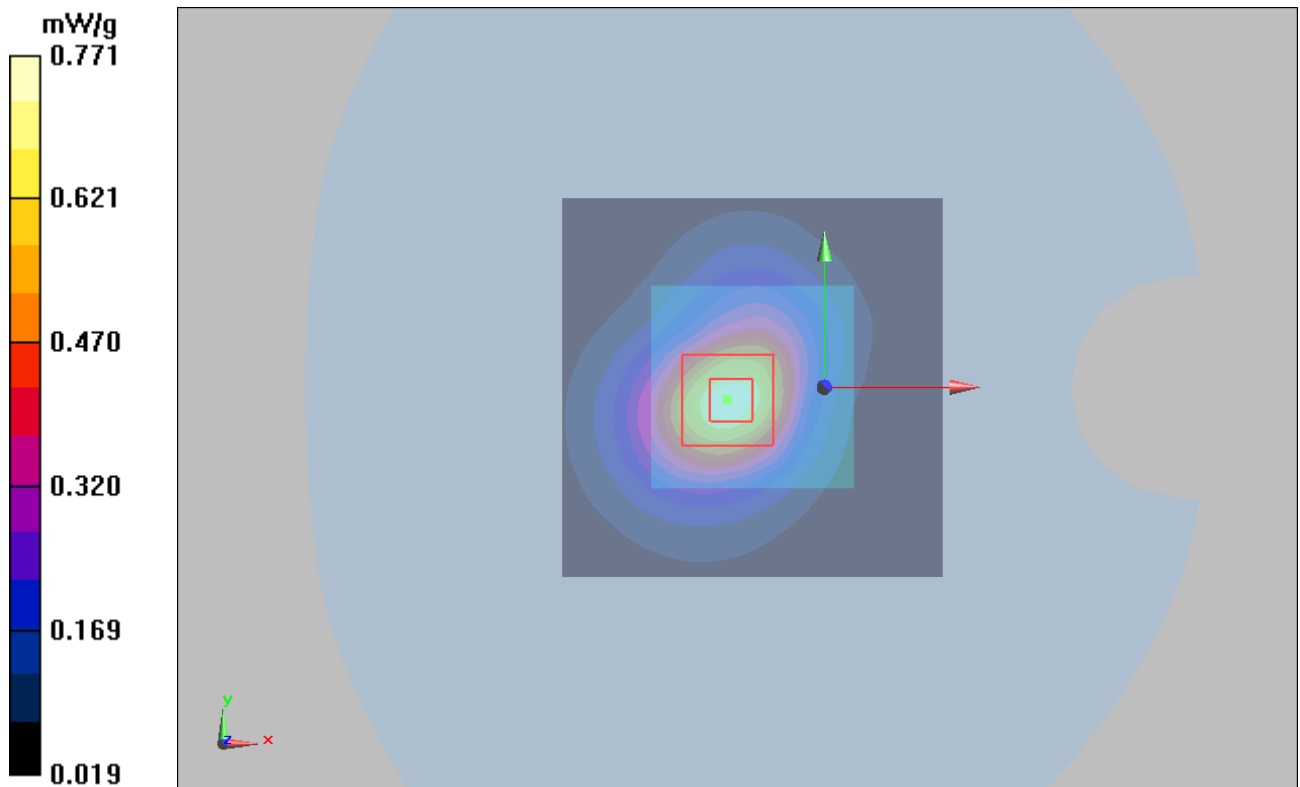


Figure 26 GSM 1900 GPRS (1 timeslot in uplink) with Lenovo Y-450 Test Position 4 Channel 512

GSM 1900 GPRS (1 timeslot in uplink) with Lenovo Y-450 Test Position 1 Middle

Date/Time: 3/16/2010 6:24:40 PM

Communication System: PCS 1900+GPRS(1Up); Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 1 Middle/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.077 mW/g

Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.26 V/m; Power Drift = -0.089 dB

Peak SAR (extrapolated) = 0.139 W/kg

SAR(1 g) = 0.072 mW/g; SAR(10 g) = 0.046 mW/g

Maximum value of SAR (measured) = 0.076 mW/g

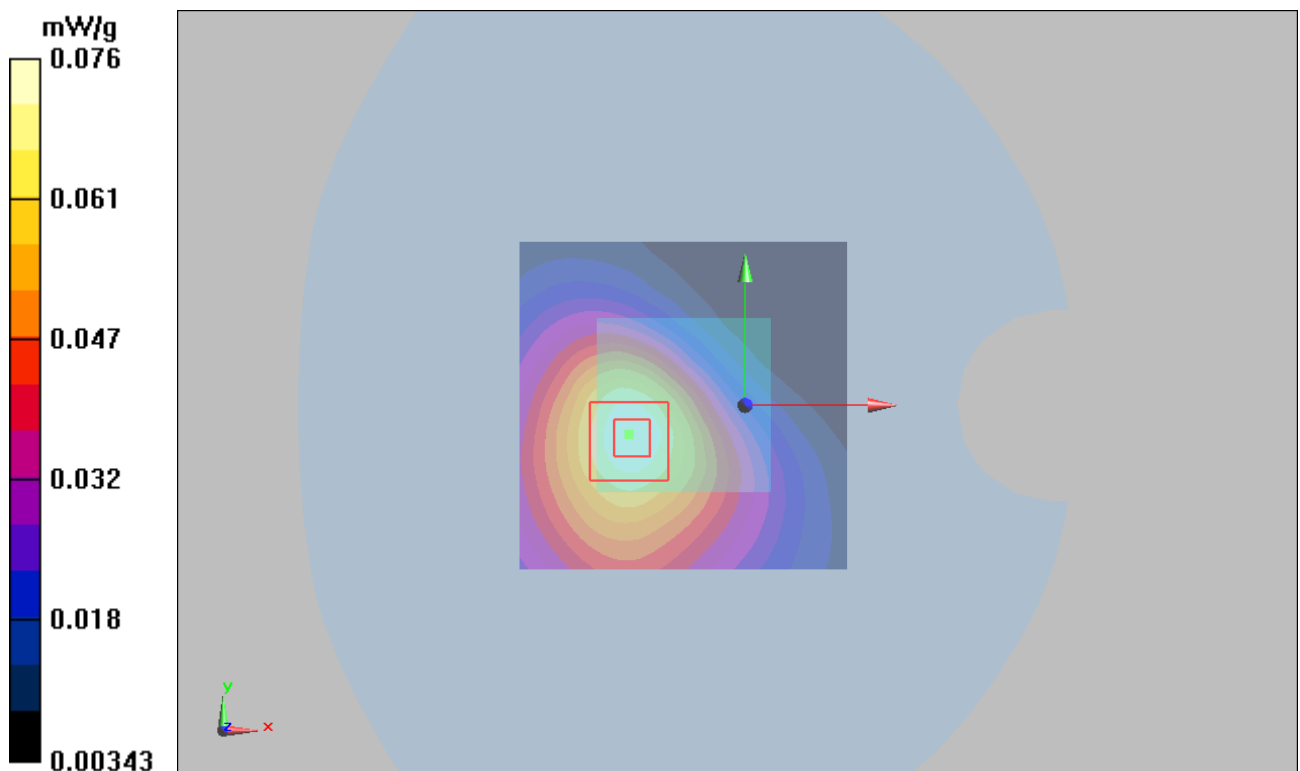


Figure 27 GSM 1900 GPRS (1 timeslot in uplink) with Lenovo Y-450 Test Position 1 Channel

GSM 1900 GPRS (1 timeslot in uplink) with Lenovo Y-450 Test Position 2 Middle

Date/Time: 3/16/2010 5:52:17 PM

Communication System: PCS 1900+GPRS(1Up); Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 2 Middle/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.518 mW/g

Test Position 2 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.2 V/m; Power Drift = -0.007 dB

Peak SAR (extrapolated) = 0.850 W/kg

SAR(1 g) = 0.475 mW/g; SAR(10 g) = 0.267 mW/g

Maximum value of SAR (measured) = 0.521 mW/g

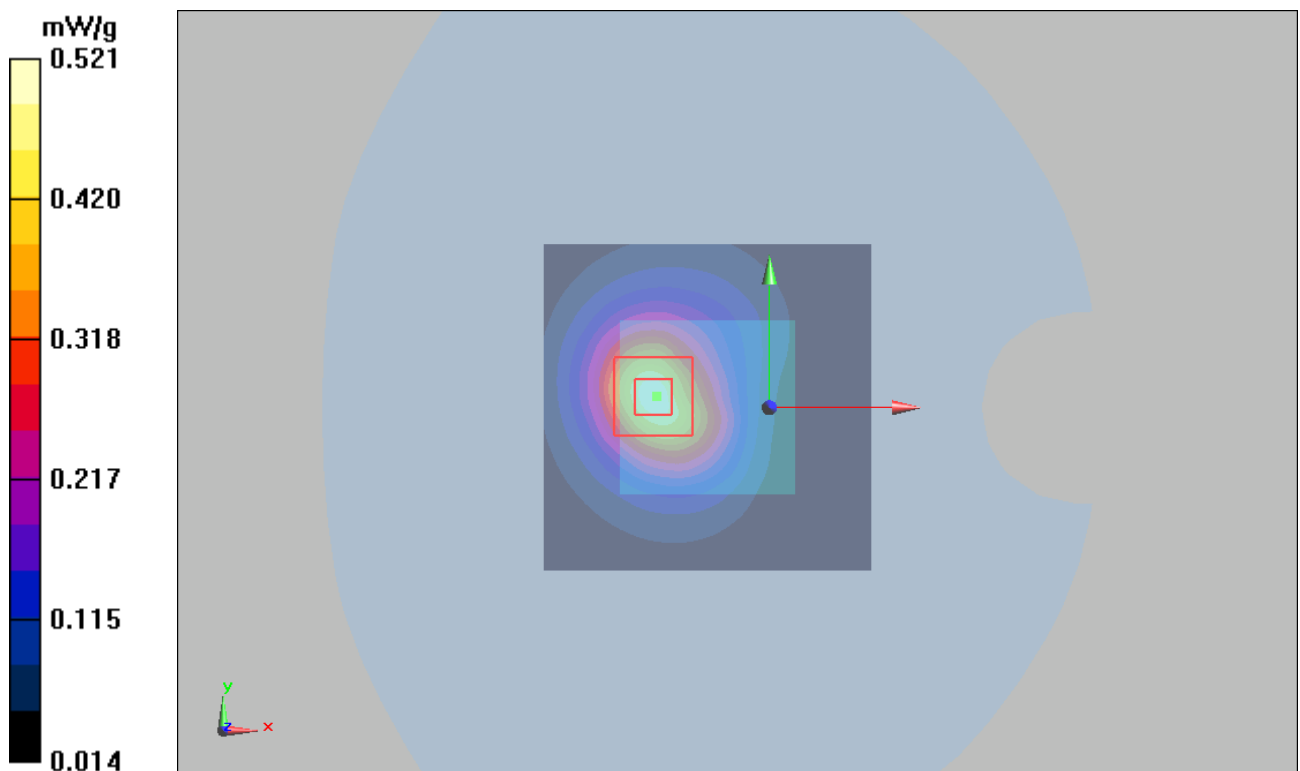


Figure 28 GSM 1900 GPRS (1 timeslot in uplink) with Lenovo Y-450 Test Position 2 Channel

GSM 1900 GPRS (1 timeslot in uplink) with Lenovo Y-450 Test Position 3 Middle

Date/Time: 3/16/2010 3:47:56 PM

Communication System: PCS 1900+GPRS(1Up); Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 3 Middle/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.429 mW/g

Test Position 3 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.7 V/m; Power Drift = 0.095 dB

Peak SAR (extrapolated) = 0.712 W/kg

SAR(1 g) = 0.382 mW/g; SAR(10 g) = 0.208 mW/g

Maximum value of SAR (measured) = 0.425 mW/g

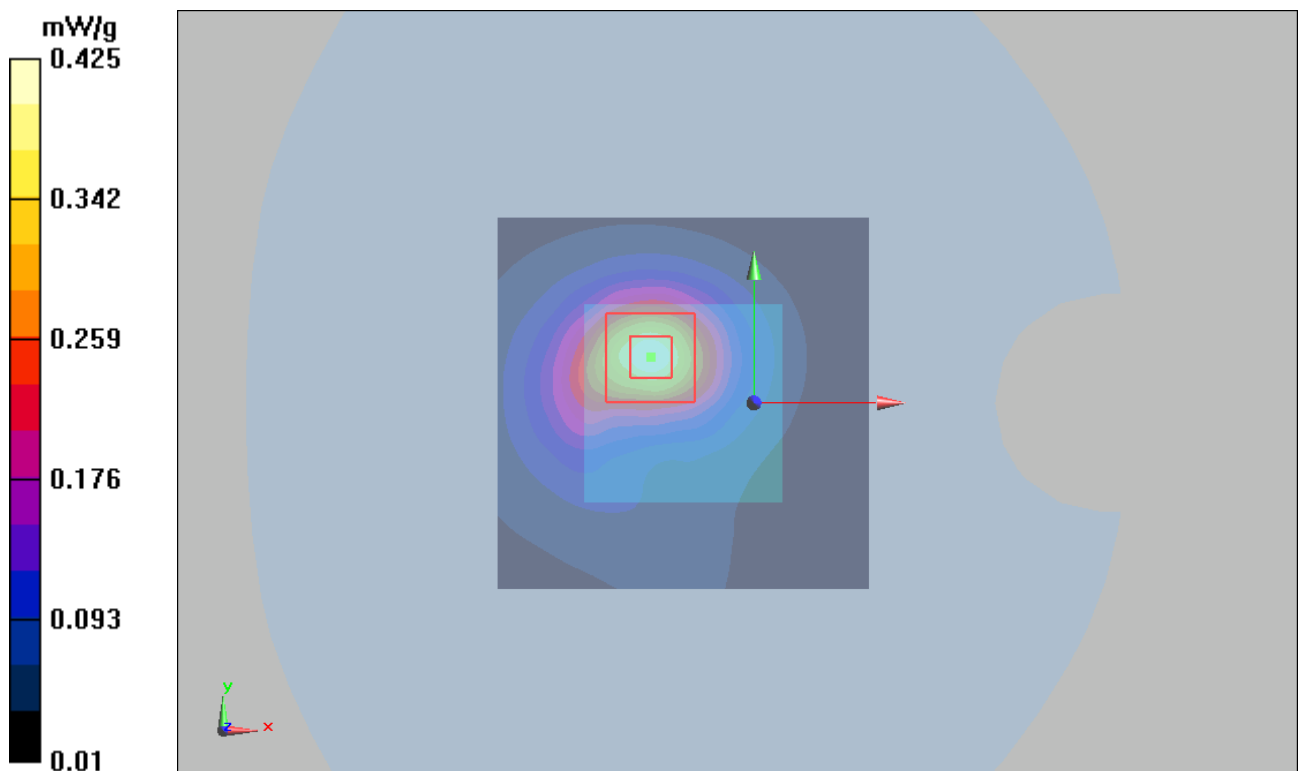


Figure 29 GSM 1900 GPRS (1 timeslot in uplink) with Lenovo Y-450 Test Position 3 Channel

GSM 1900 GPRS (1 timeslot in uplink) with Lenovo Y-450 Test Position 5 Middle

Date/Time: 3/16/2010 3:16:37 PM

Communication System: PCS 1900+GPRS(1Up); Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 5 Middle/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.201 mW/g

Test Position 5 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.1 V/m; Power Drift = 0.144 dB

Peak SAR (extrapolated) = 0.342 W/kg

SAR(1 g) = 0.187 mW/g; SAR(10 g) = 0.108 mW/g

Maximum value of SAR (measured) = 0.202 mW/g

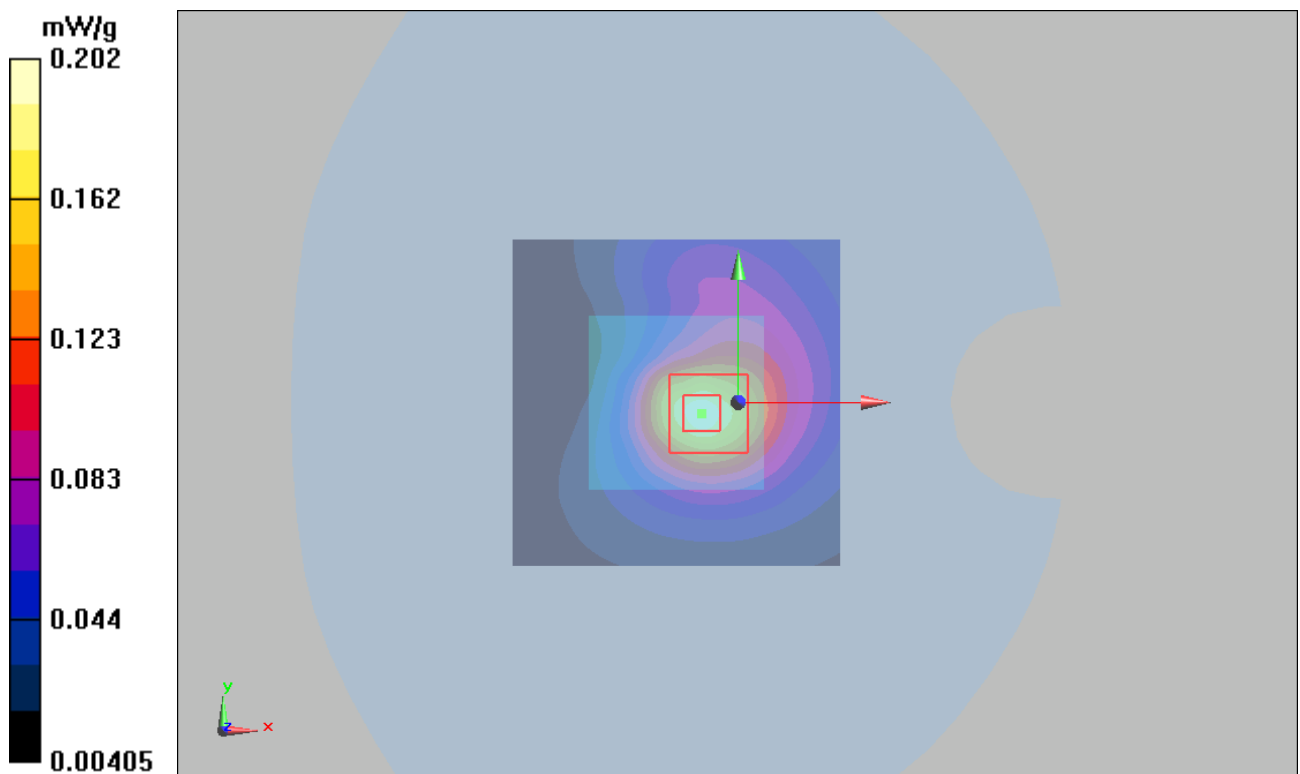


Figure 30 GSM 1900 GPRS (1 timeslot in uplink) with Lenovo Y-450 Test Position 5 Channel

GSM 1900 GPRS (1 timeslot in uplink) with Lenovo Y-450 Test Position 6 Middle

Date/Time: 3/16/2010 8:01:30 PM

Communication System: PCS 1900+GPRS(1Up); Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 6 Middle/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.739 mW/g

Test Position 6 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.4 V/m; Power Drift = -0.147 dB

Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.618 mW/g; SAR(10 g) = 0.358 mW/g

Maximum value of SAR (measured) = 0.675 mW/g

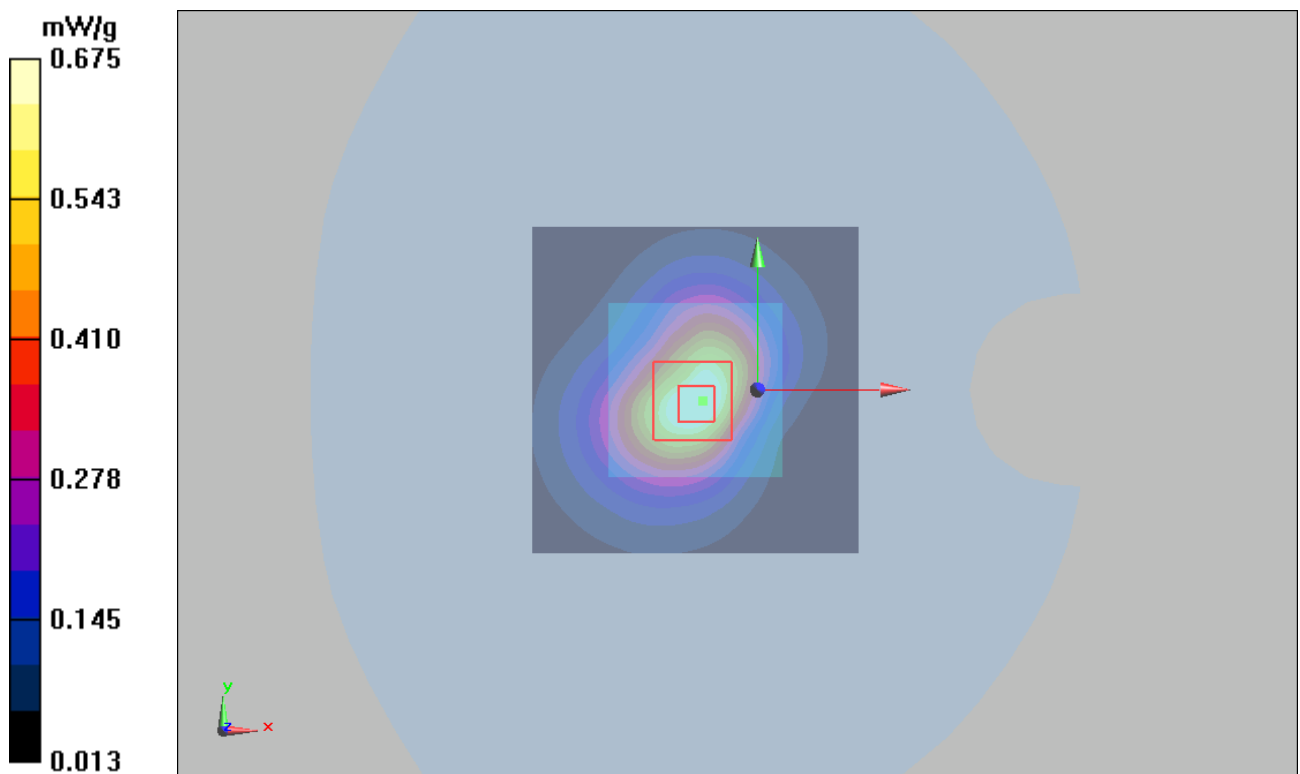


Figure 31 GSM 1900 GPRS (1 timeslot in uplink) with Lenovo Y-450 Test Position 6 Channel

GSM 1900 GPRS (1 timeslot in uplink) with Lenovo Y-450 Test Position 7 Middle

Date/Time: 3/16/2010 9:31:45 PM

Communication System: PCS 1900+GPRS(1Up); Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 7 Middle/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.614 mW/g

Test Position 7 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.6 V/m; Power Drift = 0.191 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.578 mW/g; SAR(10 g) = 0.328 mW/g

Maximum value of SAR (measured) = 0.636 mW/g

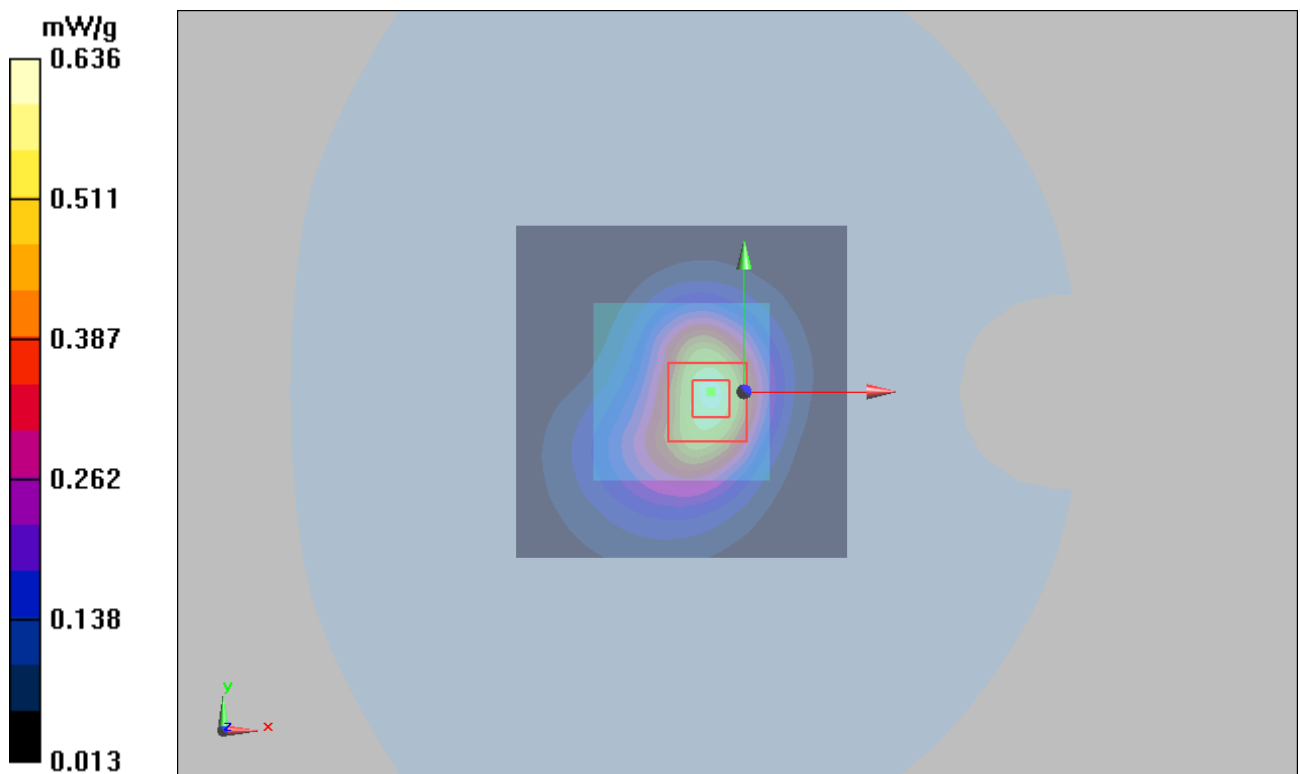


Figure 32 GSM 1900 GPRS (1 timeslot in uplink) with Lenovo Y-450 Test Position 7 Channel

GSM 1900 EGPRS (4 timeslots in uplink) with Lenovo Y-450 Test Position 4 High

Date/Time: 3/16/2010 11:20:04 PM

Communication System: PCS 1900+EGPRS(4Up); Frequency: 1909.8 MHz; Duty Cycle: 1:2.075

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 52.4$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 4 High/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.656 mW/g

Test Position 4 High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.2 V/m; Power Drift = -0.157 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.573 mW/g; SAR(10 g) = 0.320 mW/g

Maximum value of SAR (measured) = 0.625 mW/g

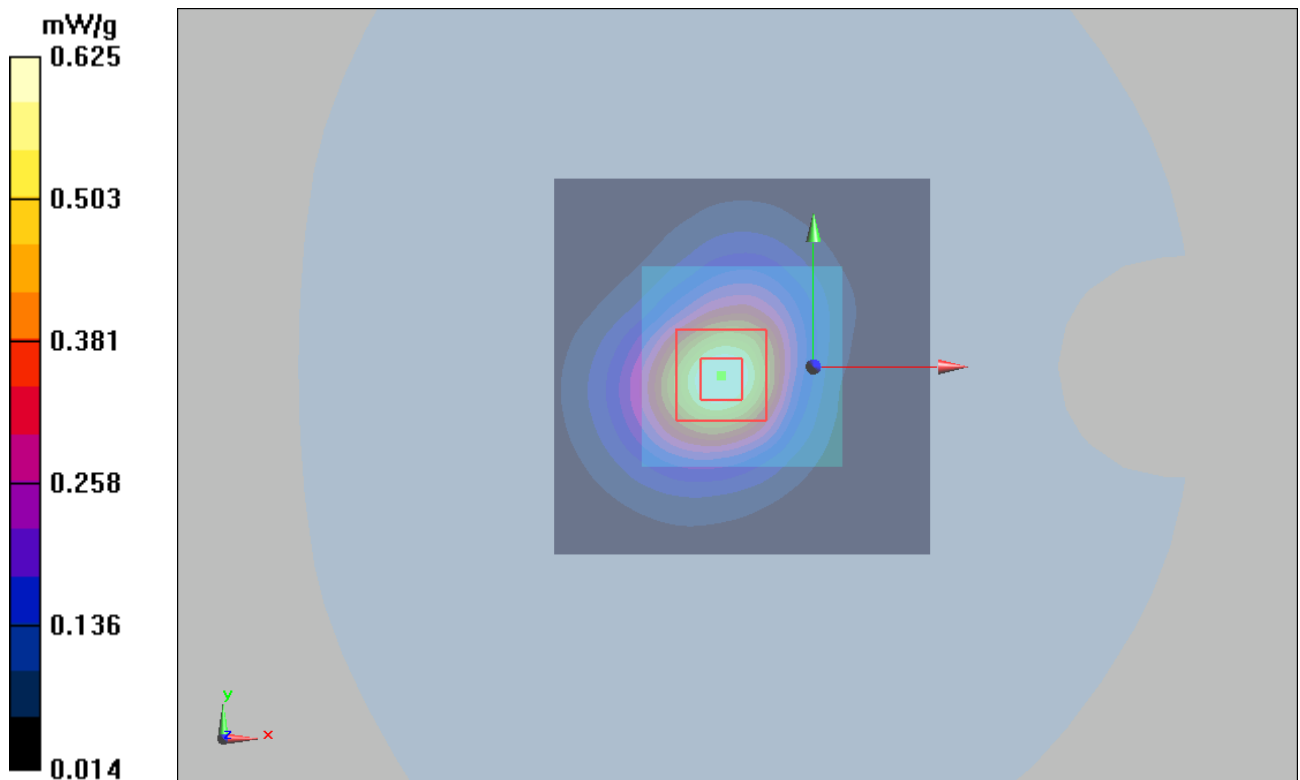


Figure 33 GSM 1900 EGPRS (4 timeslots in uplink) with Lenovo Y-450 Test Position 4 Channel
810

GSM 1900 EGPRS (3 timeslots in uplink) with Lenovo Y-450 Test Position 4 High

Date/Time: 3/16/2010 10:02:56 PM

Communication System: PCS 1900+EGPRS(3Up); Frequency: 1909.8 MHz; Duty Cycle: 1:2.767

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 52.4$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 4 High/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.698 mW/g

Test Position 4 High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.8 V/m; Power Drift = -0.196 dB

Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.637 mW/g; SAR(10 g) = 0.352 mW/g

Maximum value of SAR (measured) = 0.698 mW/g

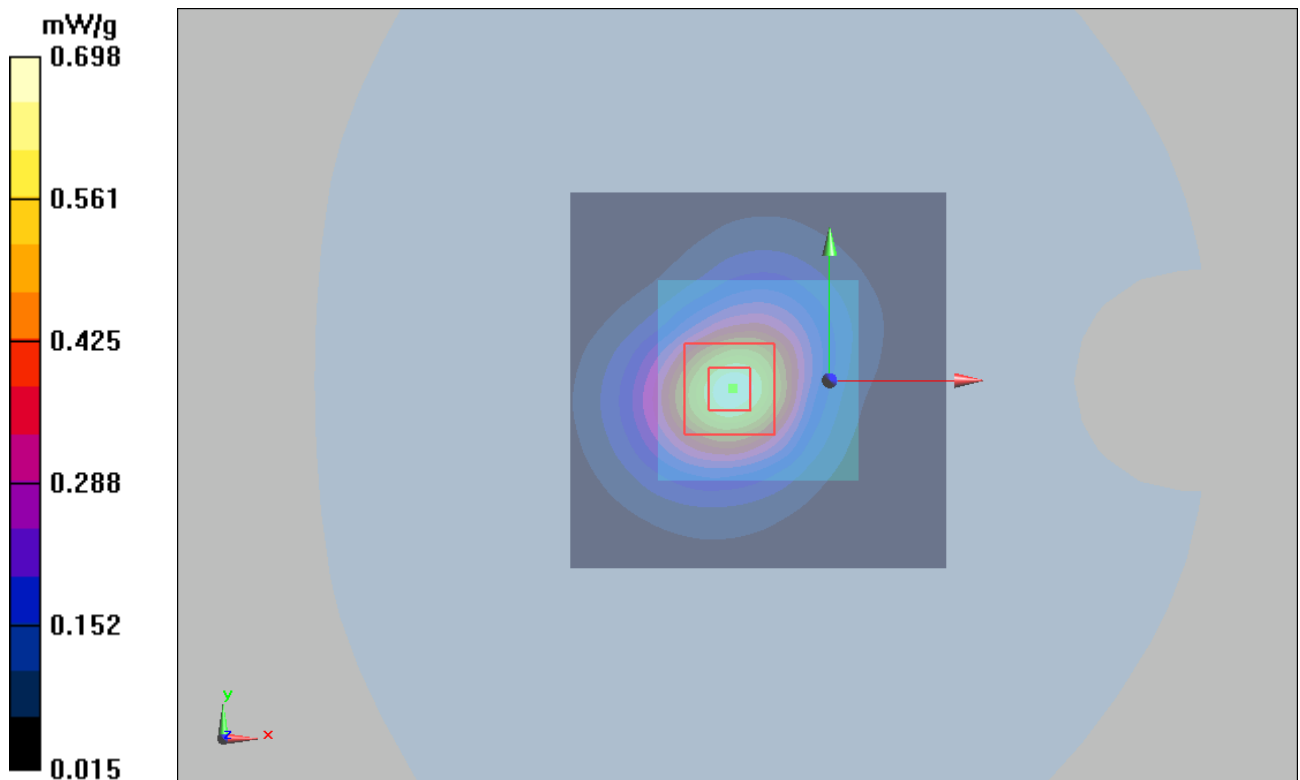


Figure 34 GSM 1900 EGPRS (3 timeslots in uplink) with Lenovo Y-450 Test Position 4 Channel
810

GSM 1900 EGPRS (2 timeslots in uplink) with Lenovo Y-450 Test Position 4 High

Date/Time: 3/16/2010 11:43:18 PM

Communication System: PCS 1900+EGPRS(2Up); Frequency: 1909.8 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 52.4$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 4 High/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.835 mW/g

Test Position 4 High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23 V/m; Power Drift = -0.031 dB

Peak SAR (extrapolated) = 1.44 W/kg

SAR(1 g) = 0.789 mW/g; SAR(10 g) = 0.435 mW/g

Maximum value of SAR (measured) = 0.856 mW/g

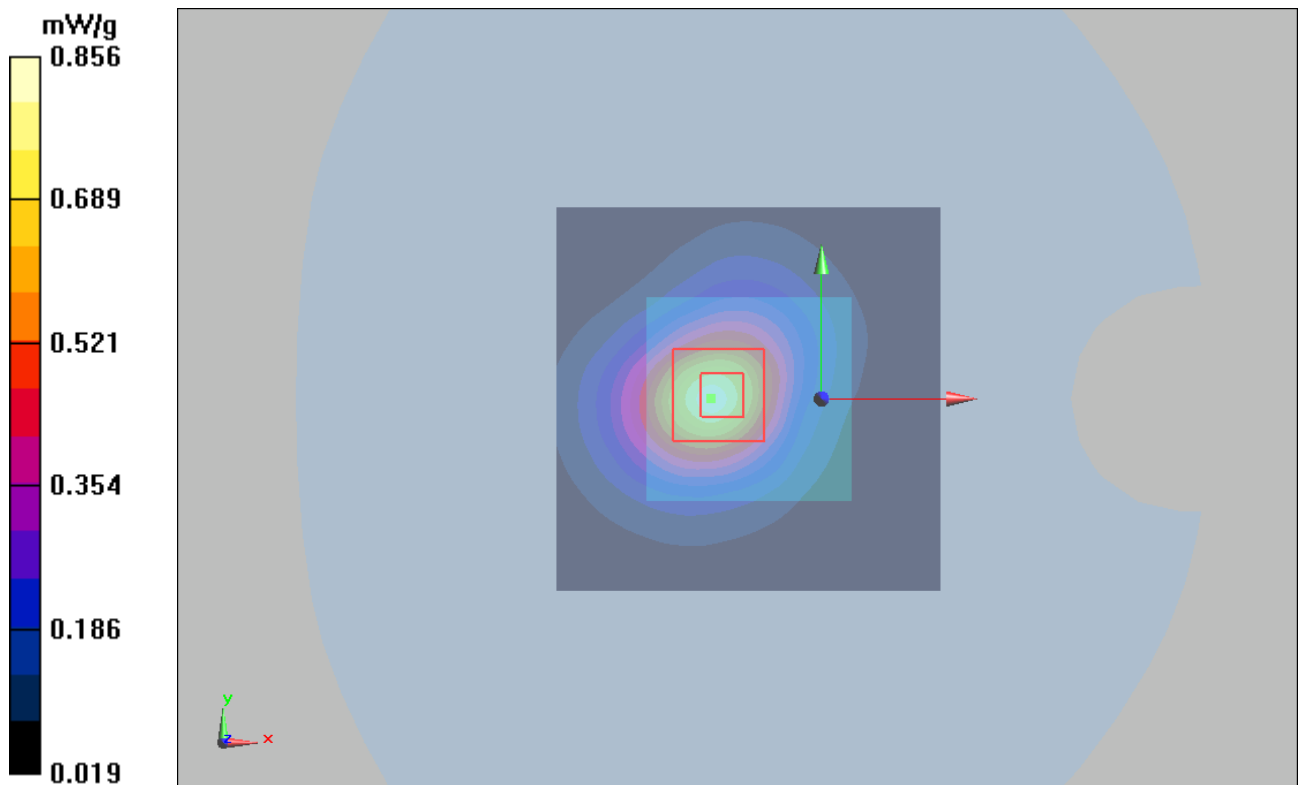


Figure 35 GSM 1900 EGPRS (2 timeslots in uplink) with Lenovo Y-450 Test Position 4 Channel
810

GSM 1900 EGPRS (1 timeslot in uplink) with Lenovo Y-450 Test Position 4 High

Date/Time: 3/17/2010 12:08:18 AM

Communication System: PCS 1900+EGPRS(1Up); Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 52.4$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 4 High/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.861 mW/g


Test Position 4 High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.2 V/m; Power Drift = 0.038 dB

Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 0.828 mW/g; SAR(10 g) = 0.456 mW/g

Maximum value of SAR (measured) = 0.912 mW/g

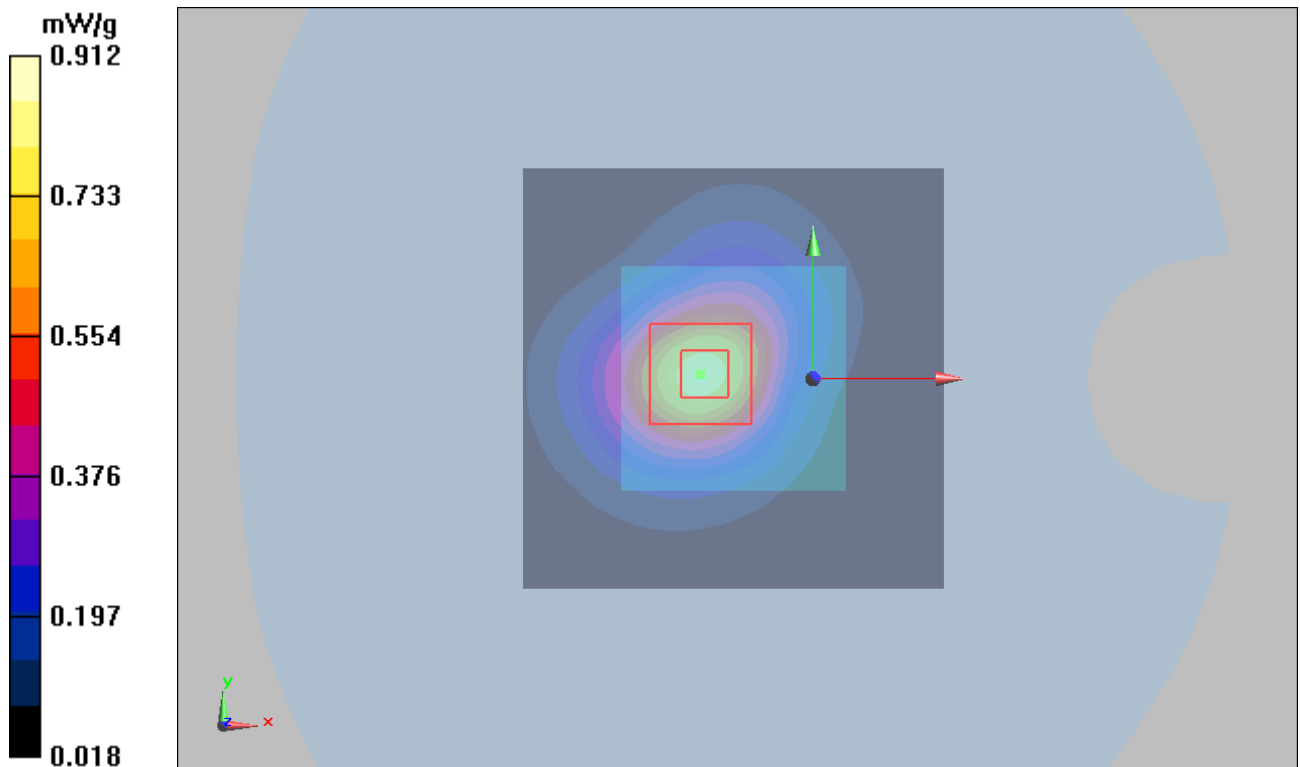

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RZA2010-0253

Page 78 of 138

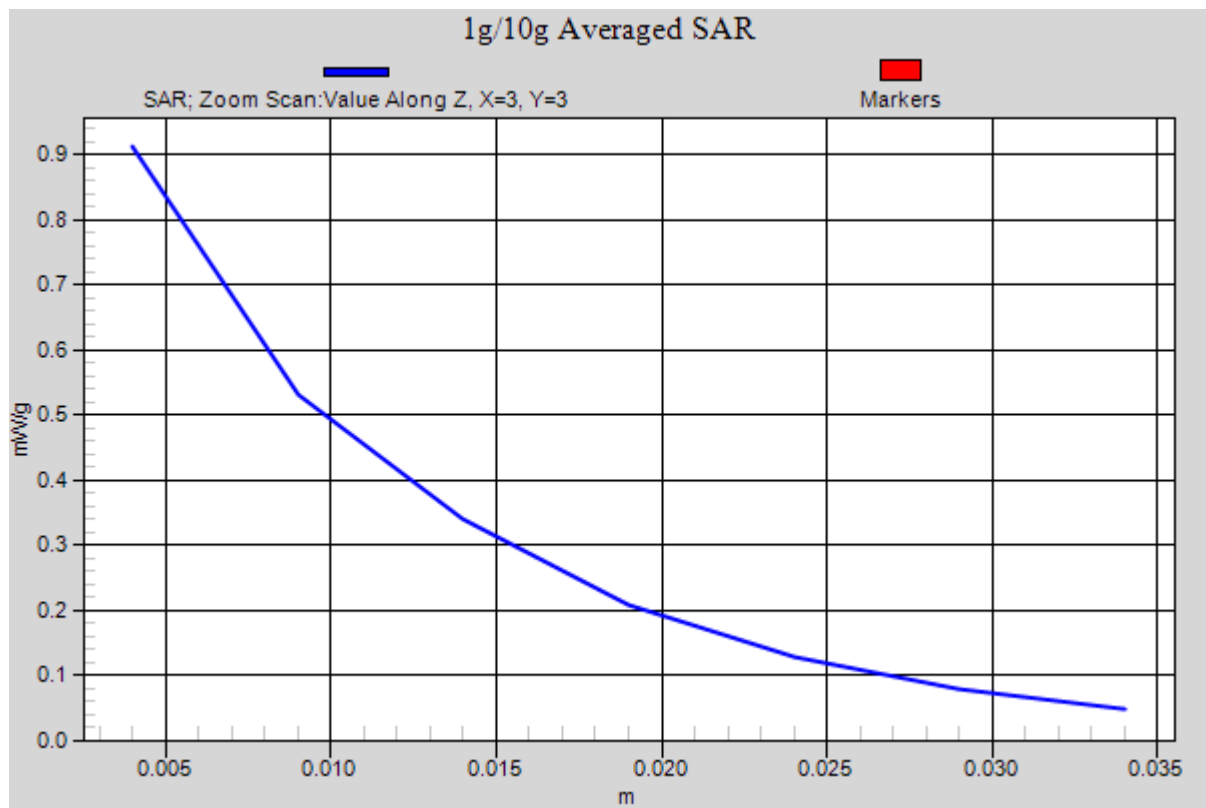


Figure 36 GSM 1900 EGPRS (1 timeslot in uplink) with Lenovo Y-450 Test Position 4 Channel

WCDMA Band II with Lenovo Y-450 Test Position 4 High

Date/Time: 3/16/2010 2:14:44 PM

Communication System: WCDMA Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1908 \text{ MHz}$; $\sigma = 1.56 \text{ mho/m}$; $\epsilon_r = 52.4$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.3°C Liquid Temperature: 21.5°C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 4 High/Area Scan (91x91x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.992 mW/g

Test Position 4 High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 24.8 V/m ; Power Drift = 0.059 dB

Peak SAR (extrapolated) = 1.63 W/kg

SAR(1 g) = 0.904 mW/g ; SAR(10 g) = 0.500 mW/g

Maximum value of SAR (measured) = 0.990 mW/g

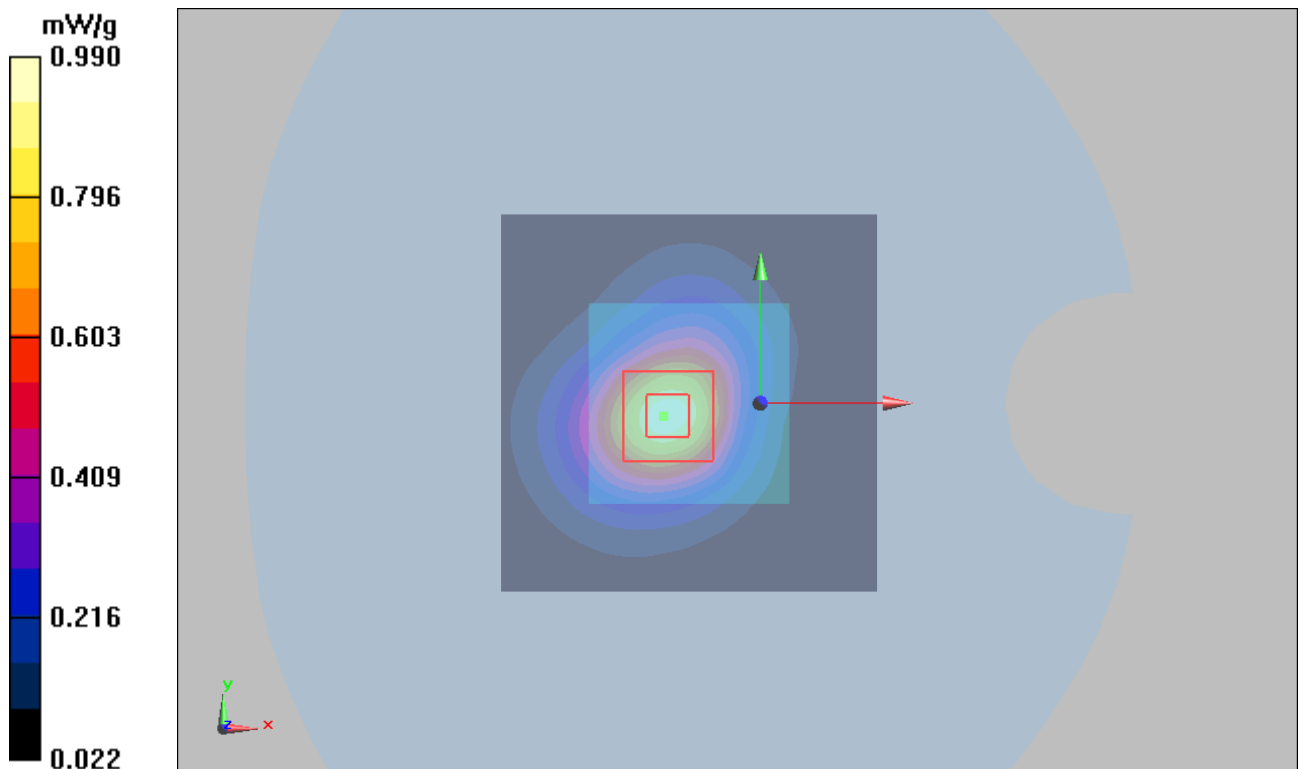


Figure 37 WCDMA Band II with Lenovo Y-450 Test Position 4 Channel 9538

WCDMA Band II with Lenovo Y-450 Test Position 4 Middle

Date/Time: 3/16/2010 1:36:44 PM

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 4 Middle/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.989 mW/g


Test Position 4 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.9 V/m; Power Drift = -0.105 dB

Peak SAR (extrapolated) = 1.74 W/kg

SAR(1 g) = 0.973 mW/g; SAR(10 g) = 0.544 mW/g

Maximum value of SAR (measured) = 1.07 mW/g

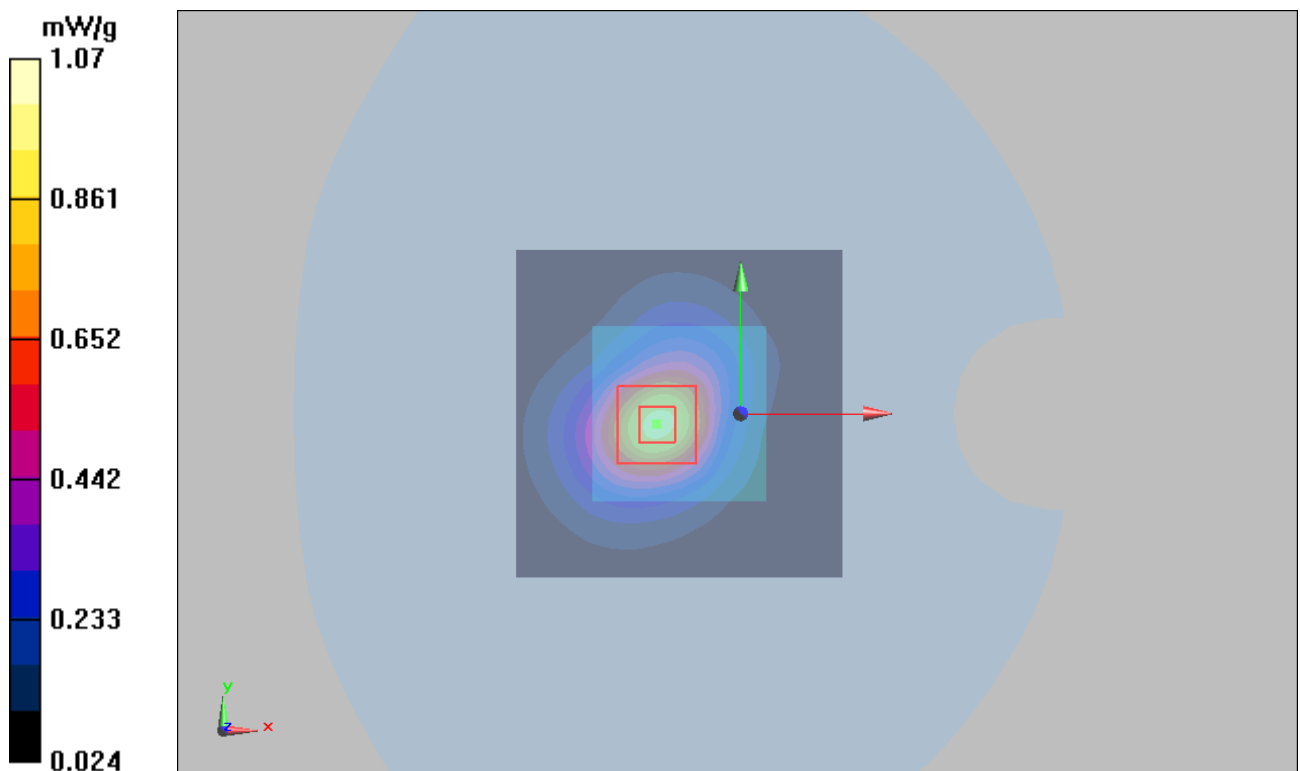

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RZA2010-0253

Page 81 of 138

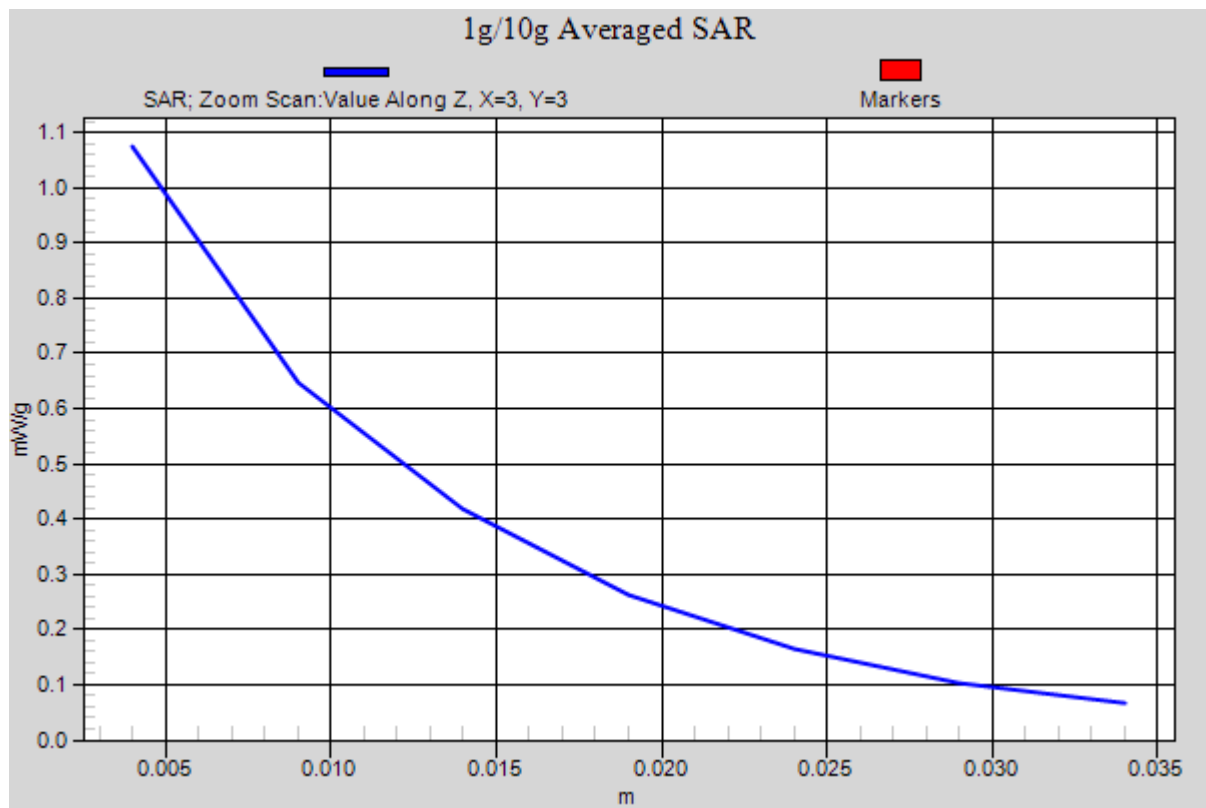


Figure 38 WCDMA Band II with Lenovo Y-450 Test Position 4 Channel 9400

WCDMA Band II with Lenovo Y-450 Test Position 4 Low

Date/Time: 3/16/2010 1:55:19 PM

Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 52.8$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 4 Low/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.889 mW/g

Test Position 4 Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.2 V/m; Power Drift = 0.040 dB

Peak SAR (extrapolated) = 1.4 W/kg

SAR(1 g) = 0.800 mW/g; SAR(10 g) = 0.450 mW/g

Maximum value of SAR (measured) = 0.879 mW/g

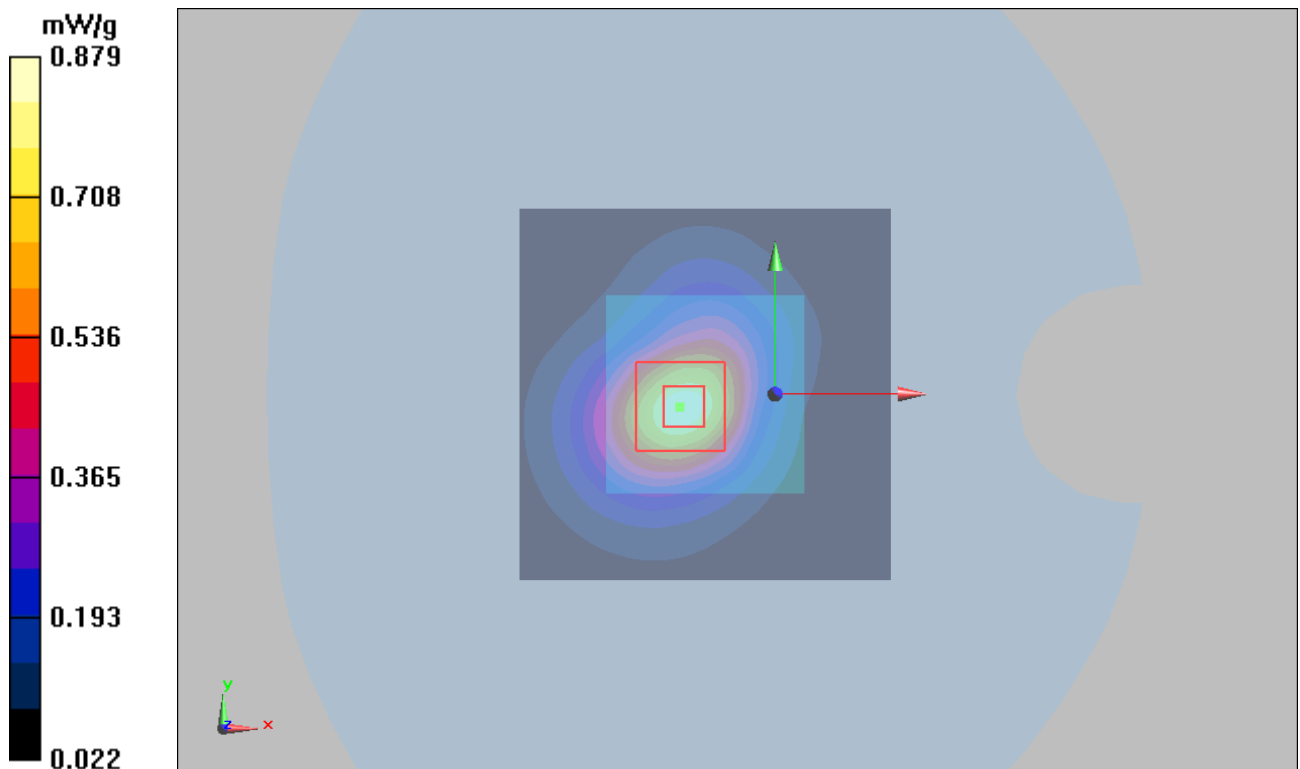


Figure 39 WCDMA Band II with Lenovo Y-450 Test Position 4 Channel 9262

WCDMA Band II with Lenovo Y-450 Test Position 1 Middle

Date/Time: 3/16/2010 6:52:49 PM

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 1 Middle/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.098 mW/g

Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.8 V/m; Power Drift = 0.173 dB

Peak SAR (extrapolated) = 0.160 W/kg

SAR(1 g) = 0.095 mW/g; SAR(10 g) = 0.060 mW/g

Maximum value of SAR (measured) = 0.101 mW/g

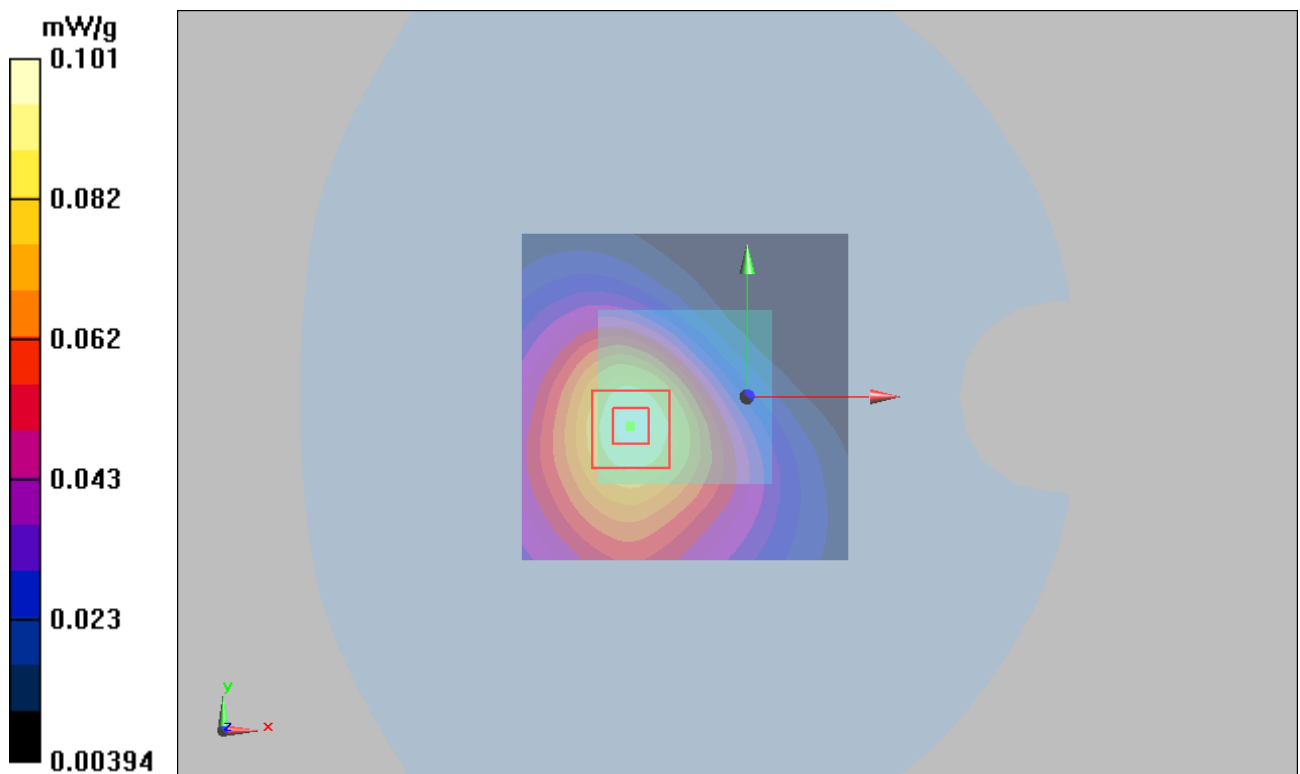


Figure 40 WCDMA Band II with Lenovo Y-450 Test Position 1 Channel 9400

WCDMA Band II with Lenovo Y-450 Test Position 2 Middle

Date/Time: 3/16/2010 5:20:14 PM

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 2 Middle/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.764 mW/g

Test Position 2 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.2 V/m; Power Drift = 0.063 dB

Peak SAR (extrapolated) = 1.24 W/kg

SAR(1 g) = 0.685 mW/g; SAR(10 g) = 0.382 mW/g

Maximum value of SAR (measured) = 0.754 mW/g

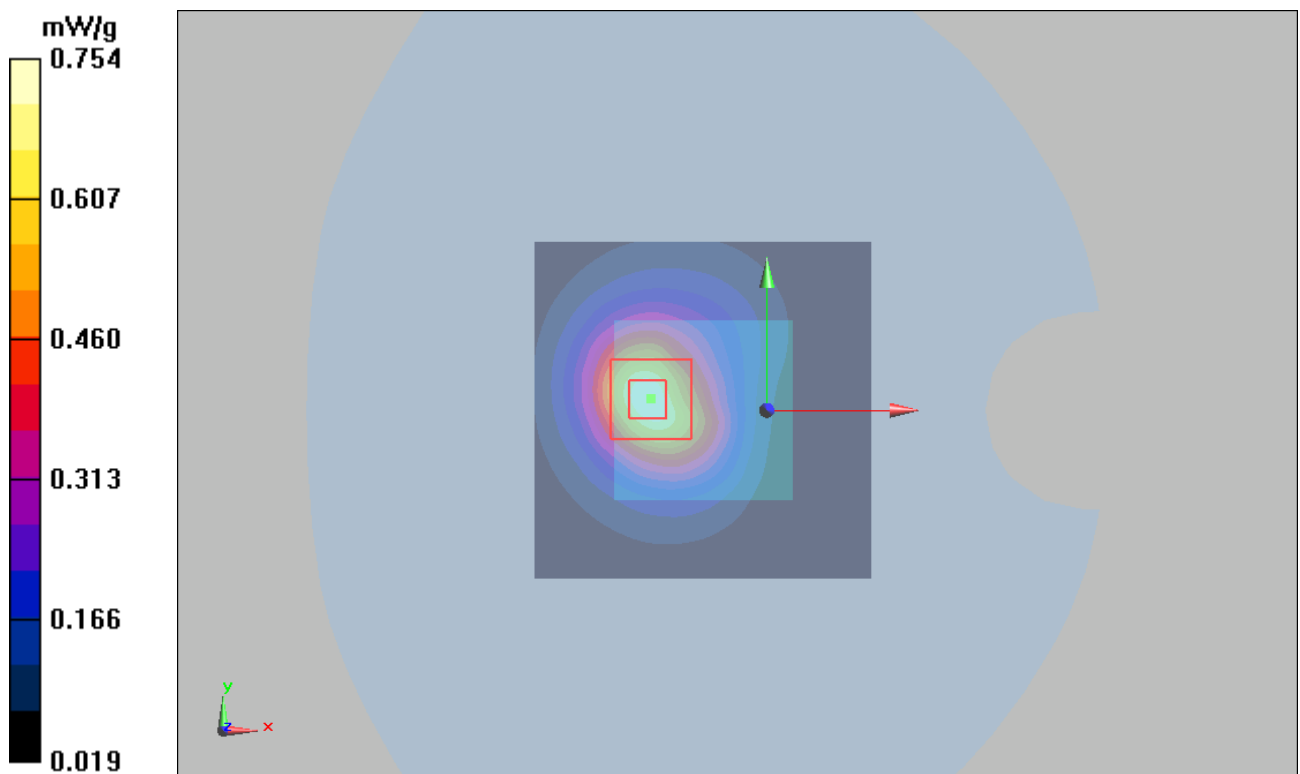


Figure 41 WCDMA Band II with Lenovo Y-450 Test Position 2 Channel 9400

WCDMA Band II with Lenovo Y-450 Test Position 3 Middle

Date/Time: 3/16/2010 4:16:51 PM

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 3 Middle/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.483 mW/g

Test Position 3 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.2 V/m; Power Drift = 0.173 dB

Peak SAR (extrapolated) = 0.823 W/kg

SAR(1 g) = 0.446 mW/g; SAR(10 g) = 0.242 mW/g

Maximum value of SAR (measured) = 0.497 mW/g

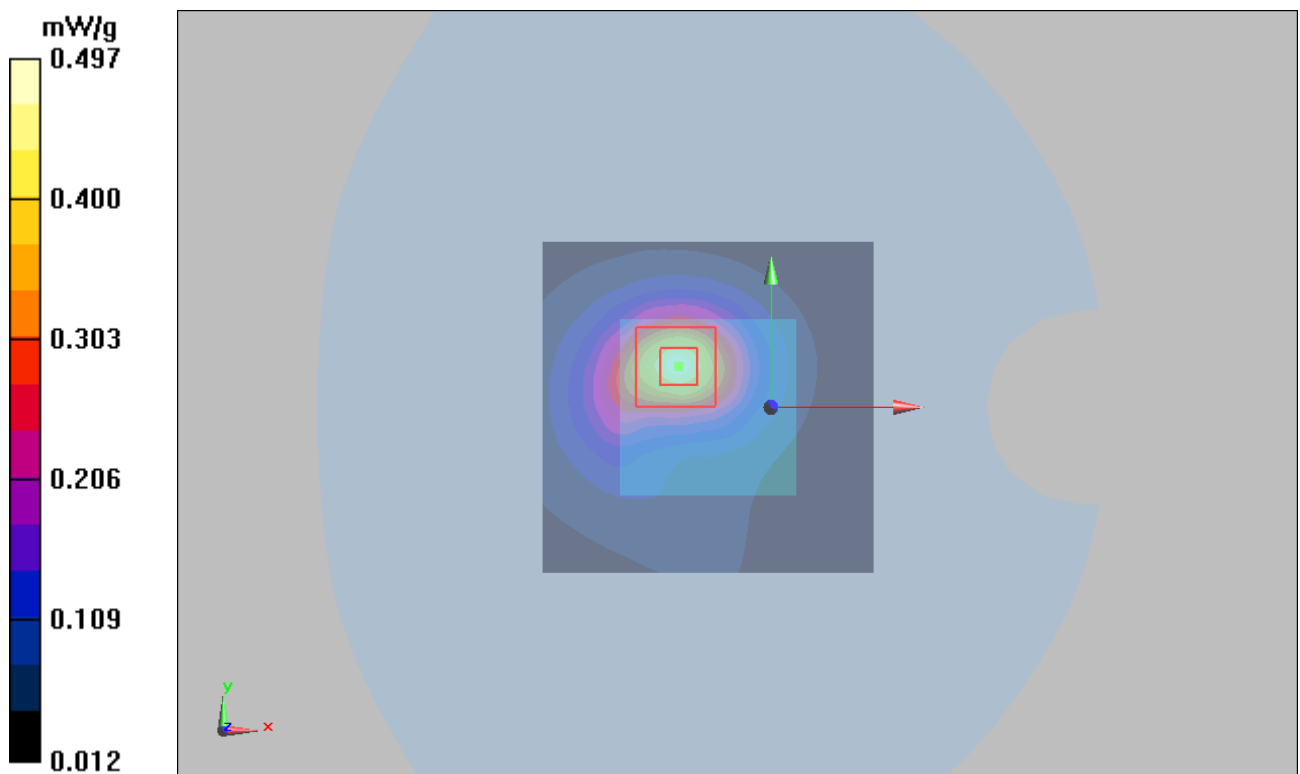


Figure 42 WCDMA Band II with Lenovo Y-450 Test Position 3 Channel 9400

WCDMA Band II with Lenovo Y-450 Test Position 5 Middle

Date/Time: 3/16/2010 2:34:37 PM

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 5 Middle/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.253 mW/g

Test Position 5 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.7 V/m; Power Drift = -0.042 dB

Peak SAR (extrapolated) = 0.428 W/kg

SAR(1 g) = 0.230 mW/g; SAR(10 g) = 0.132 mW/g

Maximum value of SAR (measured) = 0.249 mW/g

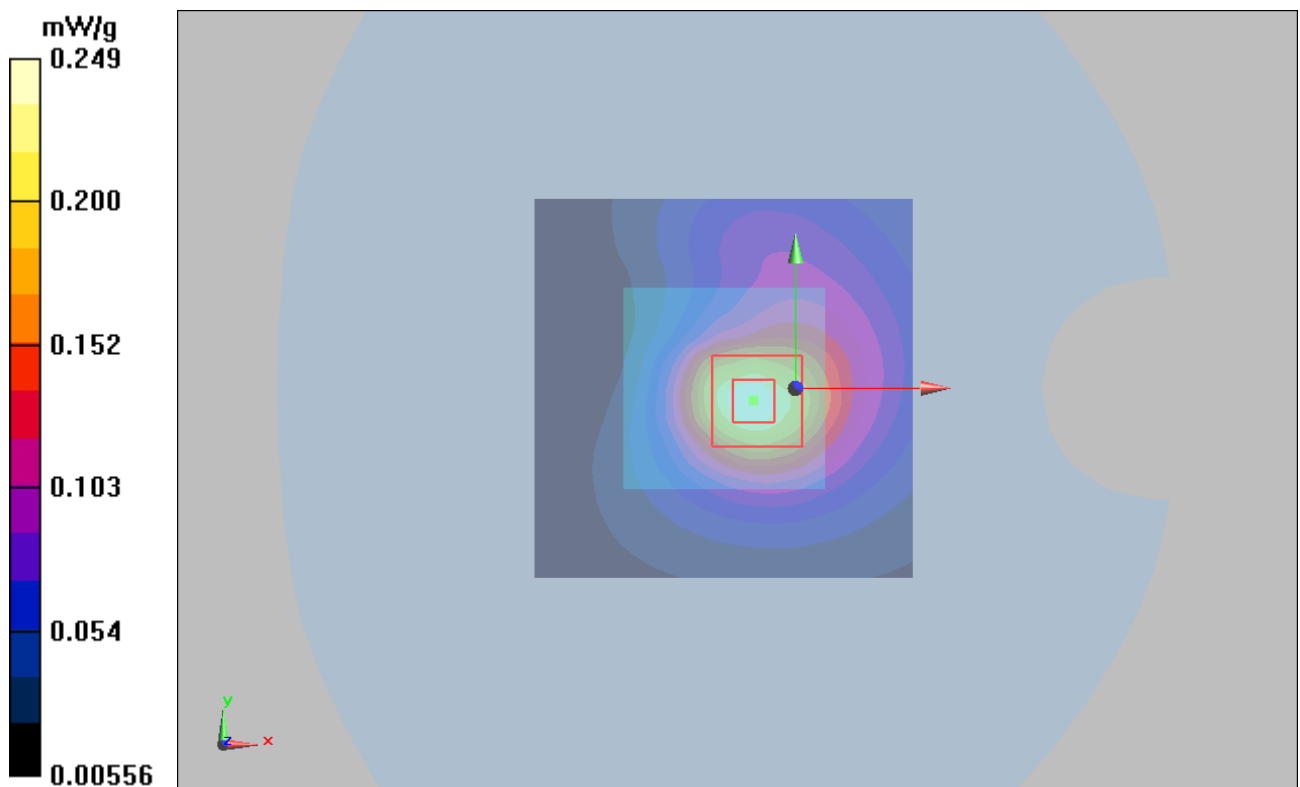


Figure 43 WCDMA Band II with Lenovo Y-450 Test Position 5 Channel 9400

WCDMA Band II with Lenovo Y-450 Test Position 6 High

Date/Time: 3/16/2010 10:31:56 PM

Communication System: WCDMA Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1908$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 52.4$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 6 High/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.815 mW/g

Test Position 6 High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.2 V/m; Power Drift = 0.173 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.757 mW/g; SAR(10 g) = 0.435 mW/g

Maximum value of SAR (measured) = 0.818 mW/g

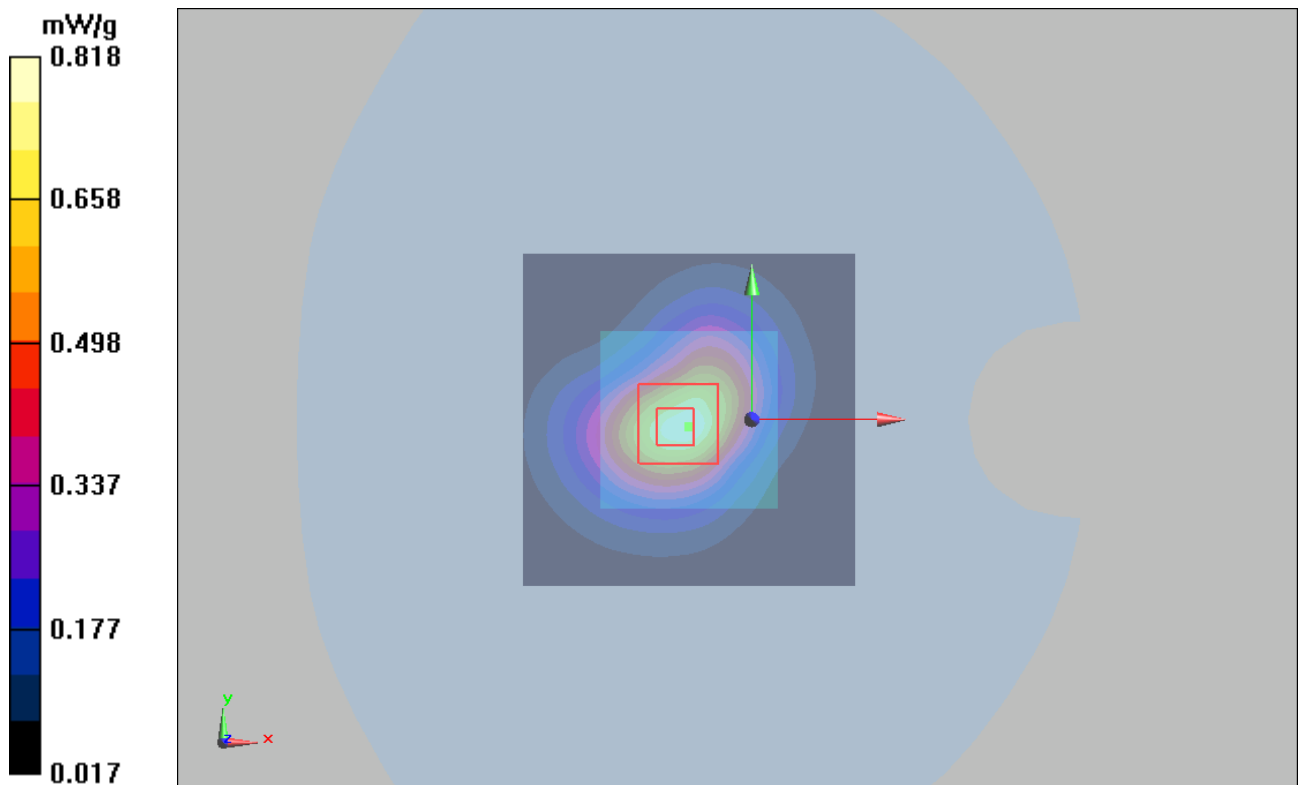


Figure 44 WCDMA Band II with Lenovo Y-450 Test Position 6 Channel 9538

WCDMA Band II with Lenovo Y-450 Test Position 6 Middle

Date/Time: 3/16/2010 8:30:29 PM

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 6 Middle/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.882 mW/g

Test Position 6 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.1 V/m; Power Drift = 0.165 dB

Peak SAR (extrapolated) = 1.38 W/kg

SAR(1 g) = 0.809 mW/g; SAR(10 g) = 0.469 mW/g

Maximum value of SAR (measured) = 0.884 mW/g

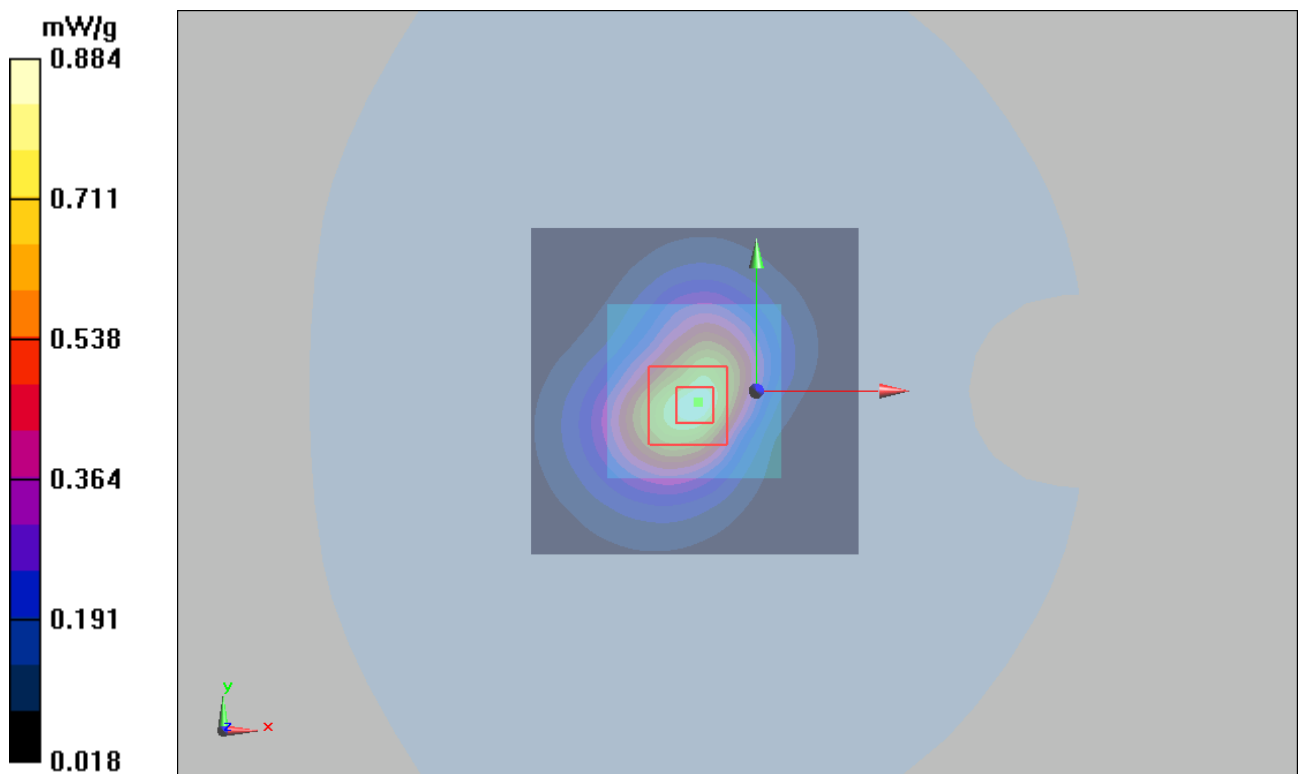


Figure 45 WCDMA Band II with Lenovo Y-450 Test Position 6 Channel 9400

WCDMA Band II with Lenovo Y-450 Test Position 6 Low

Date/Time: 3/16/2010 10:58:20 PM

Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 52.8$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 6 Low/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.783 mW/g

Test Position 6 Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.8 V/m; Power Drift = 0.028 dB

Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.717 mW/g; SAR(10 g) = 0.416 mW/g

Maximum value of SAR (measured) = 0.790 mW/g

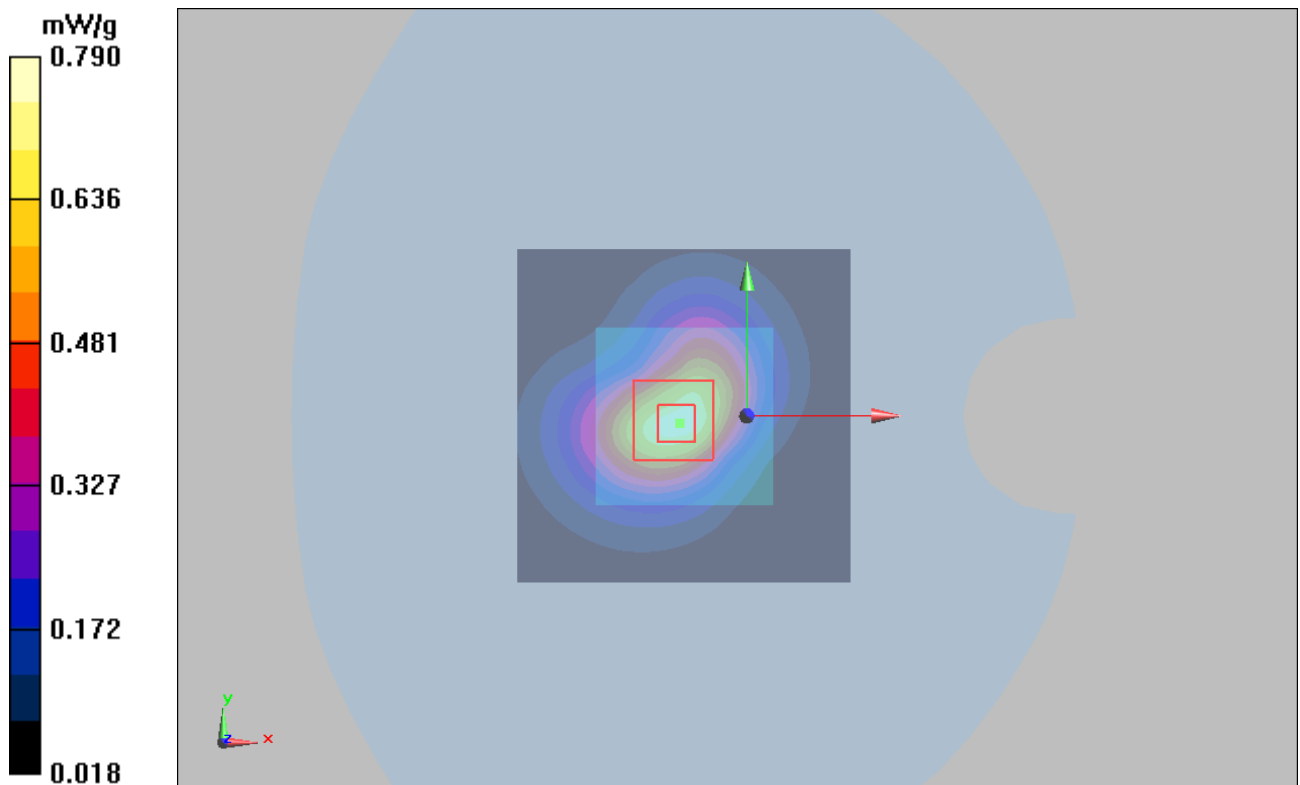


Figure 46 WCDMA Band II with Lenovo Y-450 Test Position 6 Channel 9262

WCDMA Band II with Lenovo Y-450 Test Position 7 Middle

Date/Time: 3/16/2010 9:02:42 PM

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.5 \text{ mho/m}$; $\epsilon_r = 52.6$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.3°C Liquid Temperature: 21.5°C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 7 Middle/Area Scan (91x91x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (interpolated) = 0.723 mW/g

Test Position 7 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$,
 $dz=5\text{mm}$

Reference Value = 18.8 V/m ; Power Drift = 0.173 dB

Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.692 mW/g ; SAR(10 g) = 0.394 mW/g

Maximum value of SAR (measured) = 0.760 mW/g

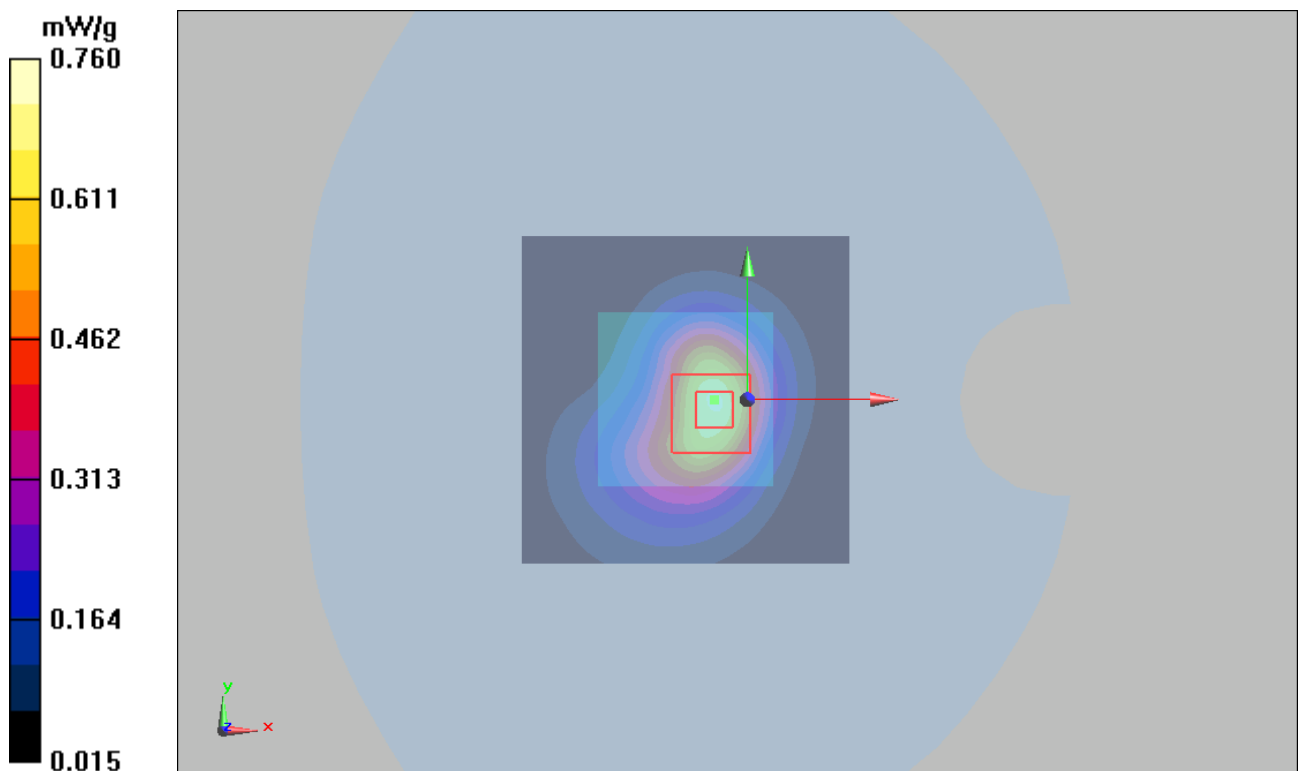


Figure 47 WCDMA Band II with Lenovo Y-450 Test Position 7 Channel 9400

WCDMA Band II + HSDPA with Lenovo Y-450 Test Position 4 Middle

Date/Time: 3/17/2010 12:30:05 AM

Communication System: WCDMA Band II+HSDPA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 4 Middle/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.921 mW/g

Test Position 4 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23 V/m; Power Drift = -0.104 dB

Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 0.869 mW/g; SAR(10 g) = 0.483 mW/g

Maximum value of SAR (measured) = 0.950 mW/g

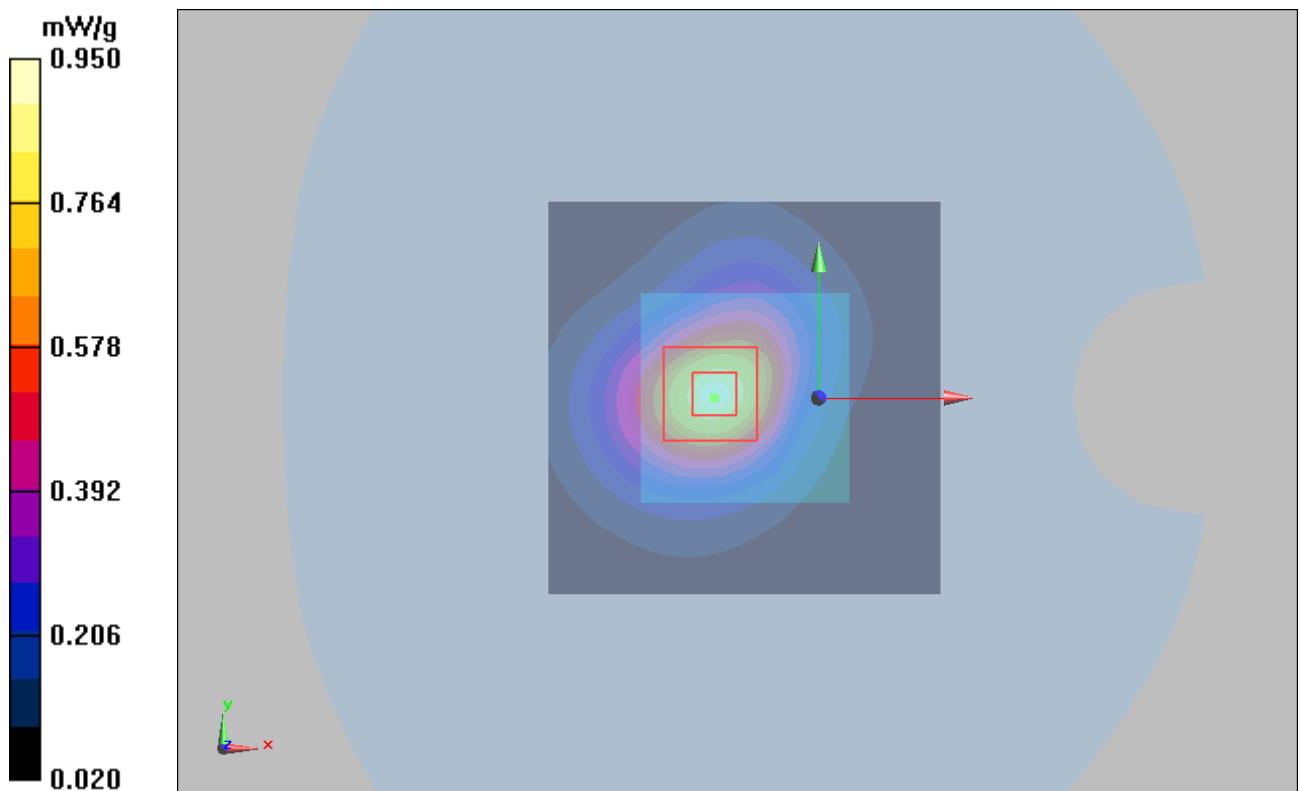


Figure 48 WCDMA Band II+ HSDPA with Lenovo Y-450 Test Position 4 Channel 9400

WCDMA Band II + HSUPA with Lenovo Y-450 Test Position 4 Middle

Date/Time: 3/17/2010 12:56:56 AM

Communication System: WCDMA Band II+HSUPA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM000 T01; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 4 Middle/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.737 mW/g

Test Position 4 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.1 V/m; Power Drift = -0.175 dB

Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.654 mW/g; SAR(10 g) = 0.367 mW/g

Maximum value of SAR (measured) = 0.716 mW/g

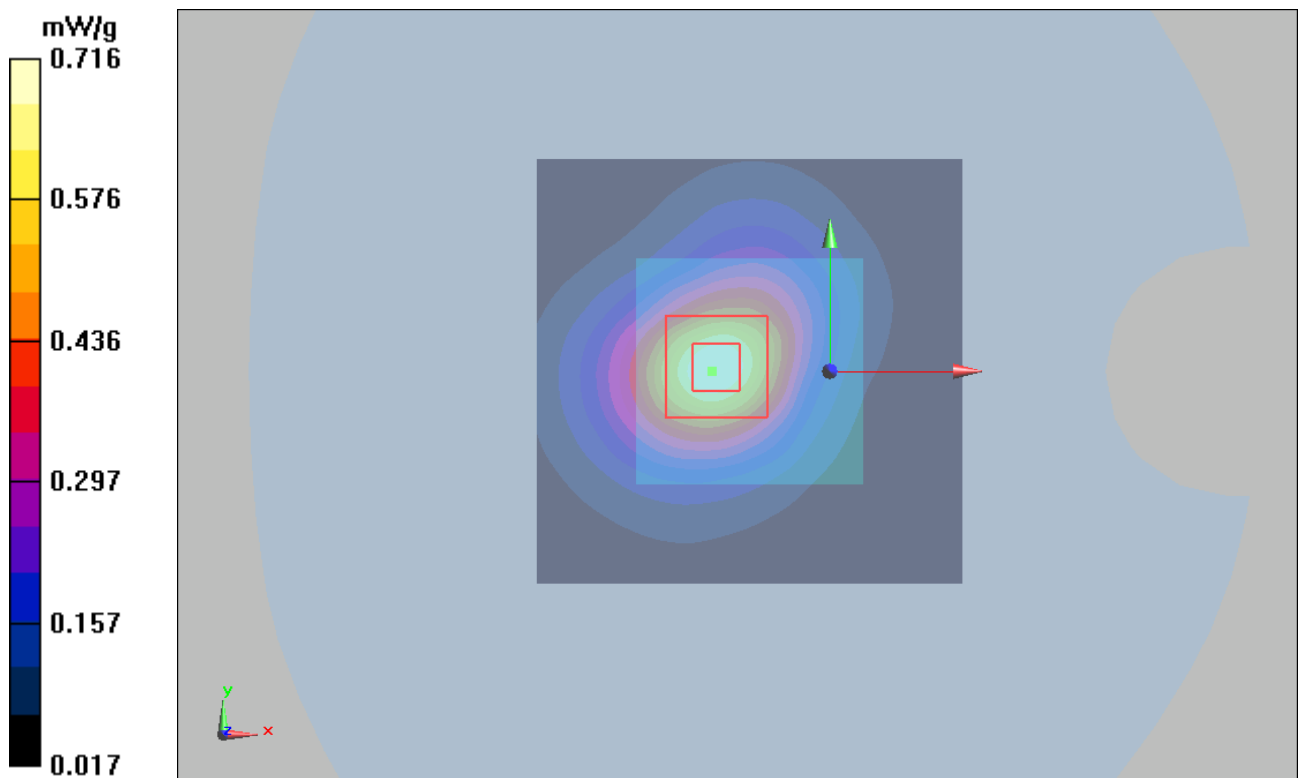


Figure 49 WCDMA Band II+ HSUPA with Lenovo Y-450 Test Position 4 Channel 9400

WCDMA Band V with Lenovo Y-450 Test Position 4 Middle

Date/Time: 3/17/2010 4:07:25 PM

Communication System: WCDMA Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 54$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 4 Middle/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.225 mW/g

Test Position 4 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.1 V/m; Power Drift = 0.116 dB

Peak SAR (extrapolated) = 0.356 W/kg

SAR(1 g) = 0.204 mW/g; SAR(10 g) = 0.115 mW/g

Maximum value of SAR (measured) = 0.229 mW/g

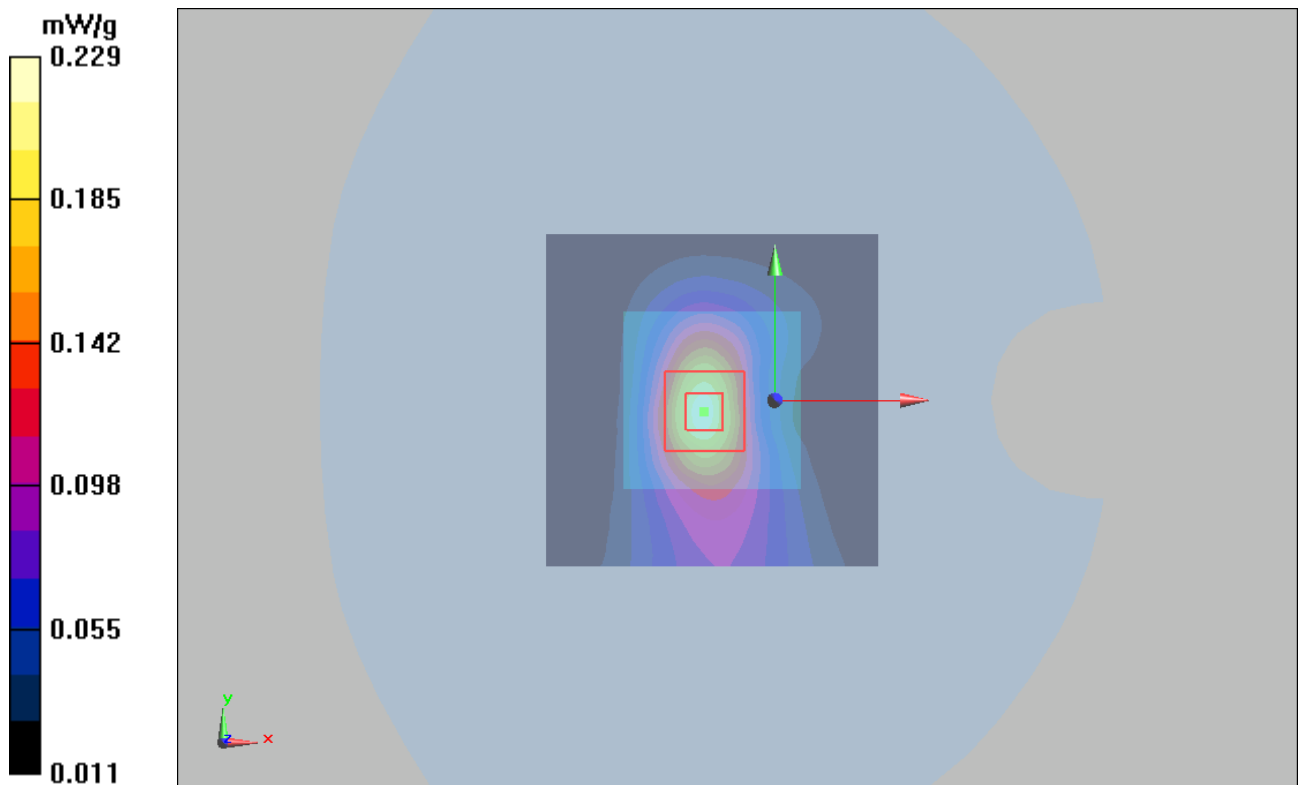


Figure 50 WCDMA Band V with Lenovo Y-450 Test Position 4 Channel 4183

WCDMA Band V with Lenovo Y-450 Test Position 1 Middle

Date/Time: 3/17/2010 3:50:23 PM

Communication System: WCDMA Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 1.01 \text{ mho/m}$; $\epsilon_r = 54$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.3°C Liquid Temperature: 21.5°C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 1 Middle/Area Scan (91x91x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (interpolated) = 0.111 mW/g

Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$,
 $dz=5\text{mm}$

Reference Value = 10.1 V/m ; Power Drift = 0.094 dB

Peak SAR (extrapolated) = 0.142 W/kg

SAR(1 g) = 0.104 mW/g ; SAR(10 g) = 0.073 mW/g

Maximum value of SAR (measured) = 0.111 mW/g

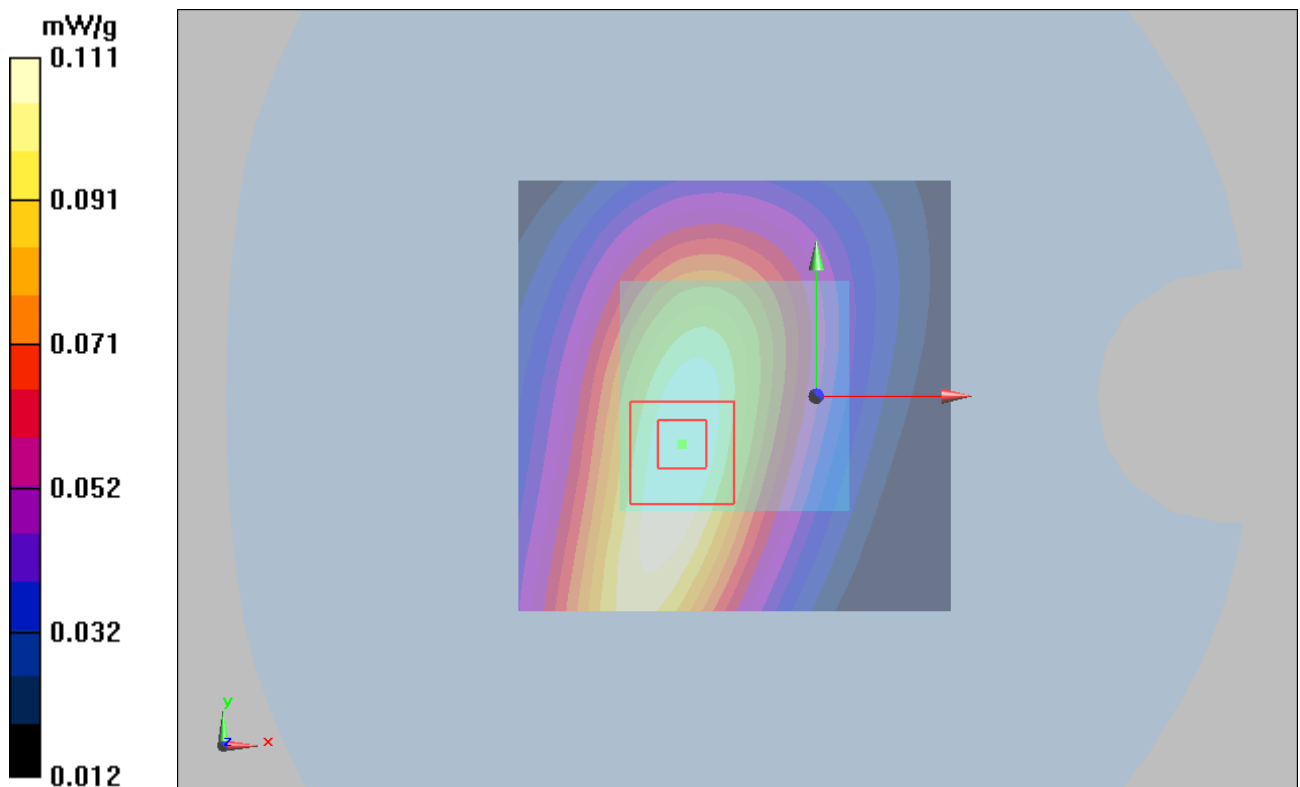


Figure 51 WCDMA Band V with Lenovo Y-450 Test Position 1 Channel 4183

WCDMA Band V with Lenovo Y-450 Test Position 2 Middle

Date/Time: 3/17/2010 4:26:07 PM

Communication System: WCDMA Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 54$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 2 Middle/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.166 mW/g

Test Position 2 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.8 V/m; Power Drift = 0.072 dB

Peak SAR (extrapolated) = 0.260 W/kg

SAR(1 g) = 0.141 mW/g; SAR(10 g) = 0.074 mW/g

Maximum value of SAR (measured) = 0.158 mW/g

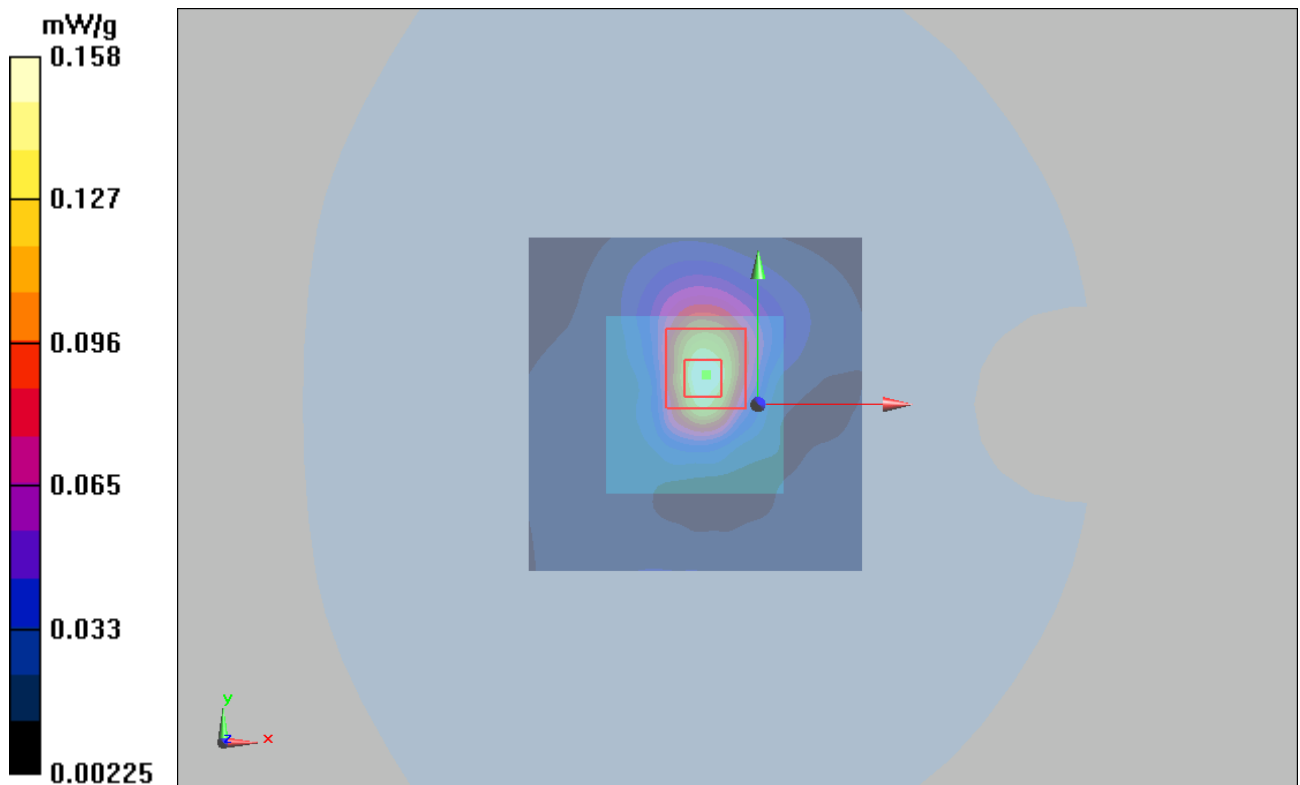


Figure 52 WCDMA Band V with Lenovo Y-450 Test Position 2 Channel 4183

WCDMA Band V with Lenovo Y-450 Test Position 3 Middle

Date/Time: 3/17/2010 3:22:43 PM

Communication System: WCDMA Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 54$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 3 Middle/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.082 mW/g

Test Position 3 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.63 V/m; Power Drift = 0.019 dB

Peak SAR (extrapolated) = 0.102 W/kg

SAR(1 g) = 0.076 mW/g; SAR(10 g) = 0.054 mW/g

Maximum value of SAR (measured) = 0.081 mW/g

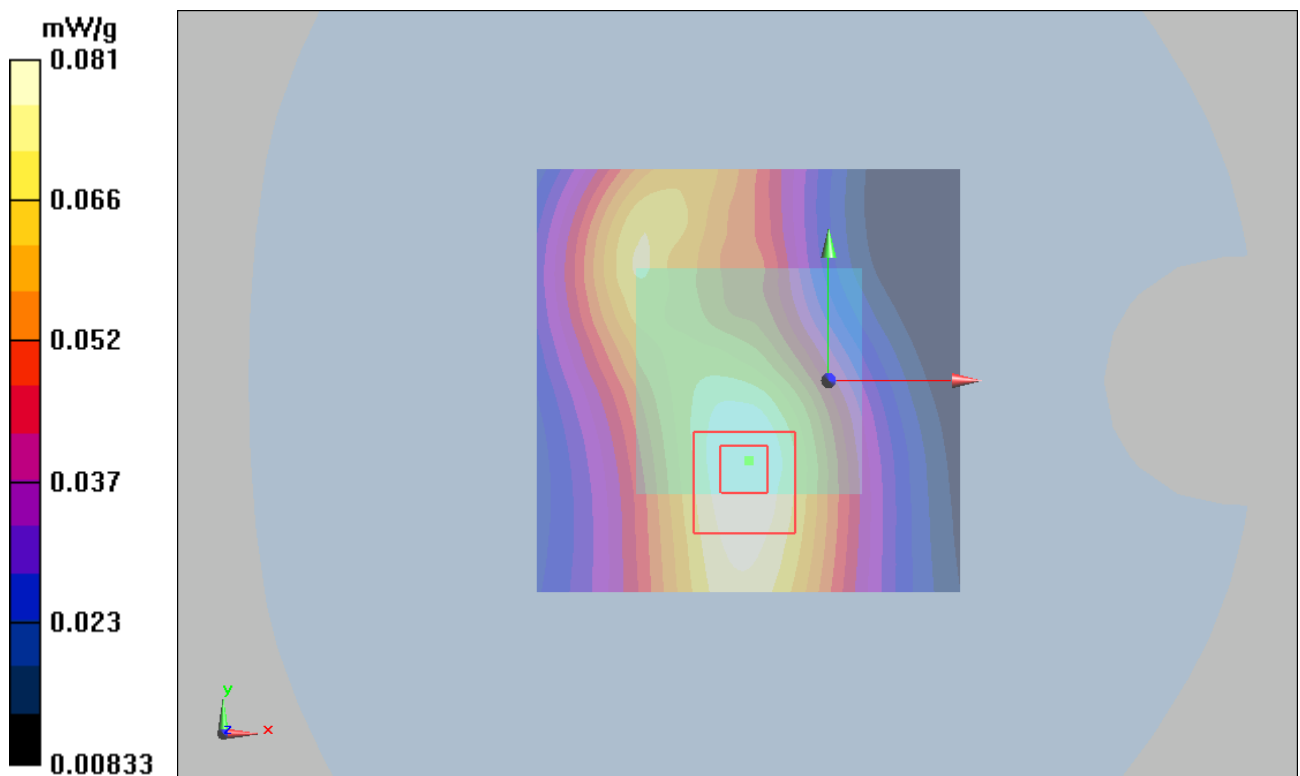


Figure 53 WCDMA Band V with Lenovo Y-450 Test Position 3 Channel 4183

WCDMA Band V with Lenovo Y-450 Test Position 5 Middle

Date/Time: 3/17/2010 3:01:29 PM

Communication System: WCDMA Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 1.01 \text{ mho/m}$; $\epsilon_r = 54$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.3°C Liquid Temperature: 21.5°C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 5 Middle/Area Scan (91x91x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (interpolated) = 0.076 mW/g

Test Position 5 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$,
 $dz=5\text{mm}$

Reference Value = 8.66 V/m ; Power Drift = 0.020 dB

Peak SAR (extrapolated) = 0.093 W/kg

SAR(1 g) = 0.072 mW/g ; SAR(10 g) = 0.053 mW/g

Maximum value of SAR (measured) = 0.076 mW/g

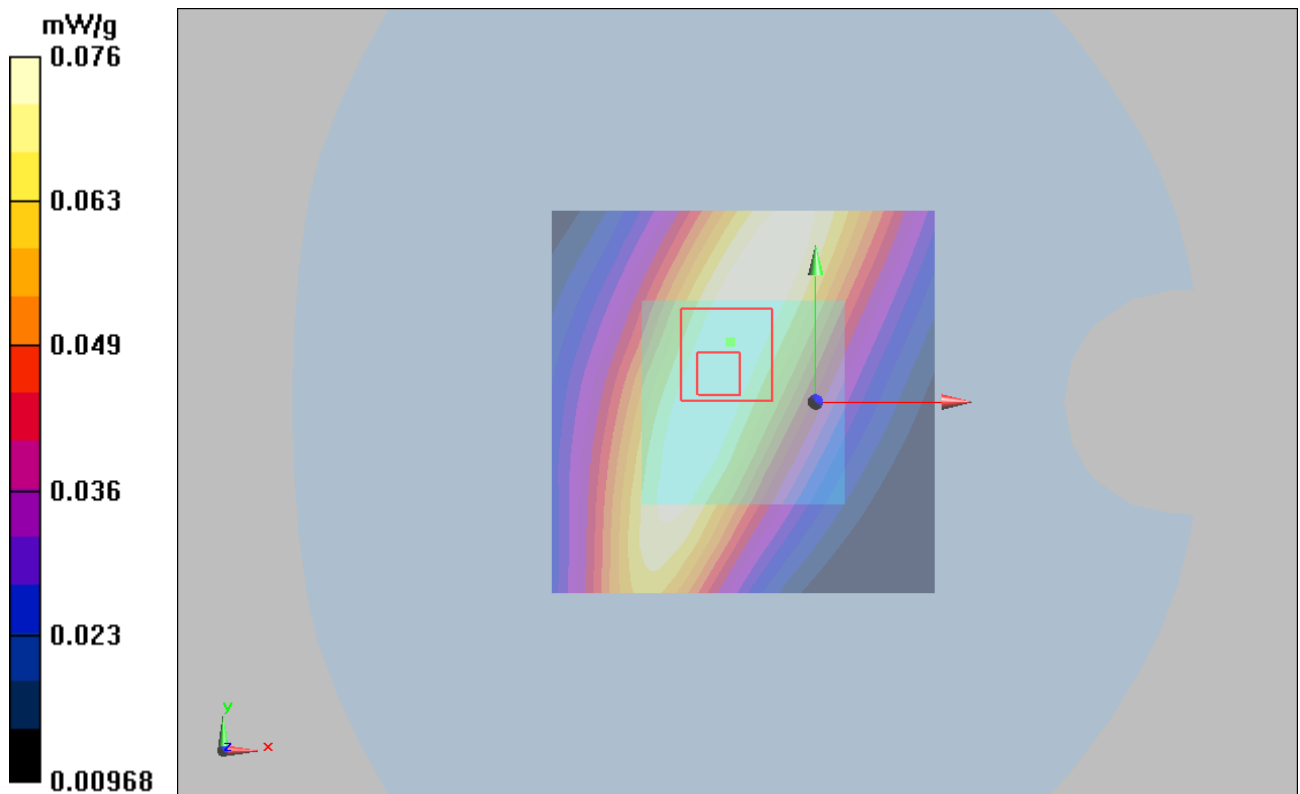


Figure 54 WCDMA Band V with Lenovo Y-450 Test Position 5 Channel 4183

WCDMA Band V with Lenovo Y-450 Test Position 6 Middle

Date/Time: 3/17/2010 6:04:38 PM

Communication System: WCDMA Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 1.01 \text{ mho/m}$; $\epsilon_r = 54$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.3°C Liquid Temperature: 21.5°C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 6 Middle/Area Scan (91x91x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (interpolated) = 0.350 mW/g

Test Position 6 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$,
 $dz=5\text{mm}$

Reference Value = 19.1 V/m ; Power Drift = -0.006 dB

Peak SAR (extrapolated) = 0.525 W/kg

SAR(1 g) = 0.313 mW/g ; SAR(10 g) = 0.179 mW/g

Maximum value of SAR (measured) = 0.350 mW/g

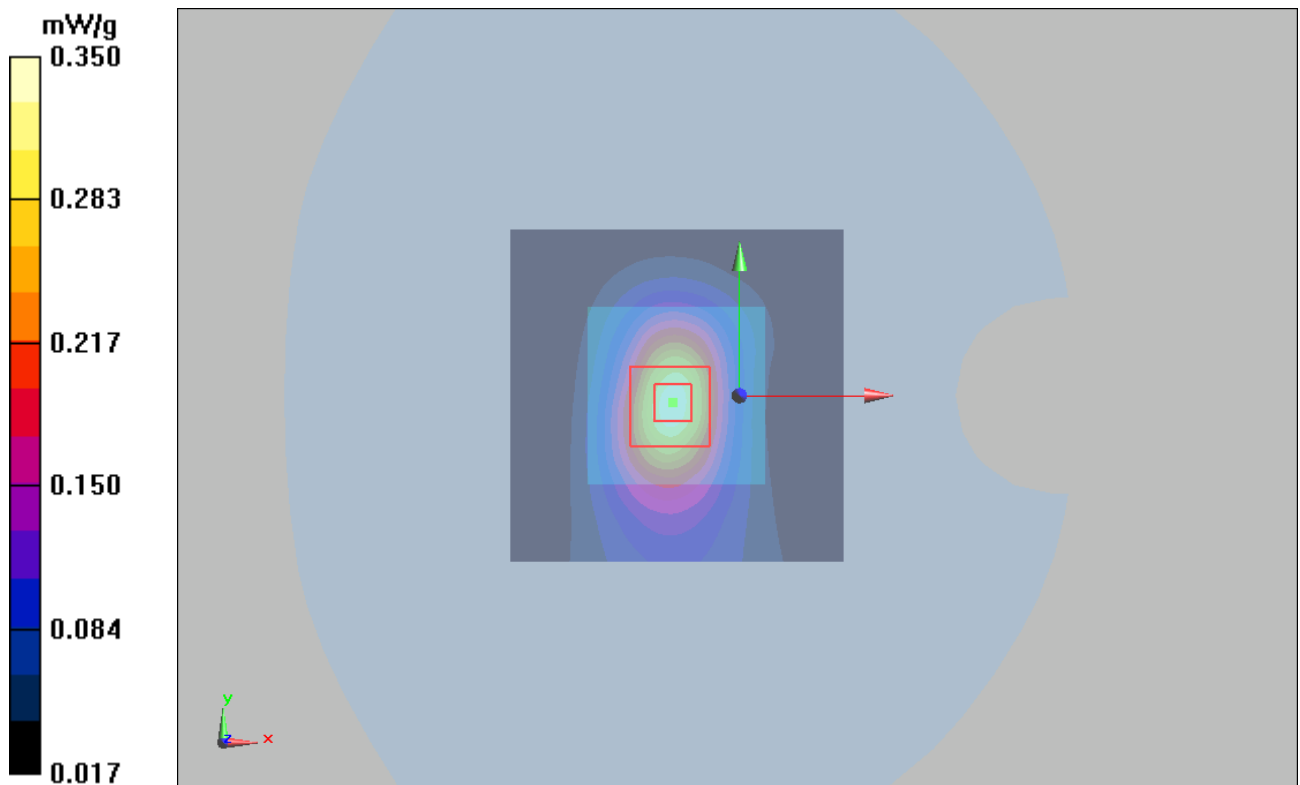


Figure 55 WCDMA Band V with Lenovo Y-450 Test Position 6 Channel 4183

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RZA2010-0253

Page 99 of 138

WCDMA Band V with Lenovo Y-450 Test Position 7 High

Date/Time: 3/17/2010 7:22:39 PM

Communication System: WCDMA Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 847$ MHz; $\sigma = 1.03$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 7 High/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.508 mW/g


Test Position 7 High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.5 V/m; Power Drift = 0.050 dB

Peak SAR (extrapolated) = 0.762 W/kg

SAR(1 g) = 0.455 mW/g; SAR(10 g) = 0.263 mW/g

Maximum value of SAR (measured) = 0.508 mW/g

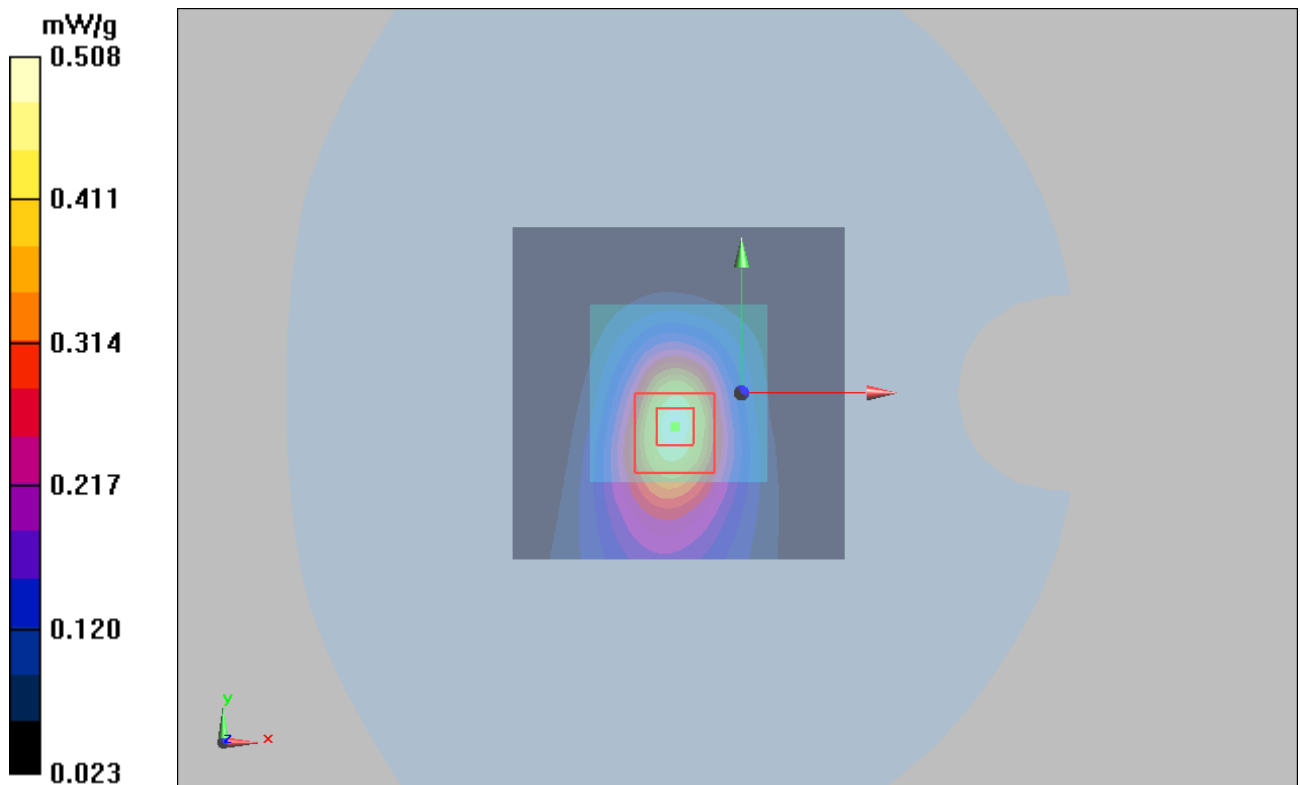

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RZA2010-0253

Page 100 of 138

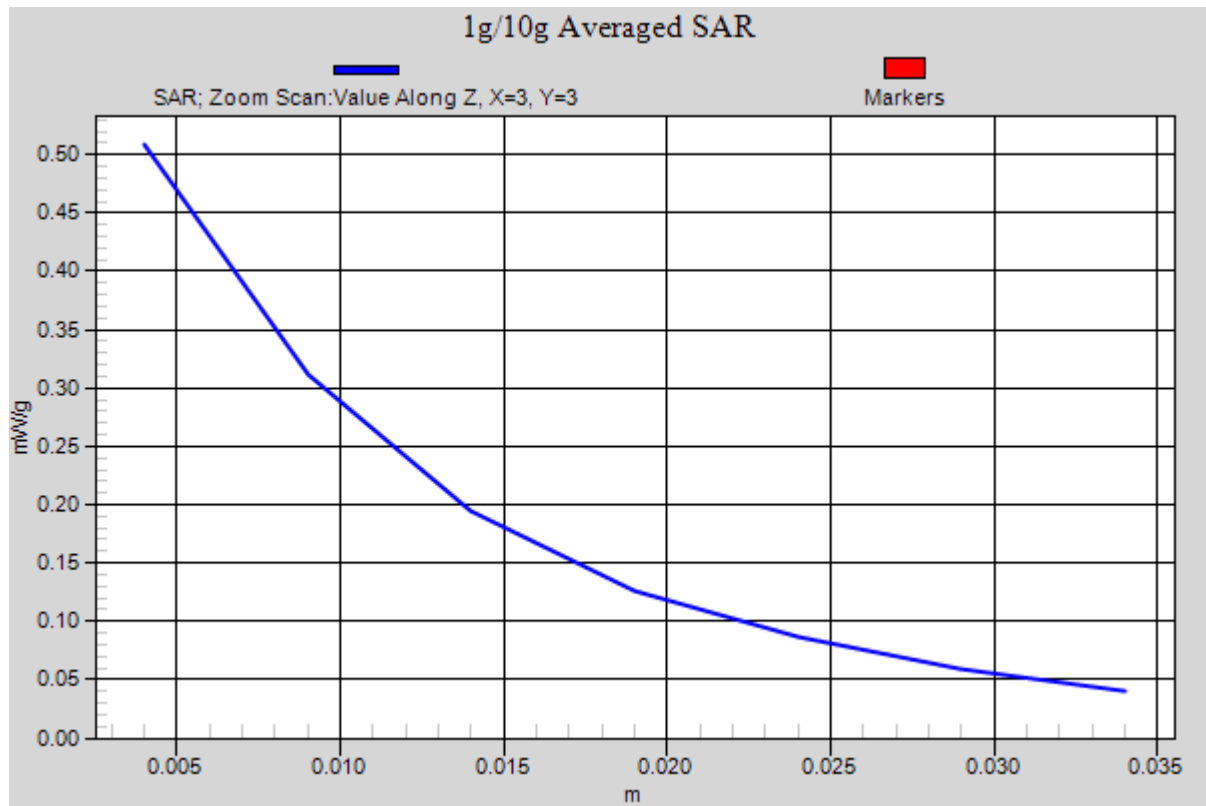


Figure 56 WCDMA Band V with Lenovo Y-450 Test Position 7 Channel 4233