



# EMC Test Report

**Product Name: Fixed Wireless Terminal**

**Model Number: ETS3253**

**Report No: SYBH(R)065072008EB-4**

**Reliability Laboratory of Huawei Technologies Co., Ltd.**

Huawei Base, Bantian, Longgang District, Shenzhen 518129, P.R. China

Tel: +86 755 28780808 Fax: +86 755 89652518

## Notice 1

1. The laboratory has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS), and accreditation number: L0310.
2. The laboratory has obtained the accreditation of THE AMERICAN ASSOCIATION FOR LABORATORY ACCREDITATION (A2LA), and Accreditation Council Certificate Number: 2174.01.
3. The laboratory has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements. The site recognition number is 97456.
4. The laboratory has been listed by industry Canada to perform electromagnetic emission measurement. The site recognition number is 6369A-1.
5. The laboratory also has been listed by the VCCI to perform EMC measurements. The accreditation number is R2364, C2583, and T256.
6. The test report is invalid if not marked with "exclusive stamp for the test report".
7. The test report is invalid if not marked with the stamps or the signatures of the persons responsible for performing, revising and approving the test report.
8. The test report is invalid if there is any evidence of erasure and/or falsification.
9. If there is any dissidence for the test report, please file objection to the test centre within 15 days from the date of receiving the test report.
10. Normally, the test report is only responsible for the samples that have undergone the test.
11. Context of the test report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of the laboratory.

## Notice 2

Modification Information:

Table 1 Modification Information

Modification Information	1	
	2	
	3	<i>Not Applicable!</i>
	4	
	5	
	6	
	7	

REPORT ON EMC Test of Cordless Phone  
M/N: ETS3253  
REGULATION FCC CFR47 Part 15: Subpart B;  
FCC CFR47 Part 22: Subpart H;  
FCC CFR47 Part 24: Subpart E;  
START OF TEST May.25, 2008  
END OF TEST May.27, 2008  
Final Judgement: Pass

Approver

2008-07-07 张兴海  
Date Name

Signature



Reviewer

2008-07-07 余辉  
Date Name

Signature



Operator

2008-07-07 张飞  
Date Name

Signature



## REPORT BODY CONTENT

1	Status .....	6
1.1	Product Information.....	6
1.2	Applied Standard .....	6
1.3	Test Site .....	7
1.4	Test environment condition .....	7
2	Summary of Results.....	8
3	Equipment Specification .....	9
3.1	General Description .....	9
3.2	Sub-Assembly Identity .....	9
4	System Configuration during EMC Test .....	11
4.1	Cables Used during Test .....	11
4.2	Associated Equipment Used during Test .....	11
4.3	Test Configurations and Test Mode.....	11
4.4	Test conditions and test Connections.....	11
5	Electromagnetic Interference (EMI) .....	13
5.1	Radiated Disturbance 30MHz to 1000MHz .....	13
5.2	Conducted Disturbance 0.15 MHz to 30MHz .....	14
5.3	Radiated Spurious Emissions .....	15
6	Main Test Instruments .....	17
7	System Measurement Uncertainty.....	18
8	Graph and Data of Emission Test.....	19
8.1	Radiated Disturbance(TC1) .....	19
8.2	Radiated Disturbance(TC2) .....	20
8.3	Conducted Disturbance(TC1) .....	21
8.4	Conducted Disturbance(TC2) .....	22
8.5	Radiated Spurious Emission(TC1) .....	23
8.6	Radiated Spurious Emission(TC2) .....	27

## 1 Status

### 1.1 Product Information

CLIENT: Huawei Technologies Co., Ltd.  
ADDRESS: Bantian Longgang District Shenzhen, P.R. China  
MANUFACTURING DESCRIPTION Fixed Wireless Terminal  
MANUFACTURERS MODEL NUMBER ETS3253

### 1.2 Applied Standard

FCC Measurement Specification	FCC Limits Part(s)	Description	Result
-	15.107	Conducted Emission at Power Port	PASS
-	15.109	Radiated Emission of Enclosure in Idle Mode	PASS
2.1053	22.917	Radiated Spurious Emission	PASS
2.1053	24.238	Radiated Spurious Emissions	PASS

### 1.3 Test Site

Site 1:  
RELIABILITY LABORATORY OF HUAWEI TECHNOLOGIES CO., LTD

### 1.4 Test environment condition

Ambient temperature	20~25°C
Relative humidity	40%~52%
Atmospheric pressure	101kPa

## 2 Summary of Results

Table 2 below shows a brief summary of the results obtained.

Table 2 Summary of results

EUT Classification : Wireless Terminal				
Test Items	Test Configuration & Test Mode	Required Performance Criteria	Result	Site
<u>Radiated Emissions</u> Enclosure Port	TC1, TC2(TM3-TM4)	N/A	Pass	Site1
<u>Conducted Emissions</u>	TC1,TC2(TM1~TM4)	N/A	Pass	Site1
<u>Radiated Spurious Emissions</u> Enclosure Port	TC1,TC2(TM1-TM2)	N/A	Pass	Site1
Note: 1, Measurement taken is within the measurement uncertainty of measurement system. 2, TC = Test configuration 3, NT=no test. Because of not containing devices susceptible to magnetic fields, the EUT has been exempt from immunity test of power frequency magnetic field.				



### 3 Equipment Specification

#### 3.1 General Description

HUAWEI ETS3253 Cordless Phone is subscriber equipment in the GSM system. The GSM frequency band includes 850M and PCS 1900M, ETS3253 implements such functions as RF signal receiving/transmitting, GSM protocol processing, voice and SMS service etc. Externally it provides Mini-USB interface (to connect to the PC etc.), SIM card interface.

##### 3.1.1 Main Equipment Technical Data






<b>Description:</b>	ETS3253 Fixed Wireless Terminal
<b>Models:</b>	ETS3253
Input Rated Voltage :	 3.7V
Rated Power :	Normal 3W ,Max 8 W
Dimensions :	212 mm ×168 mm × 82 mm
Weight :	<900g (with battery)

Table 3 Sub-Assembly Identity

Mode	Work Frequency	
	Transmitt Frequency ( MHz )	Receive Frequency ( MHz )
GSM 850/GPRS850	824-849	869-894
PCS1900/GPRS1900	1850-1910	1930-1990

#### 3.2 Sub-Assembly Identity

Table 4 Sub-Assembly Identity

Model Name		Qty.	Serial Number	Description
MG41TCPU		1	020CFL1067800102	-Module board
WG01PIPU		1	0284291067800189	-Interface board
NA		1	20060520000651	-Battery
Accessory				
Name	Qty.	Manufacture	Serials number	Description
Adaptor	1	Shenzhen Huaqiaocheng Xinqiao Techonoly Co.,Ltd.	XQLCHW06	Input: ~230V / 0.15A / 50-60Hz Output:  +5V, 0.65A Rate power: 3.35W
Adaptor	1	Dongguan Shilong Fuhua electronic Techonoly Co.,Ltd.	UE04L1-050065SPAV	Input: ~230V / 0.15A / 50-60Hz Output:  +5V, 0.65A Rate power: 3.35W
Adaptor	1	Shenzhen Liansheng Techonoly Co.,Ltd.	RD293053C65 C50	Input: ~230V / 0.15A / 50-60Hz Output:  +5V, 0.65A Rate power: 3.35W
Battery	1	HAERBIN COSLIGHT POWER CO.,LTD	HGB-2A10×3	Rated capacity: 1000mAH Nominal Voltage:  +3.8V Charging Voltage:  +4.2V
Battery	1	Shenzhen	HGB-	Rated capacity: 1000mAH

		Grepow Battery Co., LTD	2A10×3/240204 80	Nominal Voltage: --- +3.8V Charging Voltage: --- +4.2V
Battery	1	EVE BATTERY CO., LTD	HGB-2A10×3	Rated capacity: 1000mAH Nominal Voltage: --- +3.8V Charging Voltage: --- +4.2V

#### 4 System Configuration during EMC Test

The Equipment under Test (EUT) was functioning correctly during all tests. The EUT was installed within the test site and was configured to simulate a typical user installation.

##### 4.1 Cables Used during Test

Table 5 Cable Used during Test

Port	Length	Quantity	Type of Cable
POWER	1.5m	1	Non-shielding

##### 4.2 Associated Equipment Used during Test

Table 6 Associated Equipment Used during Test

Name	Model	Manufacturer	S/N	Cal Date
Base Station Simulator	CMU 200	R&S	105822	2007-10-10

##### 4.3 Test Configurations and Test Mode

###### 4.3.1 Test Configuration.

The EUT will be connected to test system (Base Station Simulator) in order to simulate normal operating conditions (with reference to the guidance given in the standard for this type of equipment).

Table 7 Configuration table

TC1,C2	TM1~TM8
--------	---------

TC1:EUT is powered with an adapter, and connected to the test system (Base Station Simulator).  
TC2: EUT was powered by the power adapter, and connected to the notebook by USB port.

###### 4.3.2 Test Mode

There were 4 test Modes. TM1 –TM8 were shown below:

TM1: operate in traffic GSM 850;  
TM2: operate in traffic PCS 1900;  
TM3: operate in traffic GPRS 850;  
TM4: operate in traffic GPRS 1900;  
TM5: operate in idle GSM 850;  
TM6: operate in idle PCS 1900;  
TM7: operate in idle GPRS 850;  
TM8: operate in idle GPRS 1900;

The EUT will be connected to test system (Base Station Simulator) in order to simulate normal operating conditions (with reference to the guidance given in the standard for this type of equipment).

##### 4.4 Test conditions and test Connections

###### 4.4.1 Test Conditions

The EUT will be connected to test system (Base Station Simulator) in order to simulate normal operating conditions (with reference to the guidance given in the standard for this type of equipment).

###### 4.4.2 Test Connections

Traffic Mode:

The EUT is required to be in the traffic mode, a call is set up according to the generic call set up procedure and enter the EUT into loop back test mode.( GSM see ETSI TS 151.010).

For GSM850 ,GPRS850 ,GPRS1900 and PCS1900, the following conditions shall also be met:

- The EUT shall be commanded to operate at maximum transmit power;
- The downlink RXQUAL shall be monitored.

Assign channel frequency to an appropriate channel number. Here, set the ARFCN channel number to 661 for PCS1900 and GPRS1900, to190 for GSM850 and GPRS850.

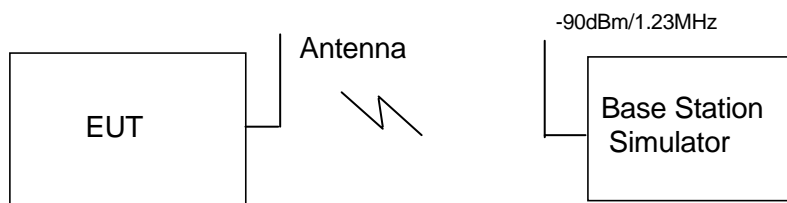


Figure 1.: Test Configuration

Idle Mode:

The EUT will be connected to test system (Base Station Simulator) in order to simulate normal operating conditions (with reference to the guidance given in the standard for this type of equipment). The EUT is required to be in the idle mode.

For PCS, the following conditions shall be met:

When the EUT is required to be in the idle mode, the test system shall simulate a Base Station (BS) with Broadcast Control Channel/Common Control Channel (BCCH/CCCH) on one carrier. The EUT shall be synchronized to the BCCH, listening to the CCCH and able to respond to paging messages. Periodic Location Updating shall be disabled.

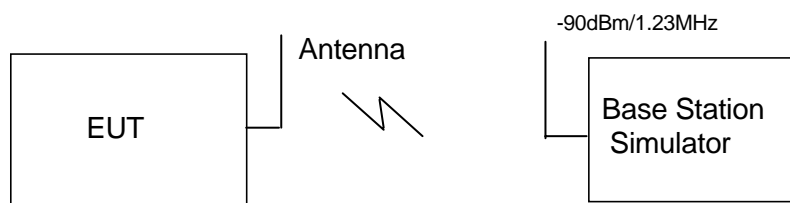


Figure 2. Test Configuration

## 5 Electromagnetic Interference (EMI)

### 5.1 Radiated Disturbance 30MHz to 1000MHz

#### 5.1.1 Test Procedure

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.4 (2003). The test distance was 3m. The EUT was set-up on insulator 80cm above the Ground Plane. The set-up and test methods were according to ANSI C63.4. The Radiated Disturbance measurements were made using a Rohde and Schwarz ESMI Test Receiver and control software ES-K1.

A preliminary scan and a final scan of the emissions were made from 30 MHz to 1GHz by using test script of software; the emissions were measured using a Quasi-Peak Detector. The maximal emission value was acquired by adjusting the antenna height, polarisation and turntable azimuth in accordance with the software setup. Normally, the height range of antenna was 1m to 4m, the azimuth range of turntable was 0° to 360°, The receive antenna has two polarizations V and H.

Huawei Mobile Station was communicated with the BTS simulator through Air interface. The Mobile Station operated on the typical channel and the Mobile Station worked in idle mode, transmitter was not work in this test.

EUT was configured in idle mode and the test performed at worst emission state.

Measurement bandwidth: 30 MHz – 1000 MHz: 120 k Hz

Test set up figure:

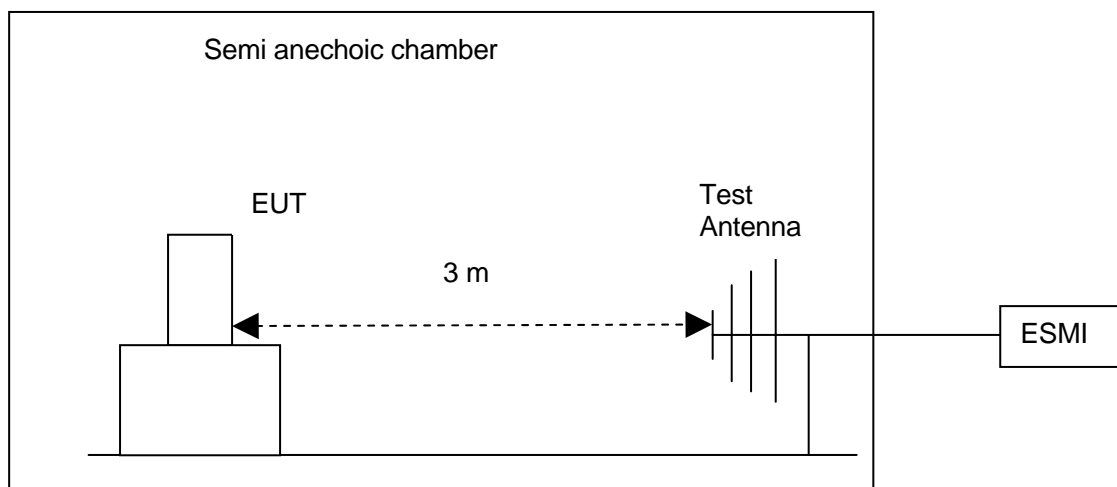


Figure 3. Test set-up

#### 5.1.2 Test Results

The EUT has met the requirements for Radiated Emission of enclosure port.

Table 8 Test Limits

Frequency of Emission (MHz)	Radiated Limit	
	Unit( $\mu\text{V}/\text{m}$ )	Unit( $\text{dB}\mu\text{V}/\text{m}$ )
30-88	100	40
88-216	150	43.5
216-960	200	46
960-1000	500	54

## 5.2 Conducted Disturbance 0.15 MHz to 30MHz

### 5.2.1 Test Procedure

The Table-top EUT was placed upon a non-metallic table 0.8 m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.4: 2003.

Conducted Disturbance at AC Port measurements were undertaken on the L and N Lines. The emissions were measured using a Quasi-Peak Detector and Average Detector.

Huawei Mobile Station was communicated with the BTS simulator through Air interface, the BTS simulator controls the Mobile Station to transmitter the maximum power which defined in specification of product. The Mobile Station operated on the typical channel.

Measurement bandwidth (RBW) for 150kHz to 30 MHz: 9 kHz;

Test Set-up figure:

The Mobile Station was setup in the screened chamber and operated under nominal conditions.

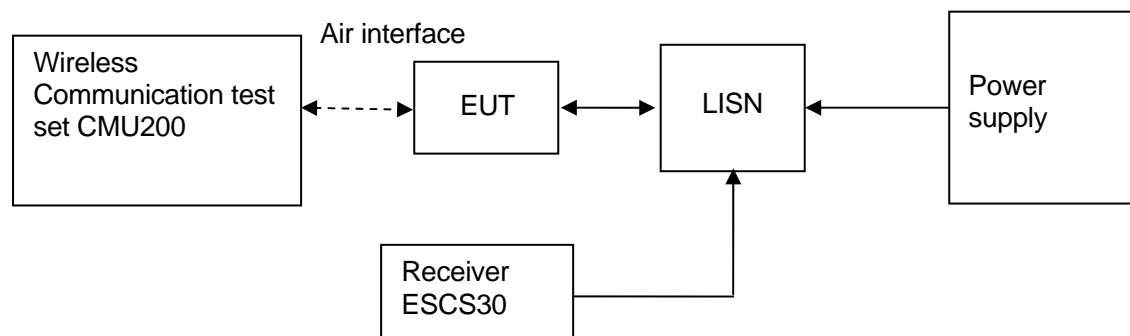


Figure 4. Test Set-up

### 5.2.2 Test Results

The EUT has met requirements for Conducted disturbance of power lines.

Table 9 Test Limit of AC Power Port

Frequency range	150kHz~ 30MHz	
Classification	Class B	
Limit(Class B)	Voltage limits	
	QP	AV
0.15MHz~0.5MHz	66~56 dB $\mu$ V	56~46 dB $\mu$ V
0.5MHz~5MHz	56 dB $\mu$ V	46 dB $\mu$ V
5MHz~30MHz	60 dB $\mu$ V	50 dB $\mu$ V

## 5.3 Radiated Spurious Emissions


### 5.3.1 Test Procedure

A test site fulfilling the requirements of ITU-R Recommendation SM329-10 was used. The EUT was placed on a non-conducting support in the anechoic chamber and was operated from a power source via an RF filter to avoid radiation from the power leads.

Step 1:


For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, EIRP shall be measured when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in 2.1033(c)(8). Connect the EUT to the BTS simulator via the air interface.

Test the Radiated maximum output power by the Rohde and Schwarz ESIB26 Test Receiver from test antenna.

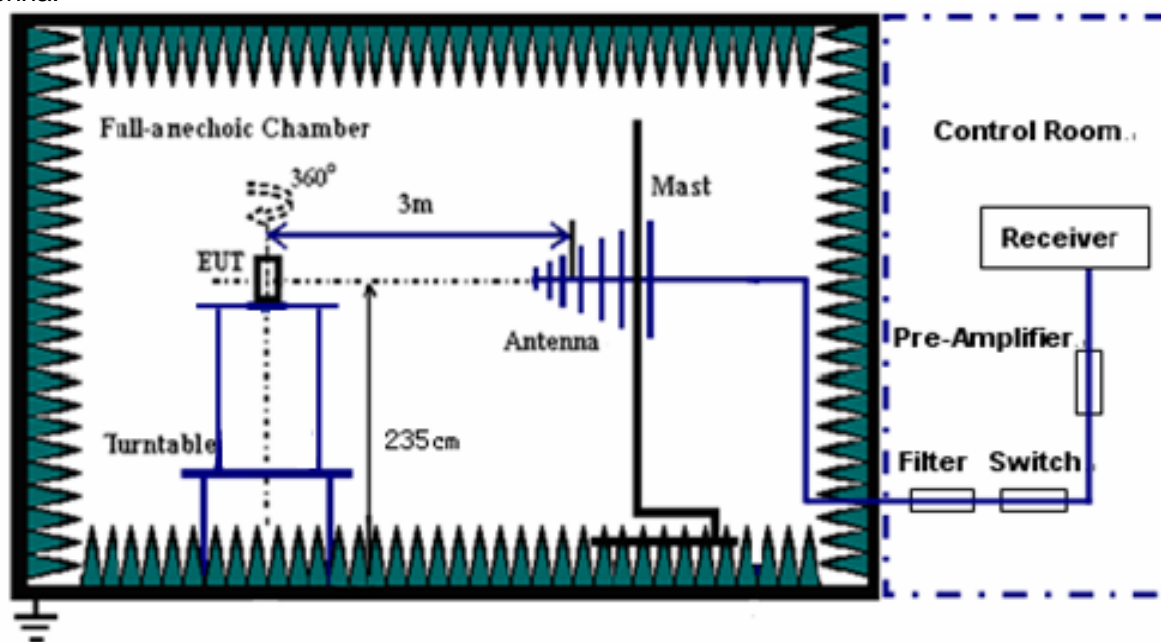

Step 2:

Use substitution method to verify the maximum output power. The EUT is substituted by a dipole antenna. The dipole is connected to a signal generator. And then adjust the output level of the signal generator to get the same received power recorded in step1 on ESIB26 Test Receiver, and record the power level of Signal Generator. Of course, the cable loss at the test frequency should be compensated.

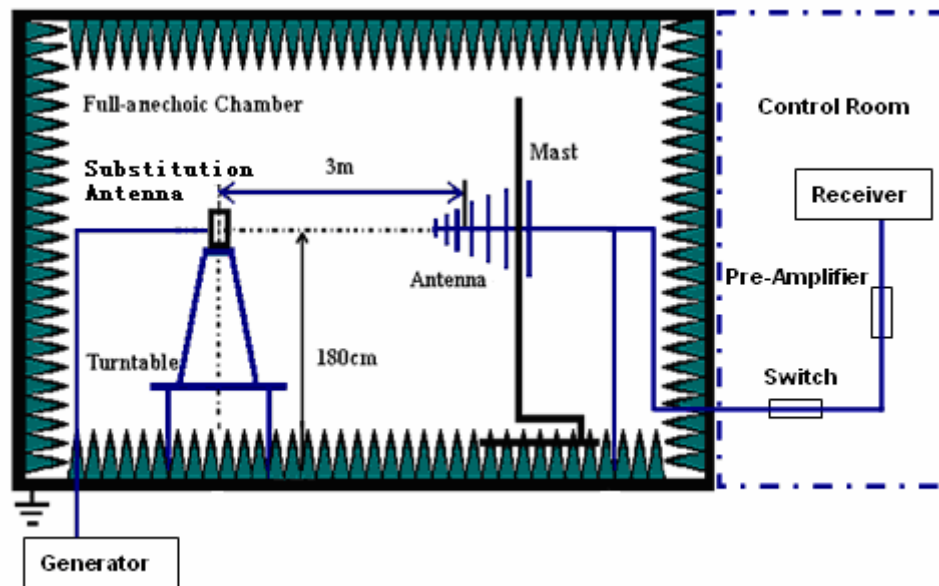

According to part 22.917, the defined measurement bandwidth as following:

22.917(b) Measurement procedure: Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater.

Measurement bandwidth (RBW) for 9 kHz up to 1GHz: 100 kHz;

Measurement bandwidth (RBW) for 1GHz up to 18GHz: 1MHz;

Table 10 Radiated Spurious Emissions Limits

Frequency band	Minimum requirement (E.R.P) traffic mode
30MHz~18GHz	-13dBm

According to part 24.238, the defined measurement bandwidth as following:

24.238 (b) Measurement procedure: Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater.

Measurement bandwidth (RBW) for 9 kHz up to 150 kHz: 1 kHz;

Measurement bandwidth (RBW) for 150 kHz up to 30 MHz: 10 kHz;

Measurement bandwidth (RBW) for 30 MHz up to 26.5 GHz: 1 MHz;

Table 11 Radiated Spurious Emissions Limits

Frequency band	Minimum requirement (E.R.P) traffic mode
30MHz~26.5GHz	-13dBm

### 5.3.2 Test Results

The EUT has met the requirements of FCC Part 22/24 requirement.



## 6 Main Test Instruments

Table 12 Main Test Equipments

Test item	Test Instrument	Model	Manufacturer	Cal-Date	Cal Interval (month)
RE	EMI Test receiver	ESMI	R&S	April.22, 2008	12
	Broadband Antenna	CBL 6112B (2536)	SCHAFFNER	Oct.17, 2007	12
CE	EMI Test receiver	ESCS30	R&S	May.12, 2008	12
	Artificial Mains Network	ENV4200	R&S	May.12, 2008	12
RSE	EMI Test receiver	ESIB26	R&S	April.22, 2008	12
	Horn Antenna	3117	EMCO	Jul.16, 2007	12
	Broadband Antenna	CBL6112B (2747 )	SCHAFFNER	Oct.17.2007	12
	Horn Antenna	3160	EMCO	Aug.03.2007	12
Software Information					
Test Item	Software Name	Manufacturer		Version	
RE/CE	ES-K1	R&S		1.7.1	
RSE	EMC32	R&S		V5.10.99	

## 7 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:


Table 13 System Measurement Uncertainty

Items		Extended Uncertainty
RE	Field strength ( dB $\mu$ V/m )	U=4.6dB; k=2(30MHz-1GHz)
RSE	ERP (dBm)	U = 2.2dB ; k = 2
CE	Disturbance Voltage ( dB $\mu$ V )	U=3.3dB; k=2

## 8 Graph and Data of Emission Test

### 8.1 Radiated Disturbance(TC1)

This test was carried out in all the test modes, Here only the worst test result was shown.

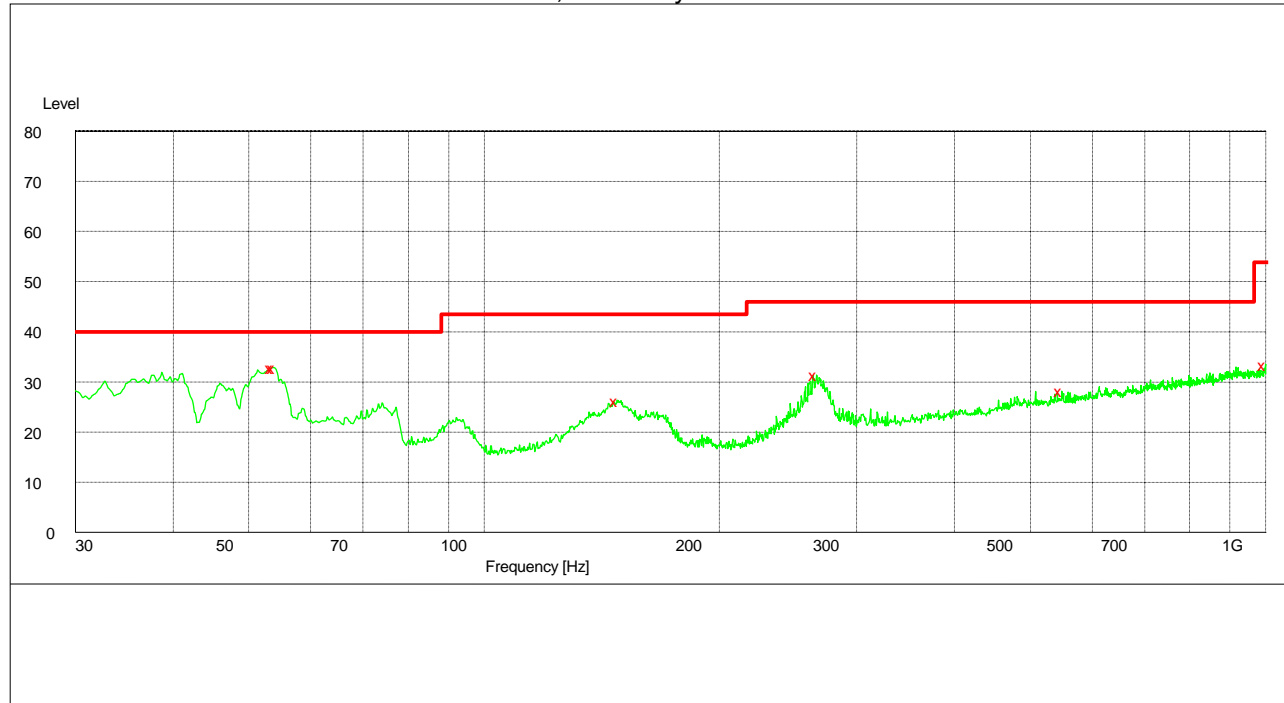

#### MEASUREMENT RESULT: QP Detector

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Height cm	Azimuth deg	Polarisation
53.700000	32.90	-17.2	40.0	7.1	100.0	270.00	VERTICAL
54.000000	32.80	-17.3	40.0	7.2	100.0	270.00	VERTICAL
147.900000	26.30	-14.9	43.5	17.2	200.0	0.00	HORIZONTAL
266.400000	31.40	-10.4	46.0	14.6	100.0	270.00	HORIZONTAL
548.888889	28.20	-4.8	46.0	17.8	100.0	180.00	VERTICAL
999.222222	33.50	1.6	54.0	20.5	100.0	0.00	VERTICAL

## 8.2 Radiated Disturbance(TC2)

This test was carried out in all the test modes, Here only the worst test result was shown.




### MEASUREMENT RESULT: QP Detector

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Height cm	Azimuth deg	Polarisation
36.120000	26.40	-9.5	40.0	13.6	100.0	108.00	VERTICAL
72.540000	25.70	-18.8	40.0	14.3	139.0	330.00	VERTICAL
161.460000	25.40	-14.7	43.5	18.1	100.0	228.00	VERTICAL
217.500000	33.50	-13.3	43.5	10.0	123.0	102.00	HORIZONTAL
336.000000	29.80	-8.9	46.0	16.2	100.0	0.00	HORIZONTAL
549.960000	30.80	-4.8	46.0	15.2	100.0	305.00	HORIZONTAL

### 8.3 Conducted Disturbance(TC1)

This test was carried out in all the test modes, Here only the worst test result was shown.

#### AC Power Port Test Data

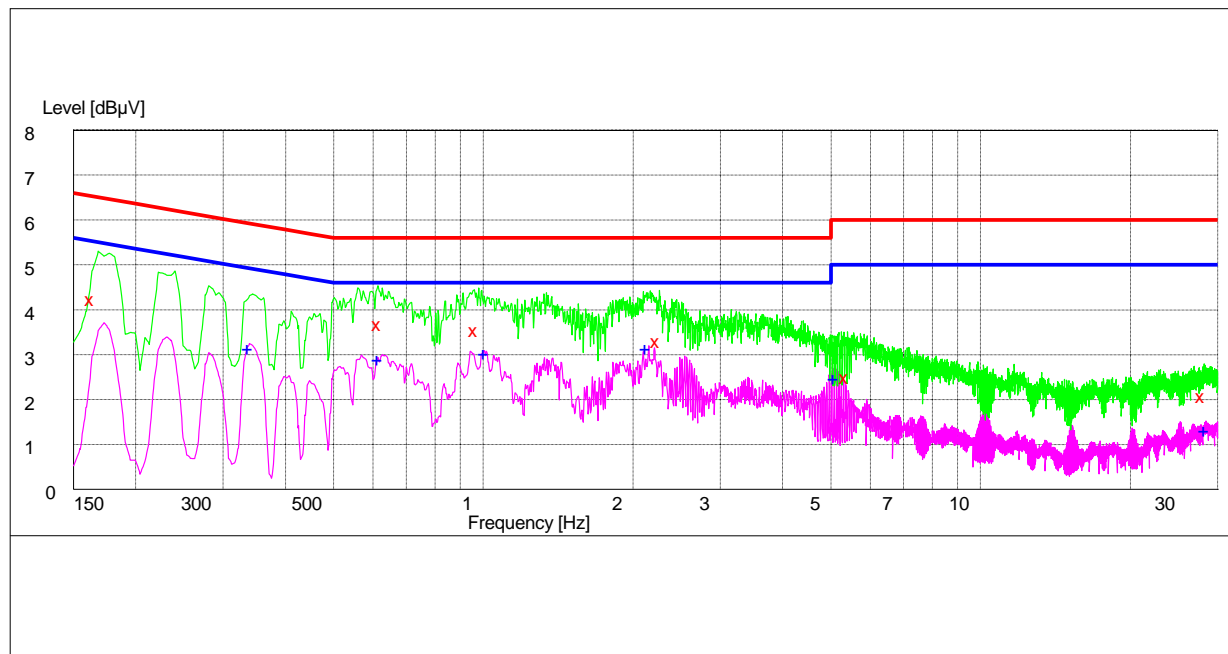

#### MEASUREMENT RESULT: QP Detector

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.163500	43.10	10.0	65	21.9	N	FLO
0.618000	37.50	10.0	56	18.5	N	FLO
0.964500	36.20	10.0	56	19.8	N	FLO
2.242500	33.70	10.1	56	22.3	N	FLO
5.379000	25.70	10.1	60	34.3	N	FLO
28.054500	21.40	10.4	60	38.6	L3	FLO


#### MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.339000	32.20	10.1	49	16.8	L3	FLO
0.618000	29.70	10.0	46	16.3	L3	FLO
1.009500	31.10	10.0	46	14.9	L3	FLO
2.139000	32.20	10.1	46	13.8	L3	FLO
5.104500	25.40	10.1	50	24.6	L3	FLO
28.414500	13.80	10.5	50	36.2	L3	FLO

#### 8.4 Conducted Disturbance(TC2)

This test was carried out in all the test modes, Here only the worst test result was shown.

##### AC Power Port Test Data

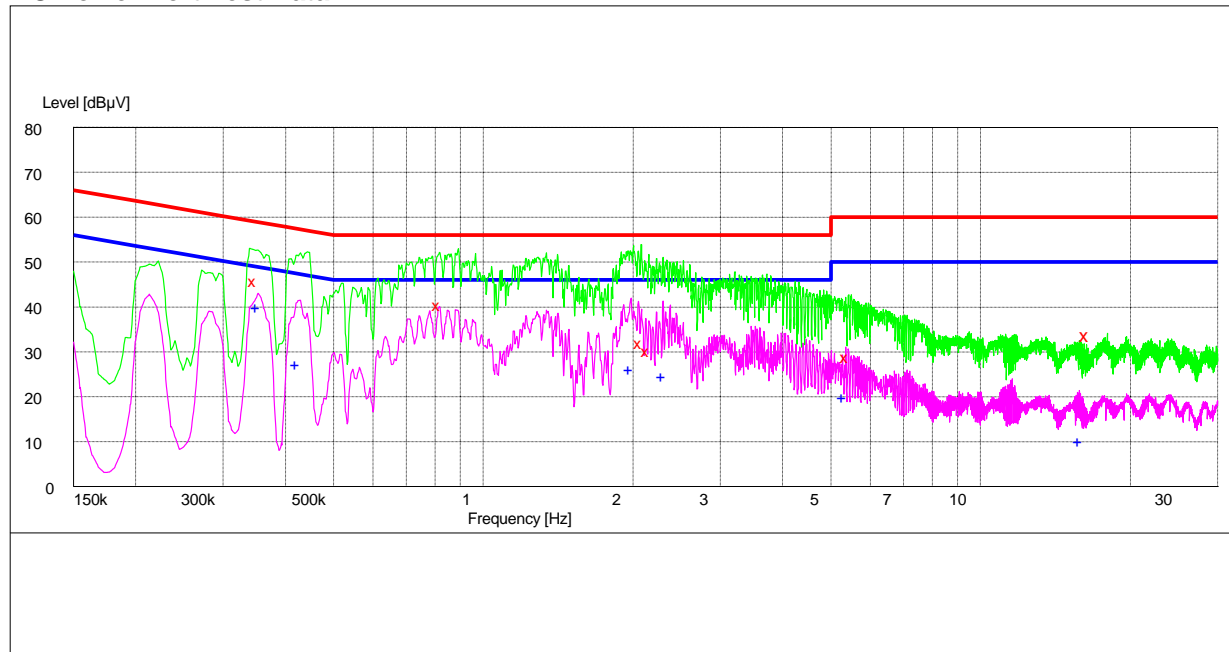

##### MEASUREMENT RESULT: QP Detector

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.348000	46.00	10.1	59	13.0	L3	FLO
0.816000	40.80	10.0	56	15.2	L3	FLO
2.076000	32.20	10.1	56	23.8	L3	FLO
2.148000	30.60	10.1	56	25.4	L3	FLO
5.410500	29.20	10.1	60	30.8	L3	FLO
15.054500	21.40	10.4	60	38.6	L3	FLO


##### MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.352500	40.30	10.1	49	8.7	L3	FLO
0.424500	27.70	10.0	47	19.3	L3	FLO
1.981500	26.50	10.1	46	19.5	L3	FLO
2.305500	25.00	10.1	46	21.0	L3	FLO
5.329500	20.20	10.1	50	29.8	L3	FLO
15.891000	10.40	10.3	50	39.6	L3	FLO


## 8.5 Radiated Spurious Emission(TC1)

### 8.5.1 For GSM 850


Traffic Mode (9kHz-30MHz)

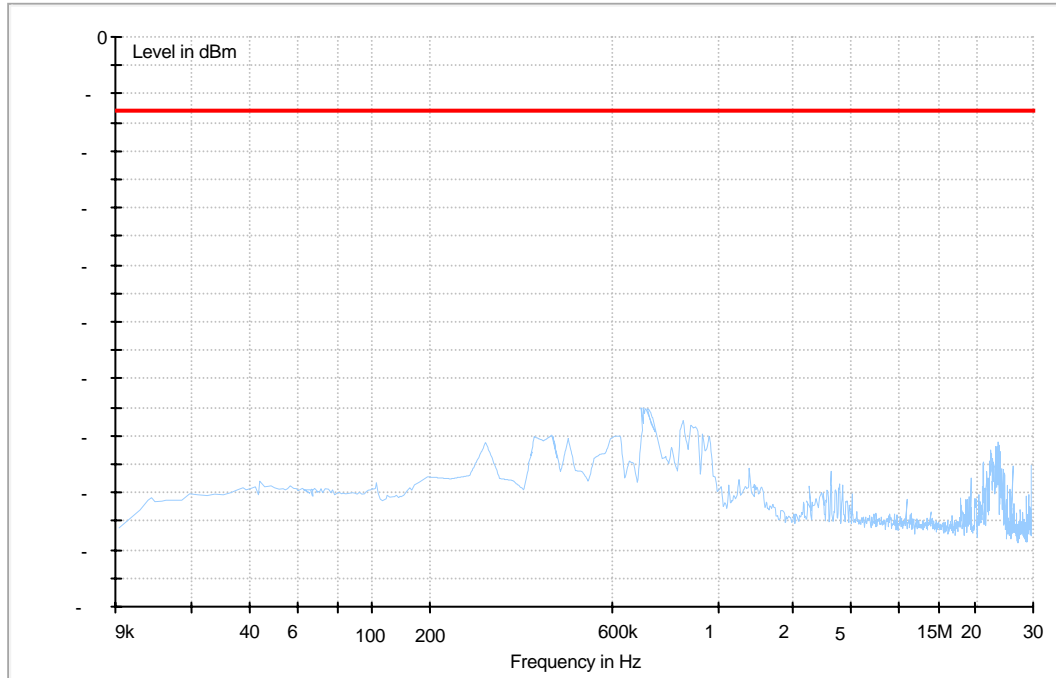

Traffic Mode (30MHz-2GHz)

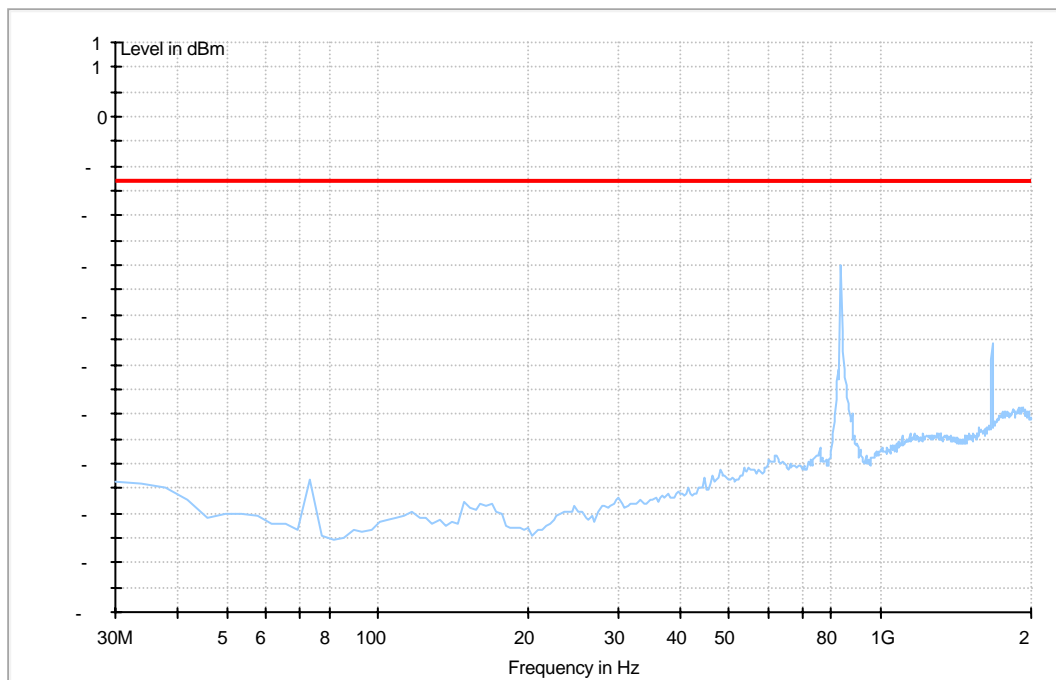


## Traffic Mode (2GHz-18GHz)

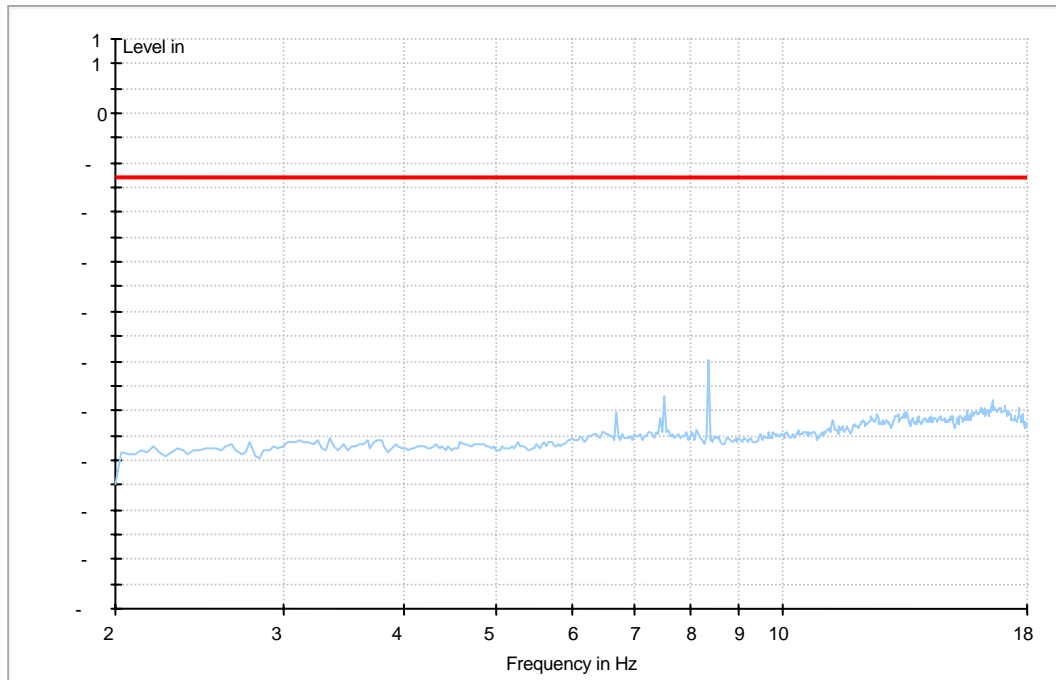


## 8.5.2 For PCS 1900

### Traffic Mode (9kHz-30MHz)

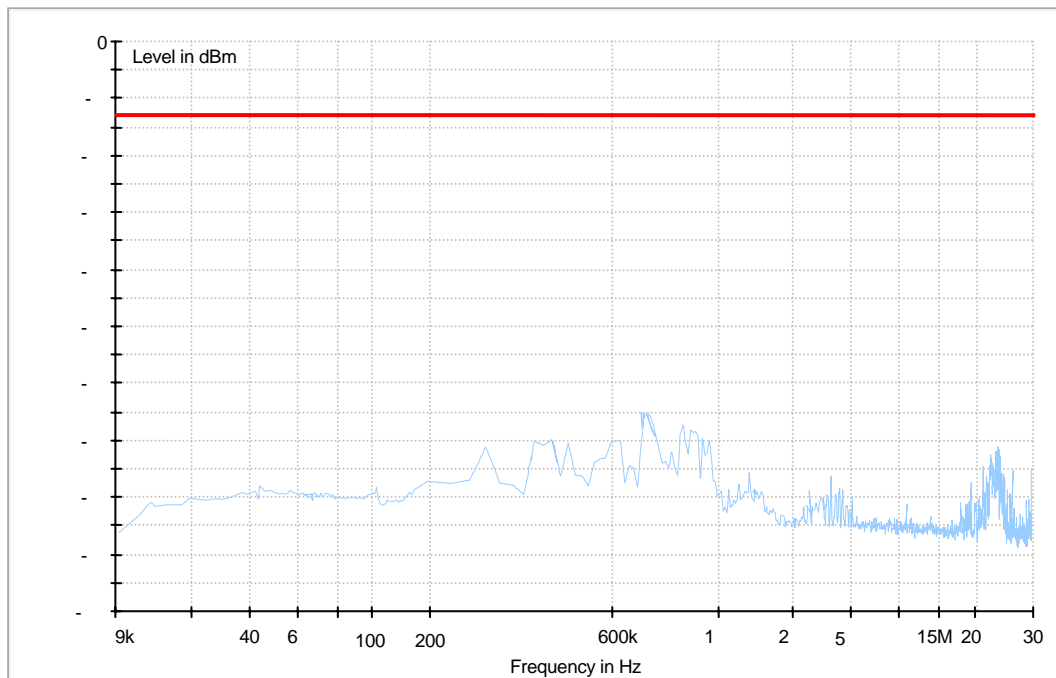





### Traffic Mode (30MHz-2GHz)

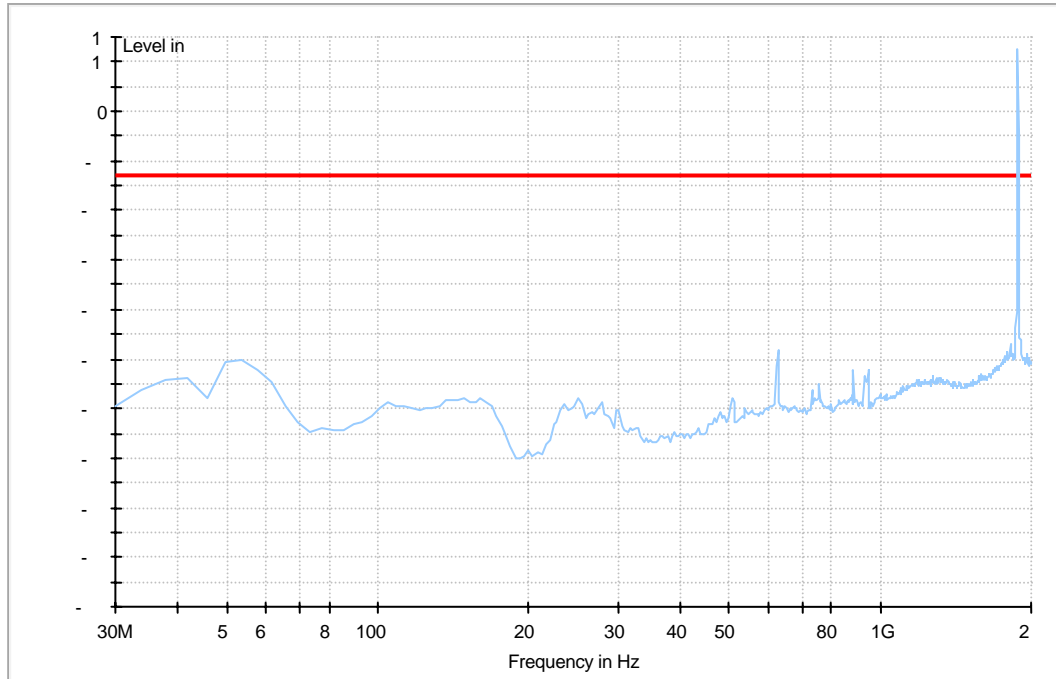

### Traffic Mode (2GHz-18GHz)

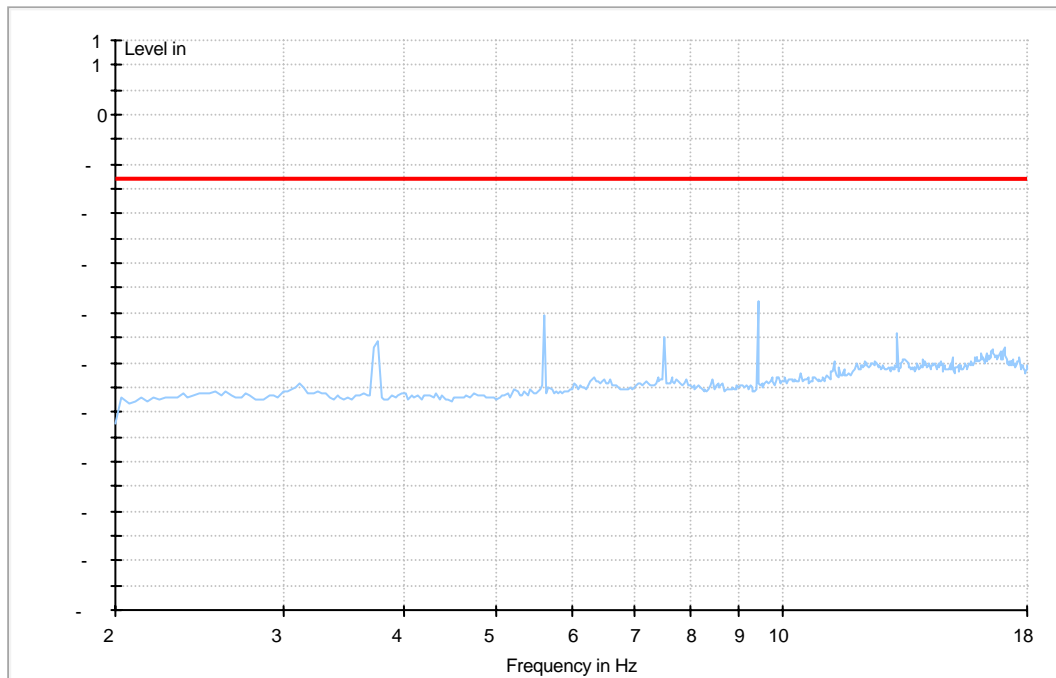


Traffic Mode (18GHz-26.5GHz)

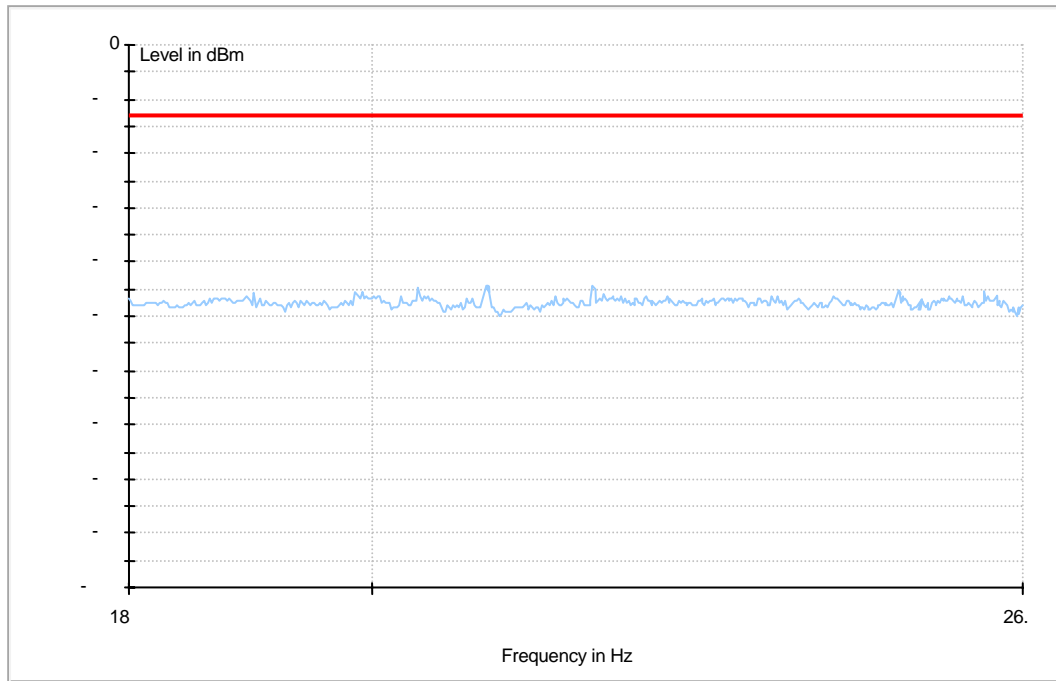


## 8.6 Radiated Spurious Emission(TC2)

### 8.6.1 For GPRS 850

Traffic Mode (9kHz-30MHz)

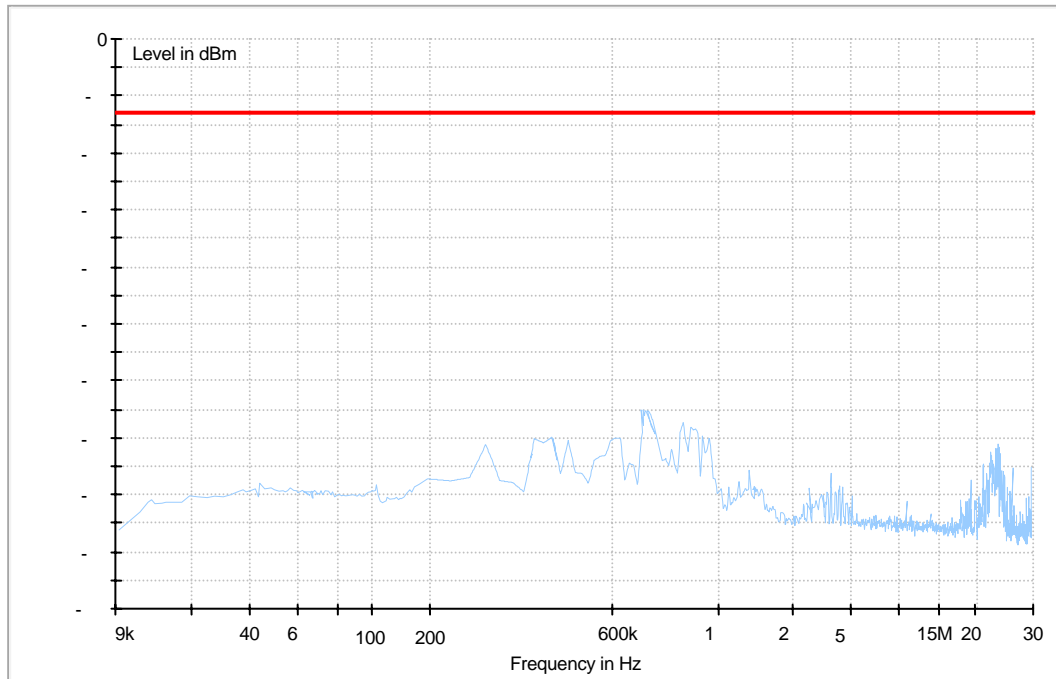

Traffic Mode (30MHz-2GHz)

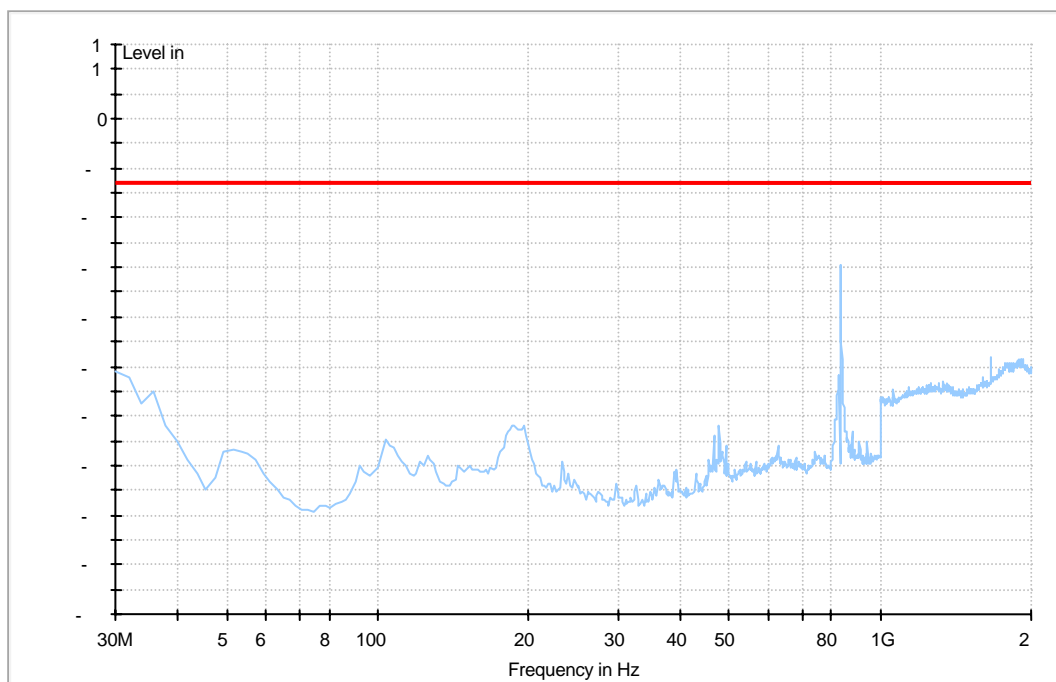




Report on EMC Test of  
Fixed Wireless Terminal




## Traffic Mode (2GHz-18GHz)

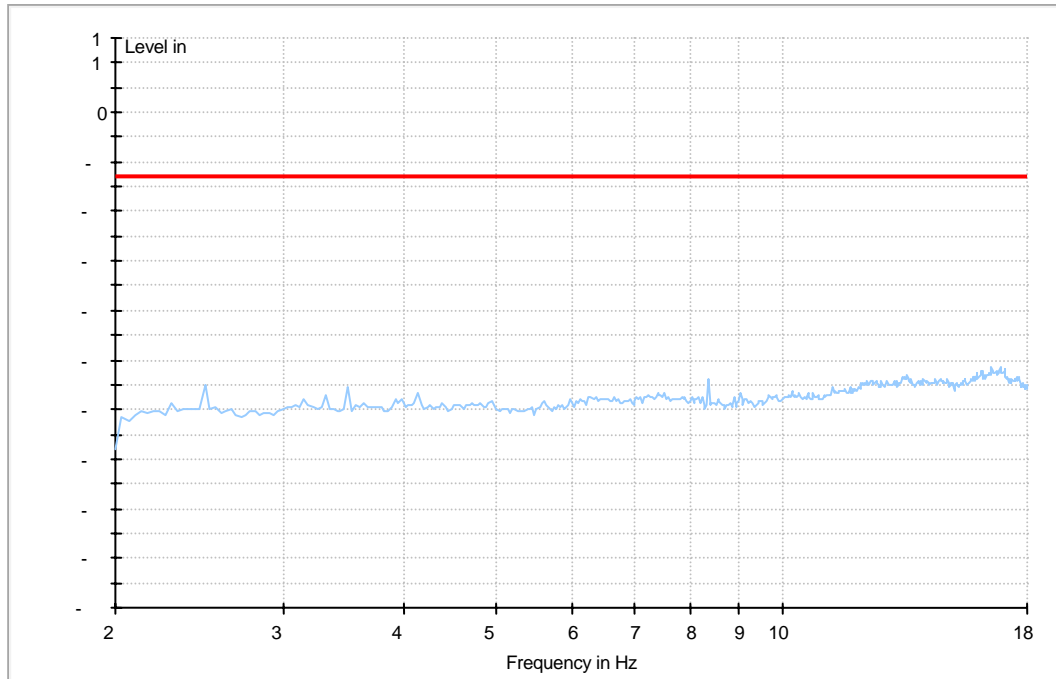


## 8.6.2 For GPRS 1900


### Traffic Mode (9kHz-30MHz)

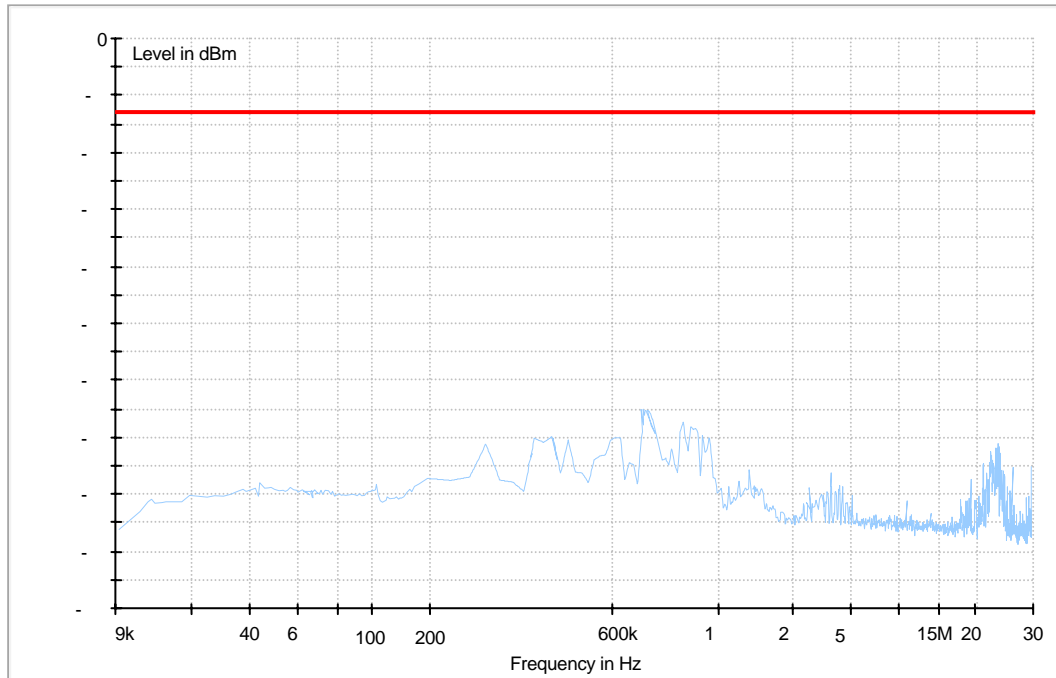


### Traffic Mode (30MHz-2GHz)

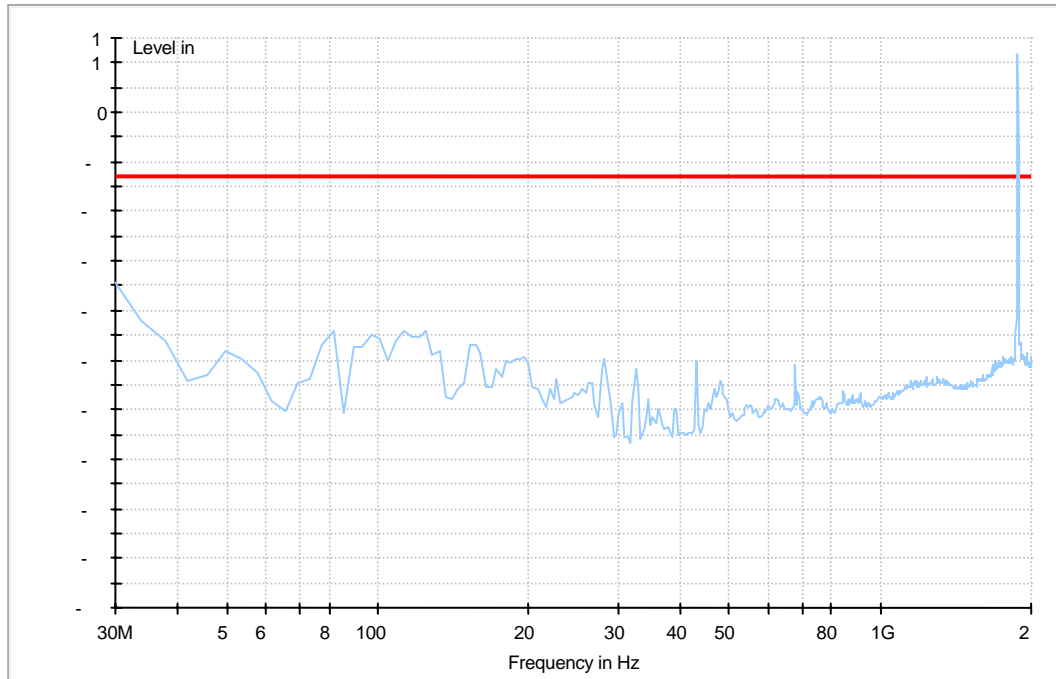

### Traffic Mode (2GHz-18GHz)

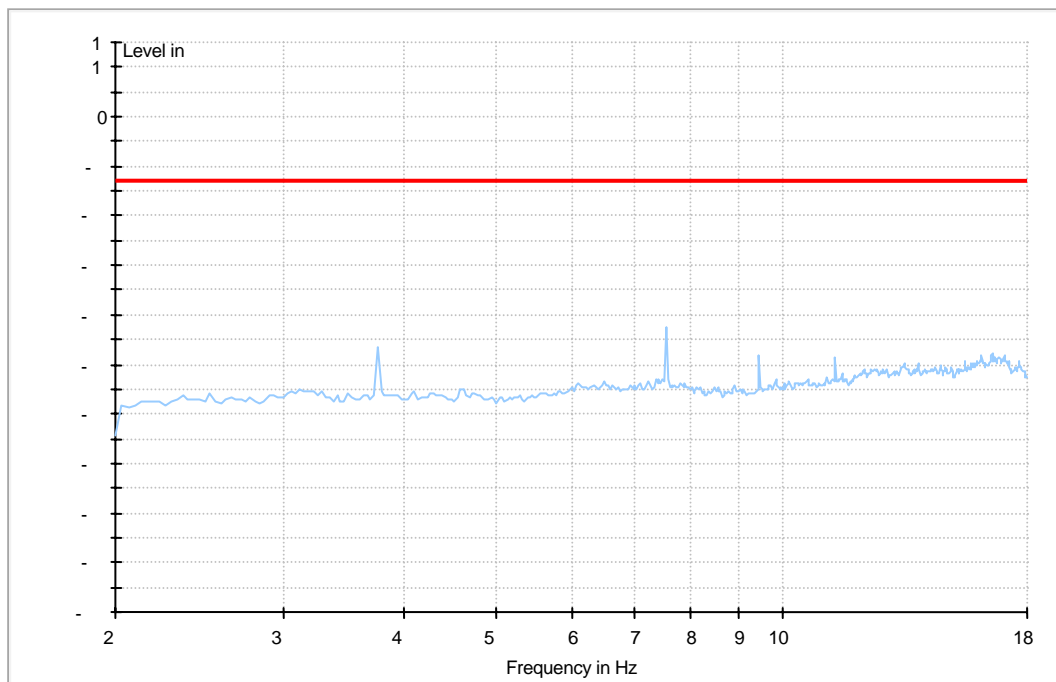

Traffic Mode (18GHz-26.5GHz)

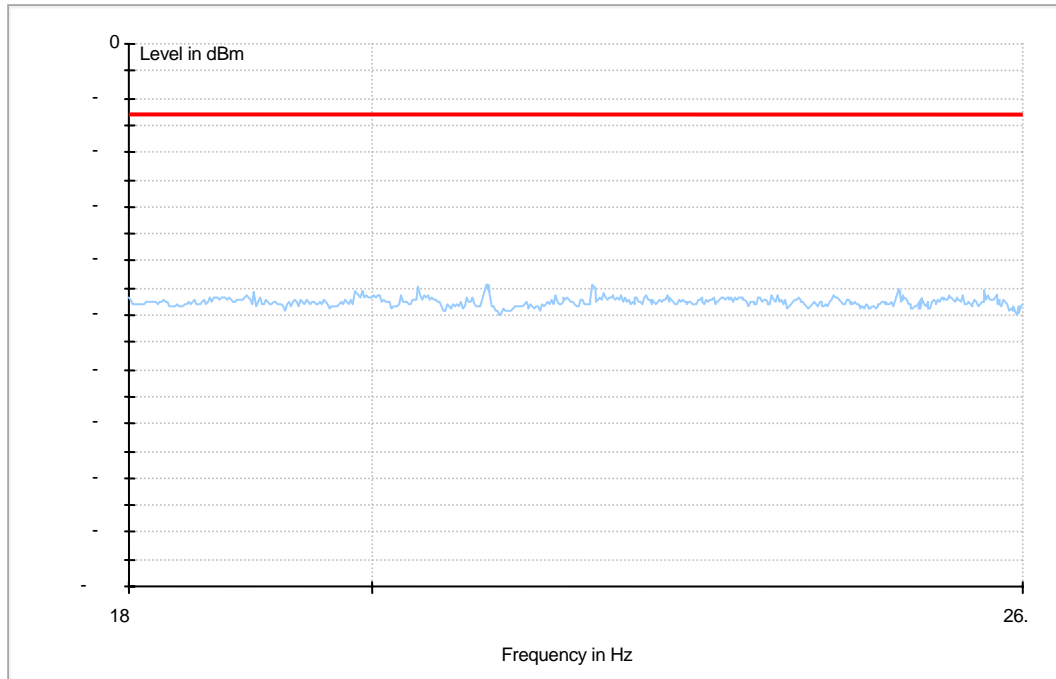

END