

19 March, 2012

Huawei Technologies Co.,Ltd
Bantian, Longgang District, Shenzhen, China
Tel.: (86) 755- 89650288
Fax: (86) 755- 89650226

Dear Mr. Zhang Xinghai:

Enclosed you will find your file copy of a Part 15 Certification (FCC ID: QISG5000).

For your reference, TCB will normally take another 5 days for reviewing the report. Approval will then be granted when no query is sorted.

Please contact me if you have any questions regarding the enclosed material.

Sincerely,



Shawn Xing
Manager

Enclosure

Intertek Testing Services Shenzhen Ltd. Kejiyuan Branch

6F, D Block, Huahan Building, Langshan Road, Nanshan District, Shenzhen, P. R. China

Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6751 Website: www.china.intertek-etlsemko.com

Huawei Technologies Co.,Ltd


Application
For
Certification
(FCC ID: QISG5000)

GSM Mobile Phone

Model: HUAWEI G5000

2.4GHz Transceiver

We hereby certify that the sample of the above item is considered to comply with the requirements of FCC Part 15, Subpart C for Intentional Radiator, mention 47 CFR [10-1-10]



SZ12030095-2
19 March, 2012

- The test results reported in this test report shall refer only to the sample actually tested and shall not refer or be deemed to refer to bulk from which such a sample may be said to have been obtained.
- This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results referenced from this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.
- For Terms And Conditions of the services, it can be provided upon request.
- The evaluation data of the report will be kept for 3 years from the date of issuance.

TRF No.: FCC 15C_TXa
FCC ID: QISG5000

Intertek Testing Services Shenzhen Ltd. Kejiyuan Branch

6F, D Block, Huahan Building, Langshan Road, Nanshan District, Shenzhen, P. R. China

Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6751 Website: www.china.intertek-etlsemko.com

INTERTEK TESTING SERVICES

LIST OF EXHIBITS

INTRODUCTION

<i>EXHIBIT 1:</i>	General Description
<i>EXHIBIT 2:</i>	System Test Configuration
<i>EXHIBIT 3:</i>	Emission Results
<i>EXHIBIT 4:</i>	Equipment Photographs
<i>EXHIBIT 5:</i>	Product Labelling
<i>EXHIBIT 6:</i>	Technical Specifications
<i>EXHIBIT 7:</i>	Instruction Manual
<i>EXHIBIT 8:</i>	Miscellaneous Information
<i>EXHIBIT 9:</i>	Test Equipment List

INTERTEK TESTING SERVICES

MEASUREMENT/TECHNICAL REPORT

Huawei Technologies Co.,Ltd - MODEL: HUAWEI G5000

FCC ID: QISG5000

This report concerns (check one:) Original Grant Class II Change

Equipment Type: DXX - Part 15 Low Power Communication Device Transmitter

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? Yes No

If yes, defer until: _____
date

Company Name agrees to notify the Commission by: _____
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Transition Rules Request per 15.37? Yes No

If no, assumed Part 15, Subpart C for intentional radiator – the new 47 CFR [10-1-10 Edition] provision.

Report prepared by:

Shawn Xing
Intertek Testing Services Shenzhen Ltd.
Kejiyuan Branch
6F, Block D, Huahan Building, Langshan Road,
Nanshan District, Shenzhen, P. R. China
Phone: (86 755) 8601 6288
Fax: (86 755) 8601 6751

INTERTEK TESTING SERVICES

Table of Contents

1.0 <u>General Description</u>	2
1.1 Product Description	2
1.2 Related Submittal(s) Grants	2
1.3 Test Methodology	3
1.4 Test Facility	3
2.0 <u>System Test Configuration</u>	5
2.1 Justification	5
2.2 EUT Exercising Software	5
2.3 Special Accessories	5
2.4 Equipment Modification	5
2.5 Measurement Uncertainty	6
2.6 Support Equipment List and Description	6
3.0 <u>Emission Results</u>	8
3.1 Radiated Test Results	9
3.1.1 Field Strength Calculation	9
3.1.2 Radiated Emission Configuration Photograph	10
3.1.3 Radiated Emissions	10
3.1.4 Transmitter Spurious Emissions (Radiated)	12
3.2 Conducted Emission at Mains Terminal	16
3.2.1 Conducted Emissions Configuration Photograph	16
3.2.2 Conducted Emissions	16
4.0 <u>Equipment Photographs</u>	20
5.0 <u>Product Labelling</u>	22
6.0 <u>Technical Specifications</u>	24
7.0 <u>Instruction Manual</u>	26
8.0 <u>Miscellaneous Information</u>	28
8.1 Bandedge Plot	29
8.2 Discussion of Pulse Desensitization	31
8.3 Transmitter Duty Cycle Calculation	32
8.4 Emissions Test Procedures	33
9.0 <u>Test Equipment List</u>	36

INTERTEK TESTING SERVICES

List of attached file

Exhibit type	File Description	Filename
Test Report	Test Report	report.pdf
Test Setup Photo	Radiated Emission	radiated photos.pdf
Test Setup Photo	Conducted Emission	conducted photos.pdf
Test Report	Bandedge Plot	bandedge.pdf
Test Report	20dB BW Plot	bw.pdf
External Photo	External Photo	external photos.pdf
Internal Photo	Internal Photo	internal photos.pdf
Block Diagram	Block Diagram	block.pdf
Schematics	Circuit Diagram	circuit.pdf
Operation Description	Technical Description	descri.pdf
ID Label/Location	Label Artwork and Location	label.pdf
User Manual	User Manual	manual.pdf
Cover Letter	Confidentiality Letter	request.pdf
Cover Letter	Letter of Agency	agency.pdf

INTERTEK TESTING SERVICES

EXHIBIT 1

GENERAL DESCRIPTION

INTERTEK TESTING SERVICES

1.0 General Description

1.1 Product Description

The equipment under test (EUT) is a GSM Mobile Phone with Bluetooth function. The EUT is powered from internal lithium battery and charged by attached AC adapter.

Details of EUT:

The Lithium type rechargeable batteries (provided with the unit) were used to power the device. Their descriptions are listed below.

- Model 1: HB5A3, 3.7V 1000mAh
- Model 2: HB5A3, 3.7V 1000mAh
- Model 3: HHB5A3L, 3.7V 800mAh
- Model 4: HBG3511, 3.7V 650mAh

Note: The model 1 & 2 described above are made by different manufacturer.

Description of Accessories:

- (1) Two type headsets for mobile phone use with 1.5m unshielded cable.
- (2) AC adapter: (100-240VAC, 50~60Hz, 0.2A to 5.0 VDC, 550mA)
 - Model 1: ZWN003AU05000551, with 1.0m unshielded USB Cable.
 - Model 2: A361-0500550U, with 1.0 shielded USB cable.

Antenna Type: Integral antenna

Modulation Type: GFSK, $\pi/4$ -DQPSK and 8-DPSK

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

1.2 Related Submittal(s) Grants

This is an application for certification of a transceiver for the GSM Mobile Phone bluetooth part, and there is no corresponding unit for certification.

INTERTEK TESTING SERVICES

1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.4 (2003). Radiated emission measurement was performed in Semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "Justification Section" of this Application. All other measurements were made in accordance with the procedures in part 2 of CFR 47.

1.4 Test Facility

The Semi-anechoic chamber and shielding room used to collect the radiated data and conducted data are **Intertek Testing Services Shenzhen Ltd. Kejiyuan Branch** and located at 6F, D Block, Huahan Building, Langshan Road, Nanshan District, Shenzhen, P. R. China. This test facility and site measurement data have been fully placed on file with the FCC.

EXHIBIT 2
SYSTEM TEST CONFIGURATION

INTERTEK TESTING SERVICES

2.0 System Test Configuration

2.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.4 (2003).

The EUT was powered separately by the 3.7V fully charged Lithium batteries and charged by two type AC adapter described in page 2, only the worst data was reported in this report (The worst case configuration is the EUT with Model 1 adapter & Model 1 battery & Earphone 1).

All packets DH1, DH3 & DH5 mode in all modulation type GFSK, $\pi/4$ -DQPSK and 8-DPSK were tested, and only the worst data was reported in this report.

For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data reported in Exhibit 3.

The rear of unit shall be flushed with the rear of the table.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was placed on a turn table, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

2.2 EUT Exercising Software

N/A

2.3 Special Accessories

N/A.

2.4 Equipment Modification

Any modifications installed previous to testing by Huawei Technologies Co.,Ltd will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd Kejiyuan Branch.

INTERTEK TESTING SERVICES

2.5 Measurement Uncertainty

When determining the test conclusion, the Measurement Uncertainty of test has been considered.

2.6 Support Equipment List and Description

Description	Manufacturer	Model No.
AC Adapter with 1.0m unshielded USB Cable	TRUMPWAY	ZWN003AU05000551 (Input: 100-240VAC, 50/60Hz, 0.2A Output: 5.0 VDC, 550mA)
AC Adapter with 1.0m shielded USB Cable	HUAWEI	A361-0500550U (Input: 100-240VAC, 50/60Hz, 0.2A Output: 5.0 VDC, 550mA)
Earphone 1	Dongguan He Tong Dian Xian	1.5m Unshielded
Earphone 2	Dongguan Excellence Electronic	1.5m Unshielded

All the items listed under section 2.0 of this report are

Confirmed by:

Shawn Xing
Manager
Intertek Testing Services Shenzhen Ltd. Kejiyuan Branch
Agent for



Signature

19 March, 2012

Date

EXHIBIT 3
EMISSION RESULTS

INTERTEK TESTING SERVICES

3.0 Emission Results

Data is included worst-case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

INTERTEK TESTING SERVICES

3.1 Radiated Test Results

A sample calculation, configuration photographs and data tables of the emissions are included.

3.1.1 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

Where

- FS = Field Strength in dB μ V/m
- RA = Receiver Amplitude (including preamplifier) in dB μ V
- CF = Cable Attenuation Factor in dB
- AF = Antenna Factor in dB
- AG = Amplifier Gain in dB
- PD = Pulse Desensitization in dB
- AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

Assume a receiver reading of 62.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0 dB, and the resultant average factor was -10 dB. The net field strength for comparison to the appropriate emission limit is 32 dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

RA = 62.0 dB μ V
AF = 7.4 dB
CF = 1.6 dB
AG = 29.0 dB
PD = 0 dB
AV = -10 dB
FS = 62 + 7.4 + 1.6 - 29 + 0 + (-10) = 32 dB μ V/m

Level in μ V/m = Common Antilogarithm [(32 dB μ V/m)/20] = 39.8 μ V/m

INTERTEK TESTING SERVICES

3.1.2 Radiated Emission Configuration Photograph

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: radiated photos. pdf.


3.1.3 Radiated Emissions

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Worst Case Radiated Emission
at
52.356 MHz

Judgement: Passed by 16.1 dB

TEST PERSONNEL:



Signature

Billy Li, Team Leader
Typed/Printed Name

19 March, 2012
Date

INTERTEK TESTING SERVICES

Applicant: Huawei Technologies Co.,Ltd

Date of Test: 19 March, 2012

Model: HUAWEI G5000

Sample: 1/1

Worst Case Operating Mode: Transmit with charging

Table 1

Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	165.240	31.0	20.0	8.8	19.8	43.5	-23.7
Horizontal	235.065	28.9	20.0	11.9	20.8	46.0	-25.2
Horizontal	278.455	30.5	20.0	12.6	23.1	46.0	-22.9
Vertical	52.356	34.9	20.0	9.0	23.9	40.0	-16.1
Vertical	102.854	32.8	20.0	8.8	21.6	43.5	-21.9
Vertical	309.270	31.0	20.0	14.7	25.7	46.0	-20.3

- NOTES: 1. Quasi-Peak detector is used except for others stated.
2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. All emissions are below the QP limit.

INTERTEK TESTING SERVICES

3.1.4 Transmitter Spurious Emissions (Radiated)


Worst Case Radiated Emission
at
2441.000 MHz

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: radiated photos. pdf.

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgement: Passed by 12.2 dB

TEST PERSONNEL:

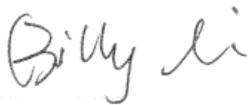

Signature

Billy Li, Team Leader
Typed/Printed Name

19 March, 2012
Date

INTERTEK TESTING SERVICES

Applicant: Huawei Technologies Co.,Ltd

Date of Test: 19 March, 2012

Model: HUAWEI G5000

Sample: 1/1

Worst Case Operating Mode: Transmit with charging

Table 2

Radiated Emissions

(2402MHz)

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	2402.000	108.6	36.7	28.5	100.4	114.0	-13.6
Horizontal	4804.000	59.5	36.7	28.5	51.3	74.0	-22.7
Horizontal	7206.000	59.8	36.1	33.1	56.8	74.0	-17.2

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Average Factor (-dB)	Net at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	2402.000	108.6	36.7	28.5	30.1	70.3	94.0	-23.7
Horizontal	4804.000	59.5	36.7	28.5	30.1	21.2	54.0	-32.8
Horizontal	7206.000	59.8	36.1	33.1	30.1	26.7	54.0	-27.3

Notes: 1. Peak Detector Data unless otherwise stated.

2. All measurements were made at 3 meter. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative value in the margin column shows emission below limit.

4. Horn antenna is used for the emission over 1000MHz.

Test Engineer: Billy Li

TRF No.: FCC 15C_TXa
FCC ID: QISG5000

INTERTEK TESTING SERVICES

Applicant: Huawei Technologies Co.,Ltd

Date of Test: 19 March, 2012

Model: HUAWEI G5000

Sample: 1/1

Worst Case Operating Mode: Transmit with charging

Table 3

Radiated Emissions

(2441MHz)

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	2441.000	110.0	36.7	28.5	101.8	114.0	-12.2
Horizontal	4882.000	58.3	36.7	28.5	50.1	74.0	-23.9
Horizontal	7323.000	59.7	36.1	33.1	56.7	74.0	-17.3

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Average Factor (-dB)	Net at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	2441.000	110.0	36.7	28.5	30.1	71.7	94.0	-22.3
Horizontal	4882.000	58.3	36.7	28.5	30.1	20.0	54.0	-34.0
Horizontal	7323.000	59.7	36.1	33.1	30.1	26.6	54.0	-27.4

Notes: 1. Peak Detector Data unless otherwise stated.

2. All measurements were made at 3 meter. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative value in the margin column shows emission below limit.

4. Horn antenna is used for the emission over 1000MHz.

Test Engineer: Billy Li

TRF No.: FCC 15C_TXa
FCC ID: QISG5000

INTERTEK TESTING SERVICES

Applicant: Huawei Technologies Co.,Ltd

Date of Test: 19 March, 2012

Model: HUAWEI G5000

Sample: 1/1

Worst Case Operating Mode: Transmit with charging

Table 4

Radiated Emissions

(2480MHz)

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	2480.000	107.7	36.7	28.6	99.6	114.0	-14.4
Horizontal	4960.000	63.8	36.7	28.6	55.7	74.0	-18.3
Horizontal	7440.000	53.0	36.1	33.4	50.3	74.0	-23.7

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Average Factor (-dB)	Net at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
Horizontal	2480.000	107.7	36.7	28.6	30.1	69.5	94.0	-24.5
Horizontal	4960.000	63.8	36.7	28.6	30.1	25.6	54.0	-28.4
Horizontal	7440.000	53.0	36.1	33.4	30.1	20.2	54.0	-33.8

Notes: 1. Peak Detector Data unless otherwise stated.

2. All measurements were made at 3 meter. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.

3. Negative value in the margin column shows emission below limit.

4. Horn antenna is used for the emission over 1000MHz.

Test Engineer: Billy Li

INTERTEK TESTING SERVICES

3.2 Conducted Emission at Mains Terminal

3.2.1 Conducted Emissions Configuration Photograph


For electronic filing, the worst case conducted emission configuration photograph is saved with filename: conducted photos.pdf.

3.2.2 Conducted Emissions

Worst Case Conducted Configuration
at
0.438 MHz

Judgement: Passed by 11.9 dB margin

TEST PERSONNEL:



Signature

Billy Li, Team Leader
Typed/Printed Name

19 March, 2012
Date

INTERTEK TESTING SERVICES

Applicant: HUAWEI TECHNOLOGIES CO.,LTD


Date of Test: 19 March, 2012

Model: HUAWEI G5000

Sample: 1/1

Worst Case Operating Mode: Transmit with charging (2441MHz)

Conducted Emission Test - FCC

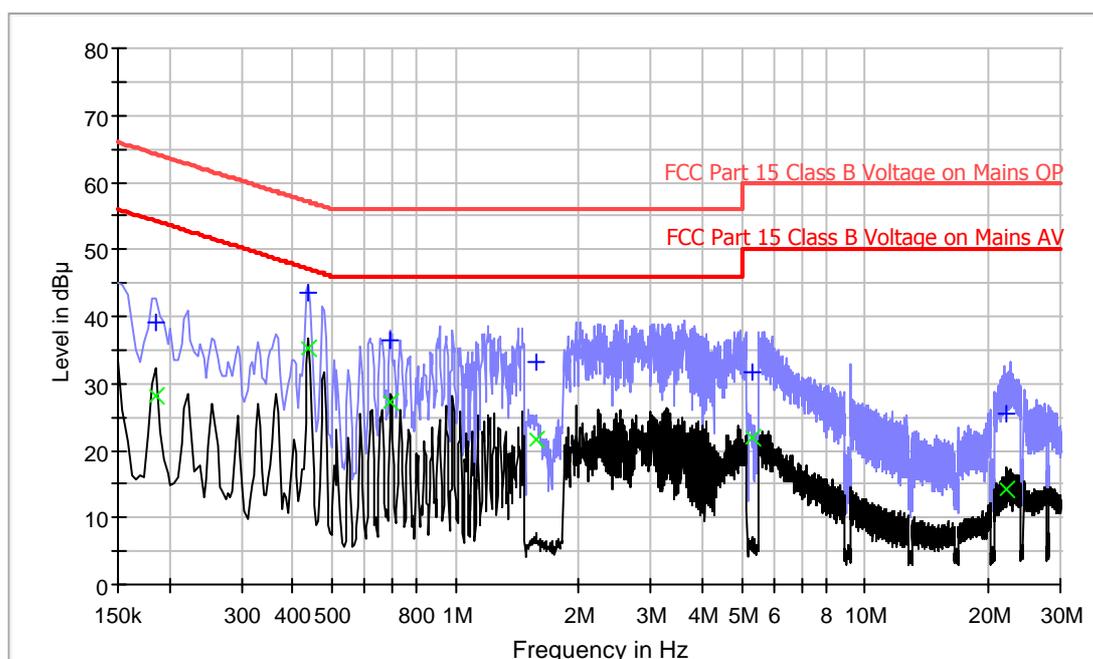

Result Table-QP

Frequency (MHz)	QuasiPeak (dB µ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB µ V)
0.186000	39.2	L1	9.6	25.0	64.2
0.438000	43.4	L1	9.6	13.7	57.1
0.694000	36.3	L1	9.7	19.7	56.0
1.574000	33.2	L1	9.7	22.8	56.0
5.314000	31.8	L1	9.8	28.2	60.0
22.114000	25.5	L1	10.1	34.5	60.0

Result Table-AV

Frequency (MHz)	Average (dB µ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB µ V)
0.186000	28.0	L1	9.6	26.2	54.2
0.438000	35.2	L1	9.6	11.9	47.1
0.694000	27.3	L1	9.7	18.7	46.0
1.574000	21.8	L1	9.7	24.2	46.0
5.314000	21.9	L1	9.8	28.1	50.0
22.114000	14.2	L1	10.1	35.8	50.0

TRF No.: FCC 15C_TXa

FCC ID: QISG5000

INTERTEK TESTING SERVICES

Applicant: HUAWEI TECHNOLOGIES CO.,LTD


Date of Test: 19 March, 2012

Model: HUAWEI G5000

Sample: 1/1

Worst Case Operating Mode: Transmit with charging (2441MHz)

Conducted Emission Test - FCC

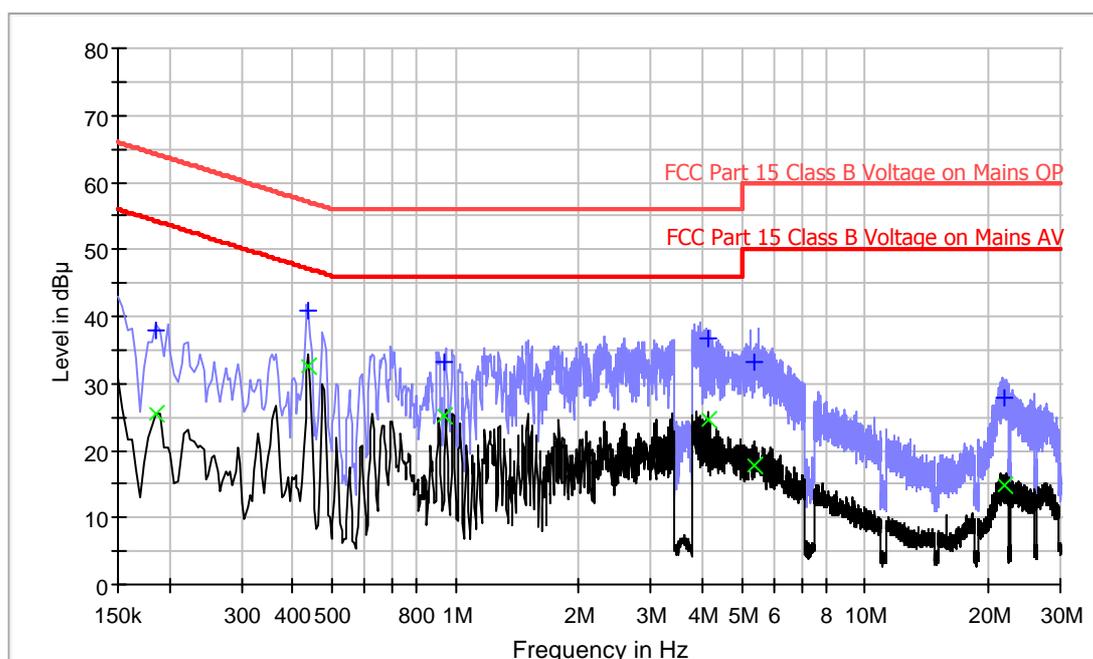

Result Table-QP

Frequency (MHz)	QuasiPeak (dB µ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB µ V)
0.186000	37.9	N	9.6	26.3	64.2
0.438000	40.9	N	9.6	16.2	57.1
0.934000	33.3	N	9.7	22.7	56.0
4.122000	36.7	N	9.8	19.3	56.0
5.388000	33.2	N	9.9	26.8	60.0
21.794000	27.9	N	10.0	32.1	60.0

Result Table-AV

Frequency (MHz)	Average (dB µ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB µ V)
0.186000	25.4	N	9.6	28.8	54.2
0.438000	32.6	N	9.6	14.5	47.1
0.934000	25.1	N	9.7	20.9	46.0
4.122000	24.7	N	9.8	21.3	46.0
5.388000	17.9	N	9.9	32.1	50.0
21.794000	14.8	N	10.0	35.2	50.0

TRF No.: FCC 15C_TXa

FCC ID: QISG5000

EXHIBIT 4
EQUIPMENT PHOTOGRAPHS

INTERTEK TESTING SERVICES

4.0 Equipment Photographs

For electronic filing, the photographs of the tested EUT are saved with filename: external photos.pdf & internal photos.pdf.

EXHIBIT 5
PRODUCT LABELLING

INTERTEK TESTING SERVICES

5.0 **Product Labelling**

For electronic filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

INTERTEK TESTING SERVICES

EXHIBIT 6

TECHNICAL SPECIFICATIONS

INTERTEK TESTING SERVICES

6.0 Technical Specifications

For electronic filing, the block diagram and schematics of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.

EXHIBIT 7
INSTRUCTION MANUAL

INTERTEK TESTING SERVICES

7.0 **Instruction Manual**

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.

INTERTEK TESTING SERVICES

EXHIBIT 8

MISCELLANEOUS INFORMATION

INTERTEK TESTING SERVICES

8.0 Miscellaneous Information

This miscellaneous information includes details of the measured bandedge, the test procedure and calculation of factor such as pulse desensitization.

INTERTEK TESTING SERVICES

8.1 Bandedge Plot

For electronic filing, the plot shows the fundamental emission when modulated is saved with filename: bandedge.pdf. From the plot, the field strength of any emissions outside of the specified frequency band are attenuated to the general radiated emission limits in section 15.209. It fulfils the requirement of 15.249(d).

Peak Measurement

Bandedge compliance is determined by applying marker-delta method, i.e (Bandedge Plot).

(i) Lower channel 2402MHz:

Peak Resultant field strength = Fundamental emissions (peak value) – delta
from the bandedge plot

$$\begin{aligned} &= 100.40 \text{ dB}\mu\text{v/m} - 54.65 \text{ dB} \\ &= 45.75 \text{ dB}\mu\text{v/m} \end{aligned}$$

(ii) Upper channel 2480MHz:

Peak Resultant field strength = Fundamental emissions (peak value) – delta
from the bandedge plot

$$\begin{aligned} &= 99.60 \text{ dB}\mu\text{v/m} - 54.52 \text{ dB} \\ &= 45.08 \text{ dB}\mu\text{v/m} \end{aligned}$$

The resultant field strength meets the general radiated emission limit in section 15.209, which does not exceed 74dB μ v/m (Peak Limit) and 54dB μ v/m (Average Limit).

INTERTEK TESTING SERVICES

8.1 Bandedge Plot (cont'd)

Pursuant to FCC part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over excepted variations in temperature and supply voltage were considered.

Figure 8.1 Bandwidth

INTERTEK TESTING SERVICES

8.2 Discussion of Pulse Desensitization

Pulse desensitivity is not applicable for this device. The effective period (T_{eff}) is approximately 625 μ s for Bluetooth. With a resolution bandwidth (3dB) of 1MHz, so the pulse desensitivity factor is 0dB.

INTERTEK TESTING SERVICES

8.3 Transmitter Duty Cycle Calculation, FCC Rule 15.35(b, c)

Based on the Bluetooth Specification, transmitter ON time is independent of packet type (DH1, DH3 and DH5) and packet length (single-slot and multi-slot). The maximum transmitter ON time for the Bluetooth is 625 μ s.

Each TX and RX time slot is 625 μ s in length. A TDD scheme is used where master and slave alternately transmit. For one period for a pseudo-random hopping through all 79 RF channels, for DH5:

Time of 1 hopset (5 TX slots + 1 RX slot) = 0.625 ms x 6 = 3.75 ms

Time of 1 cycle = 3.75 ms x 79 = 296.25 ms

Average factor = 20 log (3.125 / 100) = -30.1 dB

INTERTEK TESTING SERVICES

8.4 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services in the measurements of transmitters operating under Part 15, Subpart C rules.

The test set-up and procedures described below are designed to meet the requirements of ANSI C63.4 - 2003.

the EUT and all cables were insulated, if required, from the ground plane by up to 12 mm of insulating material. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjust through all three orthogonal axes to obtain maximum emission levels. The antenna height and polarization are varied during the testing to search for maximum signal levels.

Detector function for radiated emissions is in peak mode. Average readings, when required, are taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

Detector function for conducted emissions is in QP & AV mode and IFBW setting is 9 kHz from the frequency band 150 kHz to 30MHz.

INTERTEK TESTING SERVICES

8.4 Emissions Test Procedures (cont'd)

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.

Conducted measurements are made as described in ANSI C63.4 - 2003.

The IF bandwidth used for measurement of radiated signal strength was 10 kHz for emission below 30 MHz and 120 kHz for emission from 30 MHz to 1000 MHz. Where pulsed transmissions of short enough pulse duration warrant, a greater bandwidth is selected according to the recommendations of Hewlett Packard Application Note 150-2. Above 1000 MHz, a resolution bandwidth of 1 MHz is used.

Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the restricted bands and above 1 GHz, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, but those measurements taken at a closer distance are so marked.

EXHIBIT 9
TEST EQUIPMENT LIST

INTERTEK TESTING SERVICES

9.0 Test Equipment List

Equipment No.	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
SZ061-03	BiConiLog Antenna	ETS	3142C	00066460	02-Jul-11	02-Jan-13
SZ185-01	EMI Receiver	R&S	ESCI	100547	08-Sep-11	08-Sep-12
SZ061-08	Horn Antenna	ETS	3115	00092346	15-Sep-10	15-Sep-12
SZ056-03	Spectrum Analyzer	R&S	FSP 30	101148	08-Sep-11	08-Sep-12
SZ181-04	Preamplifier	Agilent	8449B	3008A02474	08-Sep-11	08-Sep-12
SZ188-01	Anechoic Chamber	ETS	RFD-F/A-100	4102	15-Dec-11	15-Dec-12
SZ062-02	RF Cable	RADIALL	RG 213U	--	25-Mar-11	25-Mar-12
SZ062-06	RF Cable	RADIALL	0.04-26.5GHz	--	16-Sep-11	16-Sep-12
SZ062-12	RF Cable	RADIALL	0.04-26.5GHz	--	16-Sep-11	16-Sep-12
SZ067-04	Notch Filter	Micro-Tronics	BRM5070 2-02	--	25-Mar-11	25-Mar-12
SZ185-02	EMI Test Receiver	R&S	ESCI	100692	12-Nov-11	12-Nov-12
SZ187-01	Two-Line V-Network	R&S	ENV216	100072	12-Nov-11	12-Nov-12
SZ187-02	Two-Line V-Network	R&S	ENV216	100073	12-Nov-11	12-Nov-12
SZ188-03	Shielding Room	ETS	RFD-100	4100	16-Sep-10	16-Sep-13
SZ065-03	Bluetooth Tester	R&S	CBT32	100074	11-Mar-12	11-Mar-13