



FCC Test Report

**Product Name: GSM Mobile Phone
With Bluetooth**

Model Number: HUAWEI G5730

**Report No: SYBHZ(R)E014062009EB-4
FCC ID: QISG5730**

Reliability Laboratory of Huawei Technologies Co., Ltd.

Huawei Base, Bantian, Longgang District, Shenzhen 518129, P.R. China

Tel: +86 755 28780808 Fax: +86 755 89652518

Notice

1. The laboratory has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS), and accreditation number: L0310.
2. The laboratory has obtained the accreditation of THE AMERICAN ASSOCIATION FOR LABORATORY ACCREDITATION (A2LA), and Accreditation Council Certificate Number: 2174.01.
3. The laboratory has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements. The site recognition number is 97456.
4. The laboratory has been listed by industry Canada to perform electromagnetic emission measurement. The site recognition number is 6369A-1.
5. The laboratory also has been listed by the VCCI to perform EMC measurements. The accreditation number is R2364, C2583, and T256.
6. The test report is invalid if not marked with "exclusive stamp for the test report".
7. The test report is invalid if not marked with the stamps or the signatures of the persons responsible for performing, revising and approving the test report.
8. The test report is invalid if there is any evidence of erasure and/or falsification.
9. If there is any dissidence for the test report, please file objection to the test centre within 15 days from the date of receiving the test report.
10. Normally, the test report is only responsible for the samples that have undergone the test.
11. Context of the test report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of the laboratory.



REPORT ON FCC 47CFR part 15 subpart C Test of GSM Mobile Phone With Bluetooth


M/N: HUAWEI G5730

Report No: SYBHZ(R)E014062009EB-4


FCC ID: QISG5730

REGULATION **FCC CFR47 Part 2: Subpart J;**
FCC CFR47 Part 15: Subpart C;

CONCLUSION **Pass**

General Manager	<u>2009.06.17</u>	张兴海	
	Date	Name	signature

Technical Responsibility For Area of Testing	<u>2009.06.16</u>	余 辉	
	Date	Name	signature

Test Lab Engineer	<u>2009.06.15</u>	胡 俊	
	Date	Name	signature
	Date	Name	signature



Contents

1	<u>Summary</u>	5
2	<u>Product Description</u>	6
2.1	PRODUCTION INFORMATION	6
2.2	MODIFICATION INFORMATION	6
3	<u>Test Site Description</u>	7
3.1	TESTING PERIOD	7
3.2	GENERAL SET UP DESCRIPTION	7
4	<u>Product Description</u>	8
4.1	TECHNICAL CHARACTERISTICS	8
4.2	EUT IDENTIFICATION LIST	10
5	<u>Main Test Instruments</u>	11
6	<u>Transmitter Measurements</u>	12
6.1	20DB BANDWIDTH MEASUREMENT	12
6.2	CARRIER FREQUENCY SEPARATION MEASUREMENT	14
6.3	NUMBER OF HOPPING CHANNEL	16
6.4	TIME OF OCCUPANCY	18
6.5	PEAK OUTPUT POWER	20
6.6	BAND EDGE SPURIOUS EMISSION	22
6.7	CONDUCTED RF SPURIOUS	24
6.8	RADIATED SPURIOUS EMISSION & SPURIOUS IN RESTRICTED BAND	26
6.9	CONDUCTED EMISSION AT POWER PORT	30
7	<u>System Measurement Uncertainty</u>	32
8	<u>Appendices List</u>	33



1 Summary

The table below summarizes the measurements and results for the GSM Mobile Phone With Bluetooth G5730. Detailed results and descriptions are shown in the following pages.

Summary of results

FCC Measurement Specification	Description	Result
15.247 (a) (1)	20dB bandwidth measurement	PASS
15.247 (a) (1)	Carrier frequency separation measurement	PASS
15.247 (a) (1) III	Number of hopping channel	PASS
15.247 (a) (1) III	Time of occupancy	PASS
15.247 (b) (1)	Peak output power	PASS
15.247 (d)	Band edge compliance measurement	PASS
15.247 (d)	Conducted RF spurious	PASS
15.247 (d) / 15.205 & 15.209	Radiated spurious emission & Radiated restricted band measurement	PASS
15.207	Conducted emission test for power port	PASS



2 Product Description

2.1 Production Information

General Description

Huawei GSM Mobile Phone With Bluetooth - HUAWEI G5730 is subscriber equipment in the GSM system. The frequency band is GSM850 and PCS1900. The Mobile Phone implements such functions as RF signal receiving / Transmitting, GSM protocol processing, voice and SMS service etc. The Mobile Phone uses MTK6235 single chipset and Zero-IF technologies.

2.1.1 Support function and Service

The Mobile Phone HUAWEI G5730 support the Bluetooth's function and service as follows:

Service and Test mode List

Service Name	Characteristic	Corresponding Test Mode	Note
Data and Voice	Modulation: GFSK	TM1	/

2.2 Modification Information

For original equipment, following table is not application.

Modification Information

Model Number	Board/Module	Original Version	New Version	Modify Information
Not applicable!				



3 Test Site Description

The test site of:

***Huawei Technologies Co. Ltd.
P.O. Box 518129
Huawei base, bantian,
Longgang District, Shenzhen, China***

3.1 Testing Period

The test have been performed during the period of

JUN.8, 2009 to JUN.12, 2009

3.2 General Set up Description

The Bluetooth hopping frequency system of Mobile Phone HUAWEI G5730 can Support 2.4GHz Band. For compliance with FCC regulation 47CFR part15 subpart C, we set the mobile phone as following test mode to do all compliance tests.

Bluetooth MODE:

TM1: GFSK Modulation



4 Product Description

4.1 Technical Characteristics

4.1.1 Frequency Range

Frequency Range		
Uplink band:	2400 to 2483.5 MHz	
Downlink band:	2400 to 2483.5 MHz	
Hop frequency support:	☒ YES	☐ NO

4.1.2 Channel Spacing / Separation

Channel Spacing / Separation	
Channel spacing:	1 MHz
Channel separation:	1 MHz

4.1.3 Type of Emission

Type of Emission	
Emission Designation:	-

According to CFR 47 (FCC) part 2, subpart C, section 2.201 and 2.202

4.1.4 Antenna Information

Antenna Information	
Type:	Integrated / Internal
Maximum Gain(dBi):	0 (from 2400MHz to 2500MHz)

4.1.5 Environmental Requirements

Environmental Requirements	
Minimum temperature:	- 10 °C
Maximum temperature:	+ 55 °C
Relative Humidity:	5%-95%



4.1.6 Power Source

Power Source

AC voltage nominal:	~120V
AC voltage range	~100V-240V
AC current maximal:	400mA

4.1.7 Tune-up Procedure

According to CFR (FCC) part 2, subpart 2, section 2.1033(c) (9).

Please reference the document Tune-up Procedure in TCF.

4.1.8 Applied DC Voltages and Currents

According to CFR (FCC) part 2, subpart 2, section 2.1033(c) (8).

The voltage and current in the final RF stage is:

Applied RF module DC Voltages and Currents

Voltage:	 3.7V
Current:	120mA According to CFR (FCC) part 2, subpart 2, section 2.1033(c) (8)



4.2 EUT Identification List

4.2.1 Board Information

Board Information

GSM Mobile Phone		
HUAWEI G5730		
Board and Module		
Equipment Designation / Description	Serial Number	Remarks
-Main board	020QLD209500028	HG2G5730M VER.B
-LCD	8603A-090404D33-1-1 SC	BM240320-8603FTGB
-Battery	GAG9123XA0243752	HBL3A

4.2.2 Adapter Technical Data

AC/DC Adapter Model:	HS-050040E5	HS-050040U6
Manufacturer:	Huawei Technologies Co., Ltd.	Huawei Technologies Co., Ltd.
Rated Voltage	~ 120V, 60Hz	~ 120V, 60Hz
Input Voltage:	~ 100-240V 50/60Hz	~ 100-240V 50/60Hz
Output Voltage;	=== 5.0V	=== 5.0V
Rated Power:	2W	2W
S/N:	HKA830406438	XQH831905120

4.2.3 Battery Technical Data

Battery Model:	HBL3A
Rated capacity:	600mAh
Nominal Voltage:	=== +3.7V
Charging Voltage:	=== +4.2V

4.2.4 FCC Identification

Grantee Code: QIS
Product Code: G5730
FCC Identification: QISG5730

5 Main Test Instruments

Main Test Equipments

Equipment Description	Manufacturer	Model	Serial Number	Calibrated until (MM.DD.YYYY)
Signal Analyzer	R&S	FSP	3604100094	03.17.2010
Test Receiver Display Unit	R&S	ESMI 804.8932.52	829214/011	04.22.2010
Test Receiver RF Unit	R&S	ESMI 1032.5640.53	829550/008	04.22.2010
Receiver	R&S	ESIB 26	100318	05.29.2010
Receiver	R&S	ESCS30	830245/018	05.29.2010
Pre-Amplifier	Agilent	8447D	2944A10146	05.20.2010
Pre-Amplifier	Agilent	83017A	3950M00246	03.04.2010
BiLog Antenna	Schaffner	CBL 6112B	2536	06.07.2010
Horn Antenna	R&S	HF906 4044.4507.02	359287/006	12.13.2009
Horn Antenna	ETS-Lindgren	3117	3606061621	07.15.2009
Horn Antenna	ETS-Lindgren	3160	3606061623	07.15.2009
Signal Generator	R&S	SMU200A	3604100093	03.17.2010
Artificial Mains Network	R&S	ENV4200	100001	05.20.2010
Universal Radio Communication Tester	R&S	CBT	3608053990	05.21.2010
Signal Analyzer	Agilent	E4440A	3608031630	01.14.2010

6 Transmitter Measurements

6.1 20dB bandwidth measurement

6.1.1 Test Conditions

Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25 °C
Relative humidity:	76%
Test Configurations:	TM1 at channel No.0, 40, 78

6.1.2 Test Specifications and Limits

6.1.2.1 Specification

CFR 47 (FCC) part 15.247 (a) (1) and DA 00-705

6.1.2.2 Supporting Standards

Supporting Standards:

ANSI/TIA-603-C:2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
---------------------	--

6.1.2.3 Limits

Not Applicable.

6.1.3 Test Method and Setup

- (a) Connect test port of mobile phone to universal communication tester.
- (b) Set the mobile phone to transmit maximum output power at 2.4GHz and switch off frequency hopping function, then set the measured frequency number and test the 20dB bandwidth with universal communication tester.

Test setup

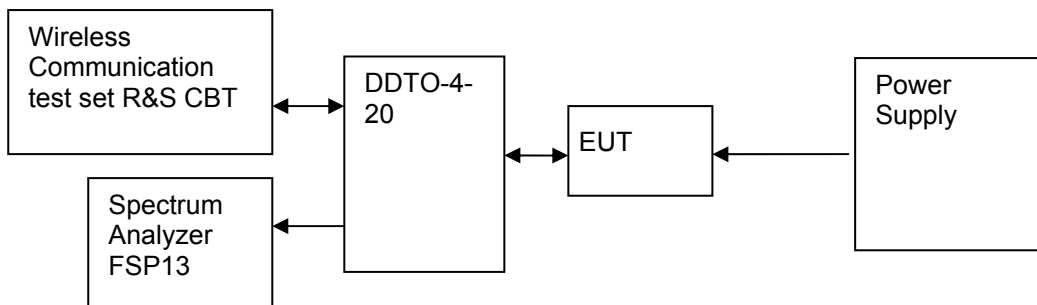


Figure 1. Test Set-up

6.1.4 Measurement Results

Measurement Results

Bandwidth Type	Channel Position	Channel Number	Frequency [GHz]	Measured Bandwidth [MHz]	Result
20dB	B	0	2.402	0.968	Pass
20dB	M	40	2.442	0.948	Pass
20dB	T	78	2.480	0.944	Pass

6.1.5 Conclusion

The equipment **PASSED** the requirement of this clause.
For the measurement results refer to . Appendix A

6.2 Carrier frequency separation measurement

6.2.1 Test Conditions

Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25 °C
Relative humidity:	76%
Test Configurations:	TM1 at channel No.39, 40, 41

6.2.2 Test Specifications and Limits

6.2.2.1 Specification

CFR 47 (FCC) part 15.247 (a) (1) and DA 00-705

6.2.2.2 Supporting Standards

Supporting Standards:

ANSI/TIA-603-C:2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
---------------------	--

6.2.2.3 Limits

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

Limits

Regulation:	≥ 0.025 or $2/3$ of the 20 dB bandwidth
Limit:	$\geq 2/3 \times 0.948 = 0.632\text{MHz}$

6.2.3 Test Method and Setup

- Connect test port of mobile phone to spectrum analyzer and universal communication tester.
- Set the mobile phone to transmit maximum output power at 2.4GHz and switch off frequency hopping function, then set the measured frequency number to two adjacent channels separately and test the carrier frequency separation with spectrum analyzer.

Test setup

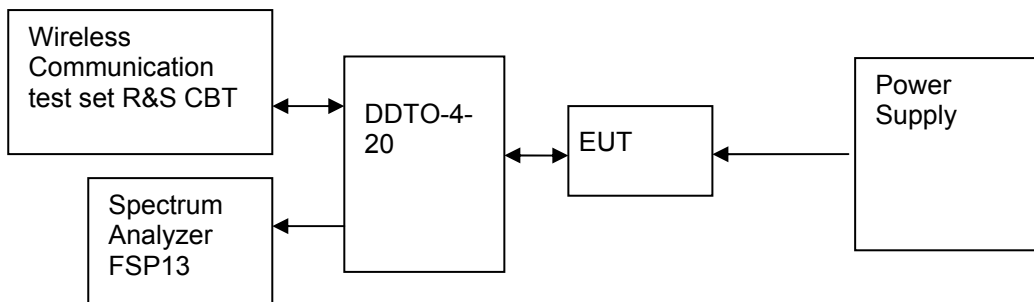


Figure 2. Test Set-up

6.2.4 Measurement Results

Measurement Results

Channel No.	Frequency [GHz]	Channel No.	Frequency [GHz]	Measured frequency separation [MHz]	Limit [MHz]	Result
40	2.442	39	2.441	1.05	≥ 0.632	Pass
40	2.442	41	2.443	1.04	≥ 0.632	Pass

6.2.5 Conclusion

The equipment **PASSED** the requirement of this clause.
For the measurement results refer to appendix B.



6.3 Number of hopping channel

6.3.1 Test Conditions

Test Conditions	
Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25 °C
Relative humidity:	76%
Test Configurations:	TM1 at hopping frequency state

6.3.2 Test Specifications and Limits

6.3.2.1 Specification

CFR 47 (FCC) part 15.247 (a) (1) iii and DA 00-705

6.3.2.2 Supporting Standards

Supporting Standards:	
ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards

6.3.2.3 Limits

Number of hopping channel should be compliance with the requirements in part15.247 (a) (1) iii.

Limits	
Limits	≥ 15 hopping frequency channel

6.3.3 Test Method and Setup

- (a) Connect test port of mobile phone to spectrum analyzer and universal communication tester.
- (b) Set the mobile phone to transmit maximum output power at 2.4GHz and switch on frequency hopping function, then set enough count time (larger than 5000 times) to get all the hopping frequency channel displayed on the screen of spectrum analyzer.
- (c) Count the quantity of peaks to get the number of hopping channels.

Test setup

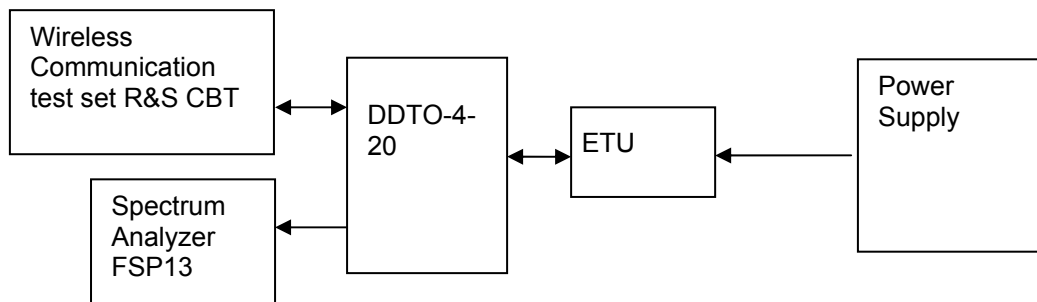


Figure 3. Test Set-up

6.3.4 Measurement Results

Measurement Results				
Measured frequency range [MHz]	Channel No. range	Measured Channel No.	Limit	Result
2400 to 2483.5	0-78	79	≥ 15	Pass

6.3.5 Conclusion

The equipment **PASSED** the requirement of this clause.
For the measurement results refer to appendix C.

6.4 Time of occupancy

6.4.1 Test Conditions

Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25°C
Relative humidity:	76%
Test Configurations:	TM1 at hopping frequency state

6.4.2 Test Specifications and Limits

6.4.2.1 Specification

CFR 47 (FCC) part 15.247 (a) (1) iii and DA 00-705

6.4.2.2 Supporting Standards

Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
----------------------	--

6.4.2.3 Limits

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Limits

Limits for time of occupancy	$\leq 0.4s$
------------------------------	-------------

6.4.3 Test Method and Setup

- Connect test port of mobile phone to spectrum analyzer and universal communication tester.
- Set the mobile phone to transmit maximum output power at 2.4GHz and switch on frequency hopping function.
- Set the span of spectrum analyzer to 0 Hz, and set the resolution bandwidth to 1 MHz and the video bandwidth to 1 MHz, then get the time domain measured diagram. and set sweep time to 2 times of one burst occupancy time, and measure the time of occupancy of one burst.
- Set the resolution bandwidth to 1 MHz and the video bandwidth to 3 MHz, and set the sweep time to a period (0.4 seconds multiplied by the number of hopping channels employed), and count the number of the bursts.
- Calculate the time of occupancy in a period with time occupancy of a burst and quantity of bursts.

Test setup

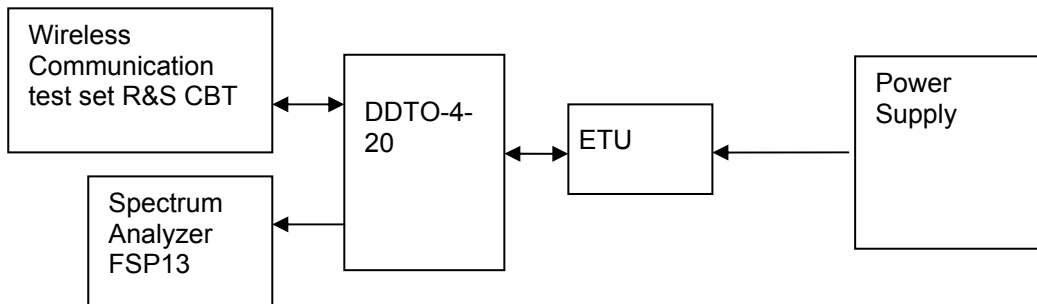


Figure 4. Test Set-up

6.4.4 Measurement Results

Measurement Results

Time of Single Slot [ms]	Numbers of slots in a period	Time of occupied in a period [s]	Limit [s]	Result
2.88	106.7	0.307	≤ 0.4	Pass

Note: The result is measured at DH5 mode in GFSK modulation, which has longest time in one transmission burst.

6.4.5 Conclusion

The equipment **PASSED** the requirement of this clause.
For the measurement results refer to appendix D.



6.5 Peak output power

6.5.1 Test Conditions

Test Conditions	
Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25 °C
Relative humidity:	76%
Test Configurations:	TM1 at channel No.0, 40, 78

6.5.2 Test Specifications and Limits

6.5.2.1 Specification

CFR 47 (FCC) part 15.247 (b) (1) and DA 00-705

6.5.2.2 Supporting Standards

Supporting Standards:	
ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards

6.5.2.3 Limits

Compliance with part 15.247 (b) (1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watt.

Limits	
2.4GHz and 5.8GHz hopping frequency system	1 Watt (=30 dBm)

6.5.3 Test Method and Setup

- Connect test port of mobile phone to universal communication tester.
- Set the mobile phone to transmit maximum output power at 2.4GHz and switch off frequency hopping function.
- Then set the mobile phone to transmit at high, middle and low frequency and measure the conducted output power separately.

Test setup

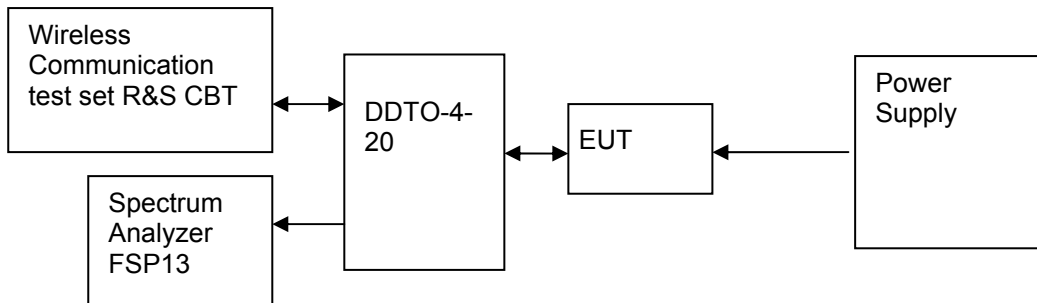


Figure 5. Test Set-up

6.5.4 Measurement Results

Measurement Results					
Channel	Channel No.	Center Freq.[MHz]	Meas. Level (Cond.) [dBm]	Limit [dBm]	Result
Bottom	0	2402	2.76	< 30	Pass
Middle	40	2442	3.61	< 30	Pass
Top	78	2480	3.81	< 30	Pass

6.5.5 Conclusion

The equipment **PASSED** the requirement of this clause.
For the measurement results refer to appendix E.

6.6 Band edge spurious emission

6.6.1 Test Conditions

Test Conditions	
Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25°C
Relative humidity:	76%
Test Configurations:	TM1 at channel No. 0, 78 and frequency hopping state

6.6.2 Test Specifications and Limits

6.6.2.1 Specification

CFR 47 (FCC) part 15.247 (d) and DA 00-705

6.6.2.2 Supporting Standards

Supporting Standards:	
ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards

6.6.2.3 Limits

Compliance with part 15.247 (d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required.

Limits	
Band edge spurious:	20 dBc/100kHz

6.6.3 Test Method and Setup

- Connect test port of mobile phone to spectrum analyzer and universal communication tester
- Set the mobile phone to transmit maximum output power at 2.4GHz and switch off frequency hopping function.
- Then set the mobile phone to transmit at high, low frequency and measure the conducted band edge spurious separately.
- Switch on the frequency hopping function, and repeat above measurement.

Test setup

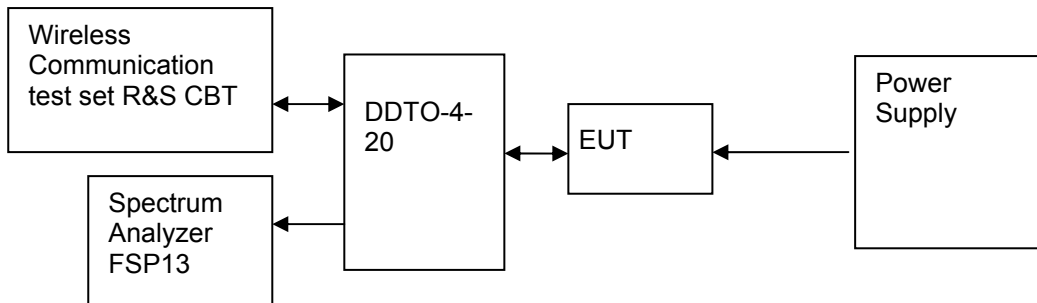


Figure 6. Test Set-up

6.6.4 Measurement Results

Measurement Results for Band Edge immediately outside the 2.4GHz Band

	Channel No.	Carrier Frequency [MHz]	Carrier Power [dBm]	Frequency Hopping	Max. Spurious Level [dBm]	Limit [dBm]	Result
Low Edge	0	2402	2.35	Off	-49.23	< -17.65	Pass
	-	-	2.35	On	-51.17	<-17.65	Pass
High Edge	78	2480	3.26	Off	-51.14	<-16.74	Pass
	-	-	3.01	On	-55.61	<-16.99	Pass

6.6.5 Conclusion

The equipment **PASSED** the requirement of this clause.
For the measurement results refer to appendix F.

6.7 Conducted RF spurious

6.7.1 Test Conditions

Test Conditions	
Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25 °C
Relative humidity:	76%
Test Configurations:	TM1 at channel No.0, 40, 78

6.7.2 Test Specifications and Limits

6.7.2.1 Specification

CFR 47 (FCC) part 15.247 (d) and DA 00-705

6.7.2.2 Supporting Standards

Supporting Standards:	
ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards

6.7.2.3 Limits

Compliance with part 15.247 (d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required.

Limits	
Band edge spurious:	20 dBc/100kHz

6.7.3 Test Method and Setup

- Connect test port of mobile phone to spectrum analyzer and universal communication tester
- Set the mobile phone to transmit maximum output power at 2.4GHz and switch off frequency hopping function.
- Then set the mobile phone to transmit at high, middle and low frequency and measure the conducted band edge spurious separately.
- Switch on the frequency hopping function, and repeat above measurement.

Test setup

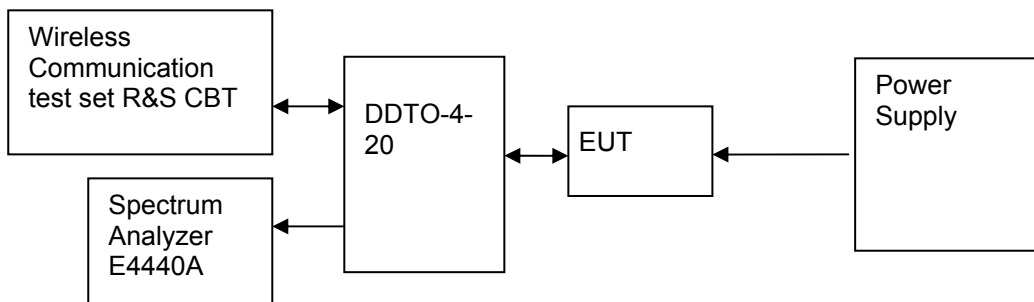


Figure 7. Test Set-up

6.7.4 Measurement Results

Measurement Results

Test Frequency Range	Channel No.	Carrier Frequency [MHz]	Carrier Power [dBm]	Frequency Hopping	Max. Spurious Level [dBm]	Limit [dBm]	Result
9kHz-25GHz	0	2402	2.74	Off	-41.99	< -17.26	Pass
9kHz-25GHz	40	2442	3.55	Off	-41.16	< -16.45	Pass
9kHz-25GHz	78	2480	3.38	Off	-42.49	< -16.62	Pass

6.7.5 Conclusion

The equipment **PASSED** the requirement of this clause.
For the measurement results refer to appendix G.

6.8 Radiated spurious emission & spurious in restricted band

6.8.1 Test Conditions

Test Conditions

Preconditioning:	0.5 hour
Measured at:	Enclosure
Ambient temperature:	25 °C
Relative humidity:	55 %
Test Configurations:	TM1 at channel No.0, 40, 78

6.8.2 Test Specifications and Limits

6.8.2.1 Specification

CFR 47 (FCC) part 15.247 (d), 15.205 & 15.209 and DA 00-705

6.8.2.2 Supporting Standards

Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
ANSI C63.4: 2003	Methods of Measurement of Radio-Noise Emissions from Low Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

6.8.2.3 Limits

According to part 15.247 (d) / 15.205 & 15.209, all spurious emission in the frequency range from 30MHz to 10th harmonics of carrier frequency should be meet the requirement of following table.

Limits

Frequency (MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance (meters)	Detector
30 - 88	100	40	3	QP
88 - 216	150	43.5	3	QP
216 - 960	200	46	3	QP
960 -1000	500	54	3	QP
Above 1000	500	54	3	PK

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a) (see above table).

6.8.3 Test Method and Setup

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.4 (2003). The EUT was set-up on insulator 80cm above the Ground Plane. The set-up and test methods were according to ANSI C63.4. The Radiated Disturbance measurements were made using a Rohde and Schwarz Test Receiver and control software.

A preliminary scan and a final scan of the emissions were made by using test script of software; the emissions were measured using a Quasi-Peak Detector below 1GHz, and AV detector above 1GHz. The maximal emission value was acquired by adjusting the antenna height, polarisation and turntable azimuth in accordance with the software setup. Normally, the height range of antenna was 1m to 4m, the azimuth range of turntable was 0° to 360°, The receive antenna has two polarizations V and H.

Huawei GSM Mobile Phone with Bluetooth G5730 was communicated with the BTS simulator through Air interface. The Mobile Phone transmits maximum output power at 2.4GHz and switch off frequency hopping function.

Measurement bandwidth: 30 MHz - 1000 MHz: 120 kHz

Measurement bandwidth: 1000 MHz - 10th Carrier Frequency: 1 MHz

Test set up

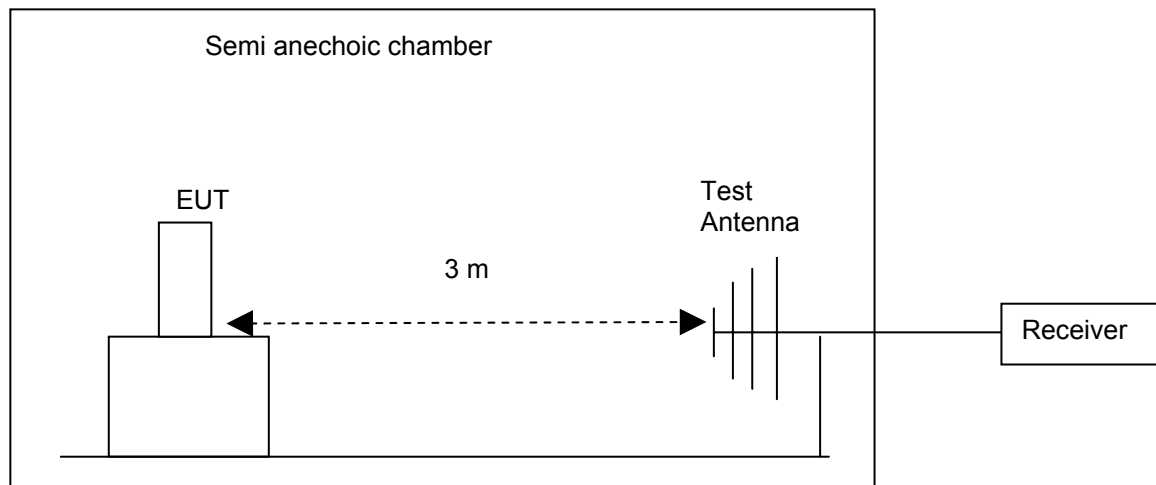


Figure 8. Test Set up

6.8.4 Measurement Results

Note: The following measurement results exceed the limit line is the carrier frequency.

Measured Result of channel: 0 (2402MHz)

MEASUREMENT RESULT

Frequency (MHz)	Level (dBμV/m)	Transd (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Polarisation
35.520000	33.40	-9.0	40.0	6.6	107.0	0.00	VERTICAL
40.920000	32.70	-12.1	40.0	7.3	115.0	337.00	VERTICAL
43.380000	34.00	-13.2	40.0	6.0	115.0	355.00	HORIZONTAL
145.920000	26.90	-14.5	43.5	16.6	124.0	92.00	HORIZONTAL
184.320000	21.30	-13.4	43.5	22.2	227.0	216.00	HORIZONTAL
944.520000	30.00	1.7	46.0	16.0	231.0	0.00	HORIZONTAL
1898.000000	11.50	-8.6	54.0	42.5	176.0	55.00	HORIZONTAL
2402.000000	74.80	-6.8	54.0	-10.8	296.0	65.00	VERTICAL
4254.000000	20.80	-0.7	54.0	33.2	237.0	35.00	VERTICAL
6415.000000	23.20	1.5	54.0	30.8	150.0	164.00	HORIZONTAL
10980.000000	29.60	11.9	54.0	24.4	200.0	270.00	HORIZONTAL
17865.000000	41.10	26.0	54.0	12.9	299.0	230.00	HORIZONTAL

Measured Result of channel: 40 (2442MHz)

MEASUREMENT RESULT

Frequency (MHz)	Level (dBμV/m)	Transd (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Polarisation
35.520000	33.40	-9.0	40.0	6.6	190.0	246.00	VERTICAL
40.920000	32.70	-12.1	40.0	7.3	185.0	255.00	VERTICAL
43.380000	34.00	-13.2	40.0	6.0	127.0	349.00	VERTICAL
147.960000	26.70	-14.5	43.5	16.8	171.0	306.00	HORIZONTAL
185.840000	21.50	-13.4	43.5	22.0	262.0	249.00	VERTICAL
944.520000	32.60	1.7	46.0	13.4	101.0	196.00	HORIZONTAL
1716.000000	10.0	-9.9	54.0	44.0	268.0	188.00	HORIZONTAL
2442.000000	75.10	-6.9	54.0	-21.1	100.0	251.00	VERTICAL
4213.000000	20.20	-0.6	54.0	33.8	261.0	226.00	VERTICAL
6356.000000	22.70	5.5	54.0	31.3	131.0	52.00	HORIZONTAL
10875.000000	29.60	12.1	54.0	24.4	269.0	318.00	HORIZONTAL
17842.000000	42.20	25.5	54.0	11.8	103.0	122.00	VERTICAL

Measured Result of channel: 78 (2480MHz)

MEASUREMENT RESULT

Frequency (MHz)	Level (dBμV/m)	Transd (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Polarisation
35.520000	33.40	-9.0	40.0	6.6	261.0	296.00	HORIZONTAL
40.920000	32.70	-12.1	40.0	7.3	230.0	8.00	HORIZONTAL
43.380000	34.00	-13.2	40.0	6.0	122.0	317.00	VERTICAL
145.920000	26.80	-14.5	43.5	16.7	146.0	240.00	HORIZONTAL
184.320000	20.70	-13.4	43.5	22.8	283.0	207.00	VERTICAL
944.520000	30.20	1.7	46.0	15.8	288.0	350.00	VERTICAL
1620.000000	9.70	-10.9	54.0	44.3	129.0	30.00	HORIZONTAL
2480.000000	75.70	-6.8	54.0	-21.7	161.0	285.00	HORIZONTAL
4245.000000	20.50	-0.4	54.0	33.5	294.0	10.00	HORIZONTAL
6576.000000	21.40	5.3	54.0	32.6	154.0	173.00	HORIZONTAL
10895.000000	28.60	12.2	54.0	25.4	205.0	65.00	HORIZONTAL
17849.000000	40.60	25.9	54.0	13.4	196.0	248.00	VERTICAL

Measurement Results for Band Edge(2310 MHz -2390MHz, 2483.5 MHz -2500MHz)

Channel No	Channel No	Carrier Frequency [MHz]	Max. Delta Spurious Level [dB]	Carrier Frequency Level test in 3 meters [dBμV/m]	Band Edge Max. Spurious Level [dBμV/m]	Limit (AV) [dBμV/m]	Result
Low Edge	0	2310-2390	63.18	72.10	8.92	54	Pass
High Edge	78	2483.5-2500	61.10	72.30	11.2	54	Pass

Notes:

1. Band Edge Max. Spurious Level = Carrier Frequency Level test in 3 meters - Max. Delta Spurious Level;
2. Max. Delta Spurious Level is got from the Band Edge test result appendix F;
3. The Carrier Frequency Levels test in 3 meters are got from the radiated spurious emission which is appendix H;
4. Because the PK detector value is smaller than AV Limit line, so the AV detector value is certainly smaller than AV limit line.



6.8.5 Conclusion

The equipment **PASSED** the requirement of this clause.
For the measurement results refer to appendix H.

6.9 Conducted Emission at Power Port

6.9.1 Test Conditions

Test Conditions	
Preconditioning:	0.5 hour
Measured at:	Power port
Ambient temperature:	23.5°C
Relative humidity:	55 %
Test Configurations:	TM1 at channel No. 40

6.9.2 Test Specifications and Limits

6.9.2.1 Specification

CFR 47 (FCC) part 15.207 and DA 00-705

6.9.2.2 Supporting Standards

Supporting Standards:	
ANSI C63.4: 2003	Methods of Measurement of Radio-Noise Emissions from Low Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

6.9.2.3 Limits

Compliance with part 15.207, conducted emission must meet the requirement of following table.

Frequency of Emission (MHz)	Limits	
	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

Note: * Decreases with the logarithm of the frequency.

6.9.3 Test Method and Setup

The Table-top EUT was placed upon a non-metallic table 0.8 m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.4: 2003.

Conducted Disturbance at AC Port measurements were undertaken on the L and N Lines. The emissions were measured using a Quasi-Peak Detector and Average Detector.

Huawei GSM Mobile Phone with Bluetooth G5730 was communicated with the BTS simulator through Air interface, the BTS simulator controls the Mobile Phone to transmitter the maximum power which defined in specification of product. The Mobile Phone operated on the typical channel.

Measurement bandwidth (RBW) for 150kHz to 30 MHz: 9 kHz;

Test Set-up

The Mobile Phone was setup in the screened chamber and operated under nominal conditions.

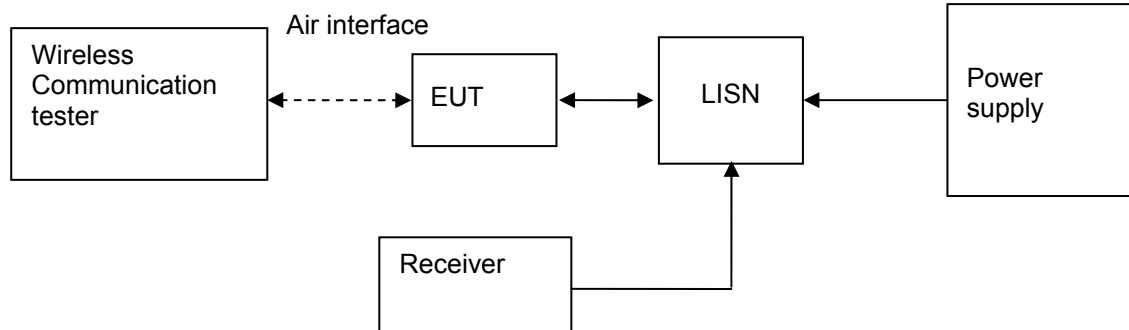


Figure 9. Test Set-up

6.9.4 Measurement Results

MEASUREMENT RESULT:QP DECTER

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.348000	41.40	10.0	59	17.6	N	FLO
0.600000	40.50	10.1	56	15.5	N	FLO
1.063500	38.90	10.1	56	17.1	N	FLO
2.089500	29.50	10.1	56	26.5	N	FLO
5.356500	26.90	10.2	60	33.1	N	FLO
19.473000	24.10	10.3	60	35.9	N	FLO

MEASUREMENT RESULT:AV DECTER

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.366000	29.70	10.0	49	19.3	N	FLO
0.591000	28.10	10.1	46	17.9	N	FLO
1.158000	19.40	10.1	46	26.6	N	FLO
2.143500	16.60	10.1	46	29.4	N	FLO
5.392500	15.40	10.2	50	34.6	N	FLO
19.473000	8.40	10.3	50	41.6	N	FLO

6.9.5 Conclusion

The equipment **PASSED** the requirement of this clause.
For the measurement results refer to appendix I.

7 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

System Measurement Uncertainty

Items		Extended Uncertainty
20dB bandwidth measurement	Magnitude (%)	U=0.2%; k=2
Carrier frequency separation measurement	Magnitude (%)	U=0.2%; k=2
Time of occupancy	Magnitude (%)	U=0.2%; k=2
Peak output power	Power(dBm)	U=0.39dB; k=2
Band edge compliance measurement	Disturbance Power(dBm)	U=2.0dB; k=2
Conducted RF spurious	Disturbance Power(dBm)	U=2.0dB; k=2
Radiated spurious emission & Radiated restricted band measurement	Field strength (dBμV/m)	U=2.2dB; k=2 U=5dB; k=2
Conducted emission test for power port	Disturbance Voltage(dBμV)	U=4dB; k=2



8 Appendices List

Appendix A	Measurement Results 20dB bandwidth measurement	4 pages
Appendix B	Measurement Results Carrier frequency separation measurement	2 pages
Appendix C	Measurement Results Number of hopping channel	2 pages
Appendix D	Measurement Results Time of occupancy	3 pages
Appendix E	Measurement Results Peak output power	4 pages
Appendix F	Measurement Results Band edge compliance measurement	5 pages
Appendix G	Measurement Results Conducted RF spurious	10 pages
Appendix H	Measurement Results Radiated spurious emission	12 pages
Appendix I	Measurement Results Conducted emission test for power port	2 pages
Appendix J	Photos of Test Setup	3 pages

----- End of Report -----