



## Appendix A. System Check Plots

Table of contents
<b>SystemPerformanceCheck-D835-EX-Head</b>
<b>SystemPerformanceCheck-D835-EX-Body</b>
<b>SystemPerformanceCheck-D1900-EX-Head</b>
<b>SystemPerformanceCheck-D1900-EX-Body</b>
<b>SystemPerformanceCheck-D2450-EX-Head</b>
<b>SystemPerformanceCheck-D2450-EX-Body</b>

Test Laboratory: HUAWEI SAR/HAC Lab

### SystemPerformanceCheck-D835-EX-Head

**DUT: Dipole 835 MHz D835V2; Type: D835V2; Serial: D835V2 - SN:4d126**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.918$  S/m;  $\epsilon_r = 41.394$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(9.7, 9.7, 9.7); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

**Configuration/d=15mm,pin=250mW/Area Scan (7x16x1):** Measurement grid:  $dx=12$ mm,  $dy=12$ mm

Maximum value of SAR (measured) = 2.55 W/kg


**Configuration/d=15mm,pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 53.434 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 3.85 W/kg

**SAR(1 g) = 2.55 W/kg; SAR(10 g) = 1.63 W/kg**

Maximum value of SAR (measured) = 2.74 W/kg

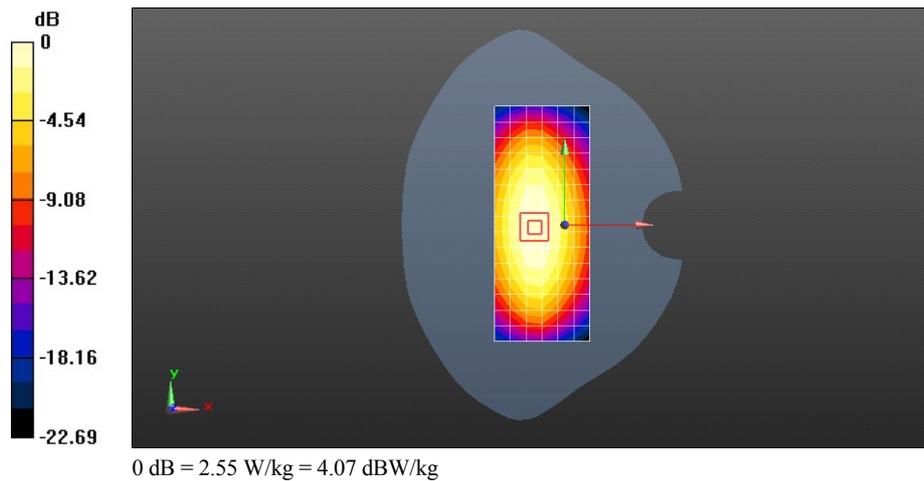

Test Laboratory: HUAWEI SAR/HAC Lab

### SystemPerformanceCheck-D835-EX-Body

**DUT: Dipole 835 MHz D835V2; Type: D835V2; Serial: D835V2 - SN:4d126**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.943$  S/m;  $\epsilon_r = 53.862$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(9.58, 9.58, 9.58); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

**Configuration/d=15mm,pin=250mW/Area Scan (7x16x1):** Measurement grid:  $dx=12$ mm,  $dy=12$ mm

Maximum value of SAR (measured) = 2.68 W/kg


**Configuration/d=15mm,pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 53.270 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 3.63 W/kg

**SAR(1 g) = 2.43 W/kg; SAR(10 g) = 1.59 W/kg**

Maximum value of SAR (measured) = 2.63 W/kg

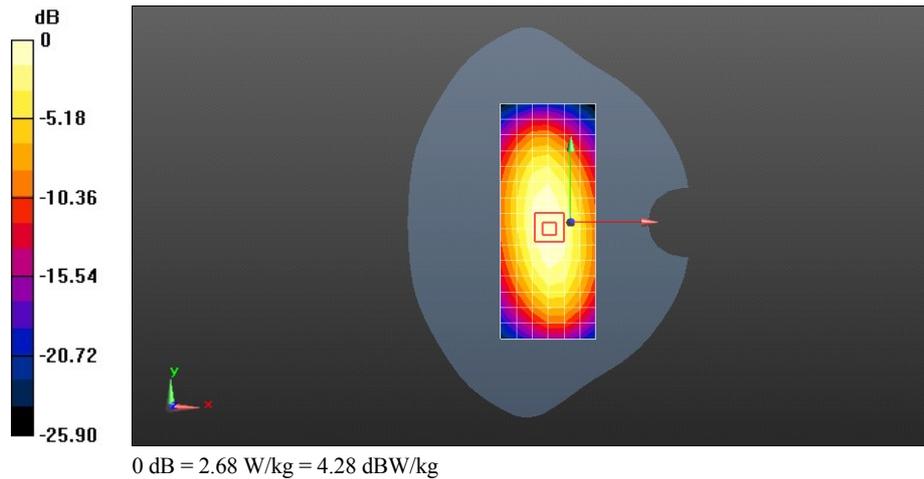

Test Laboratory: HUAWEI SAR/HAC Lab

### SystemPerformanceCheck-D1900-EX-Head

**DUT: Dipole 1900 MHz D1900V2; Type: D1900V2; Serial: D1900V2 - SN:5d143**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.424$  S/m;  $\epsilon_r = 40.419$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.94, 7.94, 7.94); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

**Configuration/d=10mm, Pin=250mW/Area Scan (8x12x1):** Measurement grid:  $dx=12$ mm,  $dy=12$ mm

Maximum value of SAR (measured) = 9.79 W/kg


**Configuration/d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 87.269 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 18.9 W/kg

**SAR(1 g) = 9.73 W/kg; SAR(10 g) = 4.93 W/kg**

Maximum value of SAR (measured) = 10.9 W/kg

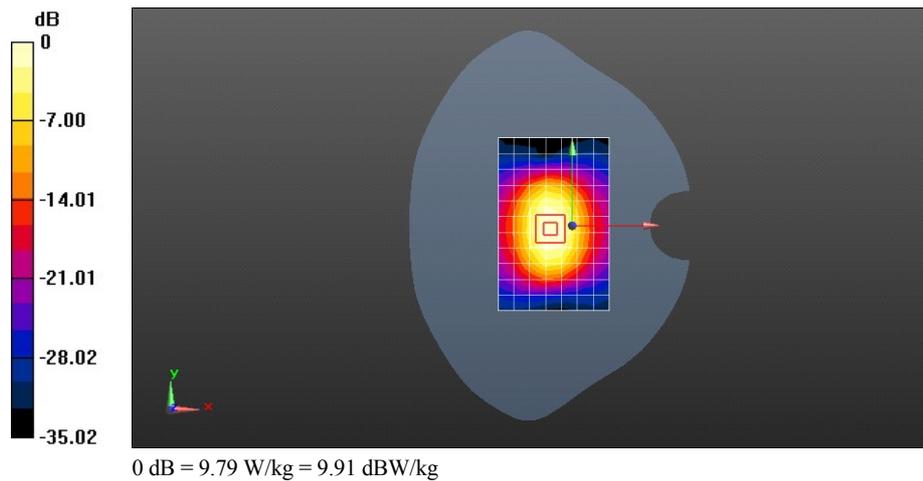

Test Laboratory: HUAWEI SAR/HAC Lab

### SystemPerformanceCheck-D1900-EX-Body

**DUT: Dipole 1900 MHz D1900V2; Type: D1900V2; Serial: D1900V2 - SN:5d143**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.569$  S/m;  $\epsilon_r = 53.055$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.52, 7.52, 7.52); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

**Configuration/d=10mm, Pin=250mW/Area Scan (8x12x1):** Measurement grid:  $dx=12$ mm,  $dy=12$ mm

Maximum value of SAR (measured) = 11.7 W/kg


**Configuration/d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 80.698 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 20.9 W/kg

**SAR(1 g) = 10.9 W/kg; SAR(10 g) = 5.51 W/kg**

Maximum value of SAR (measured) = 12.3 W/kg

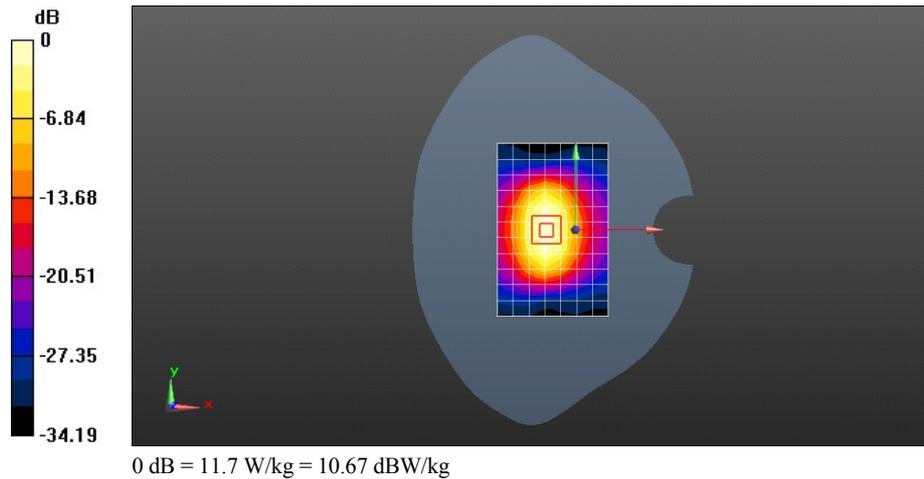

Test Laboratory: HUAWEI SAR/HAC Lab

### SystemPerformanceCheck-D2450-EX-Head

**DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:860**

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.849$  S/m;  $\epsilon_r = 39.677$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.25, 7.25, 7.25); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM 2; Type: SAM; Serial: TP-1474
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

**Configuration/d=10mm, Pin=250mW/Area Scan (7x9x1):** Measurement grid:  $dx=12$ mm,  $dy=12$ mm


Maximum value of SAR (measured) = 16.1 W/kg

**Configuration/d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 91.686 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 31.5 W/kg

**SAR(1 g) = 14.4 W/kg; SAR(10 g) = 6.49 W/kg**

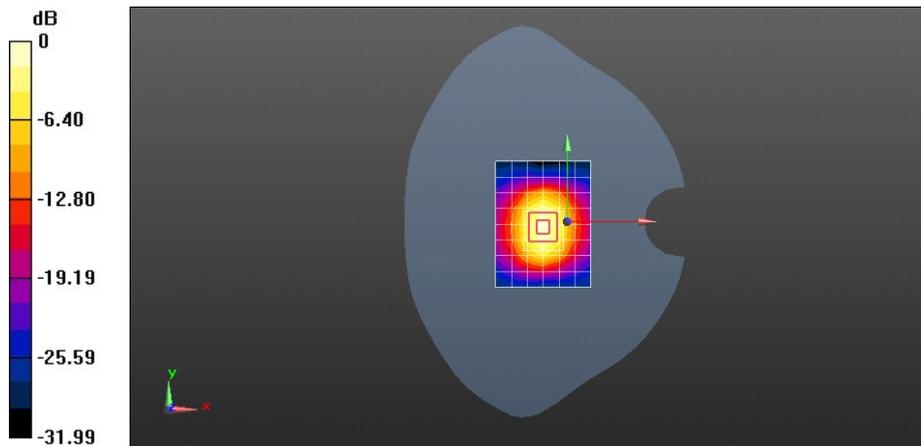

0 dB = 16.1 W/kg = 12.07 dBW/kg

Test Laboratory: HUAWEI SAR/HAC Lab

### SystemPerformanceCheck-D2450-EX-Body

**DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:860**

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.985$  S/m;  $\epsilon_r = 51.86$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3898; ConvF(7.17, 7.17, 7.17); Calibrated: 2013-1-14;
- Sensor-Surface: 4mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2012-11-22
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.4(1052); SEMCAD X 14.6.8(7028)

**Configuration/d=10mm, Pin=250mW/Area Scan (7x9x1):** Measurement grid:  $dx=12$ mm,  $dy=12$ mm

Maximum value of SAR (measured) = 13.9 W/kg

**Configuration/d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 80.726 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 31.7 W/kg

**SAR(1 g) = 14.1 W/kg; SAR(10 g) = 6.21 W/kg**

Maximum value of SAR (measured) = 16.0 W/kg

