



FCC RF Test Report

Product Name: cdma2000 Digital Mobile Phone; Asura

Model Number: HUAWEI H881C, H881C

Report No: SYBH(Z-RF)003112012-2001

FCC ID: QISH881C

Reliability Laboratory of Huawei Technologies Co., Ltd.

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District,
Shenzhen, 518129, P.R.C

Tel: +86 755 28780808 Fax: +86 755 89652518

Notice

1. The laboratory has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS), and accreditation number: L0310.
2. The laboratory has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements. The site recognition number is 97456.
3. The laboratory has been listed by industry Canada to perform electromagnetic emission measurement. The site recognition number is 6369A-2.
4. The test report is invalid if not marked with "exclusive stamp for the test report".
5. The test report is invalid if not marked with the stamps or the signatures of the persons responsible for performing, revising and approving the test report.
6. The test report is invalid if there is any evidence of erasure and/or falsification.
7. If there is any dissidence for the test report, please file objection to the test centre within 15 days from the date of receiving the test report.
8. Normally, the test report is only responsible for the samples that have undergone the test.
9. Context of the test report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of the laboratory.



Applicant:	Huawei Technologies Co., Ltd.
Address:	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C
Date of Receipt Test Item:	Nov., 05, 2012
Start Date of Test:	Nov., 07, 2012
End Date of Test:	Nov., 12, 2012
Test Result:	Pass

Approved By Senior Engineer Nov., 19, 2012 Dai Linjun
 Date Name Signature

Reviewed By Nov., 19, 2012 Cousy Xu
 Date Name Signature

Operated By Nov., 19, 2012 Huang Qiuliang
 Date Name Signature

Contents

1	<u>General Information</u>	5
1.1	APPLIED STANDARD.....	5
1.2	TEST LOCATION.....	5
1.3	TEST ENVIRONMENTAL CONDITION.....	5
2	<u>Summary</u>	6
3	<u>Product Description</u>	7
3.1	PRODUCT INFORMATION	7
4	<u>Test Description</u>	9
4.1	SUPPORTED FREQUENCY RANGE	9
4.2	TRANSMITTER / RECEIVER CHARACTERISTICS.....	9
4.3	ANTENNA GAIN.....	9
5	<u>General Test Conditions / Configurations</u>	10
5.1	RF CHANNELS UNDER TEST.....	10
5.2	TEST MODES.....	10
5.3	TEST ENVIRONMENT	10
5.4	TEST SETUP.....	11
5.5	TEST CONDITIONS	15
6	<u>Main Test Instruments</u>	17
7	<u>Test Results</u>	18
8	<u>Measurement Uncertainty</u>	18



1 General Information

1.1 Applied Standard	
Applied Rules:	47 CFR FCC Part 2:2011, Subpart J 47 CFR FCC Part 22:2011, Subpart H ANSI/TIA 603C:2004
1.2 Test Location	
Test Location 1:	Reliability Laboratory of Huawei Technologies Co., Ltd.
Address:	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C
1.3 Test Environmental Condition	
Ambient Temperature:	20 – 25 °C
Ambient Relative Humidity:	45 – 55 %
Atmospheric Pressure:	101 kPa

2 Summary

Table 1 Summary of results

Test Case	FCC Part No.	Requirements	Result
Cellular Band			
Transmitter Output Power	2.1046 & 22.913	ERP not exceed 7 W	Pass
Modulation Characteristics	2.1047	Digital modulation	Pass
Occupied Bandwidth	2.1049	(Not specified)	Pass
Band Edges Compliance	2.1051 & 917	Below -13 dBm/1%*EBW, in 1 MHz range	Pass
Spurious Emission at Antenna Terminals	2.1051 & 2.917	Below -13 dBm/1 kHz, 9 kHz to 150 kHz Below -13 dBm/10 kHz, 150 kHz to 30 MHz Below -13 dBm/100 kHz, 30 MHz to 10 th harmonics	Pass
Field Strength of Spurious Radiation	2.1053 & 22.917	Below -13 dBm/100 kHz	Pass
Frequency Stability	2.1055 & 22.355	Maintained within the tolerances of ± 2.5 ppm	Pass

3 Product Description

3.1 Product Information

3.1.1 General Description

CDMA2000 Digital Mobile Phone- HUAWEI H881C, H881C is subscriber equipment in the CDMA/EVDO system. The frequency band is US Cellular and N. American PCS, but only US Cellular band test data included in this report. The Mobile Phone implements such functions as RF signal receiving/transmitting, CDMA2000 1x and 1XEV-DO protocol processing, voice, MMS service, GPS, AGPS and WIFI etc. Externally it provides micro SD card interface, earphone port (to provide voice service). It also provides Bluetooth module to synchronize data between a PC and the phone, or to use the built-in modem of the phone to access the Internet with a PC, or to exchange data with other Bluetooth devices.

3.1.2 Board Information

Table 2 Board Information

cdma2000 Digital Mobile Phone; Asura		
HUAWEI H881C, H881C		
Board and Module		
Equipment Designation / Description	Serial Number	Hardware V
MAINBOARD	P9L01A92A0900541	HC1H881CM

3.1.3 Adapter Technical Data

AC/DCAdapter Model	HW-050100U1W
Manufacturer	Huawei Technologies Co., Ltd.
Input Voltage	~100-240V 50/60Hz 0.2A
Output Voltage	5V  1A
Rated Power	5W



3.1.4 Battery Technical Data

Name	Qty.	Manufacture	Description
Rechargeable Li-ion	1	Huawei Technologies Co., Ltd.	Battery Model: HB4W1H Rated capacity: 1750mAh Nominal Voltage: $\text{---} +3.7\text{V}$ Charging Voltage: $\text{---} +4.2\text{V}$



4 Test Description

4.1 Supported Frequency Range

Characteristics	Description
Downlink	869 to 894 MHz
Uplink	824 to 849 MHz

4.2 Transmitter / Receiver Characteristics

Characteristics	Description
System Type	CDMA
TX Output Power (per Antenna Port)	CDMA system: 24dBm
Channel Spacing(s) / Bandwidth(s)	CDMA system: 1.29MHz (Cellular band)
Designation of Emissions	CDMA system: 1M29F9W (Cellular band)

4.3 Antenna Gain

Antenna Gain(dBi)	-1.86
Antenna Gain(dBd)	-4.01

5 General Test Conditions / Configurations

5.1 RF Channels under Test

Test Mode	TX / RX	RF Channel		
		Low (L)	Middle (M)	High (H)
TM1/TM3/ Subtype 0/ Subtype 2	TX	Channel 1013	Channel 384	Channel 777
		824.7MHz	836.52MHz	848.31MHz
	RX	Channel 1013	Channel 384	Channel 777
		869.7MHz	881.52MHz	893.31MHz

5.2 Test Modes

Test Mode	Test Modes Description
TM1	CDMA2000 1x mode QPSK modulation
TM3	CDMA2000 1x mode HPSK modulation
Subtype 0	CDMA2000 1x EV-DO mode HPSK modulation
Subtype 2	CDMA2000 1x EV-DO mode The R-Data packet size determines the modulation format, R-Data Packet Size:128, 256, 512, 768 or 1024 BPSK Modulation R-Data Packet Size:1536 , 2048,3072,4096,6144 or 8192 QPSK Modulation R-Data Packet Size:12288 8-PSK Modulation

5.3 Test Environment

Environment Parameter	Selected Values During Tests	
Relative Humidity	Ambient	
Temperature	TN	Ambient
Voltage	VL	3.6V
	VN	3.7V
	VH	4.2V


NOTE: VL= lower extreme test voltage
VN= nominal voltage
VH= upper extreme test voltage
TN= normal temperature

5.4 Test Setup


5.4.1 General Test Setup Configurations

Configuration	Description
Test Antenna Ports	Until otherwise declared, all TX tests are ONLY performed at the main Transmitter antenna port (e.g. TRXA, TXA and so on) of the EUT, and all RX tests are ONLY performed at the main Receiver antenna port (e.g. TRXA, RXA and so on) of the EUT.
Multiple RF Sources	Other than the tested RF source of the EUT, other RF source(s) are disabled or shutdown during measurements.

5.4.2 Test Setup 1

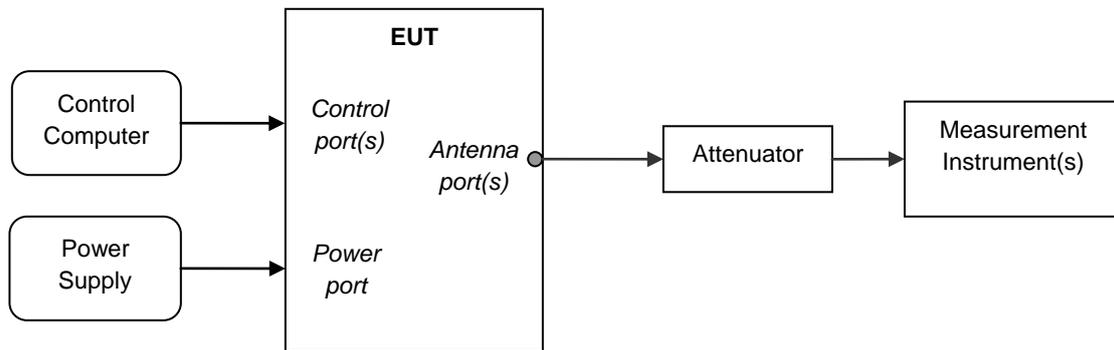

5.4.3 Test Setup 2

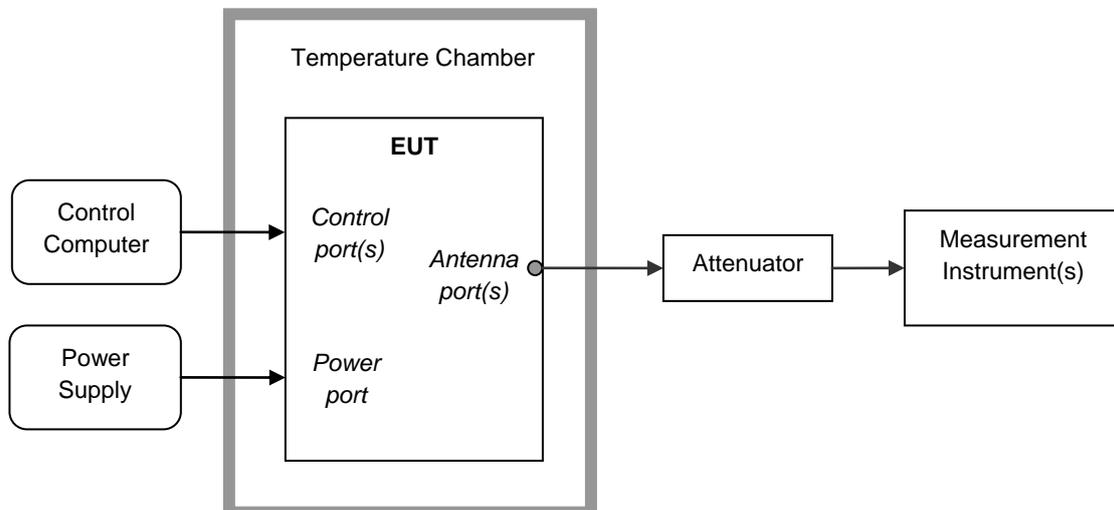


5.4.4 Test Setup 3

NOTE1: Effective radiated power (ERP) or Effective Isotropic radiated power (EIRP) refers to the EUT radiation power output, assuming all emissions are radiated from half-wave dipole antennas or horn antennas.

NOTE2: The EUT was set on insulator 80cm above the Ground Plane. The setup and test methods were according to ANSI-TIA-603C 2004. The measurements were carried through with a Rohde and Schwarz Test Receiver and control software.


Step 1: Pre-test to find the Maximum ERP or EIRP

1. Connect the test system according to the following figure. EUT is running for 30 minutes before test, and measurement instruments are warming-up for 30 minutes.
2. Set up communication link between Universal radio communication tester and EUT, set EUT working frequency, and control EUT to transmit at maximum power.
3. Set the center frequency of the signal analyzer or receiver to the EUT's operating frequency, the RBW is equal to the emission bandwidth of the signal. Set RMS detector for the test, and the span is equal to 2 times of emission bandwidth, the other settings should remain automatic. Normally, the height range of antenna was 1m to 4m, the azimuth range of turntable was 0° to 360°. The receiver antenna has two polarizations V and H. A portable or small unlicensed wireless device shall be placed on a non-metallic test fixture or other non-metallic support during testing. The supporting fixture shall permit orientation of the EUT in each of three orthogonal (x, y, z) axis positions such that emissions from the EUT are maximized. Measure the EUT maximum RF power and record the result.
4. Changing EUT working frequency and measuring the RF power at channel L, M, H respectively.
Complete the test data.

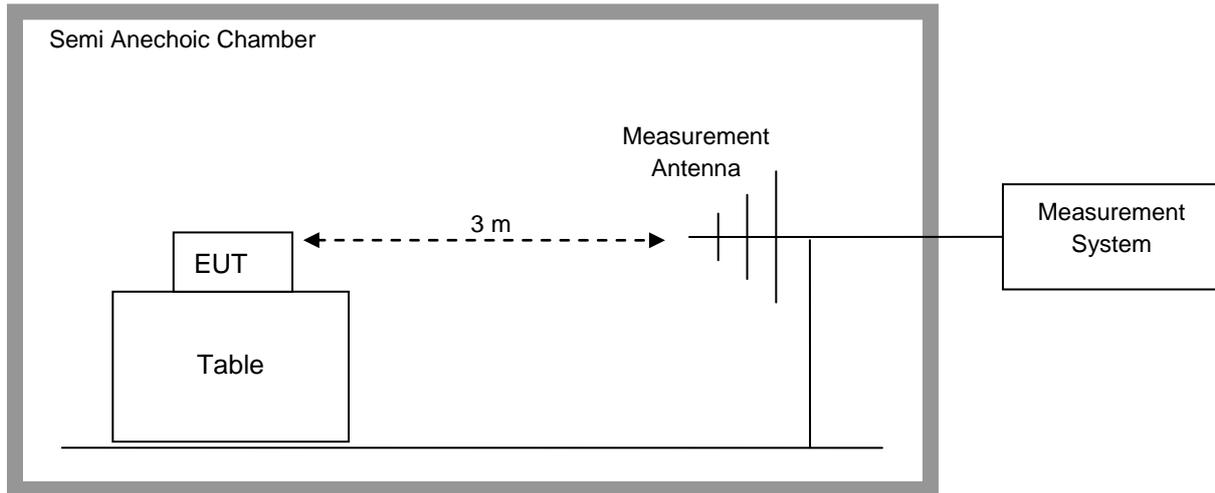

Step 2: Substitution method to verify the maximum ERP or EIRP

1. Measurement setup is according to the following figure. EUT was substituted by antenna, and the polarization is identical with the test antenna; the signal generator was connected to the substitution antenna.
2. The radiated output power, measured by signal analyzer set, is the same as recorded in above. Then this power level is matched by a signal from a calibrated signal generator which is substituted for EUT. The power supplied by the generator is then equal to the ERP or EIRP after corrected by the antenna gain and cable loss.

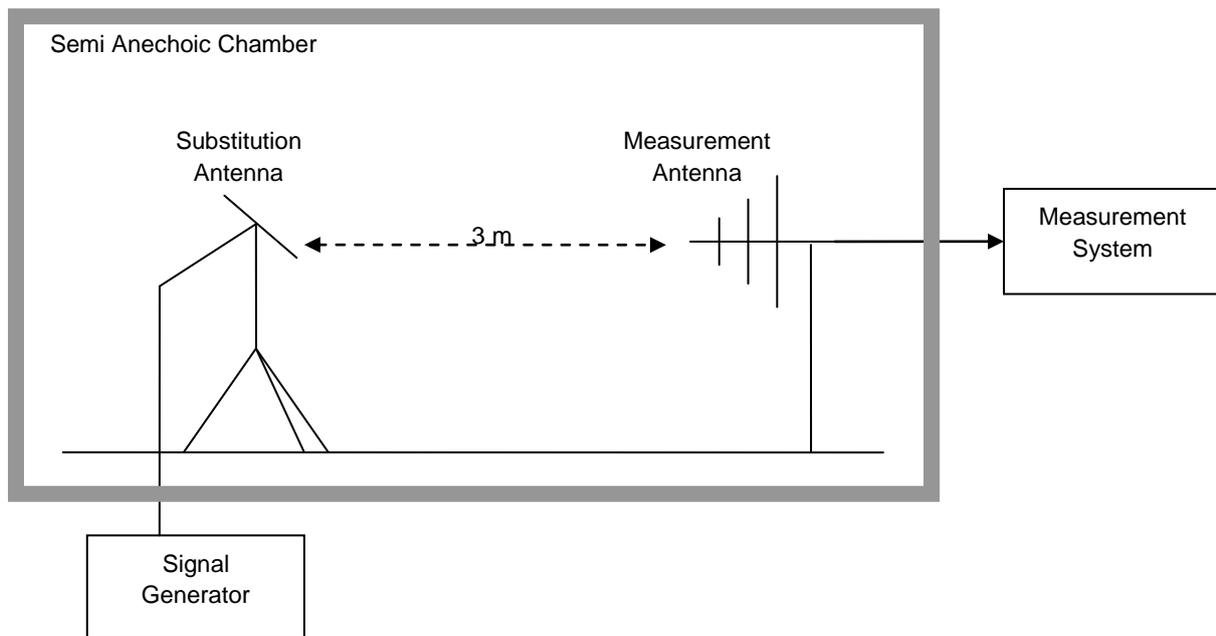

5.5 Test Conditions

Test Case	Test Conditions	
Transmitter Output Power	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1 & Test Setup 3
	Detector	RMS
	RF Channels (TX)	L, M, H
	Test Mode	TM1/TM3/ Subtype 0/ Subtype 2
Modulation Characteristics	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	RF Channels (TX)	M
	Test Mode	TM1/TM3/ Subtype 0/ Subtype 2
Occupied Bandwidth	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	Detector	PK
	RF Channels (TX)	L, M, H
	Test Mode	TM1/TM3/ Subtype 0/ Subtype 2
Band Edges Compliance	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	Detector	RMS
	RF Channels (TX)	L, H
	Test Mode	TM1/TM3/ Subtype 0/ Subtype 2
Spurious Emission at Antenna Terminals	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	Detector	PK
	RF Channels (TX)	L, M, H
	Test Mode	TM1/TM3/ Subtype 0/ Subtype
Field Strength of Spurious Radiation	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 3
	Detector	PK
	RF Channels (TX)	M
	Test Mode	TM1/TM3/ Subtype 0/ Subtype 2
Frequency Stability	Test Configuration	(1) -30 °C to +50 °C with step 10 °C at Rated Voltage; (2) 85%, 100% and 115% of Rated Voltage at Ambient Temperature.
	Test Setup	Test Setup 2
	RF Channels (TX)	M



Test Case	Test Conditions	
	Test Mode	TM1/TM3/ Subtype 0/ Subtype 2

6 Main Test Instruments

Table 3 Main Test Equipments

Equipment Description	Manufacturer	Model	Serial Number	Calibrated until
Power supply	KEITHLEY	2303	1288003	Sept., 27,2013
Universal Radio Communication Tester	R&S	CMU200	117341	Jan., 12,2013
Universal Radio Communication Tester	Agilent	E5515C	MY50260239	Aug., 30,2013
Spectrum Analyzer	Agilent	E4440A	MY49420179	Jul., 17,2013
Signal Analyzer	R&S	FSQ31	200021	Sept., 27,2013
Temperature Chamber	WEISS	WKL64	24600294	Feb.,13,2013
Signal generator	Agilent	E8257D	MY49281095	Jul.,09,2013
Spectrum analyzer	R&S	FSU3	200474	Mar., 05, 2013
Spectrum analyzer	R&S	FSU43	100144	Mar., 05, 2013
Double-Ridged Waveguide Horn Antenna (1G~18GHz)	R&S	HF907	100304	Apr., 05, 2013
Double-Ridged Waveguide Horn Antenna (1G~18GHz)	R&S	HF907	100391	Apr., 05, 2013
Trilog Broadband Antenna (30M~3GHz)	SCHWARZBECK	VULB 9163	9163-521	Jul., 07, 2013
Pyramidal Horn Antenna(26GHz-40GHz)	ETS-Lindgren	3160-10	00123940	Feb., 27, 2013
Pyramidal Horn Antenna(18GHz-26.5GHz)	ETS-Lindgren	3160-09	00125912	Feb., 27, 2013

Note: All the equipments are calibrated once a year. When it's almost due, we will arrange calibration again before the calibration deadline.

7 Test Results

No.	Test Item	Test Result
1	Transmitter Output Power	Appendix A
2	Modulation Characteristics	Appendix B
3	Occupied Bandwidth	Appendix C
4	Band Edges Compliance	Appendix D
5	Spurious Emission at Antenna Terminals	Appendix E
6	Field Strength of Spurious Radiation	Appendix F
7	Frequency Stability	Appendix G
8	Photos of Test Setup	Appendix H

NOTE: There is no test data in Appendix H, only Photos of Test Setup for Field Strength of Spurious Radiation.

8 Measurement Uncertainty

For a 95% confidence level ($k=2$), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

Test Item		Extended Uncertainty
Transmitter Output Power	Power (dBm)	U =0.39 dB
Occupied Bandwidth	Magnitude (%)	U=0.2%
Band Edge Compliance	Disturbance Power (dBm)	U=2.0 dB
Conducted Spurious Emissions	Disturbance Power (dBm)	U=2.0 dB
Field Strength of Spurious Radiation	ERP (dBm)	U=4.6 dB (30 MHz – 1GHz) U=3.0 dB (above 1 GHz)
Frequency Stability	Frequency Accuracy (ppm)	U=0.21 ppm

-----The END-----



Appendix A

Transmitter Output Power According to FCC Part 2.1046 & Part 22.913



Conducted Power of Transmitter

TEST CONDITIONS (TN/VN)	RF Output Power					
	Channel 1013(L) 824.7MHz		Channel 384(M) 836.52MHz		Channel 777(H) 848.31MHz	
	dBm		dBm		dBm	
	Measured	Limit	Measured	Limit	Measured	Limit
TM1	24.27	38.5	24.63	38.5	24.28	38.5
TM3	24.16	38.5	24.31	38.5	24.24	38.5
Subtype 0	23.78	38.5	23.86	38.5	23.75	38.5
Subtype 2	23.81	38.5	23.83	38.5	23.76	38.5



Effective Radiated Power of Transmitter (ERP)

Test Mode	Freq. [MHz]	Meas. Level [dBm]	Substitution Antenna Type	SGP [dBm]	Substitution Gain [dBd]	Cable Loss [dB]	Substitution Level (ERP) [dBm]	Limit [dBm]	Result
TM1	824.7	20.26	Dipole Ant.	23.61	-2.95	0.6	20.06	38.5	Pass
TM1	836.5 2	20.62	Dipole Ant.	24.04	-3.02	0.6	20.42	38.5	Pass
TM1	848.3 1	20.27	Dipole Ant.	23.78	-3.11	0.6	20.07	38.5	Pass
TM3	824.7	20.15	Dipole Ant.	23.5	-2.95	0.6	19.95	38.5	Pass
TM3	836.5 2	20.3	Dipole Ant.	23.72	-3.02	0.6	20.1	38.5	Pass
TM3	848.3 1	20.23	Dipole Ant.	24.05	-3.11	0.6	20.34	38.5	Pass
Subtype 0	824.7	19.77	Dipole Ant.	23.51	-2.95	0.6	19.96	38.5	Pass
Subtype 0	836.5 2	19.85	Dipole Ant.	23.27	-3.02	0.6	19.65	38.5	Pass
Subtype 0	848.3 1	19.74	Dipole Ant.	23.25	-3.11	0.6	19.54	38.5	Pass
Subtype 2	824.7	19.8	Dipole Ant.	23.15	-2.95	0.6	19.6	38.5	Pass
Subtype 2	836.5 2	19.82	Dipole Ant.	23.25	-3.02	0.6	19.62	38.5	Pass
Subtype 2	848.3 1	19.75	Dipole Ant.	23.26	-3.11	0.6	19.55	38.5	Pass

Note: a, For getting the ERP (Efficient Radiated Power) in substitution method, the following formula should be taken to calculate it,

$$\text{ERP [dBm]} = \text{SGP [dBm]} - \text{Cable Loss [dB]} + \text{Gain [dBd]}$$

b, SGP=Signal Generator Level

-----The END-----




Appendix B

Modulation Characteristics

According to FCC Part 2.1047 & Part 22 Subpart H




Channel 384(TM1)

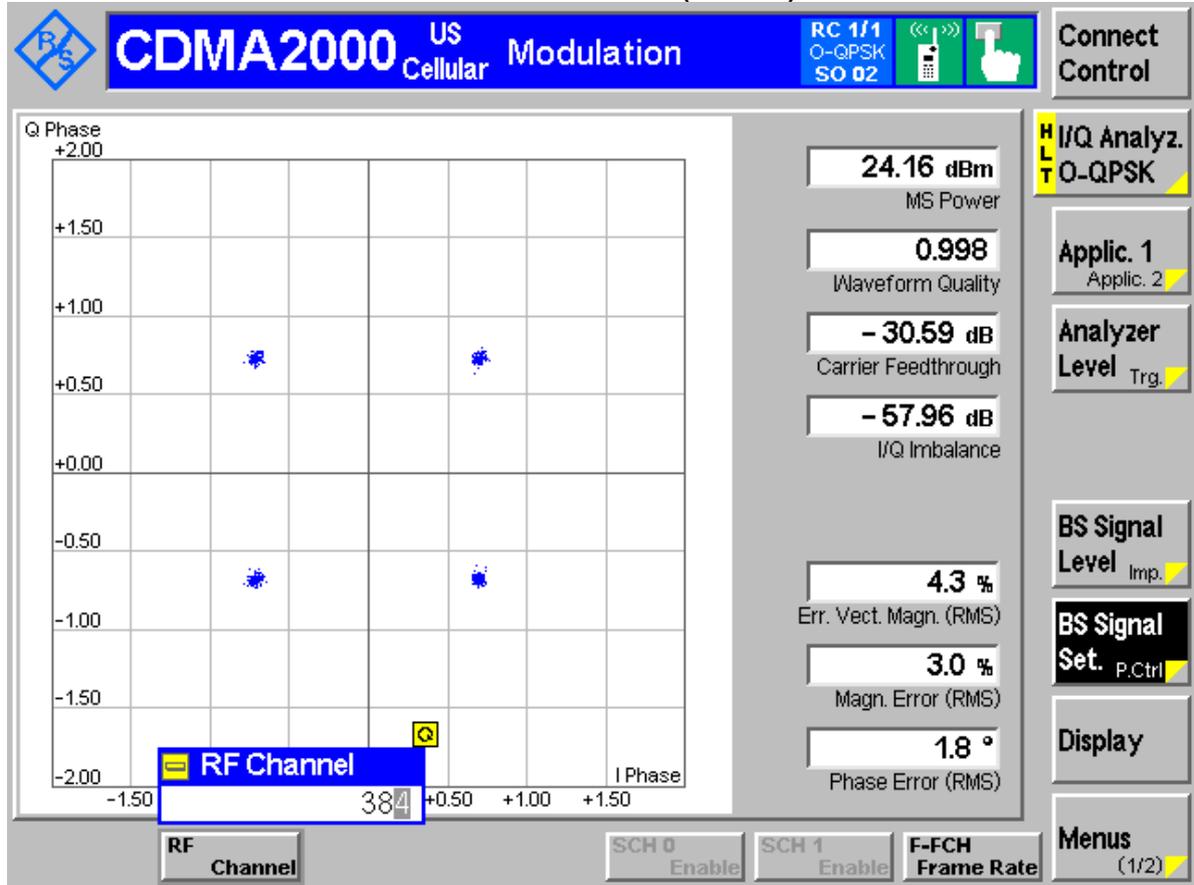




Channel 384(TM3)

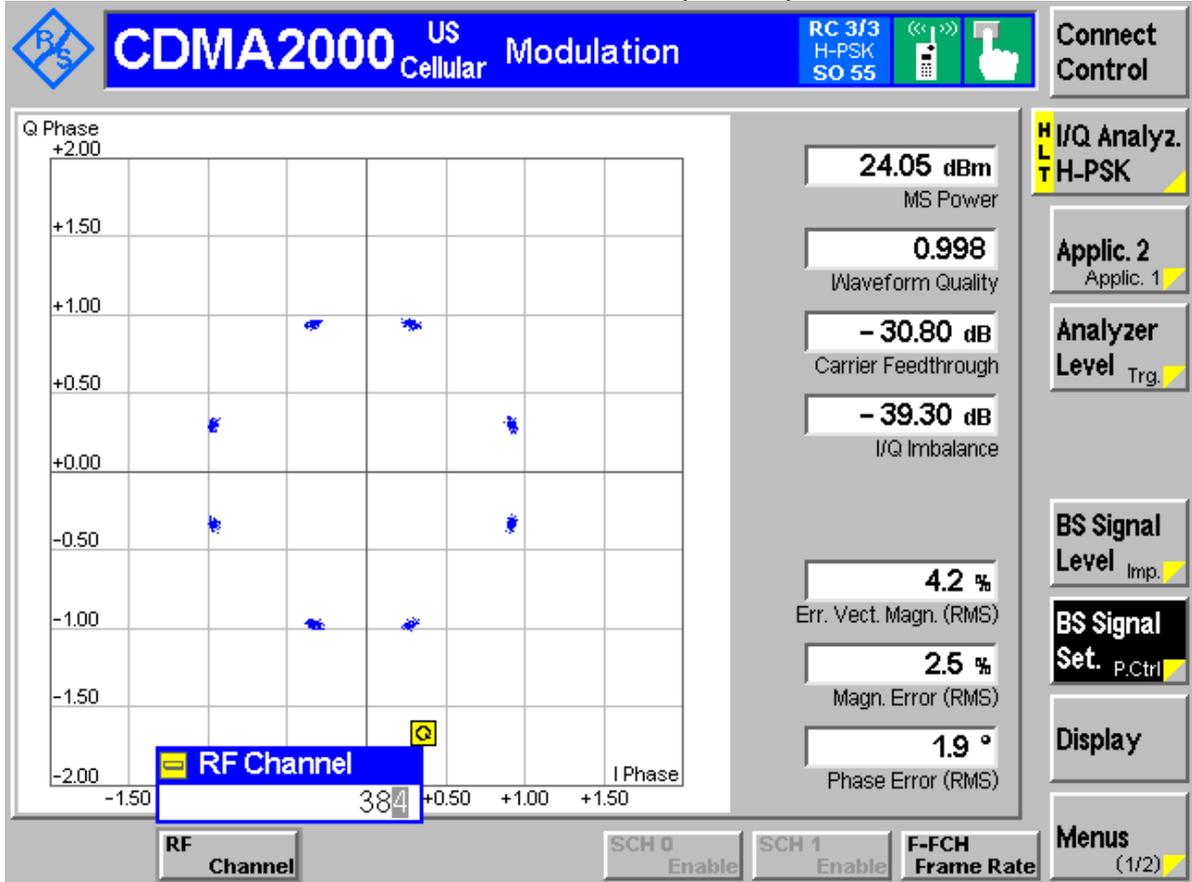




Channel 384(Subtype 0) (HPSK)

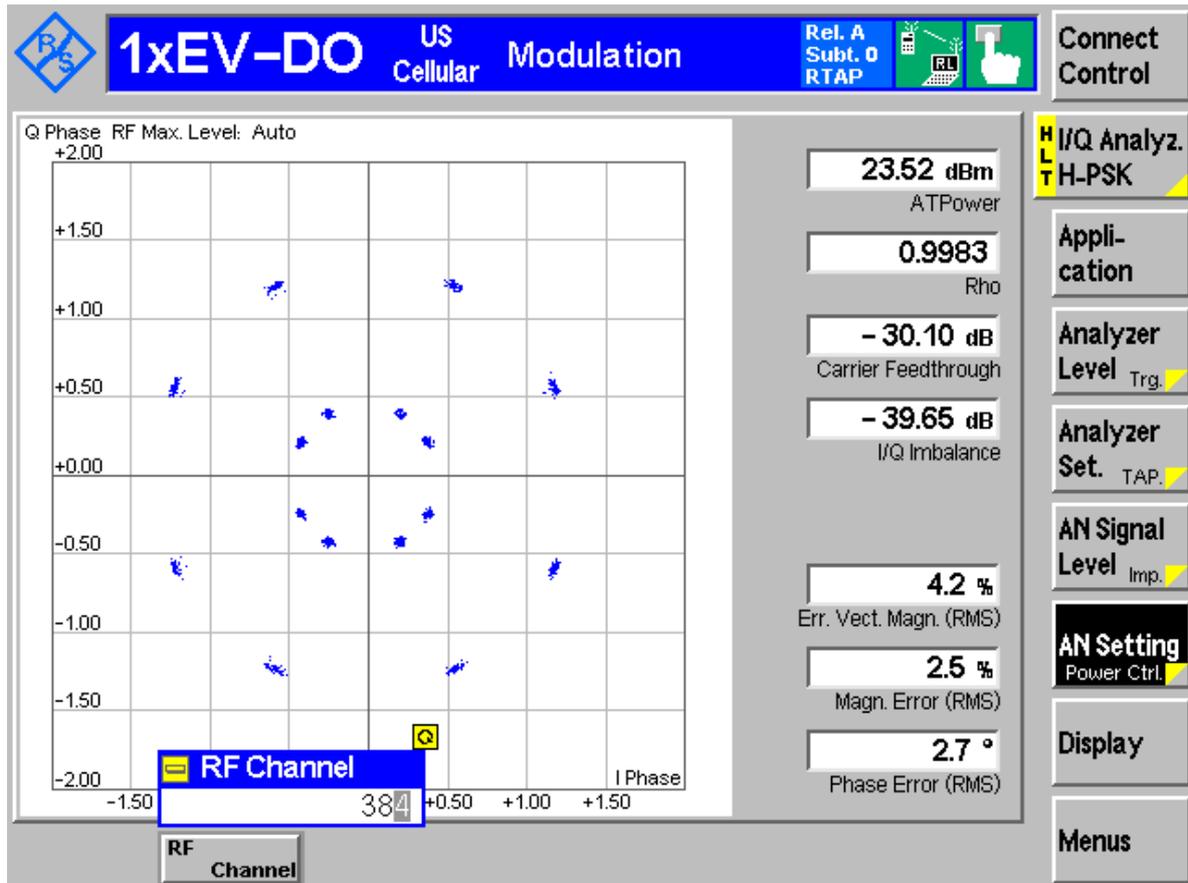




Channel 384(Subtype 2)

The R-Data packet size determines the modulation format:
R-Data Pkt Size (256 bits)(BPSK)

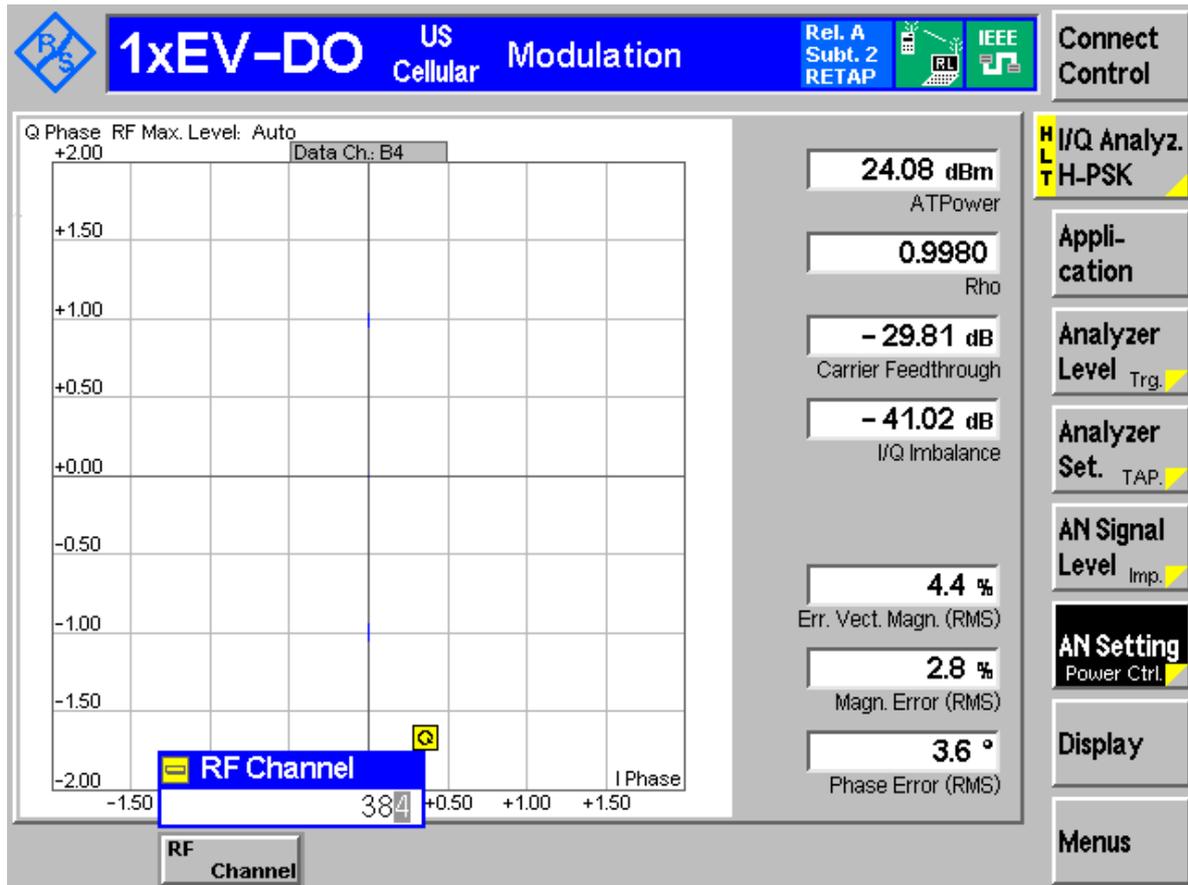




R-Data Pkt Size (4096 bits) (QPSK)

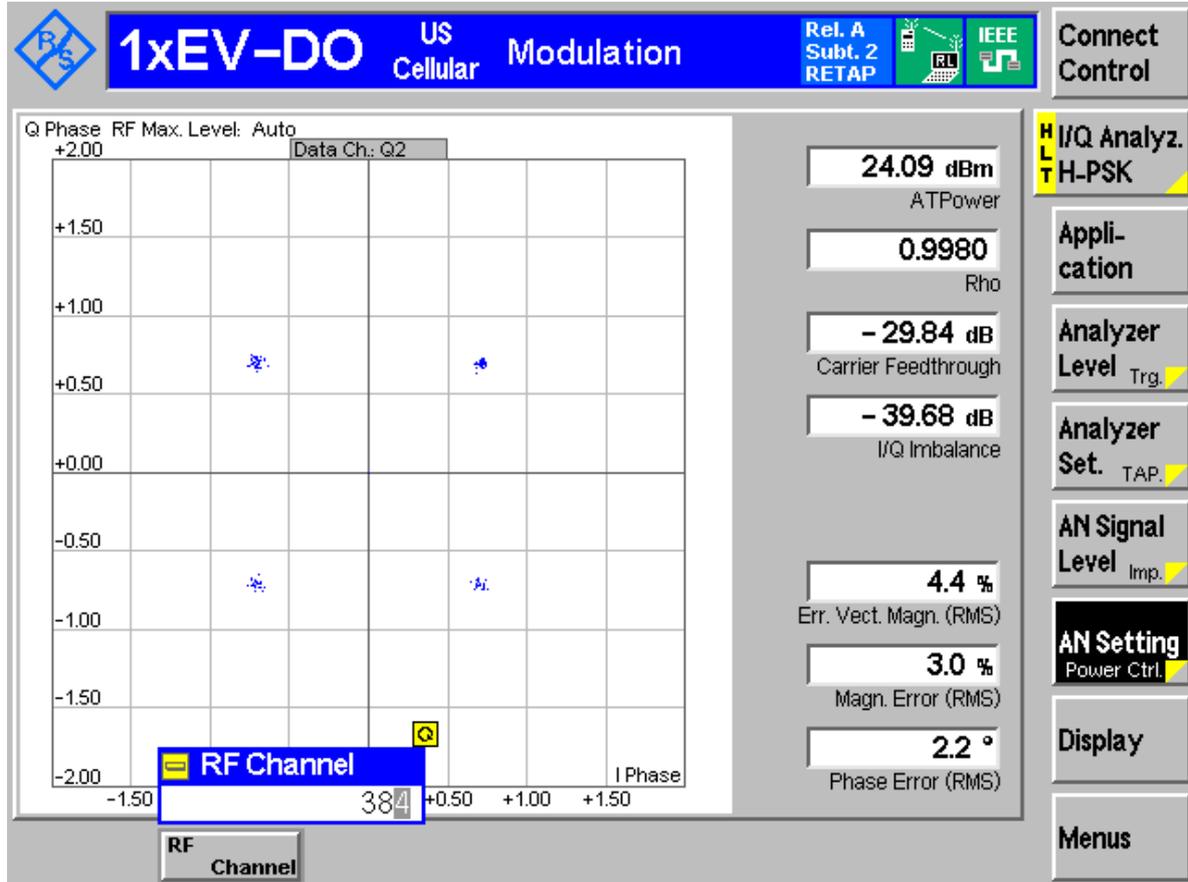



R-Data Pkt Size (12288 bits)(8PSK)

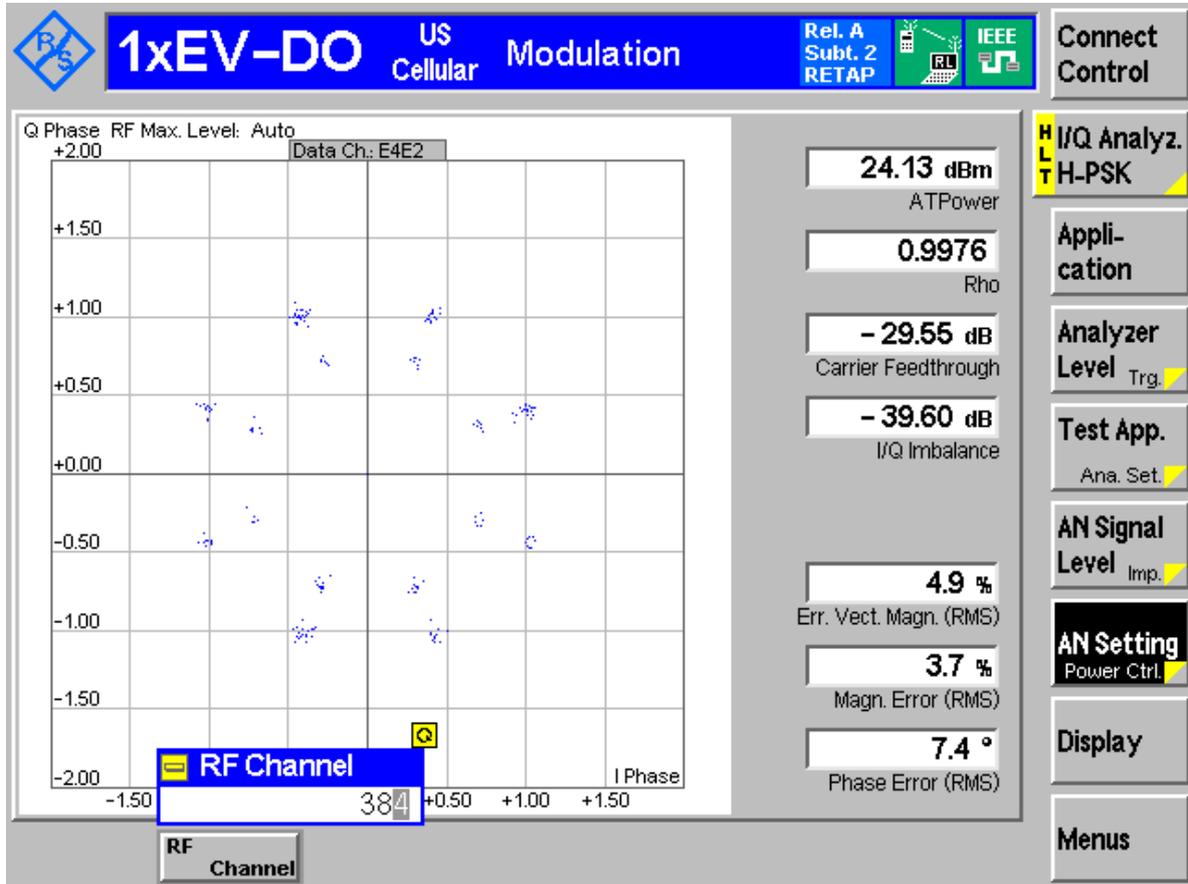

-----The END-----




Appendix C

Occupied Bandwidth According to FCC Part 2.1049 & Part 22 Subpart H




Channel 1013 (TM1)

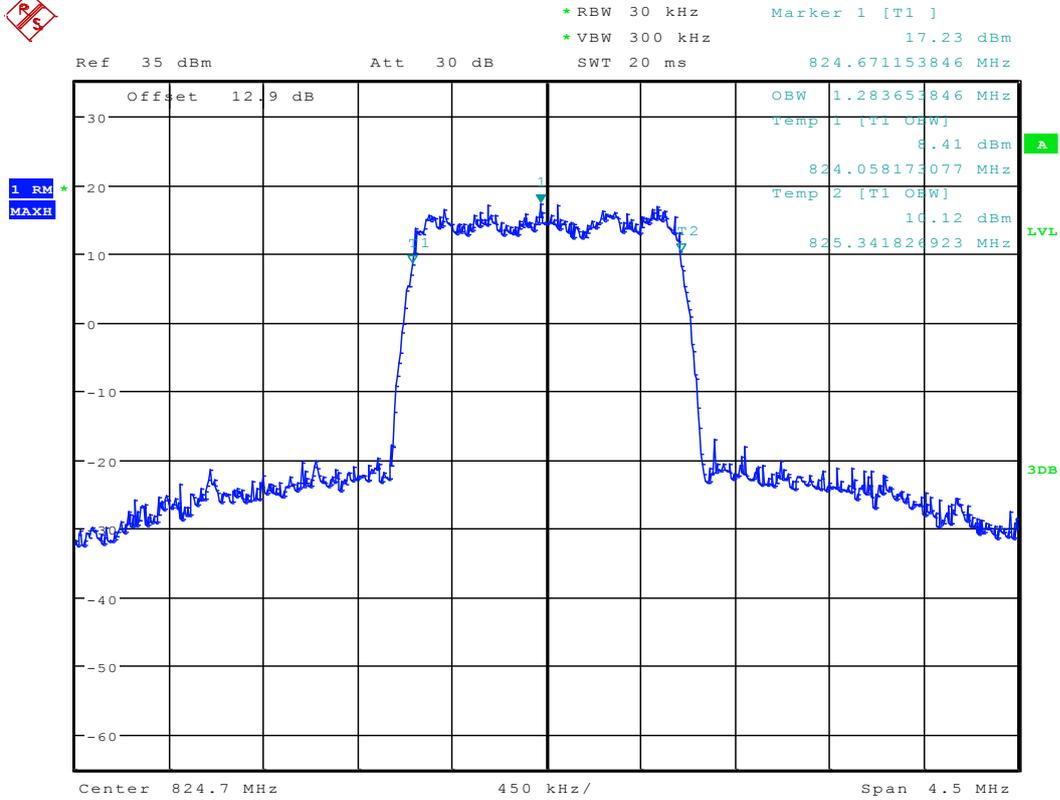

Date: 7.NOV.2012 21:34:40




Channel 1013 (TM3)

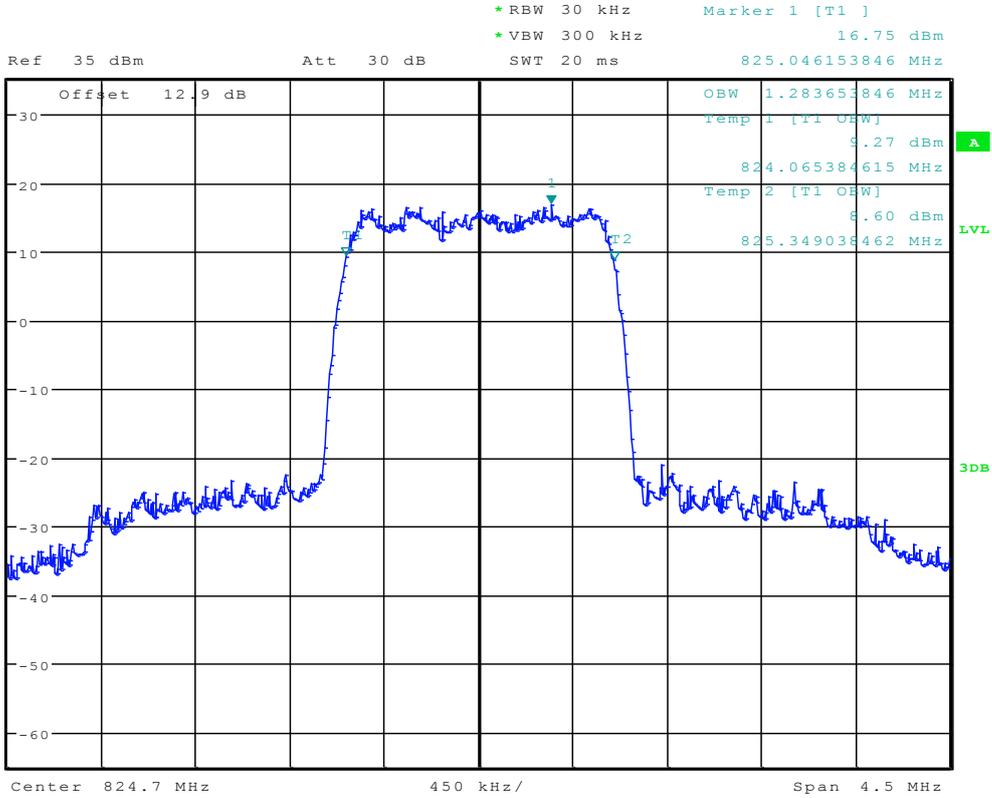

Date: 7.NOV.2012 21:35:23




Channel 1013 (EVDO subtype 0)

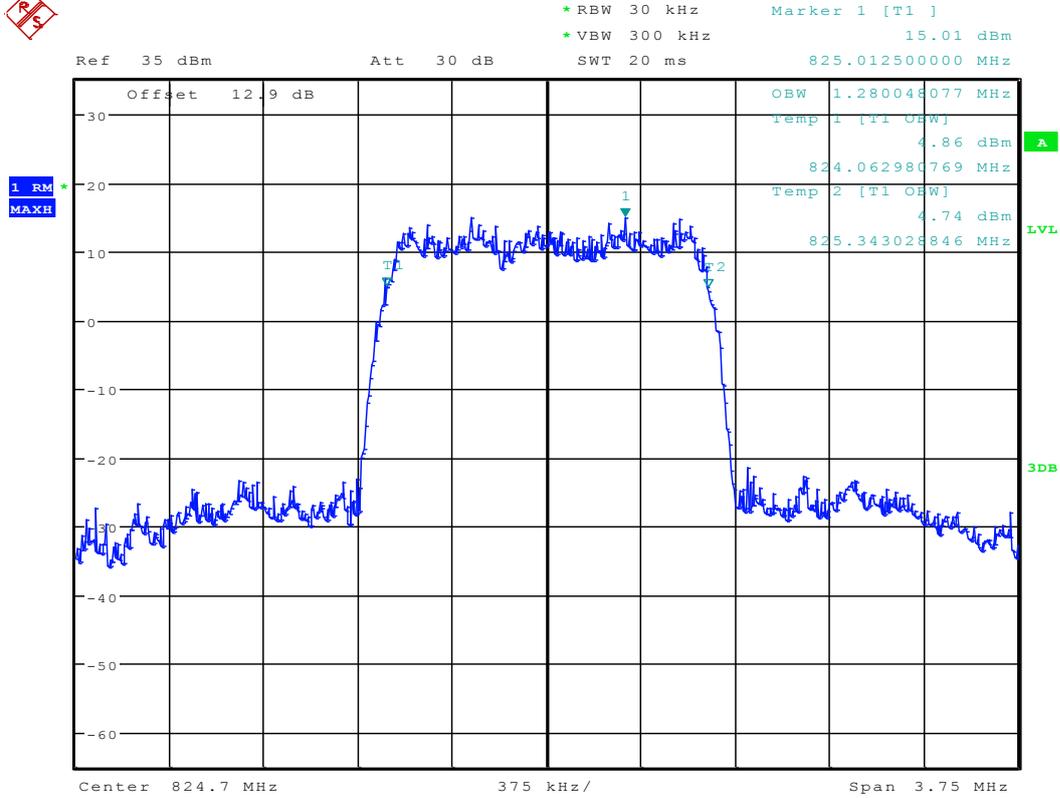

Date: 7.NOV.2012 21:40:55




Channel 1013 (EVDO subtype 2)

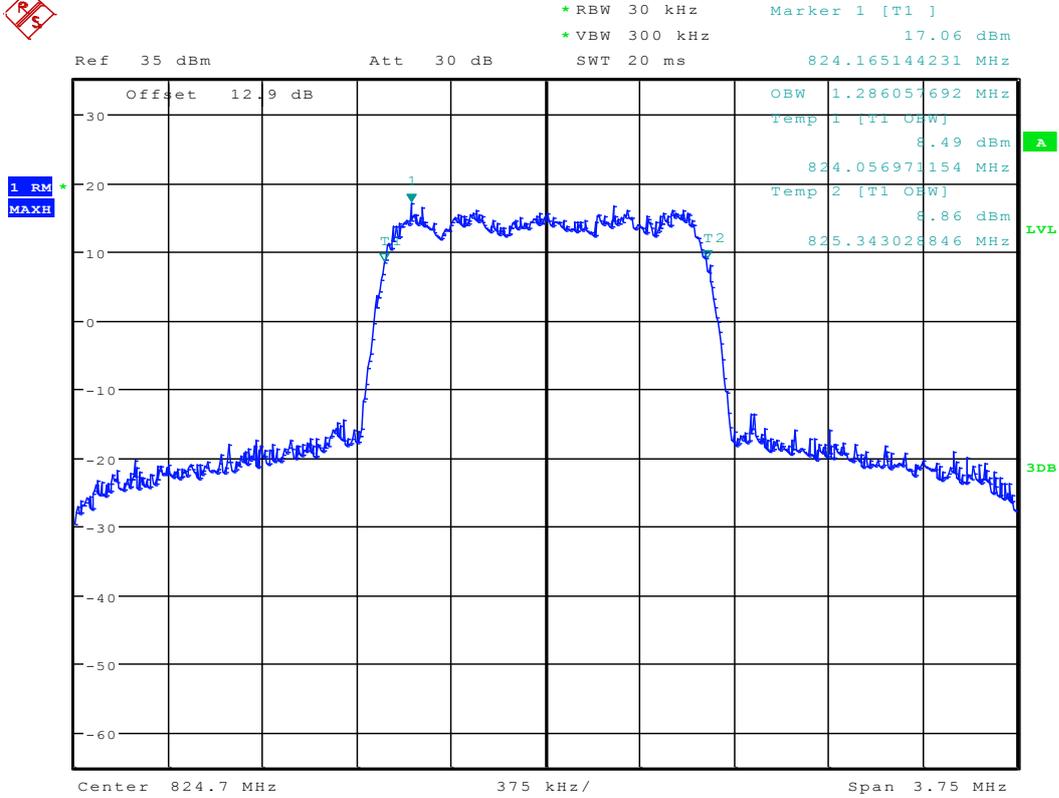

Date: 7.NOV.2012 21:46:42




Channel 384 (TM1)

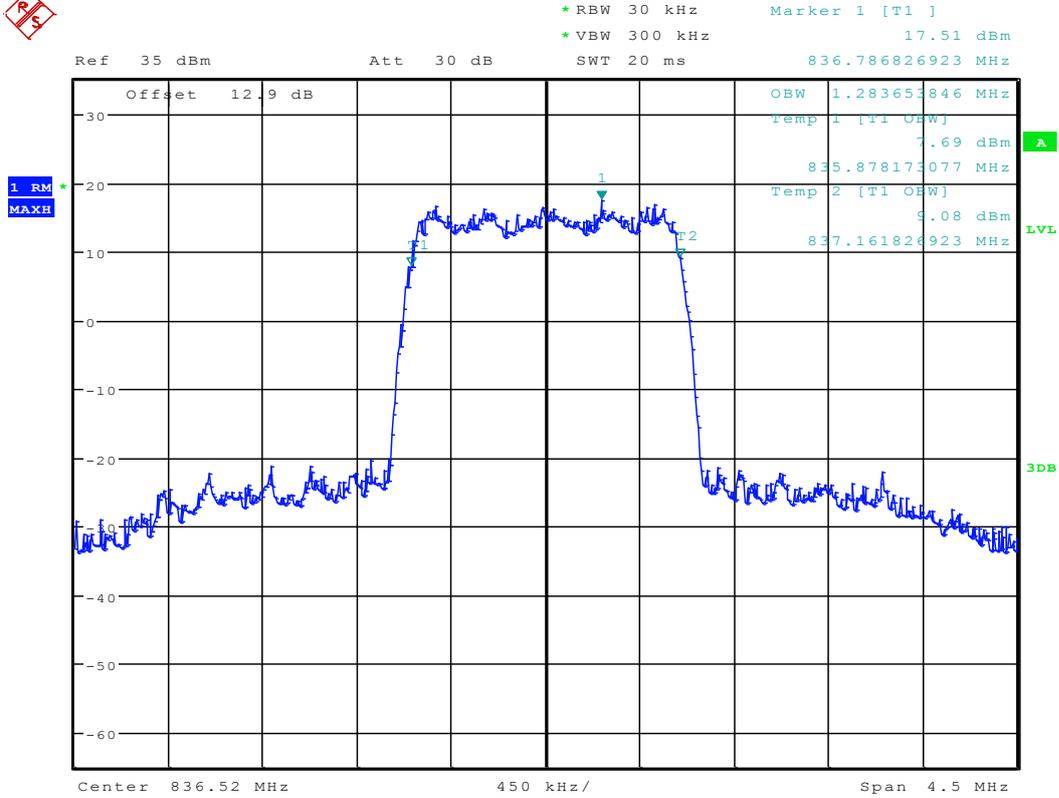

Date: 7.NOV.2012 22:32:57




Channel 384 (TM3)

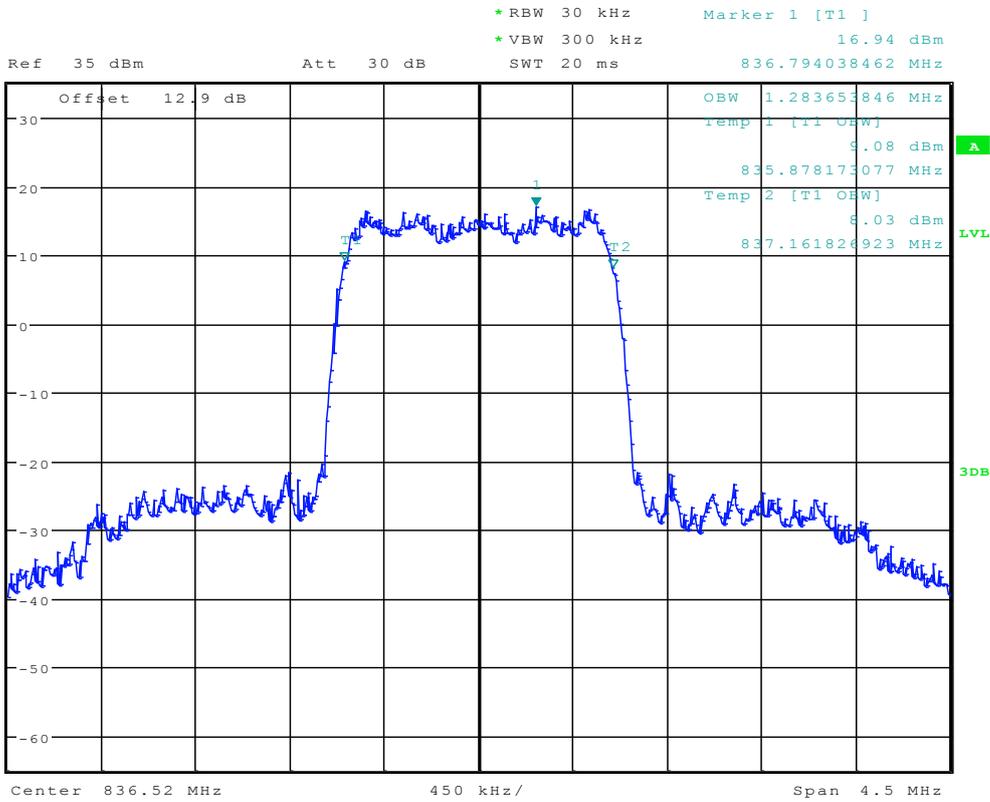

Date: 7.NOV.2012 22:33:13




Channel 384 (EVDO subtype 0)

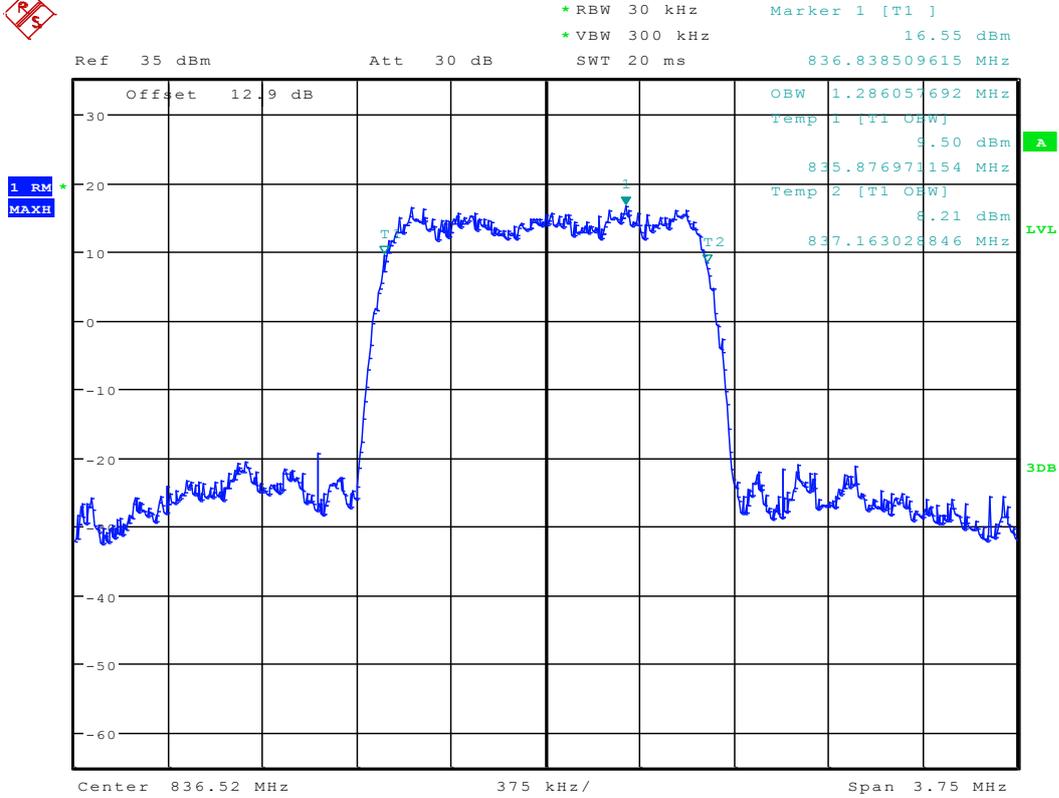

Date: 7.NOV.2012 22:35:04




Channel 384 (EVDO Subtype 2)

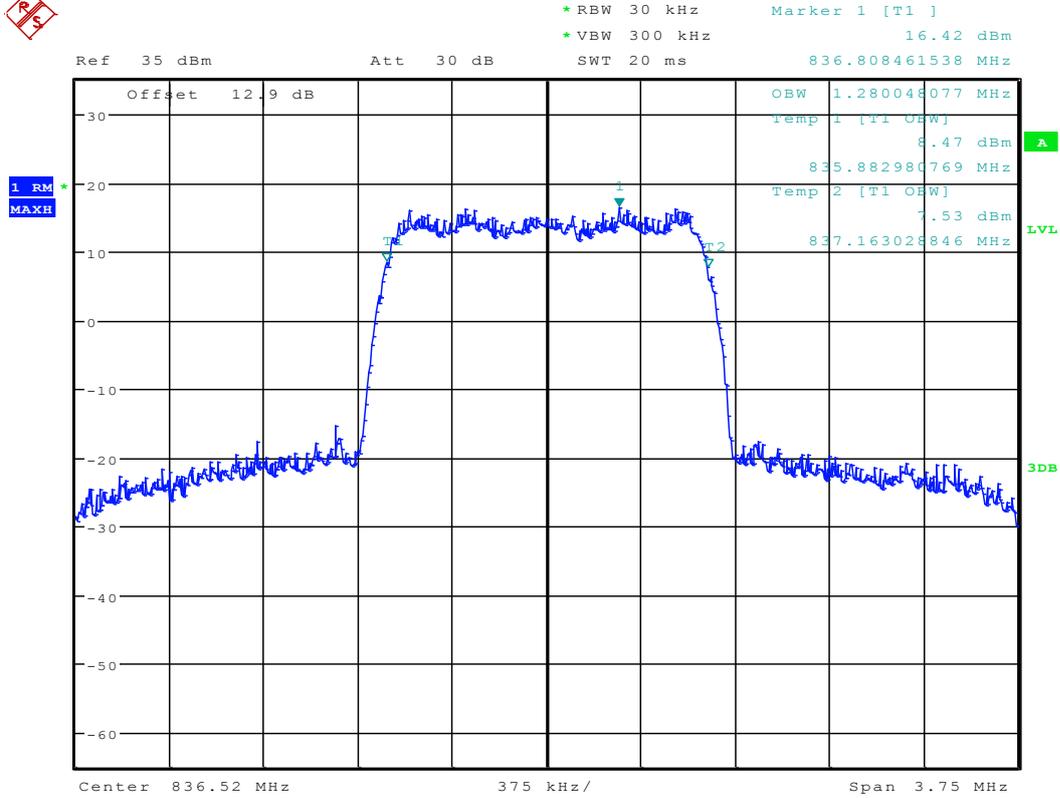

Date: 7.NOV.2012 22:47:04




Channel 777 (TM1)

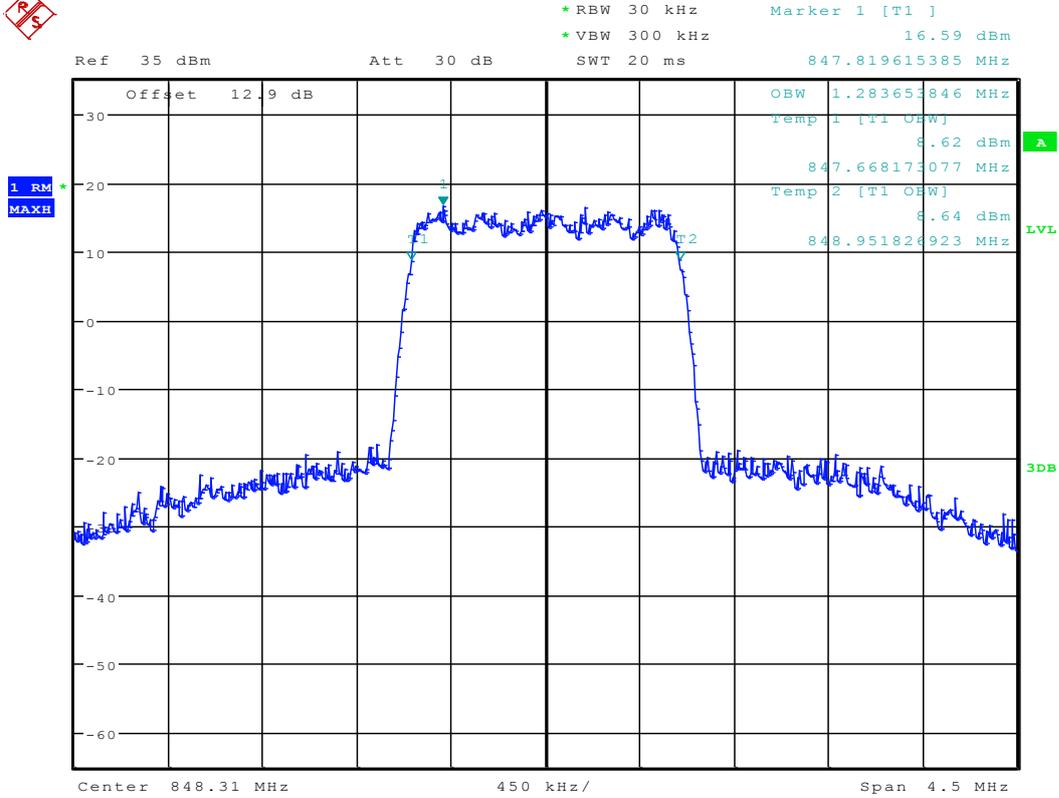

Date: 7.NOV.2012 21:35:07




Channel 777 (TM3)

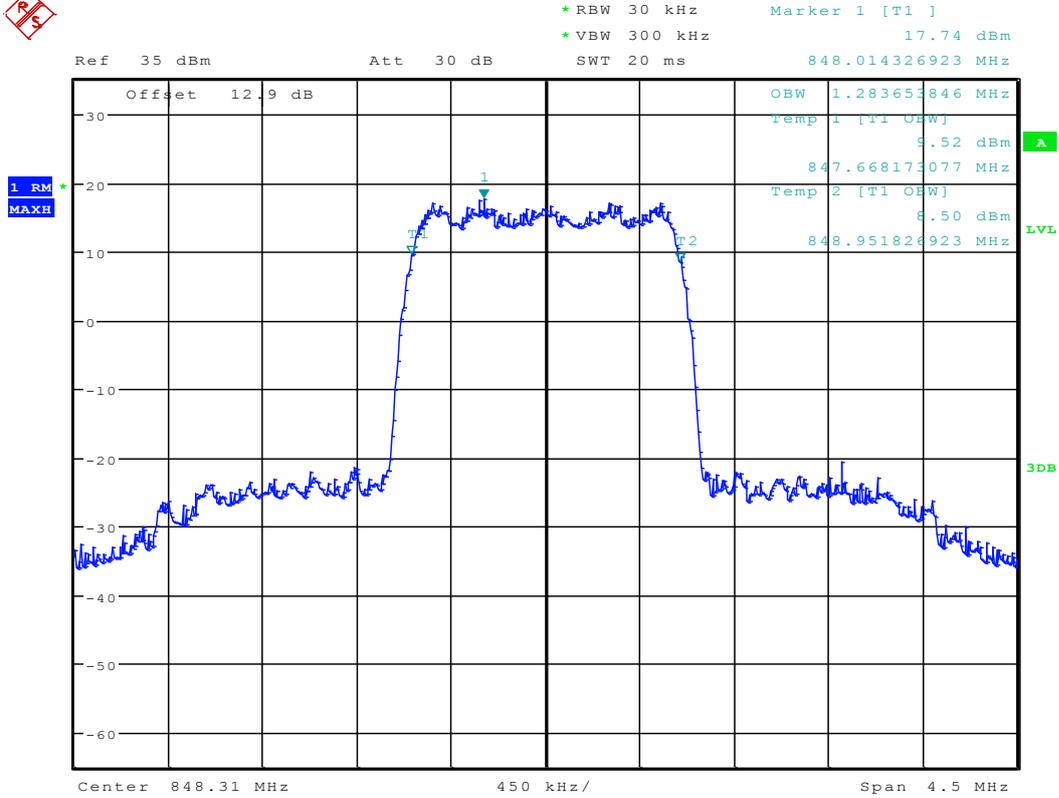

Date: 7.NOV.2012 21:36:52




Channel 777 (EVDO subtype 0)

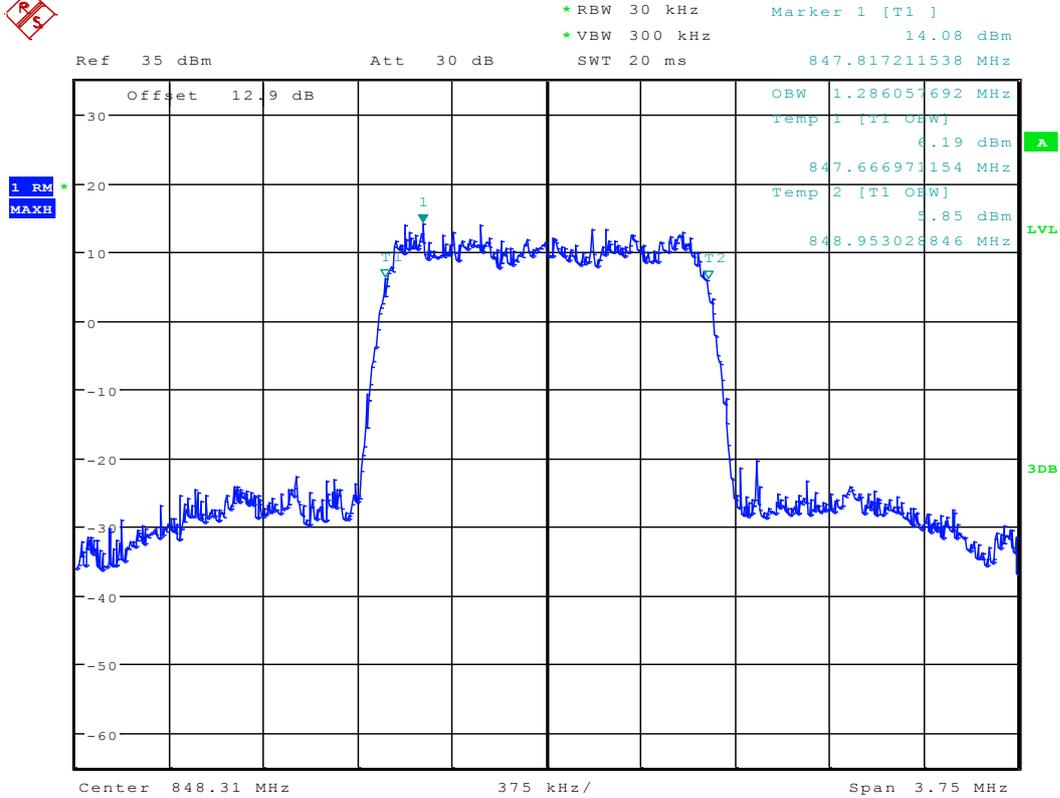

Date: 7.NOV.2012 21:41:22



Channel 777 (EVDO Subtype 2)

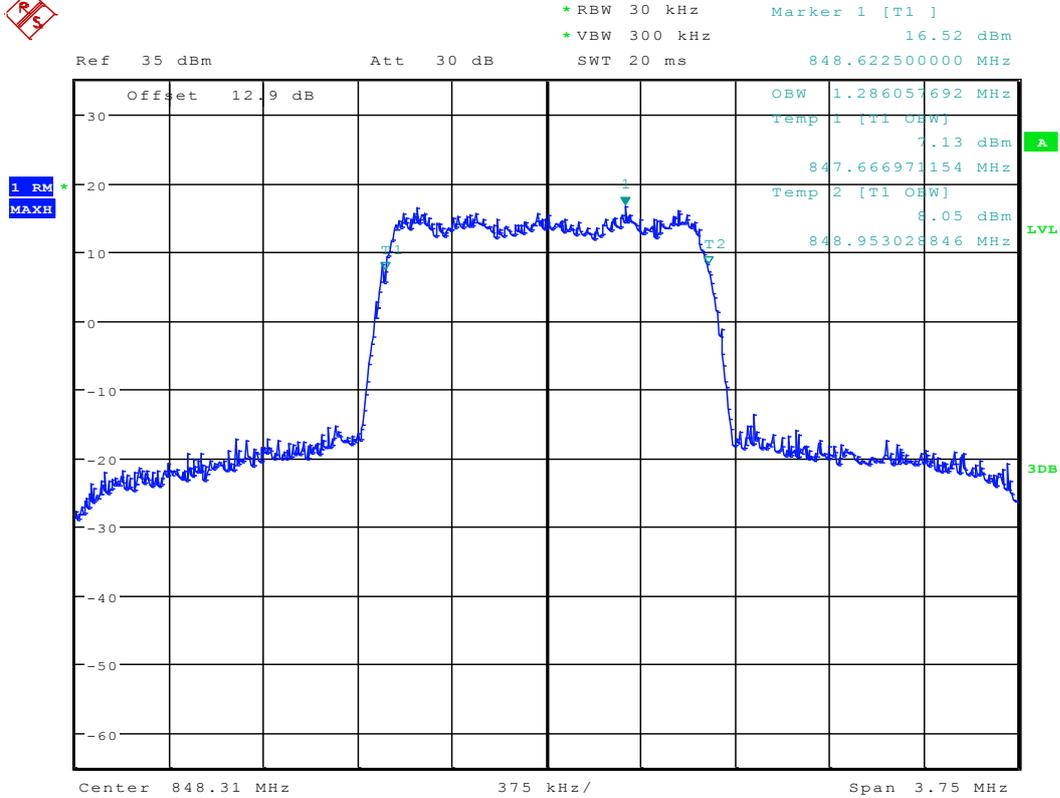

Date: 7.NOV.2012 21:47:05

-----END-----



Appendix D

Band Edges Compliance


According to FCC Part 2.1051 & 22.917



TM1

Left Edge (824 MHz)


Channel 1013

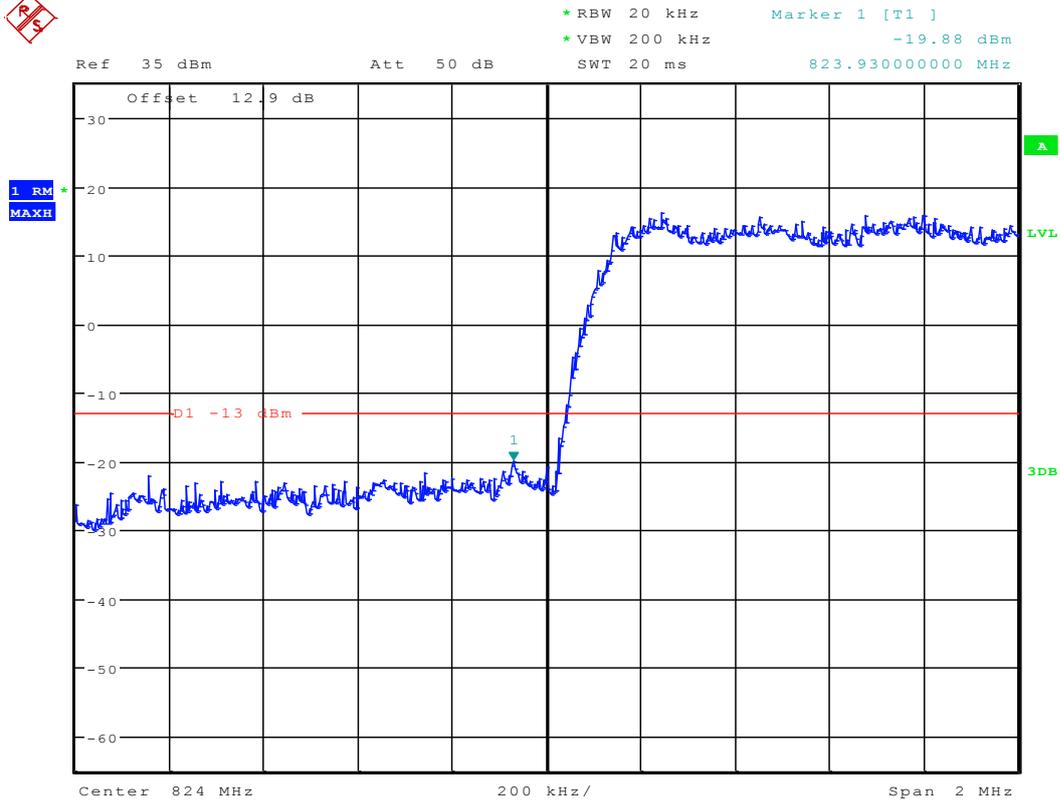

Date: 7.NOV.2012 21:54:17



Right Edge (849MHz) Channel 777

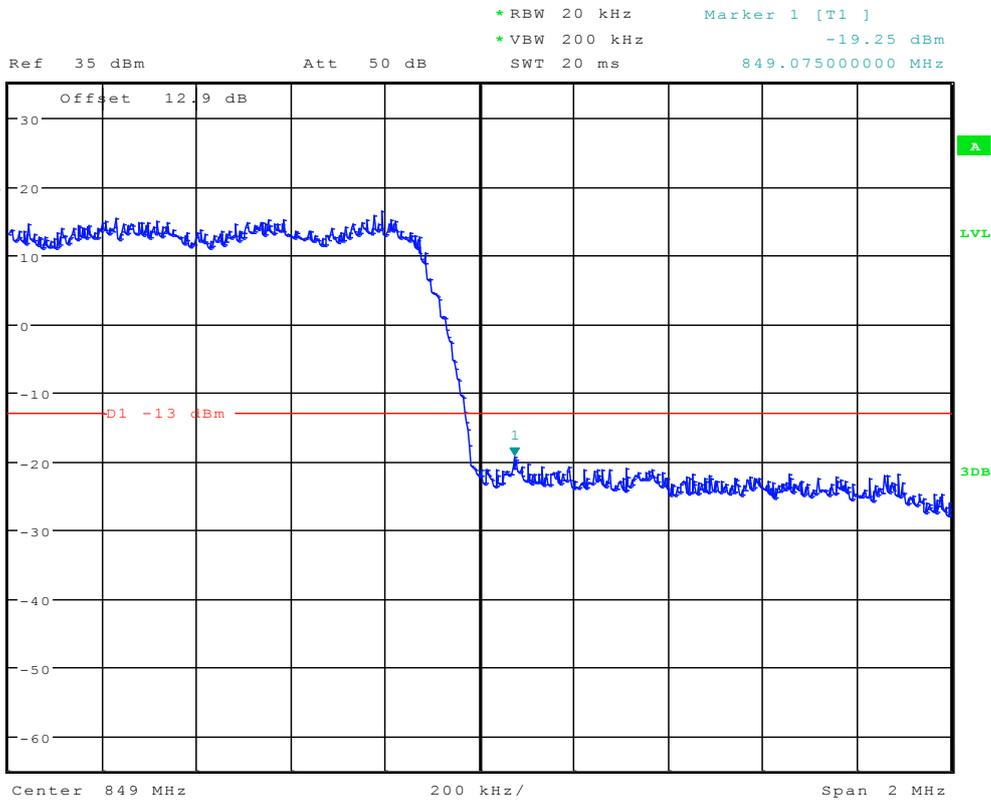


Date: 7.NOV.2012 21:54:31



TM3

Left Edge (824 MHz)


Channel 1013

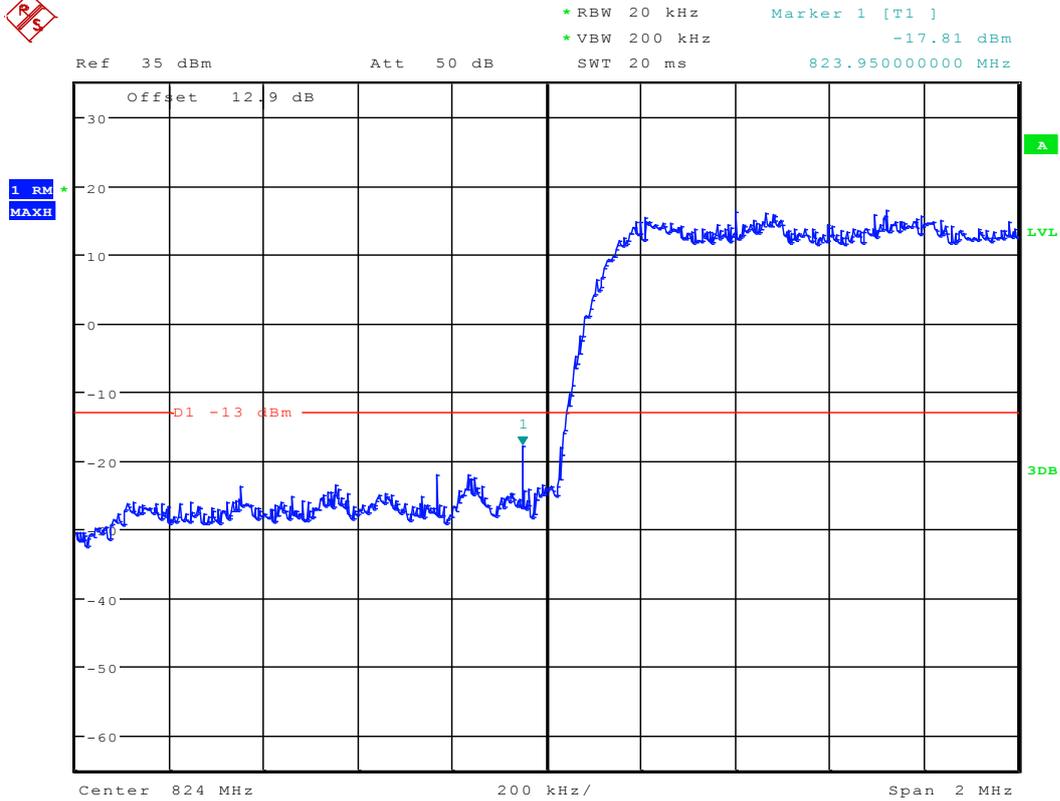

Date: 7.NOV.2012 21:54:46



Right Edge (849MHz) Channel 777

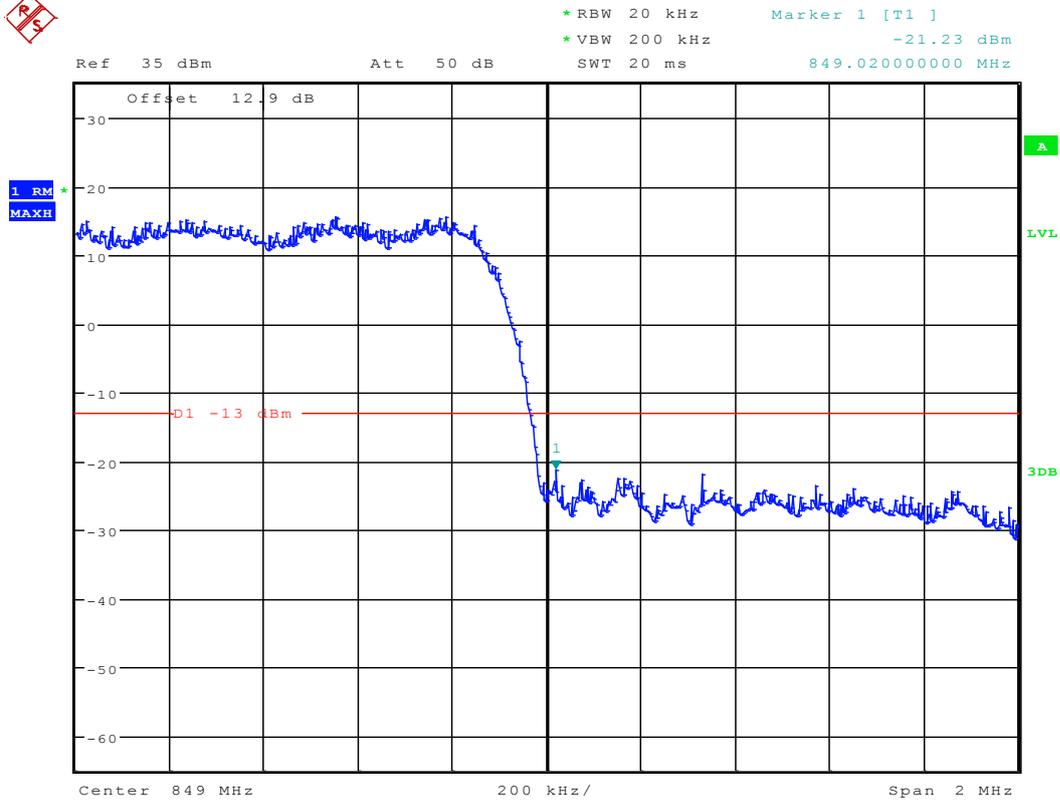


Date: 7.NOV.2012 21:55:00



EVDO Subtype 0

Left Edge (824 MHz)


Channel 1013

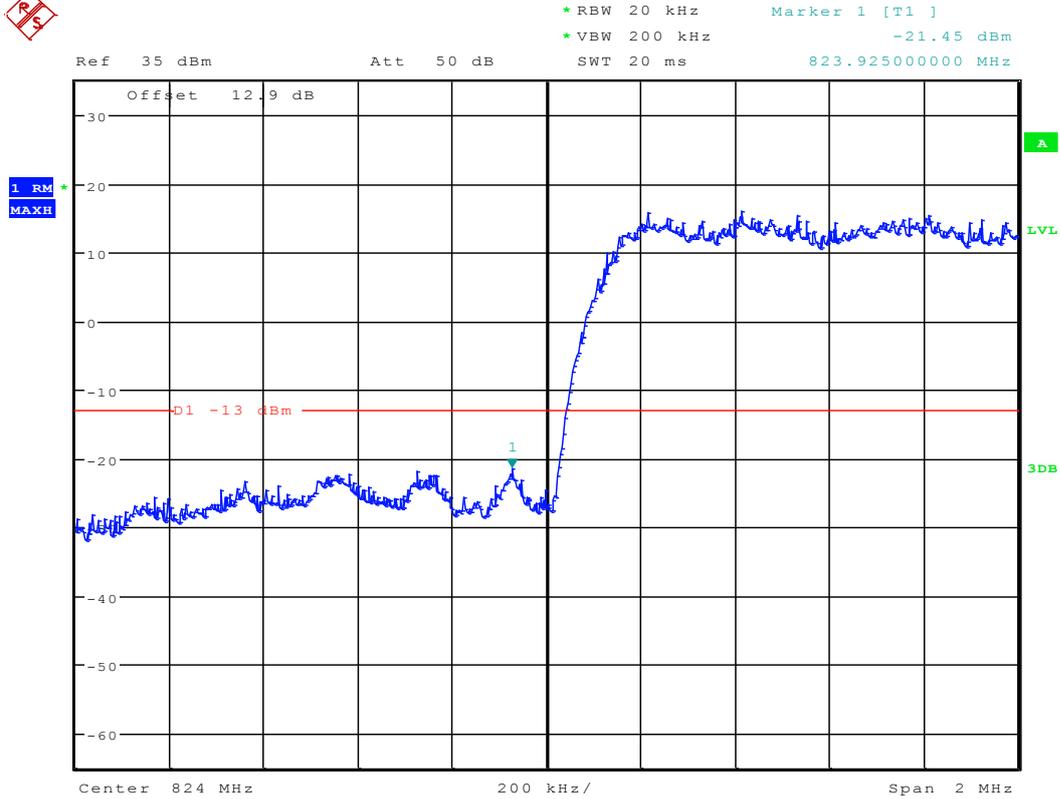

Date: 7.NOV.2012 21:40:25



Right Edge (849MHz) Channel 777

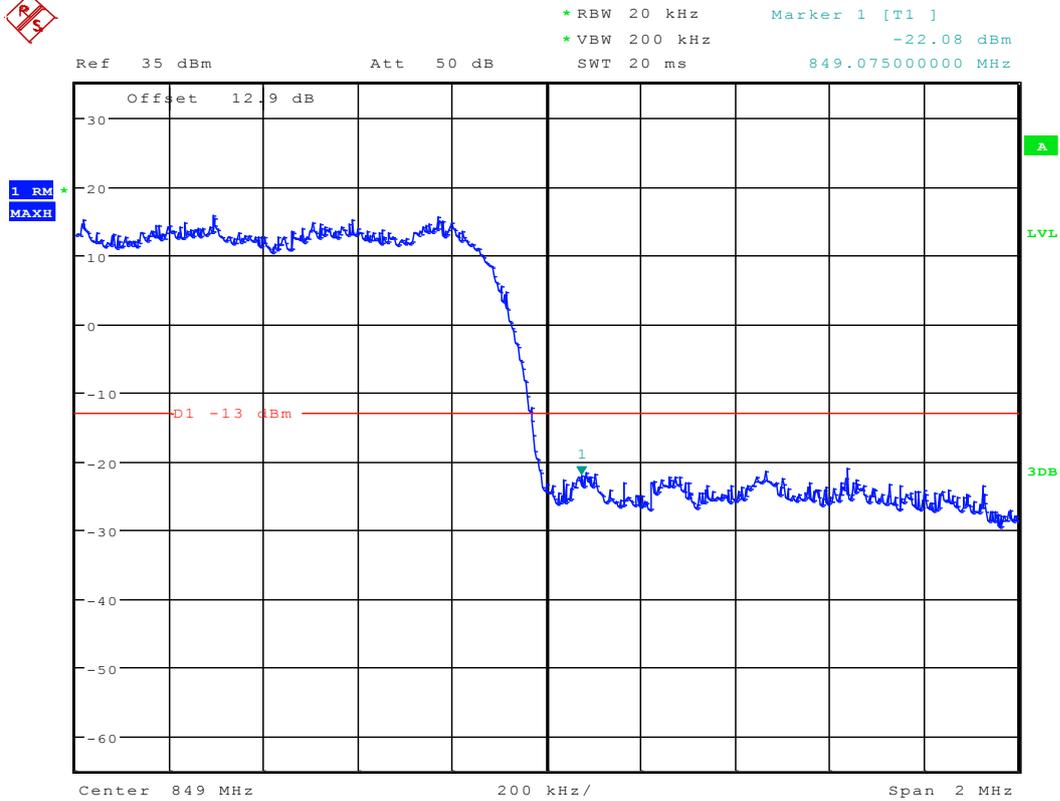

Date: 7.NOV.2012 21:40:39




EVDO Subtype 2

Modulation: BPSK

Left Edge (824 MHz)


Channel 1013

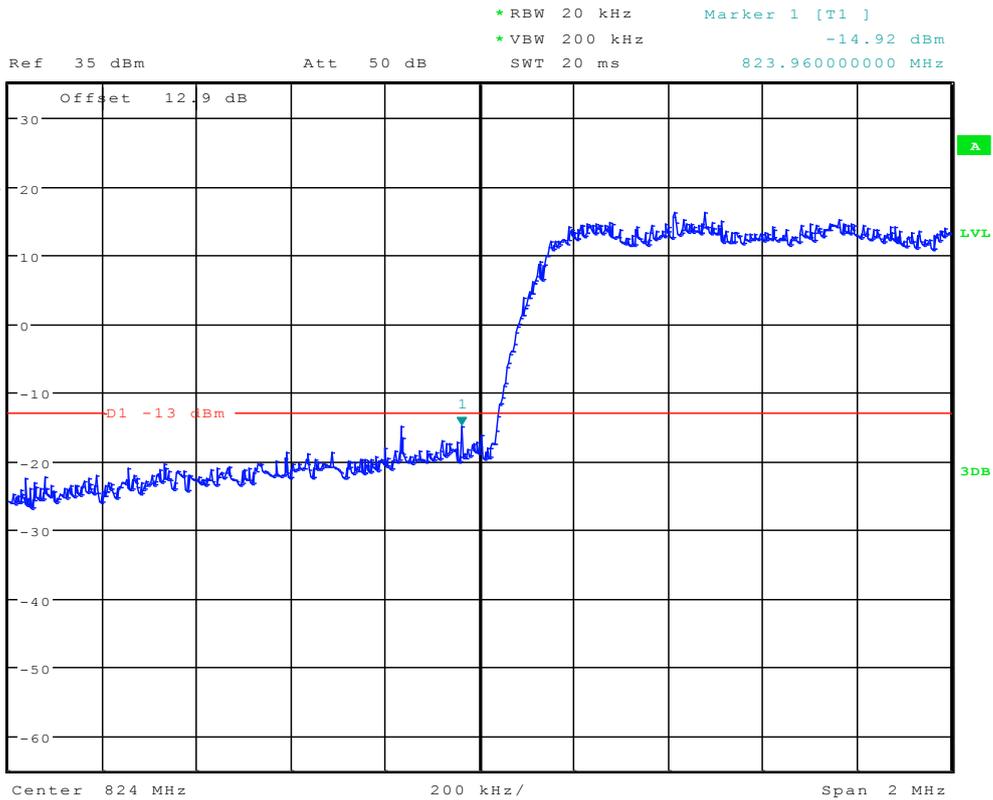

Date: 7.NOV.2012 21:44:35




Right Edge (849MHz) Channel 777

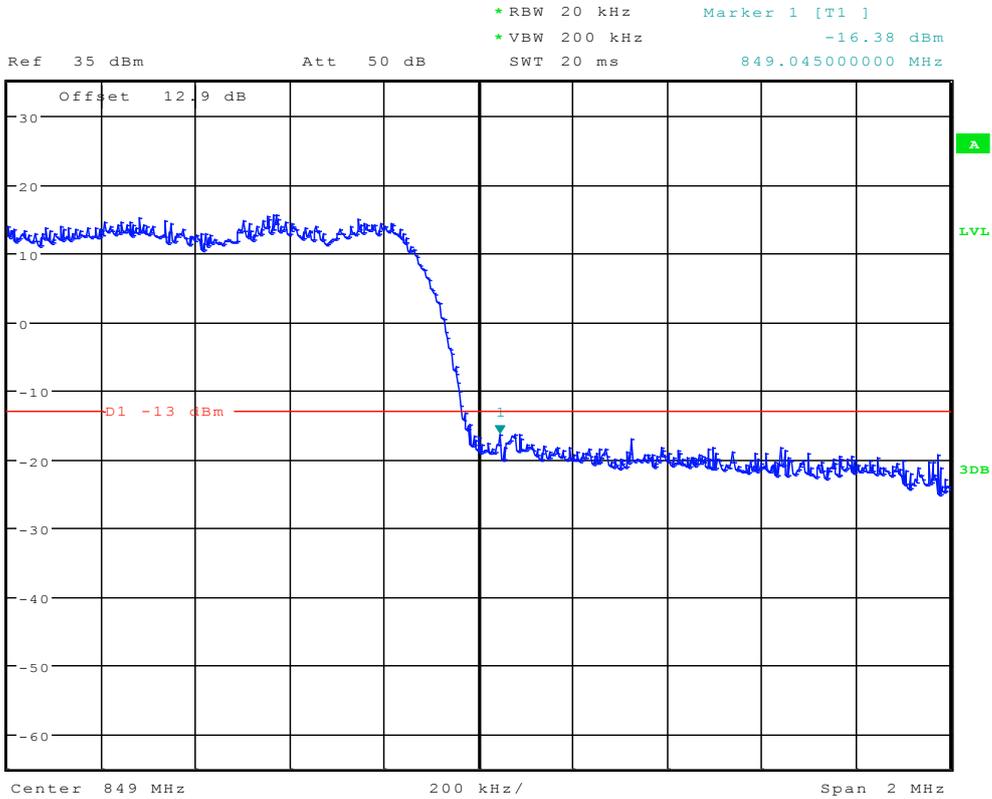

Date: 7.NOV.2012 21:44:49




Modulation: QPSK
Left Edge (824 MHz)
Channel 1013

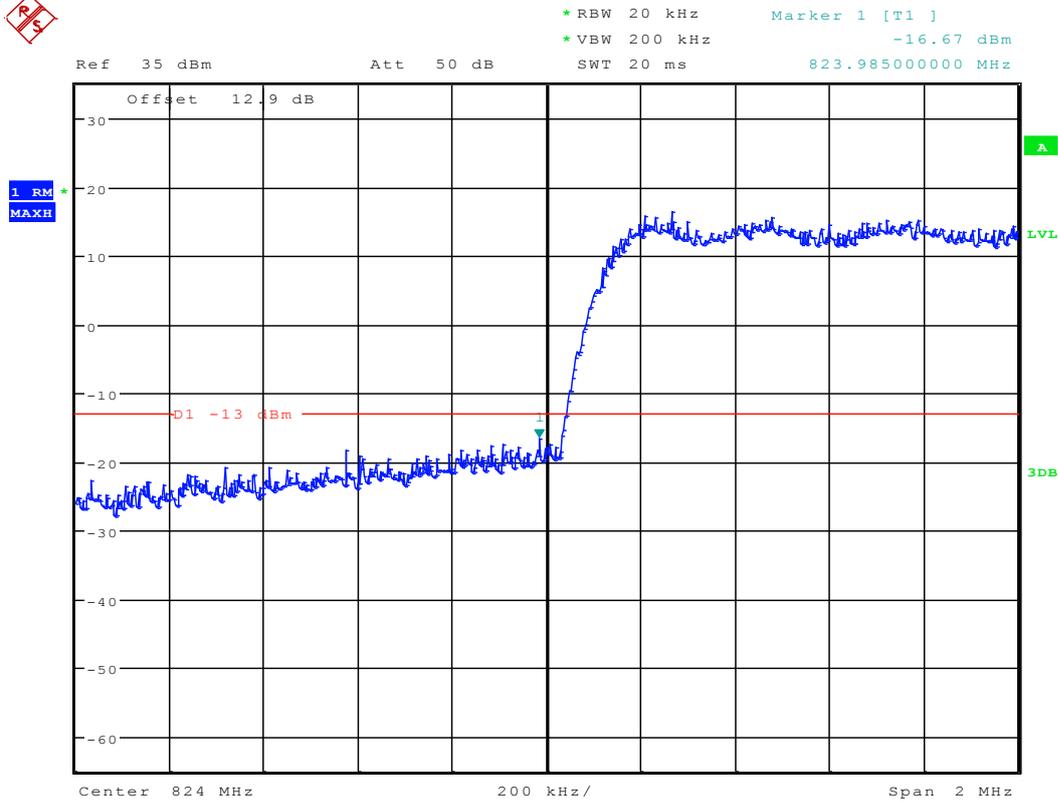

Date: 7.NOV.2012 21:45:03




Right Edge (849MHz) Channel 777

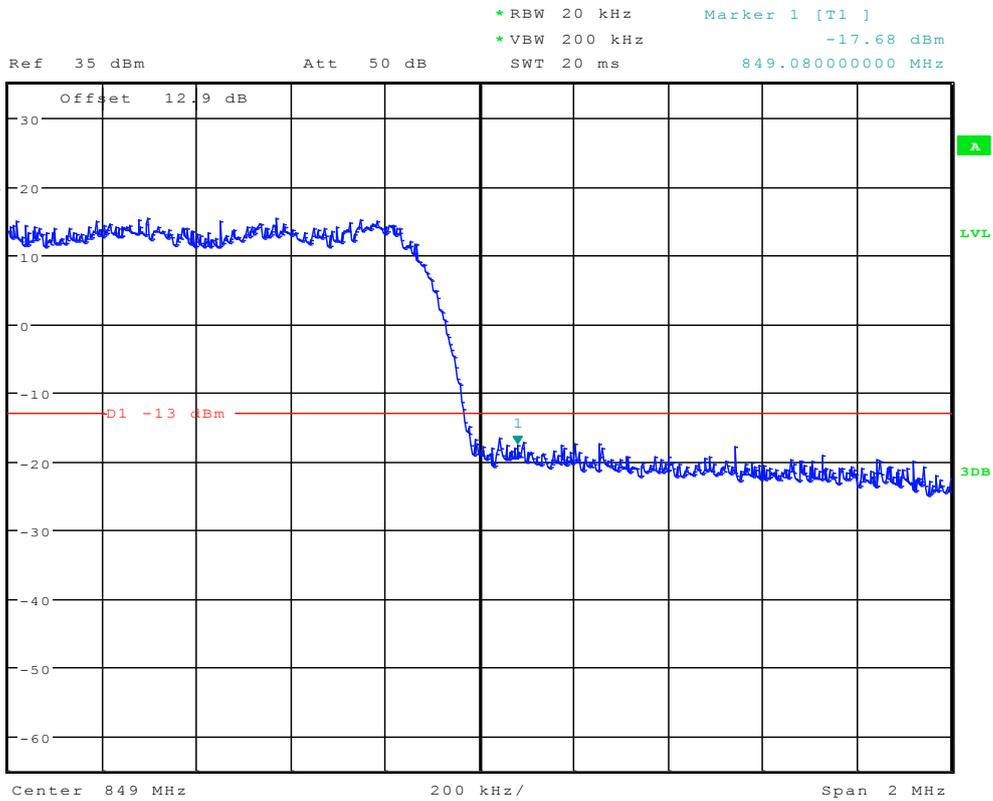

Date: 7.NOV.2012 21:45:16




Modulation: 8PSK
Left Edge (824 MHz)
Channel 1013

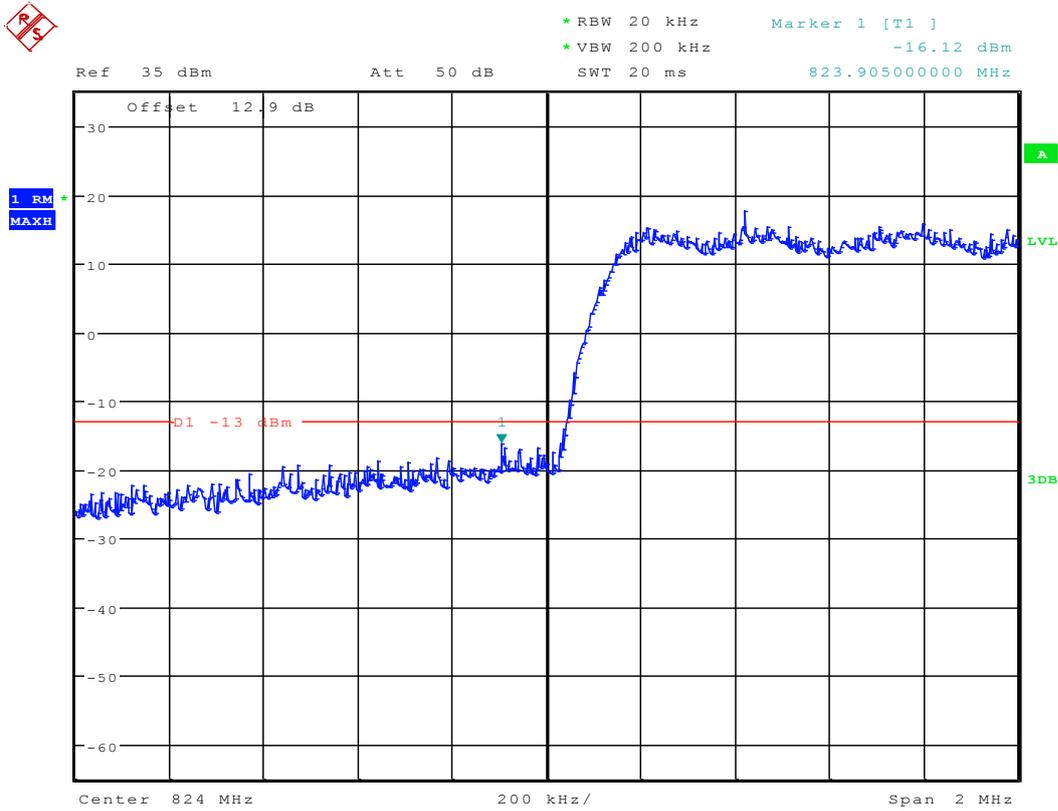

Date: 7.NOV.2012 21:45:30



Right Edge (849MHz) Channel 777

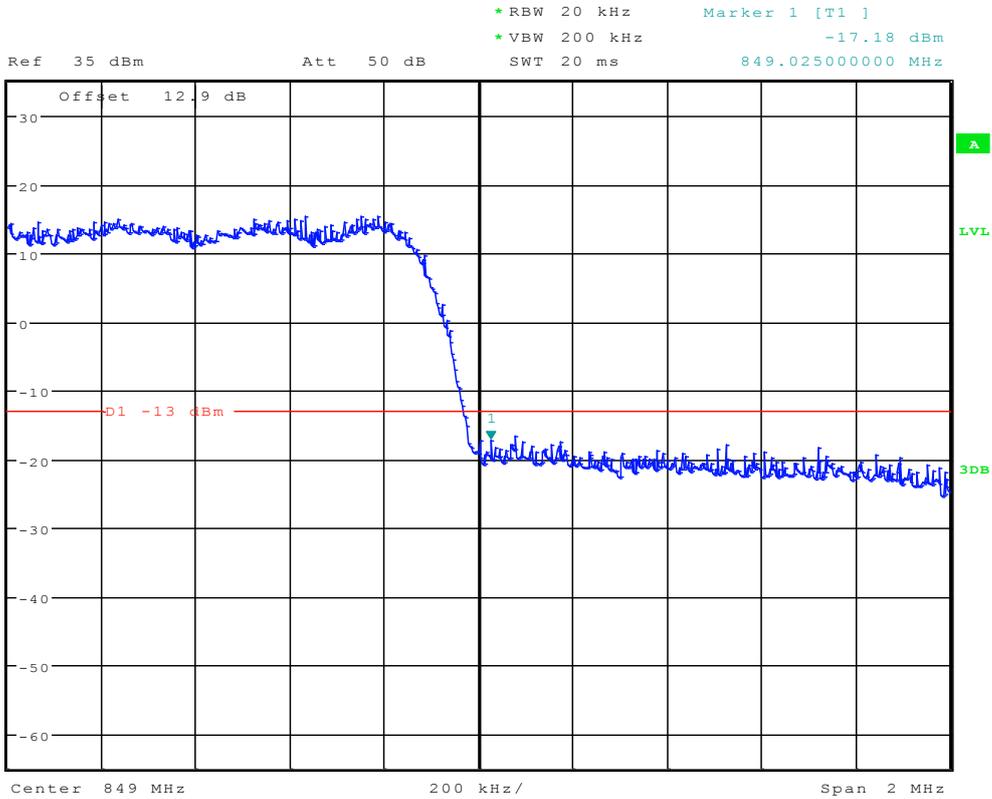

Date: 7.NOV.2012 21:45:44

-----END-----



Appendix E

Spurious Emission at Antenna Terminal

According to FCC Part 2.1051 & 22.917




TM1

Channel 1013



*RBW 1 kHz Marker 1 [T1]
*VBW 10 kHz -52.59 dBm
SWT 145 ms 9.903846154 kHz

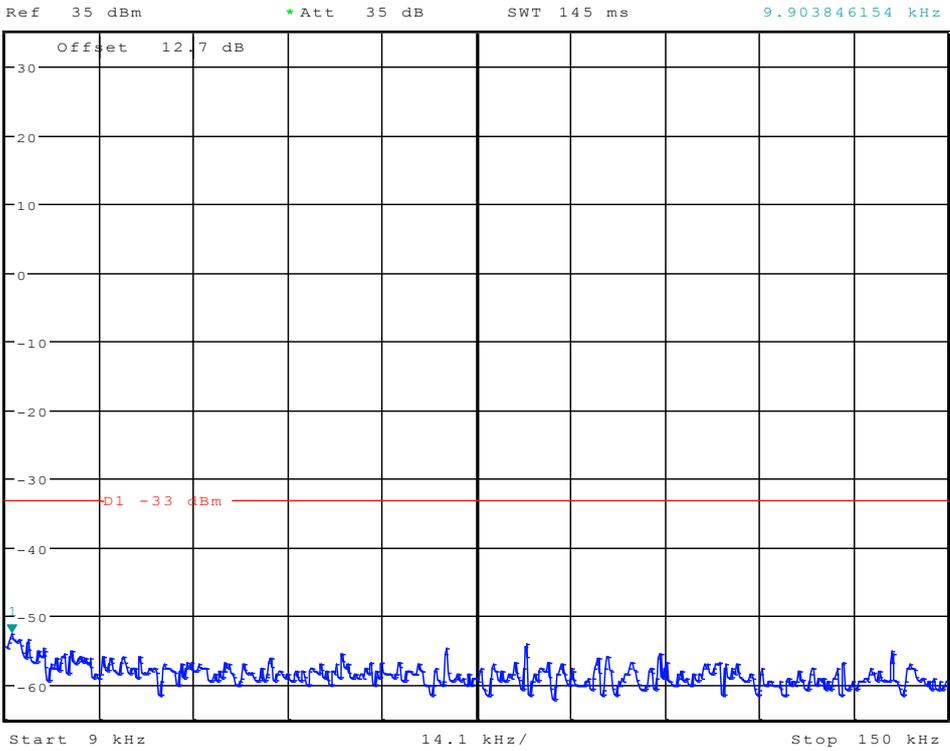


Date: 7.NOV.2012 21:37:03



* RBW 10 kHz Marker 1 [T1]
* VBW 30 kHz -47.32 dBm
SWT 300 ms 197.836538462 kHz


Ref 35 dBm

* Att 35 dB

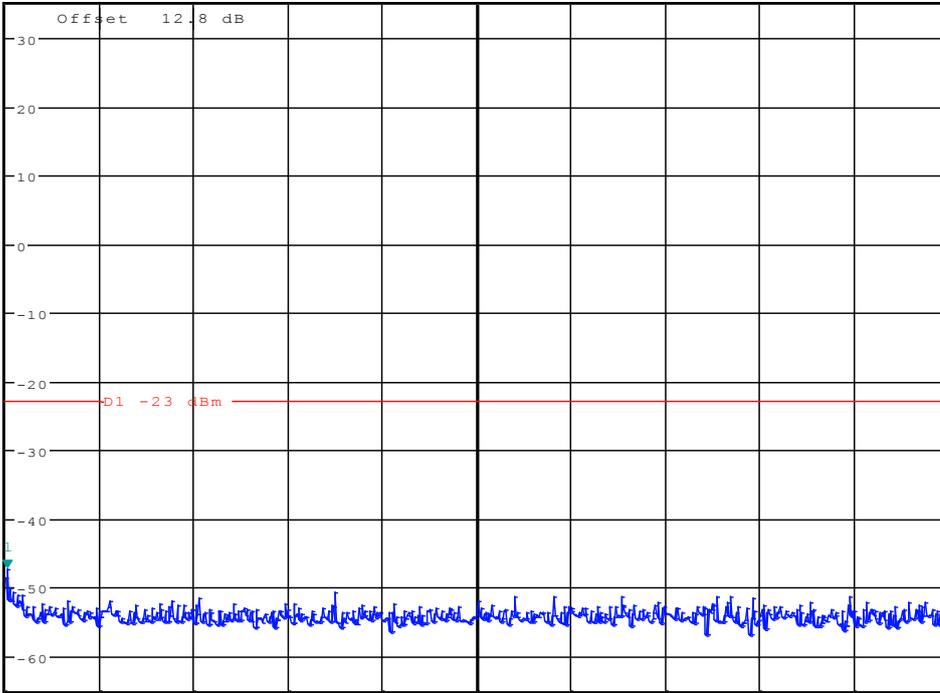

Start 150 kHz 2.985 MHz/ Stop 30 MHz

Date: 7.NOV.2012 21:37:28

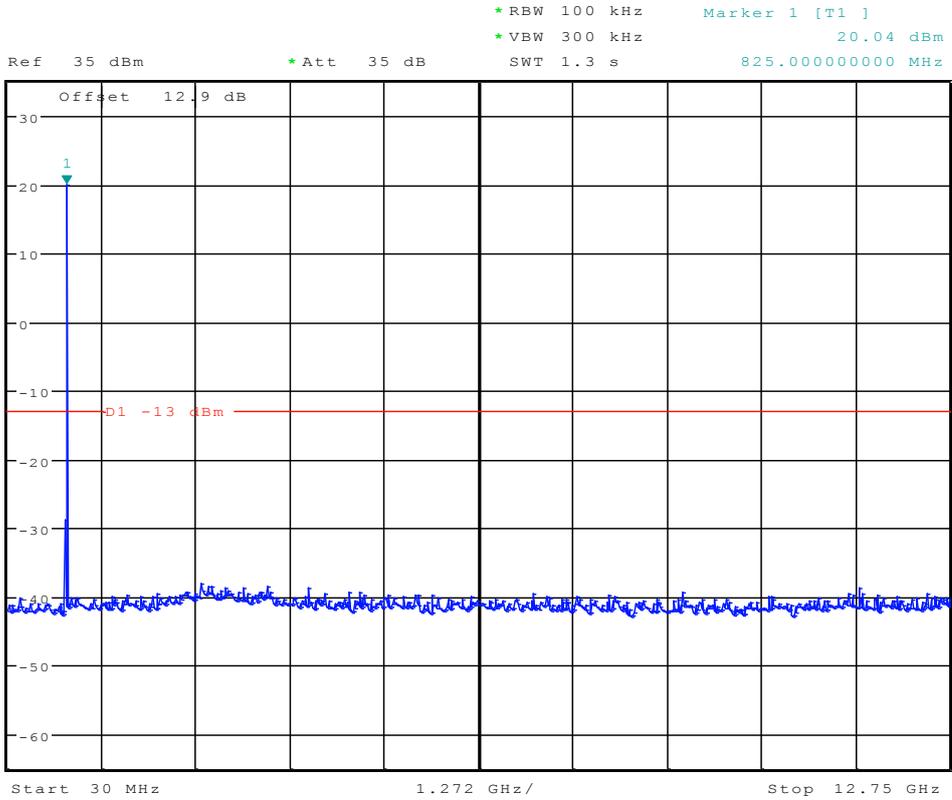


Date: 7.NOV.2012 21:37:54



Channel 384



*RBW 1 kHz Marker 1 [T1]
*VBW 10 kHz -52.07 dBm
Ref 35 dBm *Att 35 dB SWT 145 ms 9.000000000 kHz

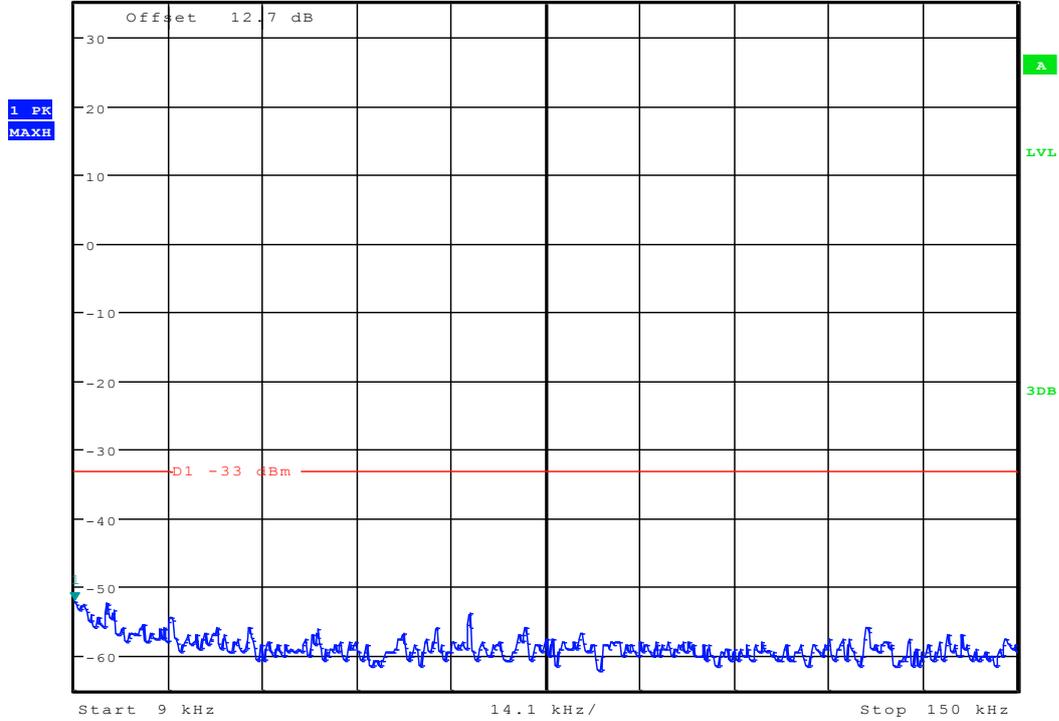

Date: 7.NOV.2012 22:33:24




* RBW 10 kHz Marker 1 [T1]
* VBW 30 kHz -48.12 dBm
SWT 300 ms 150.00000000 kHz

Ref 35 dBm


* Att 35 dB

1 PK
MAXH

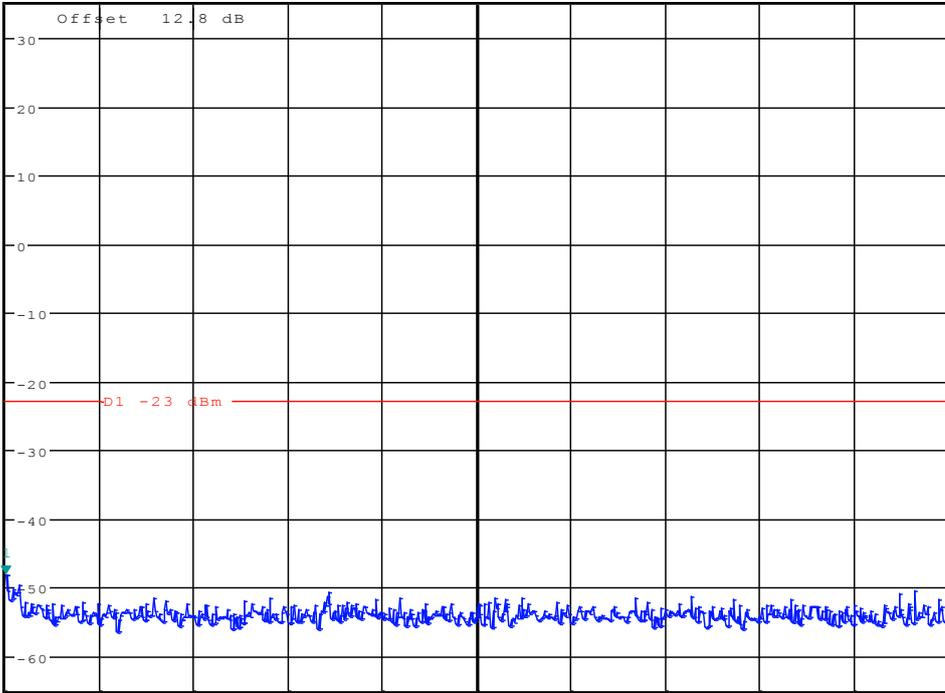

Start 150 kHz 2.985 MHz/ Stop 30 MHz

Date: 7.NOV.2012 22:33:33

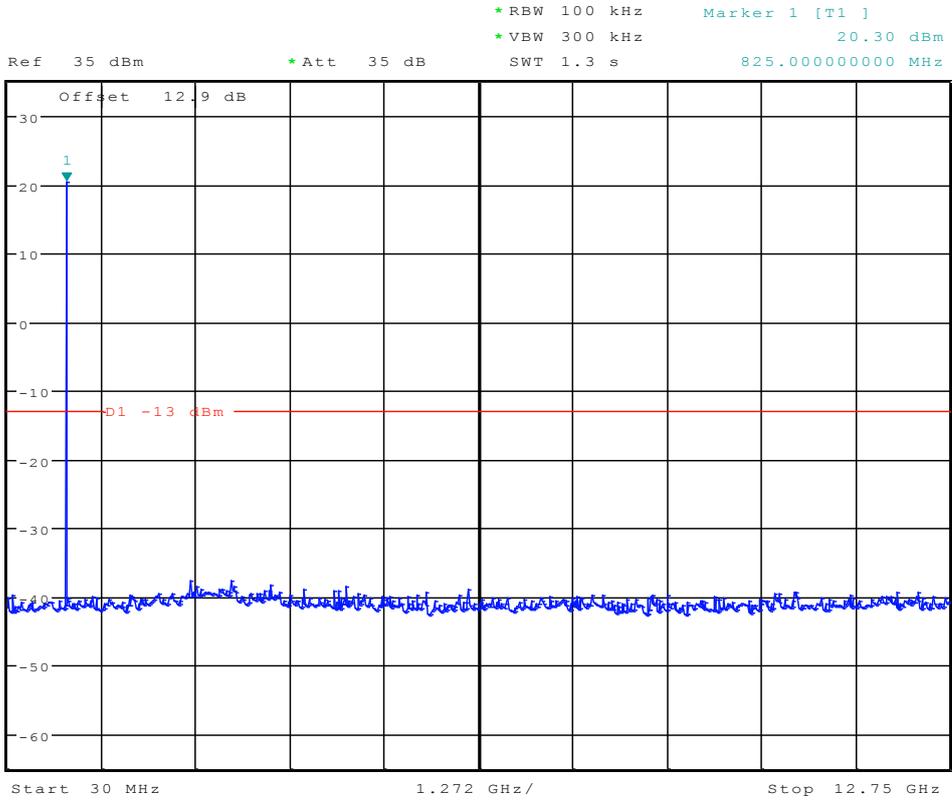


Date: 7.NOV.2012 22:33:42



Channel 777



* RBW 1 kHz Marker 1 [T1]
 * VBW 10 kHz -51.12 dBm
 Ref 35 dBm * Att 35 dB SWT 145 ms 9.000000000 kHz

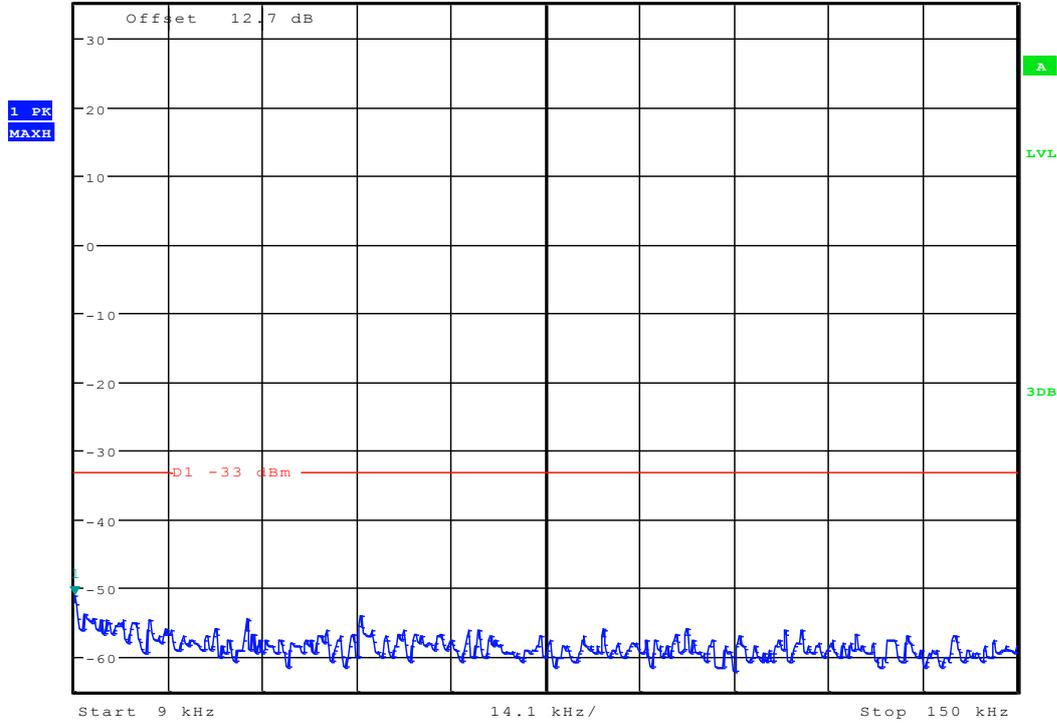


Date: 7.NOV.2012 21:37:19



* RBW 10 kHz Marker 1 [T1]
* VBW 30 kHz -47.03 dBm
SWT 300 ms 150.00000000 kHz


Ref 35 dBm

* Att 35 dB

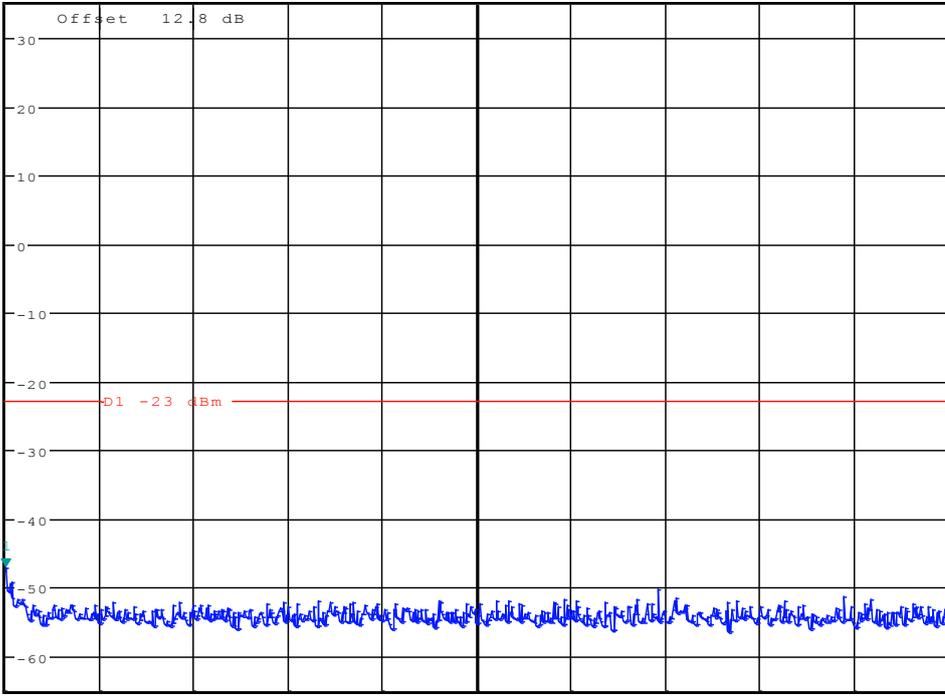

Start 150 kHz 2.985 MHz/ Stop 30 MHz

Date: 7.NOV.2012 21:37:45

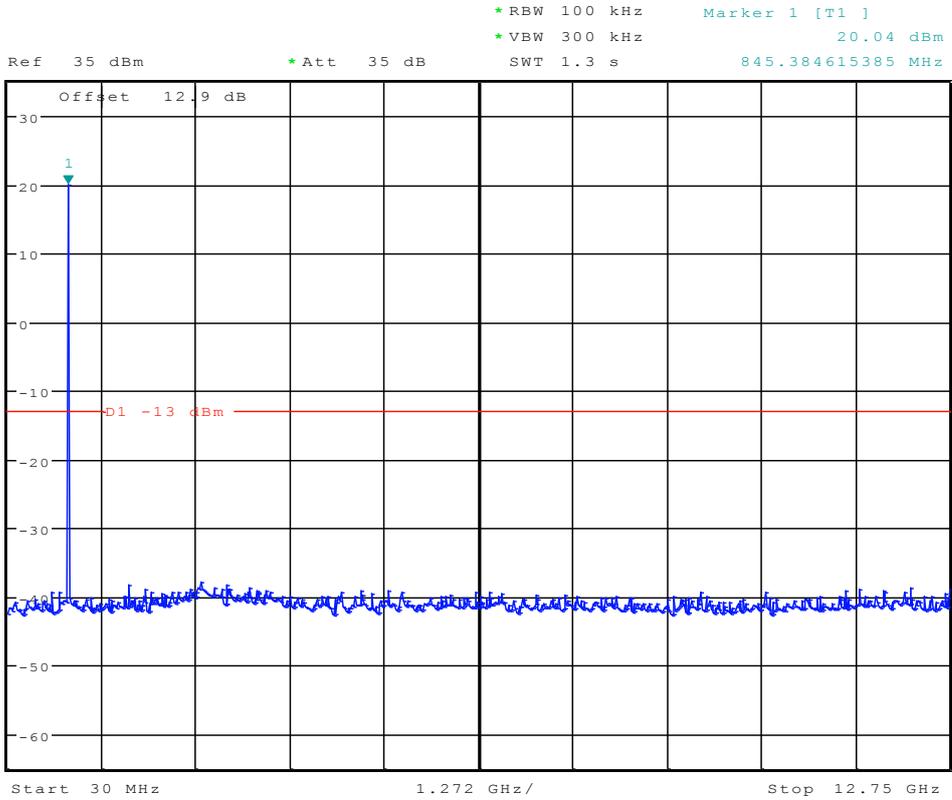

Date: 7.NOV.2012 21:38:11




TM3

Channel 1013



*RBW 1 kHz Marker 1 [T1]
*VBW 10 kHz -53.15 dBm
SWT 145 ms 10.807692308 kHz

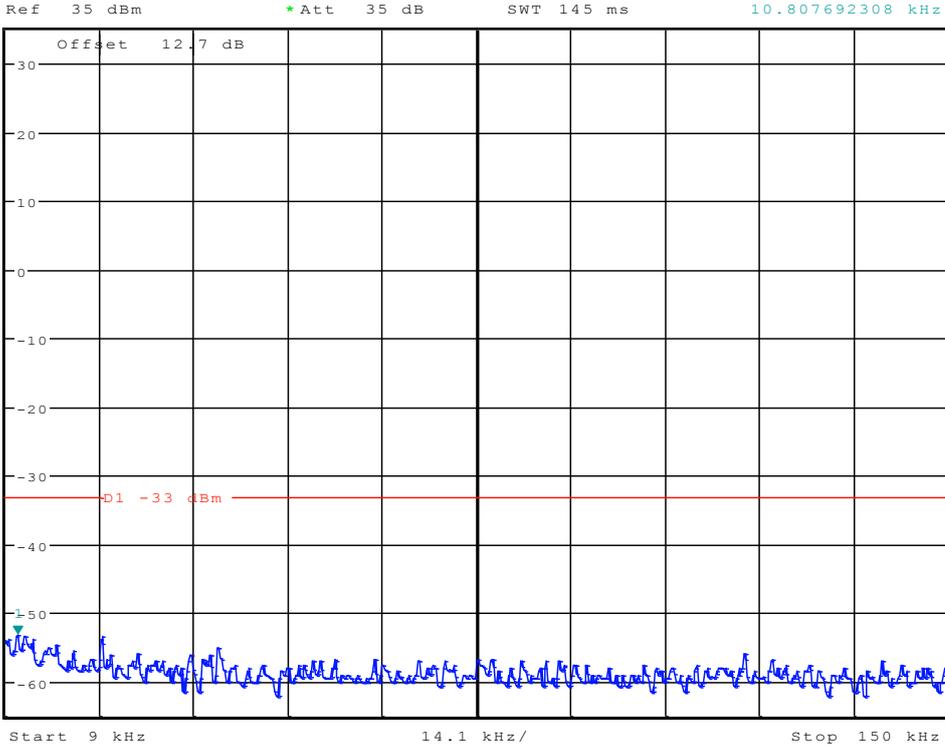


Date: 7.NOV.2012 21:38:21




Ref 35 dBm * Att 35 dB * RBW 10 kHz * VBW 30 kHz Marker 1 [T1] -47.74 dBm
SWT 300 ms 150.00000000 kHz

1 PK
MAXH

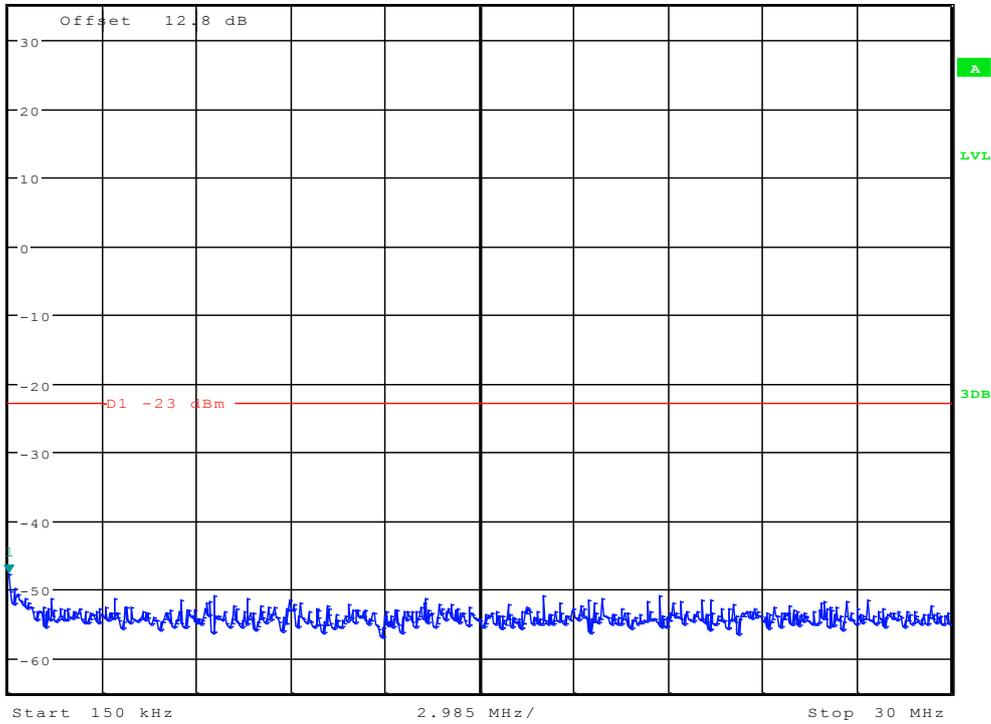

Date: 7.NOV.2012 21:38:47

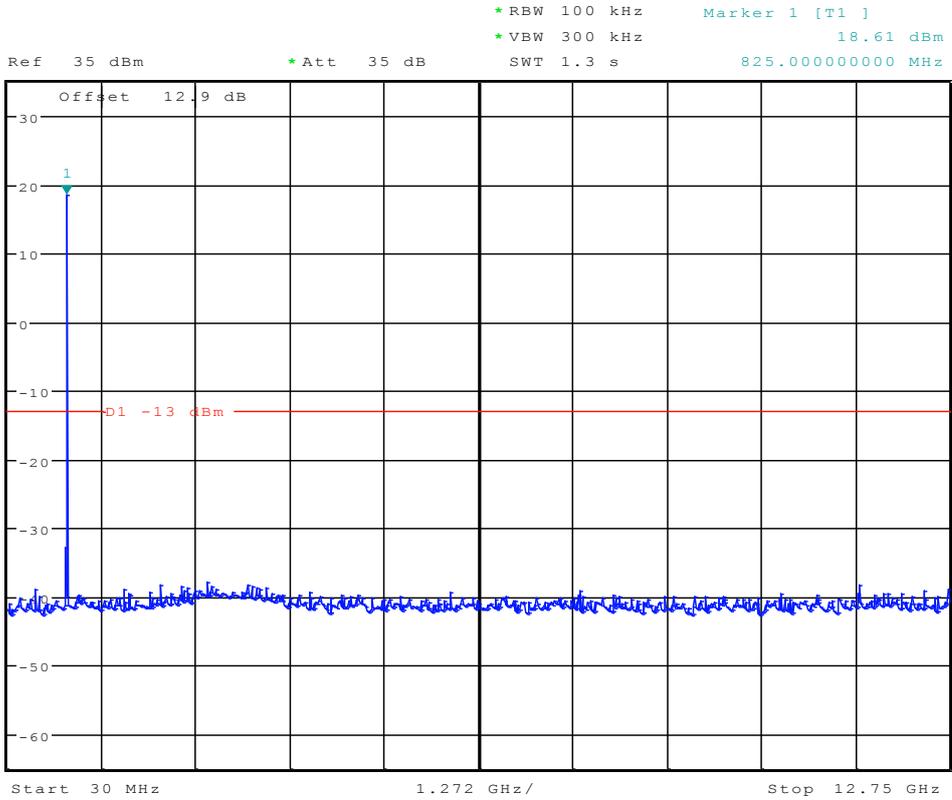


Date: 7.NOV.2012 21:39:12



Channel 384



* RBW 1 kHz Marker 1 [T1]
* VBW 10 kHz -51.39 dBm
Ref 35 dBm * Att 35 dB SWT 145 ms 15.552884615 kHz

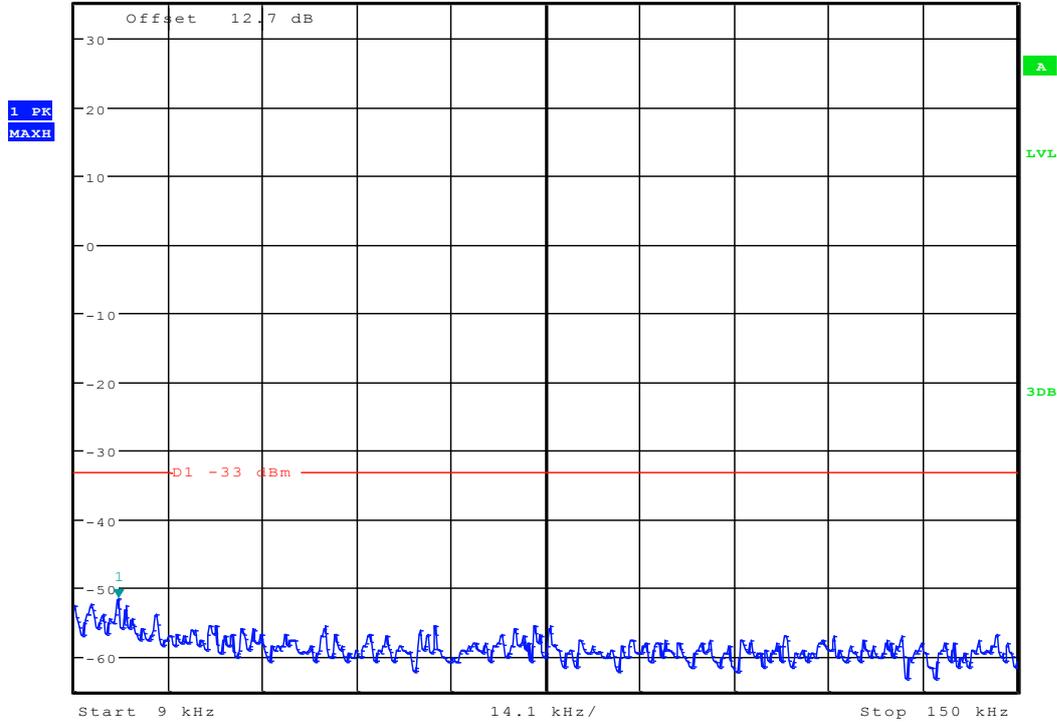


Date: 7.NOV.2012 22:33:52



* RBW 10 kHz Marker 1 [T1]
* VBW 30 kHz -45.70 dBm
SWT 300 ms 197.836538462 kHz


Ref 35 dBm

* Att 35 dB

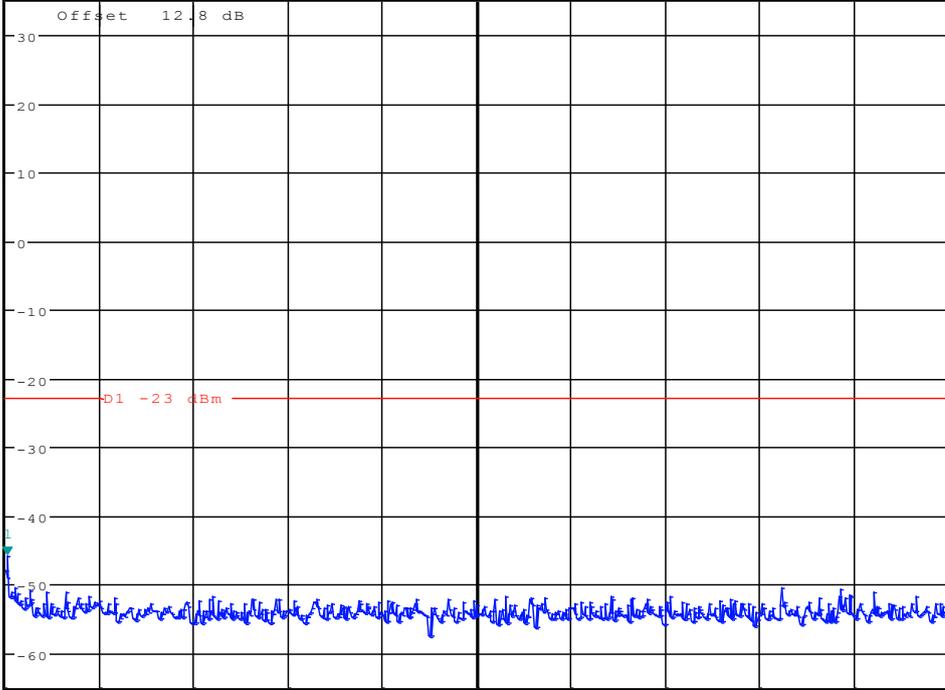

Start 150 kHz 2.985 MHz/ Stop 30 MHz

Date: 7.NOV.2012 22:34:01

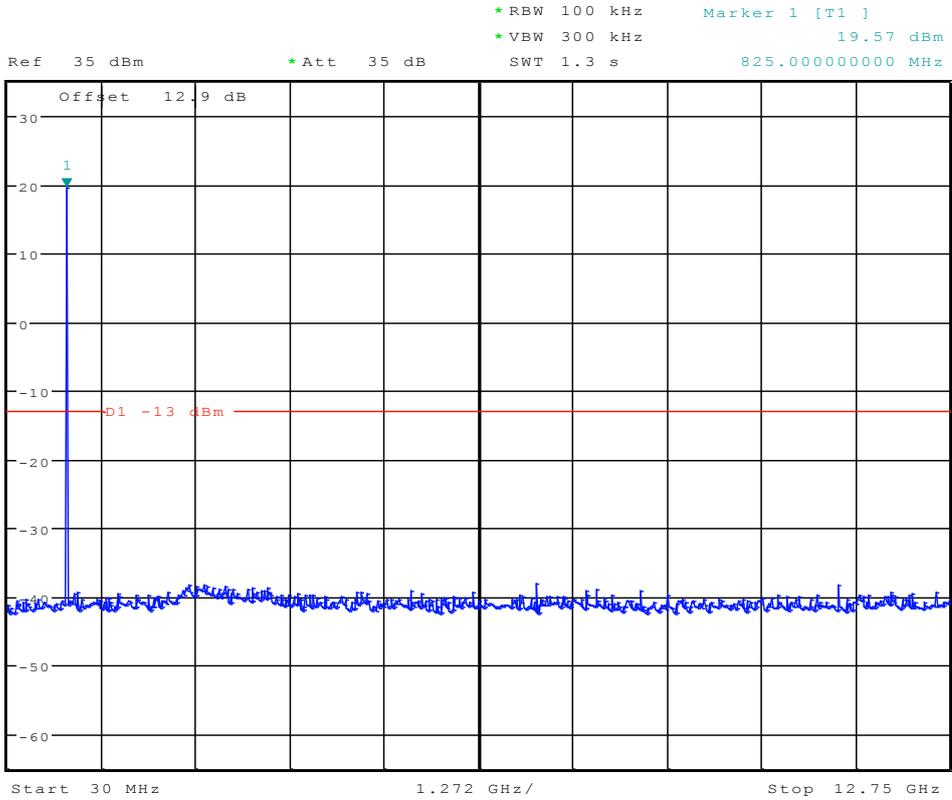


Date: 7.NOV.2012 22:34:10



Channel 777



* RBW 1 kHz Marker 1 [T1]
 * VBW 10 kHz -51.87 dBm
 Ref 35 dBm * Att 35 dB SWT 145 ms 13.971153846 kHz

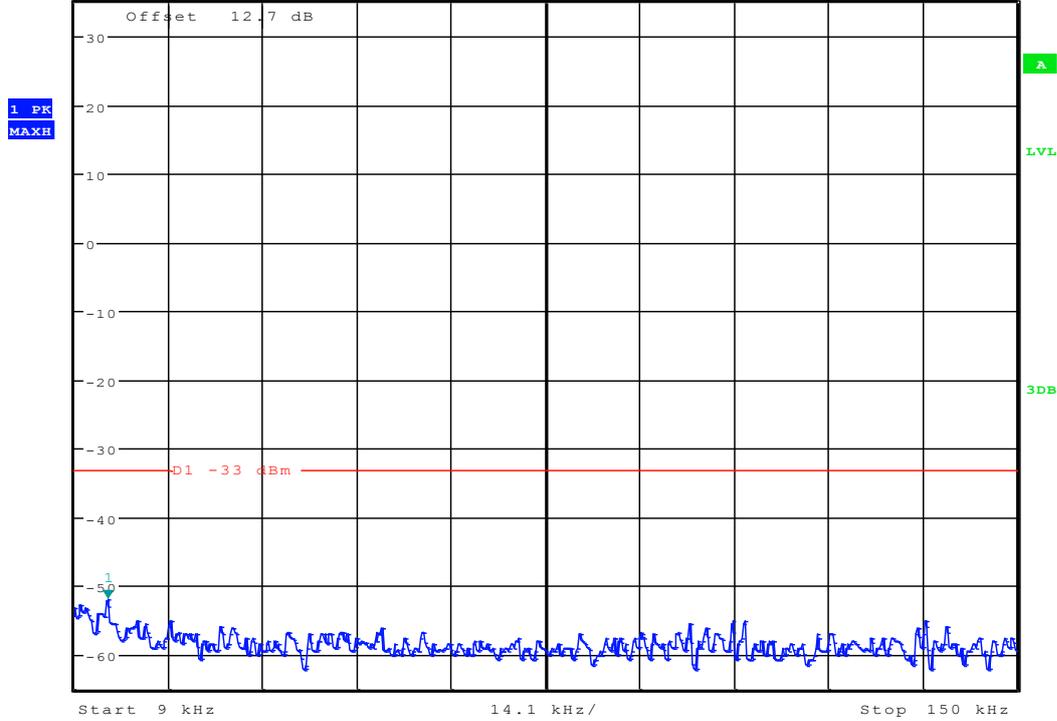

Date: 7.NOV.2012 21:38:38




* RBW 10 kHz Marker 1 [T1]
* VBW 30 kHz -46.58 dBm
SWT 300 ms 150.00000000 kHz


Ref 35 dBm

* Att 35 dB

1 PK
MAXH

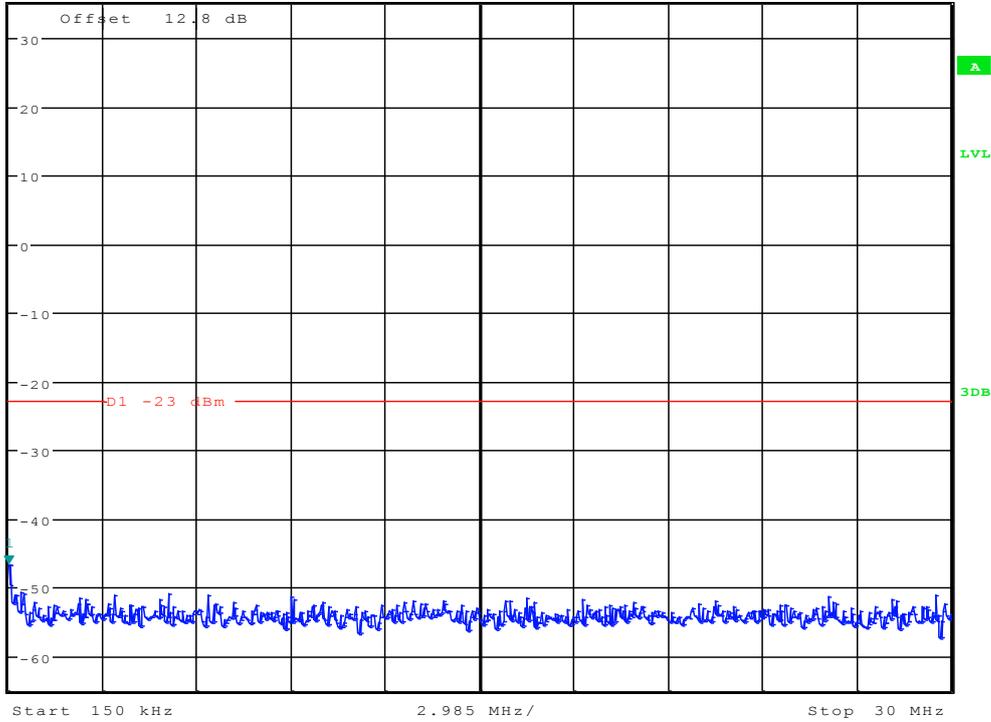

Date: 7.NOV.2012 21:39:03

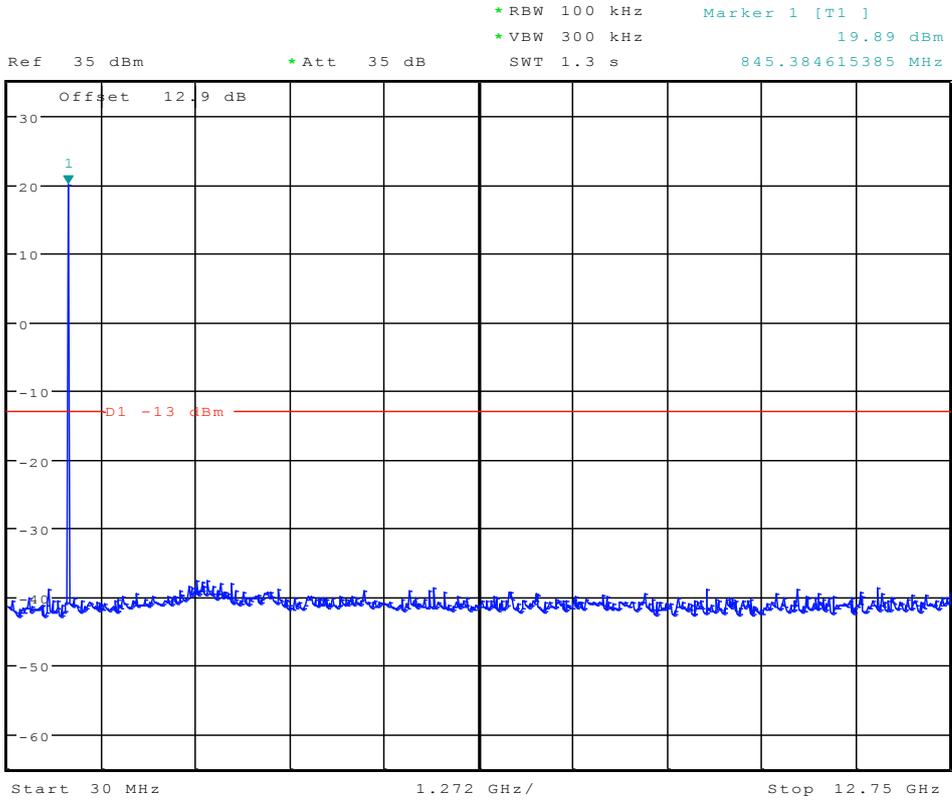


Date: 7.NOV.2012 21:39:29



EVDO subtype 0 Channel 1013




*RBW 1 kHz Marker 1 [T1]
 *VBW 10 kHz -51.39 dBm
 Ref 35 dBm *Att 35 dB SWT 145 ms 11.033653846 kHz

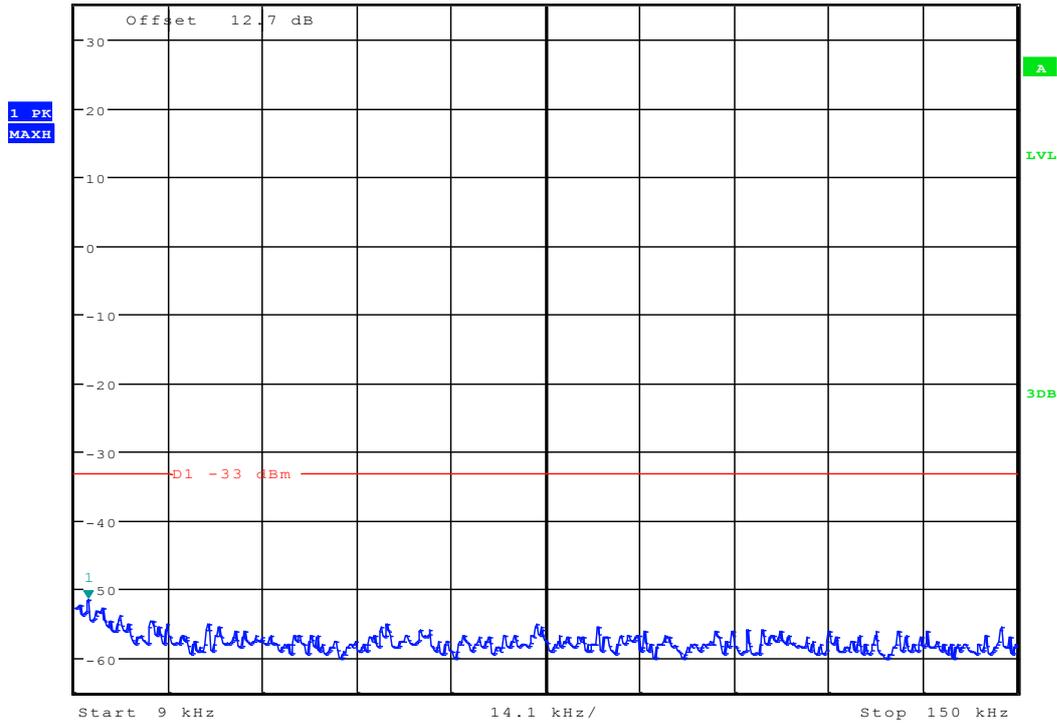


Date: 7.NOV.2012 21:41:39



* RBW 10 kHz Marker 1 [T1]
* VBW 30 kHz -46.47 dBm
SWT 300 ms 150.00000000 kHz

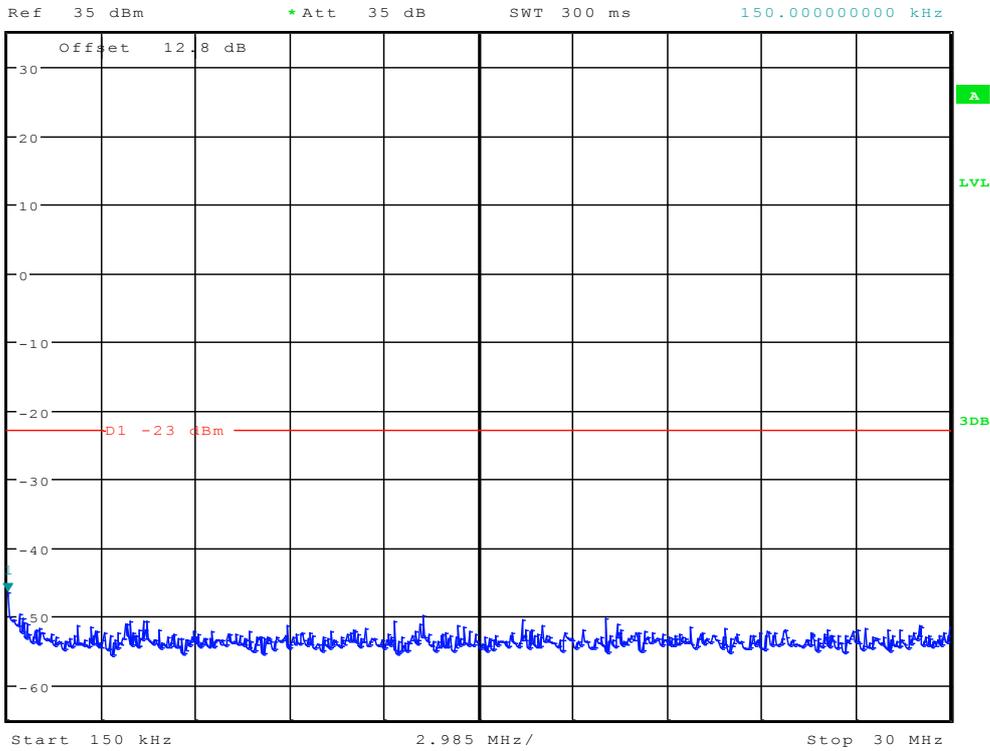

Date: 7.NOV.2012 21:42:23

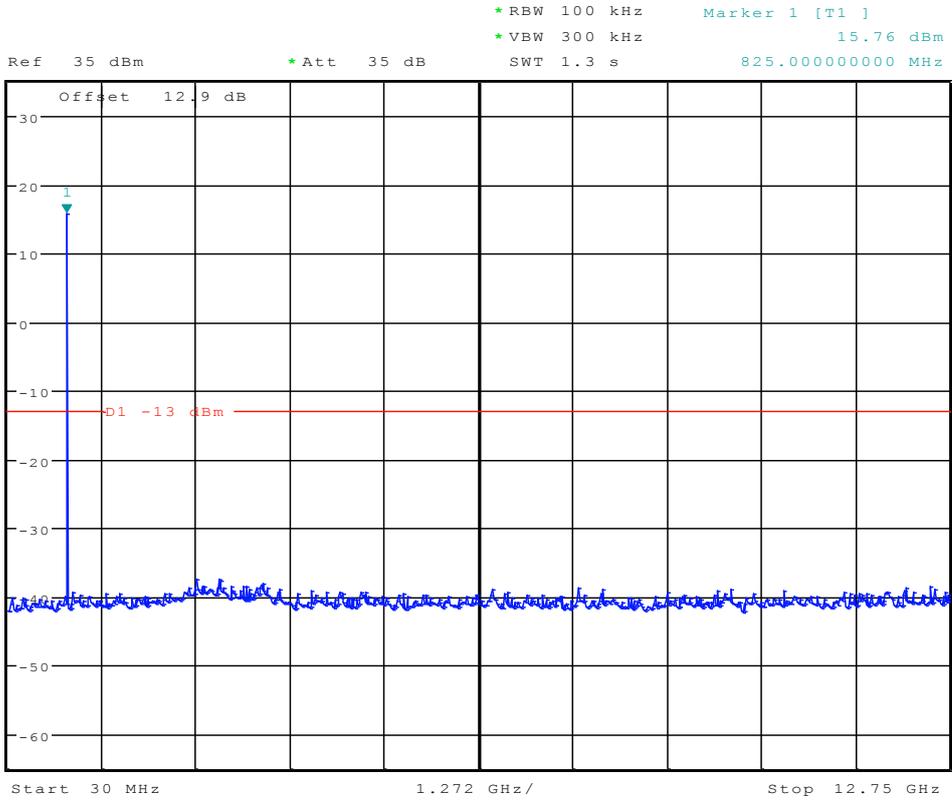


Date: 7.NOV.2012 21:43:07



Channel 384




*RBW 1 kHz Marker 1 [T1] -49.47 dBm
 *VBW 10 kHz 9.903846154 kHz
 Ref 35 dBm *Att 35 dB SWT 145 ms

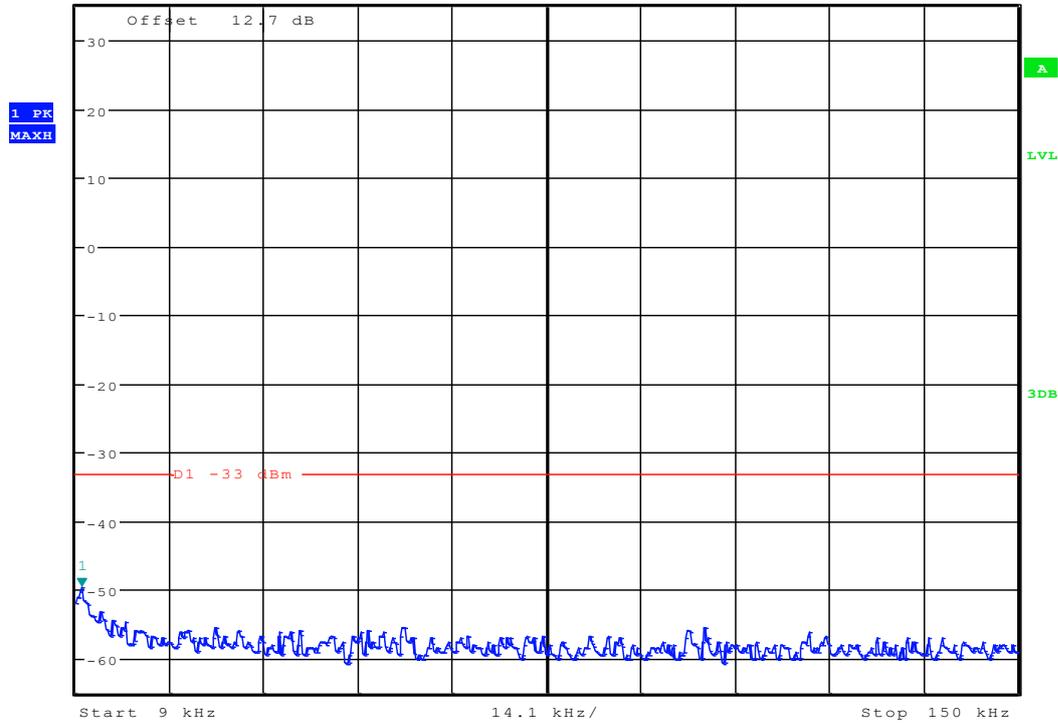


Date: 7.NOV.2012 22:35:21



* RBW 10 kHz Marker 1 [T1]
* VBW 30 kHz -47.32 dBm
SWT 300 ms 150.000000000 kHz

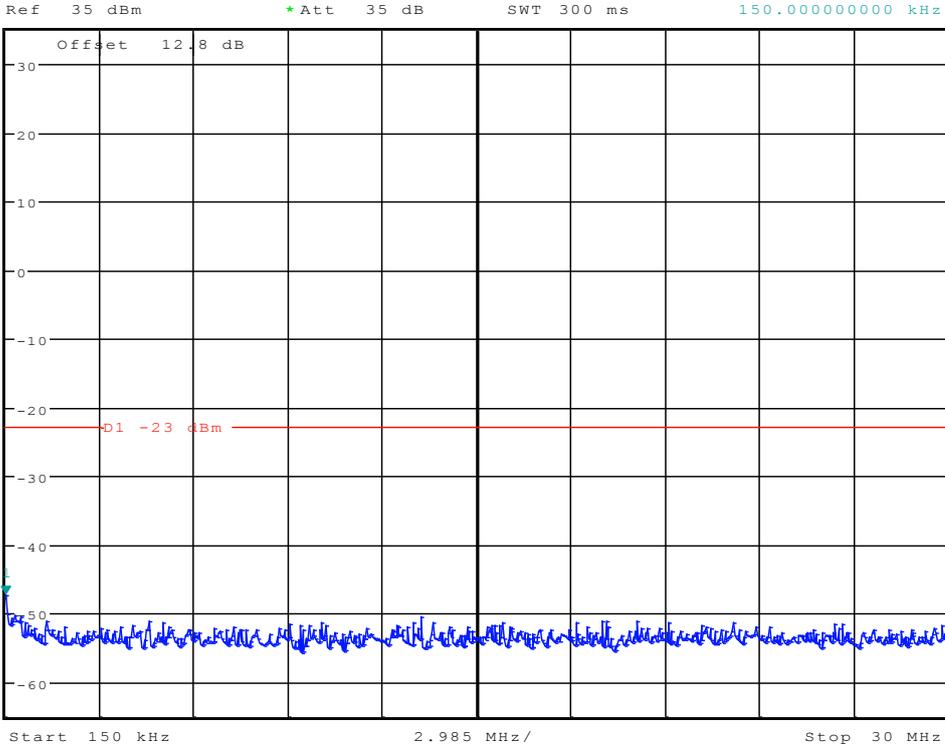

Date: 7.NOV.2012 22:35:36

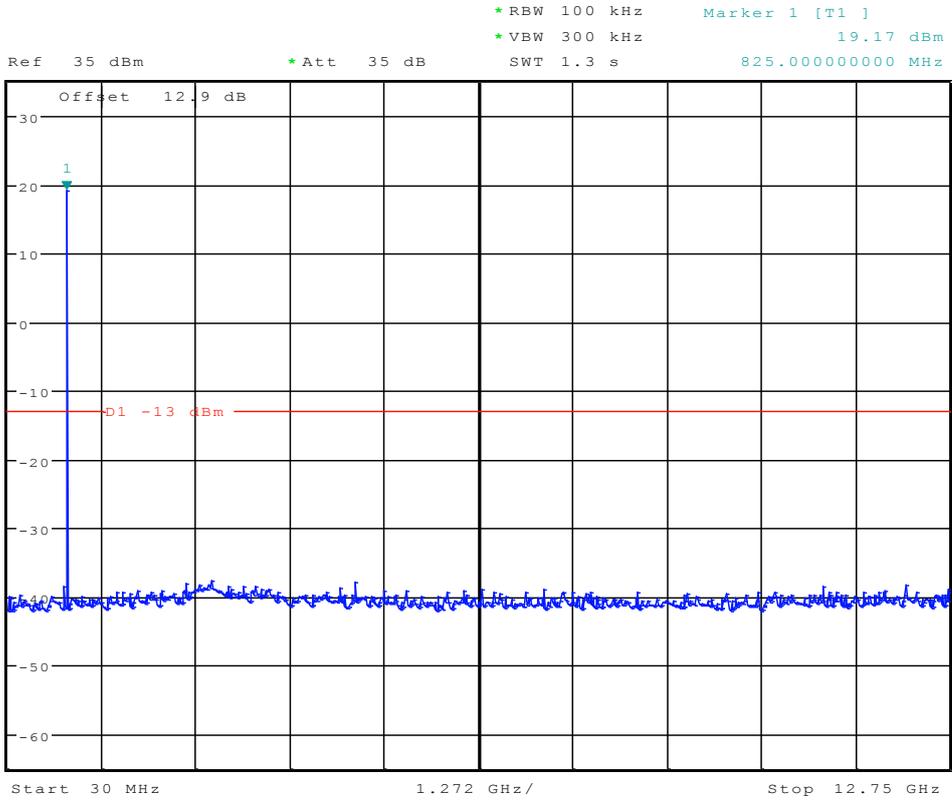


Date: 7.NOV.2012 22:35:51



Channel 777



* RBW 1 kHz Marker 1 [T1]
 * VBW 10 kHz -50.68 dBm
 Ref 35 dBm * Att 35 dB SWT 145 ms 9.451923077 kHz

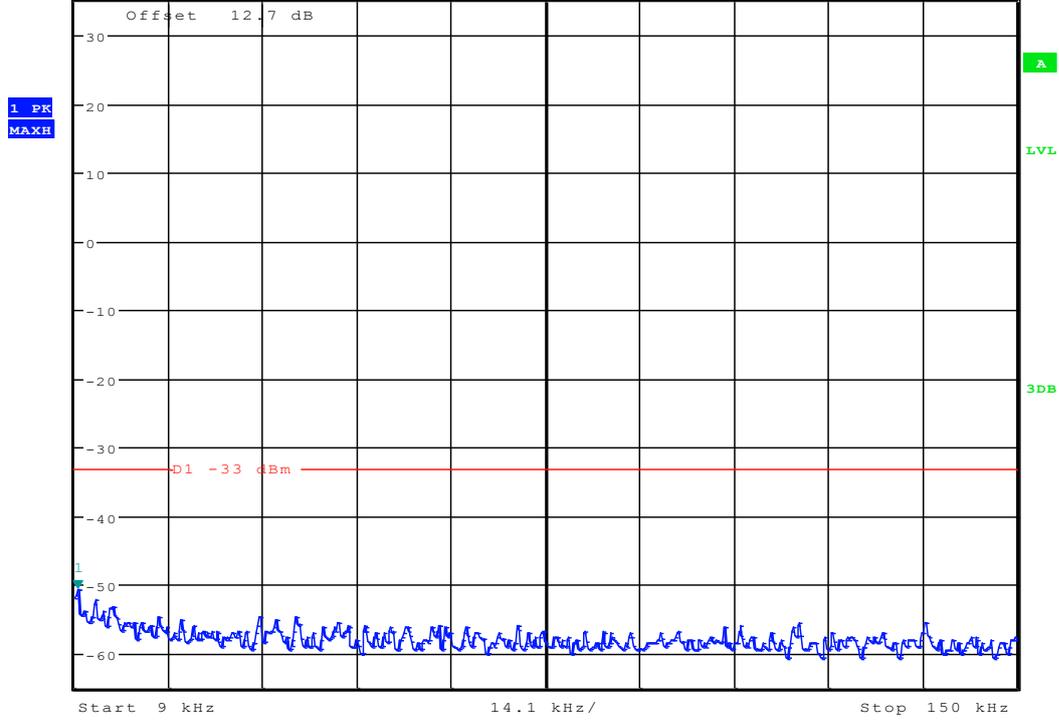


Date: 7.NOV.2012 21:42:08



* RBW 10 kHz Marker 1 [T1]
* VBW 30 kHz -46.86 dBm
SWT 300 ms 150.00000000 kHz


Ref 35 dBm

* Att 35 dB

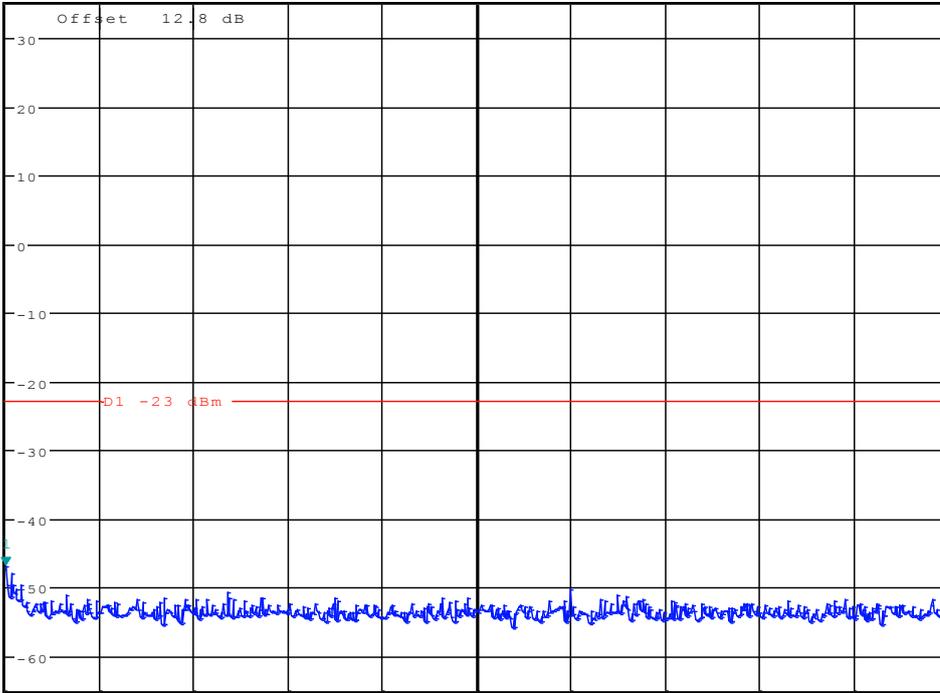

Start 150 kHz 2.985 MHz/ Stop 30 MHz

Date: 7.NOV.2012 21:42:52

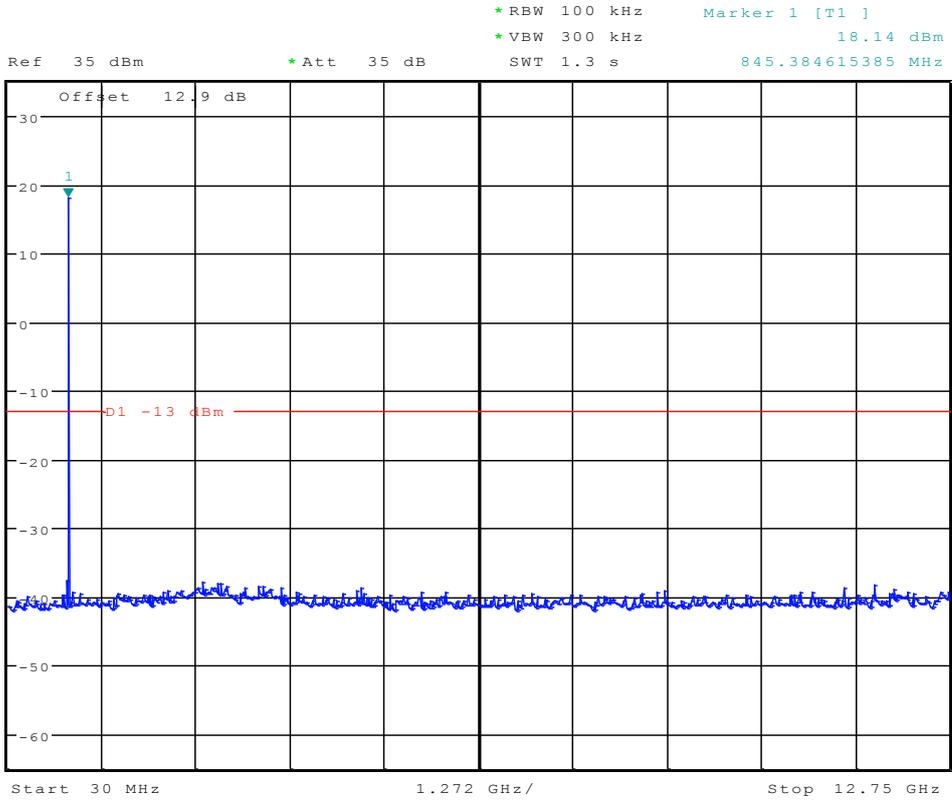

Date: 7.NOV.2012 21:43:36




EVDO subtype 2

Modulation: BPSK

Channel 1013



*RBW 1 kHz Marker 1 [T1]
 *VBW 10 kHz -52.81 dBm
 Ref 35 dBm *Att 35 dB SWT 145 ms 9.903846154 kHz

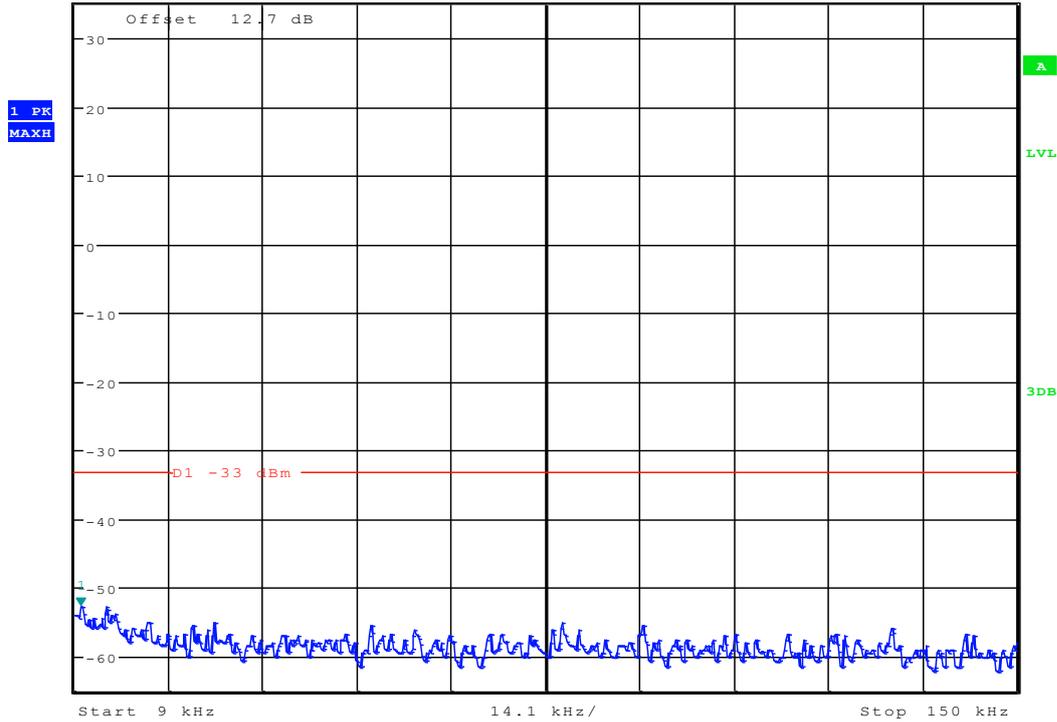

Date: 7.NOV.2012 21:48:26




* RBW 10 kHz Marker 1 [T1]
* VBW 30 kHz -46.26 dBm
SWT 300 ms 197.836538462 kHz

Ref 35 dBm


* Att 35 dB

1 PK
MAXH

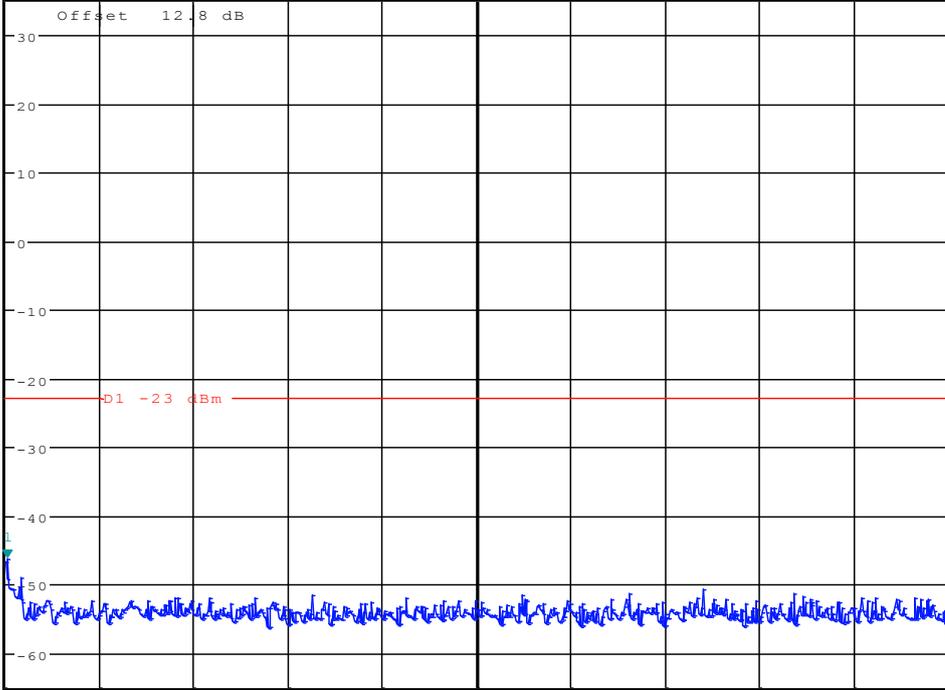

Start 150 kHz 2.985 MHz/ Stop 30 MHz

Date: 7.NOV.2012 21:48:52

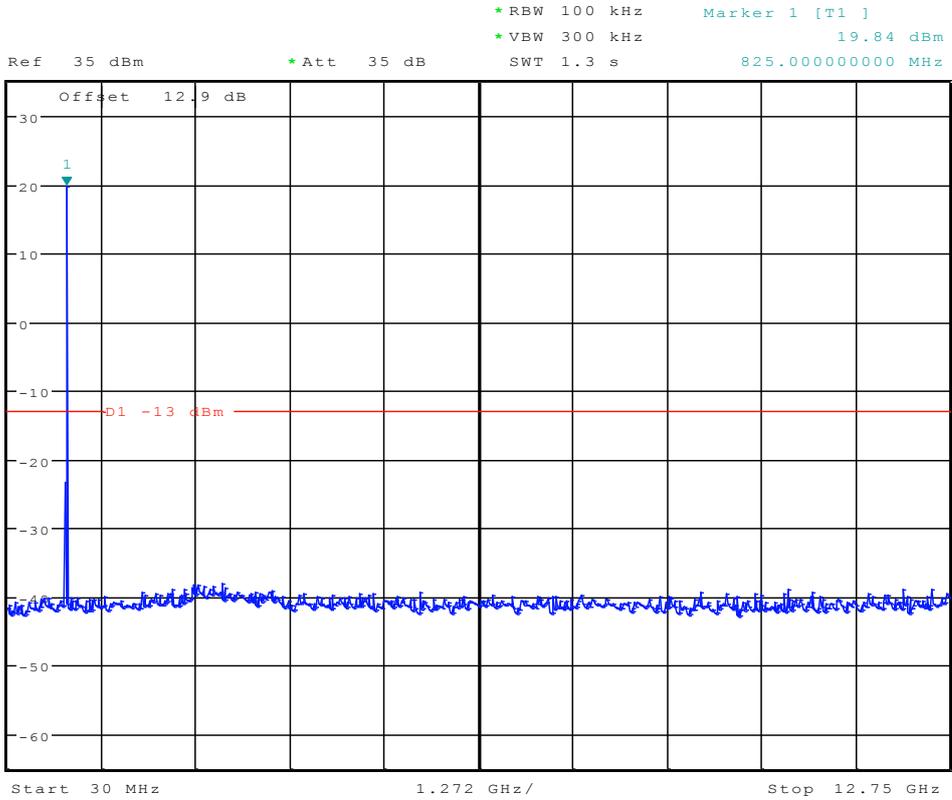


Date: 7.NOV.2012 21:49:18



Channel 384



*RBW 1 kHz Marker 1 [T1]
*VBW 10 kHz -52.59 dBm
SWT 145 ms 9.000000000 kHz

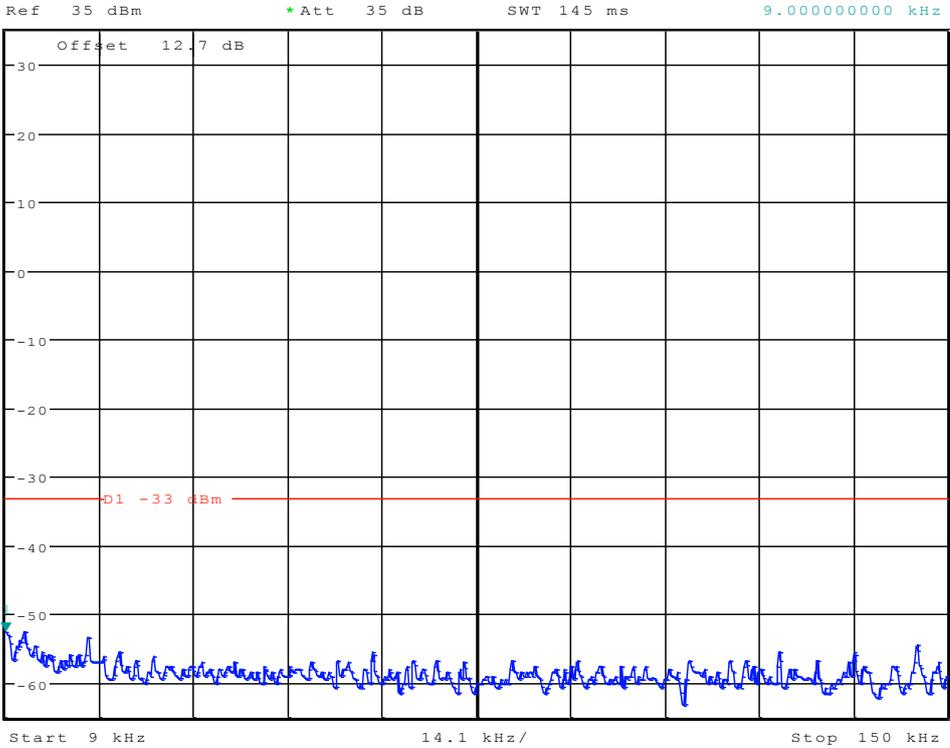


Date: 7.NOV.2012 22:47:38



* RBW 10 kHz Marker 1 [T1]
* VBW 30 kHz -47.14 dBm
SWT 300 ms 197.836538462 kHz


Ref 35 dBm

* Att 35 dB

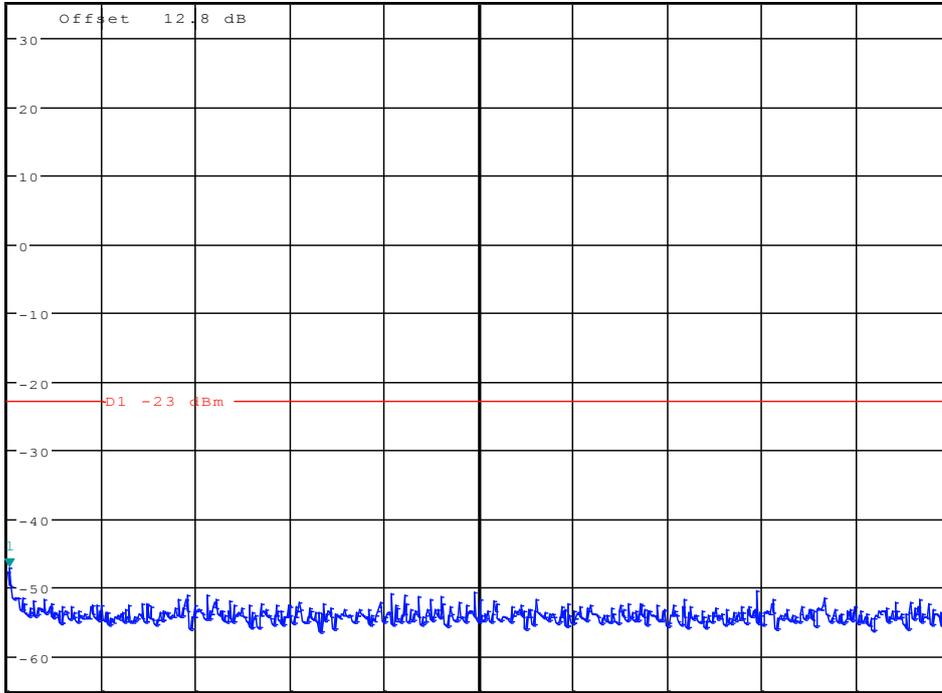

Start 150 kHz 2.985 MHz/ Stop 30 MHz

Date: 7.NOV.2012 22:47:47

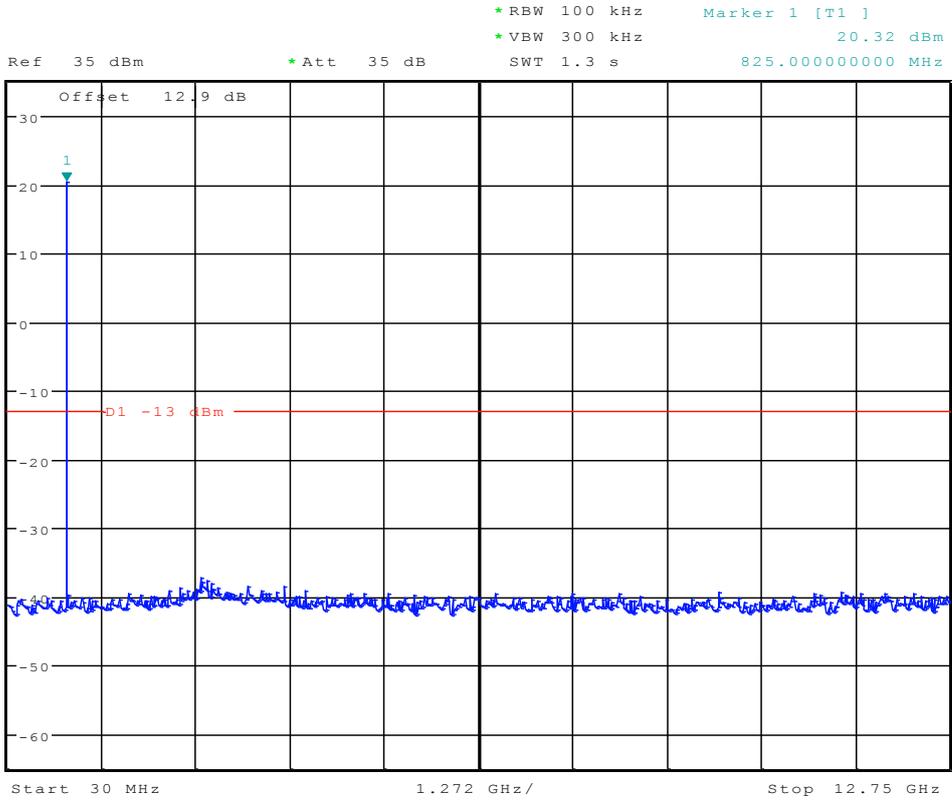


Date: 7.NOV.2012 22:47:56



Channel 777



*RBW 1 kHz Marker 1 [T1]
 *VBW 10 kHz -53.15 dBm
 Ref 35 dBm *Att 35 dB SWT 145 ms 10.355769231 kHz

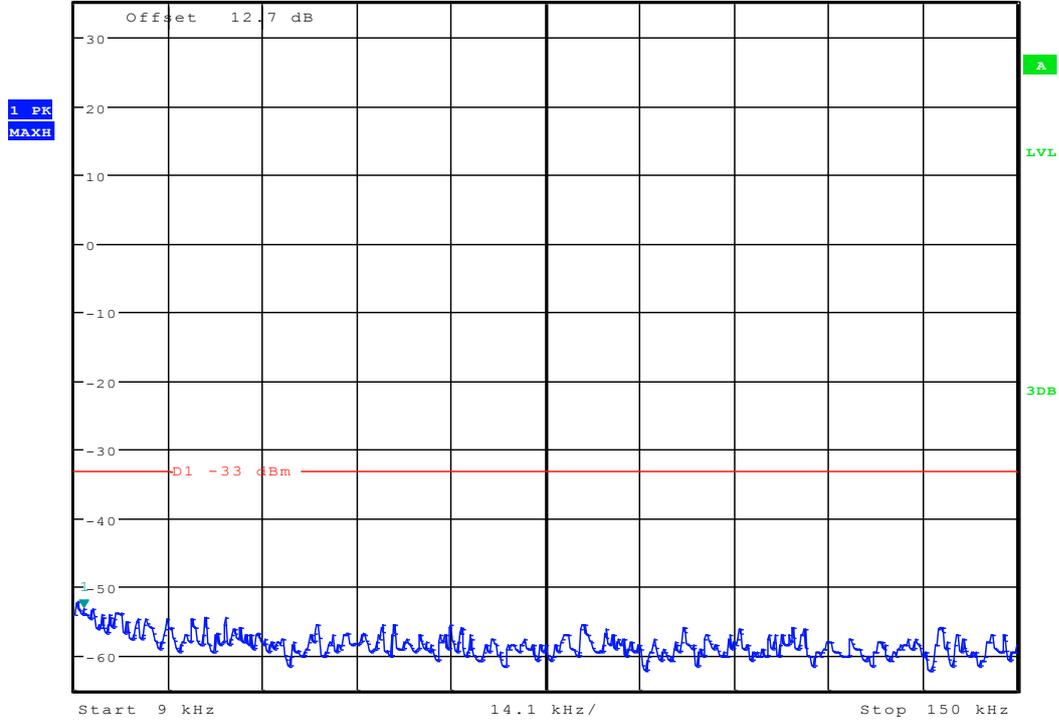

Date: 7.NOV.2012 21:48:43




* RBW 10 kHz Marker 1 [T1]
* VBW 30 kHz -46.97 dBm
SWT 300 ms 197.836538462 kHz


Ref 35 dBm

* Att 35 dB

1 PK
MAXH

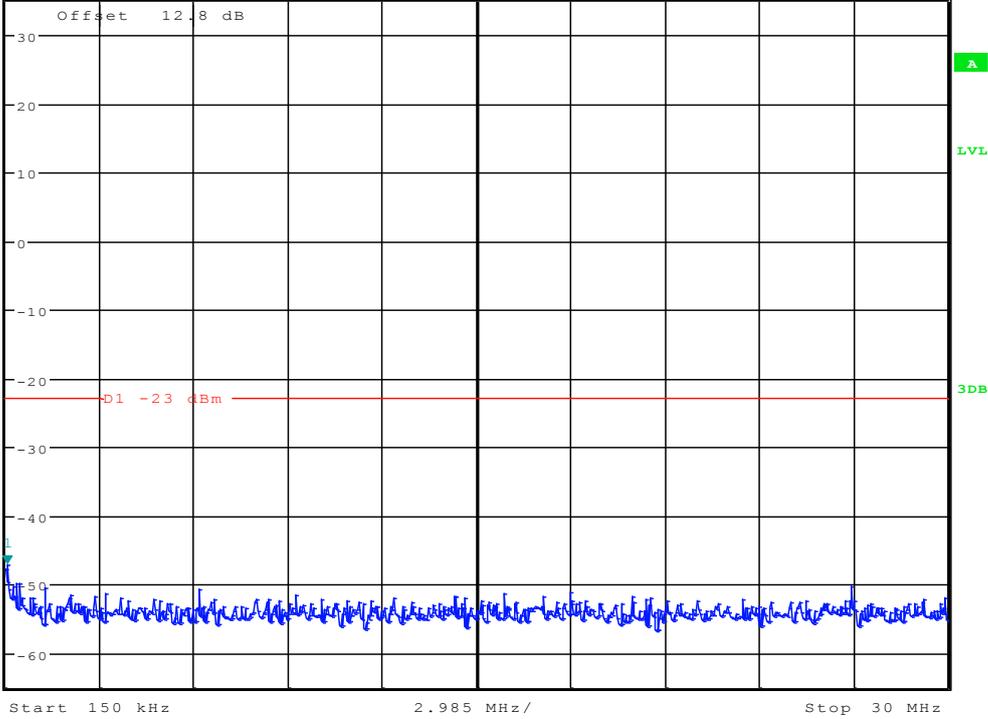

Date: 7.NOV.2012 21:49:09

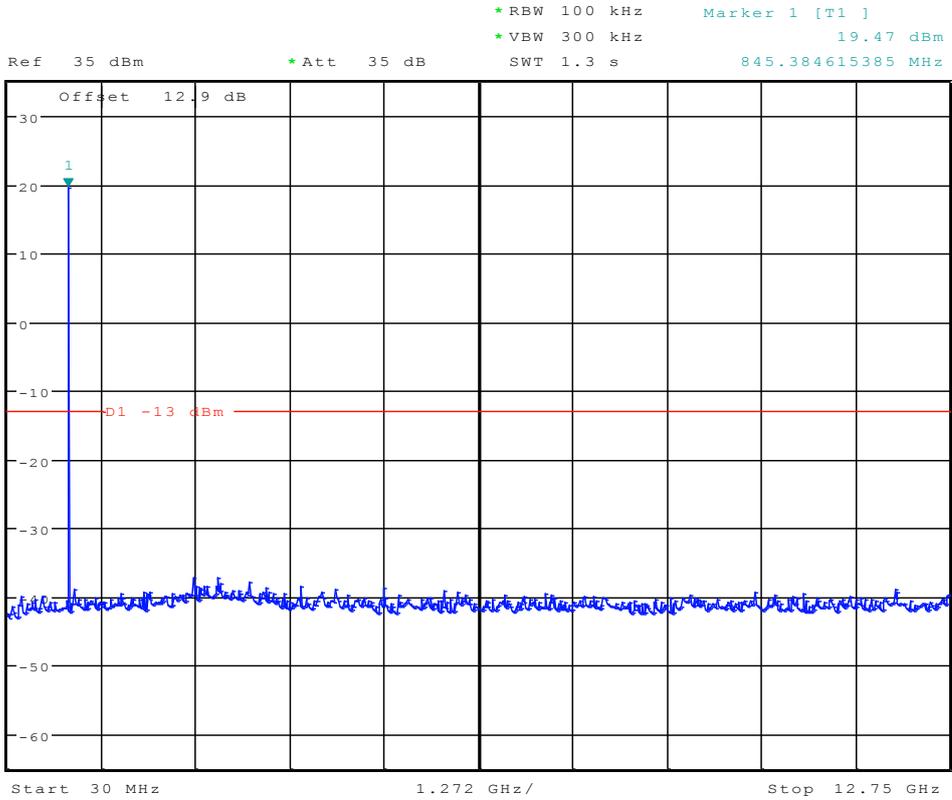


Date: 7.NOV.2012 21:49:35



Modulation: QPSK

Channel 1013

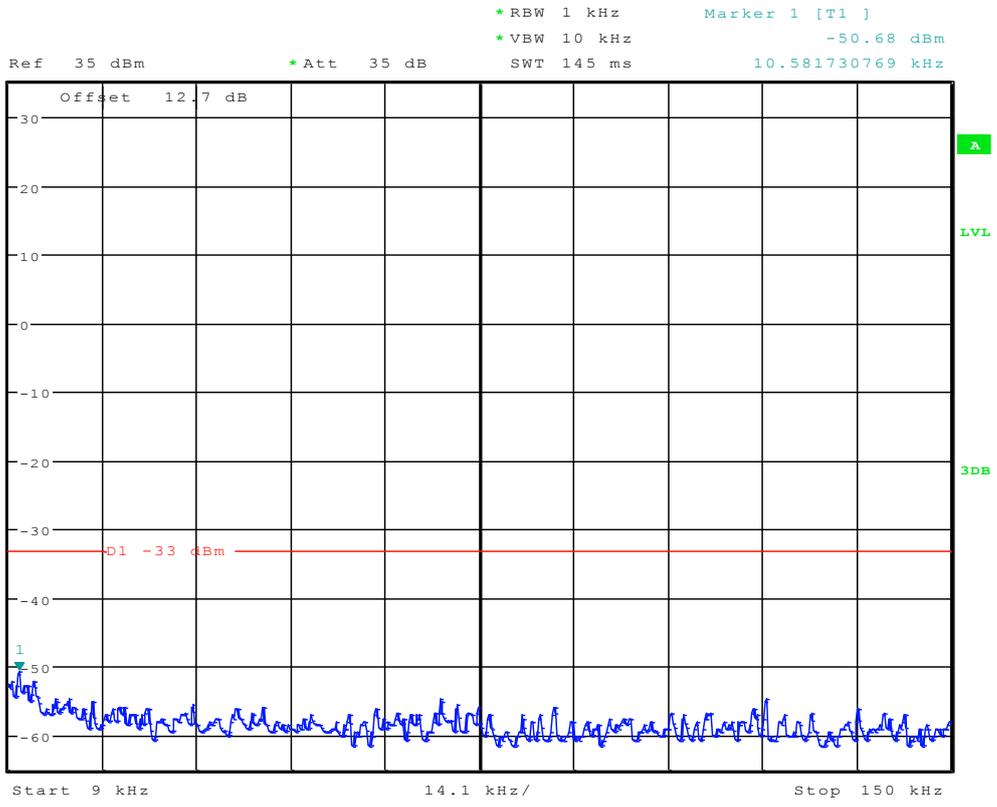


Date: 7.NOV.2012 21:49:43




Ref 35 dBm * Att 35 dB * RBW 10 kHz * VBW 30 kHz Marker 1 [T1] -46.00 dBm
SWT 300 ms 150.00000000 kHz

1 PK
MAXH

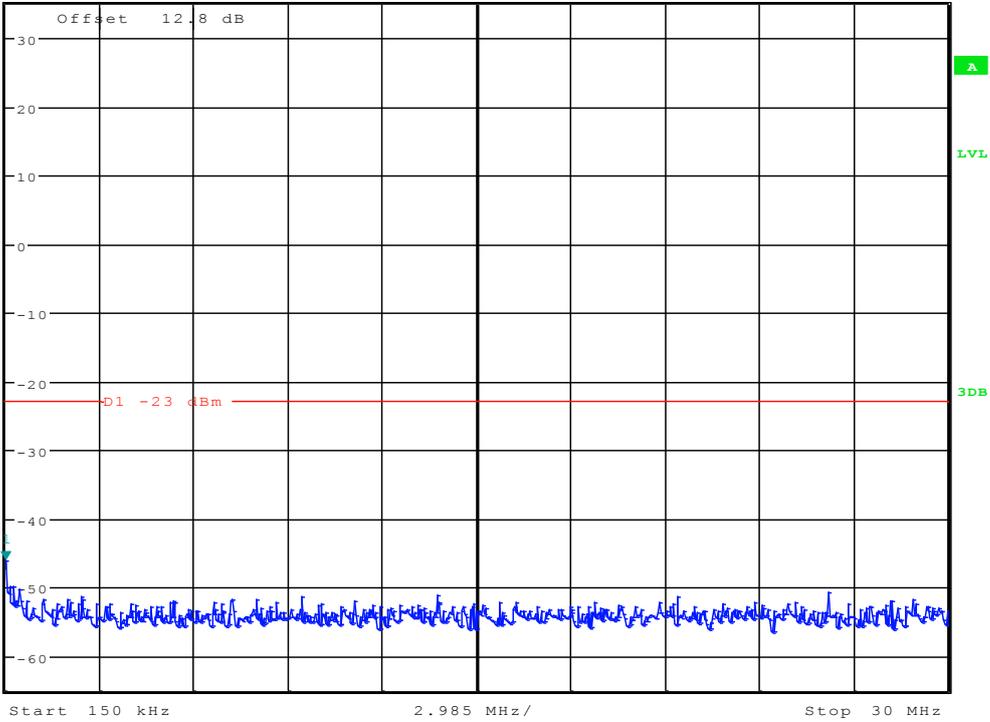

Date: 7.NOV.2012 21:50:09

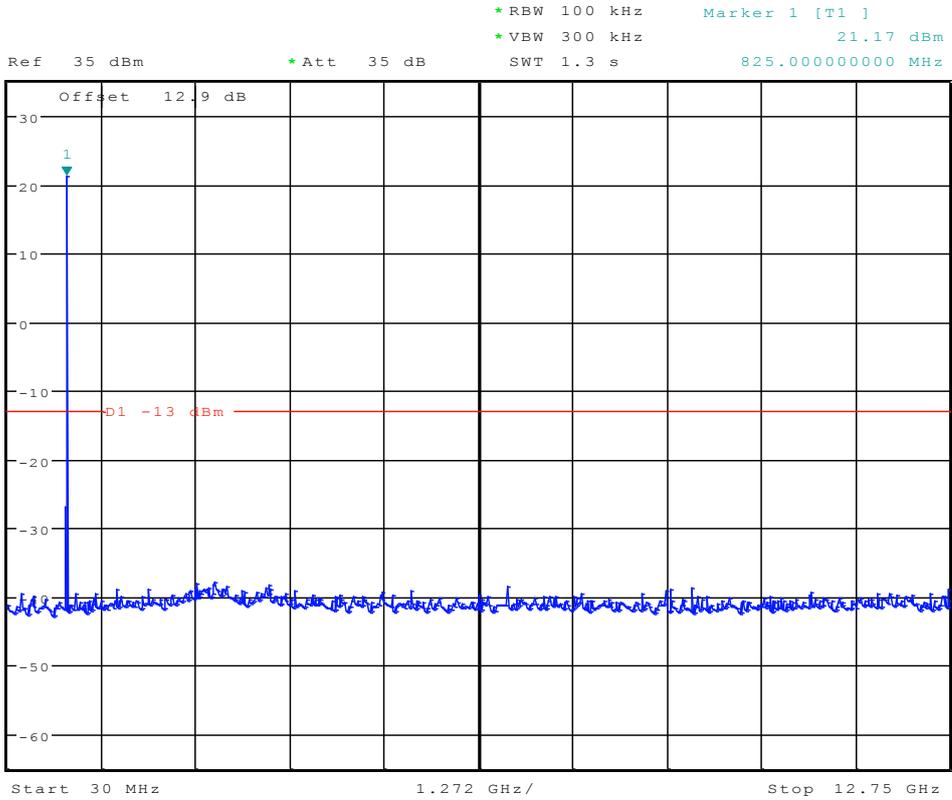


Date: 7.NOV.2012 21:50:35



Channel 384




*RBW 1 kHz Marker 1 [T1]
*VBW 10 kHz -52.07 dBm
Ref 35 dBm *Att 35 dB SWT 145 ms 13.971153846 kHz

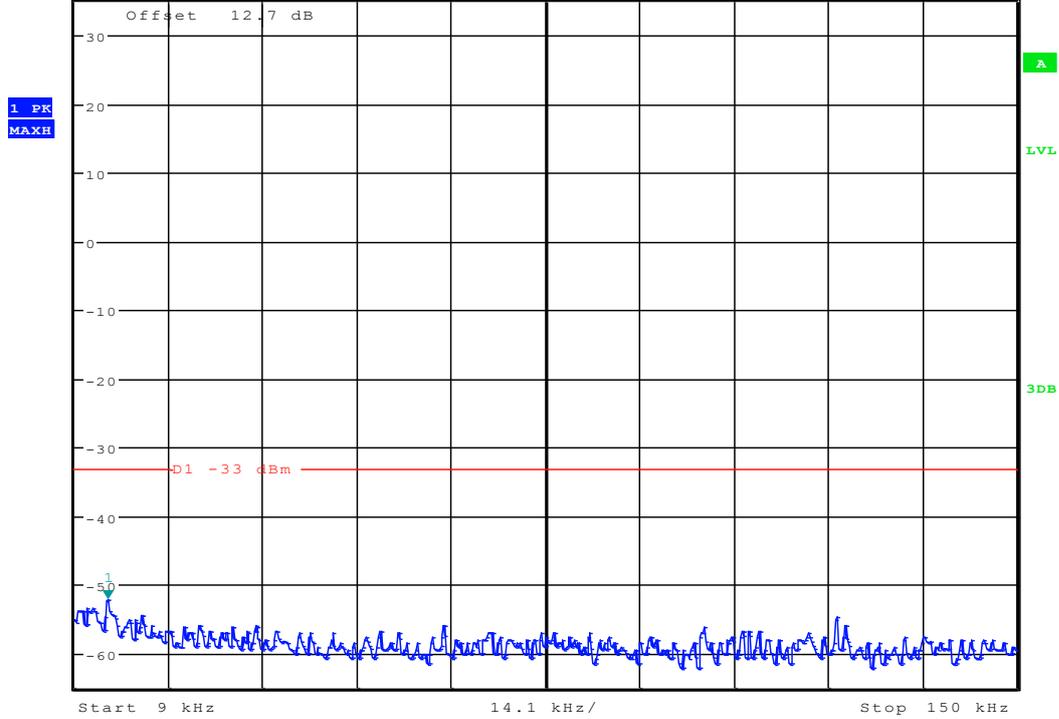


Date: 7.NOV.2012 22:48:05



* RBW 10 kHz Marker 1 [T1]
* VBW 30 kHz -48.66 dBm
SWT 300 ms 150.000000000 kHz

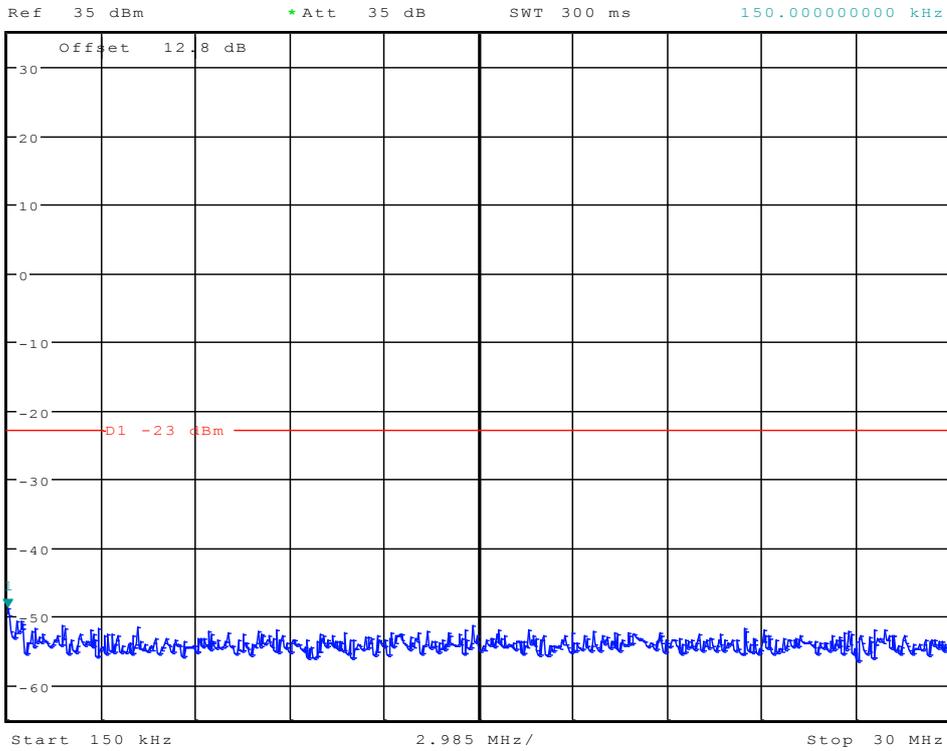

Date: 7.NOV.2012 22:48:14

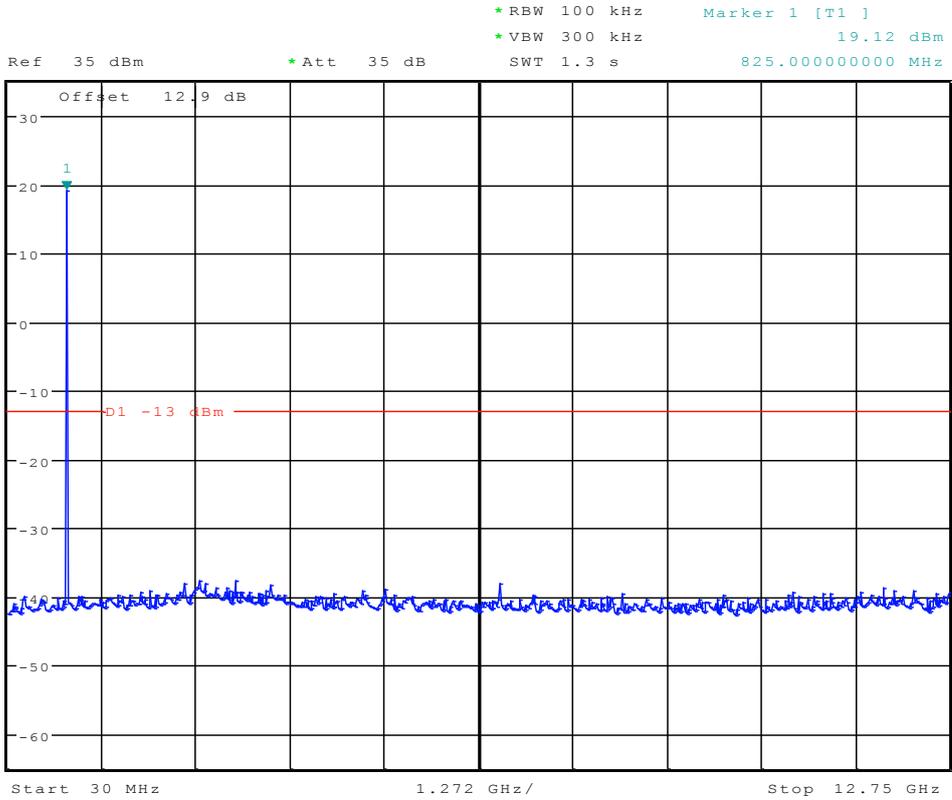


Date: 7.NOV.2012 22:48:23



Channel 777



*RBW 1 kHz Marker 1 [T1] -51.87 dBm
 *VBW 10 kHz
 Ref 35 dBm *Att 35 dB SWT 145 ms 13.067307692 kHz

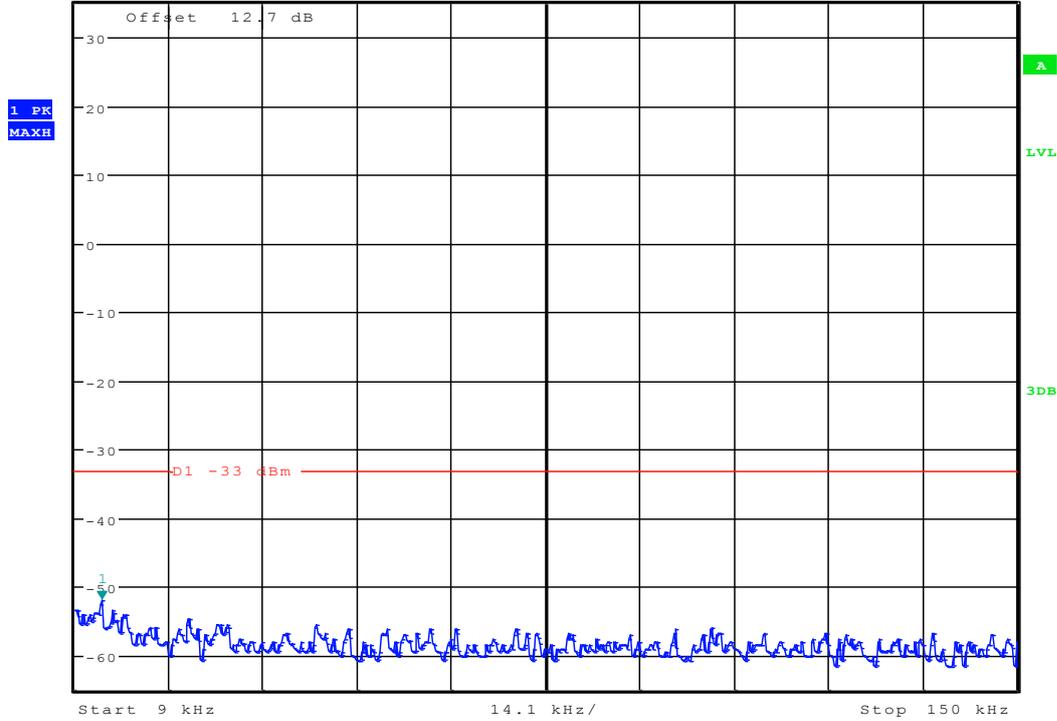


Date: 7.NOV.2012 21:50:00



* RBW 10 kHz Marker 1 [T1]
* VBW 30 kHz -47.80 dBm
SWT 300 ms 197.836538462 kHz


Ref 35 dBm

* Att 35 dB

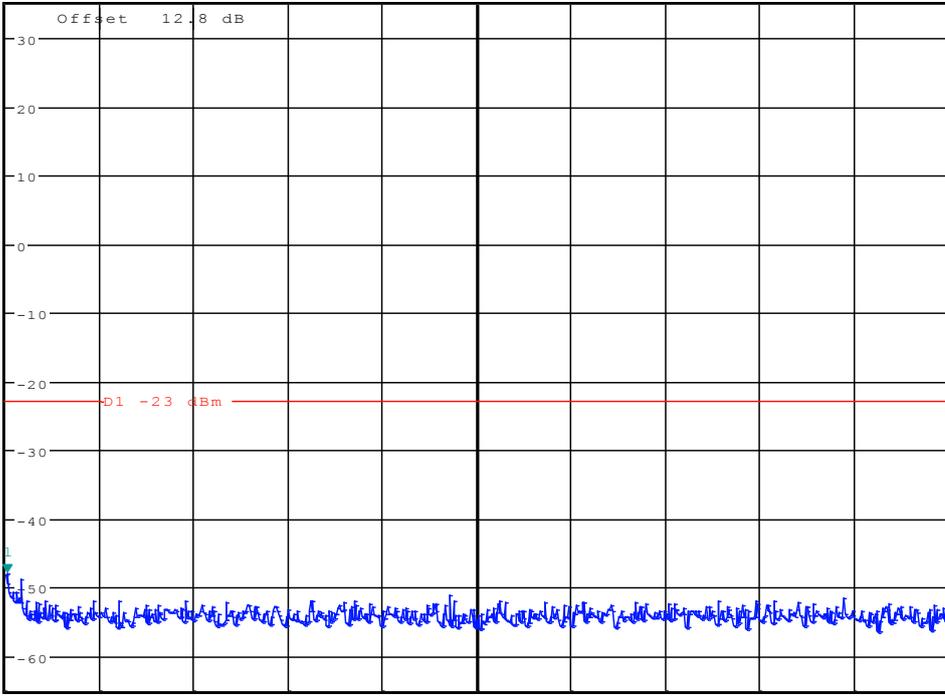

Start 150 kHz 2.985 MHz/ Stop 30 MHz

Date: 7.NOV.2012 21:50:26

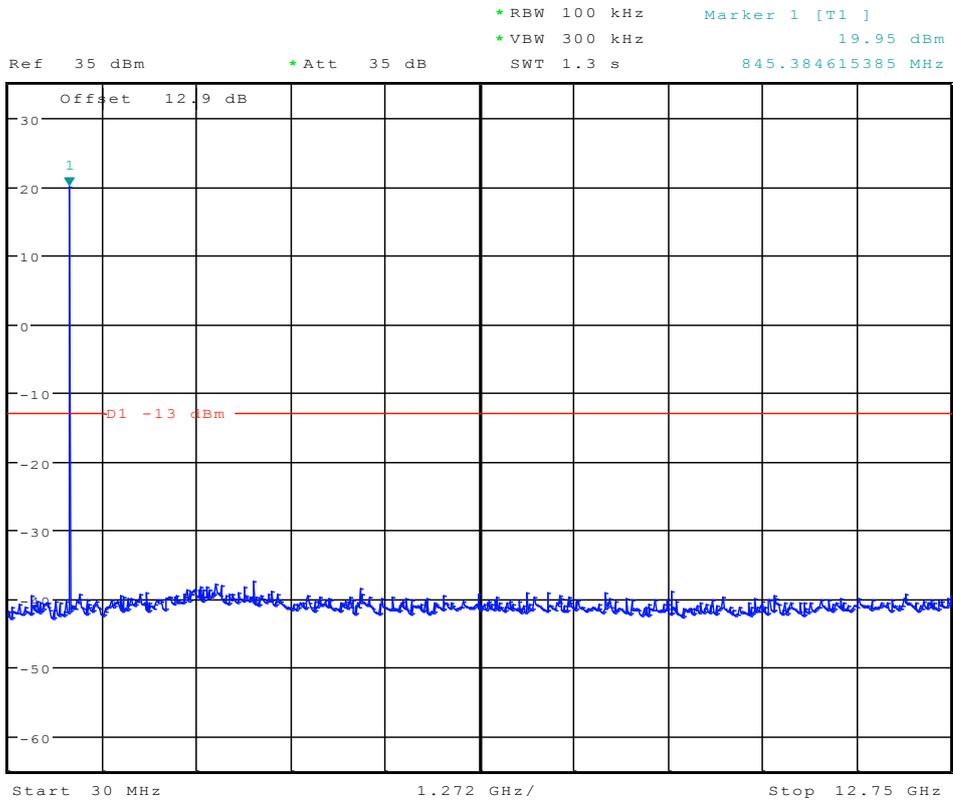

Date: 7.NOV.2012 21:50:52




Modulation: 8PSK

Channel 1013




*RBW 1 kHz Marker 1 [T1]
*VBW 10 kHz -51.12 dBm
Ref 35 dBm *Att 35 dB SWT 145 ms 9.903846154 kHz

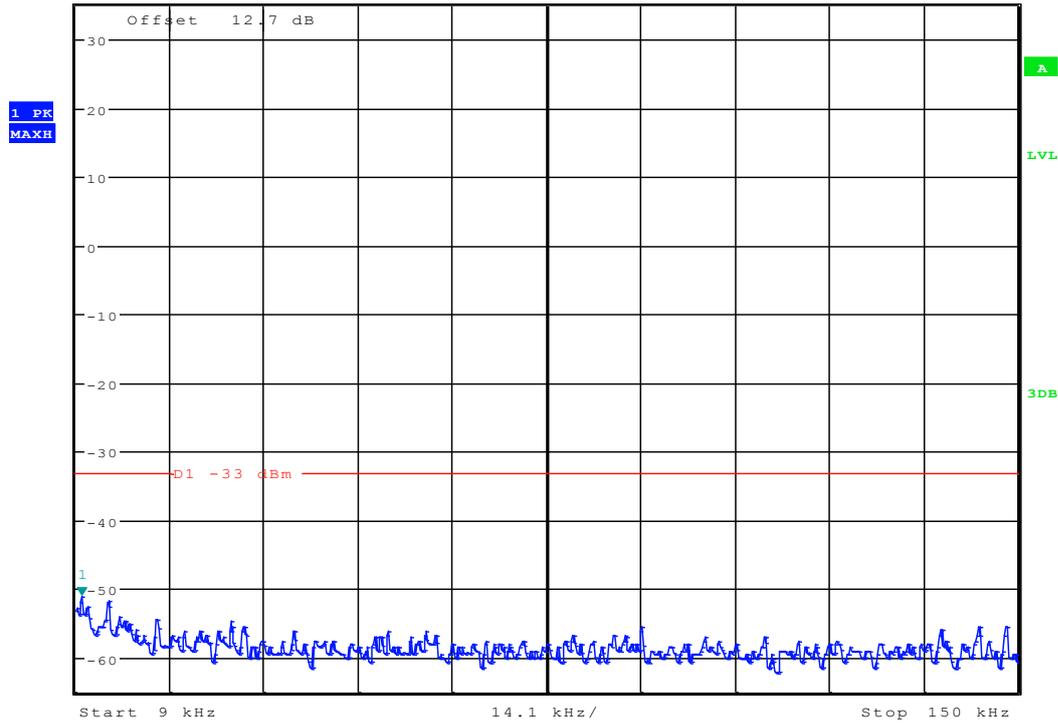


Date: 7.NOV.2012 21:51:01



* RBW 10 kHz Marker 1 [T1]
* VBW 30 kHz -47.74 dBm
SWT 300 ms 150.00000000 kHz

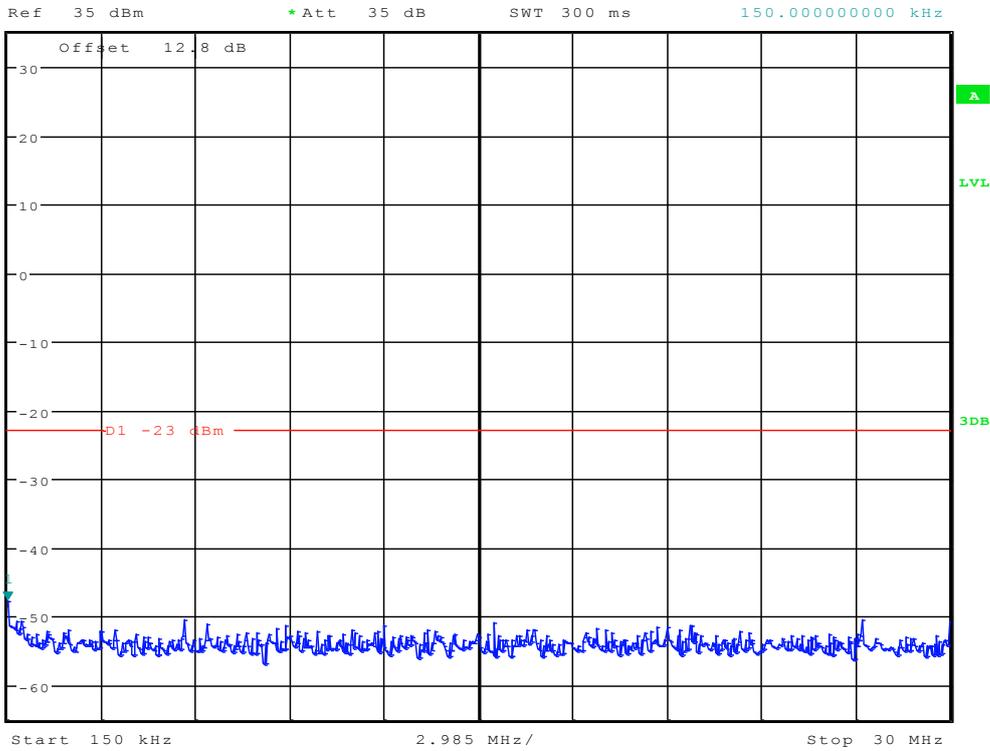

Date: 7.NOV.2012 21:51:26

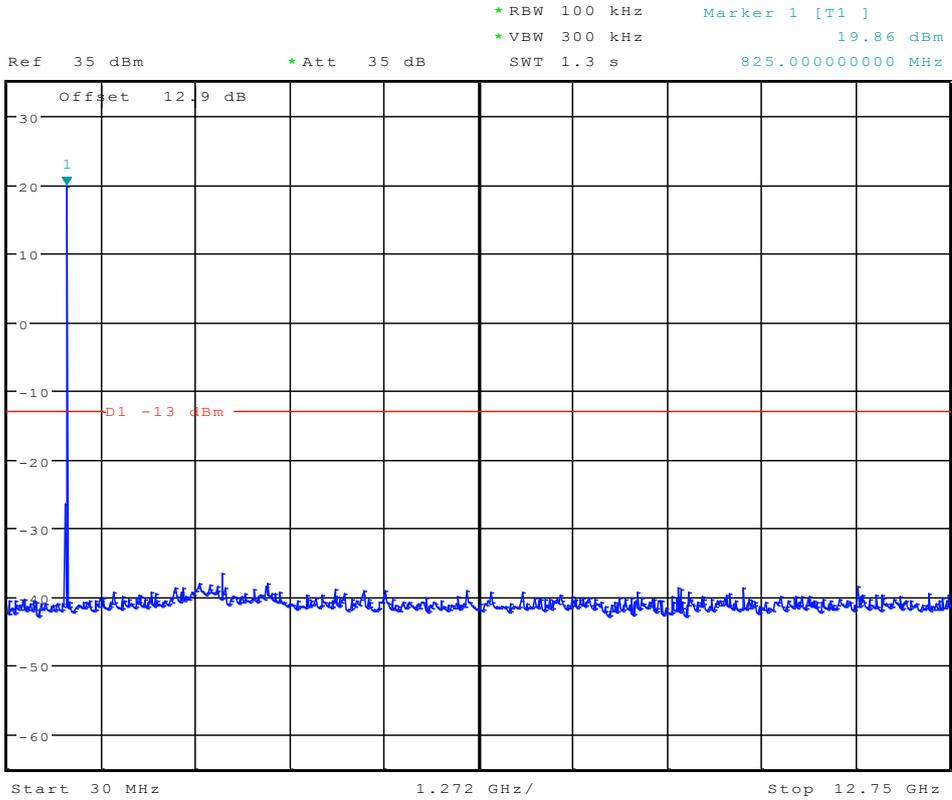

Date: 7.NOV.2012 21:51:52




Channel 384



*RBW 1 kHz Marker 1 [T1]
*VBW 10 kHz -52.59 dBm
SWT 145 ms 12.389423077 kHz

Ref 35 dBm *Att 35 dB

1 PK
MAXH

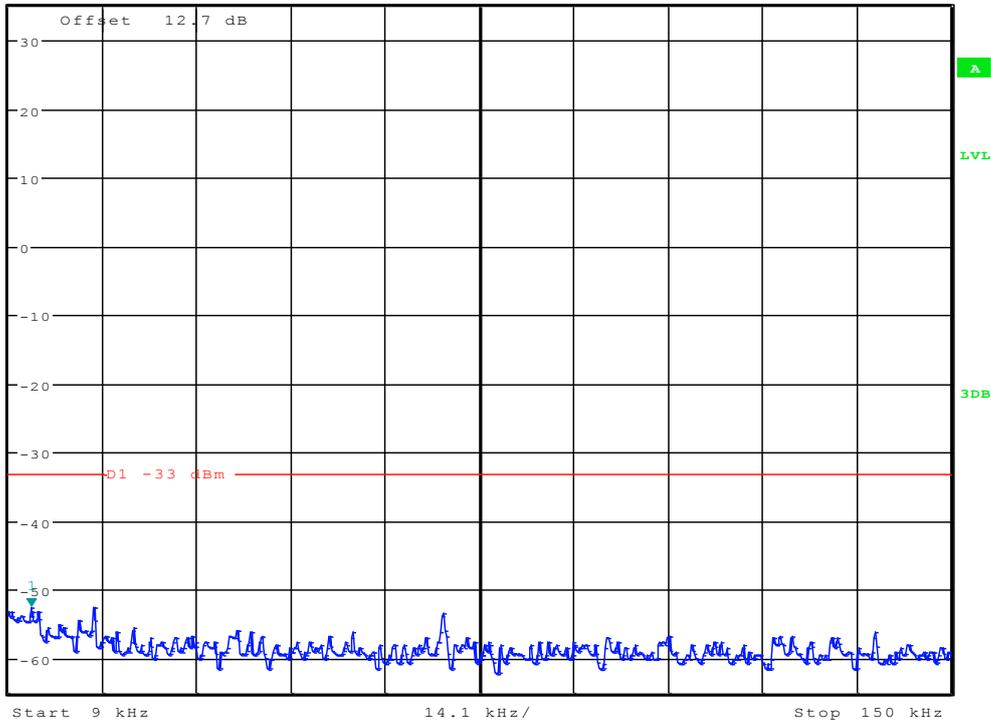


Date: 7.NOV.2012 22:48:31




* RBW 10 kHz Marker 1 [T1]
* VBW 30 kHz -47.80 dBm
SWT 300 ms 197.836538462 kHz

Ref 35 dBm

* Att 35 dB

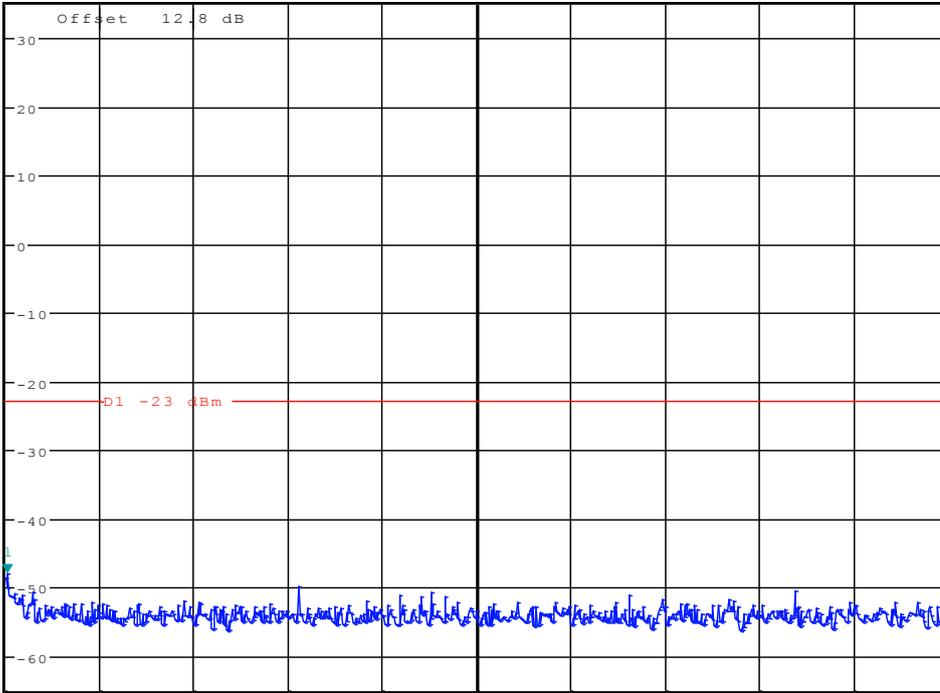

Date: 7.NOV.2012 22:48:40

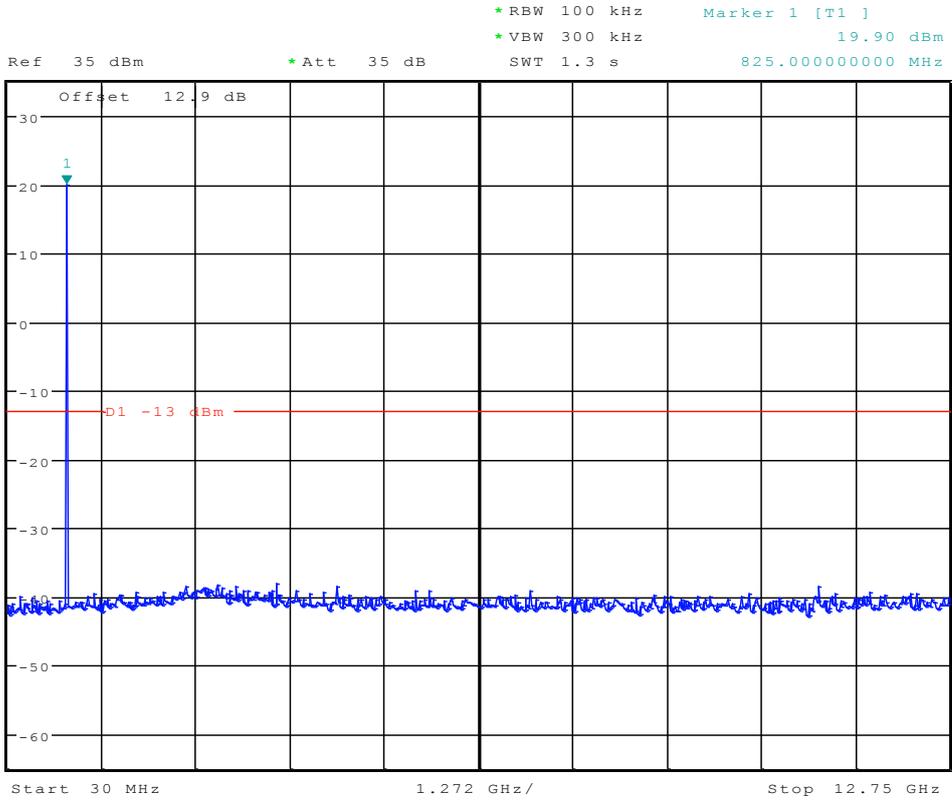


Date: 7.NOV.2012 22:48:49



Channel 777



*RBW 1 kHz Marker 1 [T1]
 *VBW 10 kHz -50.51 dBm
 Ref 35 dBm *Att 35 dB SWT 145 ms 10.129807692 kHz

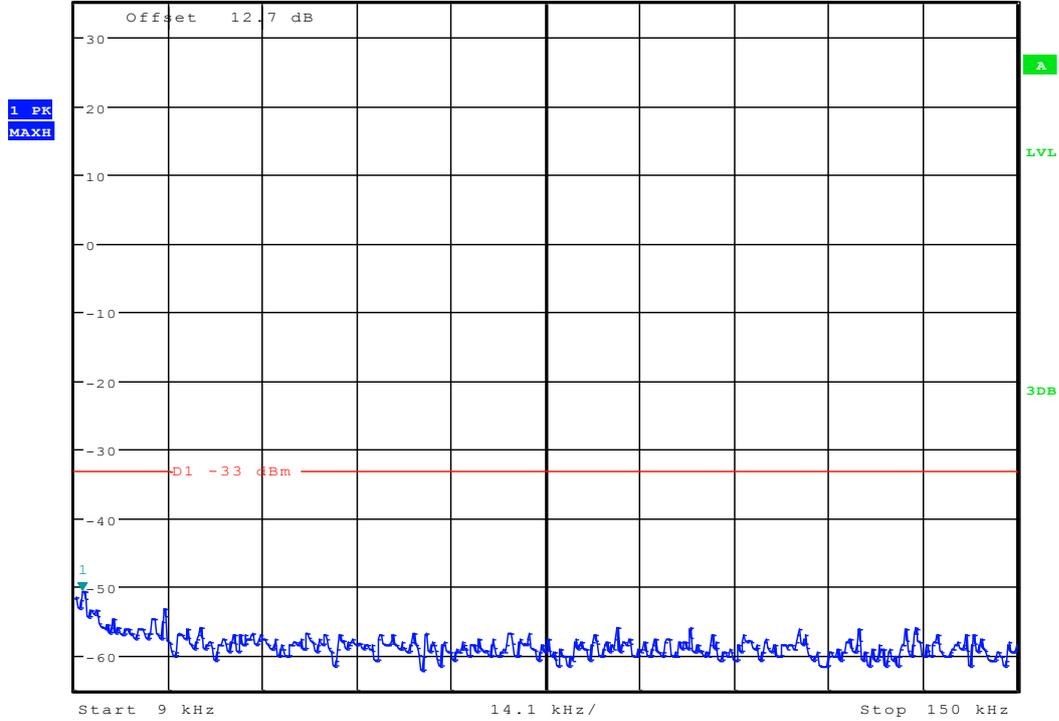

Date: 7.NOV.2012 21:51:17




* RBW 10 kHz Marker 1 [T1]
* VBW 30 kHz -47.14 dBm
SWT 300 ms 197.836538462 kHz

Ref 35 dBm


* Att 35 dB

1 PK
MAXH

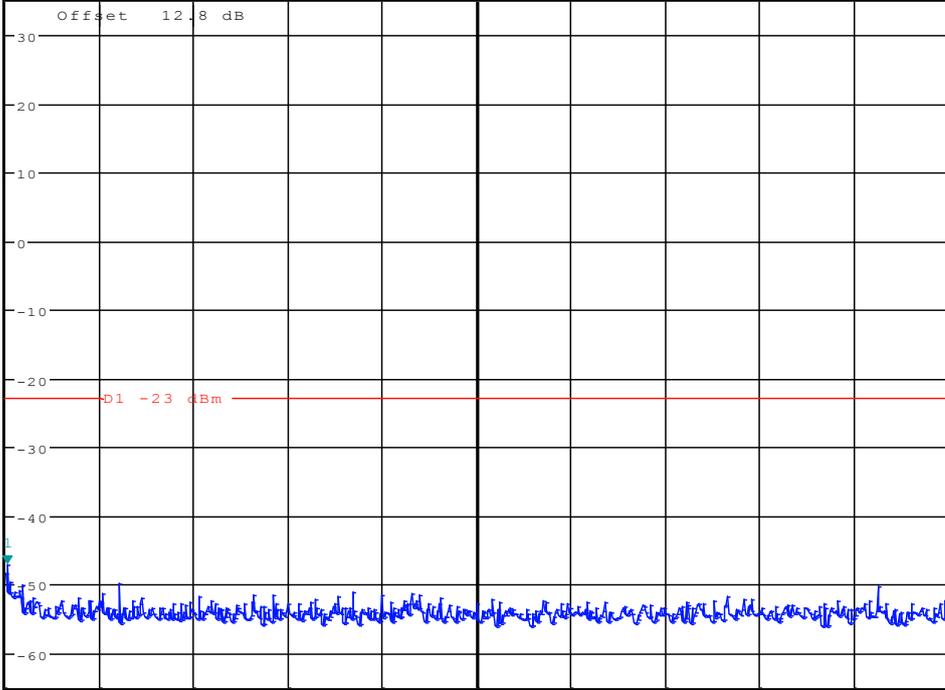

Start 150 kHz 2.985 MHz/ Stop 30 MHz

Date: 7.NOV.2012 21:51:43

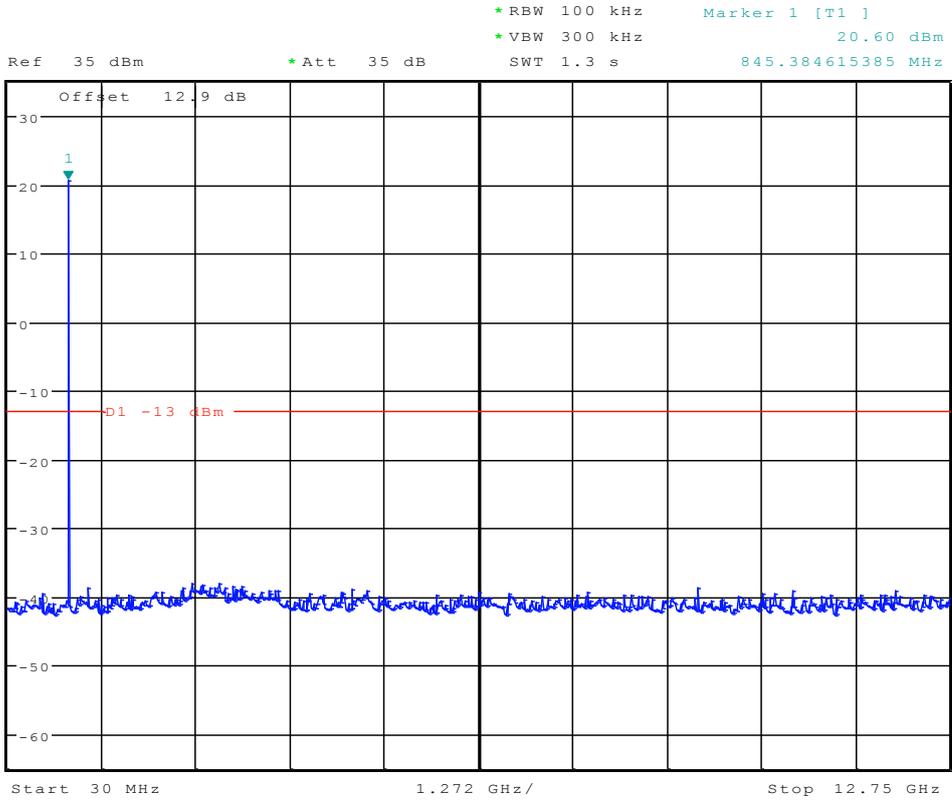

Date: 7.NOV.2012 21:52:09

-----END-----




Appendix F


Radiated spurious emission

CDMA 800


(9 kHz-30MHz)

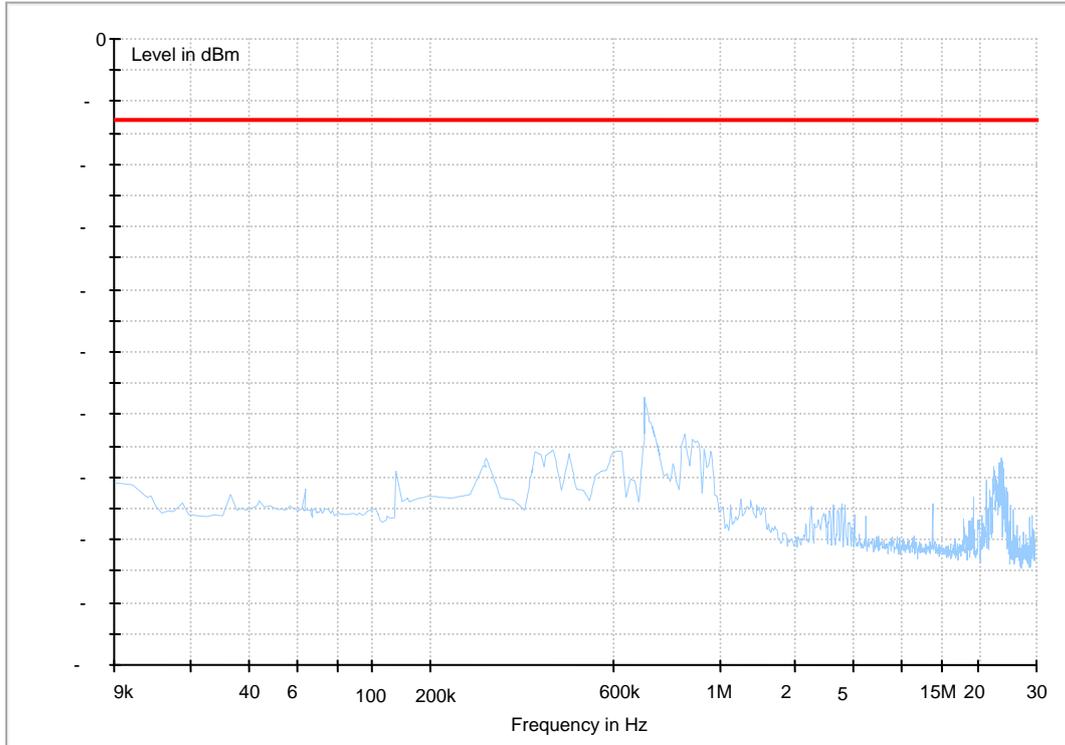

(30MHz~3GHz)

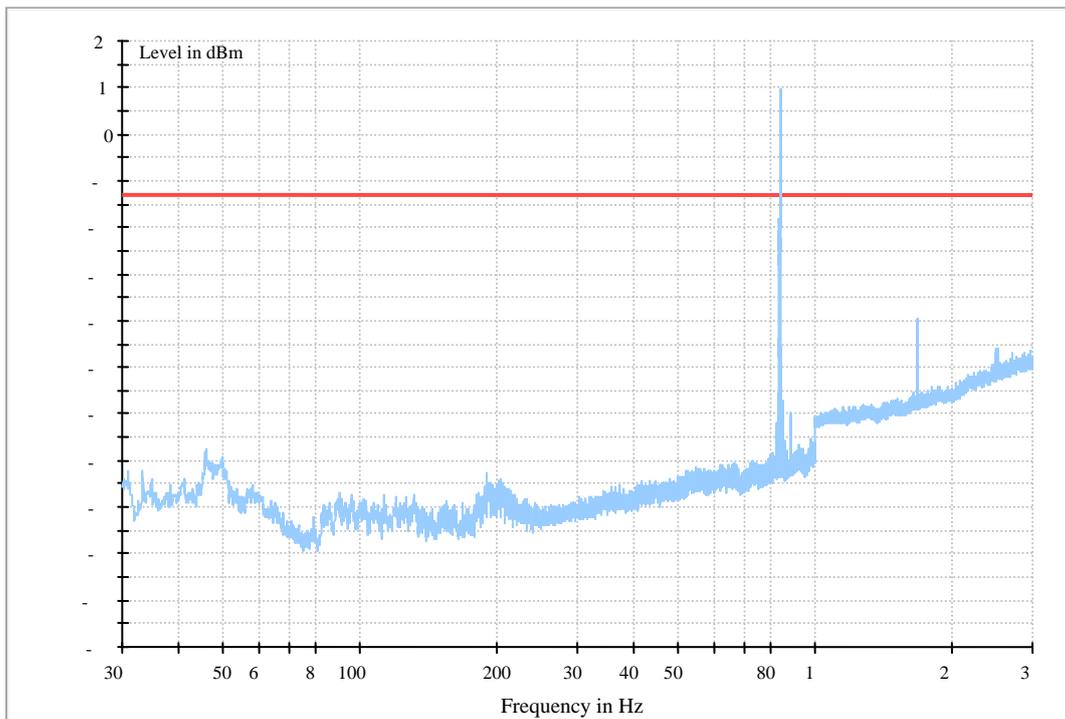


(3GHz~18GHz)

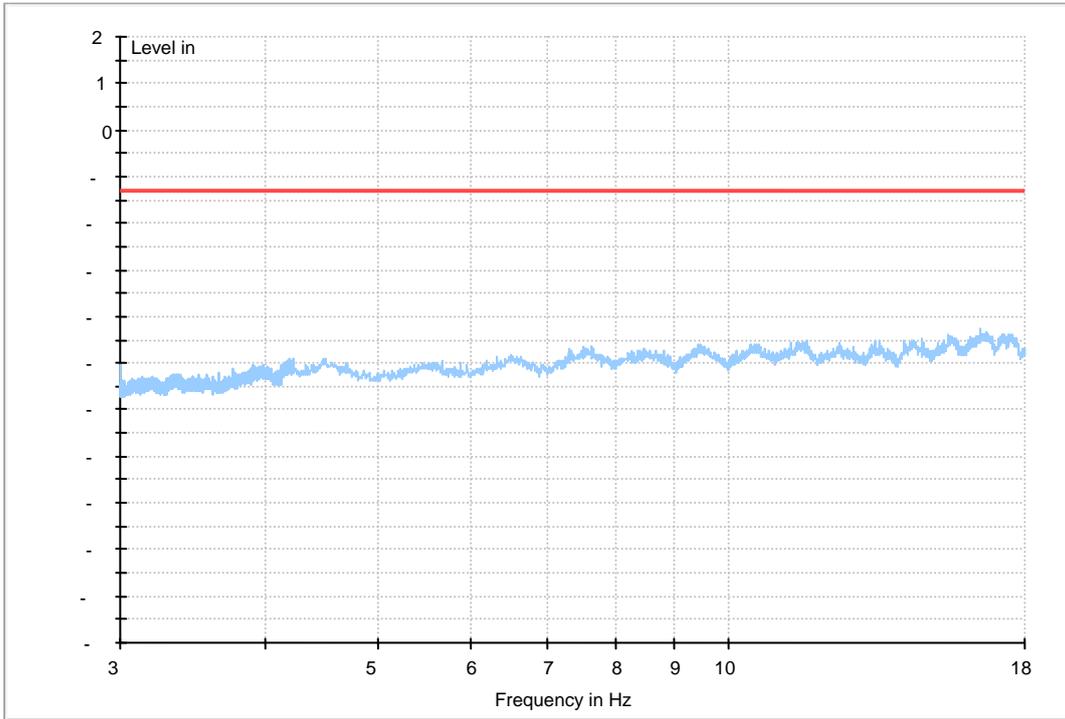


EVDO 800 Rev.0


(9kHz-30MHz)

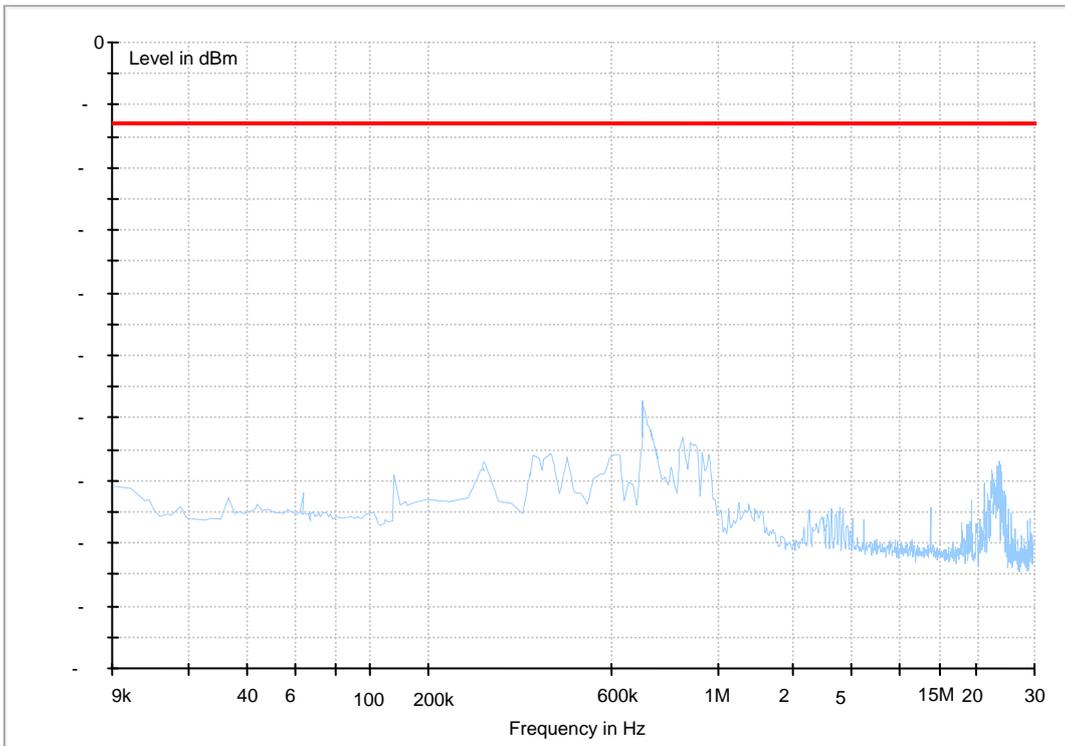

(30MHz~3GHz)

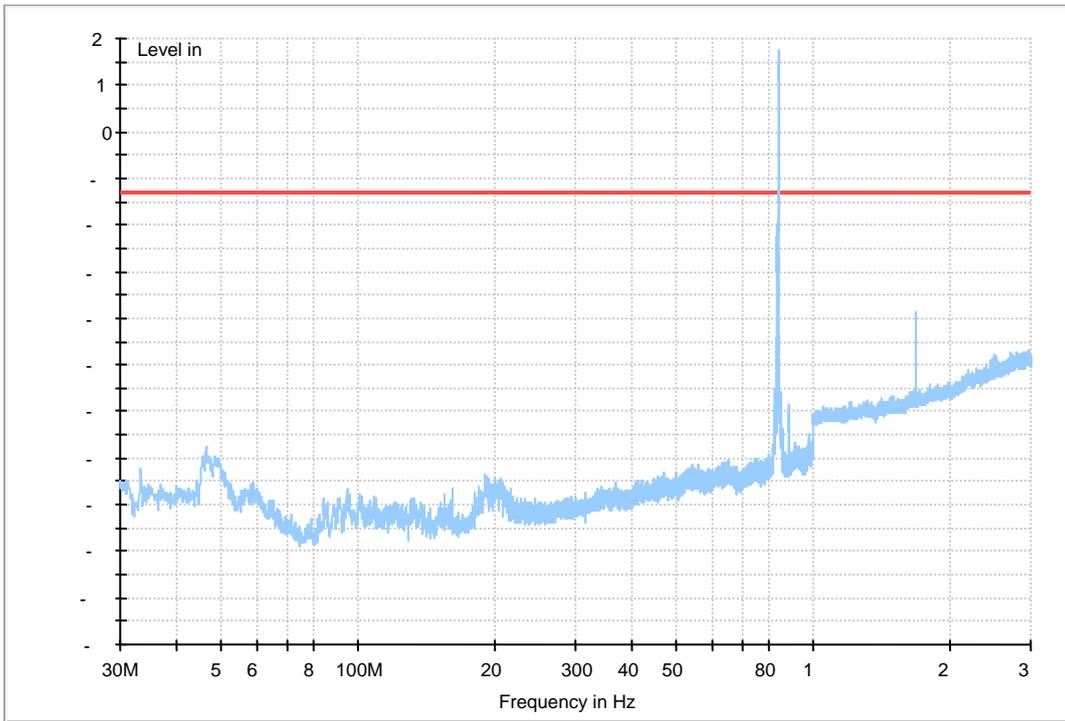


(3GHz~18GHz)

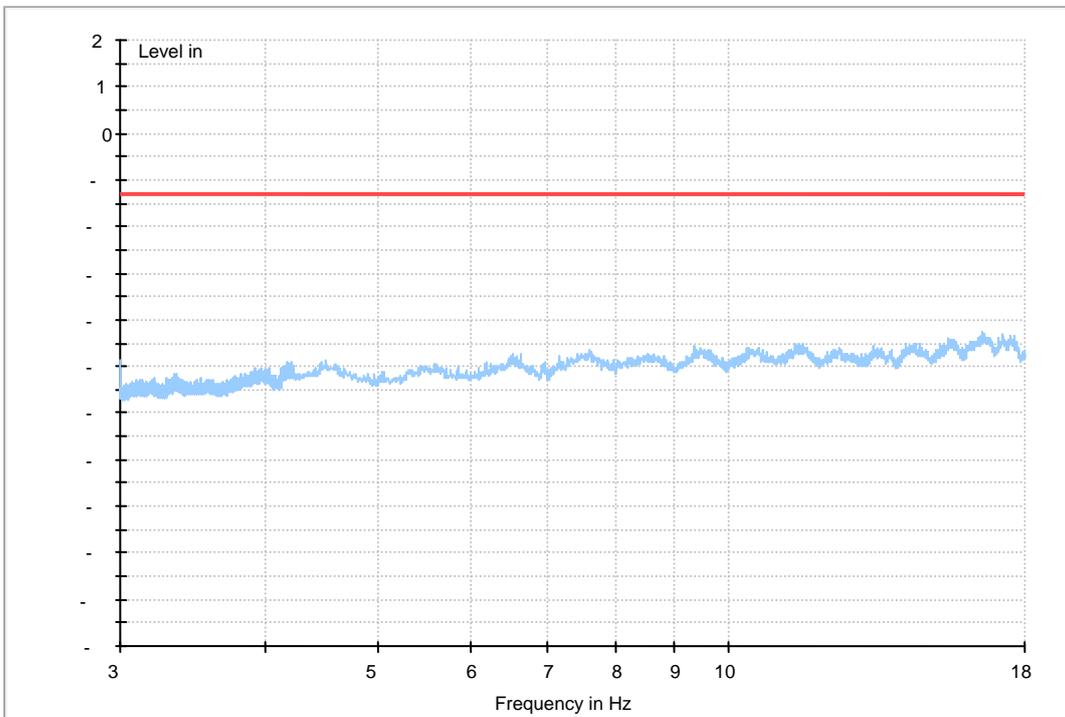


EVDO 800 Rev.A


(9kHz-30MHz)

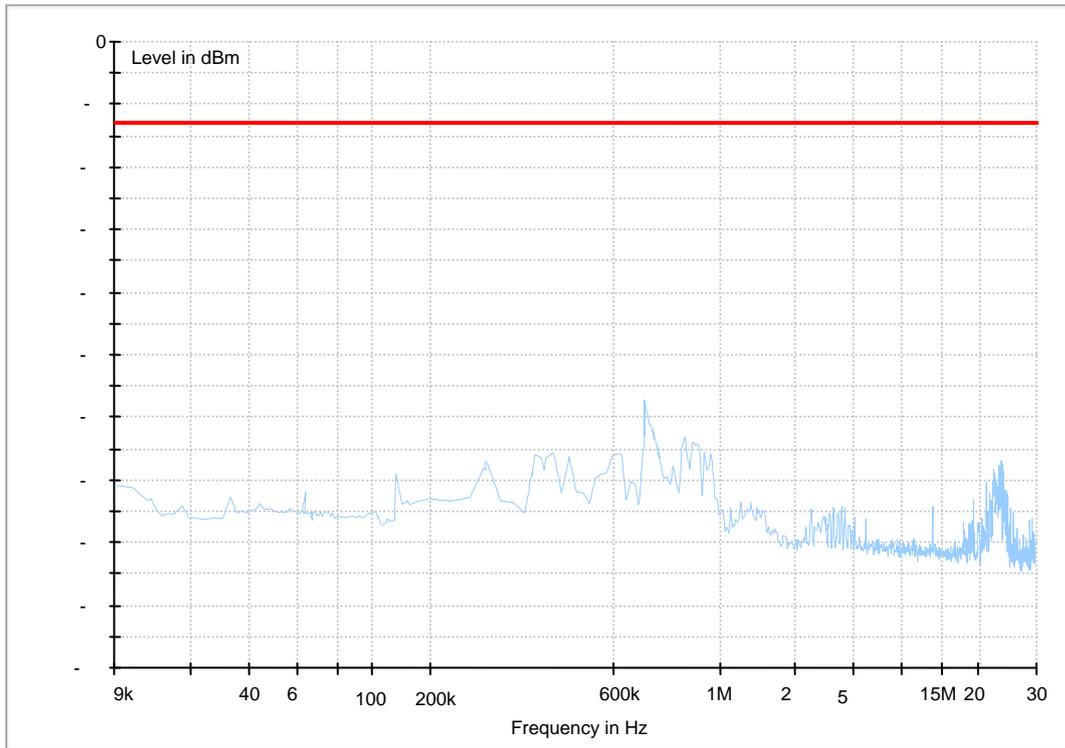

(30MHz~3GHz)

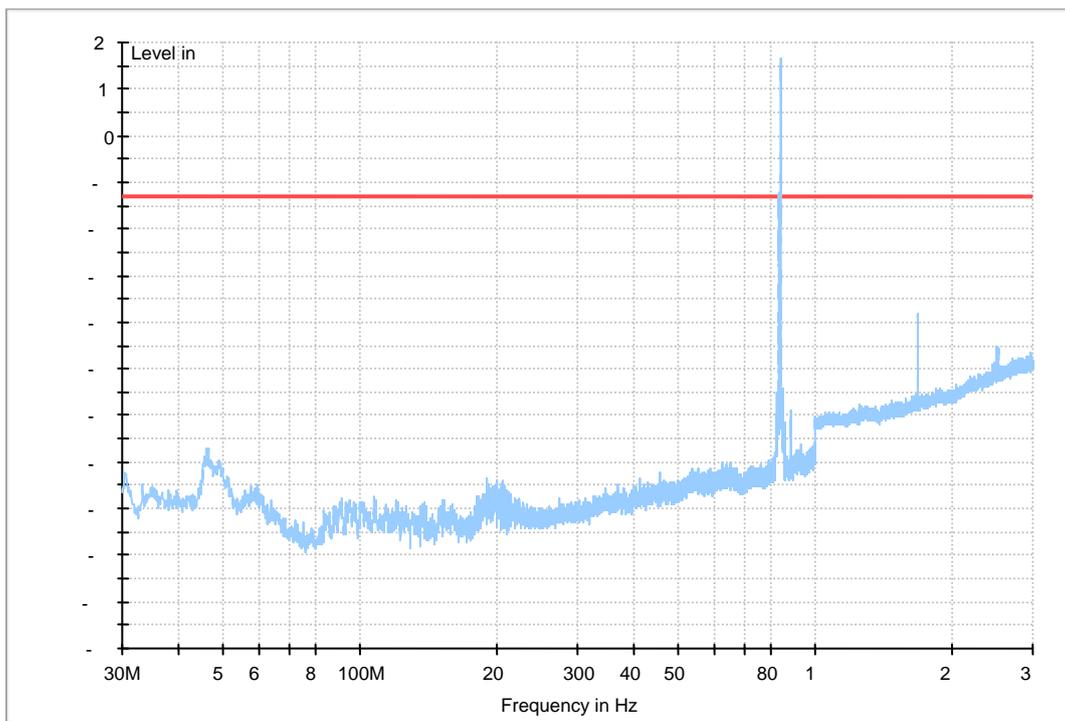

(3GHz~18GHz)

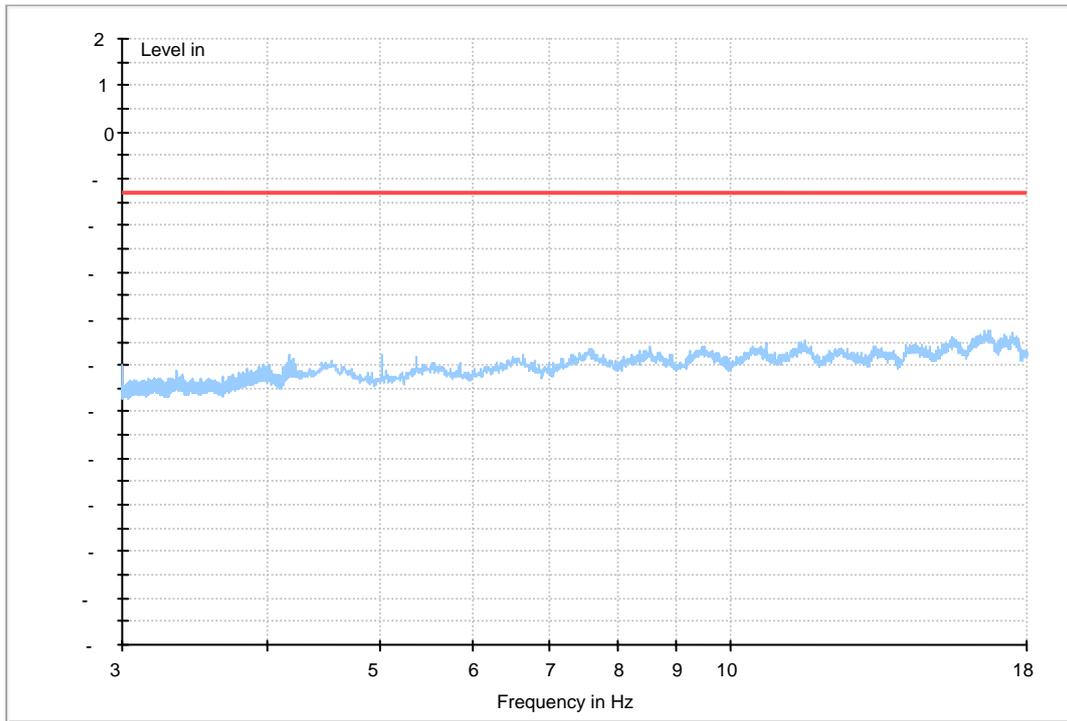



Appendix G

Frequency Stability According to FCC Part 2.1055& Part 22.355



Frequency Error vs. Temperature:

NOTE: All relevant operation modes have been tested, and the worst case data is included in this report.

Table 1 Measurement Results CDMA&EVDO

Test Mode	RF Ch.	Volt.	Temp.	Freq. Error [Hz]	Freq. vs. rated [ppm]	Freq. vs. 20 °C [ppm]	Limit [ppm]	Verdict
TM 1	M	VN	-30 °C	-13	-0.01554	---	±2.5	Pass
			-20 °C	14	0.01674	---	±2.5	Pass
			-10 °C	10	0.01195	---	±2.5	Pass
			0 °C	12	0.01435	---	±2.5	Pass
			10 °C	-6	-0.00717	---	±2.5	Pass
			20 °C	-18	-0.02152	---	±2.5	Pass
			30 °C	-23	-0.02749	---	±2.5	Pass
			40 °C	-20	-0.02391	---	±2.5	Pass
TM 3	M	VN	-30 °C	26	0.03108	---	±2.5	Pass
			-20 °C	-17	-0.02032	---	±2.5	Pass
			-10 °C	23	0.02749	---	±2.5	Pass
			0 °C	14	0.01674	---	±2.5	Pass
			10 °C	-9	-0.01076	---	±2.5	Pass
			20 °C	-8	-0.00956	---	±2.5	Pass
			30 °C	-23	-0.02749	---	±2.5	Pass
			40 °C	-11	-0.01315	---	±2.5	Pass
Subtype 0	M	VN	-30 °C	-6	-0.00717	---	±2.5	Pass
			-20 °C	-12	-0.01435	---	±2.5	Pass
			-10 °C	22	0.02630	---	±2.5	Pass
			0 °C	-19	-0.02271	---	±2.5	Pass
			10 °C	-7	-0.00837	---	±2.5	Pass
			20 °C	25	0.02989	---	±2.5	Pass
			30 °C	16	0.01913	---	±2.5	Pass
			40 °C	22	0.02630	---	±2.5	Pass
Subtype 2	M	VN	-30 °C	-18	-0.02152	---	±2.5	Pass
			-20 °C	15	0.01793	---	±2.5	Pass
			-10 °C	-11	-0.01315	---	±2.5	Pass
			0 °C	28	0.03347	---	±2.5	Pass



Test Mode	RF Ch.	Volt.	Temp.	Freq. Error [Hz]	Freq. vs. rated [ppm]	Freq. vs. 20 °C [ppm]	Limit [ppm]	Verdict
			10 °C	19	0.02271	---	±2.5	Pass
			20 °C	-9	-0.01076	---	±2.5	Pass
			30 °C	27	0.03228	---	±2.5	Pass
			40 °C	24	0.02869	---	±2.5	Pass
			50 °C	17	0.02032	---	±2.5	Pass



Frequency Error vs. Voltage:

Table 2 Measurement Results CDMA&EVDO

Test Mode	RF Ch.	Temp.	Volt.	Freq. Error [Hz]	Freq. vs. rated [ppm]	Freq. vs. 20 °C [ppm]	Limit [ppm]	Verdict
TM 1	M	TN	VL	13	0.01554	---	±2.5	Pass
			VN	-13	-0.01554	---	±2.5	Pass
			VH	21	0.02510	---	±2.5	Pass
TM 3	M	TN	VL	21	0.02510	---	±2.5	Pass
			VN	-12	-0.01435	---	±2.5	Pass
			VH	8	0.00956	---	±2.5	Pass
Subtype 0	M	TN	VL	-6	-0.00717	---	±2.5	Pass
			VN	24	0.02869	---	±2.5	Pass
			VH	-11	-0.01315	---	±2.5	Pass
Subtype 2	M	TN	VL	18	0.02152	---	±2.5	Pass
			VN	18	0.02152	---	±2.5	Pass
			VH	24	0.02869	---	±2.5	Pass

-----END-----