

FCC RF Test Report

**Product Name: HSPA/UMTS/GPRS/GSM/EDGE Mobile
Phone with Bluetooth; Ascend W1**

**Product Model: HUAWEI H883G, HUAWEI W1-U34, H883G,
W1-U34**

Report Number: SYBH(Z-RF)020122012-2003

FCC ID: QISH883G

Reliability Laboratory of Huawei Technologies Co., Ltd.

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District,
Shenzhen, 518129, P.R.C

Tel: +86 755 28780808

Fax: +86 755 89652518



Notice


1. The laboratory has Passed the accreditation by China National Accreditation Service for Conformity Assessment (CNAS). The accreditation number is L0310.
2. The laboratory has Passed the accreditation by The American Association for Laboratory Accreditation (A2LA). The accreditation number is 2174.01.
3. The laboratory has been listed by the US Federal Communications Commission to perform electromagnetic emission measurements. The site recognition number is 97456.
4. The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 6369A-2.
5. The laboratory has been listed by the VCCI to perform EMC measurements. The accreditation numbers of test site No.1 are R-2364, G-415, C-2583, and T-256, and the accreditation numbers of test site No.2 are R-3760, G-485, C-4210 and T-1237.
6. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
7. The test report is invalid if there is any evidence of erasure and/or falsification.
8. The test report is only valid for the test samples.
9. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.



Applicant: Huawei Technologies Co., Ltd.
Address: Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
 Bantian, Longgang District, Shenzhen, 518129, P.R.C
Product Name: HSPA/UMTS/GPRS/GSM/EDGE Mobile Phone with Bluetooth; Ascend W1
Product Model: HUAWEI H883G, HUAWEI W1-U34, H883G, W1-U34

Date of Receipt Sample: 2012-12-23
Start Date of Test: 2012-12-24
End Date of Test: 2013-01-08

Test Result: Pass

Approved by Senior Engineer:	2013-01-12	Dai Linjun	
	Date	Name	Signature

Prepared by:	2013-01-12	Zhong Yaning	
	Date	Name	Signature



Modification Record

No.	Last Report No.	Modification Description
1		First report.



CONTENT

1	General Information	6
1.1	Applied Standard.....	6
1.2	Test Location.....	6
1.3	Test Environment Condition.....	6
2	Test Summary	7
3	Description of the Equipment under Test (EUT)	8
3.1	General Description	8
3.2	EUT Identity	8
3.3	Technical Description.....	9
3.4	Test Modes	10
3.5	EUT Configurations.....	11
3.6	Test Environments	12
3.7	Test Setups.....	13
3.8	Test Conditions	16
4	Main Test Instruments	18



1 General Information

1.1 Applied Standard

Applied Rules: 47 CFR FCC Part 2, Subpart J (2011-10-1 Edition)
47 CFR FCC Part 15, Subpart C (2011-10-1 Edition)

Test Method: FCC KDB 558074 D01 DTS Meas Guidance v02

1.2 Test Location

Test Location 1: Reliability Laboratory of Huawei Technologies Co., Ltd.
Address: Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian, Longgang District, Shenzhen, 518129, P.R.C

1.3 Test Environment Condition

Ambient Temperature: 19.5to 25 °C
Ambient Relative Humidity: 40 to 55 %
Atmospheric Pressure: Not applicable

2 Test Summary

Test Item	FCC Part No.	IC Standard No.	Requirements	Test Result	Verdict (NOTE 2)
DTS (6 dB) Bandwidth	15.247(a)(2)	RSS-210, A8.2(a)	≥ 500 kHz.	Appendix A	Pass
Occupied Bandwidth (Only for IC requirement)	---	RSS-210, 2.1 RSS-Gen, 4.6.1	No limit.	Appendix A	--
Maximum Peak Conducted Output Power	15.247(b)(3)	RSS-210, A8.4(4)	For directional gain: < 30 dBm – (G[dBi] – 6 [dB]), peak; Otherwise: < 30 dBm, peak.	Appendix B	Pass
Maximum Power Spectral Density Level	15.247(e)	RSS-210, A8.2(b)	For directional gain: < 8 dBm/3 kHz – (G[dBi] – 6 [dB]), peak. Otherwise: < 8 dBm/3 kHz, peak.	Appendix C	Pass
Band Edges Compliance	15.247(d)	RSS-210, A8.5	< -20 dBm/100 kHz if total peak power ≤ power limit.	Appendix D	Pass
Unwanted Emissions into Non-Restricted Frequency Bands	15.247(d)	RSS-210, A8.5	< -20 dBm/100 kHz if total peak power ≤ power limit.	Appendix E	Pass
Radiated Spurious Emission	15.247(d) 15.209	RSS-210, A8.5 RSS-210, 2.2	FCC Part 15.209 field strength limit;	Appendix F	Pass
Spurious in Restricted Band	(NOTE 1)	RSS-Gen, 7.2.2 RSS-Gen, 7.2.5 (NOTE 1)	RSS-Gen 7.2.5 field strength limit.		
Receiver Spurious Emissions (Radiated, Only for IC requirement)	---	RSS-210, 2.3 RSS-Gen, 6.1	RSS-Gen 6.1 radiated limit.	---	N/T
AC Power Line Conducted Emissions	15.207	RSS-Gen, 7.2.4	FCC Part 15.207 conducted limit; RSS-Gen, 7.2.4 conducted limit.	Appendix G	Pass

NOTE 1: According to KDB 558074, antenna-port conducted measurements are acceptable as an alternative to radiated measurements for demonstrating compliance to the limits in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case emissions will also be required.

NOTE 2: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".

3 Description of the Equipment under Test (EUT)

3.1 General Description

HUAWEI H883G, HUAWEI W1-U34, H883G, W1-U34 is subscriber equipment in the WCDMA/GSM system. The HSPA/UMTS frequency band is Band IV and Band II and Band V. The GSM/GPRS/EDGE frequency band includes GSM850 and GSM900 and DCS1800 and PCS1900. The Mobile Phone implements such functions as RF signal receiving/transmitting, HSPA/UMTS and GSM/GPRS/EDGE protocol processing, voice, video MMS service, GPS, AGPS, and WIFI etc. Externally it provides micro SD card interface, earphone port(to provide voice service) and USIM card interface. It also provides Bluetooth module to synchronize data between a PC and the phone, or to use the built-in modem of the phone to access the Internet with a PC, or to exchange data with other Bluetooth devices.

NOTE: Only WLAN test data included in this report.

3.2 EUT Identity

NOTE: Unless otherwise noted in the report, the functional boards installed in the units shall be selected from the below list, but not means all the functional boards listed below shall be installed in one unit.

3.2.1 Board

Board		
Software Version	Hardware Version	Description
1030.56.37800.04800	HD1H883GM	Main board of Mobile Phone

3.2.2 Sub-Assembly

Sub-Assembly			
Sub-Assembly Name	Model	Manufacturer	Description
AC/DC Adapter	HW-050100U1W	Huawei Technologies Co., Ltd.	Input voltage: ~100-240V 50/60Hz 0.2A Output voltage: 5V  1A Rate power: 5W

3.3 Technical Description

Characteristics	Description			
IEEE 802.11 WLAN Mode Supported	<input checked="" type="checkbox"/> 802.11b (20 MHz channel bandwidth), <input checked="" type="checkbox"/> 802.11g (20 MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11n (20 MHz channel bandwidth), <input type="checkbox"/> 802.11n (40 MHz channel bandwidth)			
TX/RX Operating Range	2412-2462 MHz band	$f_c = 2407 \text{ MHz} + N * 5 \text{ MHz}$, where: - f_c = "Operating Frequency" in MHz, - N = "Channel Number" with the range from 1 to 11 for the 20 MHz channel bandwidth.		
Data Rate	802.11b	1 Mbps, 2 Mbps, 5.5 Mbps, 11 Mbps		
	802.11g	6 Mbps, 9 Mbps, 12 Mbps, 18 Mbps, 24 Mbps, 36 Mbps, 48 Mbps, 54 Mbps		
	802.11n (SISO)	MCS 0 to MCS 7		
Modulation Type	DBPSK/DQPSK/CCK (DSSS), BPSK/QPSK/16QAM/64QAM (OFDM).			
Emission Designator	8M8G1D (for 802.11b mode), 16M6G7D (for 802.11g mod), 17M7G7D (for 802.11n mode)			
TX Power Control	<input checked="" type="checkbox"/> Supported, <input type="checkbox"/> Not Supported			
Standby Mode	<input type="checkbox"/> Supported, <input checked="" type="checkbox"/> Not Supported			
Equipment Type	<input type="checkbox"/> Stand-alone equipment, <input type="checkbox"/> Plug-in radio device, <input checked="" type="checkbox"/> Combined equipment			
Antenna	Description	Isotropic Antenna,2400~2500MHz/5150~5850MHz,3dBi/5dBi,isotropic,5W,N-J,no		
	Type	<input type="checkbox"/> External, <input checked="" type="checkbox"/> Integrated		
	Ports	<input checked="" type="checkbox"/> Ant 1, <input type="checkbox"/> Ant 2, <input type="checkbox"/> Ant 3		
	Smart System	<input checked="" type="checkbox"/> SISO (for 802.11b/g/n), <input type="checkbox"/> MIMO (for 802.11n): 2 Tx & 2 Rx, <input type="checkbox"/> Diversity (for 802.11b/g) : Tx & Rx		
	Gain	-2.3 dBi (per antenna port, max.)		
	Remark	When the EUT is put into service, the practical maximum antenna gain should NOT exceed the value as described above.		
Power Supply	Type	<input checked="" type="checkbox"/> AC/DC Adapter	<input type="checkbox"/> PoE:	<input type="checkbox"/> Other:



3.4 Test Modes

NOTE: Typical working modes for each IEEE 802.11 mode are selected to perform tests.

Test Mode	Test Modes Description
11B	IEEE 802.11b with data rate of 11 Mbps using SISO mode.
11G	IEEE 802.11g with data rate of 54 Mbps using SISO mode.
11N20	IEEE 802.11n with data rate of MCS7 and bandwidth of 20 MHz using SISO mode.

3.5 EUT Configurations

3.5.1 General Configurations

Configuration	Description
Test Antenna Ports	Until otherwise specified, <ul style="list-style-type: none"> - All TX tests are performed at all TX antenna ports of the EUT, and - All RX tests are performed at all RX antenna ports of the EUT.
Multiple RF Sources	Other than the tested RF source of the EUT, other RF source(s) are disabled or shutdown during measurements.

3.5.2 Customized Configurations

Test Mode	RF Ch.	Antenna Port	TX Freq. [MHz]	RX Freq. [MHz]	Ch. BW [MHz]	Power Conf., per Port
11B	L	Ant 1	Ch No. 1 / 2412 MHz	---	20	15
11B	M	Ant 1	Ch No. 6 / 2437 MHz	---	20	15
11B	H	Ant 1	Ch No. 11 / 2462 MHz	---	20	15
11G	L	Ant 1	Ch No. 1 / 2412 MHz	---	20	14
11G	M	Ant 1	Ch No. 6 / 2437 MHz	---	20	14
11G	H	Ant 1	Ch No. 11 / 2462 MHz	---	20	14
11N20	L	Ant 1	Ch No. 1 / 2412 MHz	---	20	12
11N20	M	Ant 1	Ch No. 6 / 2437 MHz	---	20	12
11N20	H	Ant 1	Ch No. 11 / 2462 MHz	---	20	12



3.6 Test Environments


NOTE: The values used in the test report may be stringent than the declared.

Environment Parameter	Selected Values During Tests		
	Temperature	Voltage	Relative Humidity
NTNV	Ambient	3.7 VDC	Ambient

3.7 Test Setups

3.7.1 Test Setup 1


The WLAN component's antenna ports(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.

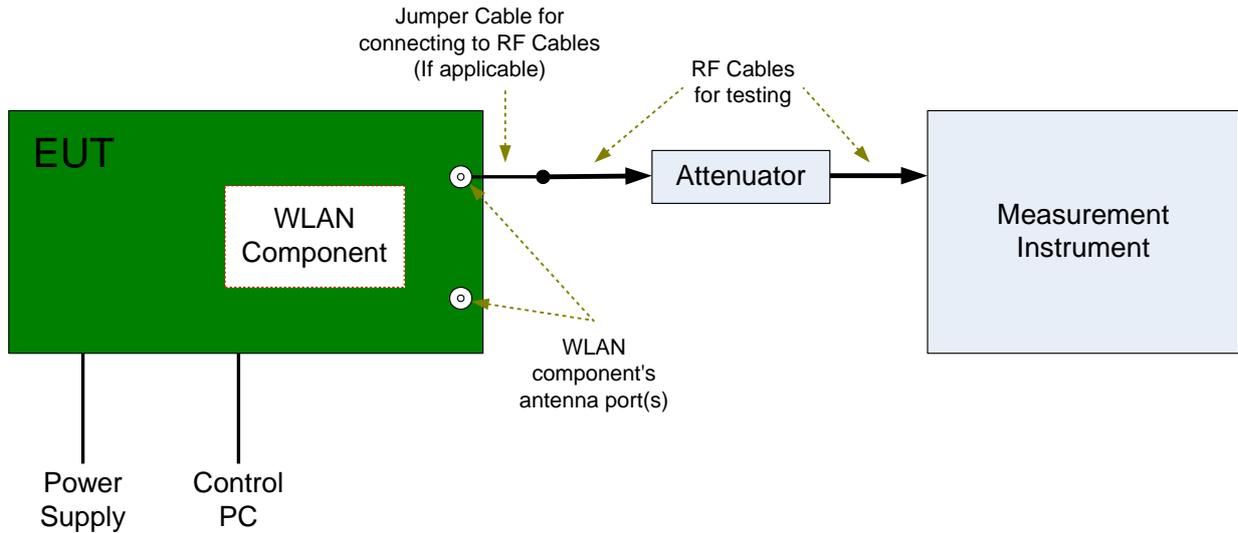


3.7.2 Test Setup 2

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.4. The test distance is 3m. The setup is according to ANSI C63.4 and CAN/CSA-CEI/IEC CISPR 22.

The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

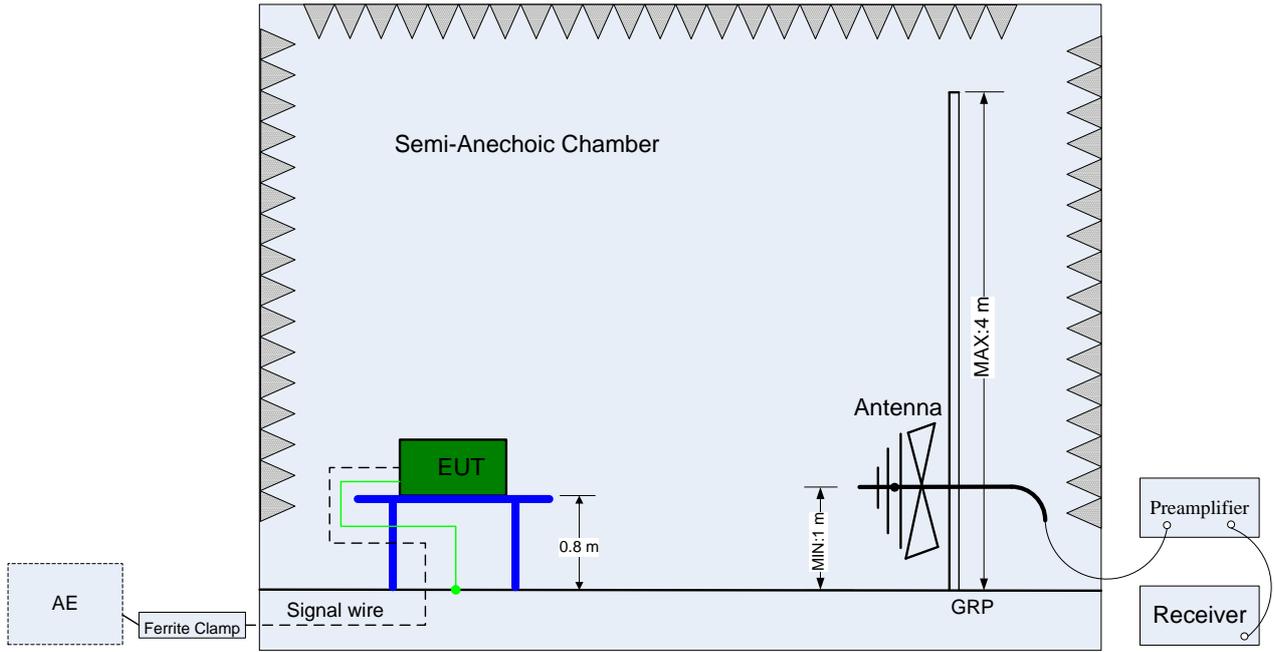

(Below 1 GHz)

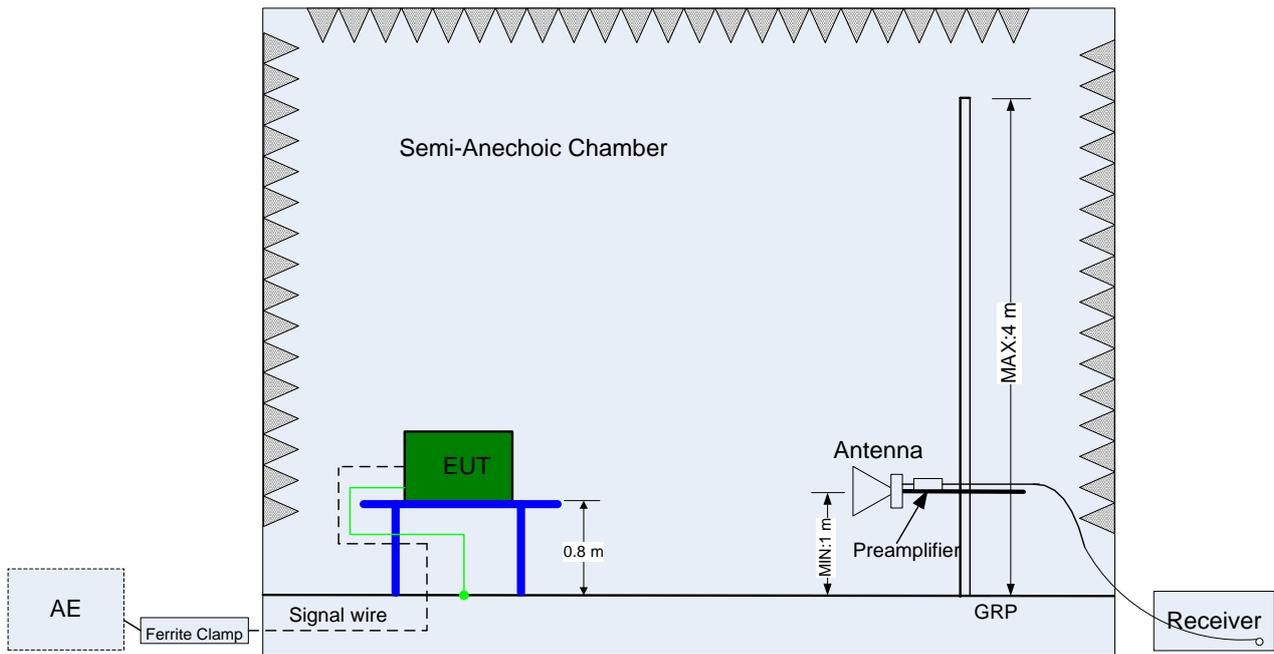


(Above 1 GHz)

3.7.3 Test Setup 3

The mains cable of the EUT (maybe per AC/DC Adapter) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8 m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1 m.

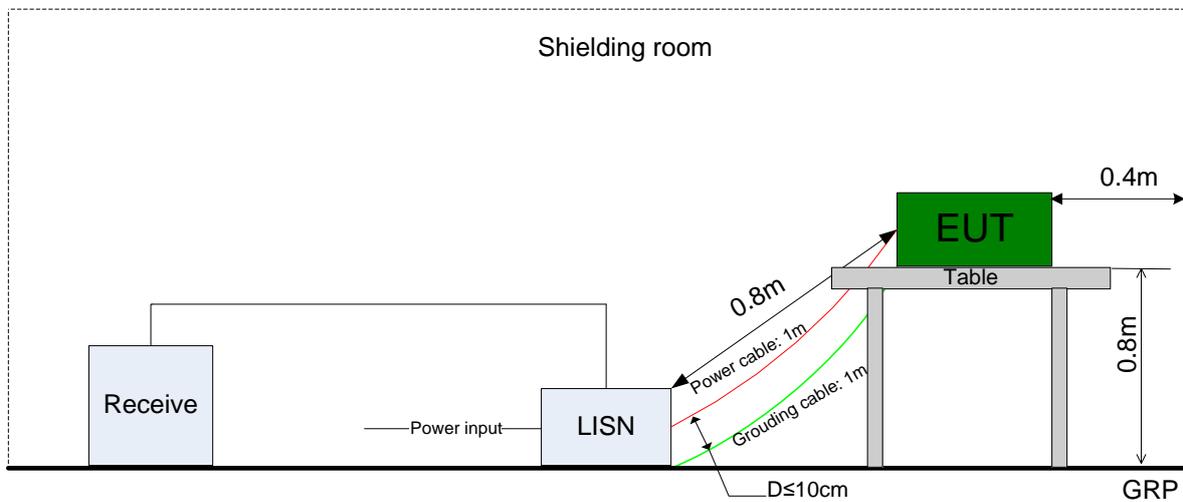

3.8 Test Conditions

Test Case	Test Conditions	
	Configuration	Description
DTS (6 dB) Bandwidth	Measurement Method	FCC KDB 558074 §7.1.1 Option 1.
	Test Environment	NTNV
	Test Setup	Test Setup 1
	EUT Configuration	11B_B, 11B_M, 11B_T 11G_B, 11G_M, 11G_T 11N20_B, 11 N20_M, 11 N20_T
Occupied Bandwidth (Only for IC requirement)	Measurement Method	RSS-Gen, 4.6.1.
	Test Environment	NTNV
	Test Setup	Test Setup 1
	EUT Configuration	---
Maximum Peak Conducted Output Power	Measurement Method	FCC KDB 558074 §7.2.1.2 Option 2 (integrated band power method).
	Test Environment	NTNV
	Test Setup	Test Setup 1
	EUT Configuration	11B_B, 11B_M, 11B_T 11G_B, 11G_M, 11G_T 11N20_B, 11 N20_M, 11 N20_T
Maximum Power Spectral Density Level	Measurement Method	FCC KDB 558074 §7.3.1 Option 1 (peak PSD).
	Test Environment	NTNV
	Test Setup	Test Setup 1
	EUT Configuration	11B_B, 11B_M, 11B_T 11G_B, 11G_M, 11G_T 11N20_B, 11 N20_M, 11 N20_T
Unwanted Emissions into Non-Restricted Frequency Bands	Measurement Method	FCC KDB 558074 §7.4.1, use Peak PSD.
	Test Environment	NTNV
	Test Setup	Test Setup 1
	EUT Configuration	11B_B, 11B_M, 11B_T 11G_B, 11G_M, 11G_T 11N20_B, 11 N20_M, 11 N20_T
Unwanted Emissions into Restricted Frequency Bands (Conducted)	Measurement Method	FCC KDB 558074 §7.4.2, Conducted (antenna-port).
	Test Environment	NTNV
	Test Setup	Test Setup 1
	EUT Configuration	11B_B, 11B_M, 11B_T 11G_B, 11G_M, 11G_T 11N20_B, 11 N20_M, 11 N20_T
Unwanted Emissions into Restricted Frequency Bands	Measurement Method	FCC KDB 558074 §7.4.2, Radiated (cabinet/case emissions with impedance matching for antenna-port).
	Test Environment	NTNV
	Test Setup	Test Setup 2



Test Case	Test Conditions	
	Configuration	Description
(Radiated)	EUT Placement	<input checked="" type="checkbox"/> Flatwise, <input type="checkbox"/> Upright, <input type="checkbox"/> Hung
	EUT Configuration	(1) 30 MHz to 1 GHz: 11B_B (Worst Conf.). (2) 1 GHz to 3 GHz: 11B_B, 11B_T 11G_B, 11G_T 11N20_B, 11 N20_T (3) 3 GHz to 18 GHz: 11B_B (Worse Conf.), 11B_T (Worse Conf.). (4) 18 GHz to 26.5 GHz: 11B_B (Worse Conf.), 11B_T (Worse Conf.).
Receiver Spurious Emissions (Only for IC requirement)	Measurement Method	Radiated.
	Test Environment	NTNV
	Test Setup	Test Setup 2
	EUT Configuration	---
AC Power Line Conducted Emissions	Measurement Method	AC mains conducted.
	Test Environment	NTNV
	Test Setup	Test Setup 3
	EUT Configuration	11B_B (Worst Conf.).



4 Main Test Instruments

Equipment Name	Manufacturer	Model	Serial Number	Cal Date	Cal. Due
Power supply	KEITHLEY	2303	1288003	2012-11-09	2013-11-08
Spectrum Analyzer	Agilent	E4440A	MY48250119	2012-07-18	2013-07-17
Signal Analyzer	R&S	FSQ31	200021	2012-11-09	2013-11-08
Spectrum Analyzer	Agilent	N9030A	MY49431698	2012-11-09	2013-11-08
Temperature Chamber	WEISS	WKL64	24600294	2012-02-14	2013-02-13
Signal generator	Agilent	E8257D	MY49281095	2012-07-10	2013-07-09
Spectrum analyzer	R&S	FSU3	200474	2012-03-06	2013-03-05
Spectrum analyzer	R&S	FSU43	100144	2012-04-06	2013-04-05
Double-Ridged Waveguide Horn Antenna (1G~18GHz)	R&S	HF907	100304	2012-04-06	2013-04-05
Double-Ridged Waveguide Horn Antenna (1G~18GHz)	R&S	HF907	100391	2012-10-12	2013-10-11
Trilog Broadband Antenna (30M~3GHz)	SCHWARZBE CK	VULB 9163	9163-521	2012-12-09	2013-12-08
Pyramidal Horn Antenna(26GHz-40GH z)	ETS-Lindgren	3160-10	00123940	2012-02-28	2013-02-27
Pyramidal Horn Antenna(18GHz-26.5G Hz)	ETS-Lindgren	3160-09	00125912	2012-02-28	2013-02-27

END



Appendix for Test report



APPENDIX A: DTS (6 DB) BANDWIDTH.....	3
<i>Part I - Test Results</i>	3
<i>Part II - Test Plots</i>	4
APPENDIX B: MAXIMUM PEAK CONDUCTED OUTPUT POWER	13
<i>Result Table</i>	13
<i>Test Plots</i>	14
APPENDIX C: MAXIMUM POWER SPECTRAL DENSITY LEVEL.....	23
<i>Part I - Test Results</i>	23
<i>Part II - Test Plots</i>	24
APPENDIX D: BAND EDGES COMPLIANCE	34
<i>Part I - Test Results</i>	34
<i>Part II - Test Plots</i>	34
APPENDIX E: UNWANTED EMISSIONS INTO NON-RESTRICTED FREQUENCY BANDS	40
<i>Part I - Test Results</i>	40
<i>Part II - Test Plots</i>	41
APPENDIX F: RADIATED SPURIOUS EMISSION & SPURIOUS IN RESTRICTED BAND	104
<i>Part 1: Testing Range of “30 MHz to 1 GHz”</i>	104
<i>Part 2: Testing Range of “18 GHz to 26.5 GHz”</i>	105
<i>Part 3: Testing Range of “2.3GHz to 2.5GHz”</i>	106
<i>Test Mode: 11b</i>	106
<i>Test Mode: 11g</i>	108
<i>Test Mode: 11n</i>	110
<i>Part 4: Testing Range of “1 GHz to 18 GHz”</i>	112
APPENDIX G: AC POWER LINE CONDUCTED EMISSIONS	113

Appendix A: DTS (6 dB) Bandwidth

In this document, the “DTS6dBBW” refers to the measured “DTS (6 dB) Bandwidth” value. In this Appendix, the “fc(DTS6dBBW)” refers to the centre of the measured “DTS6dBBW”. The introduction of the “fc(DTS6dBBW)” is due to that other measurements use it as the spectrum analyzer setting.

For measurements on smart antenna systems (devices with multiple transmit chains), the test is performed at each chain, and used as respective results for each chain.


Part I - Test Results

Test Mode	Test Channel	Frequency[MHz]	DTS6dBBW[MHz]	Verdict
11B	L	2412	8.78	pass
11B	M	2437	8.79	pass
11B	H	2462	7.96	pass
11G	L	2412	16.55	pass
11G	M	2437	16.49	pass
11G	H	2462	16.10	pass
11N20	L	2412	17.33	pass
11N20	M	2437	17.67	pass
11N20	H	2462	17.65	pass




Part II - Test Plots

2.1 11B_L

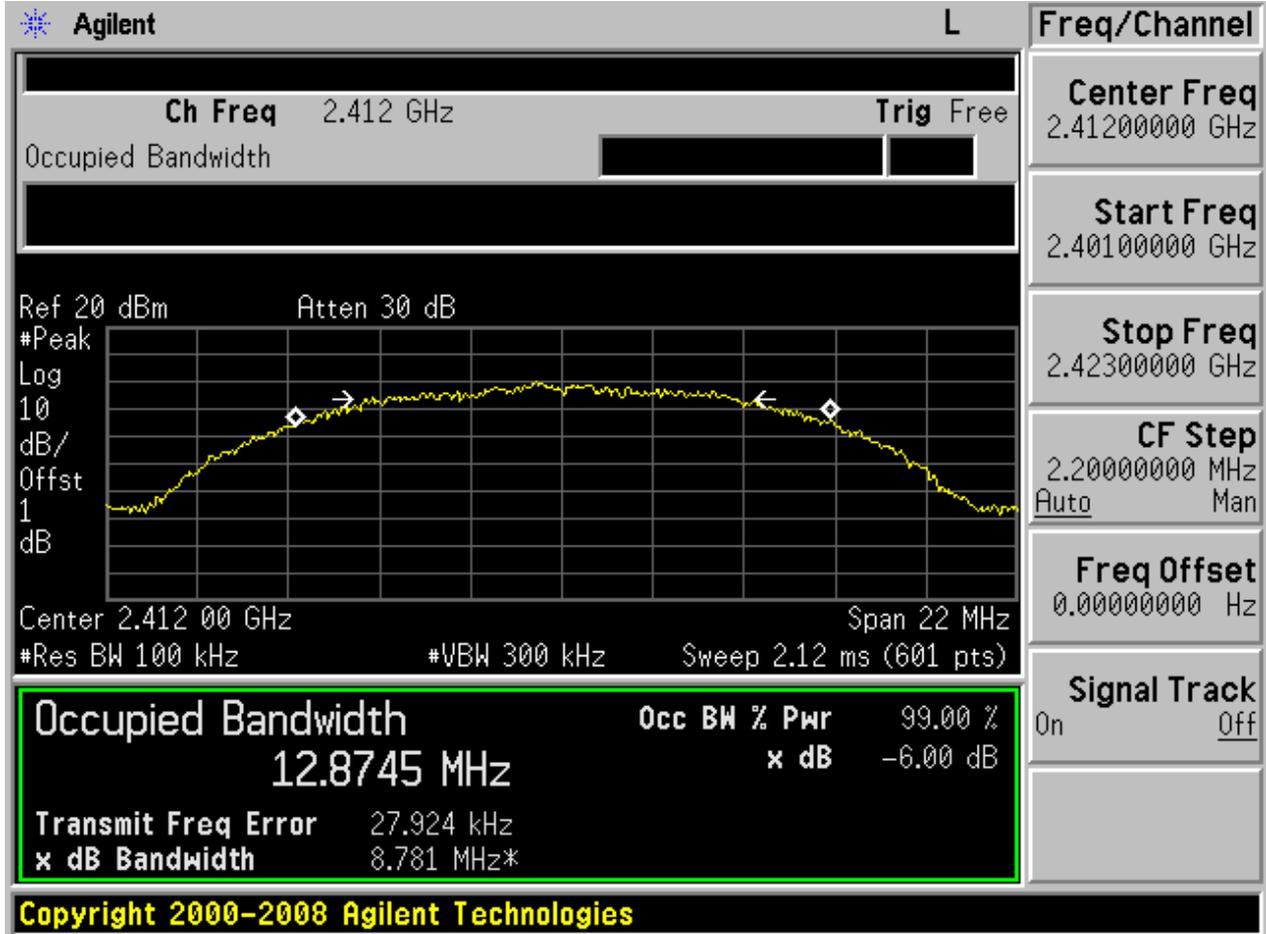


2.2 11B_M

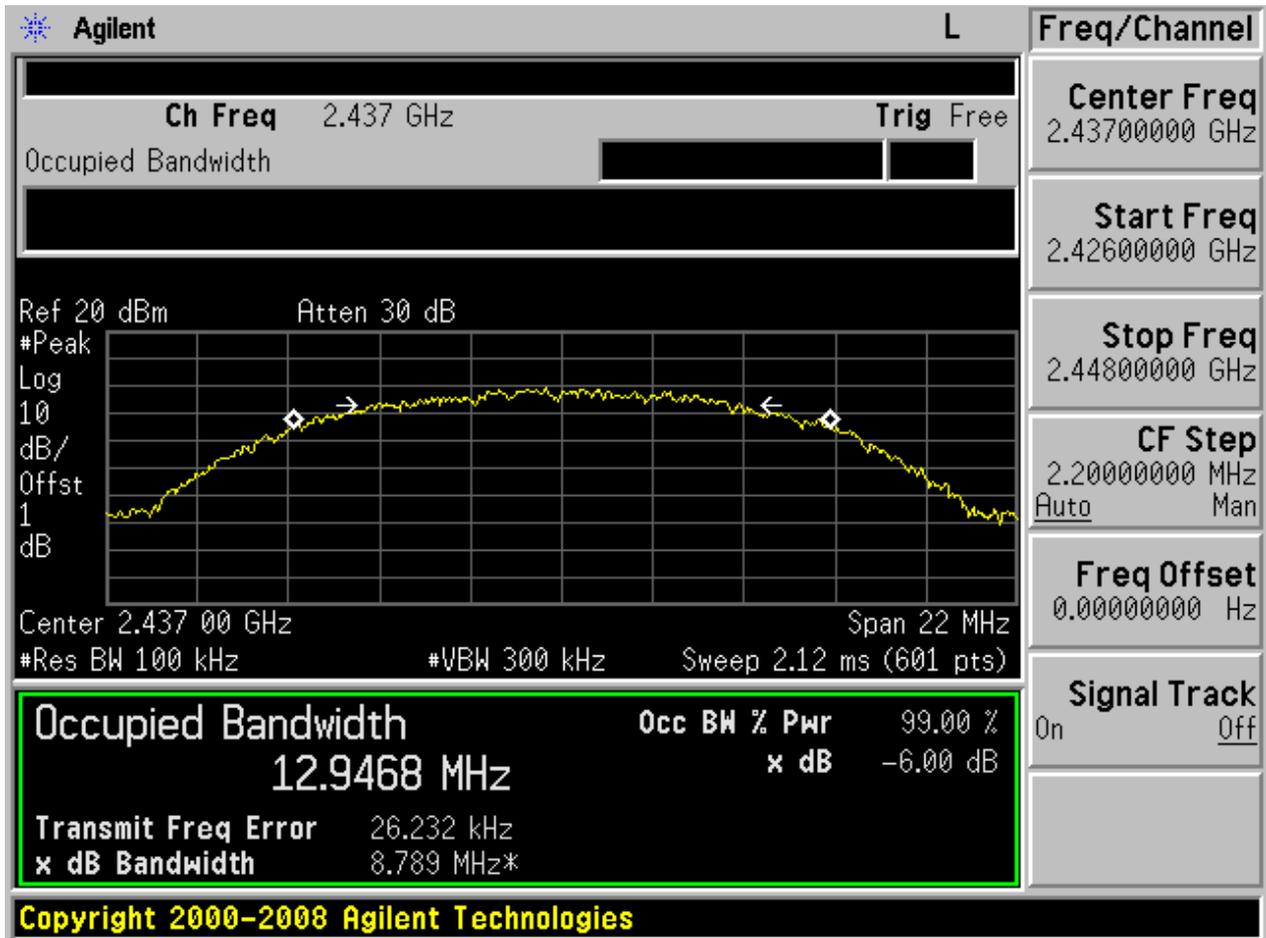




2.3 11B_H

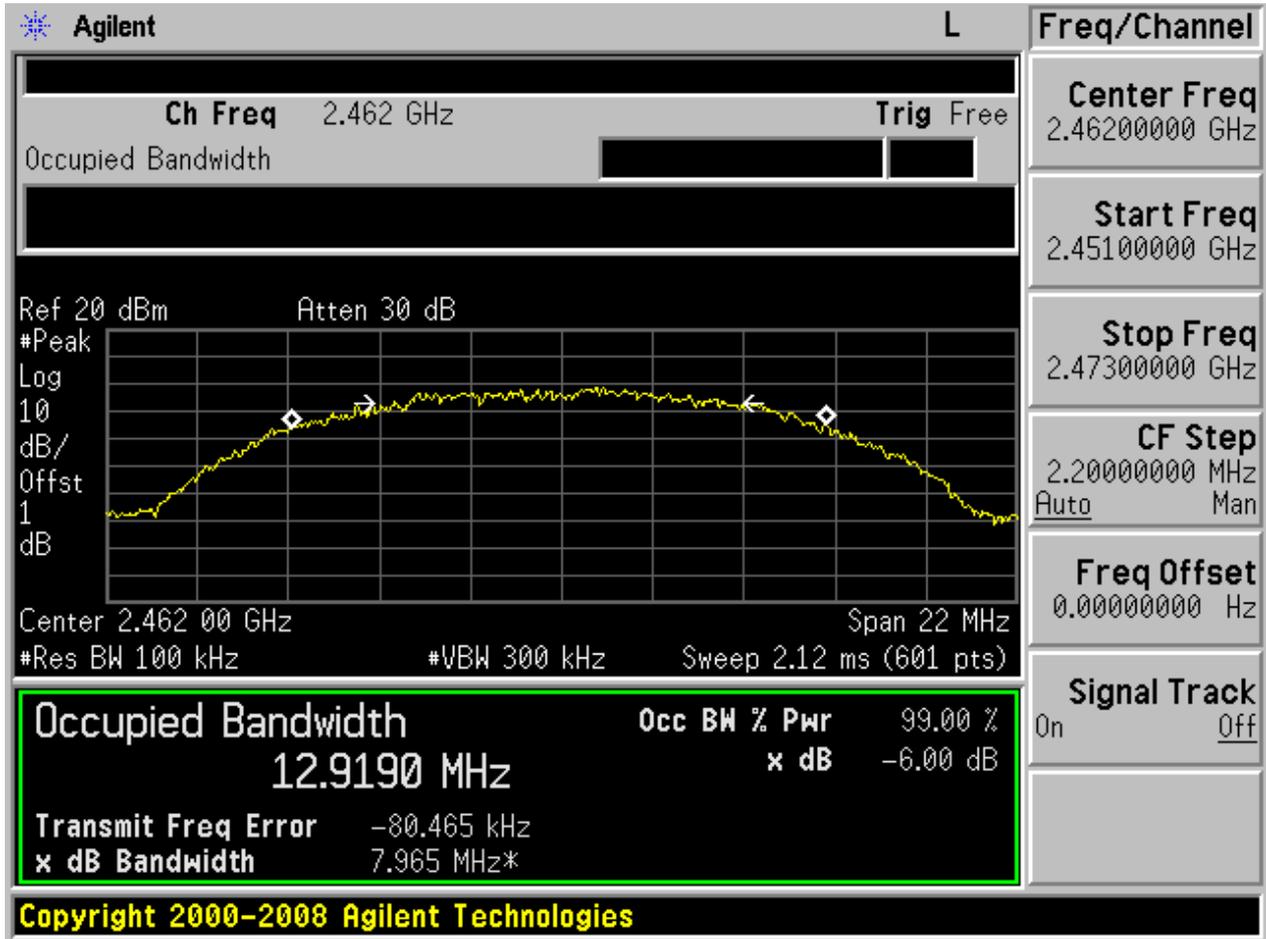




2.4 11G_L

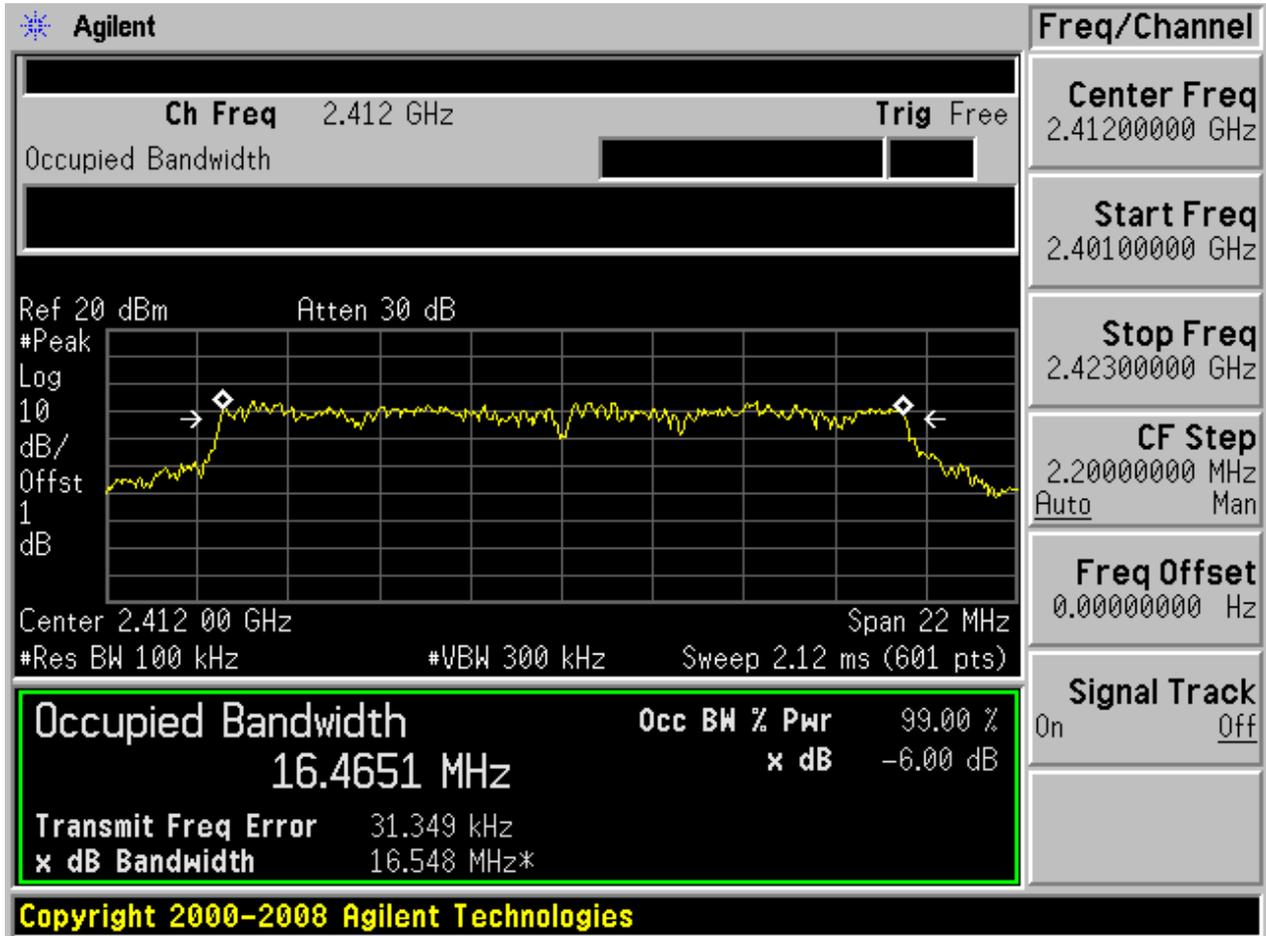




2.5 11G_M

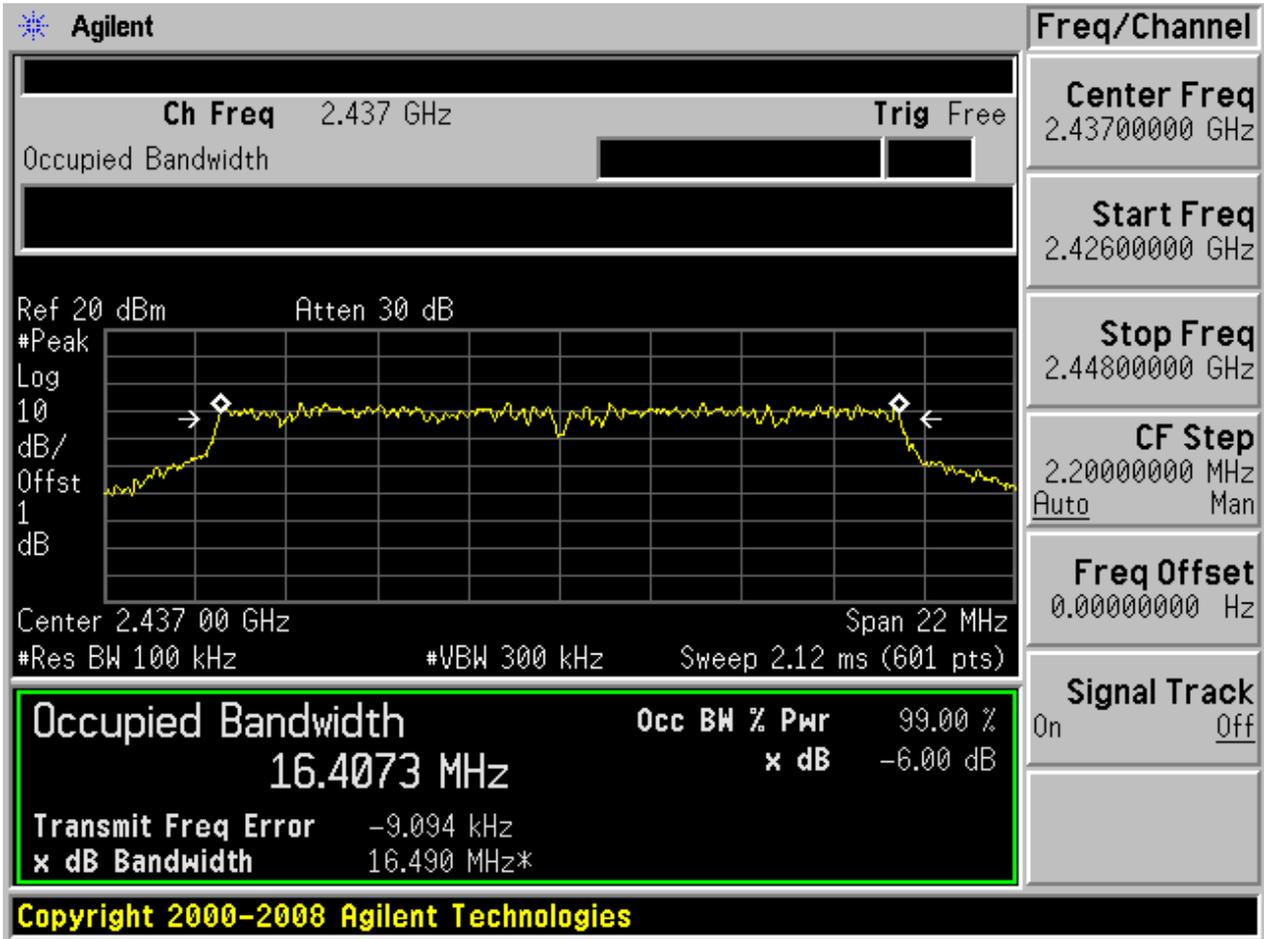




2.6 11G_H

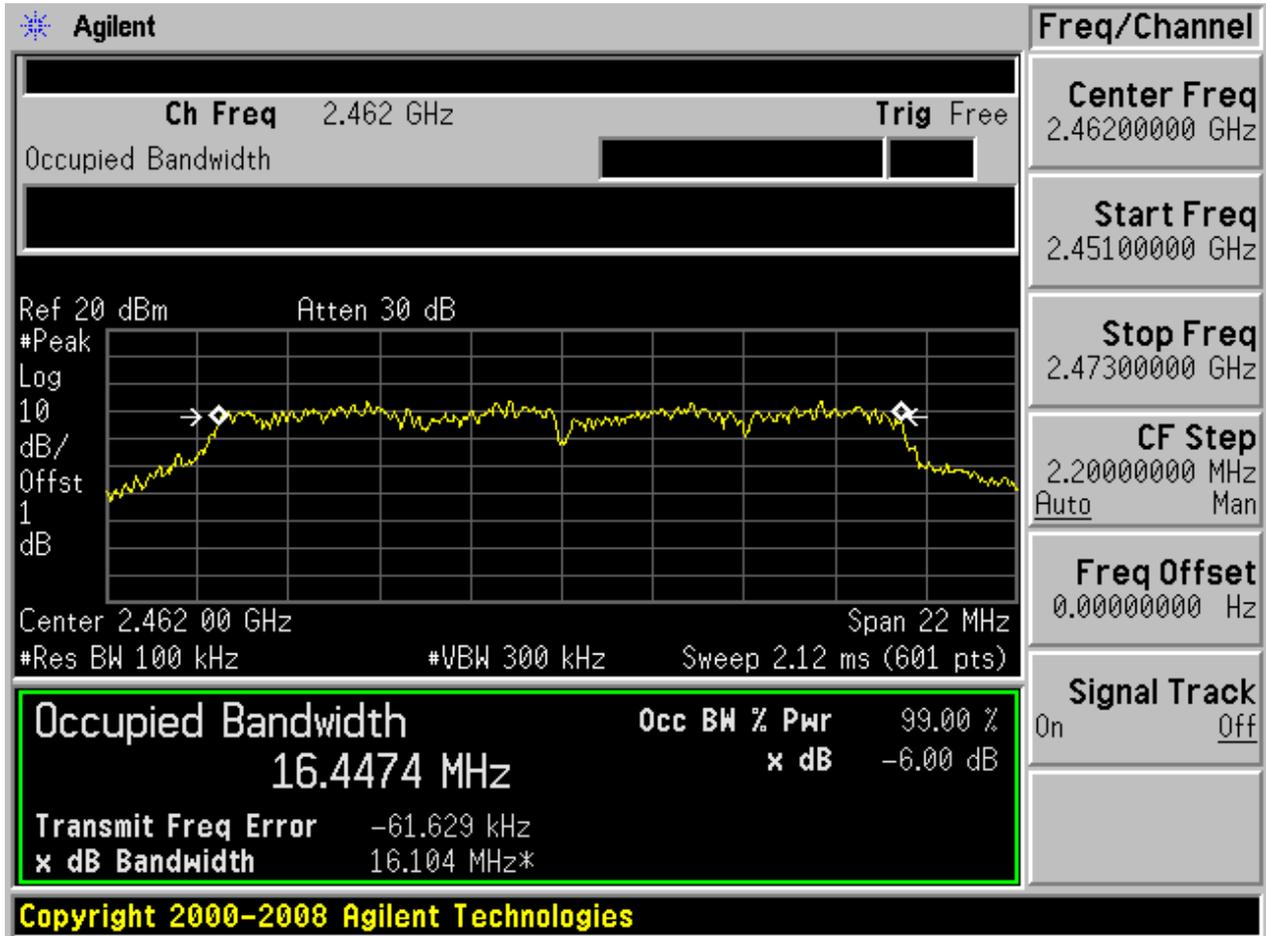


2.7 11N20_ L

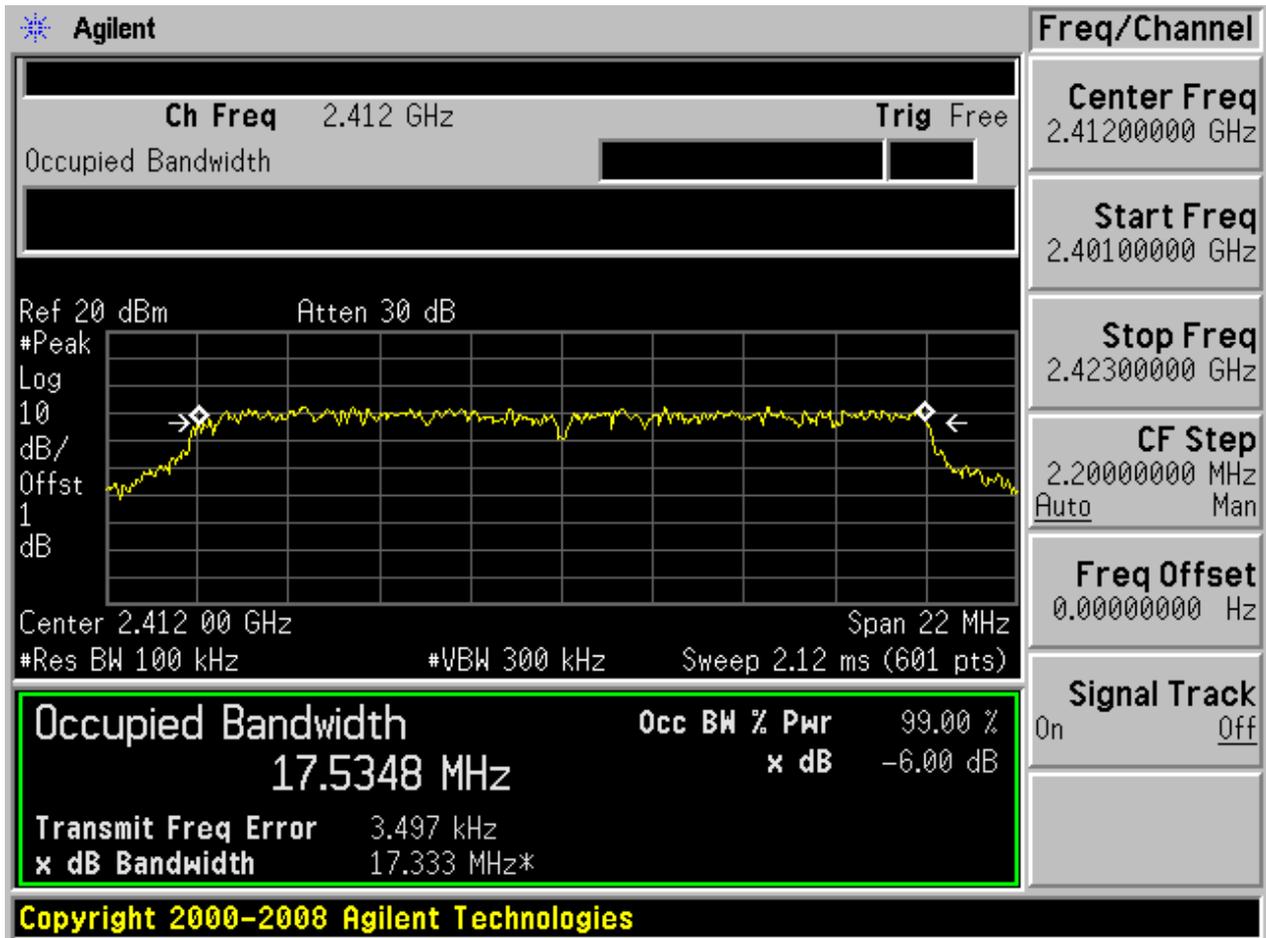




2.8 11N20_ M

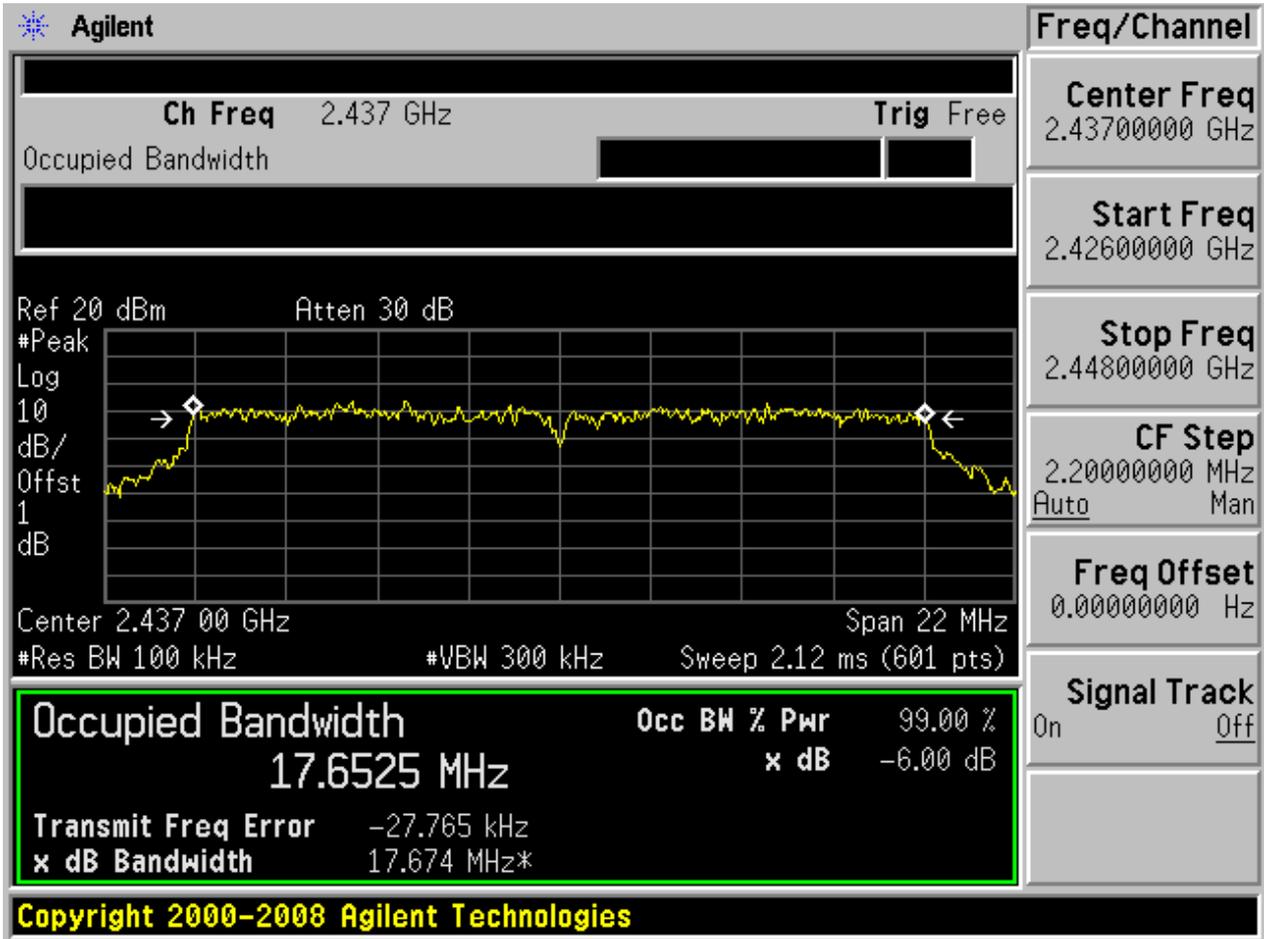

2.9 11N20_ H

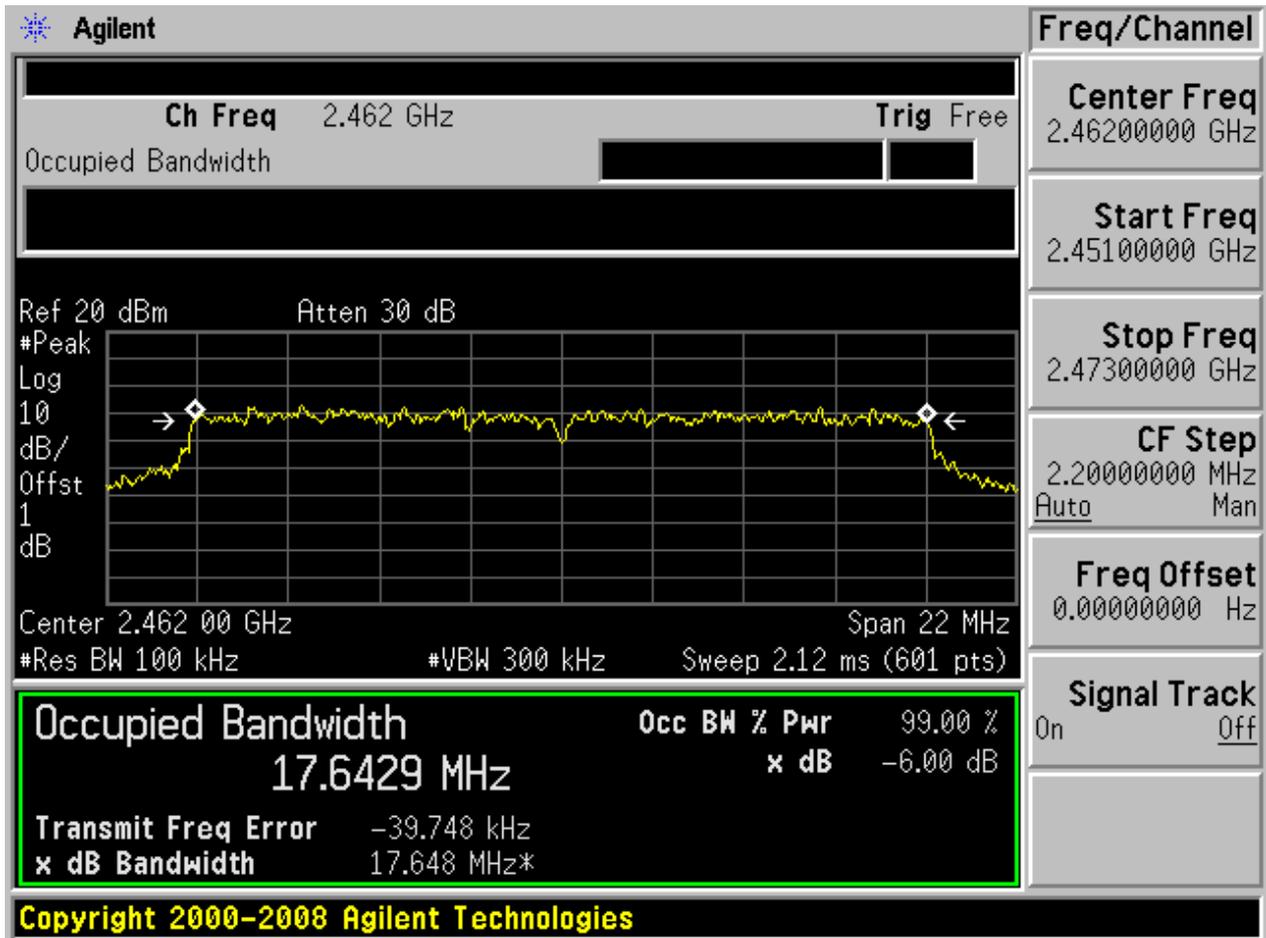

Appendix B: Maximum Peak Conducted Output Power


In this Appendix, the “Pmax” refers to the measured “Maximum Peak Conducted Output Power” value. The “fc(DTS6dBBW)” and “DTS6dBBW” in “DTS (6 dB) Bandwidth” are used to determine the integrated band power.

Result Table


EUT Conf.	Channel	Fc [MHz]	Meas. Level (Cond.) [dBm]	Verdict
11B	L	2412	22.45	pass
11B	M	2437	22.06	pass
11B	H	2462	21.48	pass
11G	L	2412	22.26	pass
11G	M	2437	21.16	pass
11G	H	2462	21.63	pass
11N20_SISO	L	2412	21.04	pass
11N20_SISO	M	2437	20.72	pass
11N20_SISO	H	2462	19.73	pass

Test Plots


2.1 11B_L

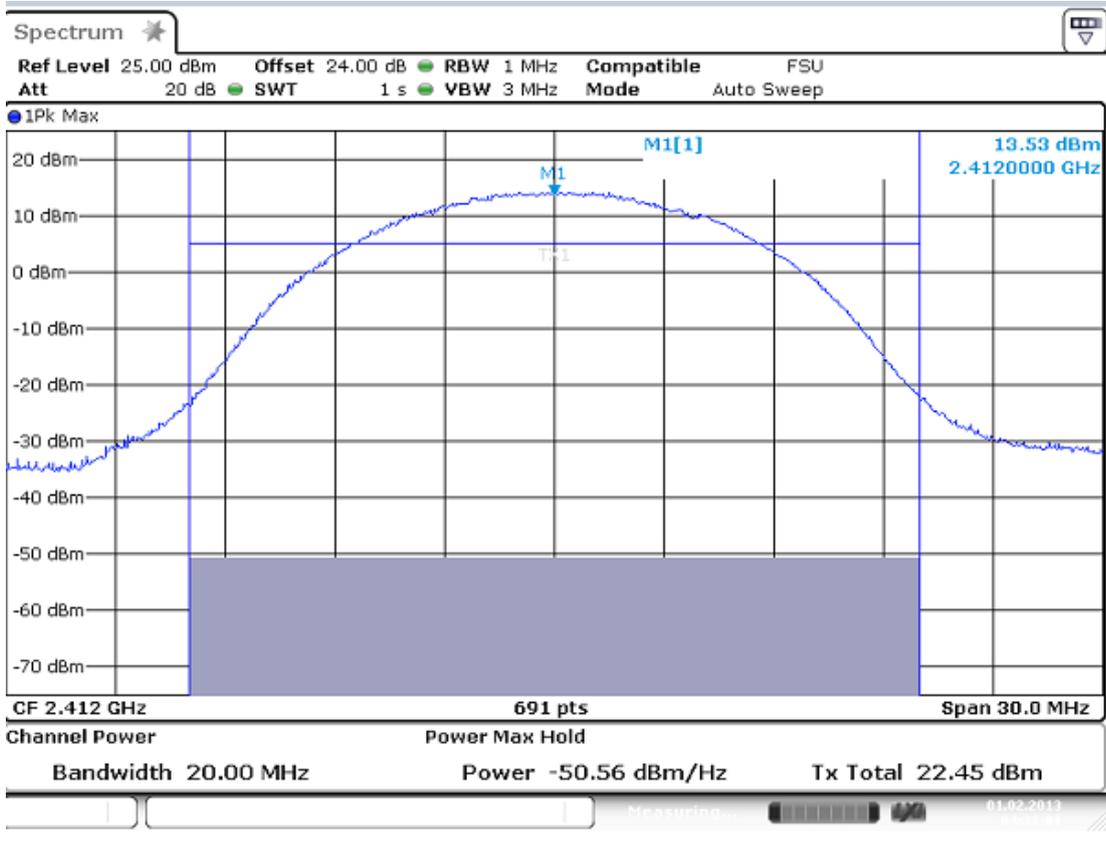


2.2 11B_M

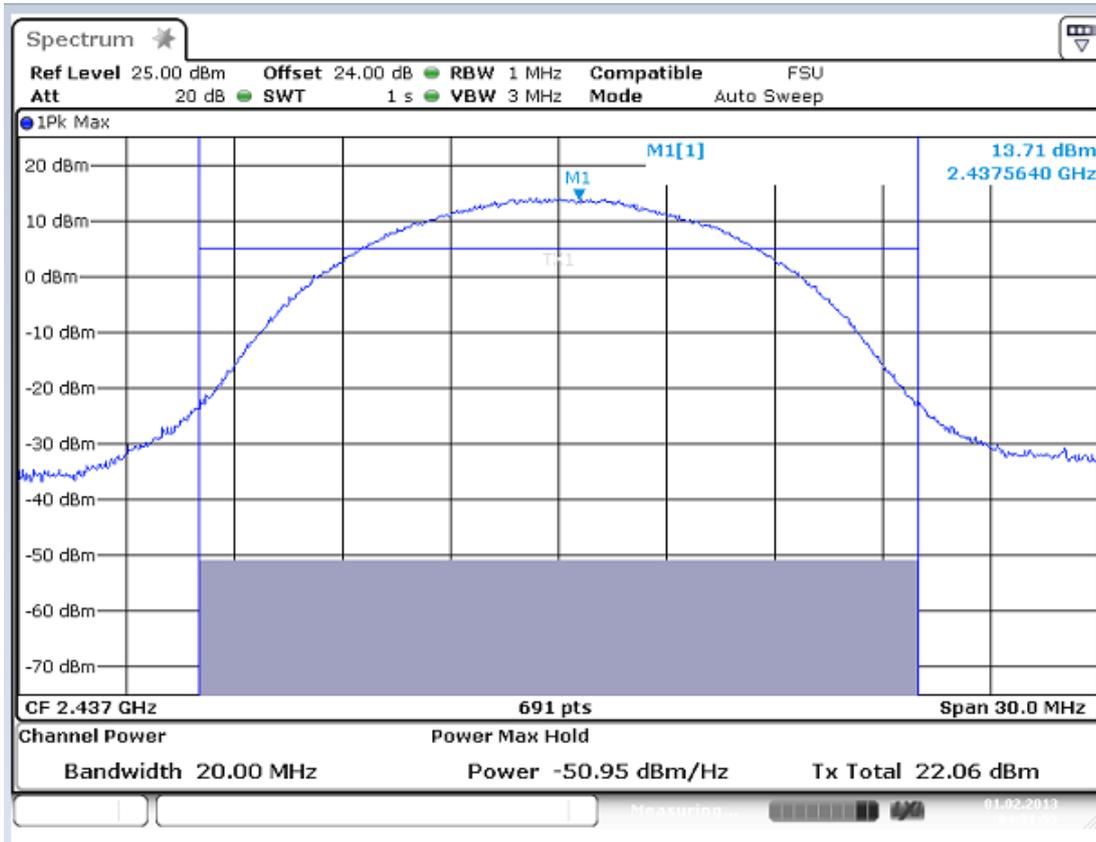


2.3 11B_H

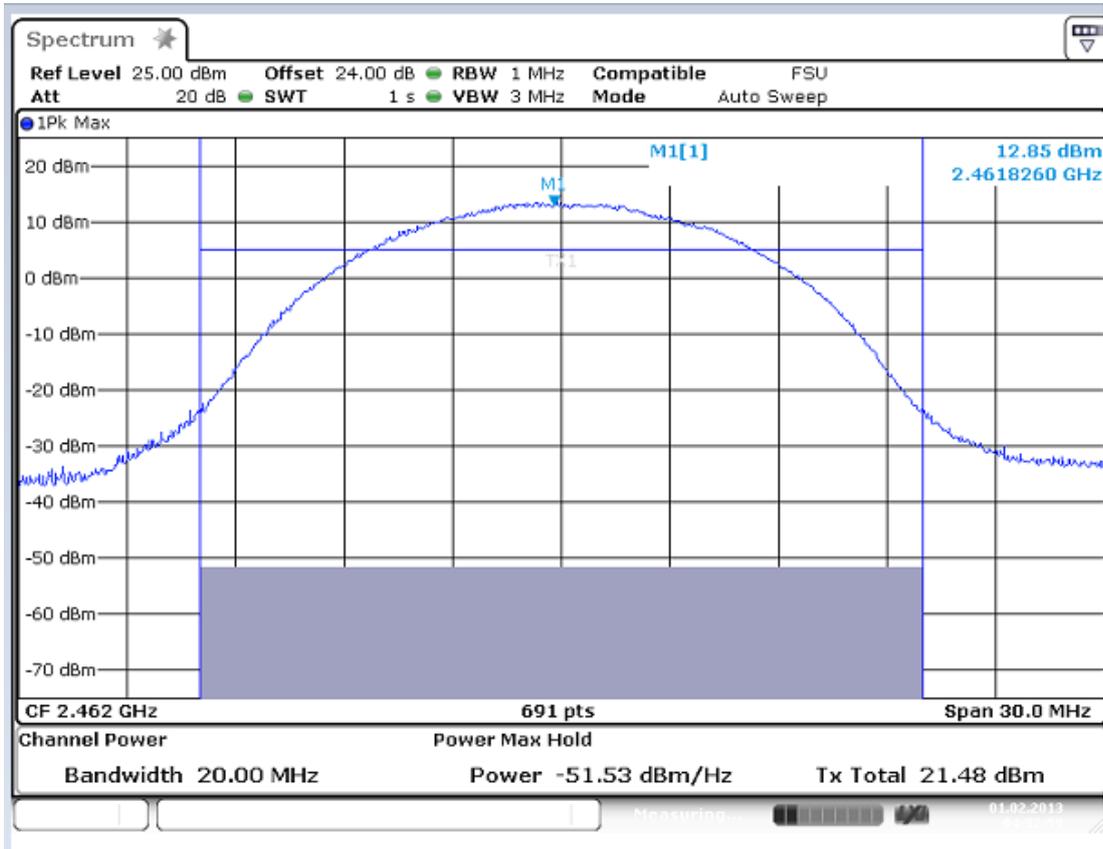


2.4 11G_L

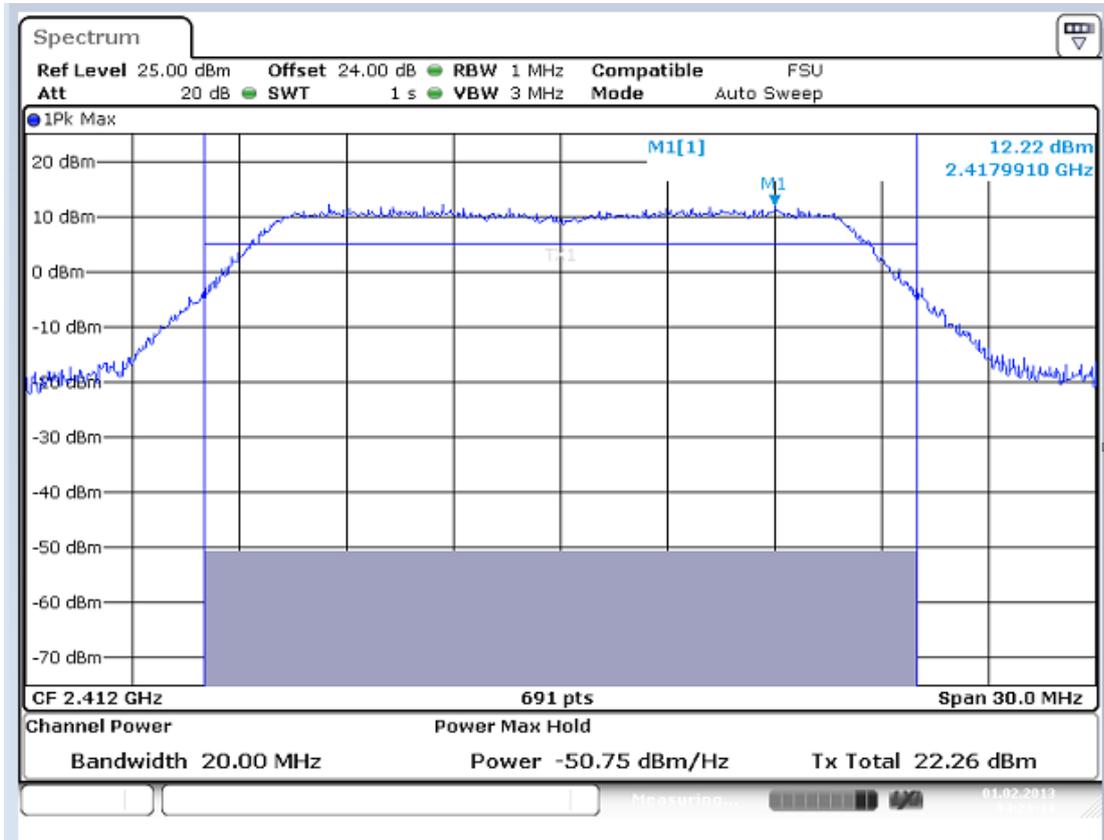


2.5 11G_M

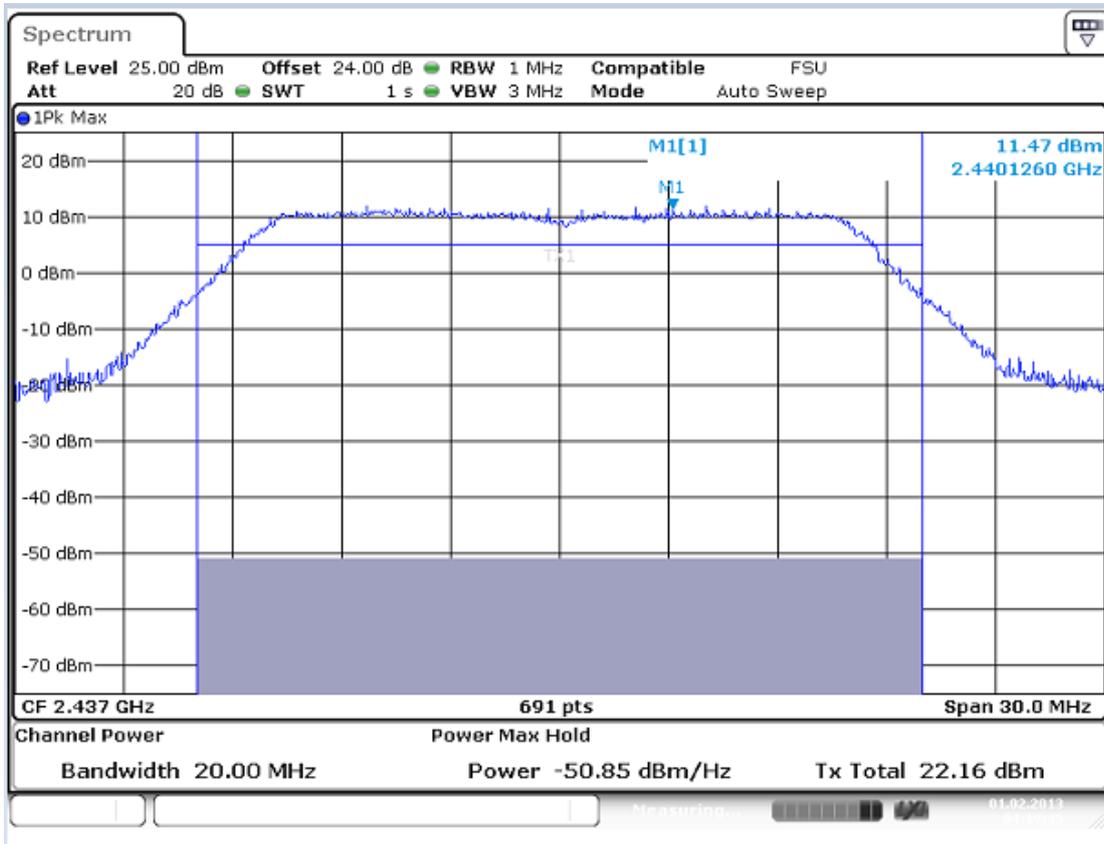


2.6 11G_H

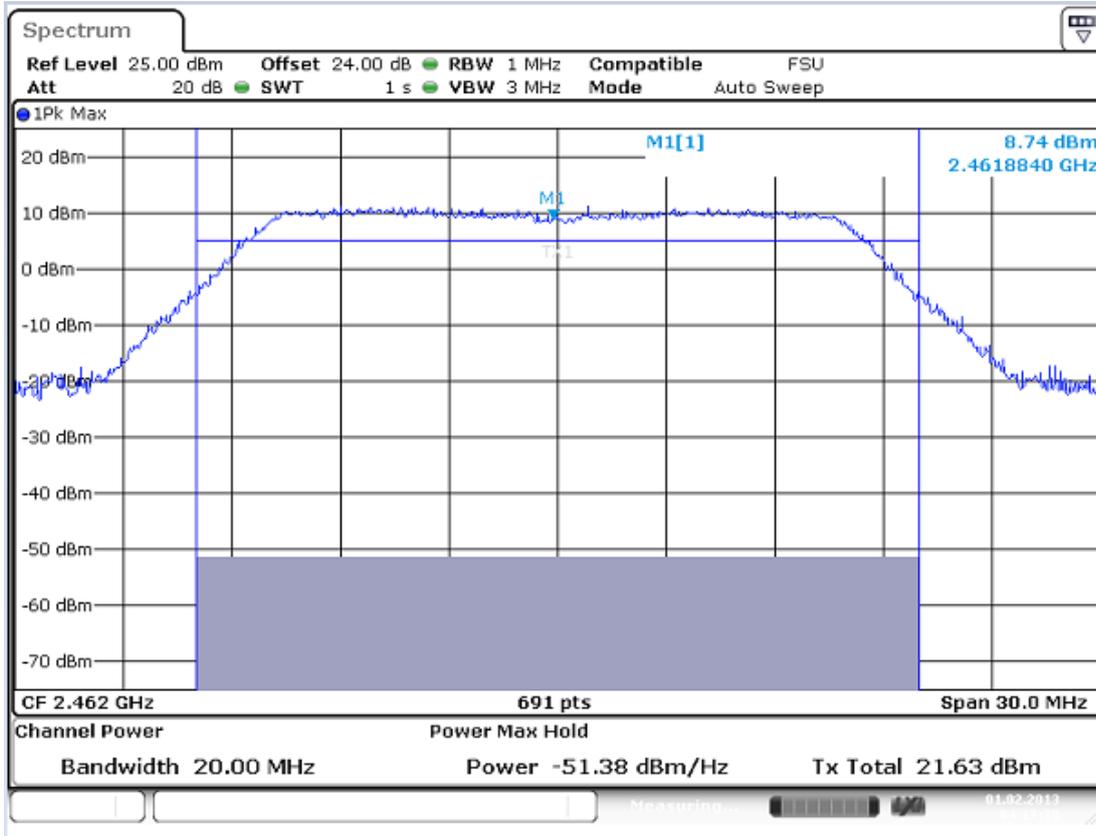


2.7 11N20_L

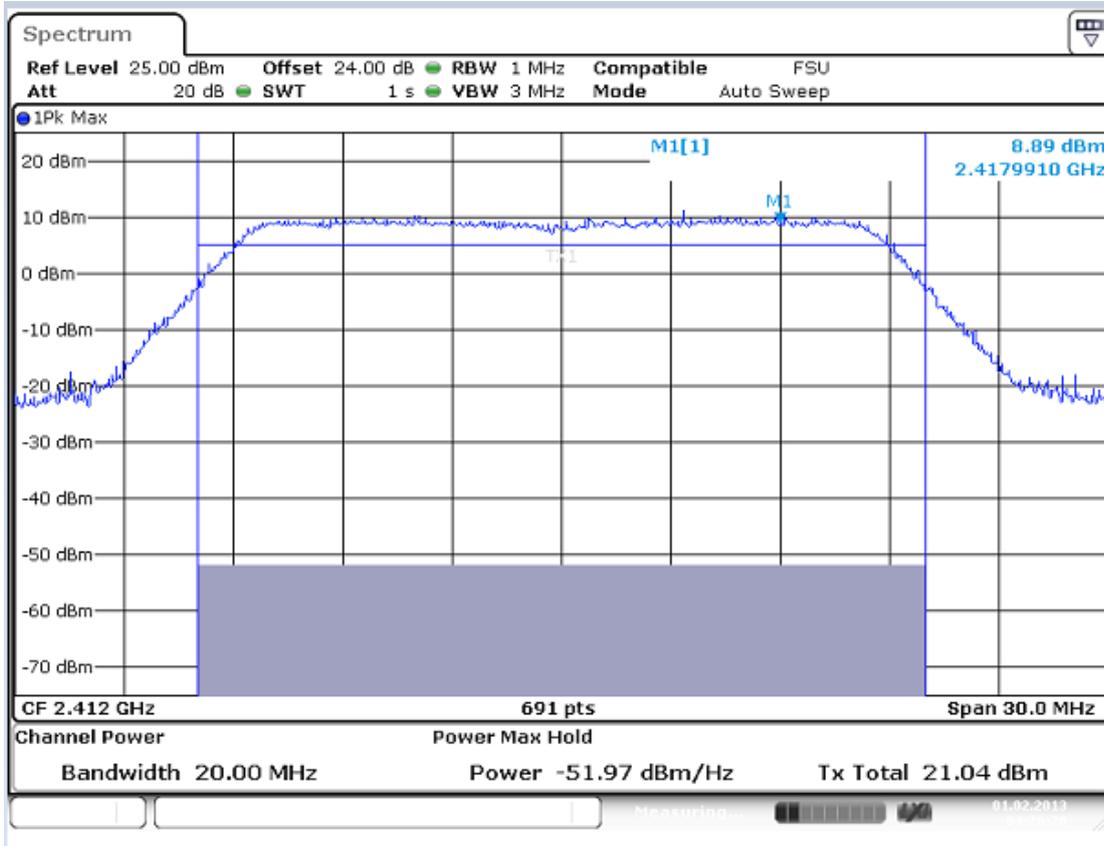

2.8 11N20_M

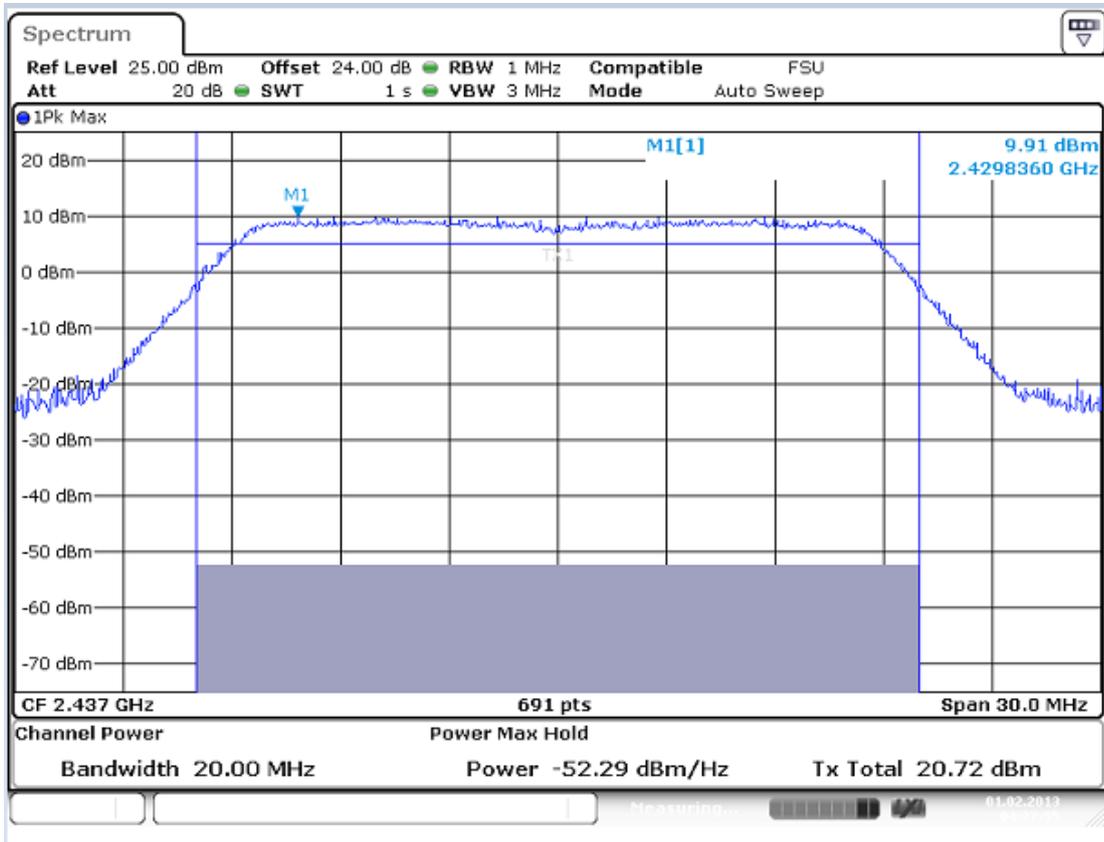

2.9 11N20_H

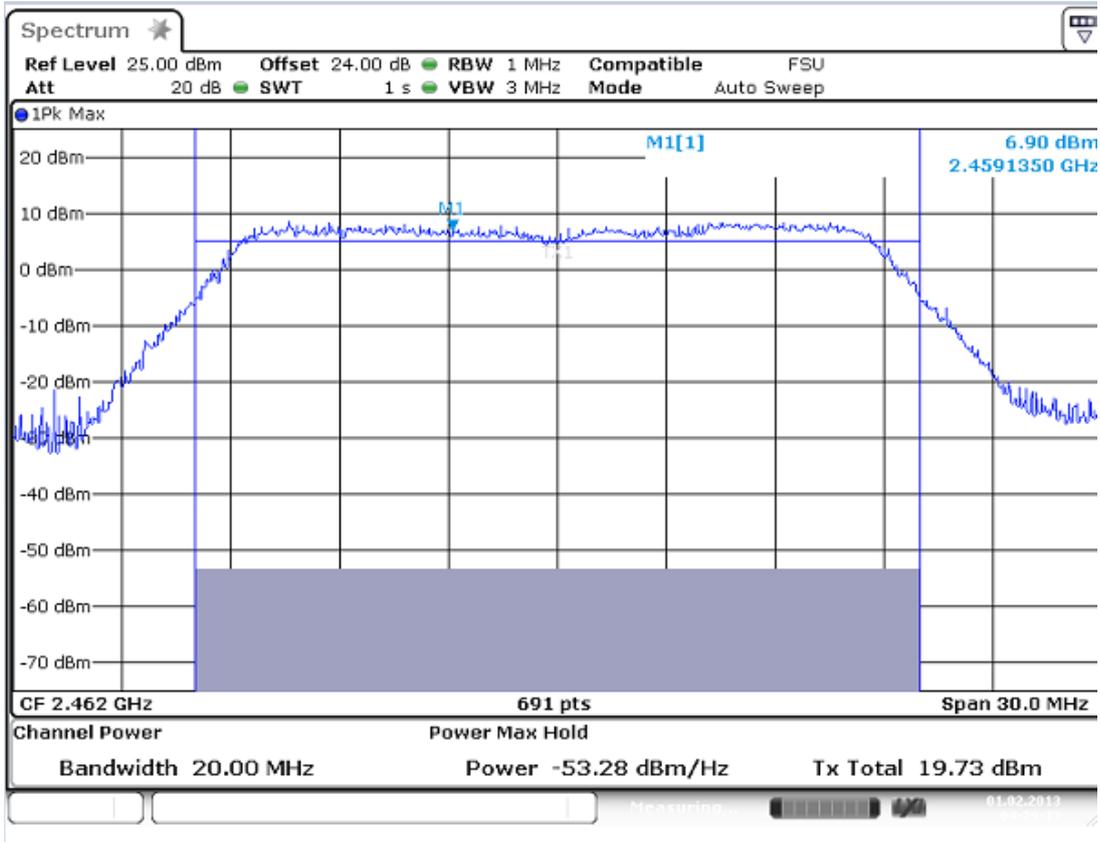




Appendix C: Maximum Power Spectral Density Level

Part I - Test Results

Test Mode	Test Channel	Frequency[MHz]	PD[MHz]	Verdict
11B	L	2412	2.18	pass
11B	M	2437	2.04	pass
11B	H	2462	0.99	pass
11G	L	2412	-2.36	pass
11G	M	2437	-2.68	pass
11G	H	2462	-2.42	pass
11N20	L	2412	-2.91	pass
11N20	M	2437	-3.29	pass
11N20	H	2462	-3.84	pass


Part II - Test Plots

2.1 11B_L

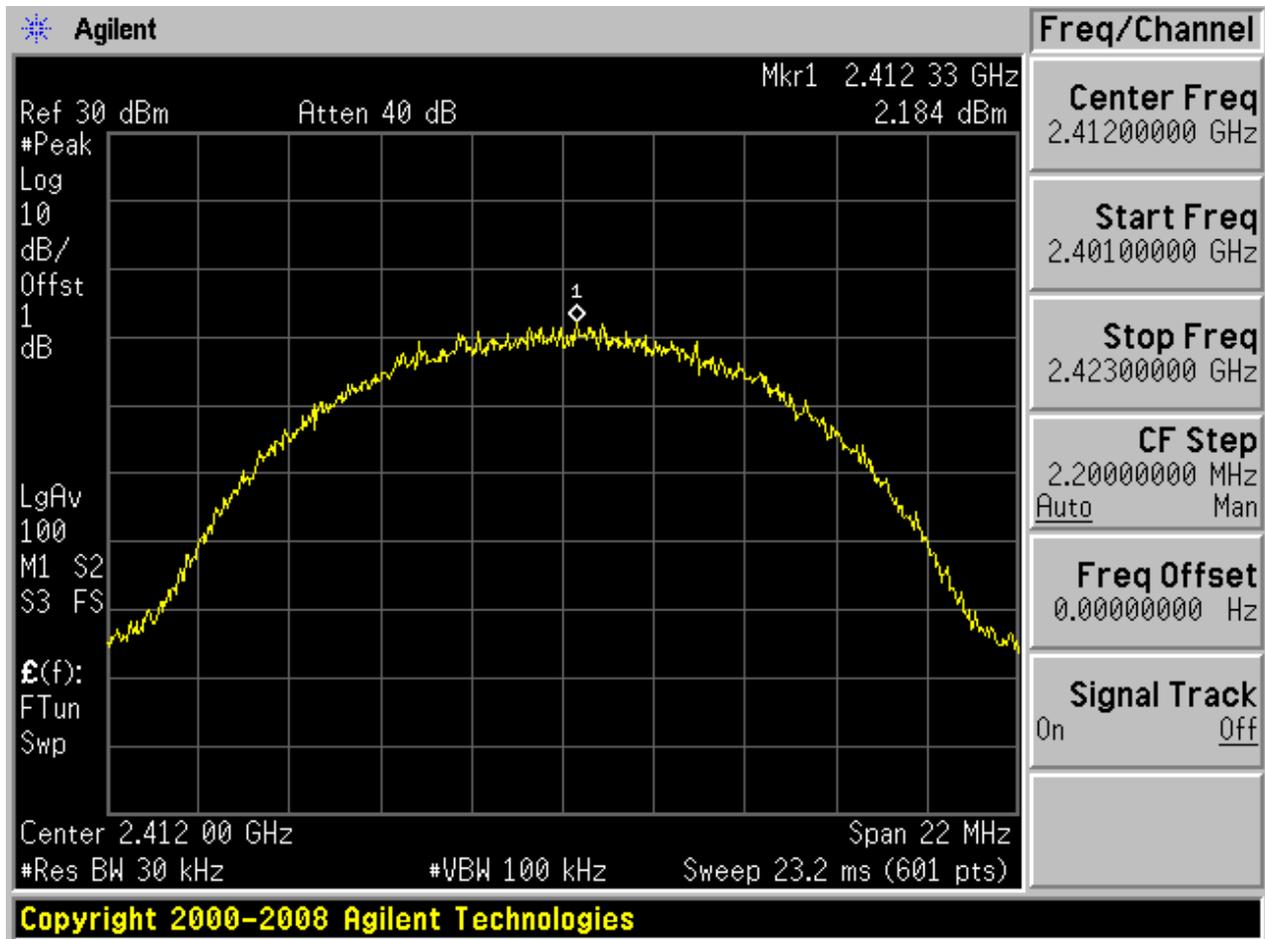




2.2 11B_M

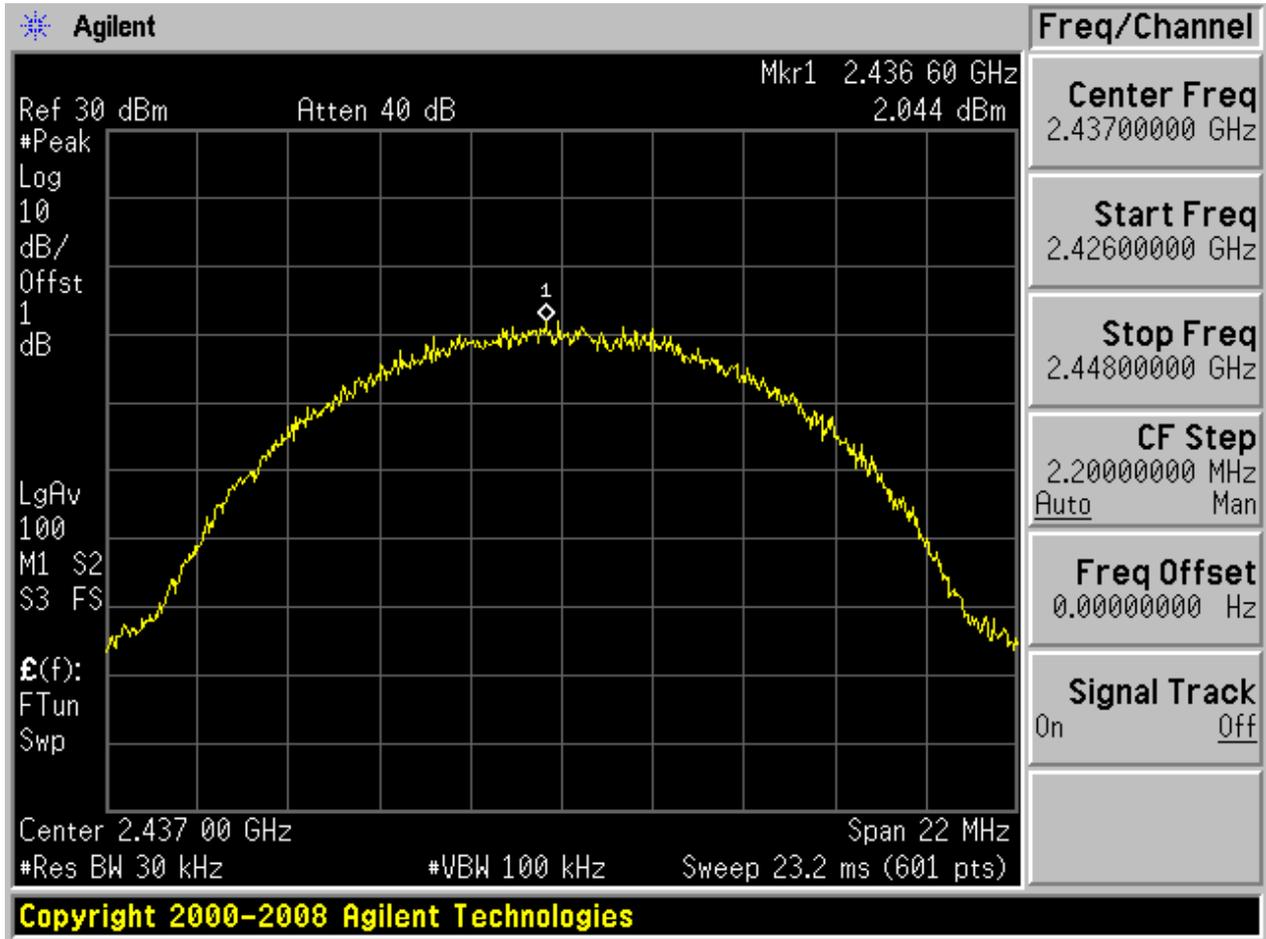




2.3 11B_H

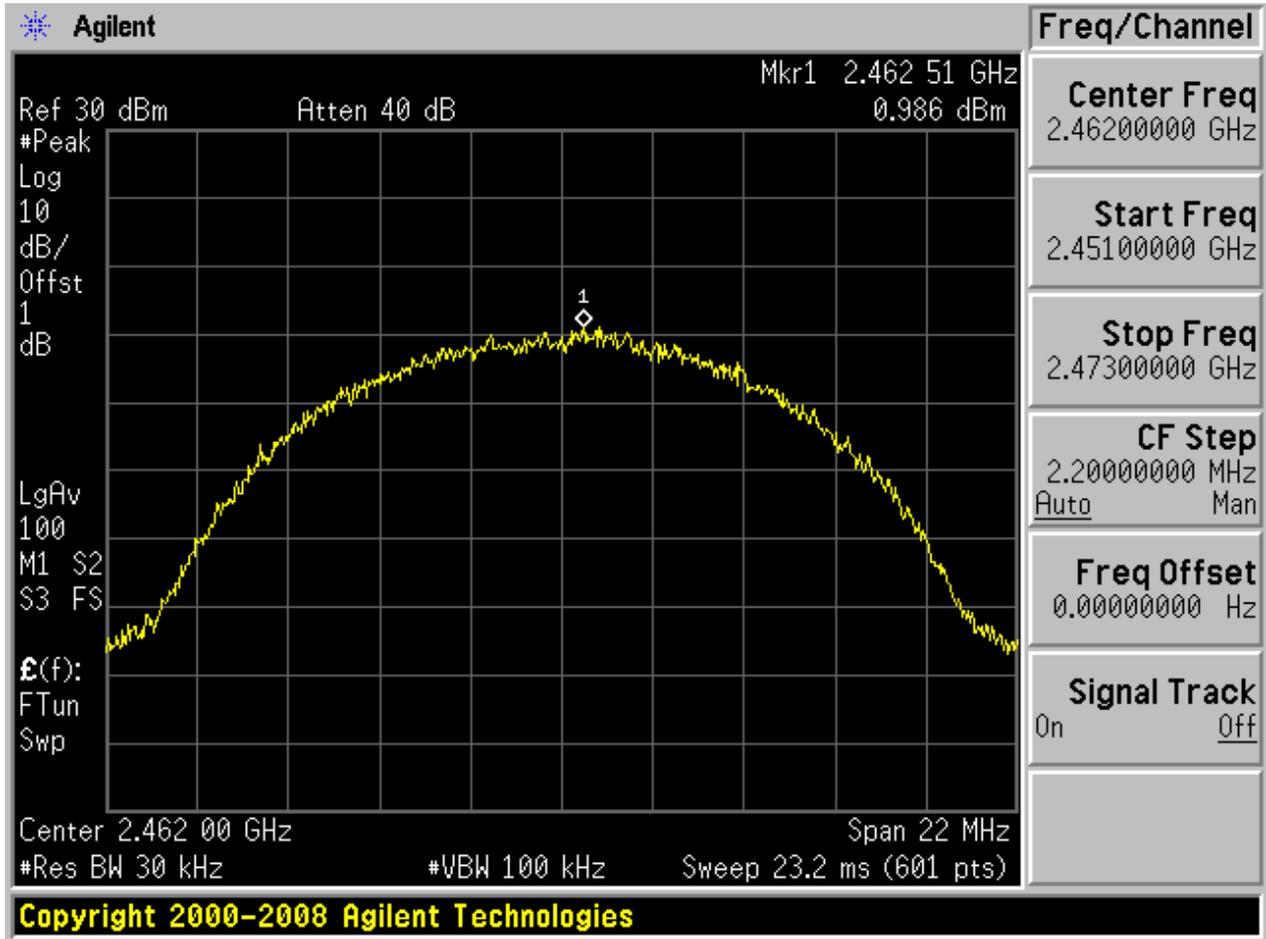




2.4 11G_L

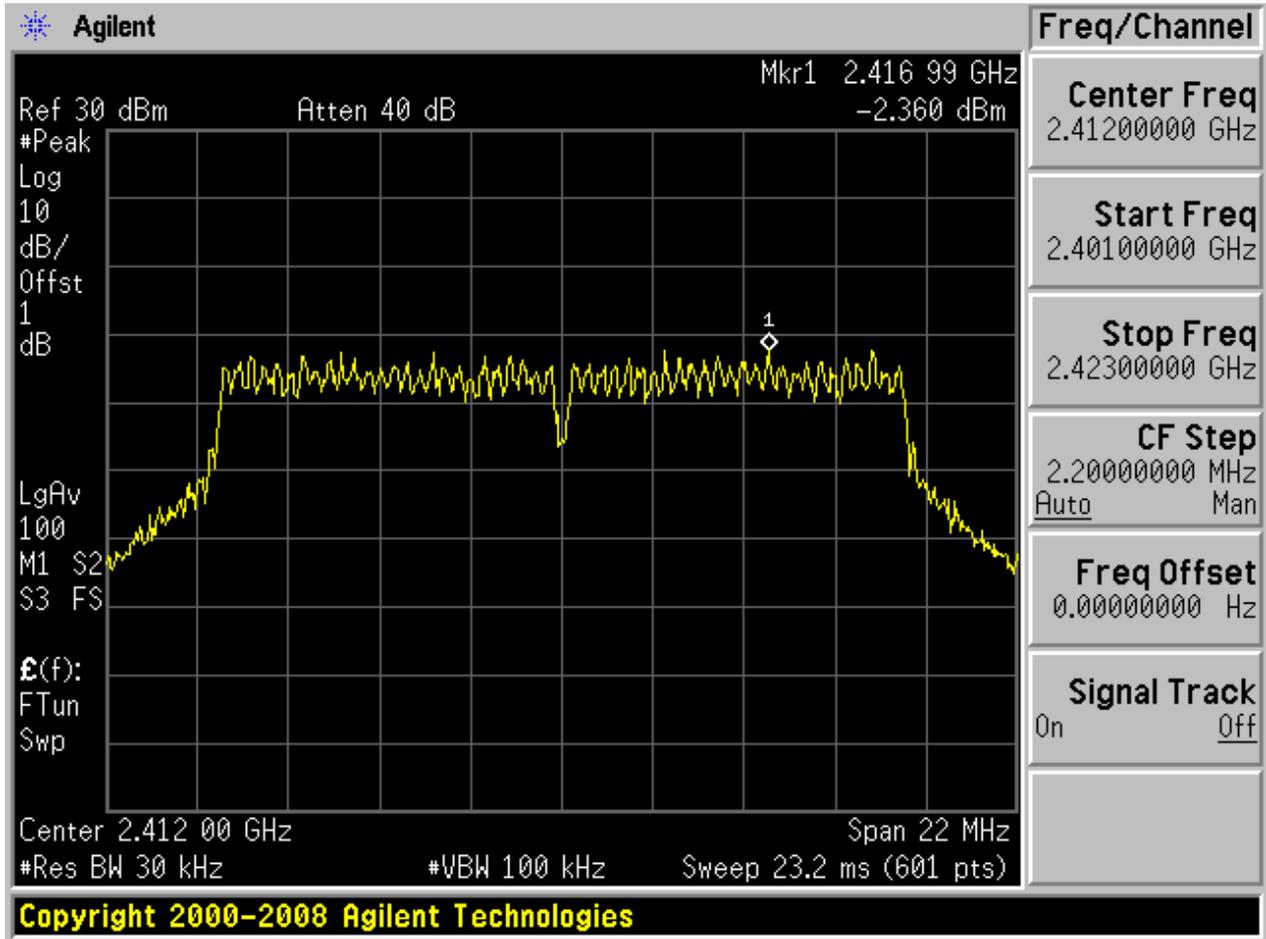




2.5 11G_M

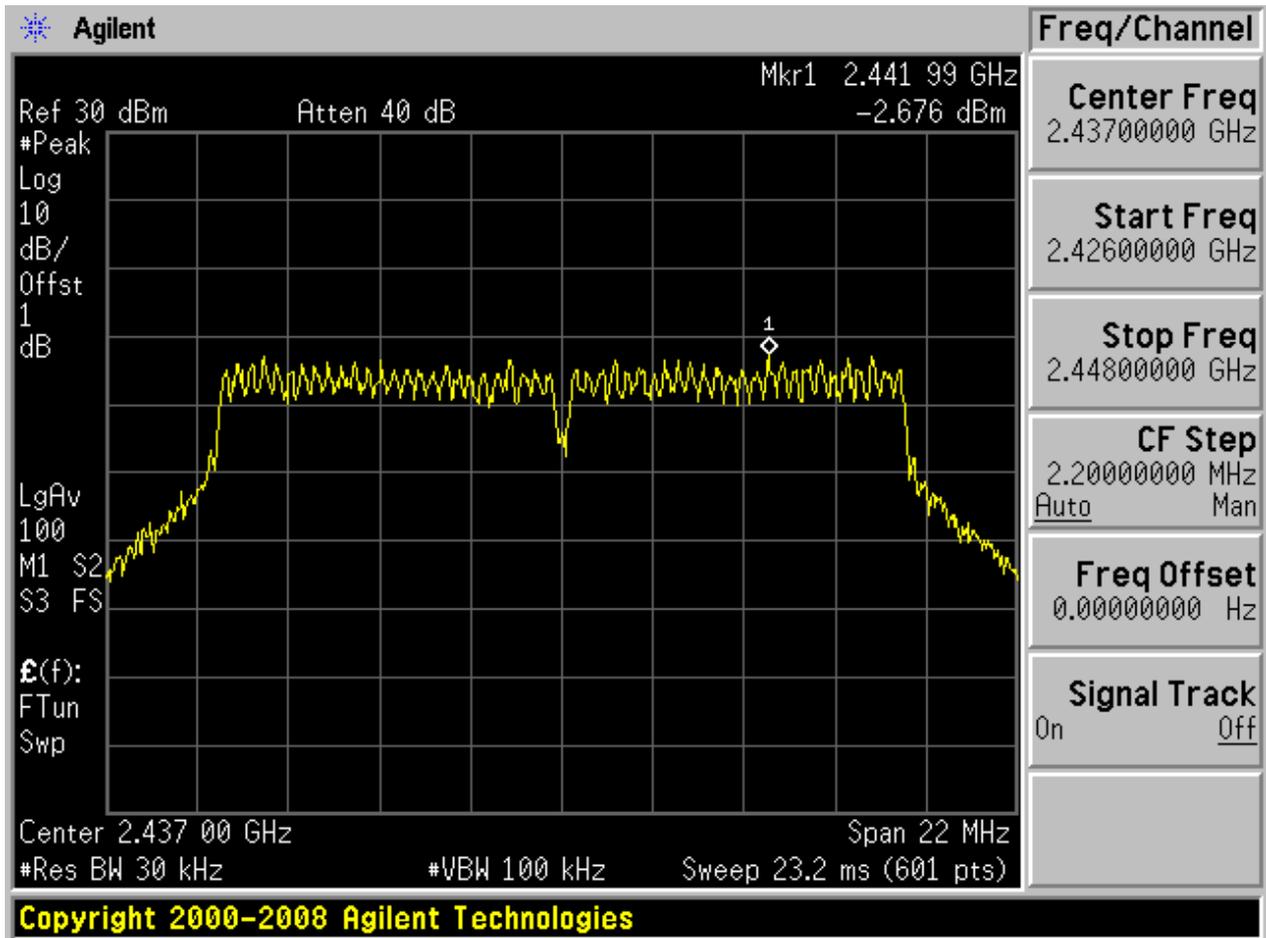


2.8 11N20_ M

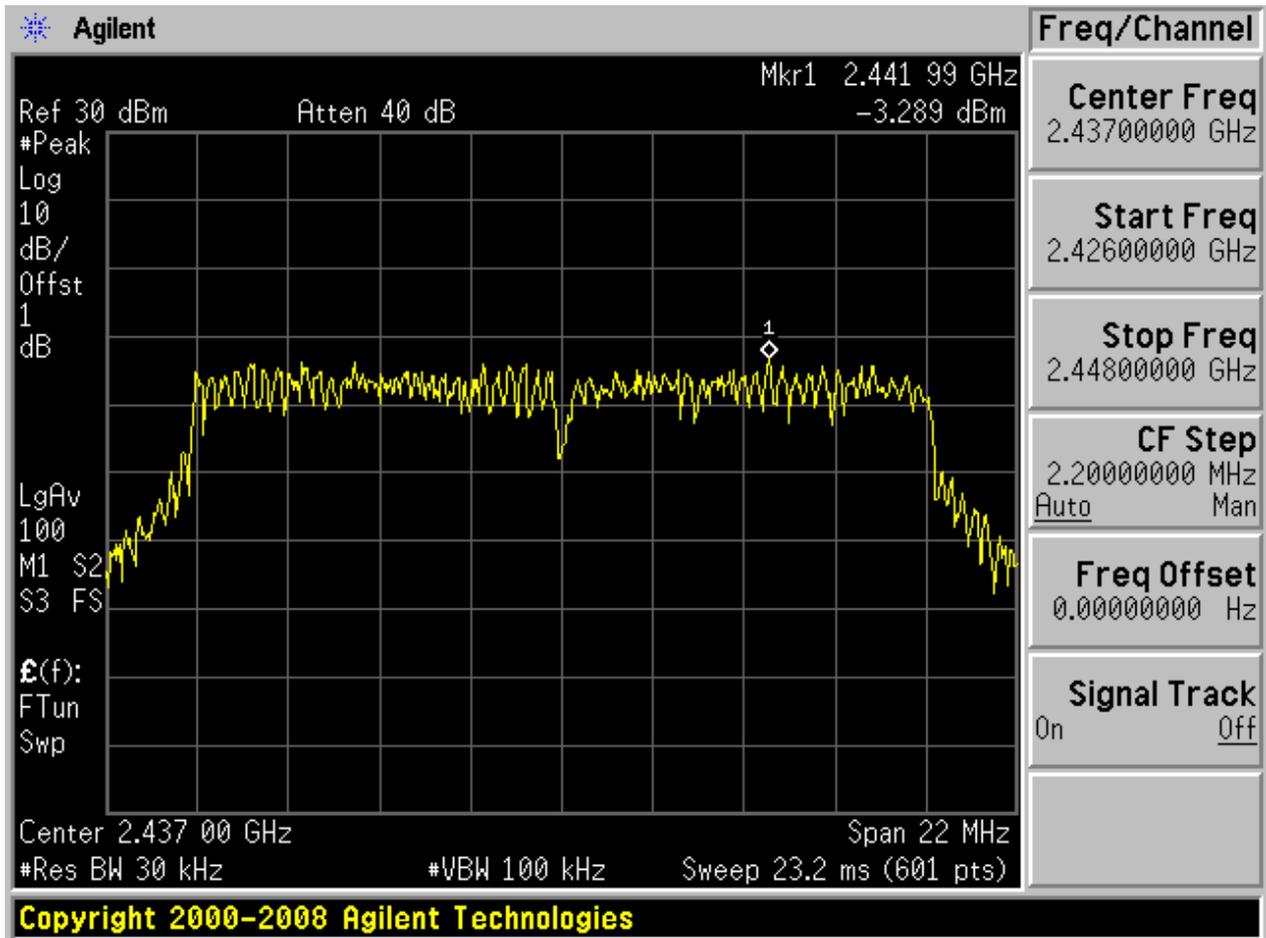



2.9 11N20_ H

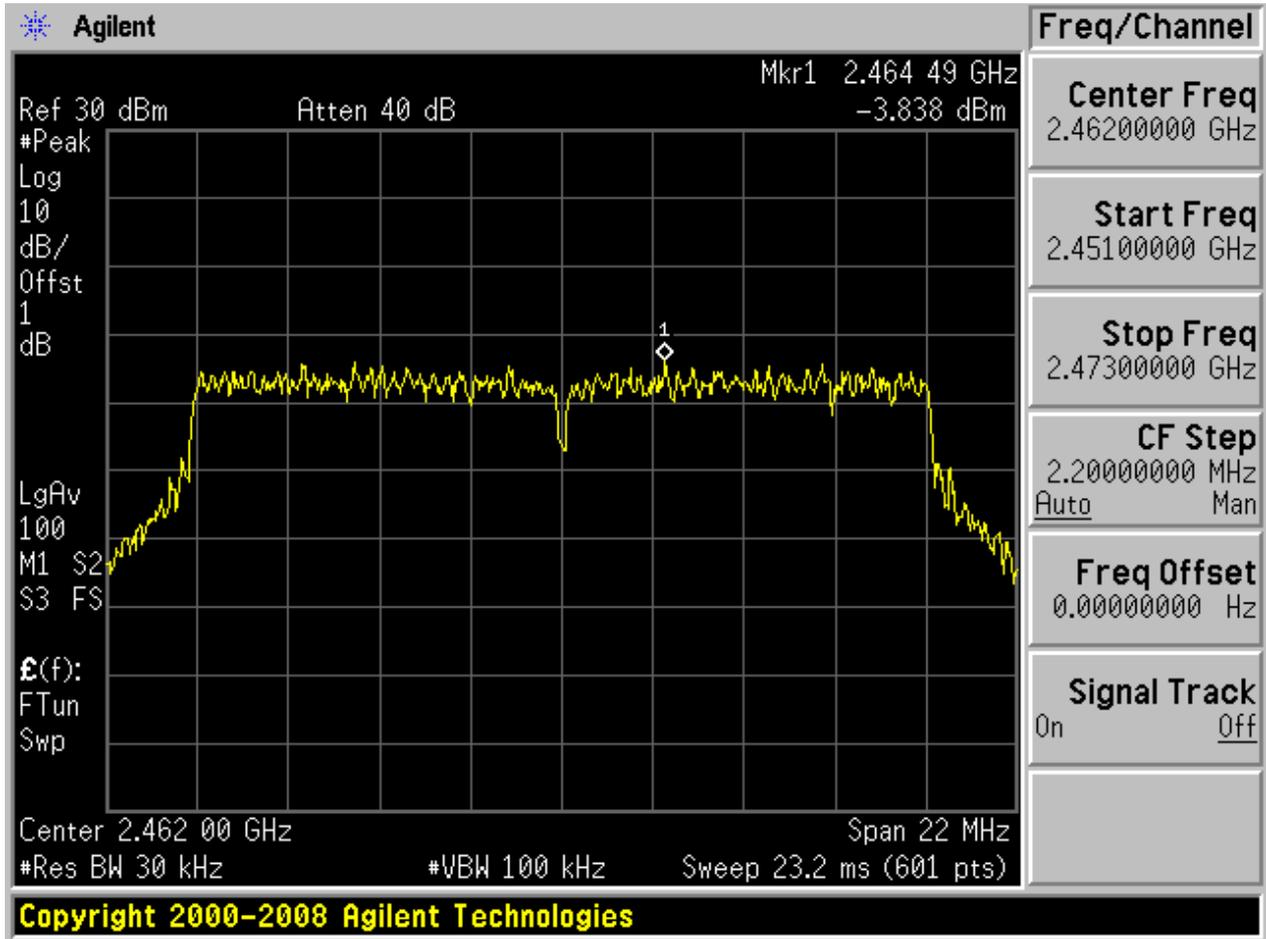




Appendix D: Band Edges Compliance

Part I - Test Results


Test Mode	Test Channel	Frequency[MHz]	Carrier Power[dBm]	Max.Spurious Level[dBm]	Verdict
11B	L	2412	5.40	-41.03	pass
11B	H	2462	4.25	-47.28	pass
11G	L	2412	0.25	-36.28	pass
11G	H	2462	0.65	-41.88	pass
11N20	L	2412	-1.98	-41.41	pass
11N20	H	2462	-1.48	-37.25	pass

Part II - Test Plots


2.1 11B_L

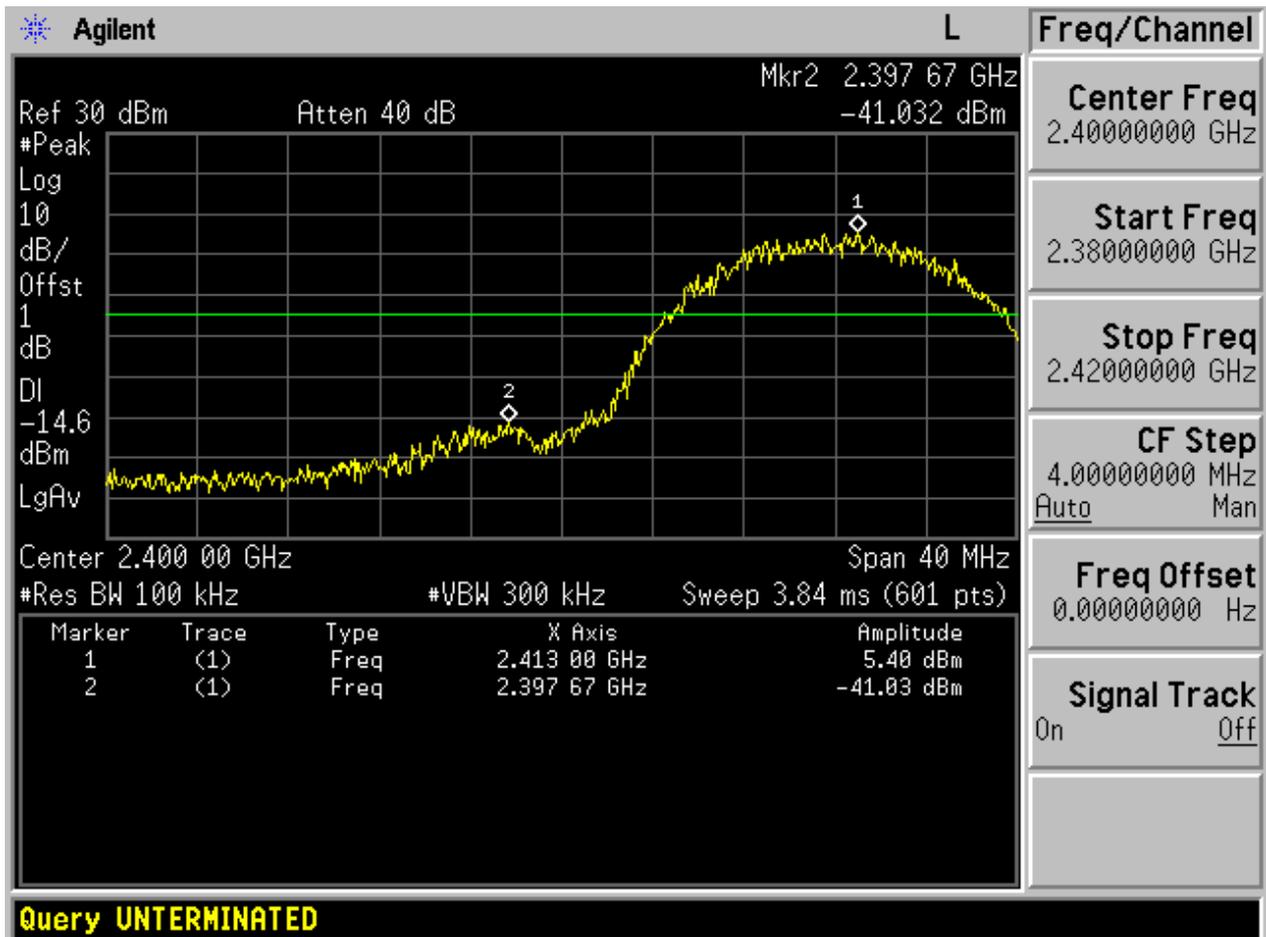


2.2 11B_H

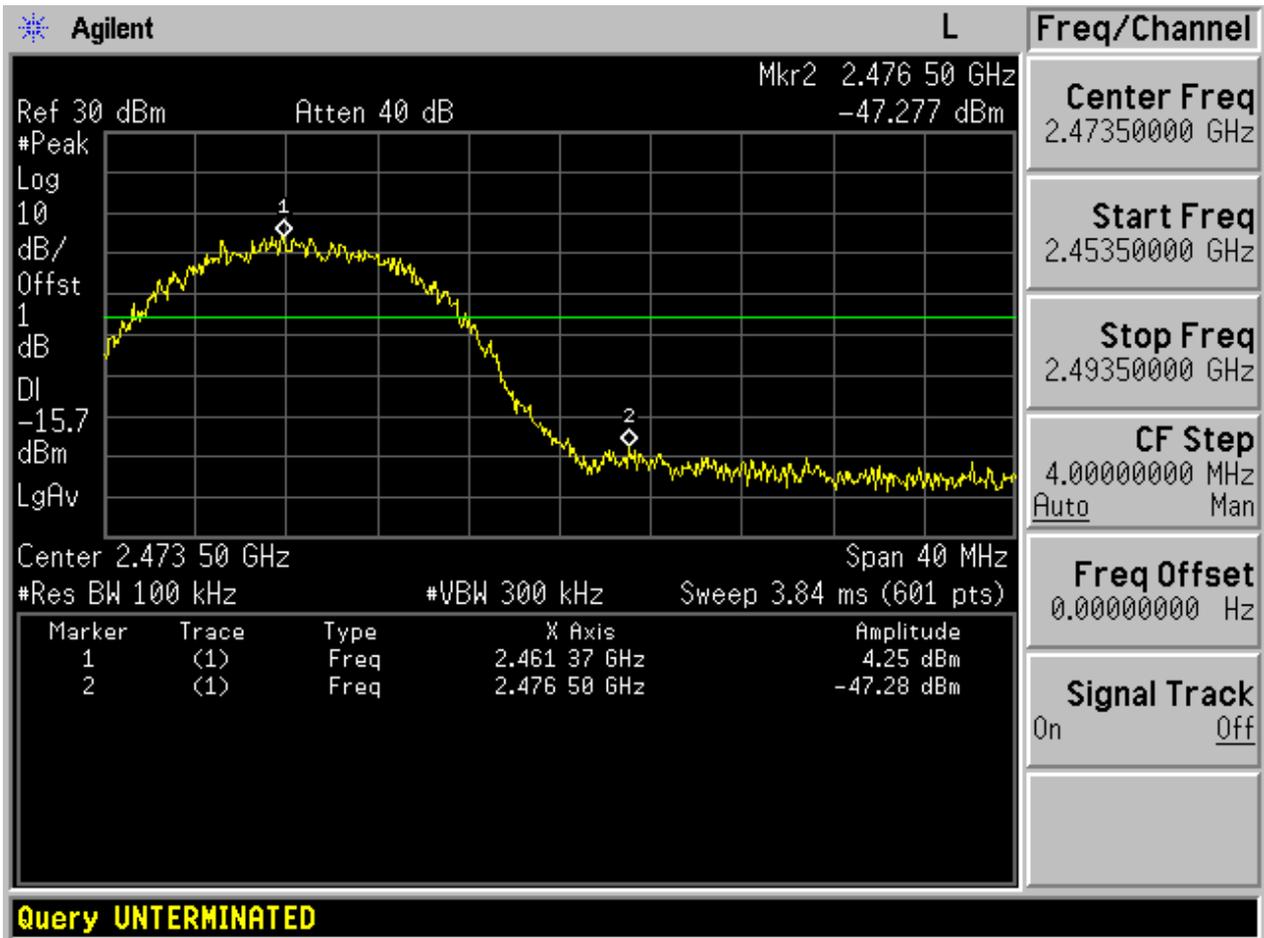


2.3 11G_L

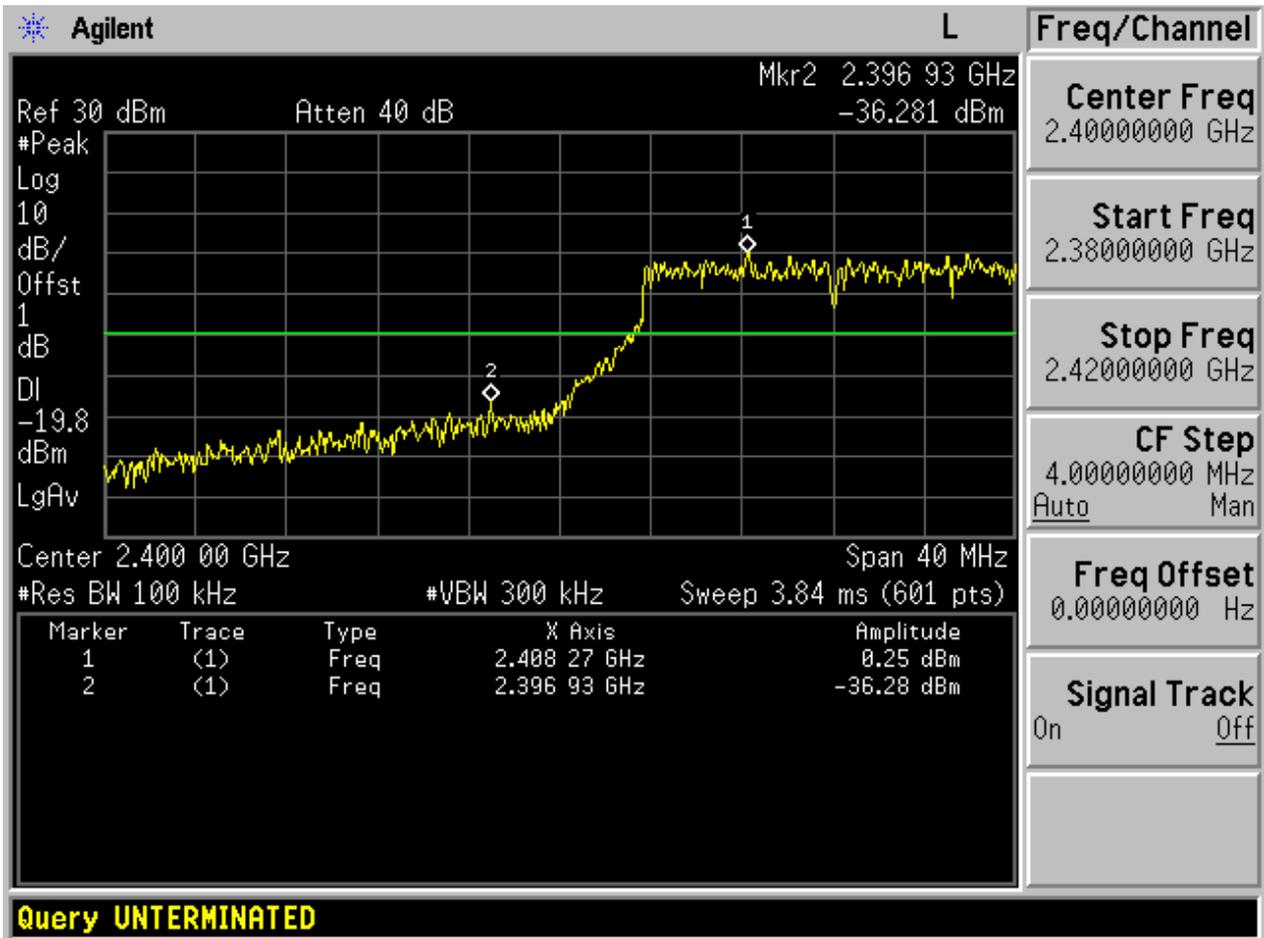

2.4 11G_H

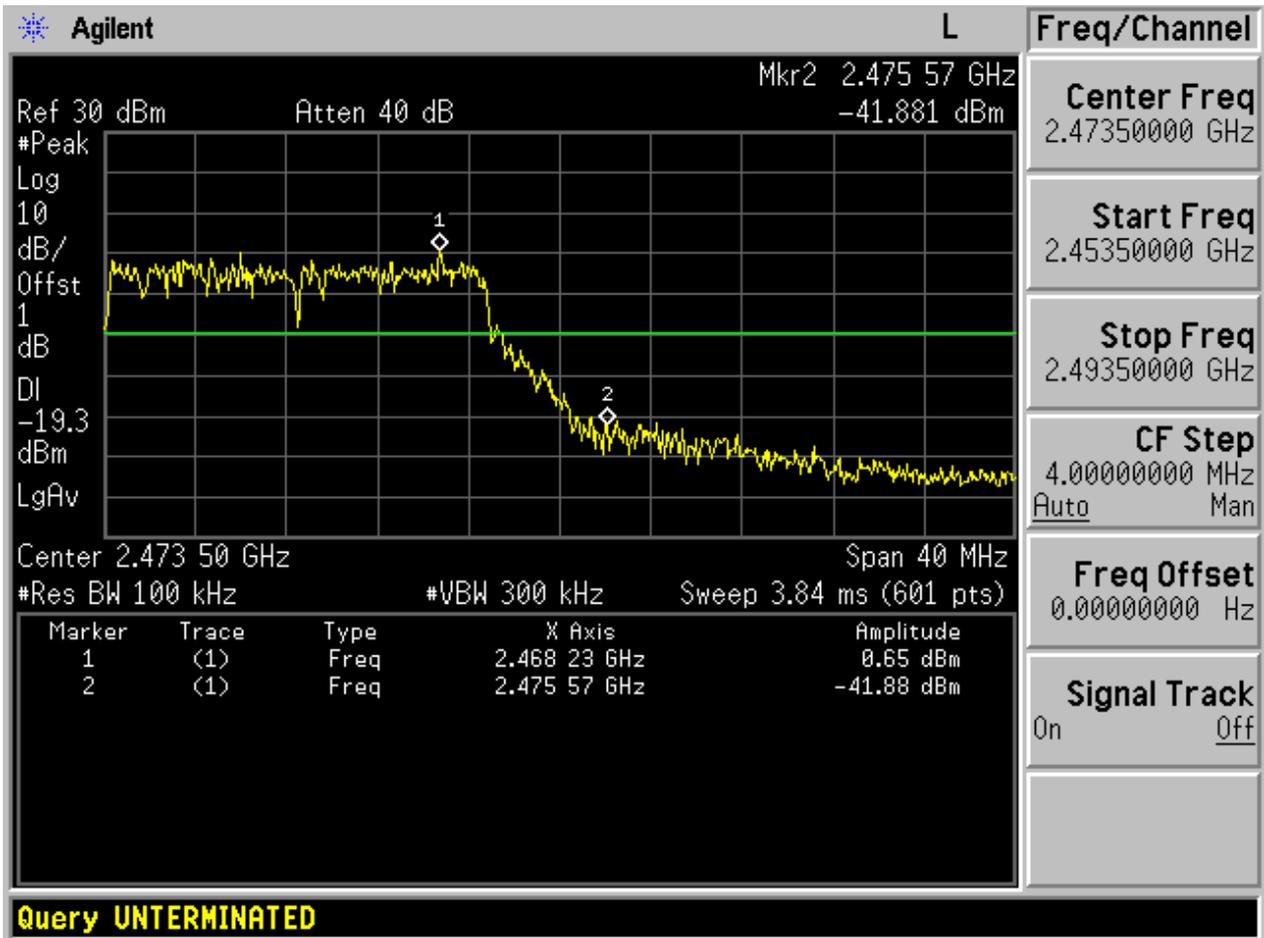


2.5 11N20_ L

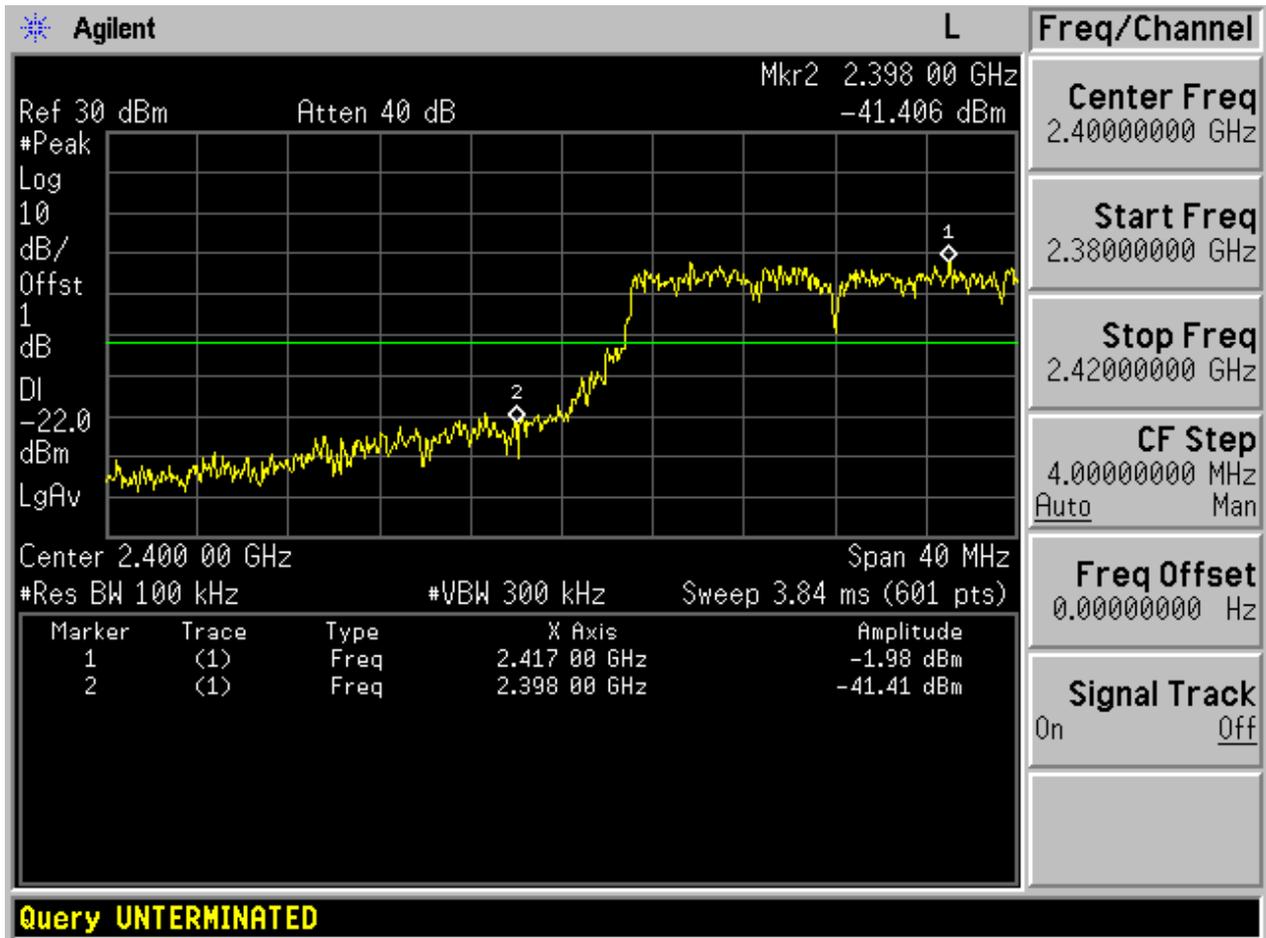



2.6 11N20_ H

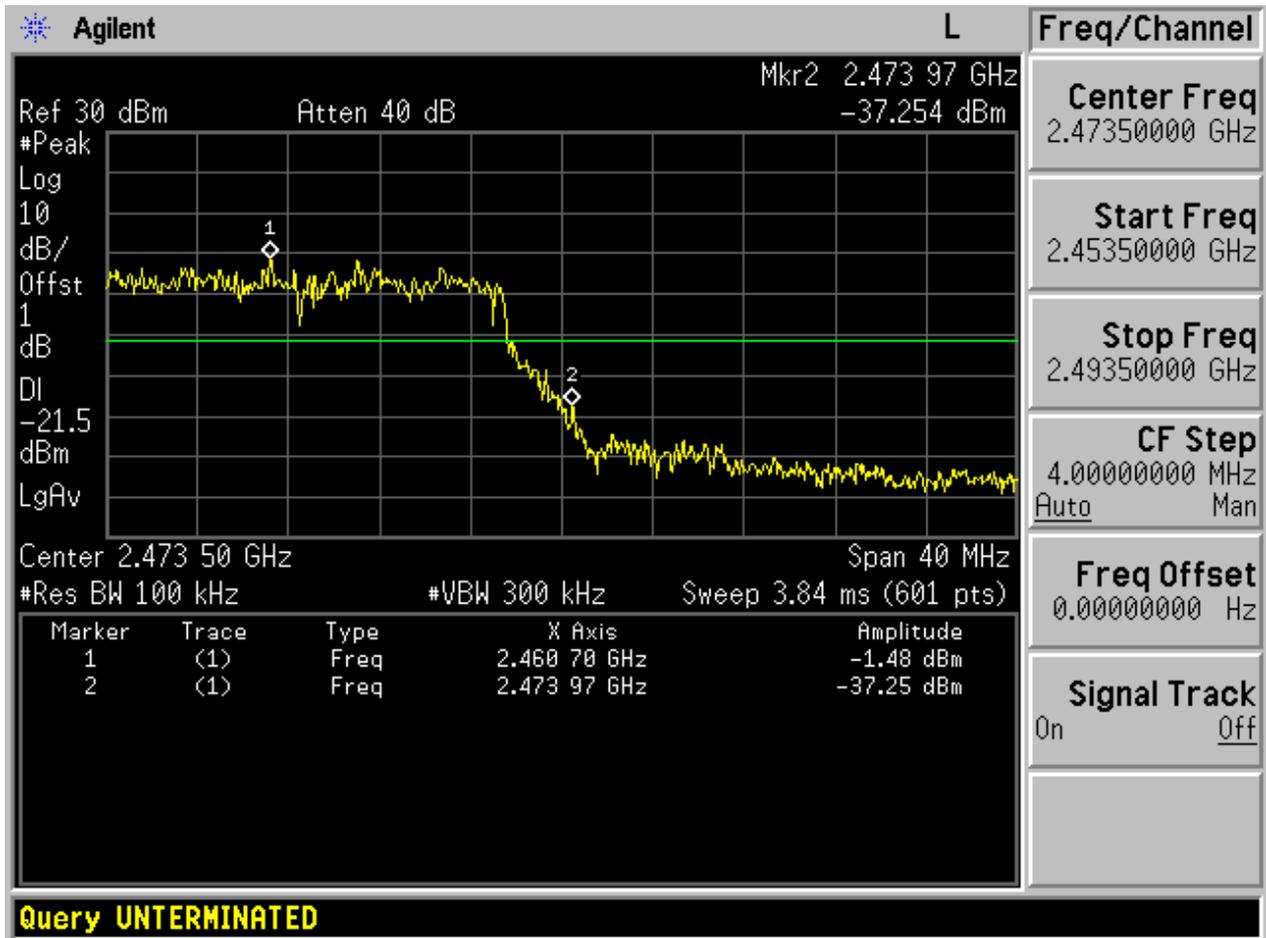

Appendix E: Unwanted Emissions into Non-Restricted Frequency

Bands

In this Appendix, the “Pref”, which is used as the reference level, refers to the peak power level in any 100 kHz bandwidth within the fundamental emission, the “Puw” refers to the maximum emission power in 100 kHz band segments outside of the authorized frequency band.

Considering that the higher ratio of RBW to the span for the frequency ranges below 30 MHz makes the results determination be complicated, a narrower RBW other than 100 kHz is used for these ranges. The measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \times \lg(100 [kHz]/\text{narrower RBW [kHz]})$. As to this Appendix, the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

For measurements on smart antenna systems (devices with multiple transmit chains), the test is performed at each chain and used as respective results for each chain, due to the relative-limit requirement.

In the result table, the “< Limit” denotes that “The Puw [dBm] is less than Pref [dBm] – 20 [dBm], see test plots for detailed”.


Part I - Test Results

Test Mode	Test Channel	Frequency[MHz]	Pref[dBm]	Puw[dBm]	Verdict
11B	L	2412	7.41	<limit	pass
11B	M	2437	6.55	<limit	pass
11B	H	2462	6.76	<limit	pass
11G	L	2412	2.18	<limit	pass
11G	M	2437	1.94	<limit	pass
11G	H	2462	1.88	<limit	pass
11N20	L	2412	2.23	<limit	pass
11N20	M	2437	2.00	<limit	pass
11N20	H	2462	1.69	<limit	pass

Part II - Test Plots


2.1 11B_L


Pref:

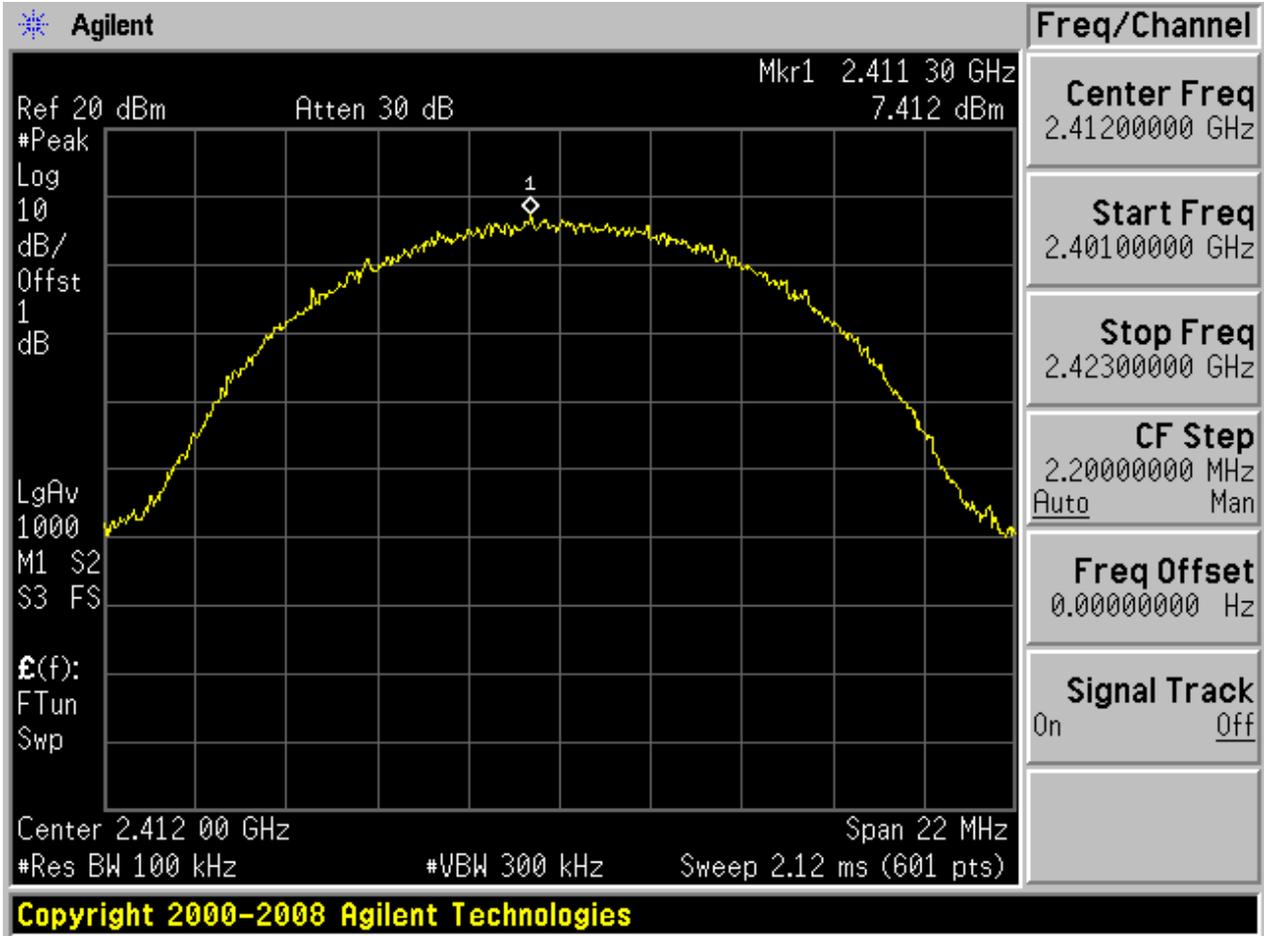






Puw:

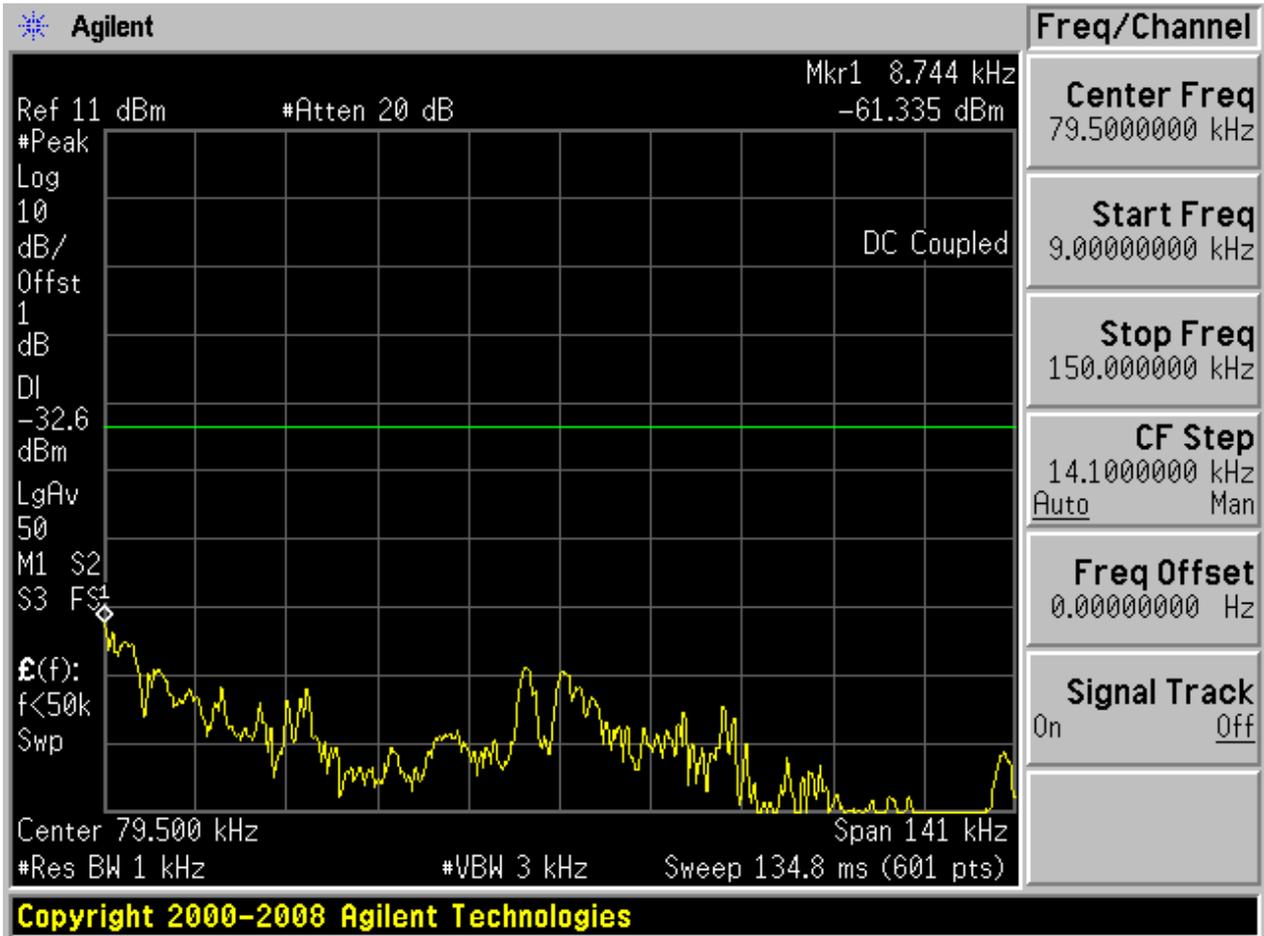


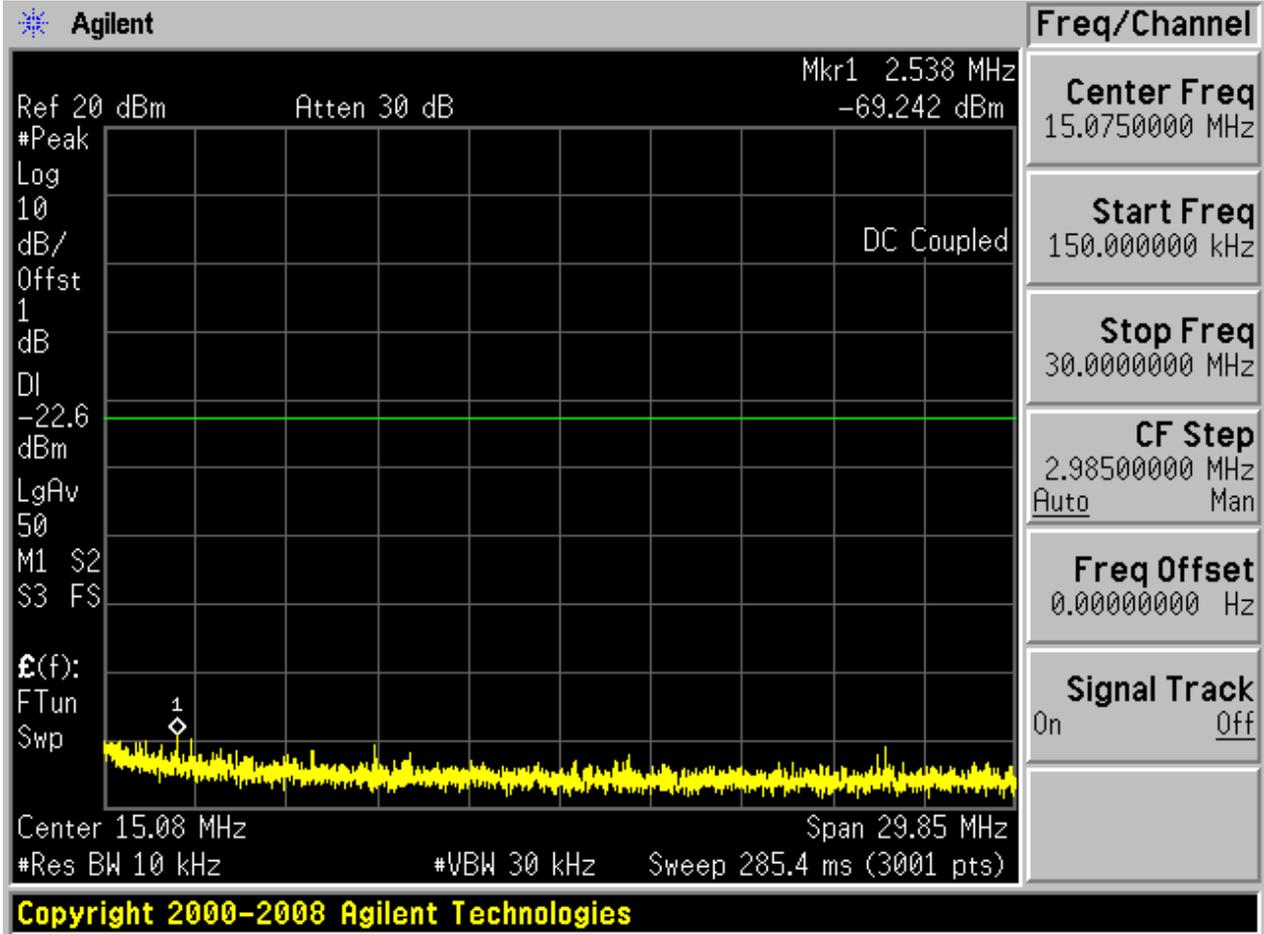

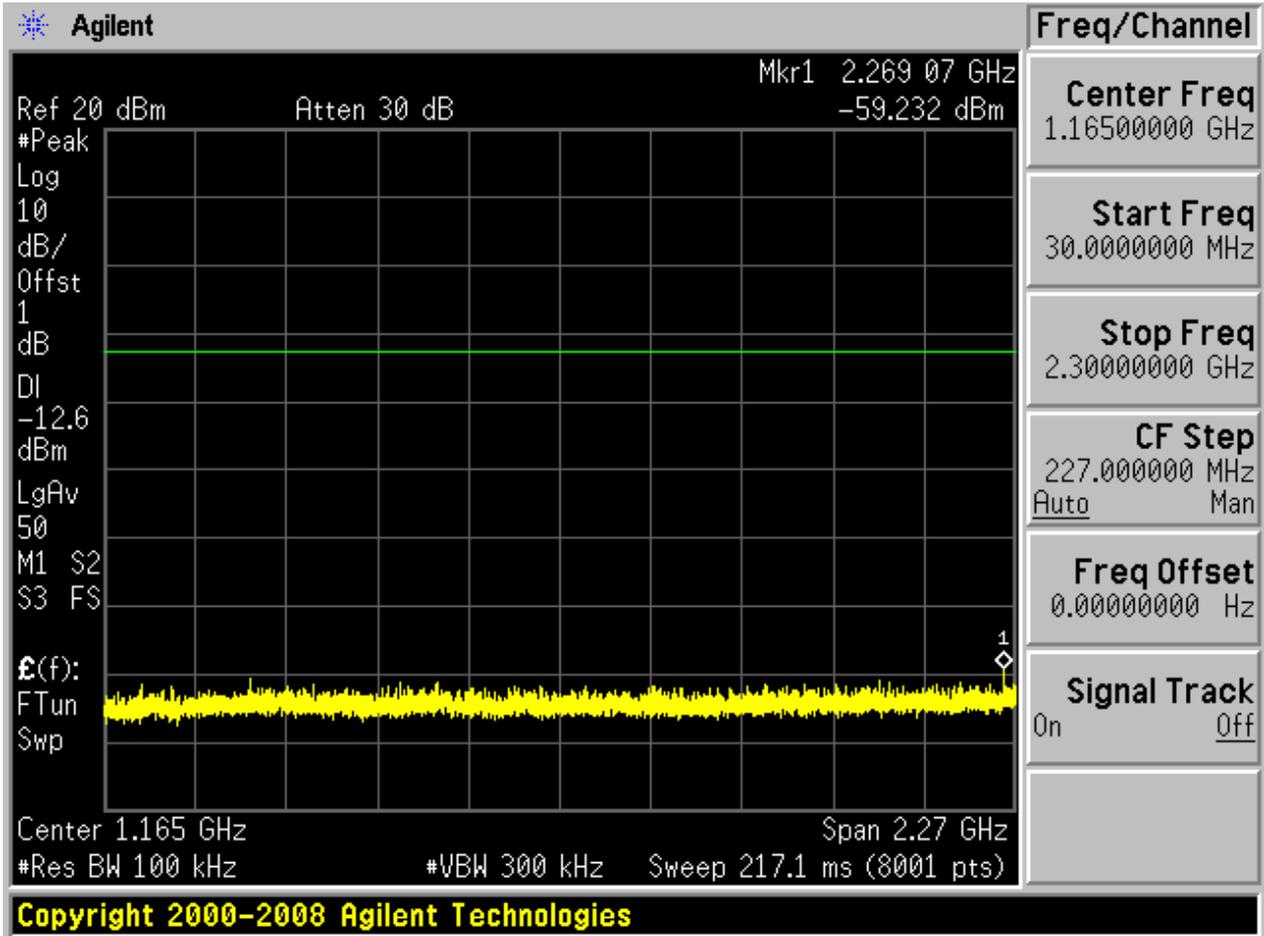

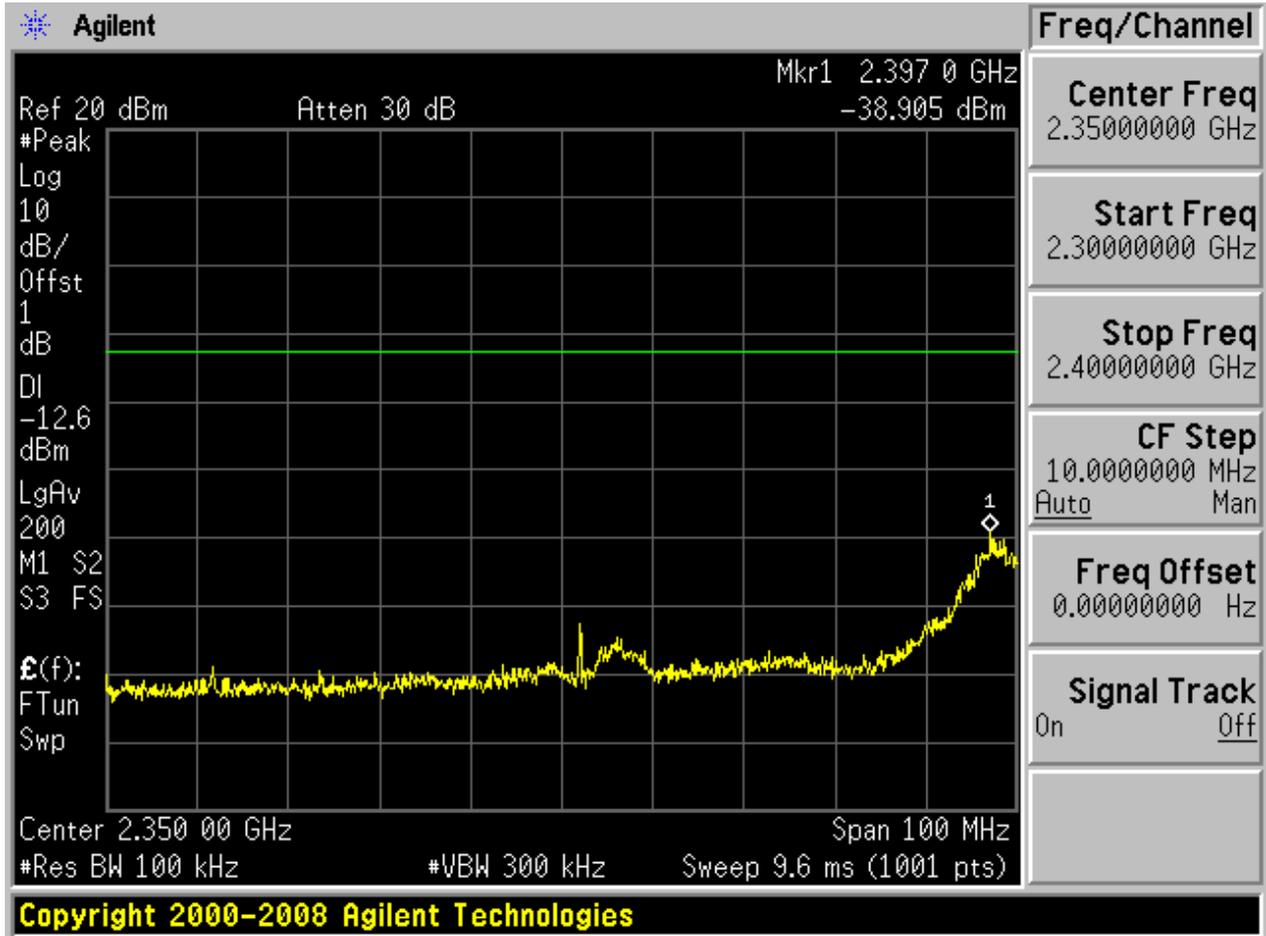


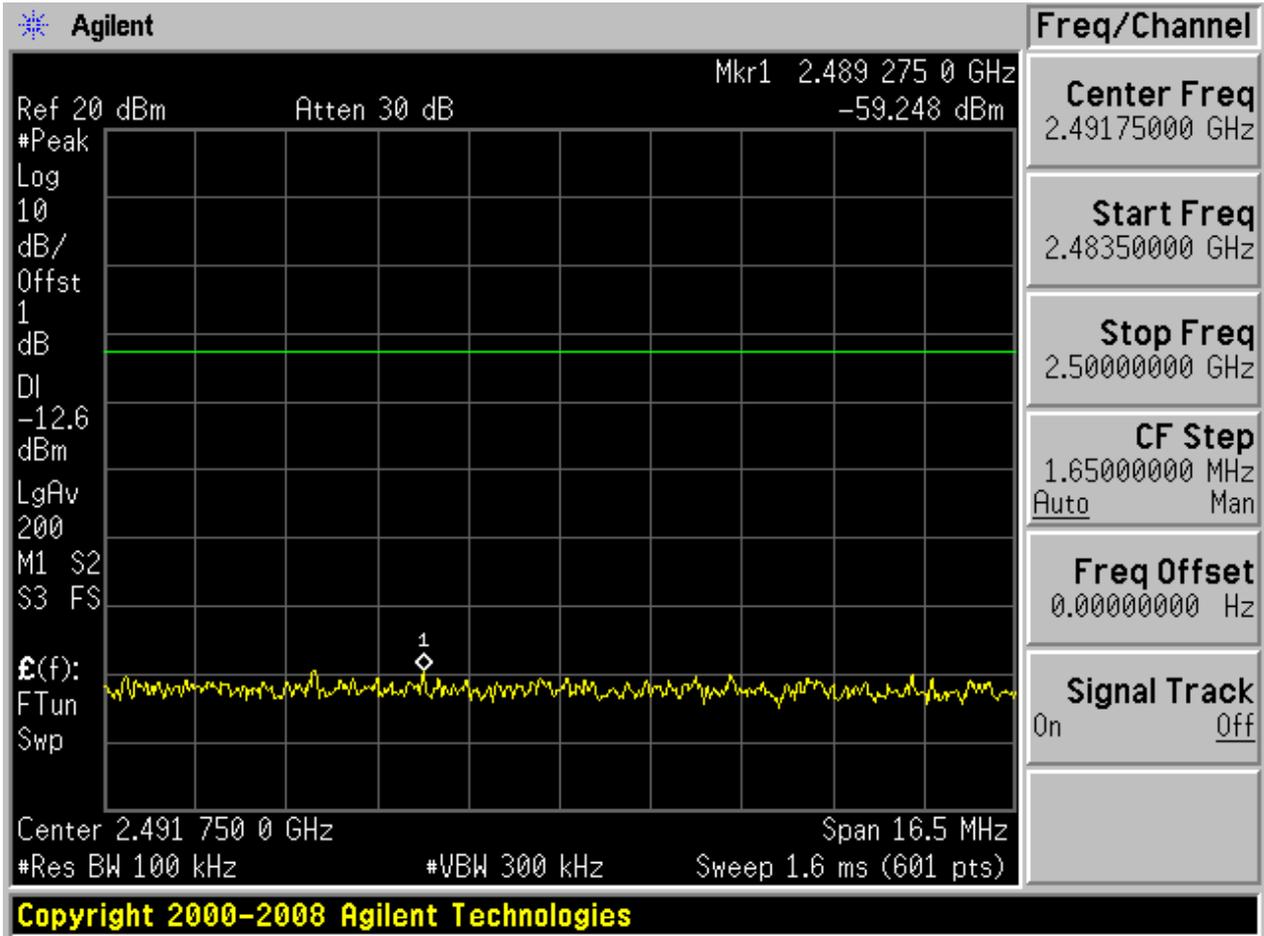

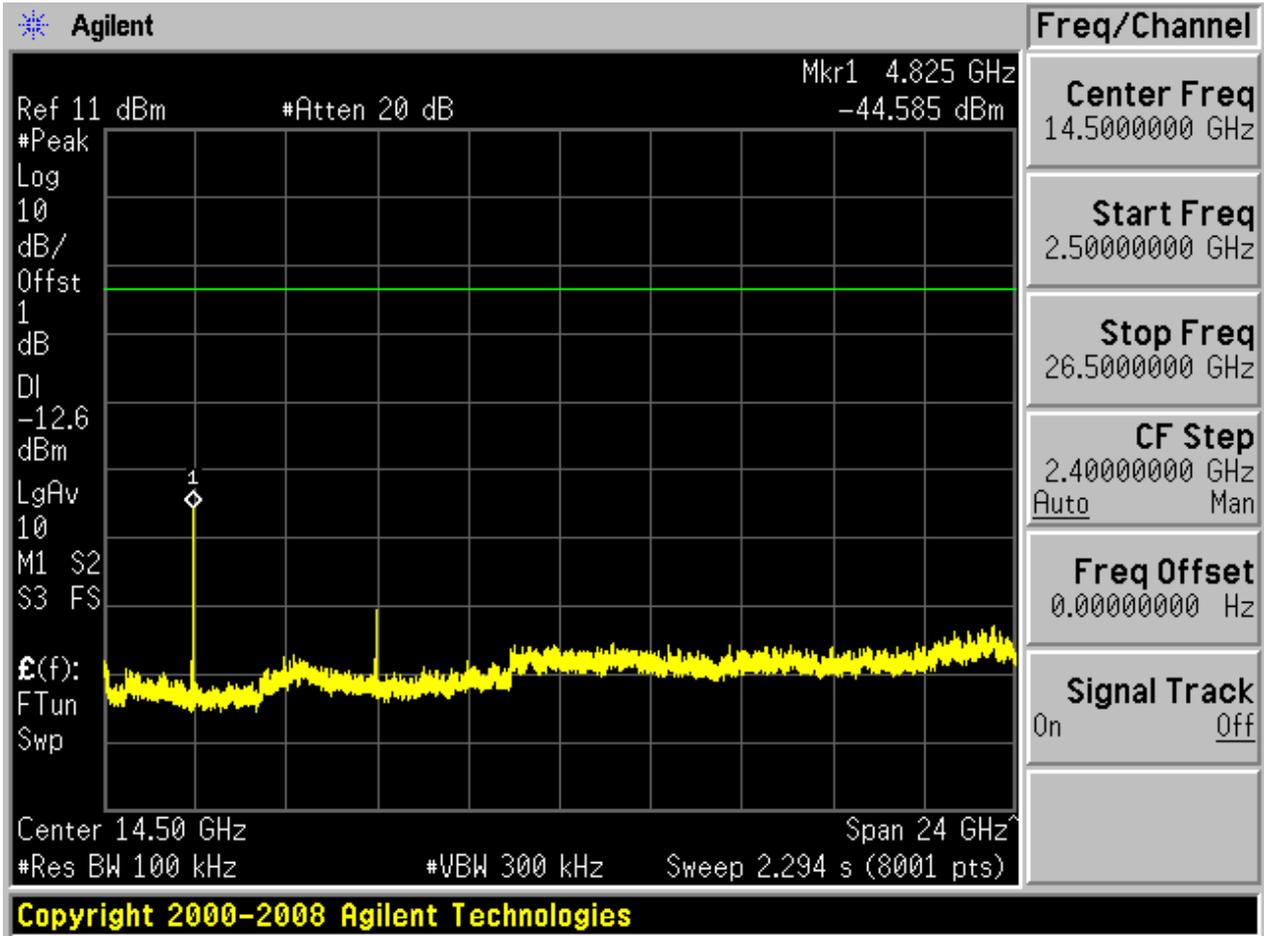


2.2 11B_M


Pref:

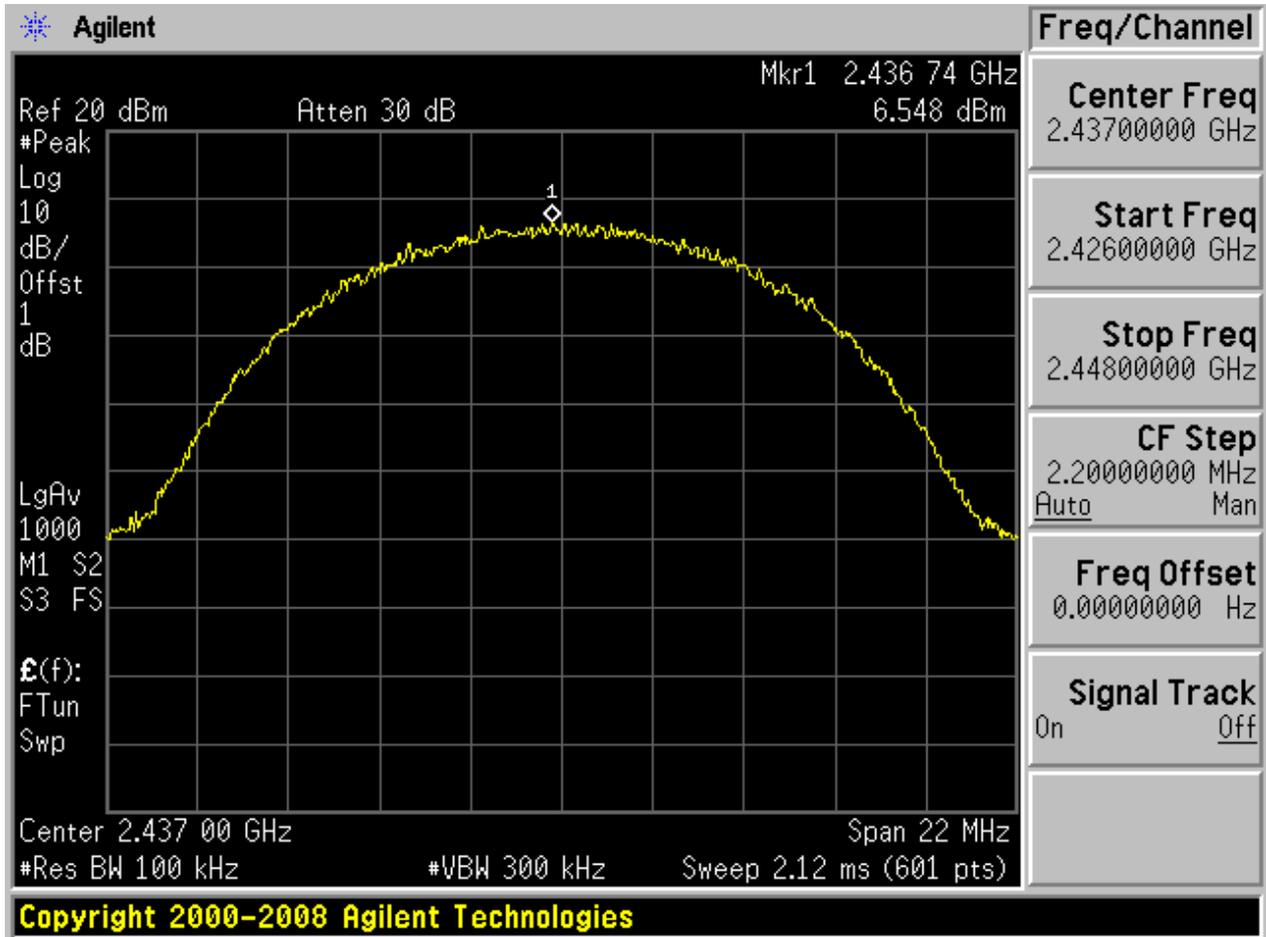






Puw:

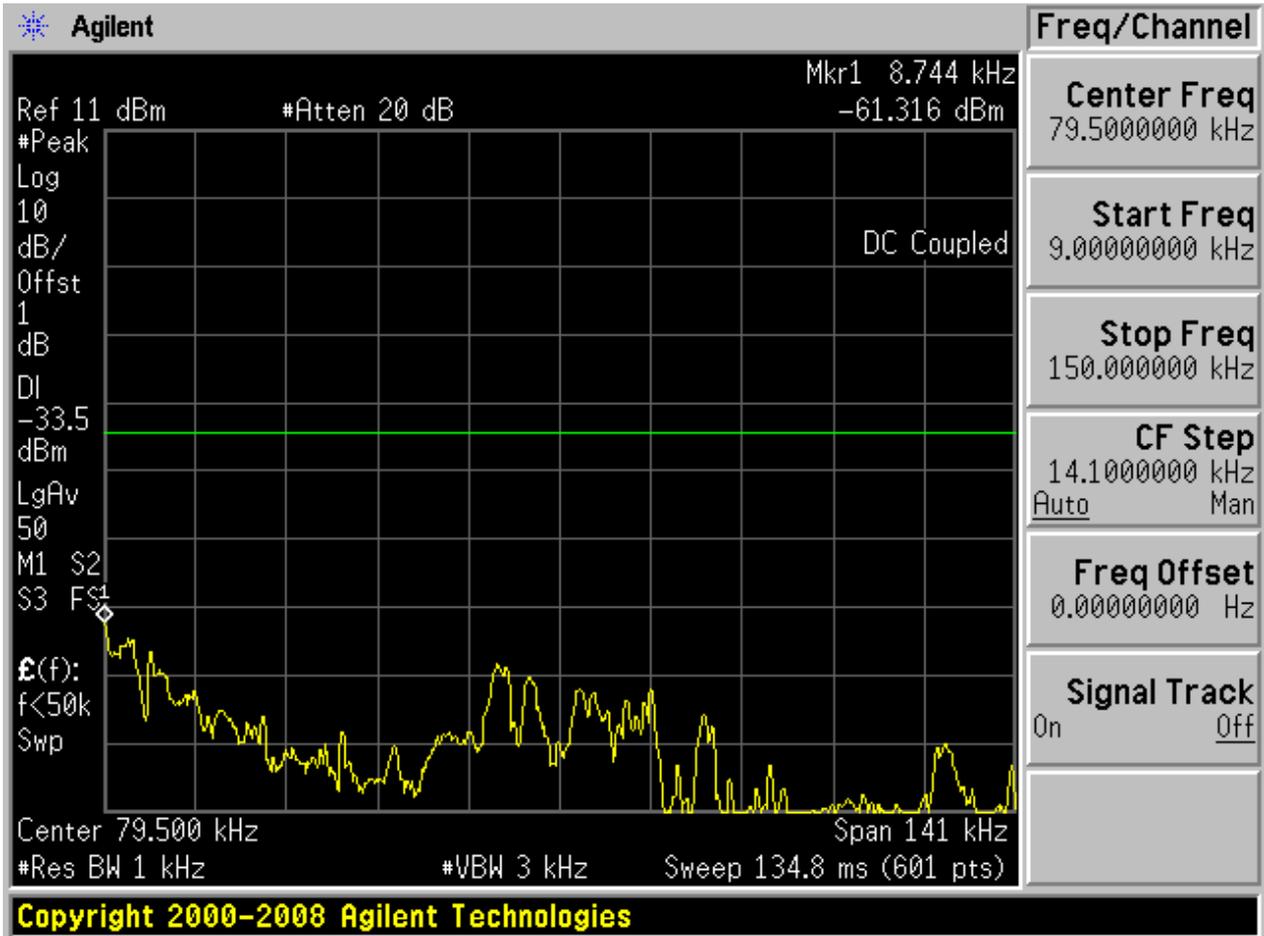

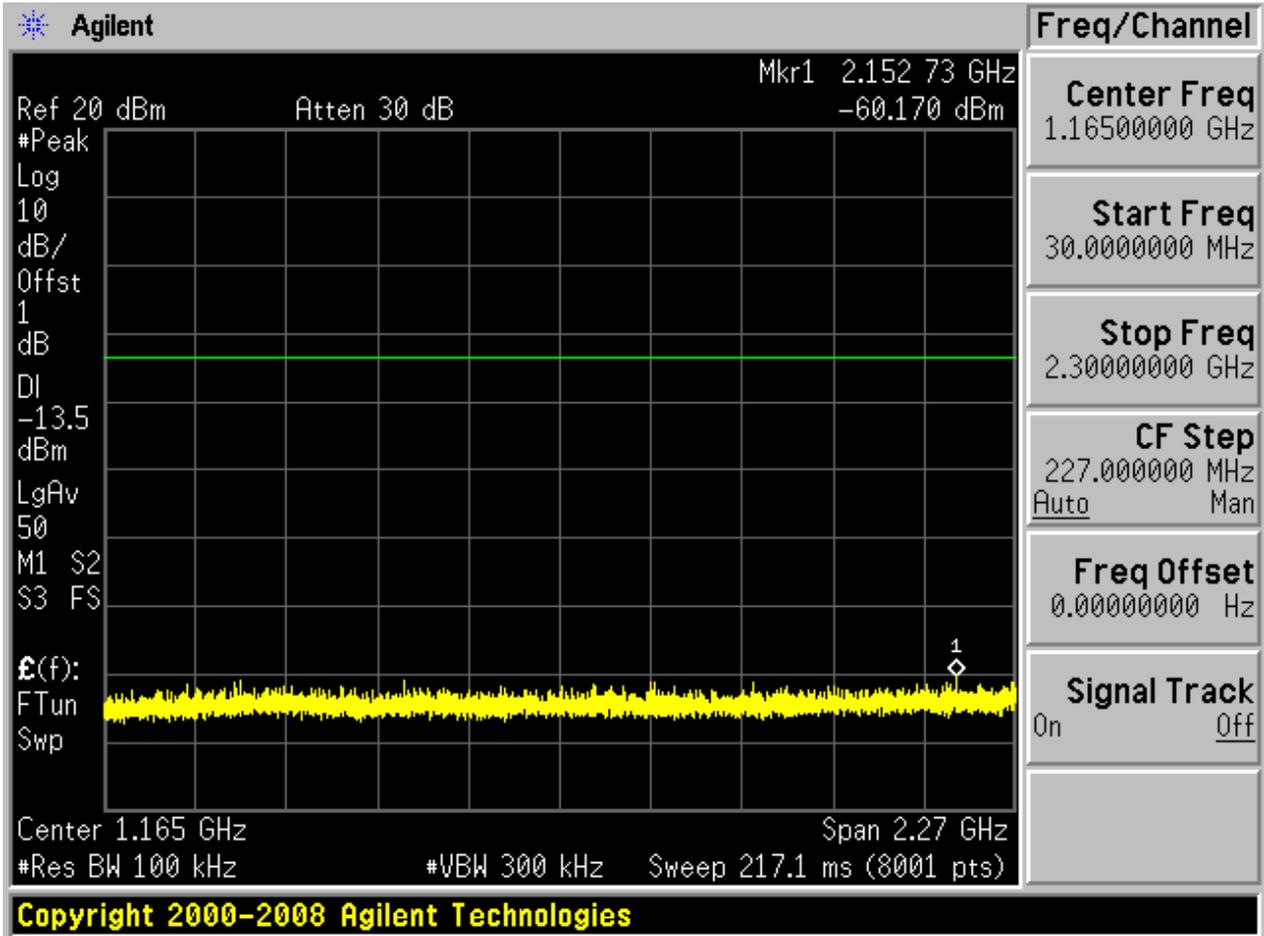

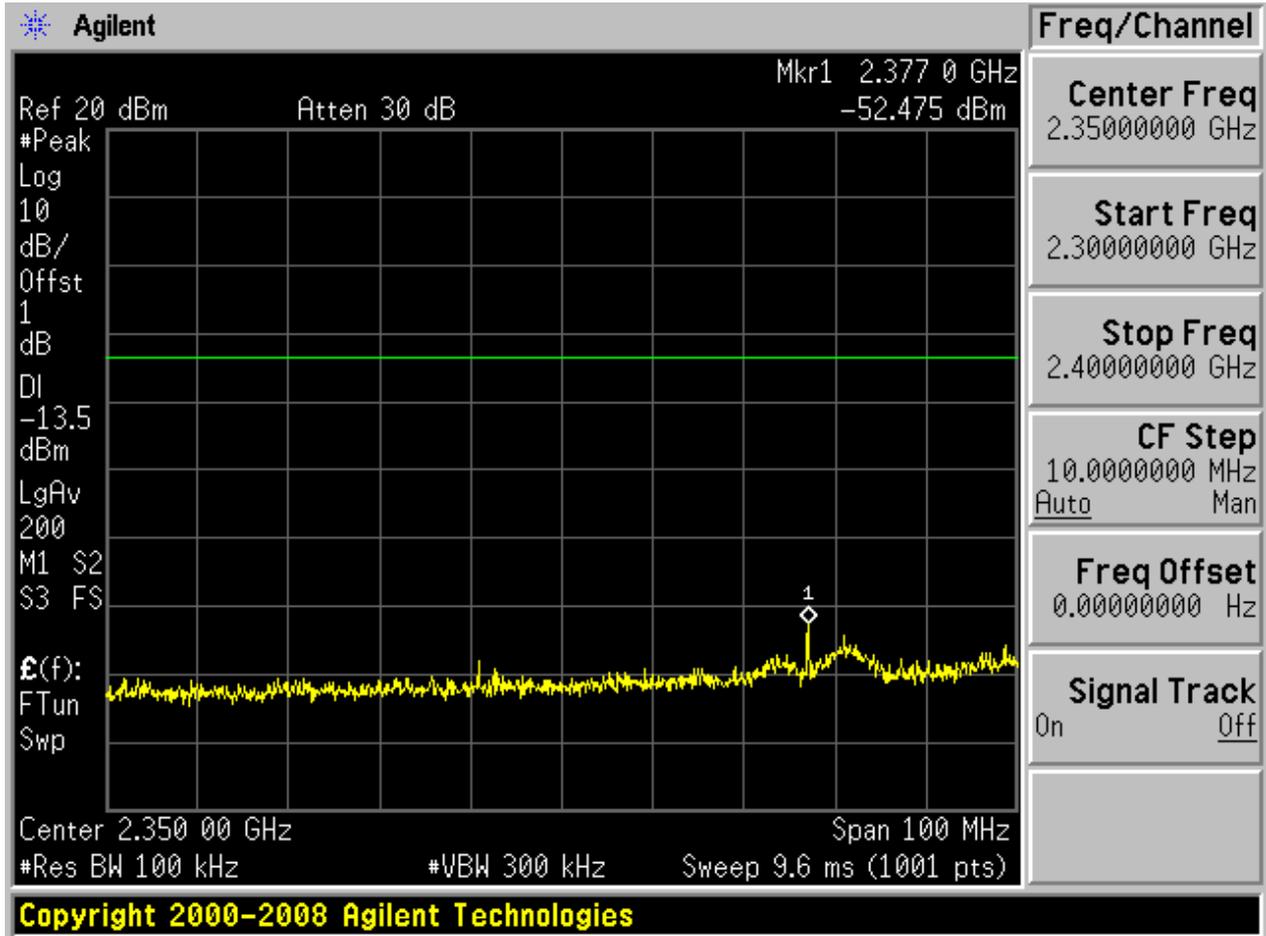


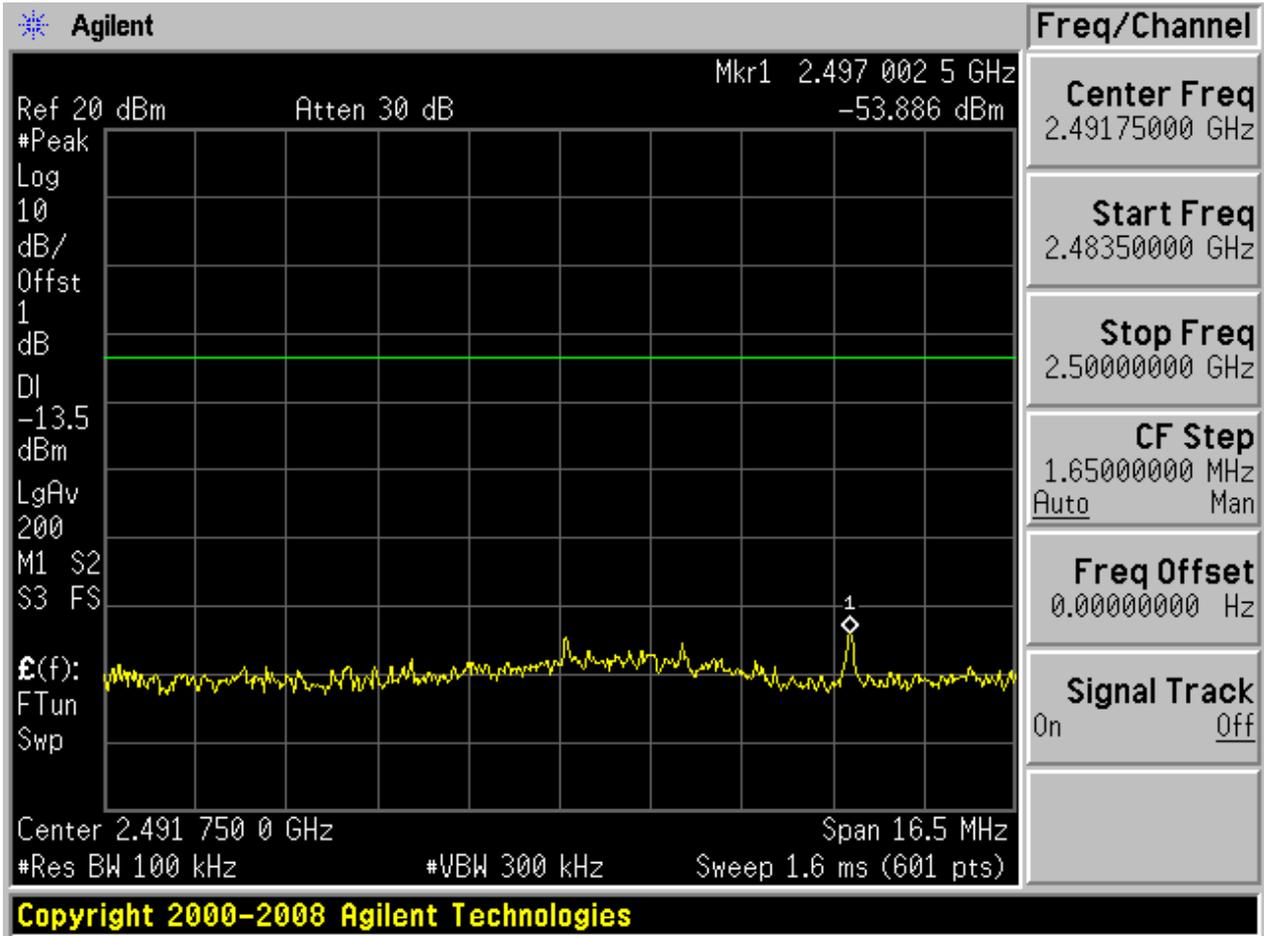

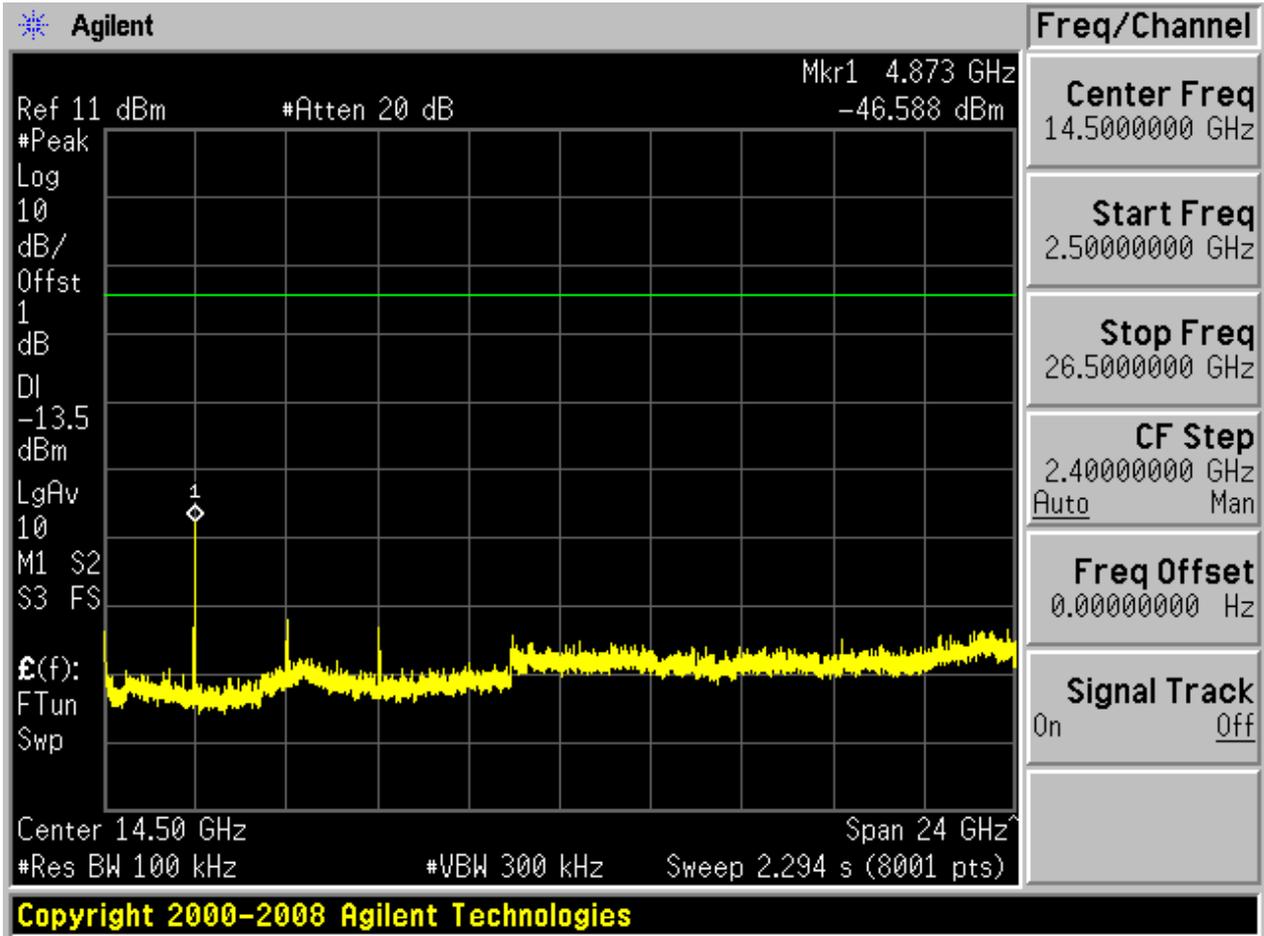


2.3 11B_H


Pref:

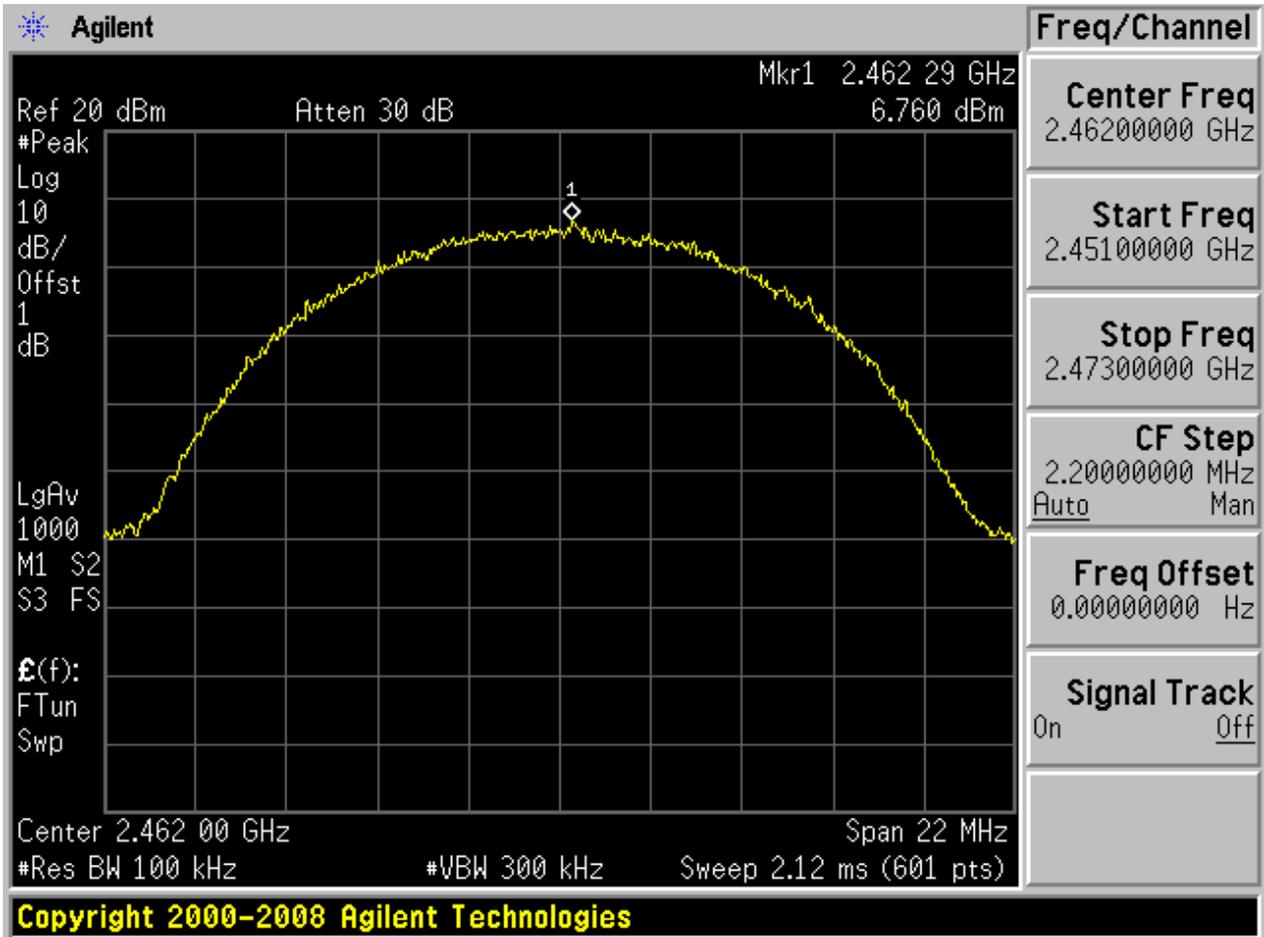






Puw:

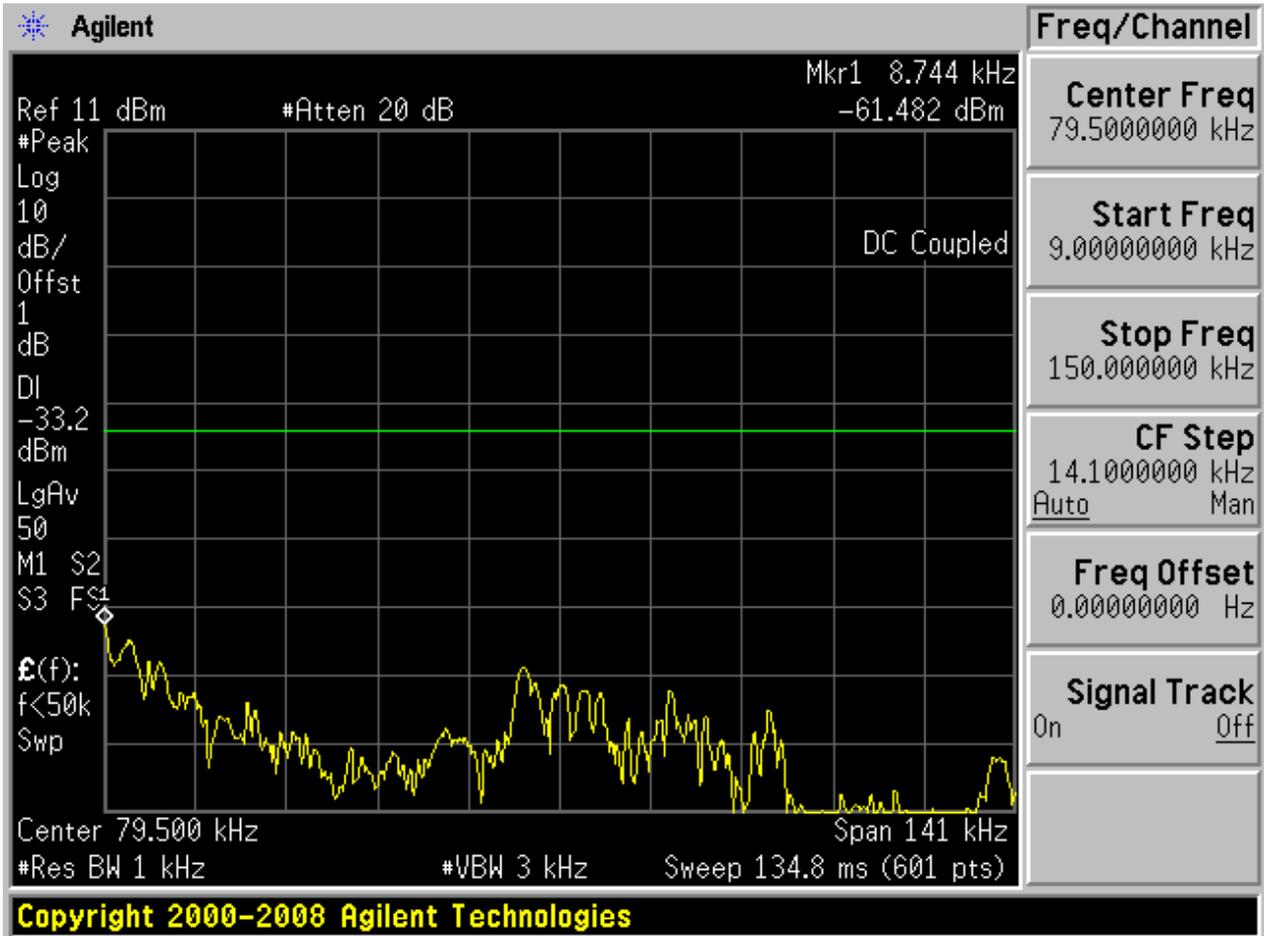

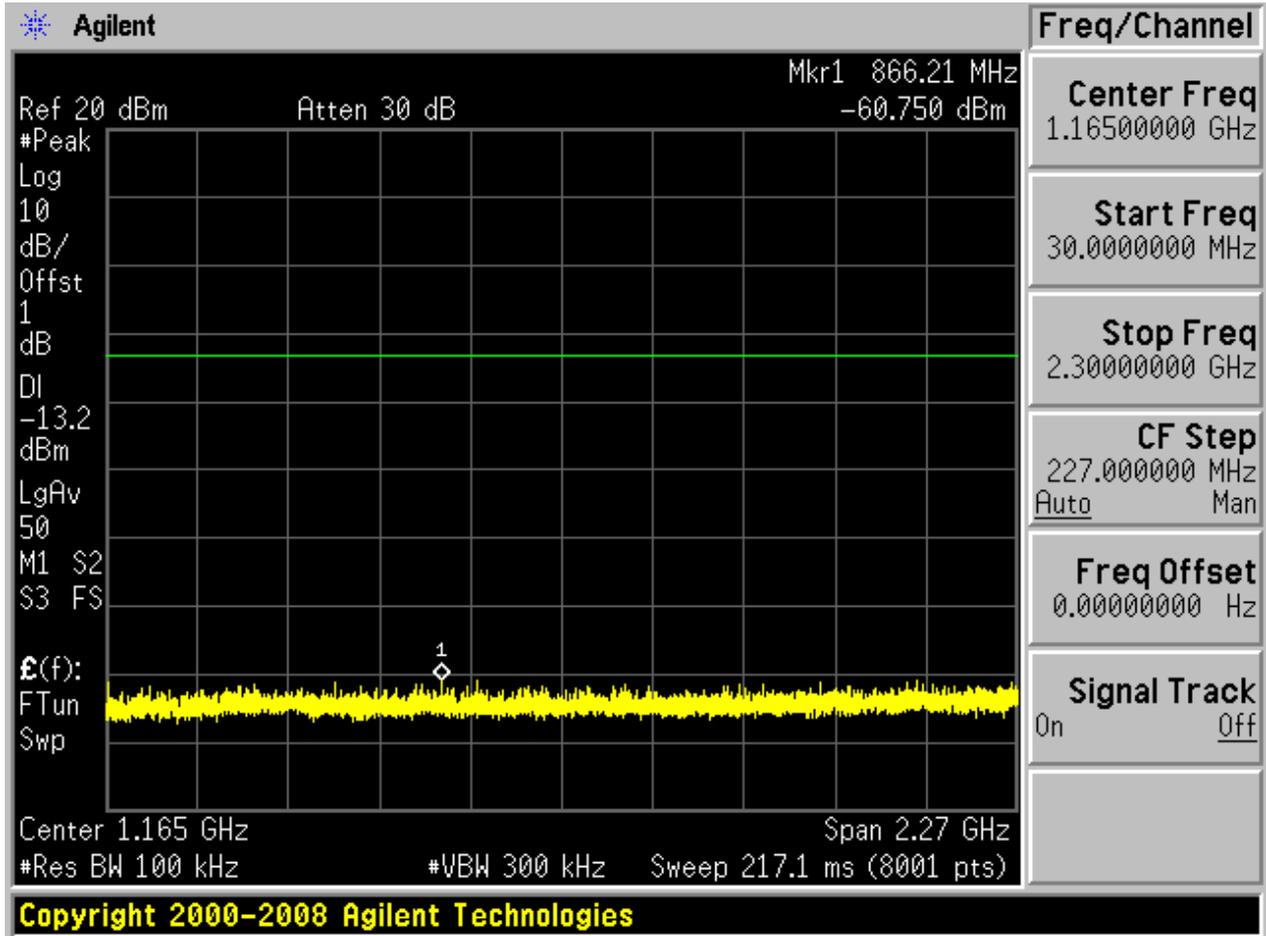

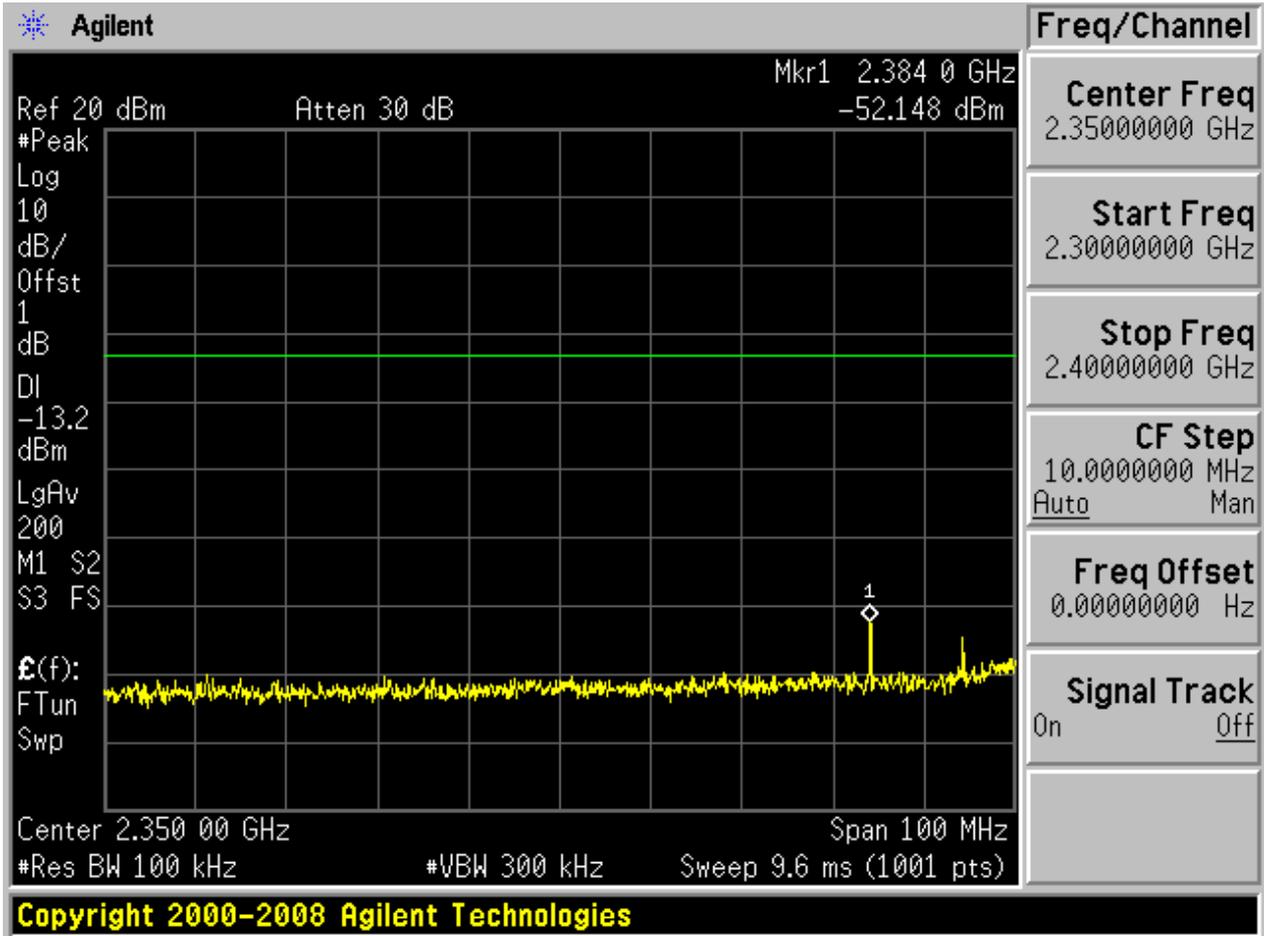


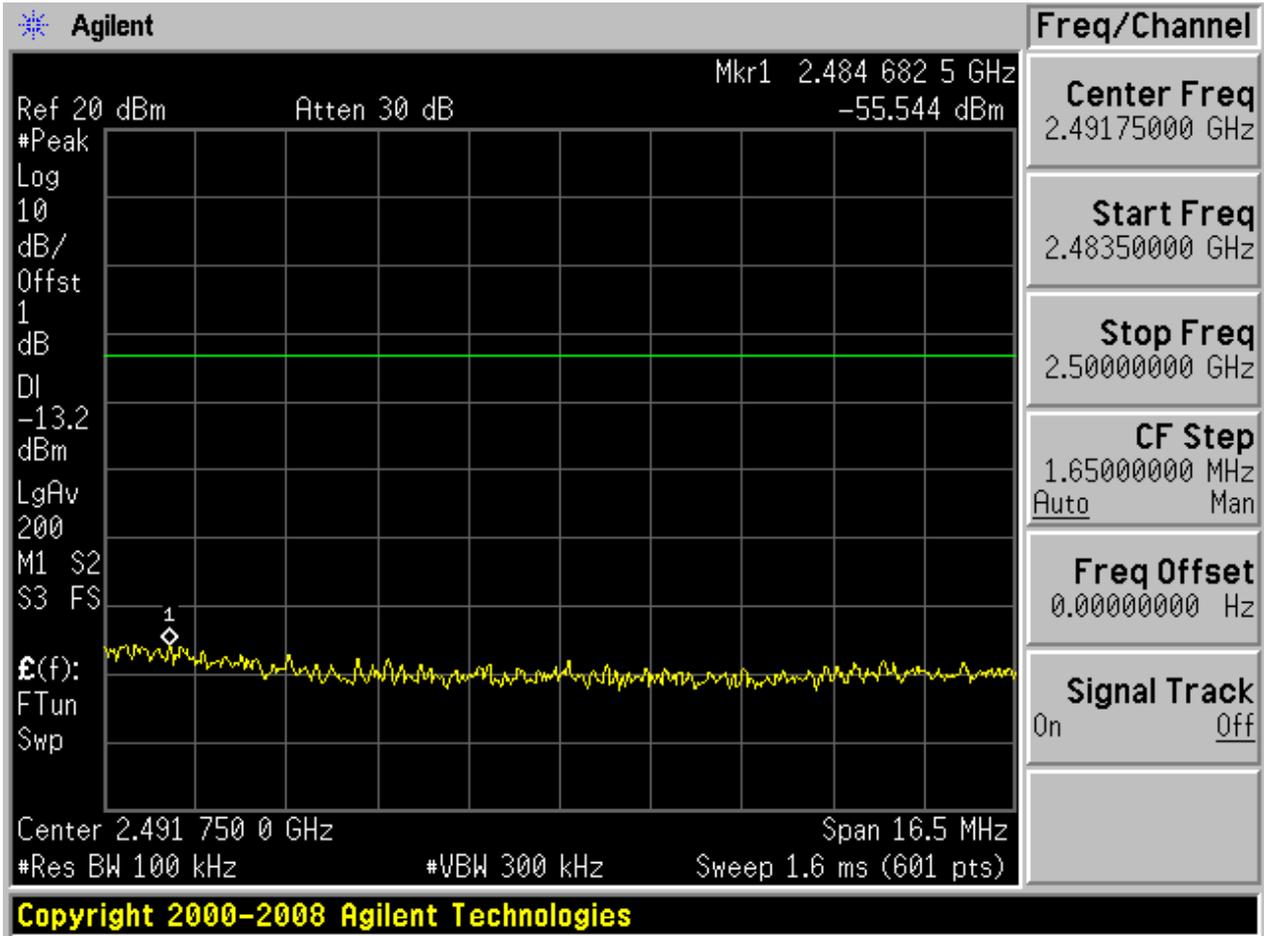

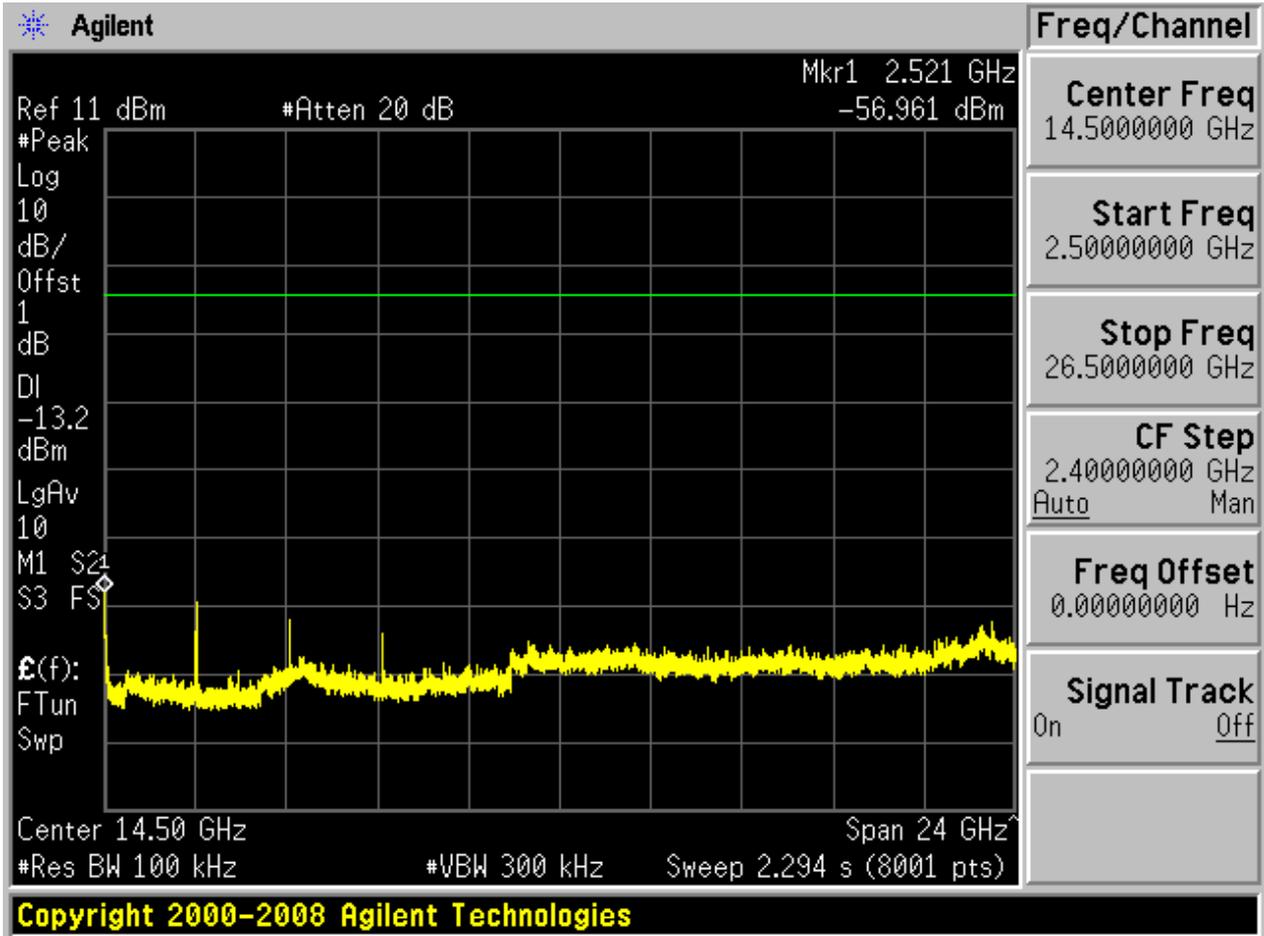


2.4 11G_L


Pref:

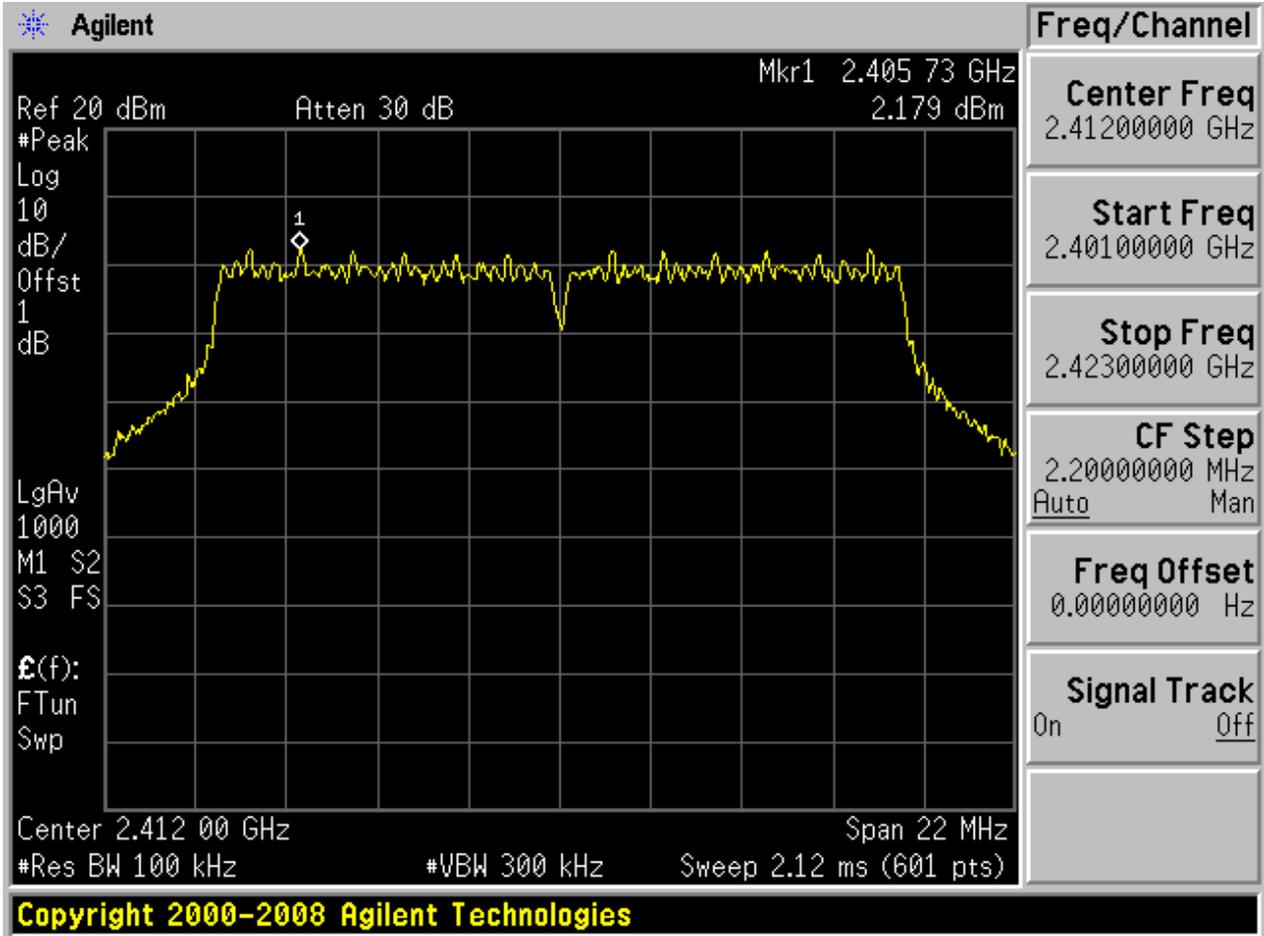






Puw:

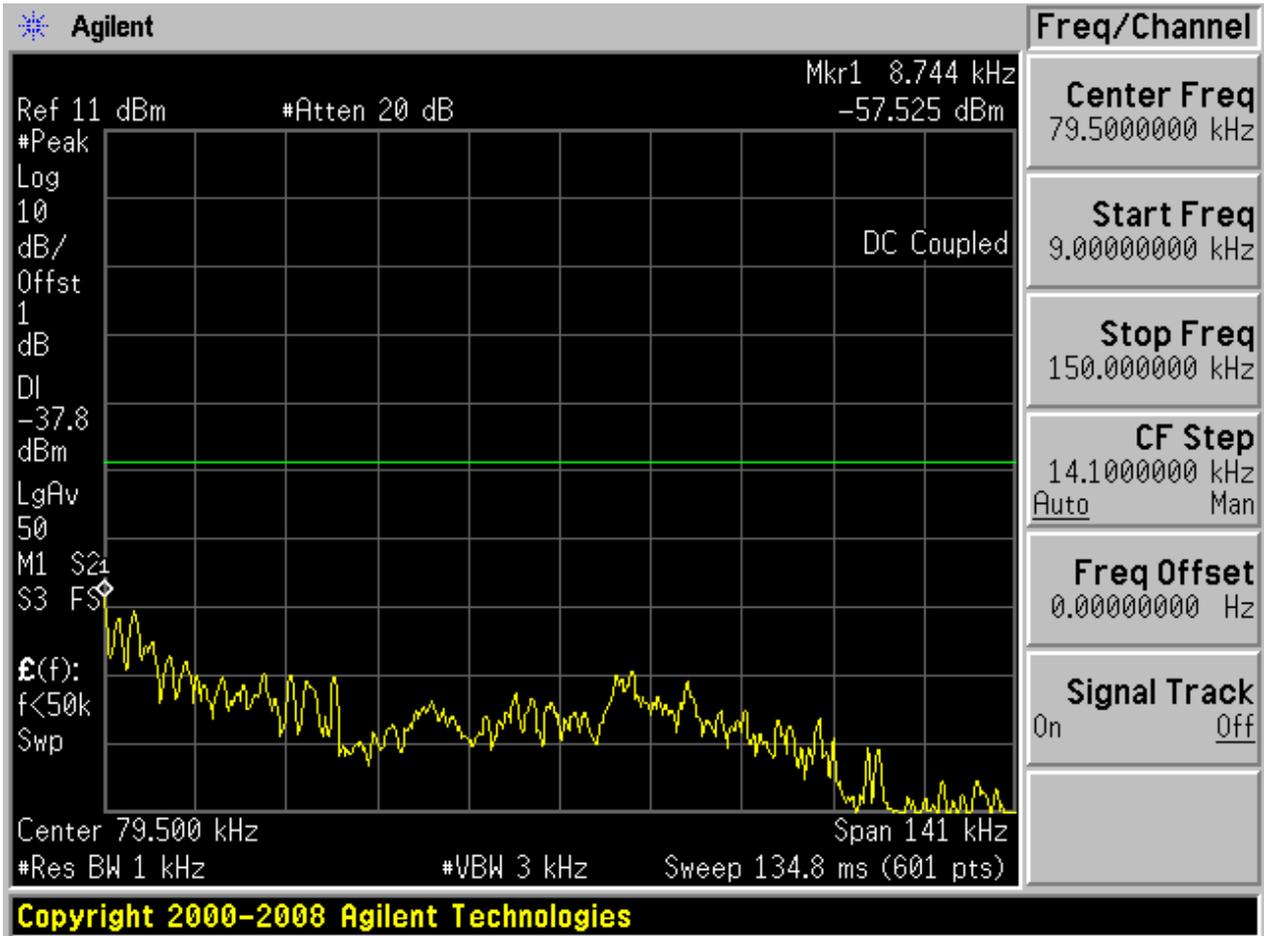


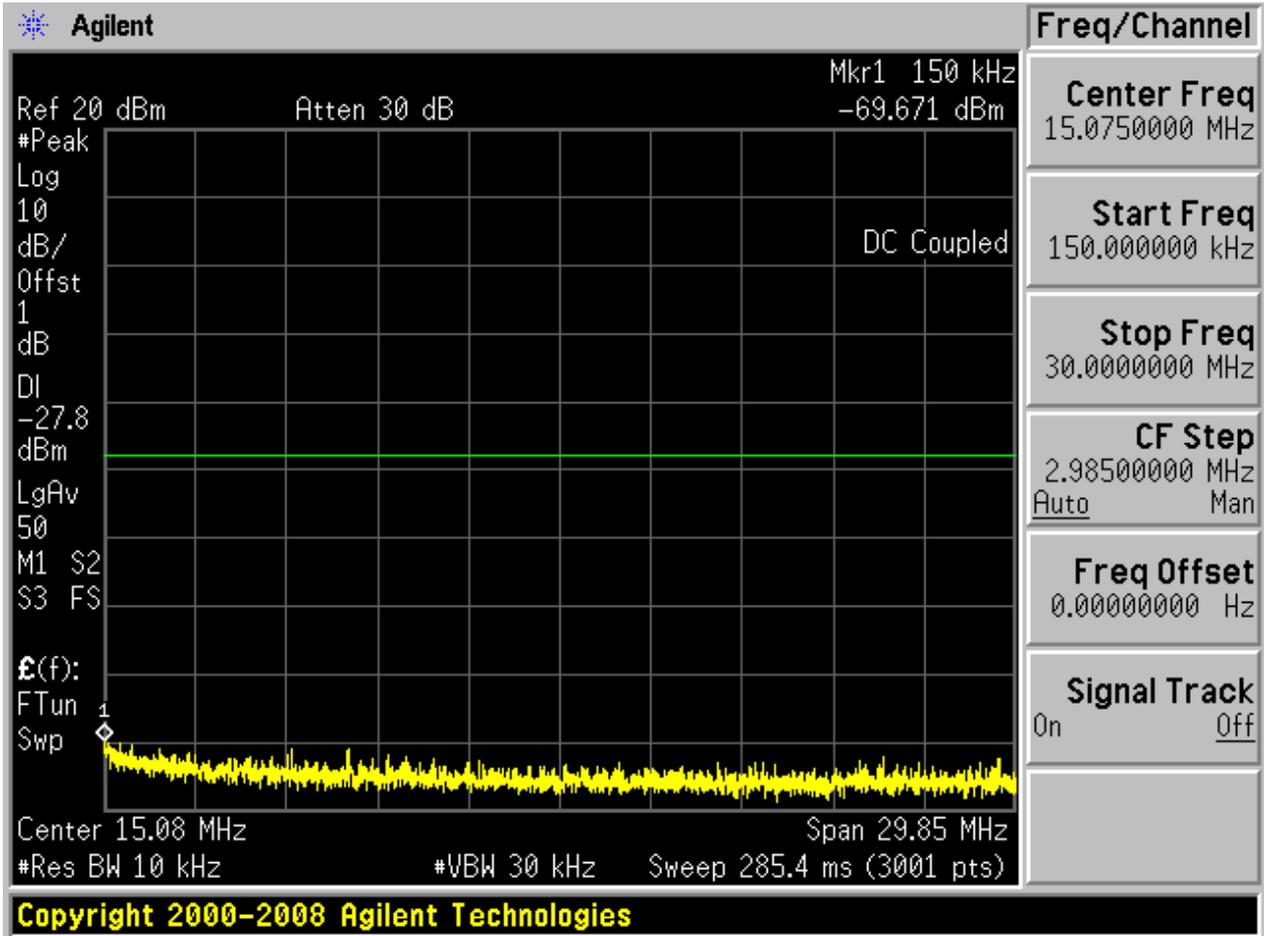

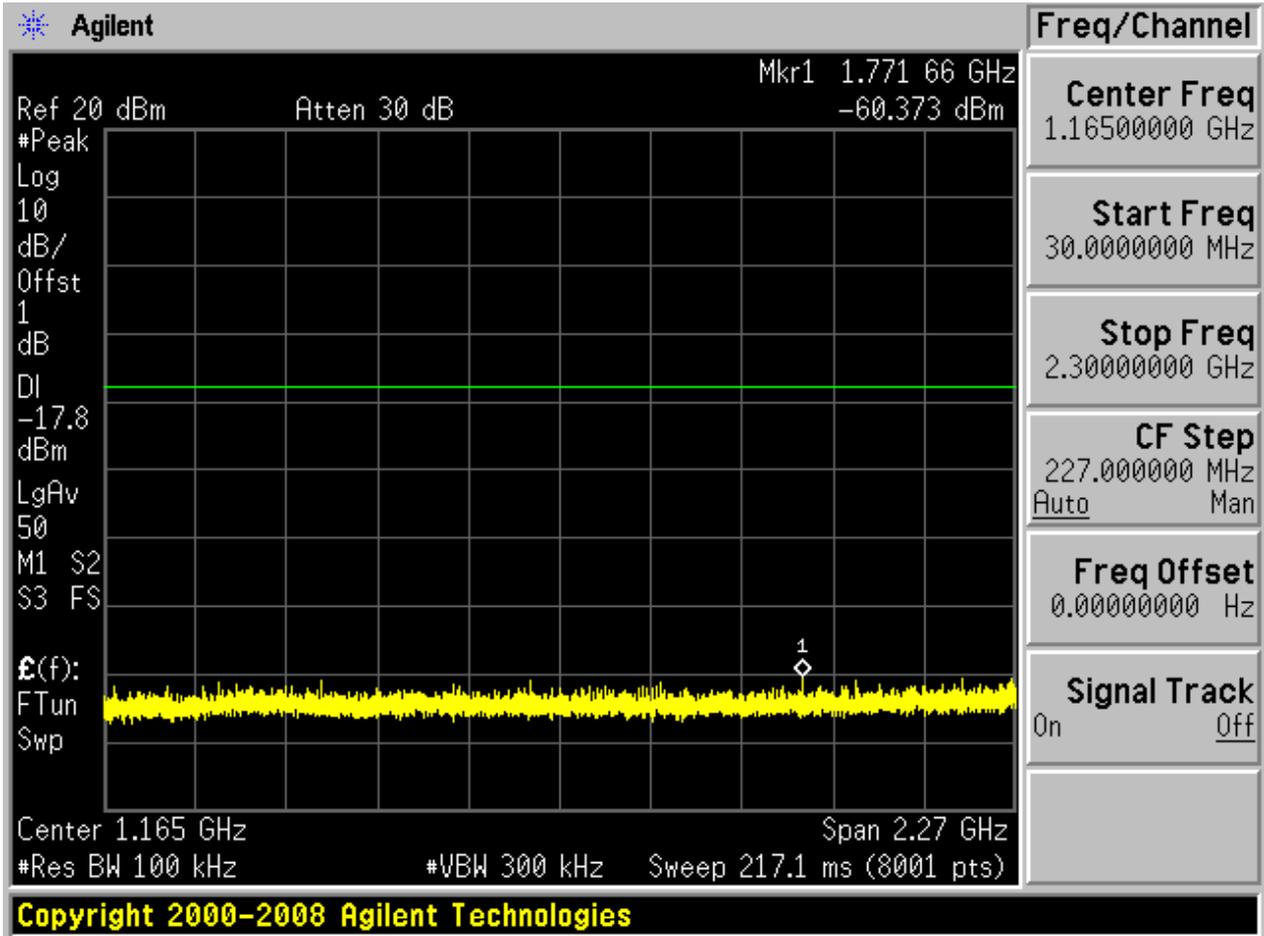

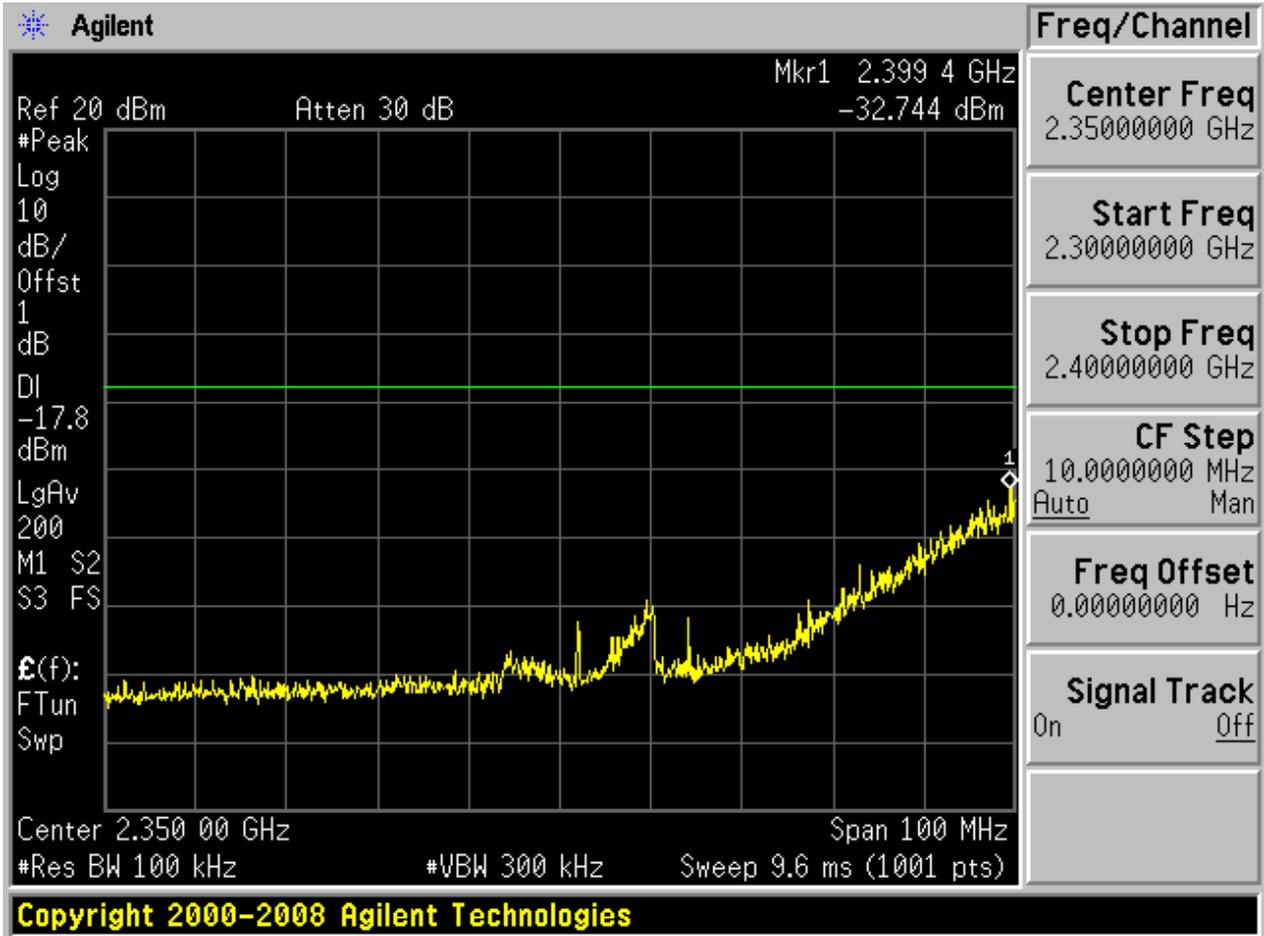


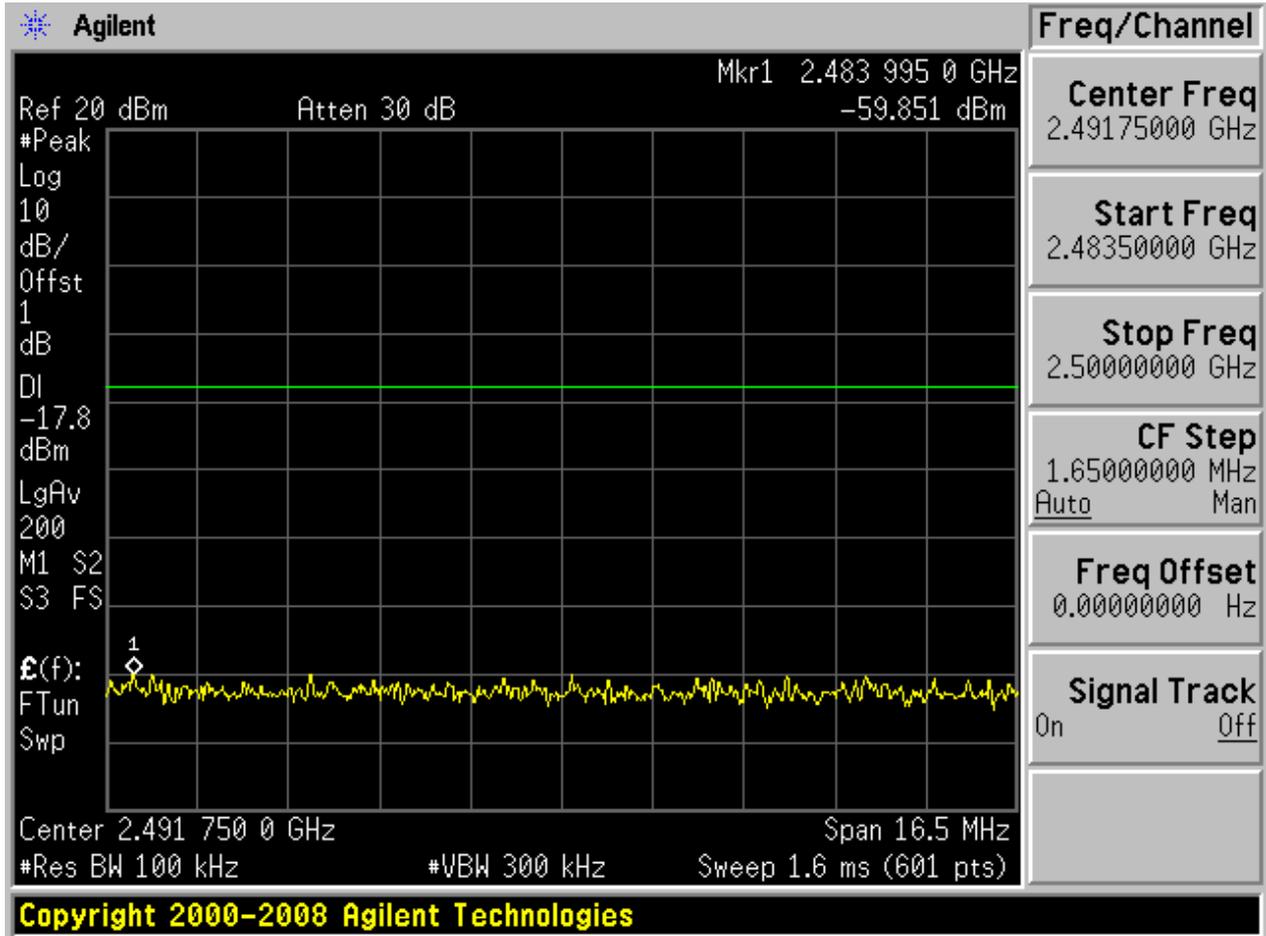

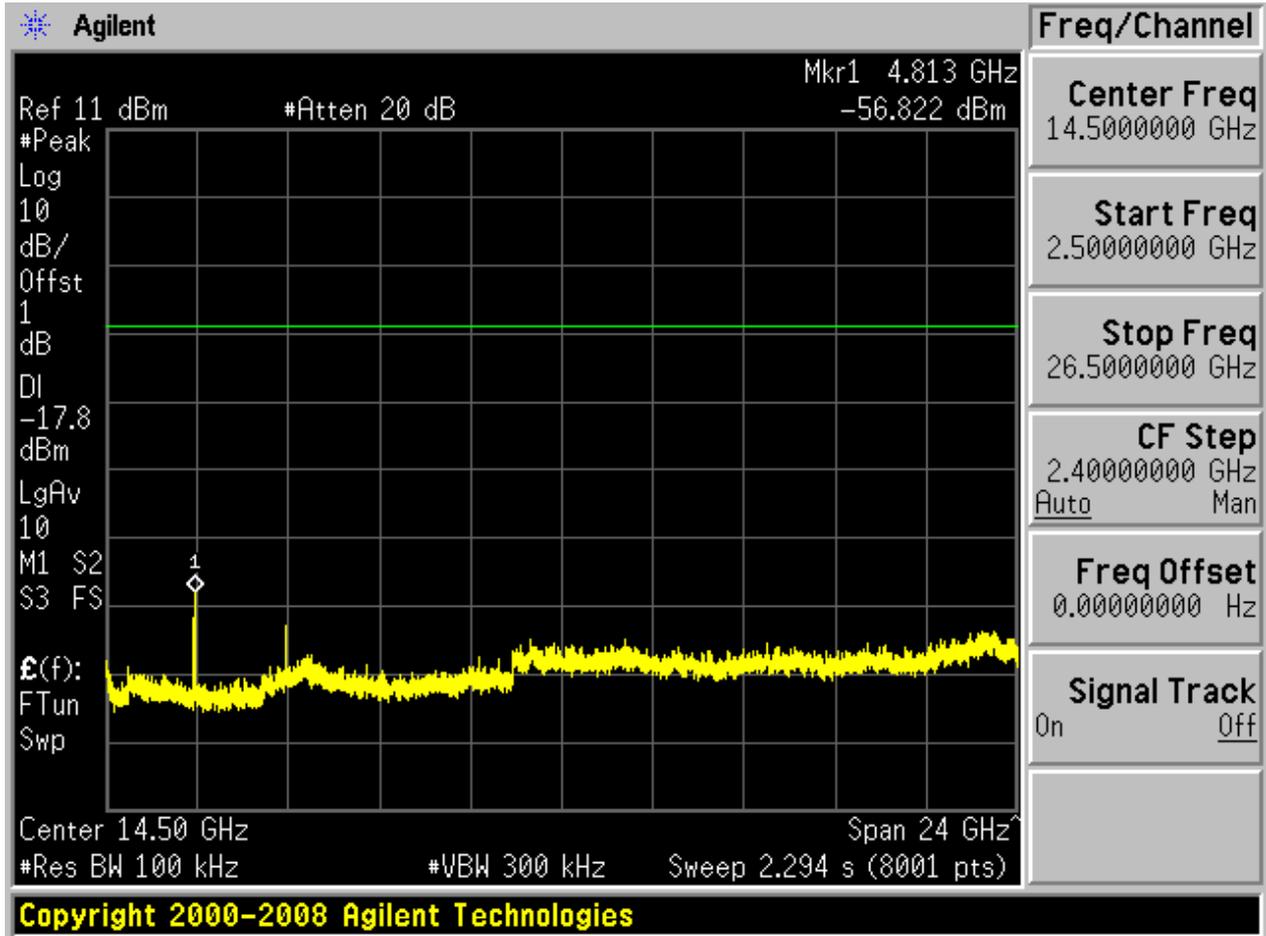


2.5 11G_M


Pref:

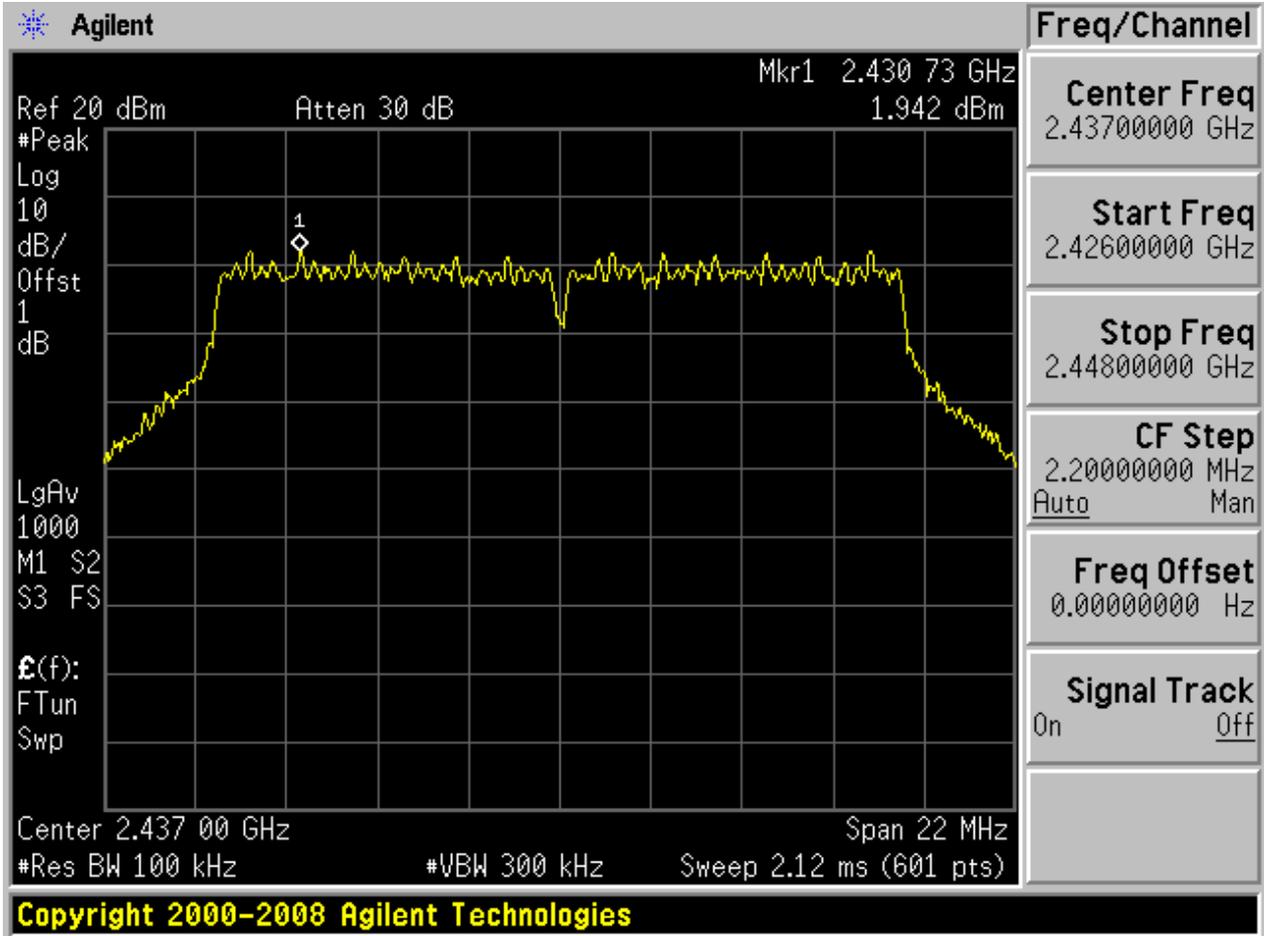






Puw:

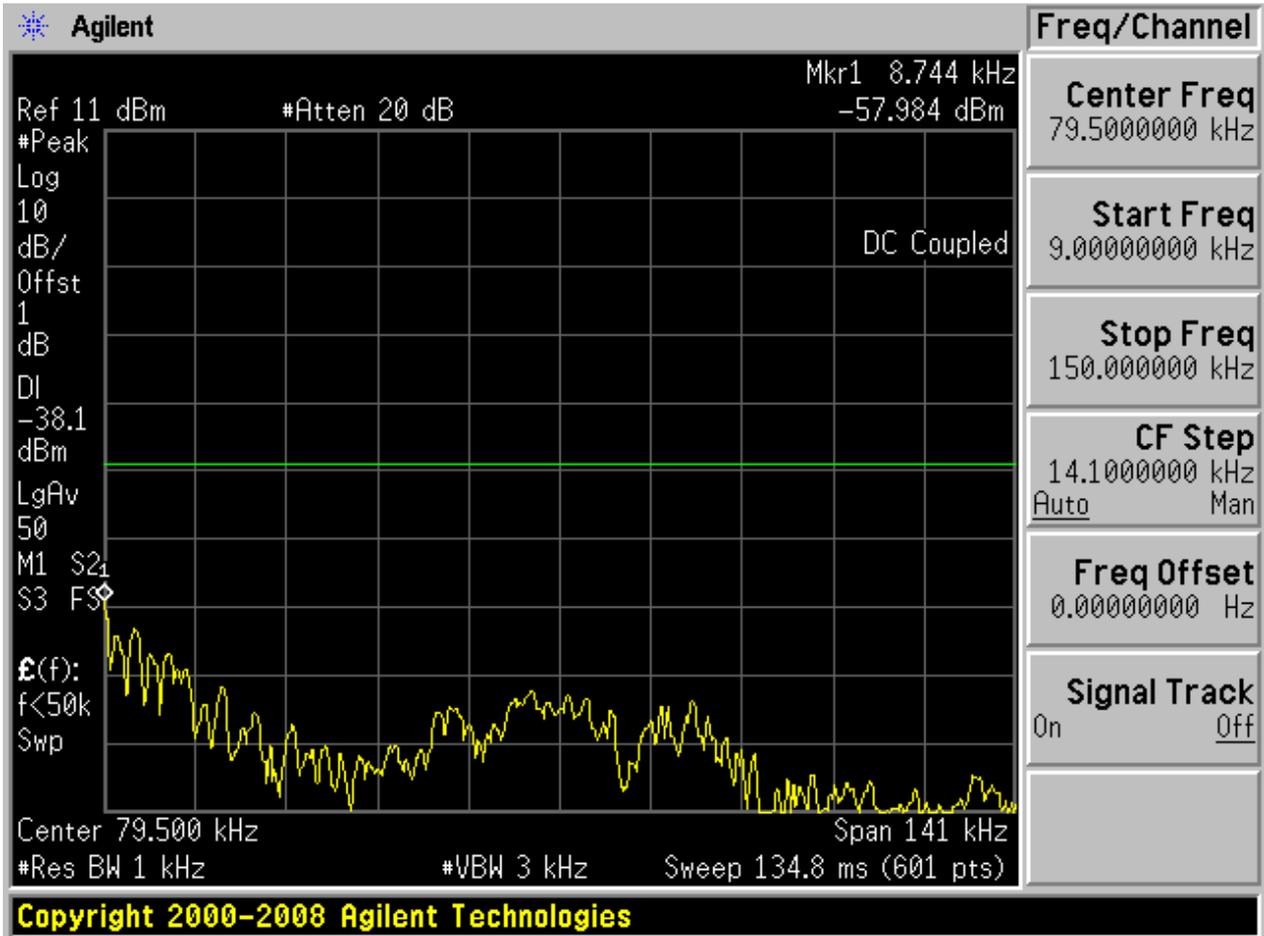

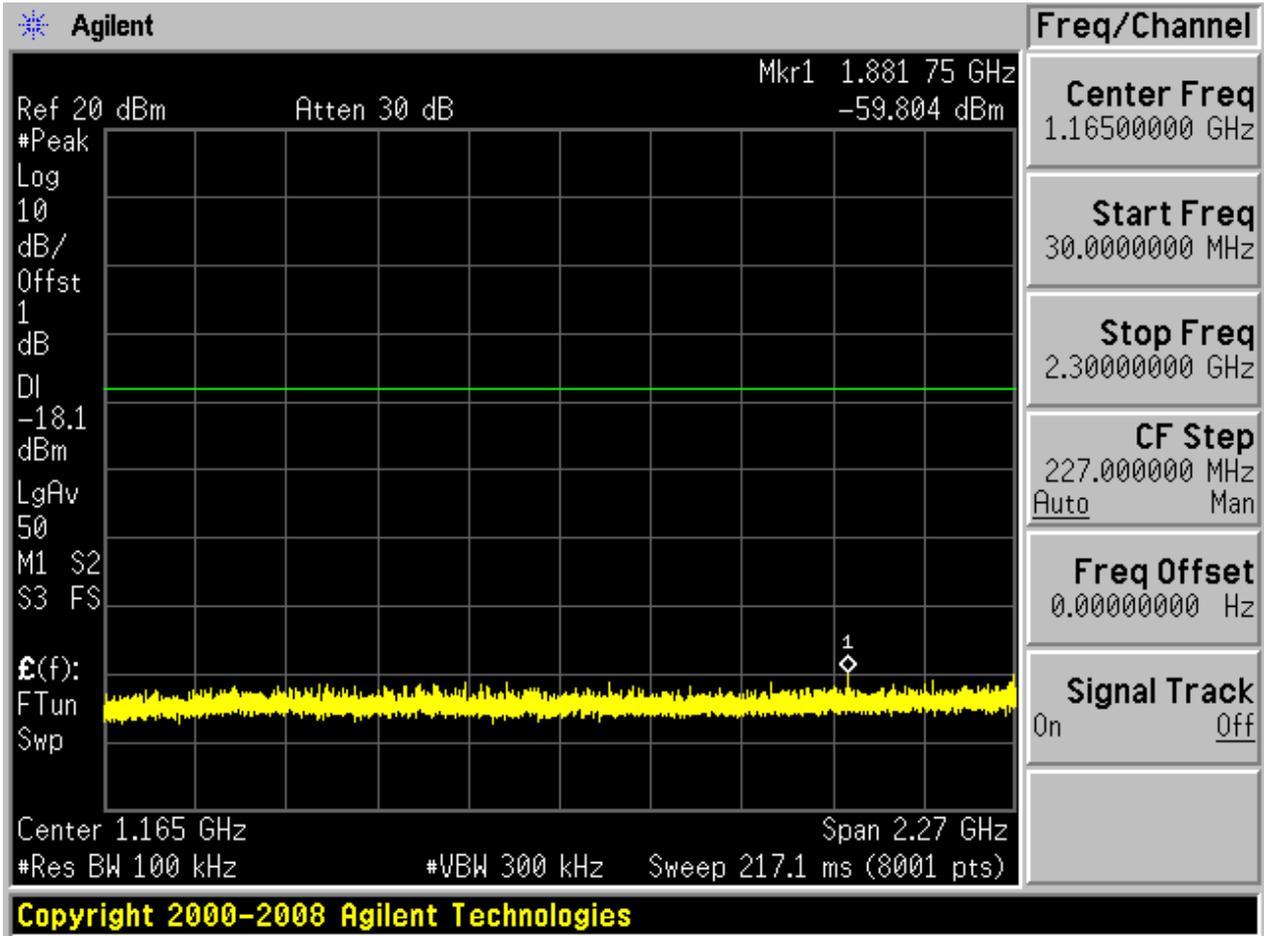

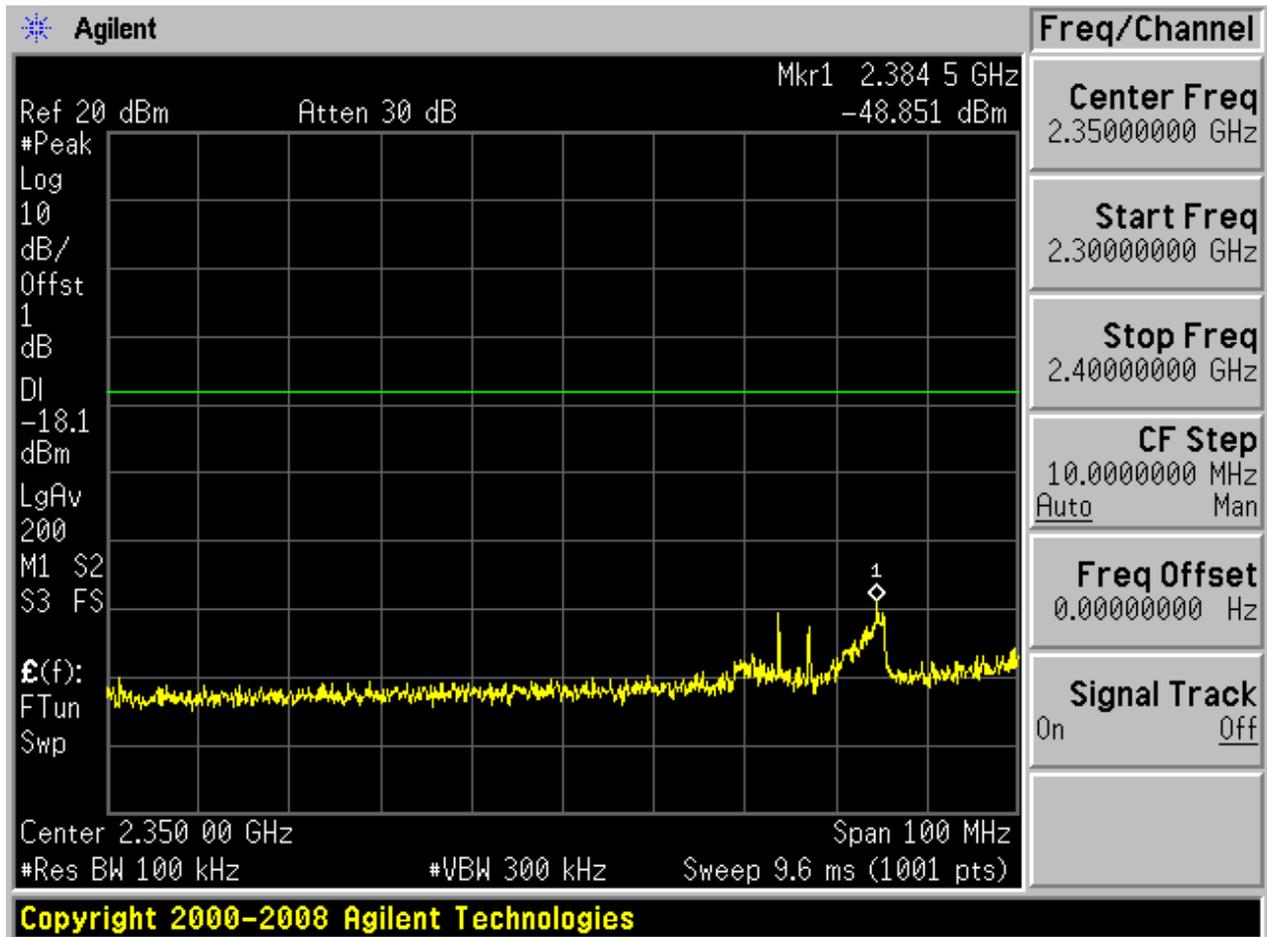


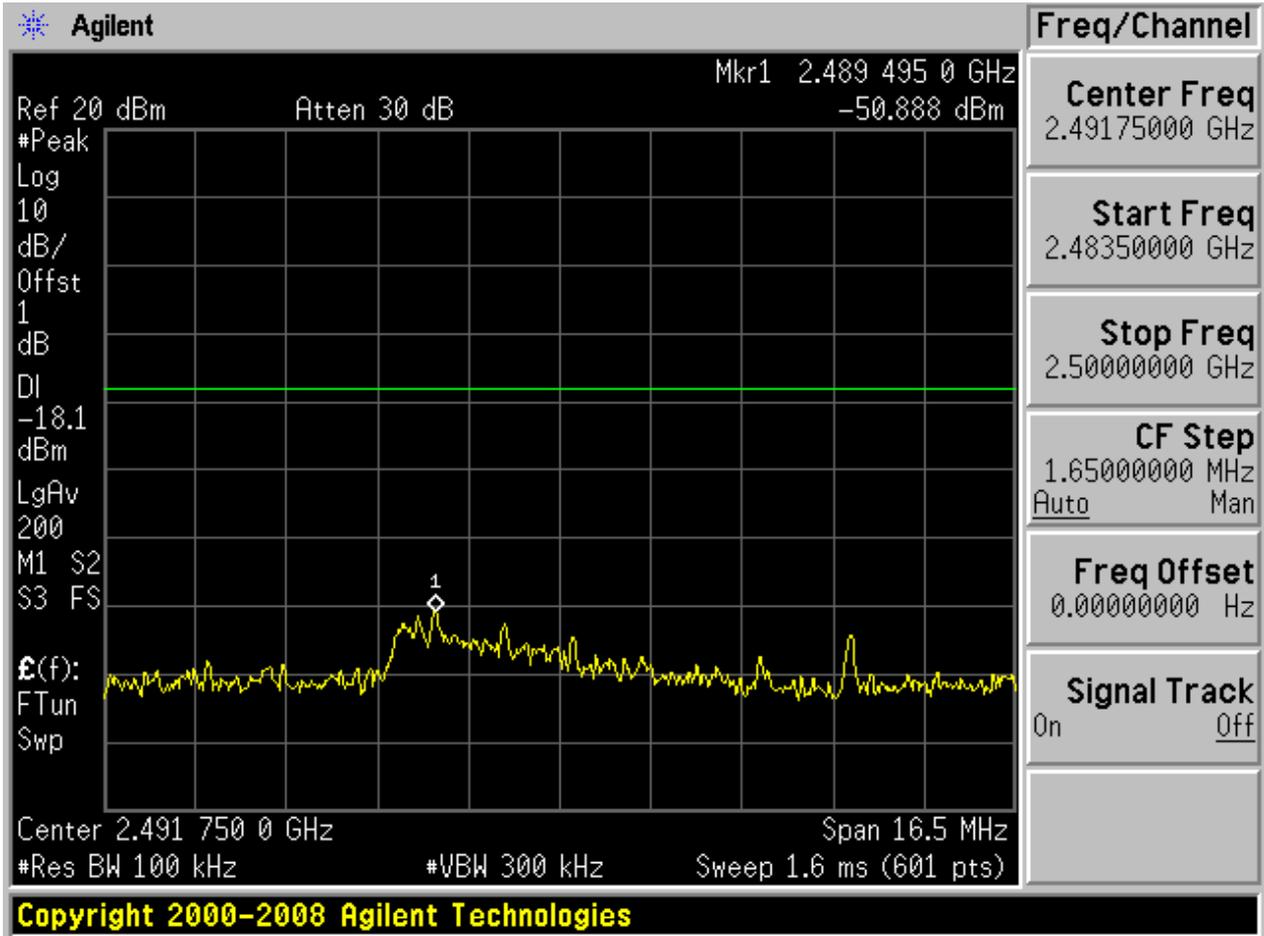

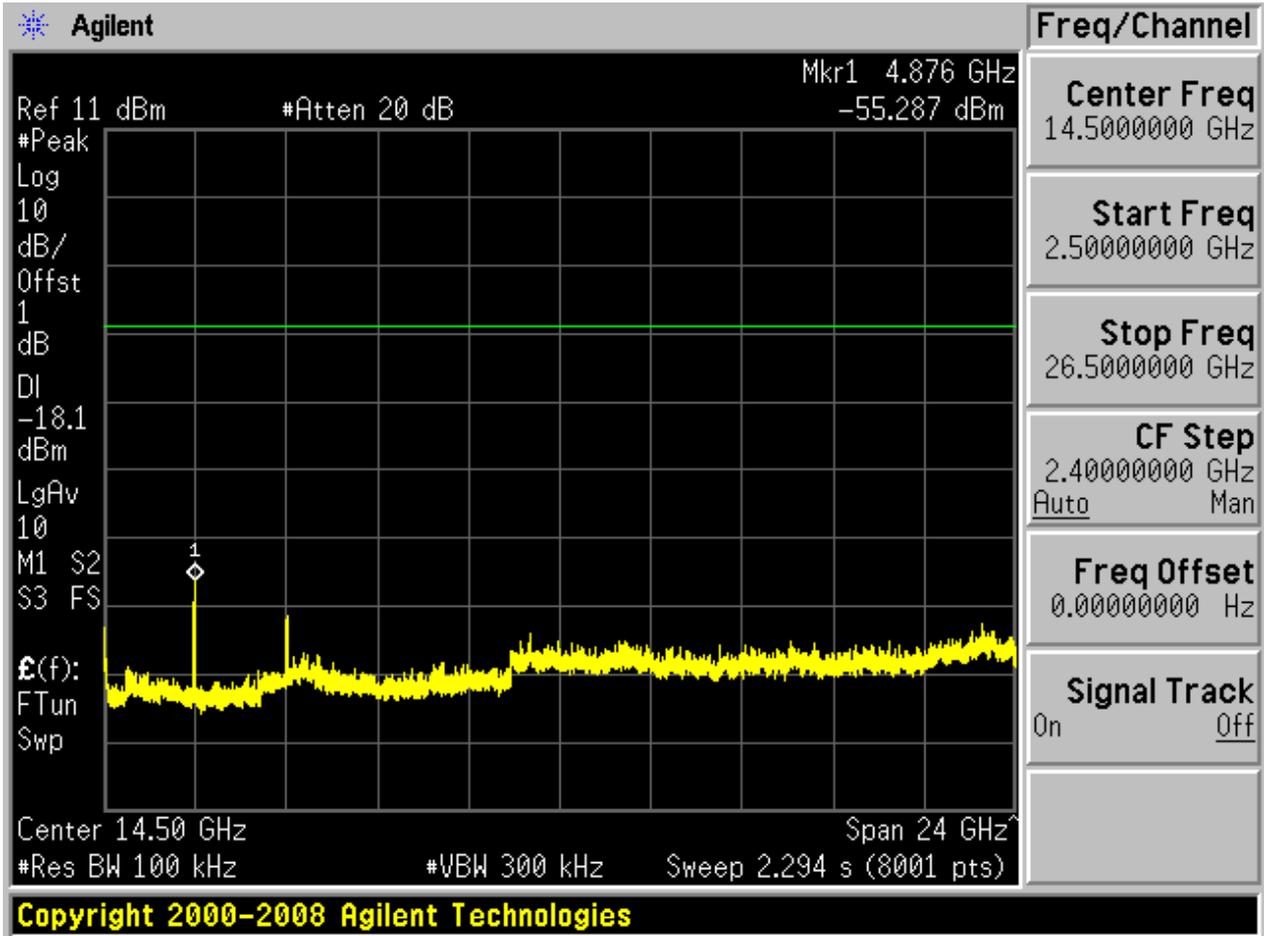


2.6 11G_H


Pref:

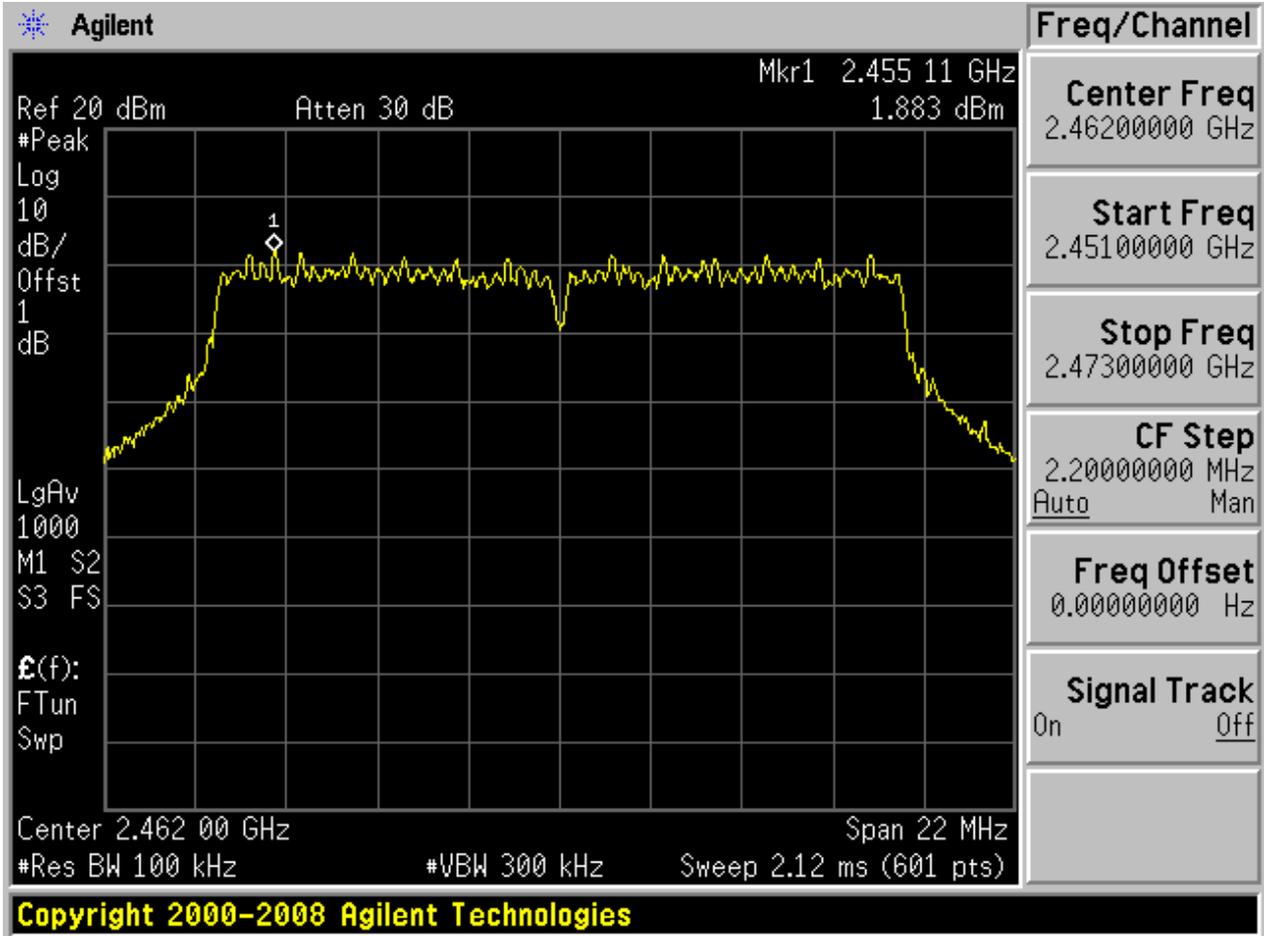






Puw:

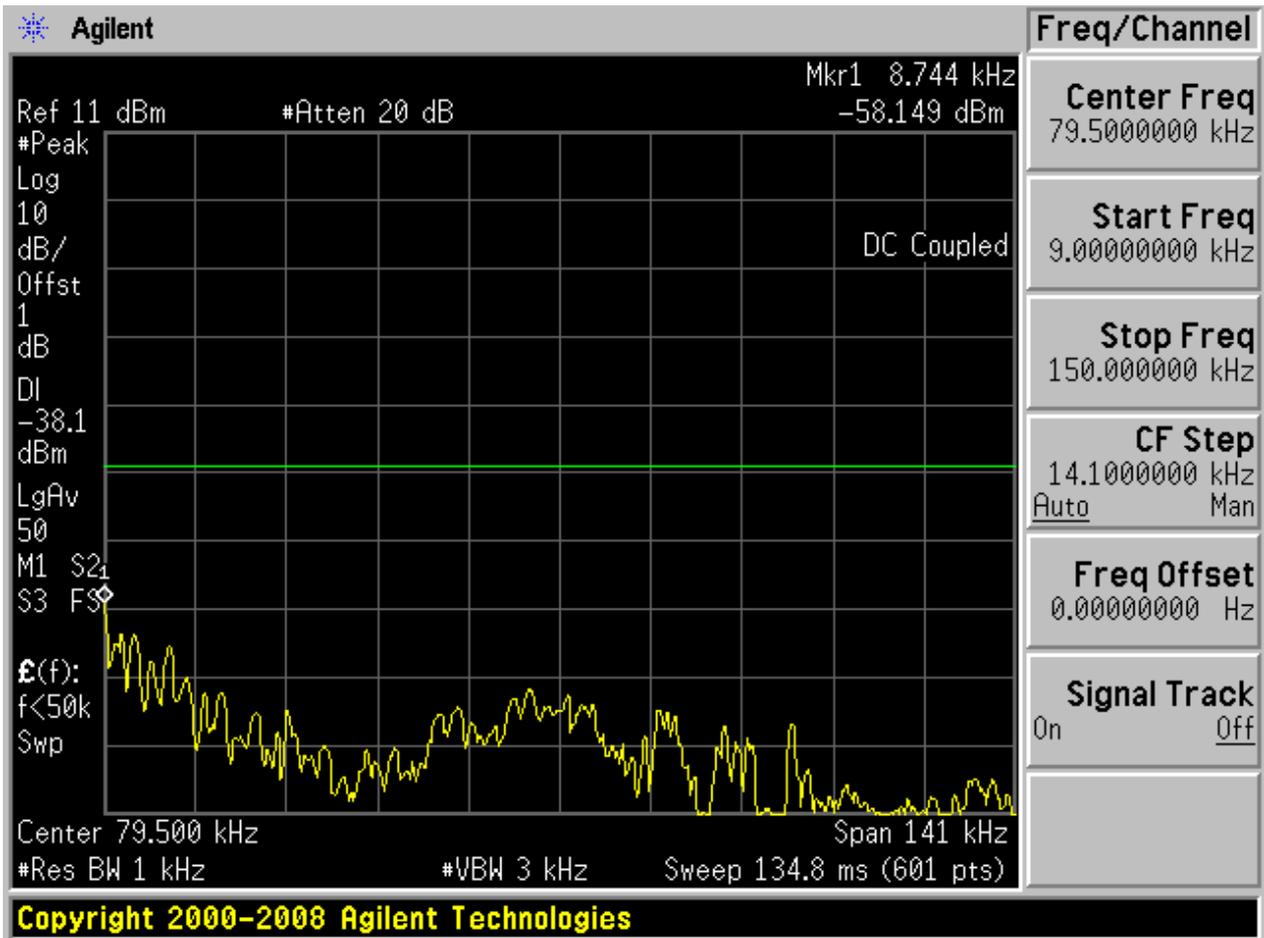

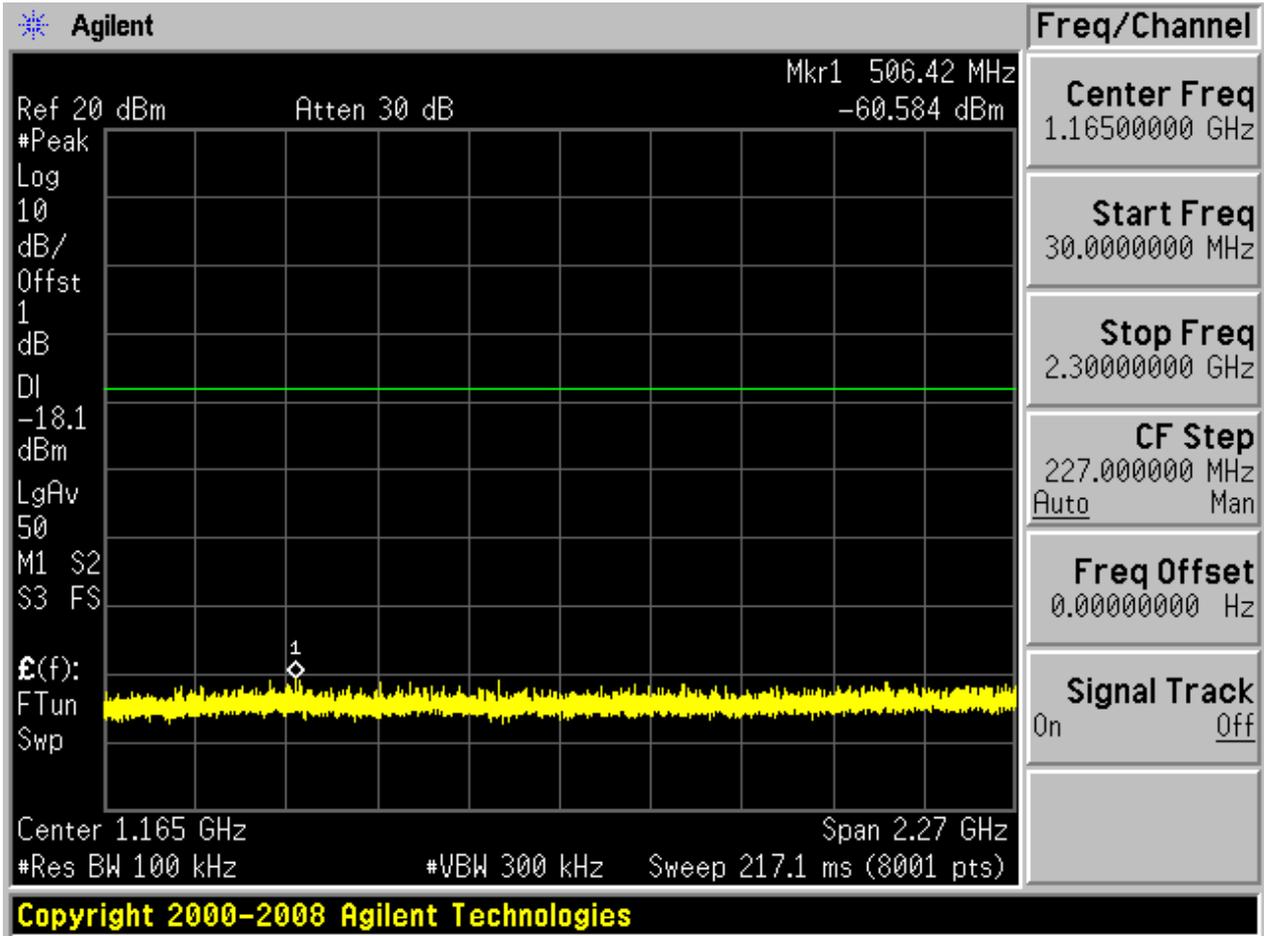

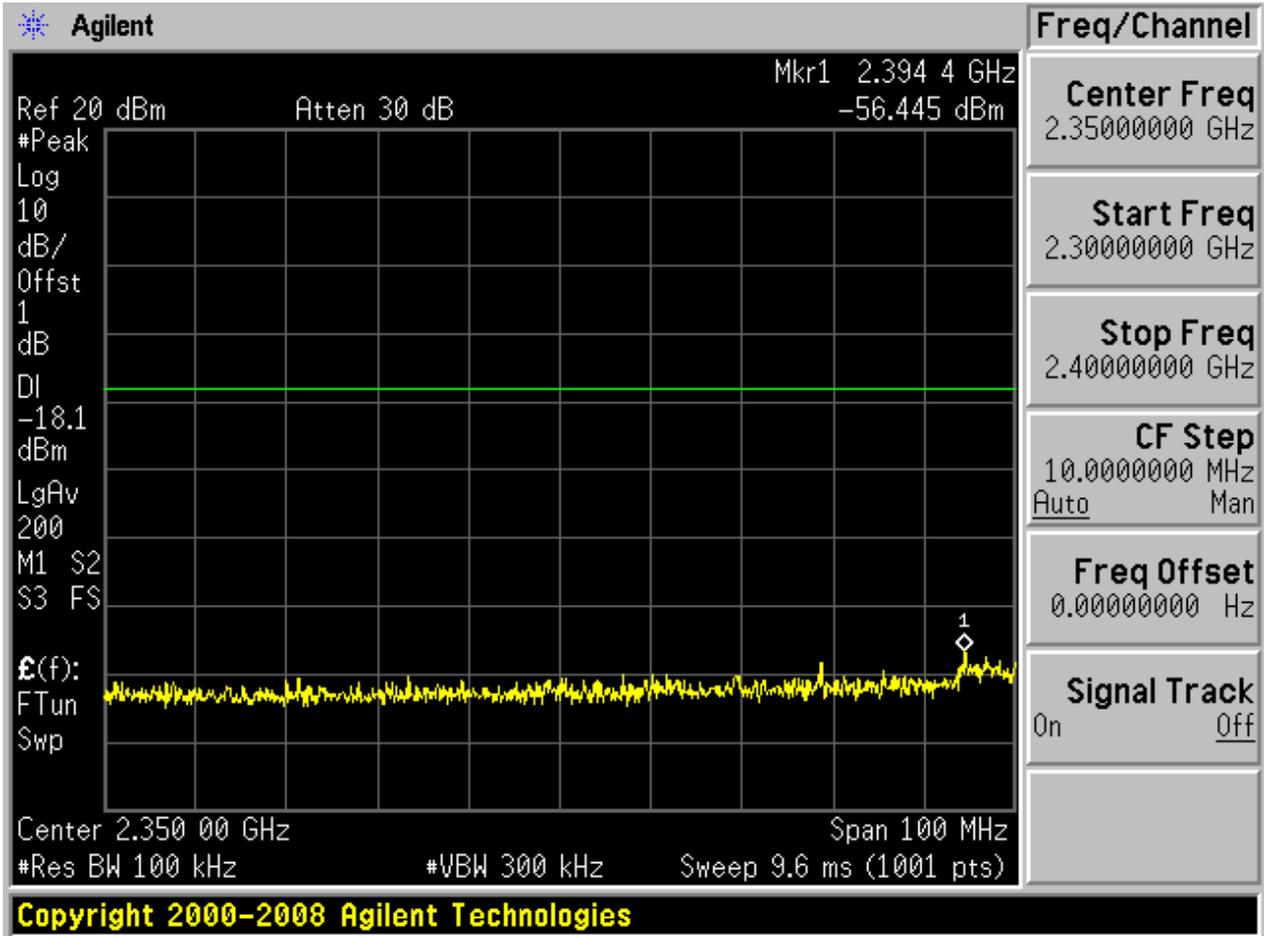


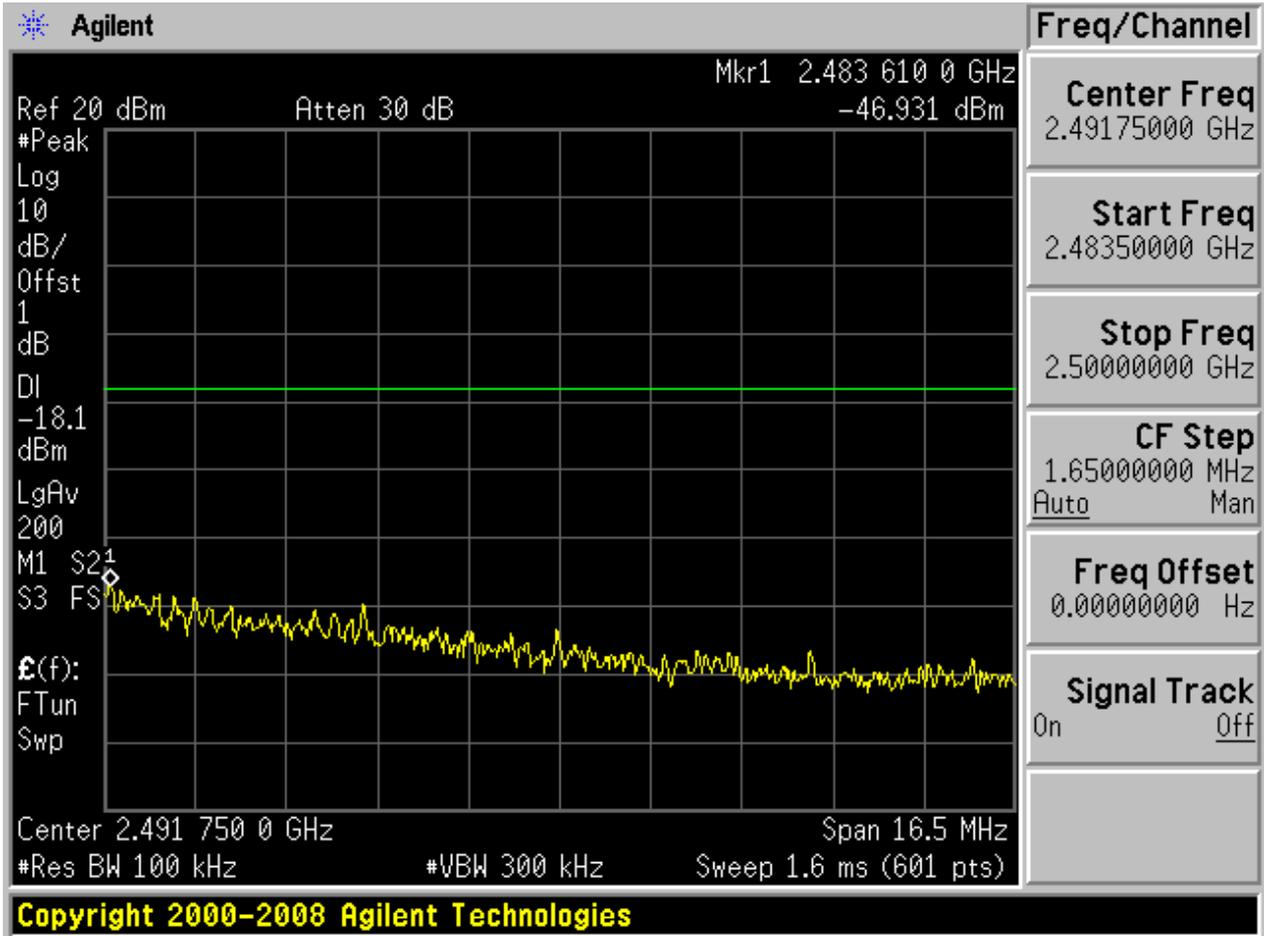

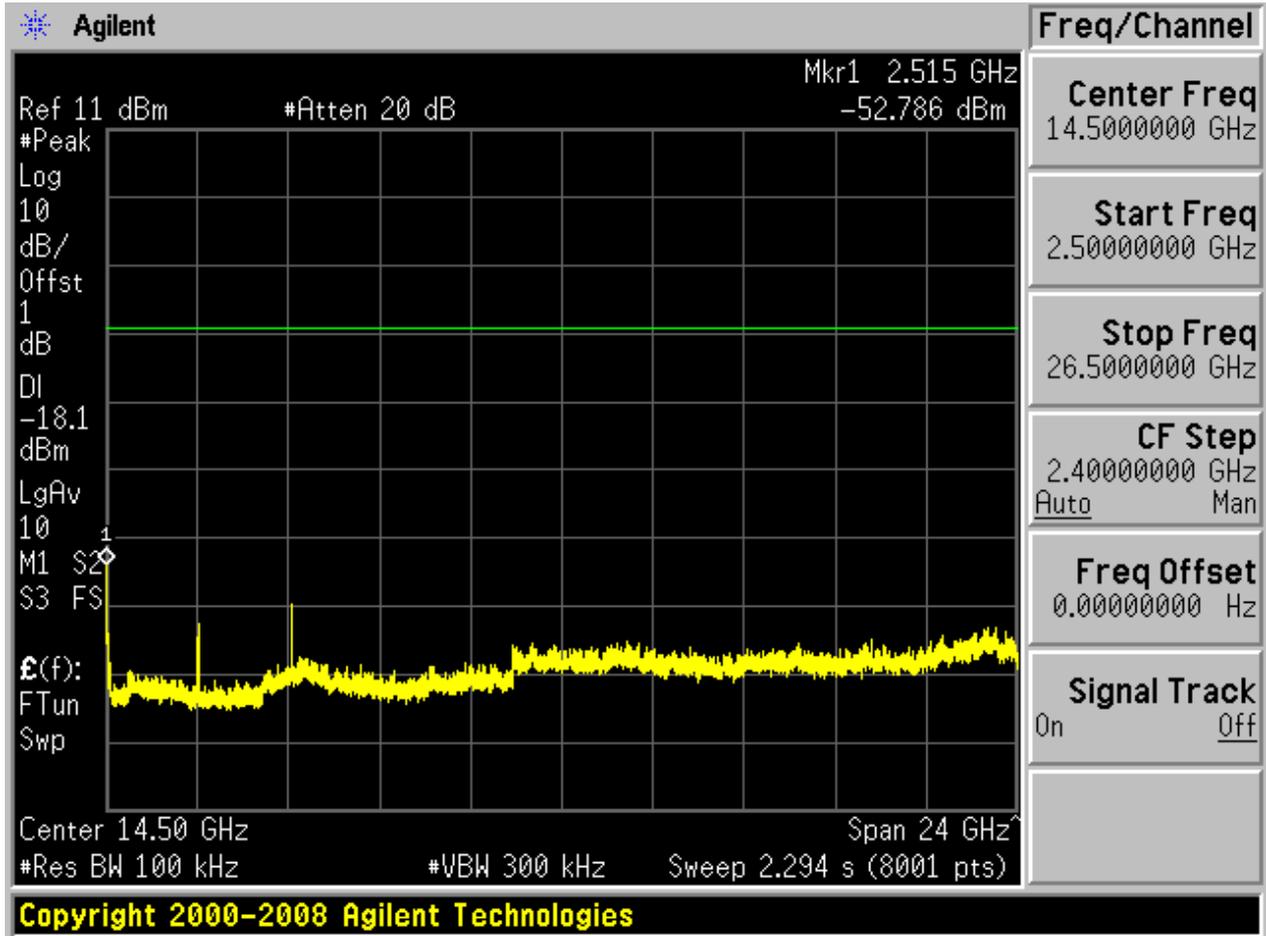


2.7 11N20_ L

Pref:

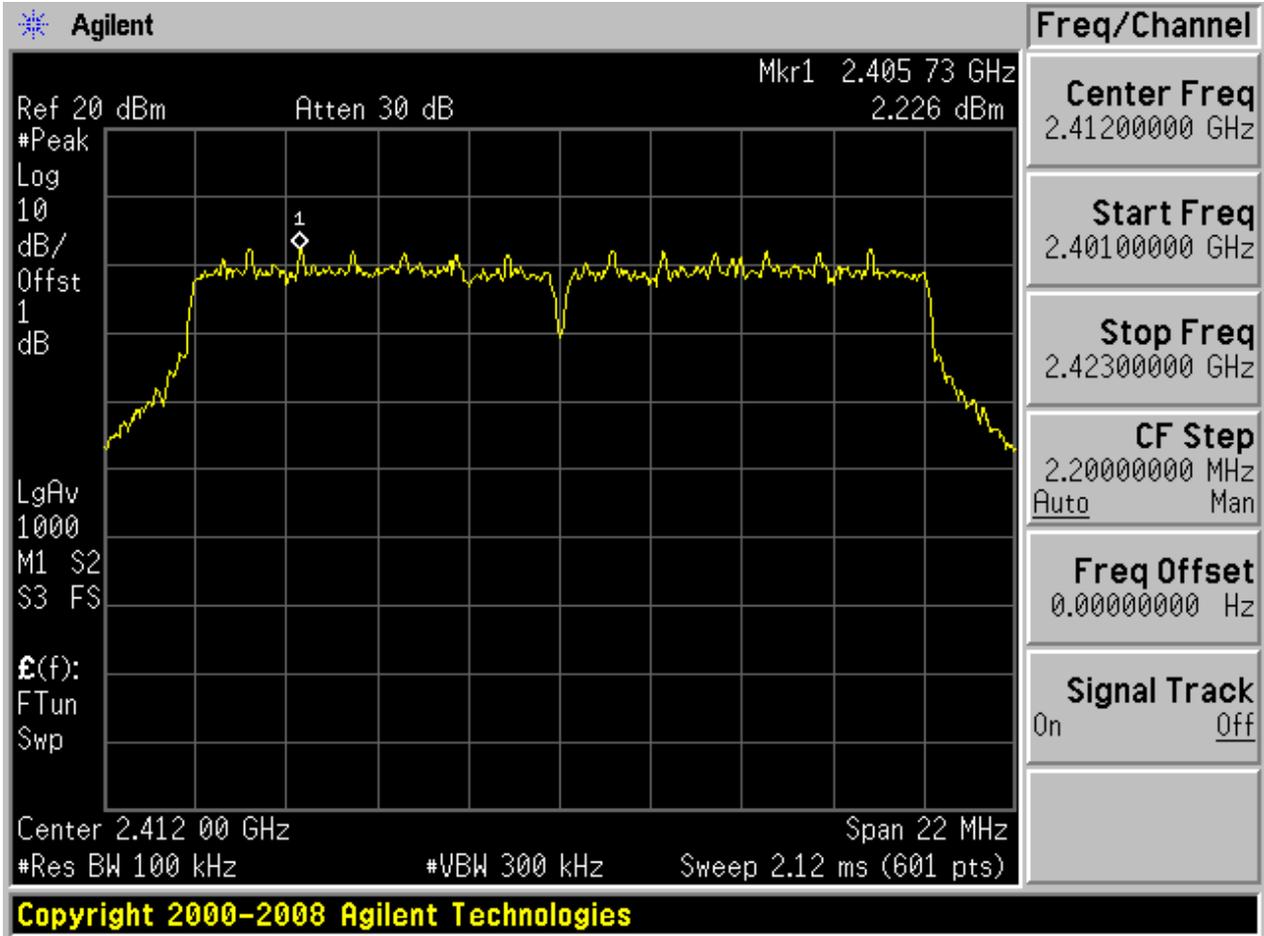






Puw:

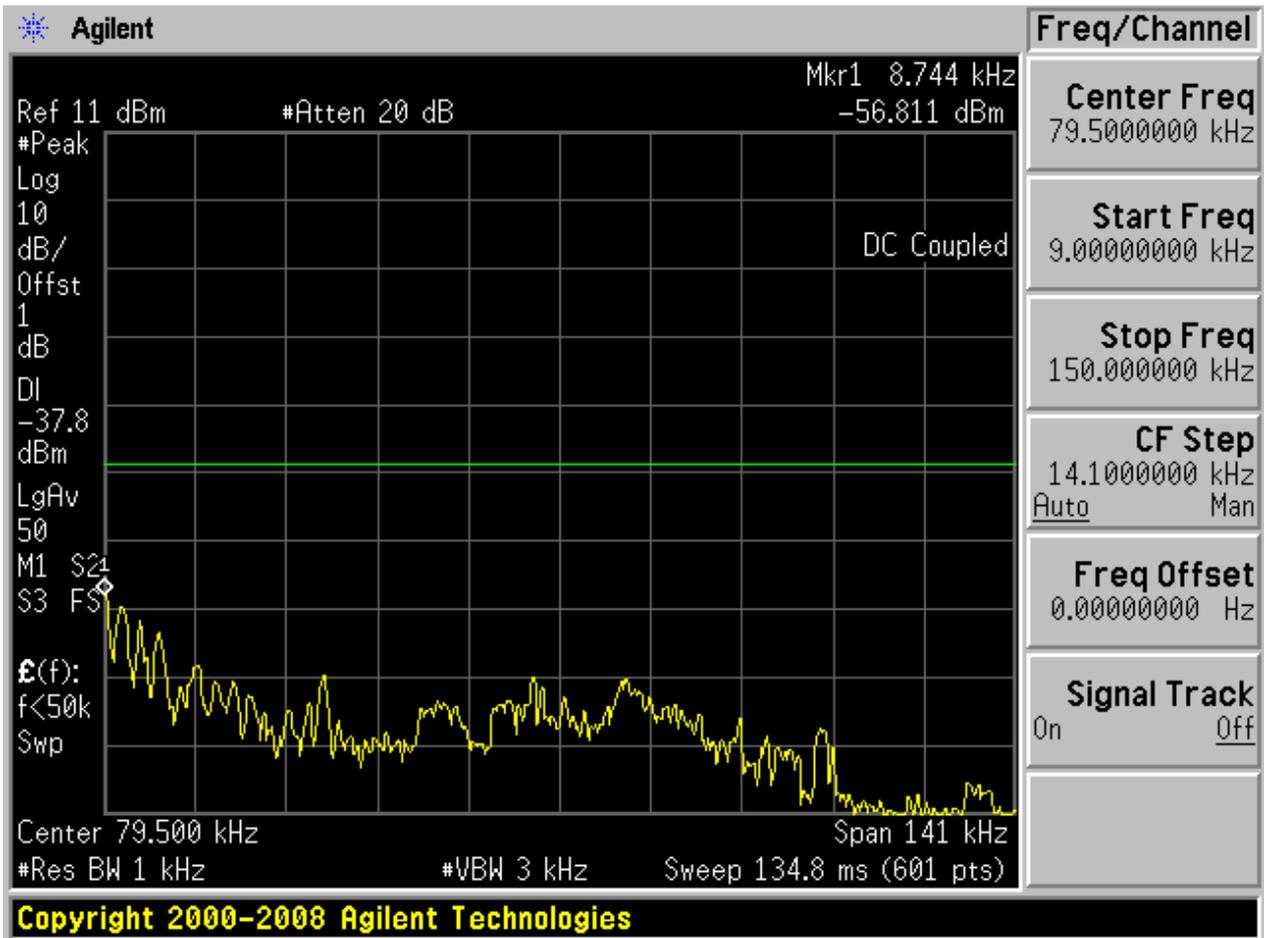



Copyright 2000-2008 Agilent Technologies

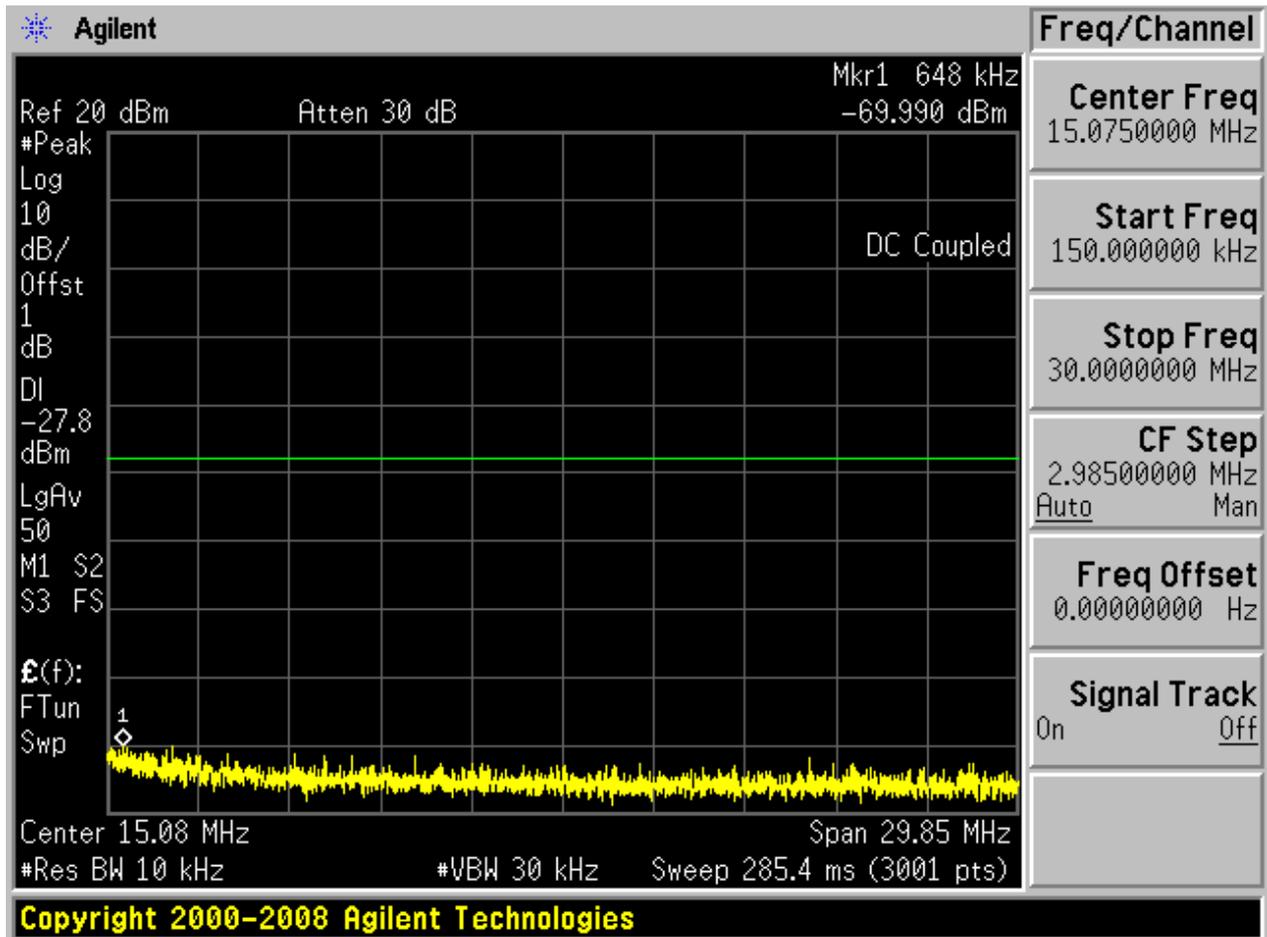

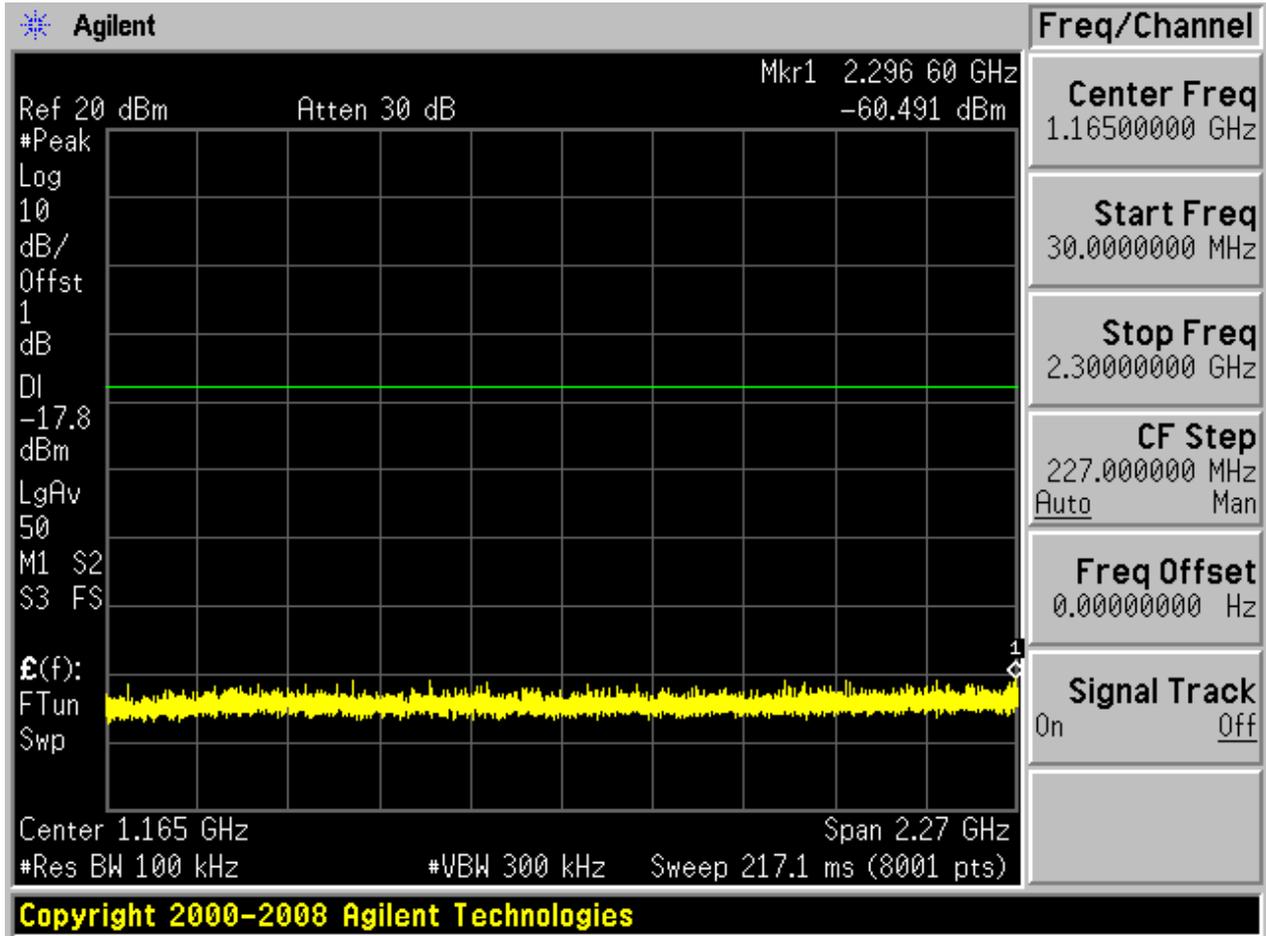

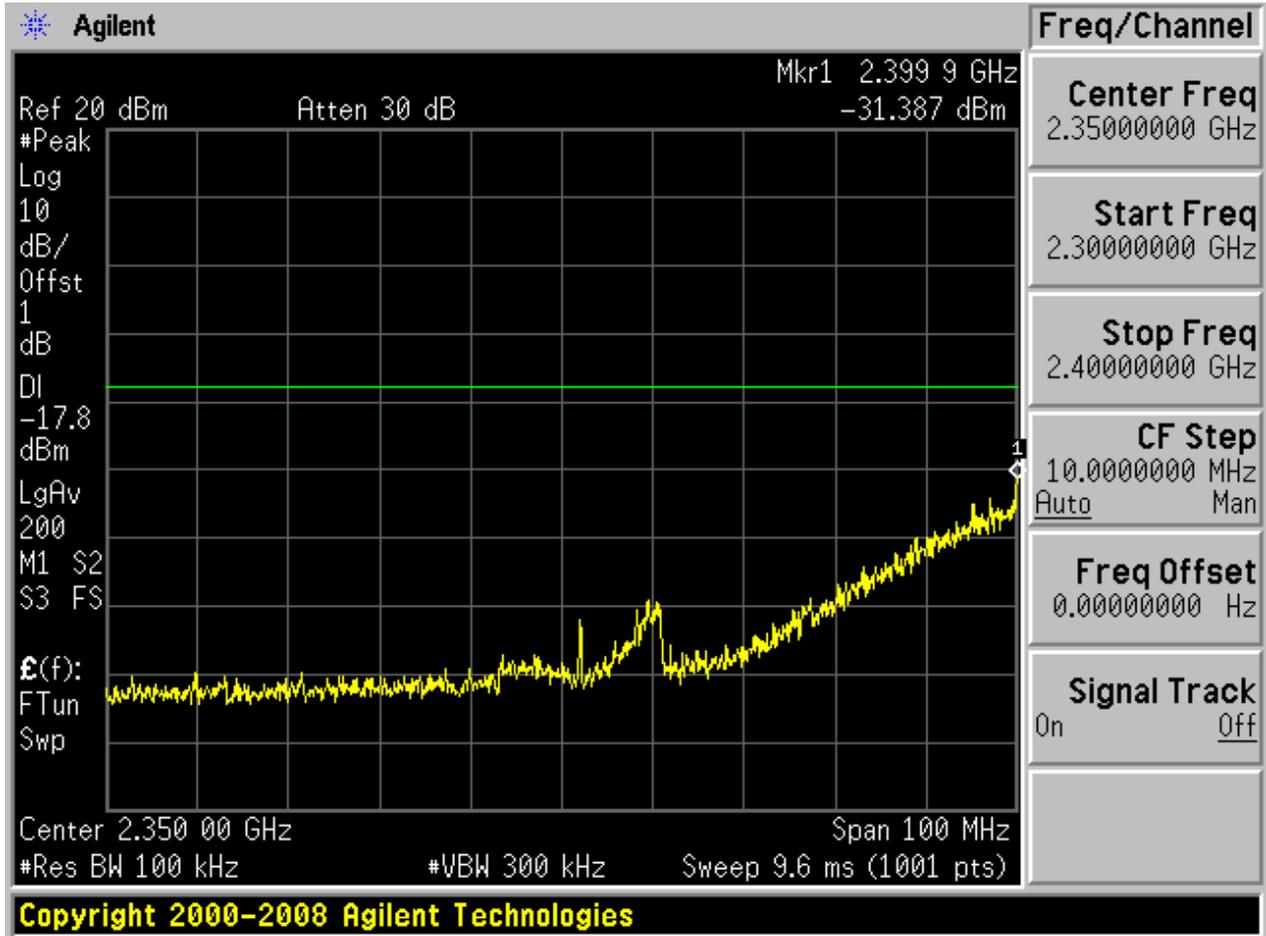


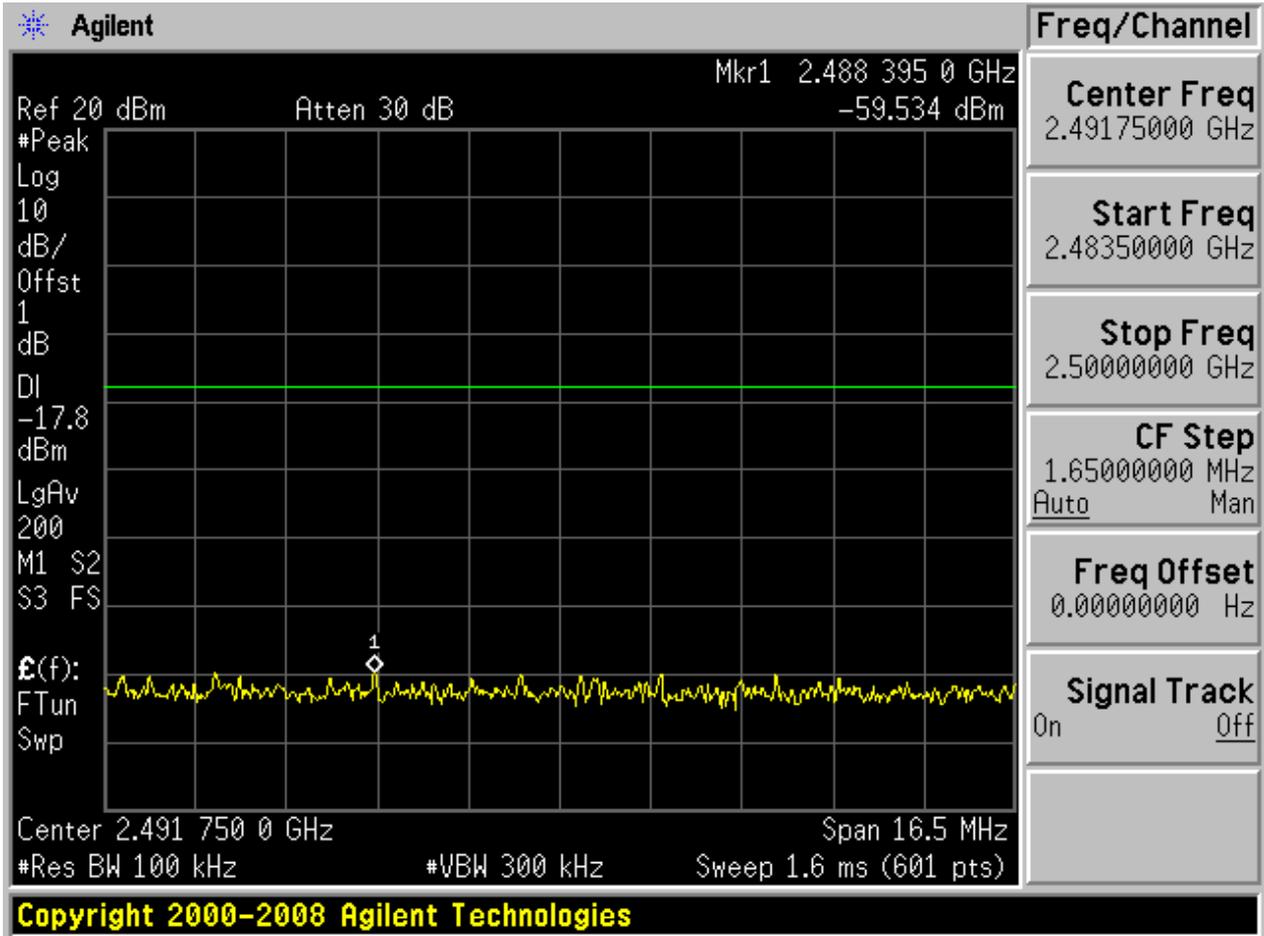

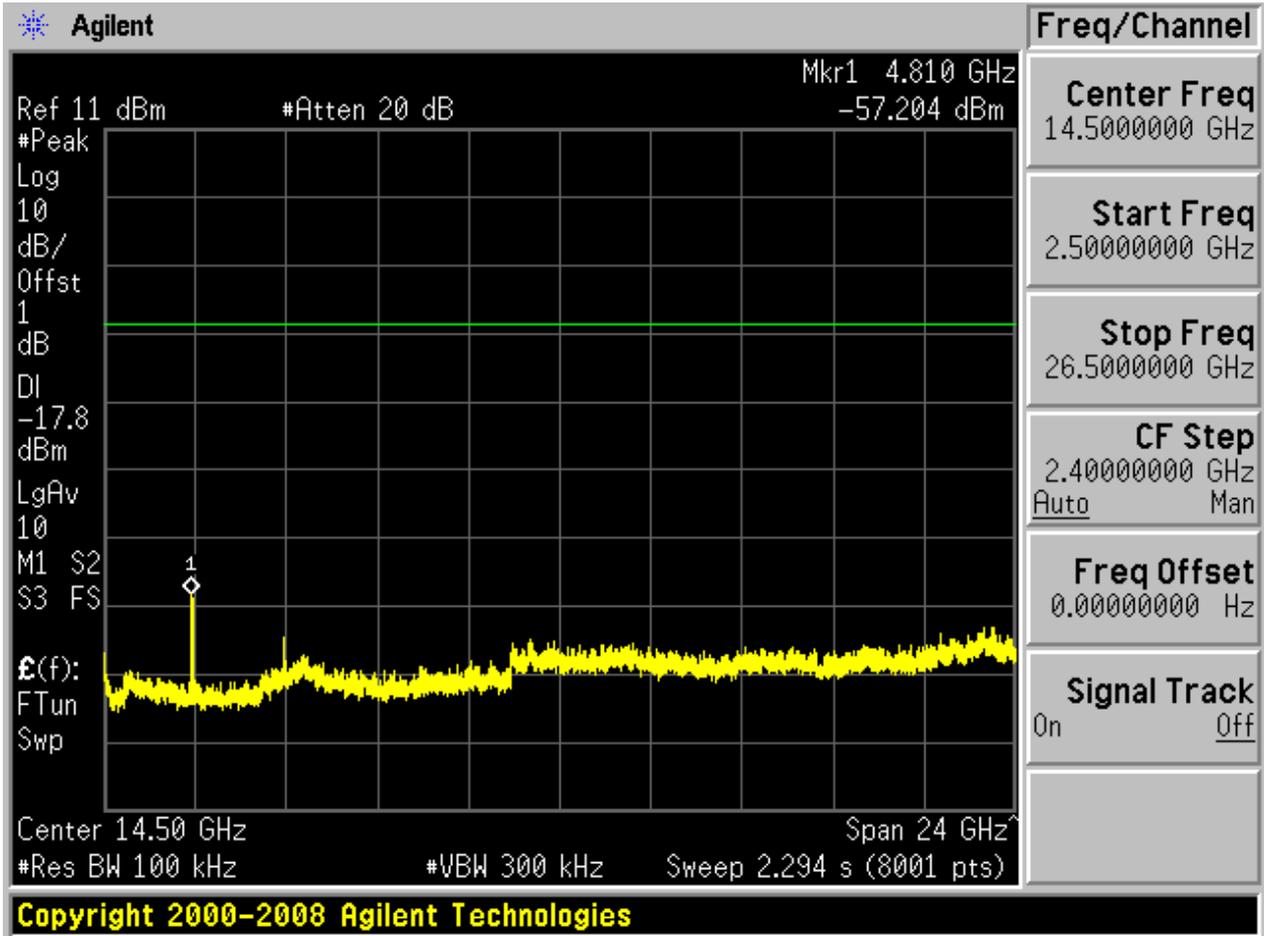


2.8 11N20_ M


Pref:

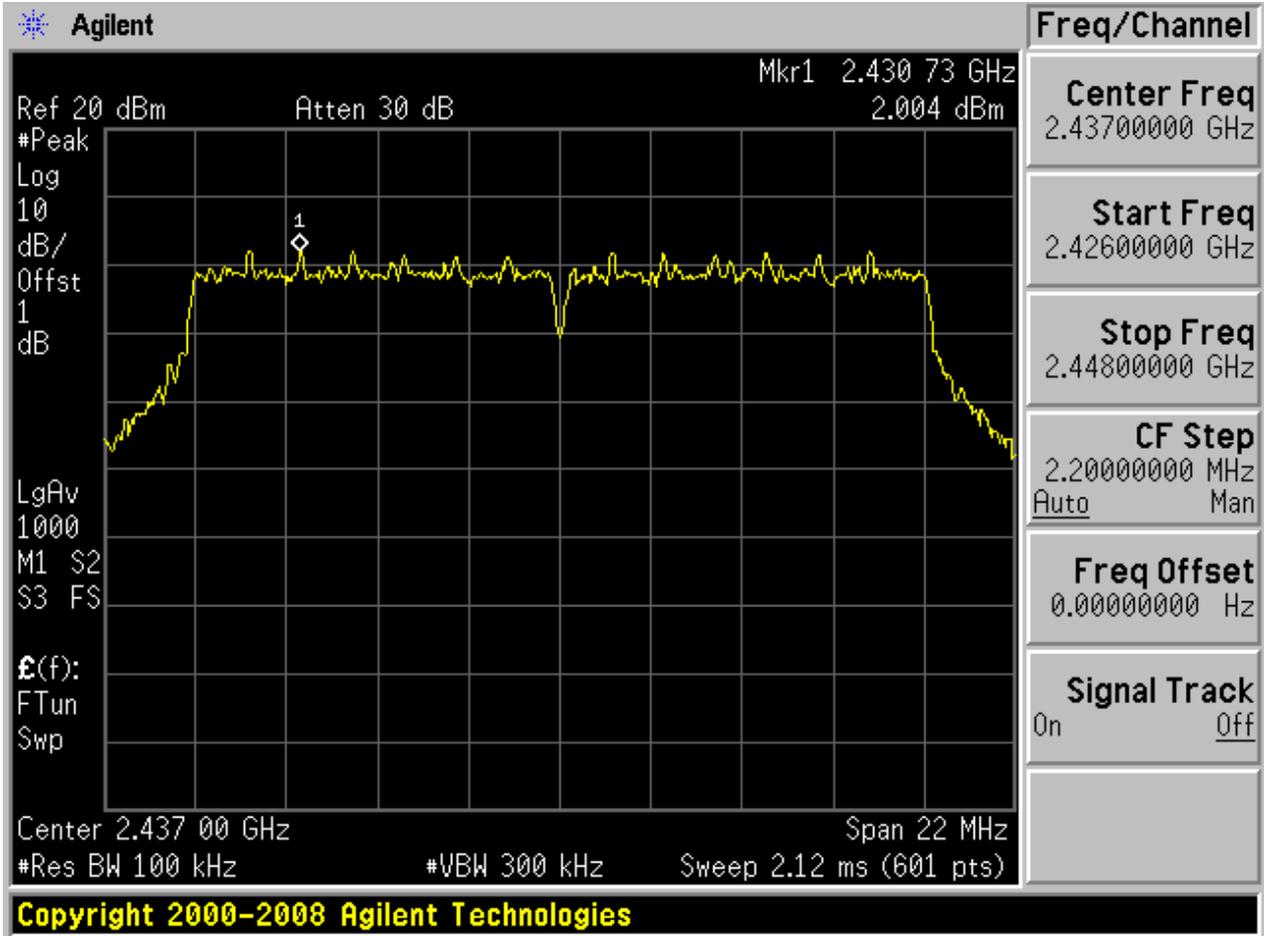






Puw:

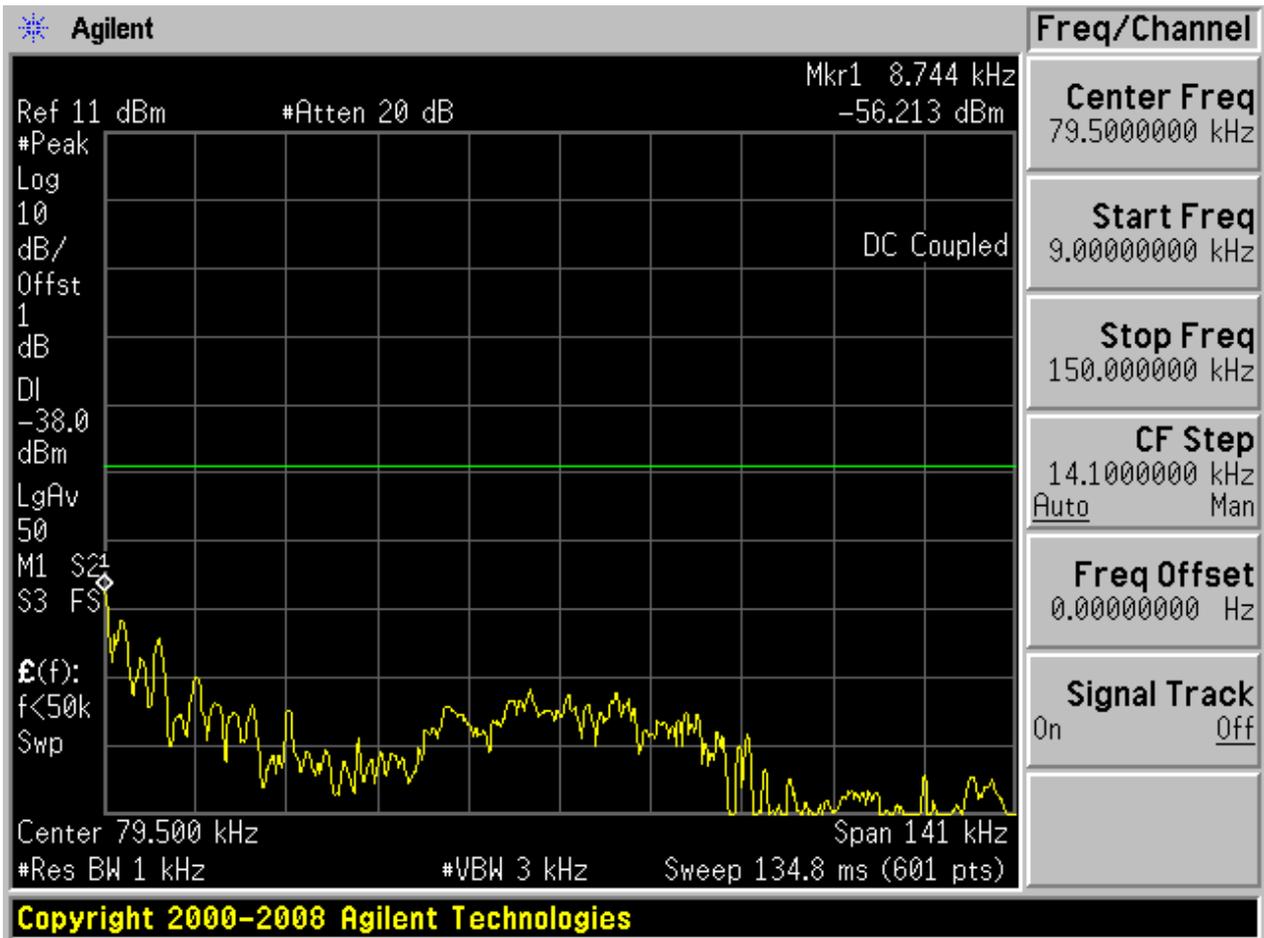

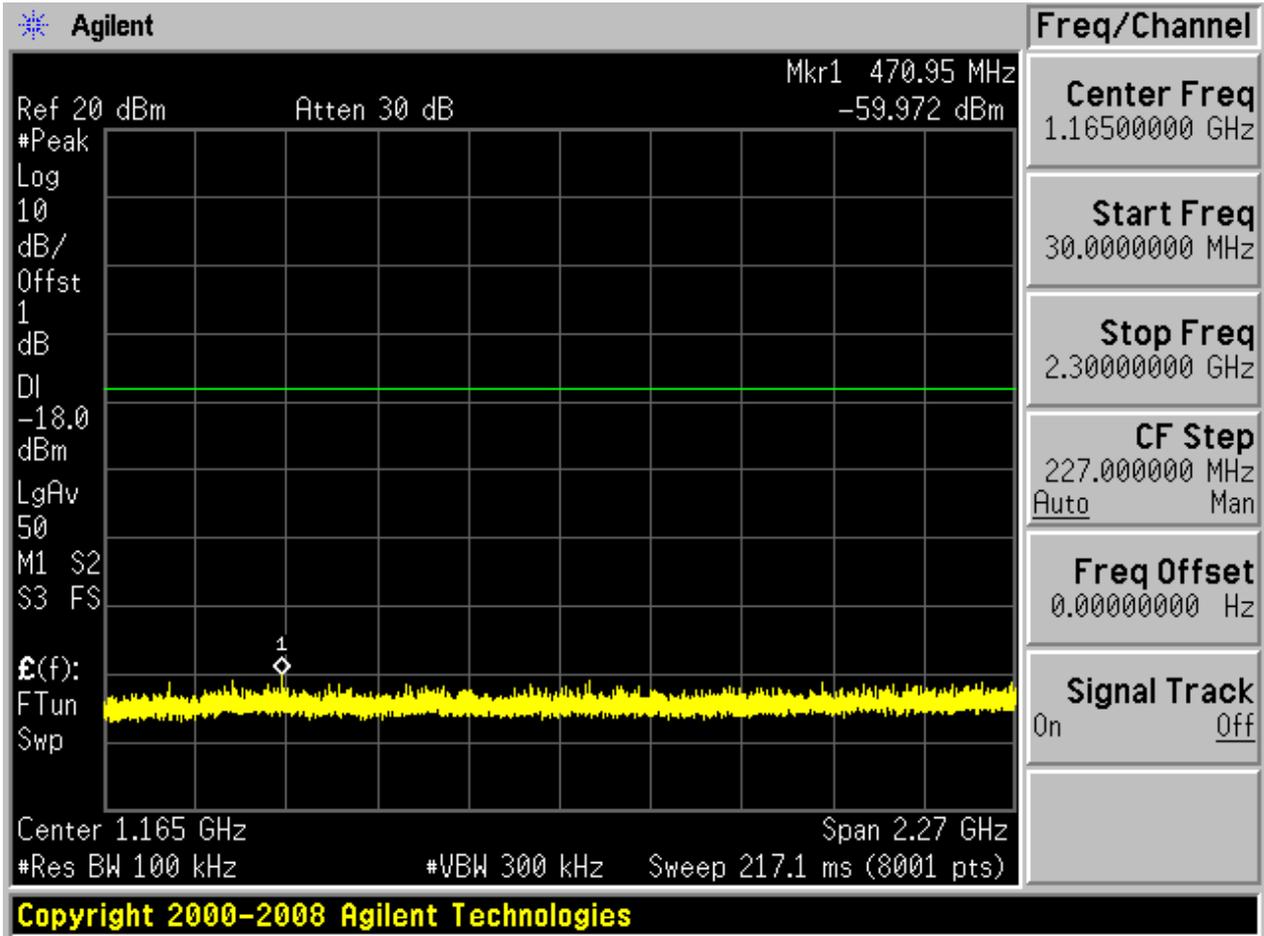

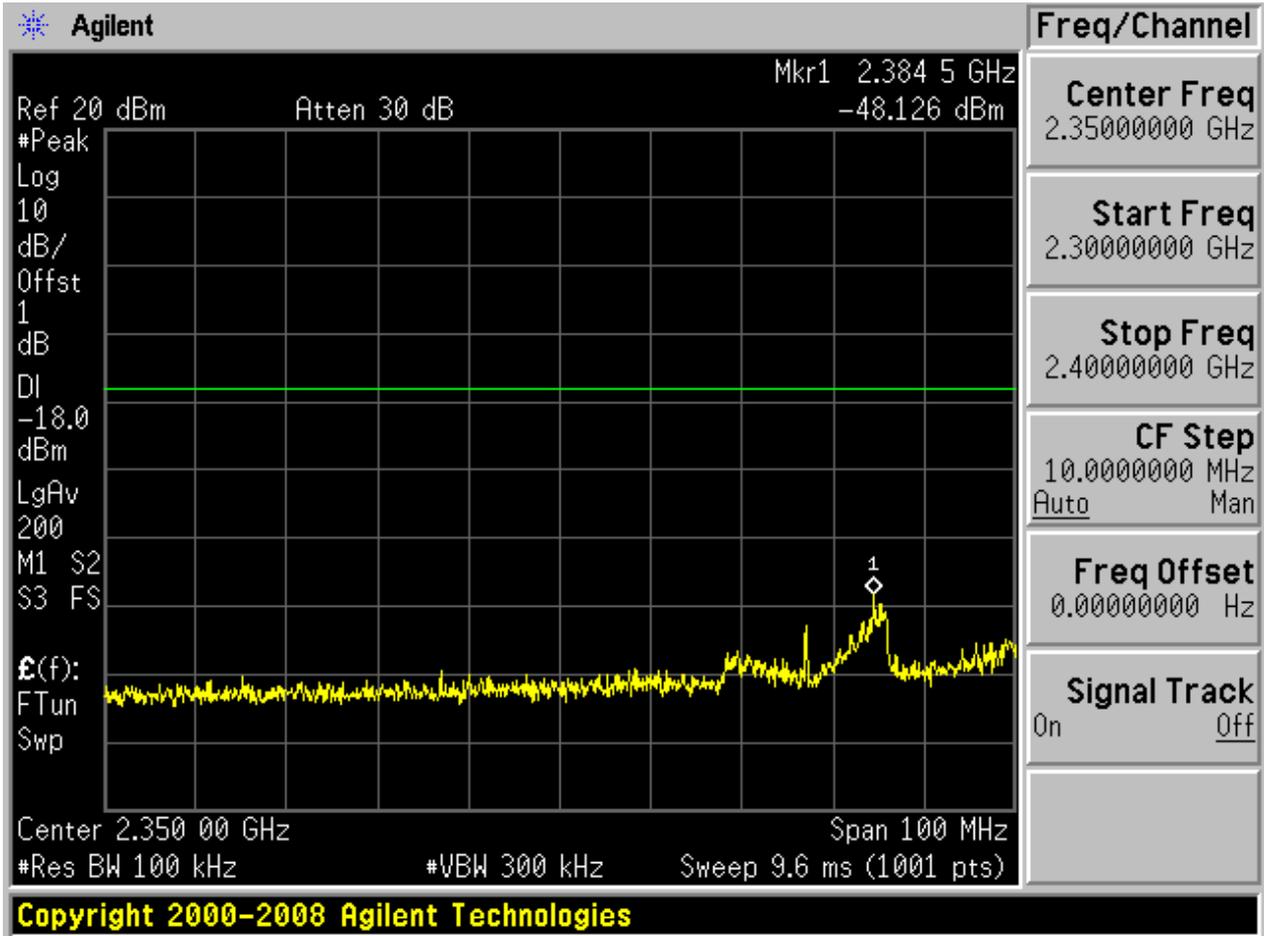


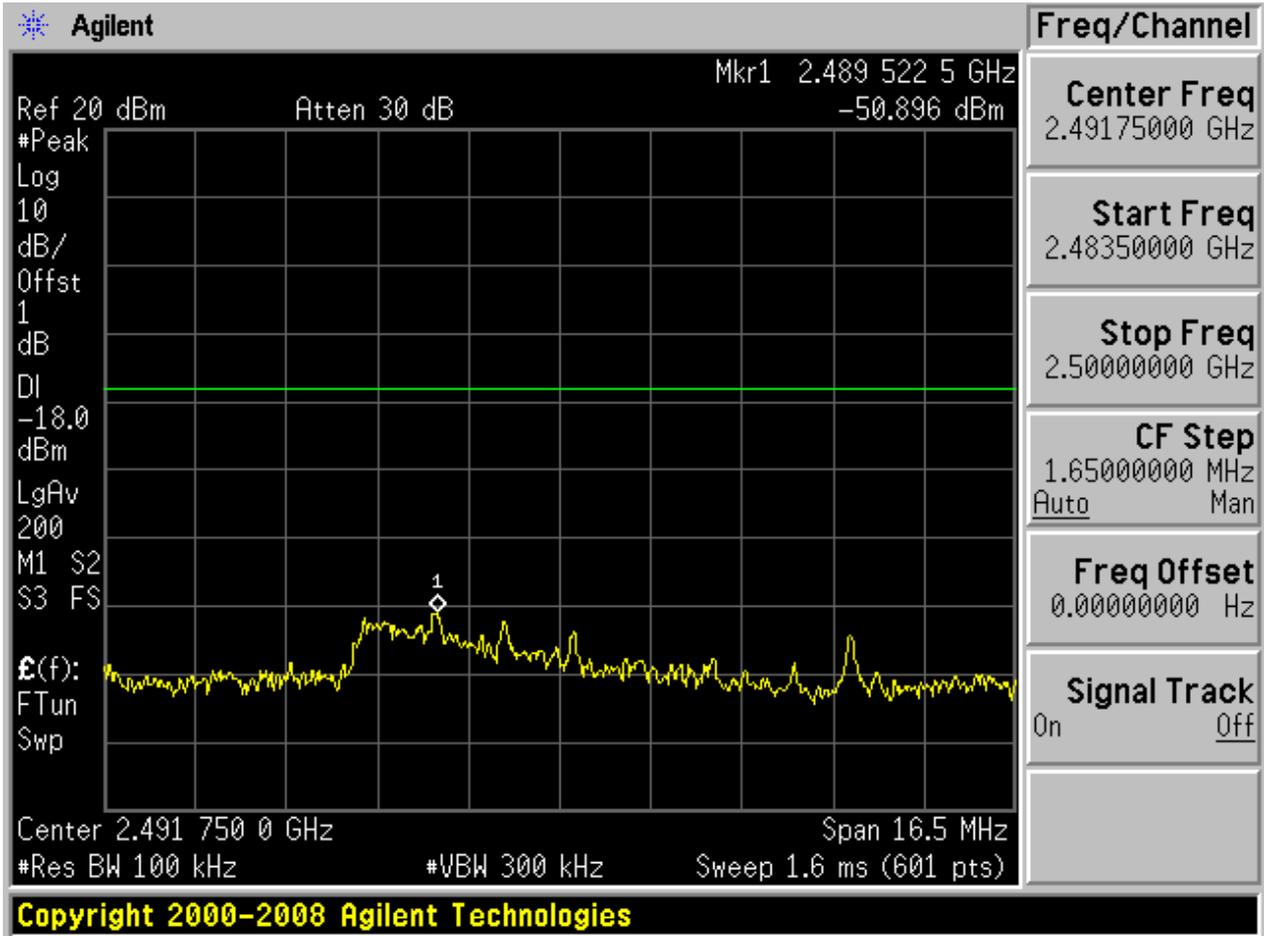

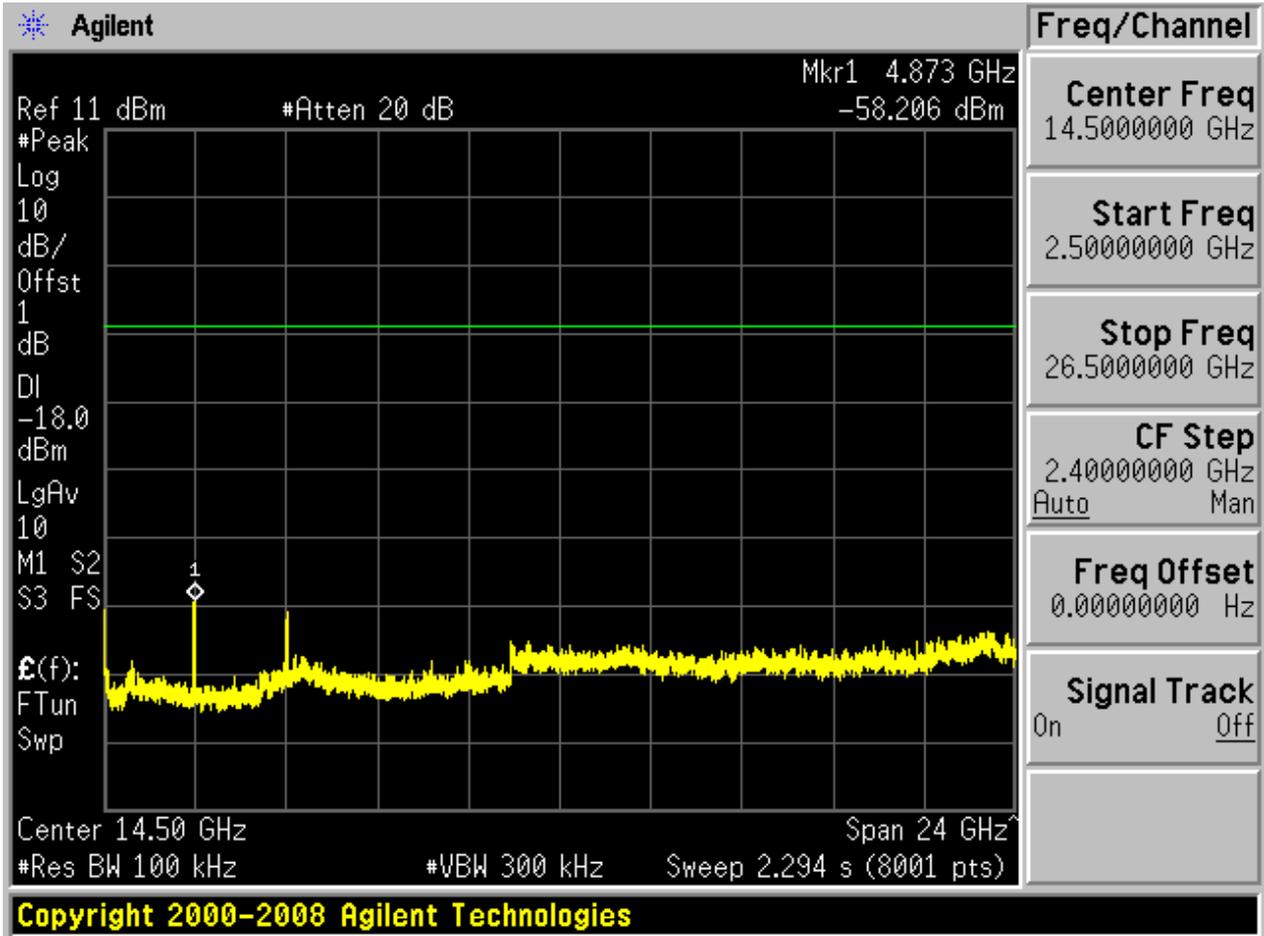


2.9 11N20_ H


Pref:

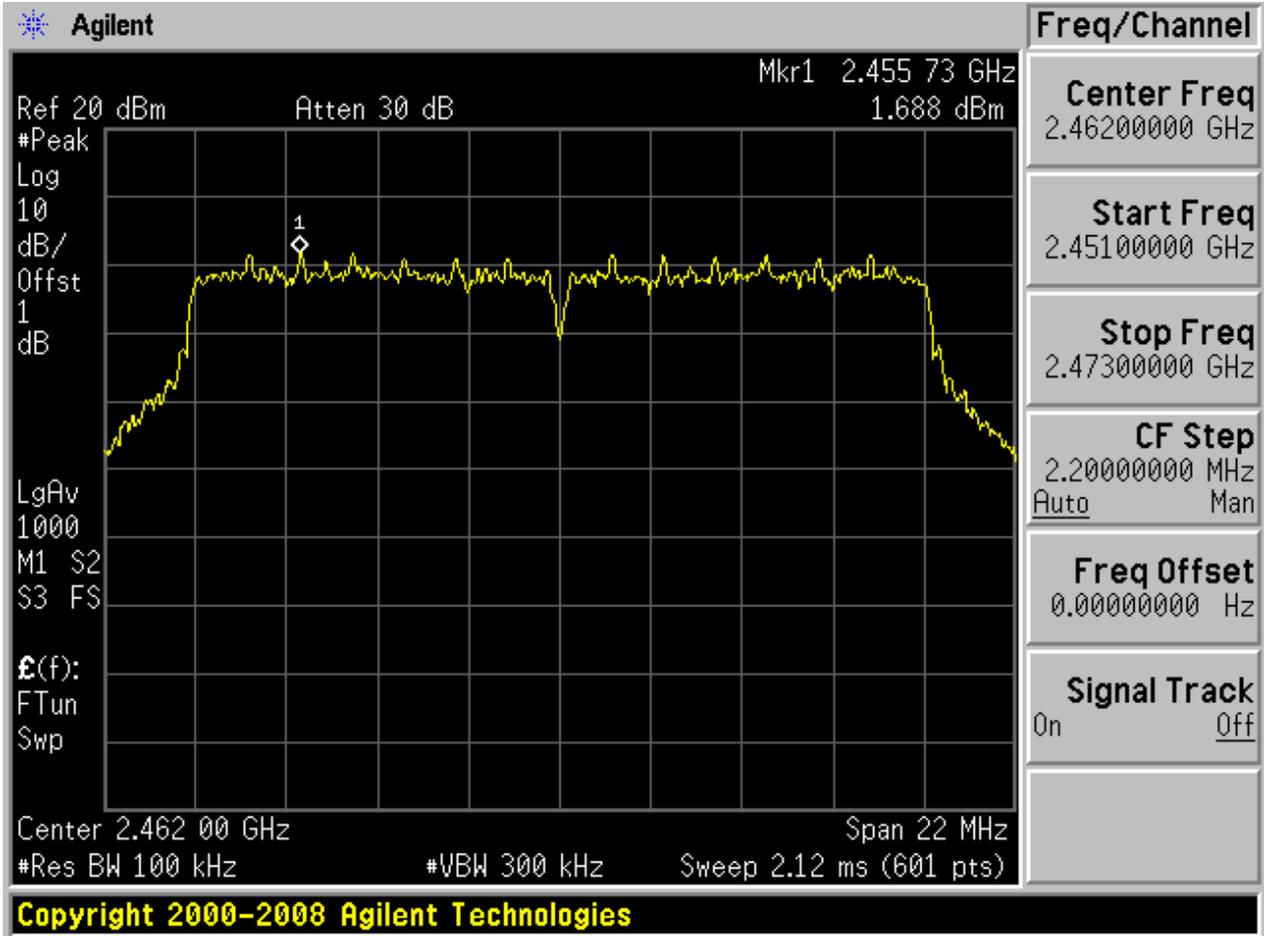






Puw:

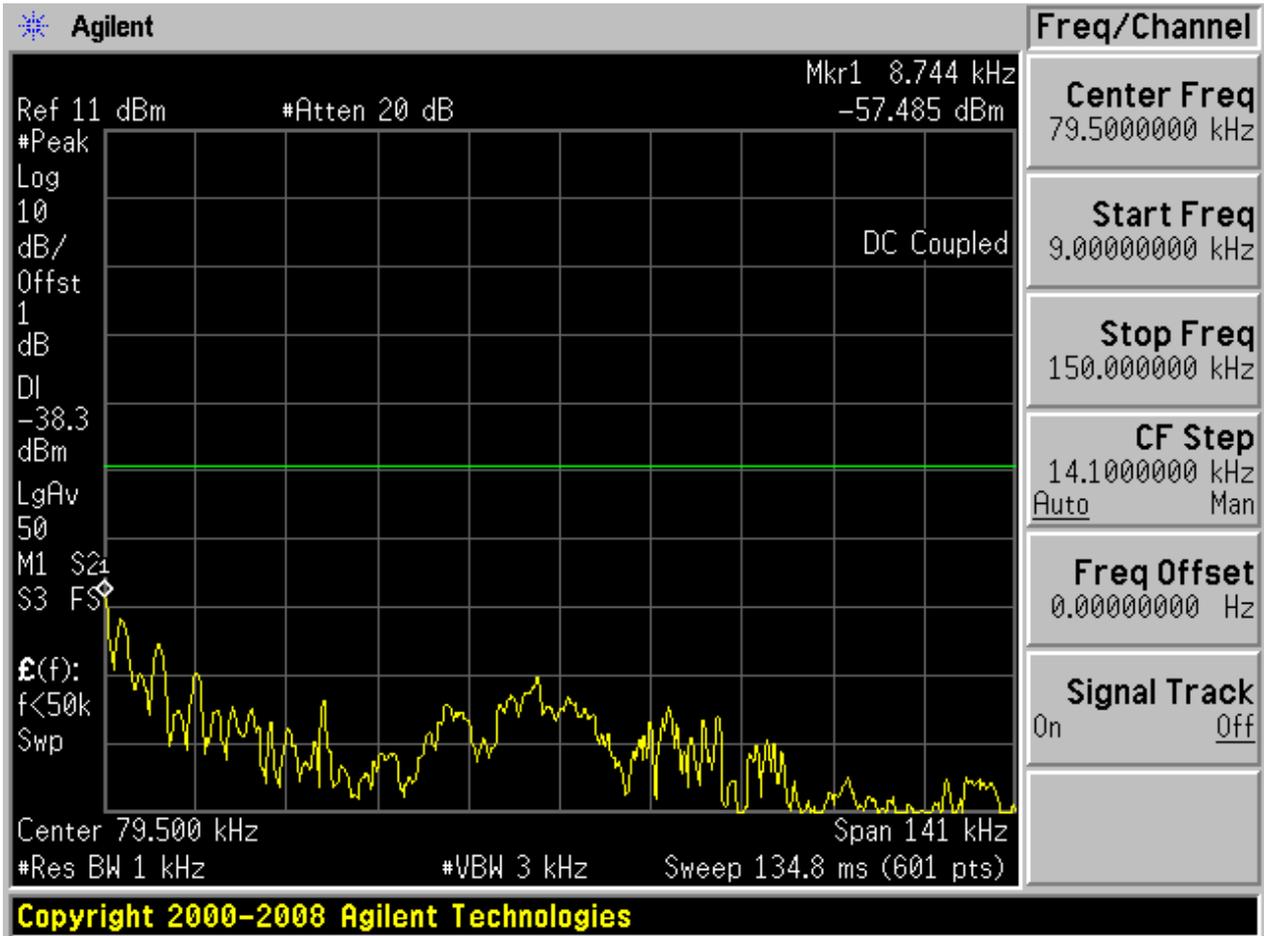


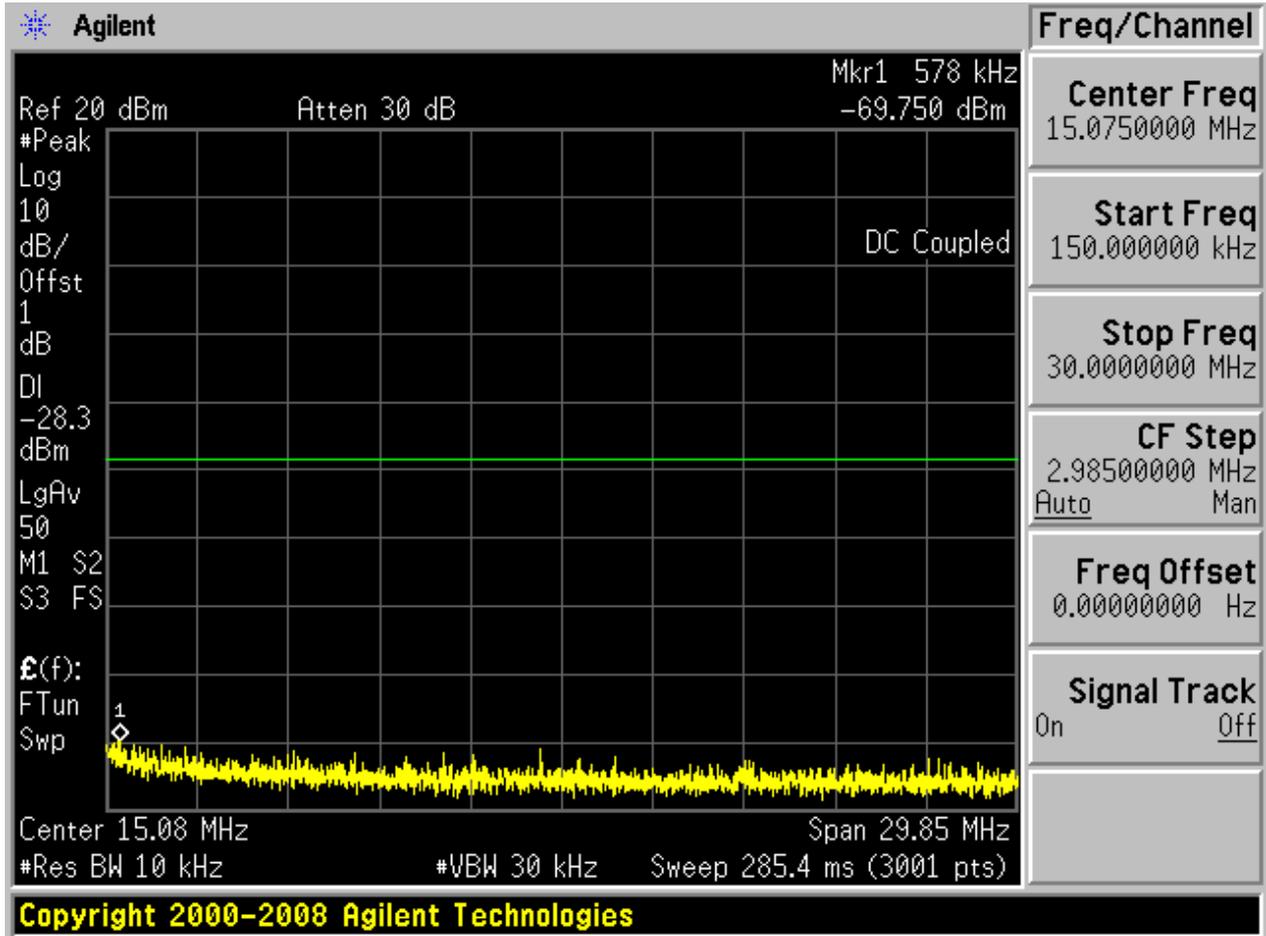

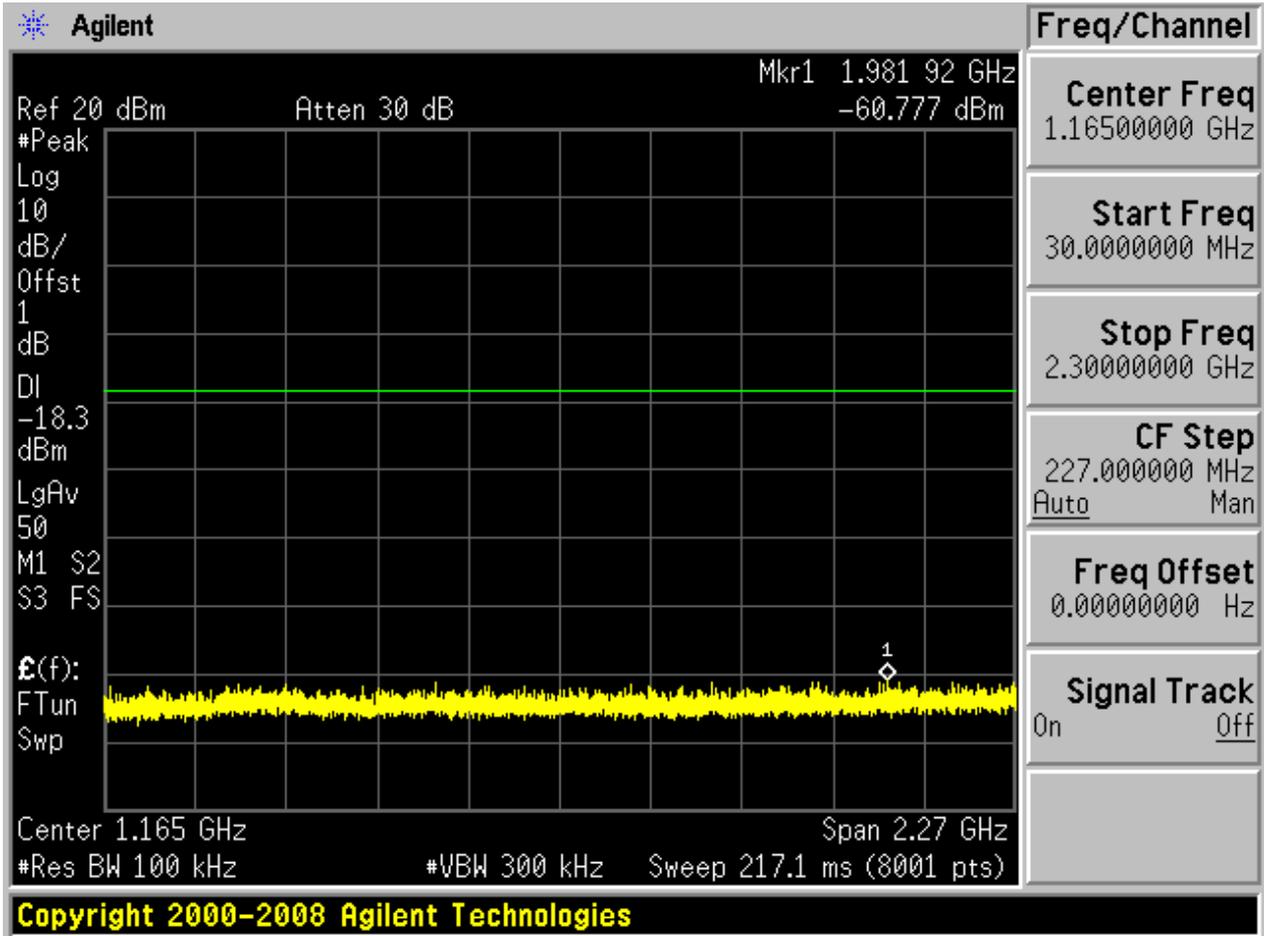

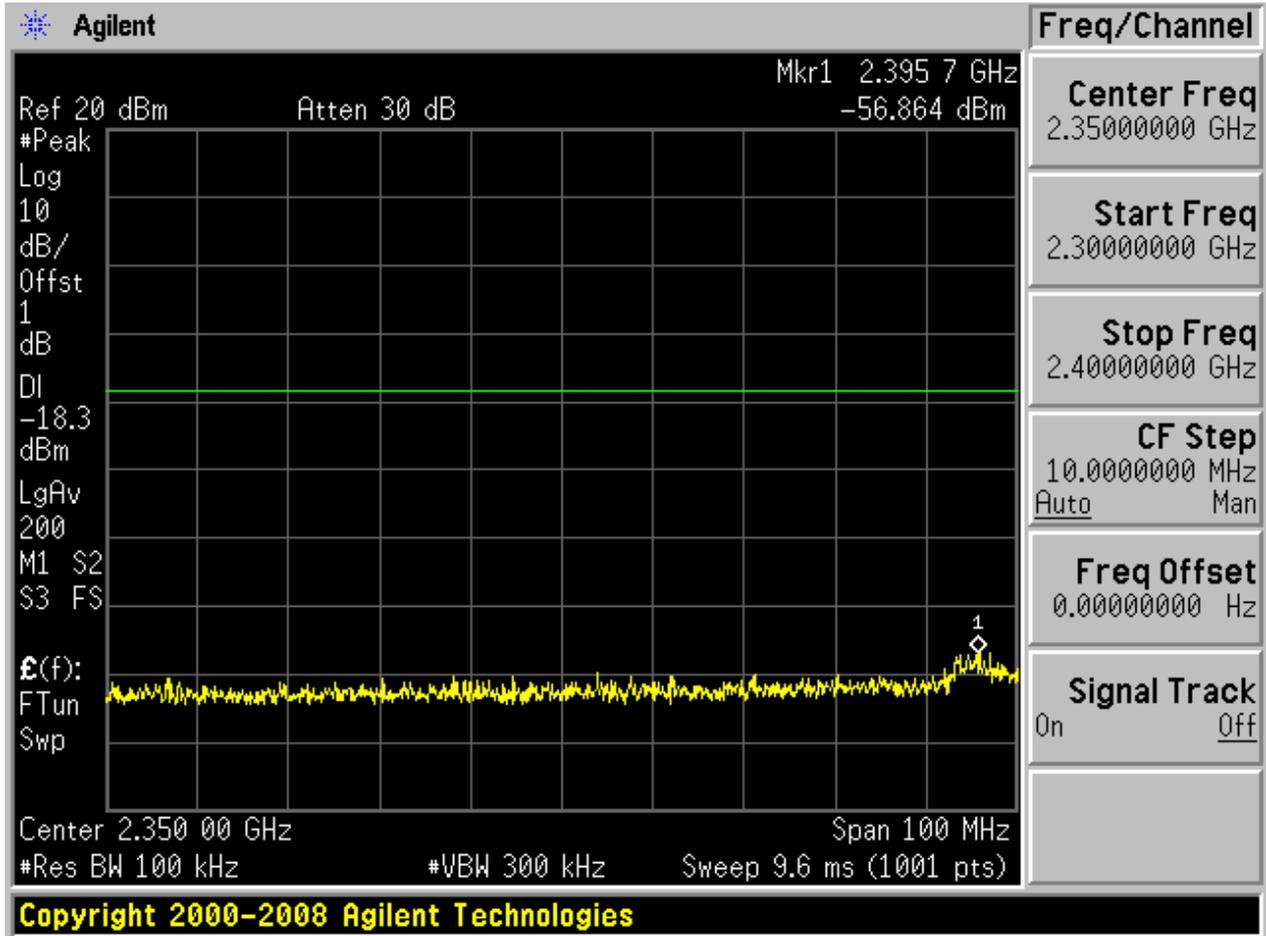

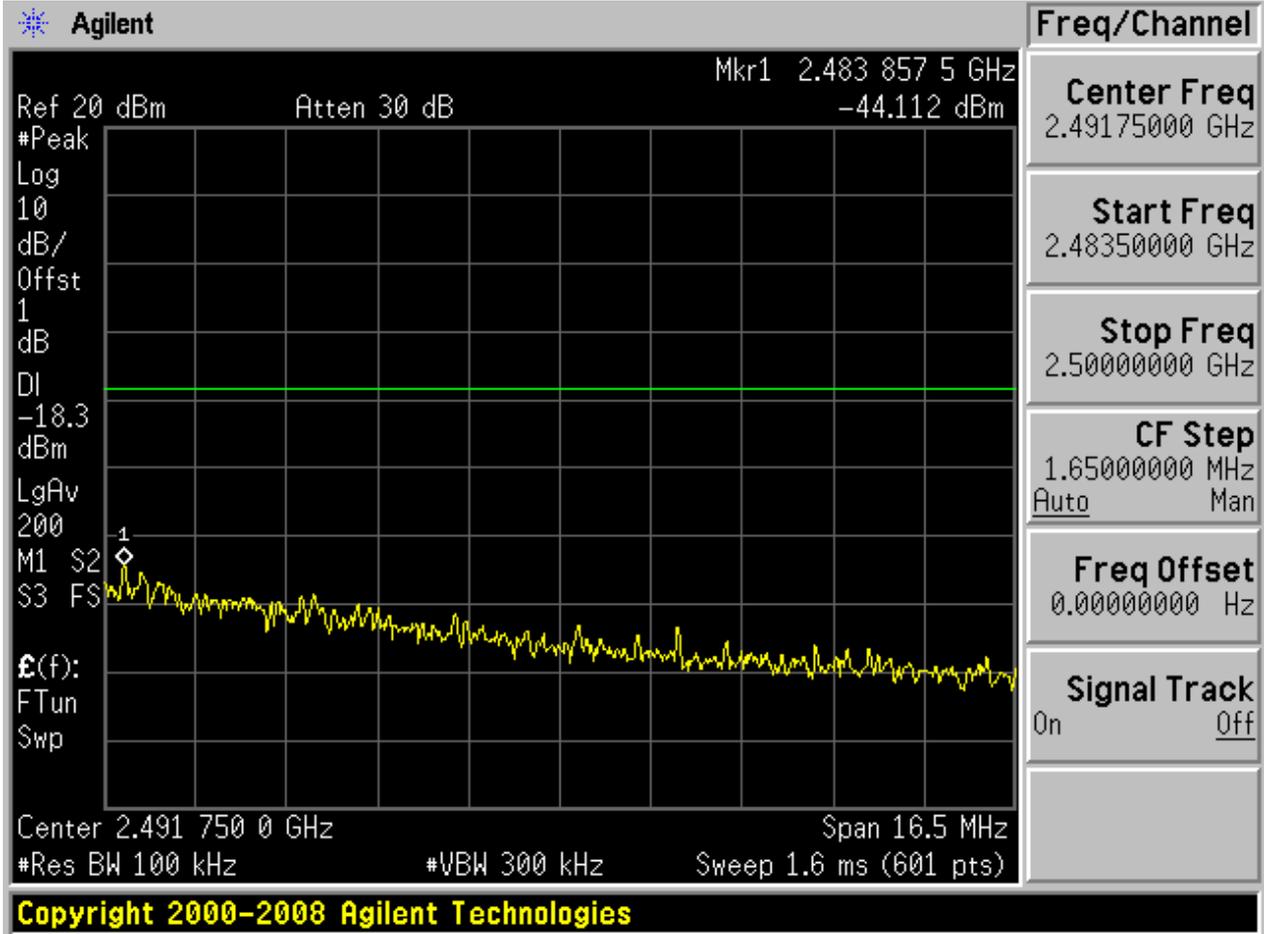

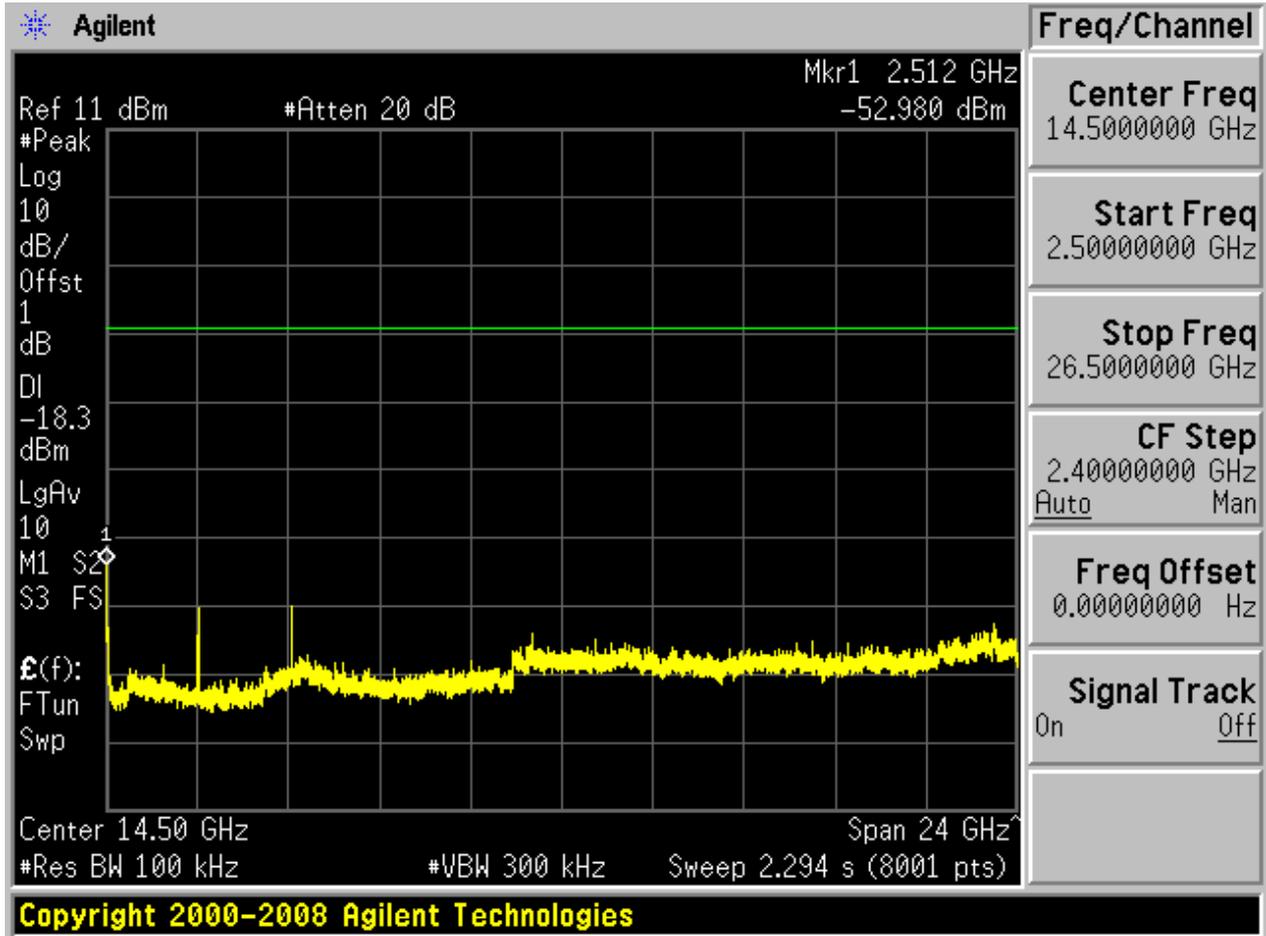


Appendix F: Radiated Spurious Emission & Spurious in Restricted Band

Part 1: Testing Range of “30 MHz to 1 GHz”

Note 1: The test results and plot for testing range of “30 MHz to 1 GHz” showed as below is **the WORST case for all Test Modes and Channels**. This range will not be presented for each Test Mode and each Channel.


Note 2: **The emissions in this range are mainly from the Platform Device (Notepad PC and its ancillary components).**

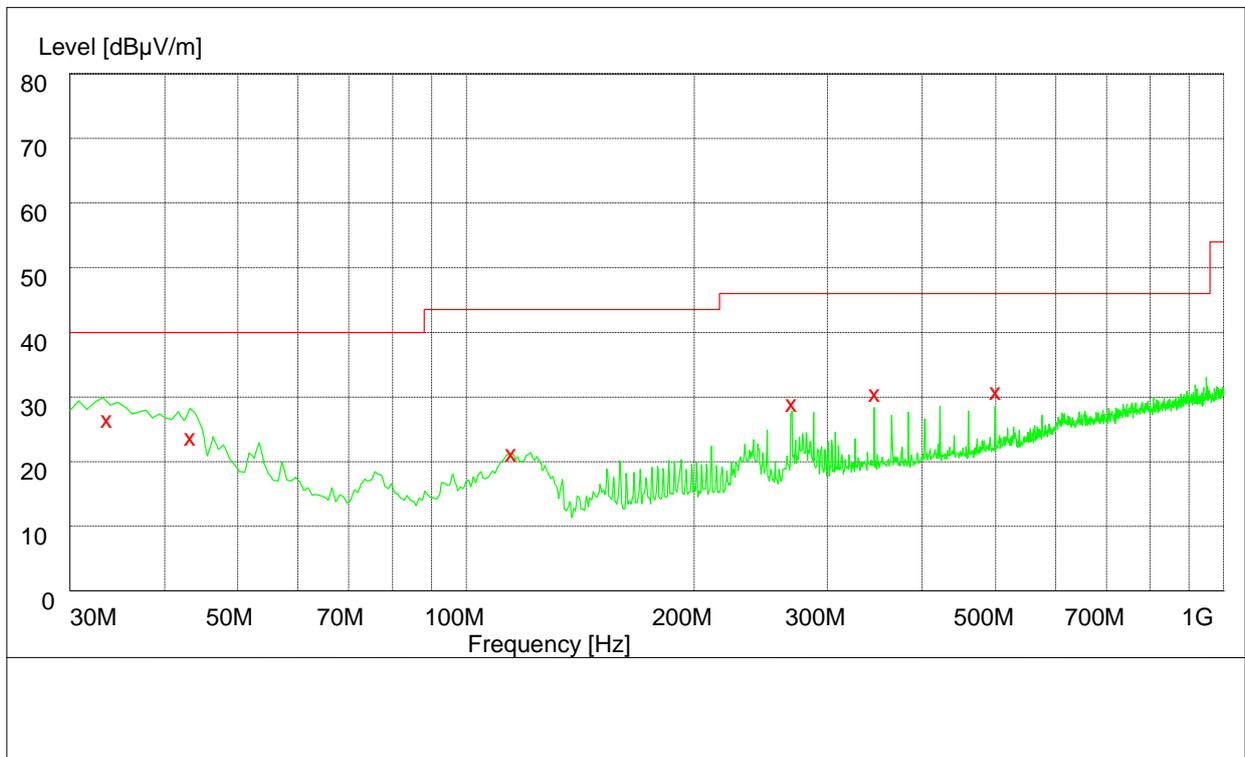

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Plarization
33.540000	26.60	14.9	40.0	13.4	103.0	178.00	VERTICAL
43.260000	23.80	15.1	40.0	16.2	103.0	263.00	VERTICAL
114.540000	21.30	12.3	43.5	22.2	100.0	146.00	VERTICAL
268.800000	29.10	14.3	46.0	16.9	100.0	309.00	HORIZONTAL
345.600000	30.60	16.5	46.0	15.4	103.0	106.00	HORIZONTAL
499.200000	30.90	19.3	46.0	15.1	196.0	119.00	HORIZONTAL

Part 2: Testing Range of “18 GHz to 26.5 GHz”

Note: No peak found in pre- test.

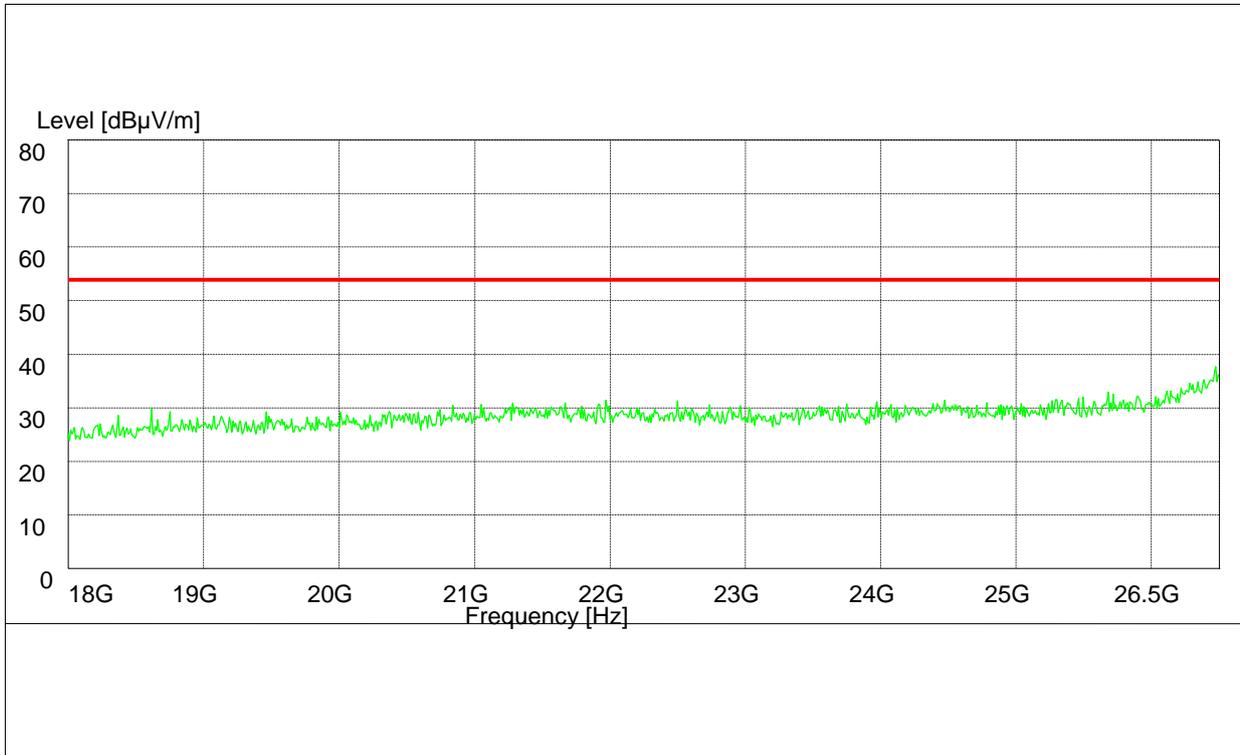


Part 3: Testing Range of “2.3GHz to 2.5GHz”

- Note 1: The testing range of “2.3 GHz to 2.5 GHz” is for checking radiated emissions located in restricted bands near the EUT operating bands.
- Note 2: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dB μ V/m) and Average Limit (54 dB μ V/m).
- Note 3: The peak spike exceeds the limit line is EUT’s operating frequency.

Test Mode: 11b

Channel 01

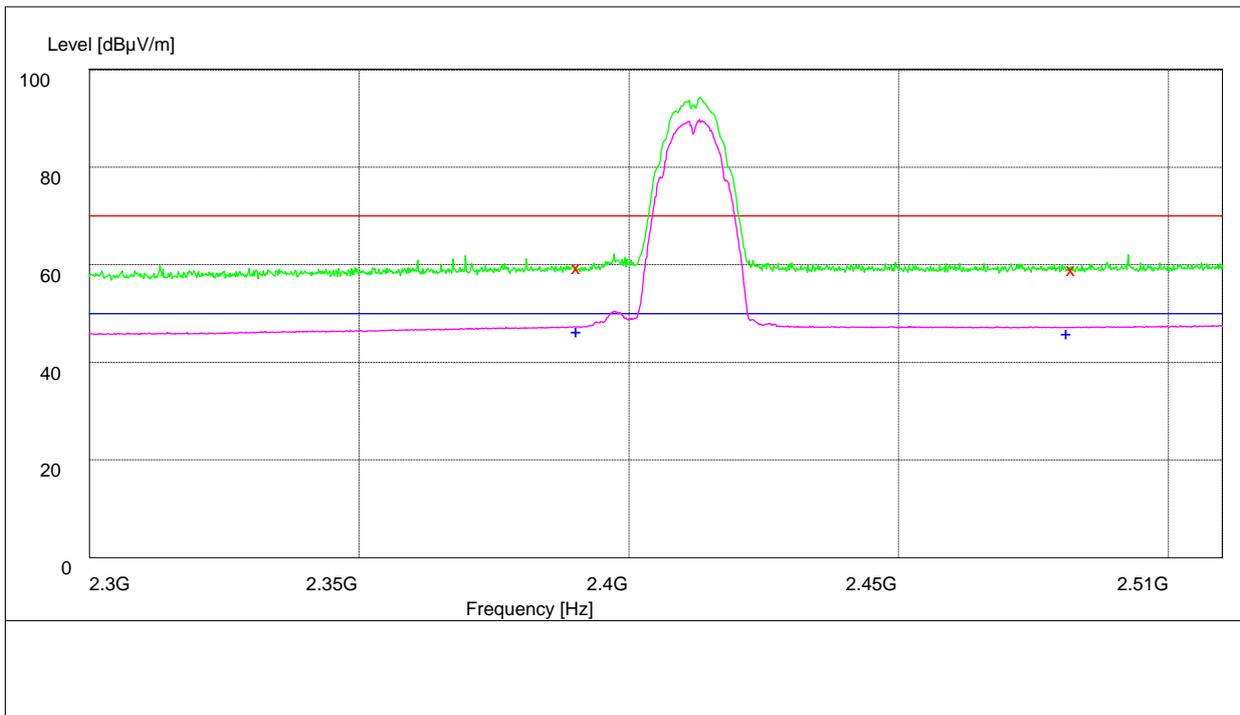

Note: The peak exceeds the limit line is carrier frequency.

MEASUREMENT RESULT: PK Detector


Frequency MHz	Level dB μ V/m	Transd dB	Limit dB μ V/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	59.70	34.8	70.0	10.3	150.0	352.00	HORIZONTAL
2483.500000	59.30	35.1	70.0	10.7	104.0	45.00	VERTICAL

MEASUREMENT RESULT: AVDetector

Frequency MHz	Level dB μ V/m	Transd dB	Limit dB μ V/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	43.20	34.8	50.0	6.8	100.0	175.00	HORIZONTAL

2483.500000	43.70	35.1	50.0	6.3	147.0	0.00	VERTICAL
-------------	-------	------	------	-----	-------	------	----------

Channel 11

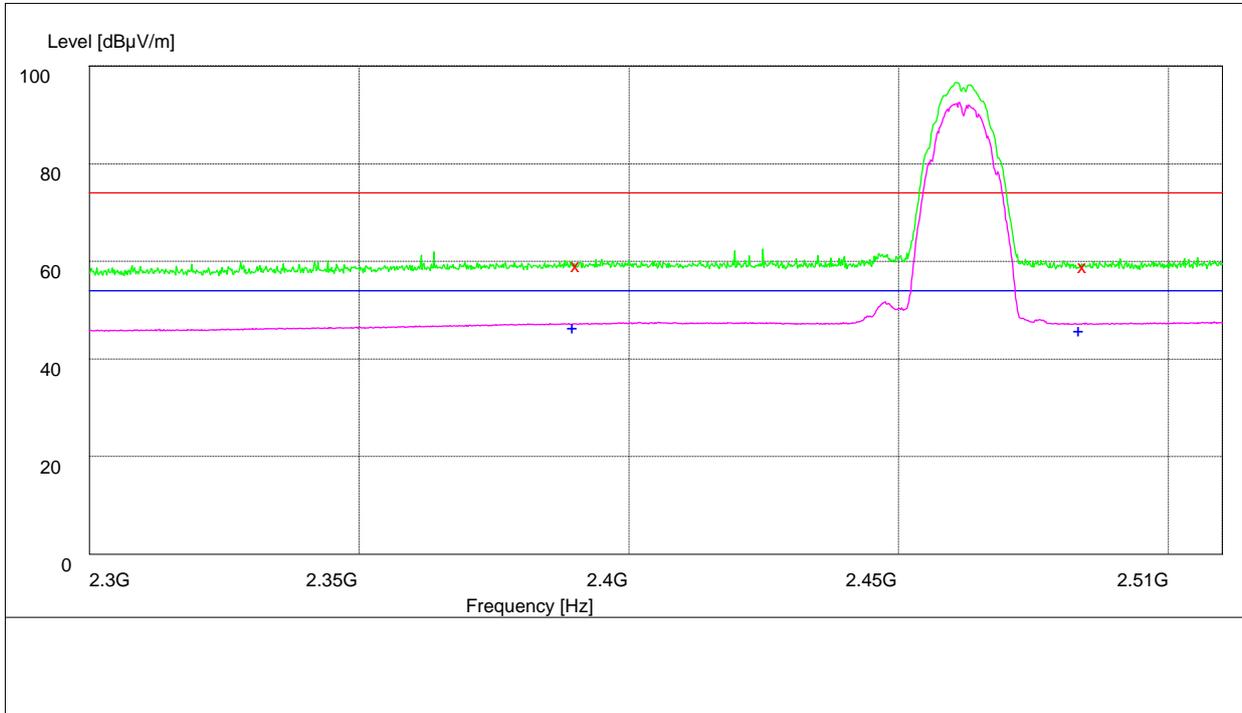

Note: The peak exceeds the limit line is carrier frequency.

MEASUREMENT RESULT: PK Detector


Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	59.10	34.8	74.0	14.9	105.0	130.00	HORIZONTAL
2483.500000	59.40	35.1	74.0	14.6	124.0	176.00	VERTICAL

MEASUREMENT RESULT: AVDetector

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarization
2387.540000	47.80	34.8	54.0	6.2	111.0	64.00	HORIZONTAL
2481.960000	47.80	35.1	54.0	6.2	121.0	163.00	HORIZONTAL

Test Mode: 11g

Channel 01

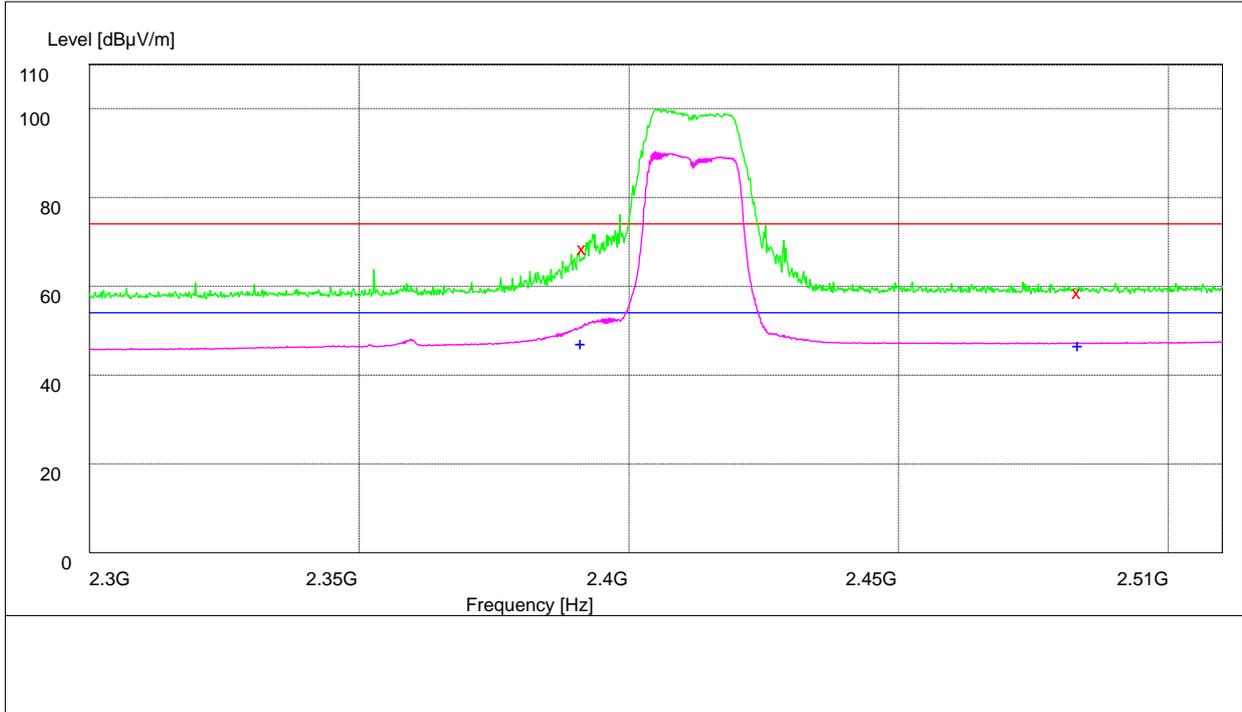

Note: The peak exceeds the limit line is carrier frequency.


MEASUREMENT RESULT: PK Detector

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	68.80	34.8	74.0	5.2	100.0	165.00	HORIZONTAL
2483.500000	59.50	35.1	74.0	14.5	100.0	201.00	VERTICAL

MEASUREMENT RESULT: AVDetector

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	47.30	34.8	54.0	6.7	100.0	123.00	HORIZONTAL
2481.456000	46.70	35.1	54.0	7.3	130.0	0.00	HORIZONTAL

Channel 11

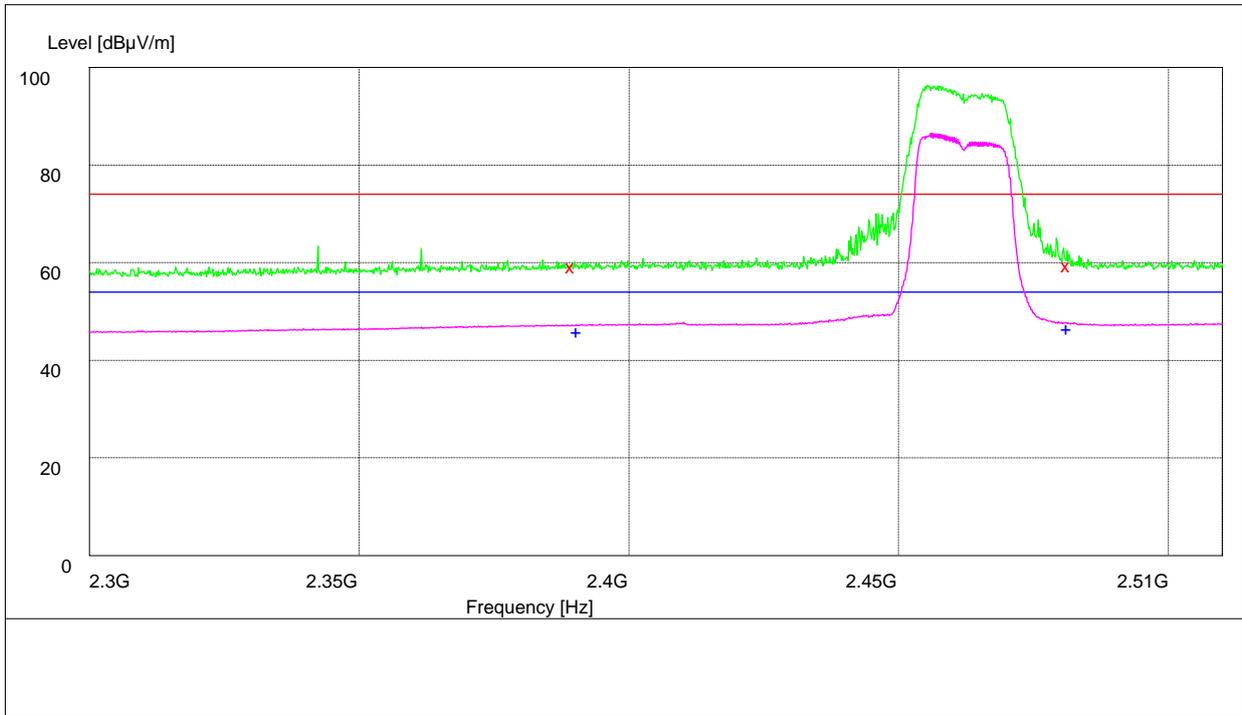

Note: The peak exceeds the limit line is carrier frequency.

MEASUREMENT RESULT: PK Detector


Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	59.10	34.8	74.0	14.9	118.0	359.00	VERTICAL
2483.500000	59.90	35.1	74.0	14.1	100.0	223.00	HORIZONTAL

MEASUREMENT RESULT: AVDetector

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	36.80	34.8	54.0	7.2	139.0	357.00	HORIZONTAL
2483.000000	47.30	35.1	54.0	6.7	100.0	142.00	HORIZONTAL

Test Mode: 11n

Channel 01

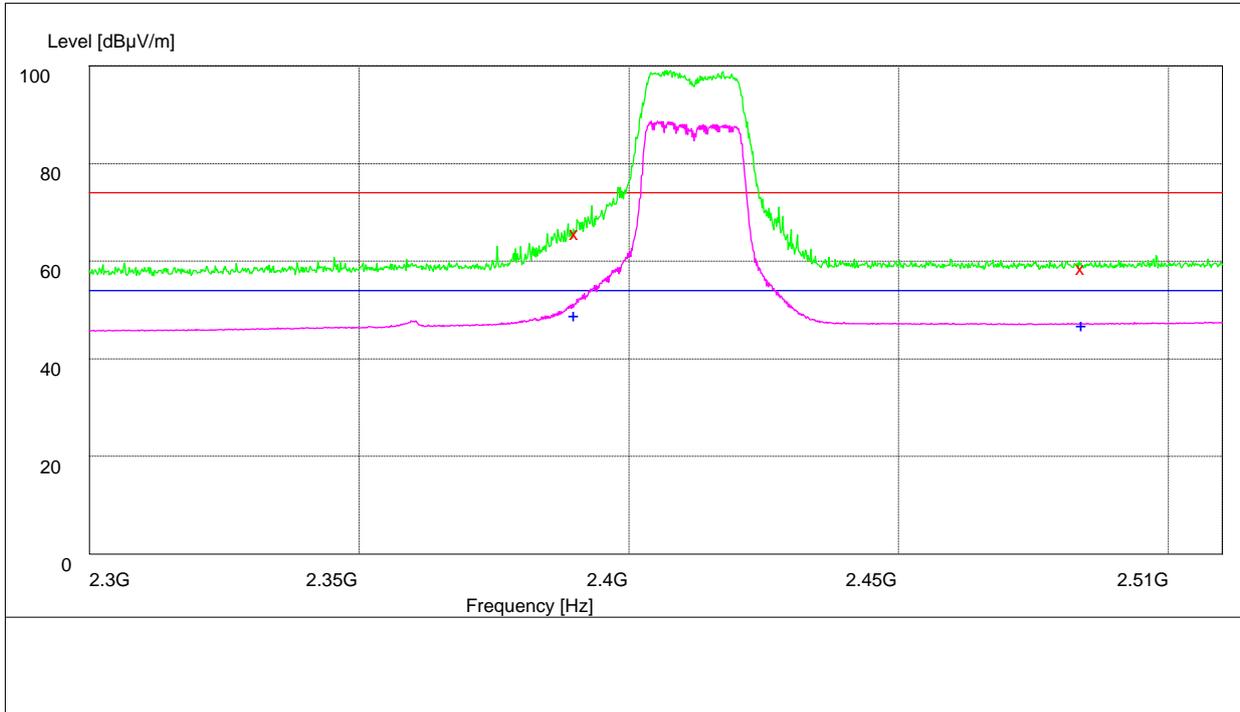

Note: The peak exceeds the limit line is carrier frequency.


MEASUREMENT RESULT: PK Detector

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	65.90	34.8	74.0	8.1	100.0	177.00	HORIZONTAL
2483.500000	58.90	35.1	74.0	15.1	142.0	114.00	HORIZONTAL

MEASUREMENT RESULT: AVDetector

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	49.00	34.8	54.0	5.0	100.0	153.00	HORIZONTAL
2481.456000	46.70	35.1	54.0	7.3	150.0	359.00	VERTICAL

Channel 11

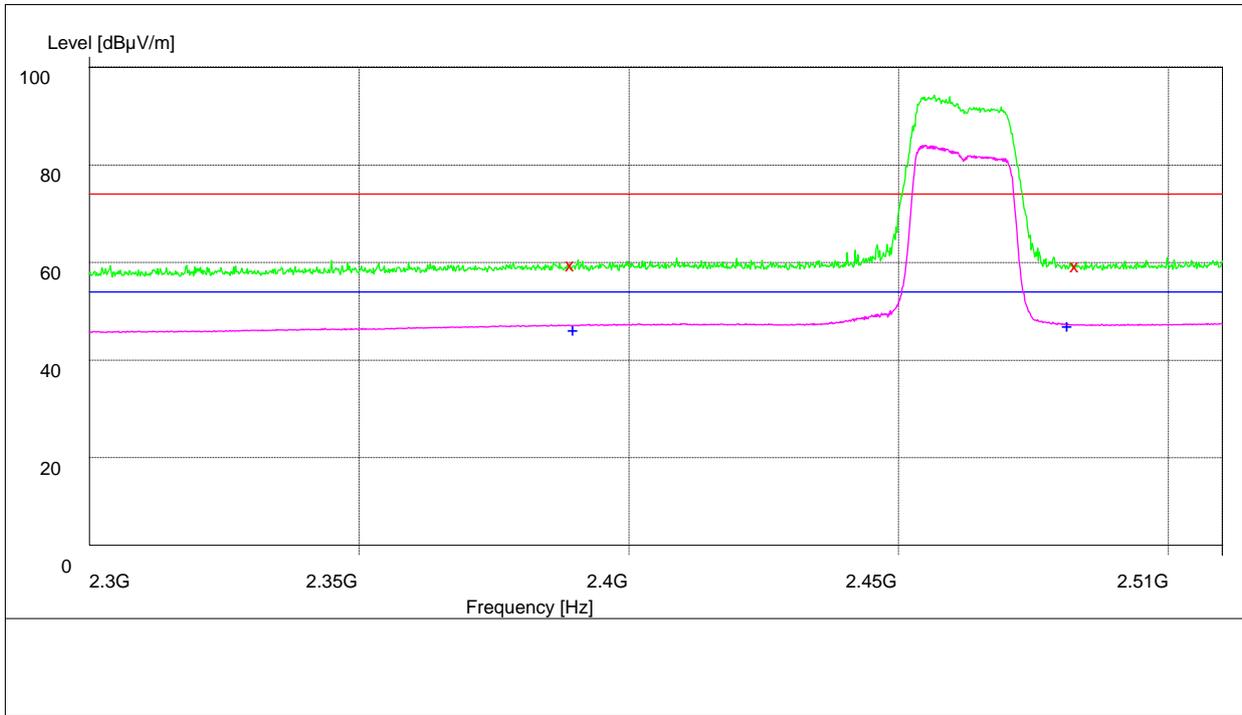

Note: The peak exceeds the limit line is carrier frequency.

MEASUREMENT RESULT: PK Detector


Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	59.50	34.8	74.0	14.5	150.0	306.00	VERTICAL
2483.500000	59.30	35.1	74.0	14.7	100.0	341.00	HORIZONTAL

MEASUREMENT RESULT: AVDetector

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	46.80	34.8	54.0	7.2	131.0	151.00	HORIZONTAL
2481.500000	46.50	35.1	54.0	7.5	100.0	128.00	HORIZONTAL

Part 4: Testing Range of “1 GHz to 18 GHz”

- Note 1: The test results and plot for testing range of “1 GHz to 18 GHz” showed as below is **the WORST case for all Test Modes and Channels**. This range will not be presented for each Test Mode and each Channel.
- Note 2: The testing range of “1 GHz to 18 GHz” is for checking radiated emissions located in restricted bands faraway from the EUT operating bands.
- Note 3: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dB μ V/m) and Average Limit (54 dB μ V/m).

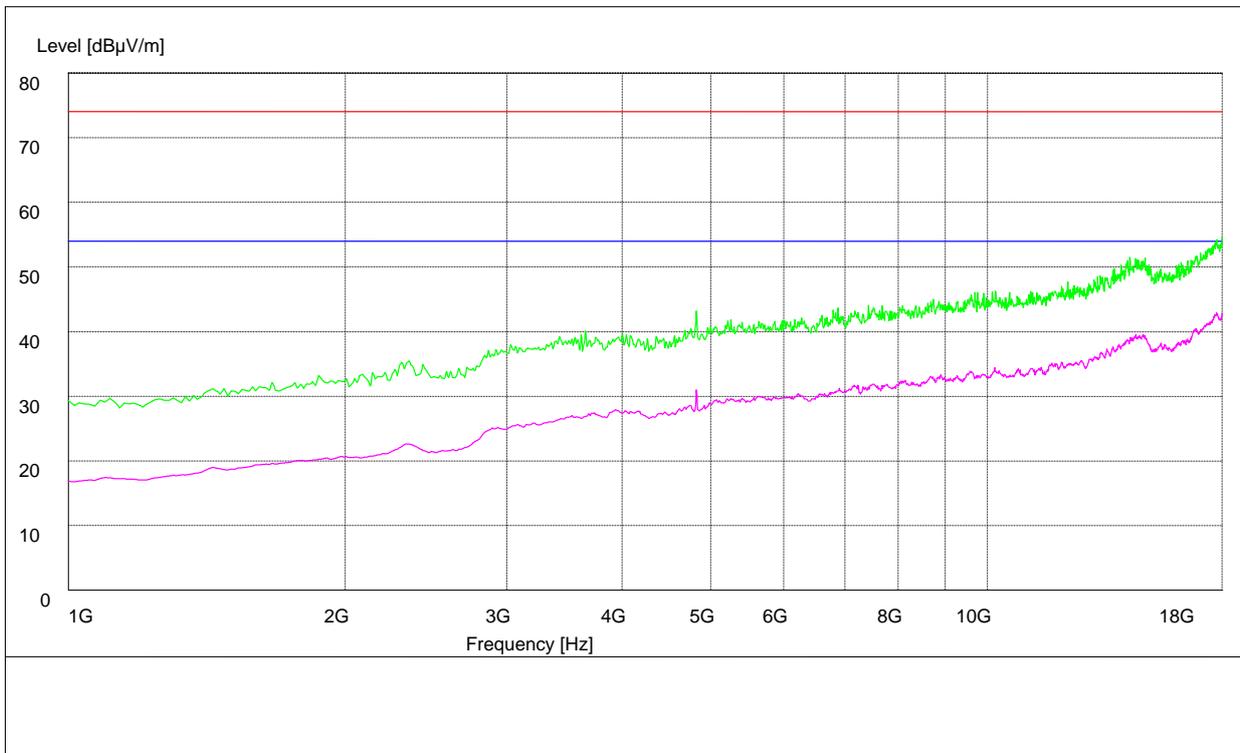




Appendix G: AC Power Line Conducted Emissions

Channel 6

CLASS B Voltage with ENV216

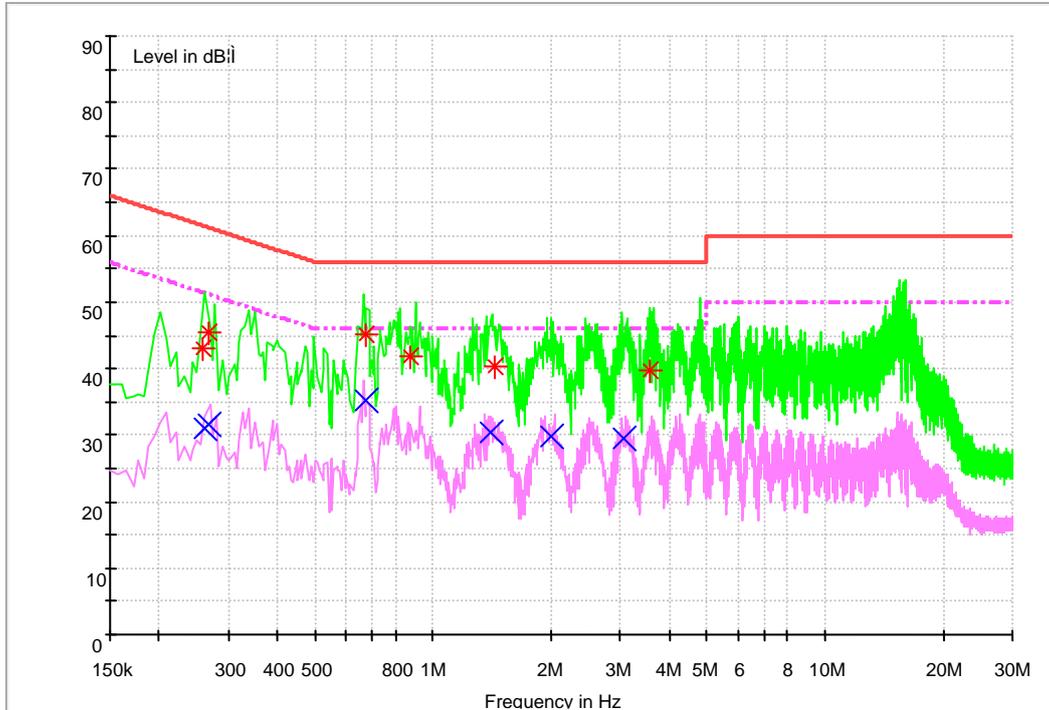

MEASUREMENT RESULT: QP Detector

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.258754	43.0	9.7	61.5	18.5	N	FLO
0.267113	45.4	9.7	61.2	15.8	N	FLO
0.676676	45.2	9.7	56.0	10.8	N	FLO
0.873071	41.8	9.7	56.0	14.2	N	FLO
1.436452	40.4	9.7	56.0	15.6	N	FLO
3.587700	39.8	9.7	56.0	16.2	N	FLO

MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.260265	31.0	9.7	51.4	20.4	N	FLO
0.267484	31.5	9.7	51.2	19.7	N	FLO
0.672356	35.3	9.7	46.0	10.7	N	FLO
1.409962	30.5	9.7	46.0	15.5	N	FLO
2.001180	29.8	9.7	46.0	16.2	N	FLO
3.071606	29.6	9.7	46.0	16.4	N	FLO

END