



FCC RF Test Report

Product Name: HSPA USB Stick

Model Number: K3772

Report No: SYBH(Z-RF)001122011-2001

FCC ID: QISK3772

Reliability Laboratory of Huawei Technologies Co., Ltd.

Huawei Base, Bantian, Longgang District, Shenzhen 518129, P.R. China

Tel: +86 755 28780808 Fax: +86 755 89652518

Notice

1. The laboratory has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS), and accreditation number: L0310.
2. The laboratory has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements. The site recognition number is 97456.
3. The laboratory has been listed by industry Canada to perform electromagnetic emission measurement. The site recognition number is 6369A-2.
4. The test report is invalid if not marked with "exclusive stamp for the test report".
5. The test report is invalid if not marked with the stamps or the signatures of the persons responsible for performing, revising and approving the test report.
6. The test report is invalid if there is any evidence of erasure and/or falsification.
7. If there is any dissidence for the test report, please file objection to the test centre within 15 days from the date of receiving the test report.
8. Normally, the test report is only responsible for the samples that have undergone the test.
9. Context of the test report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of the laboratory.



Contents

1	<u>General Information</u>	5
1.1	APPLIED STANDARD	5
1.2	TEST LOCATION	5
1.3	TEST ENVIRONMENT CONDITION	5
2	<u>Summary</u>	6
3	<u>Product Description</u>	7
3.1	PRODUCTION INFORMATION	7
3.2	TEST DESCRIPTION	7
4	<u>General Test Conditions / Configurations</u>	9
4.1	RF CHANNELS UNDER TEST.....	9
4.2	TEST MODES	9
4.3	TEST ENVIRONMENTS	9
4.4	TEST SETUPS.....	10
4.5	TEST CONDITIONS	12
5	<u>Main Test Instruments</u>	14
6	<u>Test Results</u>	15
7	<u>Measurement Uncertainty</u>	16



1 General Information

1.1 Applied Standard

Applied Rules: 47 CFR FCC Part 2, Subpart J
47 CFR FCC Part 22, Subpart H

1.2 Test Location

Test Location 1: Reliability Laboratory of Huawei Technologies Co., Ltd.
Address: Huawei Base, Bantian, Longgang District, Shenzhen 518129, P.R. China

1.3 Test Environment Condition

Ambient Temperature: 20 – 25 °C
Ambient Relative Humidity: 45 – 55 %
Atmospheric Pressure: 101 kPa

2 Summary

Table 1 Summary of results

Cellular Band			
Test Case	FCC Part No.	Requirements	Result
Transmitter Output Power	2.1046 & 22.913	ERP not exceed 7 W	Pass
Modulation Characteristics	2.1047	Digital modulation	Pass
Occupied Bandwidth	2.1049	(Not specified)	Pass
Band Edges Compliance	2.1051 & 22.917	Below -13 dBm/1%*EBW, in 1 MHz range	Pass
Spurious Emission at Antenna Terminals	2.1051 & 22.917	Below -13 dBm/1 kHz, 9 kHz to 150 kHz Below -13 dBm/10 kHz, 150 kHz to 30 MHz Below -13 dBm/100 kHz, 30 MHz to 10 th harmonics	Pass
Field Strength of Spurious Radiation	2.1053 & 22.917	Below -13 dBm/100 kHz	Pass
Frequency Stability	2.1055 & 22.355	Maintained within the tolerances of ± 2.5 ppm	Pass

3 Product Description

3.1 Production Information

3.1.1 General Description

K3772 HSPA/WCDMA/EDGE/GPRS/GSM dual mode USB Stick is subscriber equipment in the UMTS/GSM system. K3772 implement such functions as RF signal receiving/transmitting, HSPA/WCDMA and EDGE/GPRS/GSM protocol processing, data service etc. Externally it provides USB interface (to connect to the notebook etc.) and USIM card interface.

3.1.2 Board

Table 2 Board Information

HSPA USB Stick		
K3772		
Board and Module		
Equipment Designation / Description	Serial Number	Hardware Version
MAINBOARD	W5T01A11B1000033	CH2E303SM

3.2 Test Description

3.2.1 Supported Frequency Range

Characteristics	Description
Downlink	869 to 894 MHz
Uplink	824 to 849 MHz

3.2.2 Transmitter / Receiver Characteristics

Characteristics	Description
System Type	GSM
TX Output Power (per Antenna Port)	2W (= 33 dBm)
Channel Spacing(s) / Bandwidth(s)	GSM system: 200 kHz
Designation of Emissions	GSM system: 248KGXW (GMSK modulation), 250KG7W (8PSK modulation)



3.2.3 Antenna Gain

Antenna Gain(dBi):	2.1
Antenna Gain(dBd):	-0.05

3.2.4 Power Supply

	Description
Power Supply Type	Directly Connected to DC
Input to EUT (DC power)	DC Voltage Nominal: \equiv +5V DC Voltage Range: \equiv +4.75 V to +5.25V

4 General Test Conditions / Configurations

4.1 RF Channels under Test

Test Mode	TX / RX	RF Channel		
		Bottom (B)	Middle (M)	Top (T)
TM1/TM2	TX	Channel 128	Channel 192	Channel 251
		824.2MHz	837.0MHz	848.8MHz
	RX	Channel 128	Channel 192	Channel 251
		869.2MHz	882.0MHz	893.8MHz

4.2 Test Modes

Test Mode	Test Modes Description
TM1	GSM/GPRS, GMSK modulation
TM2	EDGE, 8PSK modulation

4.3 Test Environments

Environment Parameter	Selected Values During Tests	
Relative Humidity	Ambient	
Temperature	TN	Ambient
Voltage	VL	4.75V
	VN	5V
	VH	5.25V


NOTE: VL= lower extreme test voltages
 VN= nominal voltage
 VH= upper extreme test voltage
 TN= nominal temperature

4.4 Test Setups


4.4.1 General Test Setup Configurations

Configuration	Description
Test Antenna Ports	Until otherwise declared, all TX tests are ONLY performed at the main Transmitter antenna port (e.g. TRXA, TXA and so on) of the EUT, and all RX tests are ONLY performed at the main Receiver antenna port (e.g. TRXA, RXA and so on) of the EUT.
Multiple RF Sources	Other than the tested RF source of the EUT, other RF source(s) are disabled or shutdown during measurements.

4.4.2 Test Setup 1

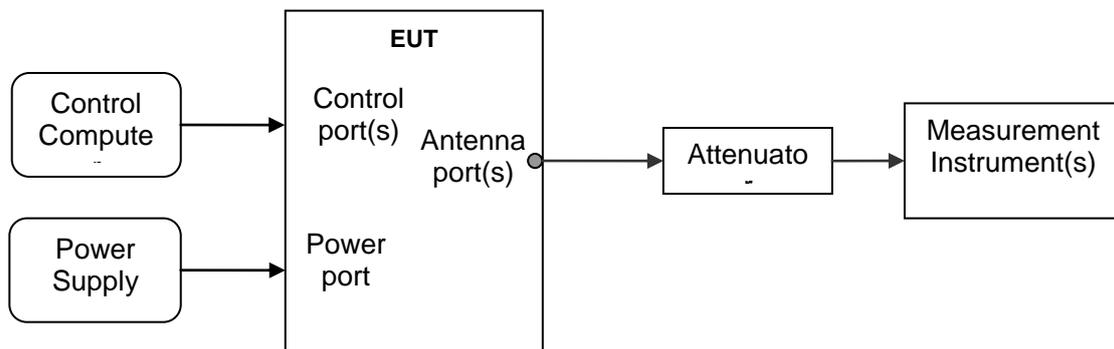


4.4.3 Test Setup 2

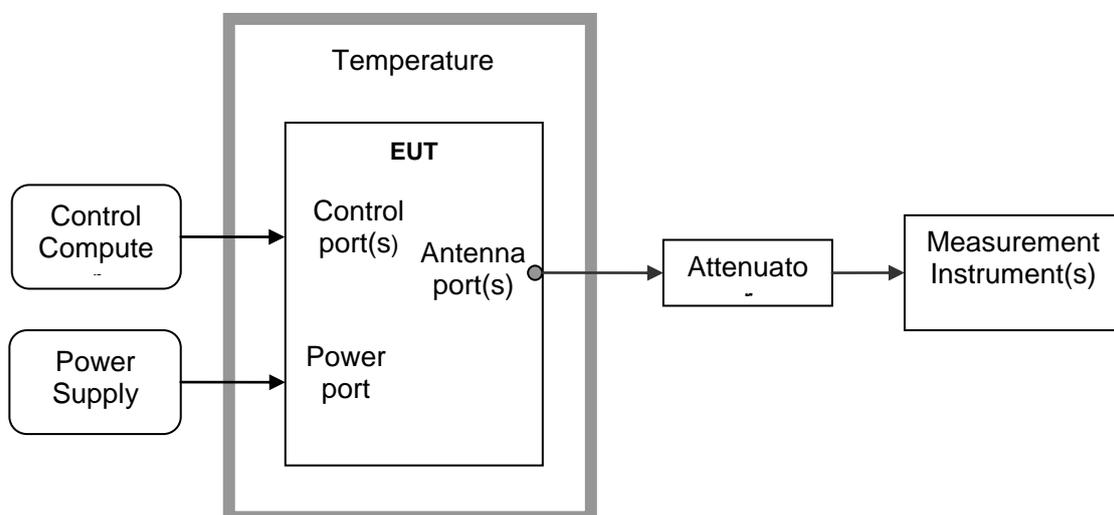


4.4.4 Test Setup 3

NOTE: Effective radiated power (ERP) refers to the radiation power output of the EUT, assuming all emissions are radiated from half-wave dipole antennas.

Step 1: Pre-test

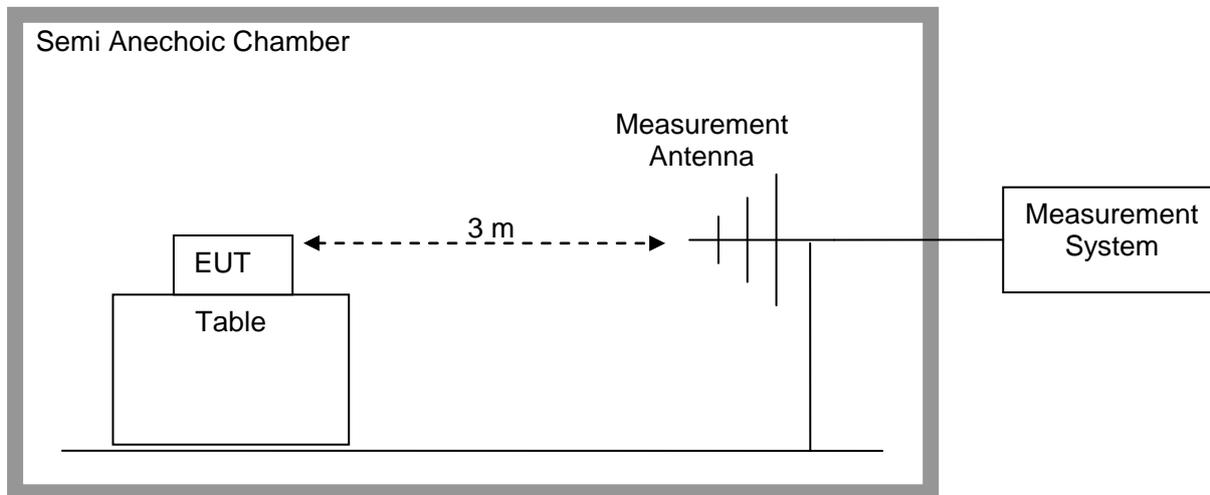

Step 2: Substitution method to verify the maximum ERP

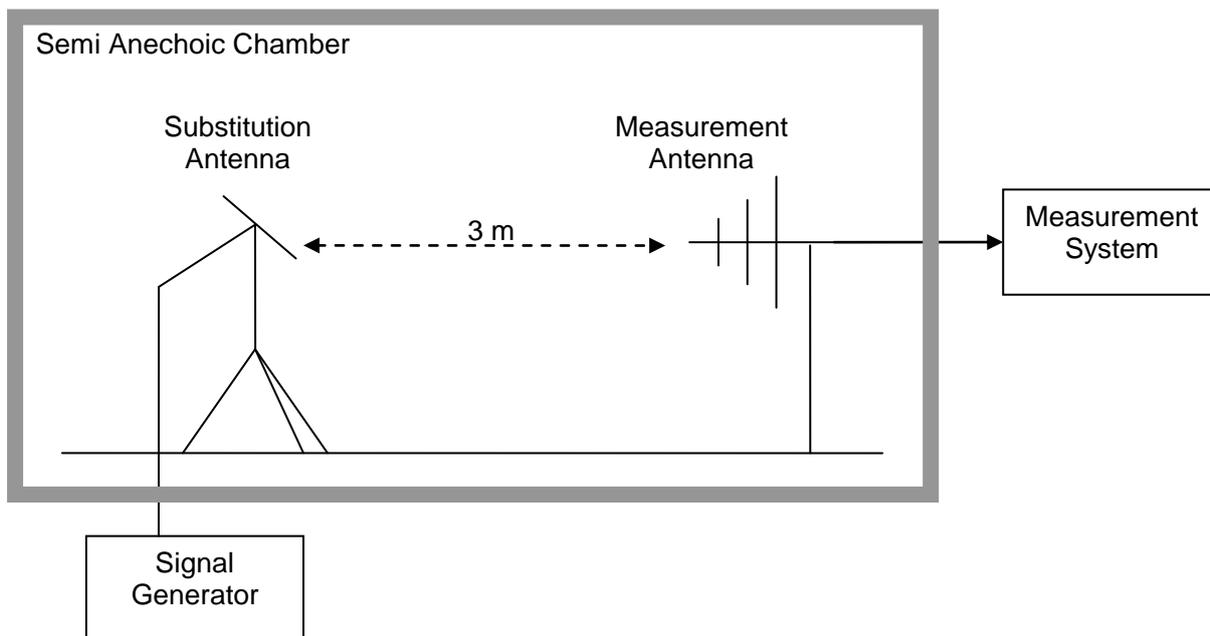

4.5 Test Conditions

Test Case	Test Conditions	
Transmitter Output Power	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1 & Test Setup 3
	Detector	RMS
	RF Channels (TX)	B, M, T
	Test Mode	TM1/TM2
Modulation Characteristics	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	RF Channels (TX)	M
	Test Mode	TM1/TM2
Occupied Bandwidth	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	Detector	PK
	RF Channels (TX)	B, M, T
	Test Mode	TM1/TM2
Band Edges Compliance	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	Detector	RMS
	RF Channels (TX)	B, T
	Test Mode	TM1/TM2
Spurious Emission at Antenna Terminals	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	Detector	PK
	RF Channels (TX)	B, M, T
	Test Mode	TM1/TM2
Field Strength of Spurious Radiation	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 3
	Detector	PK
	RF Channels (TX)	M
	Test Mode	TM1/TM2
Frequency Stability	Test Configuration	(1) -30 °C to +50 °C with step 10 °C at Rated Voltage; (2) 85%, 100% and 115% of Rated Voltage at Ambient Temperature.
	Test Setup	Test Setup 2
	RF Channels (TX)	M



Test Case	Test Conditions	
	Test Mode	TM1/TM2

5 Main Test Instruments

Table 3 Main Test Equipments

Equipment Description	Manufacturer	Model	Serial Number	Calibrated until
Power supply	KEITHLEY	2303	1288003	Sep.27,2012
Universal Radio Communication Tester	R&S	CMU200	117341	Jan.13.2012
Universal Radio Communication Tester	Agilent	E5515C	MY50260239	Aug.31,2012
Spectrum Analyzer	Agilent	E4440A	MY49420179	Apr.20,2012
Signal Analyzer	R&S	FSQ31	200021	Sep.27,2012
Temperature Chamber	WEISS	WKL64	24600294	Jan.03,2012
Signal generator	Agilent	E8257D	MY49281095	Jul.9.2012
Test receiver	R&S	ESU26	100150	May.29.2012
Tunable Dipole	Schwarzbeck	D69250-UHAP/D69250-VHAP	919/1009	Jan.29.2012
Tunable Dipole	Schwarzbeck	D69250-UHAP/D69250-VHAP	979/917	Jan.29.2012
Horn Antenna	R & S	HF906	100683	May.15, 2012
Horn Antenna	R & S	HF906	100684	Jul.01, 2012
Broadband Antenna	Schwarzbeck	VULB 9163	9163-357	May.15, 2012
Broadband Antenna	Schwarzbeck	VULB 9163	9163-356	May.15, 2012



6 Test Results

No.	Test Item	Test Result
1	Transmitter Output Power	Appendix A
2	Modulation Characteristics	Appendix B
3	Occupied Bandwidth	Appendix C
4	Band Edges Compliance	Appendix D
5	Spurious Emission at Antenna Terminals	Appendix E
6	Field Strength of Spurious Radiation	Appendix F
7	Frequency Stability	Appendix G
8	Photos of Radiated Spurious Emissions	Appendix H

NOTE: The Appendix H only photos of Radiated Spurious Emissions, no test data.



7 Measurement Uncertainty

For a 95% confidence level ($k=2$), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

Test Item		Extended Uncertainty
Transmitter Output Power	Power (dBm)	U =0.39 dB
Occupied Bandwidth	Magnitude (%)	U=0.2%
Band Edge Compliance	Disturbance Power (dBm)	U=2.0 dB
Conducted Spurious Emissions	Disturbance Power (dBm)	U=2.0 dB
Field Strength of Spurious Radiation	ERP (dBm)	U=4.6 dB (30 MHz – 1GHz) U=3.0 dB (above 1 GHz)
Frequency Stability	Frequency Accuracy (ppm)	U=0.21 ppm



FCC Test Report of K3772
FCC ID: QISK3772



Appendix A

Transmitter Output Power According to FCC Part 2.1046 & Part22.913



Conducted Power of Transmitter

TEST CONDITIONS	RF Output Power (Conducted)					
	Channel128(B)		Channel192(M)		Channel251(T)	
	824.2MHz		837.0MHz		848.8MHz	
	dBm		dBm		dBm	
T_{nom} / V_{nom}	Measured	Limit	Measured	Limit	Measured	Limit
TM1	32.56	38.55	32.47	38.55	32.51	38.55
TM2	26.3	38.55	26.55	38.55	26.33	38.55



Effective Radiated Power of Transmitter (ERP)

Test Mode	Freq. [MHz]	Meas. Level [dBm]	Substitution Antenna Type	SGP [dBm]	Substitution Gain [dBd]	Cable Loss [dB]	Substitution Level (ERP) [dBm]	FCC limit [dBm]	Result
TM1	824.2	32.51	Dipole Ant.	35.90	-2.75	0.6	32.55	38.5	Pass
TM1	837.0	32.42	Dipole Ant.	35.92	-2.87	0.6	32.45	38.5	Pass
TM1	848.8	32.46	Dipole Ant.	35.94	-2.85	0.6	32.49	38.5	Pass
TM2	824.2	26.25	Dipole Ant.	29.63	-2.75	0.6	26.28	38.5	Pass
TM2	837.0	26.50	Dipole Ant.	30.00	-2.87	0.6	26.53	38.5	Pass
TM2	848.8	26.28	Dipole Ant.	29.75	-2.85	0.6	26.30	38.5	Pass

Note: a, For getting the ERP (Efficient Radiated Power) in substitution method, the following formula should take to calculate it,

$$\text{ERP [dBm]} = \text{SGP [dBm]} - \text{Cable Loss [dB]} + \text{Gain [dBd]}$$

b, SGP=Signal Generator Level




Appendix B

Modulation Characteristics

According to FCC Part 2.1047 & Part22 Subpart H




Channel 192(TM1:GPRS/GSM)

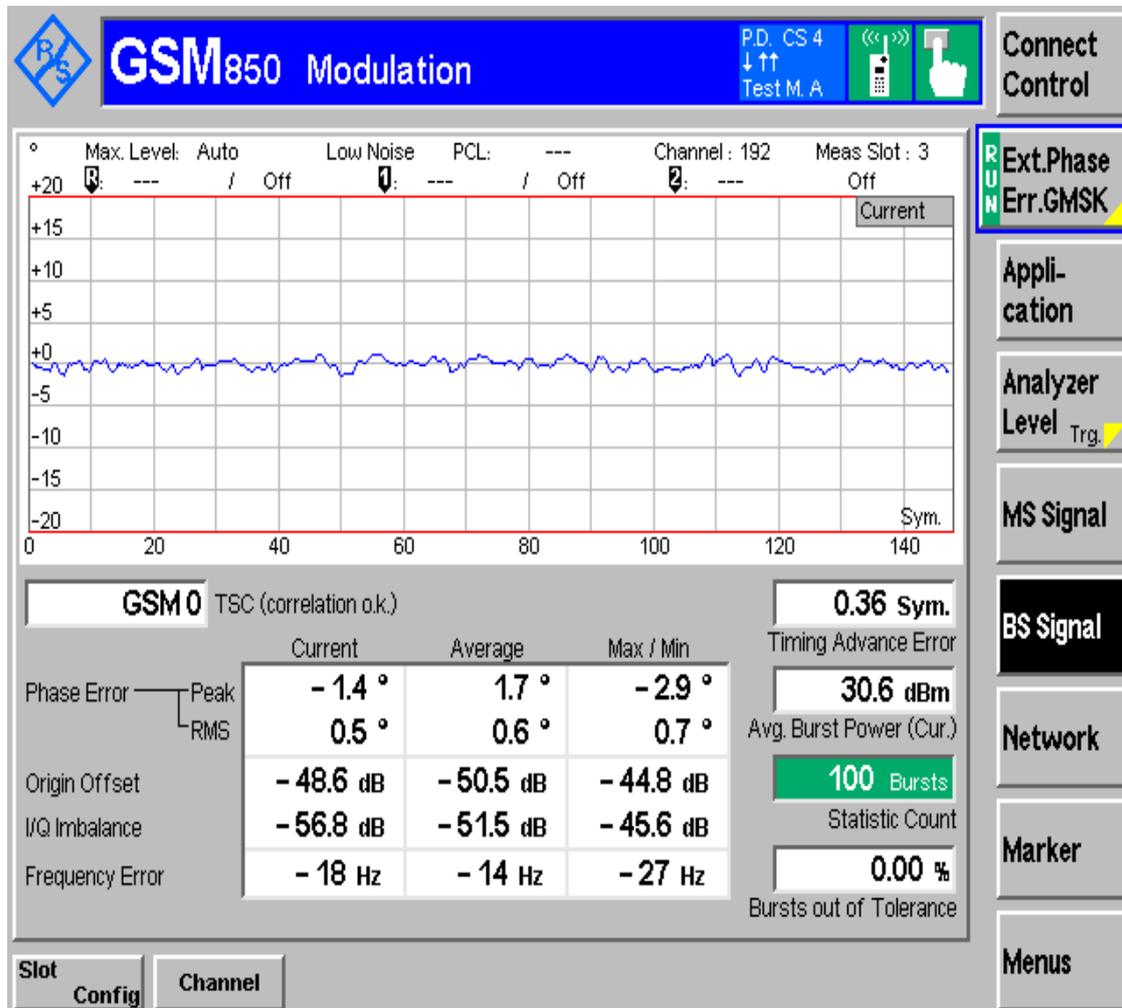



Channel 192(TM2:EDGE)

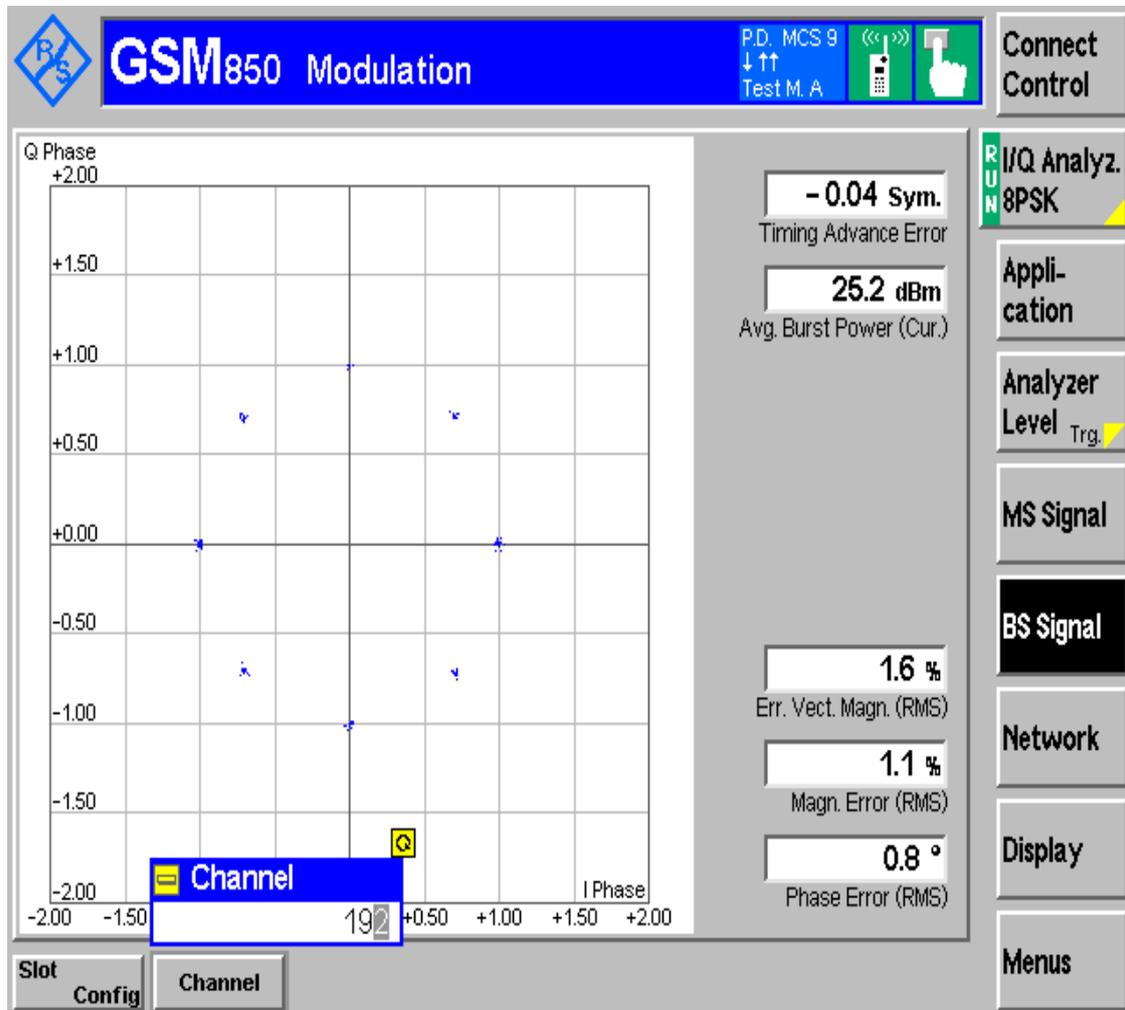



Appendix C

Occupied Bandwidth

According to FCC Part 2.1049 & Part 22 Subpart H




1 Result Table

Test Mode	Carrier Conf.	RF Ch.	Occupied Bandwidth [KHz]	Verdict
TM1	200KHz	B	248.40	Pass
		M	243.59	Pass
		T	245.19	Pass
TM2	200KHz	B	238.78	Pass
		M	250.00	Pass
		T	248.40	Pass



2.2.1.2 Ch. M

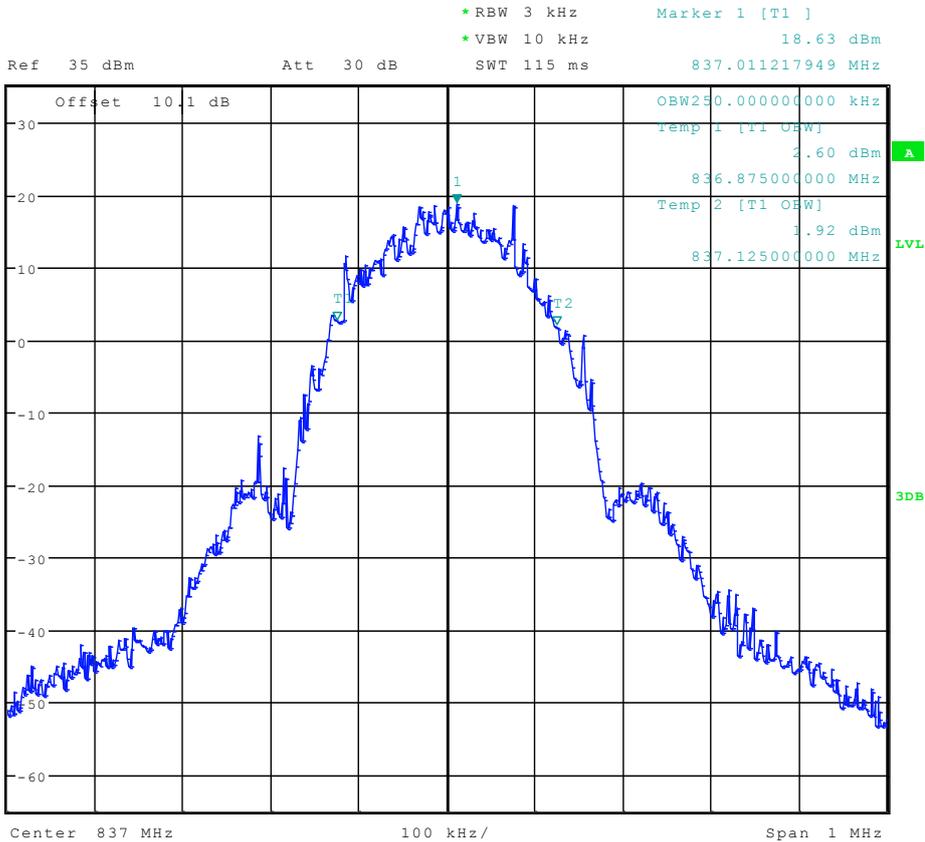

Date: 22.NOV.2011 12:31:23



Appendix D

Band Edges Compliance


According to FCC Part 2.1051 & Part22 Subpart H



TM1:GPRS/GSM

Left Edge


Channel 128

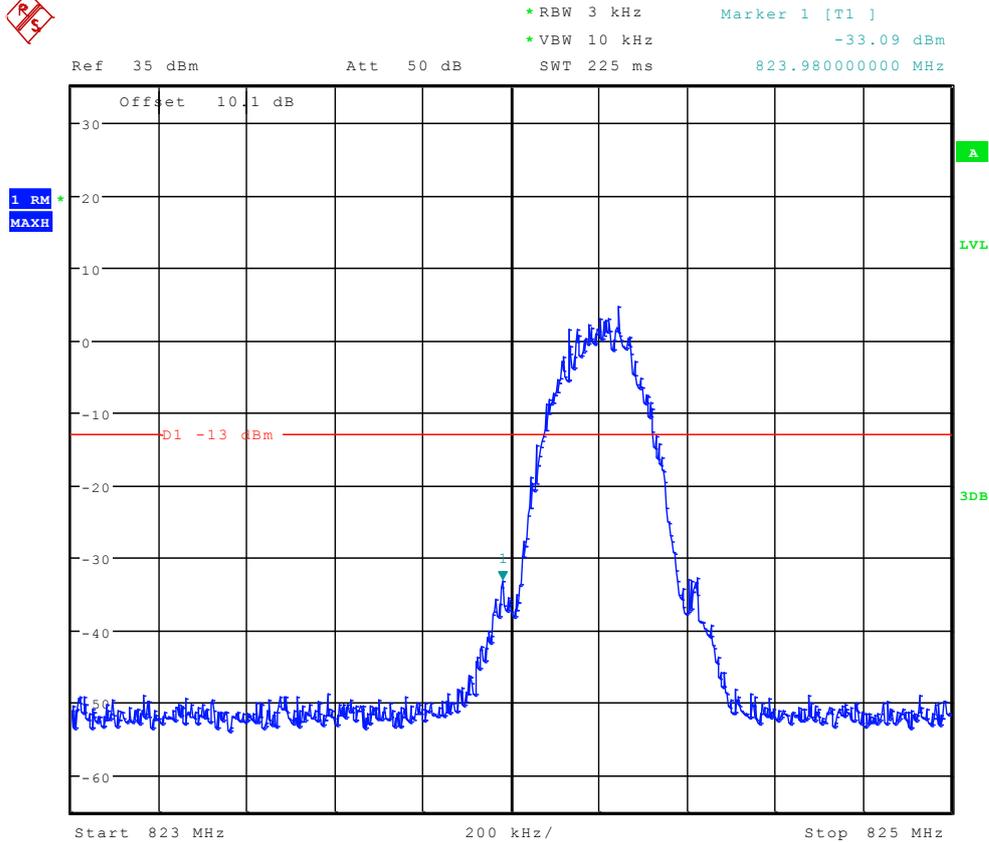

Date: 22.NOV.2011 12:26:19



Right Edge Channel 251

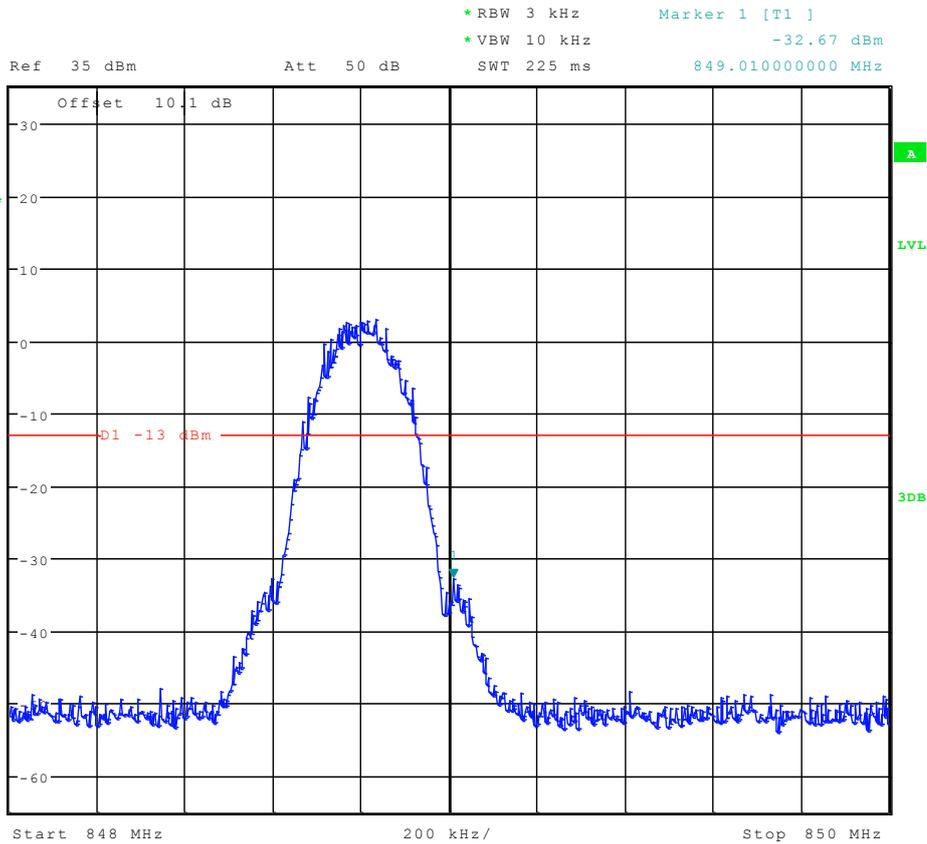


Date: 22.NOV.2011 12:26:32



TM2:EDGE

Left Edge


Channel 128

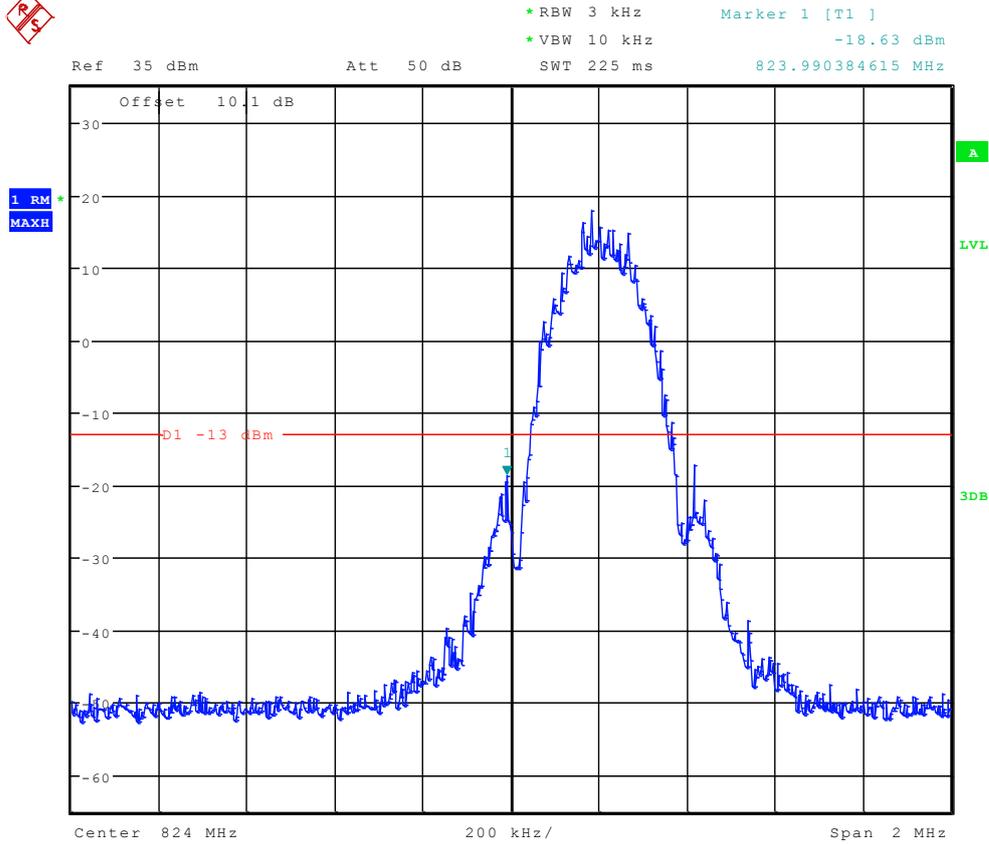

Date: 22.NOV.2011 14:38:02



Right Edge Channel 251

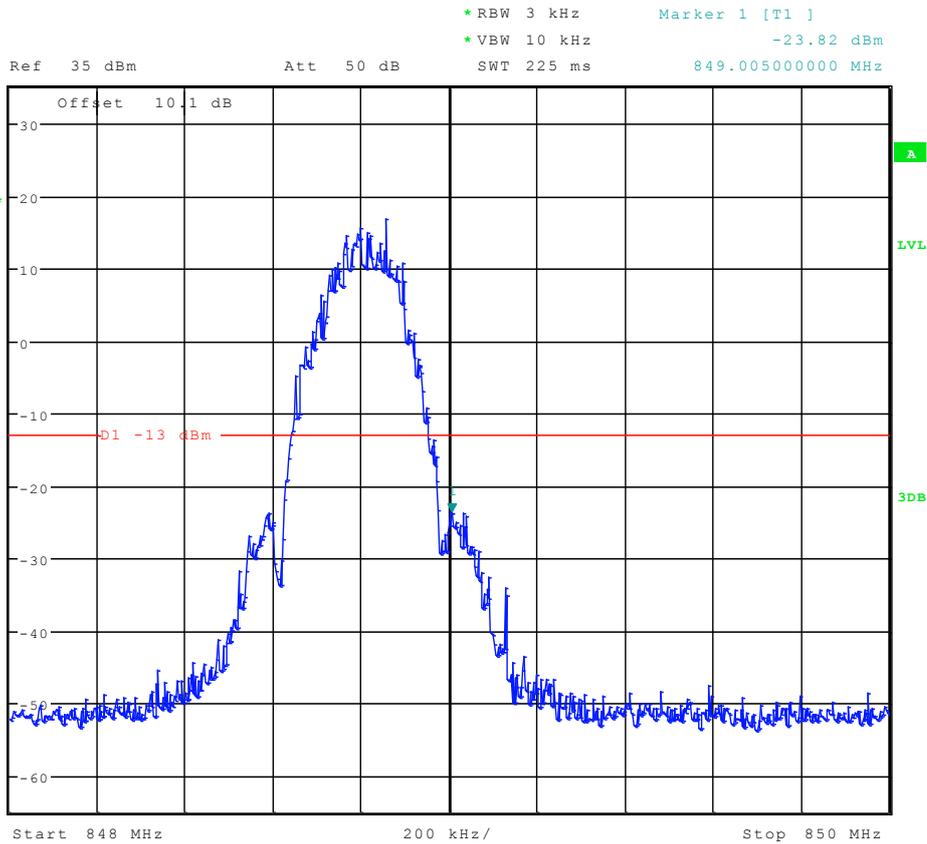

Date: 22.NOV.2011 14:32:32




Appendix E

Spurious Emission at Antenna Terminal

According to FCC Part 2.1051 & Part22 Subpart H




TM1:GPRS/GSM Channel 128

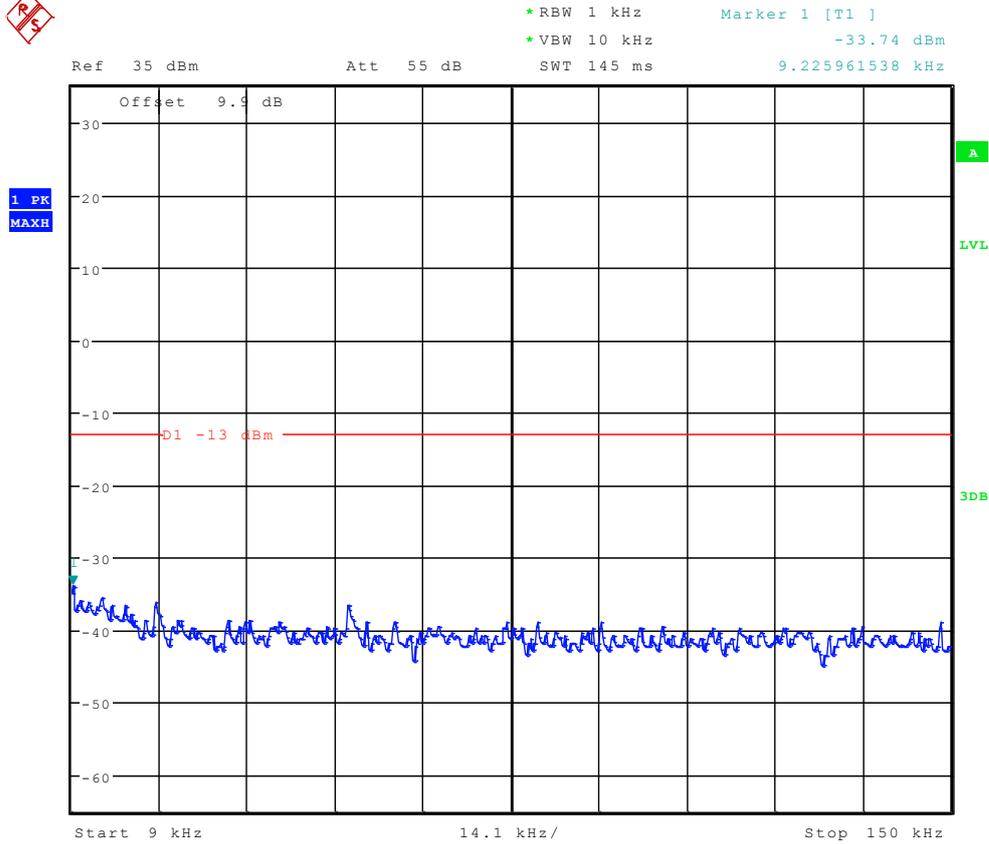

Date: 22.NOV.2011 11:07:01




Ref 35 dBm Att 55 dB SWT 300 ms 150.00000000 kHz
 *RBW 10 kHz Marker 1 [T1] -29.53 dBm
 *VBW 30 kHz

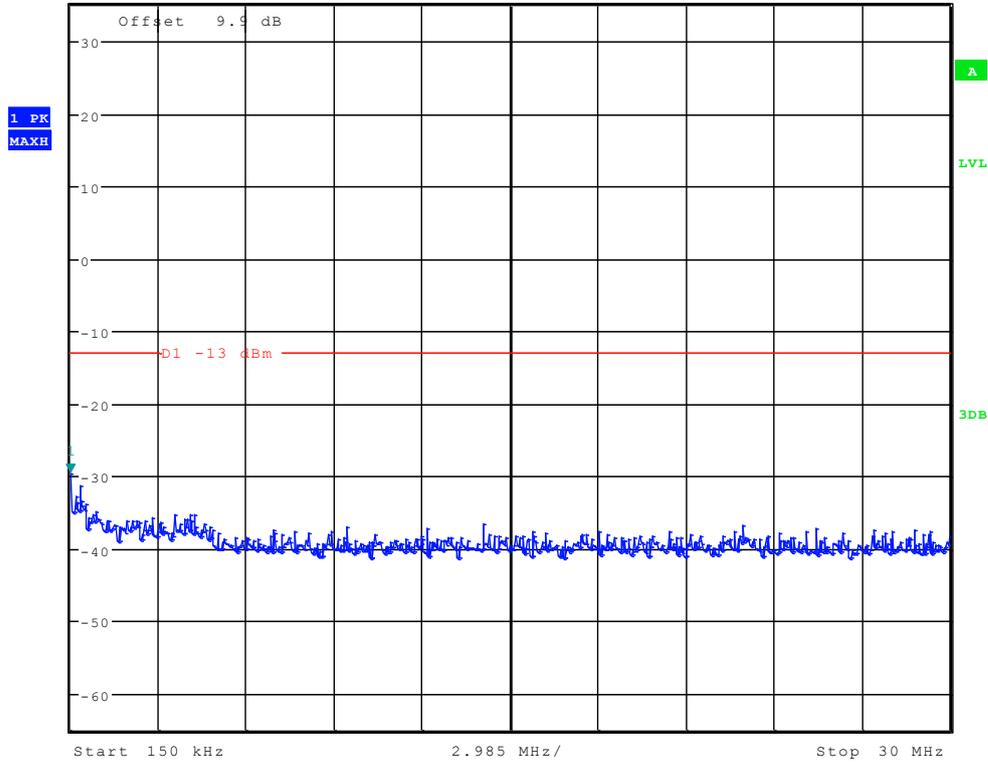

Date: 22.NOV.2011 11:07:44




Ref 35 dBm Att 50 dB SWT 100 ms 825.897435897 MHz
 *RBW 100 kHz Marker 1 [T1] 13.67 dBm
 *VBW 300 kHz

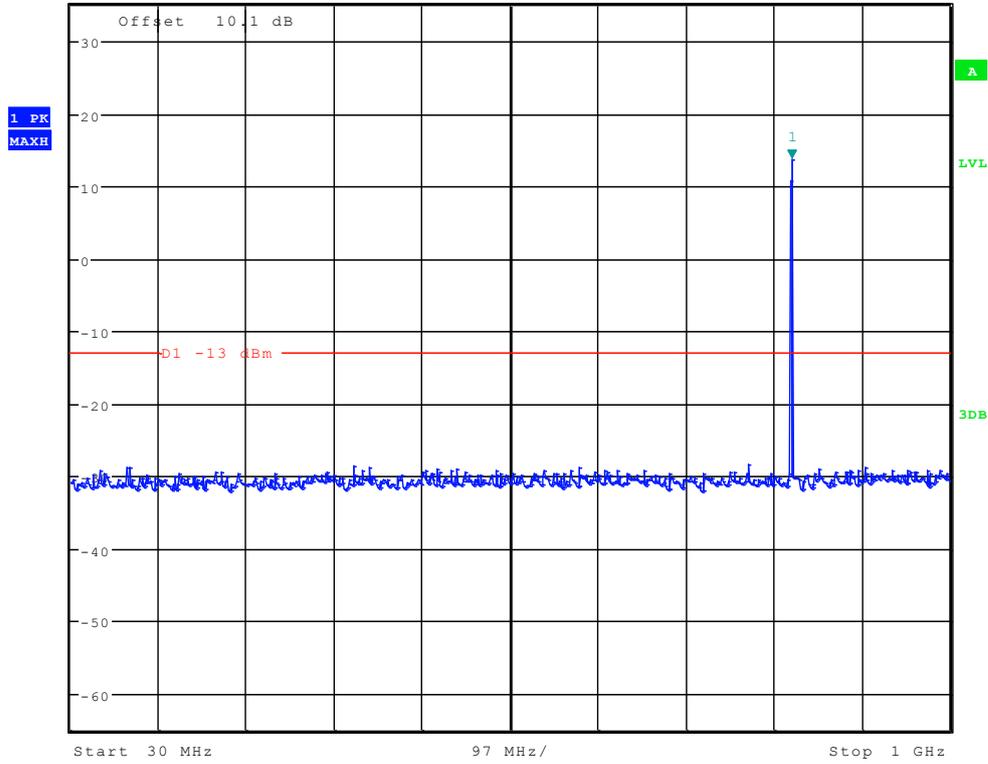

Date: 22.NOV.2011 11:08:28




*RBW 1 MHz Marker 1 [T1]
*VBW 3 MHz -17.18 dBm
Ref 35 dBm Att 50 dB SWT 70 ms 2.845352564 GHz

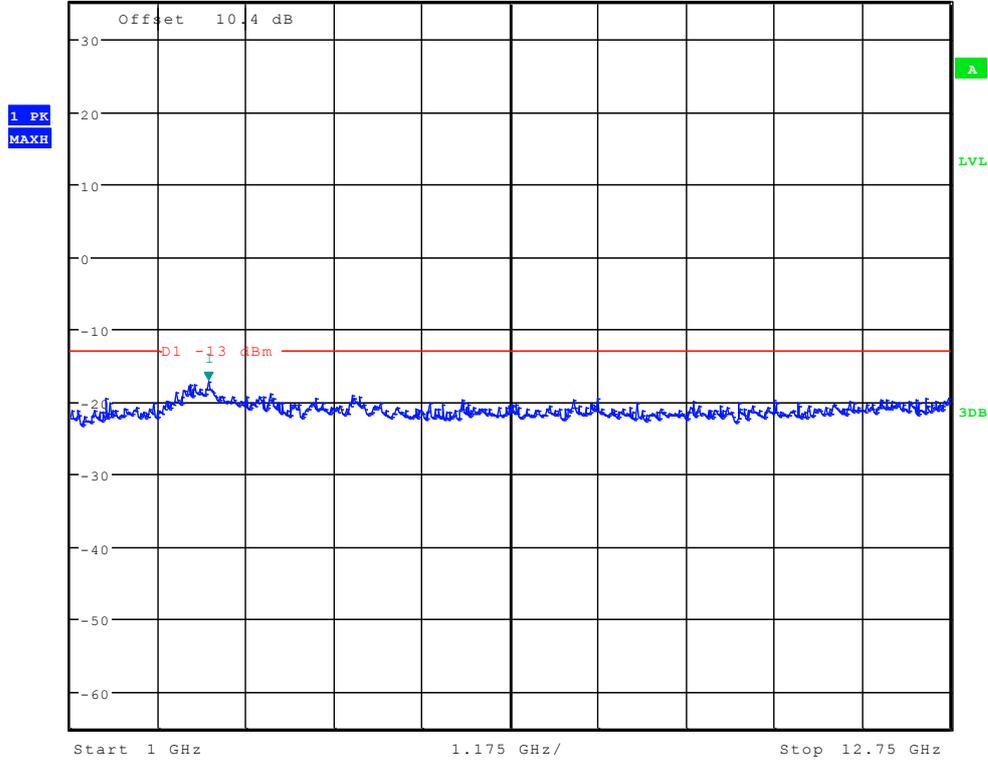

Date: 22.NOV.2011 11:09:12




Channel 192

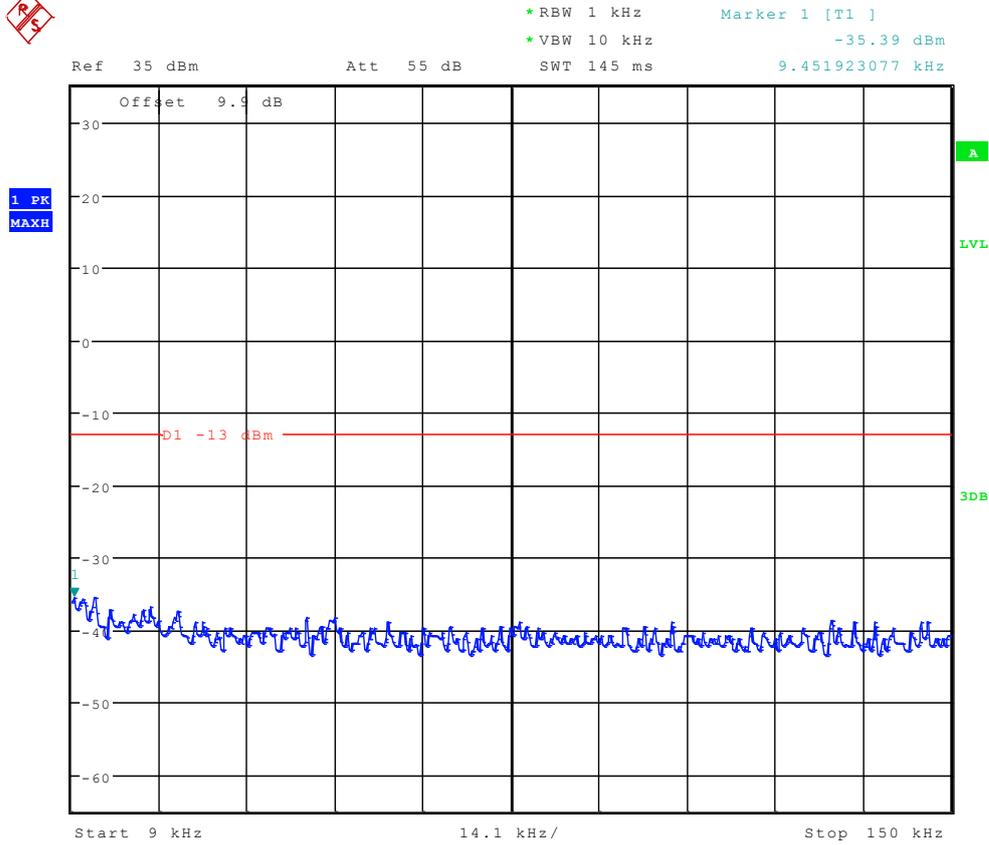

Date: 22.NOV.2011 11:07:15




Ref 35 dBm Att 55 dB SWT 300 ms 150.000000000 kHz
 *RBW 10 kHz Marker 1 [T1] -30.70 dBm
 *VBW 30 kHz

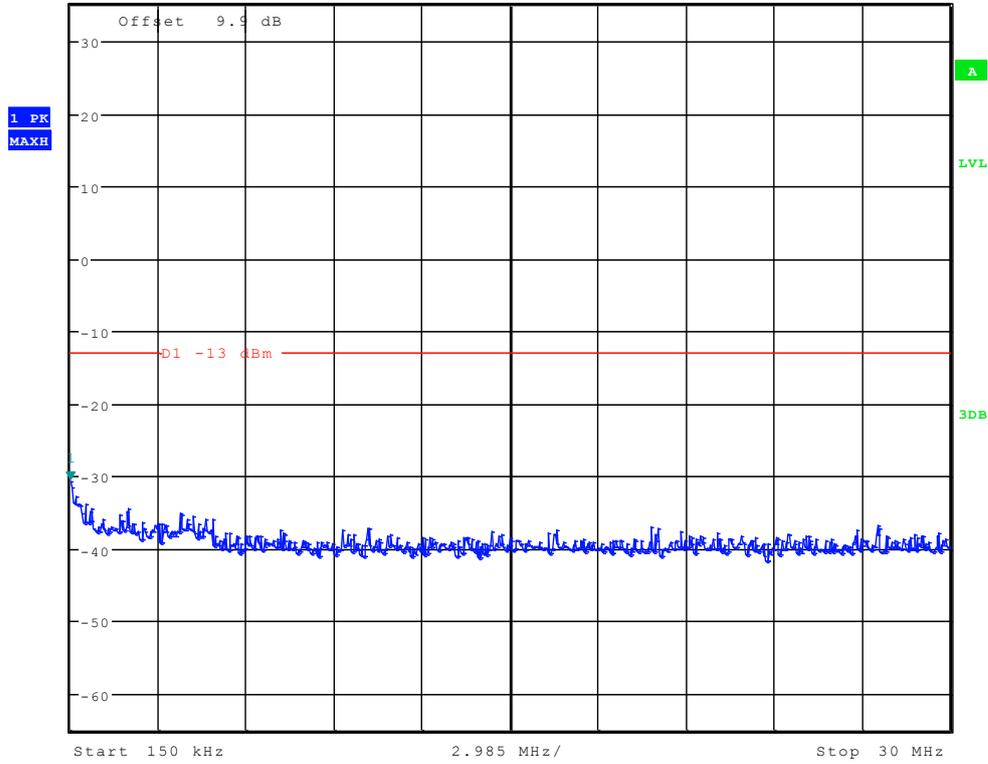

Date: 22.NOV.2011 11:07:59




Ref 35 dBm Att 50 dB SWT 100 ms 838.333333333 MHz
 *RBW 100 kHz Marker 1 [T1] 13.80 dBm
 *VBW 300 kHz

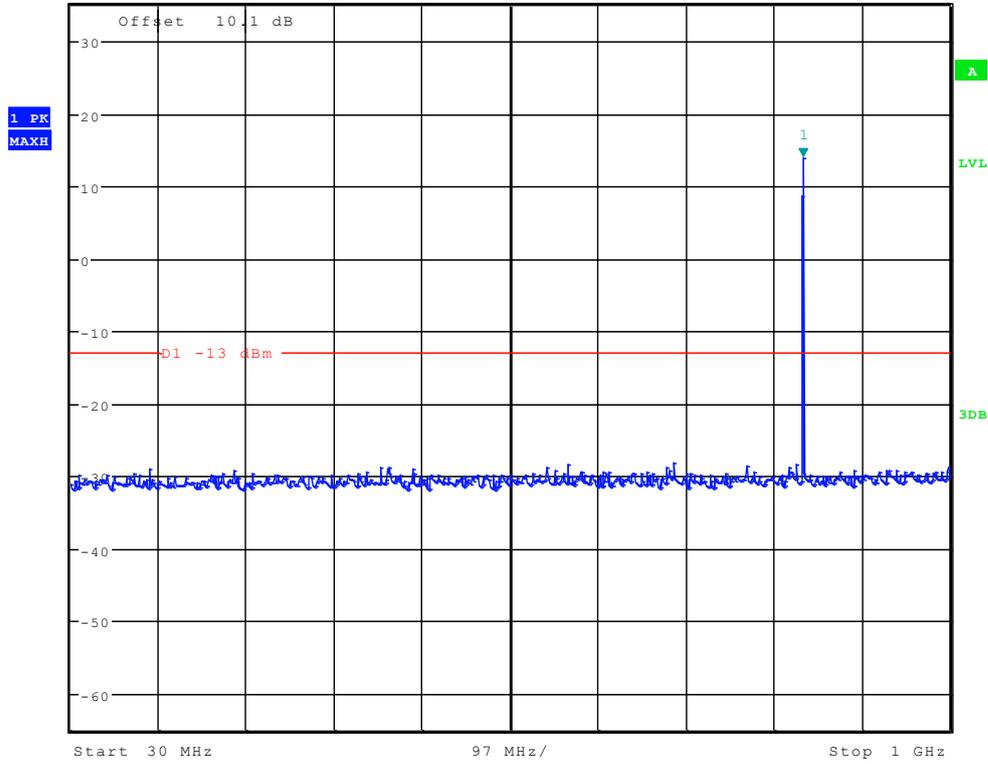

Date: 22.NOV.2011 11:08:42




*RBW 1 MHz Marker 1 [T1]
*VBW 3 MHz -17.45 dBm
Ref 35 dBm Att 50 dB SWT 70 ms 2.619391026 GHz

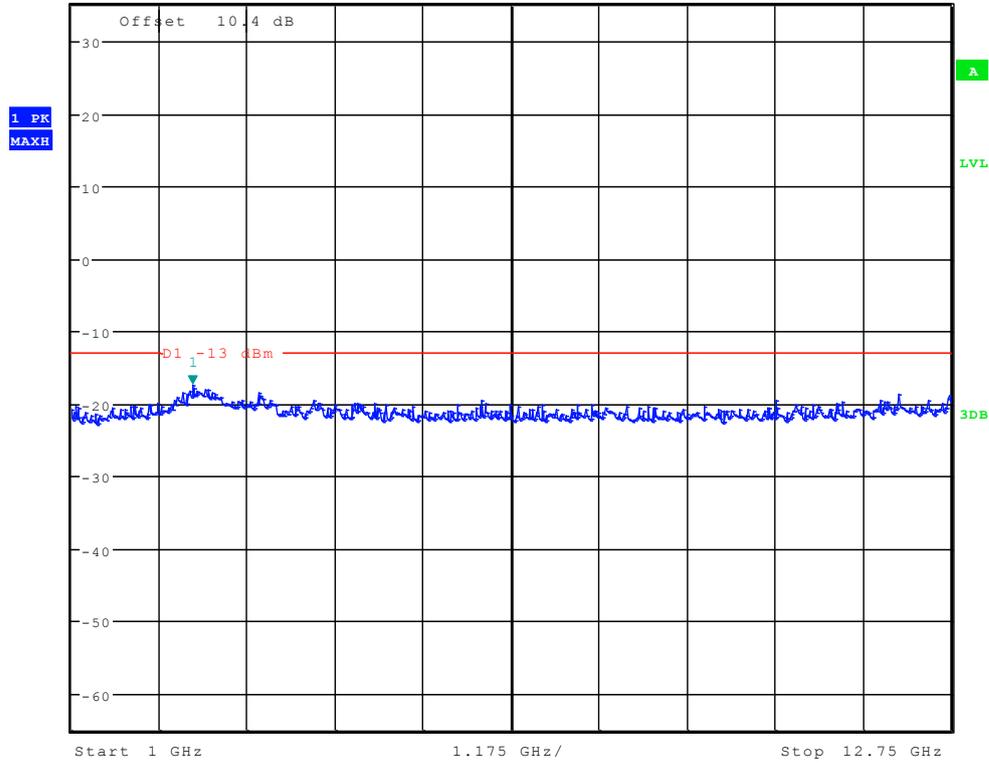


Date: 22.NOV.2011 11:09:26




Channel 251

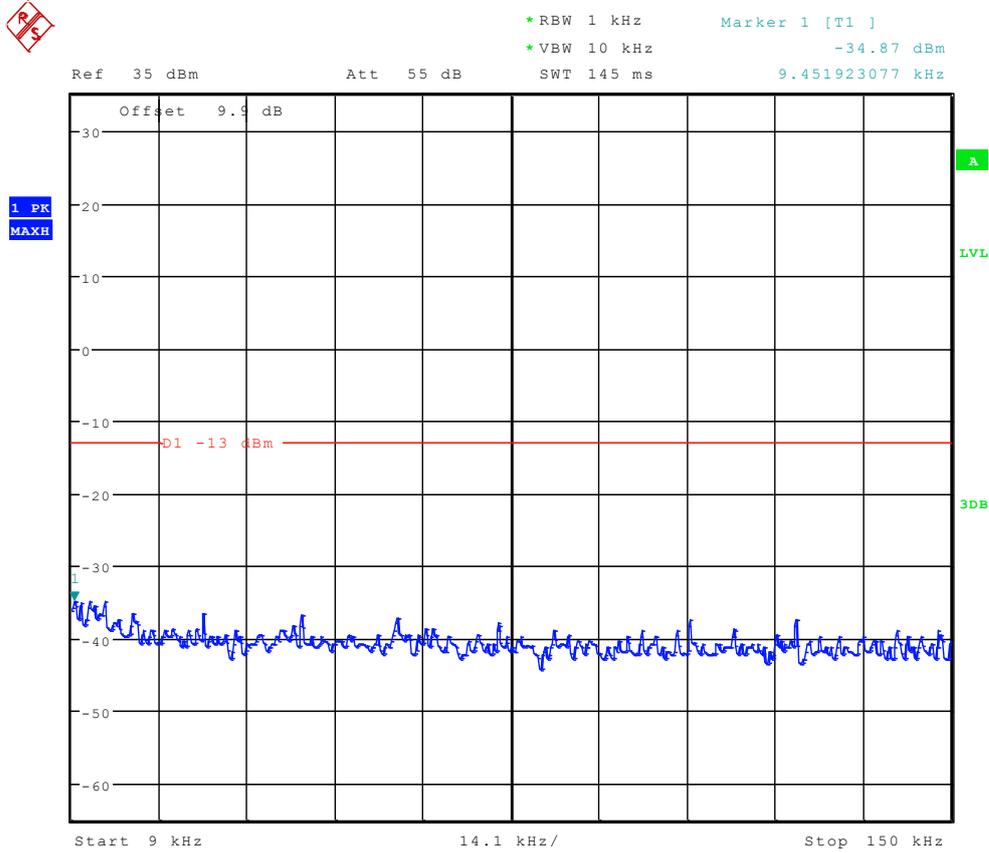

Date: 22.NOV.2011 11:07:29

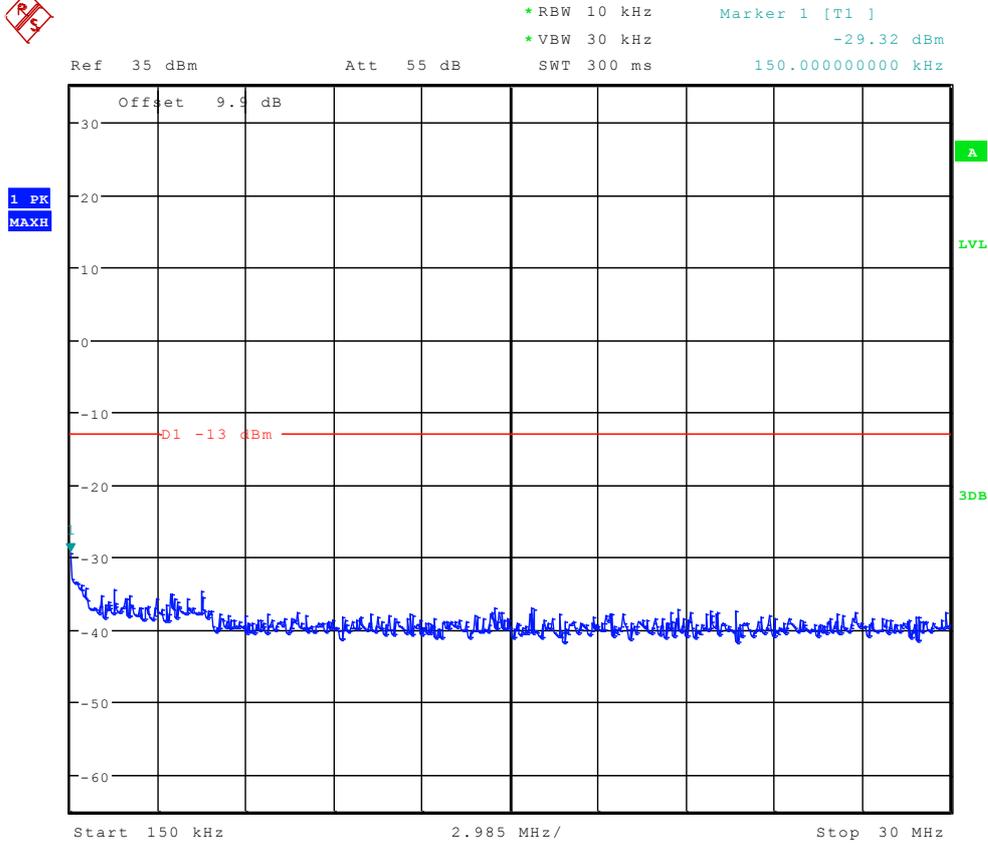


Date: 22.NOV.2011 11:08:13

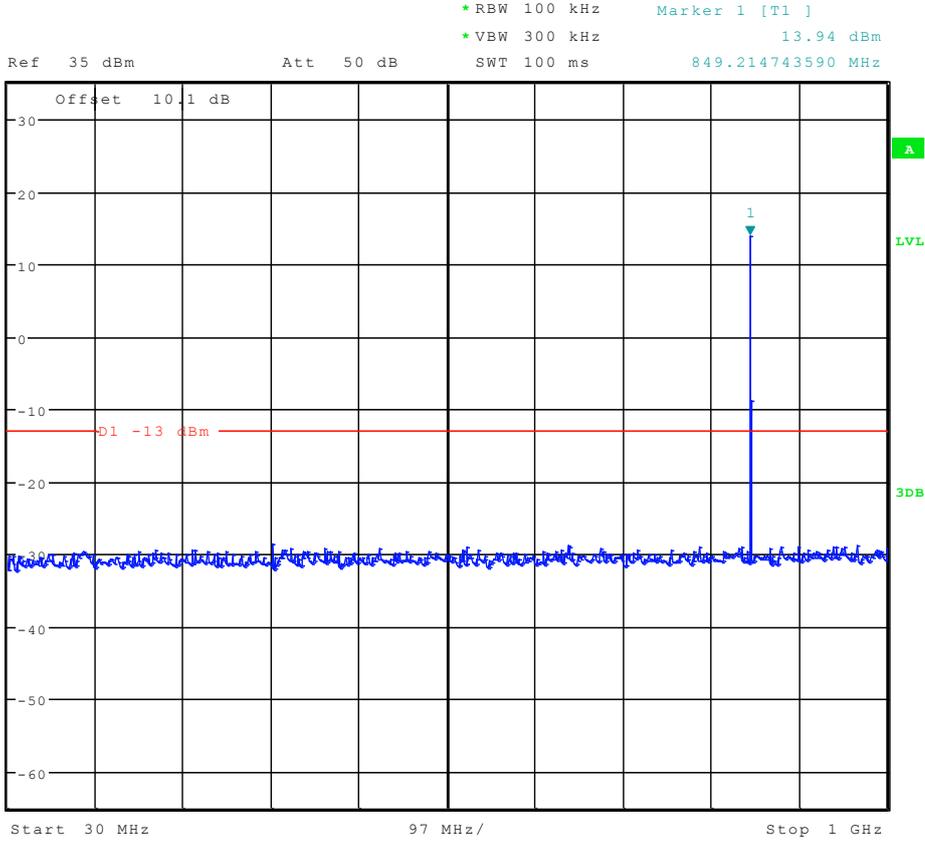

Date: 22.NOV.2011 11:08:57




*RBW 1 MHz Marker 1 [T1]
*VBW 3 MHz -17.27 dBm
Ref 35 dBm Att 50 dB SWT 70 ms 2.713541667 GHz

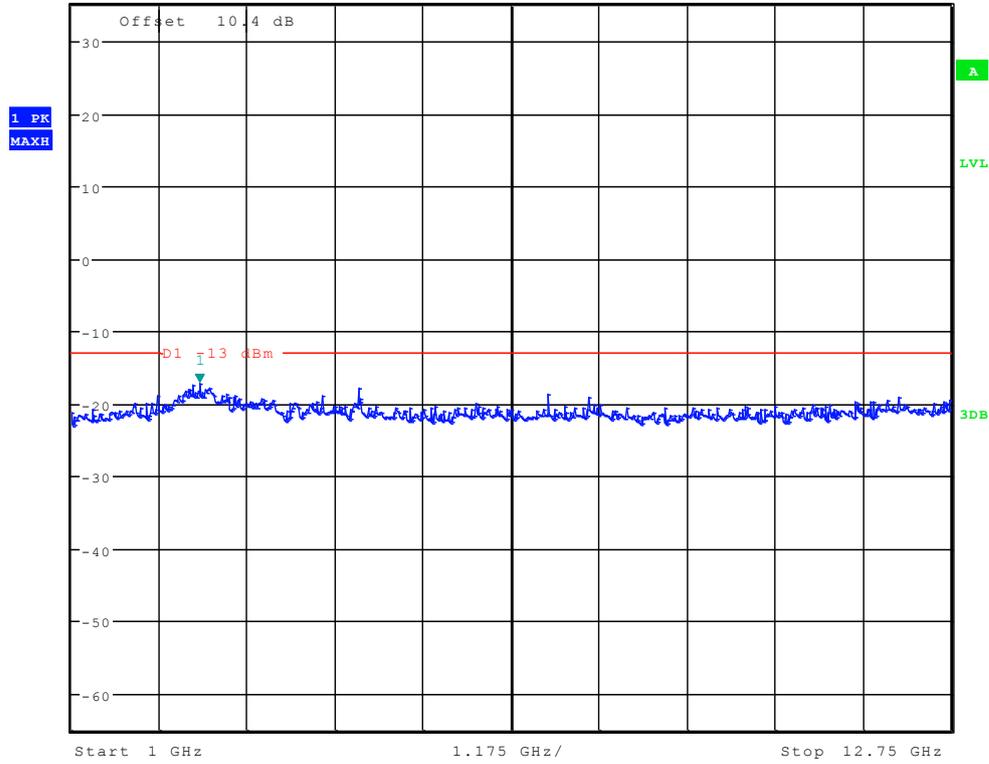

Date: 22.NOV.2011 11:09:41




TM2:EDGE Channel 128

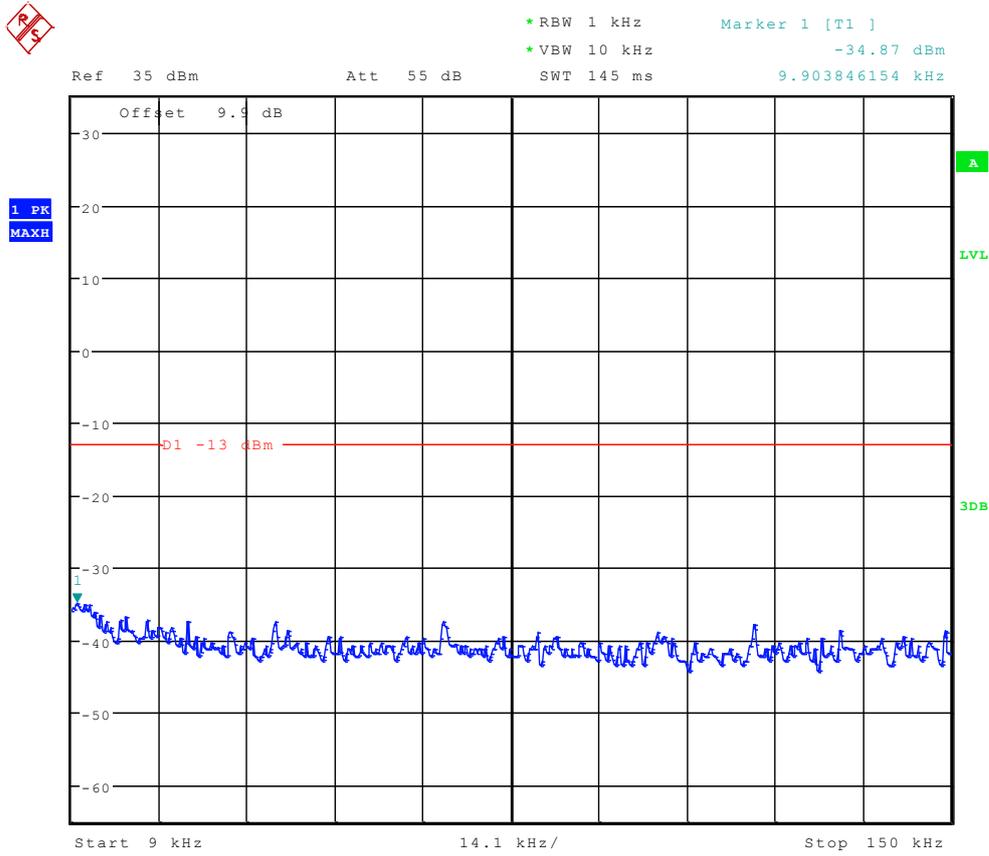

Date: 22.NOV.2011 11:15:07




Ref 35 dBm Att 55 dB SWT 300 ms
*RBW 10 kHz Marker 1 [T1] -29.37 dBm
*VBW 30 kHz 197.836538462 kHz

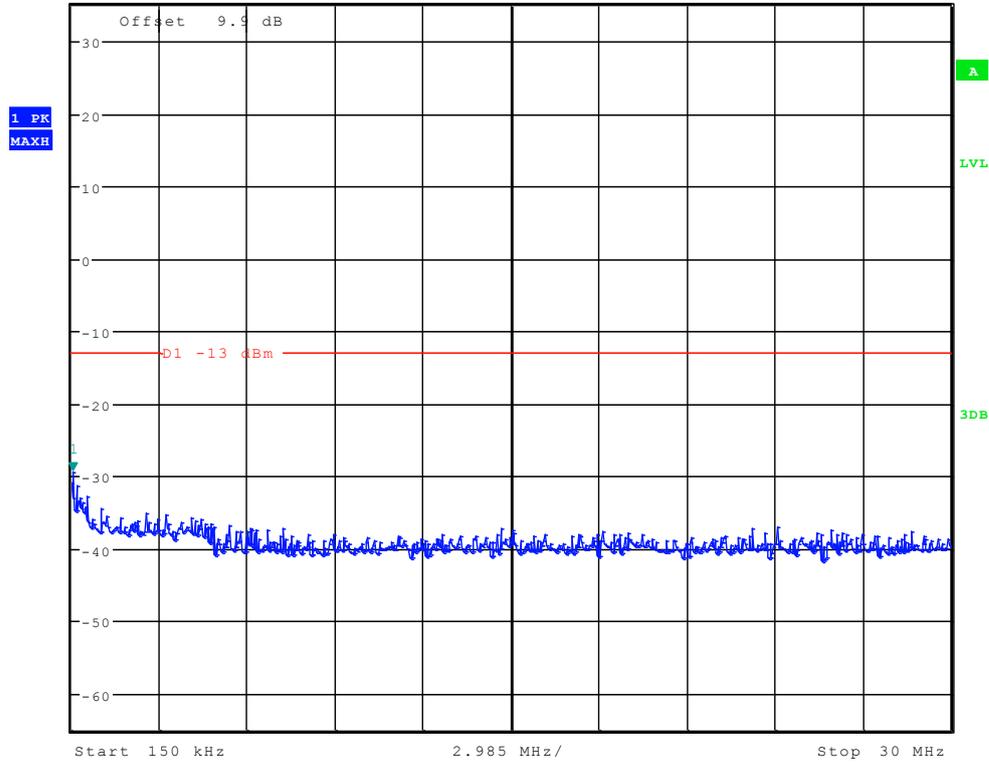

Date: 22.NOV.2011 11:15:51




Ref 35 dBm Att 50 dB SWT 100 ms
 *RBW 100 kHz Marker 1 [T1] 30.56 dBm
 *VBW 300 kHz 825.897435897 MHz

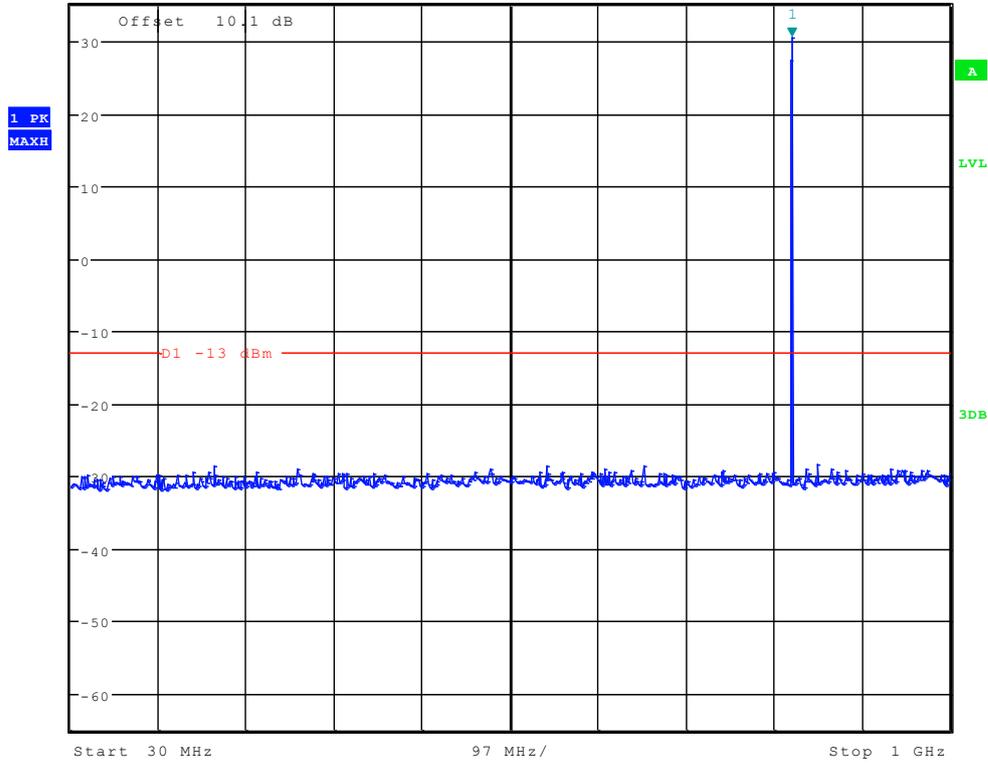

Date: 22.NOV.2011 11:16:35




*RBW 1 MHz Marker 1 [T1]
*VBW 3 MHz -17.24 dBm
Ref 35 dBm Att 50 dB SWT 70 ms 2.657051282 GHz

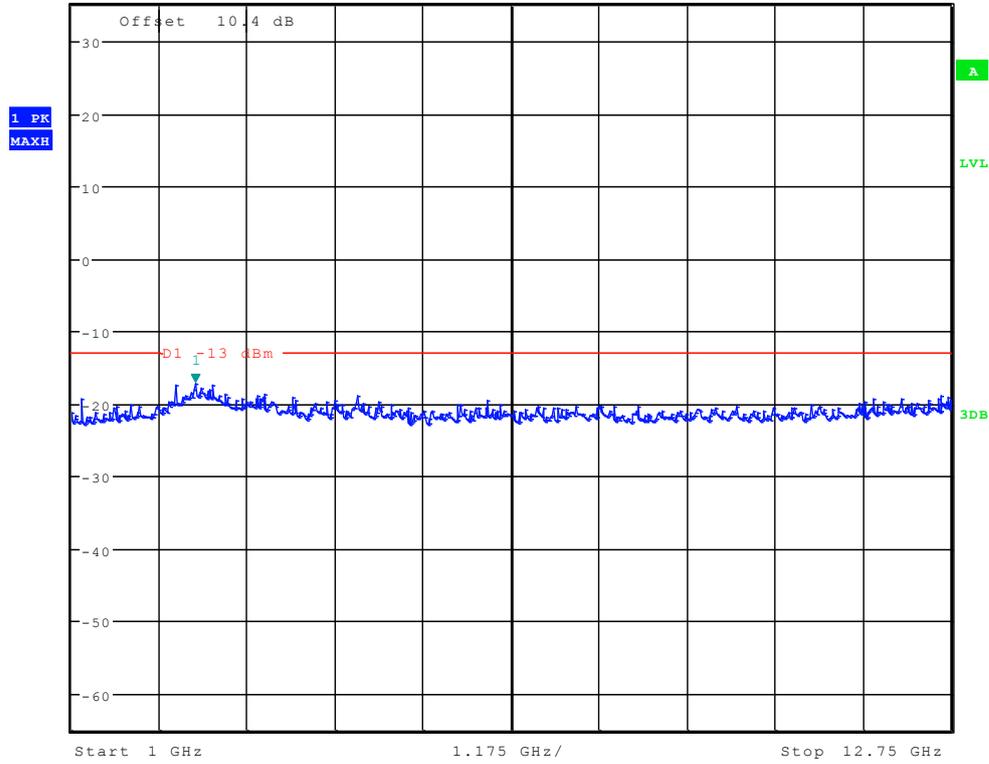

Date: 22.NOV.2011 11:17:18




Channel 192

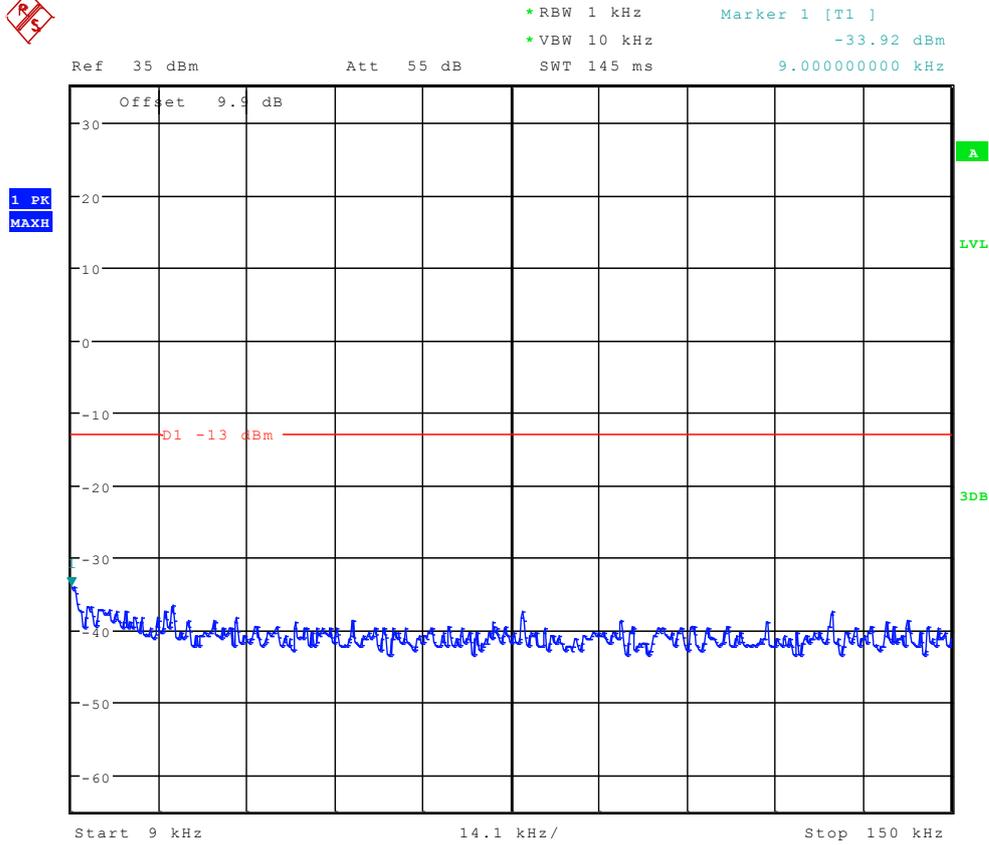


Date: 22.NOV.2011 11:15:22



Ref 35 dBm Att 55 dB SWT 300 ms 150.000000000 kHz
 *RBW 10 kHz Marker 1 [T1] -29.93 dBm
 *VBW 30 kHz

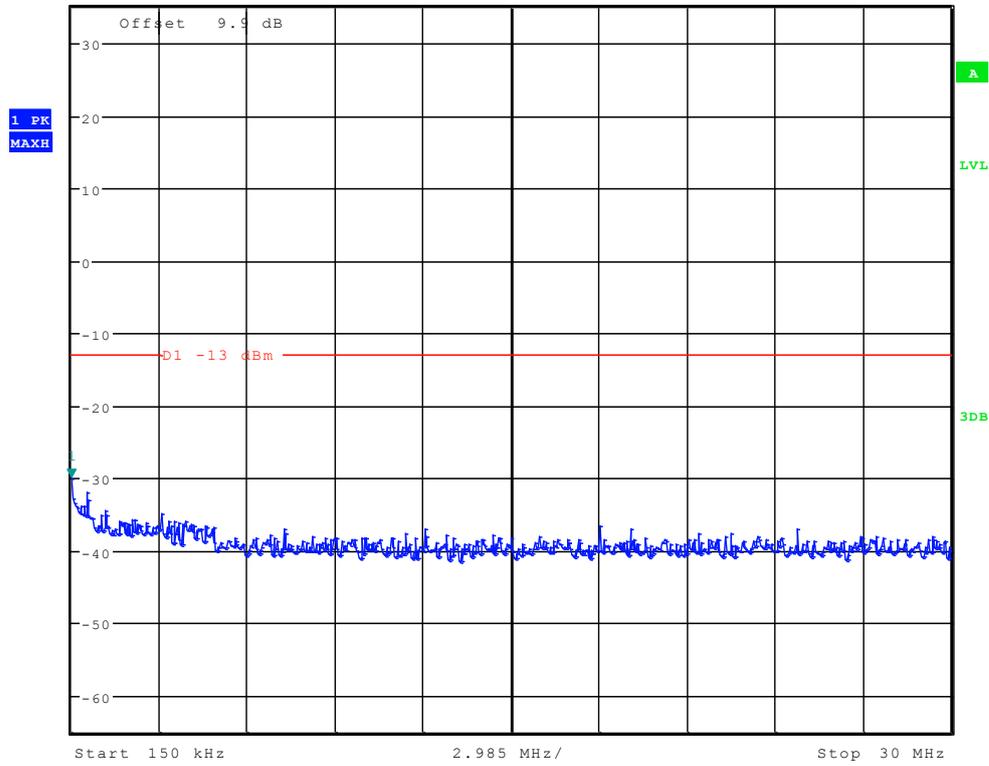


Date: 22.NOV.2011 11:16:05

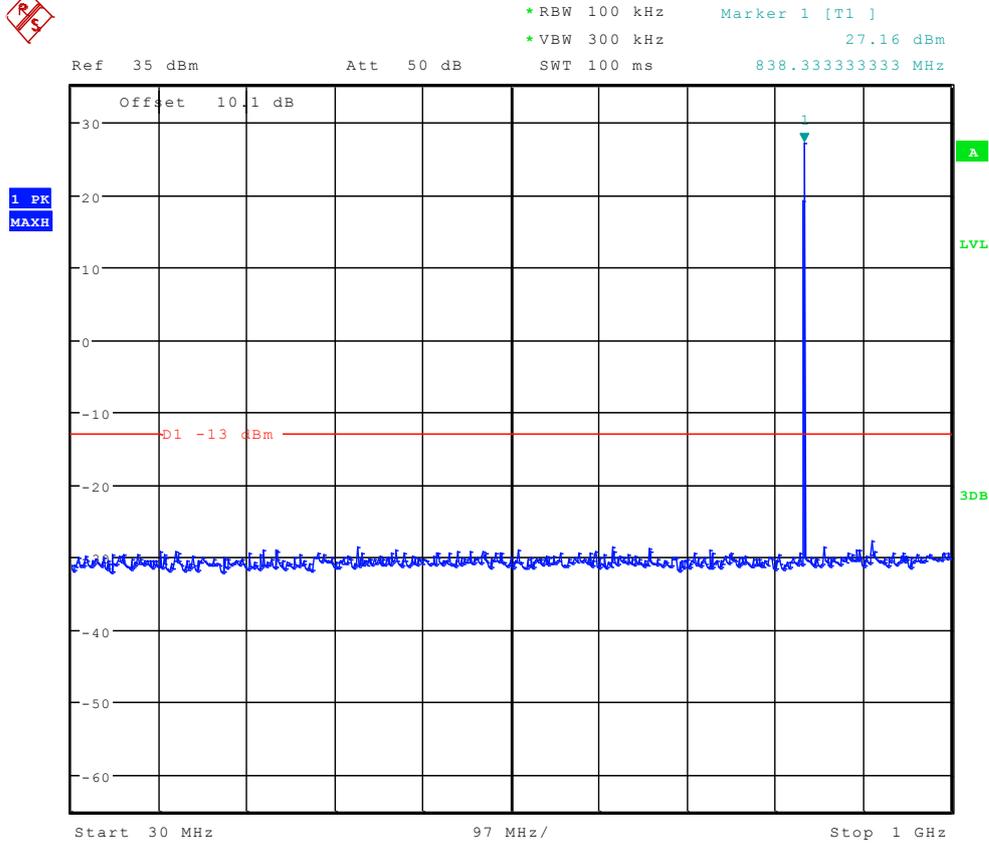

Date: 22.NOV.2011 11:16:49



*RBW 1 MHz Marker 1 [T1]
*VBW 3 MHz -16.95 dBm
Ref 35 dBm Att 50 dB SWT 70 ms 2.788862179 GHz

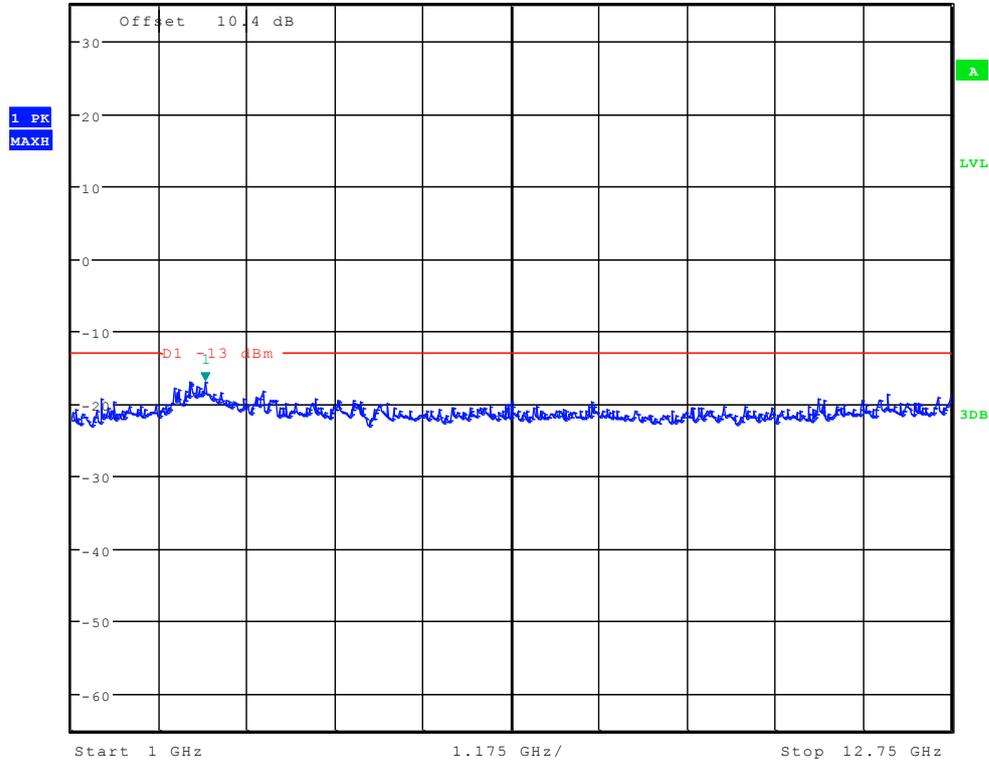


Date: 22.NOV.2011 11:17:33



Channel 251




Ref 35 dBm Att 55 dB SWT 145 ms Marker 1 [T1] -33.92 dBm
 *RBW 1 kHz *VBW 10 kHz 9.225961538 kHz

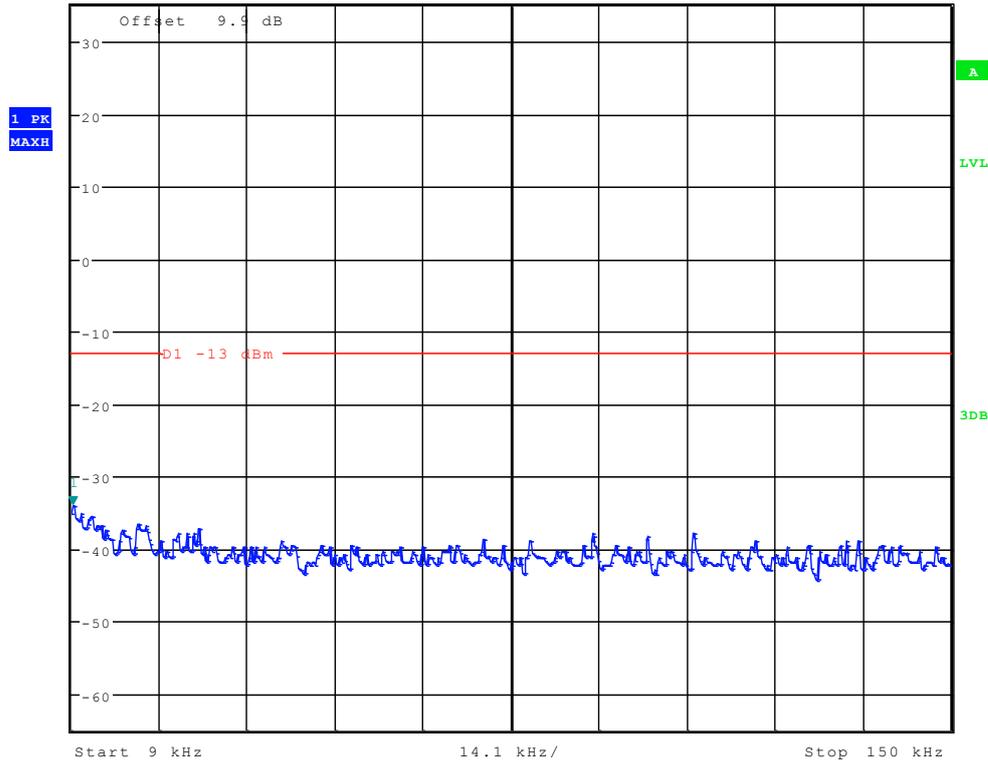

Date: 22.NOV.2011 11:15:36




Ref 35 dBm Att 55 dB SWT 300 ms 150.000000000 kHz
 *RBW 10 kHz Marker 1 [T1] -28.51 dBm
 *VBW 30 kHz

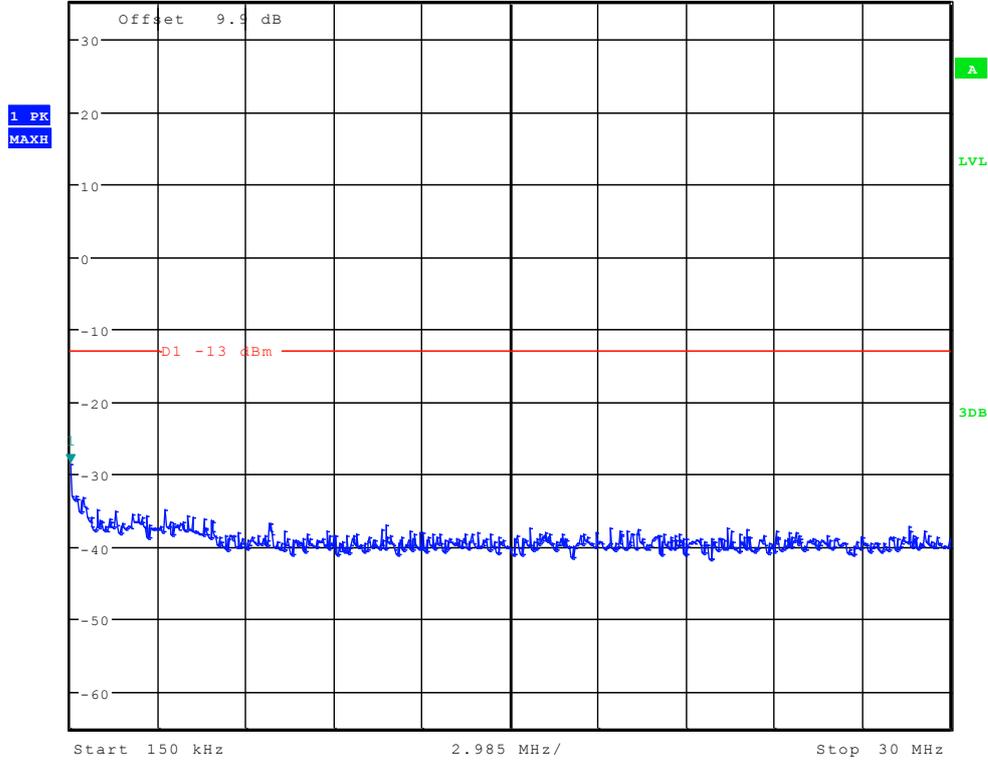

Date: 22.NOV.2011 11:16:20



Ref 35 dBm Att 50 dB SWT 100 ms
 *RBW 100 kHz Marker 1 [T1] 27.64 dBm
 *VBW 300 kHz 849.214743590 MHz

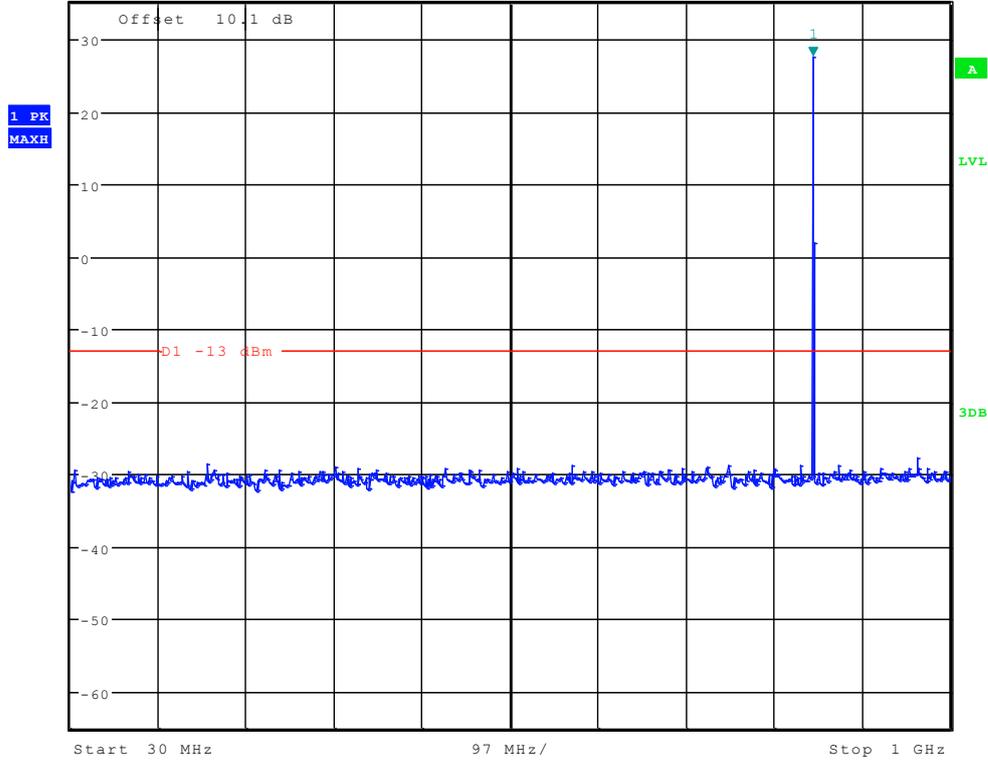


Date: 22.NOV.2011 11:17:03



*RBW 1 MHz Marker 1 [T1]
*VBW 3 MHz -17.37 dBm
2.901842949 GHz

Ref 35 dBm Att 50 dB SWT 70 ms

1 PK
MAXH

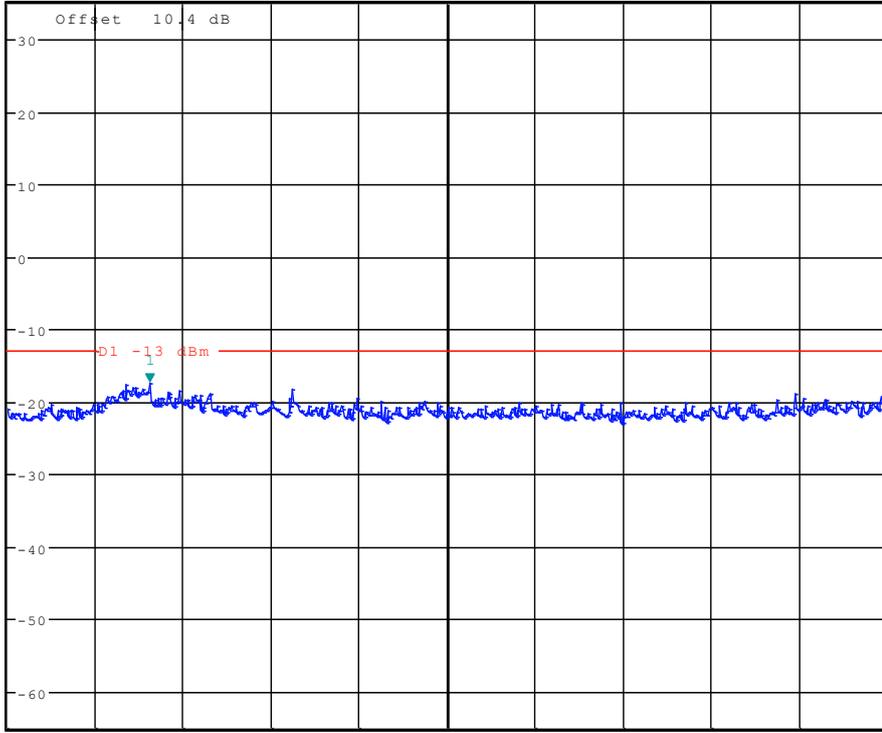

Date: 22.NOV.2011 11:17:47




Appendix F

Radiated spurious emission


According to FCC Part 2.1053& Part 22.917

GPRS 850

(9kHz~30MHz)

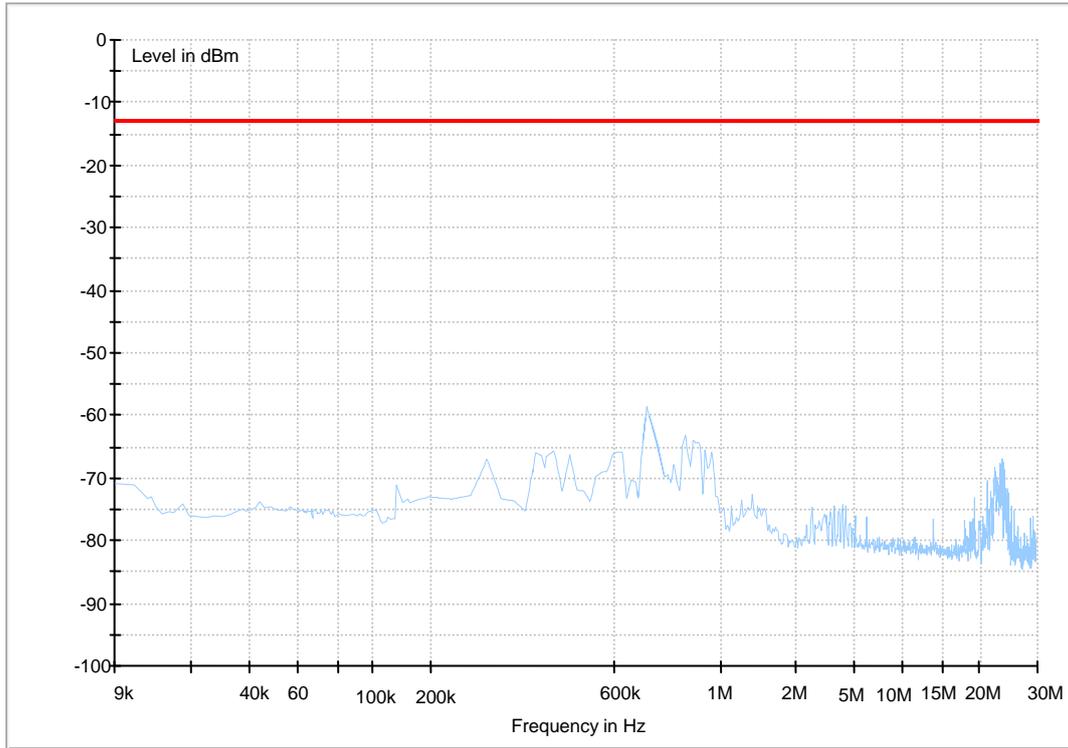


(30MHz~2GHz)

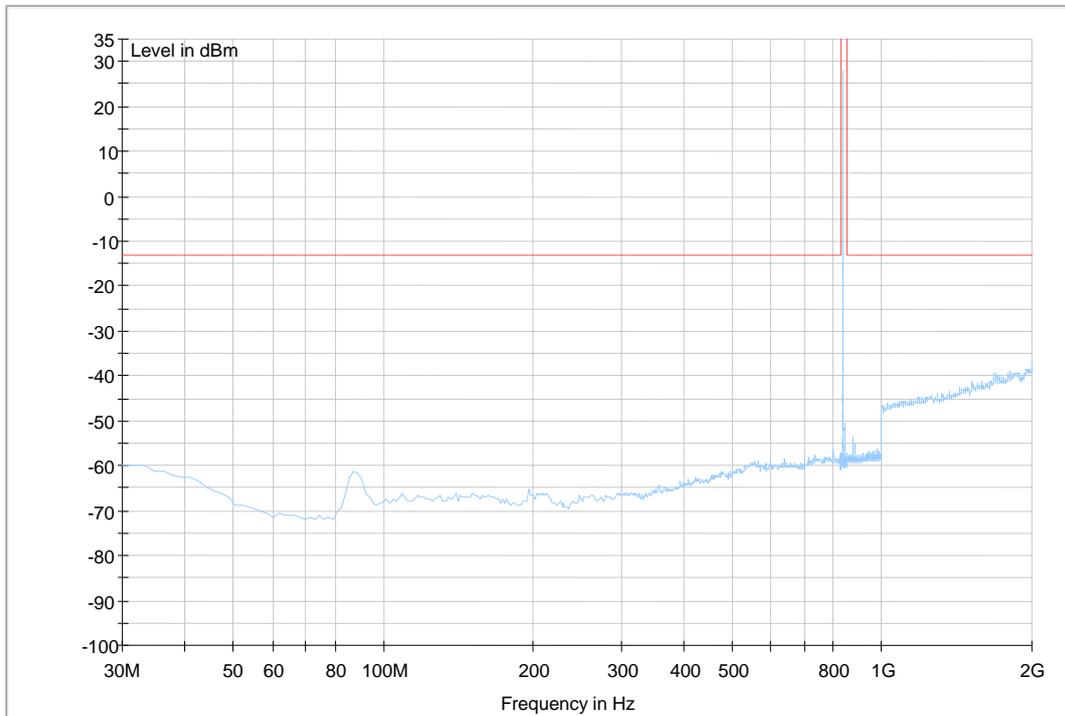




(2GHz~18GHz)

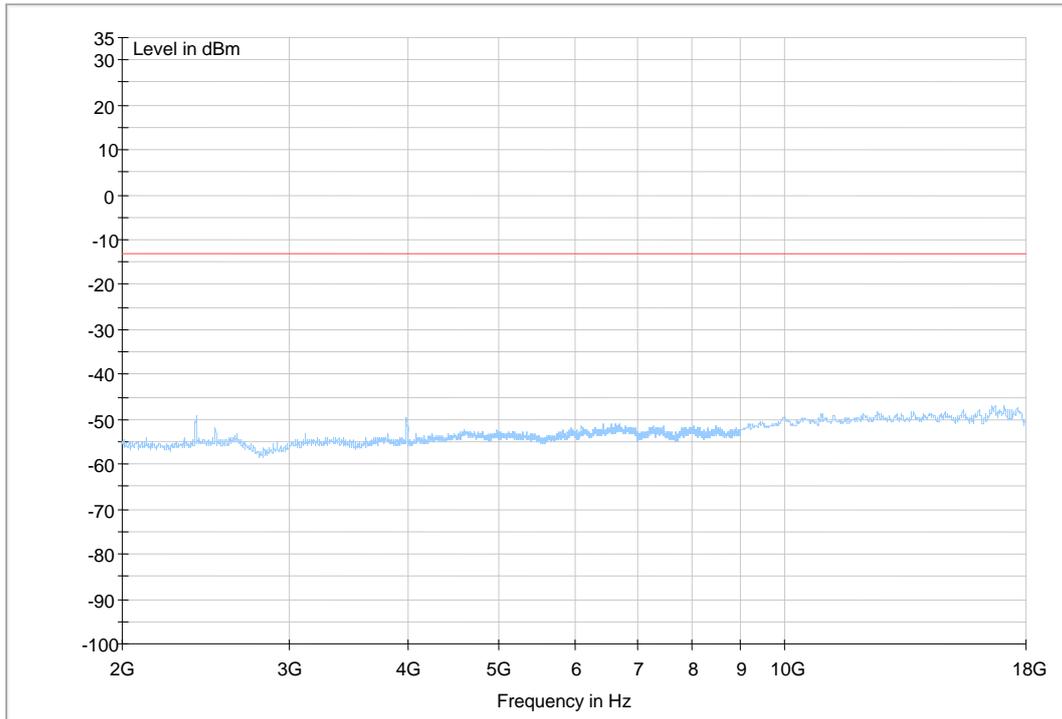




EDGE 850


(9kHz~30MHz)

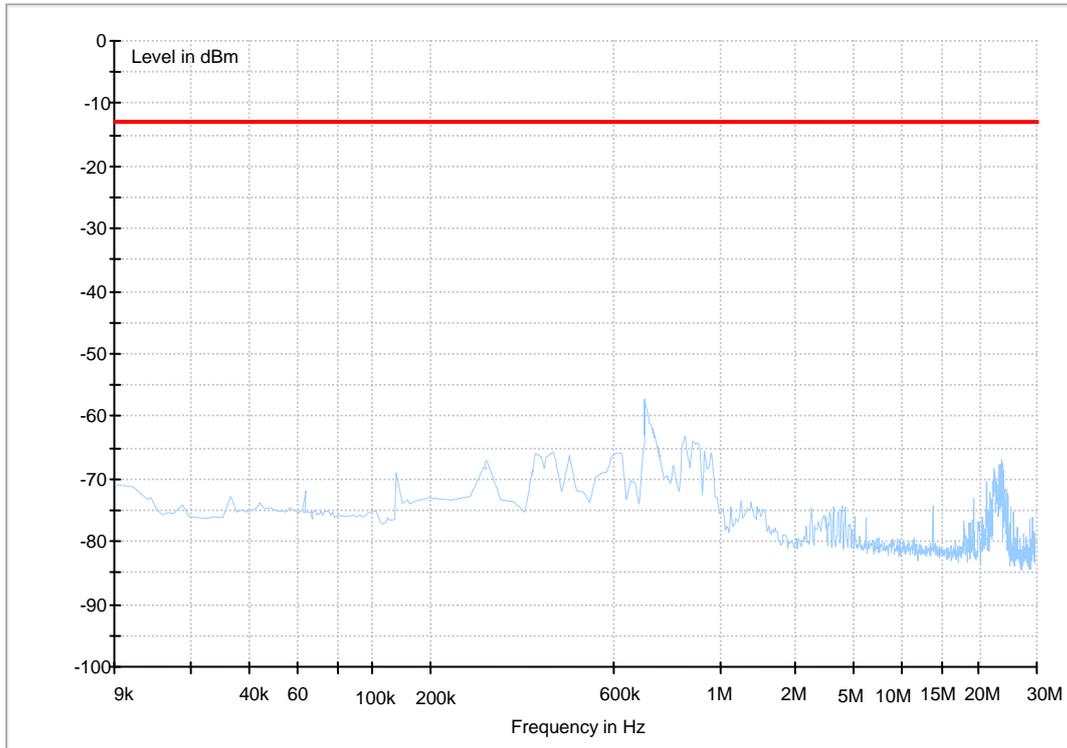

(30MHz~2GHz)

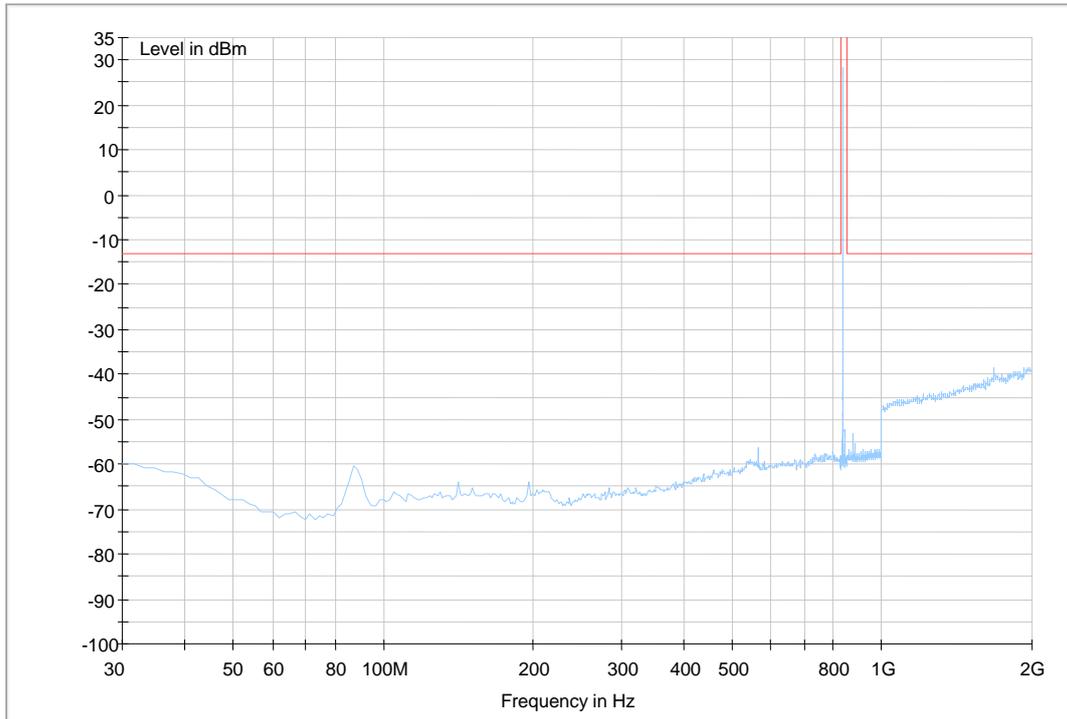

(2GHz~18GHz)

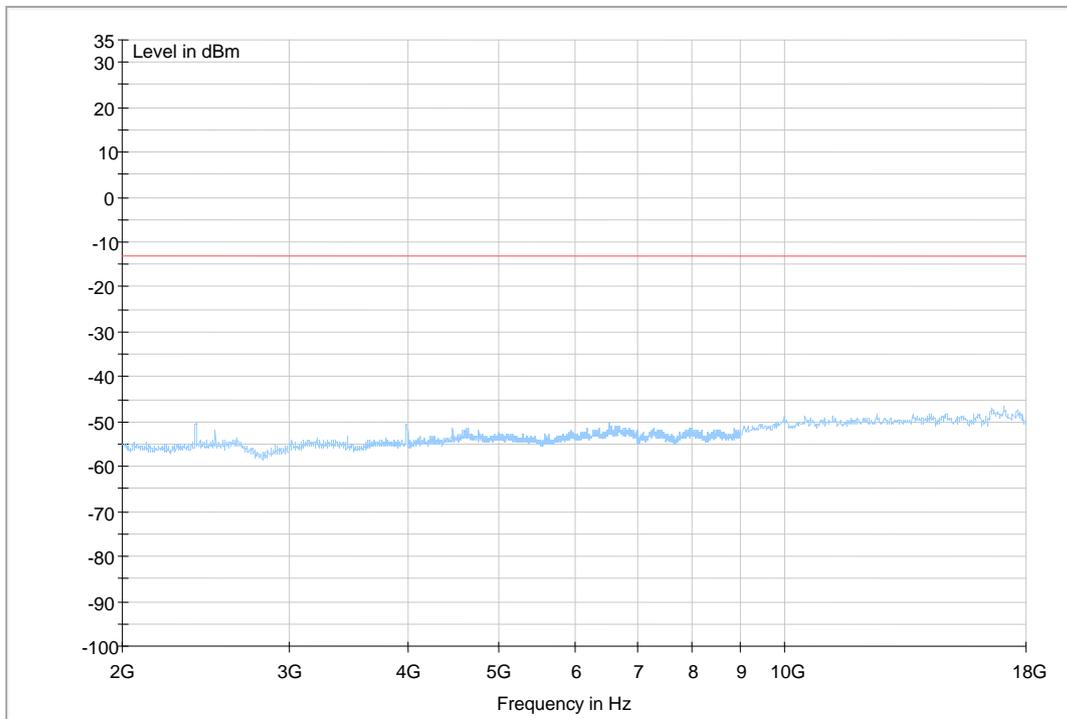



Appendix G

Frequency Stability According to FCC Part 2.1055& Part 22.355



Frequency Error vs. Temperature:

Test Mode	RF Ch.	Volt.	Temp.	Freq. Error [Hz]	Freq. vs. rated [ppm]	Freq. vs. 20 °C [ppm]	Limit [ppm]	Verdict
TM 1	M	100%	-30 °C	-15	-0.0179	---	±2.5	Pass
			-20 °C	17	0.0203	---	±2.5	Pass
			-10 °C	-13	-0.0155	---	±2.5	Pass
			0 °C	-8	-0.0096	---	±2.5	Pass
			10 °C	12	0.0143	---	±2.5	Pass
			20 °C	15	0.0179	---	±2.5	Pass
			30 °C	-19	-0.0227	---	±2.5	Pass
			40 °C	10	0.0119	---	±2.5	Pass
			50 °C	-8	-0.0096	---	±2.5	Pass
TM 2	M	100%	-30 °C	-5	-0.0060	---	±2.5	Pass
			-20 °C	-11	-0.0131	---	±2.5	Pass
			-10 °C	17	0.0203	---	±2.5	Pass
			0 °C	19	0.0227	---	±2.5	Pass
			10 °C	-16	-0.0191	---	±2.5	Pass
			20 °C	13	0.0155	---	±2.5	Pass
			30 °C	15	0.0179	---	±2.5	Pass
			40 °C	9	0.0108	---	±2.5	Pass
			50 °C	-6	-0.0072	---	±2.5	Pass



Frequency Error vs. Voltage:

Test Mode	RF Ch.	Temp.	Volt.	Freq. Error [Hz]	Freq. vs. rated [ppm]	Freq. vs. 20 °C [ppm]	Limit [ppm]	Verdict
TM 1	M	20 °C	85 %	-7	-0.0084	---	±2.5	Pass
			100 %	-11	-0.0131	---	±2.5	Pass
			115 %	14	0.0167	---	±2.5	Pass
TM 2	M	20 °C	85 %	18	0.0215	---	±2.5	Pass
			100 %	16	0.0191	---	±2.5	Pass
			115 %	-12	-0.0143	---	±2.5	Pass



Appendix H


Photos of Radiated Spurious Emissions




Photos of Test Setup



1 Radiated Spurious Emissions

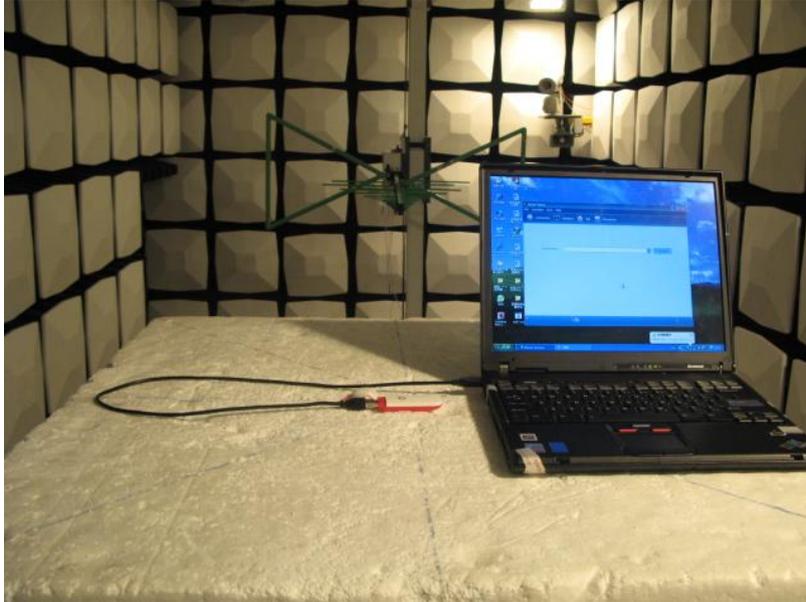

Radiated Spurious Emission (below 2GHz)

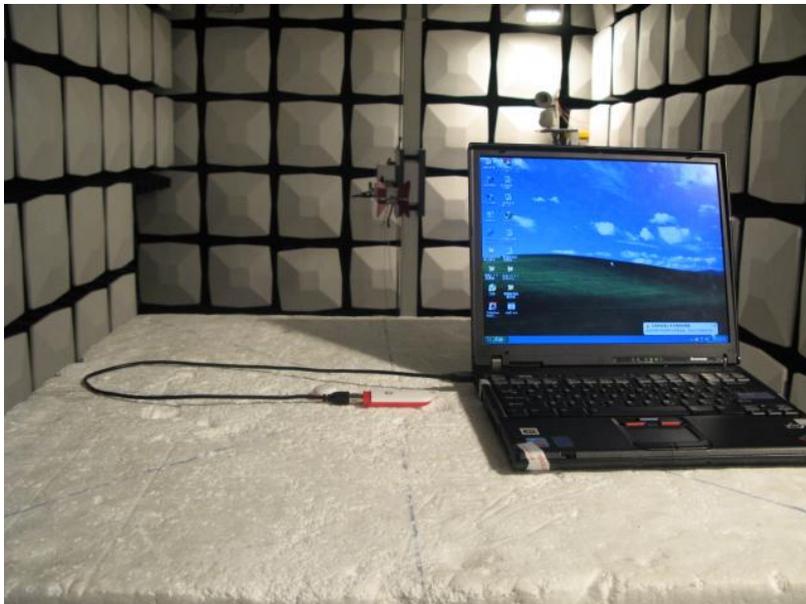

Radiated Spurious Emission (2GHz to18GHz)