



FCC RF Test Report

Product Name: cdma2000 Digital Mobile Phone

**Model Number: PCDM650KT/HUAWEI M650/ M650/HUAWEI
C8350/C8350**

**Report No: SYBH(Z-RF)002072011-2002
FCC ID: QISM650**

Reliability Laboratory of Huawei Technologies Co., Ltd.

Huawei Base, Bantian, Longgang District, Shenzhen 518129, P.R. China

Tel: +86 755 28780808 Fax: +86 755 89652518

Notice

1. The laboratory has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS), and accreditation number: L0310.
2. The laboratory has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements. The site recognition number is 97456.
3. The laboratory has been listed by industry Canada to perform electromagnetic emission measurement. The site recognition number is 6369A-2.
4. The test report is invalid if not marked with "exclusive stamp for the test report".
5. The test report is invalid if not marked with the stamps or the signatures of the persons responsible for performing, revising and approving the test report.
6. The test report is invalid if there is any evidence of erasure and/or falsification.
7. If there is any dissidence for the test report, please file objection to the test centre within 15 days from the date of receiving the test report.
8. Normally, the test report is only responsible for the samples that have undergone the test.
9. Context of the test report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of the laboratory.



Notice 2

Table 1 Modification Information

Modification Information	1	
	2	
	3	<i>Not Applicable!</i>
	4	
	5	
	6	
	7	



Contents

1	<u>Summary</u>	5
2	<u>Product Description</u>	6
2.1	PRODUCTION INFORMATION	6
2.2	MODIFICATION INFORMATION	8
3	<u>Test Site Description</u>	9
3.1	TESTING PERIOD	9
3.2	GENERAL SET UP DESCRIPTION	9
4	<u>Product Description</u>	10
4.1	TECHNICAL CHARACTERISTICS.....	10
4.2	EUT IDENTIFICATION LIST.....	12
5	<u>Main Test Instruments</u>	13
6	<u>Transmitter Measurements</u>	14
6.1	EFFECTIVE ISOTROPIC RADIATED POWER (EIRP).....	14
6.2	CONDUCTED POWER OF TRANSMITTER	19
6.3	MODULATION CHARACTERISTICS.....	22
6.4	OCCUPIED BANDWIDTH.....	24
6.5	BAND EDGES COMPLIANCE	27
6.6	SPURIOUS EMISSION AT ANTENNA TERMINAL.....	30
6.7	RADIATED SPURIOUS EMISSIONS	34
6.8	FREQUENCY STABILITY	37
7	<u>System Measurement Uncertainty</u>	45
8	<u>Appendixes</u>	46



1 Summary

The table below summarizes the measurements and results for the EUT. Detailed results and descriptions are shown in the following pages.

Table 2 Summary of results

FCC Measurement Specification	FCC Limits Part(s)	Description	Result
2.1046	24.232	Effective Isotropic radiated power of Transmitter	PASS
2.1047		Modulation Characteristics	PASS
2.1049		Occupied Bandwidth	PASS
2.1051	24.238	Band Edges Compliance	PASS
2.1051	24.238	Spurious Emission at Antenna Terminal	PASS
2.1053	24.238	Radiated Spurious Emission	PASS
2.1055	24.235	Frequency Stability	PASS

2 Product Description

2.1 Production Information

2.1.1 General Description

cdma2000 Digital Mobile Phone —PCDM650KT/HUAWEI M650/M650/HUAWEI C8350/C8350 is subscriber equipment in the CDMA/EVDO system. The frequency band is BC0 and BC1 and BC10 and BC14. BC1 and BC14 band test data included in this report. The Mobile Phone implements such functions as RF signal receiving/transmitting, CDMA2000 1x and 1XEV-DO protocol processing, voice, MMS service, GPS, AGPS and WIFI etc. Externally it provides micro SD card interface, earphone port(to provide voice service) .

2.1.2 Support function and Service

The EUT supports the function and service as follows:

Table 3 CDMA BC1 Service and Test mode List

Service Name	Characteristic	Corresponding Test Mode	Note
data and SMS	Modulation: QPSK	TM1*	
data and SMS	Modulation: HPSK	TM3*	
Data(EV-DO)	Default Access Channel MAC	Subtype 0*	Modulation: HPSK
data(EV-DO)	Enhanced Access Channel MAC	Subtype 2*	<p>The R-Data packet size determines the modulation format,</p> <p>R-Data Packet Size: 128, 256, 512, 768 or 1024 Modulation: BPSK</p> <p>R-Data Packet Size: 1536 , 2048,3072,4096,6144 or 8192 Modulation: QPSK</p> <p>R-Data Packet Size: 12288 Modulation: 8-PSK</p>

Table 4 CDMA BC14 Service and Test mode List

Service Name	Characteristic	Corresponding Test Mode	Note
data and SMS	Modulation: QPSK	TM4*	
data and SMS	Modulation: HPSK	TM6*	
Data(EV-DO)	Default Access Channel MAC	Subtype 0*	Modulation: HPSK
data(EV-DO)	Enhanced Access Channel MAC	Subtype 2*	The R-Data packet size determines the modulation



			format, R-Data Packet Size: 128, 256, 512, 768 or 1024 Modulation: BPSK R-Data Packet Size: 1536 , 2048,3072,4096,6144 or 8192 Modulation: QPSK R-Data Packet Size: 12288 Modulation: 8-PSK
--	--	--	--

Note: *The test conditions and settings are defined in ANSI/TIA-98-E section 1.3 , 3GPP2C.S0033



2.2 Modification Information

For original equipment, following table is not application.

Table 5 Modification Information

Model Number	Board/Module	Original Version	New Version	Modify Information
Not applicable!				



3 Test Site Description

The test site of:

Huawei Technologies Co. Ltd.
P.O. Box 518129
Huawei base, bantian,
Longgang District, Shenzhen, China

3.1 Testing Period

The test have been performed during the period of

Jun.27, 2011 to Jun.30, 2011

3.2 General Set up Description

The EUT can Support BC1 and BC14 Band,and Support the CDMA2000 1x standard and the CDMA2000 1xEV-DO Rev. A standard. During this measurement, the EUT works in CDMA / EV-DO mode and PCS Band.

CDMA:

TM1: Forward Traffic Channel Radio Configuration 1, Reverse Traffic Channel Radio Configuration 1

TM3: Forward Traffic Channel Radio Configuration 3, Reverse Traffic Channel Radio Configuration 3

Parameter	Units	Value
\hat{I}_{or}	dBm/1.23 MHz	-104
$\frac{Pilot Ec}{I_{or}}$	dB	-7
$\frac{Traffic Ec}{I_{or}}$	dB	-7.4

EVDO:

Current Physical Layer Subtype:

Subtype 0 * indicates that the protocol subtype assigned to the Access Channel MAC protocol is Default Access Channel MAC and its Subtype ID number is 0x0000.

Subtype 2 * indicates that the protocol subtype assigned to the Access Channel MAC protocol is Enhanced Access Channel MAC and its Subtype ID number is 0x0002

Note: *The test settings are defined in 3GPP2C.S0033.

4 Product Description

4.1 Technical Characteristics

4.1.1 Frequency Range

Table 6 Frequency Range

BAND	BC 1	BC 14
Uplink band:	1850 to 1910 MHz	1911.25 to 1913.25MHz
Downlink band:	1930 to 1990 MHz	1991.25 to 1993.75MHz

4.1.2 Channel Spacing / Separation

Table 7 Channel Spacing / Separation

Channel spacing:	50 KHz
Channel separation:	1.23 MHz

4.1.3 Type of Emission

Table 8 Type of Emission

Emission Designation:	-
-----------------------	---

According to CFR 47 (FCC) part 2, subpart C, section 2.201 and 2.202

4.1.4 Environmental Requirements

Table 9 Environmental Requirements

Minimum temperature:	- 10 °C
Maximum temperature:	+ 55 °C
Relative Humidity:	5%-95%RH

4.1.5 Power Source

Table 10 Power Source

AC voltage nominal:	~120V
AC voltage range	~100V-240V
AC current maximal:	1A

4.1.6 Tune-up Procedure

According to CFR (FCC) part 2, subpart 2, section 2.1033(c) (9).

Please reference the document Tune-up Procedure in TCF.

4.1.7 Applied DC Voltages and Currents

According to CFR (FCC) part 2, subpart 2, section 2.1033(c) (8).

The voltage and current in the final RF stage is:

Table 11 Applied DC Voltages and Currents

Voltage:	 +3.7 ~+4.2V
Current:	1 A According to CFR (FCC) part 2, subpart 2, section 2.1033(c) (8)



4.2 EUT Identification List

4.2.1 Board Information

Table 12 Board Information

cdma2000 Digital Mobile Phone		
PCDM650KT/HUAWEI M650/ M650/HUAWEI C8350/C8350 Board and Module		
Hardware Version	Software Version	Serial Number
HC1M650M Ver.D	M650V100R001USAC237B822	R7N7NA1152100130

4.2.2 Adapter

AC/DCAdapter Model	HW-050100U1W
Manufacturer	Huawei Technologies Co., Ltd.
Input Voltage	~100-240V 50/60Hz 0.2A
Output Voltage	=== +5.0V,1A
Rated Power	5W

4.2.3 Battery

Name	Manufacture	Serials number	Description
Rechargeable Li-ion	Huawei Technologies Co., Ltd.	SGCB317HI1200910	Battery Model: HB4F1 Rated capacity: 1500mAh Nominal Voltage: === +3.7V Charging Voltage: === +4.2V

4.2.4 FCC Identification

Grantee Code: QIS
Product Code: M650
FCC Identification: QISM650

5 Main Test Instruments

Table 13 Main Test Equipments

Equipment Description	Manufacturer	Model	Serial Number	Calibrated until
Power supply	KEITHLEY	2303	1288003	Sep.27,2011
Universal Radio Communication Tester	R&S	CMU200	105822	Oct.24,2011
Universal Radio Communication Tester	Agilent	E5515C	MY50260239	Aug.04,2011
Spectrum Analyzer	Agilent	E4440A	MY49420179	Apr.24,2012
Signal Analyzer	R&S	FSQ40	100025	Oct.09,2011
Signal Analyzer	R&S	FSQ31	200021	Sep.27,2011
Temperature Chamber	ESPEC	MW3030	611403	May.12,2012
Signal Generator	R&S	SMR40	100325	May.12,2012
Vector Signal Generator	R&S	SMU200A	104162	Sep.07,2011
Spectrum Analyzer	R&S	FSU26	EG26725	Mar.07,2012
Tunable Dipole	Schwarzbeck	D69250-UHAP/D69250-VHAP	919/1009	Dec.13.2011
Tunable Dipole	Schwarzbeck	D69250-UHAP/D69250-VHAP	979/917	Dec.13.2011
Horn Antenna	R & S	HF906	359287/005	May.07, 2012
Horn Antenna	R & S	HF906	359287/006	April.27, 2012
Broadband Antenna	SCHAFFNER	CBL 6112B	2536	Sep.21, 2011
Broadband Antenna	SCHAFFNER	CBL 6112B	2941	Jun.11, 2012
Test receiver	R&S	ESU26	36090302083	Jun.17.2012
Horn Antenna	ETS-LINDGREN	3160	60008	Sep.20.2011
Horn Antenna	ETS-LINDGREN	3160	60006	Oct.27.2011

6 Transmitter Measurements

6.1 Effective Isotropic radiated power (EIRP)

6.1.1 Test Conditions

Table 14 Test Conditions

Preconditioning:	0.5 hour
Measured at:	enclosure
Ambient temperature:	25°C
Relative humidity:	55%
Test Configurations:	CDMA TM1 and TM3 at frequency B,M,T EVDO Mode Subtype 0 and Subtype 2 at frequency B,M,T CDMA TM4 and TM6 at frequency B,M,T EVDO Mode Subtype 0 and Subtype 2 at frequency B,M,T

6.1.2 Test Specifications and Limits

6.1.2.1 Specification

CFR 47 (FCC) part 2.1046 and part 24.232

6.1.2.2 Supporting Standards

Table 15 Supporting Standards:

ANSI/TIA-603-C:2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
ANSI/TIA-98-E: 2003	Recommended Minimum Performance Standards for cdma2000 Spread Spectrum Mobile Stations

6.1.2.3 Limits

Compliance with part 24.232, mobile/portable stations are limited to 2 watts EIRP peak power.

$W(\text{dBm}) = 10 \cdot \log(W_{\text{watts}})$.

Table 16 Limits

Maximum Output Power (Watts)	< 2 Watts
Maximum Output Power (dBm)	< 33 dBm


6.1.3 Test Method and Setup

- (a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, ERP shall be measured when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in 2.1033(c)(8). Connect the EUT to the wireless communication tester CMU 200 via the air interface. The band class is set as PCS.
- (b) Test the Radiated maximum output power by the CMU 200 received from test antenna.

- (c) Use substitution method to verify the maximum output power. The EUT is substituted by a horn antenna. The horn is connected to a signal generator. And then adjust the output level of the signal generator to get the same received power recorded in step (b) on CMU 200, and record the power level of Signal Generator. Of course, the cable loss at the test frequency should be compensated.

Test setup

Step 1: Pre-test

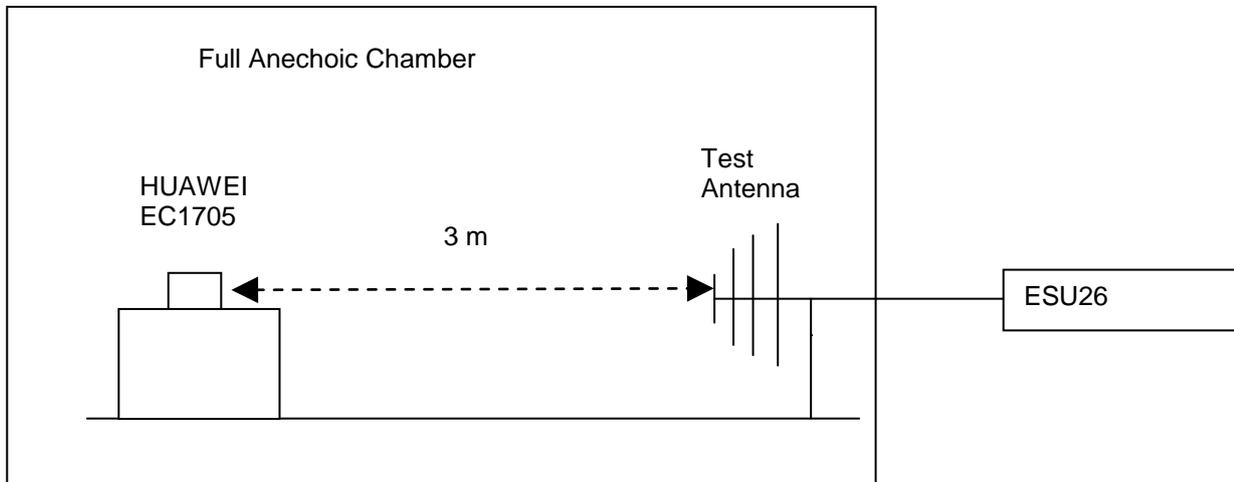

Step 2: Substitution method to verify the maximum EIRP

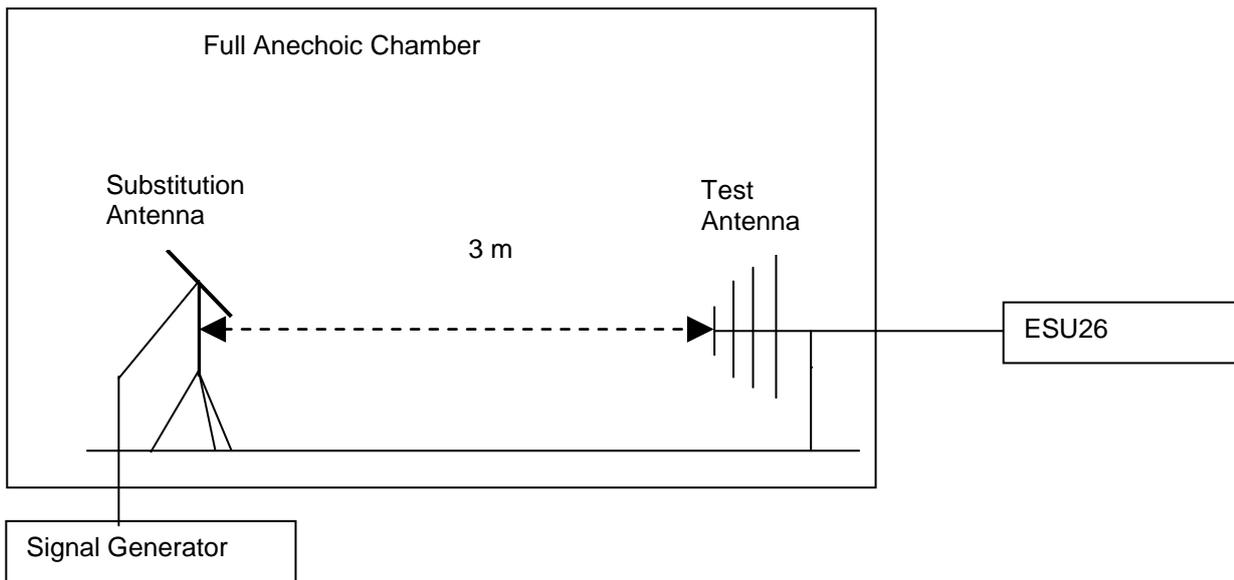


Figure 1. Test Set-up

NOTE: Effective radiated power (ERP) refers to the radiation power output of the EUT, assuming all emissions are radiated from half-wave dipole antennas.

There is a constant difference of 2.15 dB between EIRP and ERP.

$ERP \text{ (dBm)} = EIRP \text{ (dBm)} - 2.15$ (ITU-R Recommendation SM.329-10).

6.1.4 Measurement Results

Table 17 Measurement Results

TEST CONDITIONS		BC1 RF Output Power(EIRP)					
		Channel 25(B) 1851.25MHz		Channel 600(M) 1880.0MHz		Channel 1175(T) 1908.75MHz	
		dBm		dBm		dBm	
		Measure d	Limit	Measure d	Limit	Measure d	Limit
TM1	T _{nom} (25 °C) V _{nom} (3.7V)	24.86	33	25.08	33	24.63	33
TM3	T _{nom} (25 °C) V _{nom} (3.7V)	24.87	33	25.1	33	24.67	33
Subtype 0	T _{nom} (25 °C) V _{nom} (3.7V)	24.58	33	24.73	33	24.35	33
Subtype 2	T _{nom} (25 °C) V _{nom} (3.7V)	24.36	33	24.38	33	24.16	33
TEST CONDITIONS		BC14 RF Output Power(EIRP)					
		Channel 1225(B) 1911.25MHz		Channel 1250(M) 1912.50MHz		Channel 1275(T) 1913.75MHz	
		dBm		dBm		dBm	
		Measure d	Limit	Measure d	Measure d	Limit	Measure d
TM4	T _{nom} (25 °C) V _{nom} (3.7V)	24.75	33	24.85	33	24.88	33
TM6	T _{nom} (25 °C) V _{nom} (3.7V)	24.76	33	24.89	33	24.96	33
Subtype 0	T _{nom} (25 °C) V _{nom} (3.7V)	23.76	33	24.01	33	23.94	33
Subtype 2	T _{nom} (25 °C) V _{nom} (3.7V)	23.75	33	23.85	33	23.86	33

6.1.4.1 Substitution Results

Table 18 BC1 Substitution Results

Test Mode	Freq. [MHz]	Meas. Level [dBm]	Substitution Antenna Type	SGP [dBm]	Substitution Gain [dBi]	Cable Loss [dB]	Substitution Level (ERP) [dBm]	FCC limit [dBm]	Result
TM1	1851.25	24.86	Horn Ant.	21.31	4.5	1	24.81	33	Pass
TM1	1880	25.08	Horn Ant.	21.68	4.5	1	25.18	33	Pass
TM1	1908.75	24.63	Horn Ant.	20.85	4.8	1	24.65	33	Pass
TM3	1851.25	24.87	Horn Ant.	21.35	4.5	1	24.85	33	Pass
TM3	1880	25.1	Horn Ant.	21.61	4.5	1	25.11	33	Pass
TM3	1908.75	24.67	Horn Ant.	20.81	4.8	1	24.61	33	Pass
Subtype 0	1851.25	24.58	Horn Ant.	21.07	4.5	1	24.57	33	Pass
Subtype 0	1880	24.73	Horn Ant.	21.22	4.5	1	24.72	33	Pass
Subtype 0	1908.75	24.35	Horn Ant.	20.56	4.8	1	24.36	33	Pass
Subtype 2	1851.25	24.36	Horn Ant.	20.84	4.5	1	24.34	33	Pass
Subtype 2	1880	24.38	Horn Ant.	20.83	4.5	1	24.33	33	Pass
Subtype 2	1908.75	24.16	Horn Ant.	20.32	4.8	1	24.12	33	Pass

Table 19 BC14 Substitution Results

Test Mode	Freq. [MHz]	Meas. Level [dBm]	Substitution Antenna Type	SGP [dBm]	Substitution Gain [dBi]	Cable Loss [dB]	Substitution Level (ERP) [dBm]	FCC limit [dBm]	Result
TM4	1911.25	24.75	Horn Ant.	20.91	4.8	1	24.71	33	Pass
TM4	1912.50	24.85	Horn Ant.	21.09	4.8	1	24.89	33	Pass
TM4	1913.75	24.88	Horn Ant.	20.98	4.8	1	24.78	33	Pass
TM6	1911.25	24.76	Horn Ant.	20.91	4.8	1	24.71	33	Pass
TM6	1912.50	24.89	Horn Ant.	21.01	4.8	1	24.81	33	Pass
TM6	1913.75	24.96	Horn Ant.	21.12	4.8	1	24.92	33	Pass
Subtype 0	1911.25	23.76	Horn Ant.	19.93	4.8	1	23.73	33	Pass
Subtype 0	1912.50	24.01	Horn Ant.	20.31	4.8	1	24.11	33	Pass
Subtype 0	1913.75	23.94	Horn Ant.	20.13	4.8	1	23.93	33	Pass



Subtype 2	1911.25	23.75	Horn Ant.	19.91	4.8	1	23.71	33	Pass
Subtype 2	1912.50	23.85	Horn Ant.	20.08	4.8	1	23.88	33	Pass
Subtype 2	1913.75	23.86	Horn Ant.	20.01	4.8	1	23.81	33	Pass

Note: a, For getting the EIRP (Efficient Isotropically Radiated Power) in substitution method, the following formula should take to calculate it,

$$\text{EIRP [dBm]} = \text{SGP [dBm]} - \text{Cable Loss [dB]} + \text{Gain [dBi]}$$

NOTE: SGP- Signal Generator Level

b, A CDMA signal with bandwidth of 1.23MHz is created by the vector generator R&S SMU200A.

c, RBW=10kHz, VBW=300kHz, and integrated by the instrument to 1.23MHz.

6.1.5 Conclusion

The equipment **PASSED** the requirement of this clause.



6.2 Conducted Power of Transmitter

6.2.1 Test Conditions

Table 20 Test Conditions

Preconditioning:	0.5 hour
Measured at:	enclosure
Ambient temperature:	25°C
Relative humidity:	55%
Test Configurations:	CDMA TM1 and TM3 at frequency B,M,T EVDO Mode Subtype 0 and Subtype 2 at frequency B,M,T CDMA TM4 and TM6 at frequency B,M,T EVDO Mode Subtype 0 and Subtype 2 at frequency B,M,T

6.2.2 Test Specifications and Limits

6.2.2.1 Specification

CFR 47 (FCC) part 2.1046 and part 24.232

6.2.2.2 Supporting Standards

Table 21 Supporting Standards:

ANSI/TIA-603-C:2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
ANSI/TIA-98-E: 2003	Recommended Minimum Performance Standards for cdma2000 Spread Spectrum Mobile Stations

6.2.2.3 Limits

Compliance with part 24.232, in no any case may the peak power of a mobile station transmitter exceed 2 W. The calculated longitude EIRP by following formula:

$$EIRP(dBm) = 10 * \log (EIRP_{in \text{ watts}}).$$

And for conducted power, we can use Antenna Gain to calculate the limit. So the conducted power:

$$P_{cod.}(dBm) = EIRP(dBm) - Gain(dBi).$$

and $Gain(dBi) = Gain(dBd) + 2.15dB$

Table 22 Limits

Maximum Output Power	< 2 Watts(33 dBm)
Antenna Gain(dBi):	1.0

Maximum Conducted Output Power	< 32.0 dBm
--------------------------------	------------

6.2.3 Test Method and Setup

(a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, Conducted maximum power shall be measured when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in 2.1033(c)(8). Connect the EUT to the wireless communication tester CMU 200 via the antenna connector. The band class is set as PCS.

(b) Test the Conducted maximum output power by the CMU 200.

Test setup

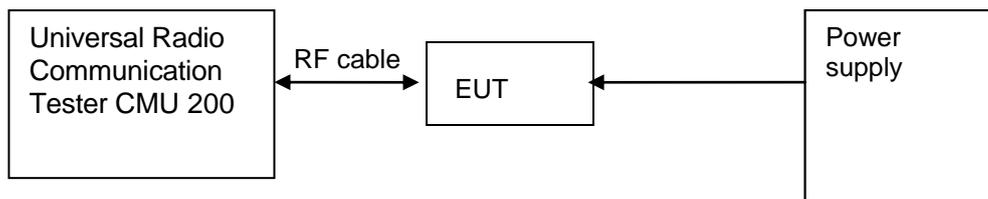


Figure 2. Test Set-up

6.2.4 Measurement Results

Table 23 Measurement Results

TEST CONDITIONS		BC1 RF Output Power					
		Channel 25(B) 1851.25MHz		Channel 600(M) 1880.0MHz		Channel 1175(T) 1908.75MHz	
		dBm		dBm		dBm	
		Measured	Limit	Measured	Limit	Measured	Limit
TM1	T _{nom} (25 °C) V _{nom} (3.7V)	23.86	32.00	24.08	32.00	23.63	32.00
TM3	T _{nom} (25 °C) V _{nom} (3.7V)	23.87	32.00	24.1	32.00	23.67	32.00
Subtype 0	T _{nom} (25 °C) V _{nom} (3.7V)	23.58	32.00	23.73	32.00	23.35	32.00
Subtype 2	T _{nom} (25 °C) V _{nom} (3.7V)	23.36	32.00	23.38	32.00	23.16	32.00

TEST CONDITIONS		BC14 RF Output Power					
		Channel 1225(B) 1911.25MHz		Channel 1250(M) 1912.50MHz		Channel 1275(T) 1913.75MHz	
		dBm		dBm		dBm	
		Measured	Limit	Measured	Limit	Measured	Limit



TM4	T _{nom} (25 °C) V _{nom} (3.7V)	23.75	32.00	23.85	32.00	23.88	32.00
TM6	T _{nom} (25 °C) V _{nom} (3.7V)	23.76	32.00	23.89	32.00	23.96	32.00
Subtype 0	T _{nom} (25 °C) V _{nom} (3.7V)	22.76	32.00	23.01	32.00	22.94	32.00
Subtype 2	T _{nom} (25 °C) V _{nom} (3.7V)	22.75	32.00	22.85	32.00	22.86	32.00

6.2.5 Conclusion

The equipment **PASSED** the requirement of this clause.

6.3 Modulation Characteristics

6.3.1 Test Conditions

Table 24 Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25°C
Relative humidity:	55%
Test Configurations:	CDMA mode TM1 and TM3 at frequency M EVDO mode Subtype 0 and Subtype 2 at frequency M CDMA mode TM4 and TM6 at frequency M EVDO mode Subtype 0 and Subtype 2 at frequency M

6.3.2 Test Specifications and Limits

6.3.2.1 Specification

CFR 47 (FCC) part 2.1047 and part 24 subpart E

6.3.2.2 Supporting Standards

Table 25 Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
ANSI/TIA-98-E: 2003	Recommended Minimum Performance Standards for cdma2000 Spread Spectrum Mobile Stations.

6.3.2.3 Limits

No specific modulation characteristics requirement limits in part 2.1047 and part 24 subpart E.

Table 26 Limits

Limits	Not applicable
--------	----------------

6.3.3 Test Method and Setup

Connect the EUT to Universal Radio Communication Tester CMU200 via the antenna connector. The band class is set as PCS; the EUT's output is matched with 50 Ω load, test method was according to ANSI/TIA-98-E and. The waveform quality and constellation of the EUT was tested.

Test setup

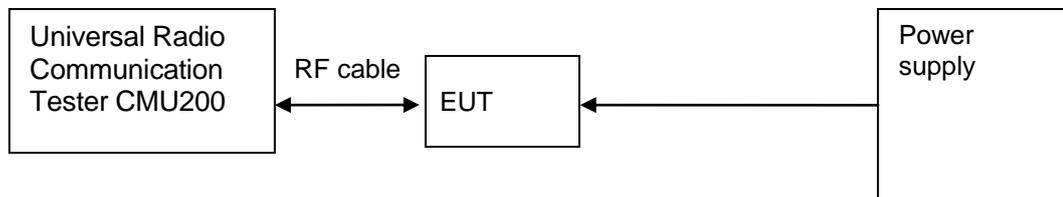


Figure 3. Test Set-up

6.3.4 Measurement Results

Table 27 Measurement Results

TEST CONDITIONS	BC1 Modulation Characteristic	
	Channel 600(M) 1880.0MHz	
	Measured	
	CDMA TM1 & TM3	EVDO Mode Subtype 0 & Subtype2
T _{nom} (25 °C)/V _{nom} (3.7V)	Refer to Appendix_A	Refer to Appendix_A
TEST CONDITIONS	BC14 Modulation Characteristic	
	Channel 1250(M) 1912.5MHz	
	Measured	
	CDMA TM4 & TM6	EVDO Mode Subtype 0 & Subtype2
T _{nom} (25 °C)/V _{nom} (3.7V)	Refer to Appendix_A	Refer to Appendix_A

6.3.5 Conclusion

The equipment **PASSED** the requirement of this clause.

For the measurement results refer to appendix_A.

6.4 Occupied Bandwidth

6.4.1 Test Conditions

Table 28 Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25°C
Relative humidity:	55%
Test Configurations:	CDMA TM1 and TM3 at frequency B,M,T EVDO Mode Subtype 0 and Subtype 2 at frequency B,M,T CDMA TM4 and TM6 at frequency B,M,T EVDO Mode Subtype 0 and Subtype 2 at frequency B,M,T

6.4.2 Test Specifications and Limits

6.4.2.1 Specification

CFR 47 (FCC) part 2.1049 and part 24 subpart E

6.4.2.2 Supporting Standards

Table 29 Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
ANSI/TIA-98-E: 2003	Recommended Minimum Performance Standards for cdma2000 Spread Spectrum Mobile Stations.

6.4.2.3 Limits

No specific occupied bandwidth requirement in part 24 subpart E, but the occupied bandwidth was defined in part 2.1049: the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.

Table 30 Limits

Upper /lower frequency limits	0.5% of the mean power
-------------------------------	------------------------

6.4.3 Test Method and Setup

The EUT was connected to the wireless signal analyzer R&S FSQ31 via the one RF connector. The band class is set as PCS; EUT was controlled to transmit maximum power. Measure and record the occupied bandwidth of the EUT by the R&S FSQ31.

The OBW, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a

given emission shall be measured under the following conditions as applicable:

Refer to 47CFR part2.1049 section (g)&(h).

(g) Transmitter in which the modulating base band comprises not more than three independent channels - when modulated by the full complement of signals for which the transmitter is rated. The level of modulation for each channel should be set to that prescribed in rule parts applicable to the services for which the transmitter is intended. If specific modulation levels are not set forth in the rules, the tests should provide the manufacturer's maximum rated condition.

(h) Transmitters employing digital modulation techniques - when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudorandom generators or other devices required in normal service. Additionally, the occupied bandwidth shall be shown for operation with any devices used for modifying the spectrum when such devices are optional at discretion of the user.

Measurement bandwidth (RBW): 30 kHz (Resolution bandwidth)

Video bandwidth (VBW): 300 kHz

Test Set-up

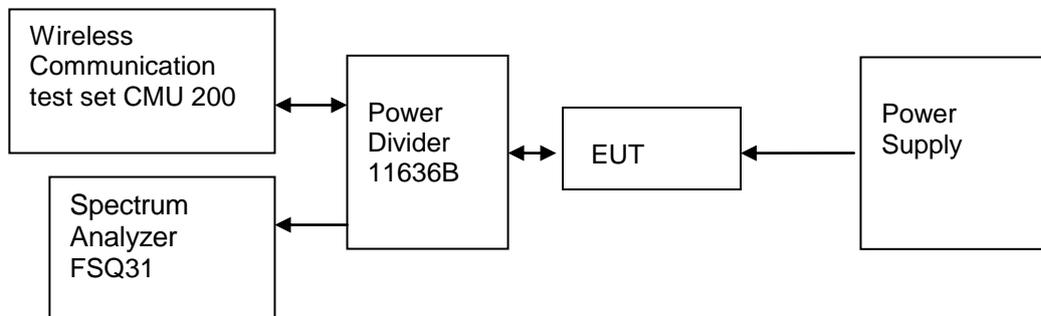


Figure 4.

Test Set-up

6.4.4 Measurement Results

Table 31 Measurement Results

TEST CONDITIONS	BC1 Occupied Bandwidth											
	Channel 25(B) 1851.25MHz				Channel 600(M) 1880.0MHz				Channel 1175(T) 1908.75MHz			
	Measured (MHz)				Measured (MHz)				Measured (MHz)			
	CDMA		EVDO		CDMA		EVDO		CDMA		EVDO	
	TM1	TM3	Subtype 0	Subtype 2	TM1	TM3	Subtype 0	Subtype 2	TM1	TM3	Subtype 0	Subtype 2
T _{nom} (25 °C) V _{nom} (3.7V)	1.28	1.28	1.29	1.29	1.28	1.29	1.29	1.28	1.28	1.28	1.29	1.29
TEST CONDITIONS	BC14 Occupied Bandwidth											
	Channel 1225(B) 1911.25MHz				Channel 1250(M) 1912.50MHz				Channel 1275(T) 1913.75MHz			
	Measured (MHz)				Measured (MHz)				Measured (MHz)			
	CDMA		EVDO		CDMA		EVDO		CDMA		EVDO	
	TM4	TM6	Subtype 0	Subtype 2	TM4	TM6	Subtype 0	Subtype 2	TM4	TM6	Subtype 0	Subtype 2
T _{nom} (25 °C) V _{nom} (3.7V)	1.29	1.28	1.28	1.30	1.28	1.28	1.29	1.30	1.30	1.28	1.28	1.30

6.4.5 Conclusion

The equipment **PASSED** the requirement of this clause.
 For the measurement results refer to appendix_B.

6.5 Band Edges Compliance

6.5.1 Test Conditions

Table 32 Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25°C
Relative humidity:	55%
Test Configurations:	CDMA TM1 and TM3 at frequency B,T EVDO Mode Subtype 0 and Subtype 2 at frequency B,T CDMA TM4 and TM6 at frequency B,T EVDO Mode Subtype 0 and Subtype 2 at frequency B,T

6.5.2 Test Specifications and Limits

6.5.2.1 Specification

CFR 47 (FCC) part 2.1051 and part 24.238

6.5.2.2 Supporting Standards

Table 33 Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
ANSI/TIA-98-E: 2003	Recommended Minimum Performance Standards for cdma2000 Spread Spectrum Mobile Stations.

6.5.2.3 Limits

Compliance with part 24.238, all spurious emission must be attenuated below the transmitter power by at least $43 + 10 \log_{10} P$. (Whereas P is the rated power of the EUT).

Table 34 Limits

Rated Power:	24 dBm
Required attenuation:	$43 + 10 \log(0.25) = 37$, 24 dBm – 37 dB
Absolute level	- 13 dBm

6.5.3 Test Method and Setup

The EUT was connected to the wireless signal analyzer R&S FSQ31 via the one RF connector, the band class is set as PCS. EUT was controlled to transmit maximum power. Measure and record band edges compliance of the EUT by the R&S FSQ31.

RBW of 20 kHz (1% of 2MHz) was used up to 5MHz away from the band edge. So the FCC rules specify that RBW of 1MHz for measurements of emissions >1MHz away from the band edges ,the limit

was adjusted with -13dBm to -30dBm to compensate for the reduced measurement bandwidth.

Test Set-up

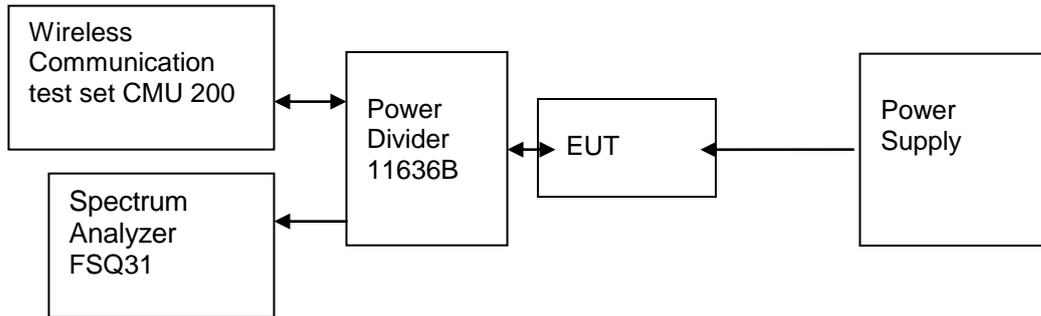


Figure 5. Test Set-up

6.5.4 Measurement Results

Table 35 Measurement Results outside Band Edges-- Single Carrier

Band	Frequency of Band edges [MHz]	Channel Number	Test Mode	Power [dBm]	Spurious Level measured [dBm]	FCC limit	Result
T_{nom} (25 °C) V_{nom} (3.7V)							
CDMA2000 BC1	1851.25	25 (B)	TM1 & TM3	24	<-13(See appendix_C)	- 13 dBm	Pass
	1908.75	1175 (T)	TM1 & TM3	24	<-13(See appendix_C)	- 13 dBm	Pass
	1851.25	25 (B)	Subtype 0 and Subtype 2	24	<-13(See appendix_C)	- 13 dBm	Pass
	1908.75	1175 (T)	Subtype 0 and Subtype 2	24	<-13(See appendix_C)	- 13 dBm	Pass
CDMA2000 BC14	1911.25	1225 (B)	TM4 & TM6	24	<-13(See appendix_C)	- 13 dBm	Pass
	1913.75	1275 (T)	TM4 & TM6	24	<-13(See appendix_C)	- 13 dBm	Pass
	1911.25	1225 (B)	Subtype 0 and Subtype 2	24	<-13(See appendix_C)	- 13 dBm	Pass
	1913.75	1275 (T)	Subtype 0 and Subtype 2	24	<-13(See appendix_C)	- 13 dBm	Pass

6.5.5 Conclusion

The equipment **PASSED** the requirement of this clause.



For the measurement results refer to appendix_C.

6.6 Spurious Emission at Antenna Terminal

6.6.1 Test Conditions

Table 36 Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25°C
Relative humidity:	55%
Test Configurations:	TM1 and TM3 at frequency B,M,T EVDO Mode Subtype 0 and Subtype 2 at frequency B,M,T TM4 and TM6 at frequency B,M,T EVDO Mode Subtype 0 and Subtype 2 at frequency B,M,T

6.6.2 Test Specifications and Limits

6.6.2.1 Specification

CFR 47 (FCC) part 2.1051 and part 24.238

6.6.2.2 Supporting Standards

Table 37 Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
ANSI/TIA-98-E: 2003	Recommended Minimum Performance Standards for cdma2000 Spread Spectrum Mobile Stations.

6.6.2.3 Limits

Compliance with part 24.238, all spurious emission must be attenuated below the transmitter power by at least $43 + 10 \log_{10} P$. (Whereas P is the rated power of the EUT).

Table 38 Limits

Rated Power:	24 dBm
Required attenuation:	$43 + 10 \log (0.25) = 37$, 24 dBm – 37 dB
Absolute level	- 13 dBm

6.6.3 Test Method and Setup

The EUT was connected to the wireless signal analyzer R&S FSQ31 via the one RF connector, the band class is set as PCS. EUT was controlled to transmit maximum power. Measure and record the Conducted Spurious Emission of the EUT by the R&S FSQ31.

According to part 24.238, the defined measurement bandwidth as following:

24.238 (b) Measurement procedure: Compliance with these provisions is based on the use of

measurement instrumentation employing a resolution bandwidth of 1 MHz or greater.

Measurement bandwidth (RBW) for 9 kHz up to 3GHz: 1 MHz;

Measurement bandwidth (RBW) for 3GHz up to 12.5GHz: 1MHz;

Measurement bandwidth (RBW) for 12.5GHz up to 20GHz: 1MHz;

Test Set-up

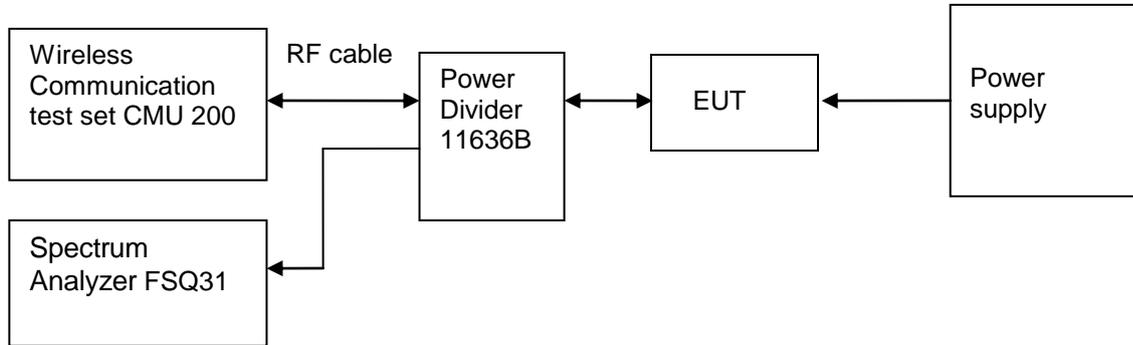


Figure 6.

Test Set-up

6.6.4 Measurement Results

Table 39 BC1 Measurement Results

Channel Number	Test Mode	Test Range (Frequency)	Output Power [dBm]	Spurious Level measured [dBm]	FCC limit	Result
Channel 25(B)	TM1	9 kHz ~20GHz	24	<- 13 dBm (See appendix_D)	- 13 dBm	Pass
	TM3	9 kHz ~20GHz	24	<- 13 dBm (See appendix_D)	- 13 dBm	Pass
	Subtype 0	9 kHz ~20GHz	24	<- 13 dBm (See appendix_D)	- 13 dBm	Pass
	Subtype 2	9 kHz ~20GHz	24	<- 13 dBm (See appendix_D)	- 13 dBm	Pass
Channel 600(M)	TM1	9 kHz ~20GHz	24	<- 13 dBm (See appendix_D)	- 13 dBm	Pass
	TM3	9 kHz ~20GHz	24	<- 13 dBm (See appendix_D)	- 13 dBm	Pass
	Subtype 0	9 kHz ~20GHz	24	<- 13 dBm (See appendix_D)	- 13 dBm	Pass
	Subtype 2	9 kHz ~20GHz	24	<- 13 dBm (See appendix_D)	- 13 dBm	Pass
Channel 1175(T)	TM1	9 kHz ~20GHz	24	<- 13 dBm (See appendix_D)	- 13 dBm	Pass
	TM3	9 kHz ~20GHz	24	<- 13 dBm (See appendix_D)	- 13 dBm	Pass
	Subtype 0	9 kHz ~20GHz	24	<- 13 dBm (See appendix_D)	- 13 dBm	Pass
	Subtype 2	9 kHz ~20GHz	24	<- 13 dBm (See appendix_D)	- 13 dBm	Pass

Table 40 BC14 Measurement Results

Channel Number	Test Mode	Test Range (Frequency)	Output Power [dBm]	Spurious Level measured [dBm]	FCC limit	Result
Channel 1225(B)	TM1	9 kHz ~20GHz	24	<- 13 dBm (See appendix_D)	- 13 dBm	Pass

	TM3	9 kHz ~20GHz	24	<- 13 dBm (See appendix_D)	- 13 dBm	Pass
	Subtype 0	9 kHz ~20GHz	24	<- 13 dBm (See appendix_D)	- 13 dBm	Pass
	Subtype 2	9 kHz ~20GHz	24	<- 13 dBm (See appendix_D)	- 13 dBm	Pass
Channel 1250(M)	TM1	9 kHz ~20GHz	24	<- 13 dBm (See appendix_D)	- 13 dBm	Pass
	TM3	9 kHz ~20GHz	24	<- 13 dBm (See appendix_D)	- 13 dBm	Pass
	Subtype 0	9 kHz ~20GHz	24	<- 13 dBm (See appendix_D)	- 13 dBm	Pass
	Subtype 2	9 kHz ~20GHz	24	<- 13 dBm (See appendix_D)	- 13 dBm	Pass
Channel 1275(T)	TM1	9 kHz ~20GHz	24	<- 13 dBm (See appendix_D)	- 13 dBm	Pass
	TM3	9 kHz ~20GHz	24	<- 13 dBm (See appendix_D)	- 13 dBm	Pass
	Subtype 0	9 kHz ~20GHz	24	<- 13 dBm (See appendix_D)	- 13 dBm	Pass
	Subtype 2	9 kHz ~20GHz	24	<- 13 dBm (See appendix_D)	- 13 dBm	Pass

6.6.5 Conclusion

The equipment **PASSED** the requirement of this clause.
 For the measurement results refer to appendix_D.

6.7 Radiated Spurious Emissions

6.7.1 Test Conditions

Table 41 Test Conditions

Preconditioning:	0.5 hour
Measured at:	enclosure
Ambient temperature:	25°C
Relative humidity:	55%
Test Configurations:	CDMA TM1 at frequency M EVDO Mode Subtype 0 and Subtype 2 at frequency M CDMA TM4 at frequency M EVDO Mode Subtype 0 and Subtype 2 at frequency M

6.7.2 Test Specifications and Limits

6.7.2.1 Specification

CFR 47 (FCC) part 2.1053 and part 24.238

6.7.2.2 Supporting Standards

Table 42 Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
ANSI/TIA-98E: 2003	Recommended Minimum Performance Standards for cdma2000 Spread Spectrum Mobile Stations.

6.7.2.3 Limits

Compliance with part 24.238, all spurious emission must be attenuated below the transmitter power by at least $43 + 10 \log_{10} P$. (Whereas P is the rated power of the EUT).

Table 43 Limits

Rated Power:	24 dBm
Required attenuation:	$43 + 10 \log_{10}(0.25) = 37$, 24 dBm – 37 dB
Absolute level	- 13 dBm

6.7.3 Test Method and Setup

A test site fulfilling the requirements of ITU-R Recommendation SM329-11 was used. The EUT was placed on a non-conducting support in the anechoic chamber and was operated from a power source via an RF filter to avoid radiation from the power leads.

According to part 24.238, the defined measurement bandwidth as following:

24.238(b) Measurement procedure: Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater.


Measurement bandwidth (RBW) for 9 kHz up to 150 kHz: 1 kHz;
 Measurement bandwidth (RBW) for 150 kHz up to 30 MHz: 10 kHz;
 Measurement bandwidth (RBW) for 30MHz up to 26.5GHz: 1MHz;

Test Set-up

Step 1:


For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, EIRP shall be measured when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in 2.1033(c)(8). Connect the EUT to the BTS simulator via the air interface.

Test the Radiated maximum output power by the Test Receiver from test antenna.

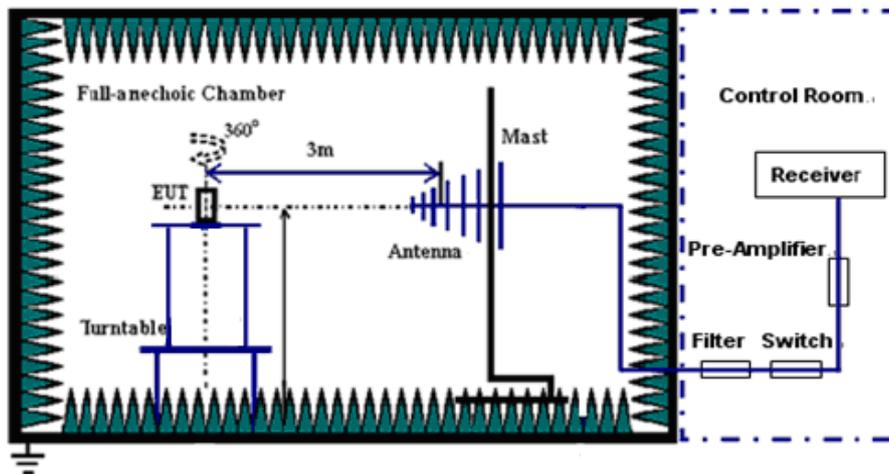

Step 2:

Use substitution method to verify the maximum output power. The EUT is substituted by a dipole antenna. The dipole is connected to a signal generator. And then adjust the output level of the signal generator to get the same received power recorded in step1 on Test Receiver, and record the power level of Signal Generator. Of course, the cable loss at the test frequency should be compensated.

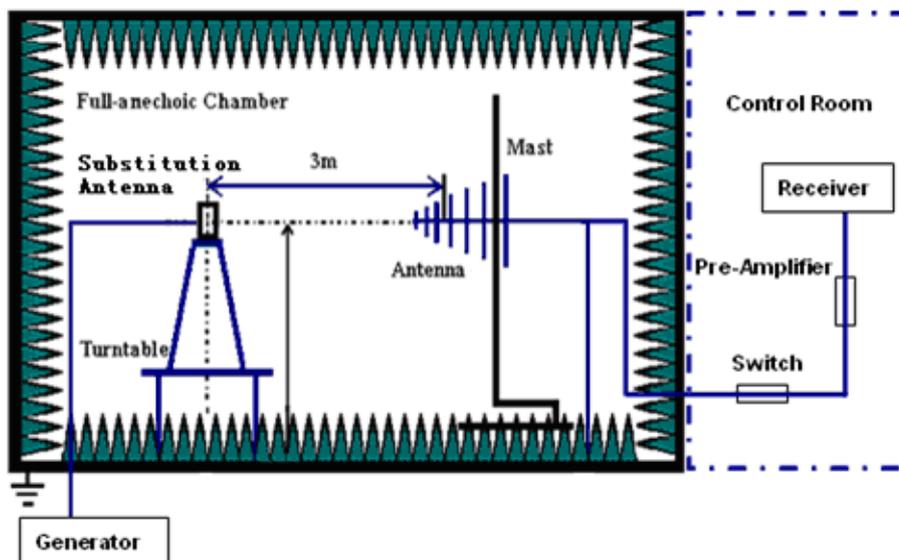

Test should be performed in normal voltage condition.



Table 44 Substitution Results

Freq. [MHz]	Measurement Value [dBm]	Substitution Antenna Type	Gain [dBd]	Cable Loss [dB]	Signal Generator Level [dBm]	Substitution Level [dBm]	FCC limit [dBm]	Result

Note: For get the E.R.P. (Efficient Radiated Power) in substitution method, the following formula should take to calculate it,

$$\text{E.R.P. [dBm]} = \text{SGP [dBm]} - \text{Cable Loss [dB]} + \text{Gain [dBd]}$$

NOTE: SGP- Signal Generator Level

6.7.4 Conclusion

The equipment **PASSED** the requirement of this clause.
For the measurement results refer to appendix_E

6.8 Frequency Stability

6.8.1 Test Conditions

Table 45 Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	See below
Relative humidity:	55 %
Test Configurations:	TM1 and TM3 at frequency M EVDO Mode Subtype 0 and Subtype 2 at frequency M TM4 and TM6 at frequency M EVDO Mode Subtype 0 and Subtype 2 at frequency M

6.8.2 Test Specifications and Limits

6.8.2.1 Specification

CFR 47 (FCC) part 2.1055 and part 24.235

6.8.2.2 Supporting Standards

Table 46 Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
ANSI/TIA-98E: 2003	Recommended Minimum Performance Standards for cdma2000 Spread Spectrum Mobile Stations.

6.8.2.3 Limits

No specific frequency stability requirement in part 2.1055 and part 24.235.

6.8.3 Test Method and Setup

The frequency stability shall be measured with variation of ambient temperature as follows:

- (1) From -30° to $+50^{\circ}$ centigrade for all equipment except that specified in subparagraphs (2) and (3) of paragraph 2.1055

(b) Frequency measurements shall be made at the extremes of the specified temperature range and at intervals of not more than 10° centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short-term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stabilizing circuitry need be subjected to the temperature variation test.

(d) The frequency stability shall be measured with variation of primary supply voltage as follows:

- (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
- (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point, which shall be specified by the manufacturer.

(3) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.

(e) When deemed necessary, the Commission may require tests of frequency stability under conditions in addition to those specifically set out in paragraphs (a), (b), (c) and (d) of this section. (For example, measurements showing the effect of proximity to large metal objects, or of various types of antennas, may be required for portable equipment.)

The EUT can only work in such extreme voltage 3.6V and 4.2V, so here the EUT is tested in the 3.6V and 4.2V.

Test Setup

Connect the EUT to the Wireless Communication test set CMU 200 via the connector. Then measure the frequency error by the Wireless Communication test set CMU 200. The EUT's output is matched with a 50 Ω load.

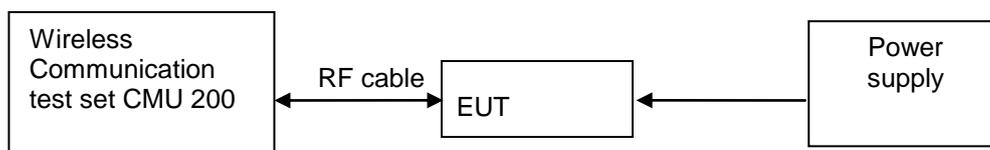


Figure 7.

Test Set up

6.8.4 Measurement Results

6.8.4.1 BC1 Measurement Results vs. Variation of Temperature

- TM1, 3.7 V DC Channel No.600(1880.0MHz)

Table 47 Measurement Results vs. Variation of Temperature—TM1

Temperature	Norminal Frequency (MHz)	Measured Frequency Error(Hz)	Result
-30 °C	1880.0	8	Pass
-20 °C	1880.0	12	Pass
-10 °C	1880.0	-15	Pass
0 °C	1880.0	-14	Pass
+10 °C	1880.0	-13	Pass
+20 °C	1880.0	-2	Pass
+30 °C	1880.0	15	Pass
+40 °C	1880.0	-19	Pass
+50 °C	1880.0	24	Pass

- TM3, 3.7V DC Channel No.600(1880.0MHz)

Table 48 Measurement Results vs. Variation of Temperature—TM3

Temperature	Norminal Frequency (MHz)	Measured Frequency Error(Hz)	Result
-30 °C	1880.0	-11	Pass
-20 °C	1880.0	-15	Pass
-10 °C	1880.0	-11	Pass
0 °C	1880.0	18	Pass
+10 °C	1880.0	18	Pass
+20 °C	1880.0	-2	Pass
+30 °C	1880.0	-16	Pass
+40 °C	1880.0	13	Pass
+50 °C	1880.0	-16	Pass

● **Subtype 0, 3.7V DC Channel No.600(1880.0MHz)**

Table 49 Measurement Results vs. Variation of Temperature—Subtype 0

Temperature	Norminal Frequency (MHz)	Measured Frequency Error(Hz)	Result
-30 °C	1880.0	-21	Pass
-20 °C	1880.0	-26	Pass
-10 °C	1880.0	-11	Pass
0 °C	1880.0	-12	Pass
+10 °C	1880.0	-9	Pass
+20 °C	1880.0	-15	Pass
+30 °C	1880.0	18	Pass
+40 °C	1880.0	-12	Pass
+50 °C	1880.0	16	Pass

● **Subtype 2, 3.7V DC Channel No.600(1880.0MHz)**

Table 50 Measurement Results vs. Variation of Temperature— Subtype 2

Temperature	Norminal Frequency (MHz)	Measured Frequency Error(Hz)	Result
-30 °C	1880.0	-11	Pass
-20 °C	1880.0	-12	Pass
-10 °C	1880.0	-13	Pass
0 °C	1880.0	11	Pass

+10 °C	1880.0	-15	Pass
+20 °C	1880.0	-3	Pass
+30 °C	1880.0	-7	Pass
+40 °C	1880.0	-15	Pass
+50 °C	1880.0	13	Pass

6.8.4.2 BC1 Measurement Results vs. Variation of Voltage

- **TM1, 25 °C ,Channel No. 600(1880.0MHz)**

Table 51 Measurement Results vs. Variation of Voltage—TM1

Voltage	Norminal Frequency (MHz)	Measured Frequency Error(Hz)	Result
+3.6 V	1880.0	24	Pass
+3.7 V	1880.0	13	Pass
+4.2 V	1880.0	26	Pass

- **TM3, 25 °C ,Channel No. 600(1880.0MHz)**

Table 52 Measurement Results vs. Variation of Voltage—TM3

Voltage	Norminal Frequency (MHz)	Measured Frequency Error(Hz)	Result
+3.6 V	1880.0	23	Pass
+3.7 V	1880.0	11	Pass
+4.2 V	1880.0	26	Pass

- **Subtype 0, 25 °C ,Channel No. 600(1880.0MHz)**

Table 53 Measurement Results vs. Variation of Voltage—Subtype 0

Voltage	Norminal Frequency (MHz)	Measured Frequency Error(Hz)	Result
+3.6 V	1880.0	13	Pass
+3.7 V	1880.0	23	Pass
+4.2 V	1880.0	25	Pass

- **Subtype 2, 25 °C ,Channel No. 600(1880.0MHz)**

Table 54 Measurement Results vs. Variation of Voltage—Subtype 2

Voltage	Norminal Frequency (MHz)	Measured Frequency Error(Hz)	Result
+3.6 V	1880.0	24	Pass
+3.7 V	1880.0	22	Pass
+4.2 V	1880.0	21	Pass

6.8.4.3 BC14 Measurement Results vs. Variation of Temperature

- TM4, 3.7 V DC Channel No.1250(1912.5MHz)

Table 55 Measurement Results vs. Variation of Temperature – TM4

Temperature	Norminal Frequency (MHz)	Measured Frequency Error(Hz)	Result
-30 °C	1912.50	-11	Pass
-20 °C	1912.50	19	Pass
-10 °C	1912.50	-2	Pass
0 °C	1912.50	-31	Pass
+10 °C	1912.50	-15	Pass
+20 °C	1912.50	-14	Pass
+30 °C	1912.50	12	Pass
+40 °C	1912.50	-11	Pass
+50 °C	1912.50	-12	Pass

● **TM6, 3.7V DC Channel No.1250(1912.5MHz)**

Table 56 Measurement Results vs. Variation of Temperature – TM6

Temperature	Norminal Frequency (MHz)	Measured Frequency Error(Hz)	Result
-30 °C	1912.50	-15	Pass
-20 °C	1912.50	-17	Pass
-10 °C	1912.50	-19	Pass
0 °C	1912.50	18	Pass
+10 °C	1912.50	8	Pass
+20 °C	1912.50	-12	Pass
+30 °C	1912.50	-13	Pass
+40 °C	1912.50	16	Pass
+50 °C	1912.50	-11	Pass

● **Subtype 0, 3.7V DC Channel No.1250(1912.5MHz)**

Table 57 Measurement Results vs. Variation of Temperature – Subtype 0

Temperature	Norminal Frequency (MHz)	Measured Frequency Error(Hz)	Result
-30 °C	1912.50	-12	Pass
-20 °C	1912.50	5	Pass
-10 °C	1912.50	-11	Pass
0 °C	1912.50	16	Pass
+10 °C	1912.50	-9	Pass
+20 °C	1912.50	11	Pass
+30 °C	1912.50	18	Pass
+40 °C	1912.50	-14	Pass
+50 °C	1912.50	6	Pass

● **Subtype 2, 3.7V DC Channel No.1250(1912.5MHz)**

Table 58 Measurement Results vs. Variation of Temperature – Subtype 2

Temperature	Norminal Frequency (MHz)	Measured Frequency Error(Hz)	Result
-30 °C	1912.50	11	Pass
-20 °C	1912.50	12	Pass
-10 °C	1912.50	-15	Pass
0 °C	1912.50	17	Pass
+10 °C	1912.50	-5	Pass

+20 °C	1912.50	-9	Pass
+30 °C	1912.50	-7	Pass
+40 °C	1912.50	-18	Pass
+50 °C	1912.50	15	Pass

6.8.4.4 Measurement Results vs. Variation of Voltage

- **TM4, 25 °C ,Channel No. 1250(1912.5MHz)**

Table 59 Measurement Results vs. Variation of Voltage—TM4

Voltage	Norminal Frequency (MHz)	Measured Frequency Error(Hz)	Result
+3.6 V	1912.50	13	Pass
+3.7 V	1912.50	12	Pass
+4.2 V	1912.50	-19	Pass

- **TM6, 25 °C ,Channel No. 1250(1912.5MHz)**

Table 60 Measurement Results vs. Variation of Voltage—TM6

Voltage	Norminal Frequency (MHz)	Measured Frequency Error(Hz)	Result
+3.6 V	1912.50	12	Pass
+3.7 V	1912.50	16	Pass
+4.2 V	1912.50	-16	Pass

- **Subtype 0, 25 °C ,Channel No. 1250 (1912.5MHz)**

Table 61 Measurement Results vs. Variation of Voltage—Subtype 0

Voltage	Norminal Frequency (MHz)	Measured Frequency Error(Hz)	Result
+3.6 V	1912.50	14	Pass
+3.7 V	1912.50	-11	Pass
+4.2 V	1912.50	13	Pass

- **Subtype 2, 25 °C ,Channel No. 1250 (1912.5MHz)**

Table 62 Measurement Results vs. Variation of Voltage—Subtype 2

Voltage	Norminal Frequency (MHz)	Measured Frequency Error(Hz)	Result
---------	-----------------------------	---------------------------------	--------



+3.6 V	1912.50	15	Pass
+3.7 V	1912.50	27	Pass
+4.2 V	1912.50	23	Pass

6.8.5 Conclusion

The equipment **PASSED** the requirement of this clause.

7 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

Table 63 System Measurement Uncertainty

Items		Extended Uncertainty
Effective Radiated Power of Transmitter	EIRP (dBm)	U=3dB; k=2
Band Width	Magnitude (%)	U=0.2%; k=2
Band Edge Compliance	Disturbance Power (dBm)	U=2.0dB; k=2
Conducted Spurious Emission at Antenna Terminal	Disturbance Power (dBm)	U=2.0dB; k=2
Frequency Stability	Frequency Accuracy(ppm)	U=0.21ppm; k=2
Field Strength of Spurious Radiation	ERP(dBm)	U=3dB; k=2
Conducted Output Power	Power(dBm)	U=0.39dB; k=2
Conducted Emission at Power Port	Disturbance Voltage (dB μ V)	U=4dB; k=2
Radiated Emission of enclosure at ideal mode	Field strength (dB μ V/m)	U=5dB; k=2



8 Appendixes

Appendix A	Measurement Results Modulation Characteristics	14 pages
Appendix B	Measurement Results Occupied Bandwidth	26 Pages
Appendix C	Measurement Results Band Edges	26 Pages
Appendix D	Measurement Results Spurious Emission at Antenna Terminal	110 Pages
Appendix E	Measurement Results Radiated Spurious Emissions	26 Pages
Appendix F	Photos of Radiated Spurious Emissions	14 Pages