



EMC Test Report

Product Name: Wireless Module

Model Number: MC703

Report No: SYBHZ(R)E021102009EB-1

FCC ID: QISMC703

Reliability Laboratory of Huawei Technologies Co., Ltd.

Huawei Base, Bantian, Longgang District, Shenzhen 518129, P.R. China

Tel: +86 755 28780808 Fax: +86 755 89652518

Notice 1

1. The laboratory has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS), and accreditation number: L0310.
2. The laboratory has obtained the accreditation of THE AMERICAN ASSOCIATION FOR LABORATORY ACCREDITATION (A2LA), and Accreditation Council Certificate Number: 2174.01.
3. The laboratory has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements. The site recognition number is 97456.
4. The laboratory has been listed by industry Canada to perform electromagnetic emission measurement. The site recognition number is 6369A-1.
5. The laboratory also has been listed by the VCCI to perform EMC measurements. The accreditation number is R2364, C2583, and T256.
6. The test report is invalid if not marked with "exclusive stamp for the test report".
7. The test report is invalid if not marked with the stamps or the signatures of the persons responsible for performing, revising and approving the test report.
8. The test report is invalid if there is any evidence of erasure and/or falsification.
9. If there is any dissidence for the test report, please file objection to the test centre within 15 days from the date of receiving the test report.
10. Normally, the test report is only responsible for the samples that have undergone the test.
11. Context of the test report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of the laboratory.

Notice 2

Modification Information:

Table 1 Modification Information

Modification Information	1	
	2	
	3	<i>Not Applicable!</i>
	4	
	5	
	6	
	7	

REPORT ON	Wireless Module
	M/N: MC703
REGULATION	FCC CFR47 Part 15: Subpart B; FCC CFR47 Part 22: Subpart H; FCC CFR47 Part 24: Subpart E;
START OF TEST	Sep.10, 2009
END OF TEST	Sep.20, 2009
Final Judgement:	Pass

Approver

2009-10-16
Date

张兴海
Name

Signature



Operator

2009-10-15
Date

张 飞
Name

Signature

张 飞

REPORT BODY CONTENT

1	Status	6
1.1	Product Information	6
1.2	Applied Standard	6
1.3	Test Site	7
1.4	Test environment condition	7
2	Summary of Results	8
3	Equipment Specification	9
3.1	General Description	9
3.2	Sub-Assembly Identity	9
4	System Configuration during EMC Test	10
4.1	Cables Used during Test	10
4.2	Associated Equipment Used during Test	10
4.3	Test Configurations and Test Mode	10
4.4	Test conditions and test Connections	10
5	Electromagnetic Interference (EMI)	12
5.1	Radiated Disturbance 30MHz to 18000MHz	12
5.2	Conducted Disturbance 0.15 MHz to 30MHz	13
5.3	Radiated Spurious Emissions	13
6	Main Test Instruments	16
7	System Measurement Uncertainty	17
8	Graph and Data of Emission Test	18
8.1	Radiated Disturbance	18
8.2	Conducted Disturbance	20
8.3	Radiated Spurious Emission	21

1 Status

1.1 Product Information

CLIENT: Huawei Technologies Co., Ltd.
ADDRESS: Bantian Longgang District Shenzhen, P.R. China
MANUFACTURING DESCRIPTION Wireless Module
MANUFACTURERS MODEL NUMBER MC703

1.2 Applied Standard

FCC Measurement Specification	FCC Limits Part(s)	Description	Result
-	15.107	Conducted Emission at Power Port	PASS
-	15.109	Radiated Emission of Enclosure in Idle Mode	PASS
2.1051	22.917&24.238	Radiated Spurious Emission	PASS

1.3 Test Site

Site 1:
RELIABILITY LABORATORY OF HUAWEI TECHNOLOGIES CO., LTD

1.4 Test environment condition

Ambient temperature	20~25℃
Relative humidity	40%~52%
Atmospheric pressure	101kPa

2 Summary of Results

Table 2 below shows a brief summary of the results obtained.

Table 2 Summary of results

EUT Classification: Wireless Equipment				
Test Items	Test Configuration & Test Mode	Required Performance Criteria	Result	Site
<u>Radiated Emissions</u> Enclosure Port	TC1 (TM5~TM8)	N/A	Pass	Site1
<u>Conducted Emissions</u>	TC1 (TM1~TM8)	N/A	Pass	Site1
<u>Radiated Spurious Emissions</u> Enclosure Port	TC1 (TM1~TM4)	N/A	Pass	Site1
Note: 1, Measurement taken is within the measurement uncertainty of measurement system. 2, TC = Test configuration 3, NT=no test. Because of not containing devices susceptible to magnetic fields, the EUT has been exempt from immunity test of power frequency magnetic field.				

3 Equipment Specification

3.1 General Description

MC703 are CDMA Wireless Module is subscriber equipment in the CDMA and CDMA2000 1xEV-DO Rev. A system. It's operated in Band Class 0 (800MHz) and band class 1 (1900MHz). The Wireless Module implements such functions as RF signal receiving / Transmitting, CDMA protocol processing, data etc. For the Band Class 0 the TX is 824.025MHz-848.985MHz and the RX 869.026MHz-893.985MHz. For the Band Class 1 the TX is 1850MHz-1910MHz, the RX is 1930MHz-1990MHz. Externally it provides board to board interface for twice exploitation, antenna interface.

3.1.1 Main Equipment Technical Data

Description:	Wireless Module
Models:	MC703
Input Rated Voltage:	3.8V DC
Rated Power:	Normal 3W ,Max 8 W
Dimensions:	31±0.20 mm x 45±0.20 mm x 5±0.20 mm
Weight:	About 9.5g

Table 3 Sub-Assembly Identity

Mode		Work Frequency	
		Transmitt Frequency(MHz)	Receive Frequency (MHz)
CDMA	CDMA 800	824.025MHz~848.985MHz	869.026MHz~893.985MHz
	CDMA 1900	1850MHz ~1910MHz	1930MHz ~1990MHz

3.2 Sub-Assembly Identity

Table 4 Sub-Assembly Identity

Board			
Model Name	Qty.	Serial Number	Description
MG12MCPUC	1	731052102147	Centre Processing Unit
Accessory			
Name	Qty.	Serials number	Description

4 System Configuration during EMC Test

The Equipment under Test (EUT) was functioning correctly during all tests. The EUT was installed within the test site and was configured to simulate a typical user installation.

4.1 Cables Used during Test

Table 5 Cable Used during Test

Port	Connector	Type of Cable
PCI-E	PCI-E	N/A

4.2 Associated Equipment Used during Test

Table 6 Associated Equipment Used during Test

Name	Model	Manufacturer	S/N	Cal Date
Radio Communication Tester	CMU200	R&S	108522	2008-10-22
Interface Processing Unit	MC03MIPU	huawei		
Antenna	Linear	huawei		

4.3 Test Configurations and Test Mode

4.3.1 Test Configuration.

The EUT will be connected to test system (Base Station Simulator) in order to simulate normal operating conditions (with reference to the guidance given in the standard for this type of equipment).

Table 7 Configuration table

Test configuration	Test mode
TC1	TM1~TM8

TC1: EUT was powered by a demo board, which is connected to the notebook by USB port.

4.3.2 Test Mode

There were 8 test Modes. TM1 to TM8 were shown below:

TM1: operate in traffic mode CDMA800;

TM2: operate in traffic mode 1xEV-DO Rev. A 800;

TM3: operate in traffic mode CDMA 1900;

TM4: operate in traffic mode 1xEV-DO Rev. A 1900;

TM5: operate in idle mode CDMA800;

TM6: operate in idle mode 1xEV-DO Rev. A 800;

TM7: operate in idle mode CDMA1900;

TM8: operate in idle mode 1xEV-DO Rev. A 1900;

4.4 Test conditions and test Connections

4.4.1 Test Conditions

The EUT will be connected to test system (Base Station Simulator) in order to simulate normal operating conditions (with reference to the guidance given in the standard for this type of equipment).

4.4.2 Test Connections

Traffic Mode:

The EUT is required to be in the traffic mode, a call is set up according to the generic call set up procedure and enter the EUT into loop back test mode.(see clause 1.3 in 3GPP2 C.S0011-A). and the following conditions shall be met:

The EUT shall be commanded to operate at maximum transmit power 24dBm;

The "variable Data Rate Transmission" shall be disabled;

The Fixed terminal shall be set for maximum data transmission rate.

Assign channel frequency to an appropriate channel number, For MC703 the channel numbers is set to 283 (Transmit frequency 833.49MHz), to 575 (Transmit frequency 1878.75 MHz)here.

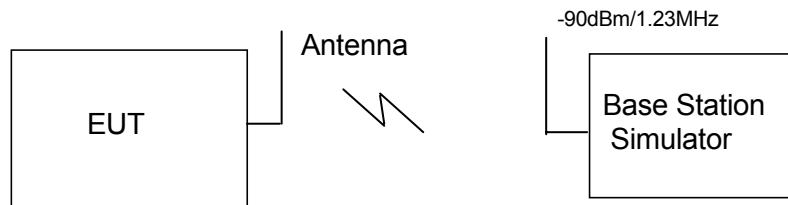


Figure 1. Test Configuration

Idle Mode:

The EUT will be connected to test system (Base Station Simulator) in order to simulate normal operating conditions (with reference to the guidance given in the standard for this type of equipment)

When the EUT is required to be in the idle mode, then the following conditions shall be met:

Enable the receiver for CDMA-only mode;

The test system shall simulate a Base Station with the Paging Channel or the Quick Paging Channel or Forward Common Control Channel/Broadcast Control Channel on one carrier. The Base Station Simulator shall be synchronized and be able to respond to paging messages. The fixed terminal shall not initiate a call (originated call), re-registration, or message transmission.

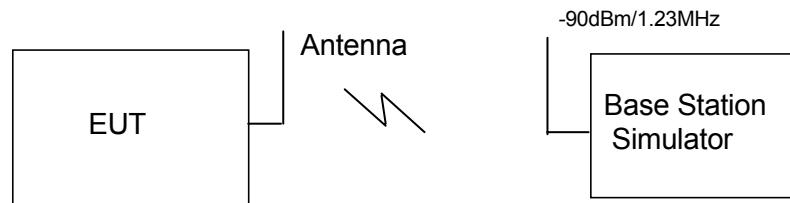


Figure 2. Test Configuration

5 Electromagnetic Interference (EMI)

5.1 Radiated Disturbance 30MHz to 18000MHz

5.1.1 Test Procedure

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.4 (2003). The test distance was 3m. The EUT was set-up on insulator 80cm above the Ground Plane. The set-up and test methods were according to ANSI C63.4. The Radiated Disturbance measurements were made using a Rohde and Schwarz ESMI Test Receiver and control software ES-K1.

A preliminary scan and a final scan of the emissions were made from 30 MHz to 18GHz by using test script of software; the emissions were measured using a Quasi-Peak Detector. The maximal emission value was acquired by adjusting the antenna height, polarisation and turntable azimuth in accordance with the software setup. Normally, the height range of antenna was 1m to 4m, the azimuth range of turntable was 0° to 360°, The receive antenna has two polarizations V and H.

Huawei Mobile Station was communicated with the BTS simulator through Air interface. The Mobile Station operated on the typical channel and the Mobile Station worked in idle mode, transmitter was not work in this test.

EUT was configured in idle mode and the test performed at worst emission state.

Measurement bandwidth: 30 MHz – 1000 MHz: 120 k Hz

Measurement bandwidth: 1GHz – 18GHz: 1MHz

Test set up figure:

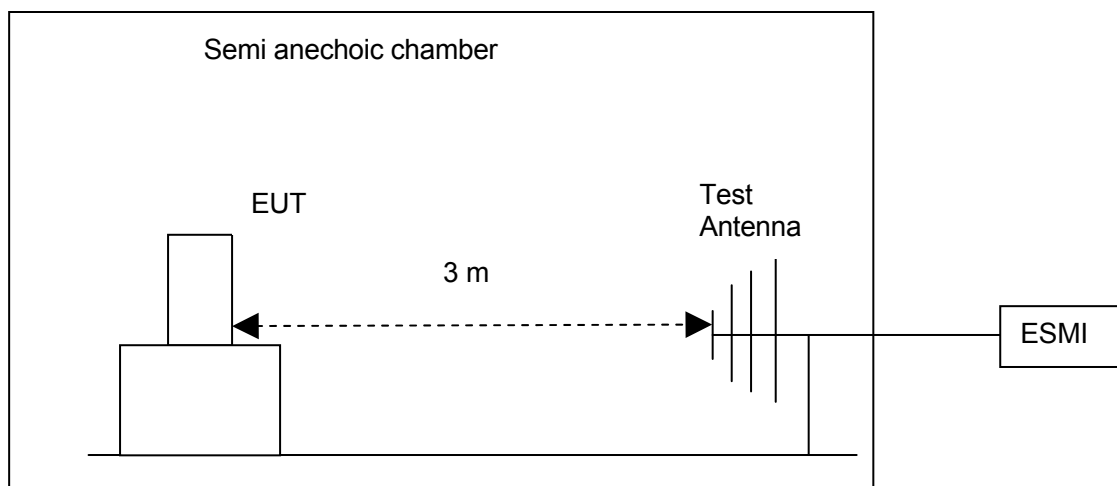


Figure 3. Test set-up

5.1.2 Test Results

The EUT has met the requirements for Radiated Emission of enclosure port.

Table 8 Test Limits

Frequency of Emission (MHz)	Radiated Limit
-----------------------------	----------------

	Unit($\mu\text{V}/\text{m}$)	Unit($\text{dB}\mu\text{V}/\text{m}$)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

5.2 Conducted Disturbance 0.15 MHz to 30MHz

5.2.1 Test Procedure

The Table-top EUT was placed upon a non-metallic table 0.8 m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.4: 2003.

Conducted Disturbance at AC Port measurements were undertaken on the L and N Lines. The emissions were measured using a Quasi-Peak Detector and Average Detector.

Huawei Mobile Station was communicated with the BTS simulator through Air interface, the BTS simulator controls the Mobile Station to transmitter the maximum power which defined in specification of product. The Mobile Station operated on the typical channel.

Measurement bandwidth (RBW) for 150kHz to 30 MHz: 9 kHz;

Test Set-up figure:

The Mobile Station was setup in the screened chamber and operated under nominal conditions.

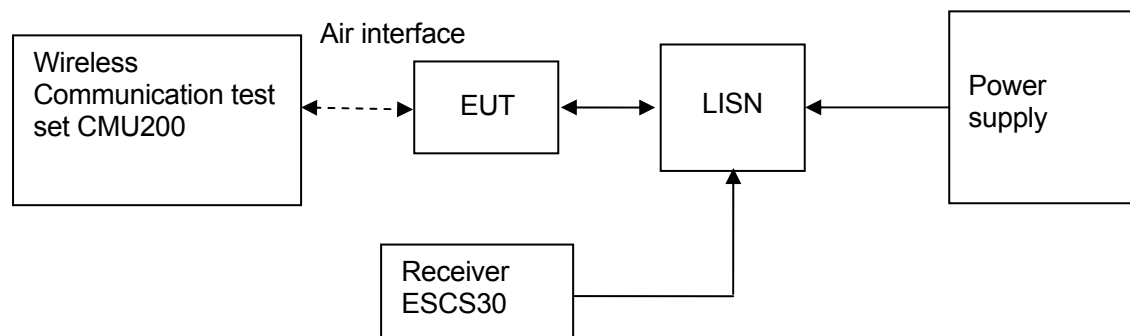


Figure 4. Test Set-up

5.2.2 Test Results

The EUT has met requirements for Conducted disturbance of power lines.

Table 9 Test Limit of DC&AC Power Port

Frequency range	150kHz~ 30MHz	
Classification	Class B	
Limit(Class B)	Voltage limits	
	QP	AV
0.15MHz~0.5MHz	66~56 $\text{dB}\mu\text{V}$	56~46 $\text{dB}\mu\text{V}$
0.5MHz~5MHz	56 $\text{dB}\mu\text{V}$	46 $\text{dB}\mu\text{V}$
5MHz~30MHz	60 $\text{dB}\mu\text{V}$	50 $\text{dB}\mu\text{V}$

5.3 Radiated Spurious Emissions

5.3.1 Test Procedure

22.917(b) Measurement procedure: Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater.

Measurement bandwidth (RBW) for 9 kHz up to 150 kHz: 1 kHz;
Measurement bandwidth (RBW) for 150 kHz up to 30 MHz: 10 kHz;
Measurement bandwidth (RBW) for 30 MHz up to 1 GHz: 100 kHz;
Measurement bandwidth (RBW) for 1GHz up to 18 GHz: 1MHz;

Table 10 Radiated Spurious Emissions Limits

Frequency band	Minimum requirement (E.R.P) traffic mode
30MHz~18GHz	-13dBm

According to part 24.238, the defined measurement bandwidth as following:

24.238 (b) Measurement procedure: Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater.

Measurement bandwidth (RBW) for 9 kHz up to 150 kHz: 1 kHz;
Measurement bandwidth (RBW) for 150 kHz up to 30 MHz: 10 kHz;
Measurement bandwidth (RBW) for 30 MHz up to 26.5 GHz: 1 MHz;

Table 11 Radiated Spurious Emissions Limits

Frequency band	Minimum requirement (E.R.P) traffic mode
30MHz~26.5GHz	-13dBm

5.3.2 Test Results

The EUT has met the requirements of FCC Part22/24requirement.

6 Main Test Instruments

Table 12 Main Test Equipments

Test item	Test Instrument	Model	Manufacturer	Cal-Date	Cal Interval (month)
RE	EMI Test receiver	ESMI	R&S	April.22, 2009	12
	Broadband Antenna	CBL 6112B (2536)	SCHAFFNER	Jun.08, 2009	12
CE	EMI Test receiver	ESCS30	R&S	April.22, 2009	12
	Artificial Mains Network	ENV4200	R&S	May.12, 2009	12
RSE	EMI Test receiver	ESIB26	R&S	May.30, 2009	12
	Horn Antenna	3117	ETS-LINDGREN	Jul.16, 2009	12
	Broadband Antenna	CBL6112B (2747)	SCHAFFNER	Oct.17,2008	12
	Horn Antenna	3160	ETS-LINDGREN	Sep.27,2008	12
Software Information					
Test Item	Software Name	Manufacturer		Version	
RE/CE	ES-K1	R&S		1.7.1	
RSE	EMC32	R&S		V5.10.99	

7 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:


Table 13 System Measurement Uncertainty

Items		Extended Uncertainty
RE	Field strength (dB μ V/m)	U=4.6dB; k=2(30MHz-1GHz)
RSE	ERP (dBm)	U=2.2dB; k=2
CE	Disturbance Voltage(dB μ V)	U=3.3dB; k=2

8 Graph and Data of Emission Test

8.1 Radiated Disturbance


This test was carried out in all the test modes, but only the worst test result was shown.

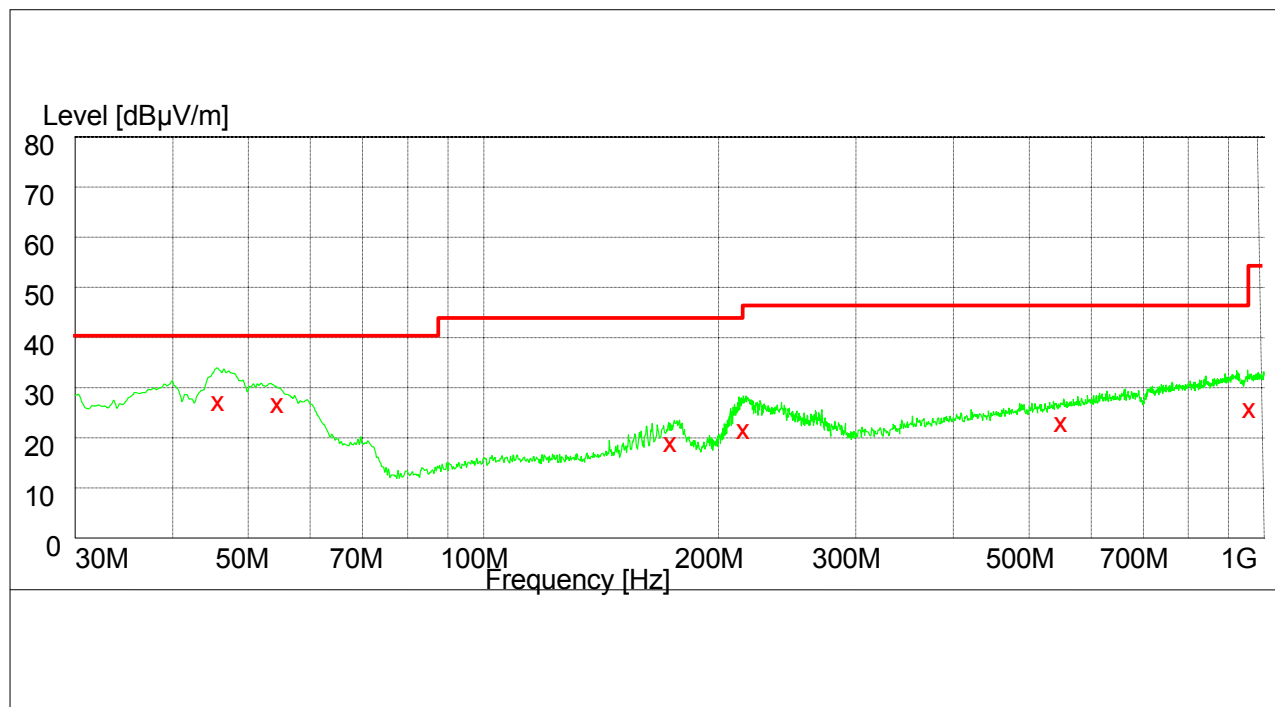

MEASUREMENT RESULT: QP Detector

Frequency (MHz)	Level (dBμV/m)	Transd (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Polarisation
45.600000	30.50	-14.4	40.0	9.5	107.0	300.00	VERTICAL
101.340000	17.90	-15.7	40.0	22.1	219.0	0.00	HORIZONTAL
176.460000	30.30	-14.0	43.5	13.2	238.0	0.00	HORIZONTAL
285.780000	22.40	-10.4	46.0	23.6	100.0	22.00	HORIZONTAL
549.000000	19.80	-4.8	46.0	26.2	254.0	117.00	VERTICAL
989.660000	22.50	-1.3	54.0	31.5	252.0	171.00	VERTICAL

1GHz-18GHz

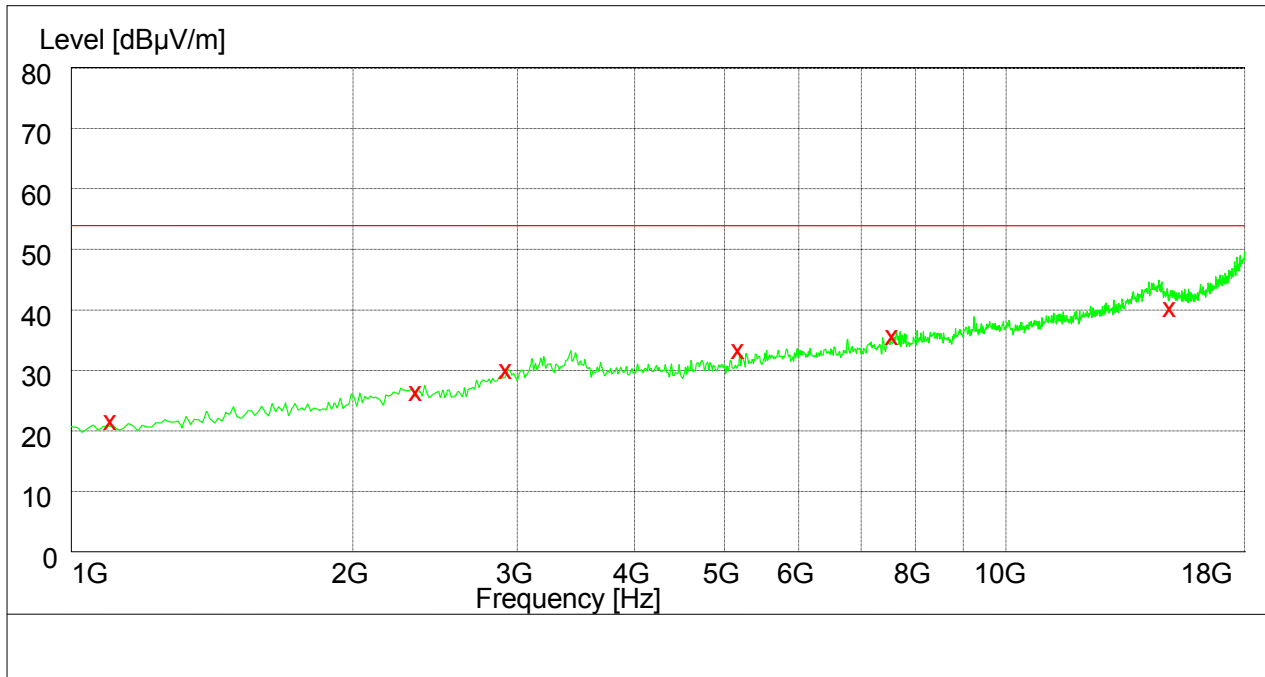


MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Height cm	Azimuth deg	Polarisation
1108.500000	21.90	-15.9	54.0	32.1	129.0	90.00	HORIZONTAL
2379.000000	28.80	-10.0	54.0	25.2	150.0	273.00	HORIZONTAL
2909.500000	30.50	-7.6	54.0	23.5	148.0	13.00	HORIZONTAL
5061.500000	33.00	-1.4	54.0	21	148.0	170.00	HORIZONTAL
7510.000000	37.40	4.1	54.0	16.6	139.0	224.00	VERTICAL
15995.500000	40.20	17.3	54.0	13.8	100.0	110.00	HORIZONTAL

8.2 Conducted Disturbance

This test was carried out in all the test modes, but only the worst test result was shown.

8.2.1 AC Power Port Test Data

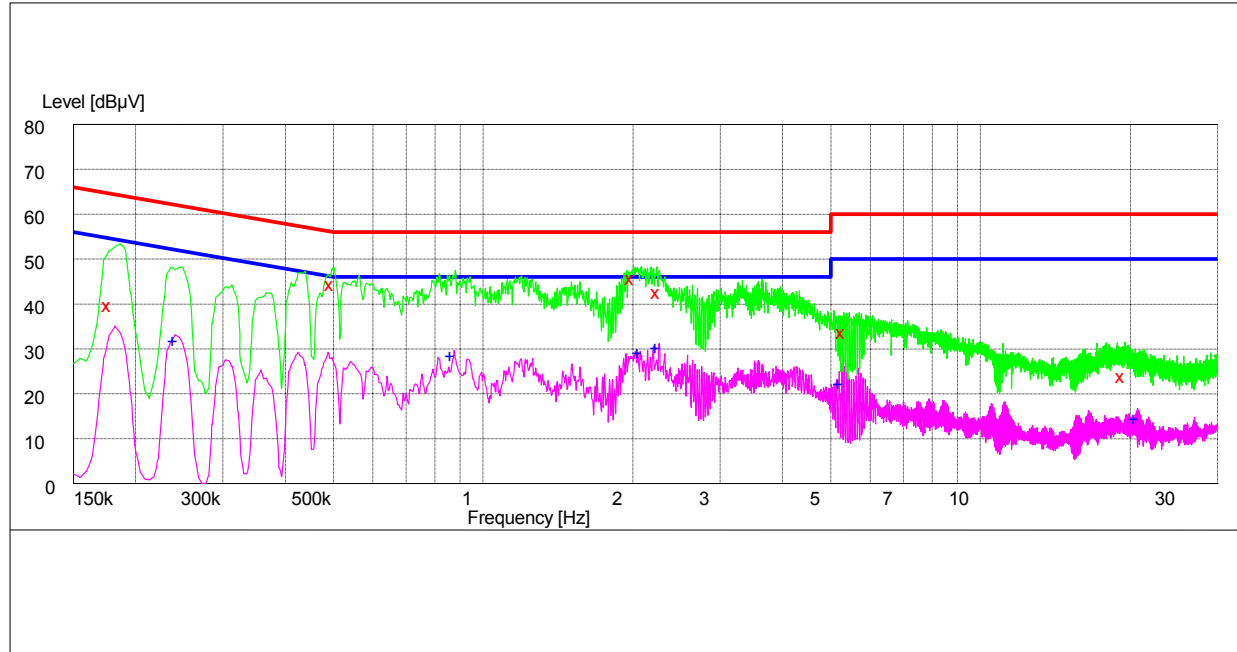

MEASUREMENT RESULT: QP Detector

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.177000	40.4	10.1	65	24.6	N	FLO
0.496500	45.1	10	56	10.9	L3	FLO
1.995000	46.4	10.1	56	9.6	L3	FLO
2.247000	43.4	10.1	56	12.6	L3	FLO
5.293500	34.5	10.2	60	25.5	N	FLO
19.333500	24.7	10.3	60	35.3	L3	FLO


MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.240000	32.5	10.1	52	19.5	L3	FLO
0.865500	29.1	10	46	16.9	L3	FLO
2.067000	29.8	10.1	46	16.2	L3	FLO
2.242500	30.8	10.1	46	15.2	L3	FLO
5.230500	22.8	10.2	50	27.2	L3	FLO
20.557500	15	10.3	50	35	L3	FLO


8.3 Radiated Spurious Emission

8.3.1 For CDMA800


Traffic Mode (9kHz-30MHz)

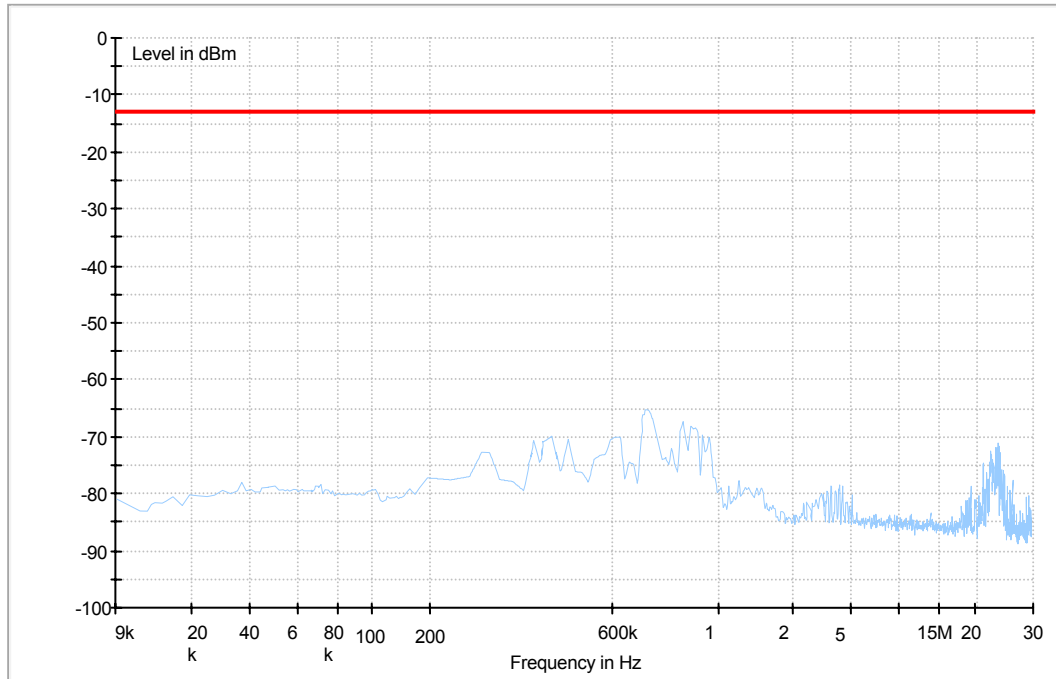

Traffic Mode (30MHz-2GHz)

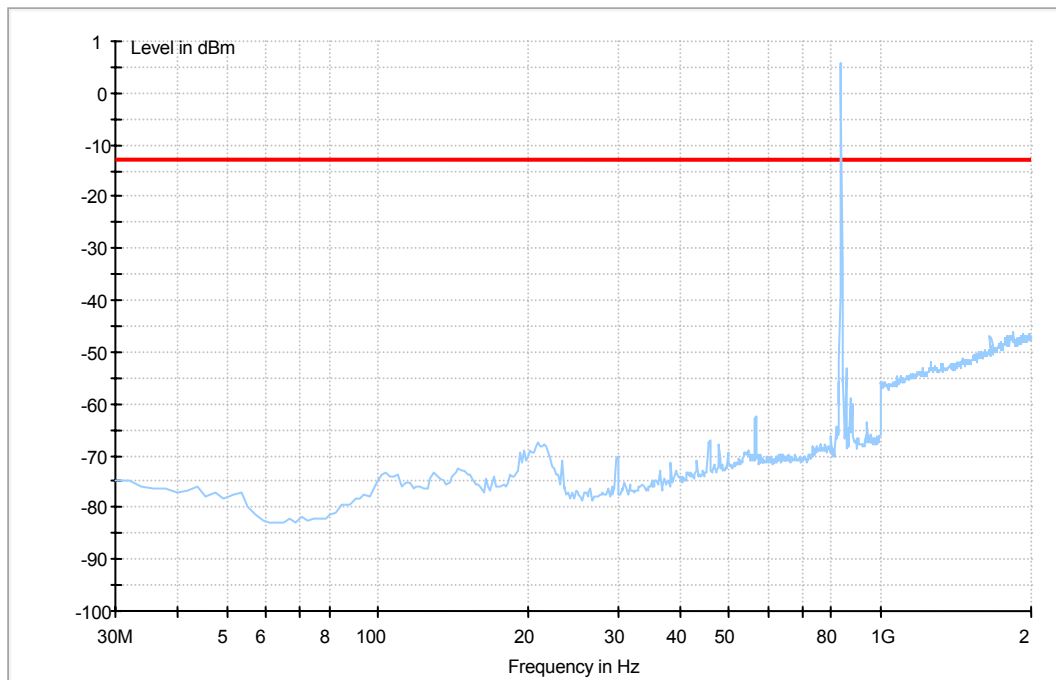


Traffic Mode (2GHz-18GHz)

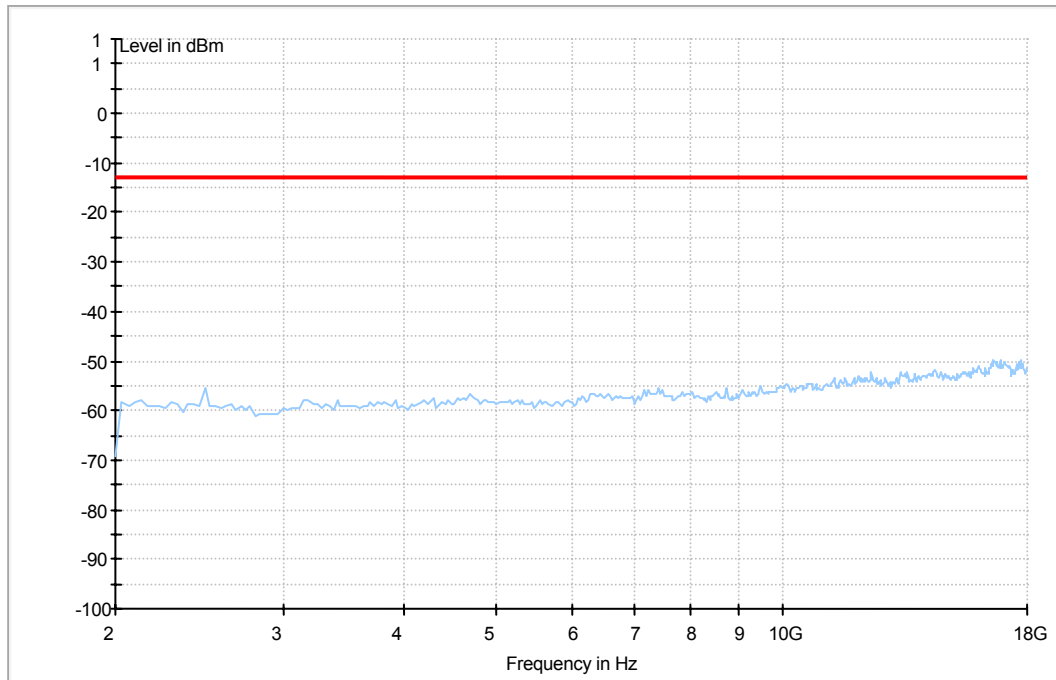


8.3.2 For EV-DO Rev. A 800


Traffic Mode (9kHz-30MHz)

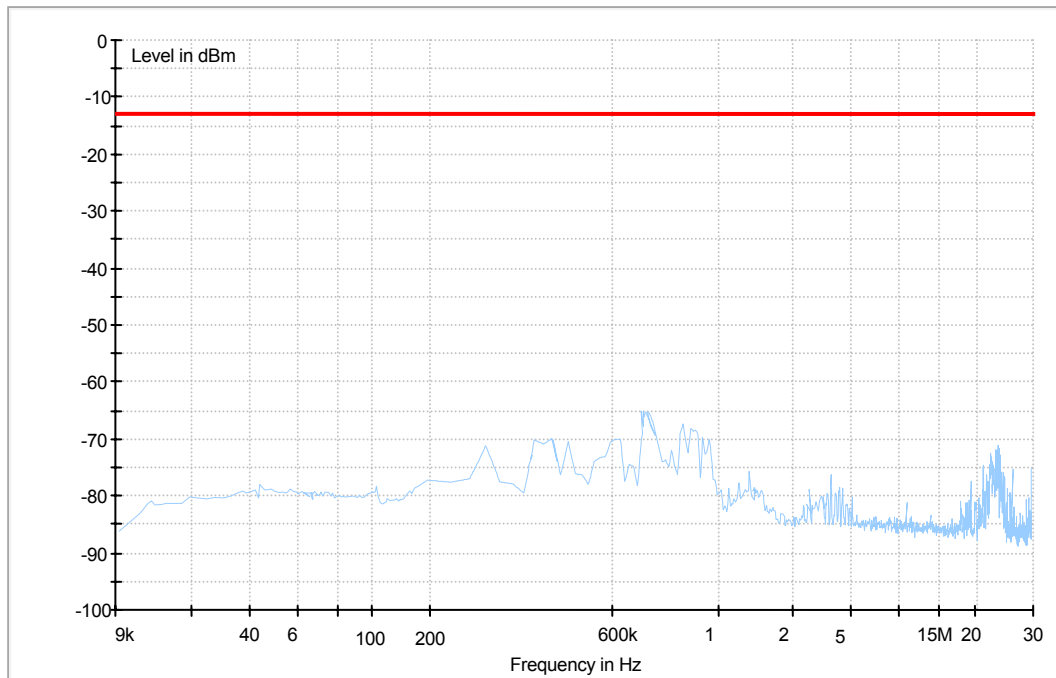


Traffic Mode (30MHz-2GHz)

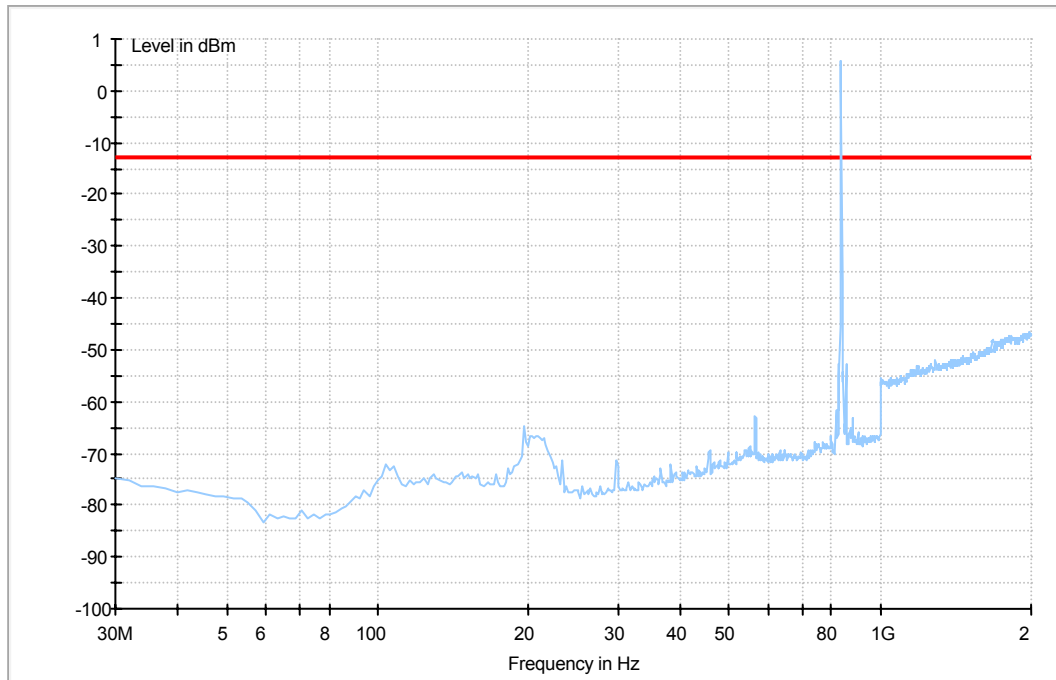

Traffic Mode (2GHz-18GHz)

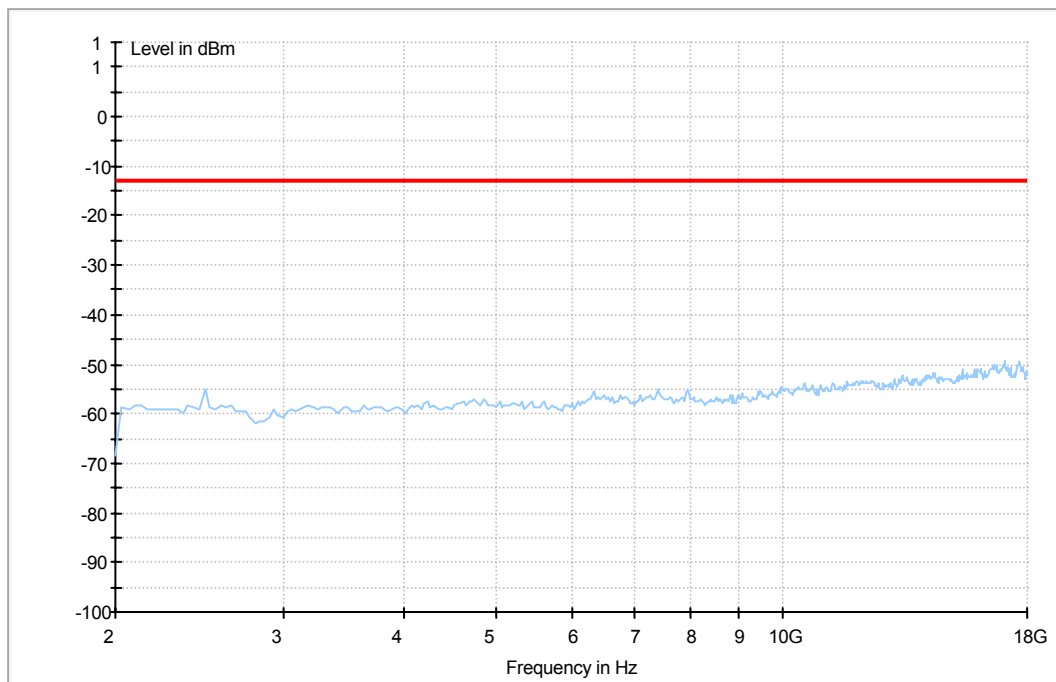


Traffic Mode (18GHz-26.5GHz)

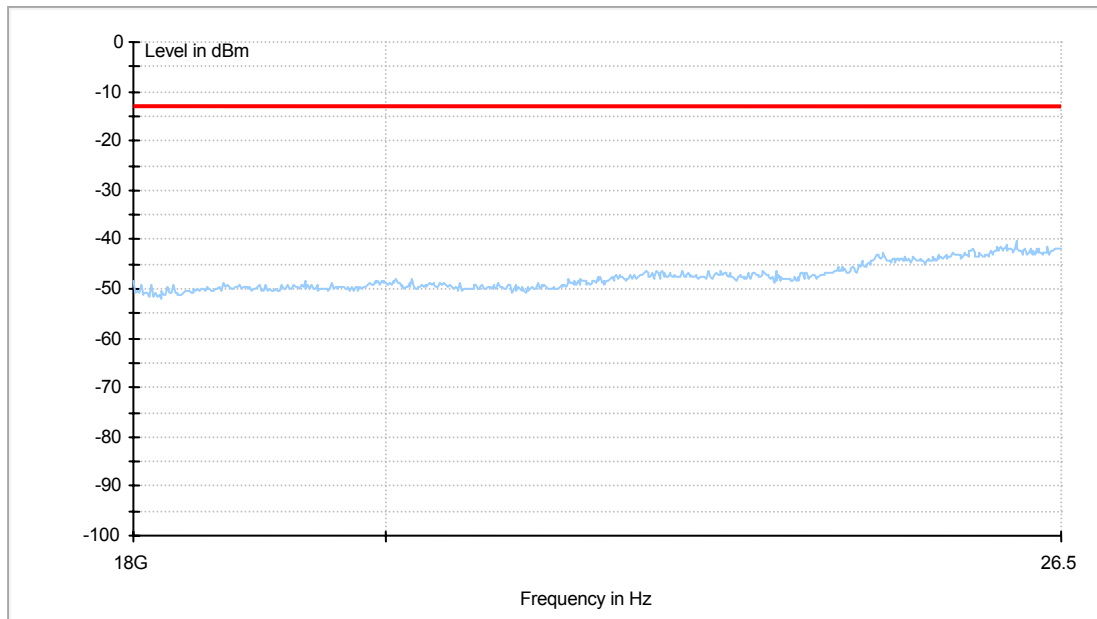


8.3.3 For CDMA 1900


Traffic Mode (9kHz-30MHz)

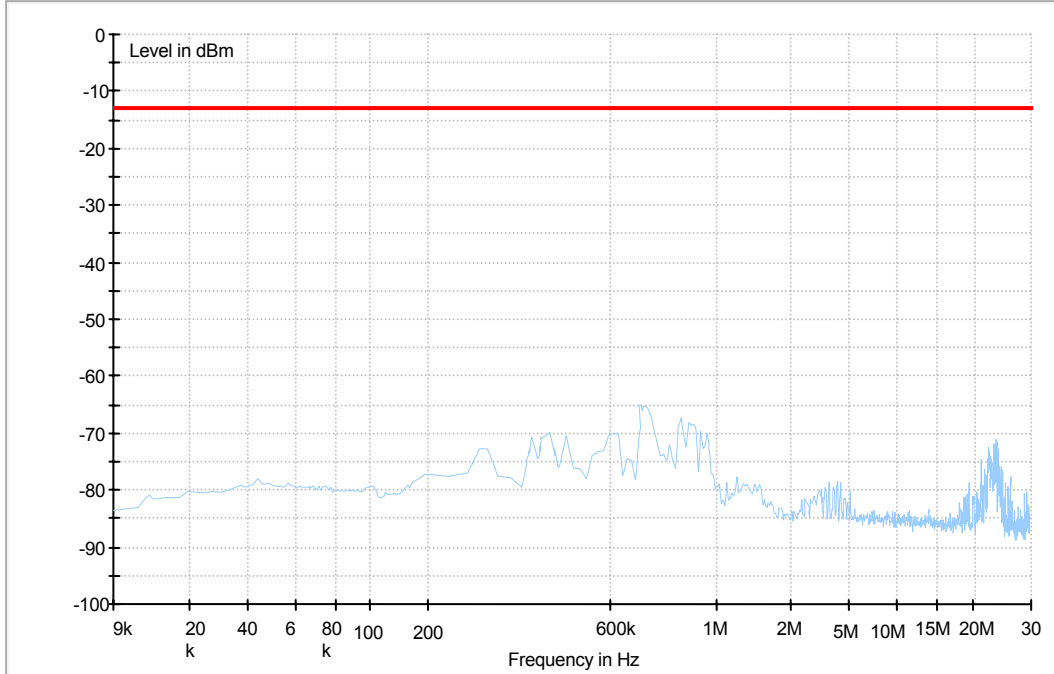


Traffic Mode (30MHz-2GHz)

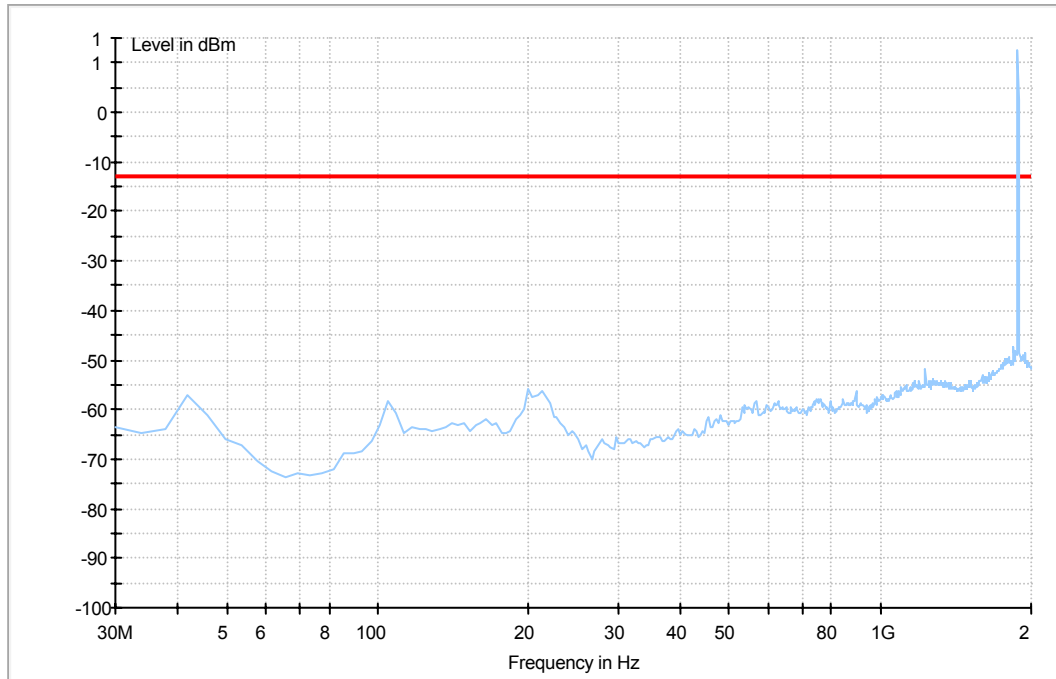

Traffic Mode (2GHz-18GHz)

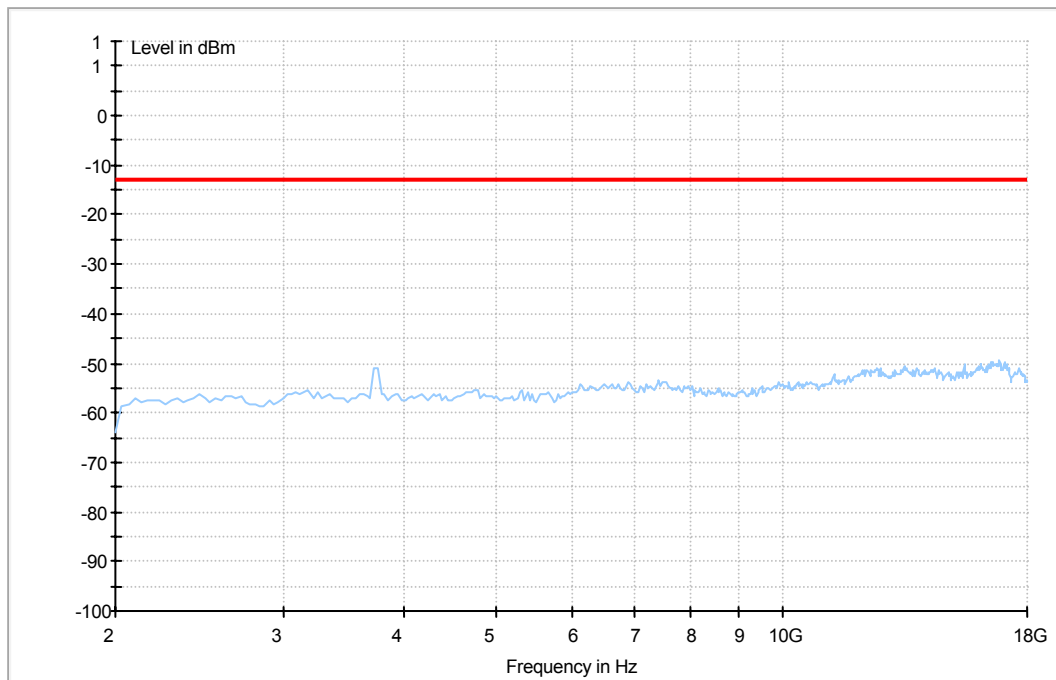


Traffic Mode (18GHz-26.5GHz)

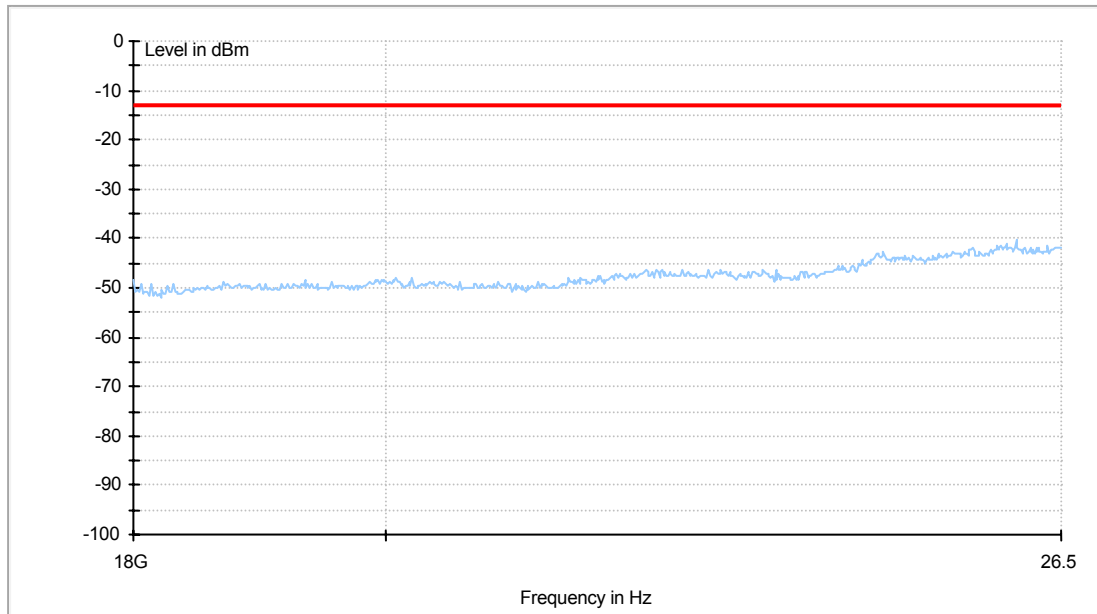


8.3.4 For EV-DO Rev. A 1900


Traffic Mode (9kHz-30MHz)

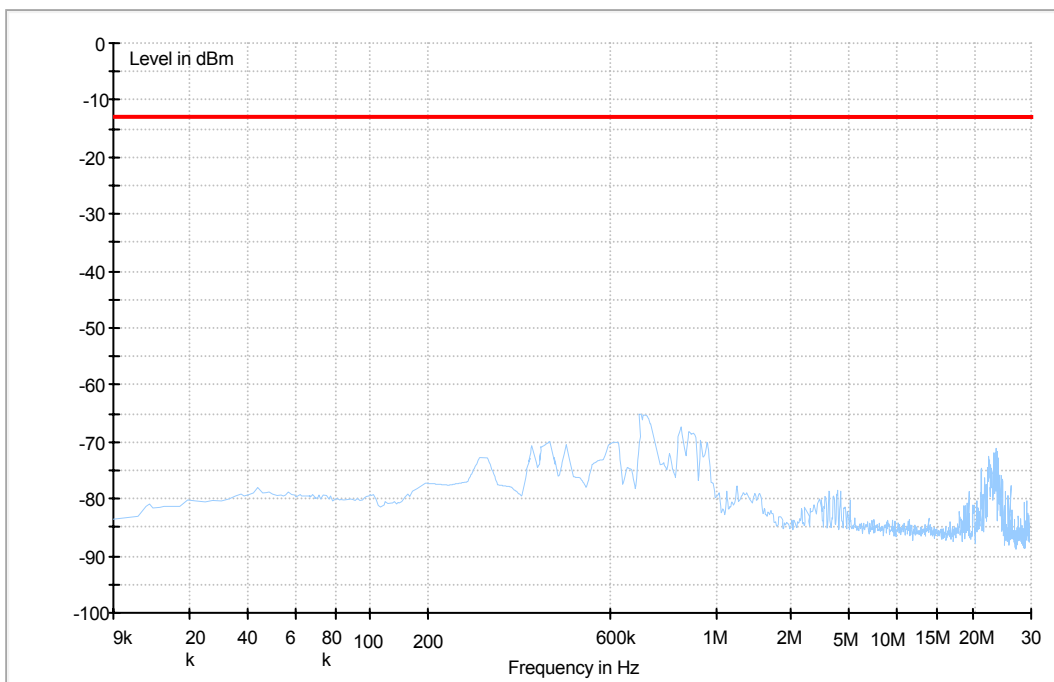


Traffic Mode (30MHz-2GHz)

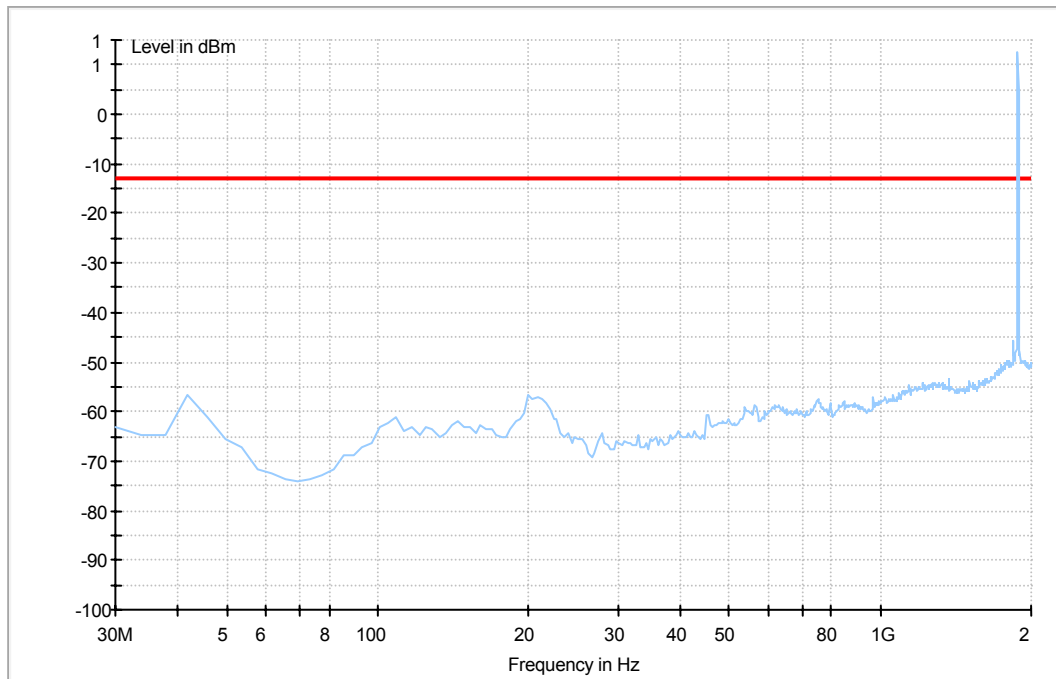

Traffic Mode (2GHz-18GHz)

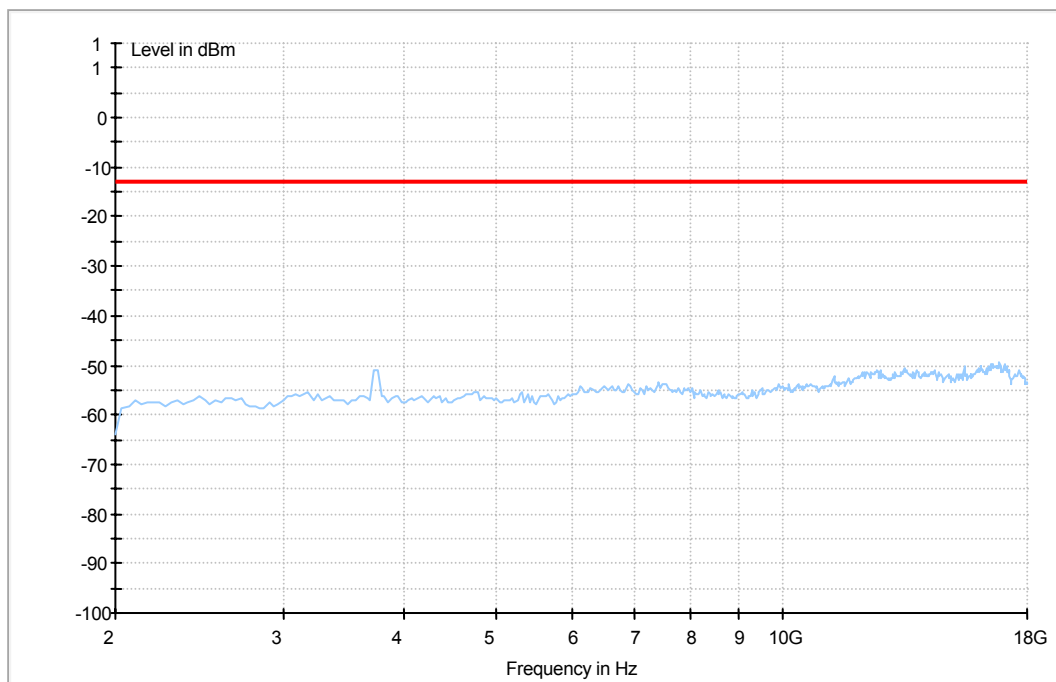

Traffic Mode (18GHz-26.5GHz)

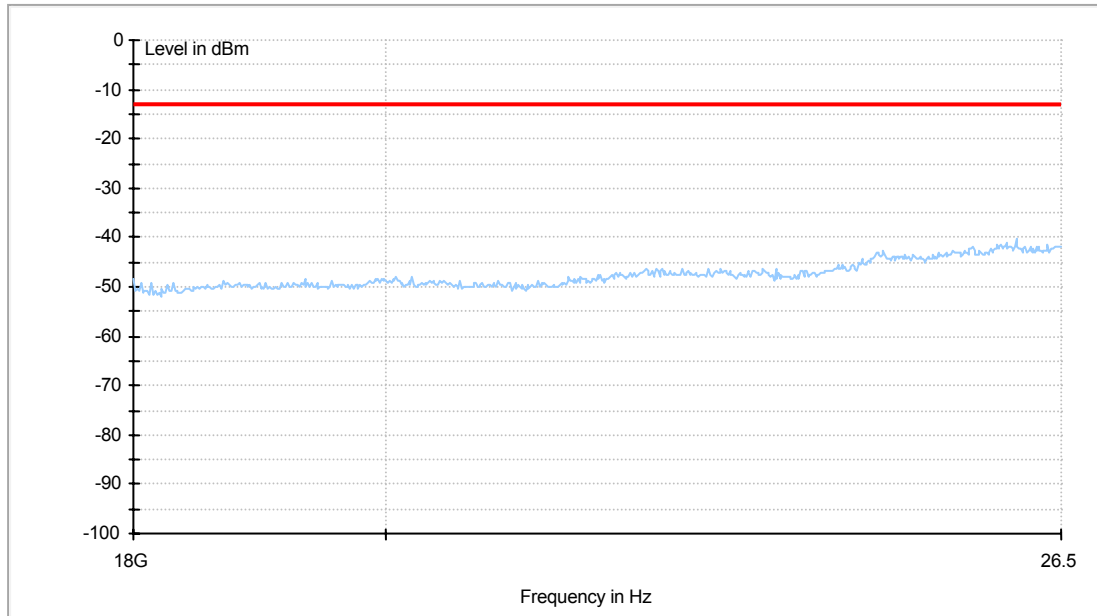

END