



FCC RF Test Report

Product Name: HSPA+ Module

Model Number: MU739

Report No: SYBH(Z-RF)021092011-2001

FCC ID: QISMU739

Reliability Laboratory of Huawei Technologies Co., Ltd.

Huawei Base, Bantian, Longgang District, Shenzhen 518129, P.R. China

Tel: +86 755 28780808 Fax: +86 755 89652518

Notice

1. The laboratory has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS), and accreditation number: L0310.
2. The laboratory has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements. The site recognition number is 97456.
3. The laboratory has been listed by industry Canada to perform electromagnetic emission measurement. The site recognition number is 6369A-2.
4. The test report is invalid if not marked with "exclusive stamp for the test report".
5. The test report is invalid if not marked with the stamps or the signatures of the persons responsible for performing, revising and approving the test report.
6. The test report is invalid if there is any evidence of erasure and/or falsification.
7. If there is any dissidence for the test report, please file objection to the test centre within 15 days from the date of receiving the test report.
8. Normally, the test report is only responsible for the samples that have undergone the test.
9. Context of the test report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of the laboratory.



Notice 2

Modification Information:

Table 1 Modification Information

Modification Information	1	
	2	
	3	<i>Not Applicable!</i>
	4	
	5	
	6	
	7	



REGULATION	FCC CFR47 Part 2: Subpart J;
	FCC CFR47 Part 22: Subpart H;
START OF TEST	Sep.20, 2011
END OF TEST	Sep.24, 2011
Final Judgement:	Pass

Approved By

Sep.26, 2011
Date

Dai Linjun
Name

Dai Linjun
Signature

Reviewed By

Sep.26, 2011
Date

Cousy Xu
Name

Cousy XU
Signature

Operator

Sep.26, 2011
Date

Huang Qiuliang
Name

Huang Qiuliang
Signature



Contents

1	<u>Summary</u>	6
2	<u>Product Description</u>	7
2.1	PRODUCTION INFORMATION	7
2.2	MODIFICATION INFORMATION	7
3	<u>Test Site Description</u>	8
3.1	TESTING PERIOD	8
3.2	GENERAL SET UP DESCRIPTION	8
4	<u>Product Description</u>	9
4.1	TECHNICAL CHARACTERISTICS	9
4.2	EUT IDENTIFICATION LIST	11
5	<u>Main Test Instruments</u>	12
6	<u>Transmitter Measurements</u>	13
6.1	EFFECTIVE RADIATED POWER OF TRANSMITTER (ERP)	13
6.2	CONDUCTED POWER OF TRANSMITTER	17
6.3	MODULATION CHARACTERISTICS	21
6.4	OCCUPIED BANDWIDTH	23
6.5	BAND EDGES COMPLIANCE	26
6.6	SPURIOUS EMISSION AT ANTENNA TERMINAL	28
6.7	RADIATED SPURIOUS EMISSIONS	31
6.8	FREQUENCY STABILITY	34
7	<u>System Measurement Uncertainty</u>	38
8	<u>Appendices</u>	39



1 Summary

The table below summarizes the measurements and results for the EUT. Detailed results and descriptions are shown in the following pages.

Table 2 Summary of results

FCC Measurement Specification	FCC Limits Part(s)	Description	Result
2.1046	22.913	Effective Radiated Power of Transmitter	PASS
2.1046	22.913	Conducted Power of Transmitter	PASS
2.1047	/	Modulation Characteristics	PASS
2.1049	/	Occupied Bandwidth	PASS
2.1051	22.917	Band Edges compliance	PASS
2.1051	22.917	Spurious Emission at Antenna Terminal	PASS
2.1053	22.917	Radiated Spurious Emissions	PASS
2.1055	22.355	Frequency Stability	PASS



2 Product Description

2.1 Production Information

2.1.1 General Description

MU739 HSPA+/WCDMA(UMTS)/GSM/GPRS/EDGE dual mode Wireless Module is subscriber equipment in the UMTS/GSM system. MU739 implement such functions as RF signal receiving/transmitting, HSPA+/WCDMA and EDGE/GPRS/GSM protocol processing, data service etc. Externally it provides LGA interface.

2.1.2 Support function and Service

The EUT support the function and service as follows:

Table 3 Service and Test mode List

Service Name	Characteristic	Corresponding Test Mode	Note
Data	Modulation: GMSK	TM1	GPRS/GSM
Data	Modulation: 8PSK	TM2	EDGE
Data	Modulation: QPSK	TM3	WCDMA
Data	Modulation: QPSK	TM4	HSDPA
Data	Modulation: QPSK	TM5	HSUPA

Note: * The specified GPRS test conditions & settings are defined in 3GPP TS51.010 V5.4.0 and the EDGE test conditions & settings are defined in 3GPP TS51.010 V5.4.0. The WCDMA test condition & settings are defined in 3GPP TS 34.121 V8.7.0:2009.

2.2 Modification Information

For original equipment, following table is not application.

Table 4 Modification Information

Model Number	Board/Module	Original Version	New Version	Modify Information
Not applicable				

3 Test Site Description

The test site of:

***Huawei Technologies Co. Ltd.
P.O. Box 518129
Huawei base, Bantian,
Longgang District, Shenzhen, China***

3.1 Testing Period

The test have been performed during the period of

Sep.20, 2011 – Sep.24, 2011

3.2 General Set up Description

TM1: GPRS/GSM Mode with GMSK Modulation

TM2: EDGE Mode with 8PSK Modulation

TM3: WCDMA Mode with QPSK Modulation

TM4: HSDPA Mode with QPSK Modulation

TM5: HSUPA Mode with QPSK Modulation

4 Product Description

4.1 Technical Characteristics

4.1.1 Frequency Range

Table 5 Frequency Range

Uplink band:	824 to 849 MHz
Downlink band:	869 to 894 MHz

4.1.2 Channel Spacing / Separation

Table 6 Channel Spacing / Separation

	EDGE/GPRS/GSM	WCDMA/HSPA
Channel raster	200 kHz	200 kHz
Channel spacing:	200 kHz	5 MHz

4.1.3 Type of Emission

Table 7 Type of Emission

	EDGE	GPRS/GSM	WCDMA/HSPA
Emission Designation:	300KG7W	300KGXW	5M00F9W

According to CFR 47 (FCC) part 2, subpart C, section 2.201 and 2.202

4.1.4 Environmental Requirements

Table 8 Environmental Requirements

Minimum temperature:	- 10 °C
Maximum temperature:	+ 55 °C
Relative Humidity:	5%-95%RH

4.1.5 Power Source

Table 9 Power Source

AC voltage nominal:	 120 V
AC voltage range	 100 V to  240 V
AC current maximal:	1 A

4.1.6 Tune-up Procedure

According to CFR (FCC) part 2, subpart 2, section 2.1033(c) (9).

Please reference the document Tune-up Procedure in TCF.

4.1.7 Applied DC Voltages and Currents

According to CFR (FCC) part 2, subpart 2, section 2.1033(c) (8).

The voltage and current in the final RF stage is:

Table 10 Applied RF module DC Voltages and Currents

Voltage:	 +3.8V
Current:	100mA According to CFR (FCC) part 2, subpart 2, section 2.1033(c) (8)



4.2 EUT Identification List

4.2.1 Board Information

Table 11 Board Information

HSPA+ Module	
MU739	
Board and Module	
Hardware Version	Software Version
MD1MU739MS	11.101.06.02.00

4.2.2 FCC Identification

Grantee Code: QIS
Product Code: MU739
FCC Identification: QISMU739

5 Main Test Instruments

Table 12 Main Test Equipments

Equipment Description	Manufacturer	Model	Serial Number	Calibrated until
Power supply	KEITHLEY	2303	1288003	Sep.27,2011
Universal Radio Communication Tester	R&S	CMU200	105822	Oct.24.2011
Wireless Communication Test set	Agilent	N4010A	MY49081592	Dec.14.2011
Universal Radio Communication Tester	Agilent	E5515C	MY50260239	Aug.31,2012
Spectrum Analyzer	Agilent	E4440A	MY49420179	Apr.20,2012
Signal Analyzer	R&S	FSQ31	200021	Sep.27,2011
Temperature Chamber	WEISS	WKL64	24600294	Jan.03,2012
Signal generator	Agilent	E8257D	MY49281095	Jul.09.2012
Vector Signal Generator	R&S	SMU200A	104162	Sep.07,2012
Test receiver	R&S	ESU26	100150	May.24.2012
Tunable Dipole	Schwarzbeck	D69250-UHAP/D69250-VHAP	919/1009	Dec.13.2011
Tunable Dipole	Schwarzbeck	D69250-UHAP/D69250-VHAP	979/917	Dec.13.2011
Horn Antenna	R & S	HF906	100683	May.16, 2012
Horn Antenna	R & S	HF906	100684	May.16, 2012
Broadband Antenna	Schwarzbeck	VULB 9163	9163-357	Sep.15, 2012
Broadband Antenna	Schwarzbeck	VULB 9163	9163-356	Sep.15, 2012



6 Transmitter Measurements

6.1 Effective Radiated Power of Transmitter (ERP)

6.1.1 Test Conditions

Table 13 Test Conditions

Preconditioning:	0.5 hour
Measured at:	enclosure
Ambient temperature:	25 °C
Relative humidity:	55%
Test Configurations:	TM1/TM2/TM3 at frequency B, M, T

6.1.2 Test Specifications and Limits

6.1.2.1 Specification

CFR 47 (FCC) part 2.1046 and part 22.913

6.1.2.2 Supporting Standards

Table 14 Supporting Standards:

ANSI/TIA-603-C:2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;
3GPP TS 34.121 V8.7.0:2009	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.1.2.3 Limits

Compliance with part 22.913, mobile/portable stations are limited to 7 watts ERP peak power.
The calculated longitude ERP by following formula: $ERP(dBm) = 10 \cdot \log(ERP_{in\ mWatts})$.

Table 15 Limits

Maximum Output Power (Watts)	< 7 Watts
Maximum Output Power (dBm)	< 38.5 dBm

6.1.3 Test Method and Setup


- (a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, ERP shall be measured when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in

2.1033(c)(8). Connect the EUT to the wireless communication tester CMU200 via the air interface. The band class is set as GSM850M.

- (b) Test the Radiated maximum output power by the CMU200 received from test antenna.
- (c) Use substitution method to verify the maximum output power. The EUT is substituted by a dipole antenna. The dipole is connected to a signal generator. And then adjust the output level of the signal generator to get the same received power recorded in step (b) on CMU200, and record the power level of Signal Generator. Of course, the cable loss at the test frequency should be compensated.

Test setup

Step 1: Pre-test

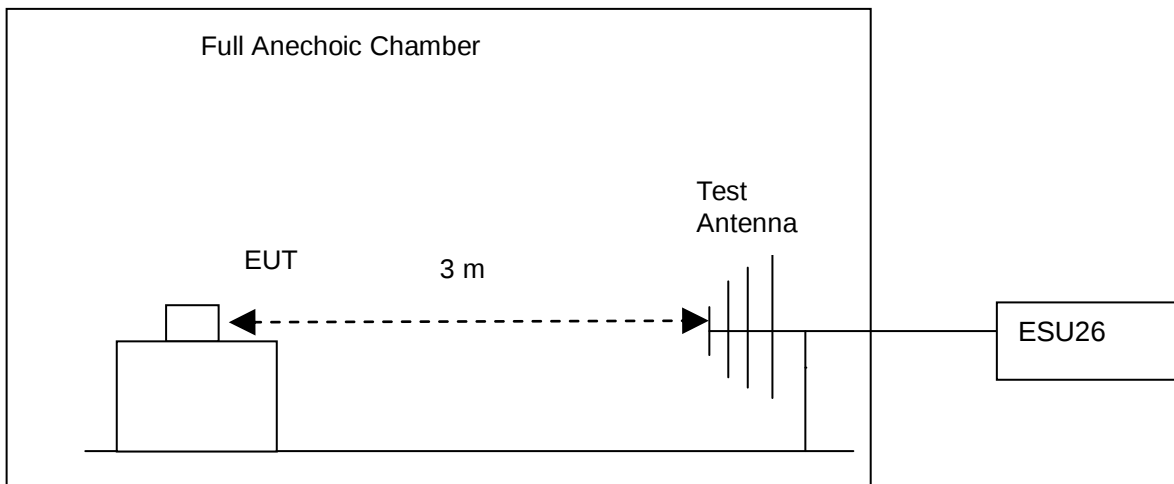

Step 2: Substitution method to verify the maximum ERP

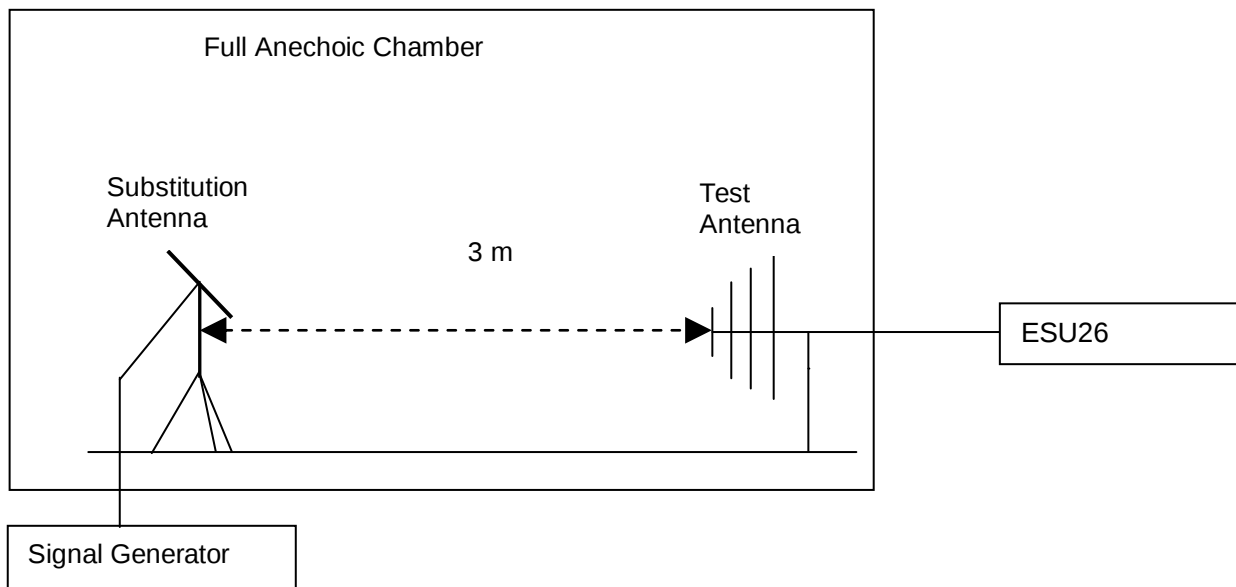


Figure 1. Test Set-up

NOTE: Effective radiated power (ERP) refers to the radiation power output of the EUT, assuming all emissions are radiated from half-wave dipole antennas.

ERP was measured using 1 host.

BenQ Joy book S72



6.1.4 Measurement Results

6.1.4.1 Pre-test Results

Measurement Results

	RF Output Power (ERP)					
TEST CONDITIONS	Channel 128(B) 824.2MHz		Channel 192(M) 837.0MHz		Channel 251(T) 848.8MHz	
	dBm		dBm		dBm	
T _{nom} (25 °C)/ V _{nom} (3.8V)	Measured	Limit	Measured	Limit	Measured	Limit
TM1	34.20	38.5	34.21	38.5	34.19	38.5
TM2	28.98	38.5	29.02	38.5	29.04	38.5
TEST CONDITIONS	Channel 4132(B) 826.4MHz		Channel 4182(M) 836.4MHz		Channel 4233(T) 846.6MHz	
	dBm		dBm		dBm	
T _{nom} (25 °C)/ V _{nom} (3.8V)	Measured	Limit	Measured	Limit	Measured	Limit
TM3	25.82	38.5	25.64	38.5	25.68	38.5

6.1.4.2 Substitution Results

Table 16 Substitution Results

Test Mode	Freq. [MHz]	Meas. Level [dBm]	Substitution Antenna Type	SGP [dBm]	Substitution Gain [dBd]	Cable Loss [dB]	Substitution Level (ERP) [dBm]	Limit [dBm]	Result
TM1	824.2	34.20	Dipole Ant.	37.61	-2.75	0.6	34.26	38.5	Pass
TM1	837.0	34.21	Dipole Ant.	37.74	-2.87	0.6	34.27	38.5	Pass
TM1	848.8	34.19	Dipole Ant.	37.70	-2.85	0.6	34.25	38.5	Pass
TM2	824.2	28.98	Dipole Ant.	32.38	-2.75	0.6	29.03	38.5	Pass
TM2	837.0	29.02	Dipole Ant.	32.53	-2.87	0.6	29.06	38.5	Pass
TM2	848.8	29.04	Dipole Ant.	32.53	-2.85	0.6	29.08	38.5	Pass
TM3	826.4	25.82	Dipole Ant.	29.18	-2.75	0.6	25.83	38.5	Pass
TM3	836.4	25.64	Dipole Ant.	29.15	-2.87	0.6	25.68	38.5	Pass
TM3	846.6	25.68	Dipole Ant.	29.18	-2.85	0.6	25.73	38.5	Pass

Note: a, For get the ERP (Efficient Radiated Power) in substitution method, the following formula should take to calculate it,

$$\text{ERP [dBm]} = \text{SGP [dBm]} - \text{Cable Loss [dB]} + \text{Gain [dBd]}$$

NOTE: SGP- Signal Generator Level

b, Measurement the ERP with RMS detector.

c, RBW=10kHz, VBW=300kHz, and integrated by the instrument to 250kHz for TM1 and TM2 and 5M for TM3.

6.1.5 Conclusion

The equipment **PASSED** the requirement of this clause.

6.2 Conducted Power of Transmitter

6.2.1 Test Conditions

Table 17 Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25 °C
Relative humidity:	55 %
Test Configurations:	TM1/TM2/TM3/TM4/TM5 at frequency B, M, T

6.2.2 Test Specifications and Limits

6.2.2.1 Specification

CFR 47 (FCC) part 2.1047 and part 22 subpart H

6.2.2.2 Supporting Standards

Table 18 Supporting Standards:

ANSI/TIA-603-C:2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;
3GPP TS 34.121 V8.7.0:2009	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.2.2.3 Limits

Compliance with part 22.913, in no any case may the peak power of a mobile station transmitter exceed 7 W. The calculated longitude ERP by following formula:

$$ERP(\text{dBm}) = 10 \cdot \log(ERP_{\text{in mwatts}}).$$

And for conducted power, we can use Antenna Gain to calculate the limit. So the conducted power:

$$P_{\text{cod}}(\text{dBm}) = ERP(\text{dBm}) - \text{Gain}(\text{dBd}).$$

and $\text{Gain}(\text{dBd}) = \text{Gain}(\text{dBi}) - 2.15\text{dB}$

Table 19 Limits

Maximum Output Power (Watts)	< 7 Watts(38.5dBm)
Antenna Gain(dBi):	4.28
Antenna Gain(dBd):	2.13
Maximum Conducted Output Power (dBm)	< 36.37

For HSDPA test mode, there are 4 sub-tests for different configuration.

Table 20 HSDPA conducted max power pre-scan

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	HS	CM (dB)	MPR (dB)
1	2/15	15/15	64	2/15	4/15	0	0
2	12/15	15/15	64	12/15	24/15	1	0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

For HSUPA test mode, there are 5 sub-tests for different configuration.

Table 21 HSUPA conducted max power pre-scan

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 5) (Note 6)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/22 5	1309/22 5	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 6: β_{ed} can not be set directly, it is set by Absolute Grant Value.

6.2.3 Test Method and Setup

(a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, Conducted maximum power shall be measured when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in 2.1033(c)(8). Connect the EUT to the wireless communication tester CMU200 via the antenna connector. The band class is set as GSM850M.

(b) Test the Conducted maximum output power by the CMU200.

Test setup

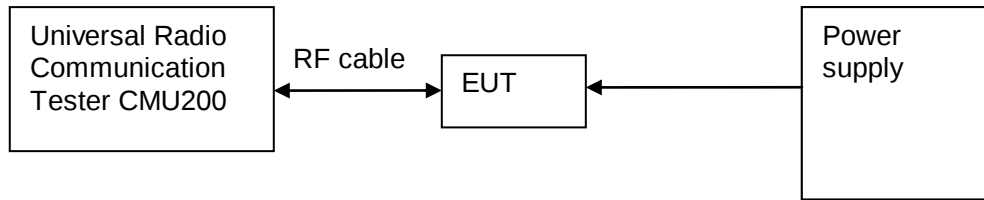


Figure 2. Test Set-up

6.2.4 Measurement Results

Table 22 Measurement Results

		RF Output Power (Conducted)					
TEST CONDITIONS		Channel 128(B)		Channel 192(M)		Channel 251(T)	
		824.2MHz		837.0MHz		848.8MHz	
		dBm		dBm		dBm	
T _{nom} (25 °C)/ V _{nom} (3.8V)		Measured	Limit	Measured	Limit	Measured	Limit
TM1		32.07	36.37	32.08	36.37	32.06	36.37
TM2		26.85	36.37	26.89	36.37	26.91	36.37
TEST CONDITIONS		Channel 4132(B)		Channel 4182(M)		Channel 4233(T)	
		826.4MHz		836.4MHz		846.6MHz	
		dBm		dBm		dBm	
T _{nom} (25 °C)/ V _{nom} (3.8V)		Measured	Limit	Measured	Limit	Measured	Limit
TM3		23.69	36.37	23.51	36.37	23.55	36.37
TM4	Case1	23.63	36.37	23.46	36.37	23.44	36.37
	Case2	22.85	36.37	22.67	36.37	22.64	36.37
	Case3	22.24	36.37	22.05	36.37	22.06	36.37
	Case4	22.02	36.37	21.82	36.37	21.79	36.37
TM5	Case1	22.49	36.37	22.36	36.37	22.33	36.37
	Case2	20.72	36.37	20.56	36.37	20.58	36.37
	Case3	21.74	36.37	21.72	36.37	21.67	36.37
	Case4	20.97	36.37	20.77	36.37	20.78	36.37
	Case5	22.68	36.37	22.52	36.37	22.54	36.37

Note: Measurement the Conducted output power with RMS detector.



6.2.5 Conclusion

The equipment **PASSED** the requirement of this clause.

6.3 Modulation Characteristics

6.3.1 Test Conditions

Table 23 Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25 °C
Relative humidity:	55 %
Test Configurations:	TM1/TM2/TM3 at frequency M

6.3.2 Test Specifications and Limits

6.3.2.1 Specification

CFR 47 (FCC) part 2.1047 and part 22 subpart H

6.3.2.2 Supporting Standards

Table 24 Supporting Standards:

ANSI/TIA-603-C:2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;
3GPP TS 34.121 V8.7.0:2009	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.3.2.3 Limits

No specific modulation characteristics requirement limits in part 2.1047 and part 22 subpart H.

Table 25 Limits

Limits	Not applicable
--------	----------------

6.3.3 Test Method and Setup

Connect the EUT to Wireless Communication Test Set R&S CMU200 via the antenna connector. The band class is set as GSM850M; the EUT's output is matched with 50 Ω loads, test method was according to 3GPP TS 51.010. The waveform quality and constellation of the EUT was tested.

Test setup

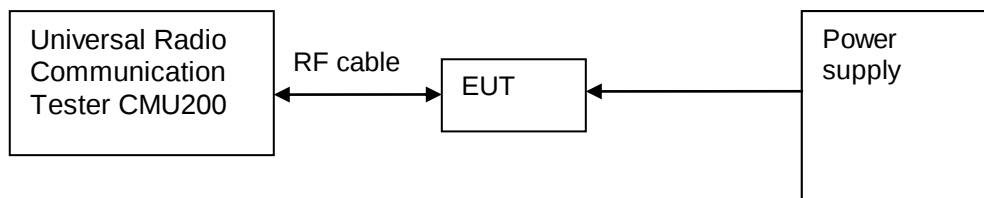


Figure 3. Test Set-up

6.3.4 Measurement Results

Table 26 Measurement Results

TEST CONDITIONS		Modulation Characteristic	
		Channel 192(M)	
		Measured	
		TM1	TM2
T _{nom} (25 °C)	V _{nom} (3.8V)	Refer to Appendix A	Refer to Appendix A
TEST CONDITIONS		Modulation Characteristic	
		Channel 4182(M) 836.4MHz	
		Measured	
		TM3	
T _{nom} (25 °C)	V _{nom} (3.8V)	Refer to Appendix A	

6.3.5 Conclusion

The equipment **PASSED** the requirement of this clause.
For the measurement results refer to appendix A.

6.4 Occupied Bandwidth

6.4.1 Test Conditions

Table 27 Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25 °C
Relative humidity:	55 %
Test Configurations:	TM1/TM2/TM3 at frequency B, M, T

6.4.2 Test Specifications and Limits

6.4.2.1 Specification

CFR 47 (FCC) part 2.1049 and part 22 subpart H.

6.4.2.2 Supporting Standards

Table 28 Supporting Standards:

ANSI/TIA-603-C:2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;
3GPP TS 34.121 V8.7.0:2009	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.4.2.3 Limits

No specific occupied bandwidth requirement in part 22 subpart H, but the occupied bandwidth was defined in part 2.1049: the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.

Table 29 Limits

Upper /lower frequency limits	0.5% of the mean power
-------------------------------	------------------------

6.4.3 Test Method and Setup

The EUT was connected to the wireless signal analyzer R&S FSQ31 via the one RF connector. The band class is set as GSM850M; The EUT was controlled to transmit maximum power. Measure and record the occupied bandwidth of the EUT by the R&S FSQ31.

The OBW, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions as applicable:

Refer to 47CFR part2.1049 section (g) & (h).

(g) Transmitter in which the modulating base band comprises not more than three independent channels - when modulated by the full complement of signals for which the transmitter is rated. The level of modulation for each channel should be set to that prescribed in rule parts applicable to the services for which the transmitter is intended. If specific modulation levels are not set forth in the rules, the tests should provide the manufacturer's maximum rated condition.

(h) Transmitters employing digital modulation techniques - when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudorandom generators or other devices required in normal service. Additionally, the occupied bandwidth shall be shown for operation with any devices used for modifying the spectrum when such devices are optional at discretion of the user.

For TM1/TM2 following RBW and VBW are employed:

Measurement bandwidth (RBW): 3 kHz (Resolution bandwidth)

Video bandwidth (VBW): 10 kHz

For TM3 following RBW and VBW are employed:

Measurement bandwidth (RBW): 50 kHz (Resolution bandwidth)

Video bandwidth (VBW): 500 kHz

Test Set-up

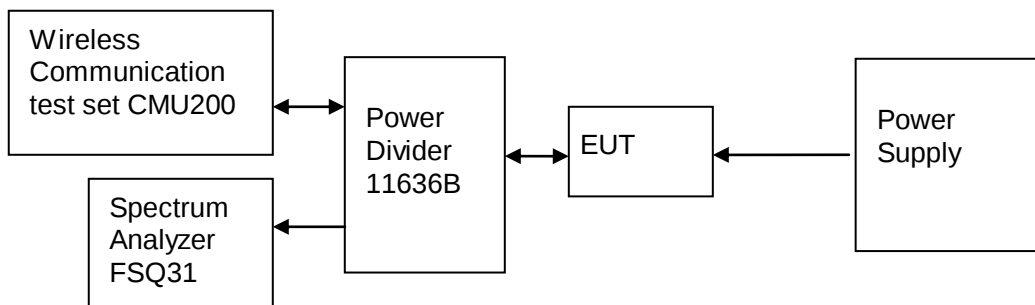


Figure 4. Test Set-up

6.4.4 Measurement Results

Table 30 Measurement Results

TEST CONDITIONS		Occupied Bandwidth					
		Channel 128(B)		Channel 192(M)		Channel 251(T)	
Center Frequency		824.2MHz		837.0MHz		848.8MHz	
		Measured		Measured		Measured	
		(kHz)		(kHz)		(kHz)	
		TM1	TM2	TM1	TM2	TM1	TM2
T _{nom} (25 °C)/ V _{nom} (3.8V)	99%	245.19	238.78	245.19	245.19	243.59	243.59



		Channel 4132(B)	Channel 4182(M)	Channel 4233(T)
Center Frequency		826.4MHz	836.4MHz	846.6MHz
		Measured	Measured	Measured
		(MHz)	(MHz)	(MHz)
		TM3	TM3	TM3
T_{nom} (25 °C)/ V_{nom} (3.8V)	99%	4.05	4.07	4.07

6.4.5 Conclusion

The equipment **PASSED** the requirement of this clause.
For the measurement results refer to appendix B.

6.5 Band Edges Compliance

6.5.1 Test Conditions

Table 31 Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25°C
Relative humidity:	55 %
Test Configurations:	TM1/TM2/TM3 at frequency B, T

6.5.2 Test Specifications and Limits

6.5.2.1 Specification

CFR 47 (FCC) part 2.1051 and part 22.917

6.5.2.2 Supporting Standards

Table 32 Supporting Standards:

ANSI/TIA-603-C:2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;
3GPP TS 34.121 V8.7.0:2009	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.5.2.3 Limits

Compliance with part 22.917, all spurious emission must be attenuated below the transmitter power by at least $43 + 10 \log_{10} P(W)$. (Whereas P is the rated power of the EUT in Watt).

Table 33 Limits

	TM1	TM2	TM3
Rated Power:	33 dBm	27 dBm	24 dBm
Required attenuation:	$43 + 10 \log(2) = 46$, 33 dBm - 46 dB	$43 + 10 \log(0.5) = 40$, 27 dBm - 40 dB	$43 + 10 \log(0.25) = 37$, 24dBm - 37 dB
Absolute level	- 13 dBm	- 13 dBm	- 13 dBm

6.5.3 Test Method and Setup

The EUT was connected to the wireless signal analyzer R&S FSQ31 via the one RF connector, the band class is set as GSM850M. The EUT was controlled to transmit maximum power. Measure and

record band edges compliance of the EUT by the R&S FSQ31.

The limit is -13dBm.

For TM1/TM2 following RBW and VBW are employed:

Measurement bandwidth (RBW): 3 kHz (Resolution bandwidth)

Video bandwidth (VBW): 10 kHz

For TM3 following RBW and VBW are employed:

Measurement bandwidth (RBW): 50 kHz (Resolution bandwidth)

Video bandwidth (VBW): 200 kHz

Test Set-up

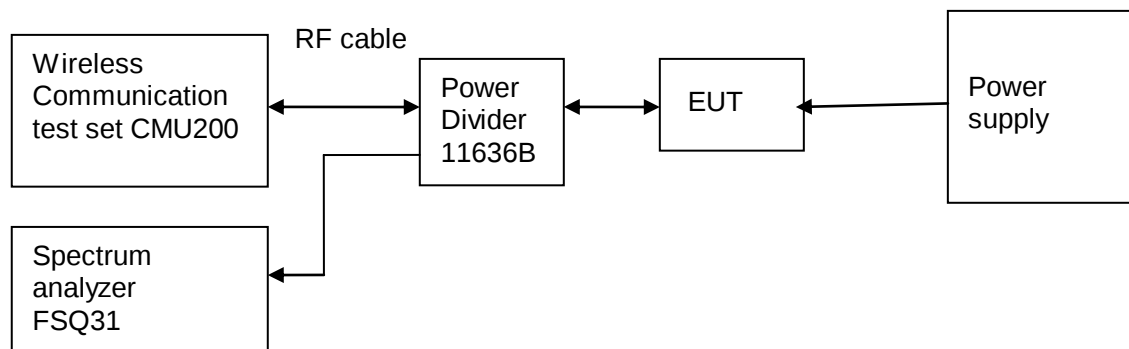


Figure 5. Test Set-up

6.5.4 Measurement Results

Table 34 Measurement Results outside Band Edges

Band	Frequency of Band edges [MHz]	Channel Number	Test Mode	Spurious Level measured [dBm]	FCC limit	Result
Cellular	T_{nom} (25 °C), V_{nom} (3.8V)					
	824.2	128	TM1	<-13(See appendix C)	- 13 dBm	Pass
	848.8	251	TM1	<-13(See appendix C)	- 13 dBm	Pass
	824.2	128	TM2	<-13(See appendix C)	- 13 dBm	Pass
	848.8	251	TM2	<-13(See appendix C)	- 13 dBm	Pass
	826.4	4132	TM3	<-13(See appendix C)	- 13 dBm	Pass
	846.6	4233	TM3	<-13(See appendix C)	- 13 dBm	Pass

6.5.5 Conclusion

The equipment **PASSED** the requirement of this clause.

For the measurement results refer to appendix C.

6.6 Spurious Emission at Antenna Terminal

6.6.1 Test Conditions

Table 35 Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25°C
Relative humidity:	55 %
Test Configurations:	TM1/TM2/TM3 at frequency B, M, T

6.6.2 Test Specifications and Limits

6.6.2.1 Specification

CFR 47 (FCC) part 2.1051 and part 22.917

6.6.2.2 Supporting Standards

Table 36 Supporting Standards:

ANSI/TIA-603-C:2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;
3GPP TS 34.121 V8.7.0:2009	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.6.2.3 Limits

Compliance with part 22.917, all spurious emission must be attenuated below the transmitter power by at least $43 + 10 \log_{10} P$. (Whereas P is the rated power of the EUT in Watt).

Table 37 Limits

	TM1	TM2	TM3
Rated Power:	33 dBm	27 dBm	24 dBm
Required attenuation:	$43 + 10 \log(2) = 46$, 33 dBm - 46 dB	$43 + 10 \log(0.5) = 40$, 27 dBm - 40 dB	$43 + 10 \log(0.25) = 37$, 24dBm - 37 dB
Absolute level	- 13 dBm	- 13 dBm	- 13 dBm

6.6.3 Test Method and Setup

The EUT was connected to the wireless signal analyzer R&S FSQ31 via the one RF connector, the band class is set as GSM850M. The EUT was controlled to transmit maximum power. Measure and

record the Conducted Spurious Emission of the EUT by the R&S FSQ31.

According to part 22.917, the defined measurement bandwidth as following:

22.917 (b) Measurement procedure: Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater.

Measurement bandwidth (RBW) for 9 kHz up to 150 kHz: 1 kHz;
Measurement bandwidth (RBW) for 150 kHz up to 30 MHz: 10 kHz;
Measurement bandwidth (RBW) for 30 MHz up to 1 GHz: 100 kHz;
Measurement bandwidth (RBW) for 1 GHz up to 12.75 GHz: 1 MHz;

Test Set-up

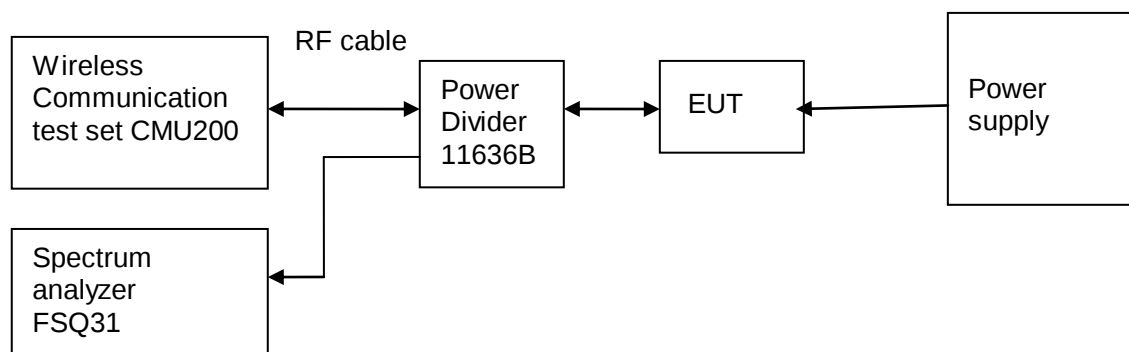


Figure 6. Test Set-up

6.6.4 Measurement Results

Table 38 Measurement Results

Channel Number	Test Mode	Test Range (Frequency)	Output Power [dBm]	Spurious Level measured [dBm]	FCC limit	Result
Channel 128(B)	TM1	9 kHz ~12.75GHz	33	<- 13 dBm (See appendix D)	- 13 dBm	Pass
	TM2	9 kHz ~12.75GHz	27	<- 13 dBm (See appendix D)	- 13 dBm	Pass
Channel 4132(B)	TM3	9 kHz ~12.75GHz	24	<- 13 dBm (See appendix D)	- 13 dBm	Pass
Channel 192(M)	TM1	9 kHz ~12.75GHz	33	<- 13 dBm (See appendix D)	- 13 dBm	Pass
	TM2	9 kHz ~12.75GHz	27	<- 13 dBm (See appendix D)	- 13 dBm	Pass

Channel 4182(M)	TM3	9 kHz ~12.75GHz	24	<- 13 dBm (See appendix D)	- 13 dBm	Pass
Channel 251(T)	TM1	9 kHz ~12.75GHz	33	<- 13 dBm (See appendix D)	- 13 dBm	Pass
	TM2	9 kHz ~12.75GHz	27	<- 13 dBm (See appendix D)	- 13 dBm	Pass
Channel 4233(T)	TM3	9 kHz ~12.75GHz	24	<- 13 dBm (See appendix D)	- 13 dBm	Pass

6.6.5 Conclusion

The equipment **PASSED** the requirement of this clause.
For the measurement results refer to appendix D.

6.7 Radiated Spurious Emissions

6.7.1 Test Conditions

Table 39 Test Conditions

Preconditioning:	0.5 hour
Measured at:	enclosure
Ambient temperature:	25°C
Relative humidity:	55%
Test Configurations:	TM1/TM2/TM3/TM4/TM5 at frequency M

6.7.2 Test Specifications and Limits

6.7.2.1 Specification

CFR 47 (FCC) part 2.1053 and part 22.917

6.7.2.2 Supporting Standards

Table 40 Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;
3GPP TS 34.121 V8.7.0:2009	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.7.2.3 Limits

Compliance with part 22.917, all spurious emission must be attenuated below the transmitter power by at least $43 + 10 \log_{10} P$. (Whereas P is the rated power of the EUT).

Table 41 Limits

Absolute level	- 13 dBm
----------------	----------

6.7.3 Test Method and Setup

A test site fulfilling the requirements of ITU-R Recommendation SM329-11 was used. The EUT was placed on a non-conducting support in the anechoic chamber and was operated from a power source via an RF filter to avoid radiation from the power leads.

According to part 22.917, the defined measurement bandwidth as following:

22.917 (b) Measurement procedure: Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater.

Measurement bandwidth (RBW) for 9 kHz up to 150 kHz: 1 kHz;

Measurement bandwidth (RBW) for 150 kHz up to 30 MHz: 10 kHz;


Measurement bandwidth (RBW) for 30MHz up to 1GHz: 100k Hz;
Measurement bandwidth (RBW) for 1GHz up to 18GHz: 1MHz;

Test Set-up

Step 1:


For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, EIRP shall be measured when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in 2.1033(c)(8). Connect the EUT to the BTS simulator via the air interface.

Test the Radiated maximum output power by the Test Receiver from test antenna.

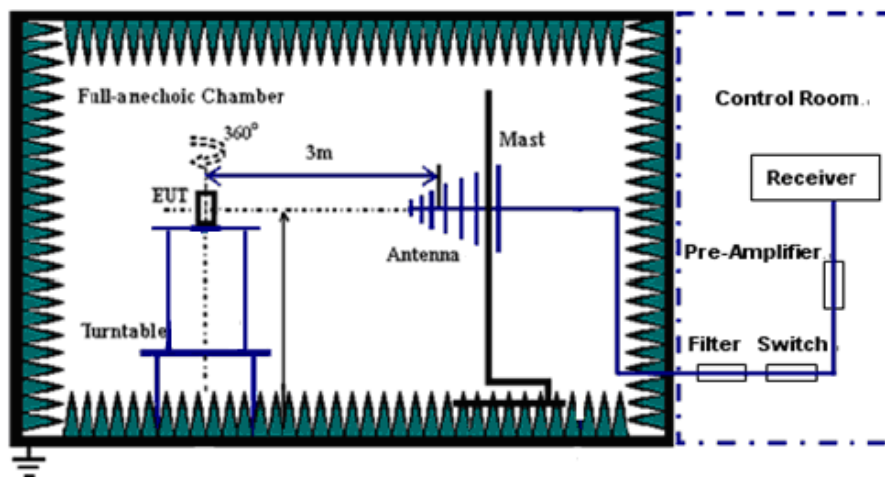

Step 2:

Use substitution method to verify the maximum output power. The EUT is substituted by a dipole antenna. The dipole is connected to a signal generator. And then adjust the output level of the signal generator to get the same received power recorded in step1 on Test Receiver, and record the power level of Signal Generator. Of course, the cable loss at the test frequency should be compensated.

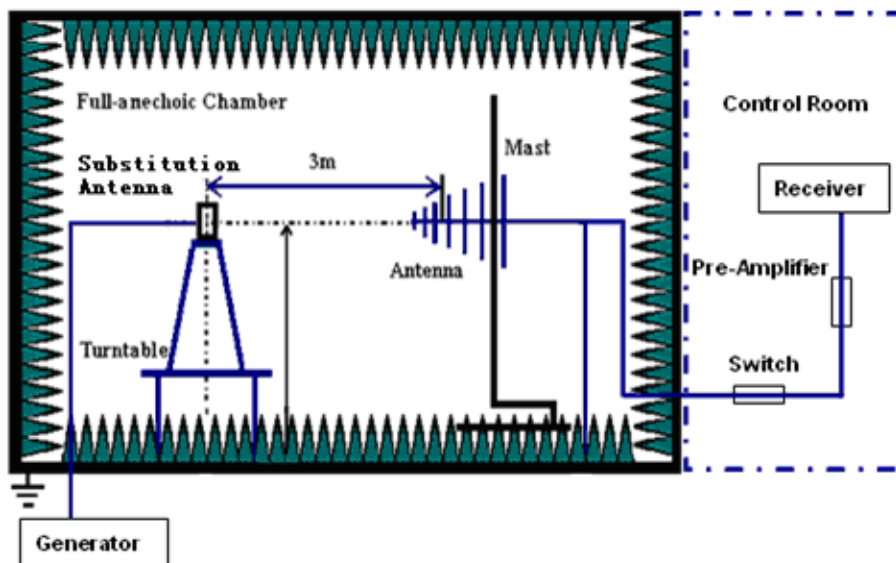

Test should be performed in normal voltage condition.



No peak found in pre- test. All frequency points' margin is bigger than 20dB, so the substitution method isn't used.

Calculation Sample:

Table 42 Substitution Results

Freq. [MHz]	Measure ment Value [dBm]	Substitution Antenna Type	Gain [dBd]	Cable Loss [dB]	Signal Generator Level [dBm]	Substitution Level [dBm]	FCC limit [dBm]	Result

Note: For get the E.R.P. (Efficient Radiated Power) in substitution method, the following formula should take to calculate it,

$$\text{E.R.P. [dBm]} = \text{SGP [dBm]} - \text{Cable Loss [dB]} + \text{Gain [dBd]}$$

NOTE: SGP- Signal Generator Level

6.7.4 Conclusion

The equipment **PASSED** the requirement of this clause.

For the measurement results refer to appendix_E

6.8 Frequency Stability

6.8.1 Test Conditions

Table 43 Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	See below
Relative humidity:	55 %
Test Configurations:	TM1/TM2/TM3 at frequency M

6.8.2 Test Specifications and Limits

6.8.2.1 Specification

CFR 47 (FCC) part 2.1055 and part 22.355

6.8.2.2 Supporting Standards

Table 44 Supporting Standards:

ANSI/TIA-603-C:2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0	Digital cellular telecommunications system; Mobile Station (MS) conformance specification;
3GPP TS 34.121 V8.7.0:2009	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.8.2.3 Limits

According to part 22.355, from 821MHz to 896MHz, for mobile device, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances 2.5ppm.

6.8.3 Test Method and Setup

The frequency stability shall be measured with variation of ambient temperature as follows:

- (1) From -30 ° to +50 ° centigrade for all equipment except that specified in subparagraphs
- (2) and (3) of paragraph 2.1055

(a) Frequency measurements shall be made at the extremes of the specified temperature range and at intervals of not more than 10° centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short-term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stabilizing circuitry need be subjected to the temperature variation test.

(b) The frequency stability shall be measured with variation of primary supply voltage as follows:

- (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
- (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating

end point, which shall be specified by the manufacturer.

(3) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.

(c) When deemed necessary, the Commission may require tests of frequency stability under conditions in addition to those specifically set out in paragraphs (a), (b), (c) of this section. (For example, measurements showing the effect of proximity to large metal objects, or of various types of antennas, may be required for portable equipment.)

Test Set up

Connect the EUT to the Wireless Communication test set CMU200 via the connector. Then measure the frequency error by the Wireless Communication test set CMU200. The EUT's output is matched with a 50 Ω load.

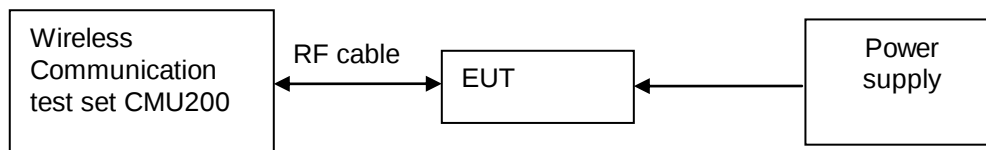


Figure 7. Test Set-up

6.8.4 Measurement Results

6.8.4.1 Measurement Results vs. Variation of Temperature

● TM1,3.8V DC Channel No.192(837.0MHz)

Table 45 Measurement Results vs. Variation of Temperature—TM1

Temperature	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
-30 °C	837.0	-22	Pass
-20 °C	837.0	-15	Pass
-10 °C	837.0	14	Pass
0 °C	837.0	12	Pass
+10 °C	837.0	-10	Pass
+20 °C	837.0	-14	Pass
+30 °C	837.0	8	Pass
+40 °C	837.0	-11	Pass
+50 °C	837.0	-17	Pass

● TM2,3.8V DC Channel No.192(837.0MHz)

Table 46 Measurement Results vs. Variation of Temperature—TM2

Temperature	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
-30 °C	837.0	-21	Pass
-20 °C	837.0	-8	Pass
-10 °C	837.0	11	Pass
0 °C	837.0	-12	Pass
+10 °C	837.0	15	Pass
+20 °C	837.0	-17	Pass
+30 °C	837.0	-14	Pass
+40 °C	837.0	11	Pass
+50 °C	837.0	7	Pass

● **TM3,3.8V DC Channel No.4182(836.4MHz)**

Table 47 Measurement Results vs. Variation of Temperature—TM3

Temperature	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
-30 °C	836.4	-25	Pass
-20 °C	836.4	5	Pass
-10 °C	836.4	10	Pass
0 °C	836.4	-12	Pass
+10 °C	836.4	-11	Pass
+20 °C	836.4	15	Pass
+30 °C	836.4	-10	Pass
+40 °C	836.4	-5	Pass
+50 °C	836.4	-13	Pass

6.8.4.2 Measurement Results vs. Variation of Voltage

● **TM1, 25 °C ,Channel No. 192(837.0MHz)**

Table 48 Measurement Results vs. Variation of Voltage—TM1

Voltage	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
+4.2V	837.0	-22	Pass
+3.8V	837.0	-18	Pass
+3.3V	837.0	-16	Pass

● **TM2, 25 °C ,Channel No. 192(837.0MHz)**

Table 49 Measurement Results vs. Variation of Voltage—TM2

Voltage	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
+4.2V	837.0	-16	Pass
+3.8V	837.0	-27	Pass
+3.3V	837.0	-25	Pass

● **TM3, 25 °C ,Channel No. 4182(836.4MHz)**

Table 50 Measurement Results vs. Variation of Voltage—TM3

Voltage	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
+4.2V	836.4	5	Pass
+3.8V	836.4	-12	Pass
+3.3V	836.4	-16	Pass

6.8.5 Conclusion

The equipment **PASSED** the requirement of this clause.

7 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

Table 51 System Measurement Uncertainty

Items		Extended Uncertainty
Effective Radiated Power of Transmitter	ERP (dBm)	U=3dB; k=2
Band Width	Magnitude (%)	U=0.2%; k=2
Band Edge Compliance	Disturbance Power(dBm)	U=2.0dB; k=2
Conducted Spurious Emission at Antenna Terminal	Disturbance Power(dBm)	U=2.0dB; k=2
Frequency Stability	Frequency Accuracy(ppm)	U=0.21ppm; k=2
Field Strength of Spurious Radiation	ERP(dBm)	U=2.2dB; k=2



8 Appendices

Appendix A	Measurement Results Modulation Characteristics
Appendix B	Measurement Results Occupied Bandwidth
Appendix C	Measurement Results Band Edges
Appendix D	Measurement Results Spurious Emission at Antenna Terminal
Appendix E	Measurement Results Radiated Spurious Emissions
Appendix F	Photos of Radiated Spurious Emissions

(END OF REPORT)




Appendix A

Modulation Characteristics

According to FCC Part 2.1047 & Part22 Subpart H




TM1:GPRS/GSM Channel 192

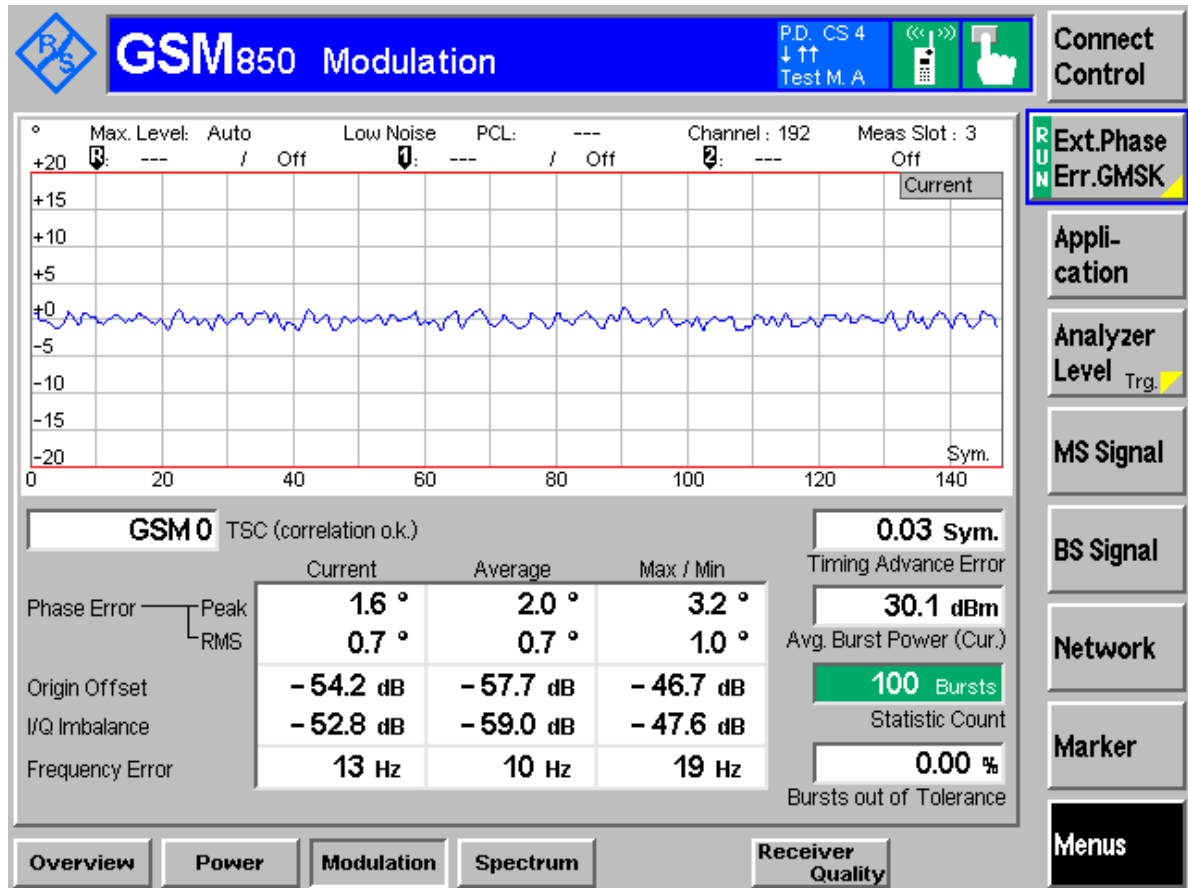




TM2:EDGE Channel 192

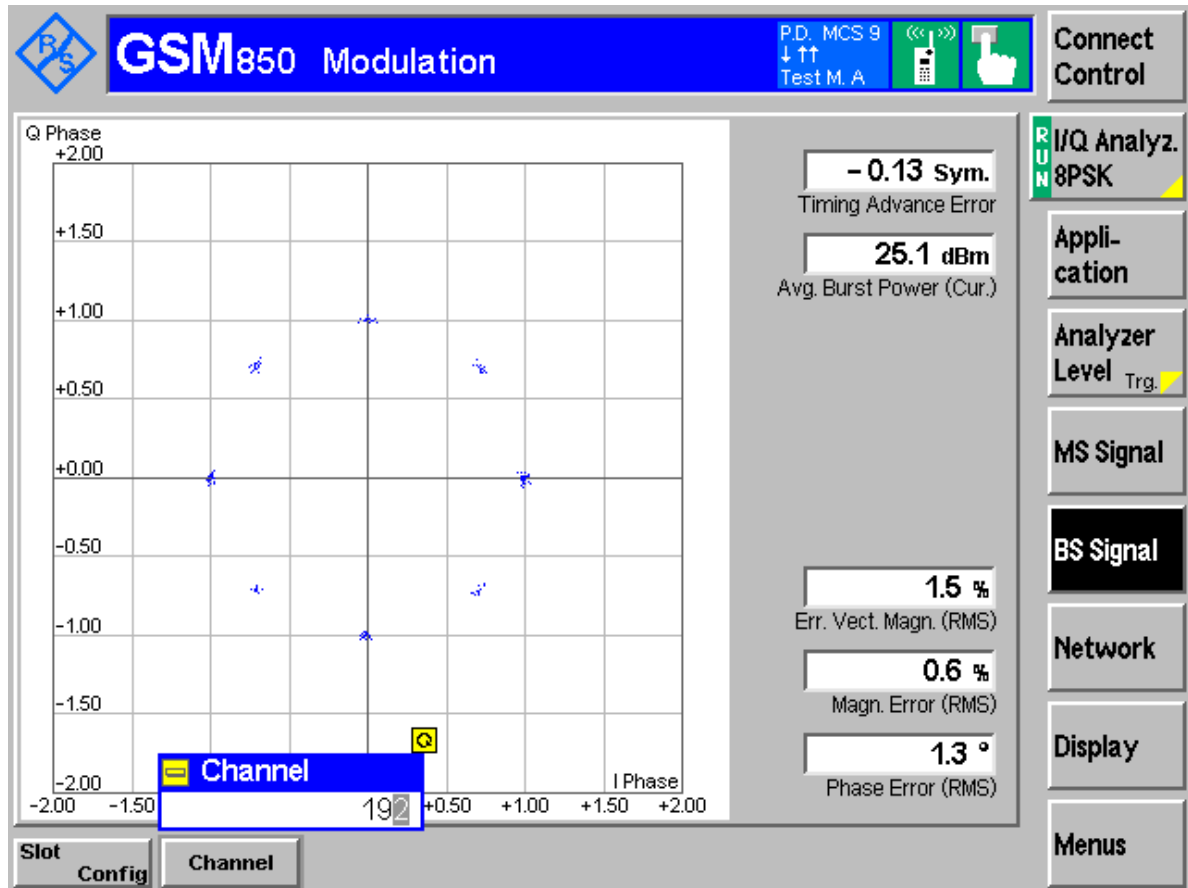



TM3: WCDMA Channel 4182

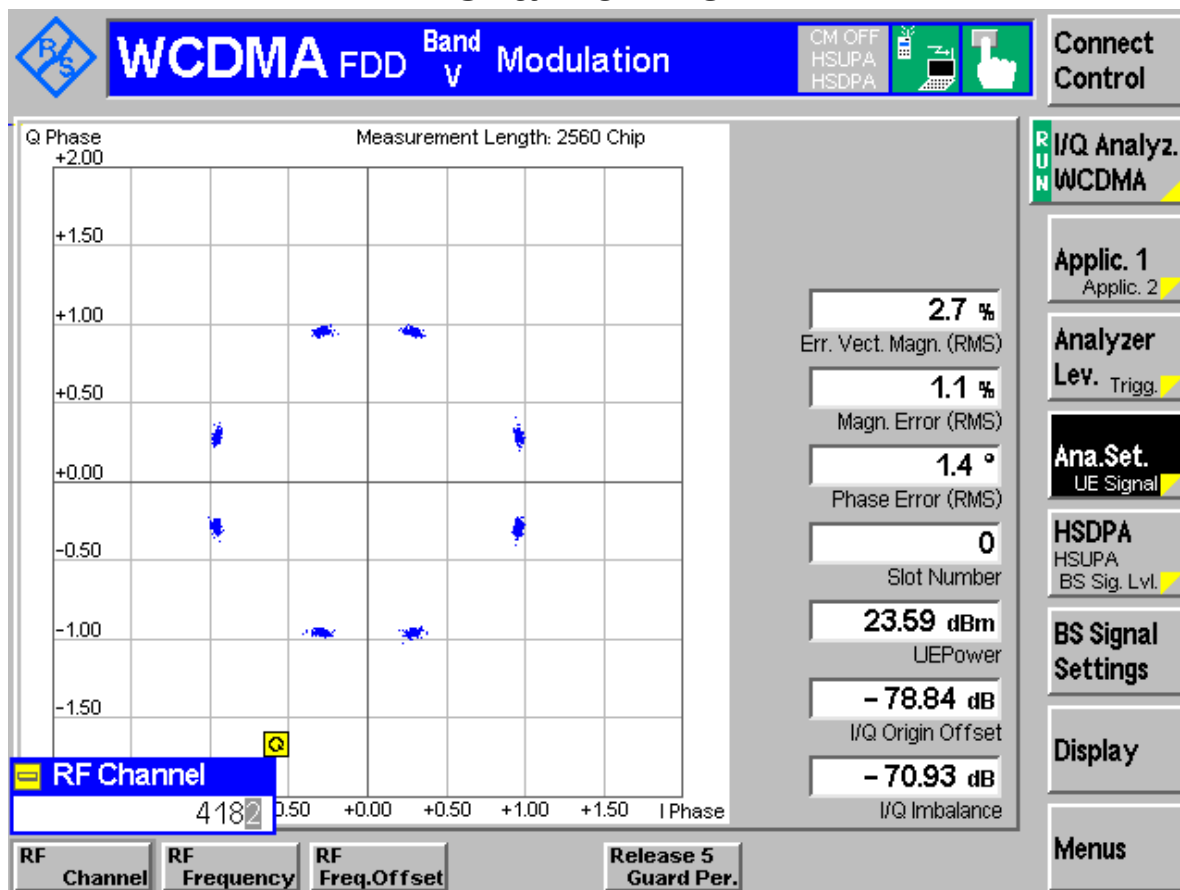




Appendix B



Occupied Bandwidth According to FCC Part 2.1049 & Part 22 Subpart H



Channel 128 (TM1:GPRS/GSM)

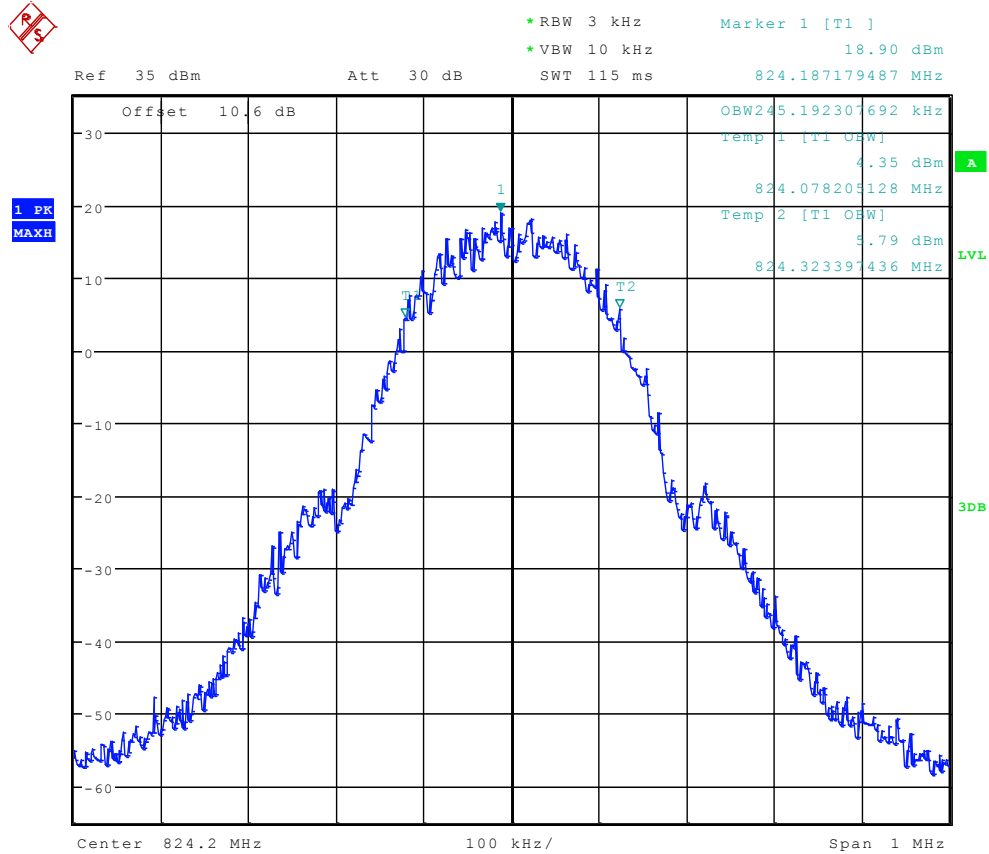


Date: 22.SEP.2011 00:35:12

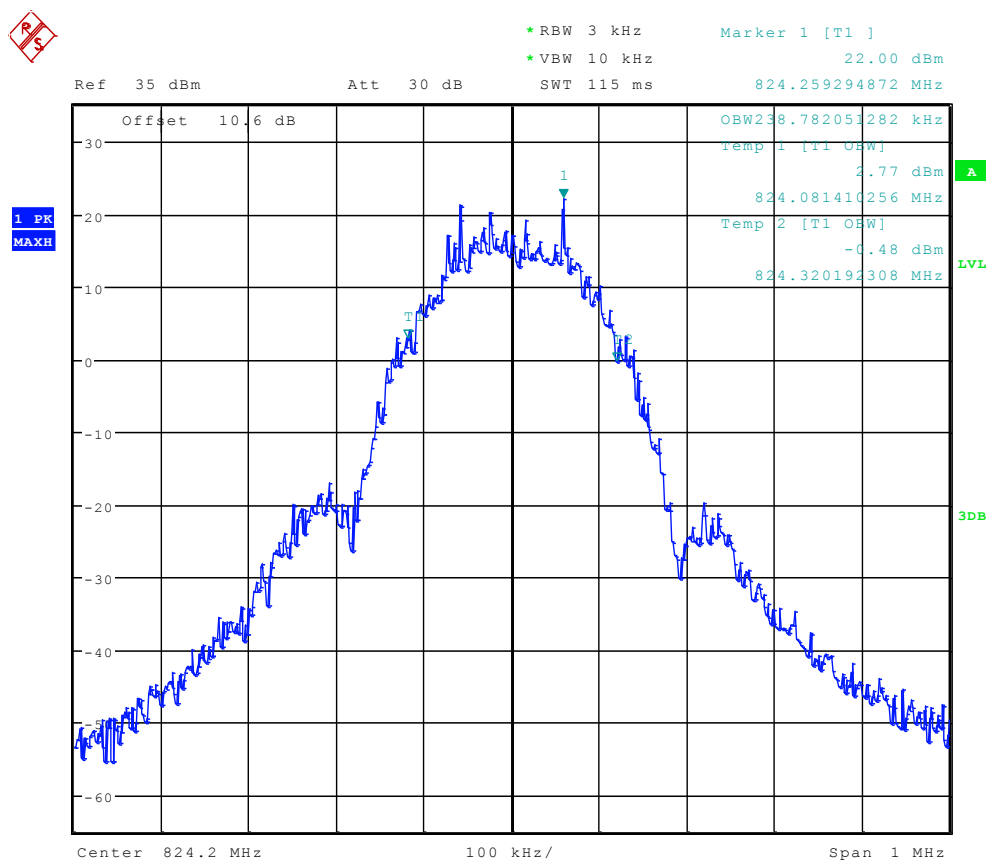

Date: 22.SEP.2011 00:48:19




Channel 4132 (TM3: WCDMA)

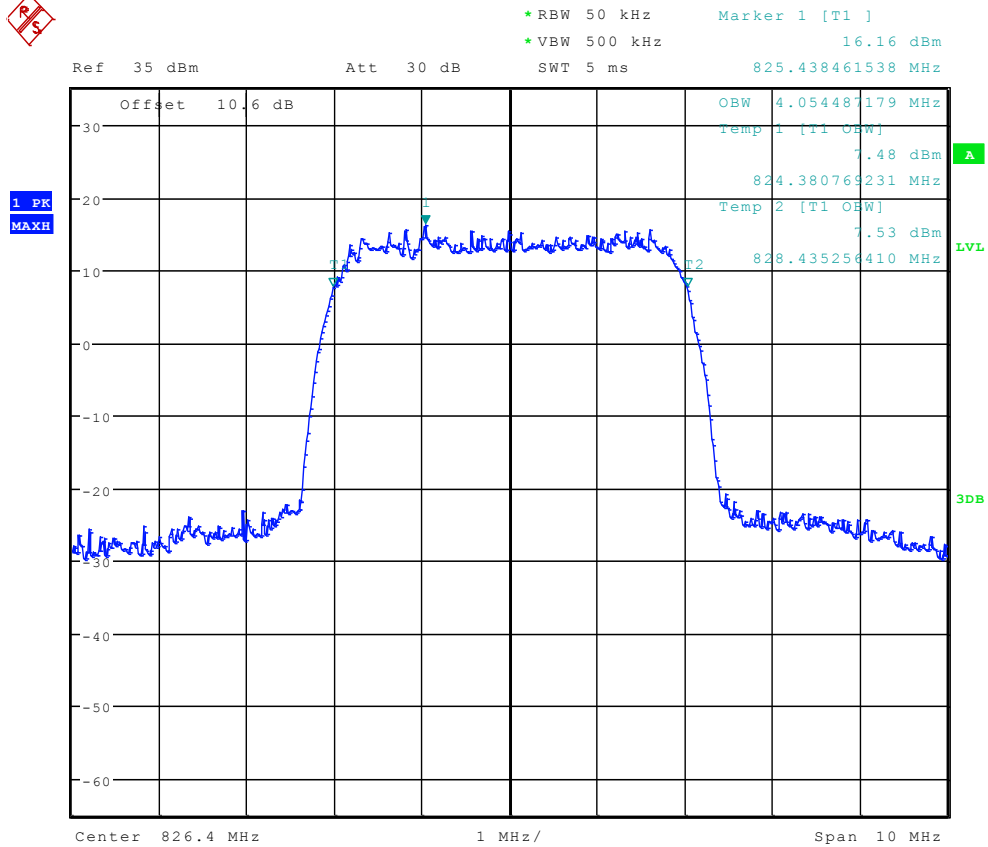

Date: 22.SEP.2011 00:54:19




Channel 192 (TM1:GPRS/GSM)

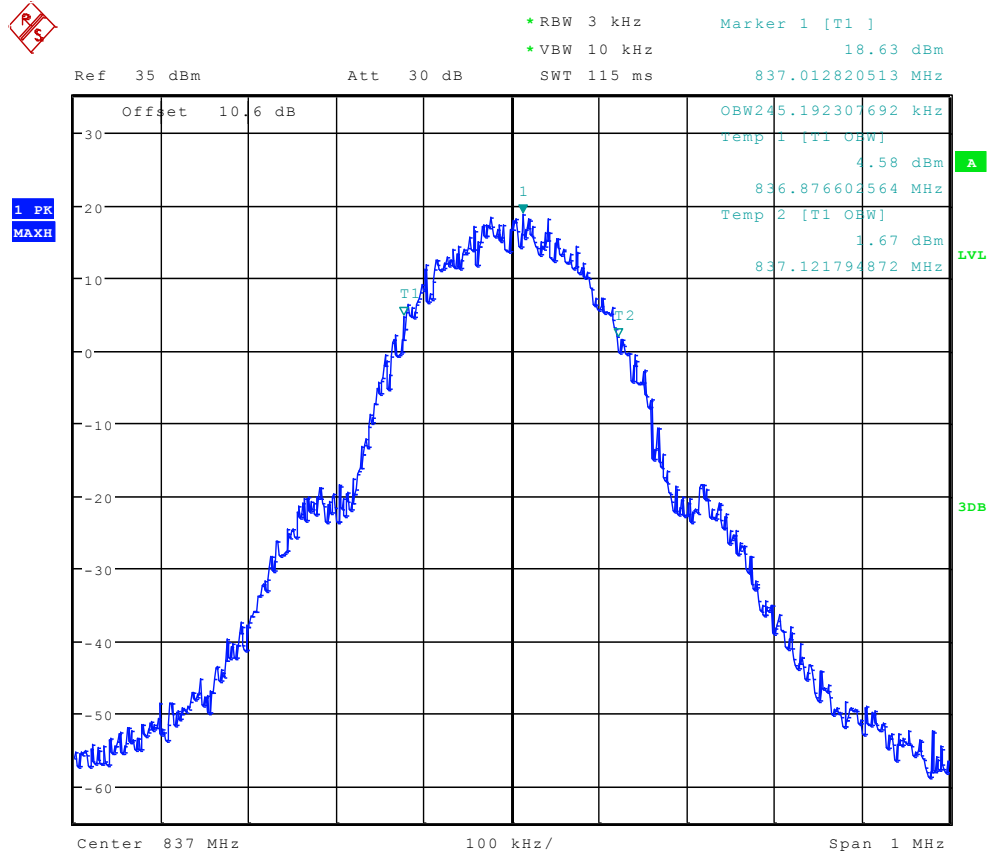

Date: 22.SEP.2011 00:35:26




Channel 192 (TM2:EDGE)

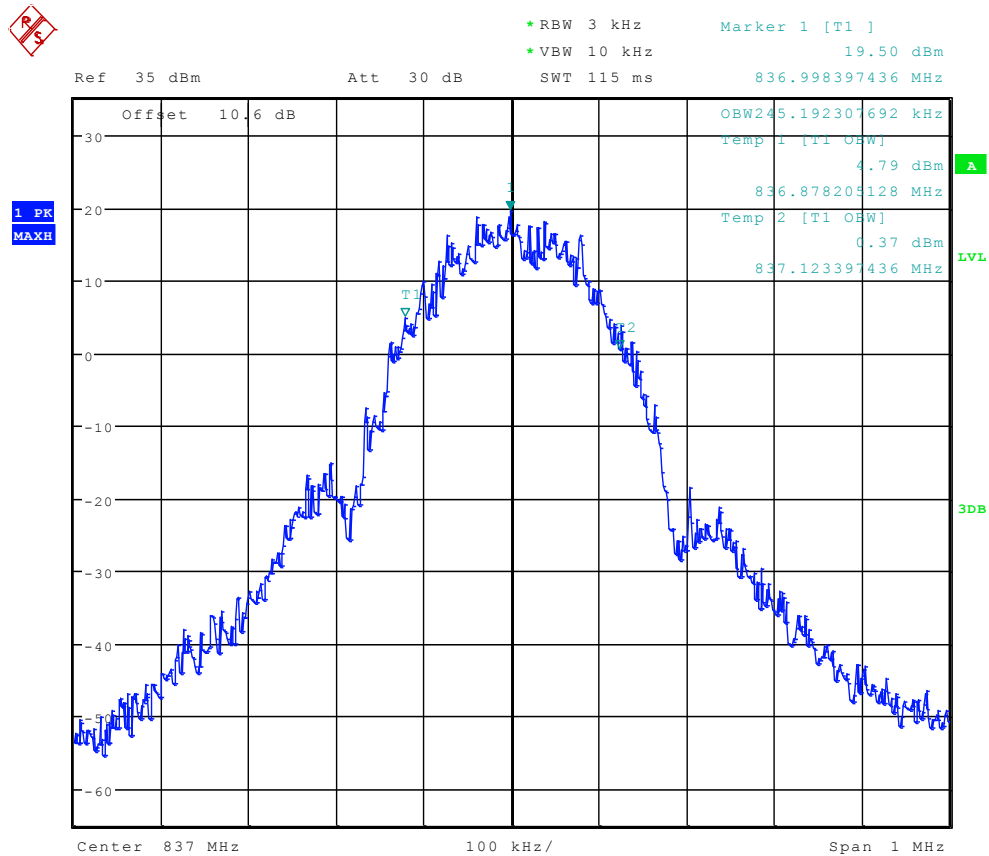

Date: 22.SEP.2011 00:48:33




Channel 4182 (TM3: WCDMA)

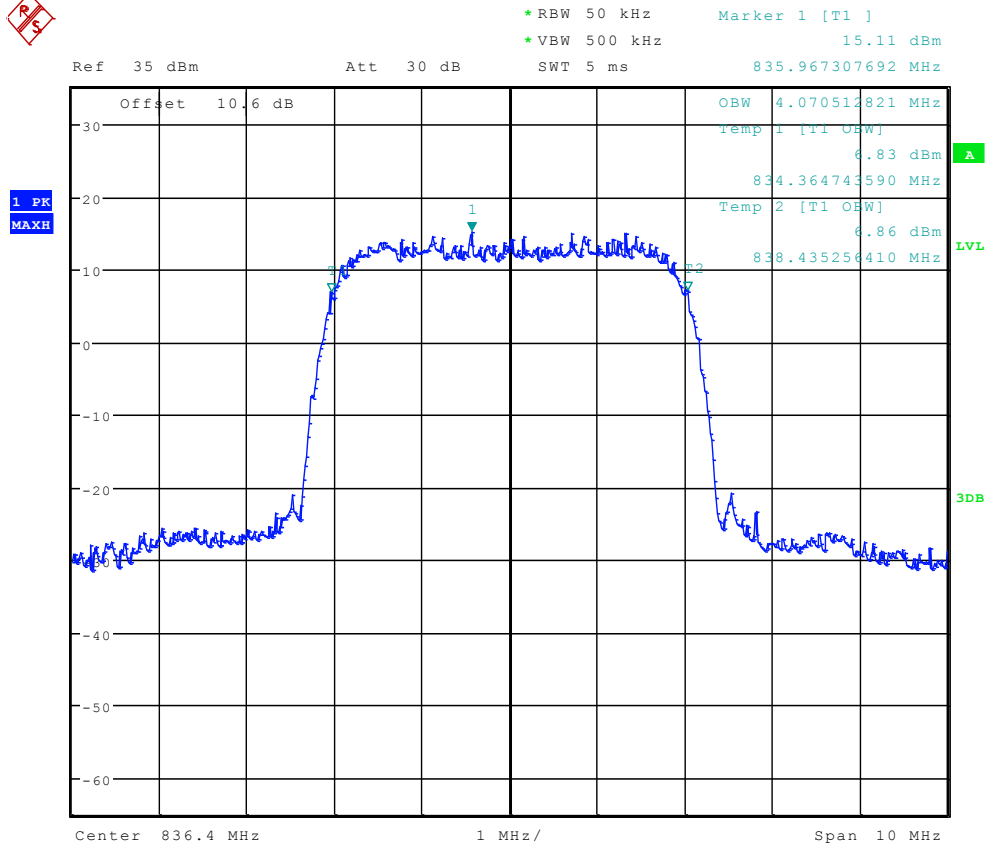

Date: 22.SEP.2011 00:54:33




Channel 251 (TM1:GPRS/GSM)

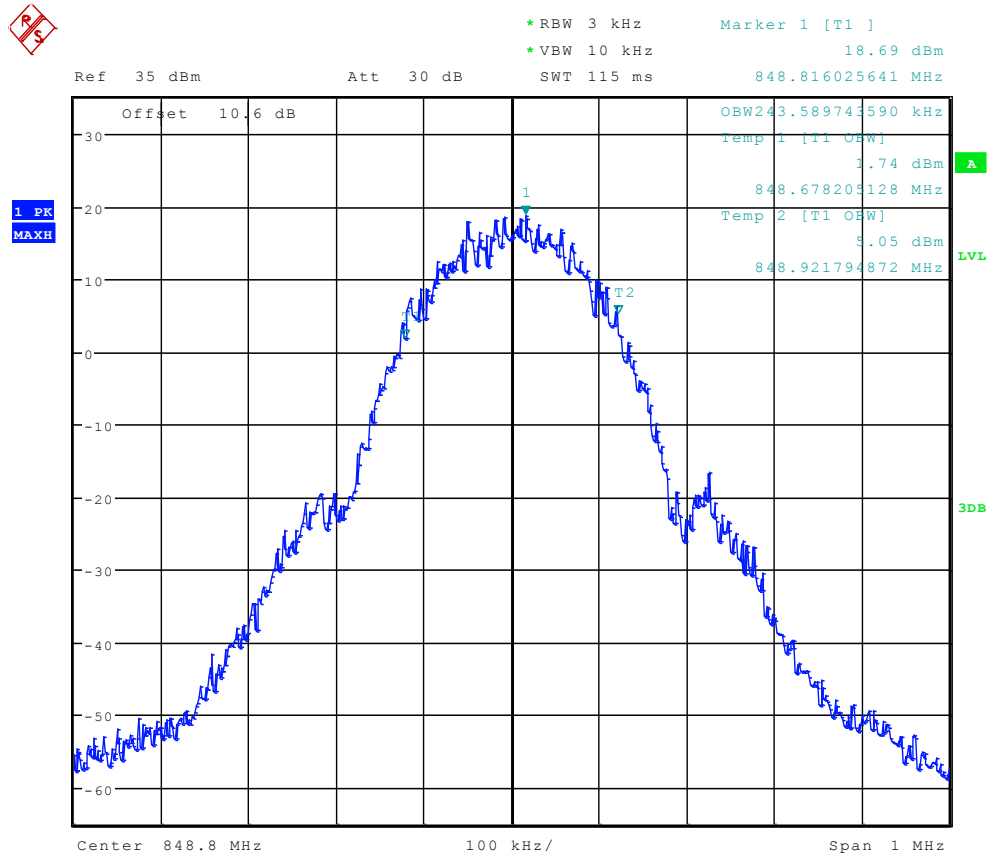

Date: 22.SEP.2011 00:35:40




Channel 251 (TM2:EDGE)

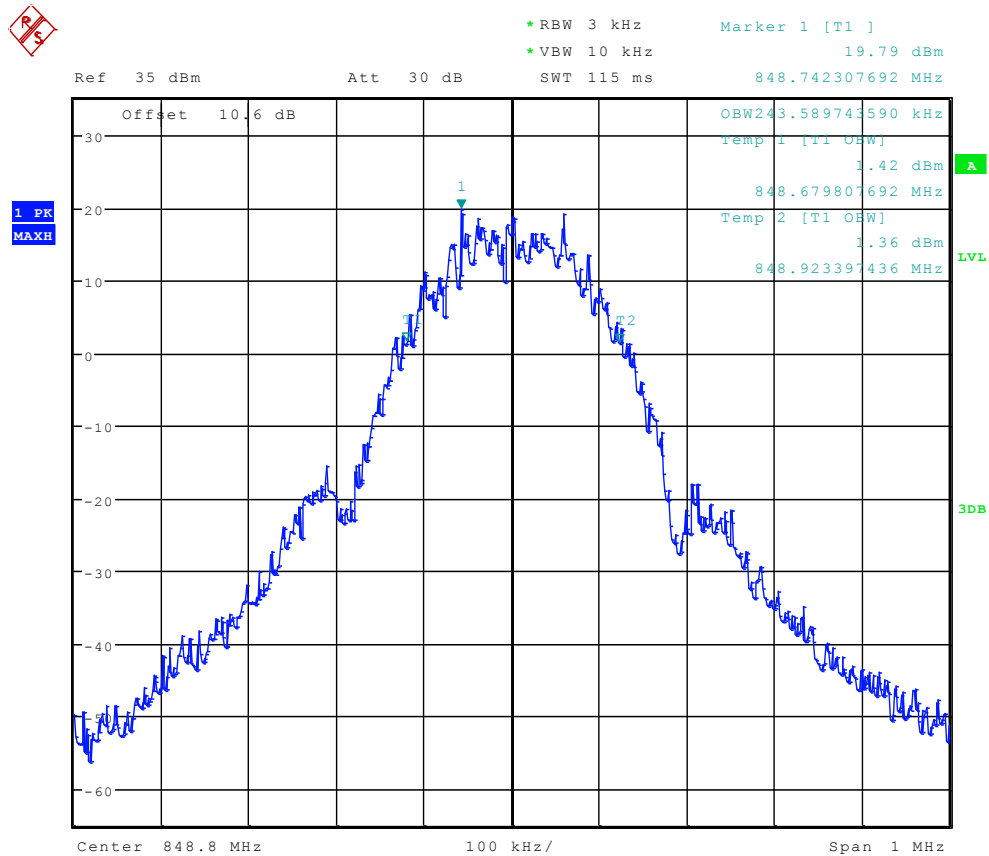

Date: 22.SEP.2011 00:48:47



Channel 4233 (TM3: WCDMA)

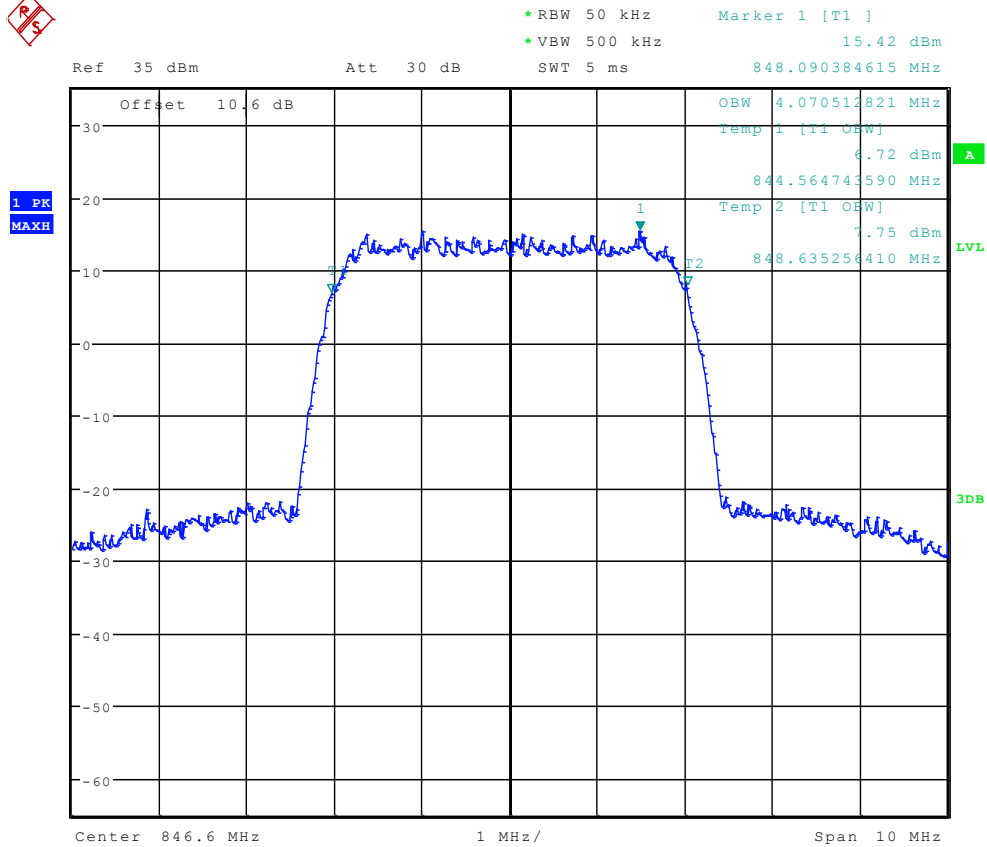

Date: 22.SEP.2011 00:54:47



Appendix C

Band Edges Compliance


According to FCC Part 2.1051 & Part 22 Subpart H



TM1:GPRS/GSM

Left Edge


Channel 128

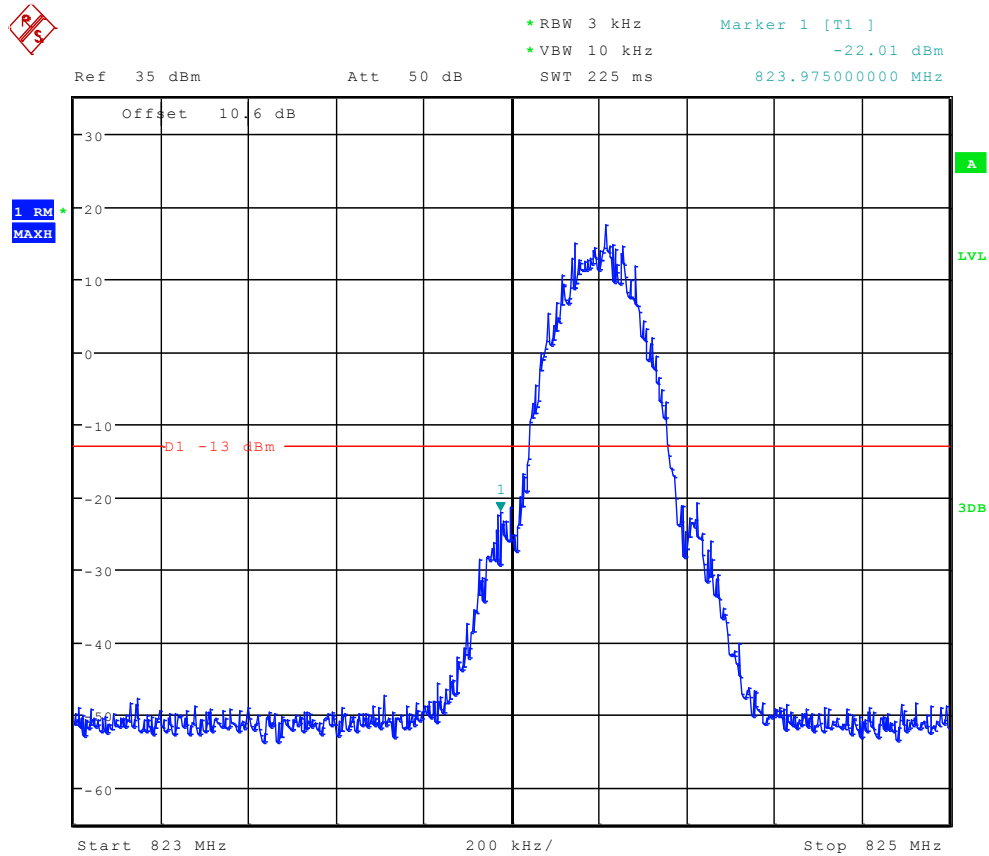

Date: 22.SEP.2011 00:38:49




Right Edge Channel 251

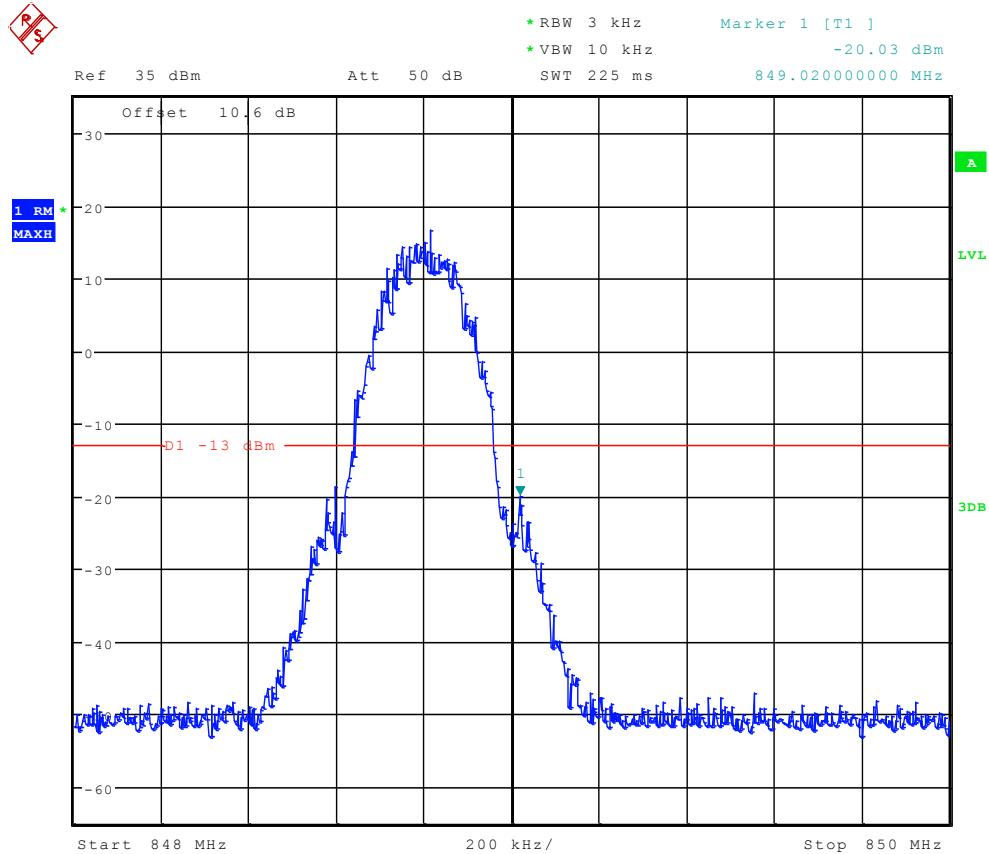

Date: 22.SEP.2011 00:39:07




TM2:EDGE Left Edge Channel 128

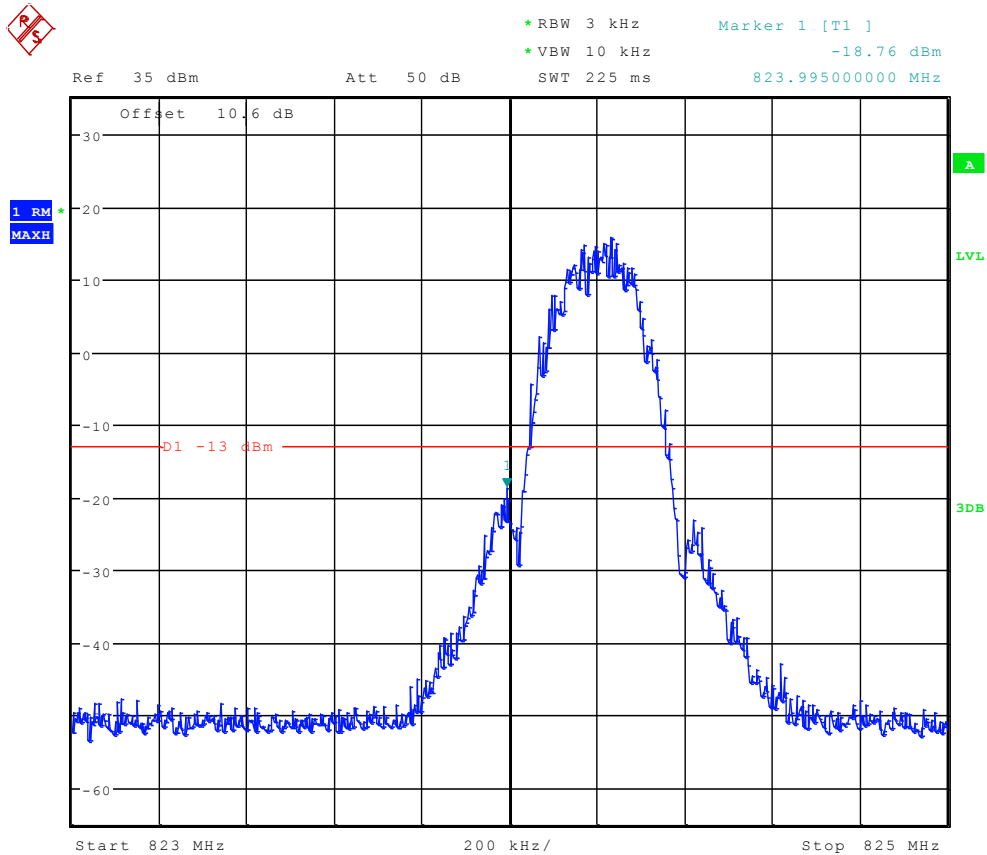

Date: 22.SEP.2011 00:47:44



Right Edge Channel 251

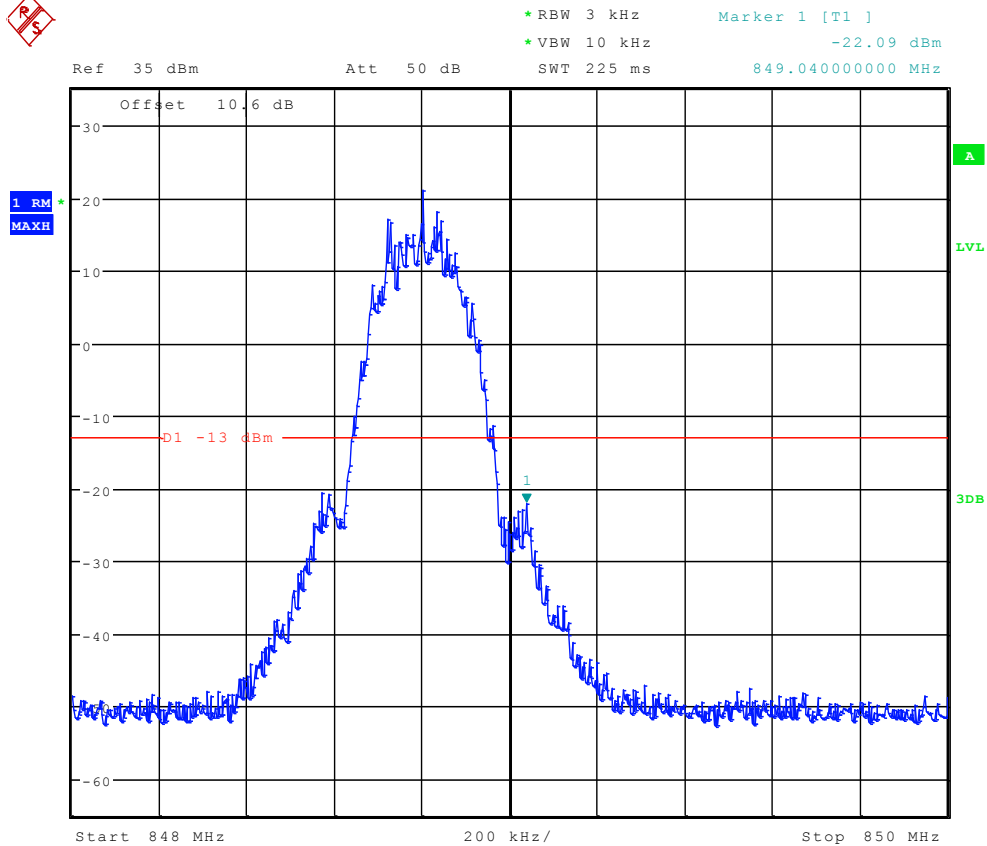


Date: 22.SEP.2011 00:48:05



TM3: WCDMA


Left Edge

Channel 4132

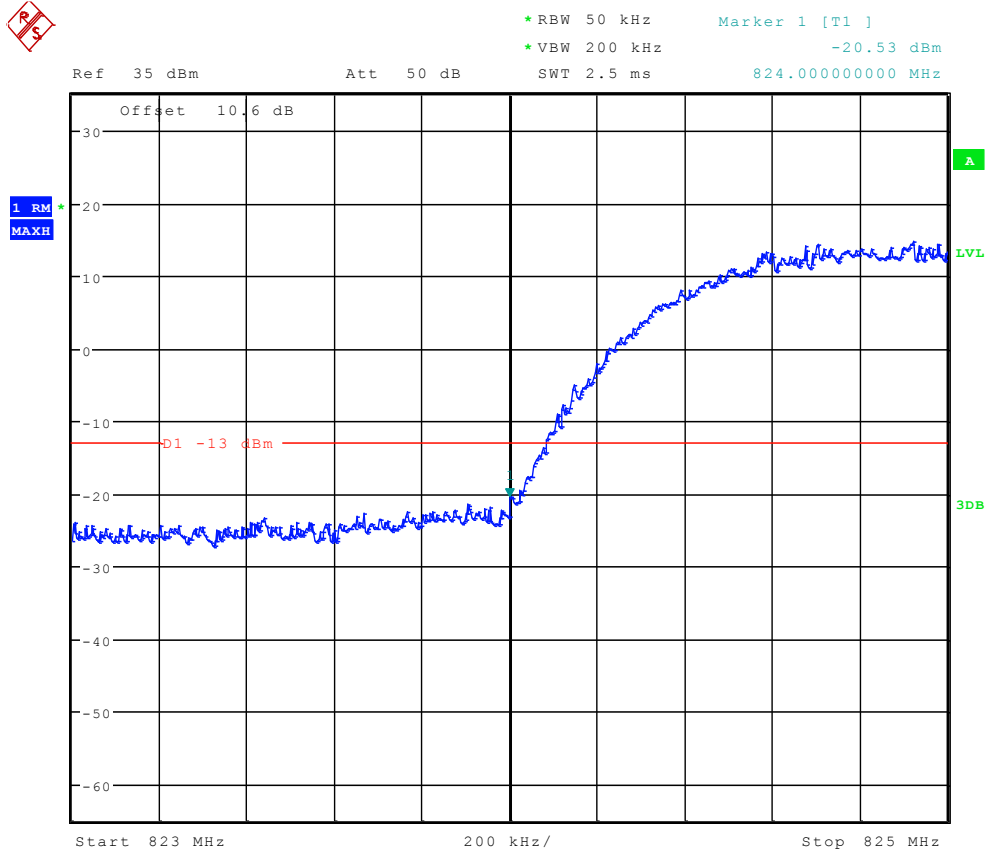

Date: 22.SEP.2011 00:55:01

Right Edge

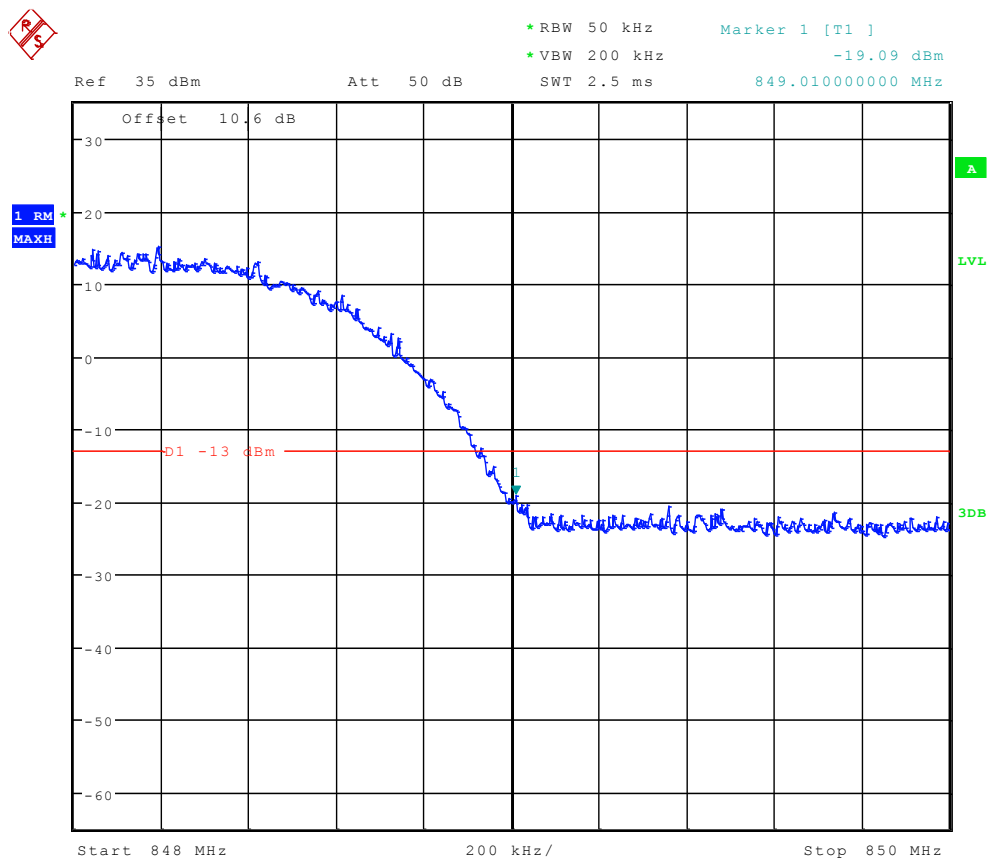

Date: 22.SEP.2011 00:55:15



Appendix D


Spurious Emission at Antenna Terminal

According to FCC Part 2.1051 & Part 22 Subpart H




TM1: GPRS/GSM


Channel 128

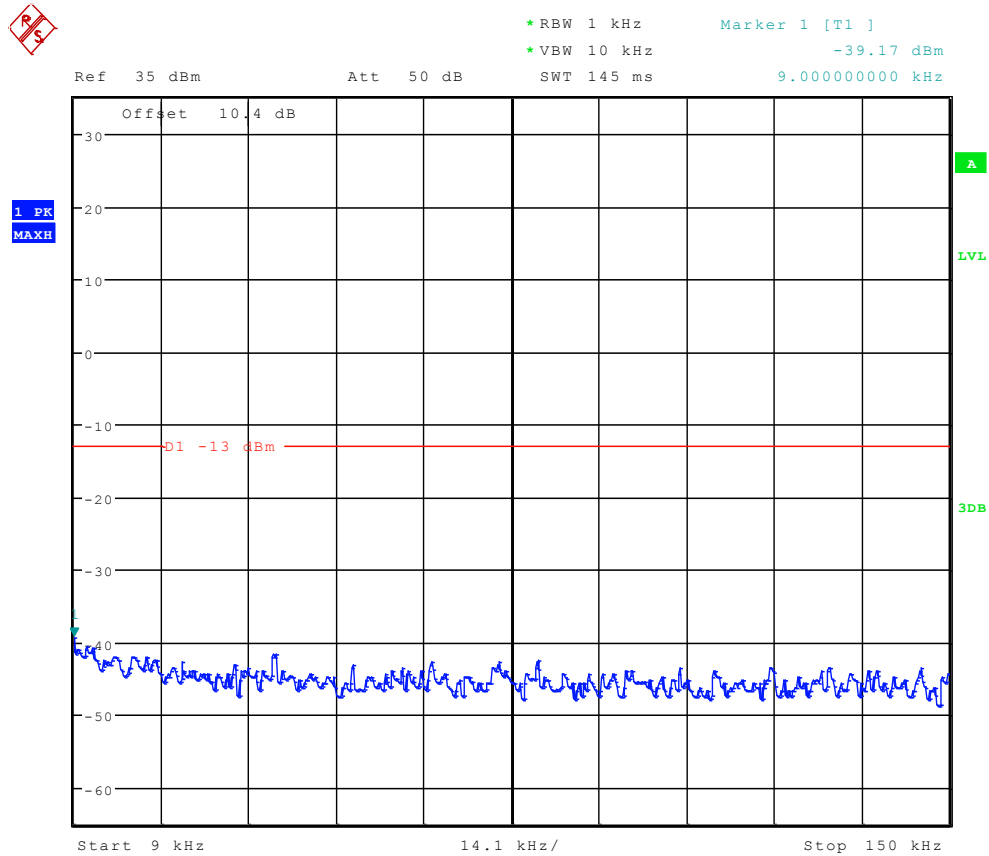


Date: 22.SEP.2011 00:35:54

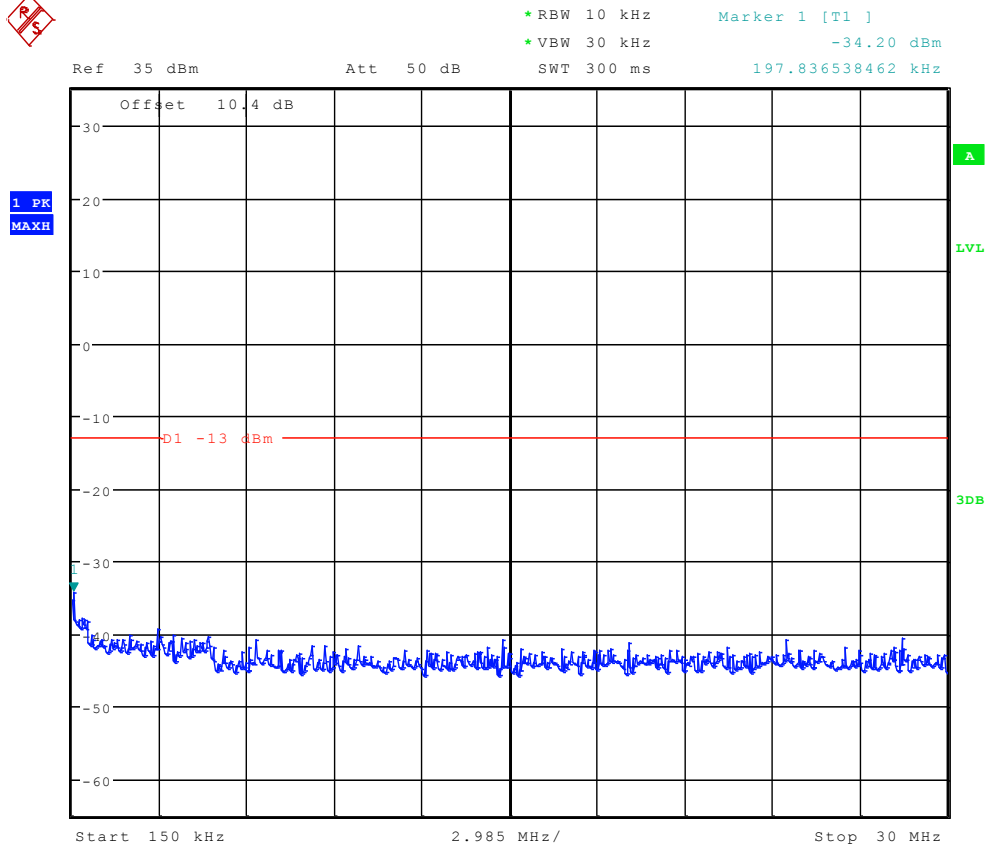

Date: 22.SEP.2011 00:36:38

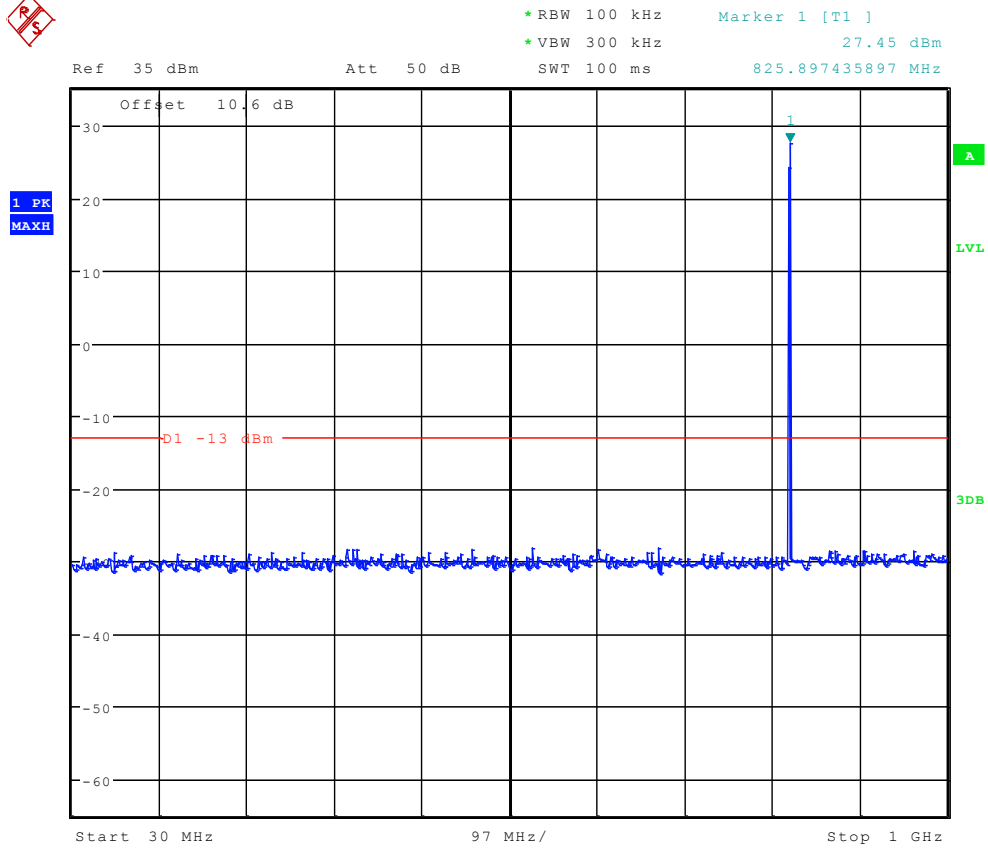


Date: 22.SEP.2011 00:37:22

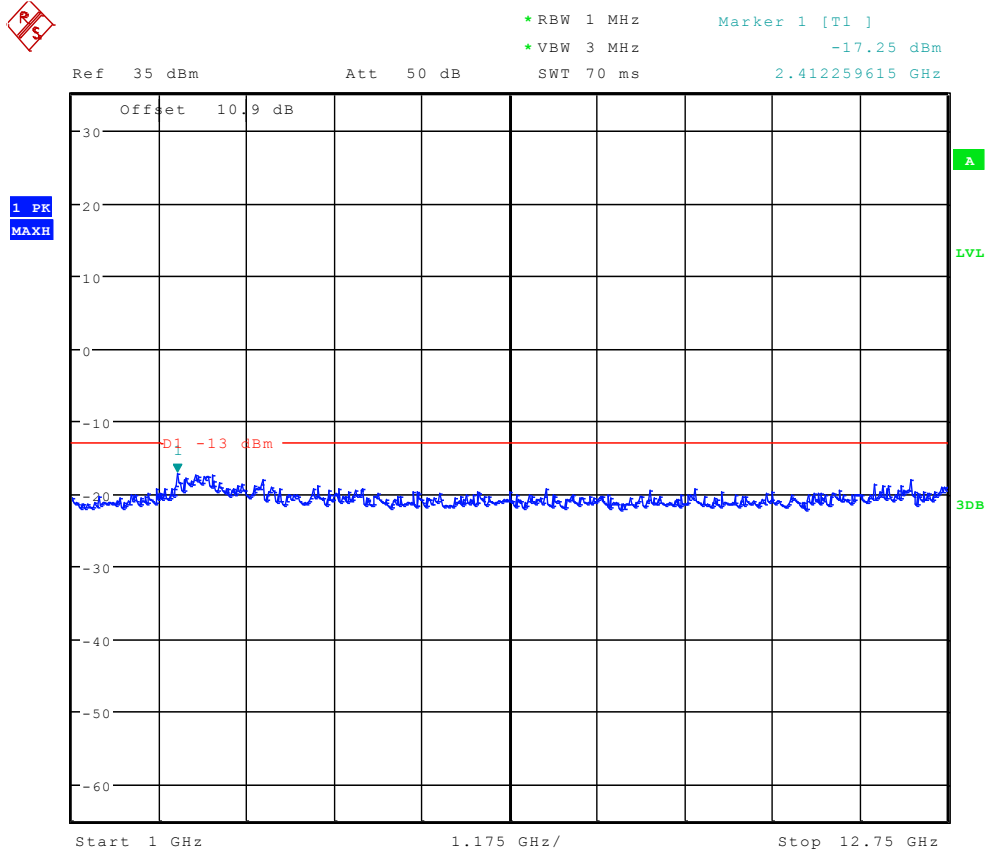


Date: 22.SEP.2011 00:38:06




Channel 192

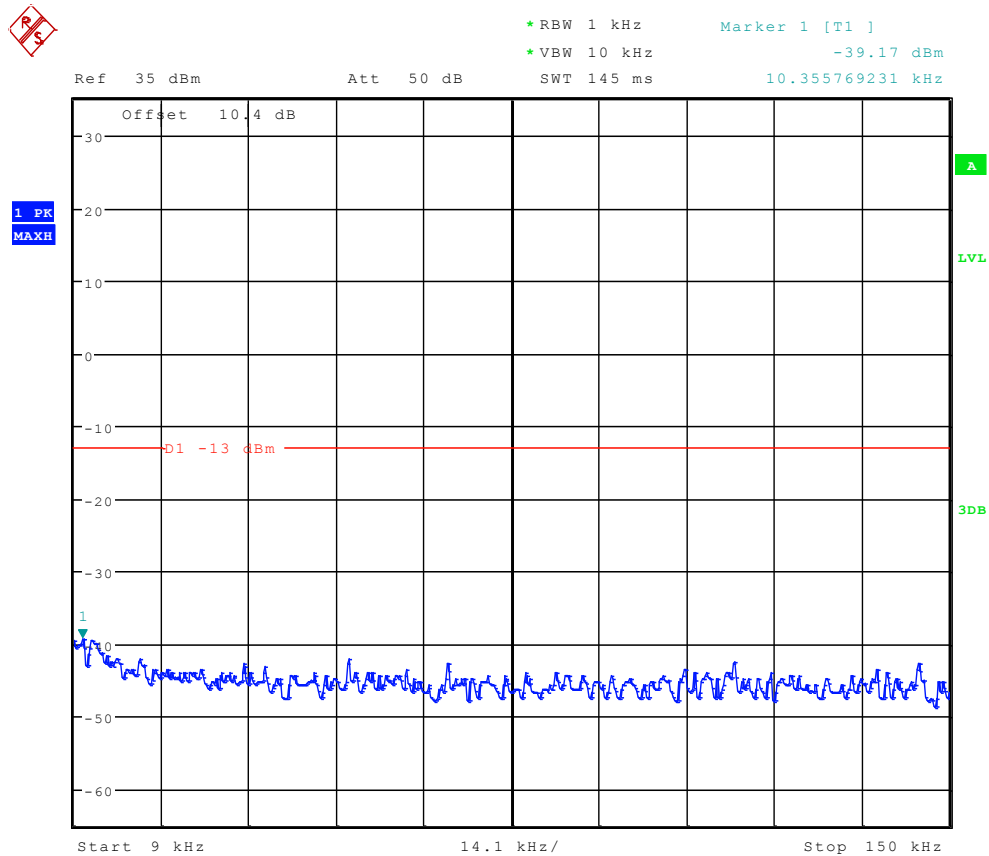


Date: 22.SEP.2011 00:36:09

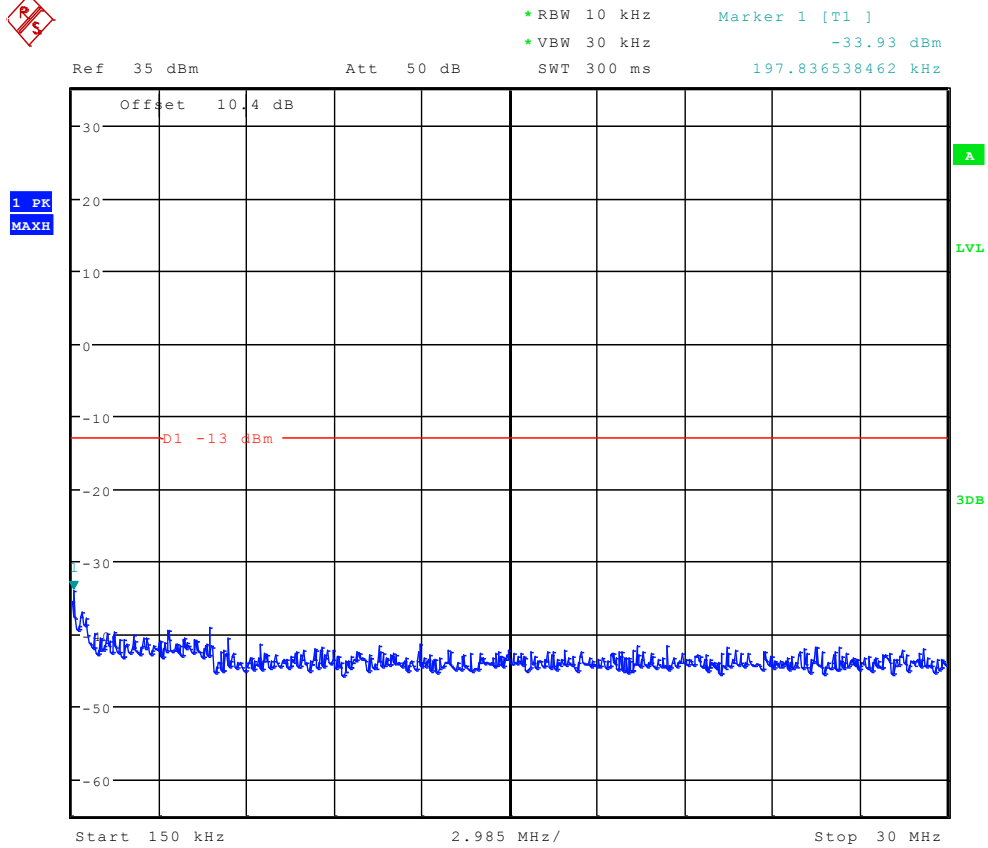

Date: 22.SEP.2011 00:36:53

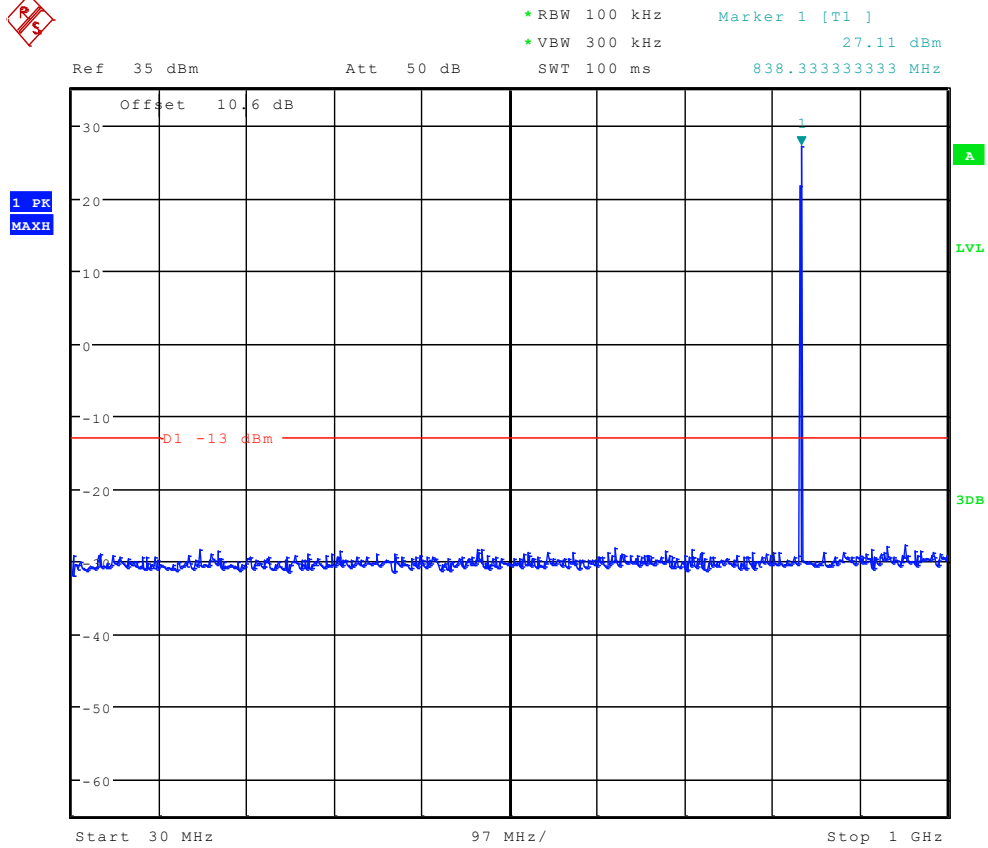


Date: 22.SEP.2011 00:37:36

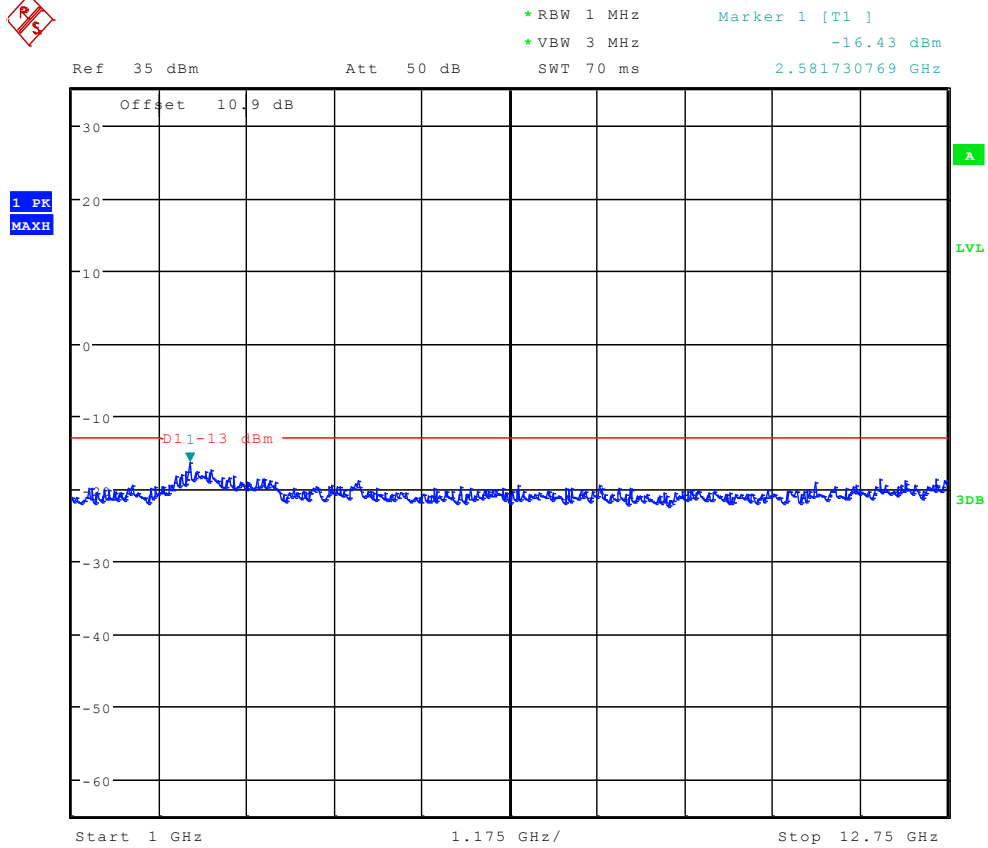


Date: 22.SEP.2011 00:38:20




Channel 251

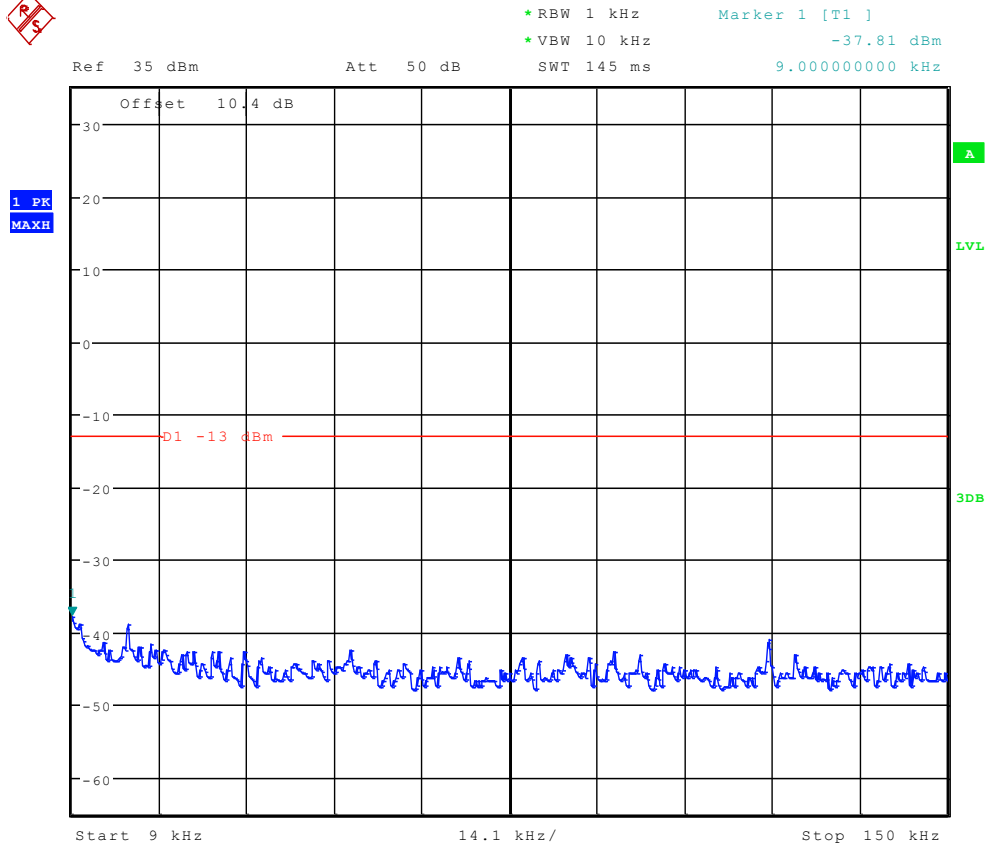


Date: 22.SEP.2011 00:36:23

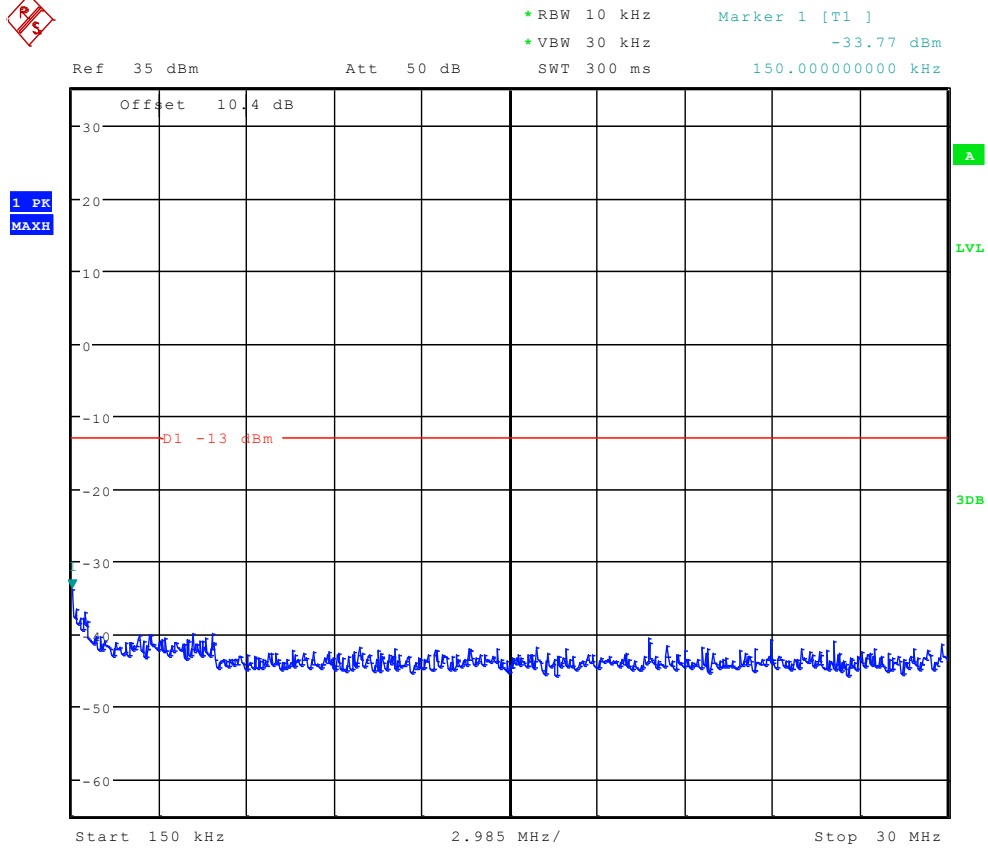

Date: 22.SEP.2011 00:37:07

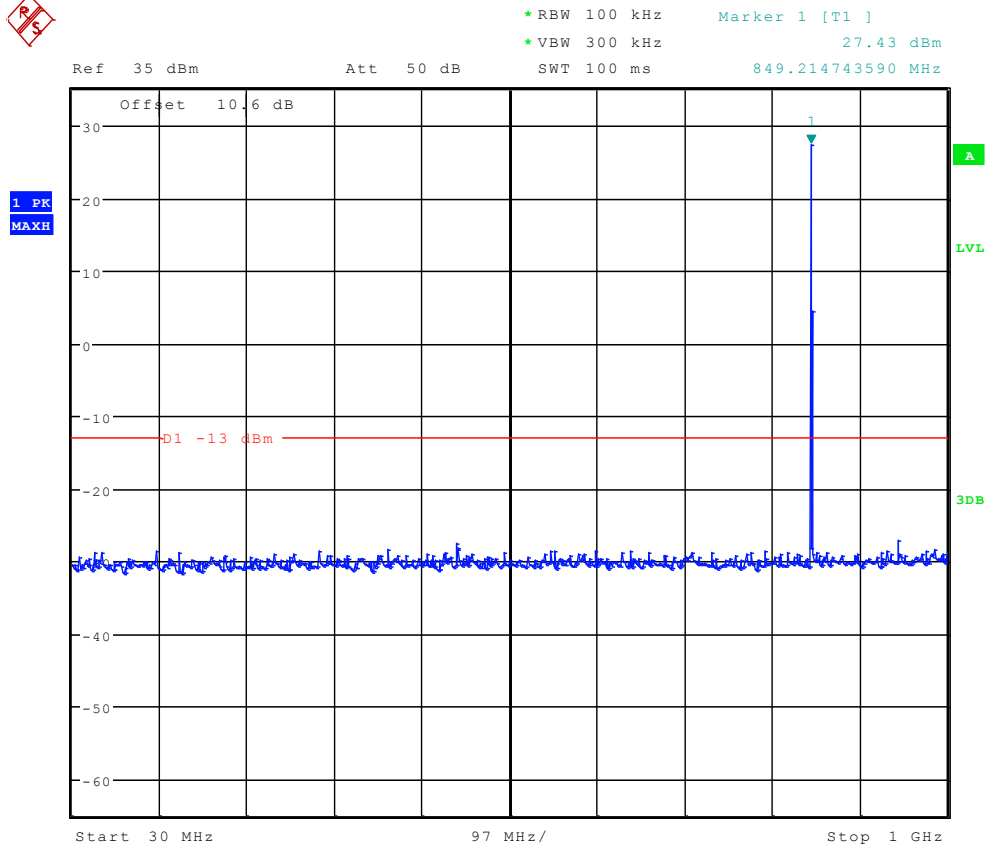


Date: 22.SEP.2011 00:37:51

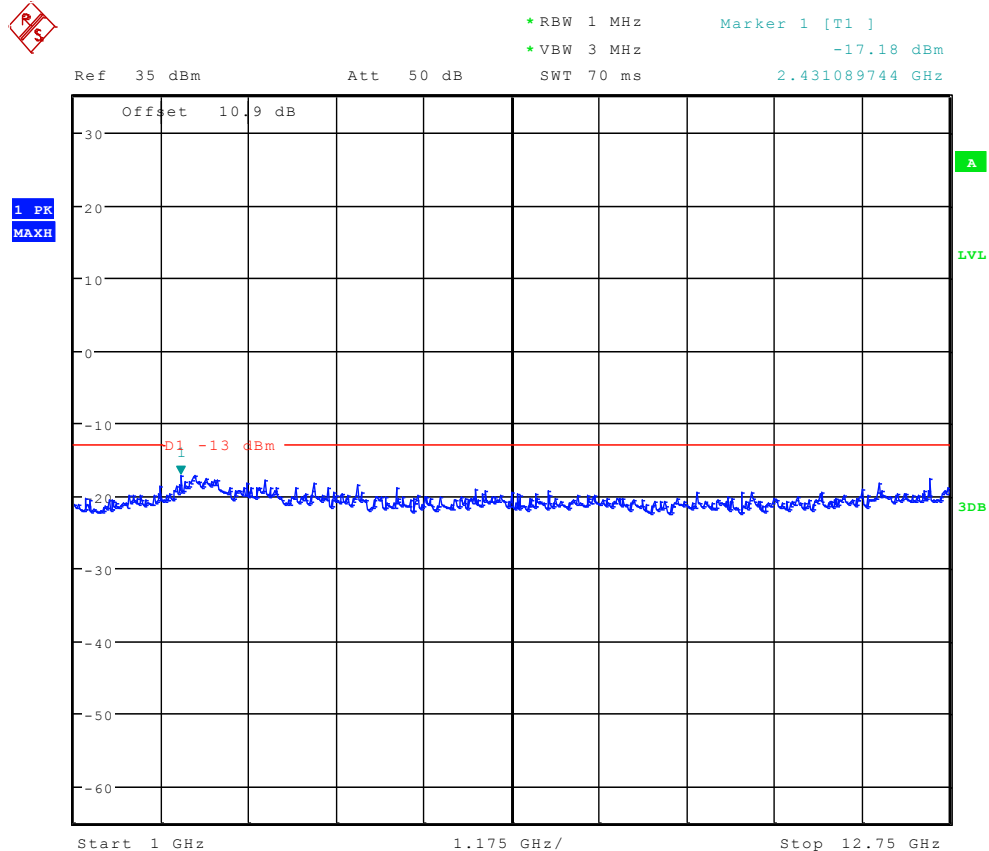


Date: 22.SEP.2011 00:38:35




TM2: EDGE Channel 128

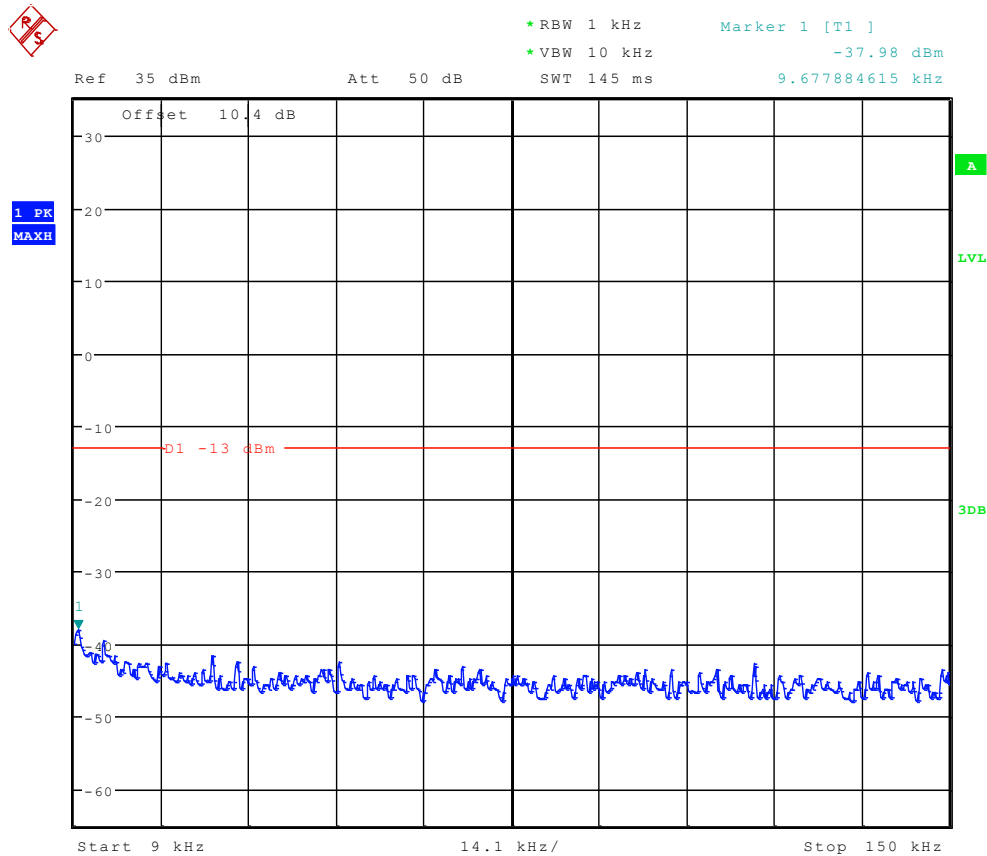


Date: 22.SEP.2011 00:49:02

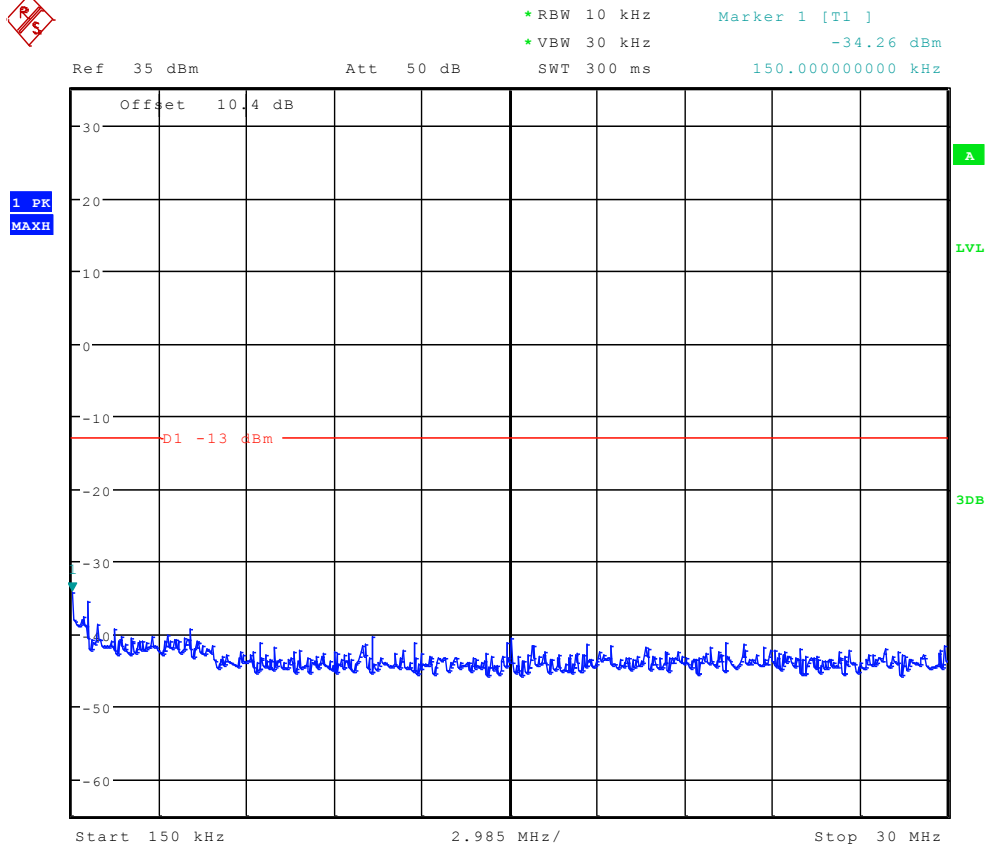

Date: 22.SEP.2011 00:49:45

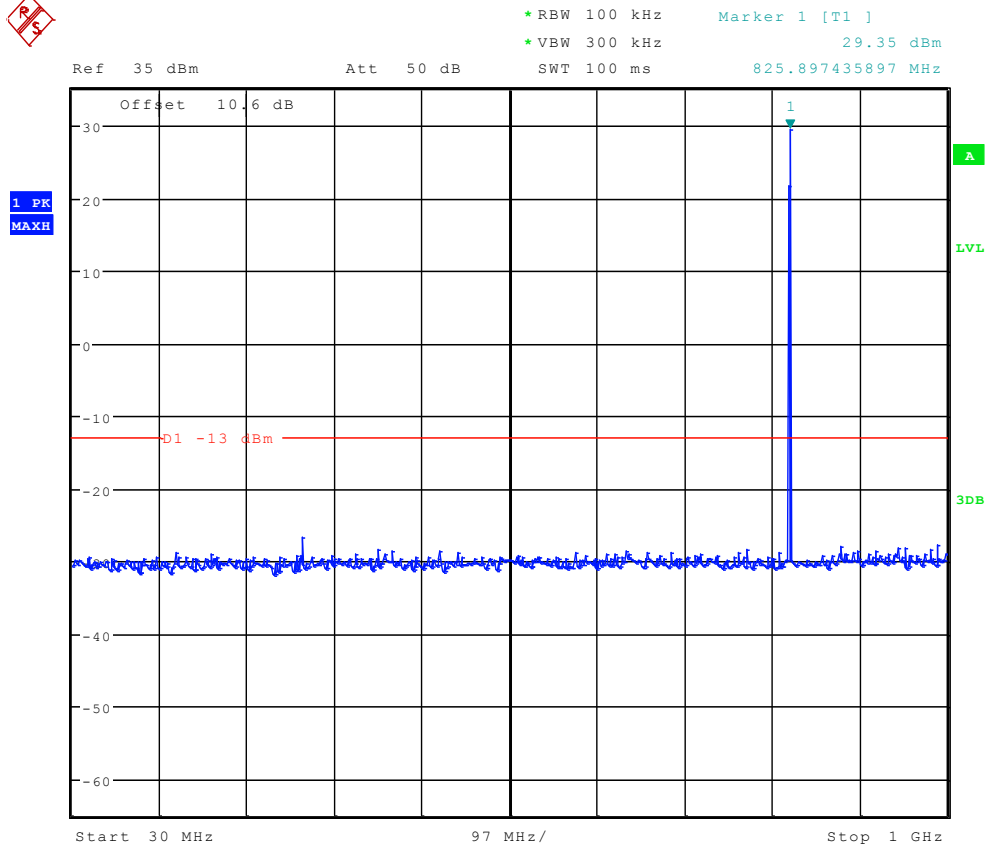


Date: 22.SEP.2011 00:50:29

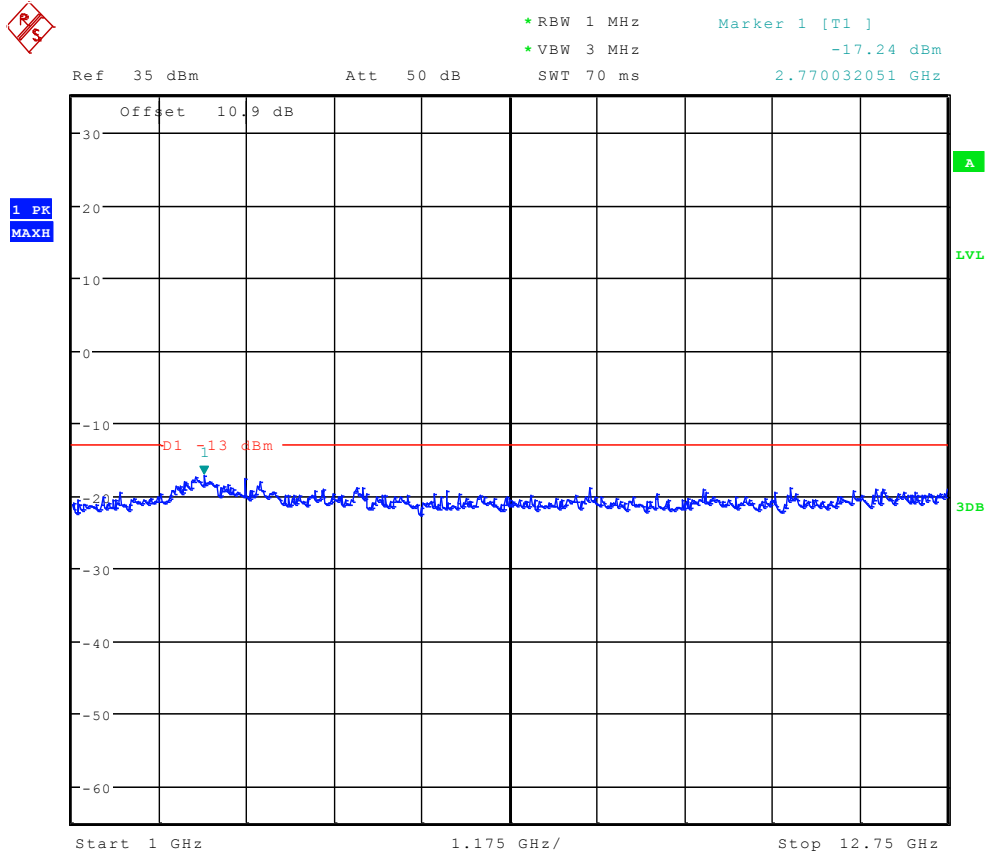


Date: 22.SEP.2011 00:51:13



Channel 192

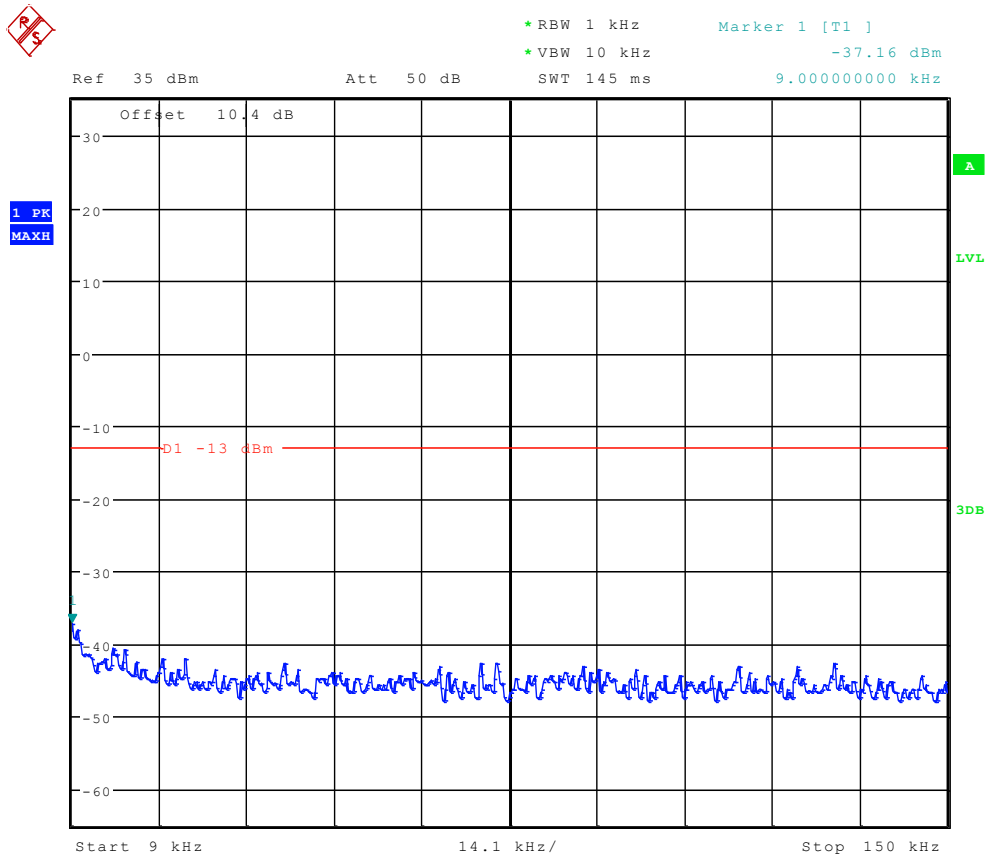

Date: 22.SEP.2011 00:49:16

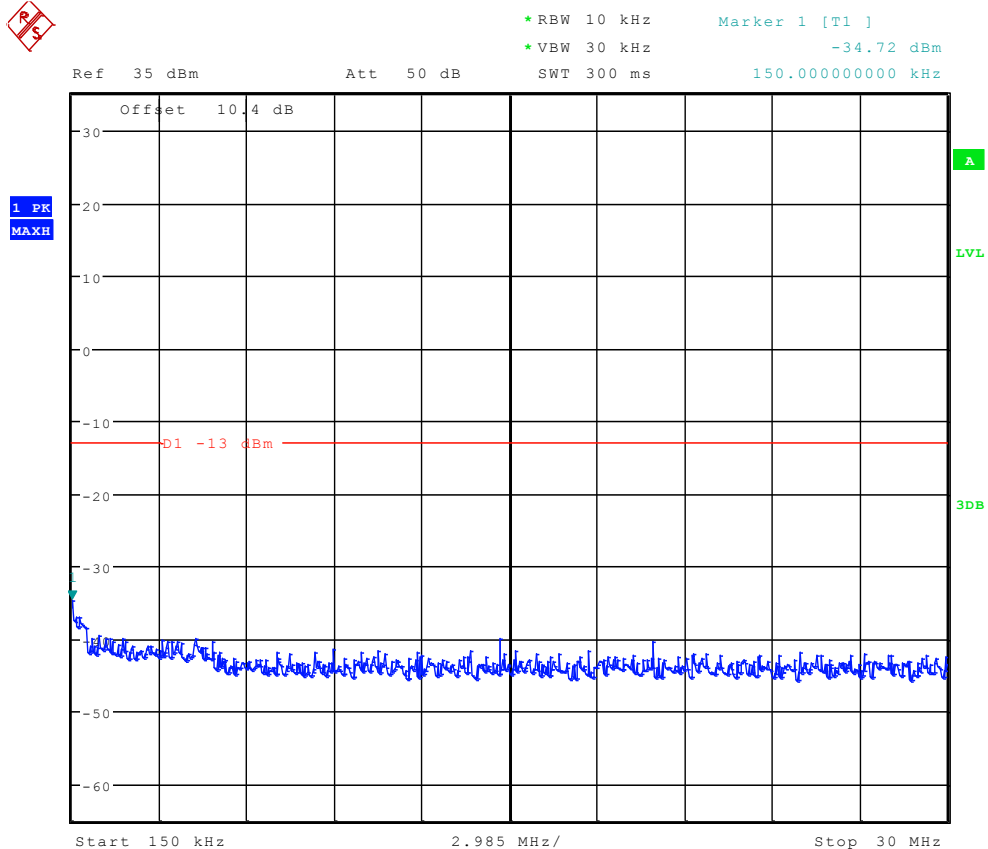


Date: 22.SEP.2011 00:50:00




```
* RBW 100 kHz      Marker 1 [T1 ]
* VBW 300 kHz      27.48 dBm
SWT 100 ms        838.333333333 MHz
```

Ref	35 dBm	Att	50 dB	SWT	100 ms	838.333333333 MHz
-----	--------	-----	-------	-----	--------	-------------------

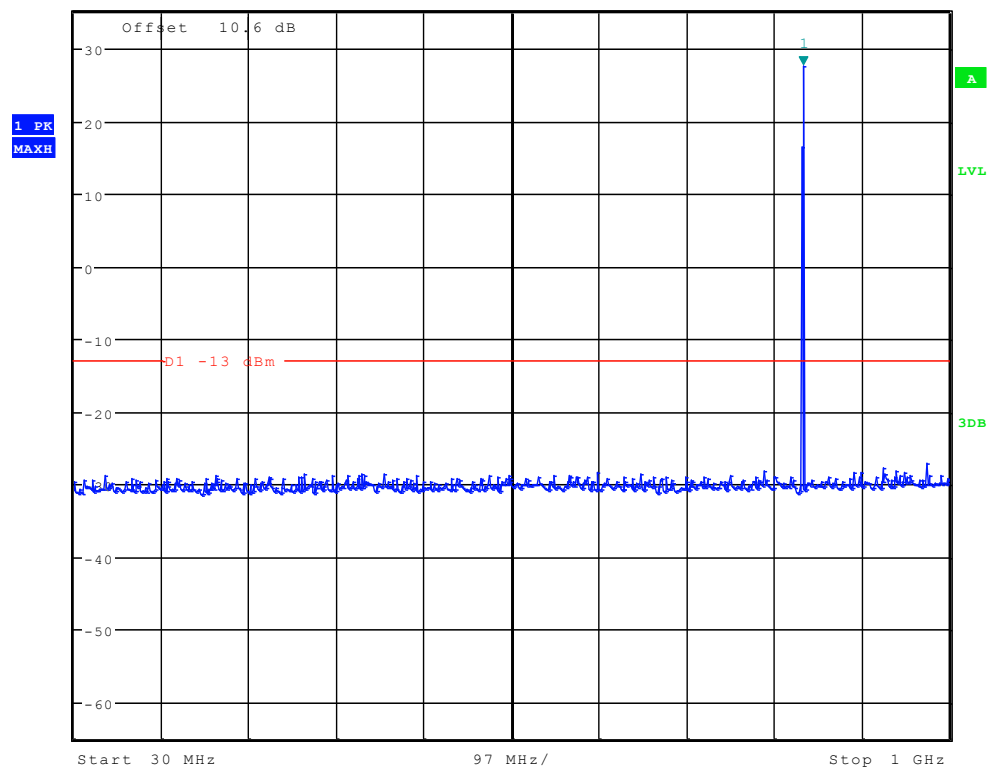


Date: 22.SEP.2011 00:50:43

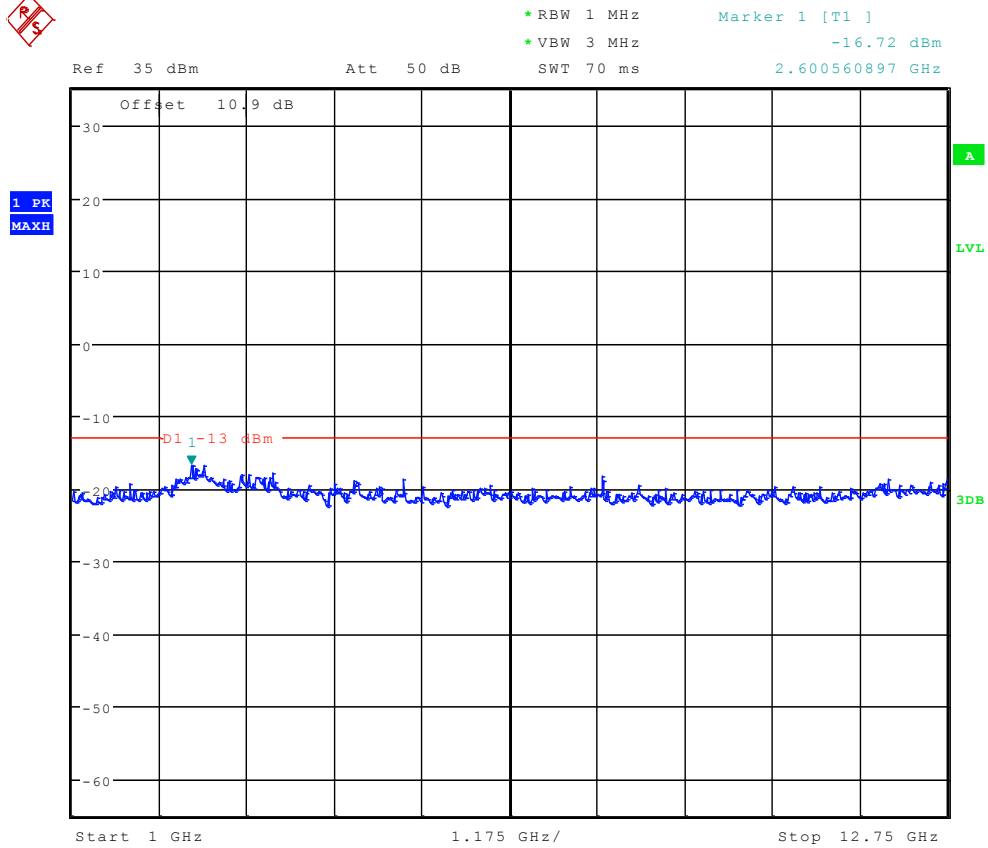


Date: 22.SEP.2011 00:51:27




Channel 251

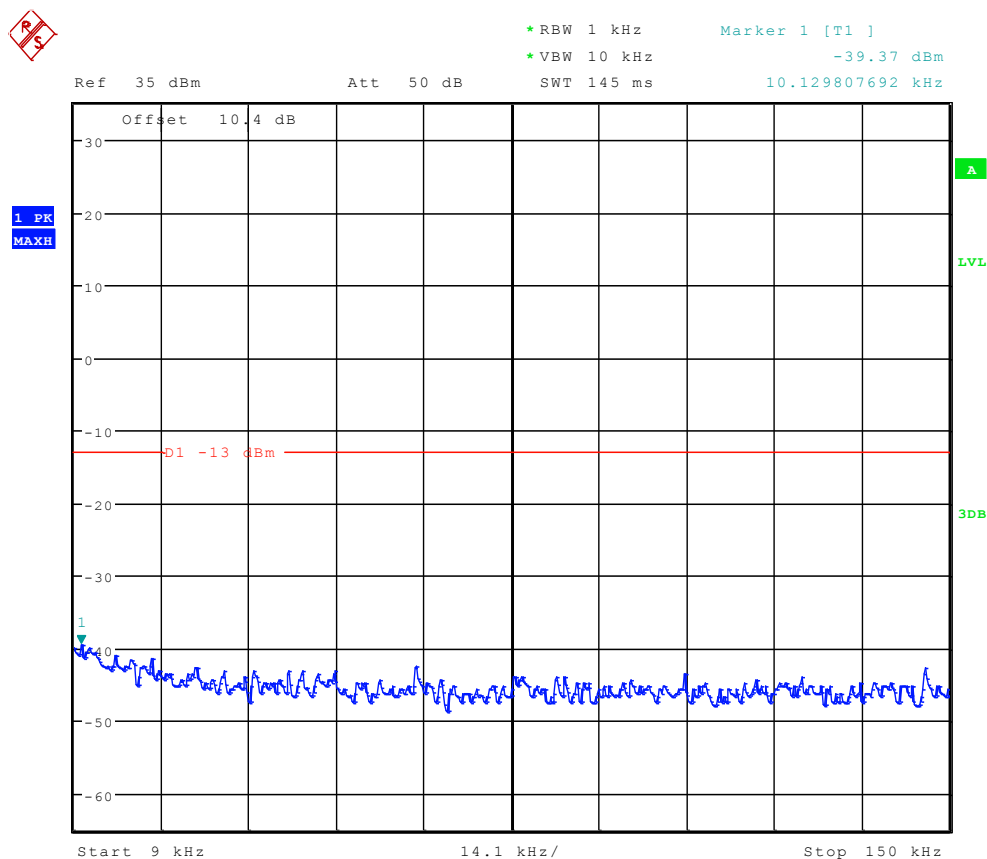


Date: 22.SEP.2011 00:49:30

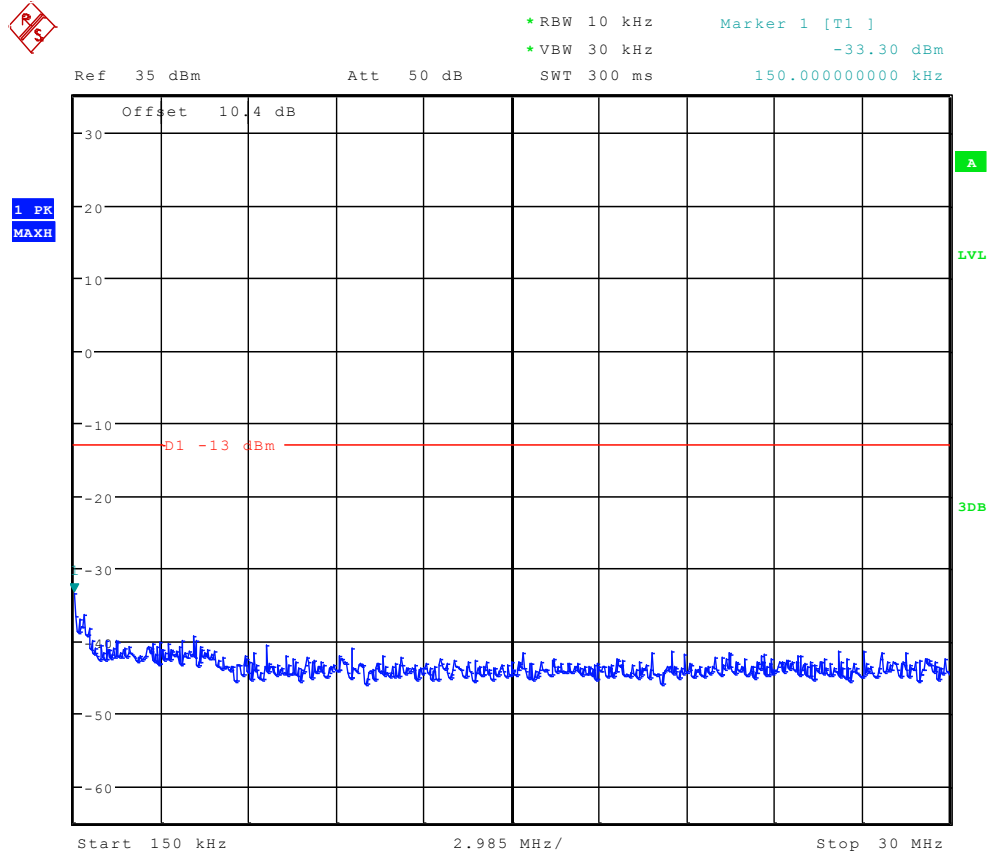

Date: 22.SEP.2011 00:50:14

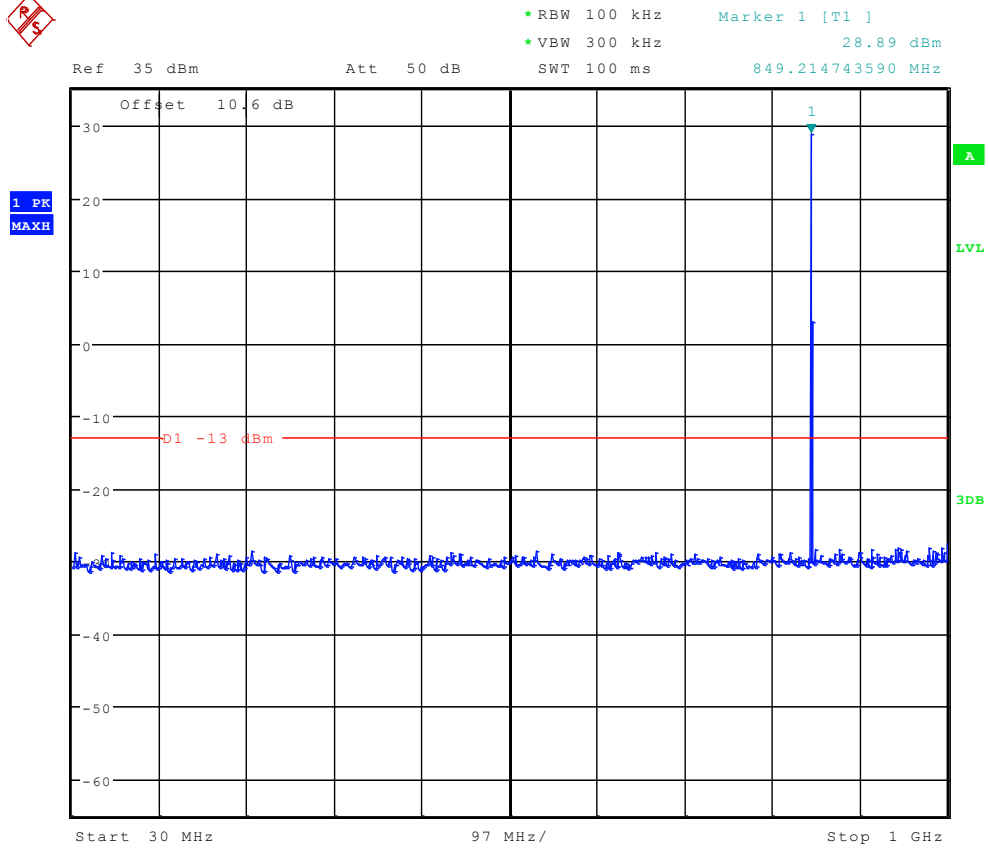


Date: 22.SEP.2011 00:50:58

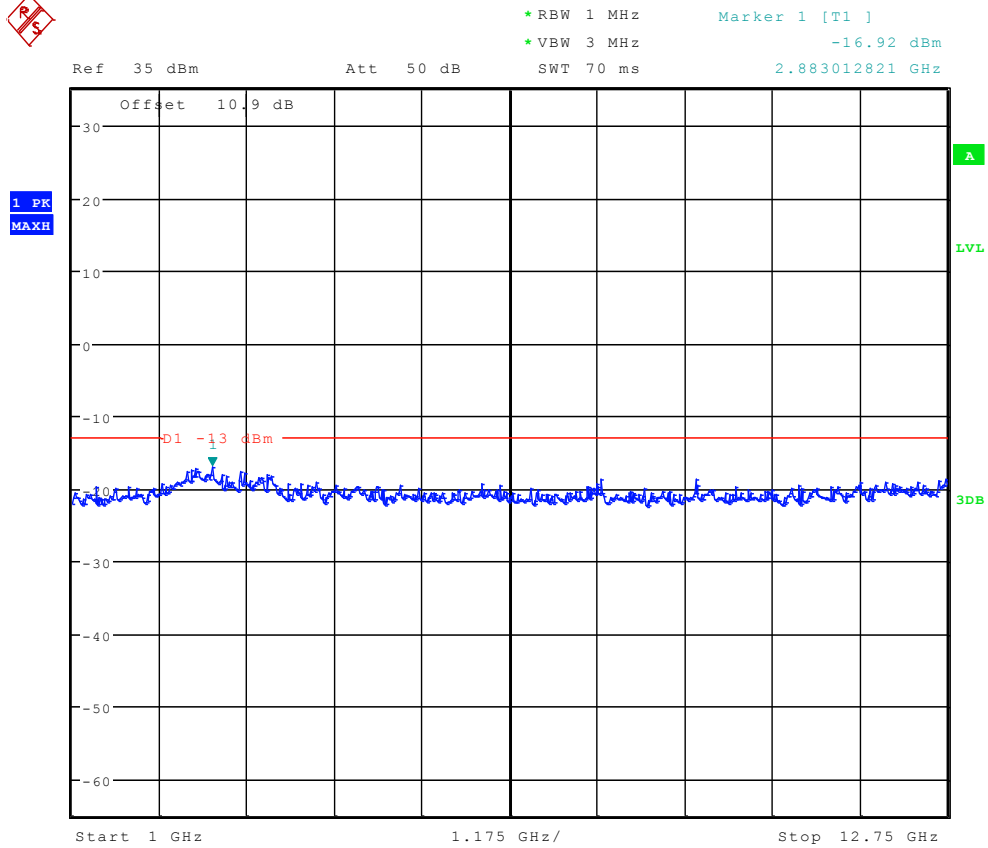


Date: 22.SEP.2011 00:51:42




TM3: WCDMA Channel 4132

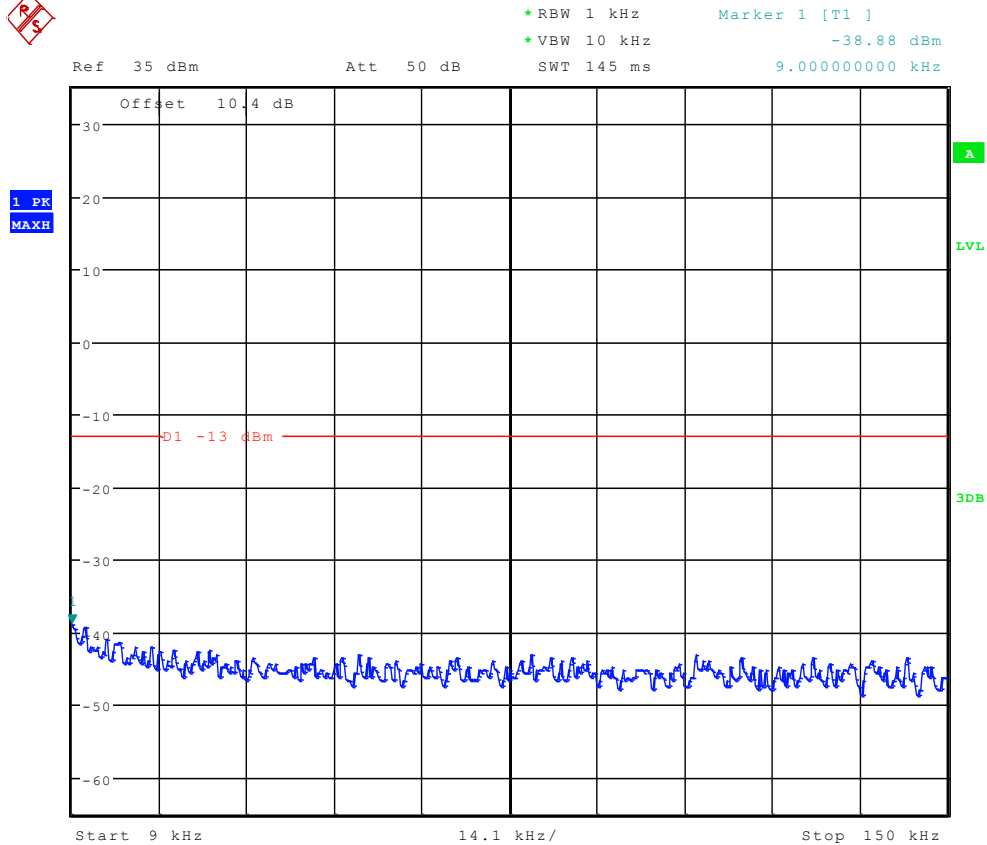


Date: 22.SEP.2011 00:55:29

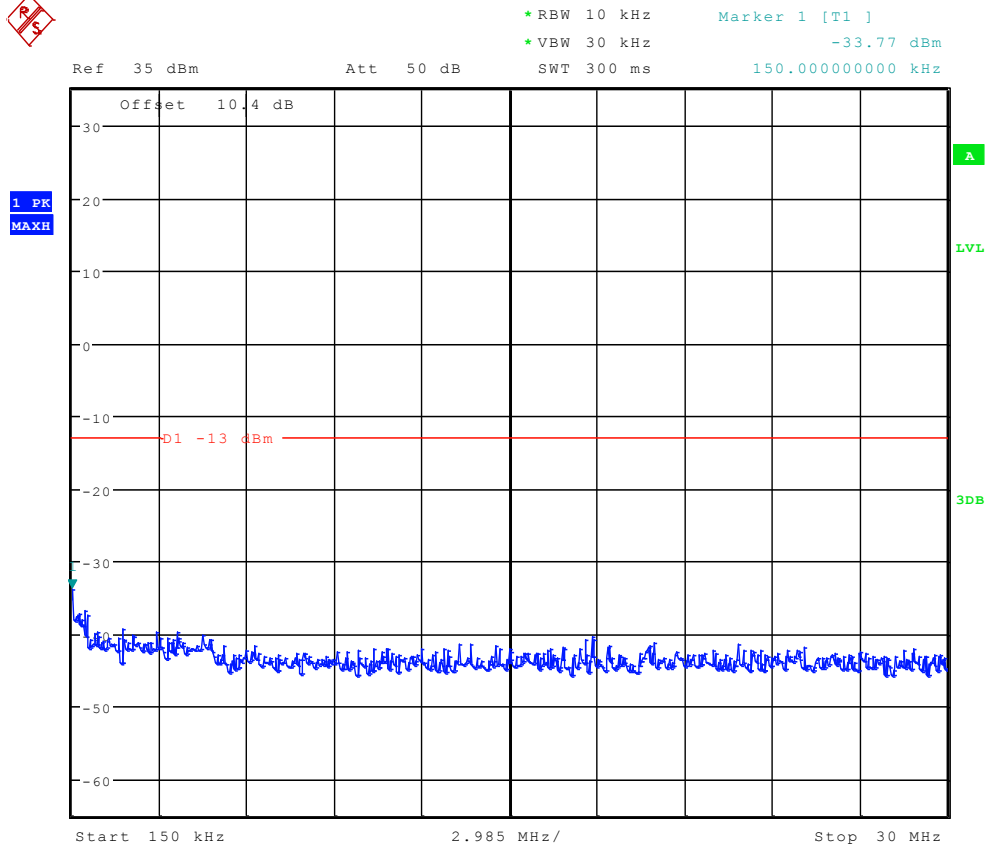

Date: 22.SEP.2011 00:56:13

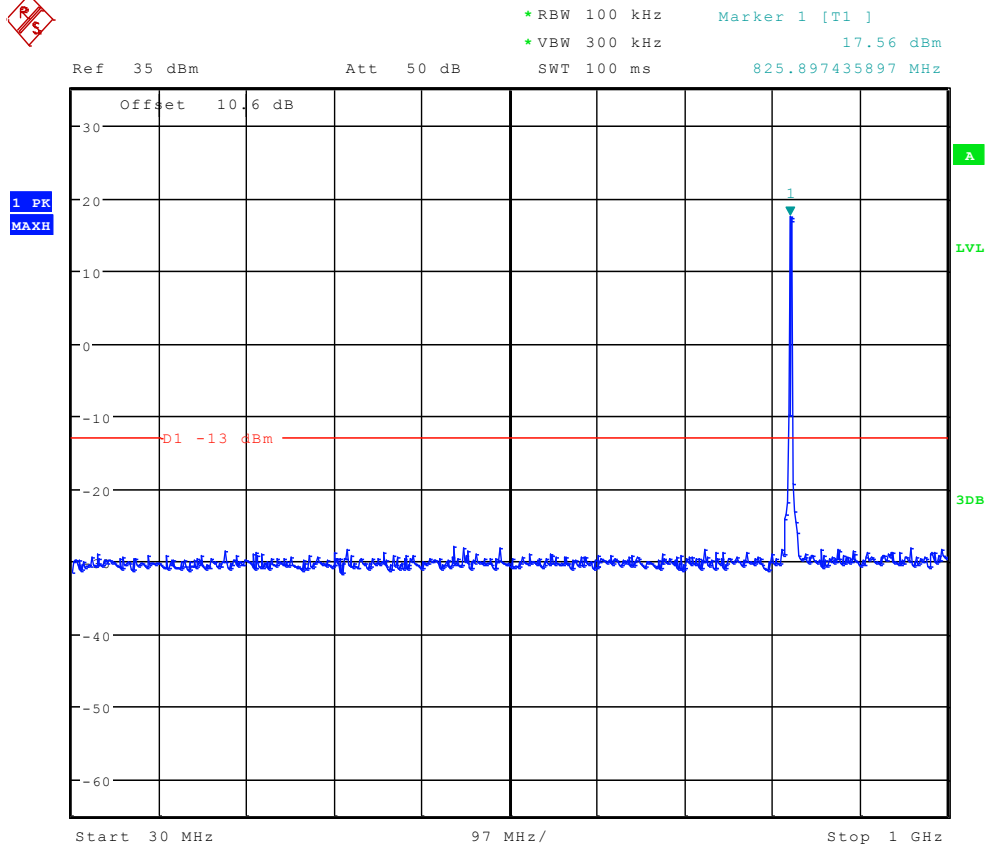


Date: 22.SEP.2011 00:56:57

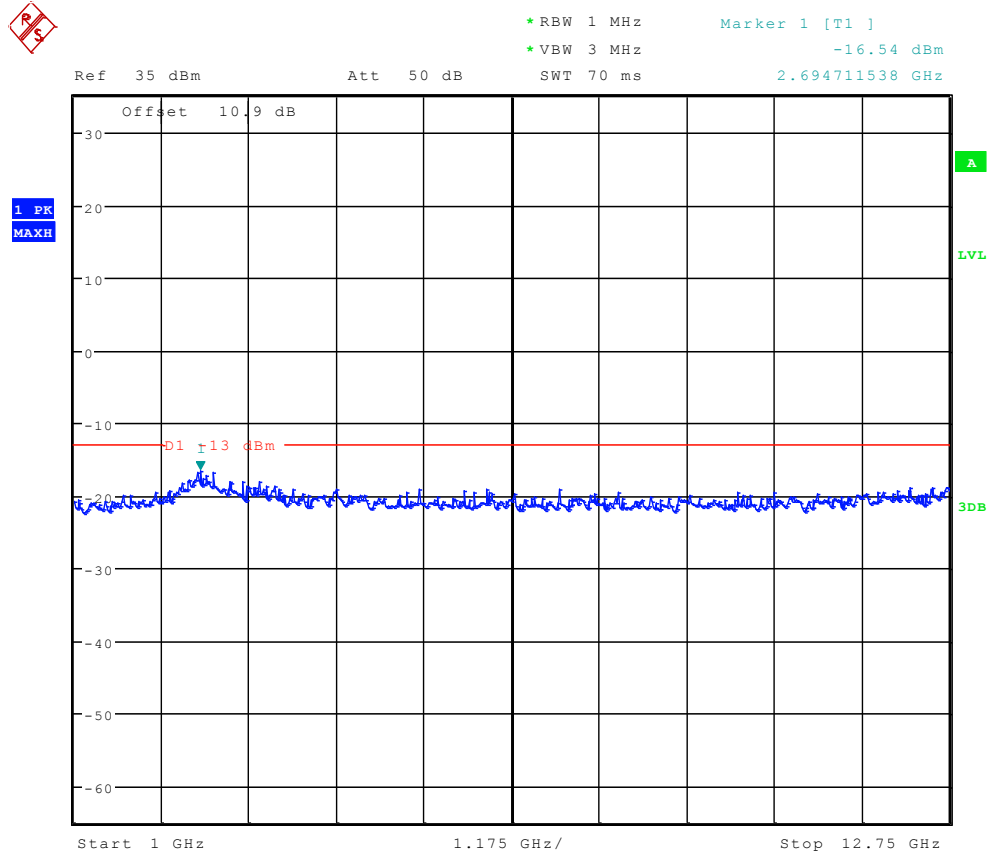


Date: 22.SEP.2011 00:57:41




Channel 4182

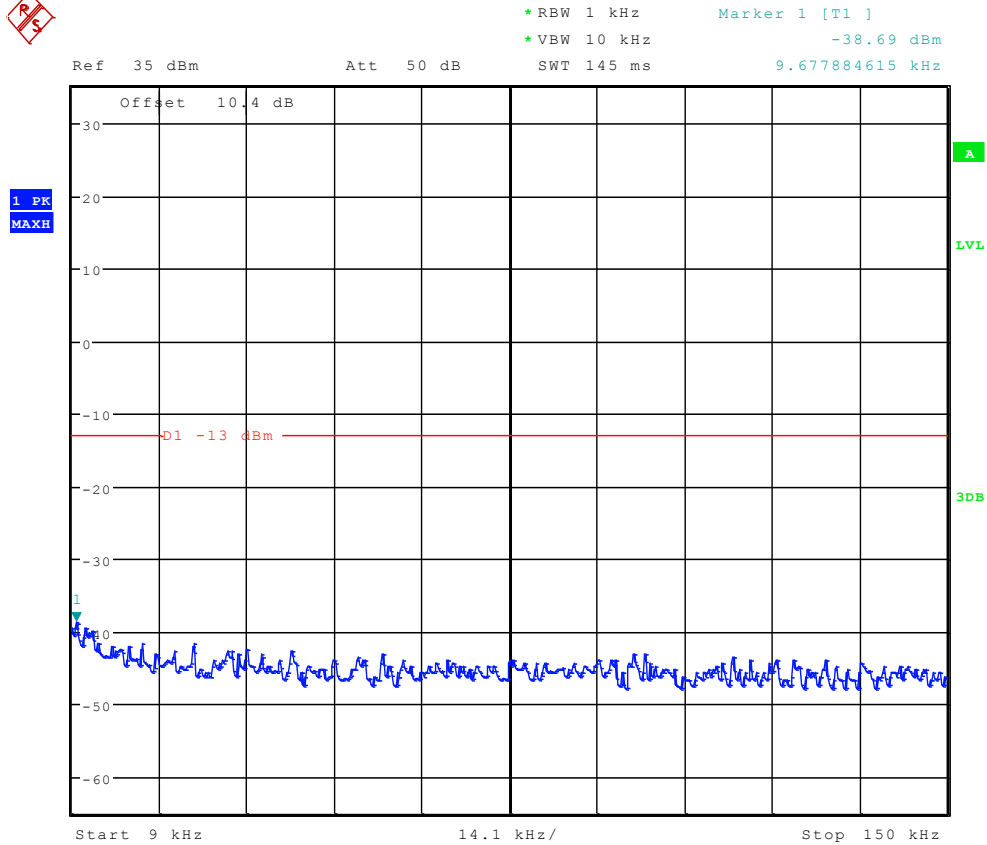


Date: 22.SEP.2011 00:55:44

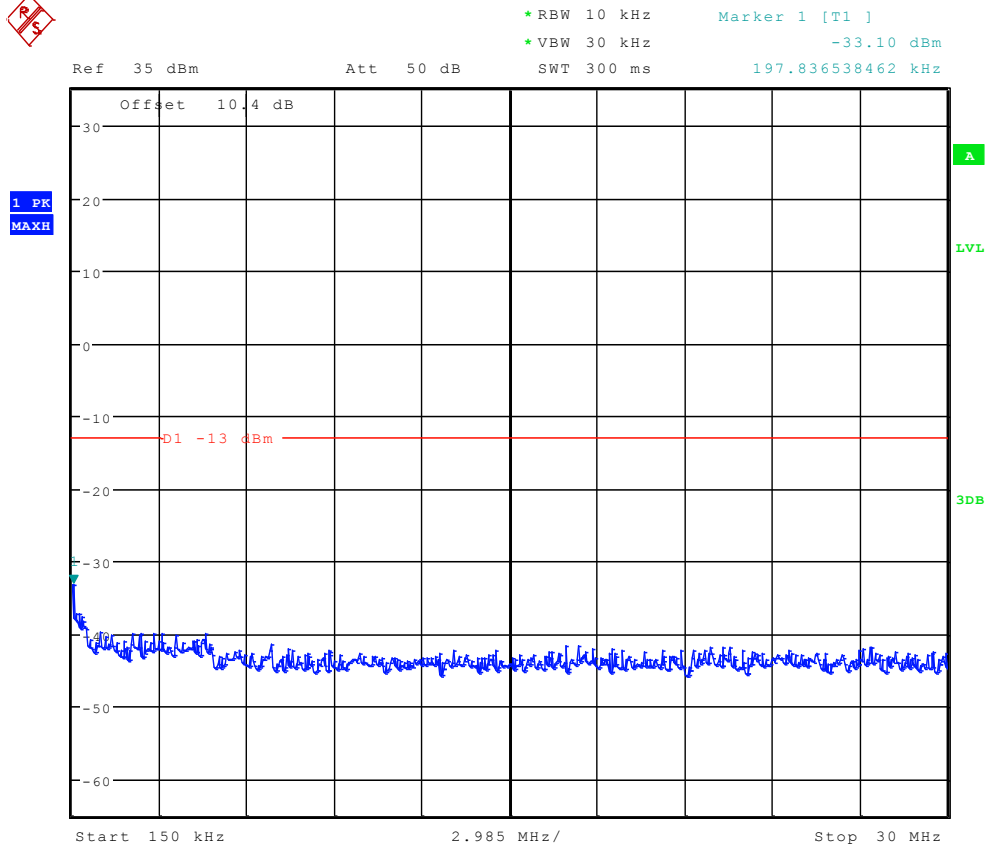

Date: 22.SEP.2011 00:56:27

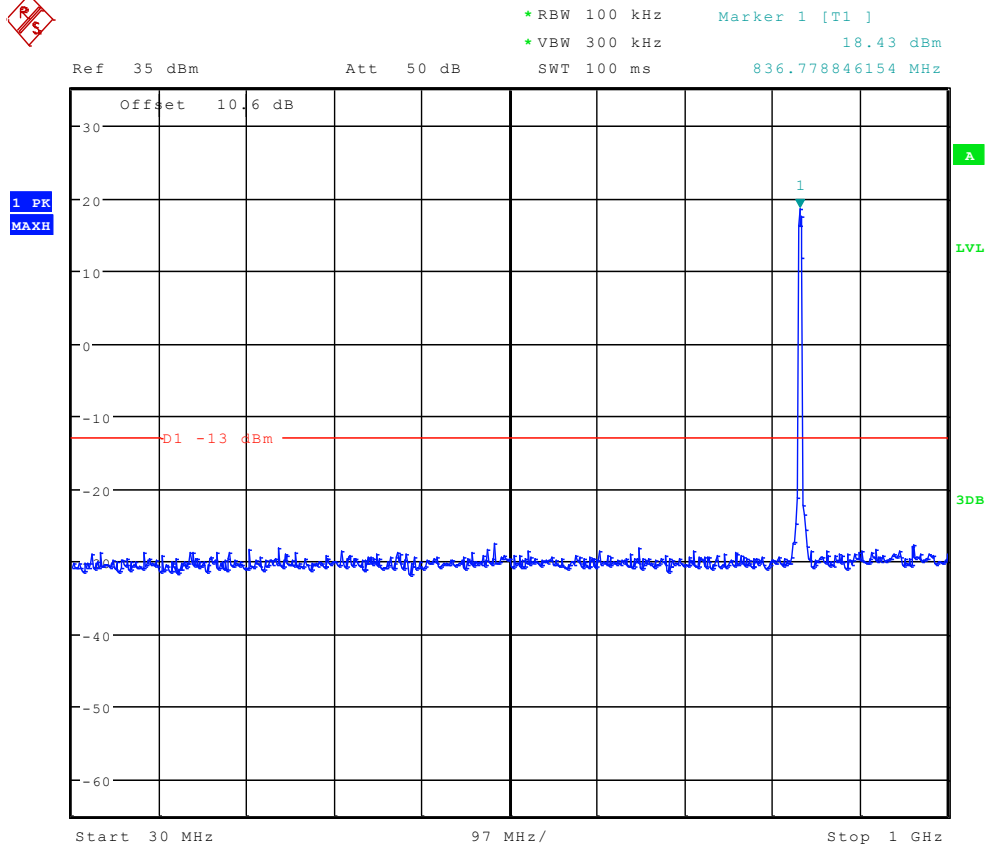


Date: 22.SEP.2011 00:57:11

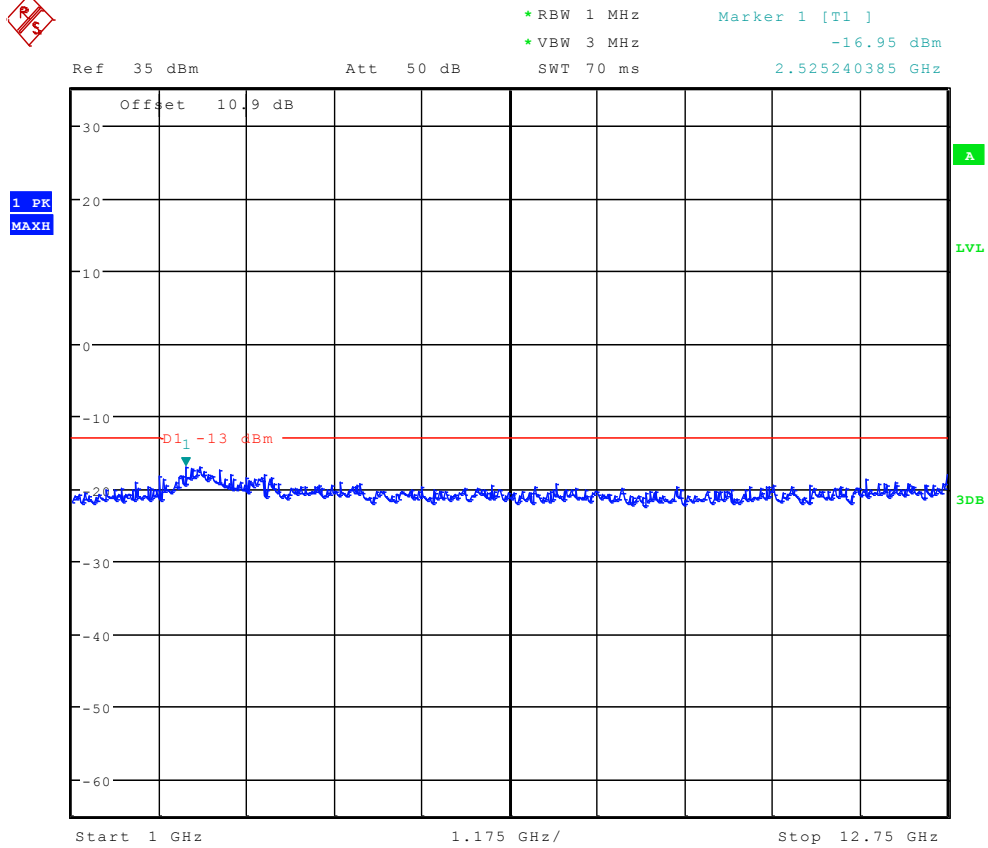


Date: 22.SEP.2011 00:57:55




Channel 4233

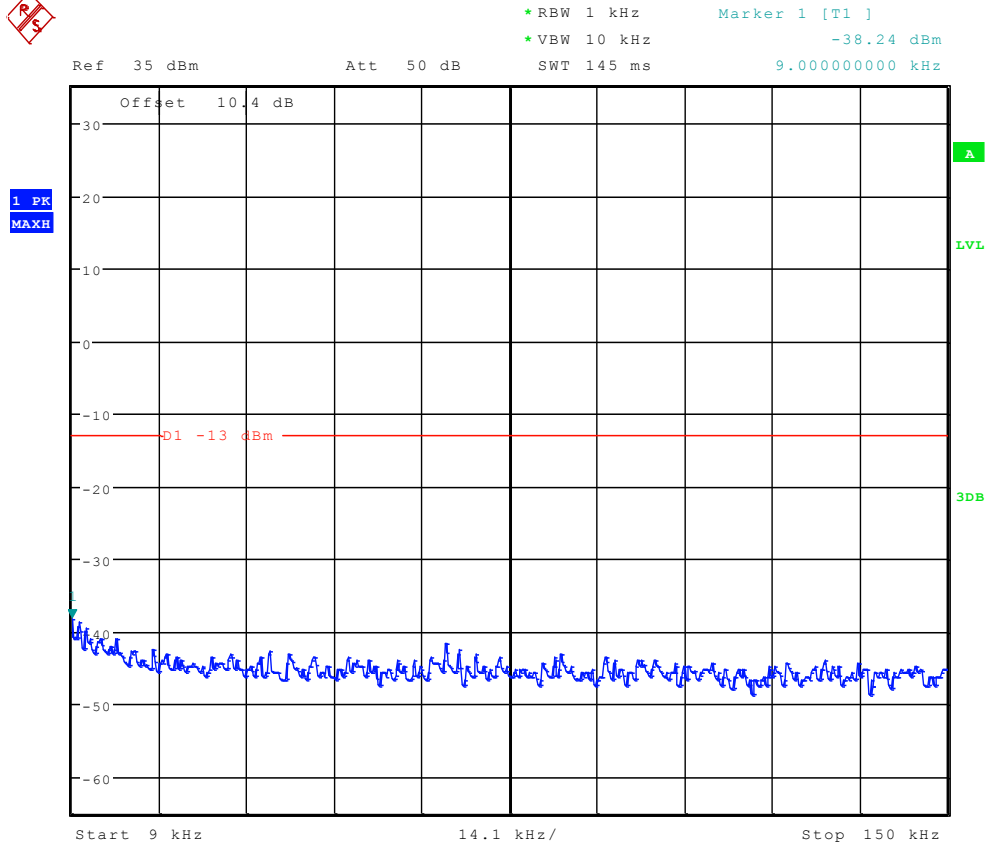


Date: 22.SEP.2011 00:55:58

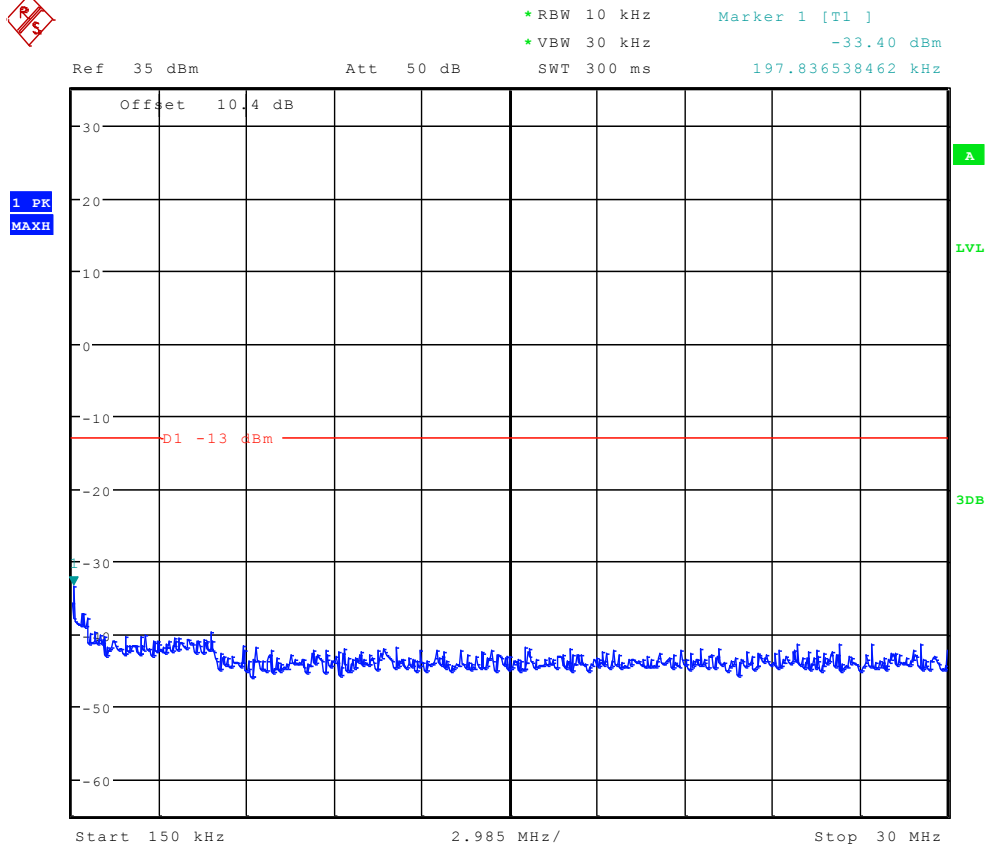

Date: 22.SEP.2011 00:56:42

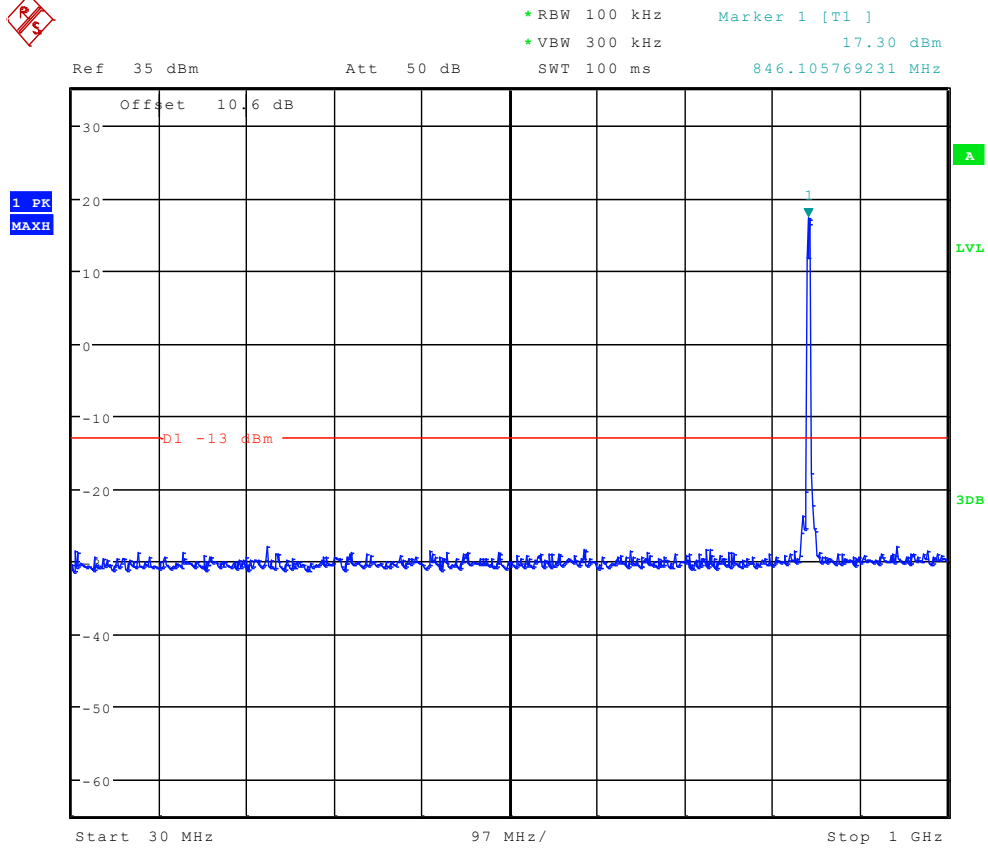

Date: 22.SEP.2011 00:57:26

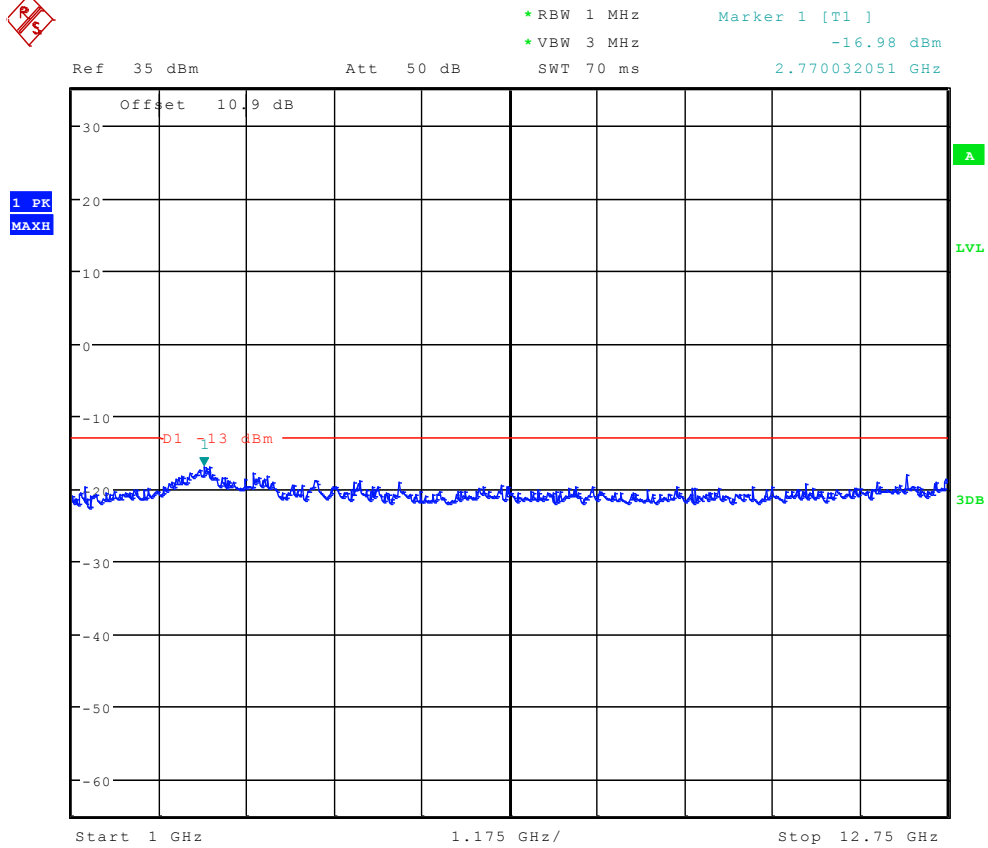

Date: 22.SEP.2011 00:58:10



Appendix E


Radiated spurious emission

According to FCC Part 2.1053& Part 22.917




GPRS 850

(9kHz~30MHz)

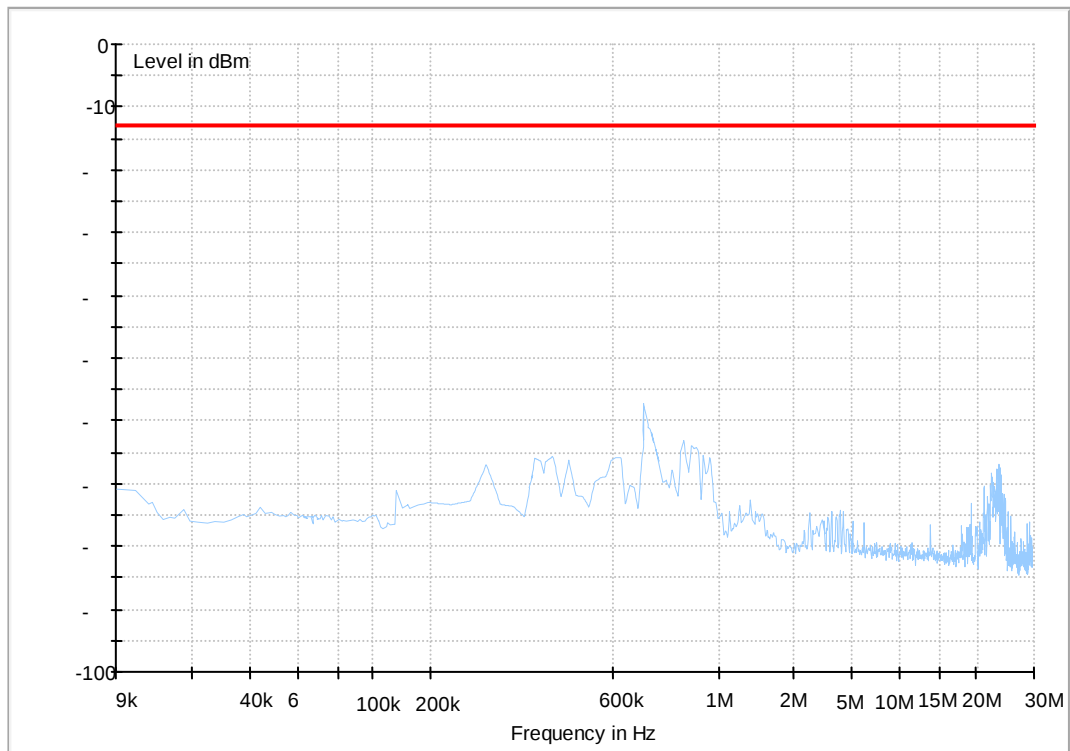




(30MHz~2GHz)

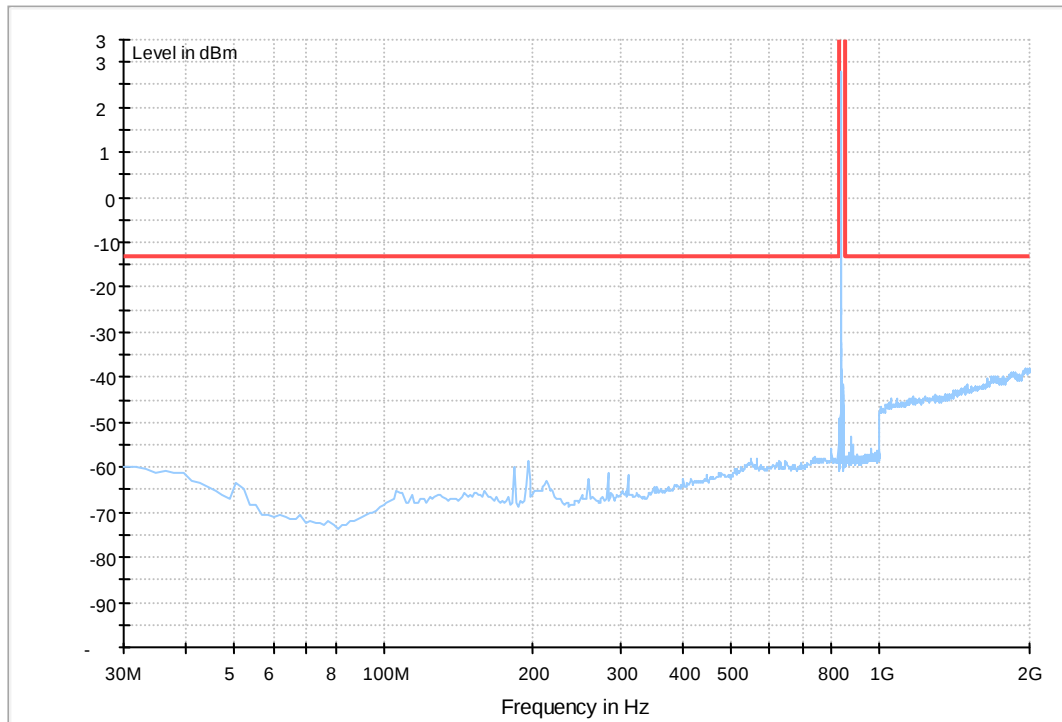


(2GHz~18GHz)

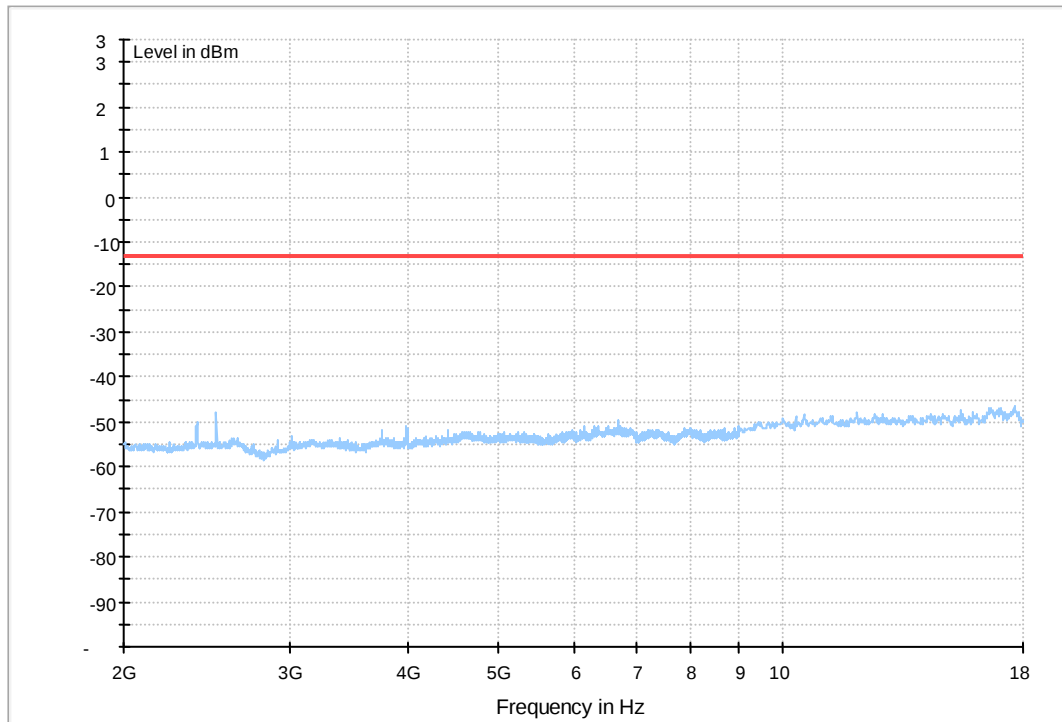




EDGE 850

(9kHz~30MHz)

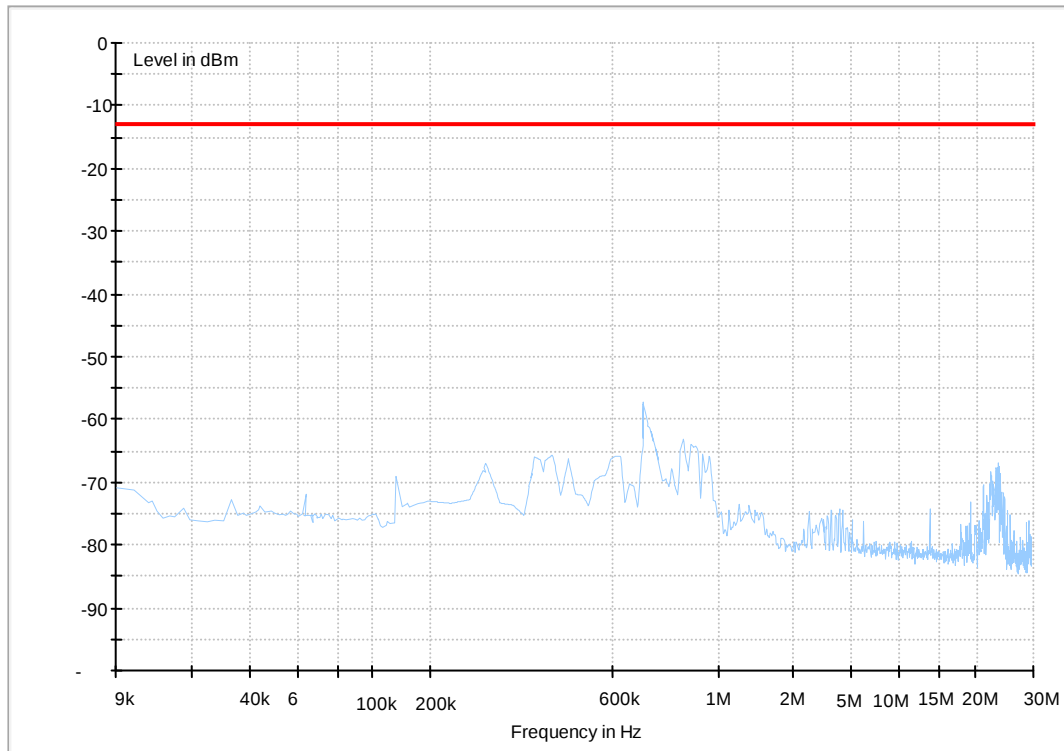


(30MHz~2GHz)

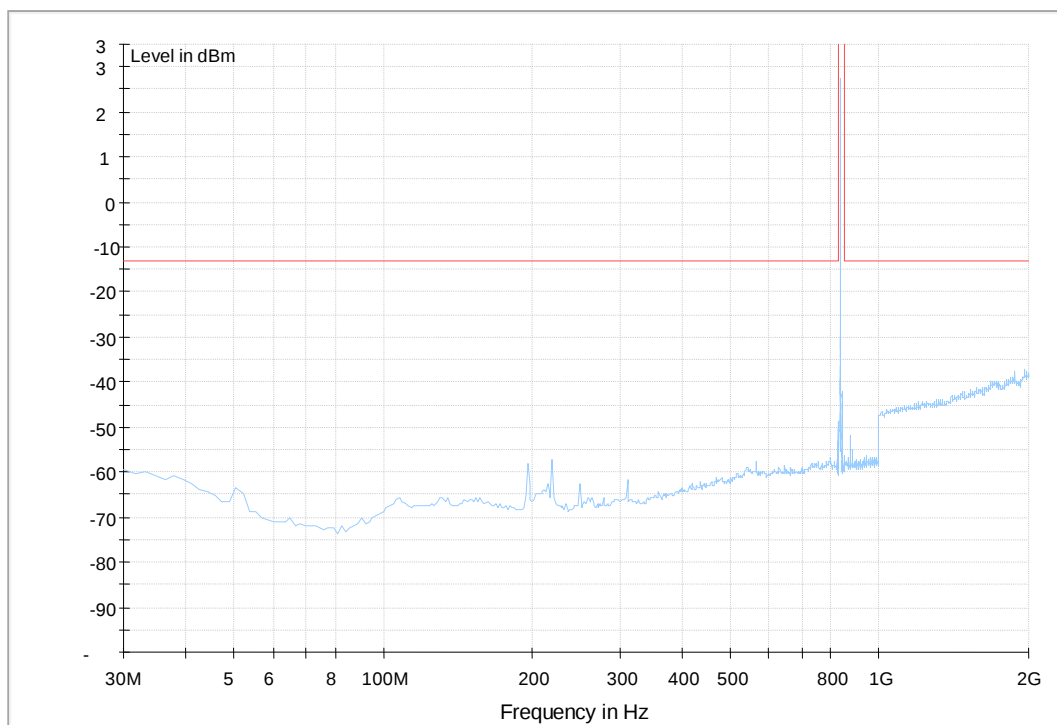




(2GHz~18GHz)

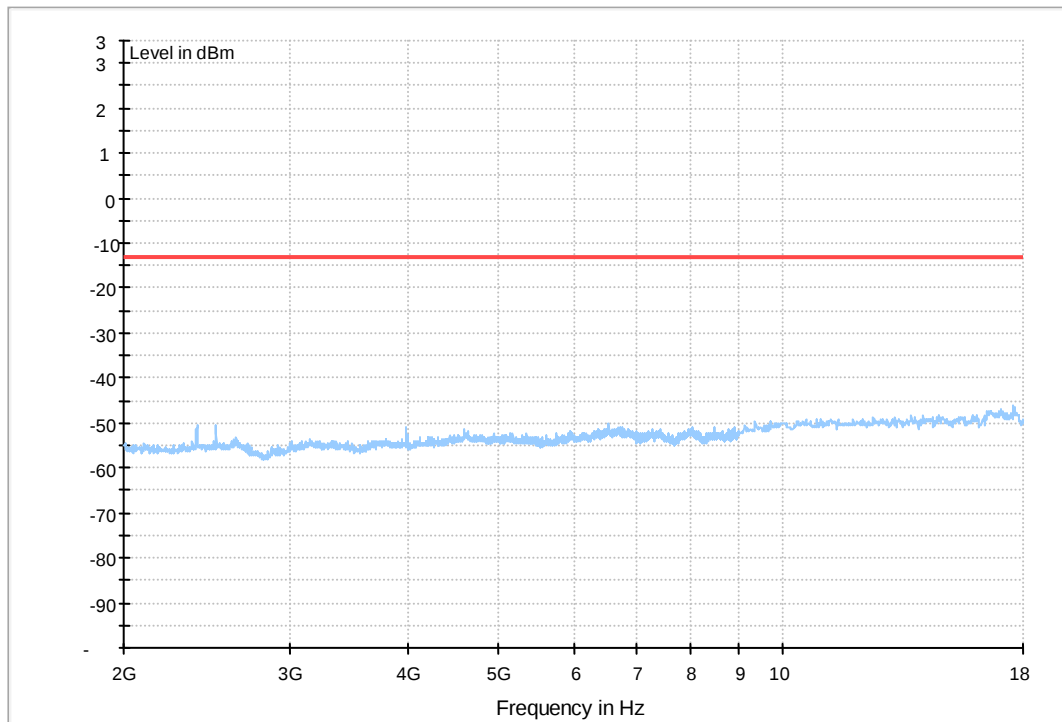




WCDMA Band V

(9KHz~30MHz)

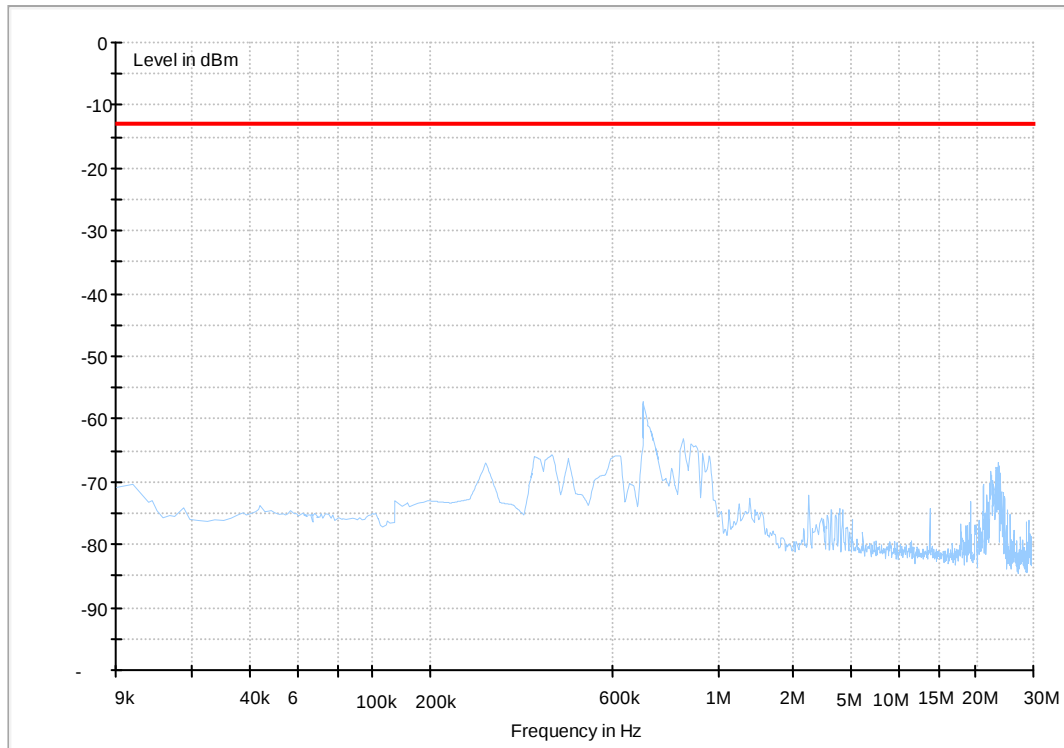




(30MHz~2GHz)

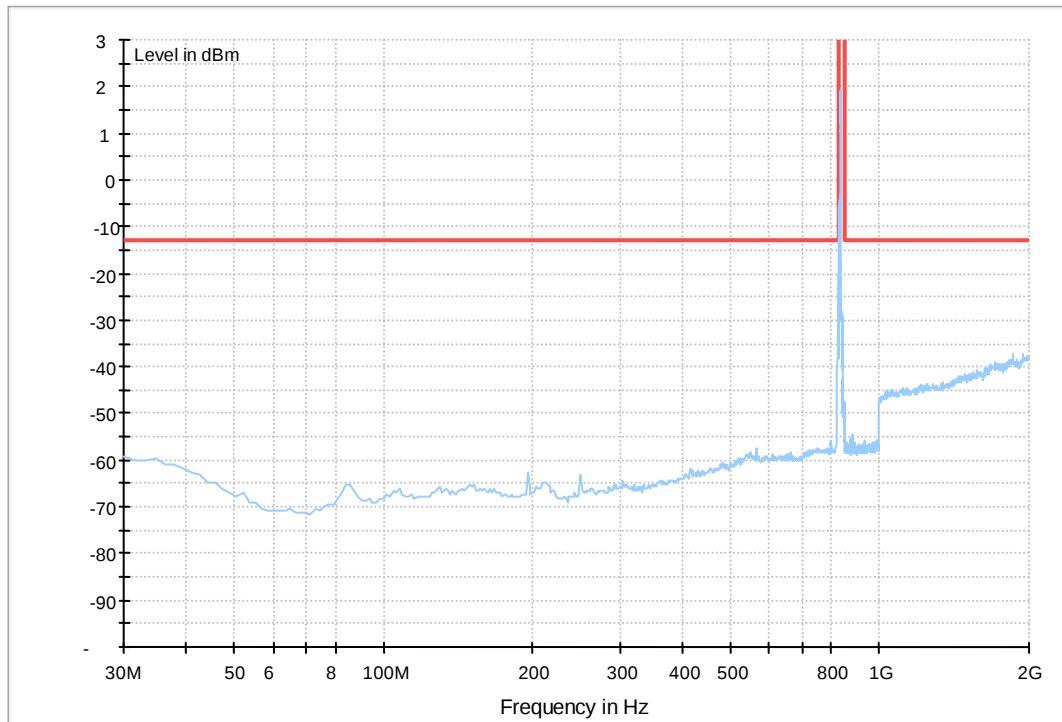




(2GHz~18GHz)

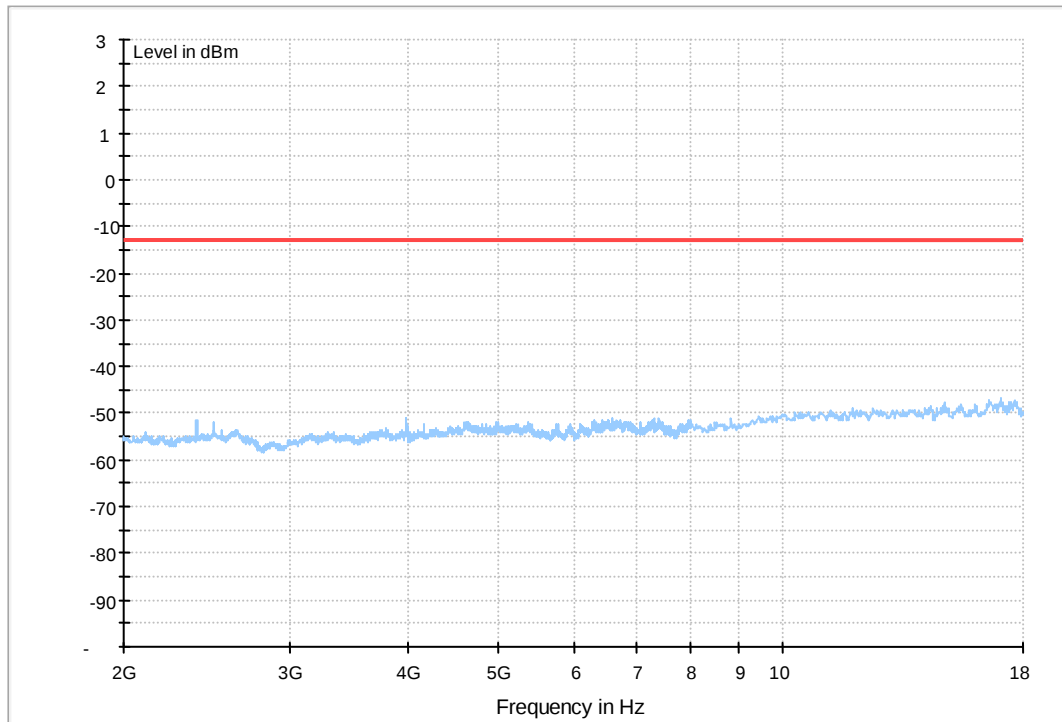




HSDPA Band V


(9KHz~30MHz)

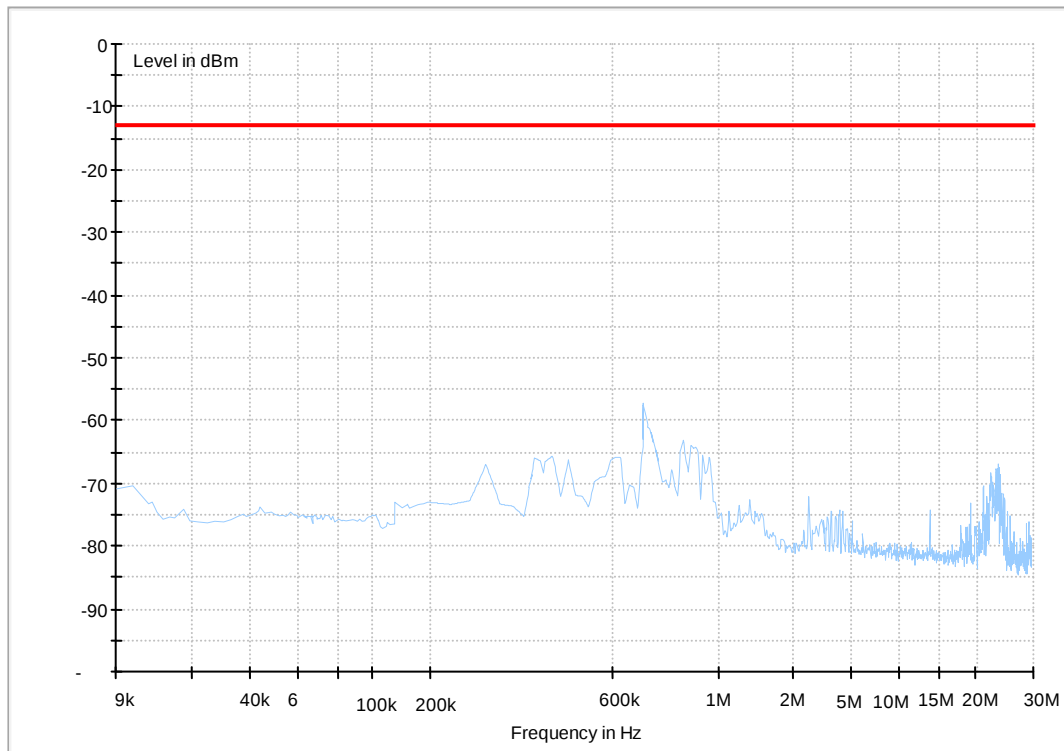

(30MHz~2GHz)

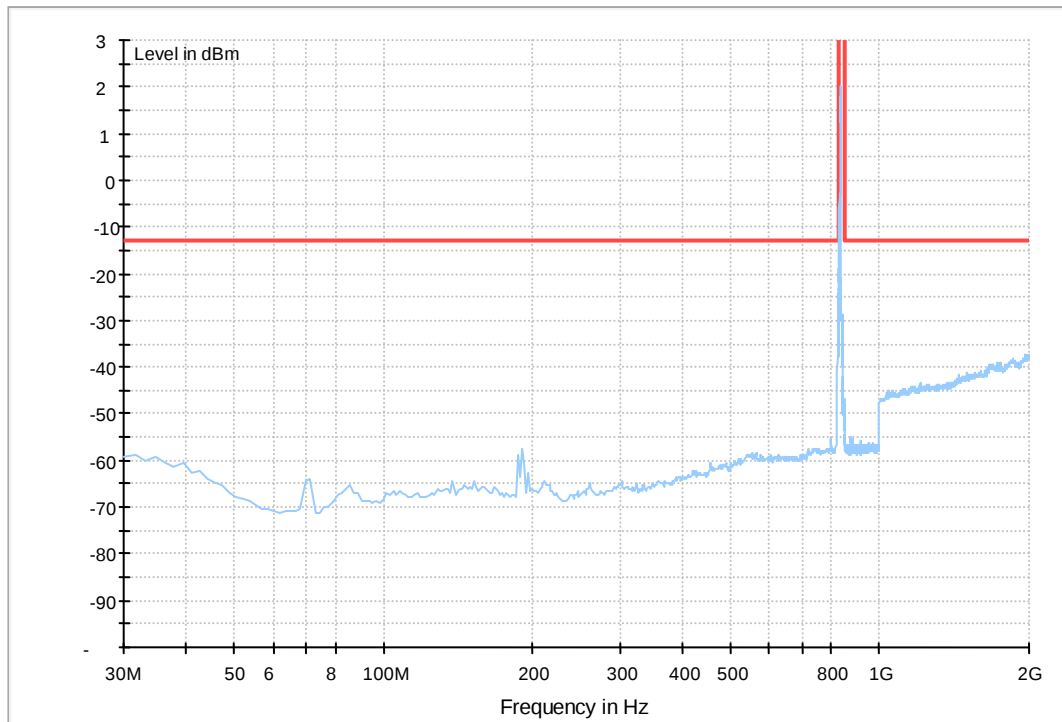


(2GHz~18GHz)

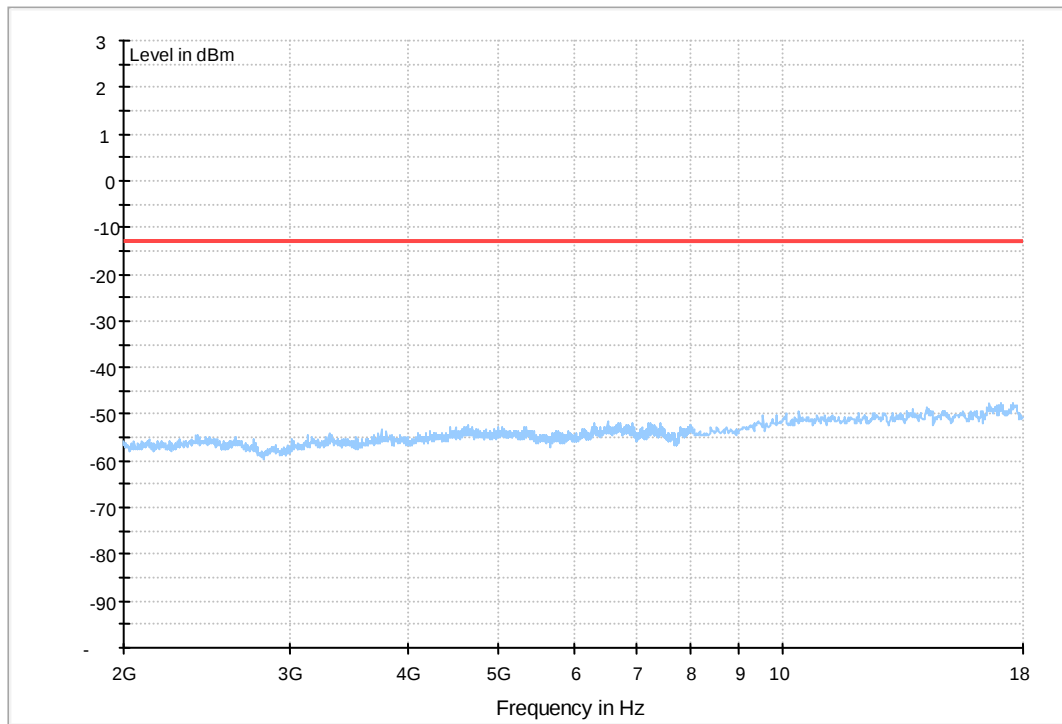


HSUPA Band V


(9KHz~30MHz)

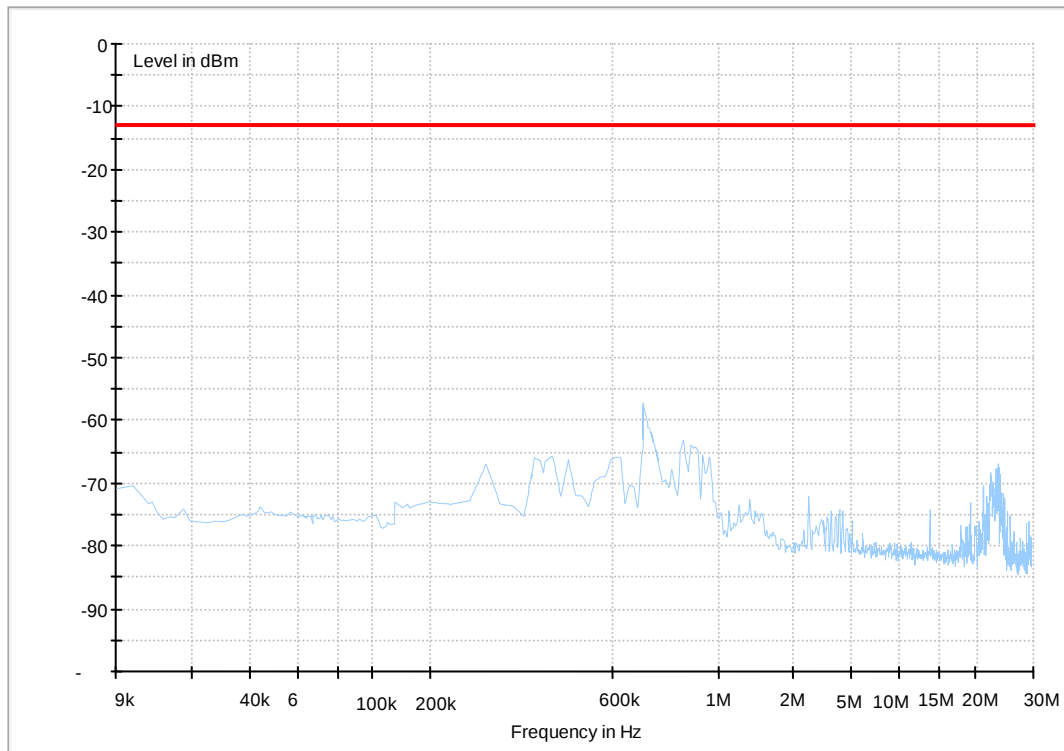

(30MHz~2GHz)

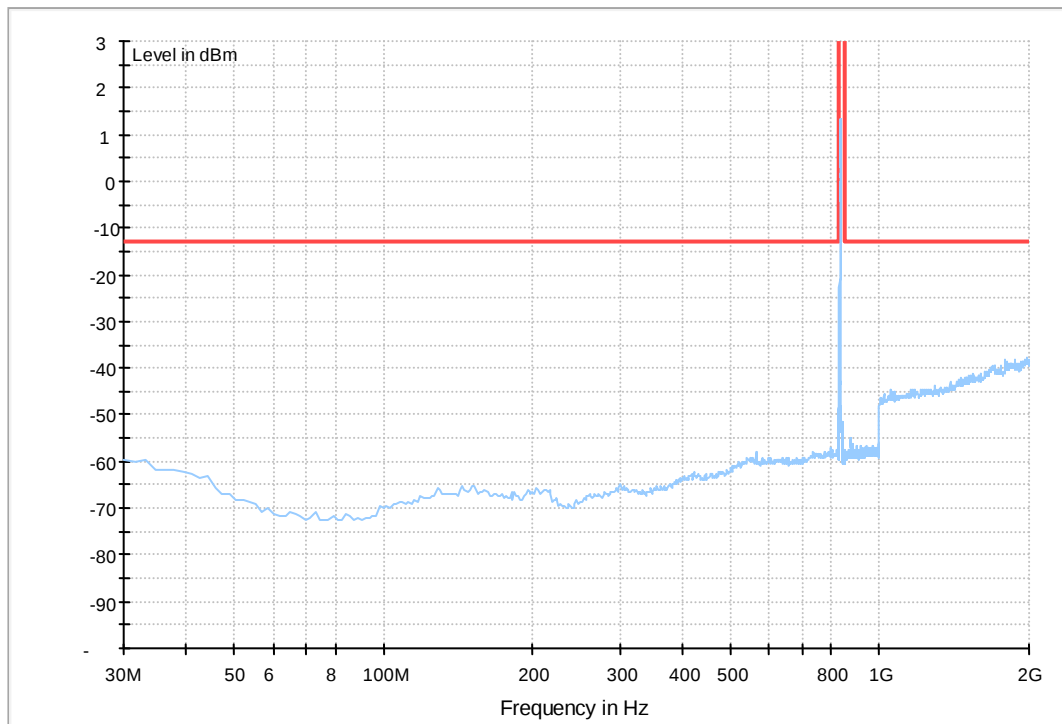

(2GHz~18GHz)

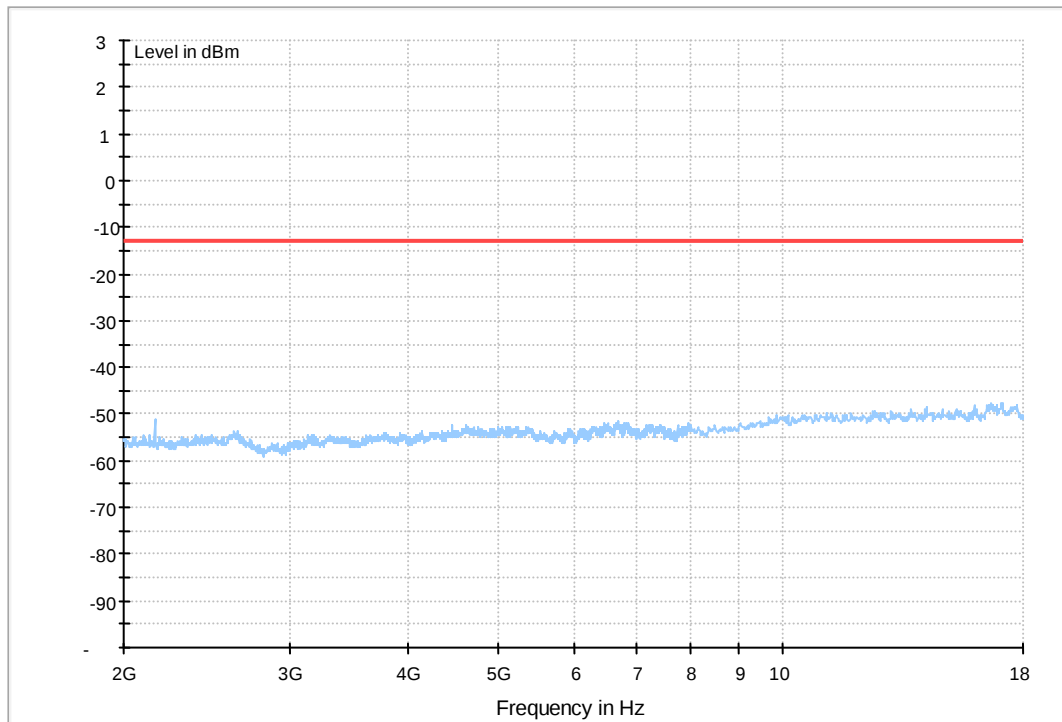



FCC RF Test Report

Product Name: HSPA+ Module

Model Number: MU739

Report No: SYBH(Z-RF)021092011-2002

FCC ID: QISMU739

Reliability Laboratory of Huawei Technologies Co., Ltd.

Huawei Base, Bantian, Longgang District, Shenzhen 518129, P.R. China

Tel: +86 755 28780808 Fax: +86 755 89652518

Notice

1. The laboratory has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS), and accreditation number: L0310.
2. The laboratory has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements. The site recognition number is 97456.
3. The laboratory has been listed by industry Canada to perform electromagnetic emission measurement. The site recognition number is 6369A-2.
4. The test report is invalid if not marked with "exclusive stamp for the test report".
5. The test report is invalid if not marked with the stamps or the signatures of the persons responsible for performing, revising and approving the test report.
6. The test report is invalid if there is any evidence of erasure and/or falsification.
7. If there is any dissidence for the test report, please file objection to the test centre within 15 days from the date of receiving the test report.
8. Normally, the test report is only responsible for the samples that have undergone the test.
9. Context of the test report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of the laboratory.

Notice 2

Modification Information:

Modification Information

Modification Information	1	
	2	
	3	<i>Not Applicable!</i>
	4	
	5	
	6	
	7	

REGULATION	FCC CFR47 Part 2: Subpart J;
	FCC CFR47 Part 24: Subpart E;
START OF TEST	Sep.20, 2011
END OF TEST	Sep.24, 2011
Final Judgement:	Pass

Approved By

Sep.26, 2011
Date

Dai Linjun
Name

Dai Linjun
Signature

Reviewed By

Sep.26, 2011
Date

Cousy Xu
Name

Cousy XU
Signature

Operator

Sep.26, 2011
Date

Huang Qiuliang
Name

Huang Qiuliang
Signature

Contents

1	<u>Summary</u>	6
2	<u>Product Description</u>	7
2.1	PRODUCTION INFORMATION	7
2.2	MODIFICATION INFORMATION	7
3	<u>Test Site Description</u>	8
3.1	TESTING PERIOD	8
3.2	GENERAL SET UP DESCRIPTION	8
4	<u>Product Description</u>	9
4.1	TECHNICAL CHARACTERISTICS	9
4.2	EUT IDENTIFICATION LIST	11
5	<u>Main Test Instruments</u>	12
6	<u>Transmitter Measurements</u>	13
6.1	EFFECTIVE ISOTROPIC RADIATED POWER OF TRANSMITTER (EIRP)	13
6.2	CONDUCTED POWER OF TRANSMITTER	17
6.3	MODULATION CHARACTERISTICS	21
6.4	OCCUPIED BANDWIDTH	23
6.5	BAND EDGES COMPLIANCE	26
6.6	SPURIOUS EMISSION AT ANTENNA TERMINAL	28
6.7	RADIATED SPURIOUS EMISSIONS	31
6.8	FREQUENCY STABILITY	34
7	<u>System Measurement Uncertainty</u>	38
8	<u>Appendices</u>	39

1 Summary

The table below summarizes the measurements and results for the EUT. Detailed results and descriptions are shown in the following pages.

Table 1 Summary of results

FCC Measurement Specification	FCC Limits Part(s)	Description	Result
2.1046	24.232	Effective Isotropic radiated power of Transmitter	PASS
2.1046	24.232	Conducted Power of Transmitter	PASS
2.1047	/	Modulation Characteristics	PASS
2.1049	/	Occupied Bandwidth	PASS
2.1051	24.238	Band Edges Compliance	PASS
2.1051	24.238	Spurious Emission at Antenna Terminal	PASS
2.1053	24.238	Radiated Spurious Emissions	PASS
2.1055	24.235	Frequency Stability	PASS

2 Product Description

2.1 Production Information

2.1.1 General Description

MU739 HSPA+/WCDMA(UMTS)/GSM/GPRS/EDGE dual mode Wireless Module is subscriber equipment in the UMTS/GSM system. MU739 implement such functions as RF signal receiving/transmitting, HSPA+/WCDMA and EDGE/GPRS/GSM protocol processing, data service etc. Externally it provides LGA interface.

2.1.2 Support function and Service

The EUT support the function and service as follows:

Service and Test mode List

Service Name	Characteristic	Corresponding Test Mode	Note
Data	Modulation: GMSK	TM1	GPRS/GSM
Data	Modulation: 8PSK	TM2	EDGE
Data	Modulation: QPSK	TM3	WCDMA
Data	Modulation: QPSK	TM4	HSDPA
Data	Modulation: QPSK	TM5	HSUPA

Note: * The specified GPRS test conditions & settings are defined in 3GPP TS51.010 V5.4.0 and the EDGE test conditions & settings are defined in 3GPP TS51.010 V5.4.0. The WCDMA test condition & settings are defined in 3GPP TS 34.121 V8.7.0:2009.

2.2 Modification Information

For original equipment, following table is not application.

Modification Information

Model Number	Board/Module	Original Version	New Version	Modify Information
Not applicable				

3 Test Site Description

The test site of:

***Huawei Technologies Co. Ltd.
P.O. Box 518129
Huawei base, bantian,
Longgang District, Shenzhen, China***

3.1 Testing Period

The test have been performed during the period of

Sep.20, 2011 – Sep.24, 2011

3.2 General Set up Description

TM1: GSM/GPRS Mode with GMSK Modulation

TM2: EDGE Mode with 8PSK Modulation

TM3: WCDMA Mode with QPSK Modulation

TM4: HSDPA Mode with QPSK Modulation

TM5: HSUPA Mode with QPSK Modulation

4 Product Description

4.1 Technical Characteristics

4.1.1 Frequency Range

Frequency Range

Uplink band:	1850 to 1910 MHz
Downlink band:	1930 to 1990 MHz

4.1.2 Channel Spacing / Separation

Channel Spacing / Separation

	EDGE/GPRS/GSM	WCDMA/HSPA
Channel raster	200 kHz	200 kHz
Channel spacing:	200 kHz	5 MHz

4.1.3 Type of Emission

Type of Emission

	EDGE	GPRS/GSM	WCDMA/HSPA
Emission Designation:	300KG7W	300KGXW	5M00F9W

According to CFR 47 (FCC) part 2, subpart C, section 2.201 and 2.202

4.1.4 Environmental Requirements

Environmental Requirements

Minimum temperature:	- 10 °C
Maximum temperature:	+ 55 °C
Relative Humidity:	5%-95%RH

4.1.5 Power Source

Power Source

AC voltage nominal:	~ 120 V
AC voltage range	~ 100 V to ~ 240 V
AC current maximal:	1A

4.1.6 Tune-up Procedure

According to CFR (FCC) part 2, subpart 2, section 2.1033(c) (9).

Please reference the document Tune-up Procedure in TCF.

4.1.7 Applied DC Voltages and Currents

According to CFR (FCC) part 2, subpart 2, section 2.1033(c) (8).

The voltage and current in the final RF stage is:

Applied RF Module Voltages and Currents

Voltage:	== +3.8V
Current:	100mA According to CFR (FCC) part 2, subpart 2, section 2.1033(c) (8)

4.2 EUT Identification List

4.2.1 Board Information

Board Information	
HSPA+ Module	
MU739	
Board and Module	
Hardware Version	Software Version
MD1MU739MS	11.101.06.02.00

4.2.2 FCC Identification

Grantee Code: QIS
Product Code: MU739
FCC Identification: QISMU739

5 Main Test Instruments

Main Test Equipments

Equipment Description	Manufacturer	Model	Serial Number	Calibrated until
Power supply	KEITHLEY	2303	1288003	Sep.27,2011
Universal Radio Communication Tester	R&S	CMU200	105822	Oct.24.2011
Wireless Communication Test set	Agilent	N4010A	MY49081592	Dec.14.2011
Universal Radio Communication Tester	Agilent	E5515C	MY50260239	Aug.31,2012
Spectrum Analyzer	Agilent	E4440A	MY49420179	Apr.20,2012
Signal Analyzer	R&S	FSQ31	200021	Sep.27,2011
Temperature Chamber	WEISS	WKL64	24600294	Jan.03,2012
Signal generator	Agilent	E8257D	MY49281095	Jul.9.2012
Vector Signal Generator	R&S	SMU200A	104162	Sep.07,2012
Test receiver	R&S	ESU26	100150	May.24.2012
Tunable Dipole	Schwarzbeck	D69250-UHAP/D69250-VHAP	919/1009	Dec.13.2011
Tunable Dipole	Schwarzbeck	D69250-UHAP/D69250-VHAP	979/917	Dec.13.2011
Horn Antenna	R & S	HF906	100683	May.16, 2012
Horn Antenna	R & S	HF906	100684	May.16, 2012
Broadband Antenna	Schwarzbeck	VULB 9163	9163-357	Sep.15, 2012
Broadband Antenna	Schwarzbeck	VULB 9163	9163-356	Sep.15, 2012

6 Transmitter Measurements

6.1 Effective Isotropic radiated power of Transmitter (EIRP)

6.1.1 Test Conditions

Test Conditions

Preconditioning:	0.5 hour
Measured at:	enclosure
Ambient temperature:	25°C
Relative humidity:	55%
Test Configurations:	TM1/TM2/TM3 at frequency B, M, T

6.1.2 Test Specifications and Limits

6.1.2.1 Specification

CFR 47 (FCC) part 2.1046 and part 24 subpart E

6.1.2.2 Supporting Standards

Supporting Standards:

ANSI/TIA-603-C:2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;
3GPP TS 34.121 V8.7.0:2009	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.1.2.3 Limits

Compliance with part 24.232, mobile/portable stations are limited to 2 watts EIRP peak power.
 $W(\text{dBm}) = 10 \cdot \log(W_{\text{In mW}})$.

Limits

Maximum Output Power (Watts)	< 2 Watts
Maximum Output Power (dBm)	< 33 dBm


6.1.3 Test Method and Setup

- For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, EIRP shall be measured when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in 2.1033(c)(8). Connect the EUT to the wireless communication tester CMU200 via the air interface. The band is set as PCS.
- Test the Radiated maximum output power by the CMU200 received from test antenna.

- (c) Use substitution method to verify the maximum output power. The EUT is substituted by a horn antenna. The horn is connected to a signal generator. And then adjust the output level of the signal generator to get the same received power recorded in step (b) on CMU200, and record the power level of Signal Generator. Of course, the cable loss at the test frequency should be compensated.

Test setup

Step 1: Pre-test

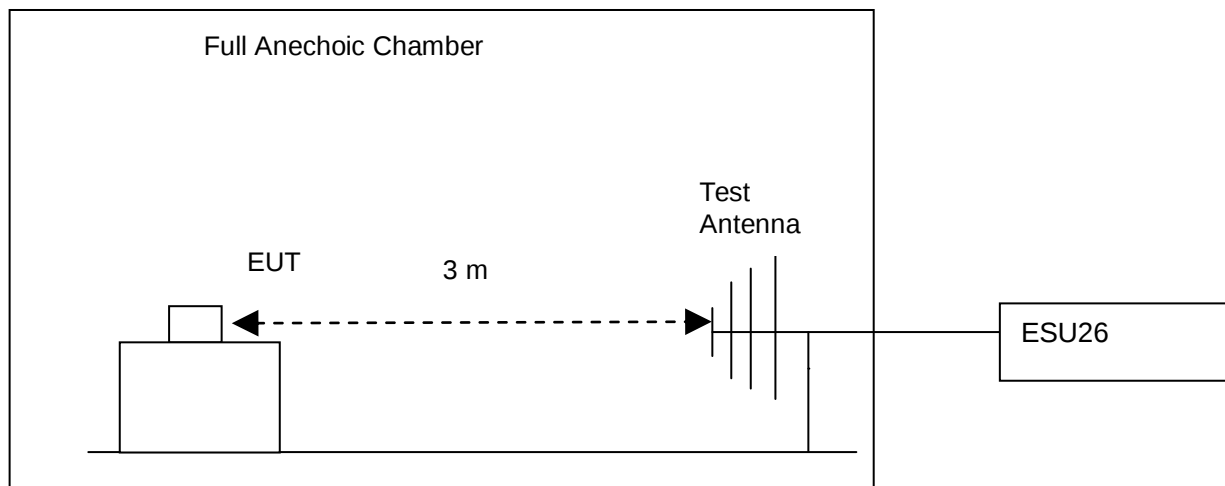

Step 2: Substitution method to verify the maximum EIRP

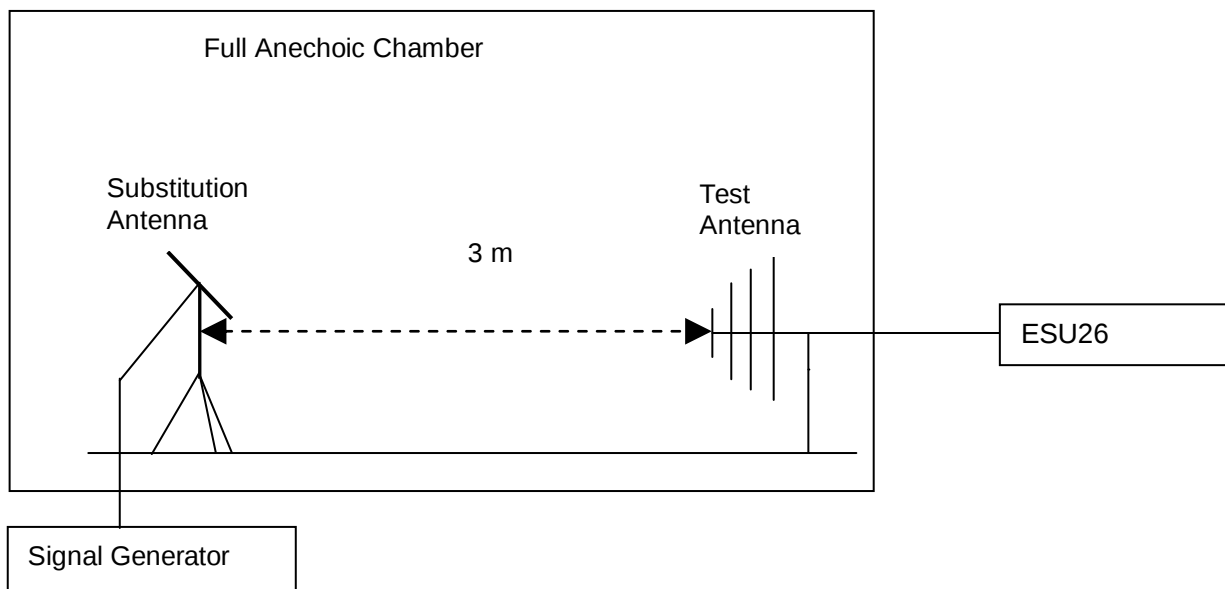


Figure 1. Test Set-up

NOTE: Effective Isotropic radiated power (EIRP) refers to the radiation power output of the EUT, assuming all emissions are radiated from half-wave horn antennas.

There is a constant difference of 2.15 dB between EIRP and ERP.

$EIRP (dBm) = ERP (dBm) + 2.15$ (ITU-R Recommendation SM.329-10).

EIRP was measured using 1 host.

BenQ Joy book S72

6.1.4 Measurement Results

6.1.4.1 Pre-test Results

Measurement Results

TEST CONDITIONS	RF Output Power (EIRP)					
	Channel 512(B) 1850.2MHz		Channel 661(M) 1880.0MHz		Channel 810(T) 1909.8MHz	
	dBm		dBm		dBm	
T _{nom} (25 °C)/ V _{nom} (3.8V)	Measured	Limit	Measured	Limit	Measured	Limit
TM1	32.53	33	32.52	33	32.59	33
TM2	28.93	33	28.91	33	28.96	33
TEST CONDITIONS	Channel 9262(B) 1852.4MHz		Channel 9400(M) 1880.0MHz		Channel 9538(T) 1907.6MHz	
	dBm		dBm		dBm	
	Measured	Limit	Measured	Limit	Measured	Limit
TM3	26.59	33	26.36	33	26.42	33

6.1.4.2 Substitution Results

Substitution Results

Test Mode	Freq. [MHz]	Meas. Level [dBm]	Substitution Antenna Type	SGP [dBm]	Substitution Gain [dBi]	Cable Loss [dB]	Substitution Level (EIRP) [dBm]	FCC limit [dBm]	Result
TM1	1850.2	32.53	Horn Ant.	29.06	4.5	1	32.56	33	Pass
TM1	1880.0	32.52	Horn Ant.	29.05	4.5	1	32.55	33	Pass
TM1	1909.8	32.59	Horn Ant.	28.82	4.8	1	32.62	33	Pass
TM2	1850.2	28.93	Horn Ant.	25.45	4.5	1	28.95	33	Pass
TM2	1880.0	28.91	Horn Ant.	25.45	4.5	1	28.95	33	Pass
TM2	1909.8	28.96	Horn Ant.	25.18	4.8	1	28.98	33	Pass
TM3	1852.4	26.59	Horn Ant.	23.08	4.5	1	26.58	33	Pass
TM3	1880.0	26.36	Horn Ant.	22.92	4.5	1	26.42	33	Pass
TM3	1907.6	26.42	Horn Ant.	22.66	4.8	1	26.46	33	Pass

Note: a, For get the EIRP (Efficient Isotropic Radiated Power) in substitution method, the following formula should take to calculate it,

$$\text{EIRP [dBm]} = \text{SGP [dBm]} - \text{Cable Loss [dB]} + \text{Gain [dBi]}$$

NOTE: SGP- Signal Generator Level

b, Measurement the EIRP with RMS detector.

c, RBW=10kHz, VBW=300kHz, and integrated by the instrument to 250kHz for TM1 and TM2 and 5M for TM3.

6.1.5 Conclusion

The equipment **PASSED** the requirement of this clause.

6.2 Conducted Power of Transmitter

6.2.1 Test Conditions

Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25 °C
Relative humidity:	55 %
Test Configurations:	TM1/TM2/TM3/TM4/TM5 at frequency B, M, T

6.2.2 Test Specifications and Limits

6.2.2.1 Specification

CFR 47 (FCC) part 2.1047 and part 24 subpart E

6.2.2.2 Supporting Standards

Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;
3GPP TS 34.121 V8.7.0:2009	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.2.2.3 Limits

Compliance with part 24.232, in no any case may the peak power of a mobile station transmitter exceed 2 W. The calculated longitude EIRP by following formula:

$$\text{EIRP(dBm)} = 10 \cdot \log(\text{EIRP}_{\text{in mW}}).$$

And for conducted power, we can use Antenna Gain to calculate the limit. So the conducted power:

$$\text{P}_{\text{cod}}(\text{dBm}) = \text{EIRP}(\text{dBm}) - \text{Gain}(\text{dBi}).$$

and $\text{Gain}(\text{dBi}) = \text{Gain}(\text{dBd}) + 2.15\text{dB}$

Limits

Maximum Output Power (Watts)	< 2 Watts (33 dBm)
Antenna Gain(dBi):	3.0
Antenna Gain(dBd):	0.85
Maximum Conducted Output Power (dBm)	< 30

For HSDPA test mode, there are 4 sub-tests for different configuration.

HSDPA conducted max power pre-scan

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	HS (Note1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0	0
2	12/15	15/15	64	12/15	24/15	1	0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

For HSUPA test mode, there are 5 sub-tests for different configuration.

HSUPA conducted max power pre-scan

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note1)	β_{ec}	β_{ed} (Note 5) (Note 6)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/22 5	1309/22 5	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 6: β_{ed} can not be set directly, it is set by Absolute Grant Value.

6.2.3 Test Method and Setup

(a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, Conducted maximum power shall be measured when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in 2.1033(c)(8). Connect the EUT to the wireless communication tester CMU200 via the antenna connector. The band class is set as PCS.

(b) Test the Conducted maximum output power by the CMU200.

Test setup

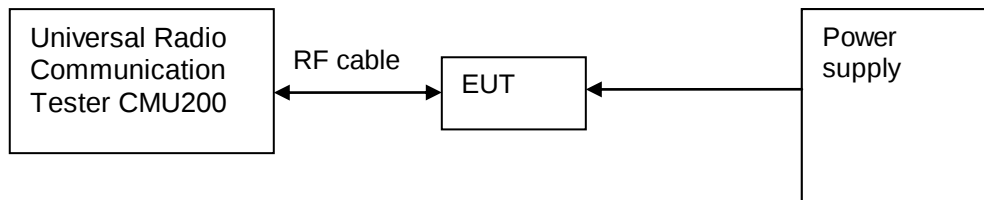


Figure 2. Test Set-up

6.2.4 Measurement Results

Measurement Results							
RF Output Power (Conducted)							
TEST CONDITIONS		Channel 512(B)		Channel 661(M)		Channel 810(T)	
		1850.2MHz		1880.0MHz		1909.8MHz	
		dBm		dBm		dBm	
T _{nom} (25 °C)/ V _{nom} (3.8V)		Measured	Limit	Measured	Limit	Measured	Limit
TM1		29.53	30	29.52	30	29.59	30
TM2		25.93	30	25.91	30	25.96	30
TEST CONDITIONS		Channel 9262(B)		Channel 9400(M)		Channel 9538(T)	
		1852.4MHz		1880.0MHz		1907.6MHz	
		dBm		dBm		dBm	
T _{nom} (25 °C)/ V _{nom} (3.8V)		Measured	Limit	Measured	Limit	Measured	Limit
TM3		23.59	30	23.36	30	23.42	30
TM4	Case1	23.53	30	23.33	30	23.38	30
	Case2	22.69	30	22.48	30	22.5	30
	Case3	22.11	30	21.86	30	21.89	30
	Case4	22.01	30	21.68	30	21.64	30
TM5	Case1	22.39	30	22.13	30	22.11	30
	Case2	20.66	30	20.44	30	20.46	30
	Case3	21.66	30	21.39	30	21.4	30
	Case4	20.88	30	20.63	30	20.64	30
	Case5	22.59	30	22.18	30	22.33	30

Note: Measurement the Conducted output power with RMS detector.



6.2.5 Conclusion

The equipment **PASSED** the requirement of this clause.

6.3 Modulation Characteristics

6.3.1 Test Conditions

Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25 °C
Relative humidity:	55 %
Test Configurations:	TM1/TM2/TM3 at frequency M

6.3.2 Test Specifications and Limits

6.3.2.1 Specification

CFR 47 (FCC) part 2.1047 and part 24 subpart E

6.3.2.2 Supporting Standards

Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;
3GPP TS 34.121 V8.7.0:2009	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.3.2.3 Limits

No specific modulation characteristics requirement limits in part 2.1047 and part 24 subpart E.

Limits

Limits	Not applicable
--------	----------------

6.3.3 Test Method and Setup

Connect the EUT to Universal Radio Communication Tester CMU200 via the antenna connector. The frequency band is set as PCS; the EUT's output is matched with 50 Ω load, test method was according to 3GPP TS 51.010 and 3GPP TS 34.121. The waveform quality and constellation of the EUT was tested.

Test setup

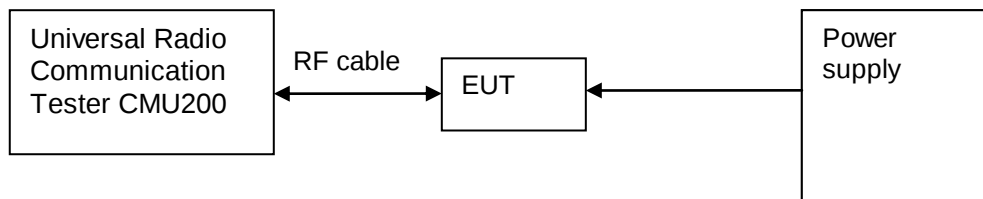


Figure 3. Test Set-up

6.3.4 Measurement Results

Measurement Results

		Modulation Characteristic	
TEST CONDITIONS		Channel 661(M) 1880.0MHz	
		Measured	
		TM1	TM2
T _{nom} (25 °C)	V _{nom} (3.8V)	Refer to Appendix A	Refer to Appendix A
TEST CONDITIONS		Channel 9400(M) 1880.0MHz	
		Measured	
		TM3	
T _{nom} (25 °C)	V _{nom} (3.8V)	Refer to Appendix A	

6.3.5 Conclusion

The equipment **PASSED** the requirement of this clause.

For the measurement results refer to appendix A.

6.4 Occupied Bandwidth

6.4.1 Test Conditions

Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25 °C
Relative humidity:	55 %
Test Configurations:	TM1/TM2/TM3 at frequency B, M, T

6.4.2 Test Specifications and Limits

6.4.2.1 Specification

CFR 47 (FCC) part 2.1049 and part 24 subpart E

6.4.2.2 Supporting Standards

Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;
3GPP TS 34.121 V8.7.0:2009	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.4.2.3 Limits

No specific occupied bandwidth requirement in part 24 subpart E, but the occupied bandwidth was defined in part 2.1049: the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.

Limits

Upper /lower frequency limits	0.5% of the mean power
-------------------------------	------------------------

6.4.3 Test Method and Setup

The EUT was connected to the wireless signal analyzer R&S FSQ31 via the one RF connector. The band class is set as PCS; The EUT was controlled to transmit maximum power. Measure and record the occupied bandwidth of the EUT by the R&S FSQ31.

The OBW, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions as applicable:

Refer to 47CFR part2.1049 section (g)&(h).

(g) Transmitter in which the modulating base band comprises not more than three independent channels - when modulated by the full complement of signals for which the transmitter is rated. The level of modulation for each channel should be set to that prescribed in rule parts applicable to the services for which the transmitter is intended. If specific modulation levels are not set forth in the rules, the tests should provide the manufacturer's maximum rated condition.

(h) Transmitters employing digital modulation techniques - when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudorandom generators or other devices required in normal service. Additionally, the occupied bandwidth shall be shown for operation with any devices used for modifying the spectrum when such devices are optional at discretion of the user.

For TM1/TM2 following RBW and VBW are employed:

Measurement bandwidth (RBW): 3 kHz (Resolution bandwidth)

Video bandwidth (VBW): 10 kHz

For TM3 following RBW and VBW are employed:

Measurement bandwidth (RBW): 50 kHz (Resolution bandwidth)

Video bandwidth (VBW): 500 kHz

Test Set-up

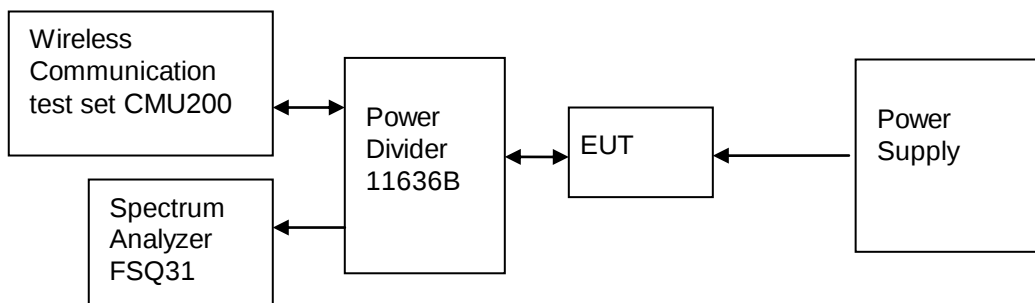


Figure 4. Test Set-up

6.4.4 Measurement Results

Measurement Results

TEST CONDITIONS		Occupied Bandwidth					
		Channel 512(B)		Channel 661(M)		Channel 810(T)	
Center Frequency		1850.2MHz		1880.0MHz		1909.8MHz	
		Measured		Measured		Measured	
		(kHz)		(kHz)		(kHz)	
		TM1	TM2	TM1	TM2	TM1	TM2
T _{nom} (25 °C)/ V _{nom} (3.8V)	99%	245.19	248.40	245.19	248.40	246.79	246.79

		Channel 9262(B)	Channel 9400(M)	Channel 9538(T)
Center Frequency		1852.4MHz	1880.0MHz	1907.6MHz
		Measured	Measured	Measured
		(MHz)	(MHz)	(MHz)
		TM3	TM3	TM3
T _{nom} (25 °C)/ V _{nom} (3.8V)	99%	4.07	4.05	4.07

6.4.5 Conclusion

The equipment **PASSED** the requirement of this clause.
For the measurement results refer to appendix B.

6.5 Band Edges Compliance

6.5.1 Test Conditions

Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25°C
Relative humidity:	55 %
Test Configurations:	TM1/TM2/TM3 at frequency B, T

6.5.2 Test Specifications and Limits

6.5.2.1 Specification

CFR 47 (FCC) part 2.1051 and Part24 Subpart E

6.5.2.2 Supporting Standards

Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;
3GPP TS 34.121 V8.7.0:2009	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.5.2.3 Limits

Compliance with part 24.238, all spurious emission must be attenuated below the transmitter power by at least $43 + 10 \log_{10} P(W)$. (Whereas P is the rated power of the EUT).

Limits

	TM1	TM2	TM3
Rated Power:	30 dBm	26 dBm	24 dBm
Required attenuation:	$43 + 10 \log(1) = 43$, 30 dBm - 43 dB	$43 + 10 \log(0.4) = 39$, 26 dBm - 39 dB	$43 + 10 \log(0.25) = 37$, 24 dBm - 37 dB
Absolute level	- 13 dBm	- 13 dBm	- 13 dBm

6.5.3 Test Method and Setup

The EUT was connected to the wireless signal analyzer R&S FSQ31 via the one RF connector, the band class is set as PCS. The EUT was controlled to transmit maximum power. Measure and record band edges compliance of the EUT by the R&S FSQ31.

For TM1/TM2 following RBW and VBW are employed:
Measurement bandwidth (RBW): 3 kHz (Resolution bandwidth)
Video bandwidth (VBW): 10 kHz
For TM3 following RBW and VBW are employed:
Measurement bandwidth (RBW): 50 kHz (Resolution bandwidth)
Video bandwidth (VBW): 200 kHz

Test Set-up

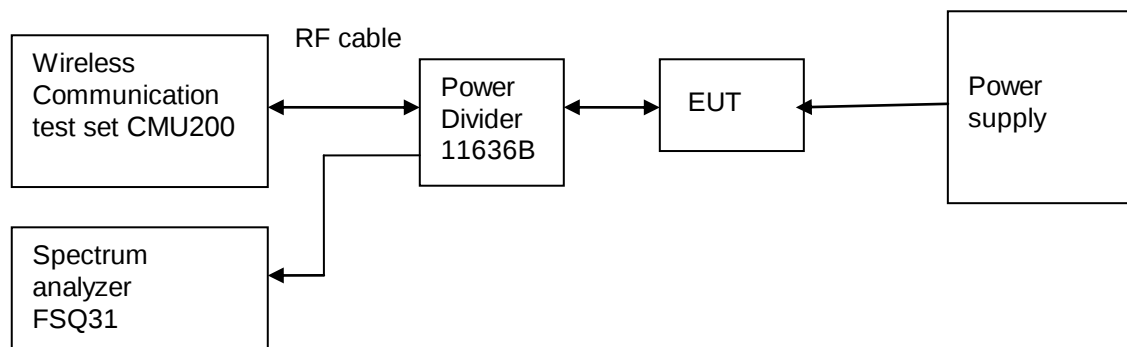


Figure 5. Test Set-up

6.5.4 Measurement Results

Measurement Results outside Band Edges-- Single Carrier

Band	Frequency of Band edges [MHz]	Channel Number	Test Mode	Spurious Level measured [dBm]	FCC limit	Result
PCS	T_{nom} (25 °C), V_{nom} (3.8V)					
	1850.2	512	TM1	<-13(See appendix C)	- 13 dBm	Pass
	1909.8	810	TM1	<-13(See appendix C)	- 13 dBm	Pass
	1850.2	512	TM2	<-13(See appendix C)	- 13 dBm	Pass
	1909.8	810	TM2	<-13(See appendix C)	- 13 dBm	Pass
	1852.4	9262	TM3	<-13(See appendix C)	- 13 dBm	Pass
	1907.6	9538	TM3	<-13(See appendix C)	- 13 dBm	Pass

6.5.5 Conclusion

The equipment **PASSED** the requirement of this clause.
For the measurement results refer to appendix C.

6.6 Spurious Emission at Antenna Terminal

6.6.1 Test Conditions

Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25°C
Relative humidity:	55 %
Test Configurations:	TM1/TM2/TM3 at frequency B, M ,T

6.6.2 Test Specifications and Limits

6.6.2.1 Specification

CFR 47 (FCC) part 2.1051 and Part24 Subpart E

6.6.2.2 Supporting Standards

Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;
3GPP TS 34.121 V8.7.0:2009	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.6.2.3 Limits

Compliance with part 24.238, all spurious emission must be attenuated below the transmitter power by at least $43 + 10 \log_{10} P$. (Whereas P is the rated power of the EUT).

Limits

	TM1	TM2	TM3
Rated Power:	30 dBm	26 dBm	24 dBm
Required attenuation:	$43 + 10 \log (1) = 43$, 30 dBm - 43 dB	$43 + 10 \log (0.4) = 39$, 26 dBm - 39 dB	$43 + 10 \log (0.25) = 37$, 24 dBm - 37 dB
Absolute level	- 13 dBm	- 13 dBm	- 13 dBm

6.6.3 Test Method and Setup

The EUT was connected to the wireless signal analyzer R&S FSQ31 via the one RF connector, the band class is set as PCS. The EUT was controlled to transmit maximum power. Measure and record the Conducted Spurious Emission of the EUT by the R&S FSQ31.

According to part 24.238, the defined measurement bandwidth as following:

24.238 (b) Measurement procedure: Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater.

Measurement bandwidth (RBW) for 9 kHz up to 150 kHz: 1 kHz;
Measurement bandwidth (RBW) for 150 kHz up to 30MHz: 10 kHz;
Measurement bandwidth (RBW) for 30 MHz up to 20GHz: 1MHz;

Test Set-up

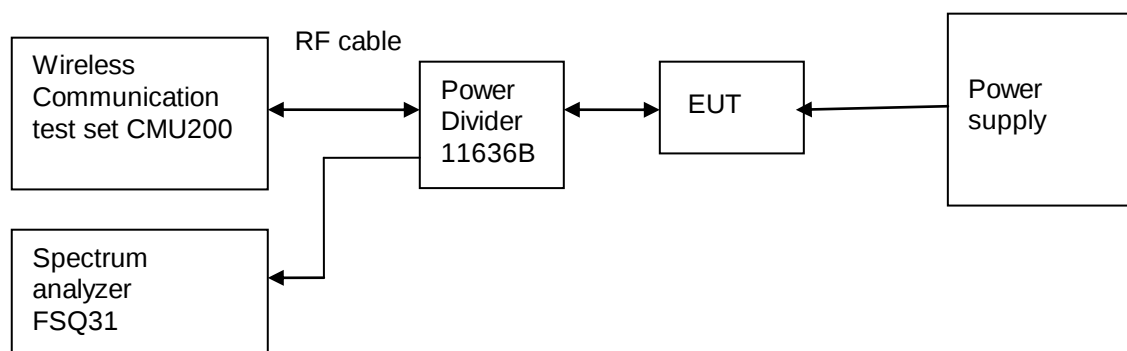


Figure 6. Test Set-up

6.6.4 Measurement Results

Measurement Results						
Channel Number	Test Mode	Test Range (Frequency)	Output Power [dBm]	Spurious Level measured [dBm]	FCC limit	Result
Channel 512(B)	TM1	9 kHz~20GHz	30	<- 13 dBm (See appendix D)	- 13 dBm	Pass
	TM2	9 kHz~20GHz	26	<- 13 dBm (See appendix D)	- 13 dBm	Pass
Channel 9262(B)	TM3	9 kHz~20GHz	24	<- 13 dBm (See appendix D)	- 13 dBm	Pass
Channel 661(M)	TM1	9 kHz~20GHz	30	<- 13 dBm (See appendix D)	- 13 dBm	Pass
	TM2	9 kHz~20GHz	26	<- 13 dBm (See appendix D)	- 13 dBm	Pass
Channel	TM3	9 kHz~20GHz	24	<- 13 dBm	- 13	Pass

9400(M)				(See appendix D)	dBm	
Channel 810(T)	TM1	9 kHz~20GHz	30	<- 13 dBm (See appendix D)	- 13 dBm	Pass
	TM2	9 kHz~20GHz	26	<- 13 dBm (See appendix D)	- 13 dBm	Pass
Channel 9538(T)	TM3	9 kHz~20GHz	24	<- 13 dBm (See appendix D)	- 13 dBm	Pass

6.6.5 Conclusion

The equipment **PASSED** the requirement of this clause.
For the measurement results refer to appendix D.

6.7 Radiated Spurious Emissions

6.7.1 Test Conditions

Test Conditions	
Preconditioning:	0.5 hour
Measured at:	enclosure
Ambient temperature:	25°C
Relative humidity:	55%
Test Configurations:	TM1/TM2/TM3/TM4/TM5 at frequency M

6.7.2 Test Specifications and Limits

6.7.2.1 Specification

CFR 47 (FCC) part 2.1053 and part 24.238

6.7.2.2 Supporting Standards

Supporting Standards:	
ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;
3GPP TS 34.121 V8.7.0:2009	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.7.2.3 Limits

Compliance with part 24.238, all spurious emission must be attenuated below the transmitter power by at least $43 + 10 \log_{10} P$. (Whereas P is the rated power of the EUT).

Limits

Absolute level	- 13 dBm
----------------	----------

6.7.3 Test Method and Setup

A test site fulfilling the requirements of ITU-R Recommendation SM329-11 was used. The EUT was placed on a non-conducting support in the anechoic chamber and was operated from a power source via an RF filter to avoid radiation from the power leads.

According to part 24.238, the defined measurement bandwidth as following:

24.238(b) Measurement procedure: Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater.

Measurement bandwidth (RBW) for 9 kHz up to 150 kHz: 1 kHz;

Measurement bandwidth (RBW) for 150 kHz up to 30 MHz: 10 kHz;


Measurement bandwidth (RBW) for 30MHz up to 26.5GHz: 1MHz;

Test Set-up

Step 1:


For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, EIRP shall be measured when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in 2.1033(c)(8). Connect the EUT to the BTS simulator via the air interface.

Test the Radiated maximum output power by the Test Receiver from test antenna.

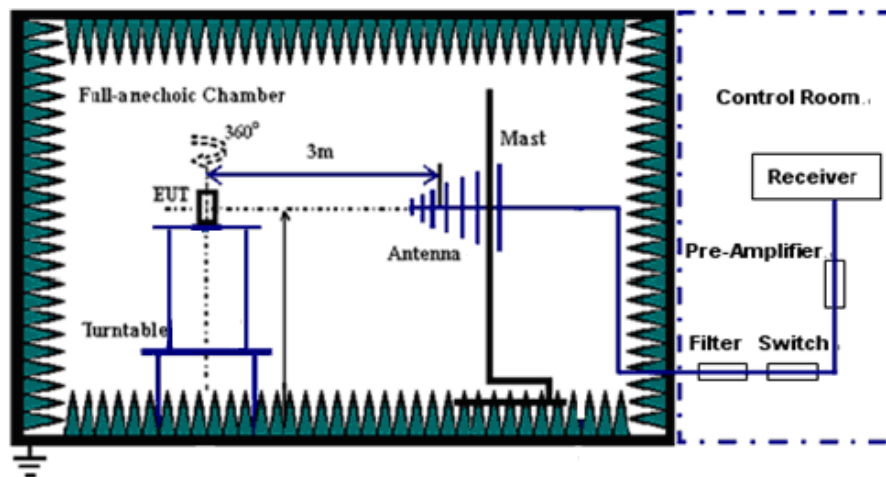

Step 2:

Use substitution method to verify the maximum output power. The EUT is substituted by a dipole antenna. The dipole is connected to a signal generator. And then adjust the output level of the signal generator to get the same received power recorded in step1 on Test Receiver, and record the power level of Signal Generator. Of course, the cable loss at the test frequency should be compensated.

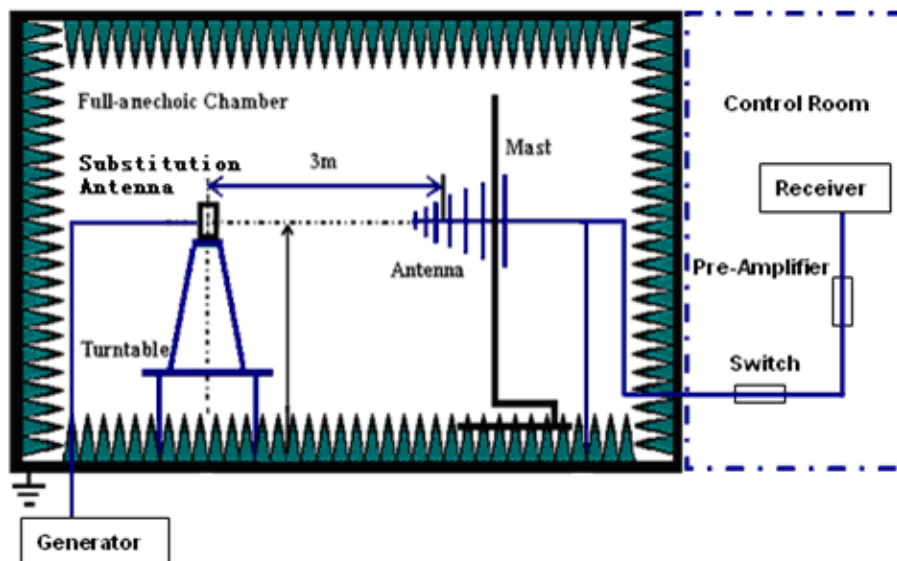

Test should be performed in normal voltage condition.

No peak found in pre- test. All frequency points' margin is bigger than 20dB, so the substitution method isn't used.

Calculation Sample:

Substitution Results

Freq. [MHz]	Measure ment Value [dBm]	Substitution Antenna Type	Gain [dBd]	Cable Loss [dB]	Signal Generator Level [dBm]	Substitution Level [dBm]	FCC limit [dBm]	Result

Note: For get the E.R.P. (Efficient Radiated Power) in substitution method, the following formula should take to calculate it,

$$\text{E.R.P. [dBm]} = \text{SGP [dBm]} - \text{Cable Loss [dB]} + \text{Gain [dBd]}$$

NOTE: SGP- Signal Generator Level

6.7.4 Conclusion

The equipment **PASSED** the requirement of this clause.

For the measurement results refer to appendix_E

6.8 Frequency Stability

6.8.1 Test Conditions

Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	See below
Relative humidity:	55 %
Test Configurations:	TM1/TM2/TM3 at frequency M

6.8.2 Test Specifications and Limits

6.8.2.1 Specification

CFR 47 (FCC) part 2.1055 and Part24 Subpart E

6.8.2.2 Supporting Standards

Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;
3GPP TS 34.121 V8.7.0:2009	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.8.2.3 Limits

No specific frequency stability requirement in part 2.1055 and part 24.235.

6.8.3 Test Method and Setup

The frequency stability shall be measured with variation of ambient temperature as follows:

- (1) From -30 ° to +50 ° centigrade for all equipment except that specified in subparagraphs
- (2) and (3) of paragraph 2.1055

(a) Frequency measurements shall be made at the extremes of the specified temperature range and at intervals of not more than 10° centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short-term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stabilizing circuitry need be subjected to the temperature variation test.

(b) The frequency stability shall be measured with variation of primary supply voltage as follows:

- (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
- (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point, which shall be specified by the manufacturer.

(3) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.

(c) When deemed necessary, the Commission may require tests of frequency stability under conditions in addition to those specifically set out in paragraphs (a), (b), (c) of this section. (For example, measurements showing the effect of proximity to large metal objects, or of various types of antennas, may be required for portable equipment.)

The EUT can only work in such extreme voltage 3.3V and 4.2V, so here the EUT is tested in the 3.3V and 4.2V.

Test Set up

Connect the EUT to the Wireless Communication test set CMU200 via the connector. Then measure the frequency error by the Wireless Communication test set CMU200. The EUT's output is matched with a 50 Ω load.

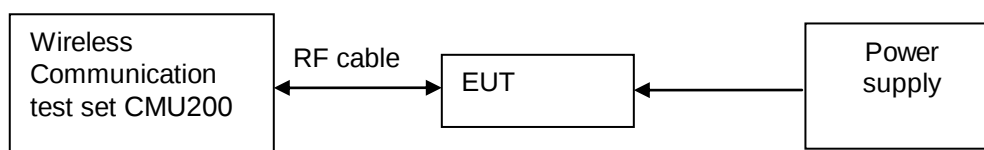


Figure 7. Test Set up

6.8.4 Measurement Results

6.8.4.1 Measurement Results vs. Variation of Temperature

● TM1,3.8V DC Channel No.661(1880.0MHz)

Measurement Results vs. Variation of Temperature—TM1

Temperature	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
-30 °C	1880.0	-10	Pass
-20 °C	1880.0	6	Pass
-10 °C	1880.0	-11	Pass
0 °C	1880.0	5	Pass
+10 °C	1880.0	17	Pass
+20 °C	1880.0	19	Pass
+30 °C	1880.0	-10	Pass
+40 °C	1880.0	13	Pass

+50 °C	1880.0	9	Pass
--------	--------	---	------

● **TM2, 3.8V DC Channel No.661(1880.0MHz)**

Measurement Results vs. Variation of Temperature—TM2

Temperature	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
-30 °C	1880.0	8	Pass
-20 °C	1880.0	-12	Pass
-10 °C	1880.0	-5	Pass
0 °C	1880.0	-15	Pass
+10 °C	1880.0	-12	Pass
+20 °C	1880.0	-13	Pass
+30 °C	1880.0	-10	Pass
+40 °C	1880.0	-17	Pass
+50 °C	1880.0	-12	Pass

● **TM3, 3.8V DC Channel No.9400(1880.0MHz)**

Measurement Results vs. Variation of Temperature—TM3

Temperature	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
-30 °C	1880.0	-5	Pass
-20 °C	1880.0	8	Pass
-10 °C	1880.0	-12	Pass
0 °C	1880.0	10	Pass
+10 °C	1880.0	17	Pass
+20 °C	1880.0	-11	Pass
+30 °C	1880.0	13	Pass
+40 °C	1880.0	-10	Pass
+50 °C	1880.0	-13	Pass

6.8.4.2 Measurement Results vs. Variation of Voltage

- **TM1, 25 °C ,Channel No. 661(1880.0MHz)**

Measurement Results vs. Variation of Voltage — TM1

Voltage	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
+4.2V	1880.0	-5	Pass
+3.8V	1880.0	-9	Pass
+3.3V	1880.0	-12	Pass

- **TM2, 25 °C ,Channel No. 661(1880.0MHz)**

Measurement Results vs. Variation of Voltage — TM2

Voltage	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
+4.2V	1880.0	6	Pass
+3.8V	1880.0	-13	Pass
+3.3V	1880.0	-6	Pass

- **TM3, 25 °C ,Channel No. 9400(1880.0MHz)**

Measurement Results vs. Variation of Voltage — TM3

Voltage	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
+4.2V	1880.0	-17	Pass
+3.8V	1880.0	-12	Pass
+3.3V	1880.0	9	Pass

6.8.5 Conclusion

The equipment **PASSED** the requirement of this clause.

7 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

System Measurement Uncertainty

Items		Extended Uncertainty
Effective Isotropic radiated power of Transmitter	EIRP (dBm)	U=3dB; k=2
Band Width	Magnitude (%)	U=0.2%; k=2
Band Edge Compliance	Disturbance Power(dBm)	U=2.0dB; k=2
Conducted Spurious Emission at Antenna Terminal	Disturbance Power(dBm)	U=2.0dB; k=2
Frequency Stability	Frequency Accuracy(ppm)	U=0.21ppm; k=2

8 Appendices

Appendix A	Measurement Results Modulation Characteristics
Appendix B	Measurement Results Occupied Bandwidth
Appendix C	Measurement Results Band Edges
Appendix D	Measurement Results Spurious Emission at Antenna Terminal
Appendix E	Measurement Results Radiated Spurious Emissions
Appendix F	Photos of Radiated Spurious Emissions




Appendix A

Modulation Characteristics

According to FCC Part 2.1047 & Part24 Subpart E




TM1:GPRS/GSM Channel 661

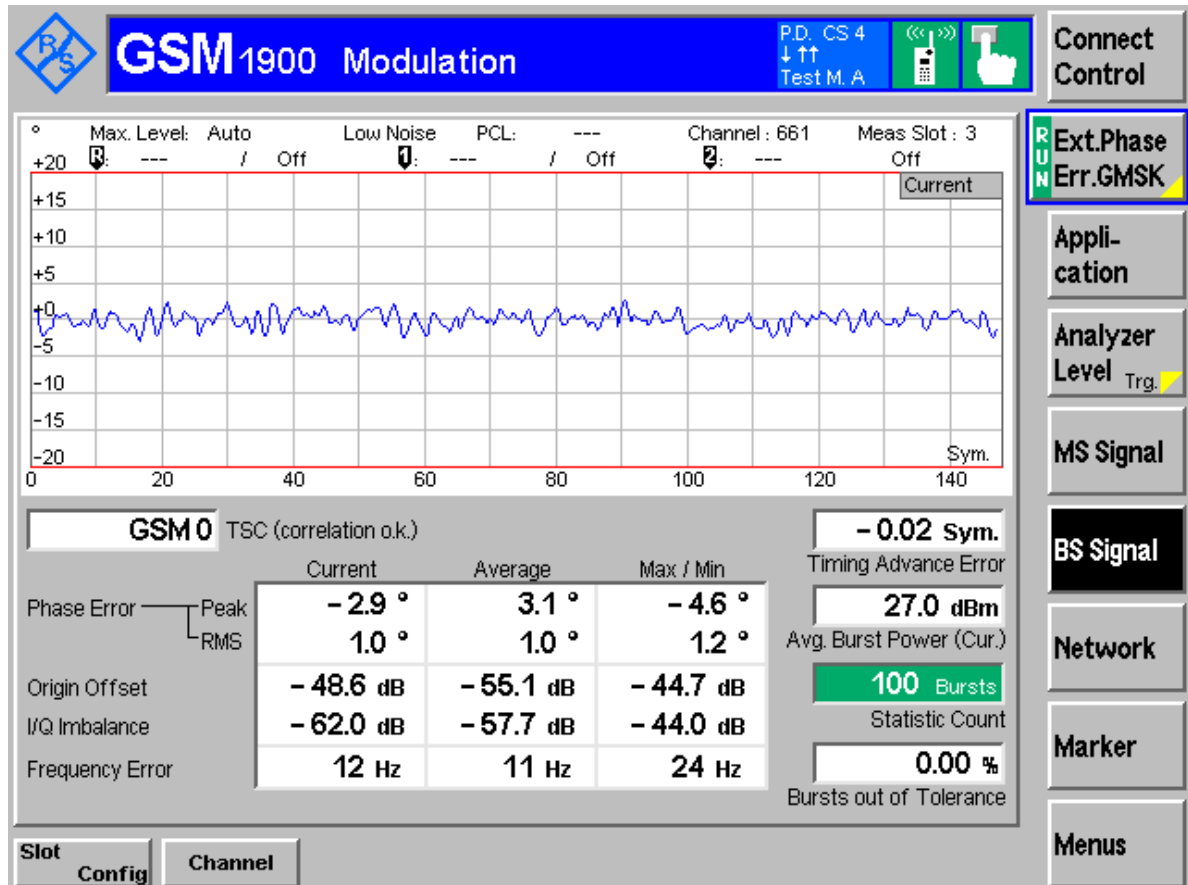




TM2:EDGE Channel 661

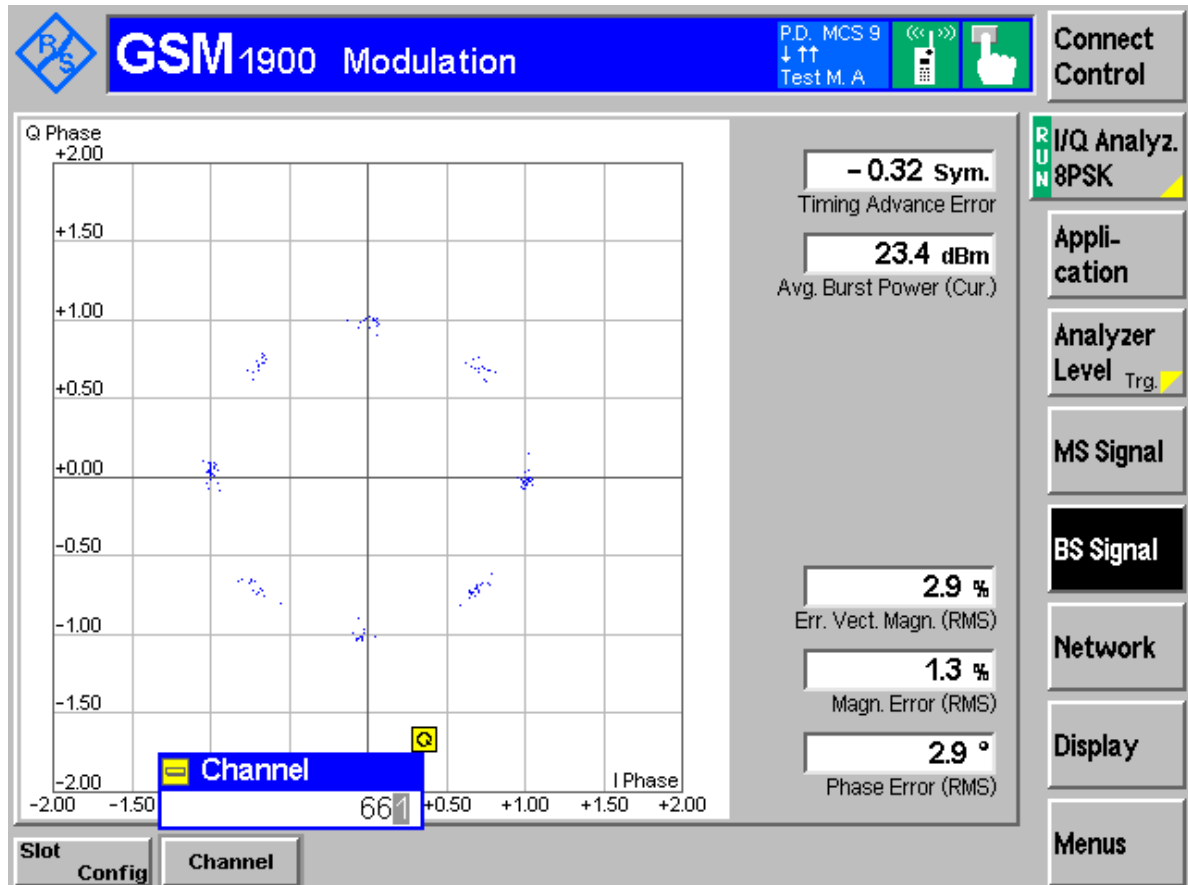



TM3: WCDMA Channel 9400

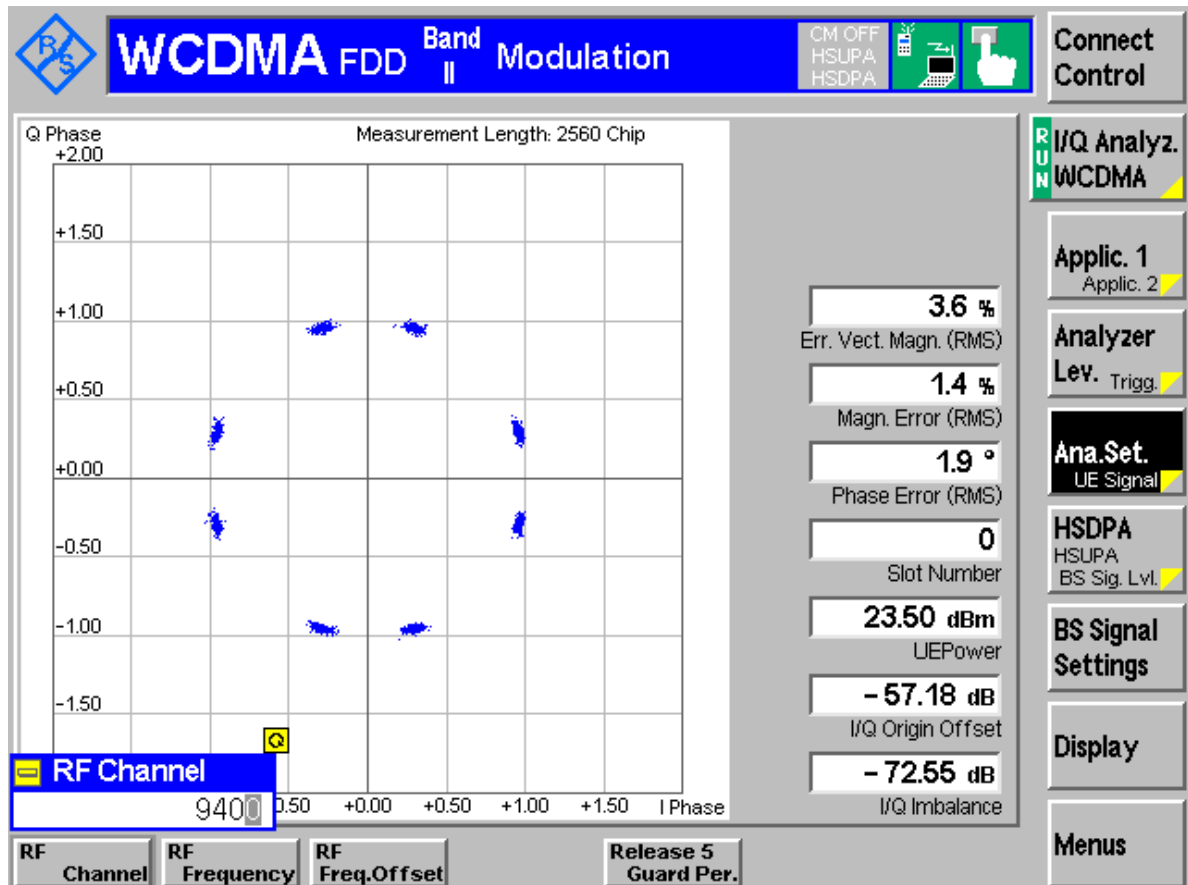




Appendix B

Occupied Bandwidth According to FCC Part 2.1049 & Part24 Subpart E




TM1:GPRS/GSM Channel 512

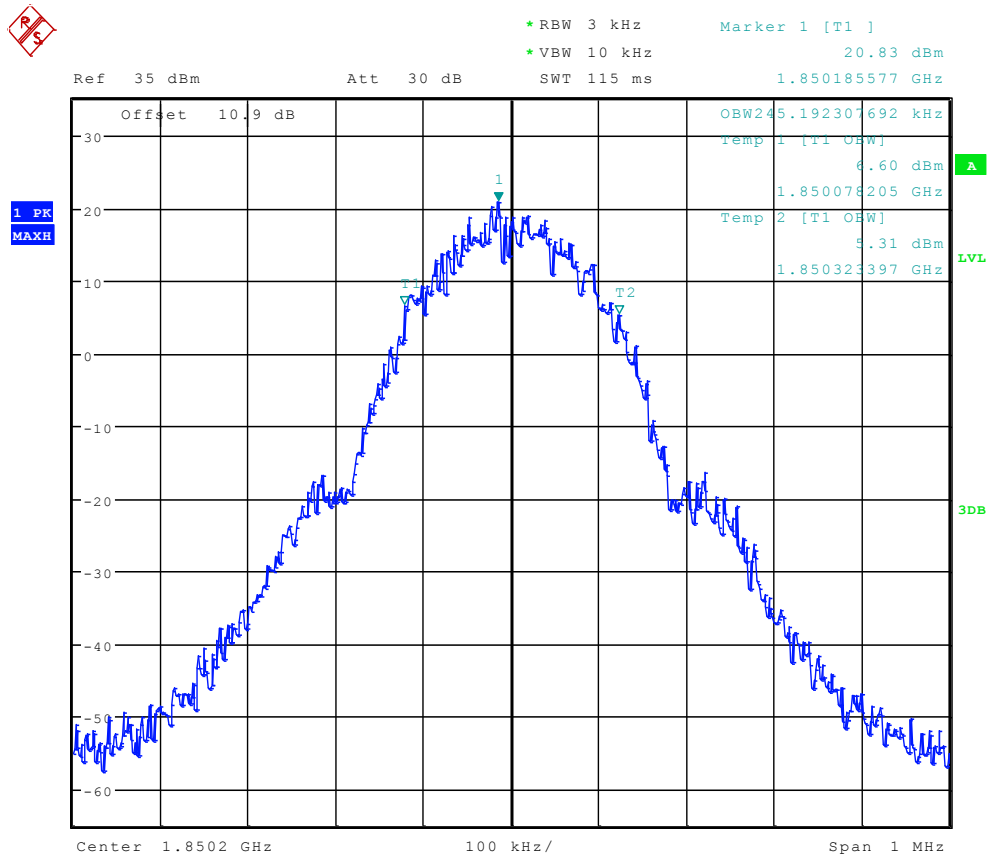

Date: 22.SEP.2011 00:05:58




TM2:EDGE Channel 512

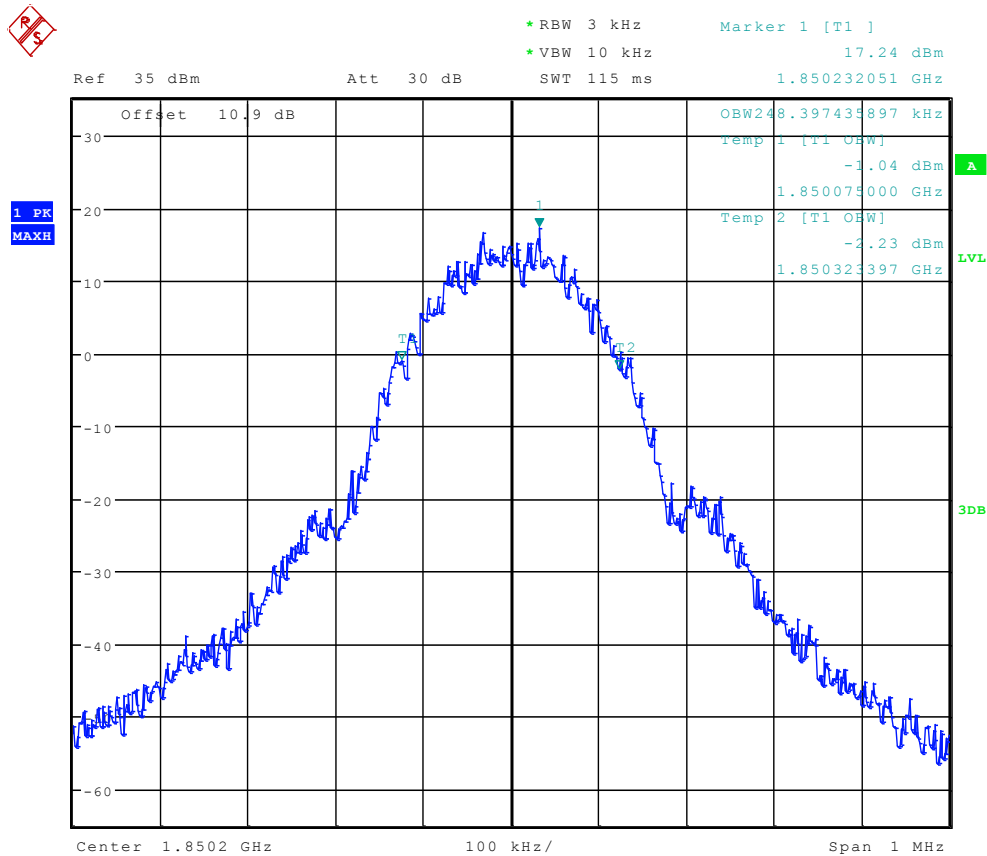

Date: 22.SEP.2011 00:22:41




TM3: WCDMA Channel 9262

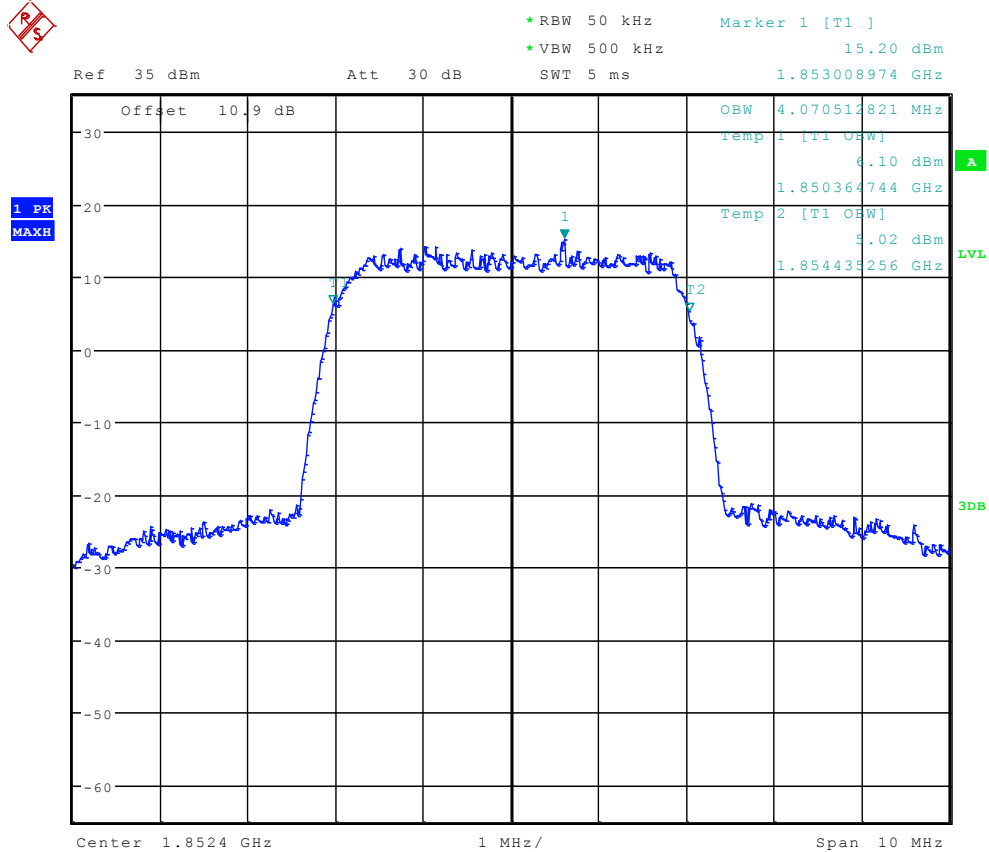

Date: 22.SEP.2011 00:28:01




TM1:GPRS/GSM Channel 661

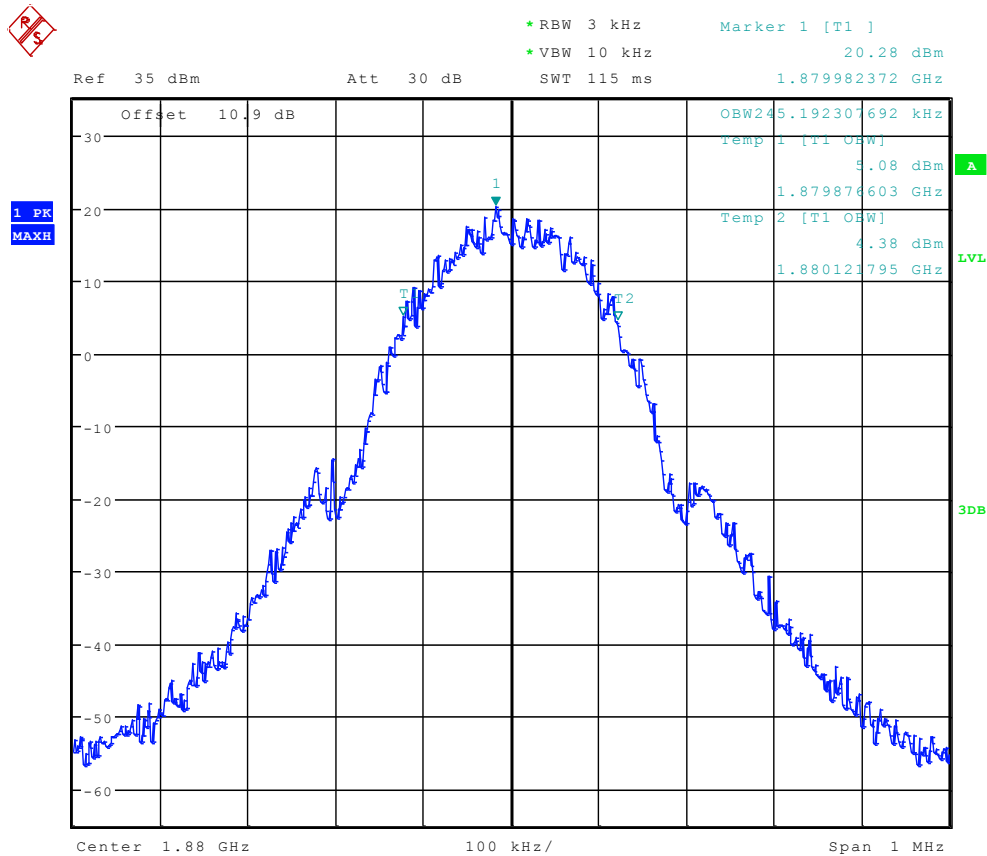

Date: 22.SEP.2011 00:06:11




TM2:EDGE Channel 661

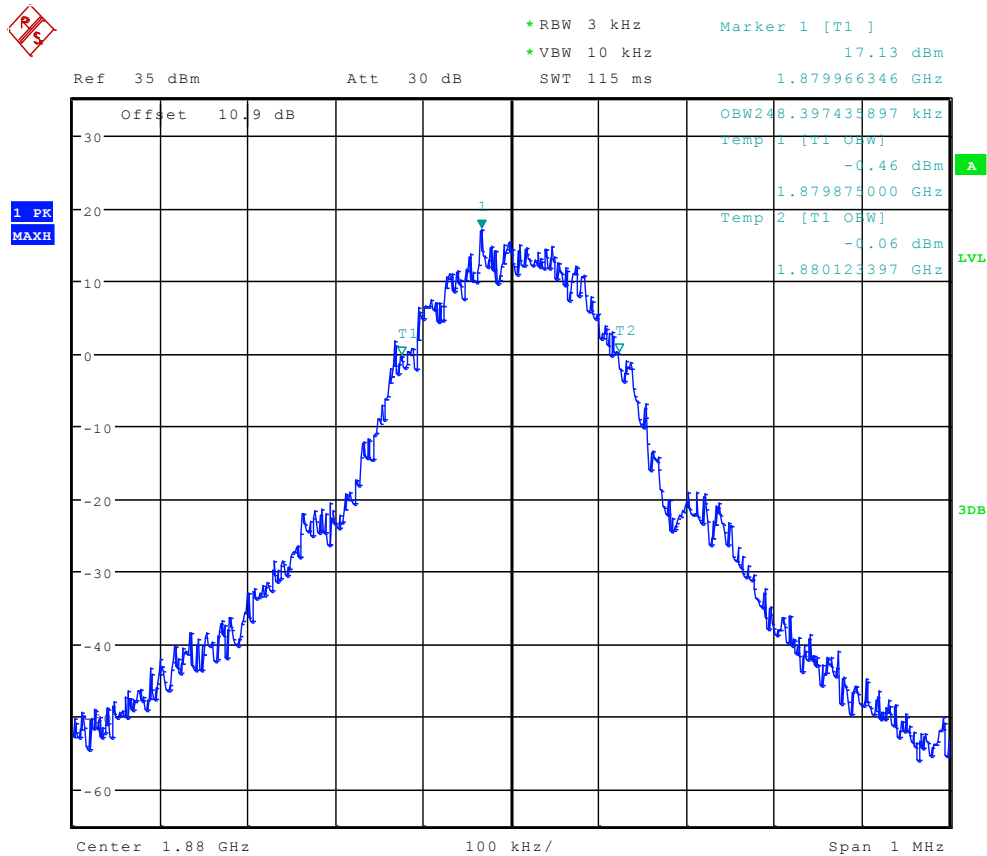


Date: 22.SEP.2011 00:22:55



TM3: WCDMA Channel 9400

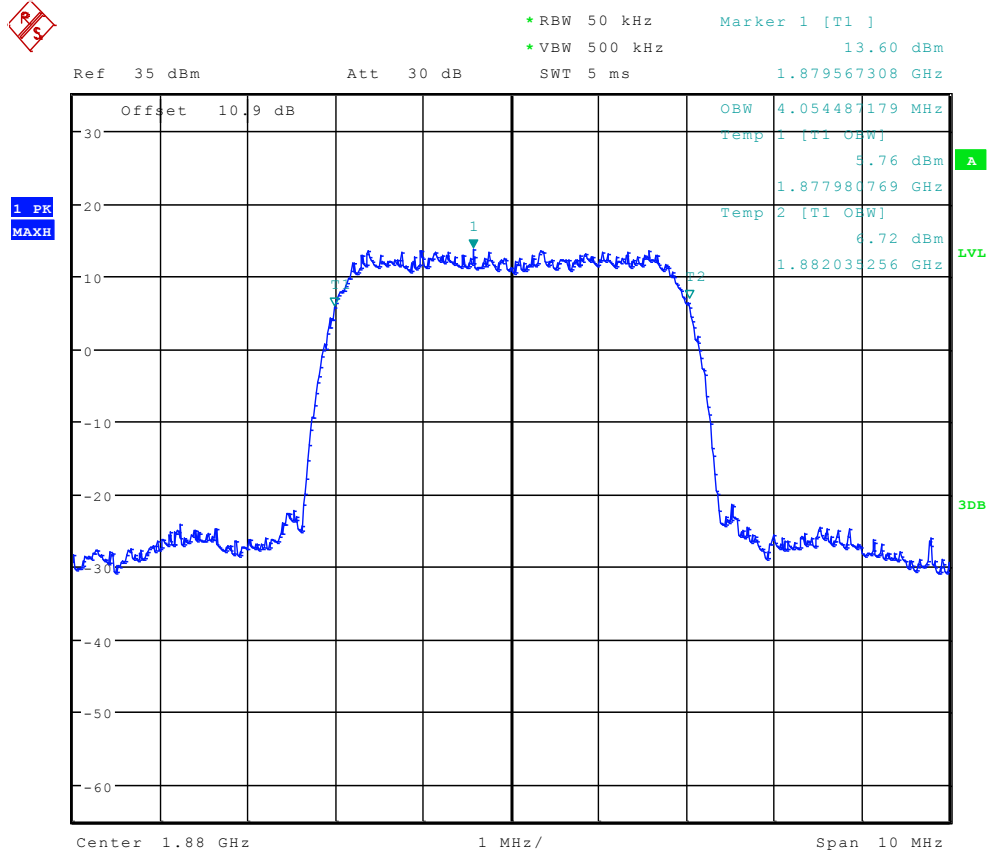


Date: 22.SEP.2011 00:28:15






TM2:EDGE Channel 810

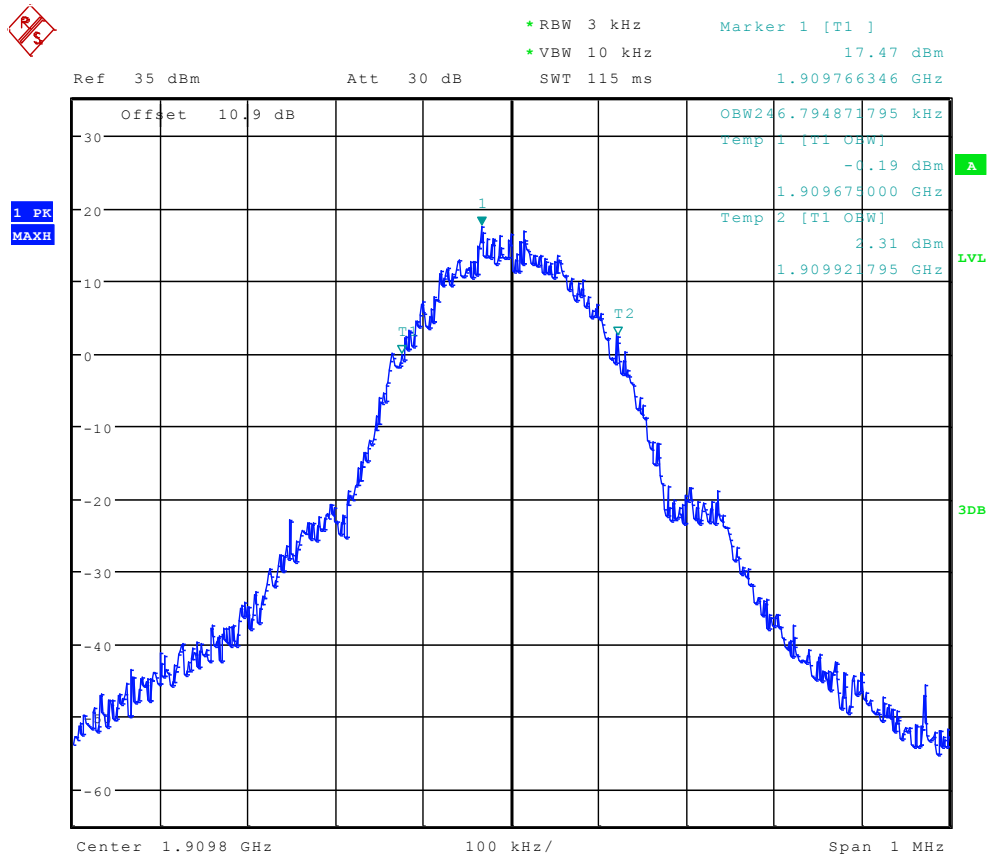

Date: 22.SEP.2011 00:23:08



TM3: WCDMA Channel 9538

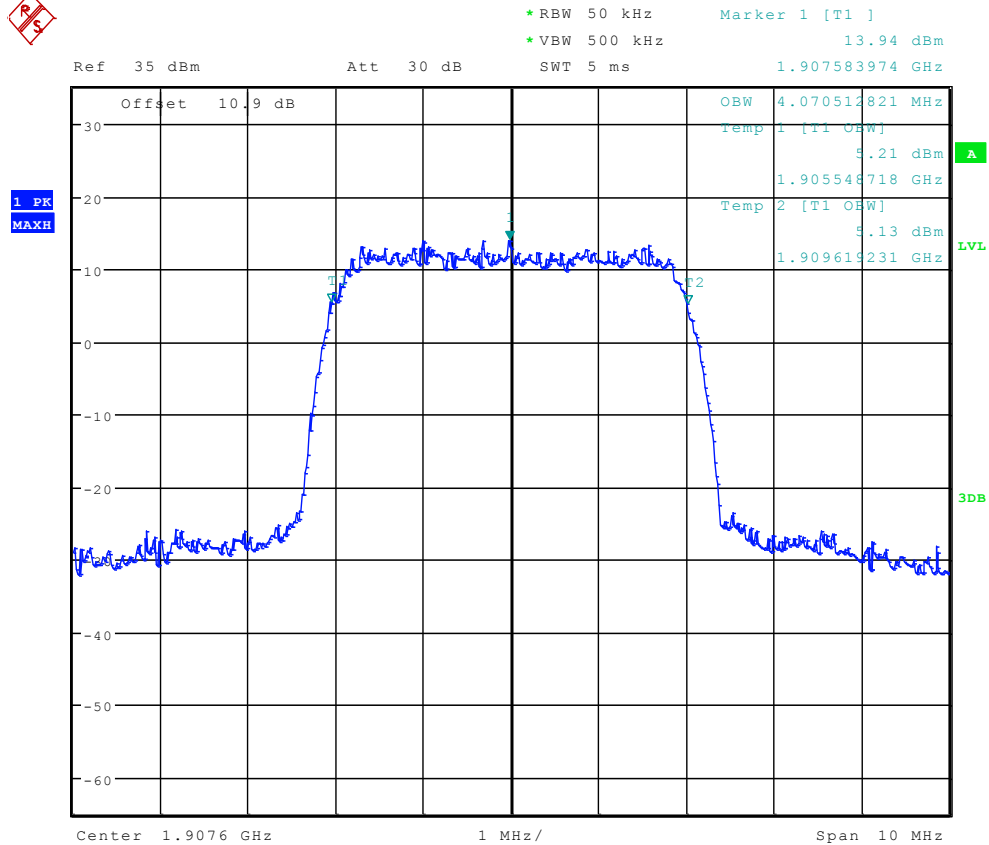

Date: 22.SEP.2011 00:28:29



Appendix C

Band Edges Compliance


According to FCC Part 2.1051 & Part24 Subpart E



TM1:GPRS/GSM

Left Edge


Channel 512

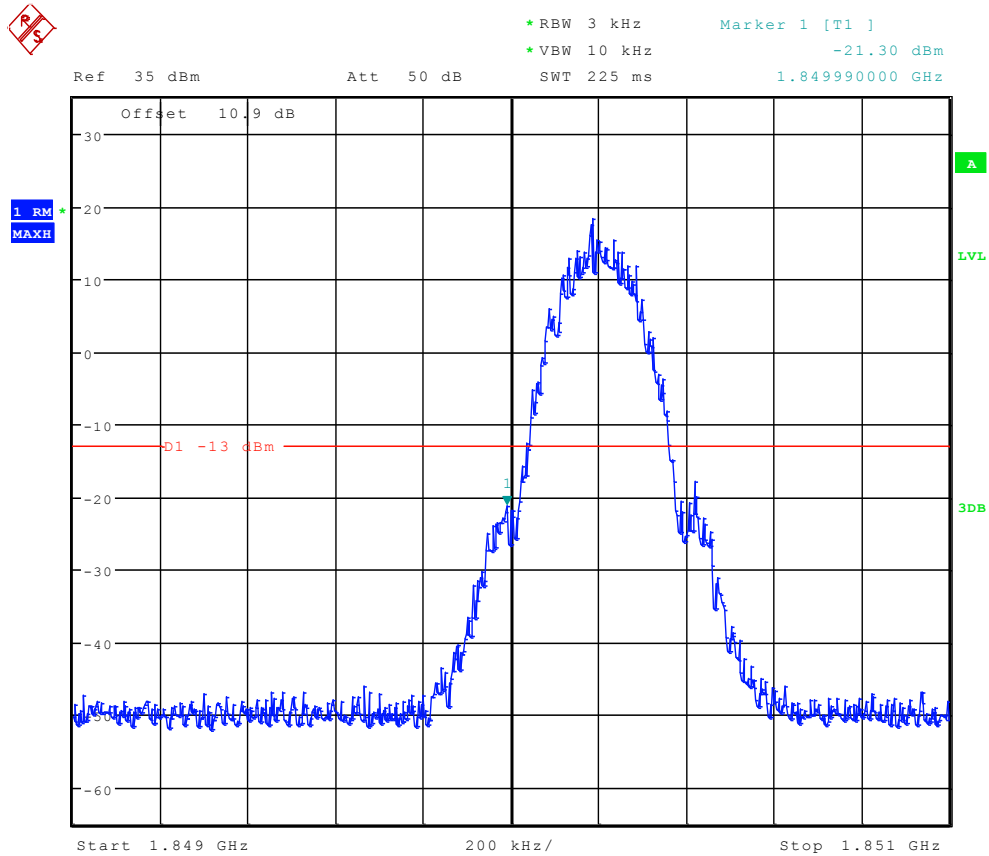



Date: 22.SEP.2011 00:16:23



Right Edge Channel 810

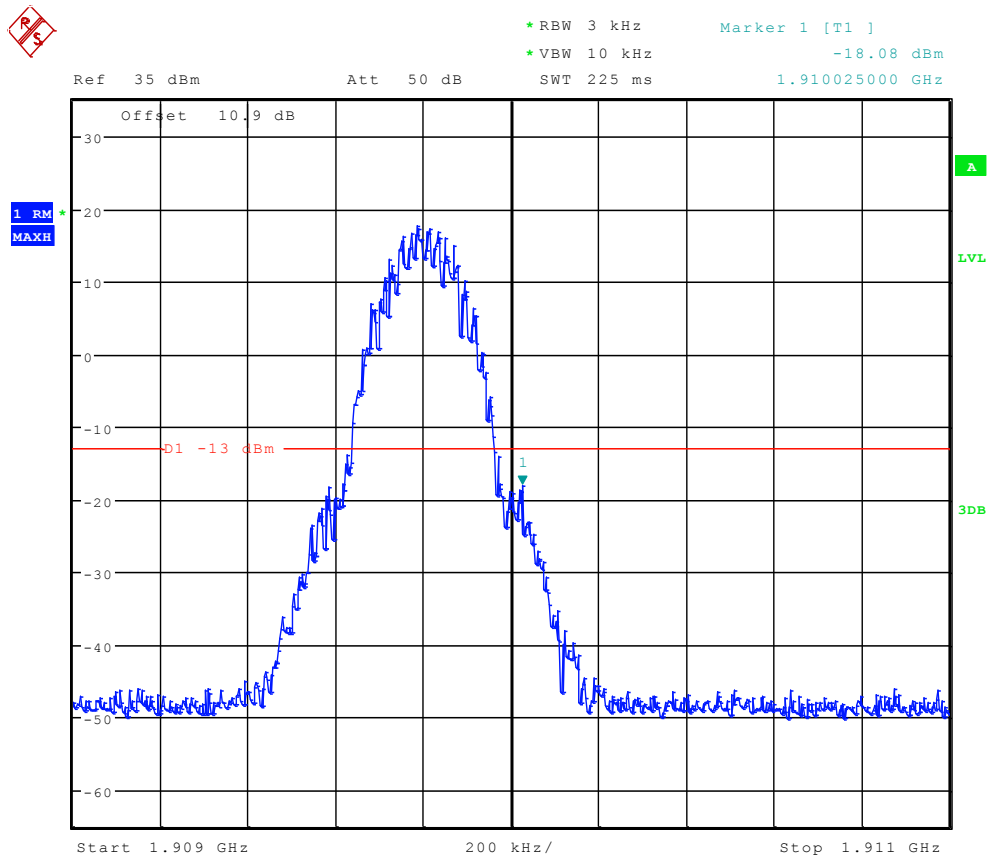


Date: 22.SEP.2011 00:17:11

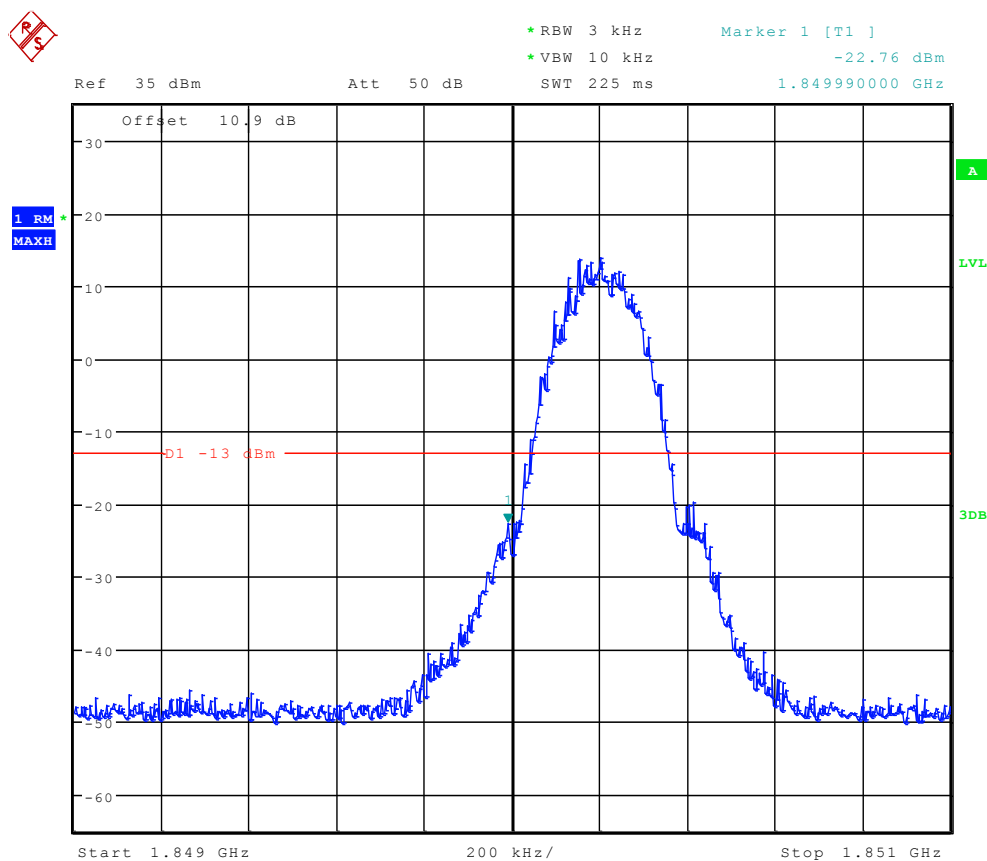

Date: 22.SEP.2011 00:21:35




Right Edge Channel 810

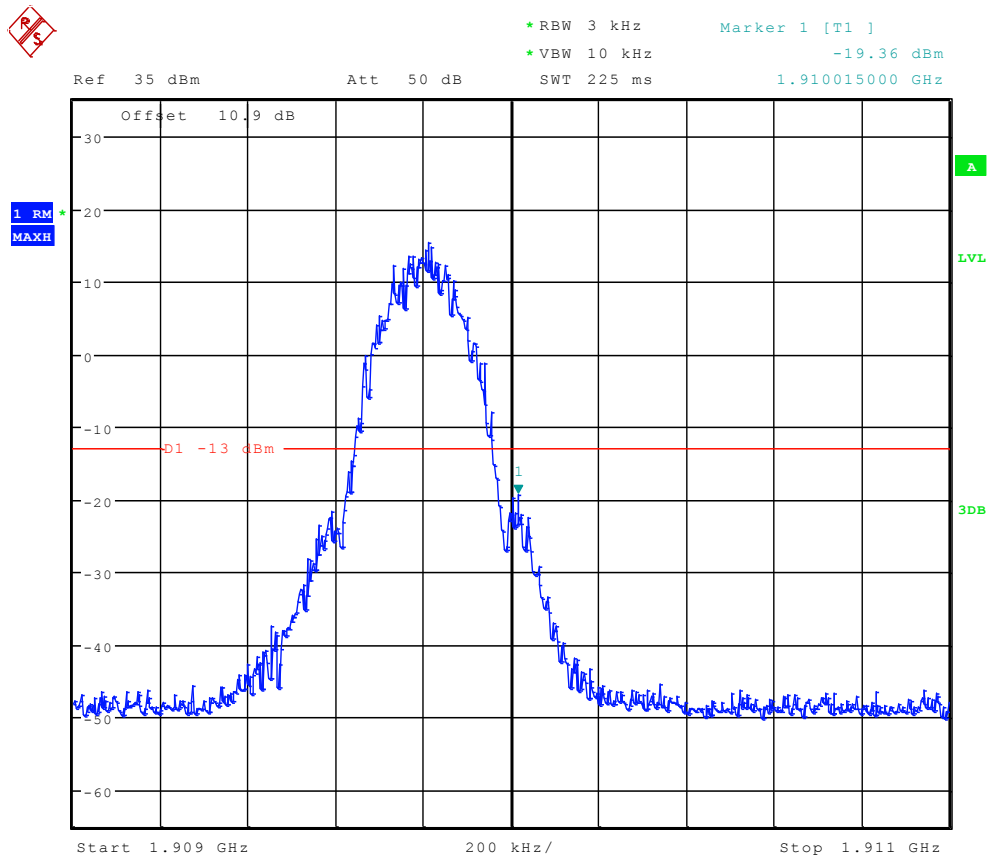

Date: 22.SEP.2011 00:22:27




TM3: WCDMA Left Edge Channel 9262

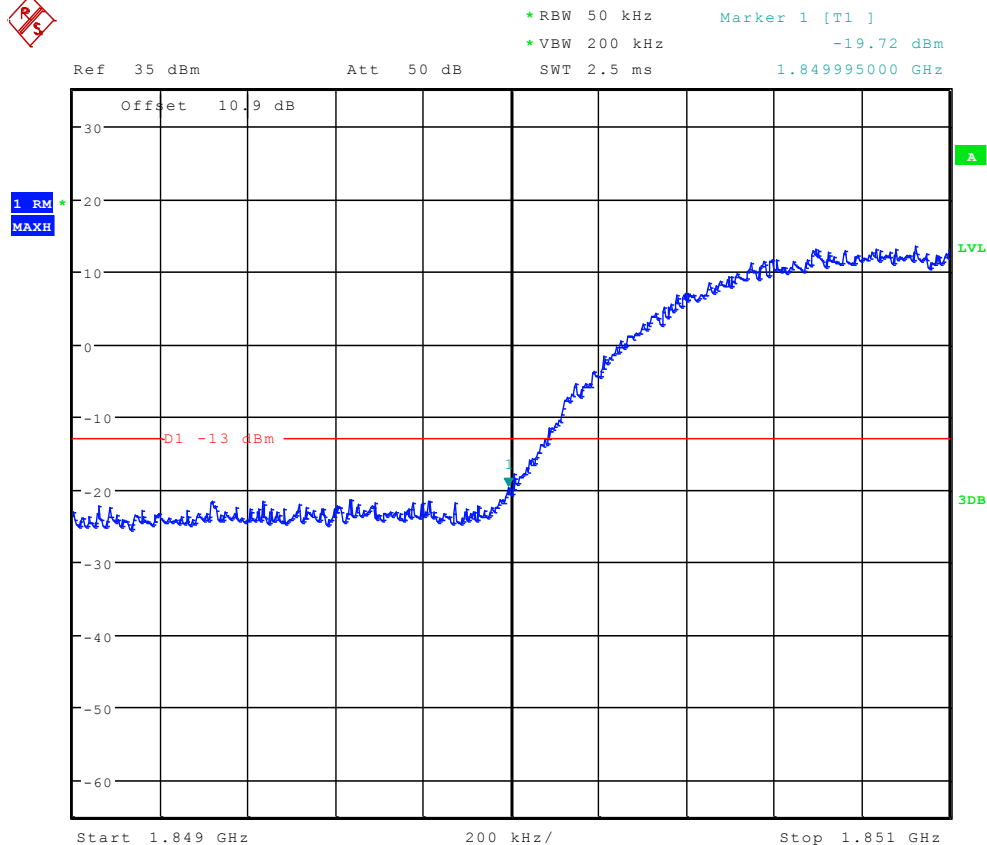

Date: 22.SEP.2011 00:28:43



Right Edge Channel 9538

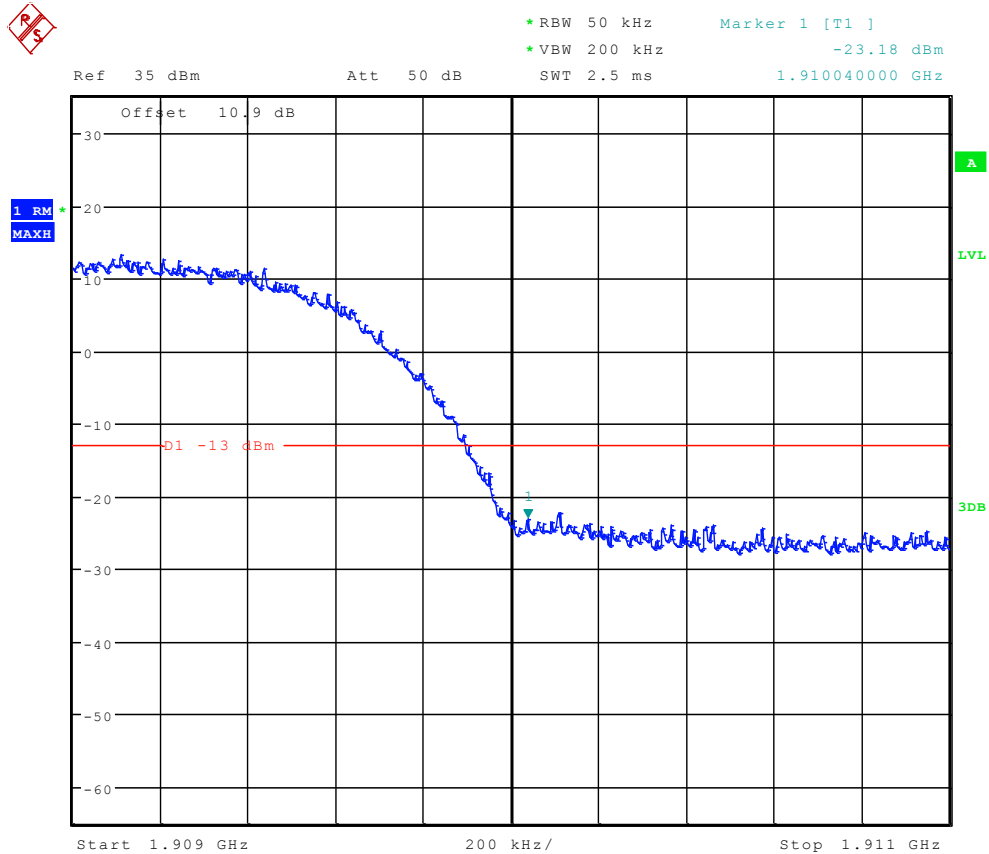

Date: 22.SEP.2011 00:28:57




Appendix D

Spurious Emission at Antenna Terminal


According to FCC Part 2.1051 & Part24 Subpart E




TM1:GPRS/GSM Channel 512

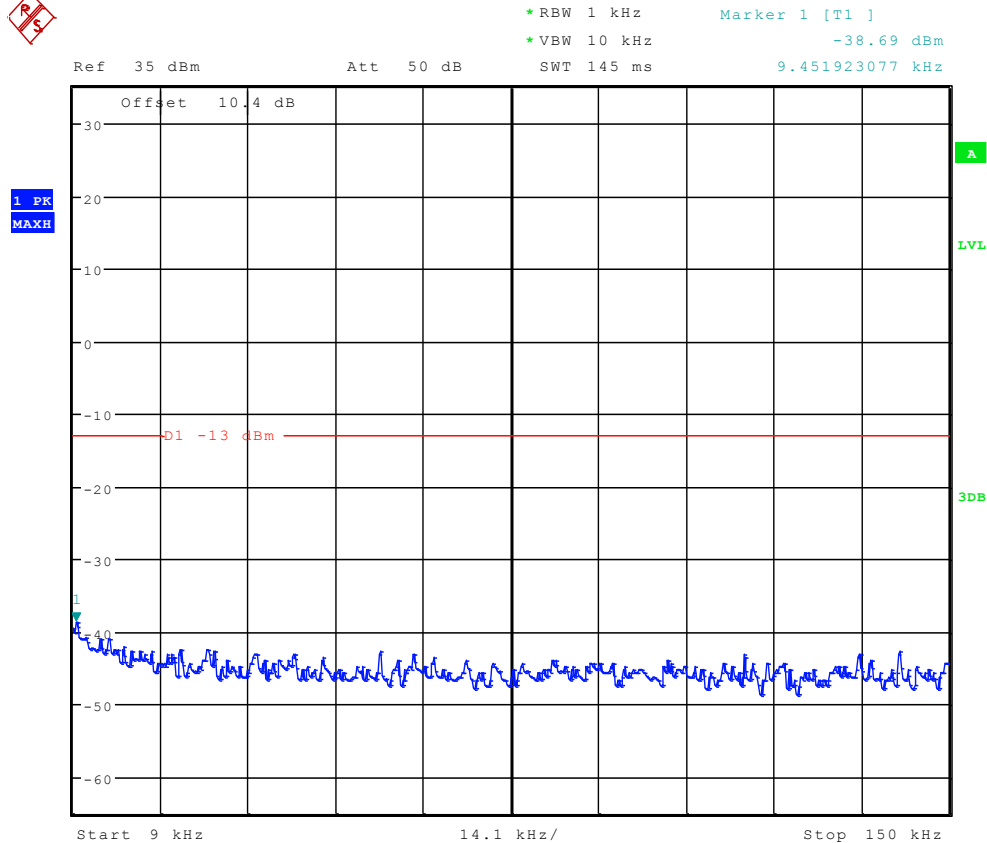

Date: 22.SEP.2011 00:06:40

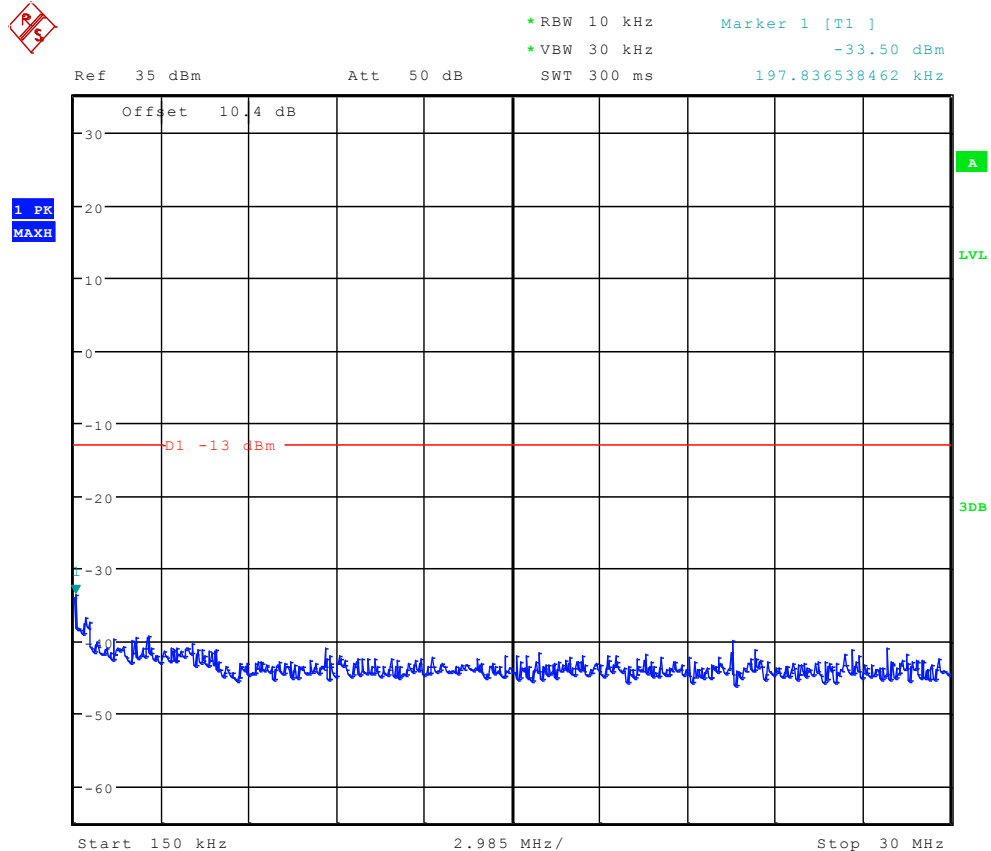


Date: 22.SEP.2011 00:07:23

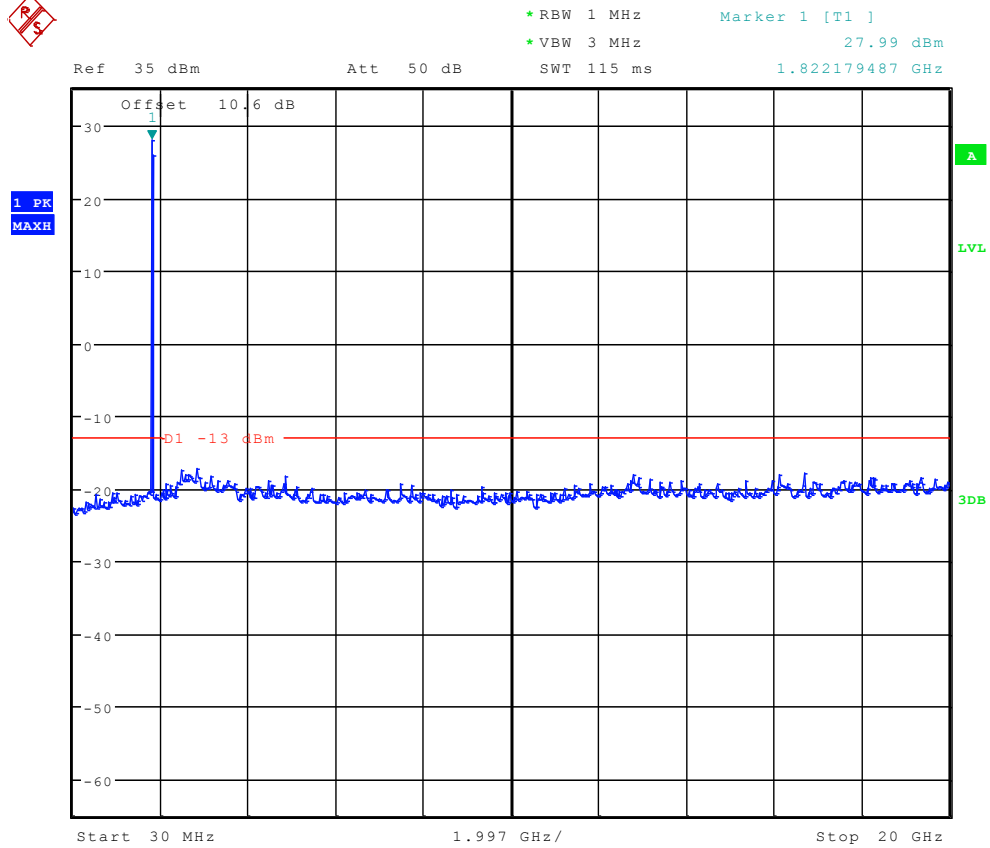


Date: 22.SEP.2011 00:08:07




Channel 661

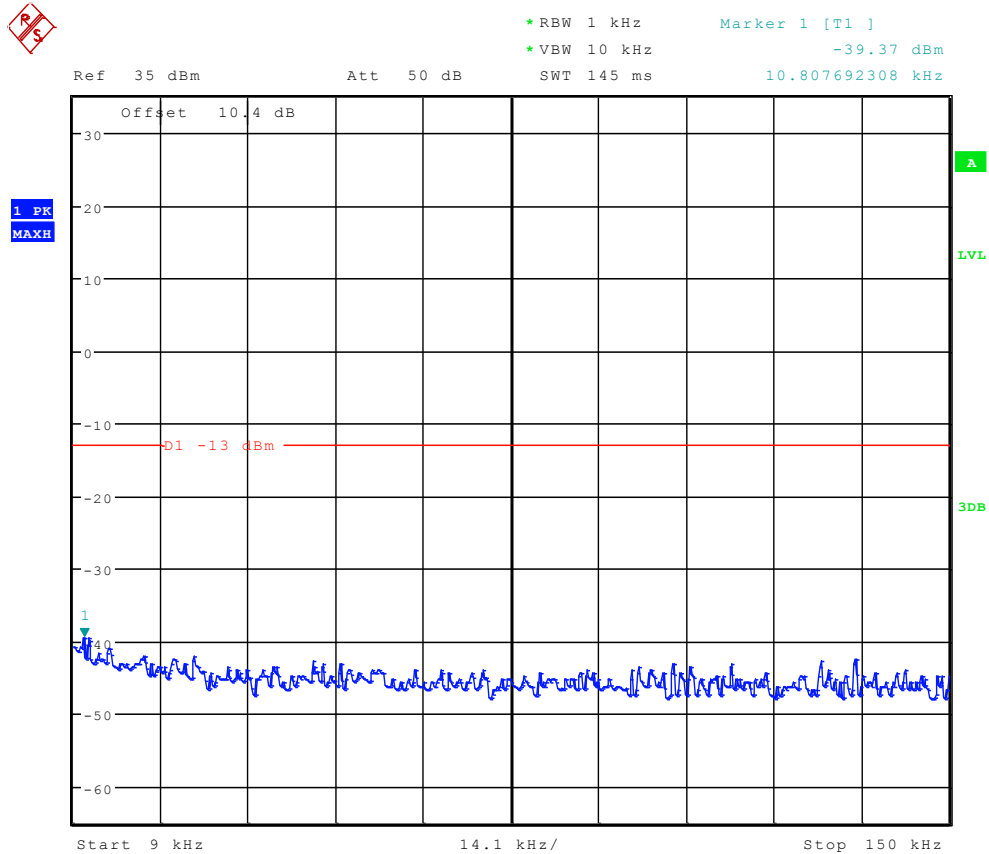

Date: 22.SEP.2011 00:06:54

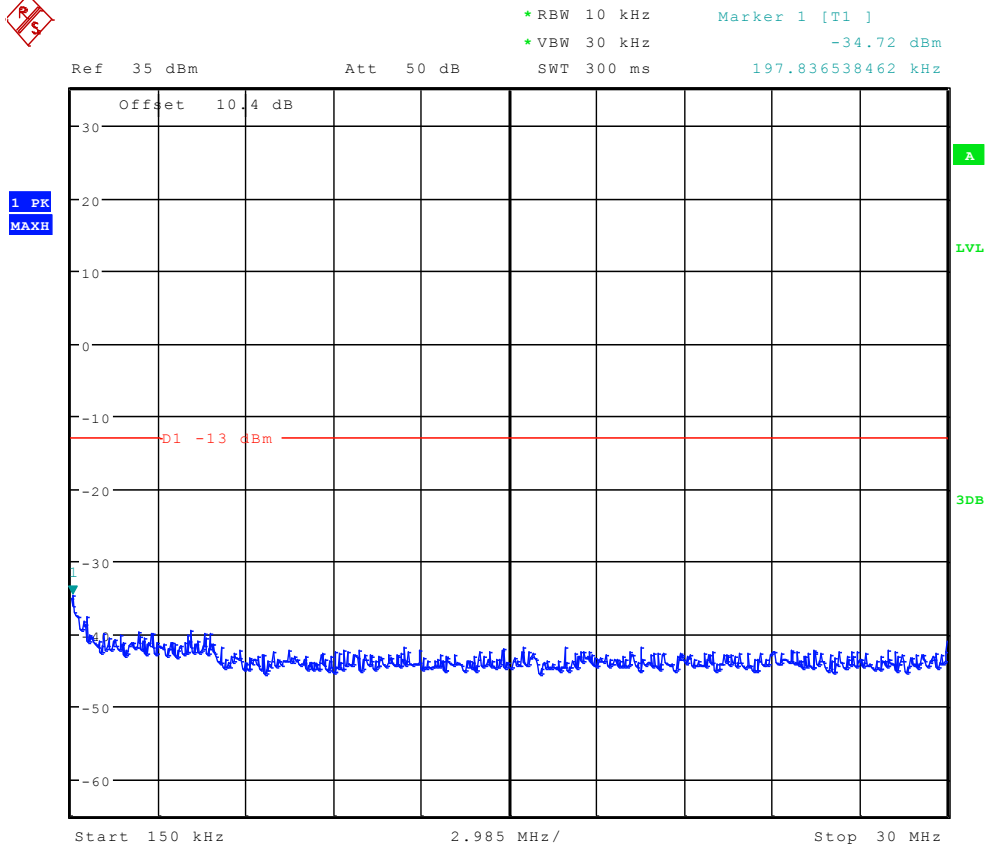


Date: 22.SEP.2011 00:07:38

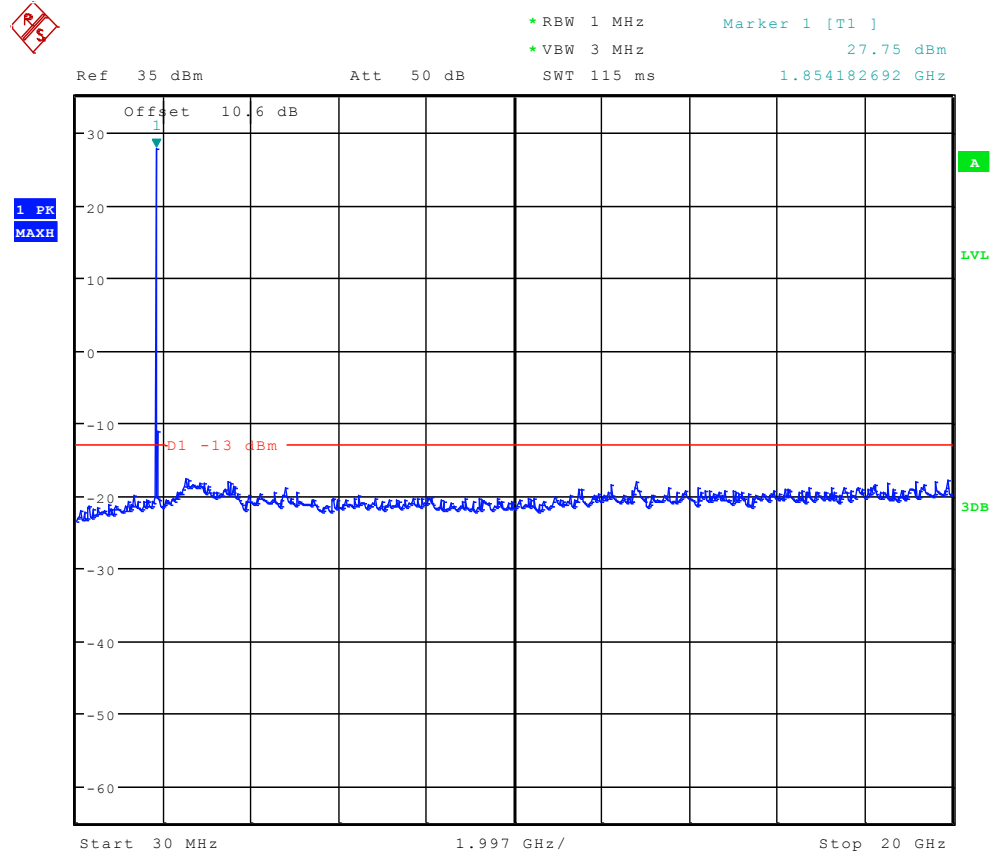


Date: 22.SEP.2011 00:08:22




Channel 810

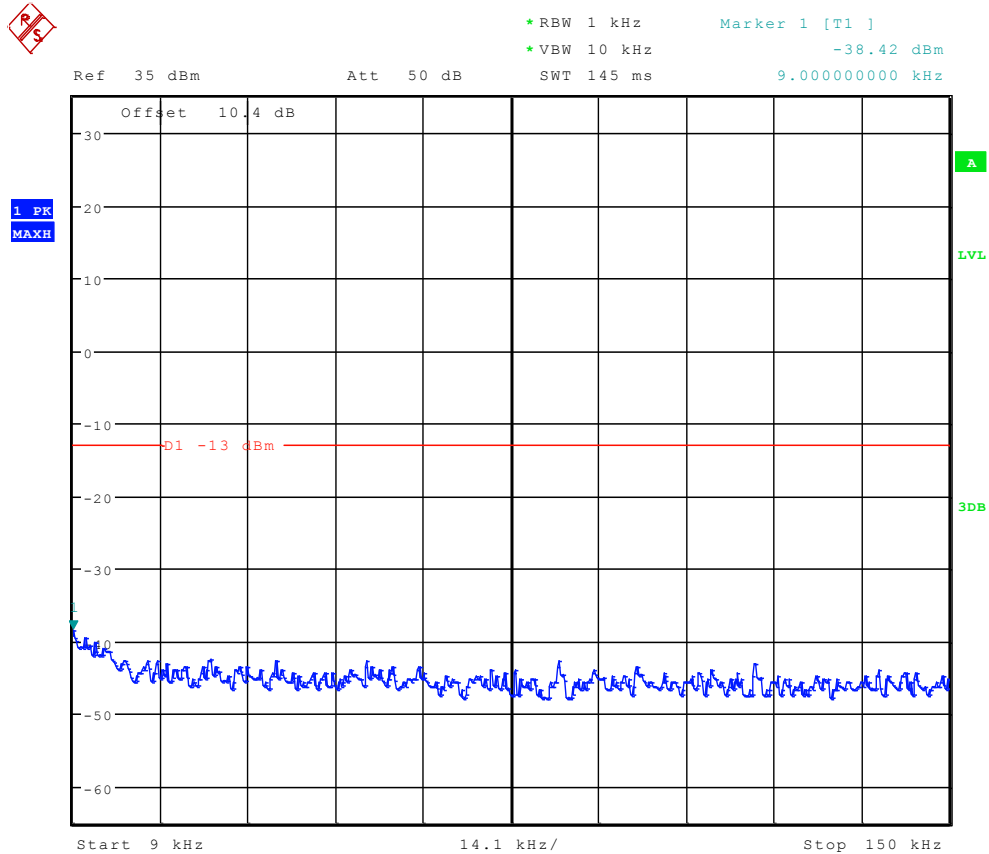

Date: 22.SEP.2011 00:07:09

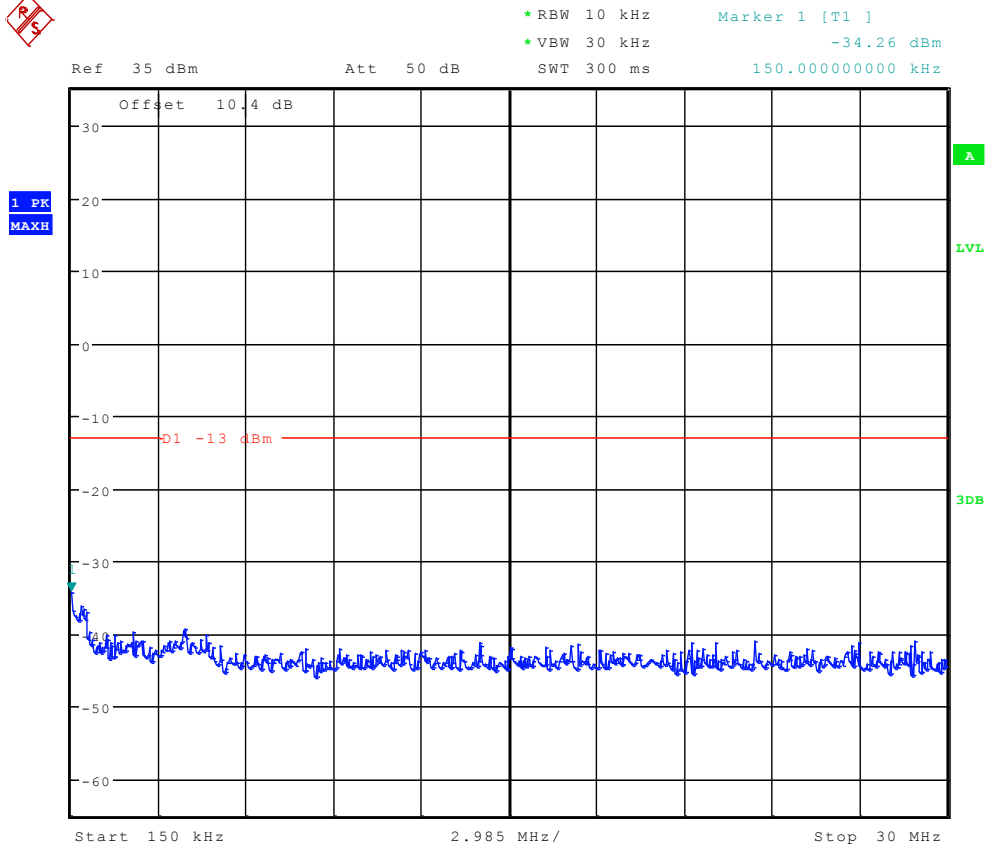


Date: 22.SEP.2011 00:07:52

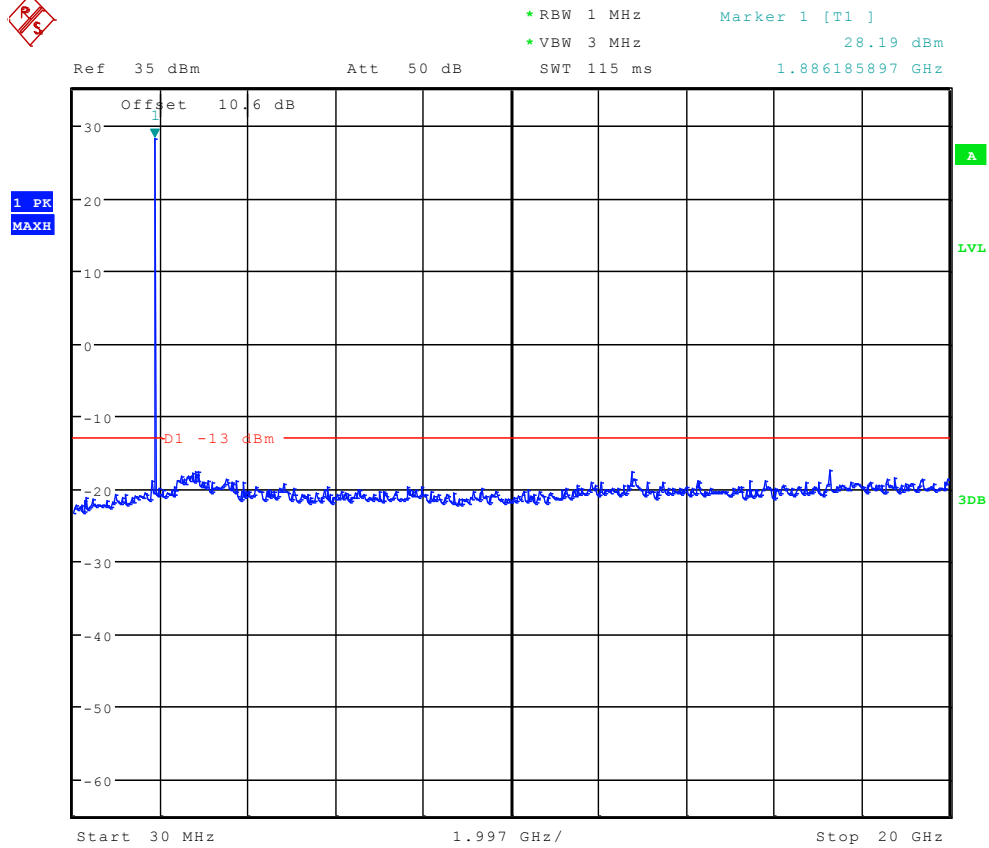


Date: 22.SEP.2011 00:08:36




TM2:EDGE Channel 512

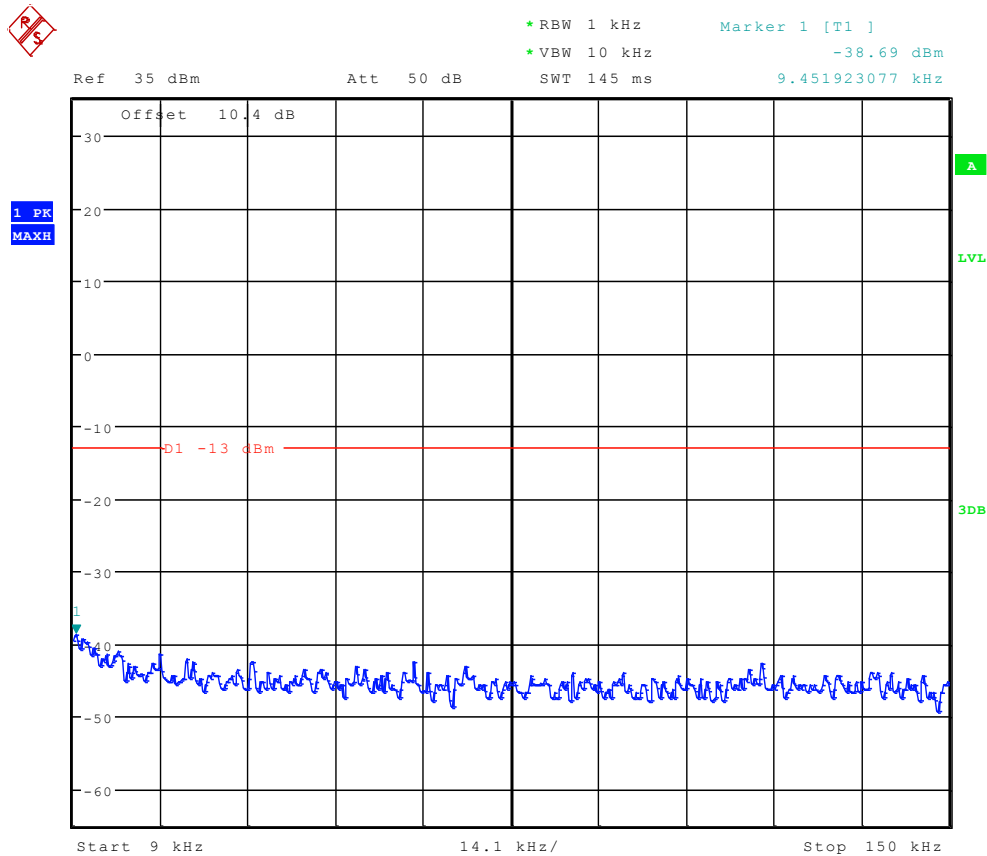

Date: 22.SEP.2011 00:23:23

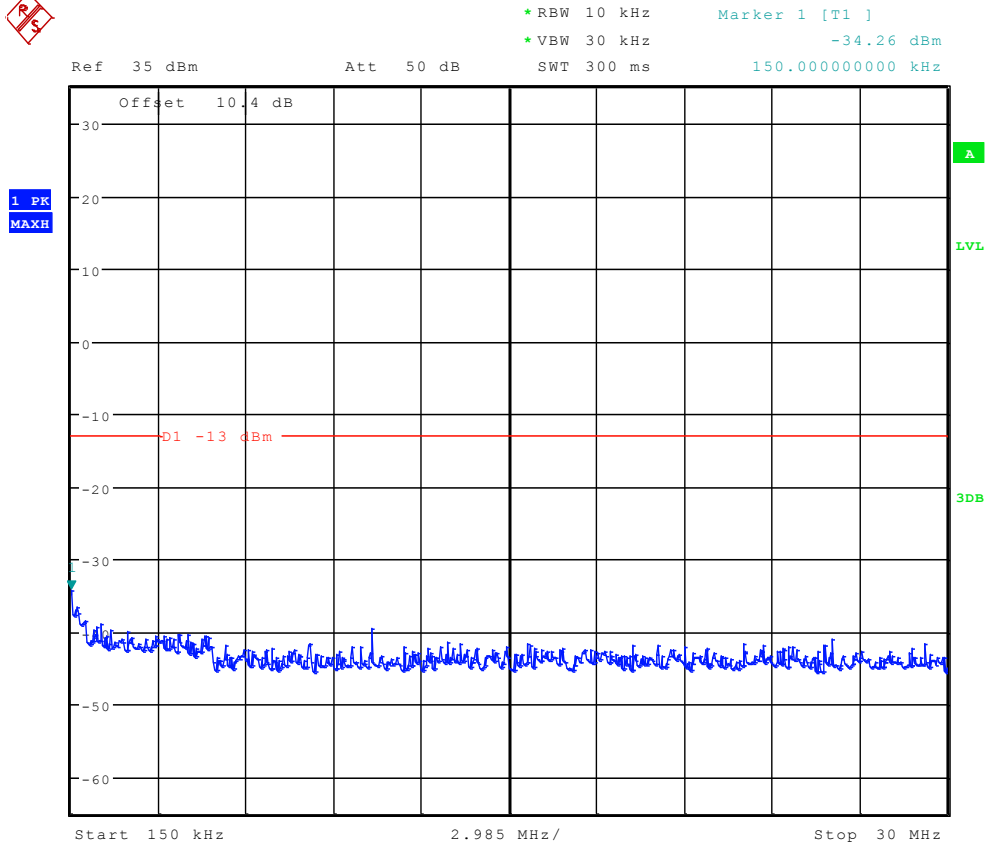


Date: 22.SEP.2011 00:24:07

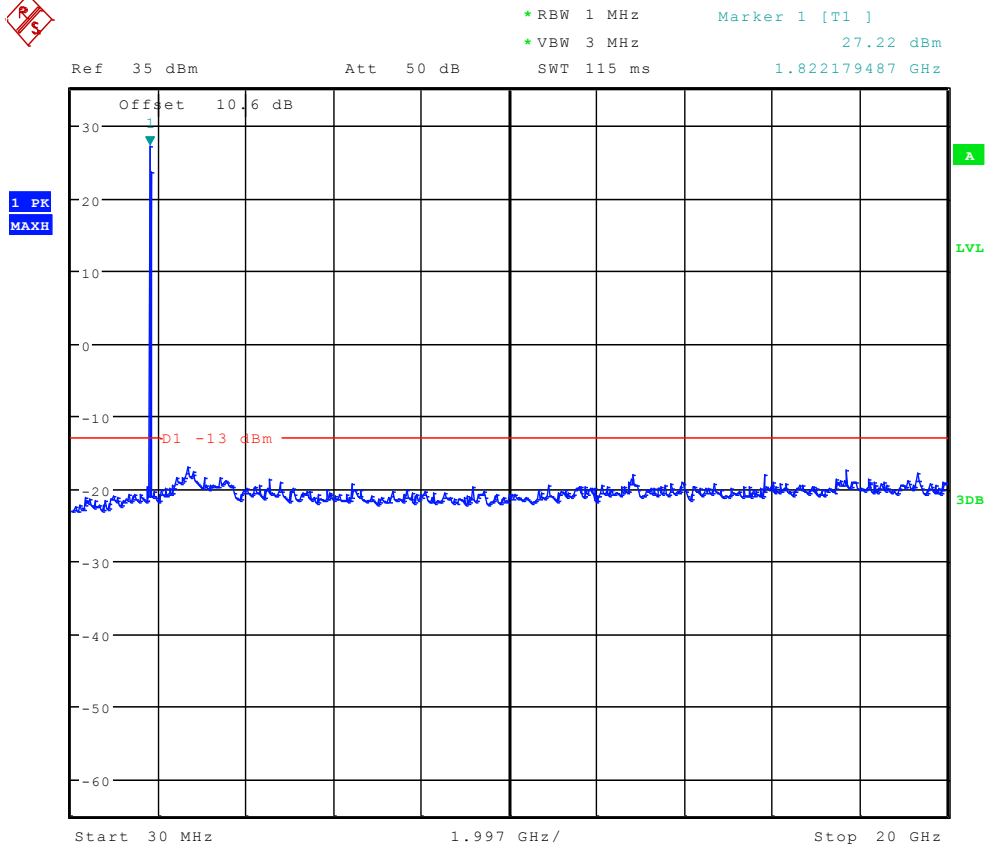


Date: 22.SEP.2011 00:24:51




Channel 661

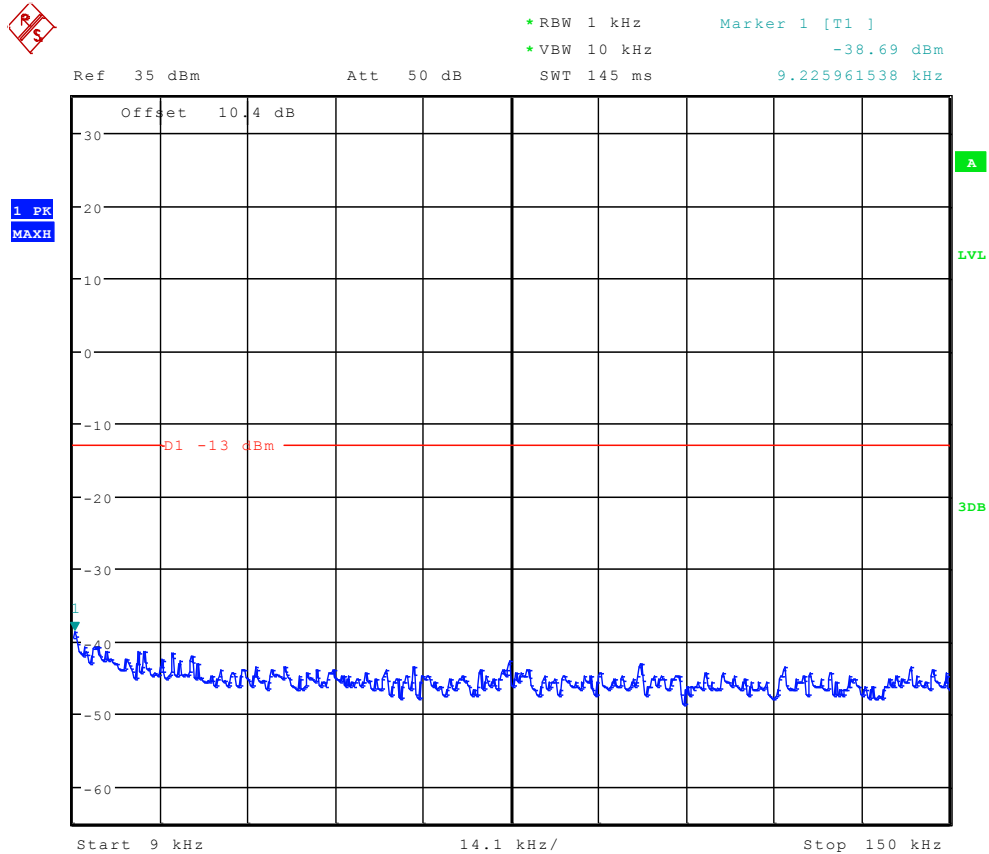

Date: 22.SEP.2011 00:23:38

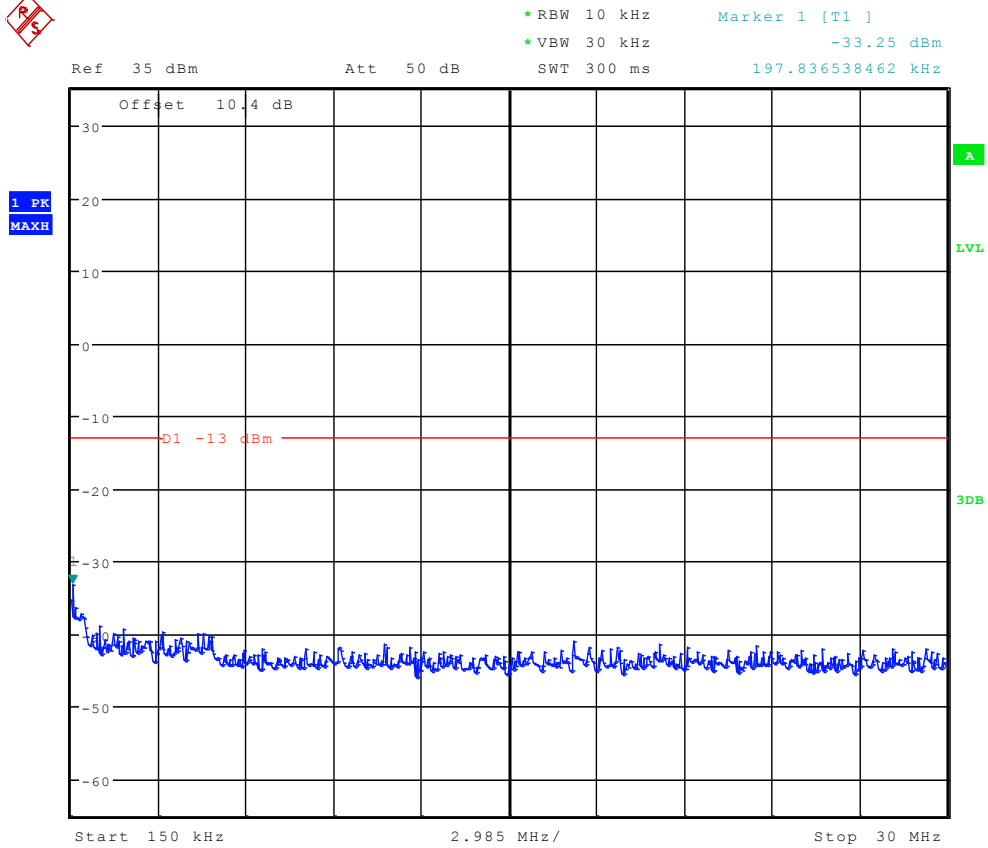


Date: 22.SEP.2011 00:24:21

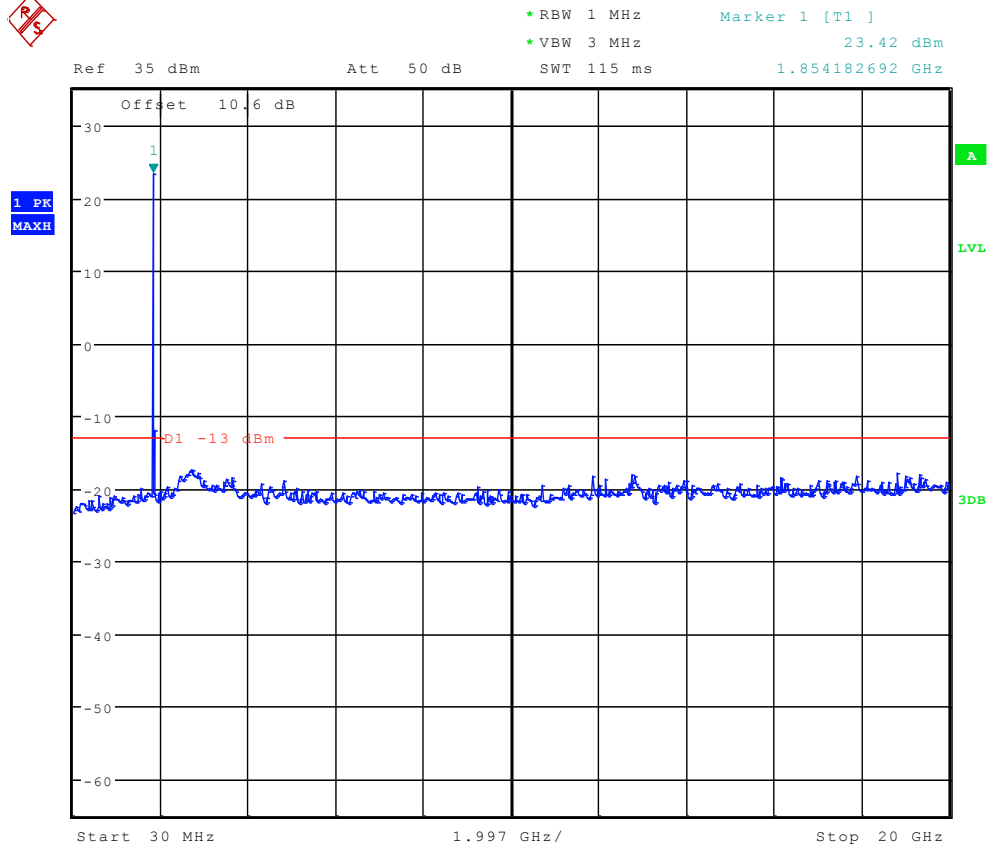


Date: 22.SEP.2011 00:25:05




Channel 810

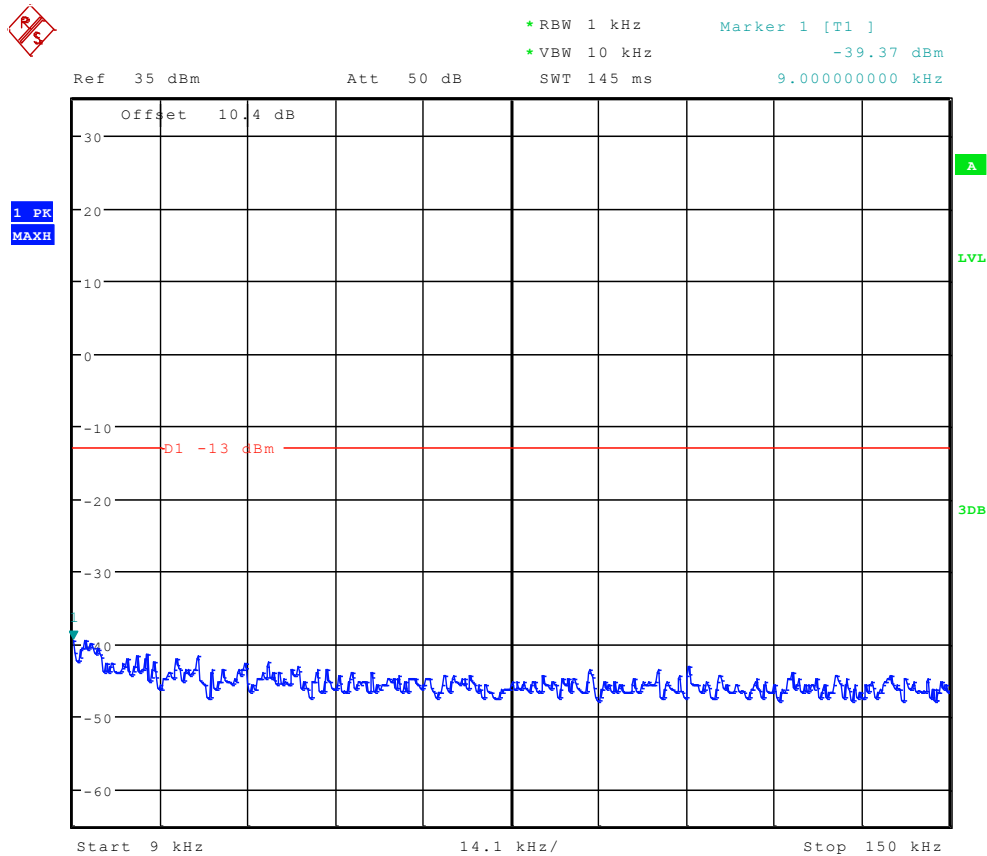

Date: 22.SEP.2011 00:23:52

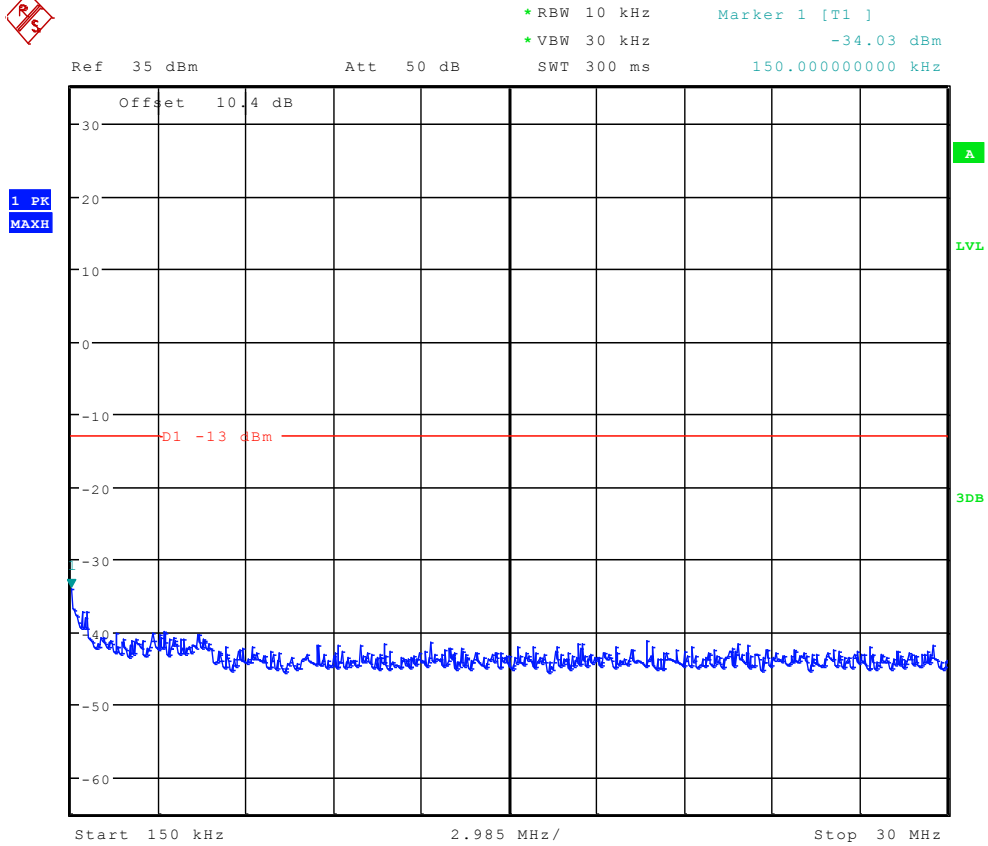

Date: 22.SEP.2011 00:24:36

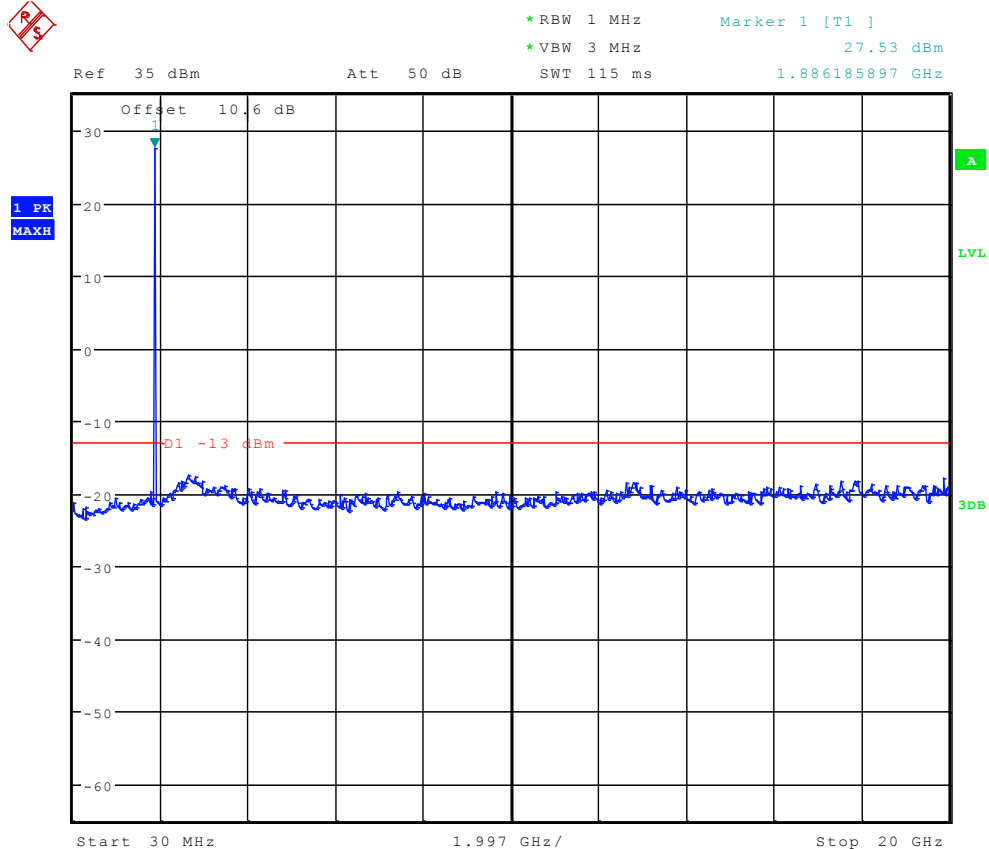


Date: 22.SEP.2011 00:25:20




TM3: WCDMA


Channel 9262

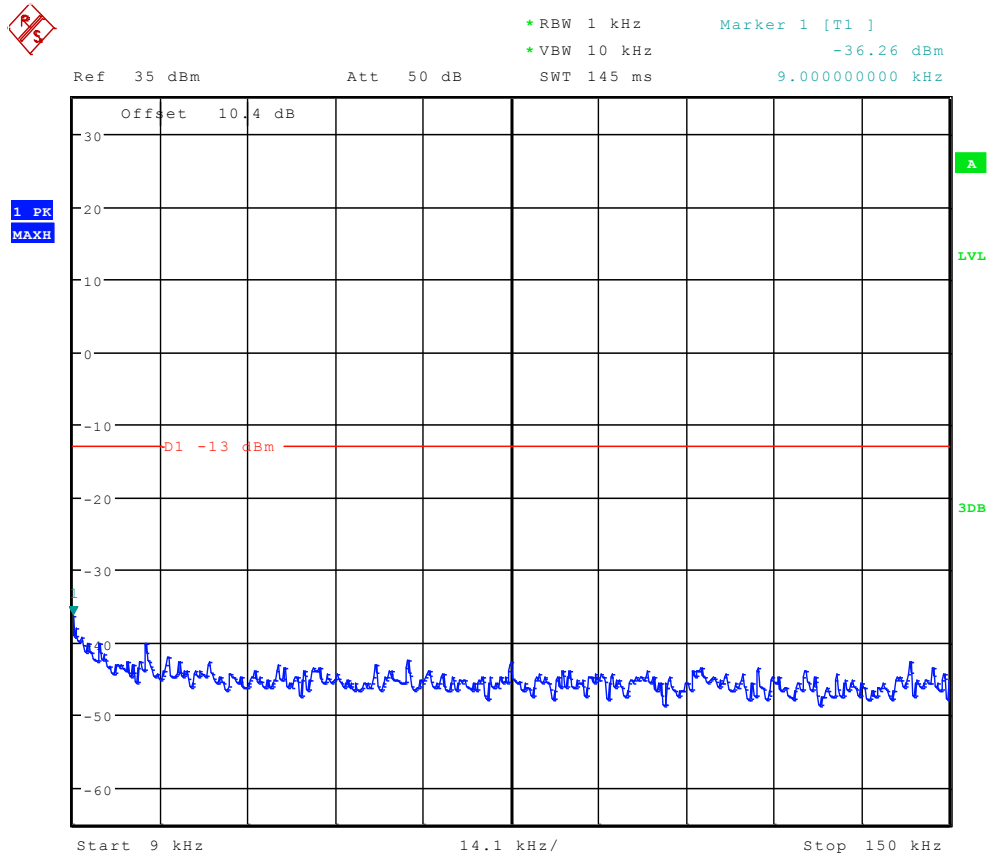

Date: 22.SEP.2011 00:29:11

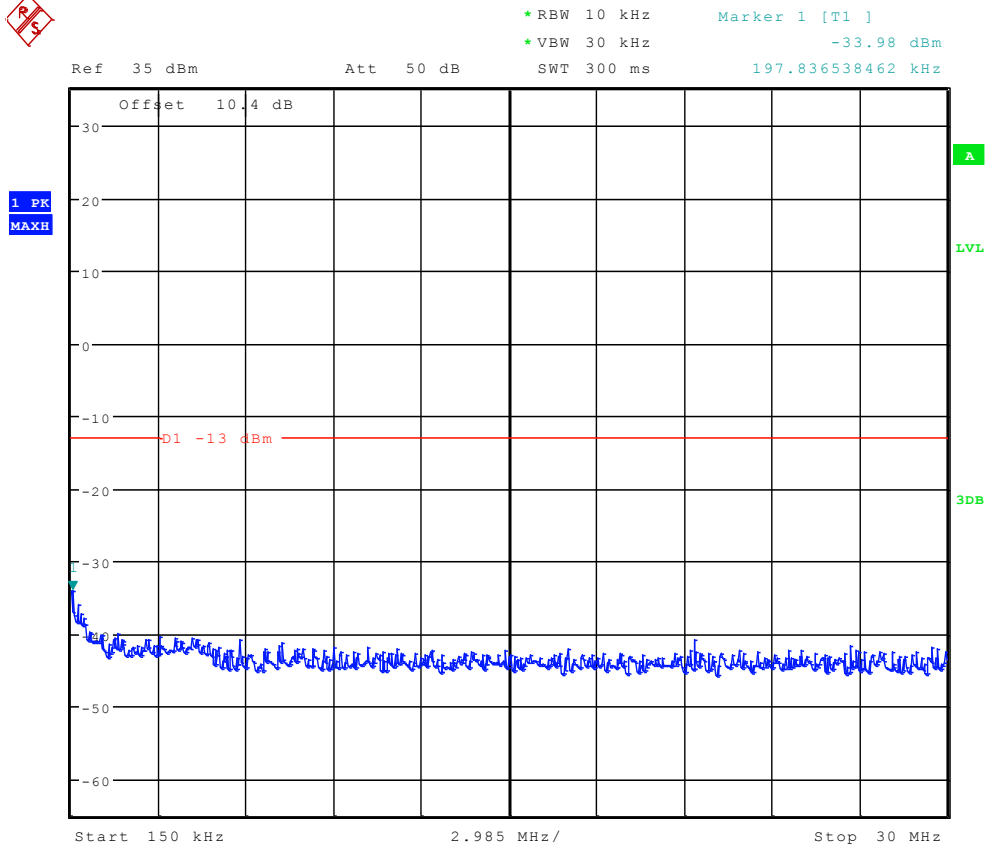


Date: 22.SEP.2011 00:29:55

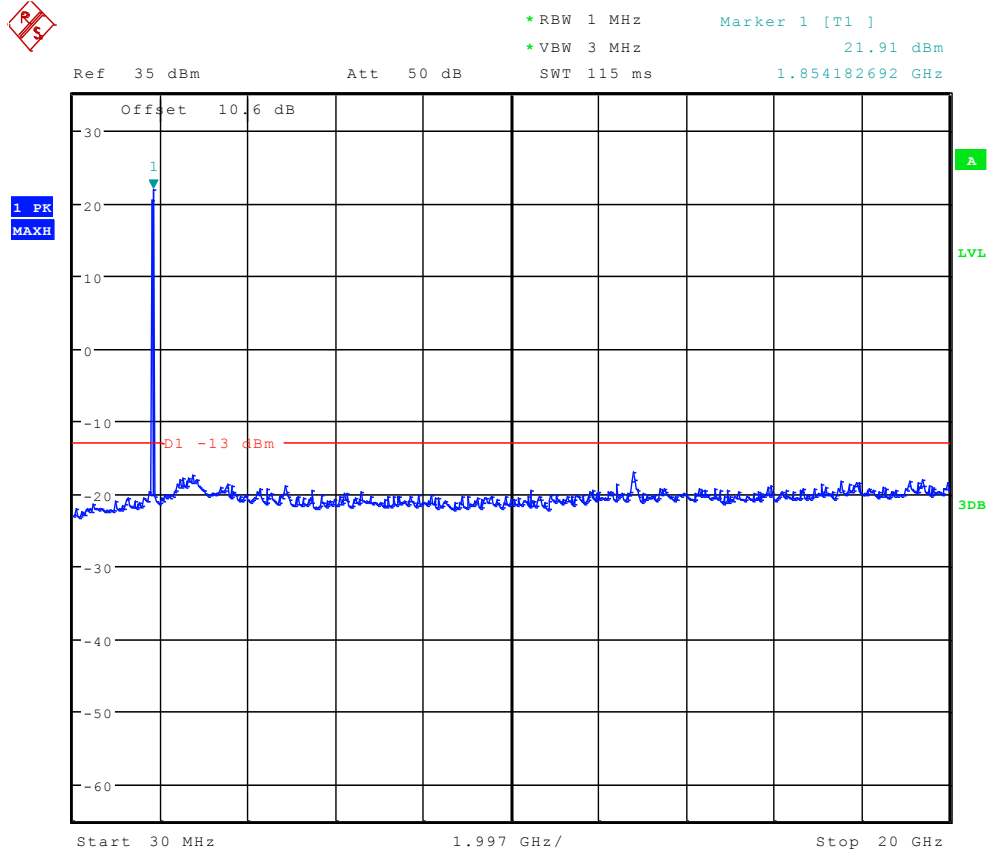


Date: 22.SEP.2011 00:30:39




Channel 9400

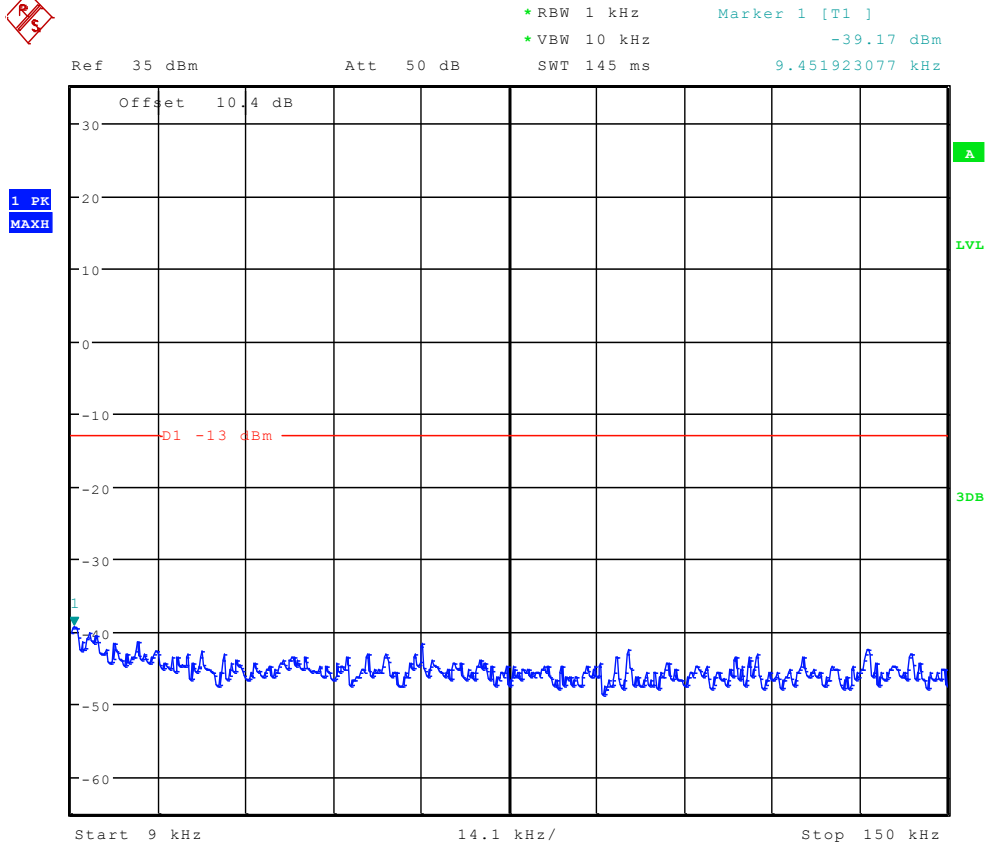

Date: 22.SEP.2011 00:29:26

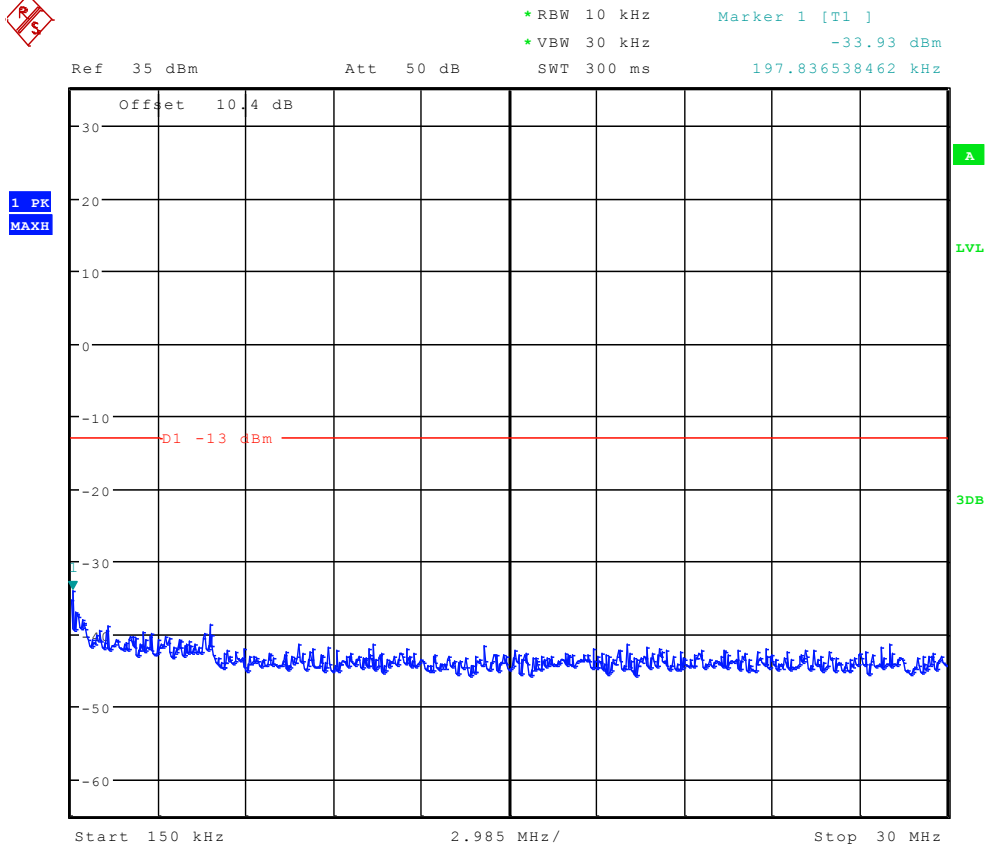


Date: 22.SEP.2011 00:30:09

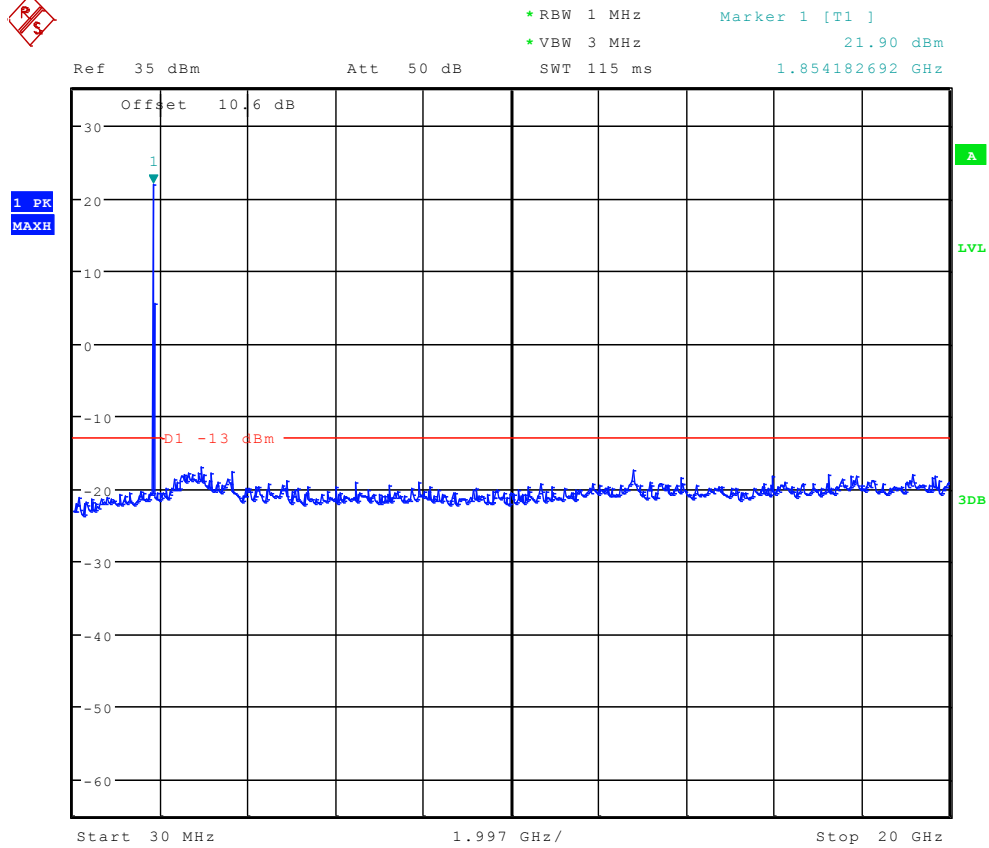


Date: 22.SEP.2011 00:30:53




Channel 9538

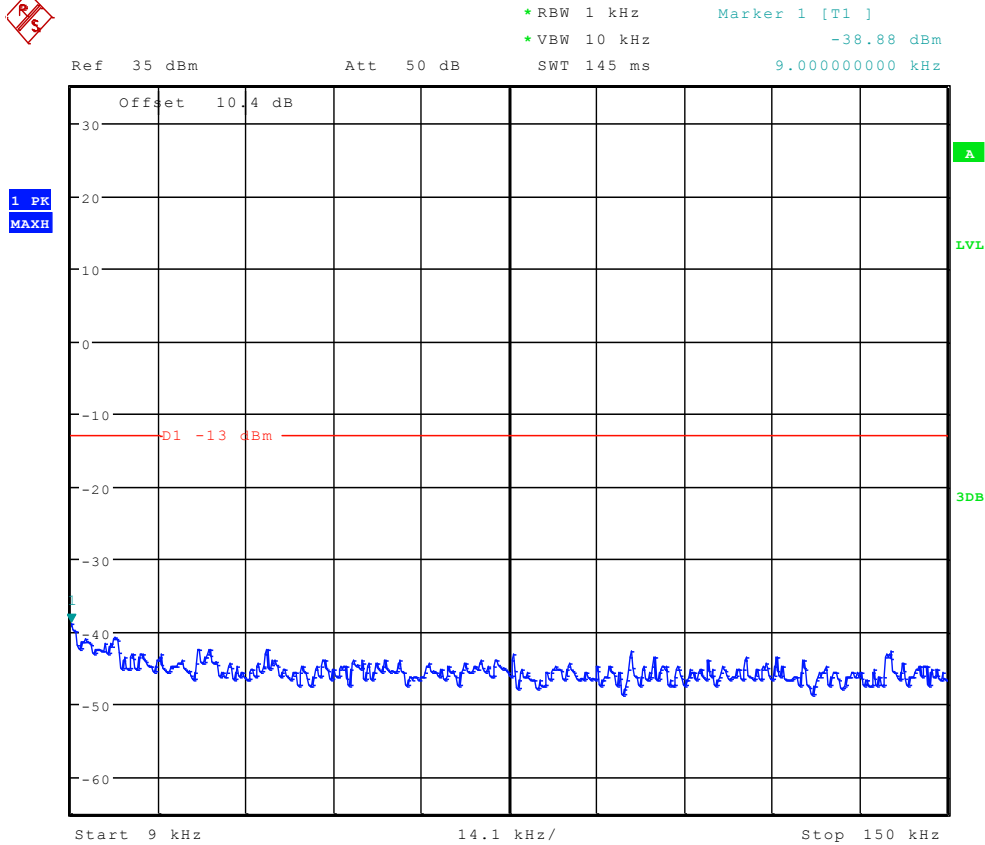

Date: 22.SEP.2011 00:29:40

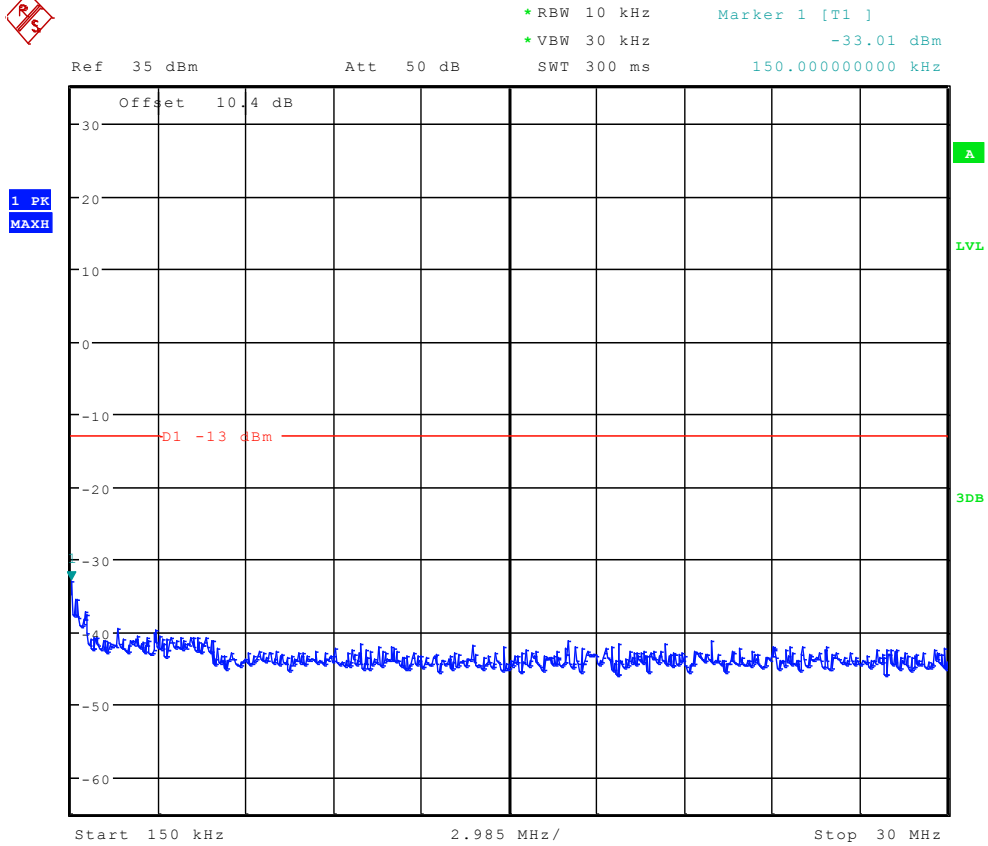

Date: 22.SEP.2011 00:30:24

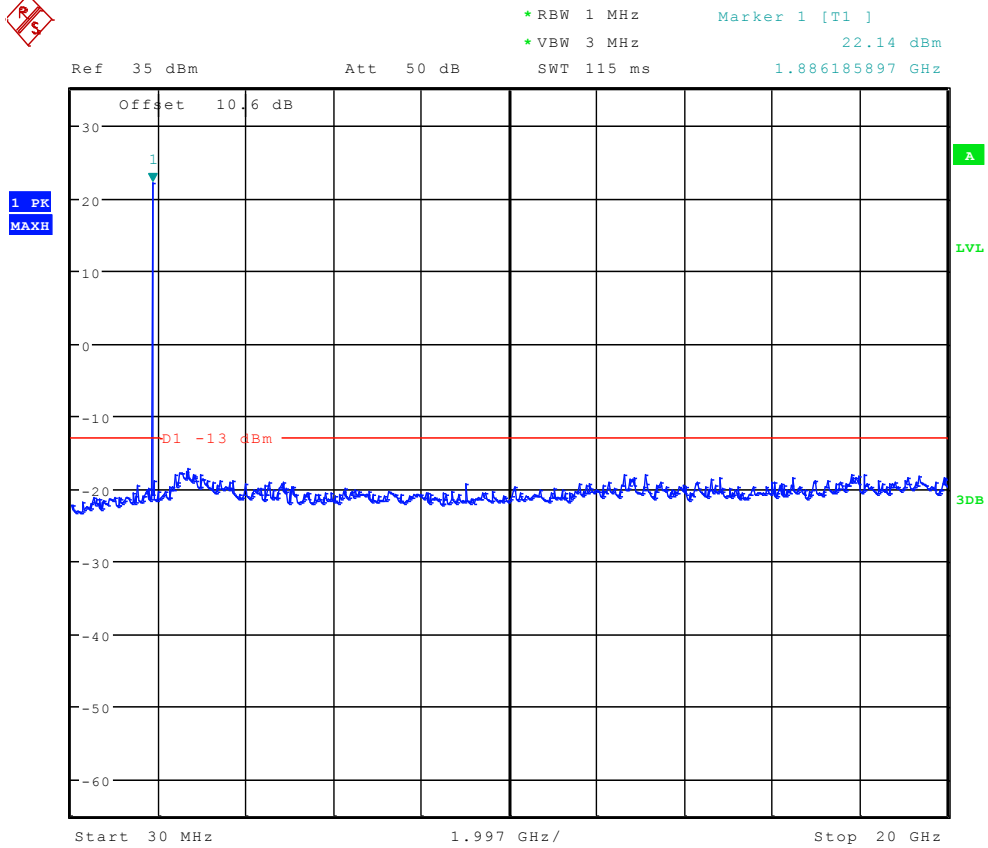

Date: 22.SEP.2011 00:31:08



Appendix E


Radiated spurious emission

According to FCC Part 2.1053& Part 24.238




GPRS 1900

(9kHz-30MHz)

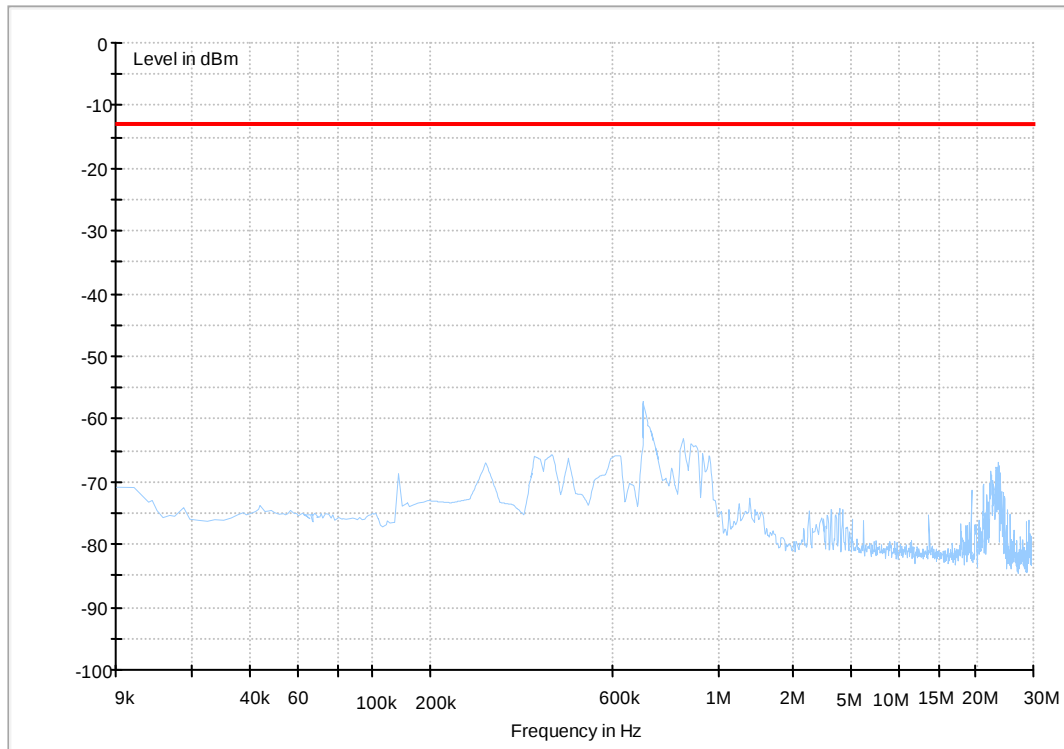




(30MHz~2GHz)

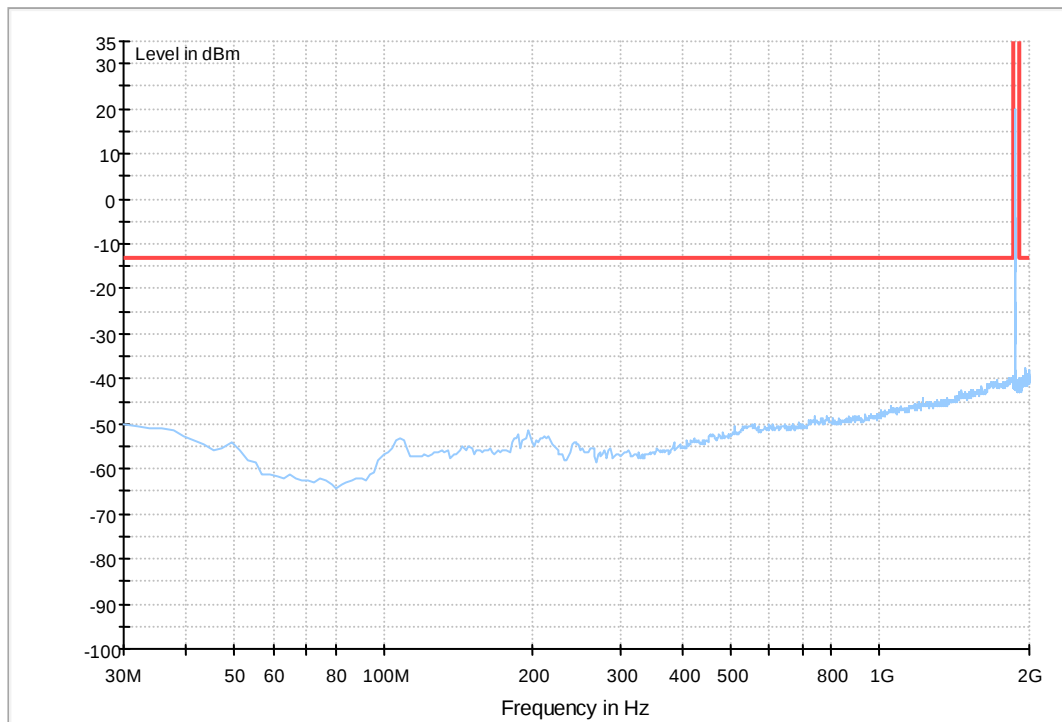




(2GHz~18GHz)

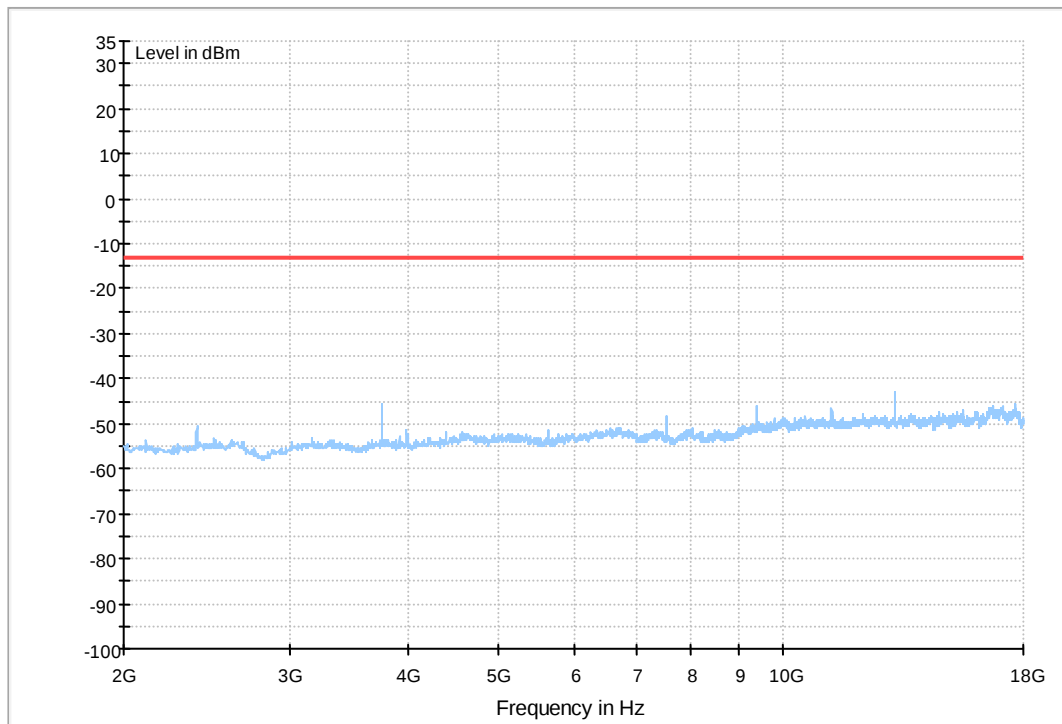




(18GHz-26.5GHz)

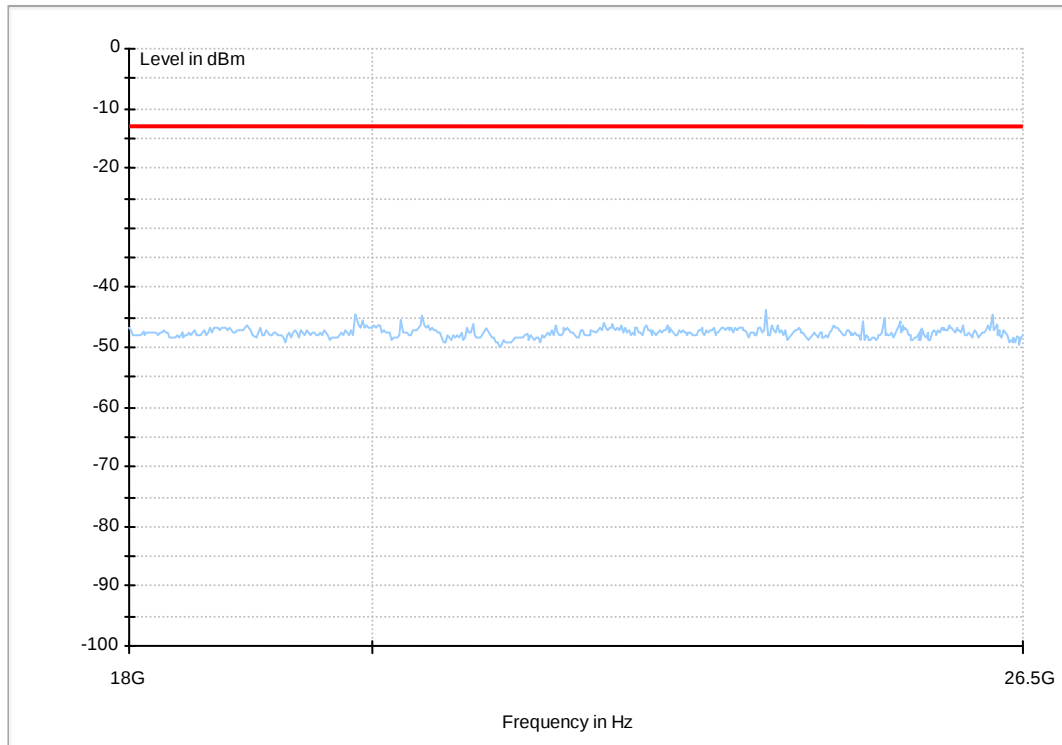




EDGE 1900

(9kHz-30MHz)

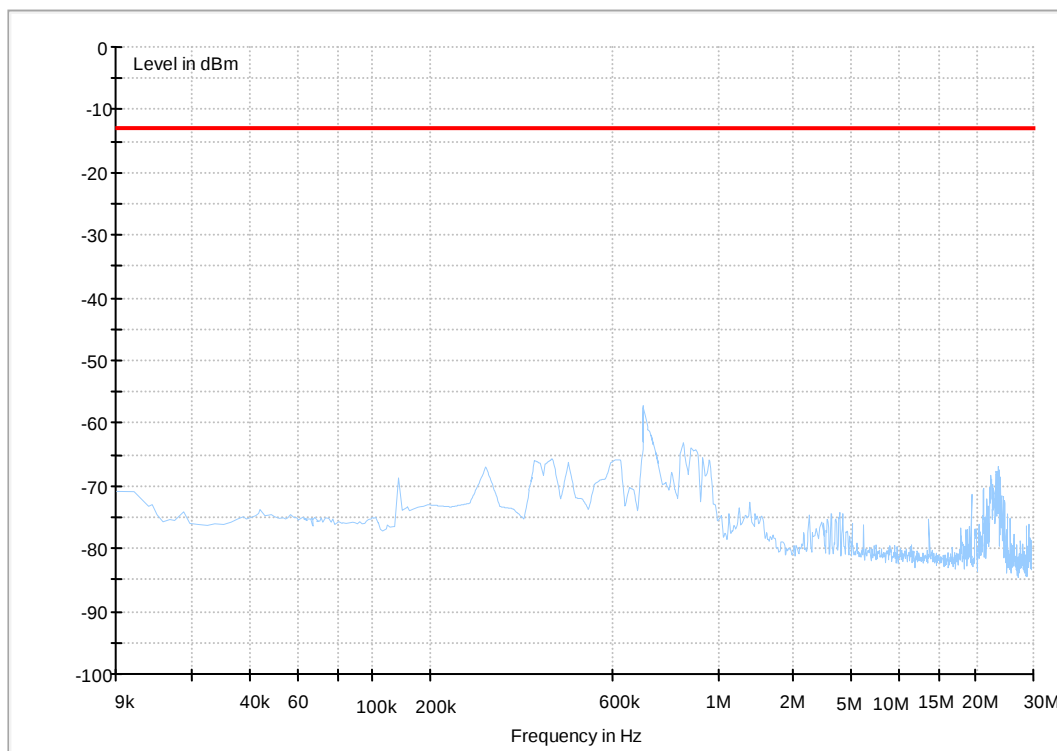




(30MHz~2GHz)

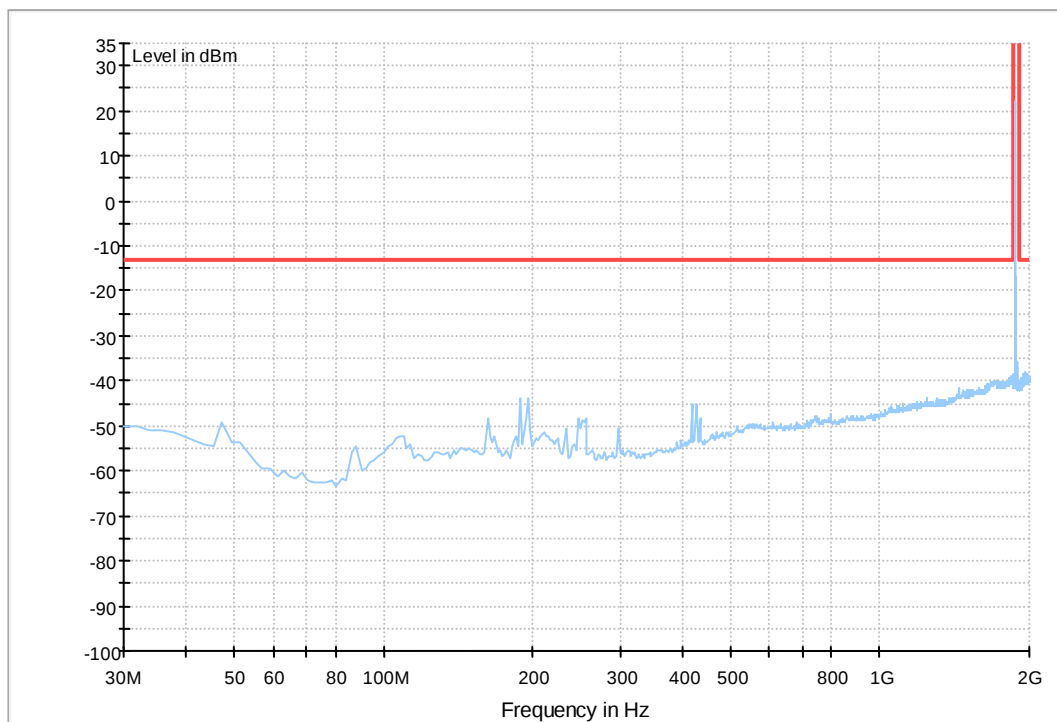




(2GHz~18GHz)

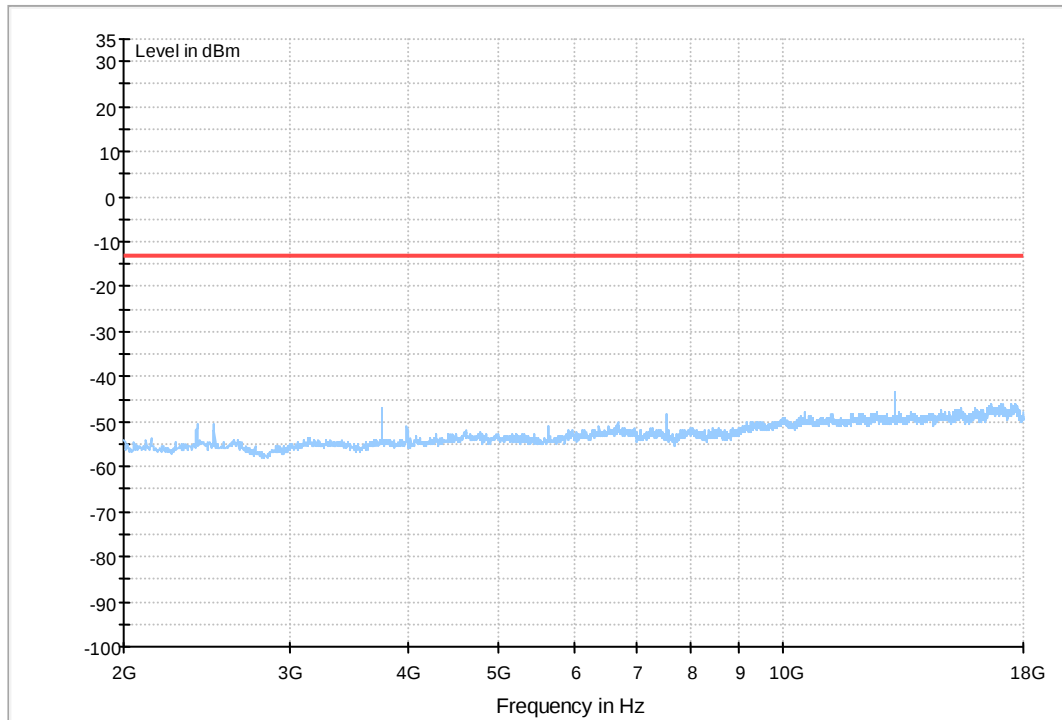




(18GHz-26.5GHz)

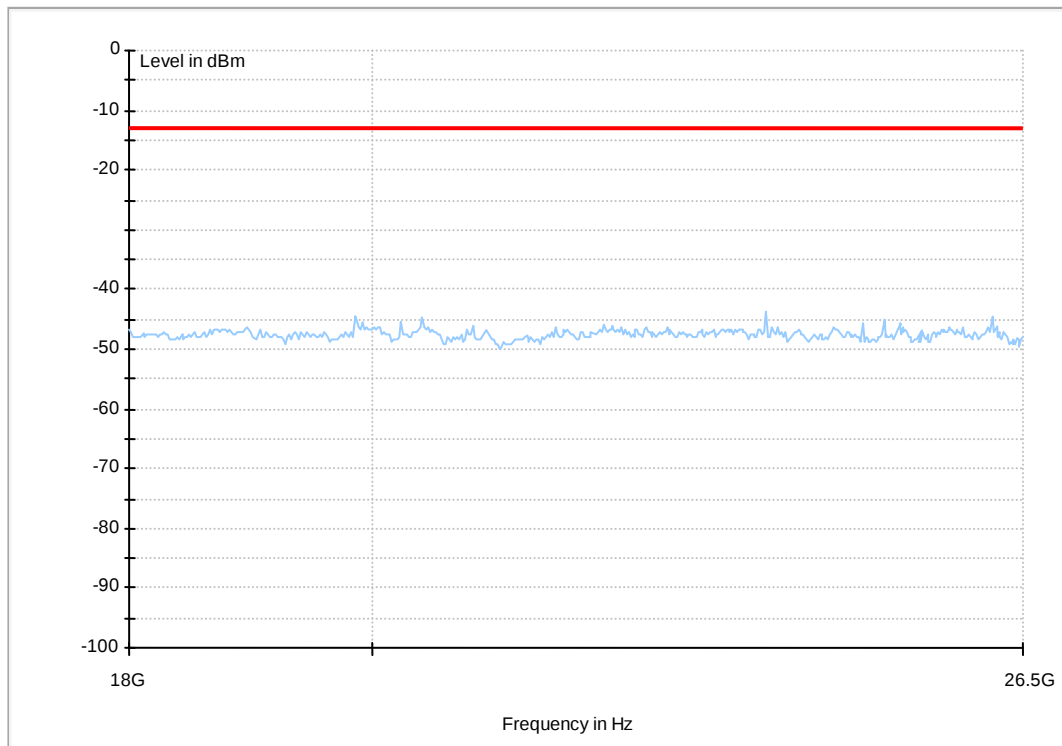




WCDMA Band II

(9KHz~30MHz)

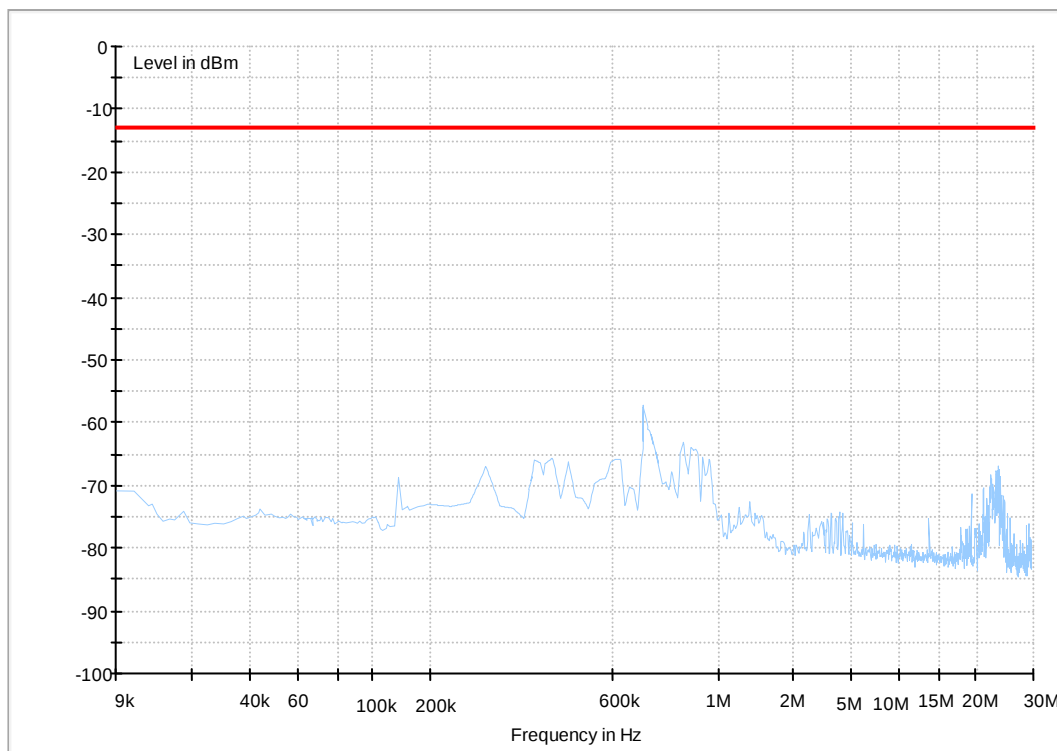




(30MHz~2GHz)

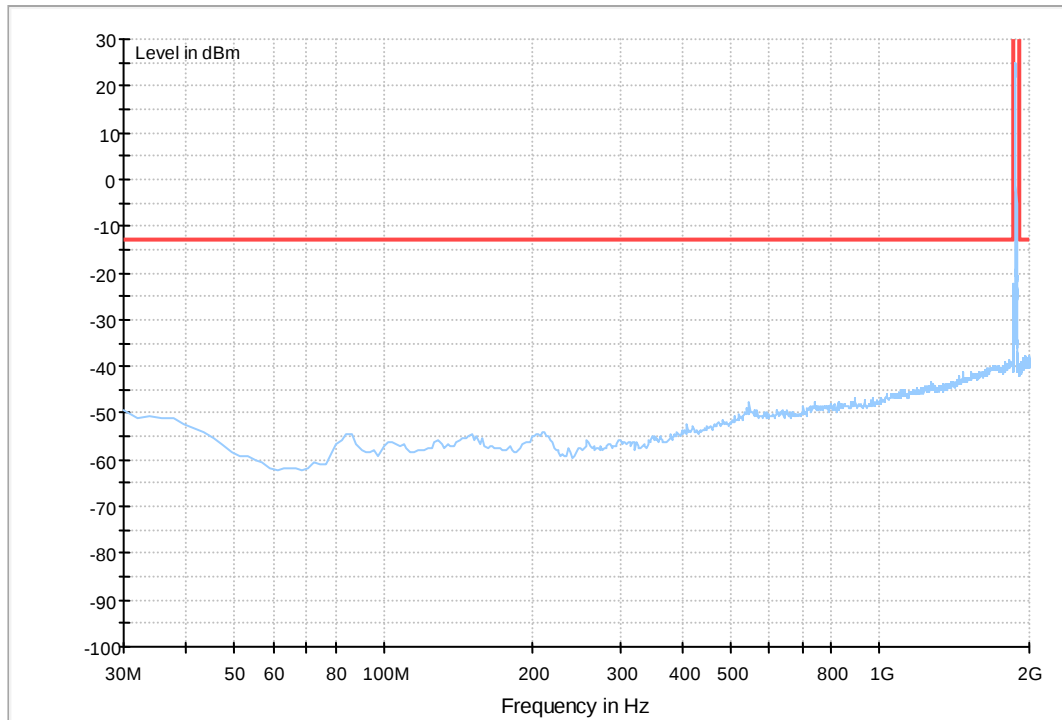




(2GHz~18GHz)

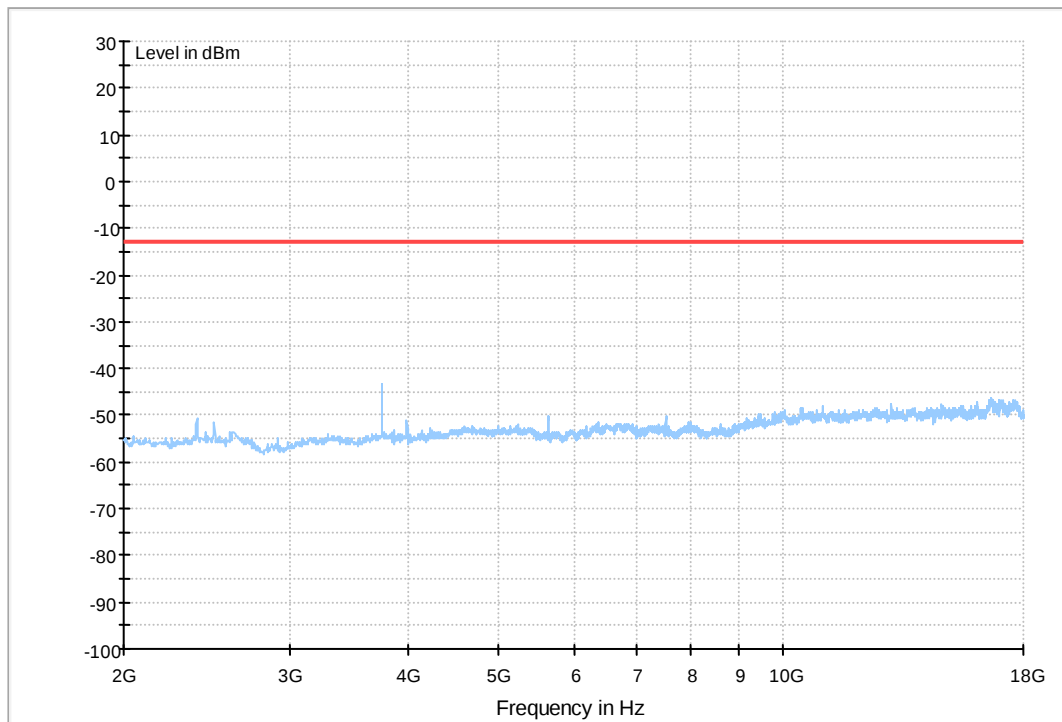




(18GHz~26.5GHz)

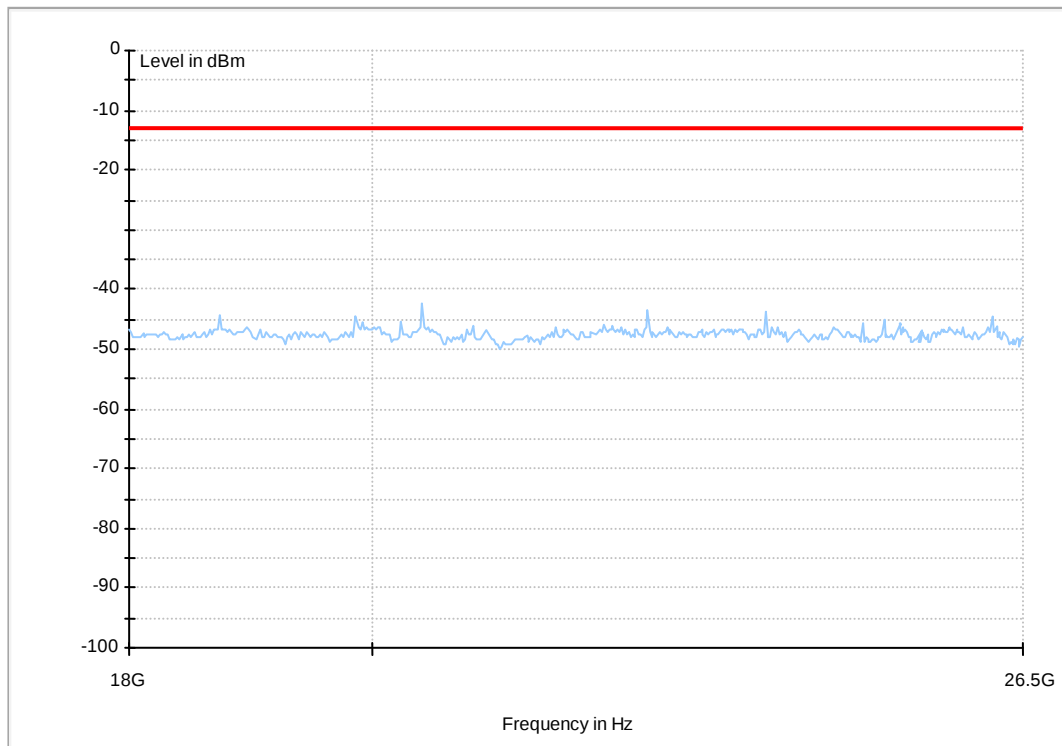




HSDPA Band II

(9KHz~30MHz)

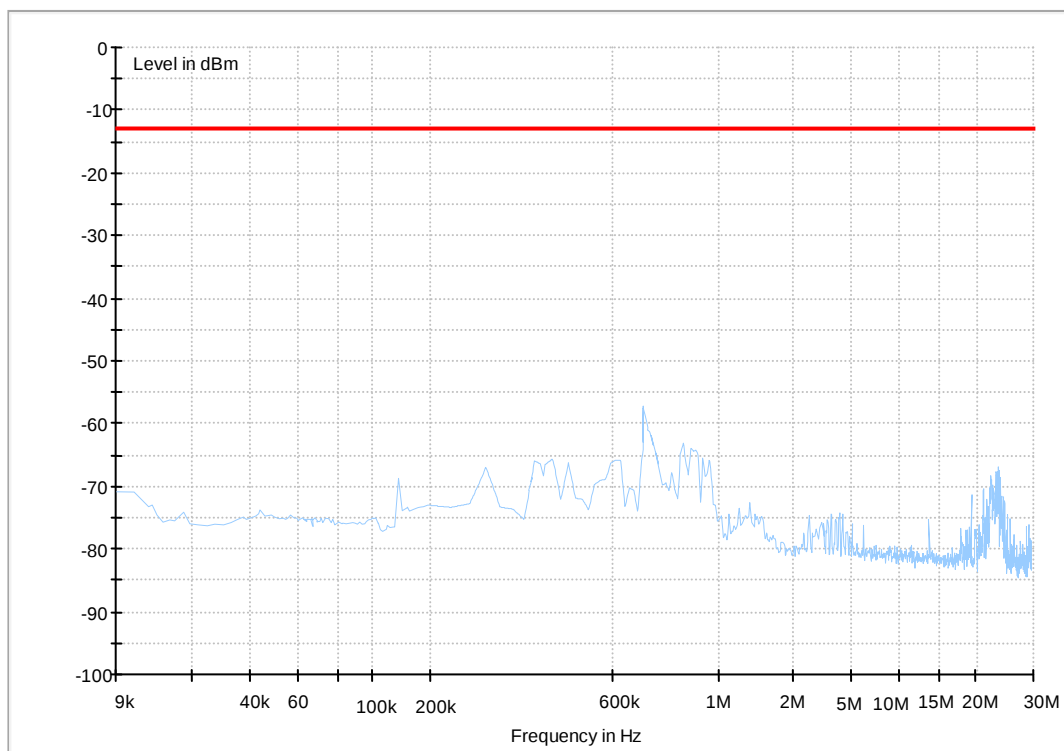




(30MHz ~2GHz)

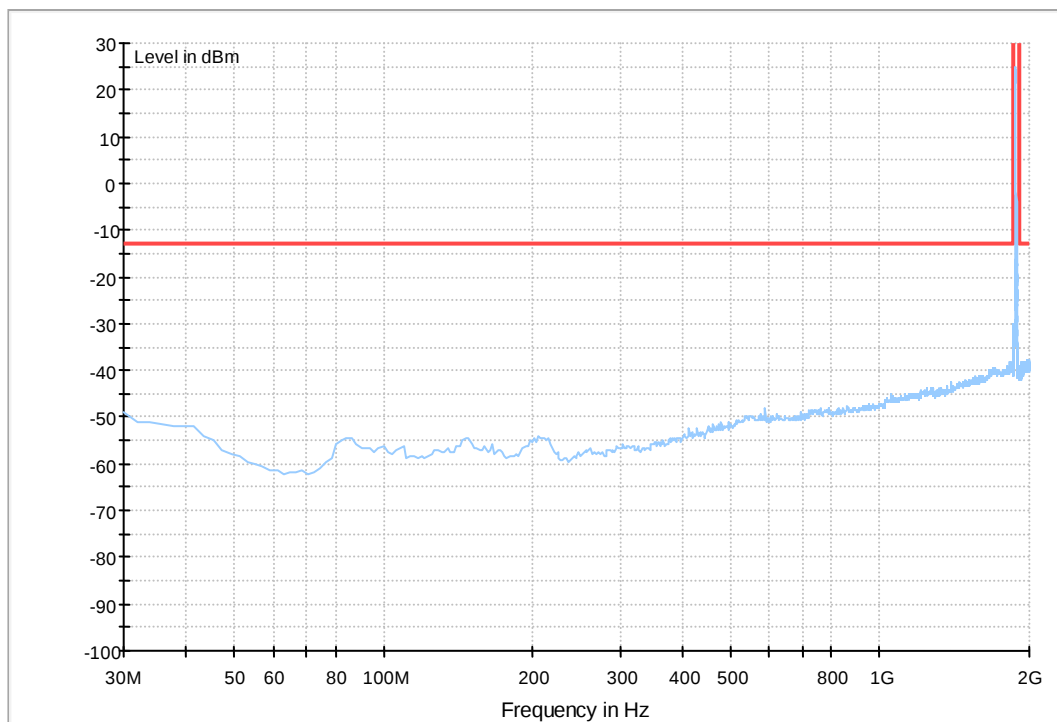




(2GHz~18GHz)

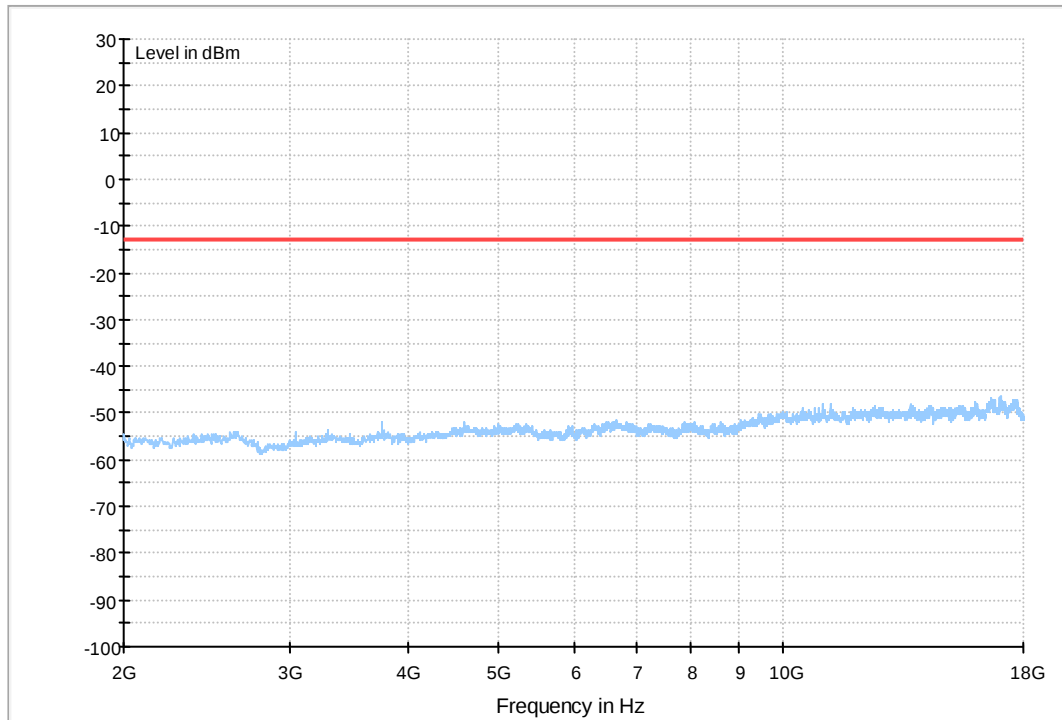




(18GHz~26.5GHz)

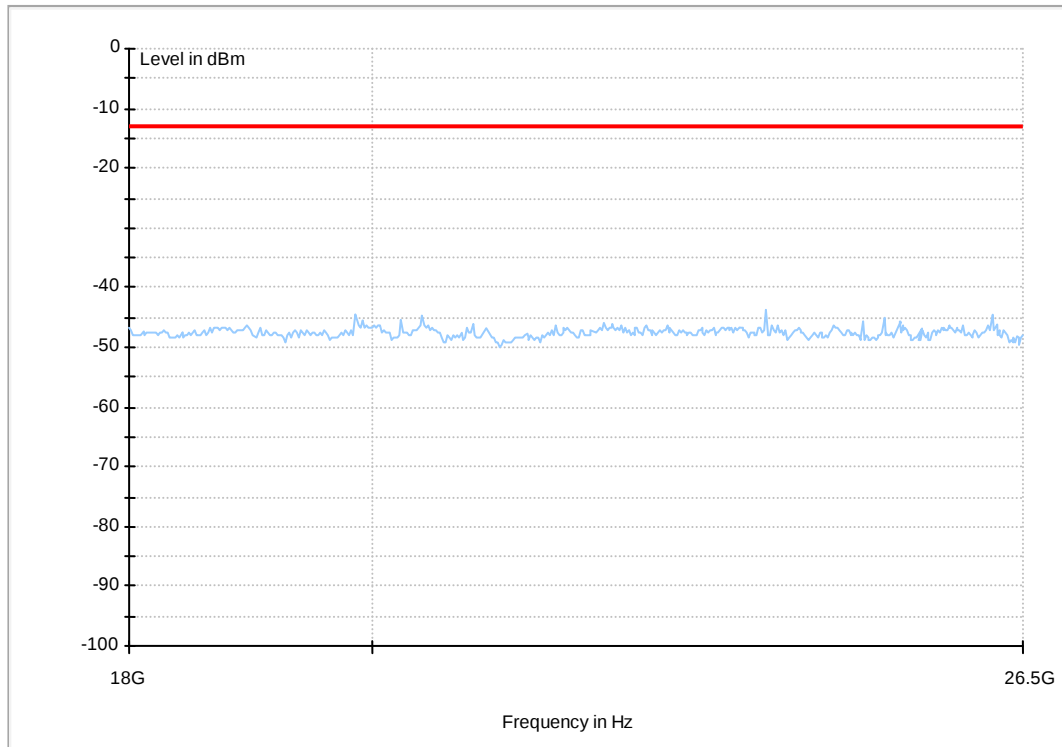




HSUPA Band II

(9KHz~30MHz)

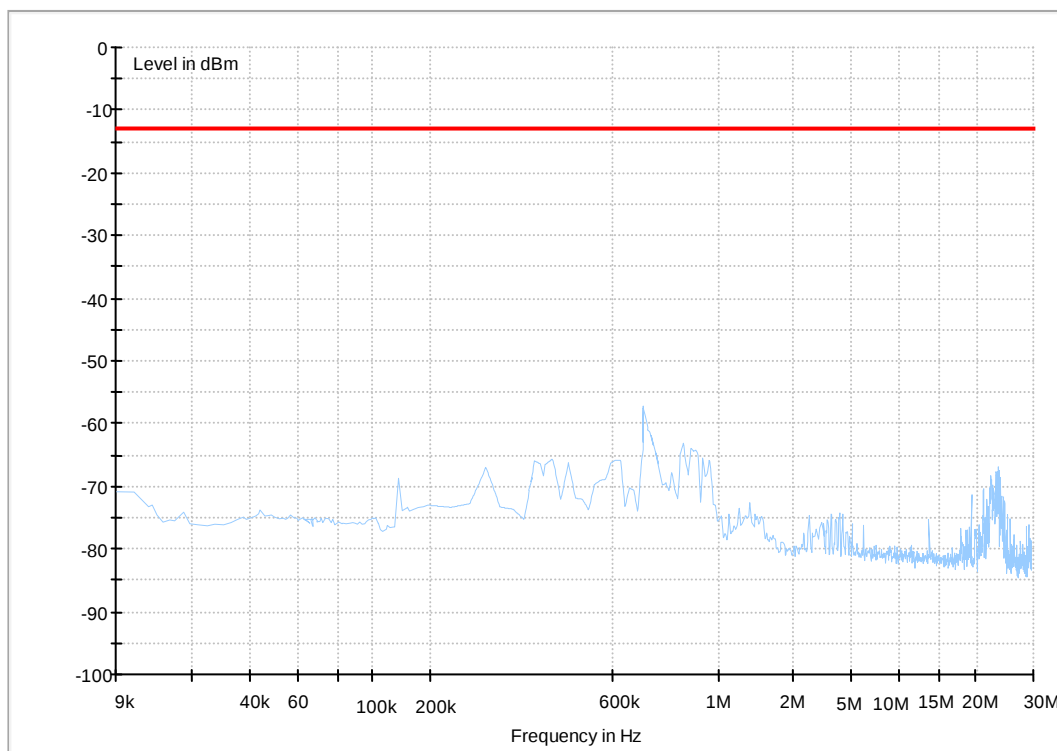




(30MHz~2GHz)

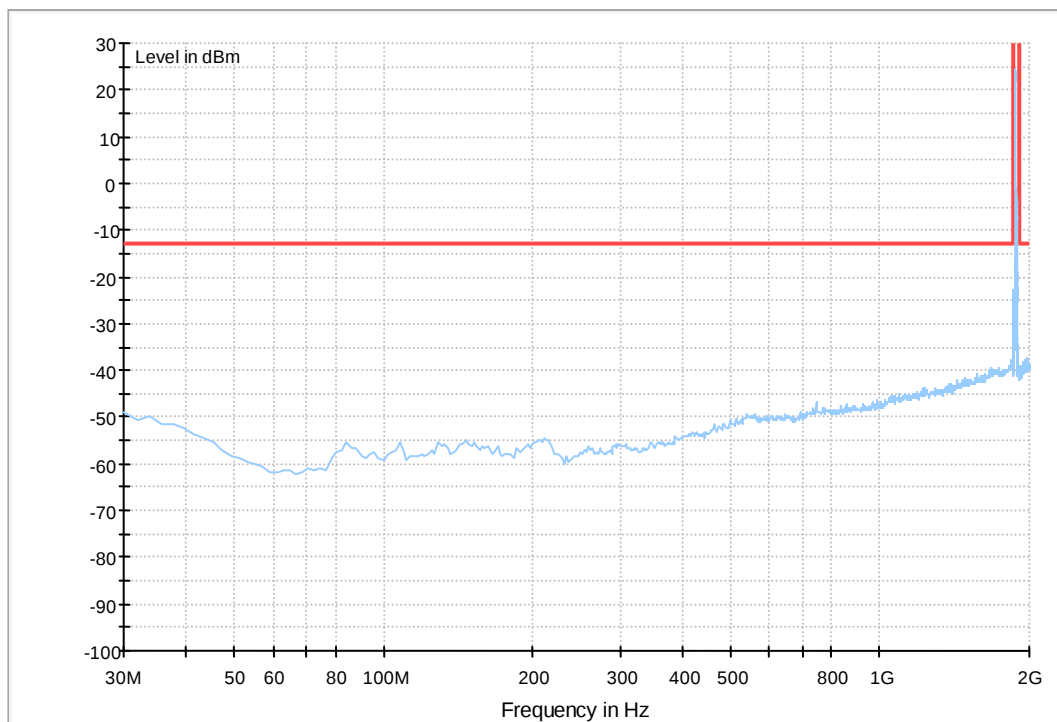




(2GHz~18GHz)

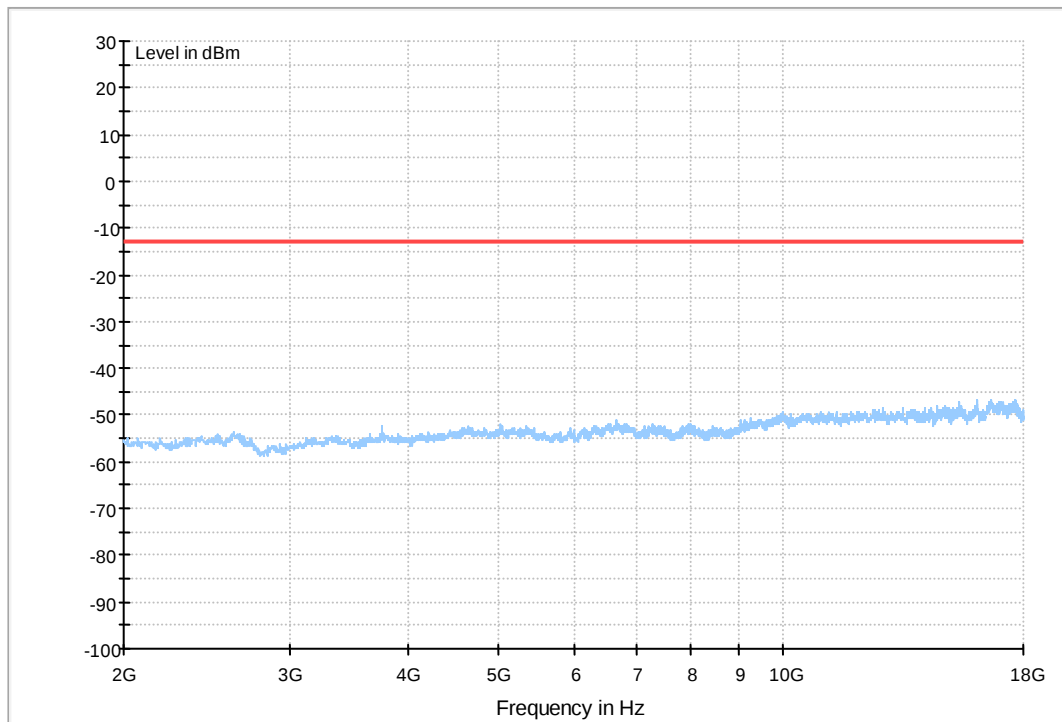



(18GHz~26.5GHz)

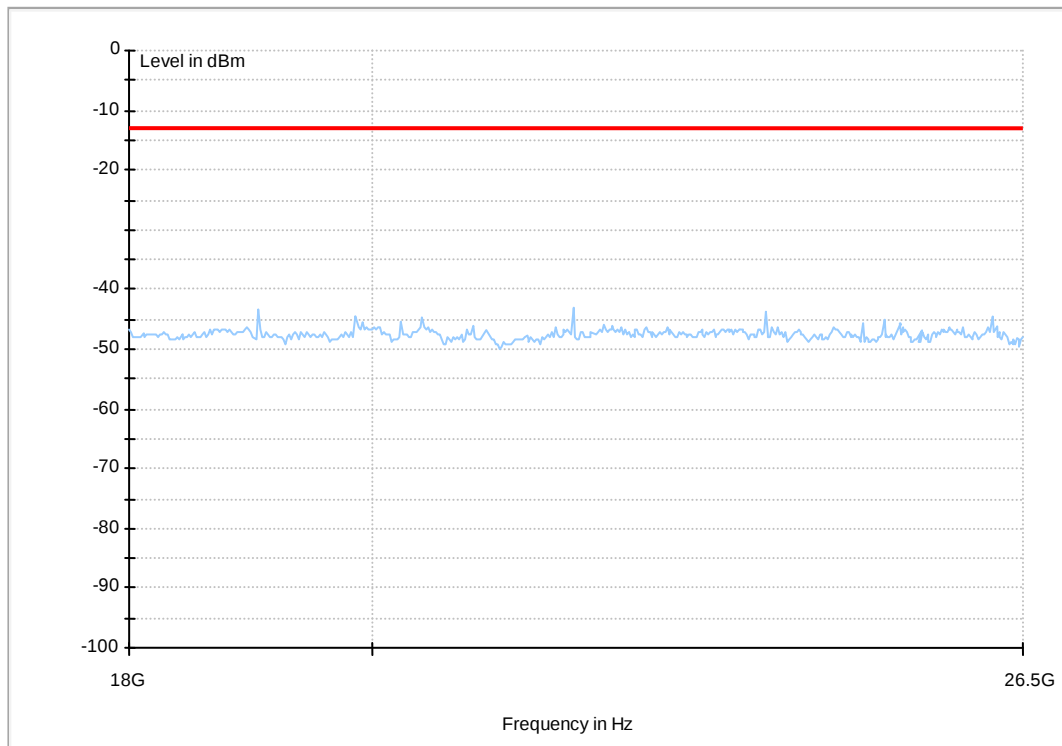



FCC RF Test Report

Product Name: HSPA+ Module

Model Number: MU739

Report No: SYBH(Z-RF)021092011-2003

FCC ID: QISMU739

Reliability Laboratory of Huawei Technologies Co., Ltd.

Huawei Base, Bantian, Longgang District, Shenzhen 518129, P.R. China

Tel: +86 755 28780808 Fax: +86 755 89652518

Notice

1. The laboratory has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS), and accreditation number: L0310.
2. The laboratory has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements. The site recognition number is 97456.
3. The laboratory has been listed by industry Canada to perform electromagnetic emission measurement. The site recognition number is 6369A-2.
4. The test report is invalid if not marked with "exclusive stamp for the test report".
5. The test report is invalid if not marked with the stamps or the signatures of the persons responsible for performing, revising and approving the test report.
6. The test report is invalid if there is any evidence of erasure and/or falsification.
7. If there is any dissidence for the test report, please file objection to the test centre within 15 days from the date of receiving the test report.
8. Normally, the test report is only responsible for the samples that have undergone the test.
9. Context of the test report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of the laboratory.



REGULATION	FCC CFR47 Part 2: Subpart J;
	FCC CFR47 Part 27 : Subpart C&L
START OF TEST	Sep.20, 2011
END OF TEST	Sep.24, 2011
Final Judgement:	Pass

Approved By

Sep.26, 2011
Date


Dai Linjun
Name


Signature

Reviewed By

Sep.26, 2011
Date


Cousy Xu
Name


Signature

Operator

Sep.26, 2011
Date

Huang Qiuliang
Name


Signature



Contents

1	<u>Summary</u>	5
2	<u>Product Description</u>	6
2.1	PRODUCTION INFORMATION	6
2.2	MODIFICATION INFORMATION	6
3	<u>Test Site Description</u>	7
3.1	TESTING PERIOD	7
3.2	GENERAL SET UP DESCRIPTION	7
4	<u>Product Description</u>	8
4.1	TECHNICAL CHARACTERISTICS	8
4.2	EUT IDENTIFICATION LIST	10
5	<u>Main Test Instruments</u>	11
6	<u>Transmitter Measurements</u>	12
6.1	EFFECTIVE ISOTROPIC RADIATED POWER OF TRANSMITTER (EIRP)	12
6.2	CONDUCTED POWER OF TRANSMITTER	15
6.3	MODULATION CHARACTERISTICS	18
6.4	OCCUPIED BANDWIDTH	20
6.5	BAND EDGES COMPLIANCE	22
6.6	SPURIOUS EMISSION AT ANTENNA TERMINAL	24
6.7	RADIATED SPURIOUS EMISSIONS	26
6.8	FREQUENCY STABILITY	29
7	<u>System Measurement Uncertainty</u>	32
8	<u>Appendices</u>	33



1 Summary

The table below summarizes the measurements and results for the EUT. Detailed results and descriptions are shown in the following pages.

Summary of results

FCC Measurement Specification	FCC Limits Part(s)	Description	Result
2.1046	27.50(d)(2)	Effective Radiated Power of Transmitter	PASS
2.1046	27.50(d)(2)	Conducted Power of Transmitter	PASS
2.1047	/	Modulation Characteristics	PASS
2.1049	/	Occupied Bandwidth	PASS
2.1051	27.53(h)	Band Edges Compliance	PASS
2.1051	27.53(h)	Spurious Emission at Antenna Terminal	PASS
2.1053	27.53(h)	Radiated Spurious Emissions	PASS
2.1055	27.54	Frequency Stability	PASS



2 Product Description

2.1 Production Information

2.1.1 General Description

MU739 HSPA+/WCDMA(UMTS)/GSM/GPRS/EDGE dual mode Wireless Module is subscriber equipment in the UMTS/GSM system. MU739 implement such functions as RF signal receiving/transmitting, HSPA+/WCDMA and EDGE/GPRS/GSM protocol processing, data service etc. Externally it provides LGA interface.

2.1.2 Support function and Service

The EUT support the function and service as follows:

Service and Test mode List

Service Name	Characteristic	Corresponding Test Mode	Note
Data	Modulation: QPSK	TM1	WCDMA
Data	Modulation: QPSK	TM2	HSDPA
Data	Modulation: QPSK	TM3	HSUPA

Note: * The WCDMA test condition & settings are defined in 3GPP TS 34.121 V7.5.0.

2.2 Modification Information

For original equipment, following table is not application.

Modification Information

Model Number	Board/Module	Original Version	New Version	Modify Information
Not applicable				



3 Test Site Description

The test site of:

***Huawei Technologies Co. Ltd.
P.O. Box 518129
Huawei base, bantian,
Longgang District, Shenzhen, China***

3.1 Testing Period

The test have been performed during the period of

Sep.20, 2011 – Sep.24, 2011

3.2 General Set up Description

TM1: WCDMA Mode with QPSK Modulation

TM2: HSDPA Mode with QPSK Modulation

TM3: HSUPA Mode with QPSK Modulation



4 Product Description

4.1 Technical Characteristics

4.1.1 Frequency Range

Frequency Range

WCDMA Band IV	
Uplink band:	1710 to 1755 MHz
Downlink band:	2110 to 2155 MHz

4.1.2 Channel Spacing / Separation

Channel Spacing / Separation

	WCDMA/HSPA
Channel Raster	200 kHz
Channel spacing:	5 MHz

4.1.3 Type of Emission

Type of Emission

	WCDMA/HSPA
Emission Designation:	5M00F9W

According to CFR 47 (FCC) part 2, subpart C, section 2.201 and 2.202

4.1.4 Environmental Requirements

Environmental Requirements

Minimum temperature:	- 10 °C
Maximum temperature:	+ 55 °C
Relative Humidity:	5%-95%RH

4.1.5 Power Source

Power Source

AC voltage nominal:	 120 V
AC voltage range	 100 V to  240 V
AC current maximal:	1A

4.1.6 Tune-up Procedure

According to CFR (FCC) part 2, subpart 2, section 2.1033(c) (9).

Please reference the document Tune-up Procedure in TCF.

4.1.7 Applied DC Voltages and Currents

According to CFR (FCC) part 2, subpart 2, section 2.1033(c) (8).

The voltage and current in the final RF stage is:

Applied RF Module DC Voltages and Currents

Voltage:	 +3.8V
Current:	100mA According to CFR (FCC) part 2, subpart 2, section 2.1033(c) (8)



4.2 EUT Identification List

4.2.1 Board Information

Board Information

HSPA+ Module	
MU739	
Board and Module	
Hardware Version	Software Version
MD1MU739MS	11.101.06.02.00

4.2.2 FCC Identification

Grantee Code: QIS
Product Code: MU739
FCC Identification: QISMU739



5 Main Test Instruments

Main Test Equipments

Equipment Description	Manufacturer	Model	Serial Number	Calibrated until
Power supply	KEITHLEY	2303	1288003	Sep.27,2011
Universal Radio Communication Tester	R&S	CMU200	105822	Oct.24.2011
Wireless Communication Test set	Agilent	N4010A	MY49081592	Dec.14.2011
Universal Radio Communication Tester	Agilent	E5515C	MY50260239	Aug.31,2012
Spectrum Analyzer	Agilent	E4440A	MY49420179	Apr.20,2012
Signal Analyzer	R&S	FSQ31	200021	Sep.27,2011
Temperature Chamber	WEISS	WKL64	24600294	Jan.03,2012
Signal generator	Agilent	E8257D	MY49281095	Jul.9.2012
Vector Signal Generator	R&S	SMU200A	104162	Sep.07,2012
Test receiver	R&S	ESU26	100150	May.24.2012
Tunable Dipole	Schwarzbeck	D69250-UHAP/D69250-VHAP	919/1009	Dec.13.2011
Tunable Dipole	Schwarzbeck	D69250-UHAP/D69250-VHAP	979/917	Dec.13.2011
Horn Antenna	R & S	HF906	100683	May.16, 2012
Horn Antenna	R & S	HF906	100684	May.16, 2012
Broadband Antenna	Schwarzbeck	VULB 9163	9163-357	Sep.15, 2012
Broadband Antenna	Schwarzbeck	VULB 9163	9163-356	Sep.15, 2012



6 Transmitter Measurements

6.1 Effective Isotropic radiated power of Transmitter (EIRP)

6.1.1 Test Conditions

Test Conditions

Preconditioning:	0.5 hour
Measured at:	enclosure
Ambient temperature:	25°C
Relative humidity:	55%
Test Configurations:	TM1 at Channel B, M, T

6.1.2 Test Specifications and Limits

6.1.2.1 Specification

CFR 47 (FCC) part 2.1046 and Part 27.50(d)2

6.1.2.2 Supporting Standards

Supporting Standards:

ANSI/TIA-603-C:2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS 34.121 V7.5.0	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.1.2.3 Limits

Compliance with Part 27.232, mobile/portable stations are limited to 1 watts EIRP peak power.
 $W(\text{dBm}) = 10 \cdot \log(W_{\text{in mW}})$.

Limits

Maximum Output Power (Watts)	< 1 Watts
Maximum Output Power (dBm)	< 30 dBm


6.1.3 Test Method and Setup

- (a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, EIRP shall be measured when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in 2.1033(c)(8). Connect the EUT to the wireless communication tester CMU200 via the air interface. The band is set as AWS.

- (b) Test the Radiated maximum output power by the CMU200 received from test antenna.
- (c) Use substitution method to verify the maximum output power. The EUT is substituted by a dipole antenna. The dipole is connected to a signal generator. And then adjust the output level of the signal generator to get the same received power recorded in step (b) on CMU200, and record the power level of Signal Generator. Of course, the cable loss at the test frequency should be compensated.

Test setup

Step 1: Pre-test

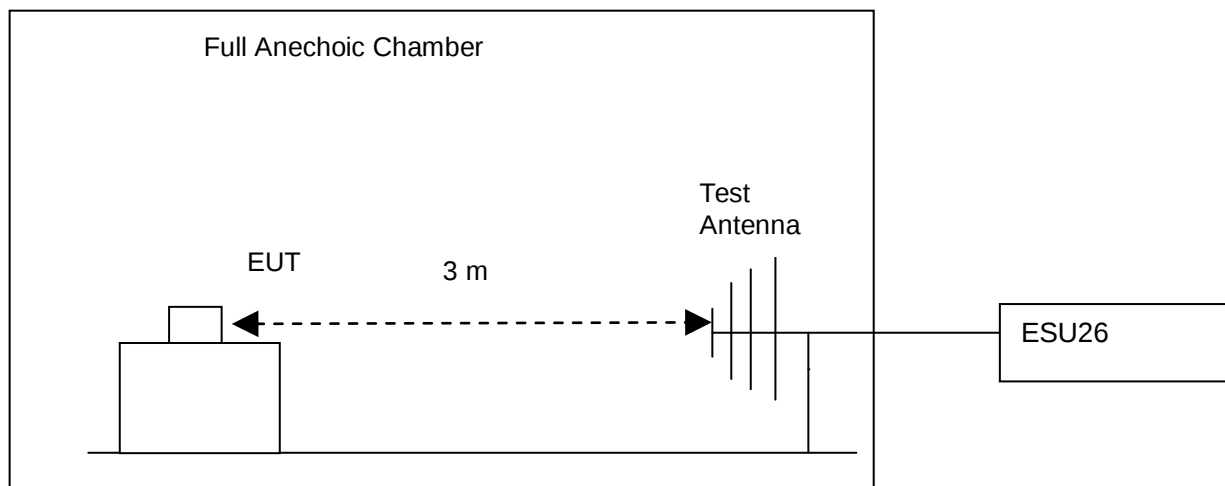

Step 2: Substitution method to verify the maximum EIRP

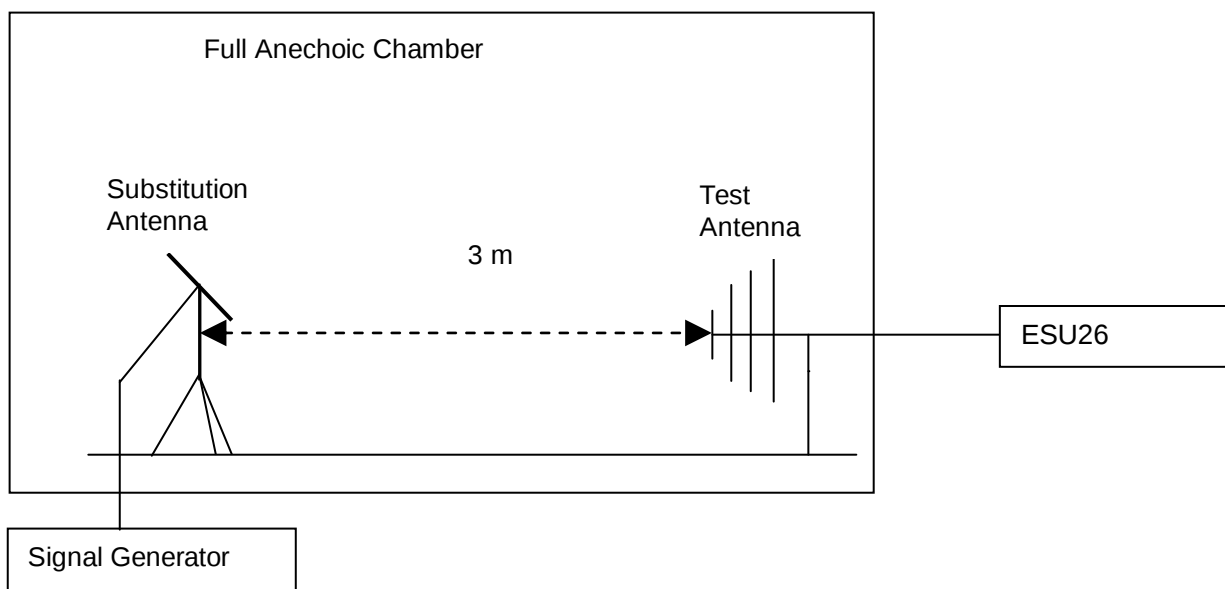


Figure 1. Test Set-up

NOTE: Effective radiated power (ERP) refers to the radiation power output of the EUT, assuming all emissions are radiated from half-wave dipole antennas.

There is a constant difference of 2.15 dB between ERP and EIRP.

$EIRP (dBm) = ERP (dBm) + 2.15$ (ITU-R Recommendation SM.329-10).

EIRP was measured using 1 host.

BenQ Joy book S72



6.1.4 Measurement Results

6.1.4.1 Pre-test Results

Measurement Results

TEST CONDITIONS	RF Output Power (EIRP)					
	Channel 1312(B)		Channel 1412(M)		Channel 1513(T)	
	1712.4MHz		1732.4MHz		1752.6MHz	
	dBm		dBm		dBm	
T _{nom} (25 °C)/ V _{nom} (3.8V)	Measured	Limit	Measured	Limit	Measured	Limit
TM1	26.28	30	26.20	30	26.22	30

6.1.4.2 Substitution Results

Test Mode	Freq. [MHz]	Meas. Level [dBm]	Substitution Antenna Type	SGP [dBm]	Substitution Gain [dBi]	Cable Loss [dB]	Substitution Level (EIRP) [dBm]	Limit [dBm]	Result
TM1	1712.4	26.28	Horn Ant.	22.82	4.5	1.0	26.32	30	Pass
TM1	1732.4	26.20	Horn Ant.	22.76	4.5	1.0	26.26	30	Pass
TM1	1752.6	26.22	Horn Ant.	22.48	4.8	1.0	26.28	30	Pass

Note: a, For get the EIRP (Effective Isotropic Radiated Power) in substitution method, the following formula should take to calculate it,

$$\text{EIRP [dBm]} = \text{SGP [dBm]} - \text{Cable Loss [dB]} + \text{Gain [dBi]}$$

NOTE: SGP- Signal Generator Level

b, Measurement the EIRP with RMS detector.

c, RBW=10kHz, VBW=300kHz, and integrated by the instrument to 5M for TM1

6.1.5 Conclusion

The equipment **PASSED** the requirement of this clause.



6.2 Conducted Power of Transmitter

6.2.1 Test Conditions

Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25 °C
Relative humidity:	55 %
Test Configurations:	TM1/TM2/TM3 at Channel B, M, T

6.2.2 Test Specifications and Limits

6.2.2.1 Specification

CFR 47 (FCC) part 2.1047 and Part 27.50(d)(2)

6.2.2.2 Supporting Standards

Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS 34.121 V7.5.0	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.2.2.3 Limits

Compliance with Part 27.232, in no any case may the peak power of a mobile station transmitter exceed 2 W. The calculated longitude EIRP by following formula:

$$\text{EIRP(dBm)} = 10 * \log(\text{EIRP}_{\text{mW}}).$$

And for conducted power, we can use Antenna Gain to calculate the limit. So the conducted power:

$$\text{P}_{\text{cod}}(\text{dBm}) = \text{EIRP(dBm)} - \text{Gain(dBi)}.$$

and $\text{Gain(dBi)} = \text{Gain(dBd)} + 2.15\text{dB}$

Limits

Maximum Output Power	< 1 Watts (30 dBm)
Antenna Gain(dBi):	2.6
Maximum Conducted Output Power (dBm)	<27.40

For HSDPA test mode, there are 4 sub-tests for different configuration.

HSDPA conducted max power pre-scan

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	HS	CM (dB)	MPR (dB)
1	2/15	15/15	64	2/15	4/15	0	0
2	12/15	15/15	64	12/15	24/15	1	0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

For HSUPA test mode, there are 5 sub-tests for different configuration.

HSUPA conducted max power pre-scan

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 5) (Note 6)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/22 5	1309/22 5	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 6: β_{ed} can not be set directly, it is set by Absolute Grant Value.

6.2.3 Test Method and Setup

(a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, Conducted maximum power shall be measured when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in 2.1033(c)(8). Connect the EUT to the wireless communication tester CMU200 via the antenna connector. The band class is set as AWS.

(b) Test the Conducted maximum output power by the CMU200.

Test setup

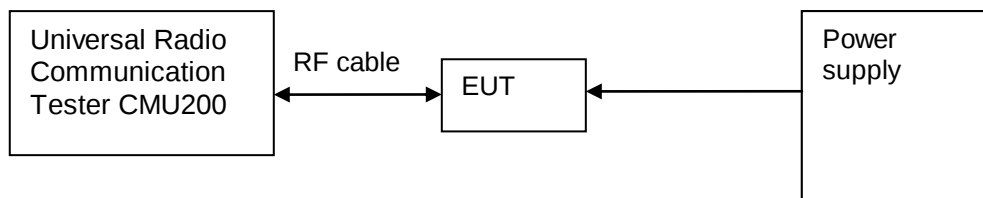


Figure 2. Test Set-up

6.2.4 Measurement Results

Measurement Results

TEST CONDITIONS		RF Output Power (Conducted)					
		Channel 1312(B)		Channel 1412(M)		Channel 1513(T)	
		1712.4MHz		1732.4MHz		1752.6MHz	
		dBm		dBm		dBm	
T _{nom} (25 °C)/ V _{nom} (3.8V)		Measured	Limit	Measured	Limit	Measured	Limit
TM1		23.68	27.40	23.60	27.40	23.62	27.40
TM2	Case1	23.63	27.40	23.55	27.40	23.56	27.40
	Case2	22.79	27.40	22.67	27.40	22.77	27.40
	Case3	22.22	27.40	22.13	27.40	22.16	27.40
	Case4	21.98	27.40	21.89	27.40	21.93	27.40
TM3	Case1	22.49	27.40	22.41	27.40	22.51	27.40
	Case2	20.75	27.40	20.68	27.40	20.70	27.40
	Case3	21.79	27.40	21.65	27.40	21.76	27.40
	Case4	20.89	27.40	20.82	27.40	20.92	27.40
	Case5	22.57	27.40	22.49	27.40	22.68	27.40

Note: Measurement the Conducted output power with RMS detector.

6.2.5 Conclusion

The equipment **PASSED** the requirement of this clause.



6.3 Modulation Characteristics

6.3.1 Test Conditions

Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25 °C
Relative humidity:	55 %
Test Configurations:	TM1 at frequency M

6.3.2 Test Specifications and Limits

6.3.2.1 Specification

CFR 47 (FCC) part 2.1047 and Part 27 Subpart C&L

6.3.2.2 Supporting Standards

Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS 34.121 V7.5.0	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.3.2.3 Limits

No specific modulation characteristics requirement limits in part 2.1047 and part 24 subpart E.

Limits

Limits	Not applicable
--------	----------------

6.3.3 Test Method and Setup

Connect the EUT to Universal Radio Communication Tester CMU200 via the antenna connector. The frequency band is set as AWS; the EUT's output is matched with 50 Ω load, test method was according to 3GPP TS 34.121. The waveform quality and constellation of the EUT Module was tested.

Test setup

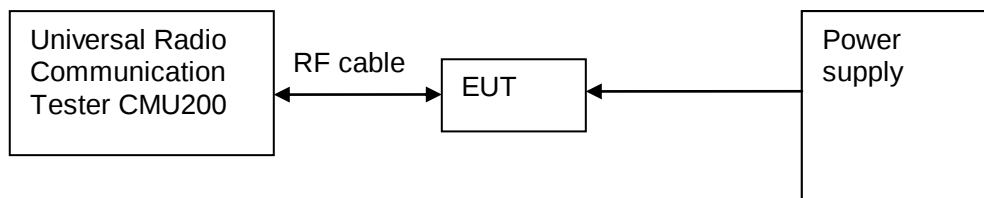


Figure 3. Test Set-up

6.3.4 Measurement Results

Measurement Results

TEST CONDITIONS		Modulation Characteristic
		Channel 1412(M) 1732.4MHz
		Measured
		TM1
T_{nom} (25 °C)	V_{nom} (3.8V)	Refer to Appendix A

6.3.5 Conclusion

The equipment **PASSED** the requirement of this clause.

For the measurement results refer to appendix A.

6.4 Occupied Bandwidth

6.4.1 Test Conditions

Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25 °C
Relative humidity:	55 %
Test Configurations:	TM1 at frequency B, M, T

6.4.2 Test Specifications and Limits

6.4.2.1 Specification

CFR 47 (FCC) part 2.1049 and Part 27

6.4.2.2 Supporting Standards

Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS 34.121 V7.5.0	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.4.2.3 Limits

No specific occupied bandwidth requirement in Part 27 Subpart C&L, but the occupied bandwidth was defined in part 2.1049: the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.

Limits

Upper /lower frequency limits	0.5% of the mean power
-------------------------------	------------------------

6.4.3 Test Method and Setup

The EUT was connected to the wireless signal analyzer R&S FSQ31 via the one RF connector. The band class is set as AWS; The EUT was controlled to transmit maximum power. Measure and record the occupied bandwidth of the EUT Module by the R&S FSQ31.

The OBW, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions as applicable:

Refer to 47CFR part2.1049 section (g) & (h).

(g) Transmitter in which the modulating base band comprises not more than three independent channels - when modulated by the full complement of signals for which the transmitter is rated. The level of modulation for each channel should be set to that prescribed in rule parts applicable to the services for which the transmitter is intended. If specific modulation levels are not set forth in the rules, the tests should provide the manufacturer's maximum rated condition.

(h) Transmitters employing digital modulation techniques - when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudorandom generators or other devices required in normal service. Additionally, the occupied bandwidth shall be shown for operation with any devices used for modifying the spectrum when such devices are optional at discretion of the user.

For TM1 following RBW and VBW are employed:

Measurement bandwidth (RBW): 50 kHz (Resolution bandwidth)

Video bandwidth (VBW): 500 kHz

Test Set-up

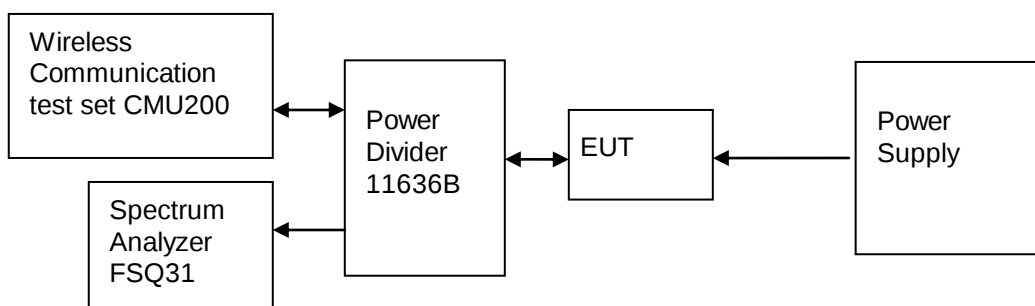


Figure 4. Test Set-up

6.4.4 Measurement Results

Measurement Results

TEST CONDITIONS		Occupied Bandwidth		
Center Frequency		Channel 1312(B) 1712.4MHz	Channel 1412(M) 1732.4MHz	Channel 1513(T) 1752.6MHz
		Measured (MHz)	Measured (MHz)	Measured (MHz)
		TM1	TM1	TM1
T _{nom} (25 °C) V _{nom} (3.8V)	99%	4.07	4.05	4.05

6.4.5 Conclusion

The equipment **PASSED** the requirement of this clause.

For the measurement results refer to appendix B.



6.5 Band Edges Compliance

6.5.1 Test Conditions

Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25°C
Relative humidity:	55 %
Test Configurations:	TM1 at frequency B, T

6.5.2 Test Specifications and Limits

6.5.2.1 Specification

CFR 47 (FCC) part 2.1051 and Part 27.53

6.5.2.2 Supporting Standards

Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS 34.121 V7.5.0	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.5.2.3 Limits

Compliance with Part 27.50(d) (2), all spurious emission must be attenuated below the transmitter power by at least $43 + 10 \log_{10} P$ (W). (Whereas P is the rated power of the EUT).

Limits

	TM1
Rated Power:	24 dBm
Required attenuation:	$43 + 10 \log(0.25) = 37$, 24 dBm - 37 dB
Absolute level	- 13 dBm

6.5.3 Test Method and Setup

The EUT was connected to the wireless signal analyzer R&S FSQ31 via the one RF connector, the band class is set as AWS. The EUT controlled to transmit maximum power. Measure and record band edges compliance of the EUT by the R&S FSQ31.

For TM1 following RBW and VBW are employed:

Measurement bandwidth (RBW): 50 kHz (Resolution bandwidth)

Video bandwidth (VBW): 200 kHz

Test Set-up

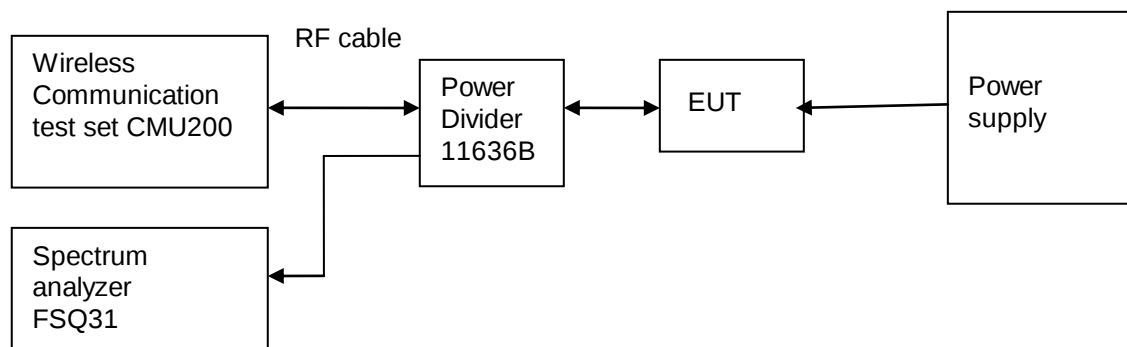


Figure 5. Test Set-up

6.5.4 Measurement Results

Measurement Results outside Band Edges-- Single Carrier

Band	Frequency of Band edges [MHz]	Channel Number	Test Mode	Spurious Level measured [dBm]	FCC limit	Result
AWS	$T_{nom} (25\text{ }^{\circ}\text{C}), V_{nom} (3.8\text{V})$					
	1712.4	1312	TM1	<-13(See appendix C)	- 13 dBm	Pass
	1752.6	1513	TM1	<-13(See appendix C)	- 13 dBm	Pass

6.5.5 Conclusion

The equipment **PASSED** the requirement of this clause.
For the measurement results refer to appendix C.



6.6 Spurious Emission at Antenna Terminal

6.6.1 Test Conditions

Test Conditions	
Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25°C
Relative humidity:	55 %
Test Configurations:	TM1 at frequency B, M, T

6.6.2 Test Specifications and Limits

6.6.2.1 Specification

CFR 47 (FCC) part 2.1051 and Part 27.53

6.6.2.2 Supporting Standards

Supporting Standards:	
ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS 34.121 V7.5.0	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.6.2.3 Limits

Compliance with Part 27.53, all spurious emission must be attenuated below the transmitter power by at least $43 + 10 \log_{10} P$. (Whereas P is the rated power of the EUT).

Limits	
	TM1
Rated Power:	24 dBm
Required attenuation:	$43 + 10 \log(0.25) = 37$, 24 dBm - 37 dB
Absolute level	- 13 dBm

6.6.3 Test Method and Setup

The EUT was connected to the wireless signal analyzer R&S FSQ31 via the one RF connector, the band class is set as AWS. The EUT was controlled to transmit maximum power. Measure and record the Conducted Spurious Emission of the EUT by the R&S FSQ31.

According to Part 27.53, the defined measurement bandwidth as following:

27.53 Measurement procedure: Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater.

Measurement bandwidth (RBW) for 9 kHz up to 150 kHz: 1 kHz;
Measurement bandwidth (RBW) for 150 kHz up to 30MHz: 10 kHz;
Measurement bandwidth (RBW) for 30 MHz up to 20GHz: 1MHz;

Test Set-up

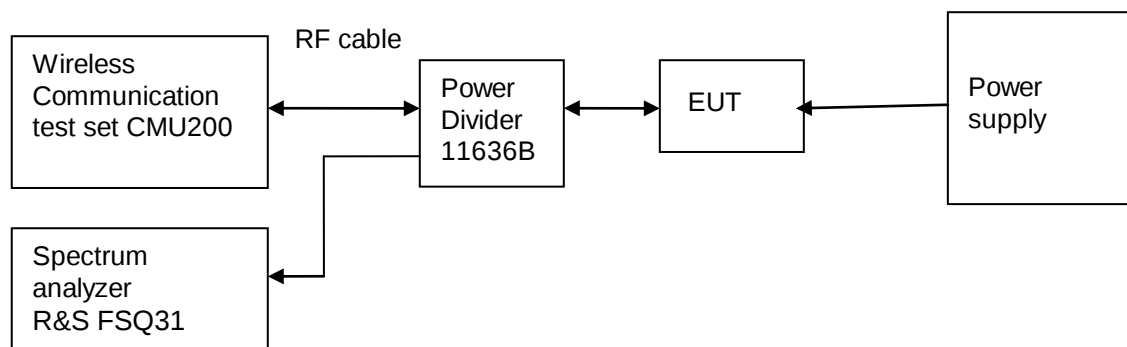


Figure 6. Test Set-up

6.6.4 Measurement Results

Measurement Results

Channel Number	Test Mode	Test Range (Frequency)	Output Power [dBm]	Spurious Level measured [dBm]	FCC limit	Result
Channel 1312(B)	TM1	9 kHz~20GHz	24	<- 13 dBm (See appendix D)	- 13 dBm	Pass
Channel 1412(M)	TM1	9 kHz~20GHz	24	<- 13 dBm (See appendix D)	- 13 dBm	Pass
Channel 1513(T)	TM1	9 kHz~20GHz	24	<- 13 dBm (See appendix D)	- 13 dBm	Pass

6.6.5 Conclusion

The equipment **PASSED** the requirement of this clause.
For the measurement results refer to appendix D.



6.7 Radiated Spurious Emissions

6.7.1 Test Conditions

Test Conditions

Preconditioning:	0.5 hour
Measured at:	enclosure
Ambient temperature:	25°C
Relative humidity:	55%
Test Configurations:	TM1/TM2/TM3 at frequency M

6.7.2 Test Specifications and Limits

6.7.2.1 Specification

CFR 47 (FCC) part 2.1053 and part 27.53(h)

6.7.2.2 Supporting Standards

Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS 34.121 V7.5.0	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.7.2.3 Limits

Compliance with part 27.53(h), all spurious emission must be attenuated below the transmitter power by at least $43 + 10 \log_{10} P$. (Whereas P is the rated power of the EUT).

Limits

Absolute level	- 13 dBm
----------------	----------

6.7.3 Test Method and Setup

A test site fulfilling the requirements of ITU-R Recommendation SM329-11 was used. The EUT was placed on a non-conducting support in the anechoic chamber and was operated from a power source via an RF filter to avoid radiation from the power leads.

According to part 27.53, the defined measurement bandwidth as following:

27.53(h) Measurement procedure: Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater.


Measurement bandwidth (RBW) for 9 kHz up to 150 kHz: 1 kHz;
Measurement bandwidth (RBW) for 150 kHz up to 30 MHz: 10 kHz;
Measurement bandwidth (RBW) for 30MHz up to 18GHz: 1MHz;

Test Set-up

Step 1:


For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, EIRP shall be measured when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in 2.1033(c)(8). Connect the EUT to the BTS simulator via the air interface.

Test the Radiated maximum output power by the Test Receiver from test antenna.

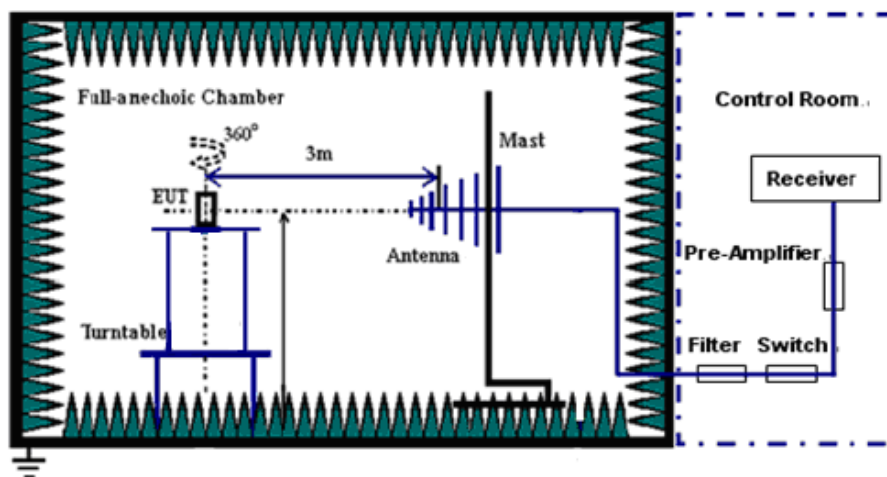

Step 2:

Use substitution method to verify the maximum output power. The EUT is substituted by a dipole antenna. The dipole is connected to a signal generator. And then adjust the output level of the signal generator to get the same received power recorded in step1 on Test Receiver, and record the power level of Signal Generator. Of course, the cable loss at the test frequency should be compensated.

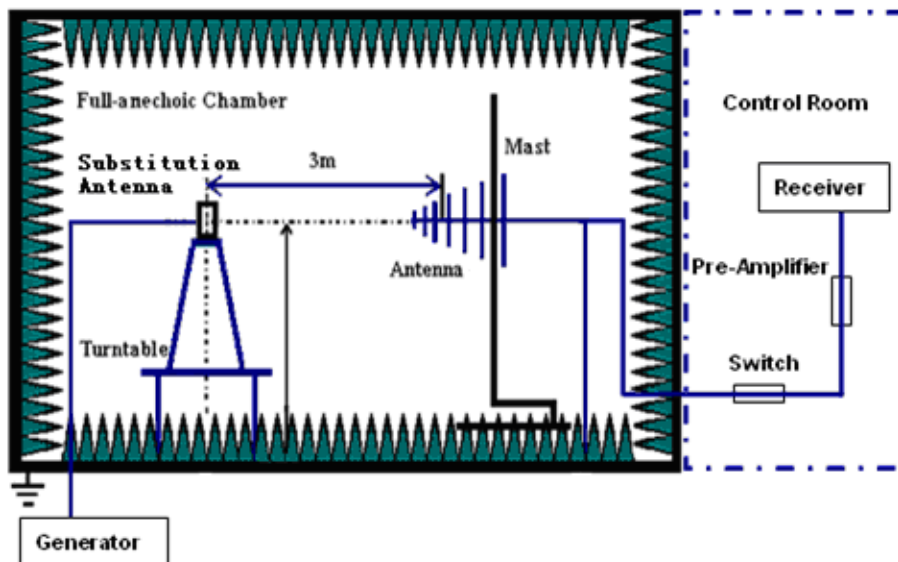

Test should be performed in normal voltage condition.



No peak found in pre- test. All frequency points' margin is bigger than 20dB, so the substitution method isn't used.

Calculation Sample:

Substitution Results

Freq. [MHz]	Measure ment Value [dBm]	Substitution Antenna Type	Gain [dBd]	Cable Loss [dB]	Signal Generator Level [dBm]	Substitution Level [dBm]	FCC limit [dBm]	Result

Note: For get the E.R.P. (Efficient Radiated Power) in substitution method, the following formula should take to calculate it,

$$\text{E.R.P. [dBm]} = \text{SGP [dBm]} - \text{Cable Loss [dB]} + \text{Gain [dBd]}$$

NOTE: SGP- Signal Generator Level

6.7.4 Conclusion

The equipment **PASSED** the requirement of this clause.

For the measurement results refer to appendix_E

6.8 Frequency Stability

6.8.1 Test Conditions

Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	See below
Relative humidity:	55 %
Test Configurations:	TM1 at frequency M

6.8.2 Test Specifications and Limits

6.8.2.1 Specification

CFR 47 (FCC) part 2.1055 and Part 27.54

6.8.2.2 Supporting Standards

Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS 34.121 V7.5.0	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.8.2.3 Limits

No specific frequency stability requirement in part 2.1055 and Part 27.50(d)(2).

6.8.3 Test Method and Setup

The frequency stability shall be measured with variation of ambient temperature as follows:

- (1) From -30 ° to +50 ° centigrade for all equipment except that specified in subparagraphs
- (2) and (3) of paragraph 2.1055

(a) Frequency measurements shall be made at the extremes of the specified temperature range and at intervals of not more than 10° centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short-term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stabilizing circuitry need be subjected to the temperature variation test.

(b) The frequency stability shall be measured with variation of primary supply voltage as follows:

- (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
- (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating

end point, which shall be specified by the manufacturer.

(3) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.

(c) When deemed necessary, the Commission may require tests of frequency stability under conditions in addition to those specifically set out in paragraphs (a), (b), (c) of this section. (For example, measurements showing the effect of proximity to large metal objects, or of various types of antennas, may be required for portable equipment.)

The EUT can only work in such extreme voltage 3.3V and 4.2V, so here the EUT is tested in the 3.3V and 4.2V.

Test Set up

Connect the EUT to the Wireless Communication test set CMU200 via the connector. Then measure the frequency error by the Wireless Communication test set CMU200. The EUT's output is matched with a 50 Ω load.

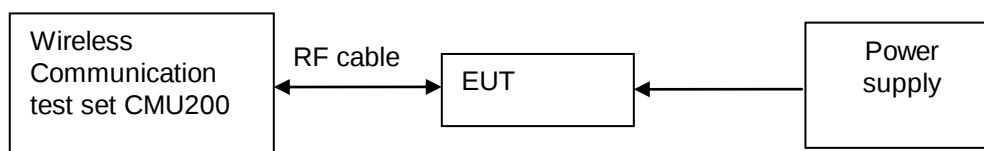


Figure 7. Test Set up

6.8.4 Measurement Results

6.8.4.1 Measurement Results vs. Variation of Temperature

- TM1, 3.8V DC Channel No.1412(1732.4MHz)

Measurement Results vs. Variation of Temperature – TM1

Temperature	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
-30 °C	1732.4	-18	Pass
-20 °C	1732.4	10	Pass
-10 °C	1732.4	13	Pass
0 °C	1732.4	-15	Pass
+10 °C	1732.4	-6	Pass
+20 °C	1732.4	9	Pass
+30 °C	1732.4	18	Pass
+40 °C	1732.4	9	Pass
+50 °C	1732.4	7	Pass



6.8.4.2 Measurement Results vs. Variation of Voltage

- TM1, 25 °C ,Channel No. 1412(1732.4MHz)

Measurement Results vs. Variation of Voltage — TM1

Voltage	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
+4.2 V	1732.4	9	Pass
+3.8 V	1732.4	-18	Pass
+3.3 V	1732.4	-16	Pass

6.8.5 Conclusion

The equipment **PASSED** the requirement of this clause.



7 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

System Measurement Uncertainty

Items		Extended Uncertainty
Effective Radiated Power of Transmitter	EIRP (dBm)	U=3dB; k=2
Band Width	Magnitude (%)	U=0.2%; k=2
Band Edge Compliance	Disturbance Power (dBm)	U=2.0dB; k=2
Conducted Spurious Emission at Antenna Terminal	Disturbance Power (dBm)	U=2.0dB; k=2
Frequency Stability	Frequency Accuracy(ppm)	U=0.21ppm; k=2



8 Appendices

Appendix A	Measurement Results Modulation Characteristics
Appendix B	Measurement Results Occupied Bandwidth
Appendix C	Measurement Results Band Edges
Appendix D	Measurement Results Spurious Emission at Antenna Terminal
Appendix E	Measurement Results Radiated Spurious Emissions
Appendix F	Photos of Radiated Spurious Emissions



FCC Test Report of MU739
FCC ID: QISMU739




Appendix A

Modulation Characteristics

According to FCC Part 2.1047 & Part 27 Subpart C&L



TM1: WCDMA Channel 1412

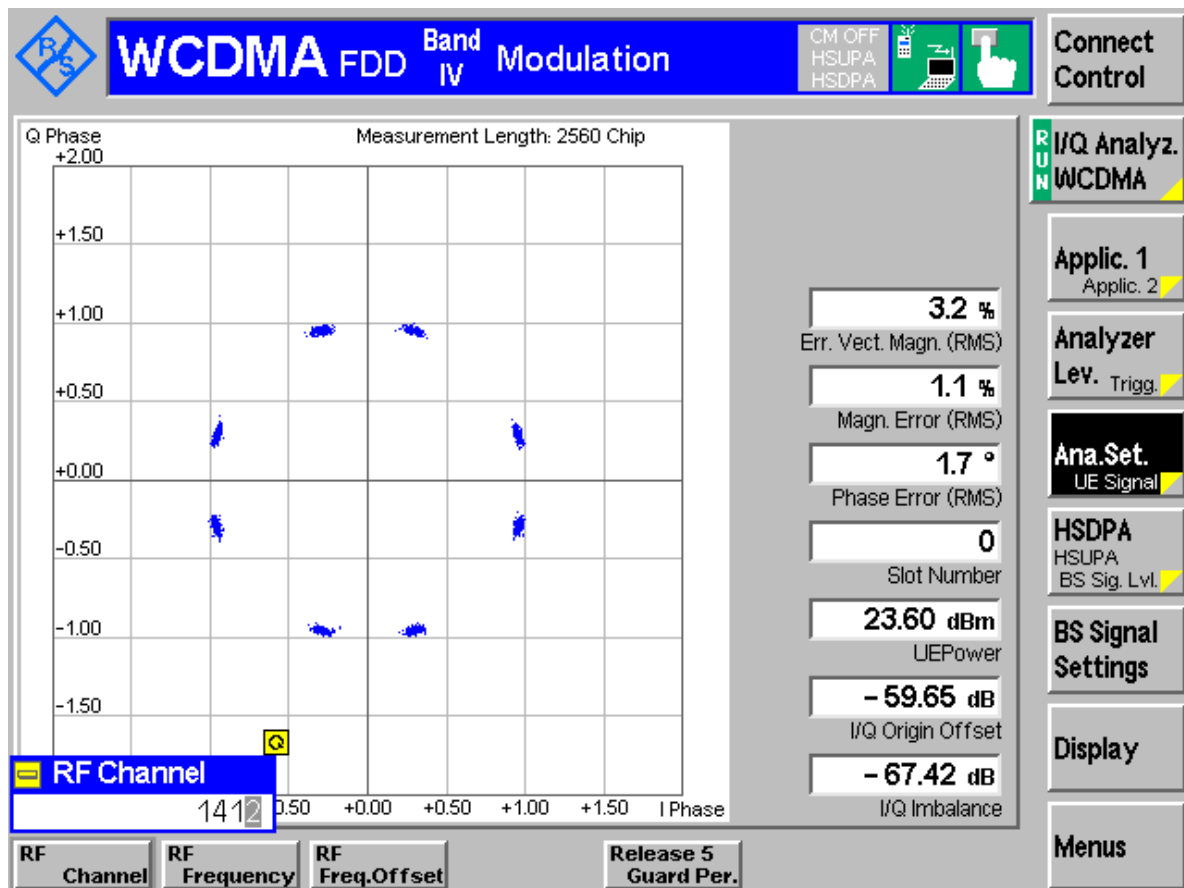




Appendix B

Occupied Bandwidth

According to FCC Part 2.1049 & Part 27 Subpart C&L




TM1: WCDMA Channel 1312

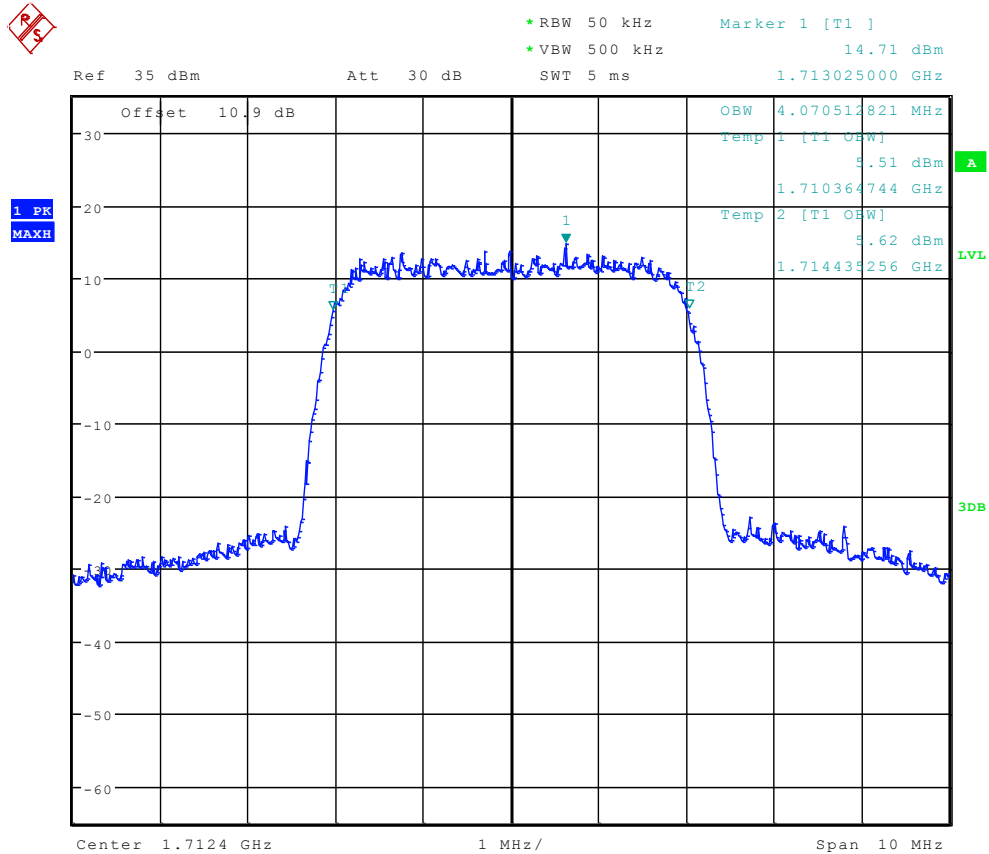

Date: 22.SEP.2011 01:04:05




Channel 1412

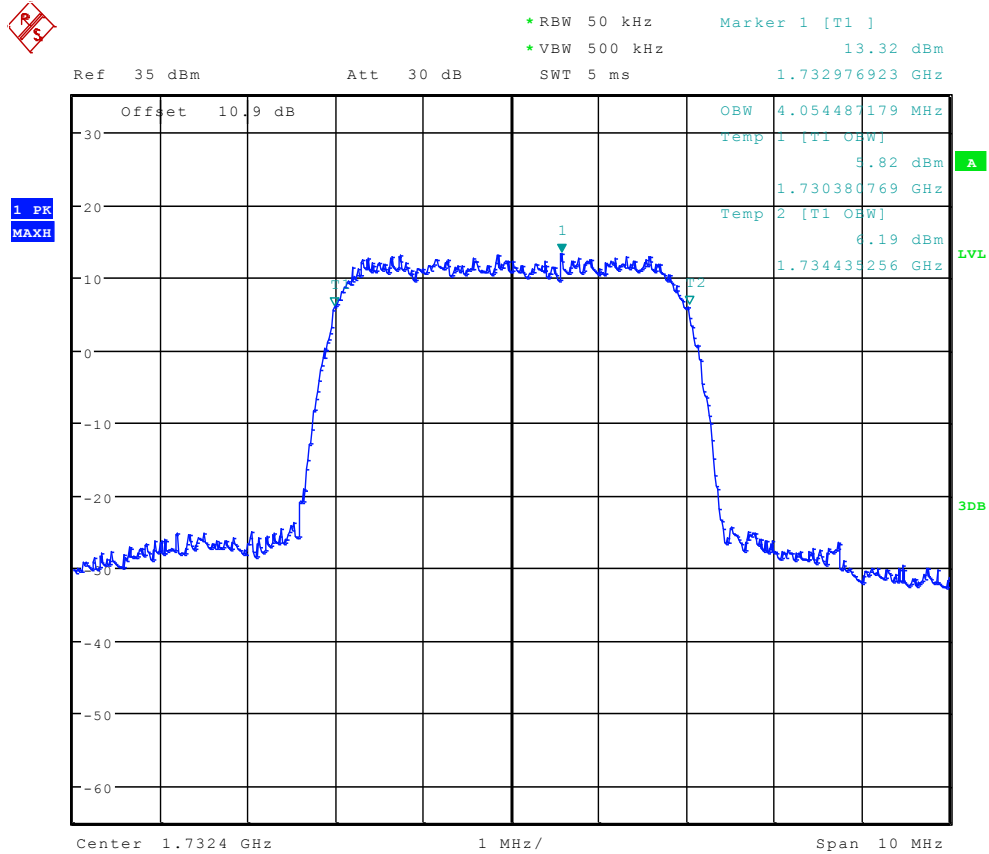

Date: 22.SEP.2011 01:04:19



Channel 1513

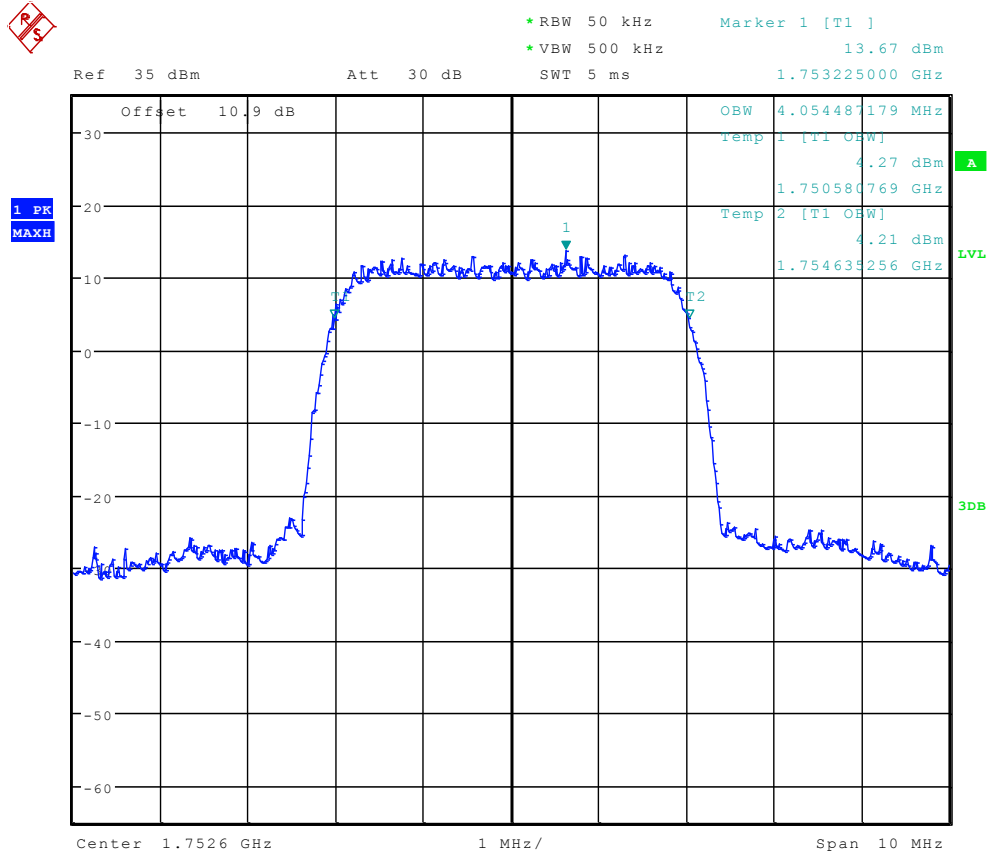

Date: 22.SEP.2011 01:04:33




Appendix C

Band Edges Compliance

According to FCC Part 2.1051 & Part 27 Subpart C&L



TM1: WCDMA Left Edge Channel 1312

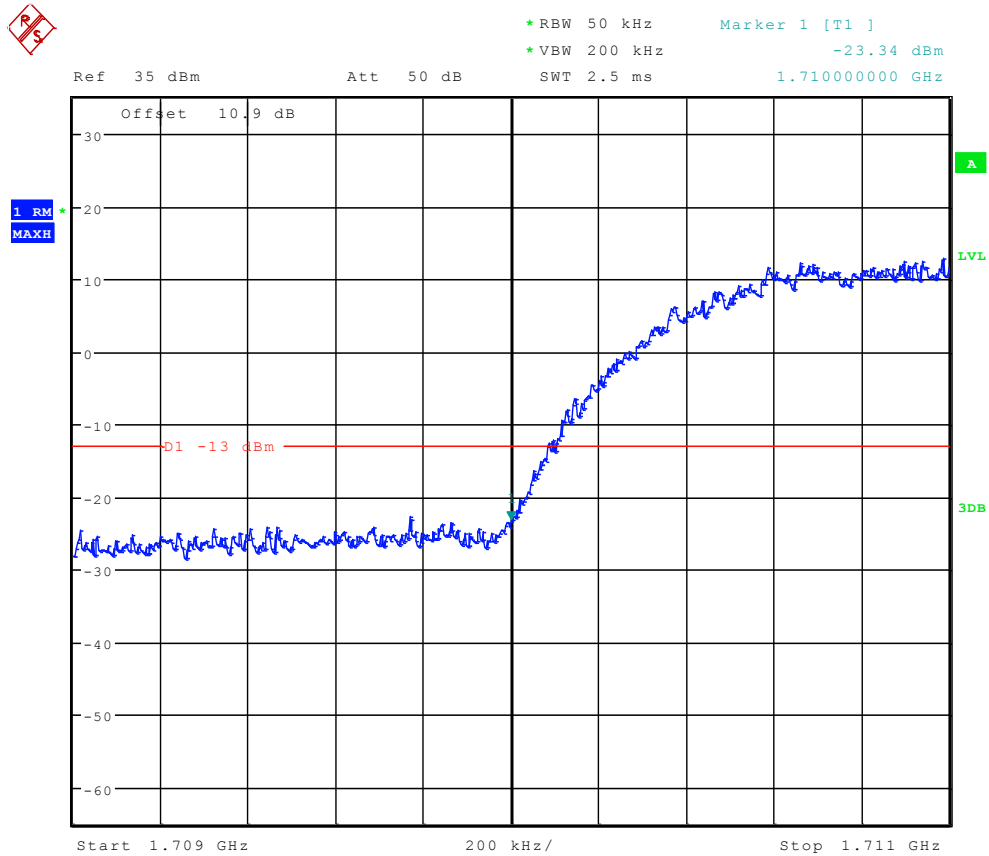

Date: 22.SEP.2011 01:04:47

Right Edge Channel 1513



```
* RBW 50 kHz      Marker 1 [T1 ]
* VBW 200 kHz      -21.53 dBm
  SWT 2.5 ms       1.755090000 GHz
```

Date: 22.SEP.2011 01:05:01



Appendix D


Spurious Emission at Antenna Terminal

According to FCC Part 2.1051 & Part 27 Subpart C&L




TM1: WCDMA


Channel 1312

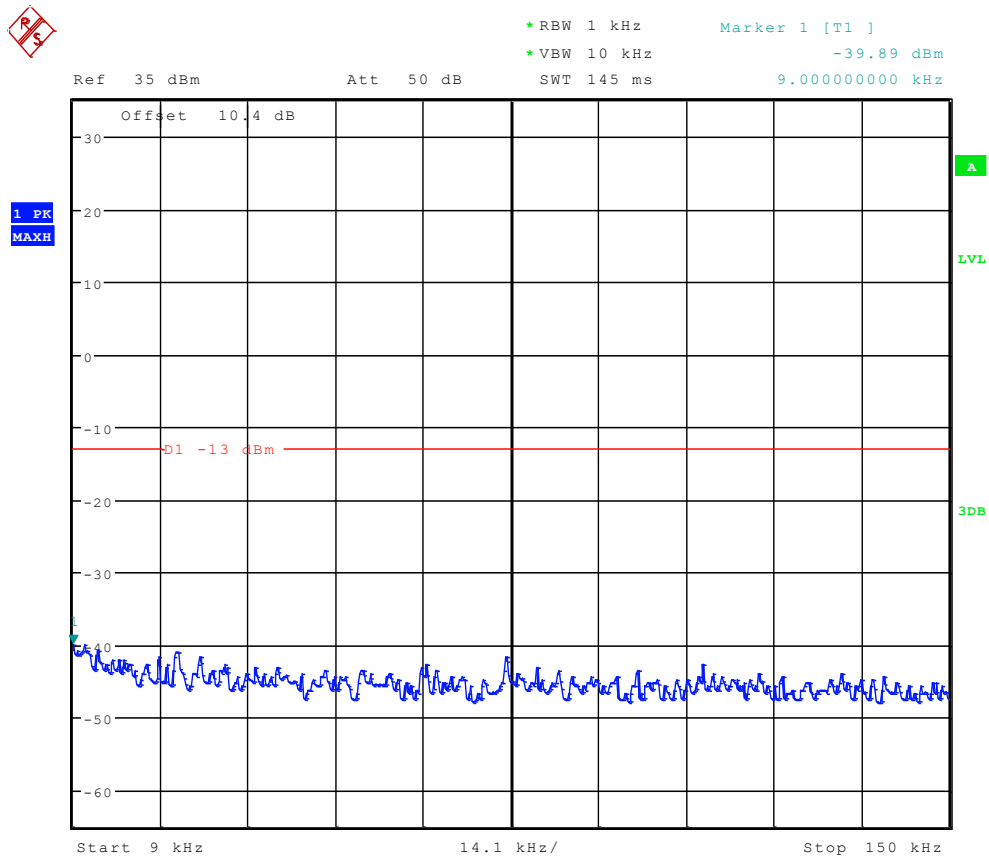

Date: 22.SEP.2011 01:05:15

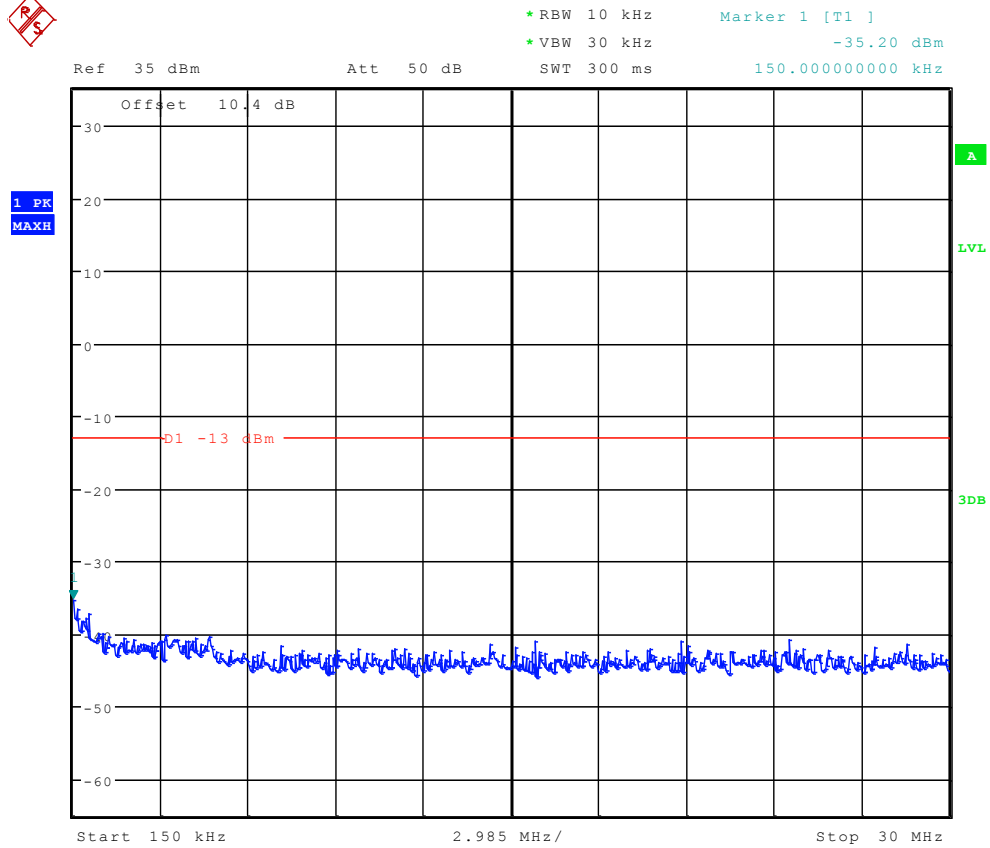


Date: 22.SEP.2011 01:05:59

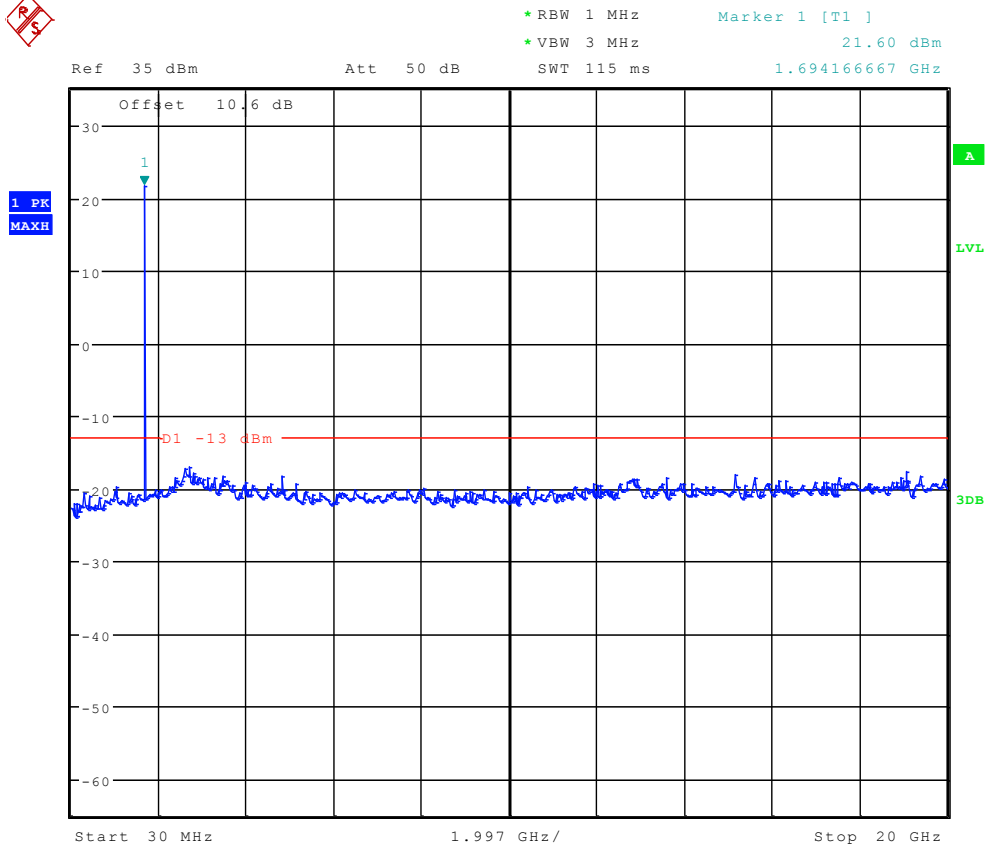


Date: 22.SEP.2011 01:06:43




Channel 1412

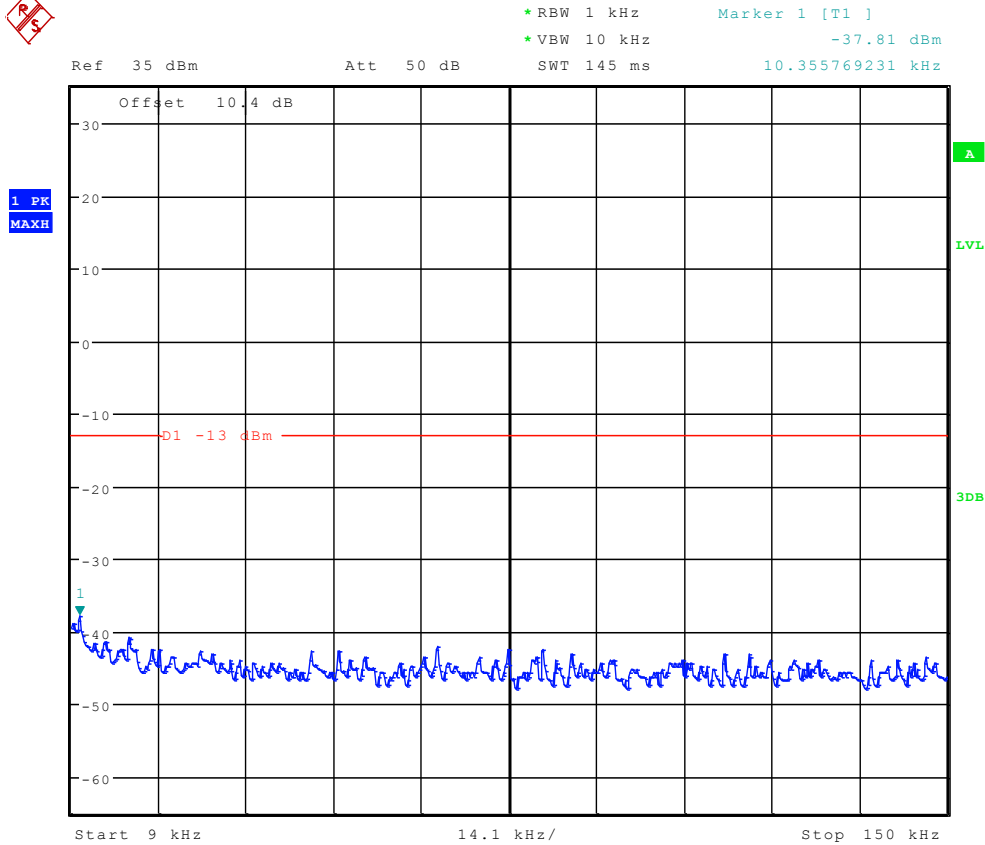

Date: 22.SEP.2011 01:05:30

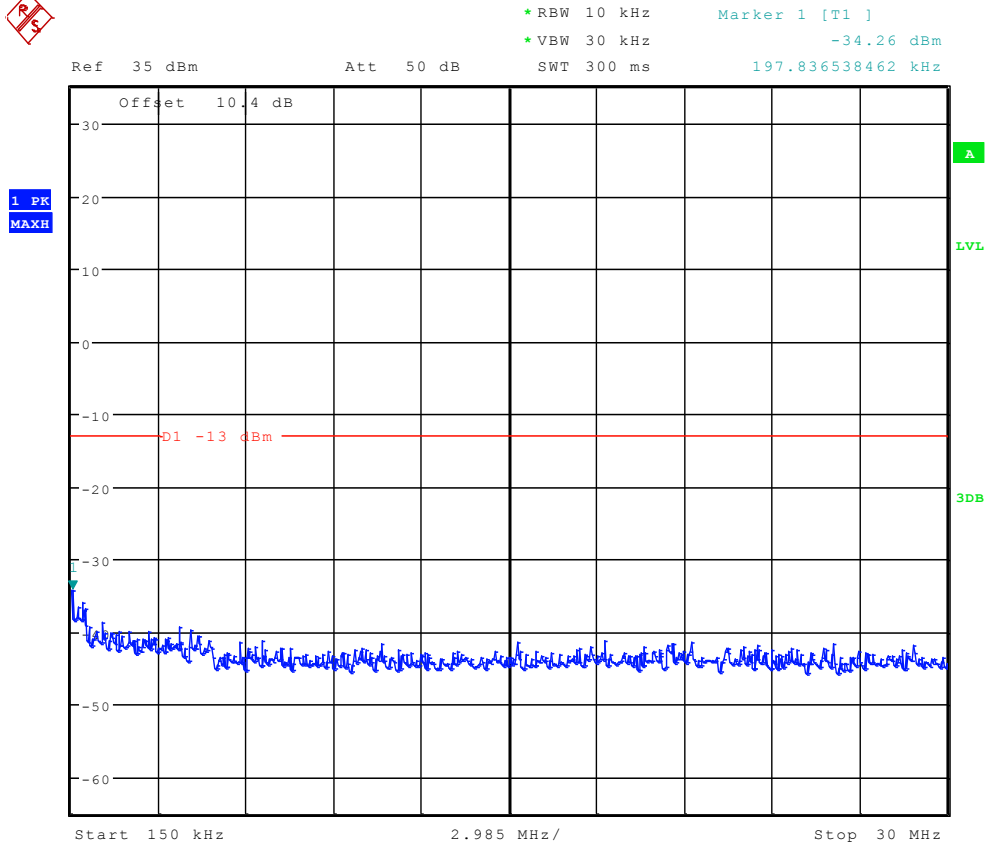


Date: 22.SEP.2011 01:06:14

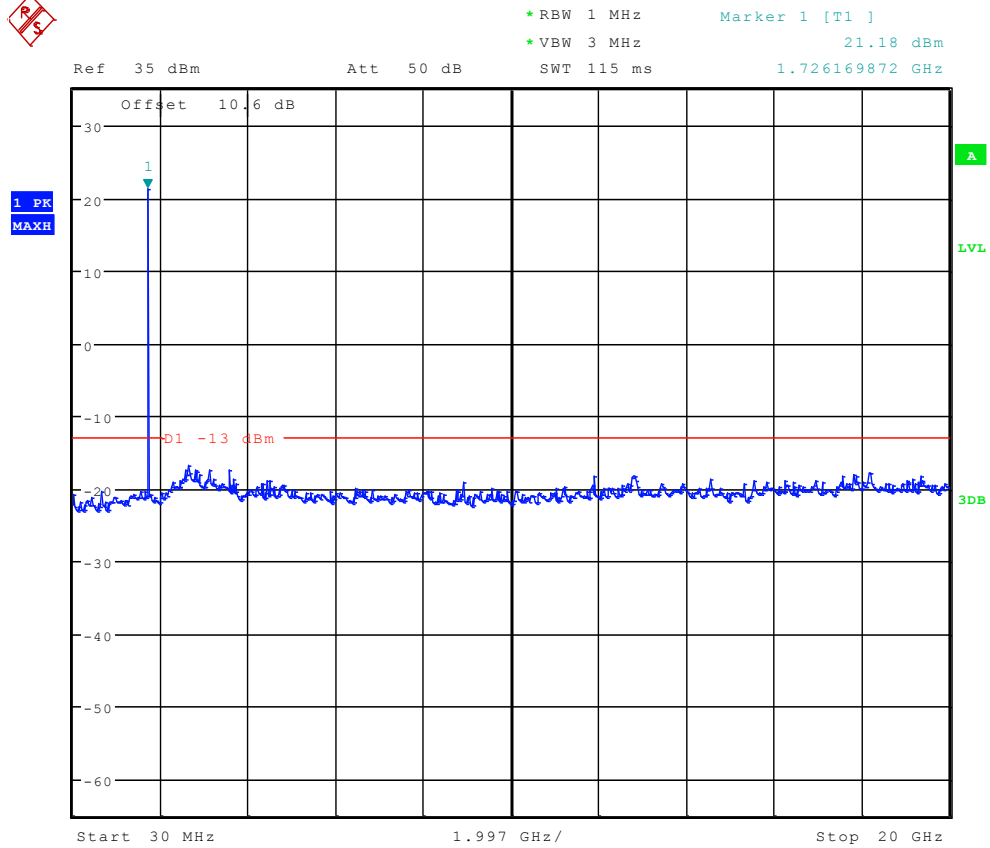


Date: 22.SEP.2011 01:06:57




Channel 1513

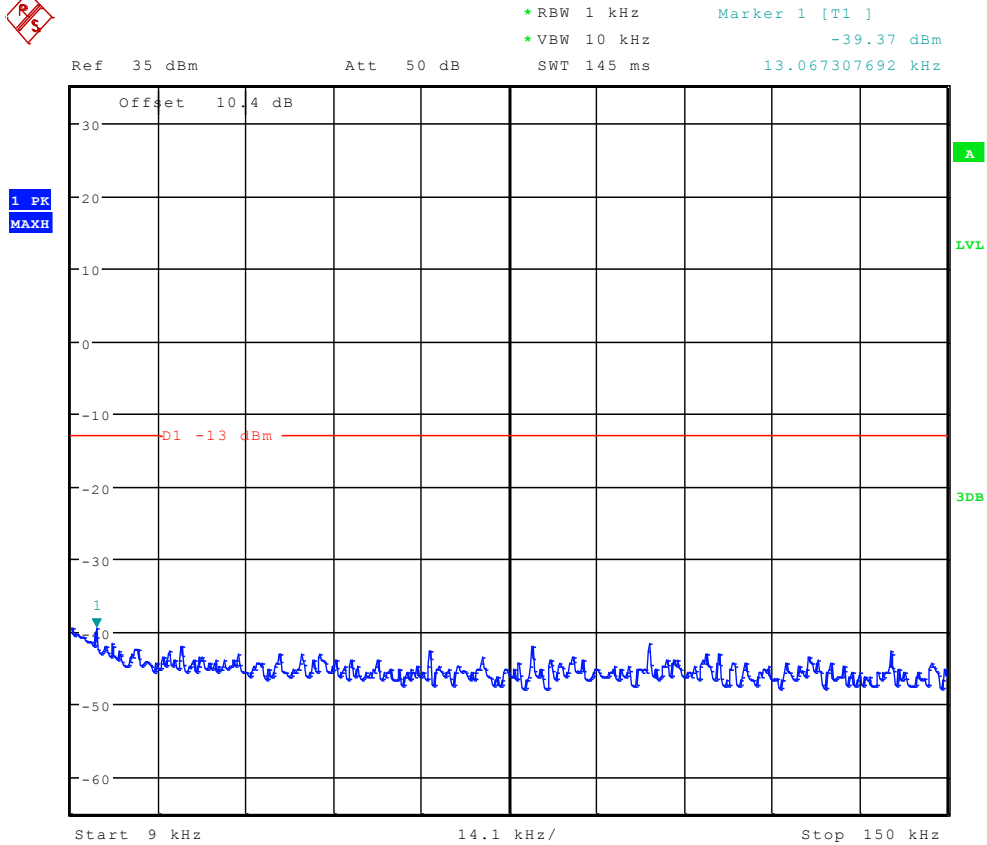

Date: 22.SEP.2011 01:05:44

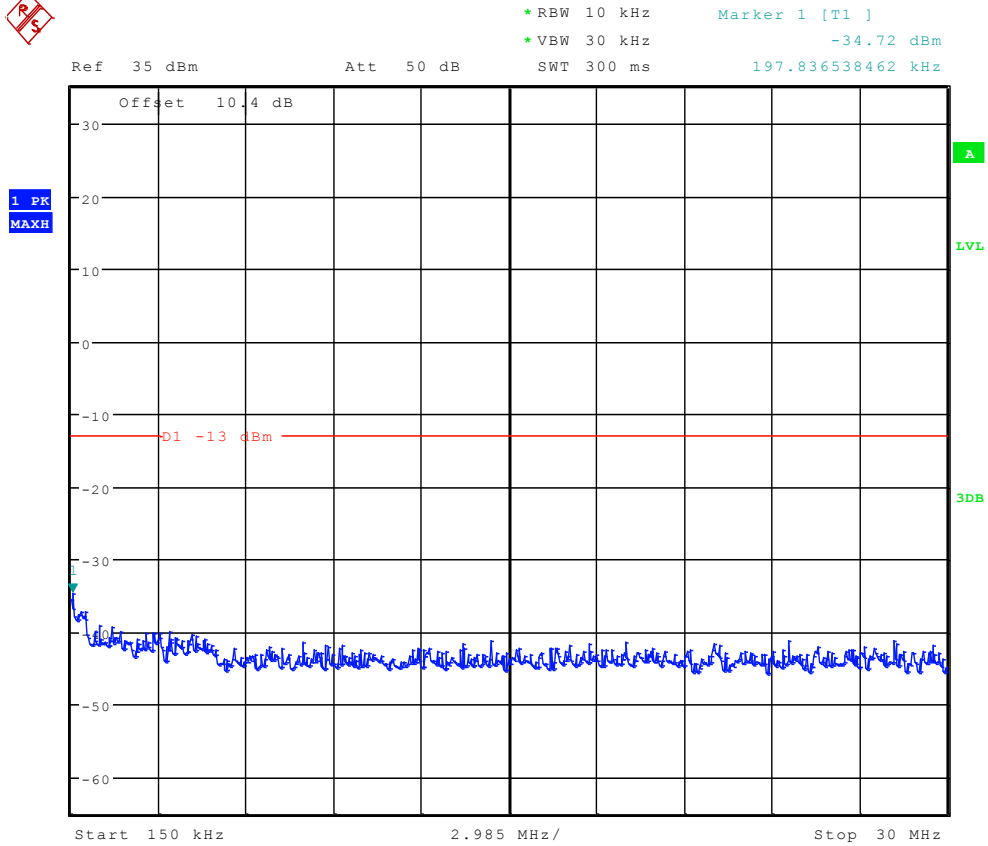

Date: 22.SEP.2011 01:06:28

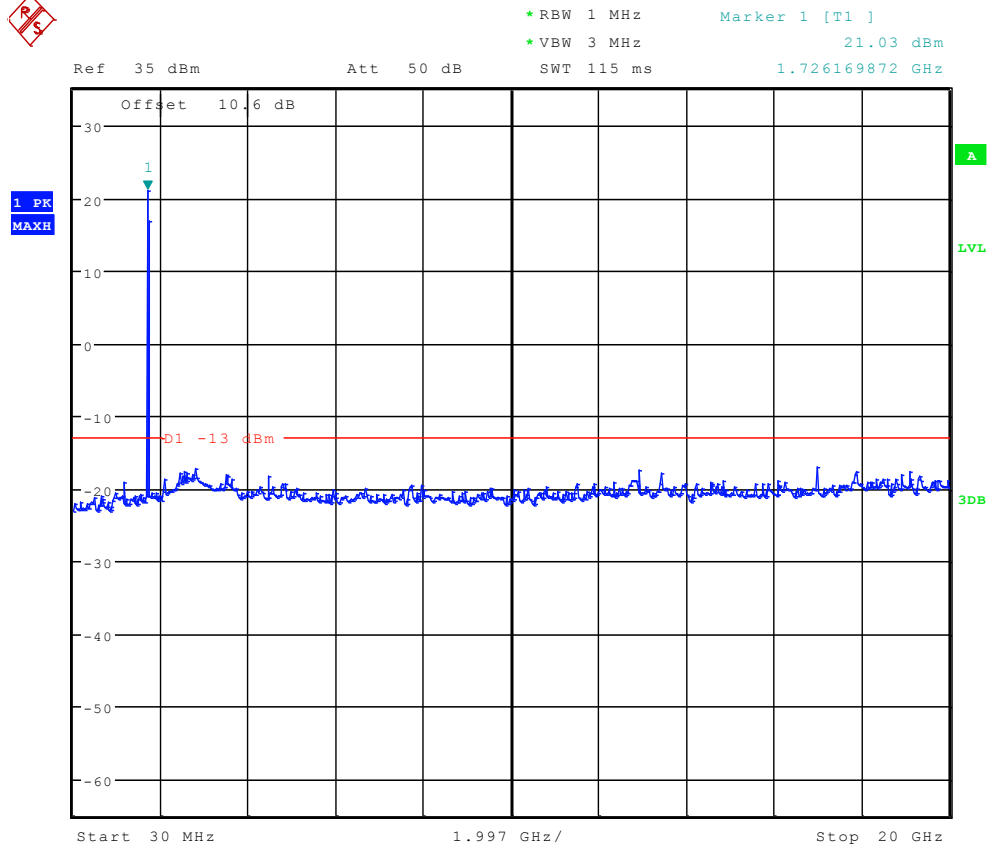

Date: 22.SEP.2011 01:07:12



Appendix E


Radiated spurious emission

According to FCC Part 2.1053& Part 27.53(g)




WCDMA AWS

(9kHz~30MHz)

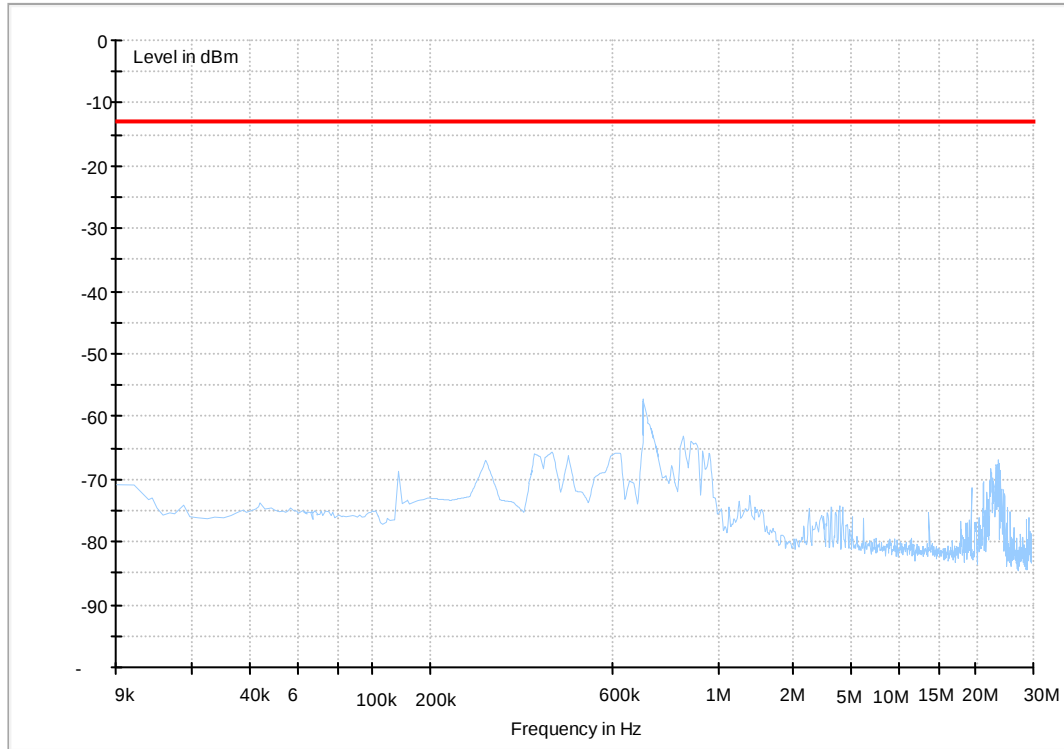




(30MHz~2GHz)

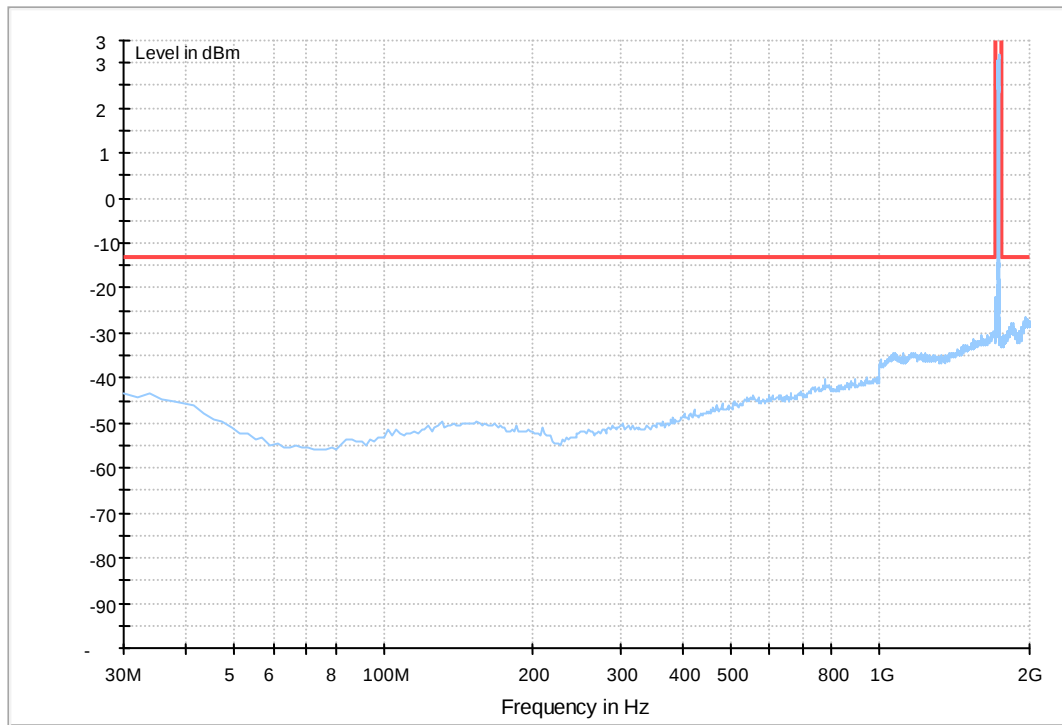




(2GHz~18GHz)

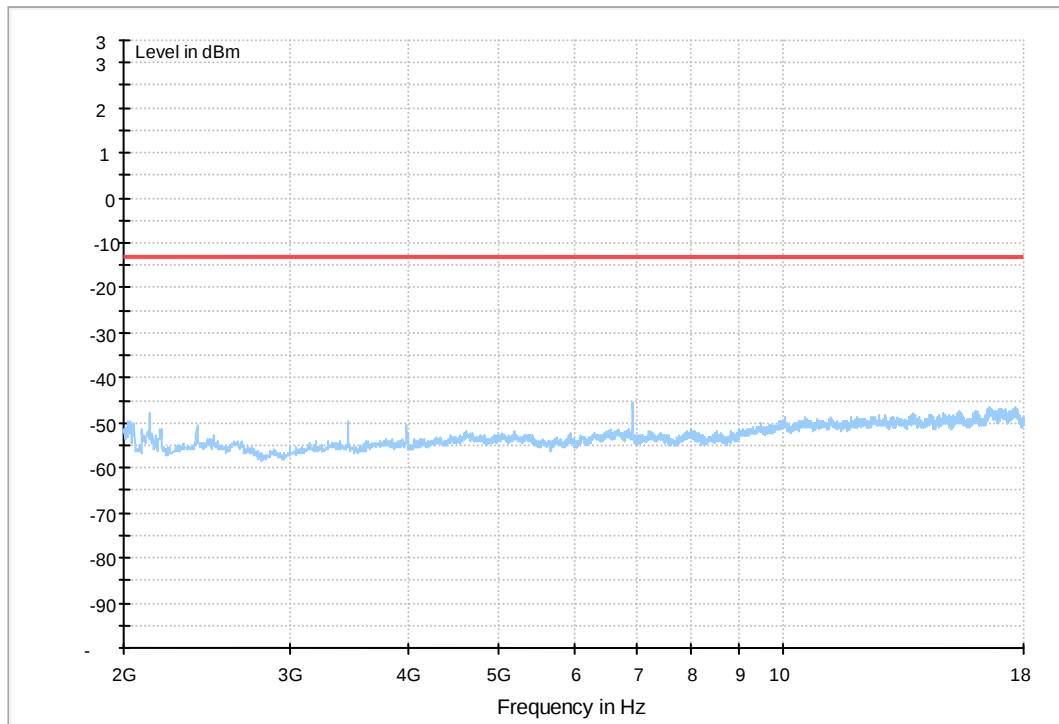




HSDPA AWS

(9kHz~30MHz)

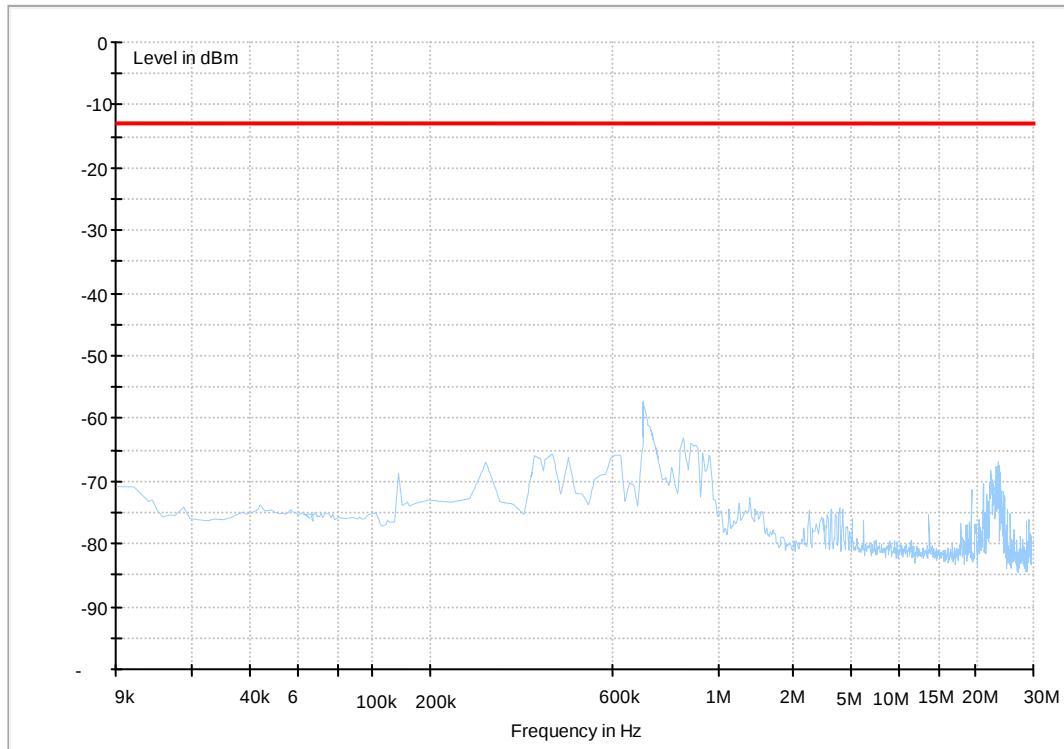




(30MHz~2GHz)

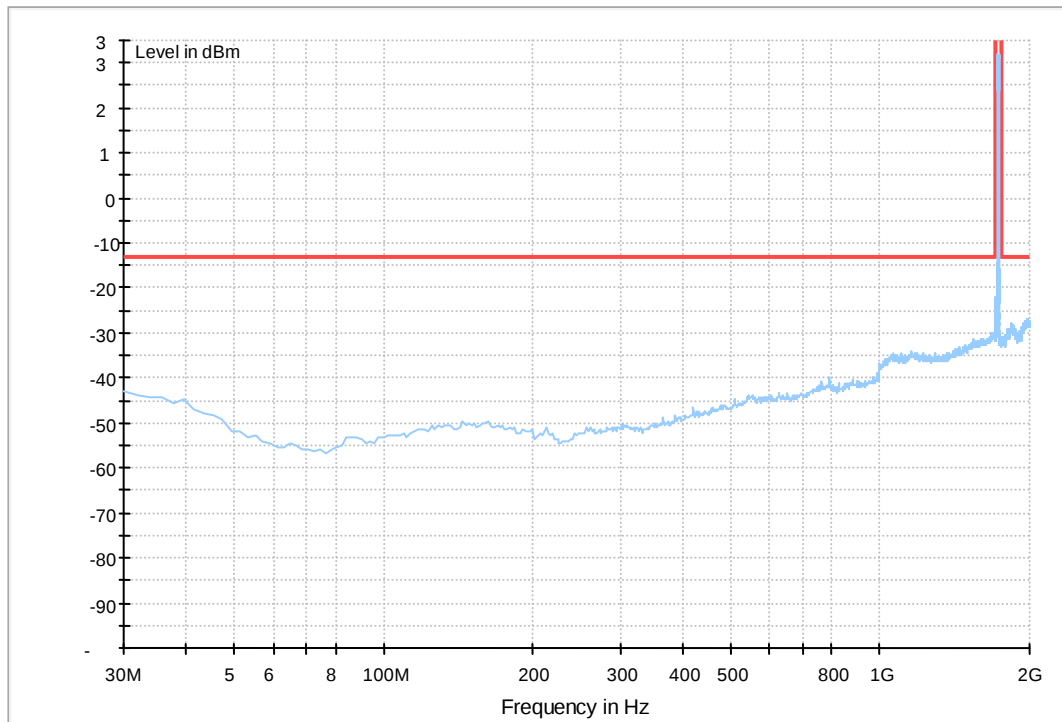




(2GHz~18GHz)

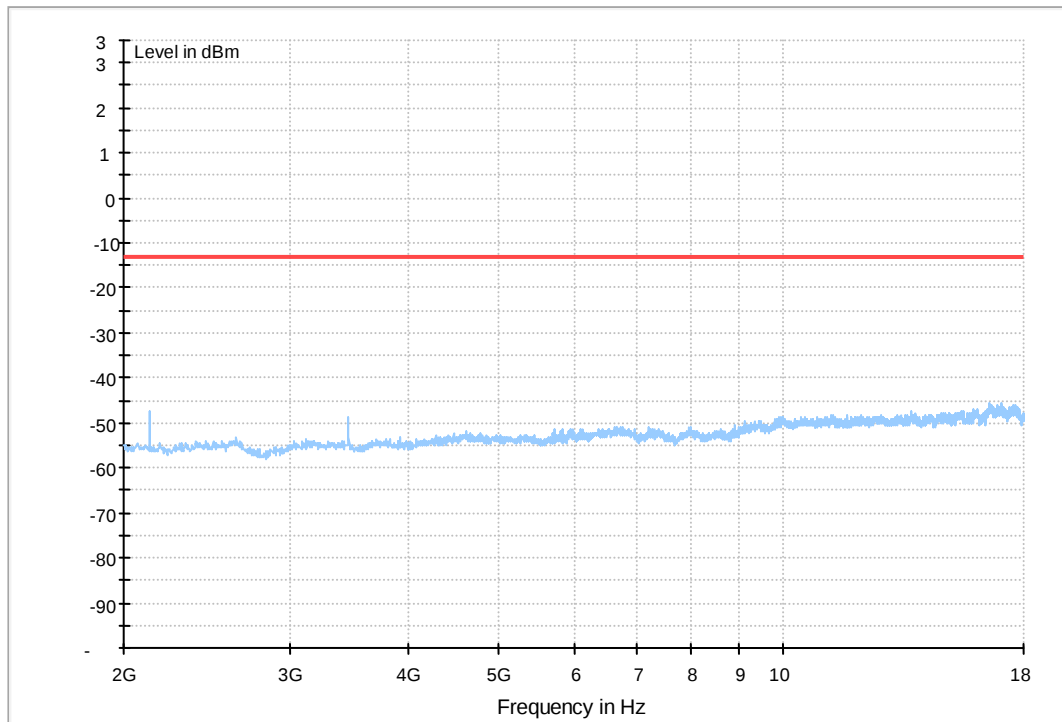




HSUPA AWS

(9kHz~30MHz)

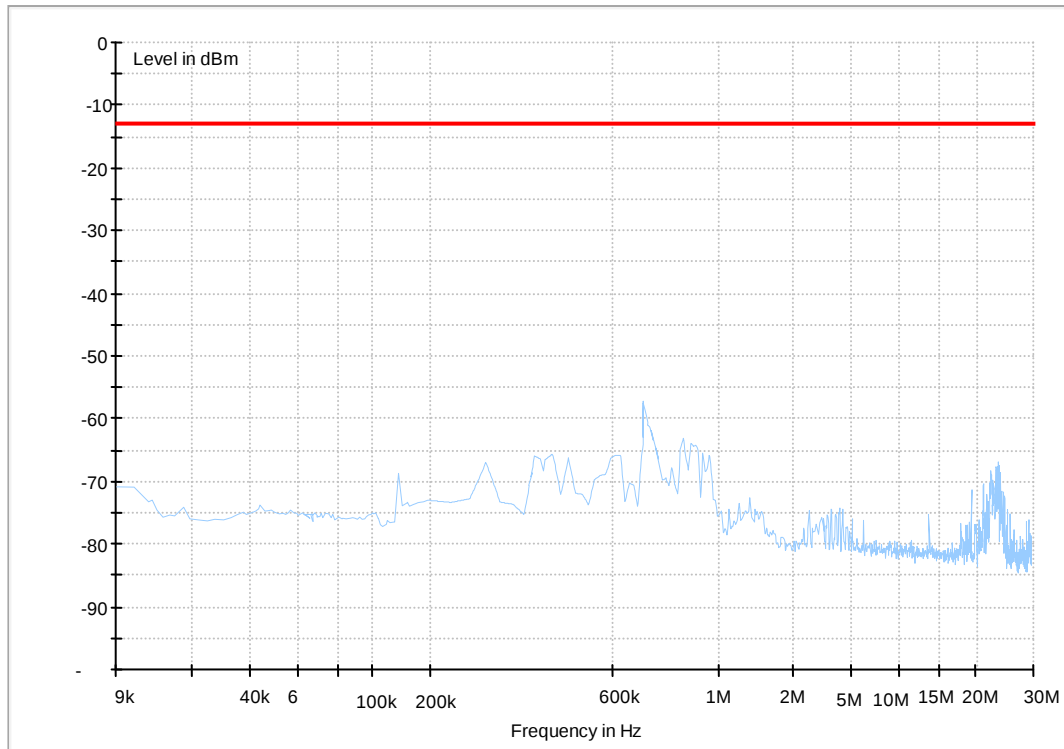



(30MHz~2GHz)

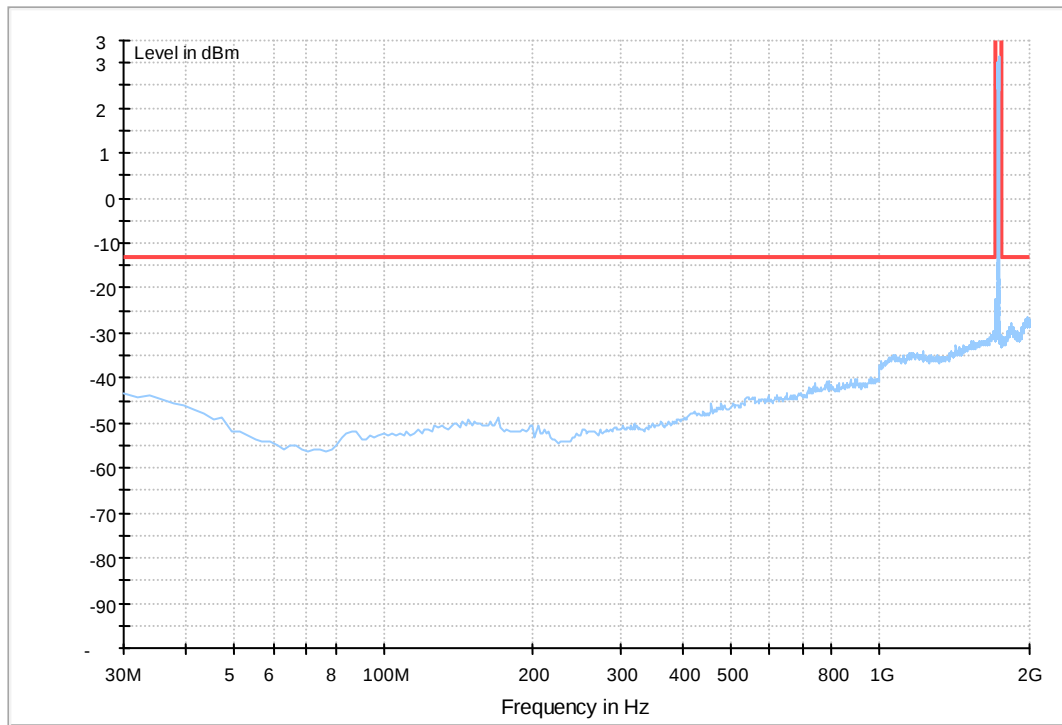



(2GHz~18GHz)

