



中国认可
国际互认
检测
TESTING
CNAS L0310



FCC SAR Compliance Test Report

Product Name: Smart Phone

Model: PRA-LX1

Report No.: SYBH(Z-SAR)015102016-2

FCC ID: QISPRA-LX1

	APPROVED (Lab Manager)	PREPARED (Test Engineer)
BY	<i>Wei Huanbin</i>	<i>He Peng</i>
DATE	2016-12-02	2016-12-02

Reliability Laboratory of Huawei Technologies Co., Ltd.

(Global Compliance and Testing Center of Huawei Technologies Co., Ltd)

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen,
518129, P.R.C

Tel: +86 755 28780808 Fax: +86 755 89652518

※ ※ **Notice** ※ ※

1. The laboratory has passed the accreditation by China National Accreditation Service for Conformity Assessment (CNAS). The accreditation number is L0310.
2. The laboratory has passed the accreditation by The American Association for Laboratory Accreditation (A2LA). The accreditation number is 2174.01 & 2174.02 & 2174.03
3. The laboratory (Reliability Lab of Huawei Technologies Co., Ltd) is also named “Global Compliance and Testing Center of Huawei Technologies Co., Ltd”, the both names have coexisted since 2009.
4. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
5. The test report is invalid if there is any evidence of erasure and/or falsification.
6. The test report is only valid for the test samples.
7. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.

Table of Contents

1	General Information.....	6
1.1	Statement of Compliance	6
1.2	RF exposure limits	7
1.3	EUT Description.....	8
1.3.1	General Description	10
1.3.2	Power reduction specification	11
1.3.3	Downlink LTE CA additional specification	12
1.4	Test specification(s).....	14
1.5	Testing laboratory	14
1.6	Applicant and Manufacturer.....	14
1.7	Application details	14
1.8	Ambient Condition.....	14
2	SAR Measurement System	15
2.1	SAR Measurement Set-up.....	15
2.2	Test environment	16
2.3	Data Acquisition Electronics description.....	16
2.4	Probe description	17
2.5	Phantom description	18
2.6	Device holder description	19
2.7	Test Equipment List	20
3	SAR Measurement Procedure	21
3.1	Scanning procedure.....	21
3.2	Spatial Peak SAR Evaluation	22
3.3	Data Storage and Evaluation.....	23
4	System Verification Procedure	25
4.1	Tissue Verification.....	25
4.2	System Check.....	27
4.3	System check Procedure.....	28
5	SAR measurement variability and uncertainty	29
5.1	SAR measurement variability	29
5.2	SAR measurement uncertainty.....	29
6	SAR Test Configuration.....	30
6.1	Test Positions Configuration.....	30
6.1.1	General considerations	30
6.1.2	Head Exposure Condition.....	30
6.1.3	Body-worn Exposure Condition	31
6.1.4	Hotspot Exposure Condition	32
6.2	3G SAR Test Reduction Procedure.....	32
6.3	GSM Test Configuration	33
6.4	UMTS Test Configuration	33
6.5	LTE Test Configuration	39
6.6	WiFi Test Configuration	41
6.6.1	Initial Test Position Procedure	41
6.6.2	Initial Test Configuration Procedure	41
6.6.3	Sub Test Configuration Procedure	41
6.6.4	WiFi 2.4G SAR Test Procedures	42
7	SAR Measurement Results	43
7.1	Conducted power measurements.....	43
7.1.1	Conducted power measurements of GSM850	44
7.1.2	Conducted power measurements of GSM1900	45
7.1.3	Conducted power measurements of UMTS Band II	47
7.1.4	Conducted power measurements of UMTS Band V.....	49
7.1.5	Conducted power measurements of LTE Band VII	50
7.1.6	Conducted power measurements of Downlink LTE CA	52
7.1.7	Conducted power measurements of WiFi 2.4G.....	53
7.1.8	Conducted power measurements of BT	53
7.2	SAR measurement Results	54

7.2.1	SAR measurement Result of GSM850	56
7.2.2	SAR measurement Result of GSM1900	58
7.2.3	SAR measurement Result of UMTS Band II	59
7.2.4	SAR measurement Result of UMTS Band V	61
7.2.5	SAR measurement Result of LTE Band VII.....	63
7.2.6	SAR measurement Result of WiFi 2.4G	66
7.3	Multiple Transmitter Evaluation	71
7.3.1	Stand-alone SAR test exclusion	72
7.3.2	Simultaneous Transmission Possibilities.....	73
7.3.3	SAR Summation Scenario	74
7.3.4	Simultaneous Transmission Conclusion.....	74
	Appendix A. System Check Plots.....	75
	Appendix B. SAR Measurement Plots.....	75
	Appendix C. Calibration Certificate	75
	Appendix D. Photo documentation.....	75

※ ※ **Modified History** ※ ※

REV.	DESCRIPTION	ISSUED DATE	REMARK
Rev.1.0	Initial Test Report Release	2016-12-02	He Peng

1 General Information

1.1 Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for PRA-LX1 is as below Table 1.

Band	Max Reported SAR(W/kg)		
	1-g Head SAR	1-g Body-worn SAR (15mm) *	1-g Hotspot SAR (10mm)
GSM850	0.26	0.30	0.67
GSM1900	0.20	0.63	0.66
UMTS Band II	0.29	1.27	0.78
UMTS Band V	0.26	0.35	0.38
LTE Band VII	0.46	0.39	0.99
WiFi 2.4G	1.12	0.09	0.21
BT	/	/	/
The highest reported SAR for head, body-worn, hotspot and simultaneous transmission exposure conditions are 1.12W/kg, 1.27W/kg, 0.99W/kg, and 1.58 W/kg respectively per KDB690783 D01.			

Table 1: Summary of test result

Note:

1)* For body worn operation, this device has been tested and meets FCC RF exposure guidelines when used with any accessory that contains no metal and that positions the handset a minimum of 15mm from the body. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.

The device is in compliance with Specific Absorption Rate(SAR) for general population/uncontrolled exposure limits according to the FCC rule §2.1093, the ANSI C95.1:1992/IEEE C95.1:1991, the NCRP Report Number 86 for uncontrolled environment, according to the Industry Canada Radio Standards Specification RSS-102 for General Population/Uncontrolled exposure, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2013.

1.2 RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR* (Brain/Body/Arms/Legs)	1.60 W/kg	8.00 W/kg
Spatial Average SAR** (Whole Body)	0.08 W/kg	0.40 W/kg
Spatial Peak SAR*** (Hands/Feet/Ankle/Wrist)	4.00 W/kg	20.00 W/kg

Table 2: RF exposure limits

The limit applied in this test report is shown in **bold** letters

Notes:

- * The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
- ** The Spatial Average value of the SAR averaged over the whole body.
- *** The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

1.3 EUT Description

Device Information:			
Product Name:	Smart Phone		
Model:	PRA-LX1		
FCC ID :	QISPRA-LX1		
IMEI:	1#:862550030024773 2#:862550030025663 3#:862550030024799		
Device Type :	Portable device		
Device Phase:	Identical Prototype		
Exposure Category:	Uncontrolled environment / general population		
Hardware Version :	HL2PRAM		
Software Version :	PRA-LX1C900B017		
Antenna Type :	Internal antenna		
Others Accessories	Headset		
Device Operating Configurations:			
Supporting Mode(s)	GSM850/1900, UMTS Band II/V, LTE Band VII, WiFi 2.4G, BT,NFC		
Test Modulation	GSM(GMSK/8PSK),UMTS(QPSK),LTE(QPSK/16QAM), WiFi(DSSS/OFDM),BT(GFSK)		
Device Class	B		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	GSM850	824-849	869-894
	GSM1900	1850-1910	1930-1990
	UMTS Band II	1850-1910	1930-1990
	UMTS Band V	824-849	869-894
	LTE Band VII	2500-2570	2620-2690
	BT	2400-2483.5	
	WiFi 2.4G	2412-2462	
	NFC	13.56	
GPRS Multislot Class(12)	Max Number of Timeslots in Uplink:	4	
	Max Number of Timeslots in Downlink:	4	
	Max Total Timeslot:	5	
EGPRS Multislot Class(12)	Max Number of Timeslots in Uplink:	4	
	Max Number of Timeslots in Downlink:	4	
	Max Total Timeslot:	5	

HSDPA UE Category	14
HSUPA UE Category	6
DC-HSDPA UE Category	24
Power Class:	4, tested with power level 5(GSM850)
	1, tested with power level 0(GSM1900)
	3, tested with power control "all 1"(UMTS Band II)
	3, tested with power control "all 1"(UMTS Band V)
	3, tested with power control all Max.(LTE Band VII)
Test Channels (low-mid-high):	128-190-251(GSM850)
	512-661-810(GSM1900)
	9262-9400-9538(UMTS Band II)
	4132-4182-4233(UMTS Band V)
	20775-21100-21425(LTE Band VII BW=5MHz)
	20800-21100-21400(LTE Band VII BW=10MHz)
	20825-21100-21375(LTE Band VII BW=15MHz)
	20850-21100-21350(LTE Band VII BW=20MHz)
	802.11b/g/n 20M:1-6-11
802.11n 40M:3-6-9 (WiFi 2.4G)	

Table 3: Device information and operating configuration

1.3.1 General Description

PRA-LX1 is subscriber equipment in the GSM/UMTS/LTE system.

The GSM frequency band includes GSM850 and GSM900 and DCS1800 and PCS1900. but only GSM850/1900 test data included in this report.

The UMTS frequency band is band I and band II and band V and Band VIII ,but only band II and Band V test data included in this report.

The LTE frequency band is Band I and band III and band VII and band VIII and band XX, but only VII test data included in this report.

The Mobile Phone implements such functions as RF signal receiving/transmitting, LTE/UMTS and GSM/GPRS/EDGE protocol processing, voice, video MMS service, GPS and Wi-Fi etc. Externally it provides micro SD card interface, earphone port (to provide voice service) and USIM card interface. Different versions of the software, the phone may support single SIM card or double SIM card. It also provides Bluetooth module to synchronize data between a PC and the phone, or to use the built-in modem of the phone to access the Internet with a PC, or to exchange data with other Bluetooth devices.

Battery information:

Name	Manufacture	Serials number	Description
Li-Polymer Battery	SCUD	NA	Battery Model: HB366481ECW- Rated capacity: 2900 mAh
	Sunwoda	NA	
	Desay	NA	Nominal Voltage: \approx +3.82V

Difference description:

The differences between PRA-LX1 and PRA-LX3 as below:

Model	PRA-LX3	PRA-LX1
Trade mark	HUAWEI	HUAWEI
FCC ID	FCC ID:QISPRALX3	FCC ID:QISPRALX1
Frequency	GSM: B2/3/5/8 WCDMA: B1/2/4/5/8 LTE:B2/4/5/7/12/17/28 802.11 b/g/n 2.4G	GSM B2/3/5/8 WCDMA B1/2/5/8 LTE B1/3/7/8/20(B3/7/20 CA) 802.11 b/g/n 2.4G Frequency disabled by hardware, Changes are followed: 1. change B4 duplexer to B3 duplexer. 2. change B12/B17 duplexer to B20 duplexer. 3. add B8 div SAW. 4. delete B28 div SAW. 5. delete B28L/B28H duplexer. 6. delete B12/17 div saw. 7. change B5 div saw to B20 div saw. 8. add B3 div LNA and SAW 9. delete B2 div SAW 10. add B3/7/20 CA duplexer 11. add B3 SP2T.
SIM Card	double	double
NFC	NA	support
RAM	3G	the same
Hardware Version	the same	the same
Software Version	different	different
Dimensions	the same	the same
Appearance	the same	the same
main antenna	antenna shape are same, antenna matching are different	antenna shape are same, antenna matching are different
BT/Wi-Fi antenna	The same	The same
NFC antenna	No NFC antenna	Add NFC antenna
Others	the same	the same

According to the difference description above, for BT/Wi-Fi antenna, PRA-LX1 is tested at the worst case of PRA-LX3(report no.: SYBH(Z-SAR)006102016-2). For the other bands, new full SAR test is performed on PRA-LX1.

1.3.2 Power reduction specification

This device uses a single fixed level of power reduction through static table look-up for SAR compliance and it is triggered by a single event or operation:

A fixed level power reduction is applied for some frequency bands when hotspot mode becomes active. When the hotspot is disabled, the power value will be recovered.

The following tables summarize the key power reduction information. The detailed full power and reduced tune-up specifications and conducted power measurement results are provided in Section 7 of this report.

Band	Power Reduction Level Amount (dB)	
	Main Antenna	
	Hotspot is active	Hotspot is disabled
GSM1900	4.0	0
UMTS Band II	6.0	0

1.3.3 Downlink LTE CA additional specification

The device supports downlink LTE Carrier Aggregation (CA) only. Other Release 10 or higher features are not supported, including Uplink Carrier Aggregation, Enhanced SC-FDMA and Uplink MIMO or other antenna diversity configurations etc. All uplink communications are identical to the Release 8 Specifications.

The possible downlink LTE CA combinations supported by this device are as below tables per 3GPP TS 36.101 V13.2.1. The conducted power measurement results of downlink LTE CA are provided in Section 7 of this report per 3GPP TS 36.521-1 V13.0.1. According to KDB 941225 D05A, the downlink LTE CA SAR test is not required and PAG requirements can be excluded.

intra-band contiguous CA(per 3GPP TS 36.101 V13.2.1 Table 5.6A.1-1)

E-UTRA CA configuration / Bandwidth combination set					
E-UTRA CA configuration	Component carriers in order of increasing carrier frequency			Maximum aggregated bandwidth [MHz]	Bandwidth combination set
	Channel bandwidths for carrier [MHz]	Channel bandwidths for carrier [MHz]	Channel bandwidths for carrier [MHz]		
CA_7C	15	15		40	0
	20	20			
	10	20		40	1
	15	15, 20			
	20	10, 15, 20			

NOTE 1: The CA configuration refers to an operating band and a CA bandwidth class specified in Table 5.6A-1 (the indexing letter). Absence of a CA bandwidth class for an operating band implies support of all classes.

NOTE 2: For the supported CC bandwidth combinations, the CC downlink and uplink bandwidths are equal.

Table 4.3.1.1A-1: Test frequencies for CA_7C

Range	CC-Combo / NRB_agg [RB]	CC1 Note1					CC2 Note1				
		BW [RB]	N _{UL}	f _{UL} [MHz]	N _{DL}	f _{DL} [MHz]	BW [RB]	N _{UL}	f _{UL} [MHz]	N _{DL}	f _{DL} [MHz]
Low	50+100	50	20805	2505.5	2805	2625.5	100	20949	2519.9	2949	2639.9
		100	20850	2510	2850	2630	50	20994	2524.4	2994	2644.4
	75+75	75	20825	2507.5	2825	2627.5	75	20975	2522.5	2975	2642.5
	75+100	75	20828	2507.8	2828	2627.8	100	20999	2524.9	2999	2644.9
		100	20850	2510	2850	2630	75	21021	2527.1	3021	2647.1
100+100	100	20850	2510	2850	2630	100	21048	2529.8	3048	2649.8	
Mid	50+100	50	21006	2525.6	3006	2645.6	100	21150	2540	3150	2660
		100	21051	2530.1	3051	2650.1	50	21195	2544.5	3195	2664.5
	75+75	75	21025	2527.5	3025	2647.5	75	21175	2542.5	3175	2662.5
	75+100	75	21003	2525.3	3003	2645.3	100	21174	2542.4	3174	2662.4
		100	21026	2527.6	3026	2647.6	75	21197	2544.7	3197	2664.7
100+100	100	21001	2525.1	3001	2645.1	100	21199	2544.9	3199	2664.9	
High	50+100	50	21206	2545.6	3206	2665.6	100	21350	2560	3350	2680
		100	21251	2550.1	3251	2670.1	50	21395	2564.5	3395	2684.5
	75+75	75	21225	2547.5	3225	2667.5	75	21375	2562.5	3375	2682.5
	75+100	75	21179	2542.9	3179	2662.9	100	21350	2560	3350	2680
		100	21201	2545.1	3201	2665.1	75	21372	2562.2	3372	2682.2
100+100	100	21152	2540.2	3152	2660.2	100	21350	2560	3350	2680	

Note 1: Carriers in increasing frequency order.

Table 5.6A.1-2: E-UTRA CA configurations and bandwidth combination sets defined for inter-band CA (two bands)

E-UTRA CA configuration / Bandwidth combination set									
E-UTRA CA Configuration	E-UTRA Bands	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz	Maximum aggregated bandwidth [MHz]	Bandwidth combination set
CA_3A-7A	3			Yes	Yes	Yes	Yes	40	0
	7				Yes	Yes	Yes		
CA_7A-20A	7				Yes	Yes	Yes	30	0
	20			Yes	Yes				

NOTE 1: The CA Configuration refers to a combination of an operating band and a CA bandwidth class specified in Table 5.4.2A-1 (the indexing letter). Absence of a CA bandwidth class for an operating band implies support of all classes.

NOTE 2: For each band combination, all combinations of indicated bandwidths belong to the set

NOTE 3: For the supported CC bandwidth combinations, the CC downlink and uplink bandwidths are equal

Note:

- 1) For the inter-band CA combinations, bands above can be used as PCC or SCC.
- 2) The channel spacing and aggregated channel bandwidth for CA are identical to the associated specification in 3GPP TS 36.101 V13.2.1.
- 3) The reference test frequencies for CA refers to 3GPP TS 36.508 V12.5.0.

1.4 Test specification(s)

ANSI C95.1:1992	Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.(IEEE Std C95.1-1991)
IEEE Std 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
RSS-102	Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands (Issue 5 of March 2015)
KDB941225 D01	3G SAR Procedures v03r01
KDB941225 D05	SAR for LTE Devices v02r05
KDB941225 D05A	LTE Rel.10 KDB Inquiry Sheet v01r02
KDB941225 D06	Hotspot SAR v02r01
KDB447498 D01	General RF Exposure Guidance v06
KDB648474 D04	Handsets SAR v01r03
KDB248227 D01	SAR Guidance for IEEE 802 11 Wi-Fi SAR v02r02
KDB865664 D01	SAR measurement 100 MHz to 6 GHz v01r04
KDB865664 D02	SAR Reporting v01r02
KDB690783 D01	SAR Listings on Grants v01r03

1.5 Testing laboratory

Test Site	The Reliability Laboratory of Huawei Technologies Co., Ltd.
Test Location	Section G1,Huawei Base Bantian, Longgang District, Shenzhen 518129, P.R. China
Telephone	+86 755 28780808
Fax	+86 755 89652518
State of accreditation	The Test laboratory (area of testing) is accredited according to ISO/IEC 17025. CNAS Registration number: L0310 A2LA TESTING CERT #2174.01 & 2174.02 & 2174.03

1.6 Applicant and Manufacturer

Company Name	HUAWEI TECHNOLOGIES CO., LTD
Address	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

1.7 Application details


Start Date of test	2016-11-04
End Date of test	2016-11-15

1.8 Ambient Condition

Ambient temperature	20°C – 24°C
Relative Humidity	30% – 70%

2 SAR Measurement System

2.1 SAR Measurement Set-up

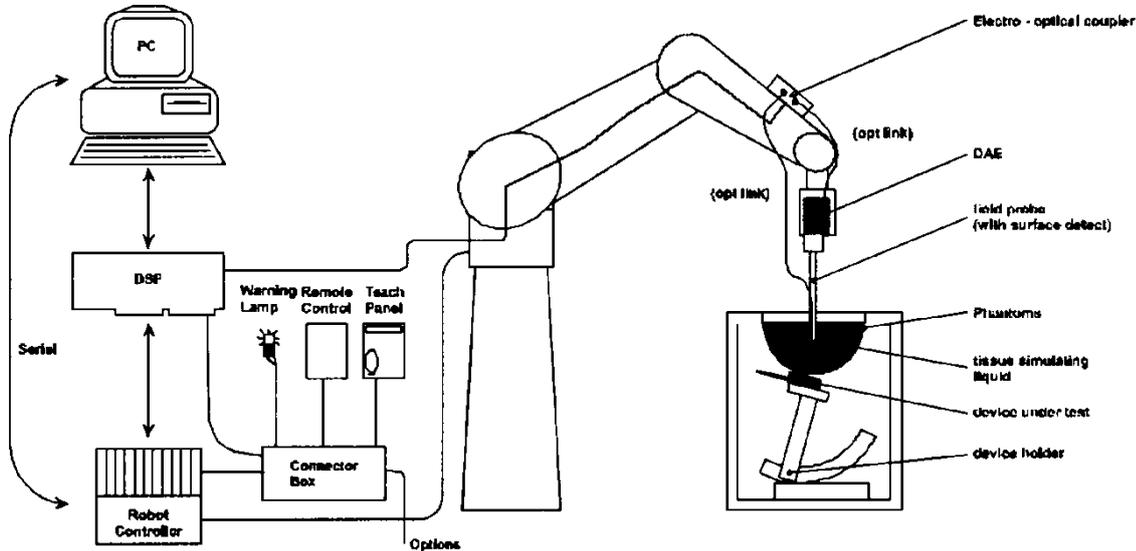

The DASY5 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- A unit to operate the optical surface detector which is connected to the EOC.
- The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.
- The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 7.
- DASY5 software and SEMCAD data evaluation software.
- Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
- The generic twin phantom enabling the testing of left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- System check dipoles allowing to validate the proper functioning of the system.

2.2 Test environment

The DASY5 measurement system is placed at the head end of a room with dimensions: 5 x 2.5 x 3 m³, the SAM phantom is placed in a distance of 75 cm from the side walls and 1.1m from the rear wall. Above the test system a 1.5 x 1.5 m² array of pyramid absorbers is installed to reduce reflections from the ceiling.

Picture 1 of the photo documentation shows a complete view of the test environment.

The system allows the measurement of SAR values larger than 0.005 mW/g.

2.3 Data Acquisition Electronics description

The data acquisition electronics (DAE) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converte and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.


DAE4

Input Impedance	200MOhm	
The Inputs	symmetrical and floating	
Common mode rejection	above 80 dB	

2.4 Probe description

These probes are specially designed and calibrated for use in liquids with high permittivities. They should not be used in air, since the spherical isotropy in air is poor (± 2 dB). The dosimetric probes have special calibrations in various liquids at different frequencies.

Isotropic E-Field Probe ES3DV3 for Dosimetric Measurements

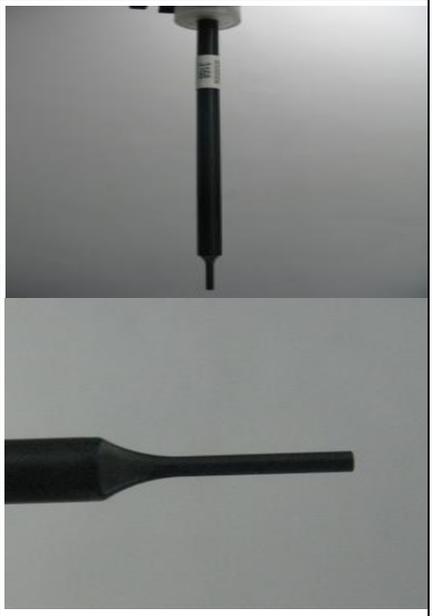Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Calibration	ISO/IEC 17025 calibration service available.	
Frequency	10 MHz to 4 GHz; Linearity: ± 0.2 dB (30 MHz to 4 GHz)	
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.3 dB in tissue material (rotation normal to probe axis)	
Dynamic range	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 3.9 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.0 mm	
Application	General dosimetry up to 4 GHz Dosimetry in strong gradient fields Compliance tests of mobile phones	

Isotropic E-Field Probe EX3DV4 for Dosimetric Measurements

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Calibration	ISO/IEC 17025 calibration service available.	
Frequency	10 MHz to >6 GHz; Linearity: ± 0.2 dB (30 MHz to 6 GHz)	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic range	10 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%	


2.5 Phantom description

SAM Twin Phantom

Shell Thickness	2mm±0.2mm;The ear region:6.0±0.2mm	
Filling Volume	Approximately 25 liters	
Dimensions	Length:1000mm; Width:500mm; Height: adjustable feet	
Measurement Areas	Left hand Right hand Flat phantom	

The bottom plate contains three pairs of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to cover the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. Free space scans of devices on top of this phantom cover are possible. Three reference marks are provided on the phantom counter. These reference marks are used to teach the absolute phantom position relative to the robot.

The following figure shows the definition of reference point:

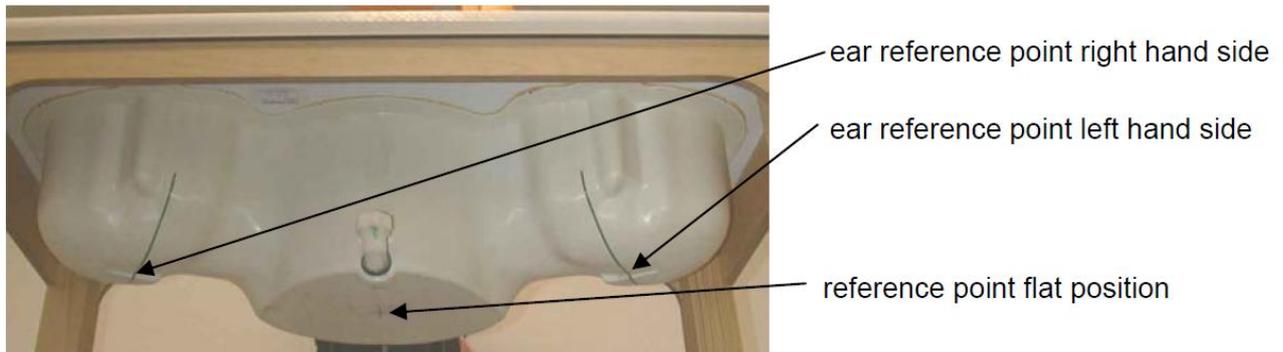

ELI4 Phantom

Shell Thickness	2mm±0.2mm	
Filling Volume	Approximately 30 liters	
Dimensions	Major axis:600mm; Minor axis:400mm;	
Measurement Areas	Flat phantom	

The ELI4 phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30MHz to 6GHz. ELI4 is fully compatible with the latest draft of the standard IEC 62209-2 and all known tissue simulating liquids.

The phantom shell material is resistant to all ingredients used in the tissue-equivalent liquid recipes. The shell of the phantom including ear spacers is constructed from low permittivity and low loss material, with a relative permittivity $2 \leq \epsilon_r \leq 5$ at ≤ 3 GHz, $3 \leq \epsilon_r \leq 4$ at > 3 GHz and a loss tangent ≤ 0.05 .

2.6 Device holder description

The DASY5 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65° . The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. This device holder is used for standard mobile phones or PDA's only. If necessary an additional support of polystyrene material is used.



The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\sigma = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

The device holder permits the device to be positioned with a tolerance of $\pm 1^\circ$ in the tilt angle.

Larger DUT's (e.g. notebooks) cannot be tested using this device holder. Instead a support of bigger polystyrene cubes and thin polystyrene plates is used to position the DUT in all relevant positions to find and measure spots with maximum SAR values.

Therefore those devices are normally only tested at the flat part of the SAM.

2.7 Test Equipment List

This table gives a complete overview of the SAR measurement equipment.

Devices used during the test described are marked

	Manufacturer	Device	Type	Serial number	Date of last calibration*	Valid period
<input checked="" type="checkbox"/>	SPEAG	Dosimetric E-Field Probe	ES3DV3	3168	2016-09-27	One year
<input type="checkbox"/>	SPEAG	750MHz Dipole	D750V3	1044	2016-09-28	Three years
<input checked="" type="checkbox"/>	SPEAG	835MHz Dipole	D835V2	4d059	2016-04-20	Three years
<input type="checkbox"/>	SPEAG	1750MHz Dipole	D1750V2	1123	2014-07-08	Three years
<input checked="" type="checkbox"/>	SPEAG	1900MHz Dipole	D1900V2	5d091	2015-09-21	Three years
<input checked="" type="checkbox"/>	SPEAG	2450MHz Dipole	D2450V2	835	2016-05-12	Three years
<input checked="" type="checkbox"/>	SPEAG	2600MHz Dipole	D2600V2	1021	2016-07-25	Three years
<input type="checkbox"/>	SPEAG	5GHz Dipole	D5GHzV2	1155	2016-04-26	Three years
<input checked="" type="checkbox"/>	SPEAG	Data acquisition electronics	DAE4	852	2016-04-20	One year
<input checked="" type="checkbox"/>	SPEAG	Software	DASY 5	N/A	NCR	NCR
<input checked="" type="checkbox"/>	SPEAG	Twin Phantom	SAM1	TP-1475	NCR	NCR
<input checked="" type="checkbox"/>	SPEAG	Twin Phantom	SAM2	TP-1474	NCR	NCR
<input checked="" type="checkbox"/>	R & S	Universal Radio Communication Tester	CMU 200	111379	2015-12-23	One year
<input checked="" type="checkbox"/>	R & S	Universal Radio Communication Tester	CMW 500	158850	2016-06-09	One year
<input checked="" type="checkbox"/>	Anritsu	Radio Communication Analyzer	MT8821C	6201588598	2016-06-16	One year
<input checked="" type="checkbox"/>	Agilent	Network Analyser	E5071C	MY46213349	2016-01-08	One year
<input checked="" type="checkbox"/>	Agilent	Dielectric Probe Kit	85070E	2484	NCR	NCR
<input checked="" type="checkbox"/>	Agilent	Signal Generator	E4438C	MY49071538	2016-03-01	One year
<input checked="" type="checkbox"/>	MINI-CIRCUITS	Amplifier	ZHL-42W	QA1402001	NCR	NCR
<input type="checkbox"/>	MINI-CIRCUITS	Amplifier	ZVE-8G+	N523101139	NCR	NCR
<input checked="" type="checkbox"/>	AR	Directional Coupler	DC7144M1	31190	2016-05-13	One year
<input type="checkbox"/>	Agilent	Dual Directional Coupler	772D	MY52180173	2016-01-06	One year
<input checked="" type="checkbox"/>	R & S	Power Meter	NRP	100740	2016-07-20	One year
<input checked="" type="checkbox"/>	R & S	Power Meter Sensor	NRP-Z11	106288	2016-07-07	One year
<input checked="" type="checkbox"/>	Agilent	Power Meter	E4417A	MY54100027	2016-03-31	One year
<input checked="" type="checkbox"/>	Agilent	Power Meter Sensor	E9321A	MY54130007	2016-03-31	One year
<input checked="" type="checkbox"/>	Agilent	Power Meter Sensor	E9321A	MY54130001	2016-03-31	One year

Note:

1) Per KDB865664D01 requirements for dipole calibration, the test laboratory has adopted three-year extended calibration interval. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.

- a) There is no physical damage on the dipole;
- b) System check with specific dipole is within 10% of calibrated value;
- c) The most recent return-loss result, measured at least annually, deviates by no more than 20% from the previous measurement.
- d) The most recent measurement of the real or imaginary parts of the impedance, measured at least annually is within 5Ω from the previous measurement.

2) Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.

3) *All the equipments are within the valid period when the tests are performed.

3 SAR Measurement Procedure

3.1 Scanning procedure

The DASY5 installation includes predefined files with recommended procedures for measurements and system check. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

- The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT’s output power and should vary max. +/- 5 %.
- The “surface check” measurement tests the optical surface detection system of the DASY5 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above $\pm 0.1\text{mm}$). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within $\pm 30^\circ$.)
- The “area scan” measures the SAR above the DUT or verification dipole on a parallel plane to the surface. It is used to locate the approximate location of the peak SAR with 2D spline interpolation. The robot performs a stepped movement along one grid axis while the local electrical field strength is measured by the probe. The probe is touching the surface of the SAM during acquisition of measurement values. The standard scan uses large grid spacing for faster measurement. Standard grid spacing for head measurements is 15 mm in x- and y- dimension ($\leq 2\text{GHz}$), 12 mm in x- and y- dimension (2-4 GHz) and 10mm in x- and y- dimension (4-6GHz). If a finer resolution is needed, the grid spacing can be reduced. Grid spacing and orientation have no influence on the SAR result. For special applications where the standard scan method does not find the peak SAR within the grid, e.g. mobile phones with flip cover, the grid can be adapted in orientation. Results of this coarse scan are shown in Appendix B.
- A “zoom scan” measures the field in a volume around the 2D peak SAR value acquired in the previous “coarse” scan. This is a fine grid with maximum scan spatial resolution: $\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}} \leq 2\text{GHz} - \leq 8\text{mm}$, 2-4GHz - $\leq 5\text{ mm}$ and 4-6 GHz- $\leq 4\text{mm}$; $\Delta z_{\text{zoom}} \leq 3\text{GHz} - \leq 5\text{ mm}$, 3-4 GHz- $\leq 4\text{mm}$ and 4-6GHz- $\leq 2\text{mm}$ where the robot additionally moves the probe along the z-axis away from the bottom of the Phantom. DASY is also able to perform repeated zoom scans if more than 1 peak is found during area scan. In this document, the evaluated peak 1g and 10g averaged SAR values are shown in the 2D-graphics in Appendix B. Test results relevant for the specified standard (see chapter 1.4.) are shown in table form in chapter 7.2.
- A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 2 mm steps. This measurement shows the continuity of the liquid and can - depending in the field strength – also show the liquid depth. A z-axis scan of the measurement with maximum SAR value is shown in Appendix B.

The following table summarizes the area scan and zoom scan resolutions per FCC KDB 865664D01:

Frequency	Maximun Area Scan resolution ($\Delta x_{area}, \Delta y_{area}$)	Maximun Zoom Scan spatial resolution ($\Delta x_{zoom}, \Delta y_{zoom}$)	Maximun Zoom Scan spatial resolution			Minimum zoom scan volume (x,y,z)
			Uniform Grid	Graded Grad		
			$\Delta z_{zoom}(n)$	$\Delta z_{zoom}(1)^*$	$\Delta z_{zoom}(n>1)^*$	
≤2GHz	≤15mm	≤8mm	≤5mm	≤4mm	$\leq 1.5 * \Delta z_{zoom}(n-1)$	≥30mm
2-3GHz	≤12mm	≤5mm	≤5mm	≤4mm	$\leq 1.5 * \Delta z_{zoom}(n-1)$	≥30mm
3-4GHz	≤12mm	≤5mm	≤4mm	≤3mm	$\leq 1.5 * \Delta z_{zoom}(n-1)$	≥28mm
4-5GHz	≤10mm	≤4mm	≤3mm	≤2.5mm	$\leq 1.5 * \Delta z_{zoom}(n-1)$	≥25mm
5-6GHz	≤10mm	≤4mm	≤2mm	≤2mm	$\leq 1.5 * \Delta z_{zoom}(n-1)$	≥22mm

3.2 Spatial Peak SAR Evaluation

The spatial peak SAR - value for 1 and 10 g is evaluated after the Cube measurements have been done. The basis of the evaluation are the SAR values measured at the points of the fine cube grid consisting of 5 x 5 x 7 points(with 8mm horizontal resolution) or 7 x 7 x 7 points(with 5mm horizontal resolution) or 8 x 8 x 7 points(with 4mm horizontal resolution). The algorithm that finds the maximal averaged volume is separated into three different stages.

- The data between the dipole center of the probe and the surface of the phantom are extrapolated. This data cannot be measured since the center of the dipole is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is about 1 mm (see probe calibration sheet). The extrapolated data from a cube measurement can be visualized by selecting 'Graph Evaluated'.
- The maximum interpolated value is searched with a straight-forward algorithm. Around this maximum the SAR - values averaged over the spatial volumes (1g or 10 g) are computed using the 3d-spline interpolation algorithm. If the volume cannot be evaluated (i.e., if a part of the grid was cut off by the boundary of the measurement area) the evaluation will be started on the corners of the bottom plane of the cube.
- All neighboring volumes are evaluated until no neighboring volume with a higher average value is found.

Extrapolation

The extrapolation is based on a least square algorithm [W. Gander, Computermathematik, p.168-180]. Through the points in the first 3 cm along the z-axis, polynomials of order four are calculated. These polynomials are then used to evaluate the points between the surface and the probe tip. The points, calculated from the surface, have a distance of 1 mm from each other.

Interpolation

The interpolation of the points is done with a 3d-Spline. The 3d-Spline is composed of three one-dimensional splines with the "Not a knot"-condition [W. Gander, Computermathematik, p.141-150] (x, y and z -direction) [Numerical Recipes in C, Second Edition, p.123ff].

Volume Averaging

At First the size of the cube is calculated. Then the volume is integrated with the trapezoidal algorithm. 8000 points (20x20x20) are interpolated to calculate the average.

Advanced Extrapolation

DASY5 uses the advanced extrapolation option which is able to compensates boundary effects on E-field probes.

3.3 Data Storage and Evaluation

Data Storage

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension "DAE4". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Norm _i , a ₁₀ , a ₁₁ , a ₁₂
	- Conversion factor	ConvF _i
	- Diode compression point	Dcpi
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf/dcpi$$

with	V _i	= compensated signal of channel i	(i = x, y, z)
	U _i	= input signal of channel i	(i = x, y, z)
	cf	= crest factor of exciting field (DASY parameter)	
	dcpi	= diode compression point	(DASY parameter)

From the compensated input signals the primary field data for each channel can be

evaluated:

$$\begin{aligned} \text{E-field probes:} & \quad E_i = (V_i / \text{Norm}_i \cdot \text{ConvF})^{1/2} \\ \text{H-field probes:} & \quad H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2)/f \end{aligned}$$

with V_i = compensated signal of channel i (i = x, y, z)
 Norm_i = sensor sensitivity of channel i (i = x, y, z)
 [mV/(V/m)²] for E-field Probes
 ConvF = sensitivity enhancement in solution
 a_{ij} = sensor sensitivity factors for H-field probes
 f = carrier frequency [GHz]
 E_i = electric field strength of channel i in V/m
 H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{\text{tot}} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = (E_{\text{tot}}^2 \cdot \sigma) / (\rho \cdot 1000)$$

with SAR = local specific absorption rate in mW/g
 E_{tot} = total field strength in V/m
 σ = conductivity in [mho/m] or [Siemens/m]
 ρ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{\text{pwe}} = E_{\text{tot}}^2 / 3770 \quad \text{or} \quad P_{\text{pwe}} = H_{\text{tot}}^2 \cdot 37.7$$

with P_{pwe} = equivalent power density of a plane wave in mW/cm²
 E_{tot} = total electric field strength in V/m
 H_{tot} = total magnetic field strength in A/m

4 System Verification Procedure

4.1 Tissue Verification

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within $\pm 5\%$ of the target values.

The following materials are used for producing the tissue-equivalent materials.

Ingredients (% of weight)	Head Tissue						
	750	835	1750	1900	2300	2450	2600
Frequency Band (MHz)	750	835	1750	1900	2300	2450	2600
Water	39.2	41.45	52.64	55.242	62.82	62.7	55.242
Salt (NaCl)	2.7	1.45	0.36	0.306	0.51	0.5	0.306
Sugar	57.0	56.0	0.0	0.0	0.0	0.0	0.0
HEC	0.0	1.0	0.0	0.0	0.0	0.0	0.0
Bactericide	0.0	0.1	0.0	0.0	0.0	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0
DGBE	0.0	0.0	47.0	44.542	36.67	36.8	44.452
Ingredients (% of weight)	Body Tissue						
	750	835	1750	1900	2300	2450	2600
Frequency Band (MHz)	750	835	1750	1900	2300	2450	2600
Water	50.3	52.4	69.91	69.91	73.32	73.2	64.493
Salt (NaCl)	1.60	1.40	0.13	0.13	0.06	0.04	0.024
Sugar	47.0	45.0	0.0	0.0	0.0	0.0	0.0
HEC	0.0	1.0	0.0	0.0	0.0	0.0	0.0
Bactericide	0.0	0.1	0.0	0.0	0.0	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0
DGBE	0.0	0.0	29.96	29.96	26.62	26.7	32.252

Table 4: Tissue Dielectric Properties

Salt: 99+% Pure Sodium Chloride; Sugar: 98+% Pure Sucrose; Water: De-ionized, 16M Ω + resistivity
 HEC: Hydroxyethyl Cellulose; DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]
 Triton X-100(ultra pure): Polyethylene glycol mono [4-(1,1,3,3-tetramethylbutyl)phenyl]ether

Simulating Head Liquid for 5G(HBBL3500-5800MHz), Manufactured by SPEAG:

Ingredients	(% by weight)
Water	50-65%
Mineral oil	10-30%
Emulsifiers	8-25%
Sodium salt	0-1.5%

Simulating Body Liquid for 5G(MBBL3500-5800MHz), Manufactured by SPEAG:

Ingredients	(% by weight)
Water	60-80%
Esters, Emulsifiers, Inhibitors	20-40%
Sodium salt	0-1.5%

Tissue Type	Measured Frequency (MHz)	Target Tissue		Measured Tissue		Deviation (Within +/-5%)		Liquid Temp.	Test Date
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$		
835H	825	41.60	0.90	40.08	0.906	-3.65%	0.67%	21.5°C	2016/11/13
	835	41.50	0.90	39.93	0.916	-3.78%	1.78%		
	850	41.50	0.92	39.71	0.931	-4.31%	1.20%		
835B	825	55.20	0.97	56.12	0.990	1.67%	2.24%	21.7°C	2016/11/12
	835	55.20	0.97	56.00	1.002	1.45%	3.30%		
	850	55.20	0.99	55.89	1.020	1.25%	2.73%		
1900H	1850	40.00	1.40	38.76	1.364	-3.10%	-2.57%	21.2°C	2016/11/08
	1880	40.00	1.40	38.63	1.392	-3.42%	-0.57%		
	1900	40.00	1.40	38.55	1.410	-3.63%	0.71%		
	1910	40.00	1.40	38.51	1.419	-3.73%	1.36%		
1900B	1850	53.30	1.52	53.10	1.520	-0.38%	-0.20%	21.5°C	2016/11/09
	1880	53.30	1.52	52.98	1.550	-0.60%	1.71%		
	1900	53.30	1.52	52.91	1.564	-0.73%	2.89%		
	1910	53.30	1.52	52.87	1.580	-0.81%	3.62%		
2450H	2410	39.30	1.76	39.42	1.797	0.31%	2.10%	21.5°C	2016/11/04
	2435	39.20	1.79	39.34	1.813	0.36%	1.28%		
	2450	39.20	1.80	39.27	1.830	0.18%	1.67%		
	2460	39.20	1.81	39.23	1.840	0.08%	1.66%		
2450B	2410	52.80	1.91	53.03	1.960	0.44%	2.83%	21.4°C	2016/11/04
	2435	52.70	1.94	52.95	2.000	0.47%	2.89%		
	2450	52.70	1.95	52.87	2.020	0.32%	3.59%		
	2460	52.70	1.96	52.87	2.040	0.32%	3.88%		
2600H	2510	39.12	1.86	38.72	1.895	-1.02%	1.88%	21.8°C	2016/11/15
	2535	39.10	1.89	38.60	1.923	-1.28%	1.75%		
	2560	39.00	1.92	38.49	1.951	-1.31%	1.77%		
	2600	39.00	1.96	38.37	1.998	-1.62%	1.94%		
2600B	2510	52.62	2.03	52.41	2.080	-0.40%	2.51%	21.5°C	2016/11/14
	2535	52.59	2.07	52.29	2.110	-0.57%	1.98%		
	2560	52.57	2.09	52.22	2.150	-0.67%	2.92%		
	2600	52.50	2.16	52.09	2.201	-0.78%	1.90%		

Table 5: Measured Tissue Parameter

Note: 1) The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2°C of the conditions expected during the SAR evaluation to satisfy protocol requirements.

2) KDB 865664 was ensured to be applied for probe calibration frequencies greater than or equal to 50MHz of the EUT frequencies.

3) The above measured tissue parameters were used in the DASY software to perform interpolation via the DASY software to determine actual dielectric parameters at the test frequencies. The SAR test plots may slightly differ from the table above since the DASY rounds to three significant digits.

4.2 System Check

The system check is performed for verifying the accuracy of the complete measurement system and performance of the software. The system check is performed with tissue equivalent material according to IEEE P1528 (described above). The following table shows system check results for all frequency bands and tissue liquids used during the tests(Graphic Plot(s) see Appendix A).


System Check	Target SAR (1W)		Measured SAR (Normalized to 1W)		Deviation (Within +/-10%)		Liquid Temp.	Test Date
	1-g (W/kg)	10-g (W/kg)	1-g (W/kg)	10-g (W/kg)	Δ 1-g	Δ 10-g		
835MHz Head	9.30	6.05	9.00	5.84	-3.23%	-3.47%	21.5°C	2016/11/13
1900MHz Head	40.20	21.10	41.60	21.52	3.48%	1.99%	21.2°C	2016/11/08
2450MHz Head	51.70	24.40	52.80	24.56	2.13%	0.66%	21.5°C	2016/11/04
2600MHz Head	57.10	25.60	60.80	27.40	6.48%	7.03%	21.8°C	2016/11/15
835MHz Body	9.41	6.20	9.04	5.88	-3.93%	-5.16%	21.7°C	2016/11/12
1900MHz Body	39.90	21.00	42.40	22.08	6.27%	5.14%	21.5°C	2016/11/09
2450MHz Body	51.90	24.50	50.40	23.16	-2.89%	-5.47%	21.4°C	2016/11/04
2600MHz Body	54.90	24.60	57.20	25.08	4.19%	1.95%	21.5°C	2016/11/14

Table 6: System Check Results

4.3 System check Procedure

The system check is performed by using a system check dipole which is positioned parallel to the planar part of the SAM phantom at the reference point. The distance of the dipole to the SAM phantom is determined by a plexiglass spacer. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 250 mW (below 5GHz) or 100mW (above 5GHz). To adjust this power a power meter is used. The power sensor is connected to the cable before the system check to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the system check to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot).

System check results have to be equal or near the values determined during dipole calibration (target SAR in table above) with the relevant liquids and test system.

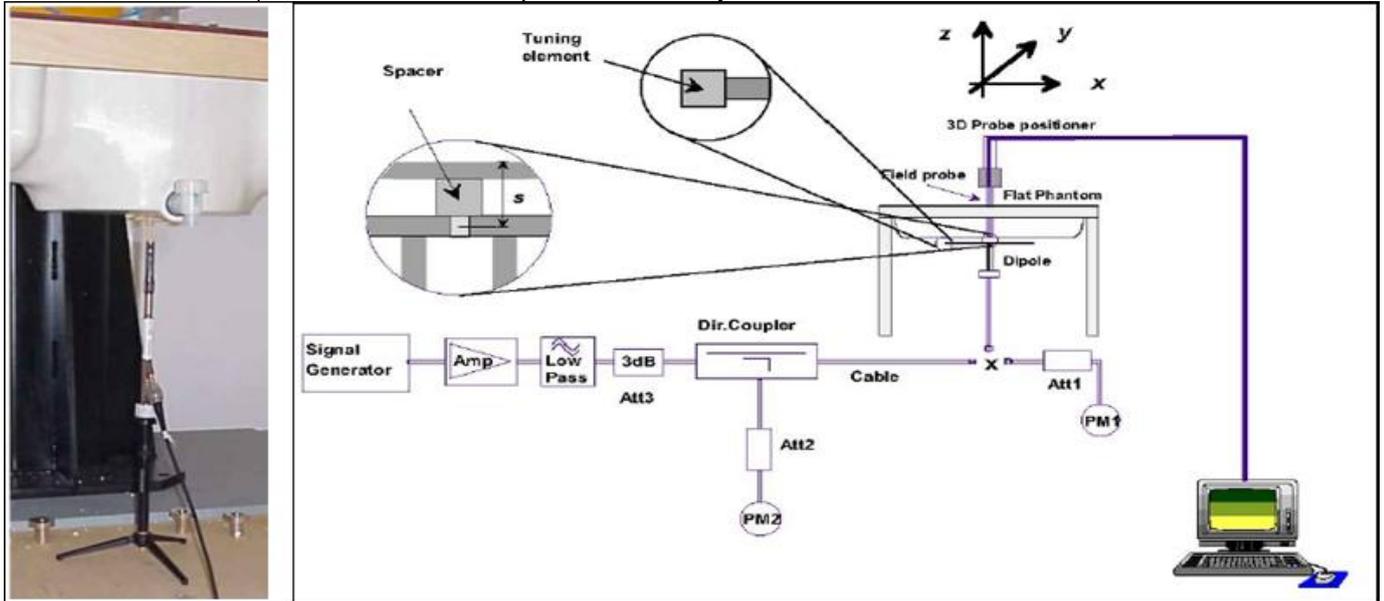

5 SAR measurement variability and uncertainty

5.1 SAR measurement variability

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01r04, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

The detailed repeated measurement results are shown in Section 7.2.

5.2 SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

6 SAR Test Configuration

6.1 Test Positions Configuration

6.1.1 General considerations

Per IEEE 1528-2013, two imaginary lines on the handset were established: the vertical centerline and the horizontal line (See Figure 1).

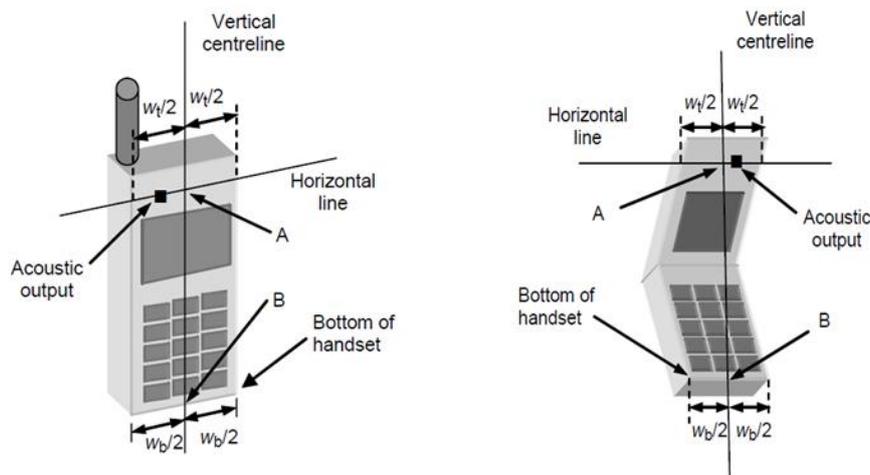


Figure 1 Hand Vertical Center & Horizontal Line Reference Points

6.1.2 Head Exposure Condition

Per IEEE 1528-2013, Head SAR measurements were made in the “cheek” position (See Figure 2) and the “tilt” position (See Figure 3). The device should be tested in both positions on left and right sides of the SAM phantom.

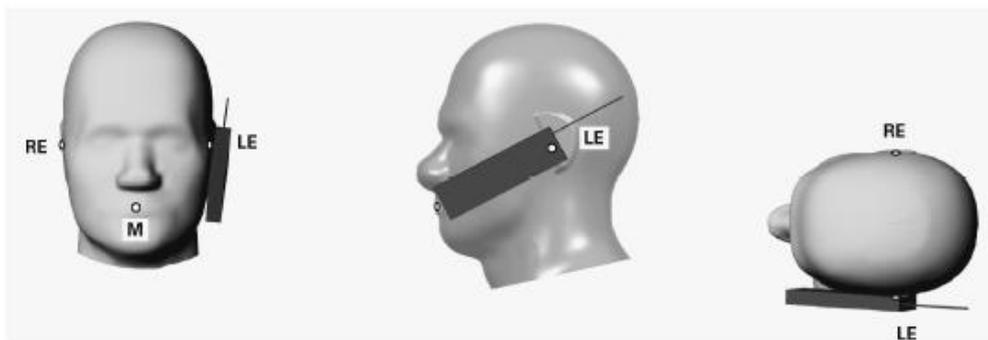


Figure 2 Front, Side and Top View of Cheek Position

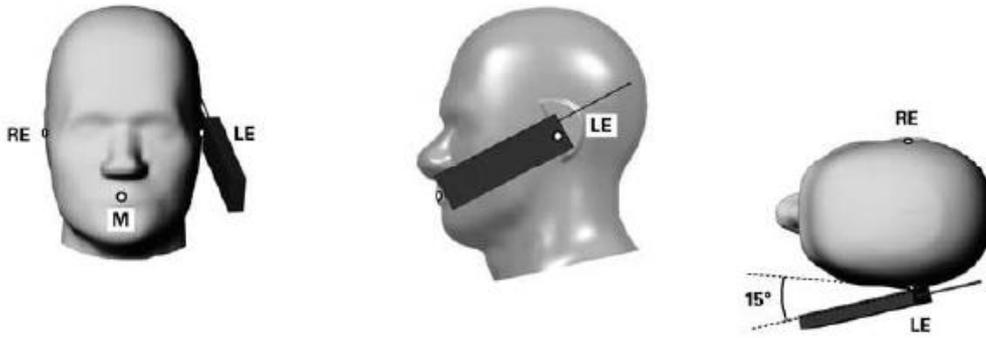


Figure 3 Front, Side and Top View of Tilt 15° Position

Note:

M Mouth reference point

LE Left ear reference point (ERP)

RE Right ear reference point(ERP)

6.1.3 Body-worn Exposure Condition

Body-worn operating configurations are tested with the holder attached to the device and positioned against a flat phantom with test separation distance of 15mm in a normal use configuration (See Figure 4). Per FCC KDB648474 D04, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

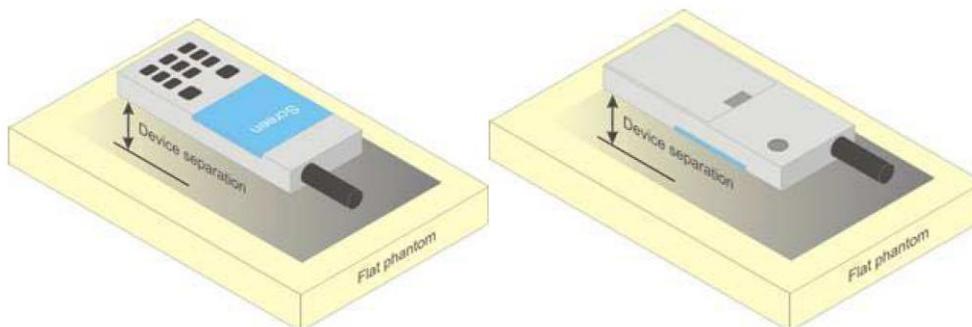


Figure 4 Test position for Body-Worn device

6.1.4 Hotspot Exposure Condition

Per FCC KDB 941225D06, The SAR test separation distance for hotspot mode is determined according to device form factor. When the overall length and width of a device is $> 9 \text{ cm} \times 5 \text{ cm}$, a test separation distance of 10 mm is required for hotspot mode SAR measurements. A test separation distance of 5 mm or less is required for smaller devices. Hotspot mode SAR is measured for all edges and surfaces of the device with a transmitting antenna located within 25 mm from that surface or edge; for the data modes, wireless technologies and frequency bands supporting hotspot mode. The SAR results are used to determine simultaneous transmission SAR test exclusion for hotspot mode; otherwise, simultaneous transmission SAR measurement is required.

6.2 3G SAR Test Reduction Procedure

Per KDB941225 D01, in the following procedures, the mode tested for SAR is referred to as the primary mode. The equivalent modes considered for SAR test reduction are denoted as secondary modes. Both primary and secondary modes must be in the same frequency band. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is $\leq 1.2 \text{ W/kg}$, SAR measurement is not required for the secondary mode. This is referred to as the 3G SAR test reduction procedure in the following SAR test guidance, where the primary mode is identified in the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as “otherwise” in the applicable procedures; SAR measurement is required for the secondary mode.

6.3 GSM Test Configuration

SAR tests for GSM850 and GSM1900, a communication link is set up with a base station by air link. Using CMU200 the power level is set to “5” and “0” in SAR of GSM850 and GSM1900. The tests in the band of GSM850 and GSM1900 are performed in the mode of GPRS/EGPRS function. Since the GPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslot is 5. The EGPRS class is 12 for this EUT, it has at most 4 timeslots in uplink, and at most 4 timeslots in downlink, the maximum total timeslot is 5.

When SAR tests for EGPRS mode is necessary, GMSK modulation should be used to minimize SAR measurement error due to higher peak-to-average power (PAR) ratios inherent in 8-PSK.

6.4 UMTS Test Configuration

1) Output Power Verification

Maximum output power is verified on the high, middle and low channels according to procedures described in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all “1’s” for WCDMA/HSDPA or by applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HSDPA, HSPA) are required in the SAR report. All configurations that are not supported by the handset or cannot be measured due to technical or equipment limitations must be clearly identified.

2) WCDMA

a. Head SAR Measurements

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all “1’s”. The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for 12.2 kbps AMR in 3.4 kbps SRB (signaling radio bearer) using the highest reported SAR configuration in 12.2 kbps RMC for head exposure.

b. Body SAR Measurements

SAR for body-worn accessory configurations is measured using a 12.2 kbps RMC with TPC bits configured to all “1’s”. The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCHn configurations supported by the handset with 12.2 kbps RMC as the primary mode

3) HSDPA

SAR for body exposure configurations is measured according to the “Body SAR Measurements” procedures of 3G device. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode. This is referred to as the 3G SAR test reduction procedure in the following SAR test guidance, where the primary mode is identified in the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that

procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as “otherwise” in the applicable procedures; SAR measurement is required for the secondary mode.

Per KDB941225 D01, the 3G SAR test reduction procedure is applied to HSDPA body configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSDPA using the HSDPA body SAR procedures for the highest reported SAR body exposure configuration in 12.2 kbps RMC.

HSDPA should be configured according to UE category of a test device. The number of HS-DSCH/HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission condition, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. The β_c and β_d gain factors for DPCCH and DPDCH were set according to the values in the below table, β_{hs} for HS-DPCCH is set automatically to the correct value when $\Delta ACK, \Delta NACK, \Delta CQI = 8$. The variation of the β_c / β_d ratio causes a power reduction at sub-tests 2 - 4.

Sub-test ^o	β_c ^o	β_d ^o	β_d (SF) ^o	β_c / β_d ^o	β_{hs} (1) ^o	CM(dB)(2) ^o	MPR (dB) ^o
1 ^o	2/15 ^o	15/15 ^o	64 ^o	2/15 ^o	4/15 ^o	0.0 ^o	0 ^o
2 ^o	12/15(3) ^o	15/15(3) ^o	64 ^o	12/15(3) ^o	24/15 ^o	1.0 ^o	0 ^o
3 ^o	15/15 ^o	8/15 ^o	64 ^o	15/8 ^o	30/15 ^o	1.5 ^o	0.5 ^o
4 ^o	15/15 ^o	4/15 ^o	64 ^o	15/4 ^o	30/15 ^o	1.5 ^o	0.5 ^o

Note 1: $\Delta ACK, \Delta NACK$ and $\Delta CQI = 8$ $A_{hs} = \beta_{hs} / \beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$
Note 2 : CM=1 for $\beta_c / \beta_d = 12/15, \beta_{hs} / \beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.
Note 3 : For subtest 2 the β_c / β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$

Table 7: Sub-tests for UMTS Release 5 HSDPA

The measurements were performed with a Fixed Reference Channel (FRC) and H-Set 1 QPSK.

Parameter	Value
Nominal average inf. bit rate	534 kbit/s
Inter-TTI Distance	3 TTI's
Number of HARQ Processes	2 Processes
Information Bit Payload	3202 Bits
MAC-d PDU size	336 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	4800 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	9600 SMLs
Coding Rate	0.67
Number of Physical Channel Codes	5

Table 8: settings of required H-Set 1 QPSK acc. to 3GPP 34.121

HS-DSCH Category	Maximum HS-DSCH Codes Received	Minimum Inter-TTI Interval	Maximum HS-DSCH Transport Block Bits/HS-DSCH TTI	Total Soft Channel Bits
1	5	3	7298	19200
2	5	3	7298	28800
3	5	2	7298	28800
4	5	2	7298	38400
5	5	1	7298	57600
6	5	1	7298	67200
7	10	1	14411	115200
8	10	1	14411	134400
9	15	1	25251	172800
10	15	1	27952	172800
11	5	2	3630	14400
12	5	1	3630	28800
13	15	1	34800	259200
14	15	1	42196	259200
15	15	1	23370	345600
16	15	1	27952	345600

Table 9:HSDPA UE category

4) HSUPA

SAR for body exposure configurations is measured according to the “Body SAR Measurements” procedures of 3G device. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

Per KDB941225 D01v03, the 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSPA using the HSPA body SAR procedures for the highest reported body exposure SAR configuration in 12.2 kbps RMC.

Due to inner loop power control requirements in HSDPA, a commercial communication test set should be used for the output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSDPA should be configured according to the values indicated below as well as other applicable procedures described in the ‘WCDMA Handset’ and ‘Release 5 HSDPA Data Device’ sections of 3G device.

Sub-test [⌘]	β_c [⌘]	β_d [⌘]	β_d (SF) [⌘]	β_c/β_d [⌘]	$\beta_{hs}^{(1)}$ [⌘]	β_{ec} [⌘]	β_{ed} [⌘]	β_e [⌘] (SF) [⌘]	β_{ed} [⌘] (code) [⌘]	CM ⁽²⁾ [⌘] (dB) [⌘]	MP R [⌘] (dB) [⌘]	AG ⁽⁴⁾ [⌘] Index [⌘]	E-TFC I [⌘]
1 [⌘]	11/15 ⁽³⁾ [⌘]	15/15 ⁽³⁾ [⌘]	64 [⌘]	11/15 ⁽³⁾ [⌘]	22/15 [⌘]	209/225 [⌘]	1039/225 [⌘]	4 [⌘]	1 [⌘]	1.0 [⌘]	0.0 [⌘]	20 [⌘]	75 [⌘]
2 [⌘]	6/15 [⌘]	15/15 [⌘]	64 [⌘]	6/15 [⌘]	12/15 [⌘]	12/15 [⌘]	94/75 [⌘]	4 [⌘]	1 [⌘]	3.0 [⌘]	2.0 [⌘]	12 [⌘]	67 [⌘]
3 [⌘]	15/15 [⌘]	9/15 [⌘]	64 [⌘]	15/9 [⌘]	30/15 [⌘]	30/15 [⌘]	$\beta_{ed1}:47/15$ [⌘] $\beta_{ed2}:47/15$ [⌘]	4 [⌘]	2 [⌘]	2.0 [⌘]	1.0 [⌘]	15 [⌘]	92 [⌘]
4 [⌘]	2/15 [⌘]	15/15 [⌘]	64 [⌘]	2/15 [⌘]	4/15 [⌘]	2/15 [⌘]	56/75 [⌘]	4 [⌘]	1 [⌘]	3.0 [⌘]	2.0 [⌘]	17 [⌘]	71 [⌘]
5 [⌘]	15/15 ⁽⁴⁾ [⌘]	15/15 ⁽⁴⁾ [⌘]	64 [⌘]	15/15 ⁽⁴⁾ [⌘]	30/15 [⌘]	24/15 [⌘]	134/15 [⌘]	4 [⌘]	1 [⌘]	1.0 [⌘]	0.0 [⌘]	21 [⌘]	81 [⌘]

Note 1: Δ ACK, Δ NACK and Δ CQI = 8 $A_{hs} = \beta_{hs}/\beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$
Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference[⌘]
Note 3 : For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$ [⌘]
Note 4 : For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$ [⌘]
Note 5 : Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g[⌘]
Note 6: β_{ed} can not be set directly; it is set by Absolute Grant Value.[⌘]

Table 10:Subtests for UMTS Release 6 HSUPA

UE E-DCH Category	Maximum E-DCH Codes Transmitted	Number of HARQ Processes	of E-DCH TTI(ms)	Minimum Spreading Factor	Maximum E-DCH Transport Block Bits	Max Rate (Mbps)
1	1	4	10	4	7110	0.7296
2	2	8	2	4	2798	1.4592
	2	4	10	4	14484	
3	2	4	10	4	14484	1.4592
4	2	8	2	2	5772	2.9185
	2	4	10	2	20000	2.00
5	2	4	10	2	20000	2.00
6 (No DPDCH)	4	8	10	2SF2&2SF	11484	5.76
	4	4	2	4	20000	2.00
7 (No DPDCH)	4	8	2	2SF2&2SF	22996	?
	4	4	10	4	20000	?

NOTE: When 4 codes are transmitted in parallel, two codes shall be transmitted with SF2 and two with SF4. UE categories 1 to 6 support QPSK only. UE category 7 supports QPSK and 16QAM.(TS25.306-7.3.0).

Table 11:HSUPA UE category

5) DC-HSDPA

SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a Second serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS 34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

Table E.5.0: Levels for HSDPA connection setup

Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

The measurements were performed with a Fixed Reference Channel (FRC) H-Set 12 with QPSK

Parameter	Value
Nominal average inf. bit rate	60 kbit/s
Inter-TTI Distance	1 TTI's
Number of HARQ Processes	6 Processes
Information Bit Payload	120 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	960 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	3200 SMLs
Coding Rate	0.15
Number of Physical Channel Codes	1

Table 12: settings of required H-Set 12 QPSK acc. to 3GPP 34.121

Note:

- 1.The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table above.
- 2.Maximum number of transmission is limited to 1,i.e.,retransmission is not allowed. The redundancy and constellation version 0 shall be used.

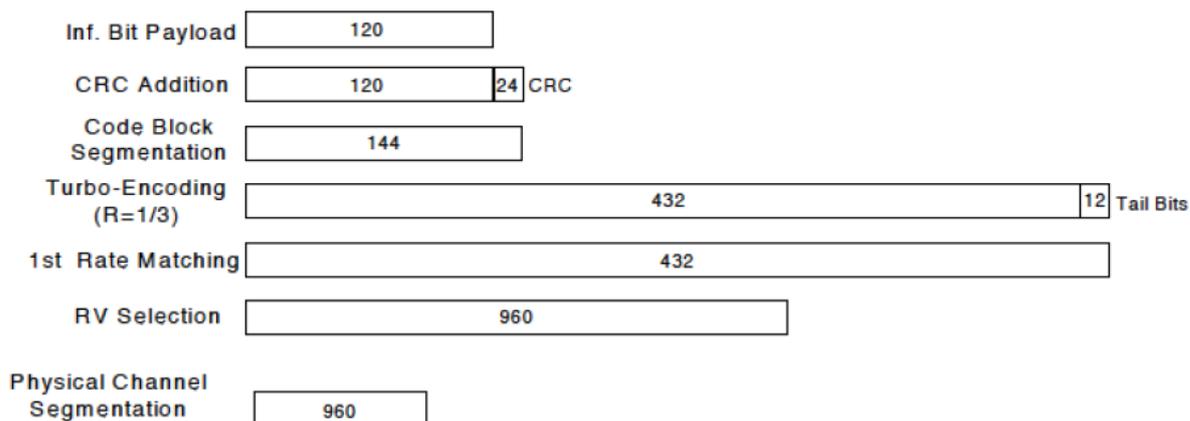


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

The following 4 Sub-tests for HSDPA were completed according to Release 5 procedures. A summary of subtest settings are illustrated below:

Sub-test [Ⓛ]	β_c [Ⓛ]	β_d [Ⓛ]	β_d (SF) [Ⓛ]	β_c/β_d [Ⓛ]	$\beta_{hs}(1)$ [Ⓛ]	CM(dB)(2) [Ⓛ]	MPR (dB) [Ⓛ]
1 [Ⓛ]	2/15 [Ⓛ]	15/15 [Ⓛ]	64 [Ⓛ]	2/15 [Ⓛ]	4/15 [Ⓛ]	0.0 [Ⓛ]	0 [Ⓛ]
2 [Ⓛ]	12/15(3) [Ⓛ]	15/15(3) [Ⓛ]	64 [Ⓛ]	12/15(3) [Ⓛ]	24/15 [Ⓛ]	1.0 [Ⓛ]	0 [Ⓛ]
3 [Ⓛ]	15/15 [Ⓛ]	8/15 [Ⓛ]	64 [Ⓛ]	15/8 [Ⓛ]	30/15 [Ⓛ]	1.5 [Ⓛ]	0.5 [Ⓛ]
4 [Ⓛ]	15/15 [Ⓛ]	4/15 [Ⓛ]	64 [Ⓛ]	15/4 [Ⓛ]	30/15 [Ⓛ]	1.5 [Ⓛ]	0.5 [Ⓛ]

Note 1: ΔACK , $\Delta NACK$ and $\Delta CQI=8$ $A_{hs}=\beta_{hs}/\beta_c=30/15$ $\beta_{hs}=30/15*\beta_c$ [Ⓛ]

Note 2: CM=1 for $\beta_c/\beta_d=12/15$, $\beta_{hs}/\beta_c=24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.[Ⓛ]

Note 3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c=11/15$ and $\beta_d=15/15$ [Ⓛ]

Up commands are set continuously to set the UE to Max power.

Note:

- 1.The Dual Carriers transmission only applies to HSDPA physical channels
- 2.The Dual Carriers belong to the same Node and are on adjacent carriers.
- 3.The Dual Carriers do not support MIMO to serve UEs configured for dual cell operation
- 4.The Dual Carriers operate in the same frequency band .
- 5.The device doesn't support the modulation of 16QAM in uplink but 64QAM in downlink for DC-HSDPA mode.
- 6.The device doesn't support carrier aggregation for it just can operate in Release 8.

6.5 LTE Test Configuration

SAR for LTE band exposure configurations is measured according to the procedures of KDB 941225 D05 SAR for LTE Devices. The CMW500 WideBand Radio Communication Tester was used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR test were performed with the same number of RB and RB offsets transmitting on all TTI frames (Maximum TTI)

1) Spectrum Plots for RB configurations

A properly configured base station simulator was used for LTE output power measurements and SAR testing. Therefore, spectrum plots for RB configurations were not required to be included in this report.

2) MPR

When MPR is implemented permanently within the UE, regardless of network requirements, only those RB configurations allowed by 3GPP for the channel bandwidth and modulation combinations may be tested with MPR active. Configurations with RB allocations less than the RB thresholds required by 3GPP must be tested without MPR.

The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

3) A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by using Network Signalling Value of "NS_01" on the base station simulator.

4) LTE procedures for SAR testing

A) Largest channel bandwidth standalone SAR test requirements

i) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

ii) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in i) are applied to measure the SAR for QPSK with 50% RB allocation.

iii) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in i) and ii) are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

iv) Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in above sections to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> \frac{1}{2}$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

B) Other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section A) to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is $> \frac{1}{2}$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.

6.6 WiFi Test Configuration

For WiFi SAR testing, a communication link is set up with the testing software for WiFi mode test. During the test, at the each test frequency channel, the EUT is operated at the RF continuous emission mode. The test procedures in KDB 248227D01 are applied.

6.6.1 Initial Test Position Procedure

For exposure condition with multiple test position, such as handsets operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all position in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is $\leq 0.4\text{W/kg}$, no additional testing for the remaining test position is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR position until the reported SAR result is $\leq 0.8\text{W/kg}$ or all test position are measured. For all positions/configurations tested using the initial test position and subsequent test positions, when the *reported* SAR is $> 0.8\text{ W/kg}$, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the *reported* SAR is $\leq 1.2\text{ W/kg}$ or all required channels are tested.

6.6.2 Initial Test Configuration Procedure

An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. SAR is measured using the highest measured maximum output power channel. For configurations with the same specified or measured maximum output power, additional transmission mode and test channel selection procedures are required (see section 5.3.2 of KDB 248227D01). SAR test reduction of subsequent highest output test channels is based on the *reported* SAR of the initial test configuration.

For next to the ear, hotspot mode and UMC mini-tablet exposure configurations where multiple test positions are required, the initial test position procedure is applied to minimize the number of test positions required for SAR measurement using the initial test configuration transmission mode. For fixed exposure conditions that do not have multiple SAR test positions, SAR is measured in the transmission mode determined by the initial test configuration.

When the *reported* SAR of the initial test configuration is $> 0.8\text{ W/kg}$, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until the *reported* SAR is $\leq 1.2\text{ W/kg}$ or all required channels are tested.

6.6.3 Sub Test Configuration Procedure

SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units.

When the highest reported SAR for the initial test configuration, according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is $\leq 1.2\text{ W/kg}$, SAR is not required for that subsequent test configuration.

6.6.4 WiFi 2.4G SAR Test Procedures

Separate SAR procedures are applied to DSSS and OFDM configurations in the 2.4 GHz band to simplify DSSS test requirements. For 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure applies to multiple exposure test positions.

A) 802.11b DSSS SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the *reported* SAR of the highest measured maximum output power channel (section 3.1 of of KDB 248227D01) for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the *reported* SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any *reported* SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

B) 2.4GHz 802.11g/n OFDM SAR Test Exclusion Requirements

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied (section 5.3 of of KDB 248227D01). SAR is not required for the following 2.4 GHz OFDM conditions.

- 1) When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- 2) When the highest *reported* SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

C) SAR Test Requirements for OFDM configurations

When SAR measurement is required for 802.11 g/n OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

7 SAR Measurement Results

7.1 Conducted power measurements

For the measurements ,the Rohde & Schwarz Radio Communication Tester CMU 200&CMW500 and/or Anritsu Radio Communication Analyzer MT8821C were used.

SAR drift measured at the same position in liquid before and after each SAR test as below 7.2 chapter.

Note: CMU200 measures GSM peak and average output power for active timeslots.For SAR the timebased average power is relevant. The difference in between depends on the duty cycle of the TDMA signal :

No. of timeslots	1	2	3	4
Duty Cycle	1:8.3	1:4.1	1:2.77	1:2.08
timebased avg. power compared to slotted avg. power	-9.19dB	-6.13dB	-4.42dB	-3.18dB

The signalling modes differ as follows:

mode	coding scheme	modulation
GPRS	CS1 to CS4	GMSK
EDGE	MCS1 to MCS4	GMSK
EDGE	MCS5 to MCS9	8PSK

Apart from modulation change (GMSK/8PSK) coding schemes differ in code rate without influence on the RF signal. Therefore one coding scheme per mode was selected for conducted power measurements.

7.1.1 Conducted power measurements of GSM850

GSM850		Burst-Averaged output Power (dBm)				Division Factors	Frame-Averaged output Power (dBm)			
		Tune-up	128CH	190CH	251CH		Tune-up	128CH	190CH	251CH
GSM (CS)		33.50	33.04	33.10	33.17	-9.19	24.31	23.85	23.91	23.98
GPRS/ EDGE (GMSK)	1 Tx Slot	33.50	33.06	33.12	33.17	-9.19	24.31	23.87	23.93	23.98
	2 Tx Slots	31.50	31.01	31.09	31.14	-6.13	25.37	24.88	24.96	25.01
	3 Tx Slots	29.50	29.01	29.07	29.13	-4.42	25.08	24.59	24.65	24.71
	4 Tx Slots	27.50	26.92	26.98	27.03	-3.18	24.32	23.74	23.80	23.85
EDGE (8PSK)	1 Tx Slot	27.00	26.09	26.24	26.17	-9.19	17.81	16.9	17.05	16.98
	2 Tx Slots	25.00	24.13	24.26	24.29	-6.13	18.87	18.00	18.13	18.16
	3 Tx Slots	23.00	21.94	22.09	22.10	-4.42	18.58	17.52	17.67	17.68
	4 Tx Slots	21.00	20.10	20.08	20.08	-3.18	17.82	16.92	16.90	16.90

Table 13: Conducted power measurement results of GSM850

Note:

- 1) The conducted power of GSM850 is measured with RMS detector.
- 2) Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- 3) Per KDB941225 D01v03, SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

7.1.2 Conducted power measurements of GSM1900

GSM1900		Burst-Averaged output Power (dBm)				Division Factors	Frame-Averaged output Power (dBm)			
		Tune-up	512CH	661CH	810CH		Tune-up	512CH	661CH	810CH
GSM (CS)		30.50	30.14	30.10	30.00	-9.19	21.31	20.95	20.91	20.81
GPRS/ EDGE (GMSK)	1 Tx Slot	30.50	29.97	29.91	29.89	-9.19	21.31	20.78	20.72	20.70
	2 Tx Slots	27.50	26.95	26.87	26.84	-6.13	21.37	20.82	20.74	20.71
	3 Tx Slots	25.50	24.90	24.77	24.79	-4.42	21.08	20.48	20.35	20.37
	4 Tx Slots	24.50	23.90	23.76	23.80	-3.18	21.32	20.72	20.58	20.62
EDGE (8PSK)	1 Tx Slot	26.00	25.60	25.36	25.42	-9.19	16.81	16.41	16.17	16.23
	2 Tx Slots	24.00	23.43	23.30	23.27	-6.13	17.87	17.30	17.17	17.14
	3 Tx Slots	22.00	21.11	21.03	21.32	-4.42	17.58	16.69	16.61	16.90
	4 Tx Slots	21.00	19.05	19.07	19.11	-3.18	17.82	15.87	15.89	15.93

Table 14: Conducted power measurement results of GSM1900(Hotspot disable)

Note:

- 1) The conducted power of GSM1900 is measured with RMS detector.
- 2) Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- 3) Per KDB941225 D01v03, SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

GSM1900		Burst-Averaged output Power (dBm)				Division Factors	Frame-Averaged output Power (dBm)			
		Tune-up	512CH	661CH	810CH		Tune-up	512CH	661CH	810CH
GPRS/ EDGE (GMSK)	1 Tx Slot	26.50	26.01	25.82	25.86	-9.19	17.31	16.82	16.63	16.67
	2 Tx Slots	23.50	22.98	22.77	22.83	-6.13	17.37	16.85	16.64	16.70
	3 Tx Slots	21.50	20.93	20.81	20.91	-4.42	17.08	16.51	16.39	16.49
	4 Tx Slots	20.50	20.01	19.96	20.02	-3.18	17.32	16.83	16.78	16.84
EDGE (8PSK)	1 Tx Slot	22.00	21.38	21.58	21.54	-9.19	12.81	12.19	12.39	12.35
	2 Tx Slots	20.00	19.29	19.22	19.2	-6.13	13.87	13.16	13.09	13.07
	3 Tx Slots	18.00	17.17	17.06	17.15	-4.42	13.58	12.75	12.64	12.73
	4 Tx Slots	17.00	15.35	15.30	15.29	-3.18	13.82	12.17	12.12	12.11

Table 15: Conducted power measurement results of GSM1900(Hotspot activated)

Note:

- 1) The conducted power of GSM1900 is measured with RMS detector.
- 2) Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- 3) Per KDB941225 D01v03, SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

7.1.3 Conducted power measurements of UMTS Band II

UMTS Band II		Tune-up	Conducted Power (dBm)		
			9262CH	9400CH	9538CH
WCDMA	12.2kbps RMC	24.00	22.94	23.04	23.01
	12.2kbps AMR	24.00	22.89	23.01	23.04
HSDPA	Subtest 1	24.00	22.91	22.96	22.93
	Subtest 2	24.00	22.68	22.76	22.73
	Subtest 3	22.50	22.11	22.20	22.17
	Subtest 4	22.50	22.09	22.18	22.15
HSUPA	Subtest 1	23.50	22.05	22.54	22.14
	Subtest 2	21.50	19.71	19.83	19.91
	Subtest 3	22.00	20.51	20.37	20.52
	Subtest 4	21.50	20.18	20.22	20.33
	Subtest 5	24.00	22.62	22.62	22.21
DC-HSDPA	Subtest 1	24.00	22.69	22.80	22.77
	Subtest 2	24.00	22.46	22.59	22.51
	Subtest 3	22.50	21.86	22.06	21.97
	Subtest 4	22.50	21.87	21.97	21.96

Table 16: Conducted power measurement results of UMTS Band II(Hotspot disable)

Note:

- 1) The conducted power of UMTS Band II is measured with RMS detector.
- 2) The bolded 12.2kbps RMC mode was selected for SAR testing(the primary mode).
- 3) Per KDB941225 D01v03, When the maximum output power and tune-up tolerance specified for production units in a Second mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of Second to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the Second mode.

UMTS Band II		Tune-up	Conducted Power (dBm)		
			9262CH	9400CH	9538CH
WCDMA	12.2kbps RMC	18.00	16.95	17.02	17.00
	12.2kbps AMR	18.00	17.02	17.01	16.98
HSDPA	Subtest 1	18.00	16.92	16.98	16.95
	Subtest 2	18.00	16.69	16.78	16.75
	Subtest 3	16.50	16.32	16.00	16.08
	Subtest 4	16.50	16.30	15.99	16.07
HSUPA	Subtest 1	17.50	15.94	15.92	16.35
	Subtest 2	15.50	13.93	14.11	13.94
	Subtest 3	16.00	14.68	15.18	15.26
	Subtest 4	15.50	14.36	14.31	14.30
	Subtest 5	18.00	16.21	16.39	16.47
DC-HSDPA	Subtest 1	18.00	16.81	16.77	16.72
	Subtest 2	18.00	16.58	16.64	16.50
	Subtest 3	16.50	16.09	15.86	15.87
	Subtest 4	16.50	16.12	15.78	15.92

Table 17: Conducted power measurement results of UMTS Band II(Hotspot activated)

Note:

- 1) The conducted power of UMTS Band II is measured with RMS detector.
- 2) The bolded 12.2kbps RMC mode was selected for SAR testing(the primary mode).
- 3) Per KDB941225 D01v03, When the maximum output power and tune-up tolerance specified for production units in a Second mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of Second to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the Second mode.

7.1.4 Conducted power measurements of UMTS Band V

UMTS Band V		Tune-up	Conducted Power (dBm)		
			4132CH	4182CH	4233CH
WCDMA	12.2kbps RMC	24.50	23.63	23.58	23.52
	12.2kbps AMR	24.50	23.61	23.60	23.49
HSDPA	Subtest 1	24.50	23.58	23.57	23.50
	Subtest 2	24.50	23.35	23.34	23.29
	Subtest 3	23.50	22.69	22.67	22.62
	Subtest 4	23.50	22.68	22.66	22.59
HSUPA	Subtest 1	24.00	22.79	22.48	22.44
	Subtest 2	21.50	20.15	20.08	20.16
	Subtest 3	22.50	21.67	21.75	20.85
	Subtest 4	21.50	20.29	20.24	20.14
	Subtest 5	24.00	22.88	22.98	22.66
DC-HSDPA	Subtest 1	24.50	23.46	23.38	23.30
	Subtest 2	24.50	23.23	23.18	23.13
	Subtest 3	23.50	22.48	22.42	22.49
	Subtest 4	23.50	22.45	22.46	22.38

Table 18: Conducted power measurement results of UMTS Band V

Note:

- 1) The conducted power of UMTS Band V is measured with RMS detector.
- 2) The bolded 12.2kbps RMC mode was selected for SAR testing(the primary mode).
- 3) Per KDB941225 D01v03, When the maximum output power and tune-up tolerance specified for production units in a Second mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of Second to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the Second mode.

7.1.5 Conducted power measurements of LTE Band VII

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20775CH	21100CH	21425CH
5MHz	QPSK	1	0	22.40	20.45	20.92	21.30
		1	13	22.40	20.61	21.18	21.60
		1	24	22.40	20.48	20.88	21.23
		12	0	21.40	20.13	20.56	20.87
		12	6	21.40	20.14	20.49	20.86
		12	13	21.40	20.00	20.33	20.68
		25	0	21.40	20.03	20.39	20.76
	16QAM	1	0	21.40	19.71	20.16	20.23
		1	13	21.40	19.80	20.32	20.51
		1	24	21.40	19.57	19.99	20.18
		12	0	21.40	19.53	19.79	20.23
		12	6	21.40	19.46	19.79	20.32
		12	13	21.40	19.55	19.61	20.15
		25	0	21.40	19.45	19.69	20.29
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20800CH	21100CH	21400CH
10MHz	QPSK	1	0	22.40	20.96	21.28	21.45
		1	25	22.40	21.26	21.57	21.59
		1	49	22.40	21.12	21.30	21.31
		25	0	21.40	20.55	20.78	20.86
		25	13	21.40	20.64	20.79	20.80
		25	25	21.40	20.54	20.63	20.71
		50	0	21.40	20.48	20.68	20.81
	16QAM	1	0	21.40	19.47	19.67	19.65
		1	25	21.40	19.68	19.78	19.82
		1	49	21.40	19.48	19.52	19.53
		25	0	21.40	19.57	19.45	19.47
		25	13	21.40	19.53	19.44	19.46
		25	25	21.40	19.47	19.46	19.57
		50	0	21.40	19.50	19.50	19.41

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20825CH	21100CH	21375CH
15MHz	QPSK	1	0	22.40	20.79	21.22	21.44
		1	38	22.40	21.31	21.52	21.64
		1	74	22.40	21.19	21.18	21.17
		36	0	21.40	20.51	20.69	20.90
		36	18	21.40	20.67	20.72	20.91
		36	39	21.40	20.65	20.68	20.70
		75	0	21.40	20.56	20.68	20.86
	16QAM	1	0	21.40	19.68	19.61	19.87
		1	38	21.40	19.76	19.89	20.02
		1	74	21.40	19.60	19.61	19.58
		36	0	21.40	19.55	19.47	19.57
		36	18	21.40	19.65	19.44	19.54
		36	39	21.40	19.64	19.46	19.68
		75	0	21.40	19.53	19.56	19.51
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20850CH	21100CH	21350CH
20MHz	QPSK	1	0	22.40	21.06	21.52	21.80
		1	50	22.40	21.46	21.87	21.73
		1	99	22.40	21.48	21.50	21.38
		50	0	21.40	20.60	20.84	21.08
		50	25	21.40	20.76	20.82	21.00
		50	50	21.40	20.80	20.73	20.80
		100	0	21.40	20.69	20.81	20.97
	16QAM	1	0	21.40	19.55	19.88	20.10
		1	50	21.40	19.95	19.87	20.03
		1	99	21.40	19.98	19.86	19.76
		50	0	21.40	19.55	19.51	19.86
		50	25	21.40	19.42	19.47	19.85
		50	50	21.40	19.47	19.67	19.68
		100	0	21.40	19.58	19.64	19.85

Table 19: Conducted power measurement results of LTE Band VII

7.1.6 Conducted power measurements of Downlink LTE CA

In this section, the following conducted power measurement results of downlink LTE carrier aggregation are provided to quantify downlink only carrier aggregation SAR test exclusion per KDB 941225 D05A.

Power test equipment: R&S Radio Communication Tester CMW500 and/or Anritsu Radio Communication Analyzer MT8821C were used.

Uplink maximum output power is measured with downlink carrier aggregation active, using the channel with highest measured maximum output power when downlink carrier aggregation is inactive, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.

The conducted power measurement results of downlink LTE CA Conducted Power are as below:

CA Class	PCC Band	PCC							SCC			Power	
		PCC Bandwidth (MHz)	PCC UL RB size	PCC UL RB offset	PCC DL RB size	PCC DL RB offset	PCC UL Channel	PCC DL Channel	SCC Band	SCC Bandwidth (MHz)	SCC DL Channel	Rel 8 LTE Tx Power(dBm)	DL LTE CA Tx Power(dBm)
CA_7C	7	20	1	99	100	0	20850	2850	7	20	3048	21.48	21.63
CA_3A_7A	7	20	1	99	100	0	20850	2850	3	20	1575	21.48	21.58
CA_7A_20A	7	20	1	99	100	0	20850	2850	20	10	6300	21.48	21.57

Table 20: Conducted power measurement results of DL LTE CA

Note: Testing is not required in bands or modes not intended/allowed for US operation.

According to KDB 941225 D05A, the downlink LTE CA SAR test is not required and PAG requirements can be excluded.

7.1.7 Conducted power measurements of WiFi 2.4G

Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune-up	Average Power (dBm)	SAR Test (Yes/No)
802.11b	1	2412	1	17.00	15.55	Yes
	6	2437		17.00	15.39	Yes
	11	2462		17.00	15.25	Yes
802.11g	1	2412	6	16.00	/	No
	6	2437		16.00	/	No
	11	2462		16.00	/	No
802.11n 20M	1	2412	6.5	16.00	/	No
	6	2437		16.00	/	No
	11	2462		16.00	/	No
802.11n 40M	3	2422	13.5	16.00	/	No
	6	2437		16.00	/	No
	9	2452		16.00	/	No

Table 21: Conducted power measurement results of WiFi 2.4G.

Note: 1) The Average conducted power of WiFi is measured with RMS detector.

7.1.8 Conducted power measurements of BT

The output power of BT antenna is as following:

BT 2450	Tune-up	Average Conducted Power (dBm)		
		0CH	39CH	78CH
DH5	9.50	7.80	9.41	8.15
2DH5	9.50	6.05	7.42	6.35
3DH5	9.50	6.53	7.54	6.24

BT 2450	Tune-up	Average Conducted Power (dBm)		
		0CH	19CH	39CH
BLE	7.00	6.02	6.81	6.31

Table 22: Conducted power measurement results of BT.

Note: The conducted power of BT is measured with RMS detector.

7.2 SAR measurement Results

General Notes:

- 1) Per KDB447498 D01, all SAR measurement results are scaled to the maximum tune-up tolerance limit to demonstrate SAR compliance.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{ MHz}$.When the maximum output power variation across the required test channels is $> \frac{1}{2}\text{ dB}$, instead of the middle channel, the highest output power channel must be used.
- 3) Per KDB865664 D01, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8\text{W/Kg}$; if the deviation among the repeated measurement is $\leq 20\%$, and the measured SAR $< 1.45\text{W/Kg}$, only one repeated measurement is required.
- 4) Per KDB941225 D06, the DUT Dimension is bigger than $9\text{ cm} \times 5\text{ cm}$, so 10mm is chosen as the test separation distance for Hotspot mode. When the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.
- 5) Per KDB648474 D04, SAR is evaluated without a headset connected to the device. When the standalone reported body-worn SAR is $\leq 1.2\text{ W/kg}$, no additional SAR evaluations using a headset are required.
- 6) Per KDB865664 D02, SAR plot is only required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination; Plots are also required when the measured SAR is $> 1.5\text{ W/kg}$, or $> 7.0\text{ W/kg}$ for occupational exposure. The published RF exposure KDB procedures may require additional plots; for example, to support SAR to peak location separation ratio test exclusion and/or volume scan post-processing(Refer to appendix B for detailed SAR plots).
- 7) Per KDB 648474D04, for handsets with additional batteries, the highest reported SAR for each wireless technology, frequency band, operating mode and applicable exposure condition (head, body-worn accessory, hotspot mode, etc.) must be repeated with the specific accessory attached. In addition, for test cases where the measured SAR for a handset is greater than 1.2 W/kg , these tests should also be repeated with the additional batteries.
- 8) Per KDB 648474 D04, Phones with built-in NFC functions do not require separate SAR testing and can generally be tested according to the SAR measurement procedures normally required for the phone. Influences of the hardware introduced by the built-in NFC functions are inherently considered through testing of the other transmitters that require SAR.

GSM Notes:

- 1) Per KDB941225 D01, SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.
- 2) Per KDB648474 D04, the device does not support DTM function. Body-worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.

UMTS Notes:

- 1) Per KDB941225 D01, when the maximum output power and tune-up tolerance specified for production units in a Second mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of Second to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the Second mode.

LTE Notes:

- 1) The LTE test configurations are determined according to KDB941225 D05. The general test procedures used for SAR testing can be found in Section 6.5.
- 2) A-MPR was disabled for all SAR test by setting NS_01 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI)

WiFi Notes:

Per KDB248227D01:

- 1) When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test position is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR position until the reported SAR result is ≤ 0.8 W/kg or all test position are measured. For all positions/configurations tested using the initial test position and subsequent test positions, when the *reported* SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the *reported* SAR is ≤ 1.2 W/kg or all required channels are tested.
- 2) The highest SAR measured for the initial test position or initial test configuration should be used to determine SAR test exclusion according to the sum of 1-g SAR and SAR peak to location ratio provisions in KDB 447498. In addition, a test lab may also choose to perform standalone SAR measurements for test positions and 802.11 configurations that are not required by the initial test position or initial test configuration procedures and apply the results to determine simultaneous transmission SAR test exclusion, according to sum of 1-g and SAR peak to location ratio requirements to reduce the number of simultaneous transmission SAR measurements.
- 3) For WiFi 2.4G, SAR is measured for 2.4 GHz 802.11b DSSS using the initial test position procedure. SAR is not required for the 2.4 GHz 802.11g/n OFDM conditions when KDB Publication 447498 SAR test exclusion applies to the OFDM configuration or when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

7.2.1 SAR measurement Result of GSM850

Test Position of Head	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	SAR Plot
			1-g	10-g					
Test data with battery 1#									
Left touch	190/836.6	GSM	0.201	0.150	0.02	33.10	33.50	0.220	/
Left tilt	190/836.6	GSM	0.203	0.131	0.06	33.10	33.50	0.223	/
Right touch	190/836.6	GSM	0.192	0.144	0.07	33.10	33.50	0.211	/
Right tilt	190/836.6	GSM	0.166	0.107	0.06	33.10	33.50	0.182	/
Left tilt	128/824.2	GSM	0.167	0.125	0.07	33.04	33.50	0.186	/
Left tilt	251/848.8	GSM	0.221	0.167	0.03	33.17	33.50	0.238	/
Tested at the worst position with SIM2									
Left tilt	251/848.8	GSM	0.233	0.174	0.09	33.17	33.50	0.251	/
Tested at the worst position with battery 2#									
Left tilt	251/848.8	GSM	0.241	0.179	-0.07	33.17	33.50	0.260	Yes
Tested at the worst position with battery 3#									
Left tilt	251/848.8	GSM	0.238	0.177	0.11	33.17	33.50	0.257	/

Table 23: Head SAR test results of GSM850

Test Position of Body-Worn with 15mm	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	SAR Plot
			1-g	10-g					
Test data with battery 1#									
Front Side	190/836.6	GSM	0.188	0.133	0.04	33.10	33.50	0.206	/
Back Side	190/836.6	GSM	0.260	0.198	-0.13	33.10	33.50	0.285	/
Tested at the worst position with SIM2									
Back Side	190/836.6	GSM	0.273	0.208	0.02	33.10	33.50	0.299	Yes
Tested at the worst position with battery 2#									
Back Side	190/836.6	GSM	0.259	0.185	0.03	33.10	33.50	0.284	/
Tested at the worst position with battery 3#									
Back Side	190/836.6	GSM	0.268	0.205	0.02	33.10	33.50	0.294	/

Table 24: Body-Worn SAR test results of GSM850

Test Position of Hotspot with 10mm	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	SAR Plot
			1-g	10-g					
Test data with battery 1#									
Front Side	190/836.6	GPRS 2TS	0.389	0.277	-0.02	31.09	31.50	0.428	/
Back Side	190/836.6	GPRS 2TS	0.613	0.471	-0.02	31.09	31.50	0.674	Yes
Left Side	190/836.6	GPRS 2TS	0.297	0.200	0.04	31.09	31.50	0.326	/
Right Side	190/836.6	GPRS 2TS	0.521	0.349	-0.01	31.09	31.50	0.573	/
Bottom Side	190/836.6	GPRS 2TS	0.094	0.053	0.06	31.09	31.50	0.103	/
Tested at the worst position with SIM2									
Back Side	190/836.6	GPRS 2TS	0.599	0.425	-0.05	31.09	31.50	0.658	/
Tested at the worst position with battery 2#									
Back Side	190/836.6	GPRS 2TS	0.592	0.420	-0.05	31.09	31.50	0.651	/
Tested at the worst position with battery 3#									
Back Side	190/836.6	GPRS 2TS	0.613	0.470	-0.01	31.09	31.50	0.674	/

Table 25: Hotspot SAR test results of GSM850

7.2.2 SAR measurement Result of GSM1900

Test Position of Head	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	SAR Plot
			1-g	10-g					
Test data with battery 1#									
Left touch	661/1880	GSM	0.150	0.092	0.10	30.10	30.50	0.164	/
Left tilt	661/1880	GSM	0.038	0.023	0.18	30.10	30.50	0.042	/
Right touch	661/1880	GSM	0.090	0.057	-0.14	30.10	30.50	0.099	/
Right tilt	661/1880	GSM	0.070	0.037	0.02	30.10	30.50	0.077	/
Left touch	512/1850.2	GSM	0.138	0.079	0.17	30.14	30.50	0.150	/
Left touch	810/1909.8	GSM	0.166	0.101	0.10	30.00	30.50	0.186	/
Tested at the worst position with SIM2									
Left touch	810/1909.8	GSM	0.164	0.100	-0.12	30.00	30.50	0.184	/
Tested at the worst position with battery 2#									
Left touch	810/1909.8	GSM	0.180	0.111	-0.15	30.00	30.50	0.202	Yes
Tested at the worst position with battery 3#									
Left touch	810/1909.8	GSM	0.173	0.099	0.10	30.00	30.50	0.194	/

Table 26: Head SAR test results of GSM1900

Test Position of Body-Worn with 15mm	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	SAR Plot
			1-g	10-g					
Test data with battery 1#									
Front Side	661/1880	GSM	0.301	0.173	0.02	30.10	30.50	0.330	/
Back Side	661/1880	GSM	0.491	0.268	-0.17	30.10	30.50	0.538	/
Tested at the worst position with SIM2									
Back Side	661/1880	GSM	0.572	0.307	-0.03	30.10	30.50	0.627	Yes
Tested at the worst position with battery 2#									
Back Side	661/1880	GSM	0.544	0.277	-0.03	30.10	30.50	0.596	/
Tested at the worst position with battery 3#									
Back Side	661/1880	GSM	0.469	0.241	-0.08	30.10	30.50	0.514	/

Table 27: Body-Worn SAR test results of GSM1900

Test Position of Hotspot with 10mm	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	SAR Plot
			1-g	10-g					
Test data with battery 1#									
Front Side	661/1880	GPRS 2TS	0.239	0.130	0.13	22.77	23.50	0.283	/
Back Side	661/1880	GPRS 2TS	0.477	0.238	-0.01	22.77	23.50	0.564	/
Left Side	661/1880	GPRS 2TS	0.051	0.029	0.00	22.77	23.50	0.060	/
Right Side	661/1880	GPRS 2TS	0.012	0.067	0.05	22.77	23.50	0.014	/
Bottom Side	661/1880	GPRS 2TS	0.534	0.284	-0.06	22.77	23.50	0.632	/
Tested at the worst position with SIM2									
Bottom Side	661/1880	GPRS 2TS	0.561	0.295	-0.15	22.77	23.50	0.664	Yes
Tested at the worst position with battery 2#									
Bottom Side	661/1880	GPRS 2TS	0.539	0.274	-0.15	22.77	23.50	0.638	/
Tested at the worst position with battery 3#									
Bottom Side	661/1880	GPRS 2TS	0.512	0.261	0.01	22.77	23.50	0.606	/

Table 28: Hotspot SAR test results of GSM1900

7.2.3 SAR measurement Result of UMTS Band II

Test Position of Head	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	SAR Plot
			1-g	10-g					
Test data with battery 1#									
Left touch	9400/1880	RMC	0.194	0.119	0.19	23.04	24.00	0.242	/
Left tilt	9400/1880	RMC	0.052	0.031	0.15	23.04	24.00	0.064	/
Right touch	9400/1880	RMC	0.117	0.069	0.00	23.04	24.00	0.146	/
Right tilt	9400/1880	RMC	0.084	0.046	0.10	23.04	24.00	0.105	/
Left touch	9262/1852.4	RMC	0.161	0.099	0.18	22.94	24.00	0.206	/
Left touch	9538/1907.6	RMC	0.230	0.141	0.19	23.01	24.00	0.289	Yes
Tested at the worst position with SIM2									
Left touch	9538/1907.6	RMC	0.221	0.136	0.19	23.01	24.00	0.278	/
Tested at the worst position with battery 2#									
Left touch	9538/1907.6	RMC	0.212	0.121	0.12	23.01	24.00	0.266	/
Tested at the worst position with battery 3#									
Left touch	9538/1907.6	RMC	0.211	0.121	0.10	23.01	24.00	0.265	/

Table 29: Head SAR test results of UMTS Band II

Test Position of Body-Worn with 15mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	SAR Plot
			1-g	10-g					
Test data with battery 1#									
Front Side	9400/1880	RMC	0.305	0.169	0.06	23.04	24.00	0.380	/
Back Side	9400/1880	RMC	0.669	0.359	0.07	23.04	24.00	0.834	/
Back Side	9262/1852.4	RMC	0.991	0.538	-0.17	22.94	24.00	1.265	Yes
Back Side-repeated	9262/1852.4	RMC	0.940	0.515	0.00	22.94	24.00	1.200	/
Back Side-holder perturbation verification	9262/1852.4	RMC	0.978	0.535	-0.14	22.94	24.00	1.248	/
Back Side	9538/1907.6	RMC	0.433	0.230	0.02	23.01	24.00	0.544	/
Tested at the worst position with headset									
Back Side	9262/1852.4	RMC	0.862	0.477	-0.10	22.94	24.00	1.100	/
Tested at the worst position with SIM2									
Back Side	9262/1852.4	RMC	0.897	0.494	0.14	22.94	24.00	1.145	/
Tested at the worst position with battery 2#									
Back Side	9262/1852.4	RMC	0.897	0.493	-0.14	22.94	24.00	1.145	/
Tested at the worst position with battery 3#									
Back Side	9262/1852.4	RMC	0.857	0.471	-0.08	22.94	24.00	1.094	/

Table 30: Body-Worn SAR test results of UMTS Band II

Note: According to 201610 FCC TCB workshop RF exposure slides, when the highest reported SAR of an antenna is > 1.2 W/kg, holder perturbation verification is required for each antenna, using the highest SAR configuration among all applicable frequency bands.

Test Position of Hotspot with 10mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	SAR Plot
			1-g	10-g					
Test data with battery 1#									
Front Side	9400/1880	RMC	0.190	0.102	0.16	17.02	18.00	0.238	/
Back Side	9400/1880	RMC	0.381	0.189	0.18	17.02	18.00	0.477	/
Left Side	9400/1880	RMC	0.034	0.019	0.16	17.02	18.00	0.043	/
Right Side	9400/1880	RMC	0.011	0.005	-0.12	17.02	18.00	0.013	/
Bottom Side	9400/1880	RMC	0.608	0.328	-0.01	17.02	18.00	0.762	/
Tested at the worst position with SIM2									
Bottom Side	9400/1880	RMC	0.624	0.337	-0.01	17.02	18.00	0.782	Yes
Tested at the worst position with battery 2#									
Bottom Side	9400/1880	RMC	0.602	0.324	-0.04	17.02	18.00	0.754	/
Tested at the worst position with battery 3#									
Bottom Side	9400/1880	RMC	0.597	0.296	-0.02	17.02	18.00	0.748	/

Table 31: Hotspot SAR test results of UMTS Band II

7.2.4 SAR measurement Result of UMTS Band V

Test Position of Head	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	SAR Plot
			1-g	10-g					
Test data with battery 1#									
Left touch	4182/836.4	RMC	0.206	0.153	0.01	23.58	24.50	0.255	/
Left tilt	4182/836.4	RMC	0.213	0.138	0.07	23.58	24.50	0.263	/
Right touch	4182/836.4	RMC	0.187	0.141	0.03	23.58	24.50	0.231	/
Right tilt	4182/836.4	RMC	0.173	0.107	0.07	23.58	24.50	0.214	/
Left tilt	4132/826.4	RMC	0.200	0.136	0.06	23.63	24.50	0.244	/
Left tilt	4233/846.6	RMC	0.209	0.131	0.09	23.52	24.50	0.262	/
Tested at the worst position with SIM2									
Left tilt	4182/836.4	RMC	0.214	0.139	0.08	23.58	24.50	0.264	Yes
Tested at the worst position with battery 2#									
Left tilt	4182/836.4	RMC	0.212	0.137	-0.03	23.58	24.50	0.262	/
Tested at the worst position with battery 3#									
Left tilt	4182/836.4	RMC	0.208	0.134	0.06	23.58	24.50	0.257	/

Table 32: Head SAR test results of UMTS Band V

Test Position of Body-Worn with 15mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	SAR Plot
			1-g	10-g					
Test data with battery 1#									
Front Side	4182/836.4	RMC	0.208	0.159	0.00	23.58	24.50	0.257	/
Back Side	4182/836.4	RMC	0.286	0.218	-0.02	23.58	24.50	0.353	Yes
Tested at the worst position with SIM2									
Back Side	4182/836.4	RMC	0.259	0.198	0.02	23.58	24.50	0.320	/
Tested at the worst position with battery 2#									
Back Side	4182/836.4	RMC	0.259	0.198	-0.01	23.58	24.50	0.320	/
Tested at the worst position with battery 3#									
Back Side	4182/836.4	RMC	0.277	0.212	-0.13	23.58	24.50	0.342	/

Table 33: Body-Worn SAR test results of UMTS Band V

Test Position of Hotspot with 10mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	SAR Plot
			1-g	10-g					
Test data with battery 1#									
Front Side	4182/836.4	RMC	0.224	0.132	-0.01	23.58	24.50	0.277	/
Back Side	4182/836.4	RMC	0.311	0.240	0.02	23.58	24.50	0.384	Yes
Left Side	4182/836.4	RMC	0.183	0.124	0.02	23.58	24.50	0.226	/
Right Side	4182/836.4	RMC	0.298	0.203	0.00	23.58	24.50	0.368	/
Bottom Side	4182/836.4	RMC	0.037	0.024	0.19	23.58	24.50	0.046	/
Tested at the worst position with SIM2									
Back Side	4182/836.4	RMC	0.309	0.238	-0.01	23.58	24.50	0.382	/
Tested at the worst position with battery 2#									
Back Side	4182/836.4	RMC	0.293	0.209	-0.01	23.58	24.50	0.362	/
Tested at the worst position with battery 3#									
Back Side	4182/836.4	RMC	0.311	0.239	-0.12	23.58	24.50	0.384	/

Table 34: Hotspot SAR test results of UMTS Band V

7.2.5 SAR measurement Result of LTE Band VII

Test Position of Head	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	SAR Plot
			1-g	10-g					
Test data with battery 1#									
1RB									
Left touch	21100/2535	20M QPSK 1RB#50	0.256	0.131	0.15	21.87	22.40	0.289	/
Left tilt	21100/2535	20M QPSK 1RB#50	0.060	0.035	0.14	21.87	22.40	0.068	/
Right touch	21100/2535	20M QPSK 1RB#50	0.178	0.098	0.12	21.87	22.40	0.201	/
Right tilt	21100/2535	20M QPSK 1RB#50	0.153	0.069	0.02	21.87	22.40	0.173	/
Left touch	20850/2510	20M QPSK 1RB#99	0.366	0.191	0.16	21.48	22.40	0.452	/
Left touch	21350/2560	20M QPSK 1RB#0	0.398	0.214	0.17	21.80	22.40	0.457	Yes
50%RB									
Left touch	21350/2560	20M QPSK 50%RB#0	0.247	0.129	0.04	21.08	21.40	0.266	/
Left tilt	21350/2560	20M QPSK 50%RB#0	0.045	0.026	0.13	21.08	21.40	0.048	/
Right touch	21350/2560	20M QPSK 50%RB#0	0.156	0.081	0.12	21.08	21.40	0.168	/
Right tilt	21350/2560	20M QPSK 50%RB#0	0.136	0.060	0.16	21.08	21.40	0.146	/
Tested at the worst position with SIM2									
Left touch	21350/2560	20M QPSK 1RB#0	0.372	0.193	0.14	21.80	22.40	0.427	/
Tested at the worst position with battery 2#									
Left touch	21350/2560	20M QPSK 1RB#0	0.354	0.186	0.19	21.80	22.40	0.406	/
Tested at the worst position with battery 3#									
Left touch	21350/2560	20M QPSK 1RB#0	0.380	0.199	0.08	21.80	22.40	0.436	/

Table 35: Head SAR test results of LTE Band VII

Test Position of Body-Worn with 15mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	SAR Plot
			1-g	10-g					
Test data with battery 1#									
1RB									
Front Side	21100/2535	20M QPSK 1RB#50	0.344	0.190	0.12	21.87	22.40	0.389	/
Back Side	21100/2535	20M QPSK 1RB#50	0.297	0.165	0.02	21.87	22.40	0.336	/
50%RB									
Front Side	21350/2560	20M QPSK 50%RB#0	0.349	0.190	0.12	21.08	21.40	0.376	Yes
Back Side	21350/2560	20M QPSK 50%RB#0	0.292	0.161	0.14	21.08	21.40	0.314	/
Tested at the worst position with SIM2									
Front Side	21100/2535	20M QPSK 1RB#50	0.343	0.185	0.10	21.87	22.40	0.388	/
Tested at the worst position with battery 2#									
Front Side	21100/2535	20M QPSK 1RB#50	0.328	0.178	0.14	21.87	22.40	0.371	/
Tested at the worst position with battery 3#									
Front Side	21100/2535	20M QPSK 1RB#50	0.320	0.174	0.16	21.87	22.40	0.362	/

Table 36: Body-Worn SAR test results of LTE Band VII

Test Position of Hotspot with 10mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	SAR Plot
			1-g	10-g					
Test data with battery 1#									
1RB									
Front Side	21100/2535	20M QPSK 1RB#50	0.757	0.403	0.11	21.87	22.40	0.855	/
Front Side	20850/2510	20M QPSK 1RB#99	0.733	0.394	0.10	21.48	22.40	0.906	/
Front Side	21350/2560	20M QPSK 1RB#0	0.866	0.459	0.15	21.80	22.40	0.994	Yes
Front Side-repeated	21350/2560	20M QPSK 1RB#0	0.766	0.408	0.11	21.80	22.40	0.879	/
Back Side	21100/2535	20M QPSK 1RB#50	0.694	0.364	0.18	21.87	22.40	0.784	/
Left Side	21100/2535	20M QPSK 1RB#50	0.345	0.185	0.05	21.87	22.40	0.390	/
Right Side	21100/2535	20M QPSK 1RB#50	0.021	0.010	0.19	21.87	22.40	0.024	/
Bottom Side	21100/2535	20M QPSK 1RB#50	0.567	0.301	-0.16	21.87	22.40	0.641	/
50%RB									
Front Side	21350/2560	20M QPSK 50%RB#0	0.629	0.333	0.13	21.08	21.40	0.677	/
Back Side	21350/2560	20M QPSK 50%RB#0	0.595	0.311	0.12	21.08	21.40	0.640	/
Left Side	21350/2560	20M QPSK 50%RB#0	0.309	0.164	0.15	21.08	21.40	0.333	/
Right Side	21350/2560	20M QPSK 50%RB#0	0.016	0.006	0.12	21.08	21.40	0.017	/
Bottom Side	21350/2560	20M QPSK 50%RB#0	0.489	0.259	0.13	21.08	21.40	0.526	/
100%RB									
Front Side	21350/2560	20M QPSK 100%RB#0	0.676	0.364	0.09	20.97	21.40	0.746	/
Tested at the worst position with SIM2									
Front Side	21350/2560	20M QPSK 1RB#0	0.739	0.392	0.18	21.80	22.40	0.848	/
Tested at the worst position with battery 2#									
Front Side	21350/2560	20M QPSK 1RB#0	0.665	0.353	0.17	21.80	22.40	0.764	/
Tested at the worst position with battery 3#									
Front Side	21350/2560	20M QPSK 1RB#0	0.688	0.37	0.18	21.80	22.40	0.790	/

Table 37: Hotspot SAR test results of LTE Band VII

7.2.6 SAR measurement Result of WiFi 2.4G

Test Position of Head	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	SAR Plot
			1-g Area Scan	1-g Zoom Scan					
The data of PRA-LX3 from the report No.:SYBH(Z-SAR)006102106-2									
Test data with battery 1#									
Left touch	1/2412	802.11 b	0.612	0.547	-0.07	15.55	17.00	0.764	/
Left tilt	1/2412	802.11 b	0.536	0.503	0.02	15.55	17.00	0.702	/
Right touch	1/2412	802.11 b	0.168	0.156	-0.11	15.55	17.00	0.218	/
Right tilt	1/2412	802.11 b	0.152	0.147	0.02	15.55	17.00	0.205	/
Left touch	6/2437	802.11 b	0.652	0.574	0.15	15.39	17.00	0.832	/
Left touch	11/2462	802.11 b	0.643	0.568	0.18	15.25	17.00	0.850	/
Tested at the worst position with battery 2#									
Left touch	11/2462	802.11 b	0.583	0.530	-0.17	15.25	17.00	0.793	/
Tested at the worst position with battery 3#									
Left touch	11/2462	802.11 b	0.657	0.589	-0.14	15.25	17.00	0.881	/
PRA-LX1 Tested at the worst position of PRA-LX3 with battery 1#									
Left touch	11/2462	802.11 b	0.554	0.502	-0.01	15.25	17.00	0.751	/
PRA-LX1 Tested at the worst position of PRA-LX3 with battery 2#									
Left touch	11/2462	802.11 b	0.736	0.687	0.11	15.25	17.00	1.028	/
PRA-LX1 Tested at the worst position of PRA-LX3 with battery 3#									
Left touch	11/2462	802.11 b	0.772	0.743	-0.10	15.25	17.00	1.112	Yes

Table 38: Head SAR test results of WiFi 2.4G

According to KDB248227 D01, The reported SAR must be scaled to 100% transmission duty factor to determine compliance at maximum tune-up tolerance limit. The scaled reported SAR is presented as below.

Test Position of Head	Test channel / Freq.(MHz)	Test Mode	Scaled SAR _{1-g} (W/kg)	Actual duty factor	Maximum duty factor	Reported SAR _{1-g} (W/kg)
The data of PRA-LX3 from the report No.:SYBH(Z-SAR)006102106-2						
Test data with battery 1#						
Left touch	1/2412	802.11 b	0.764	99.13%	100%	0.771
Left tilt	1/2412	802.11 b	0.702	99.13%	100%	0.709
Right touch	1/2412	802.11 b	0.218	99.13%	100%	0.220
Right tilt	1/2412	802.11 b	0.205	99.13%	100%	0.207
Left touch	6/2437	802.11 b	0.832	99.13%	100%	0.839
Left touch	11/2462	802.11 b	0.850	99.13%	100%	0.857
Tested at the worst position with battery 2#						
Left touch	11/2462	802.11 b	0.793	99.13%	100%	0.800
Tested at the worst position with Battery 3#						
Left touch	11/2462	802.11 b	0.881	99.13%	100%	0.889
PRA-LX1 Tested at the worst position of PRA-LX3 with battery 1#						
Left touch	11/2462	802.11 b	0.751	99.13%	100%	0.758
PRA-LX1 Tested at the worst position of PRA-LX3 with battery 2#						
Left touch	11/2462	802.11 b	1.028	99.13%	100%	1.037
PRA-LX1 Tested at the worst position of PRA-LX3 with battery 3#						
Left touch	11/2462	802.11 b	1.112	99.13%	100%	1.121

Mode	Tune-up (dBm)	Tune-up (mW)	Highest Reported SAR(W/kg)	Adjusted SAR (W/kg)	SAR test
802.11b	17.00	50.12	1.121	/	Yes
802.11g	16.00	39.81	/	0.890	No
802.11n 20M	16.00	39.81	/	0.890	No
802.11n 40M	16.00	39.81	/	0.890	No

Note: Per KDB248227D01, for Head SAR test of WiFi 2.4G,

- 1) SAR is measured for 2.4 GHz 802.11b DSSS using the initial test position procedure.
- 2) As the highest *reported* SAR for DSSS is adjusted by the ratio of OFDM 802.11g/n to DSSS specified maximum output power and the adjusted SAR is < 1.2 W/kg, so SAR for 802.11g/n is not required.

Test Position of Body-Worn with 15mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	SAR Plot
			1-g Area Scan	1-g Zoom Scan					
The data of PRA-LX3 from the report No.:SYBH(Z-SAR)006102106-2									
Test data with battery 1#									
Front Side	1/2412	802.11 b	0.045	/	0.18	15.55	17.00	/	/
Back Side	1/2412	802.11 b	0.049	0.050	0.11	15.55	17.00	0.070	/
Tested at the worst position with battery 2#									
Back Side	1/2412	802.11 b	0.065	0.067	-0.17	15.55	17.00	0.093	/
Tested at the worst position with battery 3#									
Back Side	1/2412	802.11 b	0.047	0.048	0.13	15.55	17.00	0.066	/
PRA-LX1 Tested at the worst position of PRA-LX3 with battery 1#									
Back Side	1/2412	802.11 b	0.057	0.057	-0.12	15.55	17.00	0.079	Yes
PRA-LX1 Tested at the worst position of PRA-LX3 with battery 2#									
Back Side	1/2412	802.11 b	0.049	0.049	-0.18	15.55	17.00	0.068	/
PRA-LX1 Tested at the worst position of PRA-LX3 with battery 3#									
Back Side	1/2412	802.11 b	0.044	0.044	-0.11	15.55	17.00	0.061	/

Table 39: Body-Worn SAR test results of WiFi 2.4G

According to KDB248227 D01,The reported SAR must be scaled to 100% transmission duty factor to determine compliance at maximum tune-up tolerance limit.The scaled reported SAR is presented as below.

Test Position of Body-Worn with 15mm	Test channel / Freq.(MHz)	Test Mode	Scaled SAR _{1-g} (W/kg)	Actual duty factor	Maximum duty factor	Reported SAR _{1-g} (W/kg)
The data of PRA-LX3 from the report No.:SYBH(Z-SAR)006102106-2						
Test data with battery 1#						
Front Side	1/2412	802.11 b	/	99.13%	100%	/
Back Side	1/2412	802.11 b	0.070	99.13%	100%	0.070
Tested at the worst position with battery 2#						
Back Side	1/2412	802.11 b	0.093	99.13%	100%	0.094
Tested at the worst position with Battery 3#						
Back Side	1/2412	802.11 b	0.066	99.13%	100%	0.067
PRA-LX1 Tested at the worst position of PRA-LX3 with battery 1#						
Back Side	1/2412	802.11 b	0.079	99.13%	100%	0.080
PRA-LX1 Tested at the worst position of PRA-LX3 with battery 2#						
Back Side	1/2412	802.11 b	0.068	99.13%	100%	0.069
PRA-LX1 Tested at the worst position of PRA-LX3 with battery 3#						
Back Side	1/2412	802.11 b	0.061	99.13%	100%	0.062

Mode	Tune-up (dBm)	Tune-up (mW)	Highest Reported SAR(W/kg)	Adjusted SAR (W/kg)	SAR test
802.11b	17.00	50.12	0.094	/	Yes
802.11g	16.00	39.81	/	0.075	No
802.11n 20M	16.00	39.81	/	0.075	No
802.11n 40M	16.00	39.81	/	0.075	No

Note: Per KDB248227D01, for Body-worn SAR test of WiFi 2.4G:

- 1) SAR is measured for 2.4 GHz 802.11b DSSS using the initial test position procedure.
- 2) As the highest *reported* SAR for DSSS is adjusted by the ratio of OFDM 802.11g/n to DSSS specified maximum output power and the adjusted SAR is < 1.2 W/kg, so SAR for 802.11g/n is not required.

Test Position of Hotspot with 10mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	SAR Plot
			1-g Area Scan	1-g Zoom Scan					
The data of PRA-LX3 from the report No.:SYBH(Z-SAR)006102106-2									
Test data with battery 1#									
Front Side	1/2412	802.11 b	0.083	/	0.08	15.55	17.00	/	/
Back Side	1/2412	802.11 b	0.089	0.089	0.15	15.55	17.00	0.124	/
Right Side	1/2412	802.11 b	0.134	0.134	-0.13	15.55	17.00	0.187	/
Top Side	1/2412	802.11 b	0.038	/	0.01	15.55	17.00	/	/
Tested at the worst position with battery 2#									
Right Side	1/2412	802.11 b	0.143	0.143	-0.13	15.55	17.00	0.200	/
Tested at the worst position with battery 3#									
Right Side	1/2412	802.11 b	0.136	0.135	-0.01	15.55	17.00	0.189	/
PRA-LX1 Tested at the worst position of PRA-LX3 with battery 1#									
Right Side	1/2412	802.11 b	0.148	0.147	-0.04	15.55	17.00	0.205	Yes
PRA-LX1 Tested at the worst position of PRA-LX3 with battery 2#									
Right Side	1/2412	802.11 b	0.128	0.128	-0.01	15.55	17.00	0.179	/
PRA-LX1 Tested at the worst position of PRA-LX3 with battery 3#									
Right Side	1/2412	802.11 b	0.131	0.131	0.17	15.55	17.00	0.183	/

Table 40: Hotspot SAR test results of WiFi 2.4G

According to KDB248227 D01, The reported SAR must be scaled to 100% transmission duty factor to determine compliance at maximum tune-up tolerance limit. The scaled reported SAR is presented as below.

Test Position of Hotspot with 10mm	Test channel / Freq.(MHz)	Test Mode	Scaled SAR _{1-g} (W/kg)	Actual duty factor	Maximum duty factor	Reported SAR _{1-g} (W/kg)
The data of PRA-LX3 from the report No.:SYBH(Z-SAR)006102106-2						
Test data with battery 1#						
Front Side	1/2412	802.11 b	/	99.13%	100%	/
Back Side	1/2412	802.11 b	0.124	99.13%	100%	0.126
Right Side	1/2412	802.11 b	0.187	99.13%	100%	0.189
Top Side	1/2412	802.11 b	/	99.13%	100%	/
Tested at the worst position with battery 2#						
Right Side	1/2412	802.11 b	0.200	99.13%	100%	0.201
Tested at the worst position with Battery 3#						
Right Side	1/2412	802.11 b	0.189	99.13%	100%	0.190
PRA-LX1 Tested at the worst position of PRA-LX3 with battery 1#						
Right Side	1/2412	802.11 b	0.205	99.13%	100%	0.207
PRA-LX1 Tested at the worst position of PRA-LX3 with battery 2#						
Right Side	1/2412	802.11 b	0.179	99.13%	100%	0.180
PRA-LX1 Tested at the worst position of PRA-LX3 with battery 3#						
Right Side	1/2412	802.11 b	0.183	99.13%	100%	0.185

Mode	Tune-up (dBm)	Tune-up (mW)	Highest Reported SAR(W/kg)	Adjusted SAR (W/kg)	SAR test
802.11b	17.00	50.12	0.207	/	Yes
802.11g	16.00	39.81	/	0.164	No
802.11n 20M	16.00	39.81	/	0.164	No
802.11n 40M	16.00	39.81	/	0.164	No


Note: Per KDB248227D01, for Hotspot SAR test of WiFi 2.4G:

- 1) SAR is measured for 2.4 GHz 802.11b DSSS using the initial test position procedure.
- 2) As the highest reported SAR for DSSS is adjusted by the ratio of OFDM 802.11g/n to DSSS specified maximum output power and the adjusted SAR is < 1.2 W/kg, so SAR for 802.11g/n is not required.

7.3 Multiple Transmitter Evaluation

The following tables list information which is relevant for the decision if a simultaneous transmit evaluation is necessary according to FCC KDB 447498D01 General RF Exposure Guidance v06.

The location of the antennas inside the device is shown as below picture:

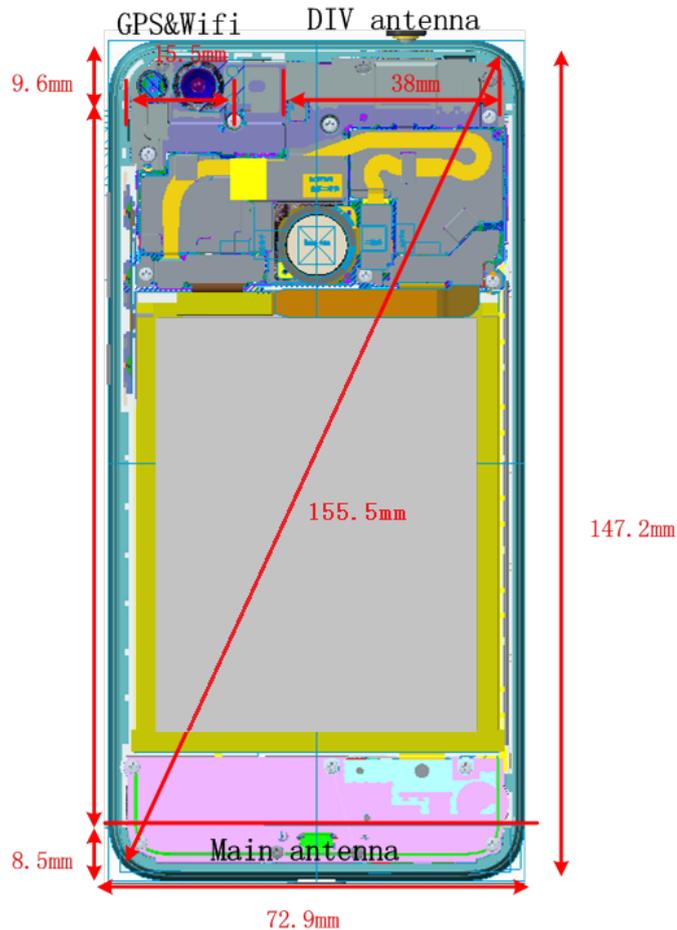

Note:

- 1) Div antenna does not have the transmitter function.

Mode	Exposure Condition	Front Side	Back Side	Left Side	Right Side	Top Side	Bottom Side
Main antenna	Hotspot	Yes	Yes	Yes	Yes	No	Yes
WiFi/BT antenna	Hotspot	Yes	Yes	No	Yes	Yes	No

Table 41: Sides for Hotspot SAR testing

Note:

- 1) Per KDB 941225 D06, particular DUT edges were not required to be evaluated for Hotspot SAR if the antenna-to-edge distance is greater than 2.5cm.

7.3.1 Stand-alone SAR test exclusion

Per FCC KDB 447498D01v06: the 1-g SAR and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for product specific 10-g SAR, where:

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	Position	P_{max} (dBm)*	P_{max} (mW)	Distance (mm)	f (GHz)	Calculation Result	SAR Exclusion threshold	SAR test exclusion
BT	Body-Worn	9.50	8.91	15	2.480	0.94	3.00	Yes

Table 42: Standalone SAR test exclusion for BT

Note:

- 1)* - maximum possible output power declared by manufacturer
- 2) Held to ear configurations are not applicable to Bluetooth for this device.

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})/x}] \text{ W/kg}$ for test separation distances ≤ 50 mm, where $x = 7.5$ for 1-g SAR and $x = 18.75$ for 10-g SAR.

Mode	Position	P_{max} (dBm)*	P_{max} (mW)	Distance (mm)	f (GHz)	X	Estimated SAR (W/kg)*
BT	Body-worn	9.50	8.91	15	2.480	7.50	0.125

Table 43: Estimated SAR calculation for BT

Note:

- 1) * - maximum possible output power declared by manufacturer
- 2) Held to ear configurations are not applicable to Bluetooth and therefore were not considered for simultaneous transmission.

7.3.2 Simultaneous Transmission Possibilities

The Simultaneous Transmission Possibilities of this device are as below:

No.	Configuration	Head	Body-worn	Hotspot
1	GSM(Voice) + BT	No	Yes	No
2	GSM(Data) + BT	No	No	No
3	GSM(Voice)+ WiFi 2.4G	Yes	Yes	No
4	GSM(Data) + WiFi 2.4G	No	No	Yes
5	UMTS(Voice) + BT	No	No	No
6	UMTS(Data) + BT	No	Yes	No
7	UMTS(Voice) + WiFi 2.4G	Yes	Yes	No
8	UMTS(Data) + WiFi 2.4G	No	Yes	Yes
9	LTE + BT	No	Yes	No
10	LTE + WiFi 2.4G	Yes	Yes	Yes

Table 44: Simultaneous Transmission Possibilities

Note:

- 1) WiFi 2.4G and BT can't transmit simutanously.
- 2) The device does not support GSM DTM function. Body-worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.
- 3) Held to ear configurations are not applicable to Bluetooth for this device.
- 4) LTE VOIP 3rd party applications may possibly be installed and used by the user.
- 5) The device supports VoLTE function.

7.3.3 SAR Summation Scenario

The yellow color SAR test data in the following summed SAR tables represent that the additional SAR test results in simultaneous transmission fixed power reduction scenario are used to ensure simultaneous transmission SAR test exclusion. For the other SAR test data in the summed SAR tables, the more conservative SAR test results at the maximum output power level without any simultaneous transmission power reduction are used.

Test Position		Main antenna SAR _{Max}					WiFi/BT antenna SAR _{Max}		Σ1-g SAR (1.6W/kg Limit)	SPLSR	Volume scan
		GSM850	GSM1900	UMTS Band II	UMTS Band V	LTE Band VII	WiFi 2.4G	BT			
Head	Left touch	0.220	0.202	0.289	0.255	0.457	1.121	/	1.578	N/A	N/A
	Left tilt	0.260	0.042	0.064	0.264	0.068	0.709	/	0.973	N/A	N/A
	Right touch	0.211	0.099	0.146	0.231	0.201	0.220	/	0.451	N/A	N/A
	Right tilt	0.182	0.077	0.105	0.214	0.173	0.207	/	0.421	N/A	N/A
Body-worn 15mm	Front side	0.206	0.330	0.380	0.257	0.389	0.094	0.125	0.514	N/A	N/A
	Back side	0.299	0.627	1.265	0.353	0.336	0.094	0.125	1.390	N/A	N/A
Hotspot 10mm	Front side	0.428	0.283	0.238	0.277	0.994	0.207	/	1.201	N/A	N/A
	Back side	0.674	0.564	0.477	0.384	0.784	0.126	/	0.910	N/A	N/A
	Left side	0.326	0.060	0.043	0.226	0.390	/	/	0.390	N/A	N/A
	Right side	0.573	0.014	0.013	0.368	0.024	0.207	/	0.780	N/A	N/A
	Top side	/	/	/	/	/	0.207	/	0.207	N/A	N/A
	Bottom side	0.103	0.664	0.782	0.046	0.641	/	/	0.782	N/A	N/A

Table 45: SAR Simultaneous Tx Combination of Main antenna and WiFi/BT.

7.3.4 Simultaneous Transmission Conclusion

The above numeral summed SAR results and/or SPLSR analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore simultaneous transmission SAR with Volume Scans is not required per KDB 447498 D01v06.

Appendix A. System Check Plots

(Pls See Appendix No.: SYBH(Z-SAR)015102016-2A, total: 9 pages)

Appendix B. SAR Measurement Plots

(Pls See Appendix No.: SYBH(Z-SAR)015102016-2B, total: 19 pages)

Appendix C. Calibration Certificate

(Pls See Appendix No.: SYBH(Z-SAR)015102016-2C, total: 51 pages)

Appendix D. Photo documentation

(Pls See Appendix No.: SYBH(Z-SAR)015102016-2D, total: 7 pages)

End