



FCC RF Test Report

Product Name: HUAWEI MediaPad 7 Lite

Model Number: S7-932u

Report No: SYBH(Z-RF)025072012-2002

FCC ID: QISS7-932U

Reliability Laboratory of Huawei Technologies Co., Ltd.

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District,
Shenzhen, 518129, P.R.C

Tel: +86 755 28780808 Fax: +86 755 89652518



Notice

1. The laboratory has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS), and accreditation number: L0310.
2. The laboratory has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements. The site recognition number is 97456.
3. The laboratory has been listed by industry Canada to perform electromagnetic emission measurement. The site recognition number is 6369A-2.
4. The test report is invalid if not marked with "exclusive stamp for the test report".
5. The test report is invalid if not marked with the stamps or the signatures of the persons responsible for performing, revising and approving the test report.
6. The test report is invalid if there is any evidence of erasure and/or falsification.
7. If there is any dissidence for the test report, please file objection to the test centre within 15 days from the date of receiving the test report.
8. Normally, the test report is only responsible for the samples that have undergone the test.
9. Context of the test report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of the laboratory.



Applicant:	Huawei Technologies Co., Ltd.
Address:	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C
Date of Receipt Test Item:	July., 30, 2012
Start Date of Test:	July., 30, 2012
End Date of Test:	Aug., 09, 2012
Test Result:	Pass

Approved By Senior Engineer Aug., 13, 2012 Dai Linjun
Date Name Signature

Reviewed By Aug., 13, 2012 Cousy Xu
Date Name Signature

Operated By Aug., 13, 2012 Huang Qiuliang
Date Name Signature

Contents

1	<u>General Information</u>	5
1.1	APPLIED STANDARD.....	5
1.2	TEST LOCATION.....	5
1.3	TEST ENVIRONMENTAL CONDITION.....	5
2	<u>Summary</u>	6
3	<u>Product Description</u>	7
3.1	PRODUCT INFORMATION	7
4	<u>Test Description</u>	9
4.1	SUPPORTED FREQUENCY RANGE	9
4.2	TRANSMITTER / RECEIVER CHARACTERISTICS.....	9
4.3	ANTENNA GAIN.....	9
4.4	POWER SUPPLY	9
5	<u>General Test Conditions / Configurations</u>	10
5.1	RF CHANNELS UNDER TEST.....	10
5.2	TEST MODES.....	10
5.3	TEST ENVIRONMENT	10
5.4	TEST SETUP.....	11
5.5	TEST CONDITIONS	15
6	<u>Main Test Instruments</u>	17
7	<u>Test Results</u>	18
8	<u>Measurement Uncertainty</u>	18

1 General Information

1.1 Applied Standard	
Applied Rules:	47 CFR FCC Part 2:2011, Subpart J 47 CFR FCC Part 24:2011, Subpart E ANSI/TIA 603C:2004
1.2 Test Location	
Test Location 1:	Reliability Laboratory of Huawei Technologies Co., Ltd.
Address:	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C
1.3 Test Environmental Condition	
Ambient Temperature:	20 – 25 °C
Ambient Relative Humidity:	45 – 55 %
Atmospheric Pressure:	101 kPa

2 Summary

Table 1 Summary of results

Test Case	FCC Part No.	Requirements	Result
PCS Band			
Transmitter Output Power	2.1046 & 24.232	Peak EIRP not exceed 2 W Peak-to-average ratio not exceed 13 dB	Pass
Modulation Characteristics	2.1047	Digital modulation	Pass
Occupied Bandwidth	2.1049	(Not specified)	Pass
Band Edges Compliance	2.1051 & 24.238	Below -13 dBm/1%*EBW, in 1 MHz range	Pass
Spurious Emission at Antenna Terminals	2.1051 & 24.238	Below -13 dBm/1 kHz, 9 kHz to 150 kHz Below -13 dBm/10 kHz, 150 kHz to 30 MHz Below -13 dBm/1 MHz, 30 MHz to 10 th harmonics	Pass
Field Strength of Spurious Radiation	2.1053 & 24.238	Below -13 dBm/1 MHz	Pass
Frequency Stability	2.1055 & 24.235	Stay within the authorized frequency block	Pass

3 Product Description

3.1 Product Information

3.1.1 General Description

HSDPA/UMTS/EDGE/GPRS/GSM information terminal HUAWEI MediaPad 7 Lite with Bluetooth and Wi-Fi is subscriber equipment in the WCDMA/GSM system. The HSPA+/HSDPA/HSUPA/UMTS frequency band is Band II and Band V. The EDGE/GPRS/GSM frequency band includes GSM850 and GSM900 and DCS1800 and PCS1900. But only PCS1900 and Band II test data included in the report. HUAWEI MediaPad 7 Lite (MediaPad 7 Lite for short) is a 7 inch tablet computer that simultaneously supports 3G and Wi-Fi data services, and has an ultra high definition IPS screen with a resolution of up to 1024 × 600 pixels. MediaPad 7 Lite incorporates Huawei's own rockchip dual-core 1.2 GHz processor and is based on the Android 4.0 (Ice Cream Sandwich) operating system, enjoying both Google Android Play Store and Huawei's unique Cloud+ solutions.

3.1.2 Board Information

Table 2 Board Information

HUAWEI MediaPad 7 Lite		
S7-932u		
Board and Module		
Software Version	Hardware Version	LCD Panel
S7-932u V100R001C001	SH1931UM	LCD Panel

3.1.3 Adapter Technical Data

AC/DCAdapter Model	HW-050200U3W
Manufacturer	Huawei Technologies Co., Ltd.
Input Voltage	100V~240V AC and 50/60 Hz,0.5A
Output Voltage	+5V $\overline{\text{---}}$ 2A

3.1.4 Battery Technical Data

Name	Qty.	Manufacture	Description
Li-ion	1	Huawei Technologies Co., Ltd.	Battery Model: HB3G1 Rated capacity: 4000 mAh Nominal Voltage: $\overline{\text{---}}$ +3.7V



			Charging Voltage:  +4.2V
--	--	--	---

4 Test Description

4.1 Supported Frequency Range

Characteristics	Description
Downlink	1930 to 1990 MHz
Uplink	1850 to 1910 MHz

4.2 Transmitter / Receiver Characteristics

Characteristics	Description
System Type	GSM UMTS
TX Output Power (per Antenna Port)	GSM system: 30dBm; UMTS system: 24dBm
Channel Spacing(s) / Bandwidth(s)	GSM system: 200 kHz UMTS system: 5 MHz
Designation of Emissions	GSM system: 247KGXW (GMSK modulation), 249KG7W (8PSK modulation) UMTS system: 4M18F9W

4.3 Antenna Gain

Antenna Gain(dBi)	-1.0
-------------------	------

4.4 Power Supply

Specification	Description
Power Supply Type	Directly Connected to DC Power Supply
Input to EUT (DC power)	DC Voltage Nominal: \approx 5 V DC Voltage Range: \approx 4.75V to 5.25V

5 General Test Conditions / Configurations

5.1 RF Channels under Test

Test Mode	TX / RX	RF Channel		
		Low (L)	Middle (M)	High (H)
TM1/TM2	TX	Channel 512	Channel 661	Channel 810
		1850.2MHz	1880.0MHz	1909.8MHz
	RX	Channel 512	Channel 661	Channel 810
		1930.2 MHz	1960.0 MHz	1989.8 MHz
TM3/TM4	TX	Channel 9262	Channel9400	Channel9538
		1852.4MHz	1880.0MHz	1907.6MHz
	RX	Channel 9662	Channel 9800	Channel 9938
		1932.4 MHz	1960.0 MHz	1987.6 MHz

5.2 Test Modes

Test Mode	Test Modes Description
TM1	GSM/GPRS, GMSK modulation
TM2	EDGE, 8PSK modulation
TM3	WCDMA, QPSK modulation
TM4	HSDPA, QPSK modulation

5.3 Test Environment

Environment Parameter	Selected Values During Tests	
Relative Humidity	Ambient	
Temperature	TN	Ambient
Voltage	VL	3.6V
	VN	3.7V
	VH	4.2V


NOTE: VL= lower extreme test voltage
 VN= nominal voltage
 VH= upper extreme test voltage
 TN= normal temperature

5.4 Test Setup


5.4.1 General Test Setup Configurations

Configuration	Description
Test Antenna Ports	Until otherwise declared, all TX tests are ONLY performed at the main Transmitter antenna port (e.g. TRXA, TXA and so on) of the EUT, and all RX tests are ONLY performed at the main Receiver antenna port (e.g. TRXA, RXA and so on) of the EUT.
Multiple RF Sources	Other than the tested RF source of the EUT, other RF source(s) are disabled or shutdown during measurements.

5.4.2 Test Setup 1

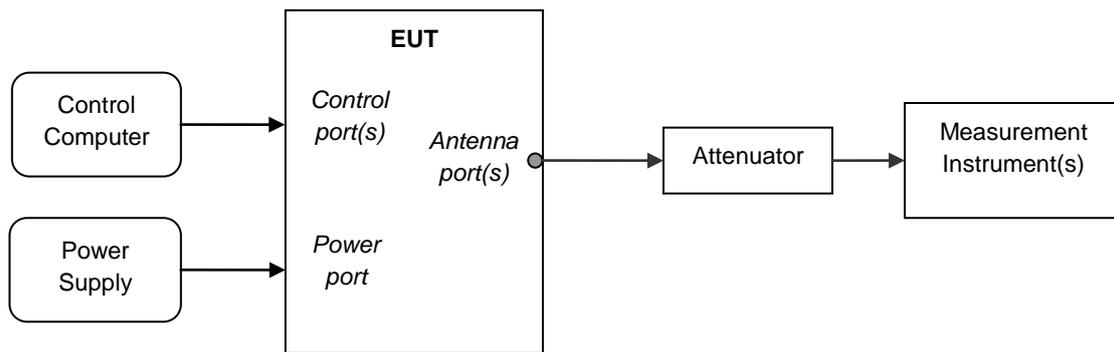

5.4.3 Test Setup 2

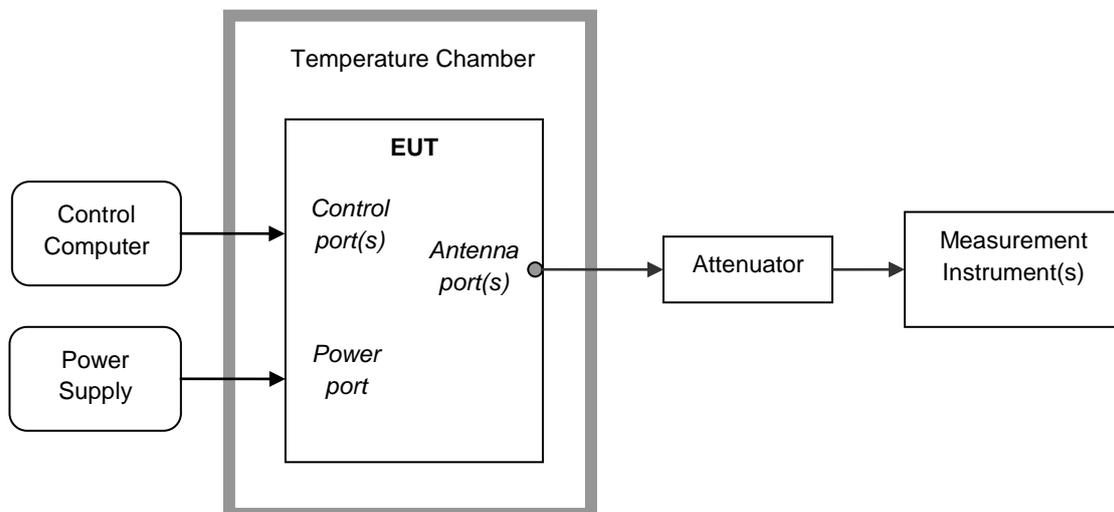


5.4.4 Test Setup 3

NOTE1: Effective radiated power (ERP) or Effective Isotropic radiated power (EIRP) refers to the EUT radiation power output, assuming all emissions are radiated from half-wave dipole antennas or horn antennas.

NOTE2: The EUT was set on insulator 80cm above the Ground Plane. The setup and test methods were according to ANSI-TIA-603C 2004. The measurements were carried through with a Rohde and Schwarz Test Receiver and control software.


Step 1: Pre-test to find the Maximum ERP or EIRP

1. Connect the test system according to the following figure. EUT is running for 30 minutes before test, and measurement instruments are warming-up for 30 minutes.
2. Set up communication link between Universal radio communication tester and EUT, set EUT working frequency, and control EUT to transmit at maximum power.
3. Set the center frequency of the signal analyzer or receiver to the EUT's operating frequency, the RBW is equal to the emission bandwidth of the signal. Set RMS detector for the test, and the span is equal to 2 times of emission bandwidth, the other settings should remain automatic. Normally, the height range of antenna was 1m to 4m, the azimuth range of turntable was 0° to 360°. The receiver antenna has two polarizations V and H. A portable or small unlicensed wireless device shall be placed on a non-metallic test fixture or other non-metallic support during testing. The supporting fixture shall permit orientation of the EUT in each of three orthogonal (x, y, z) axis positions such that emissions from the EUT are maximized. Measure the EUT maximum RF power and record the result.
4. Changing EUT working frequency and measuring the RF power at channel L, M, H respectively.
Complete the test data.

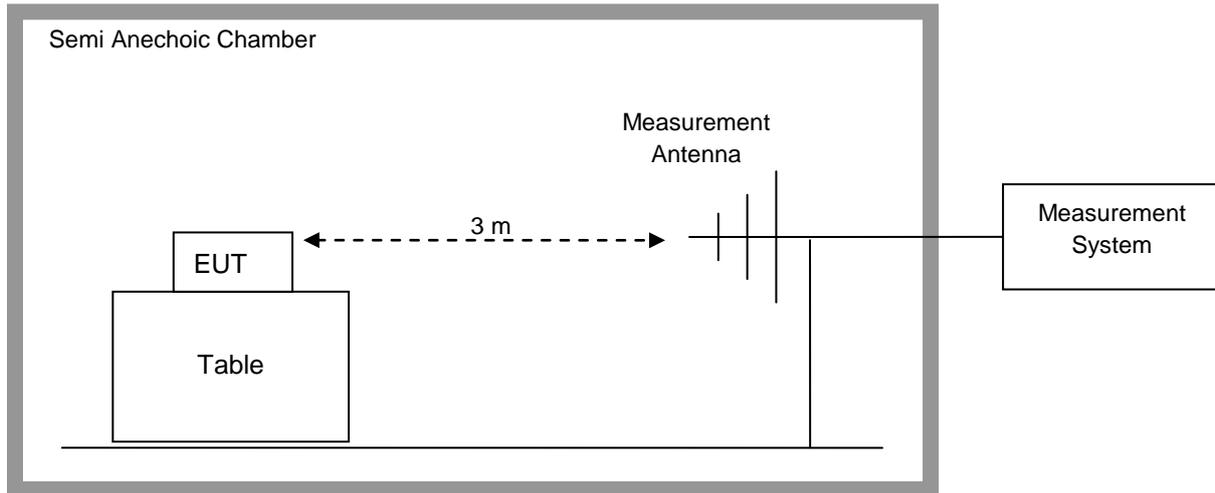

Step 2: Substitution method to verify the maximum ERP or EIRP

1. Measurement setup is according to the following figure. EUT was substituted by antenna, and the polarization is identical with the test antenna; the signal generator was connected to the substitution antenna.
2. The radiated output power, measured by signal analyzer set, is the same as recorded in above. Then this power level is matched by a signal from a calibrated signal generator which is substituted for EUT. The power supplied by the generator is then equal to the ERP or EIRP after corrected by the antenna gain and cable loss.

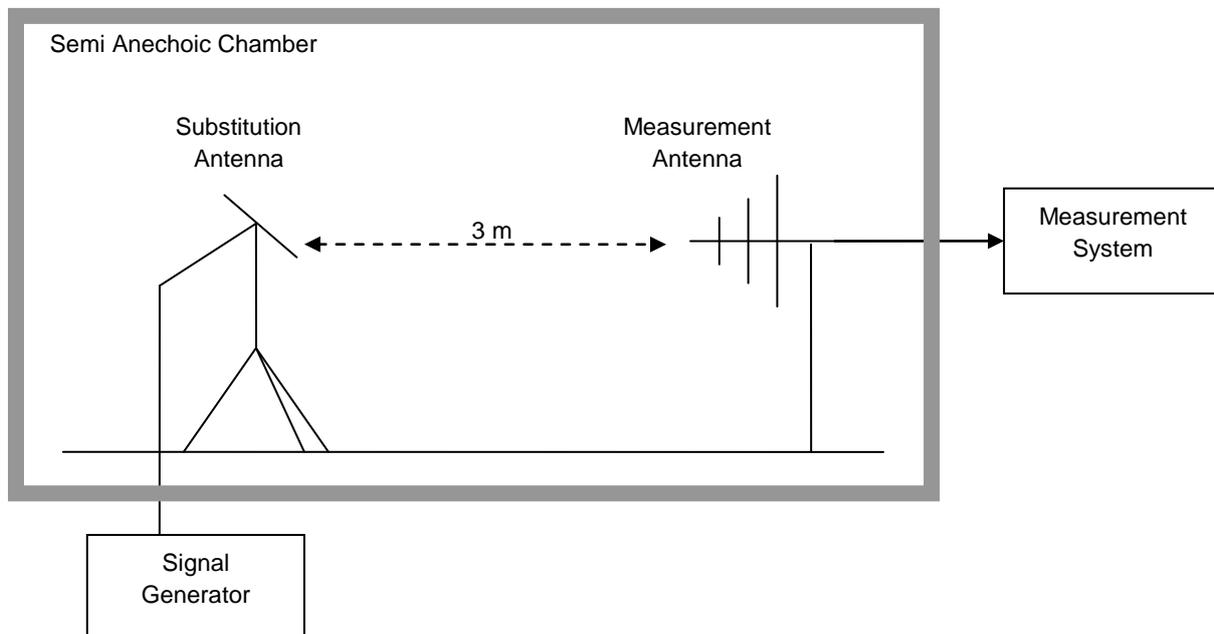

5.5 Test Conditions

Test Case	Test Conditions	
Transmitter Output Power	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1 & Test Setup 3
	Detector	RMS
	RBW	> emission bandwidth
	VBW	3*RBW
	RF Channels (TX)	L, M, H
	Test Mode	TM1/TM2/TM3/TM4
Modulation Characteristics	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	RF Channels (TX)	M
	Test Mode	TM1/TM2/TM3
Occupied Bandwidth	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	Detector	PK
	RF Channels (TX)	L, M, H
	Test Mode	TM1/TM2/TM3
Band Edges Compliance	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	Detector	RMS
	RF Channels (TX)	L, H
	Test Mode	TM1/TM2/TM3
Spurious Emission at Antenna Terminals	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	Detector	PK
	RF Channels (TX)	L, M, H
	Test Mode	TM1/TM2/TM3
Field Strength of Spurious Radiation	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 3
	Detector	PK
	RF Channels (TX)	M
	Test Mode	TM1/TM2/TM3/TM4
Frequency Stability	Test Configuration	(1) -30 °C to +50 °C with step 10 °C at Rated Voltage; (2) 85%, 100% and 115% of Rated Voltage at Ambient



Test Case	Test Conditions	
		Temperature.
	Test Setup	Test Setup 2
	RF Channels (TX)	M
	Test Mode	TM1/TM2/TM3

6 Main Test Instruments

Table 3 Main Test Equipments

Equipment Description	Manufacturer	Model	Serial Number	Calibrated until
Power supply	KEITHLEY	2303	1288003	Sept., 27,2012
Universal Radio Communication Tester	R&S	CMU200	117341	Jan., 12,2013
Universal Radio Communication Tester	Agilent	E5515C	MY50260239	Aug., 31,2012
Spectrum Analyzer	Agilent	E4440A	MY49420179	Jul., 16,2013
Signal Analyzer	R&S	FSQ31	200021	Sept., 27,2012
Temperature Chamber	WEISS	WKL64	24600294	Feb.,13,2013
Signal generator	Agilent	E8257D	MY49281095	Jul.,08,2013
Spectrum analyzer	R&S	FSU3	200474	Mar., 05, 2013
Spectrum analyzer	R&S	FSU43	100144	Mar., 05, 2013
Double-Ridged Waveguide Horn Antenna (1G~18GHz)	R&S	HF907	100304	Apr., 05, 2013
Double-Ridged Waveguide Horn Antenna (1G~18GHz)	R&S	HF907	100391	Apr., 05, 2013
Trilog Broadband Antenna (30M~3GHz)	SCHWARZBECK	VULB 9163	9163-521	Jul., 07, 2013
Pyramidal Horn Antenna(26GHz-40GHz)	ETS-Lindgren	3160-10	00123940	Feb., 27, 2013
Pyramidal Horn Antenna(18GHz-26.5GHz)	ETS-Lindgren	3160-09	00125912	Feb., 27, 2013

Note: All the equipments are calibrated once a year. When it's almost due, we will arrange calibration again before the calibration deadline.

7 Test Results

No.	Test Item	Test Result
1	Transmitter Output Power	Appendix A
2	Modulation Characteristics	Appendix B
3	Occupied Bandwidth	Appendix C
4	Band Edges Compliance	Appendix D
5	Spurious Emission at Antenna Terminals	Appendix E
6	Field Strength of Spurious Radiation	Appendix F
7	Frequency Stability	Appendix G
8	Photos of Test Setup	Appendix H

NOTE: There is no test data in Appendix H, only Photos of Test Setup for Field Strength of Spurious Radiation.

8 Measurement Uncertainty

For a 95% confidence level (k=2), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

Test Item		Extended Uncertainty
Transmitter Output Power	Power (dBm)	U =0.39 dB
Occupied Bandwidth	Magnitude (%)	U=0.2%
Band Edge Compliance	Disturbance Power (dBm)	U=2.0 dB
Conducted Spurious Emissions	Disturbance Power (dBm)	U=2.0 dB
Field Strength of Spurious Radiation	ERP (dBm)	U=4.6 dB (30 MHz – 1GHz) U=3.0 dB (above 1 GHz)
Frequency Stability	Frequency Accuracy (ppm)	U=0.21 ppm

-----The END-----