



## Appendix A. System Check Plots

<b>Table of contents</b>
SystemPerformanceCheck-D835-EX-Head
SystemPerformanceCheck-D835-EX-Body
SystemPerformanceCheck-D1900-EX-Head
SystemPerformanceCheck-D1900-EX-Body
SystemPerformanceCheck-D2450-EX-Head
SystemPerformanceCheck-D2450-EX-Body
SystemPerformanceCheck-D2600-EX-Head
SystemPerformanceCheck-D2600-EX-Body

Test Laboratory: HUAWEI SAR/HAC Lab

**SystemPerformanceCheck-D835-EX-Head**

**DUT: Dipole 835 MHz D835V2; Type: D835V2; Serial: D835V2 - SN:4d126**


Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.901 \text{ S/m}$ ;  $\epsilon_r = 40.476$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7350; ConvF(9.92, 9.92, 9.92); Calibrated: 2015-1-8;
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2015-4-27
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/d=15mm, Pin=250mW/Area Scan (6x13x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
 Maximum value of SAR (measured) = 2.52 W/kg

**Configuration/d=15mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 53.53 V/m; Power Drift = -0.12 dB  
 Peak SAR (extrapolated) = 3.50 W/kg  
**SAR(1 g) = 2.43 W/kg; SAR(10 g) = 1.6 W/kg**  
 Maximum value of SAR (measured) = 2.83 W/kg

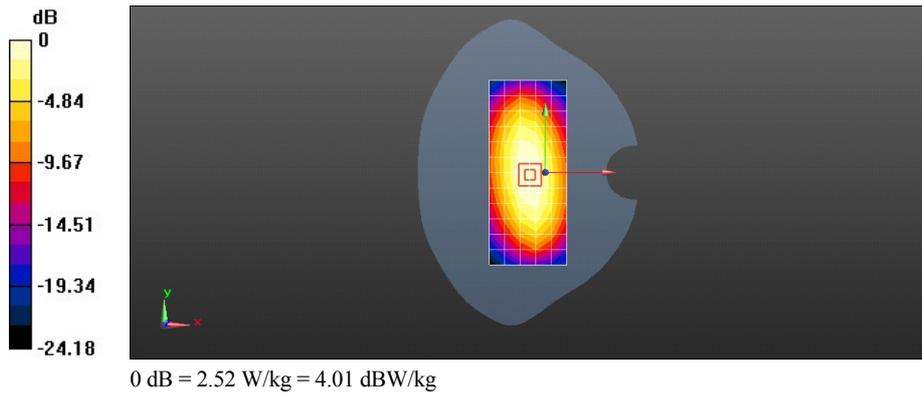

Test Laboratory: HUAWEI SAR/HAC Lab

## SystemPerformanceCheck-D835-EX-Body

**DUT: Dipole 835 MHz D835V2; Type: D835V2; Serial: D835V2 - SN:4d126**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 835$  MHz;  $\sigma = 1.006$  S/m;  $\epsilon_r = 56.693$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7350; ConvF(9.42, 9.42, 9.42); Calibrated: 2015-1-8;
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2015-4-27
- Phantom: SAM2; Type: SAM; Serial: TP:1474
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/d=15mm, Pin=250mW/Area Scan (6x13x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 2.54 W/kg


**Configuration/d=15mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 51.16 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 3.41 W/kg

**SAR(1 g) = 2.44 W/kg; SAR(10 g) = 1.63 W/kg**

Maximum value of SAR (measured) = 2.82 W/kg

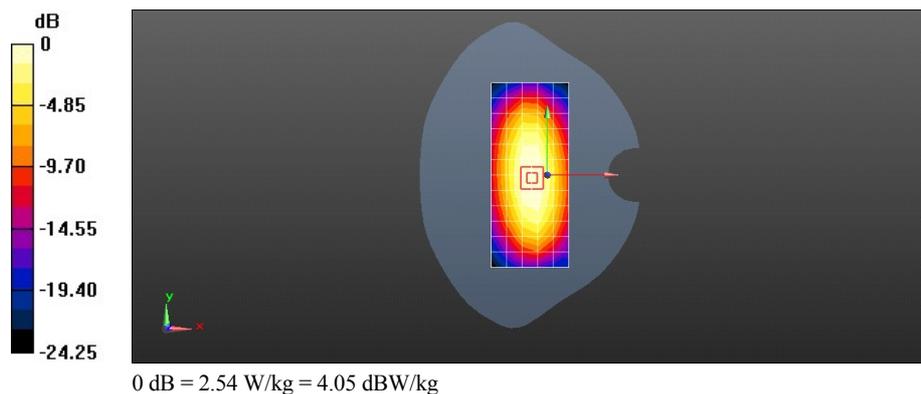

Test Laboratory: HUAWEI SAR/HAC Lab

### SystemPerformanceCheck-D1900-EX-Head

**DUT: Dipole 1900 MHz D1900V2; Type: D1900V2; Serial: D1900V2 - SN:5d143**

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.426$  S/m;  $\epsilon_r = 39.662$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7350; ConvF(8.12, 8.12, 8.12); Calibrated: 2015-1-8;
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2015-4-27
- Phantom: SAM2; Type: SAM; Serial: TP:1474
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/d=10mm pin=250mW/Area Scan (6x10x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 10.1 W/kg


**Configuration/d=10mm pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 87.28 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 17.6 W/kg

**SAR(1 g) = 10.2 W/kg; SAR(10 g) = 5.37 W/kg**

Maximum value of SAR (measured) = 12.8 W/kg

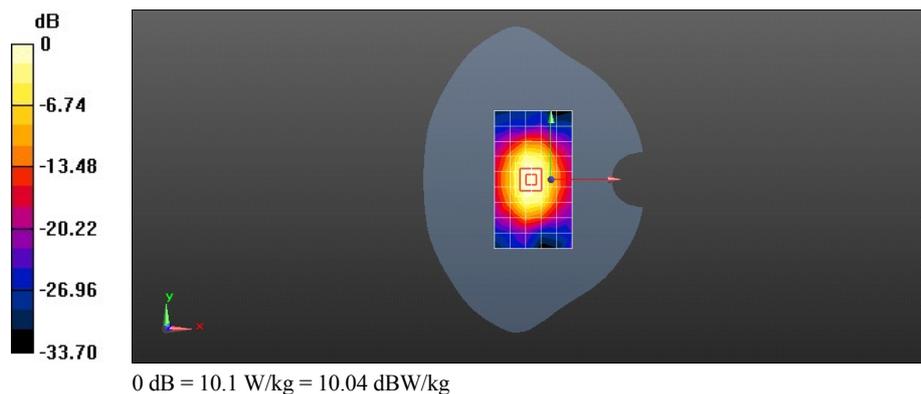

Test Laboratory: HUAWEI SAR/HAC Lab

## SystemPerformanceCheck-D1900-EX-Body

**DUT: Dipole 1900 MHz D1900V2; Type: D1900V2; Serial: D1900V2 - SN:5d143**

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.536$  S/m;  $\epsilon_r = 51.776$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7350; ConvF(7.82, 7.82, 7.82); Calibrated: 2015-1-8;
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2015-4-27
- Phantom: SAM2; Type: SAM; Serial: TP:1474
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/d=10mm pin=250mW/Area Scan (6x10x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 10.2 W/kg


**Configuration/d=10mm pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 87.24 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 17.8 W/kg

**SAR(1 g) = 10.5 W/kg; SAR(10 g) = 5.57 W/kg**

Maximum value of SAR (measured) = 13.3 W/kg

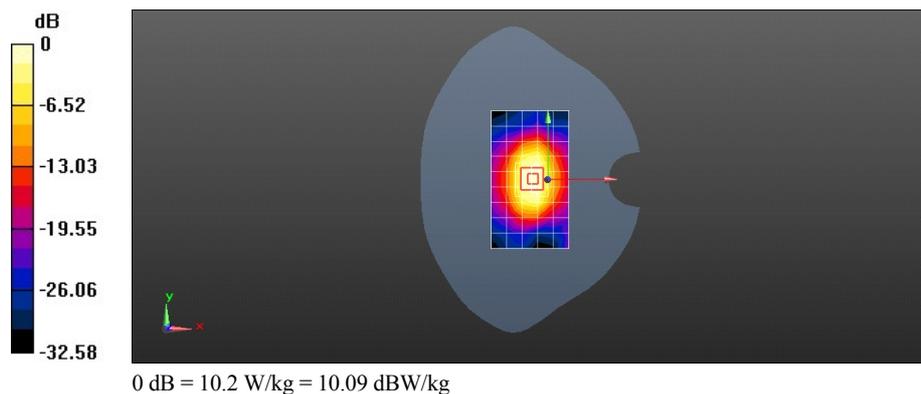

Test Laboratory: HUAWEI SAR/HAC Lab

### SystemPerformanceCheck-D2450-EX-Head

**DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:860**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.846$  S/m;  $\epsilon_r = 38.862$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7350; ConvF(7.28, 7.28, 7.28); Calibrated: 2015-1-8;
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2015-4-27
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/d=10mm, Pin=250mW/Area Scan (6x11x1):** Measurement grid:  $dx=12$ mm,  $dy=12$ mm

Maximum value of SAR (measured) = 16.4 W/kg


**Configuration/d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 88.43 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 26.5 W/kg

**SAR(1 g) = 13.6 W/kg; SAR(10 g) = 6.47 W/kg**

Maximum value of SAR (measured) = 17.8 W/kg

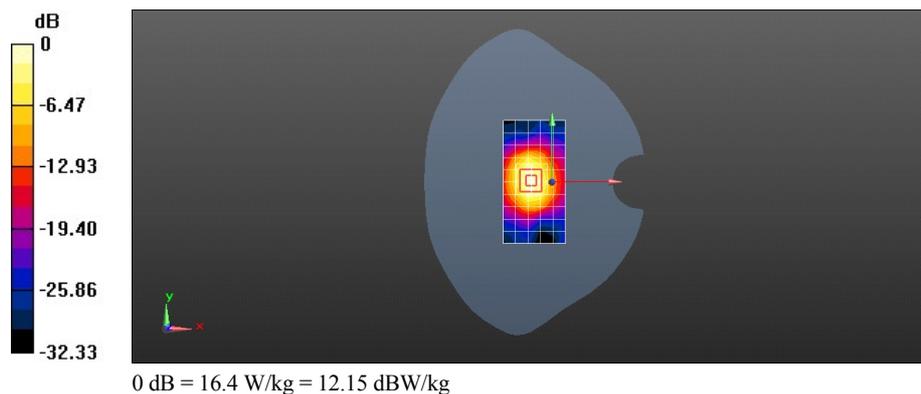

Test Laboratory: HUAWEI SAR/HAC Lab

### SystemPerformanceCheck-D2450-EX-Body

**DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:860**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.977$  S/m;  $\epsilon_r = 51.915$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7350; ConvF(7.23, 7.23, 7.23); Calibrated: 2015-1-8;
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2015-4-27
- Phantom: SAM2; Type: SAM; Serial: TP:1474
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/d=10mm, Pin=250mW/Area Scan (6x11x1):** Measurement grid:  $dx=12$ mm,  $dy=12$ mm

Maximum value of SAR (measured) = 13.0 W/kg


**Configuration/d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 86.22 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 25.9 W/kg

**SAR(1 g) = 13.3 W/kg; SAR(10 g) = 6.26 W/kg**

Maximum value of SAR (measured) = 17.5 W/kg

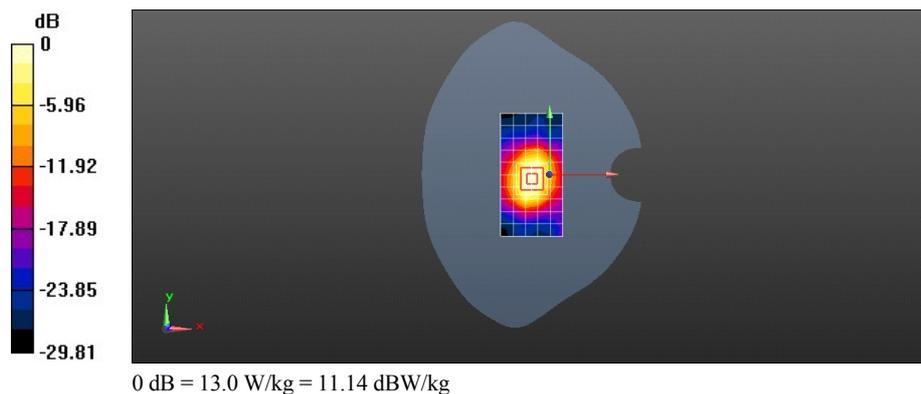

Test Laboratory: HUAWEI SAR/HAC Lab

### SystemPerformanceCheck-D2600-EX-Head

**DUT: Dipole 2600 MHz D2600V2; Type: D2600V2; Serial: D2600V2 - SN:1021**

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2600$  MHz;  $\sigma = 1.984$  S/m;  $\epsilon_r = 37.78$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7350; ConvF(7.1, 7.1, 7.1); Calibrated: 2015-1-8;
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2015-4-27
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/d=10mm, Pin=250mW/Area Scan (8x11x1):** Measurement grid:  $dx=12$ mm,  $dy=12$ mm

Maximum value of SAR (measured) = 18.7 W/kg


**Configuration/d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 89.98 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 31.1 W/kg

**SAR(1 g) = 15.2 W/kg; SAR(10 g) = 6.88 W/kg**

Maximum value of SAR (measured) = 20.1 W/kg

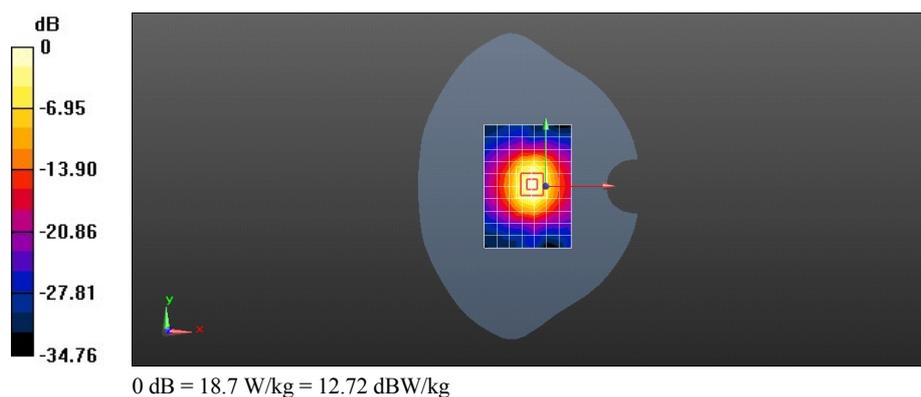

Test Laboratory: HUAWEI SAR/HAC Lab

### SystemPerformanceCheck-D2600-EX-Body

**DUT: Dipole 2600 MHz D2600V2; Type: D2600V2; Serial: D2600V2 - SN:1021**

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2600$  MHz;  $\sigma = 2.229$  S/m;  $\epsilon_r = 50.455$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7350; ConvF(7.15, 7.15, 7.15); Calibrated: 2015-1-8;
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 2015-4-27
- Phantom: SAM2; Type: SAM; Serial: TP:1474
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/d=10mm, Pin=250mW/Area Scan (8x11x1):** Measurement grid:  $dx=12$ mm,  $dy=12$ mm

Maximum value of SAR (measured) = 14.8 W/kg

**Configuration/d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 86.07 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 30.1 W/kg

**SAR(1 g) = 14.6 W/kg; SAR(10 g) = 6.49 W/kg**

Maximum value of SAR (measured) = 19.6 W/kg

