




Appendix A: 20dB Emission Bandwidth (EBW)

1 Result Table


EUT Conf.	EBW [MHz]	Verdict
TM1_DH5_Ch0	1.023	Pass
TM1_DH5_Ch39	1.023	Pass
TM1_DH5_Ch78	1.023	Pass
TM2_2DH5_Ch0	1.347	Pass
TM2_2DH5_Ch39	1.349	Pass
TM2_2DH5_Ch78	1.347	Pass
TM3_3DH5_Ch0	1.324	Pass
TM3_3DH5_Ch39	1.278	Pass
TM3_3DH5_Ch78	1.327	Pass

2 Test Plot


2.1 TM1_DH5_Ch0

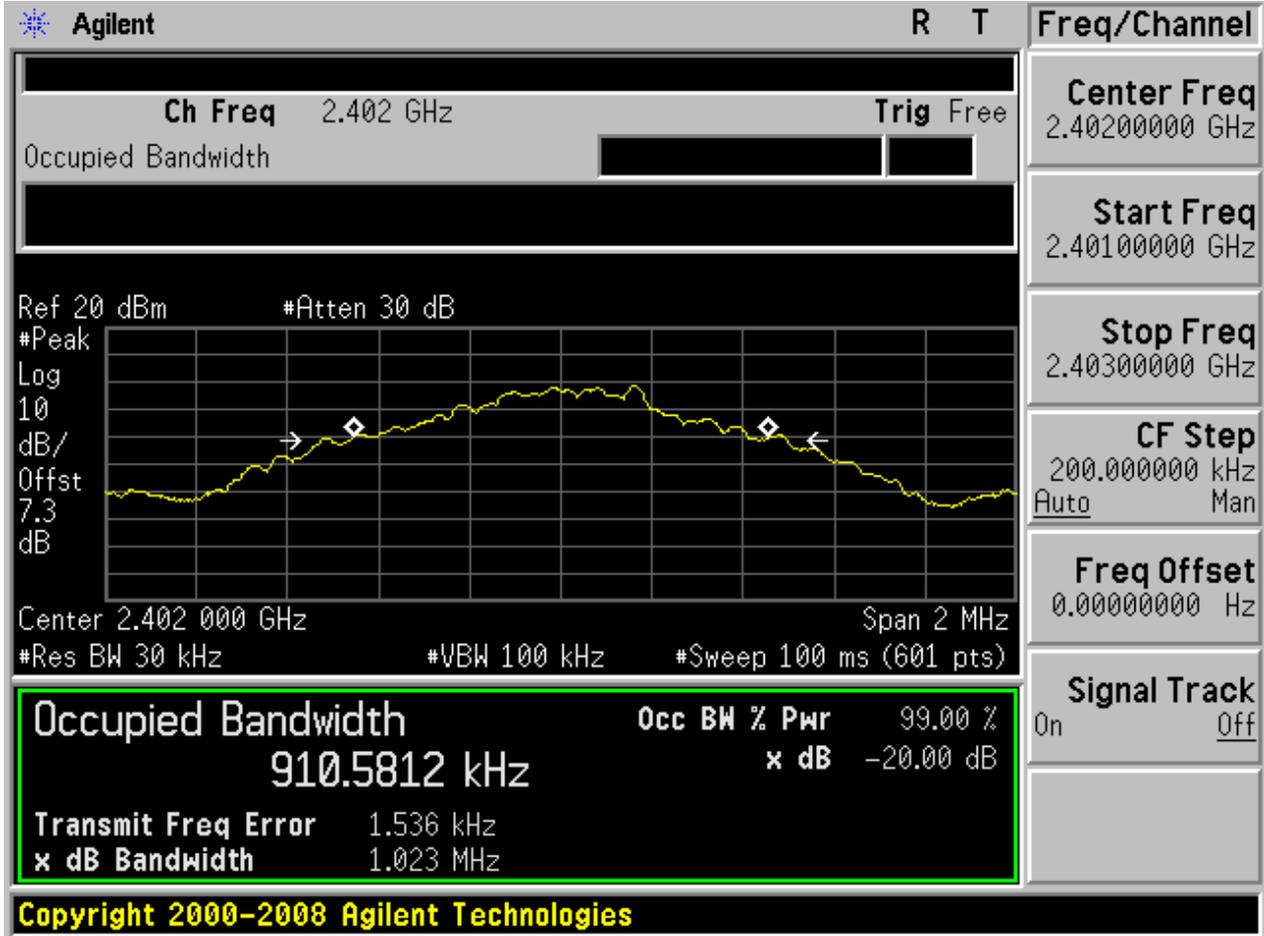

2.2 TM1_DH5_Ch39

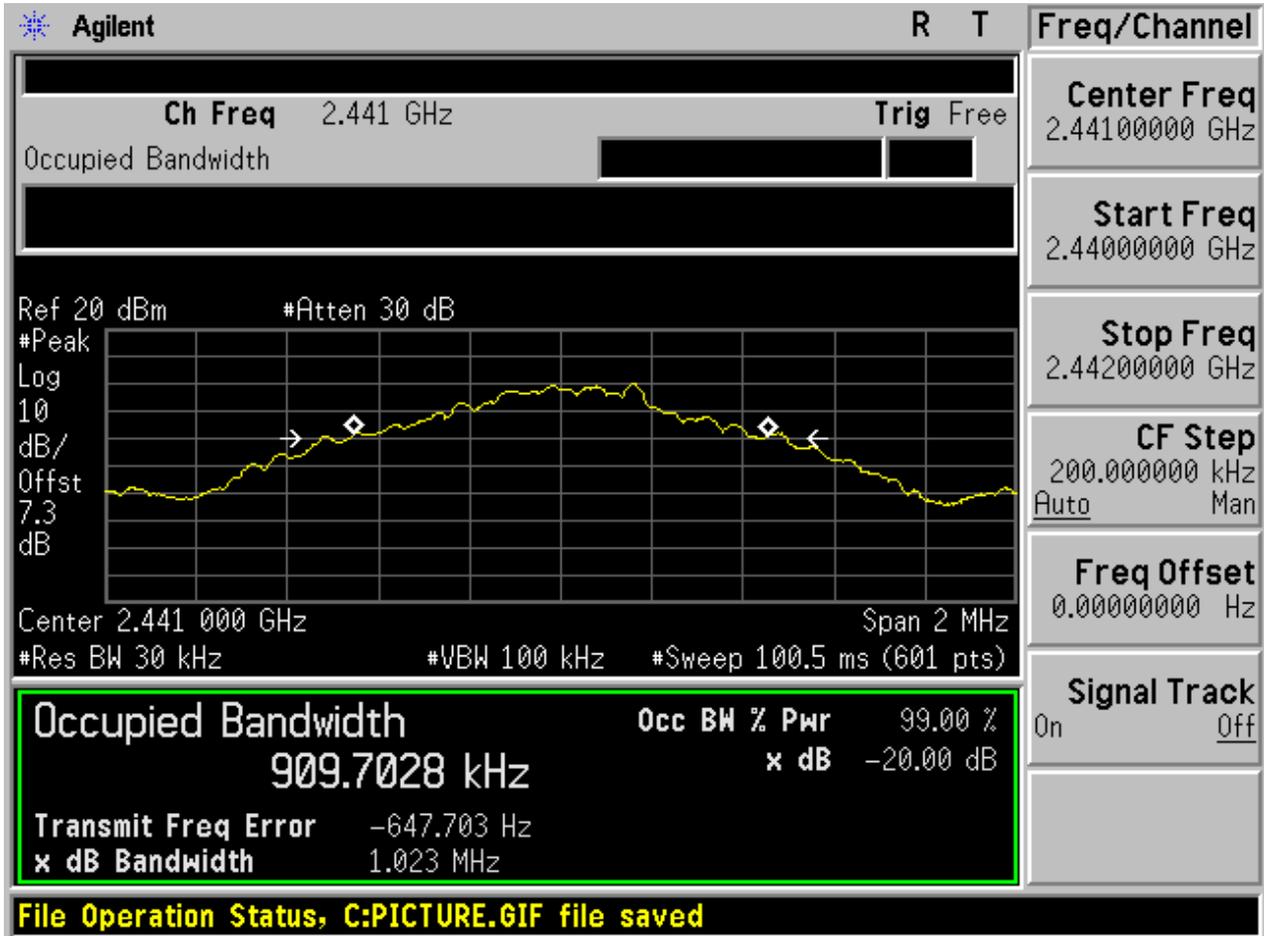

2.3 TM1_DH5_Ch78

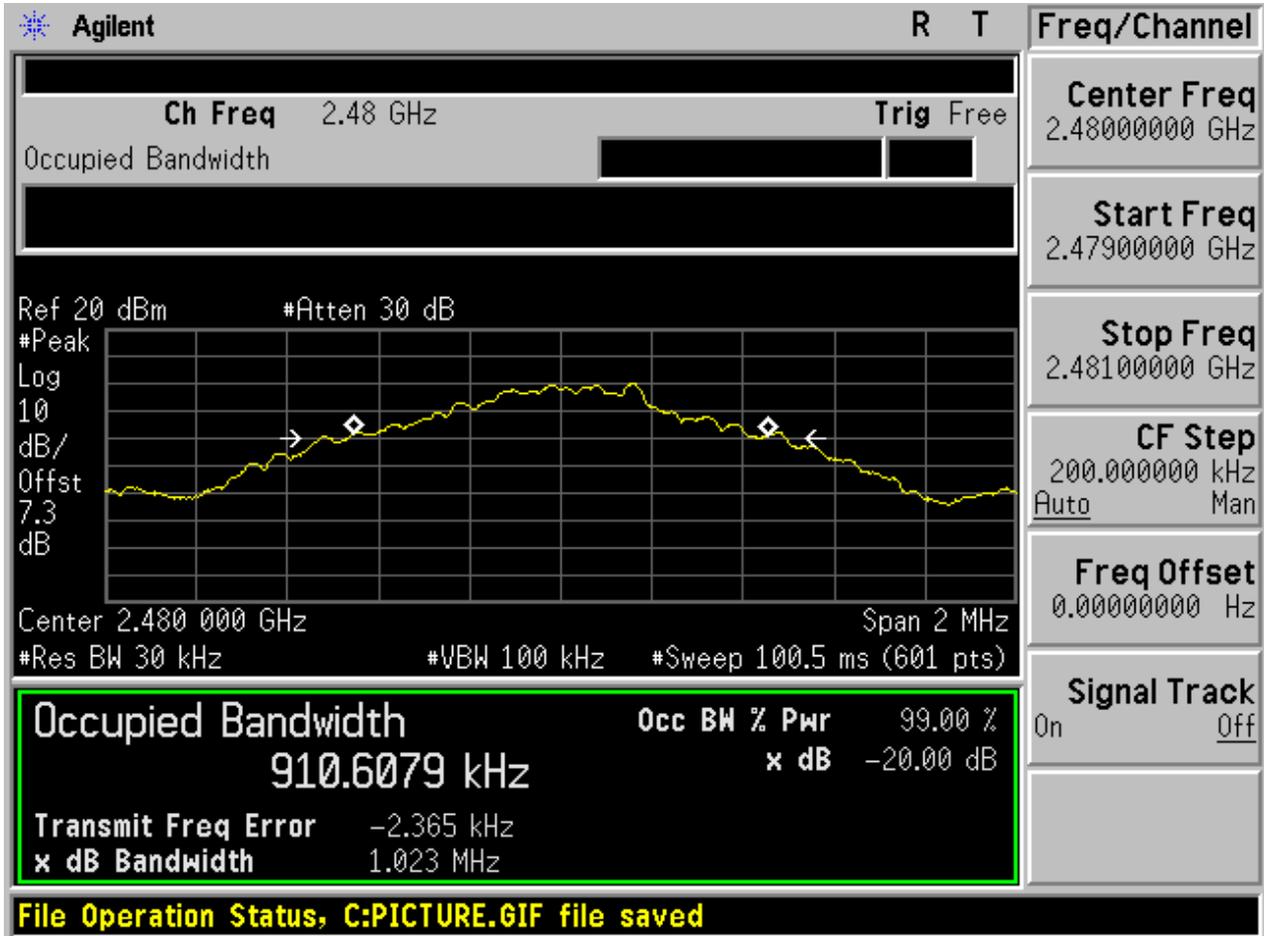

2.4 TM2_2DH5_Ch0



2.5 TM2_2DH5_Ch39



2.6 TM2_2DH5_Ch78




2.7 TM3_3DH5_Ch0



2.8 TM3_3DH5_Ch39



2.9 TM3_3DH5_Ch78

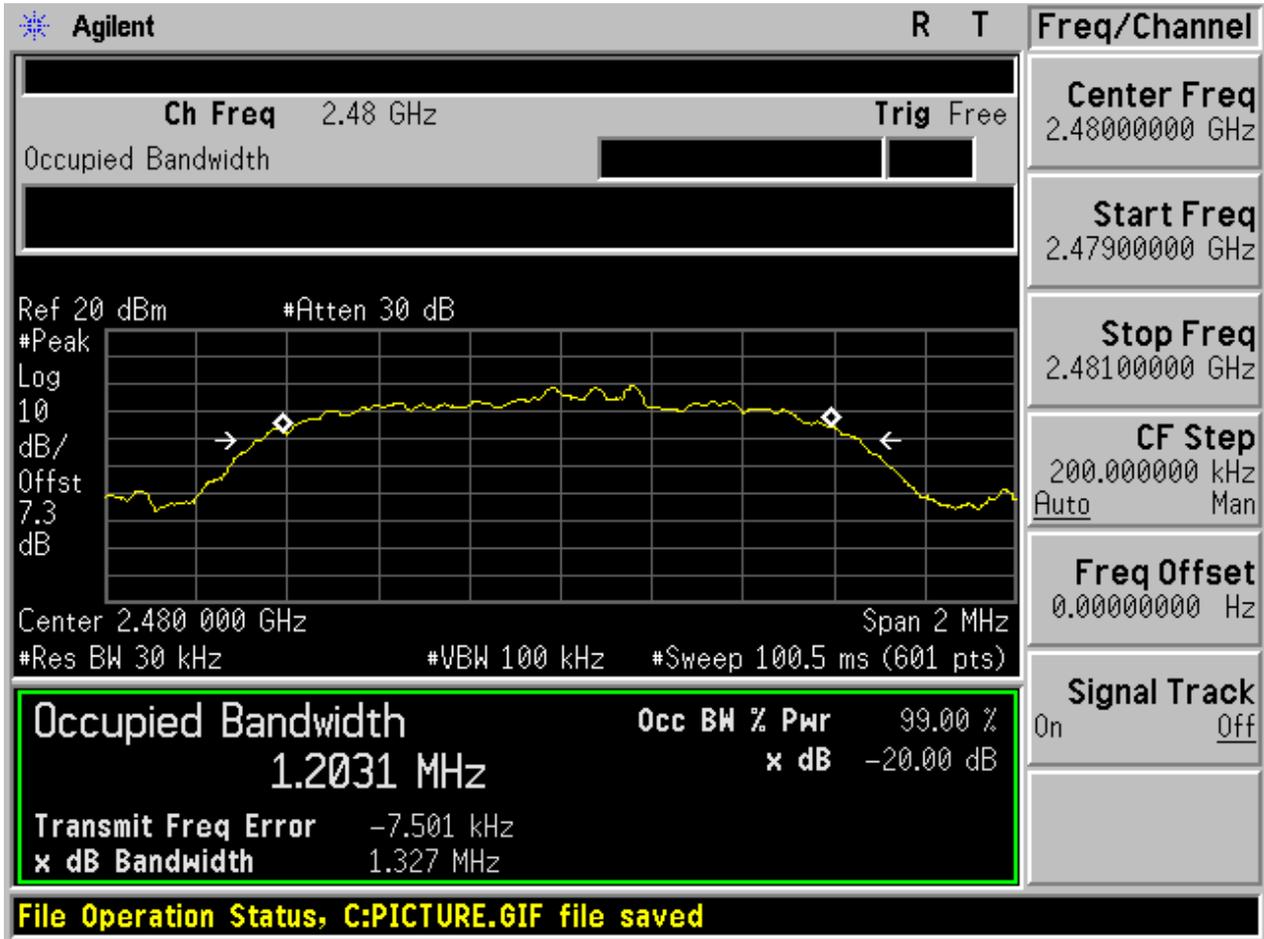


Appendix B: Carrier Frequency Separation

1 Result Table


EUT Conf.	Carrier Frequency Separation [MHz]	Verdict
TM1_DH5_Hop	1.100	Pass
TM2_2DH5_Hop	1.200	Pass
TM3_3DH5_Hop	1.200	Pass

2 Test Plot


2.1 TM1_DH5_Hop

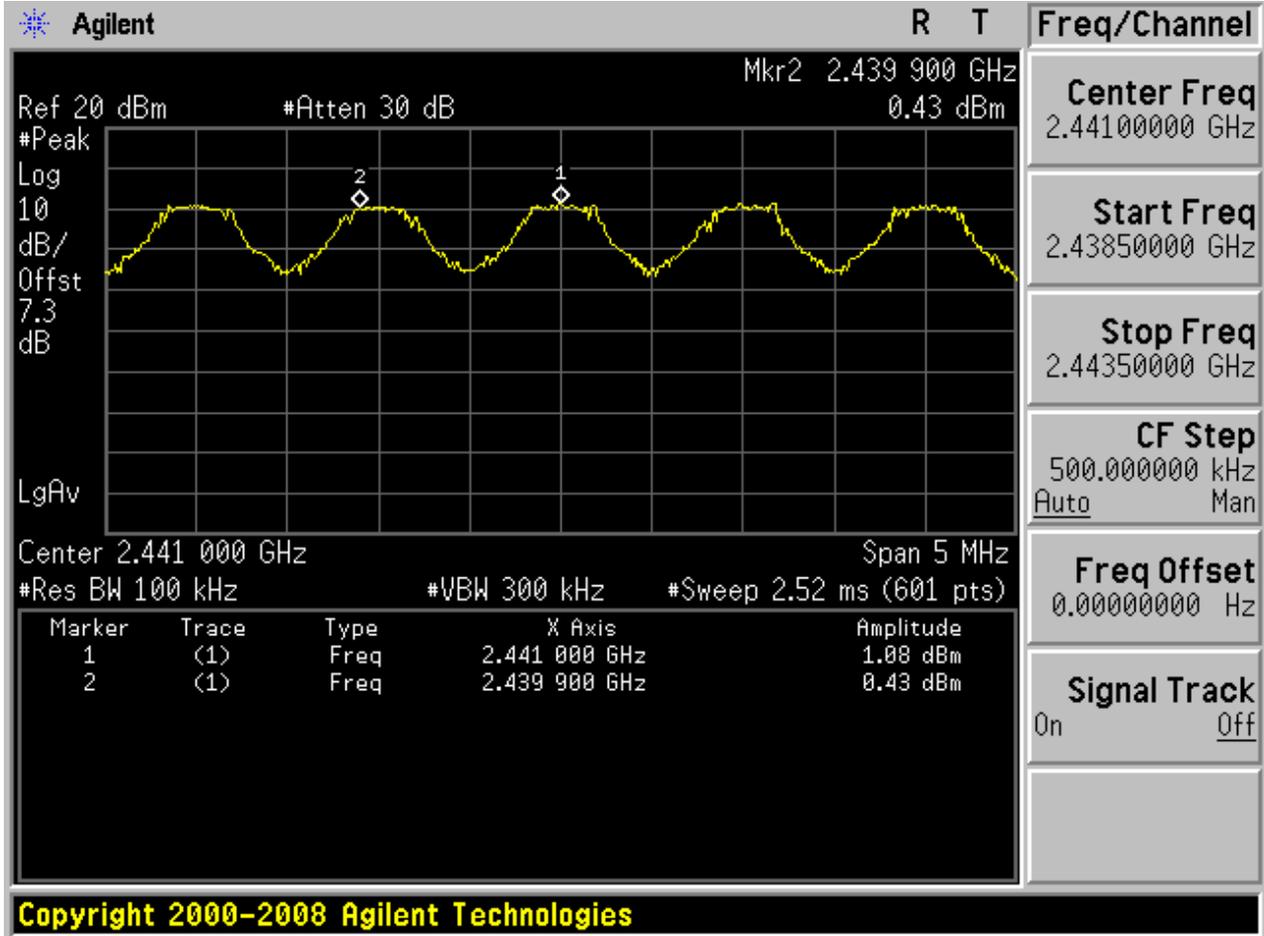

2.2 TM2_2DH5_Hop

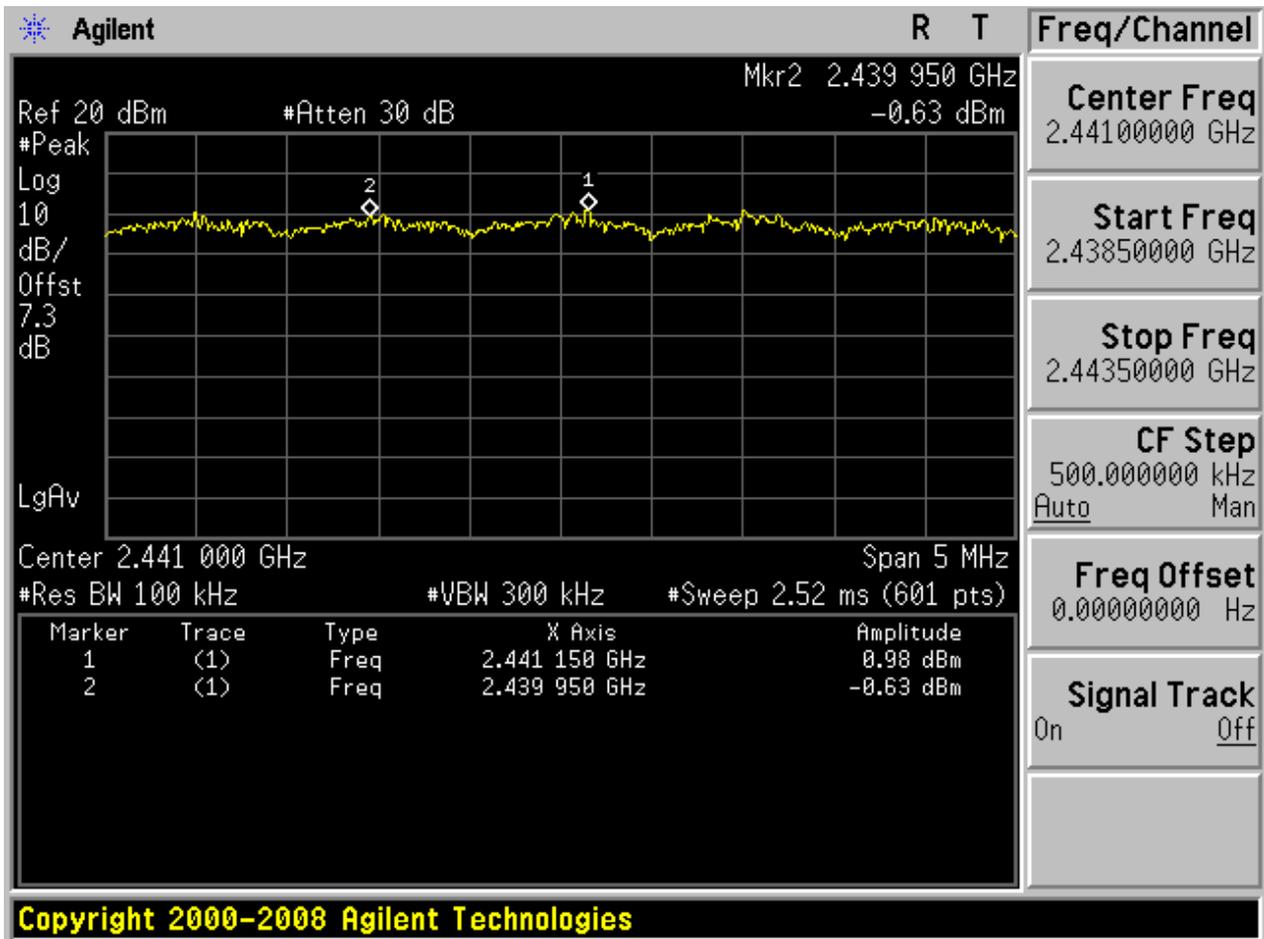

2.3 TM3_3DH5_Hop

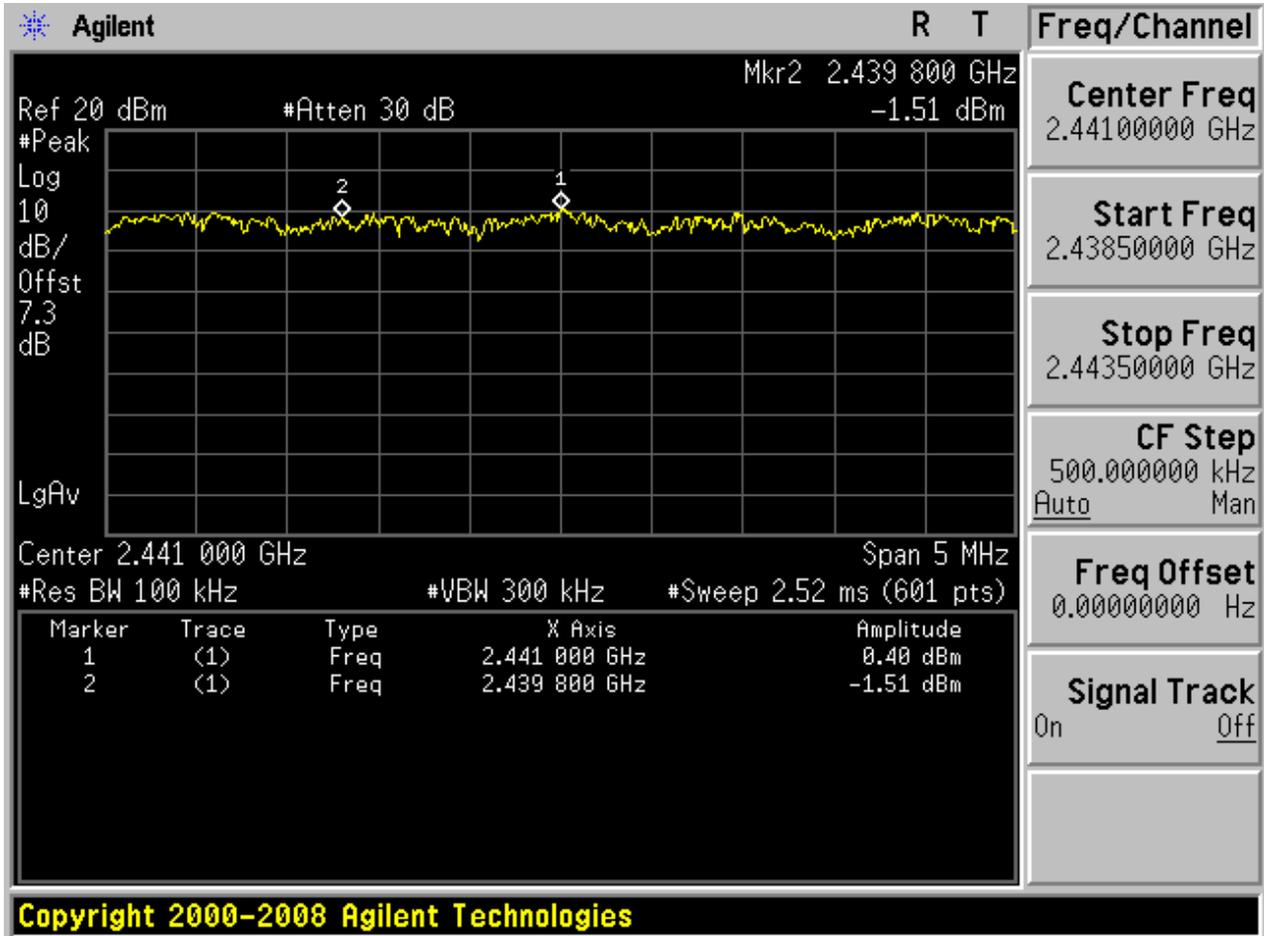


Appendix C: Number of Hopping Channel

1 Result Table


EUT Conf.	Number of Hopping Channel	Verdict
TM1_DH5_Hop	79	Pass
TM2_2DH5_Hop	79	Pass
TM3_3DH5_Hop	79	Pass

2 Test Plot


2.1 TM1_DH5_Hop

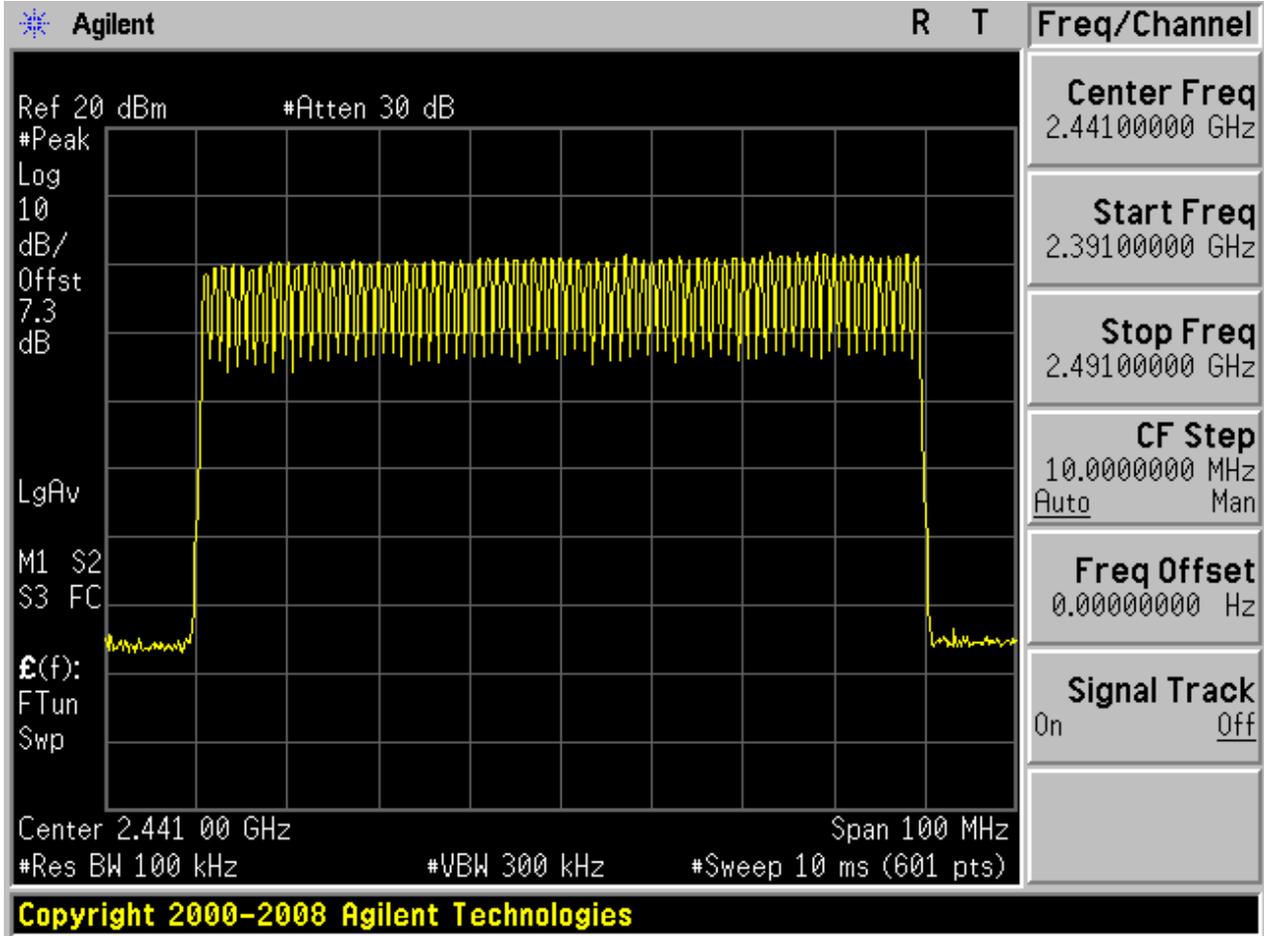

2.2 TM2_2DH5_Hop

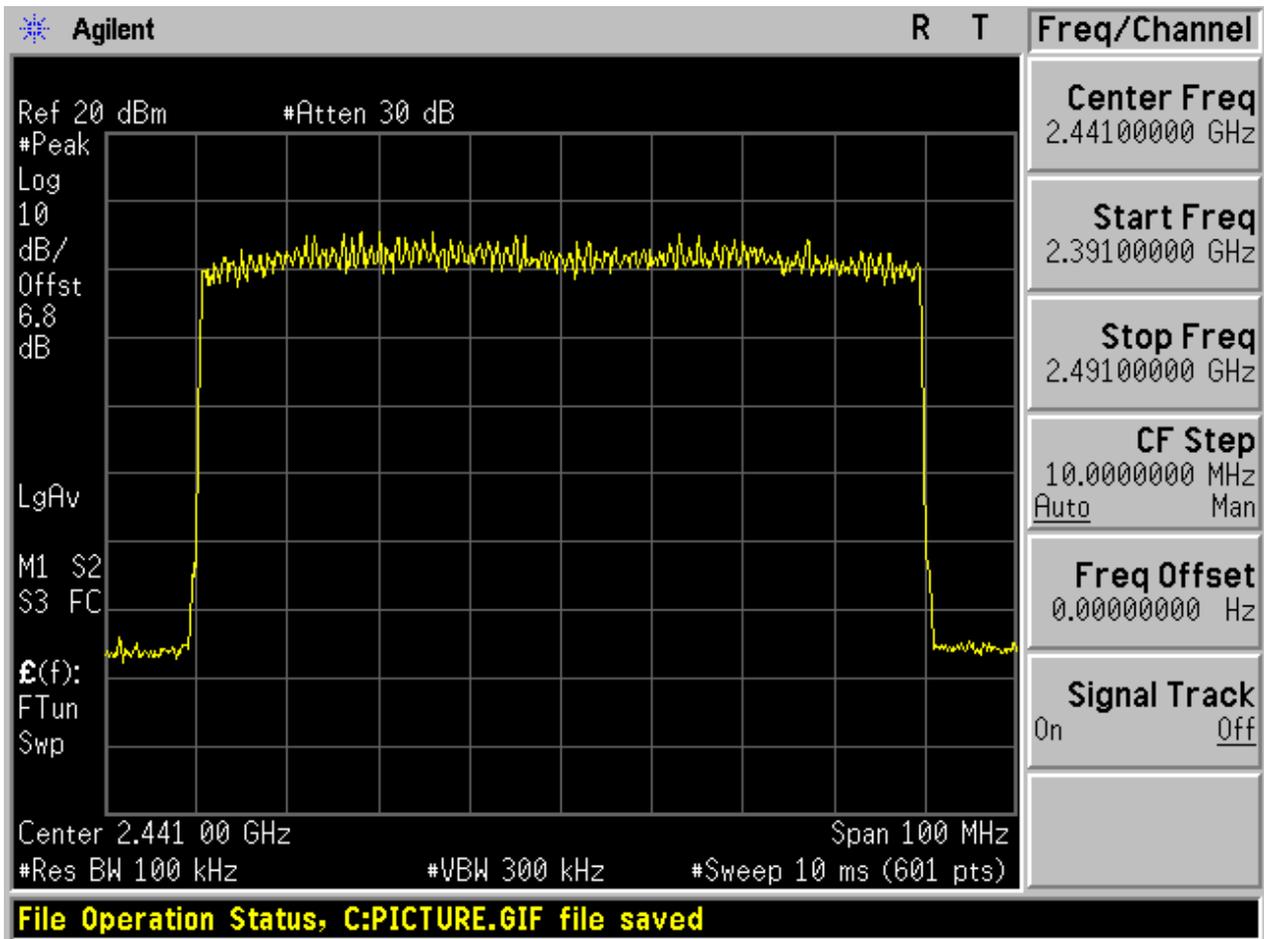

2.3 TM3_3DH5_Hop

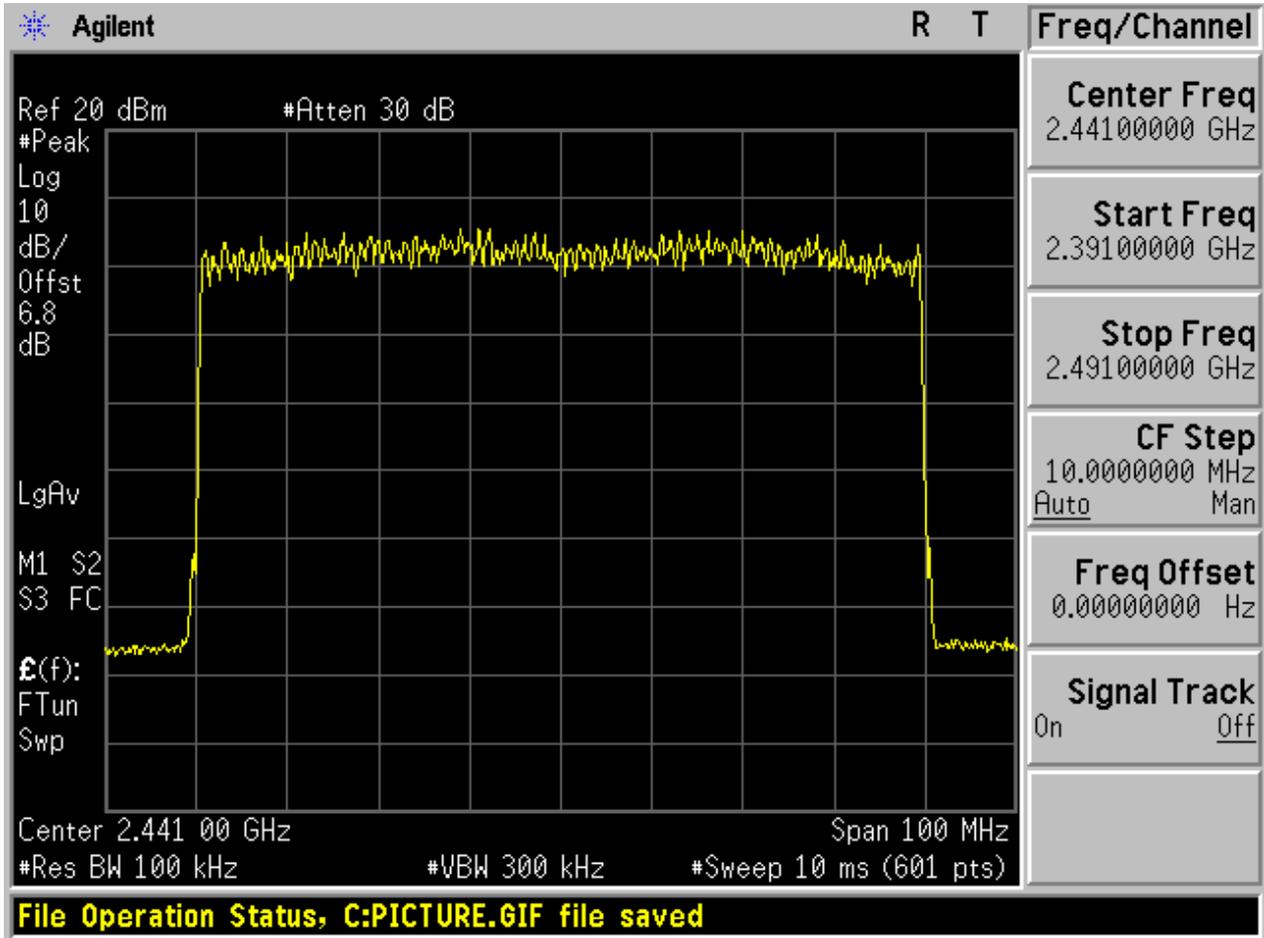

Appendix D: Time of Occupancy (Dwell Time)

1 Result Table

The Dwell Time = Burst Width * Total Hops. The detailed calculations are showed as follows:


- The duration for dwell time calculation: $0.4 \text{ [s]} * \text{hopping number} = 0.4 \text{ [s]} * 79 \text{ [ch]} = 31.6 \text{ [s*ch]}$;
- The burst width [ms/hop/ch], which is directly measured, refers to the duration on one channel hop.
- The hops per second for all channels: The selected EUT Conf uses a slot type of 5-Tx&1-Rx and a hopping rate of 1600 [ch*hop/s] for all channels. So the final hopping rate for all channels is $1600 / 6 = 266.67 \text{ [ch*hop/s]}$;
- The hops per second on one channel: $266.67 \text{ [ch*hop/s]} / 79 \text{ [ch]} = 3.38 \text{ [hop/s]}$;
- The total hops for all channels within the dwell time calculation duration: $3.38 \text{ [hop/s]} * 31.6 \text{ [s*ch]} = 106.67 \text{ [hop*ch]}$;
- The dwell time for all channels hopping: $106.67 \text{ [hop*ch]} * \text{Burst Width [ms/hop/ch]}$.

EUT Conf.	Burst Width [ms/hop/ch]	Total Hops [hop*ch]	Dwell Time [s]	Verdict
TM1_DH5_Ch39	2.900	106.67	0.309	Pass
TM2_2DH5_Ch39	2.900	106.67	0.309	Pass
TM3_3DH5_Ch39	2.900	106.67	0.309	Pass


2 Test Plot

NOTE: The test plots are only for Burst Width measurements.


2.1 TM1_DH5_Ch39

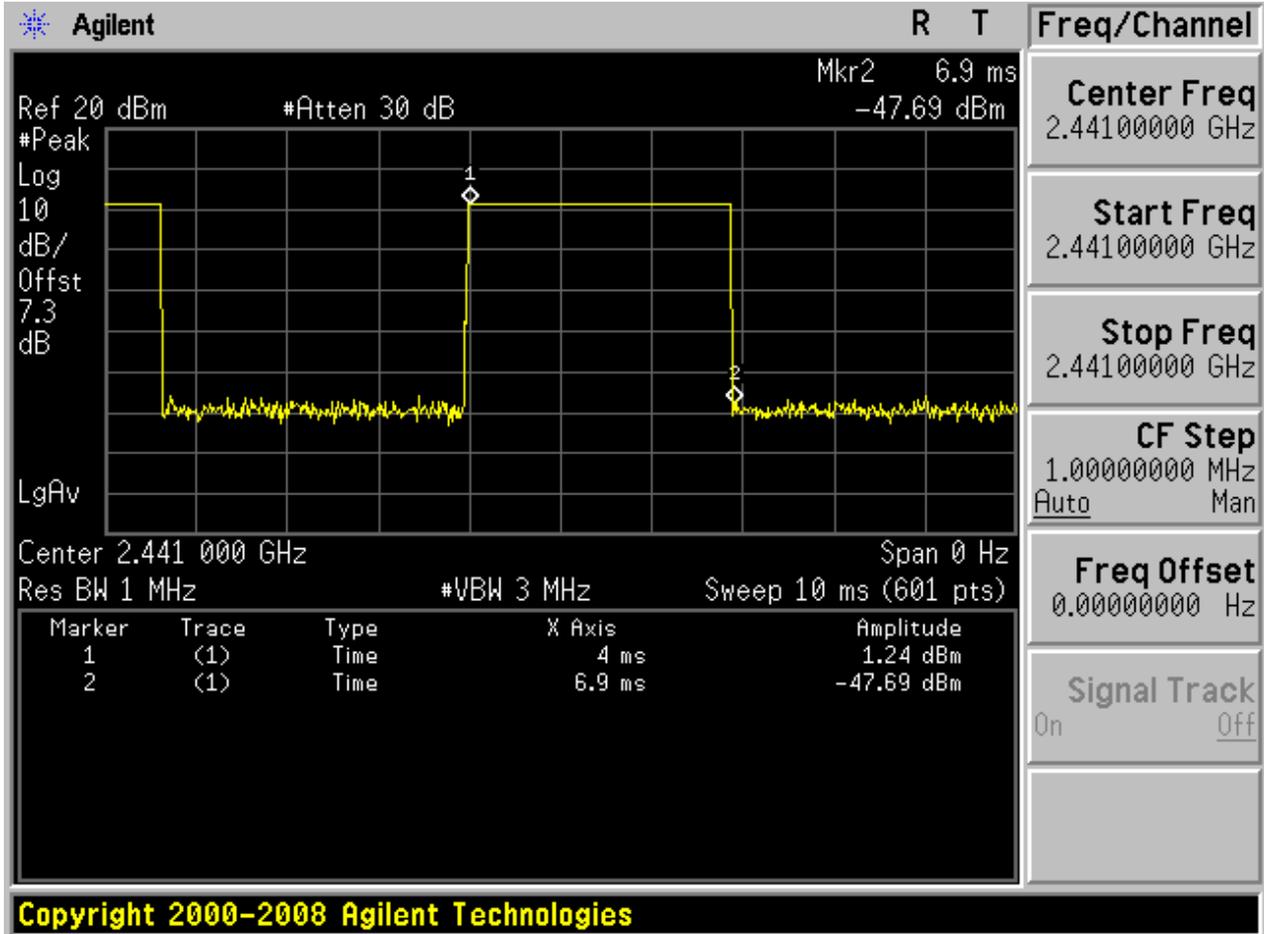

2.2 TM2_2DH5_Ch39

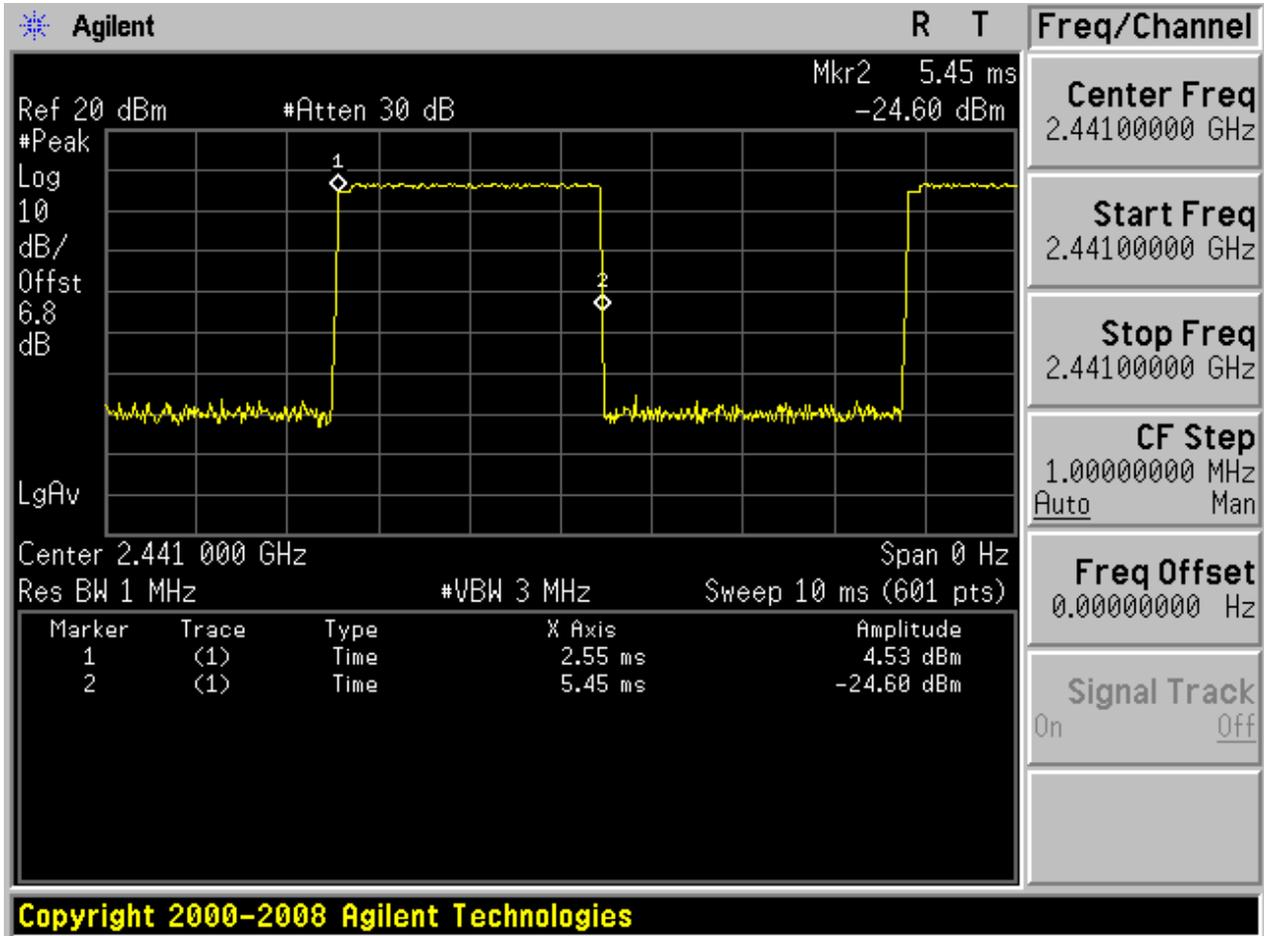

2.3 TM3_3DH5_Ch39

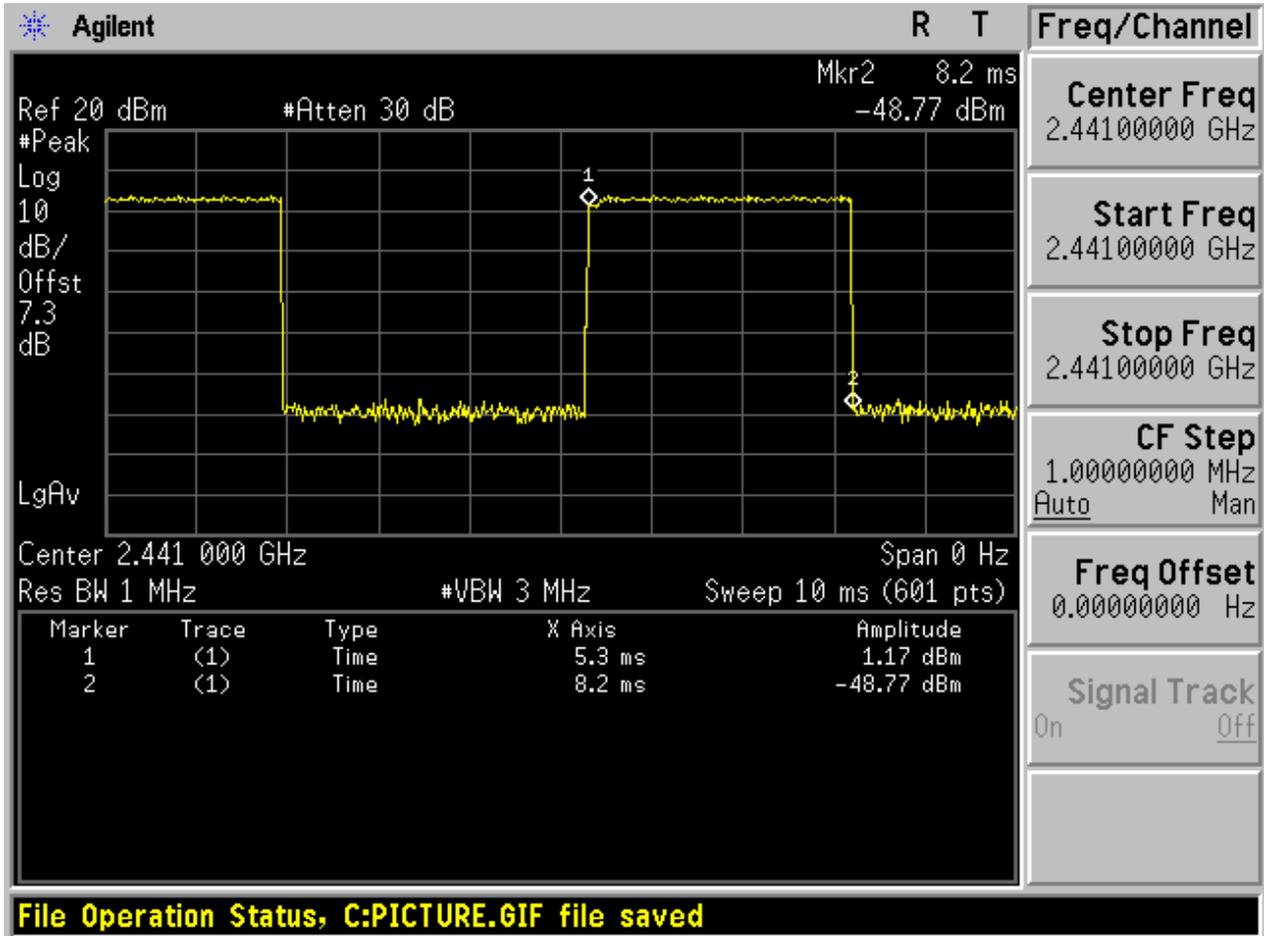




Appendix E: Maximum Peak Conducted Output Power

1 Result Table


EUT Conf.	Max. Peak Power [dBm]	Verdict
TM1_DH5_Ch0	0.1	Pass
TM1_DH5_Ch39	1.43	Pass
TM1_DH5_Ch78	1.64	Pass
TM2_2DH5_Ch0	2.77	Pass
TM2_2DH5_Ch39	3.41	Pass
TM2_2DH5_Ch78	2.95	Pass
TM3_3DH5_Ch0	3.29	Pass
TM3_3DH5_Ch39	3.93	Pass
TM3_3DH5_Ch78	3.42	Pass

2 Test Plot


2.1 TM1_DH5_Ch0

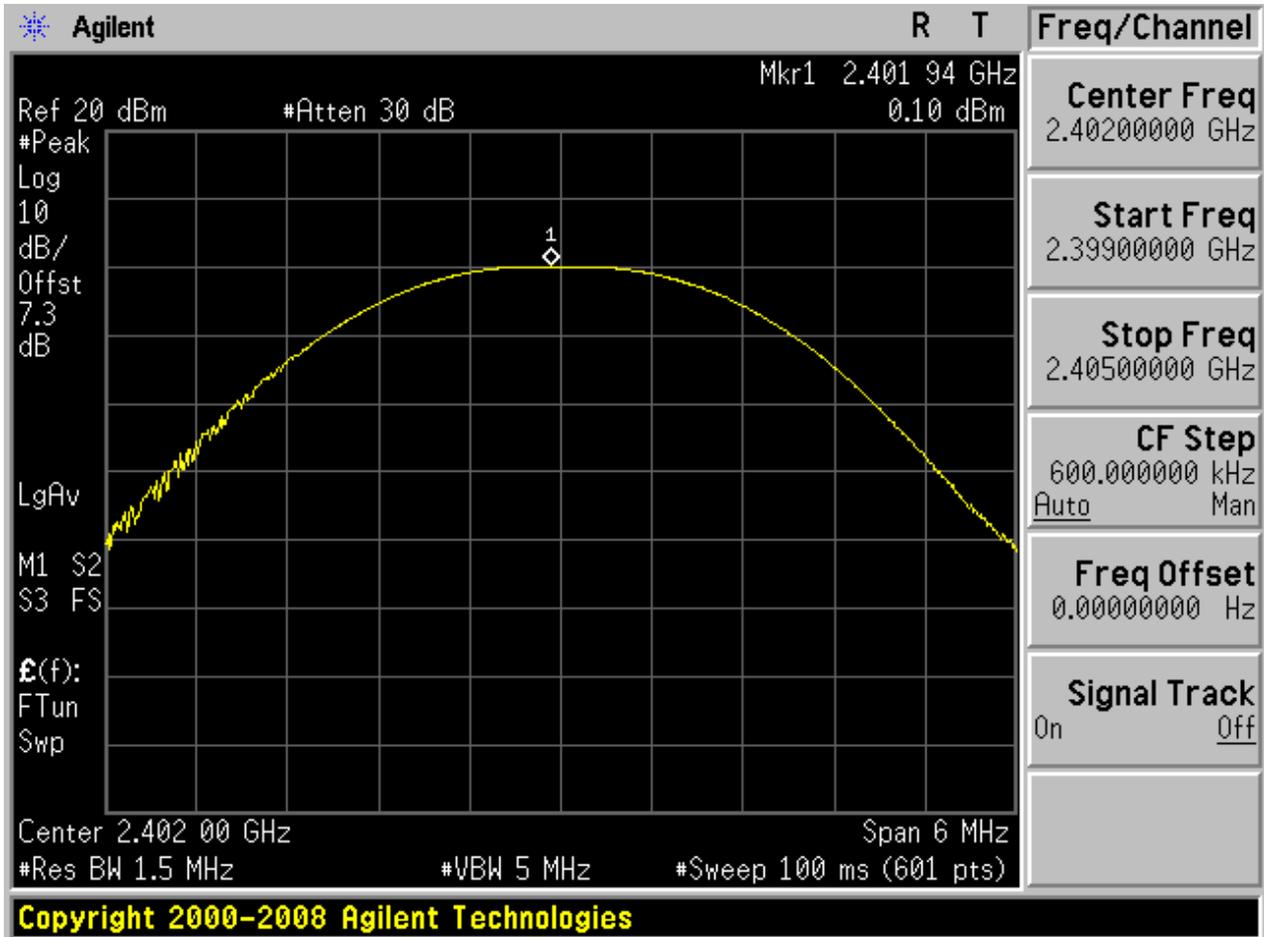


2.2 TM1_DH5_Ch39

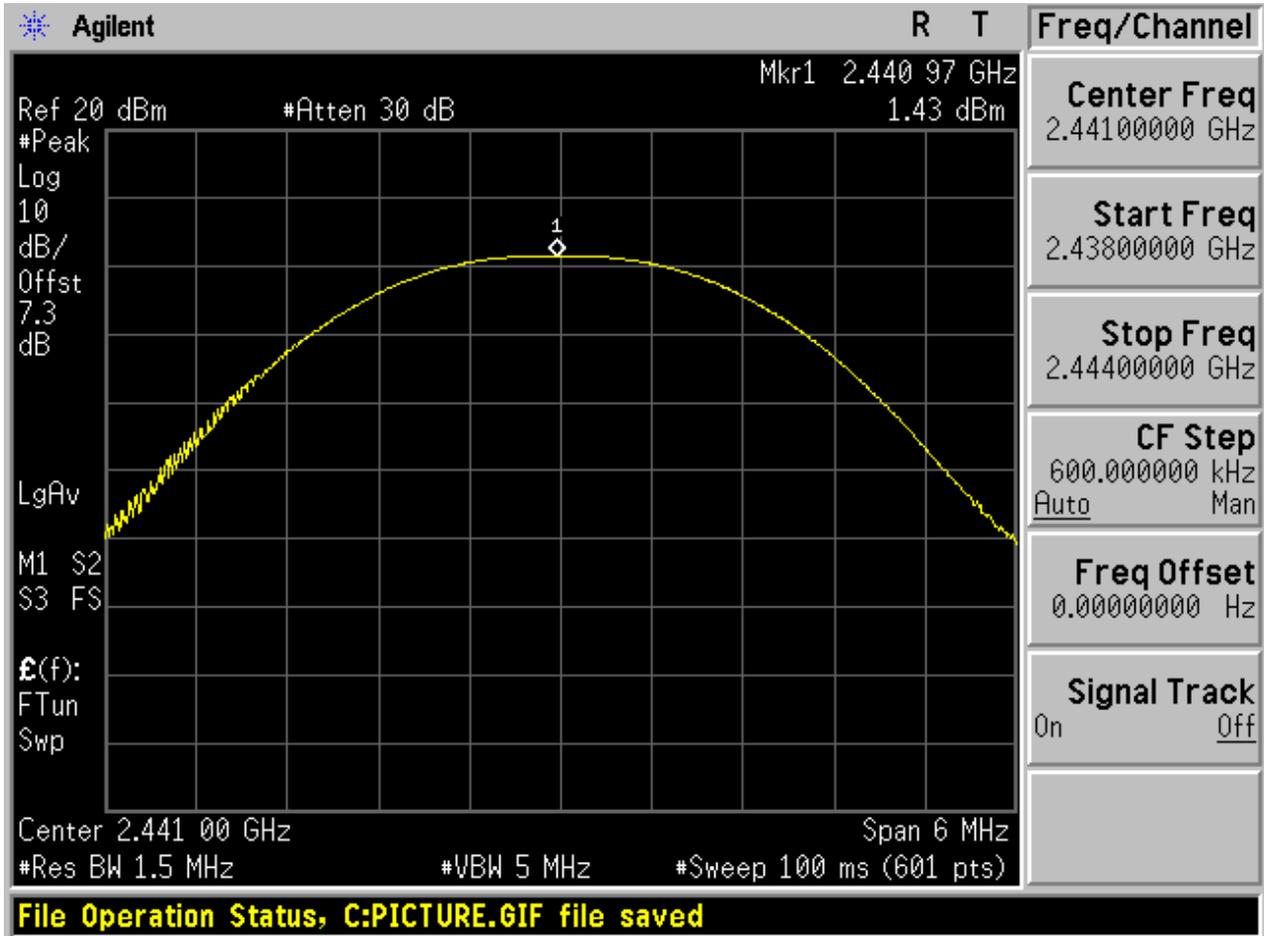


2.3 TM1_DH5_Ch78

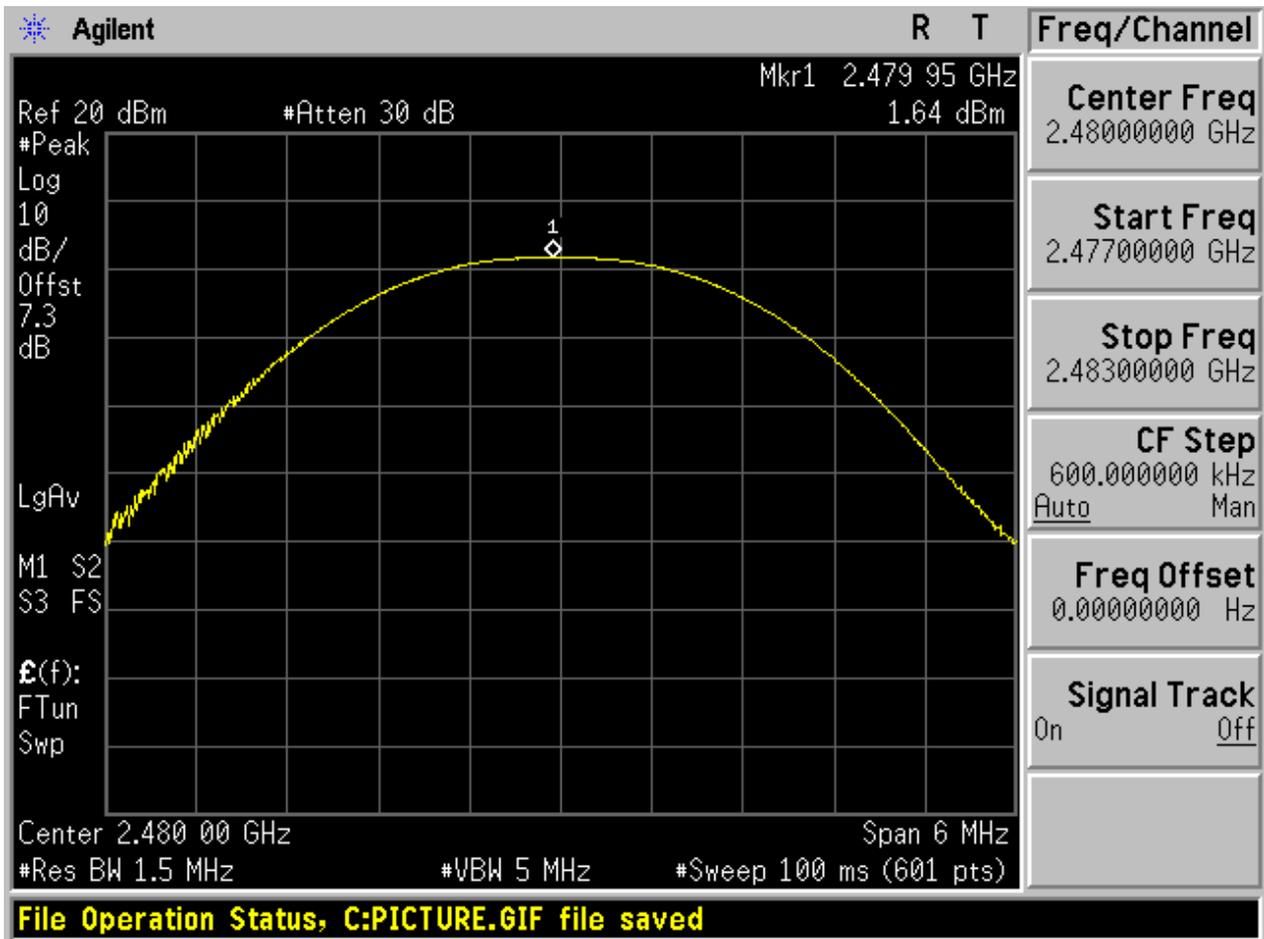


2.4 TM2_2DH5_Ch0

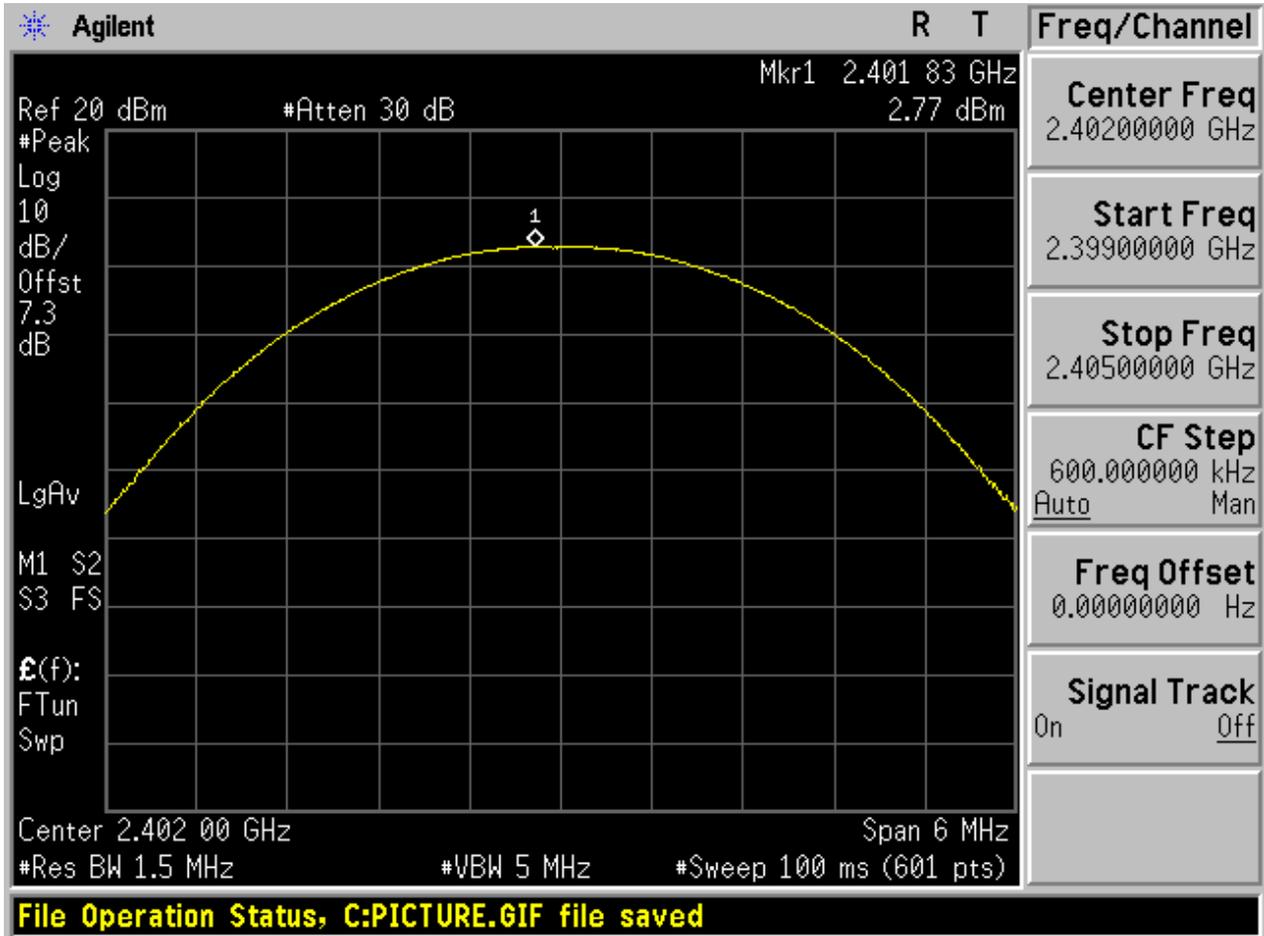


2.5 TM2_2DH5_Ch39

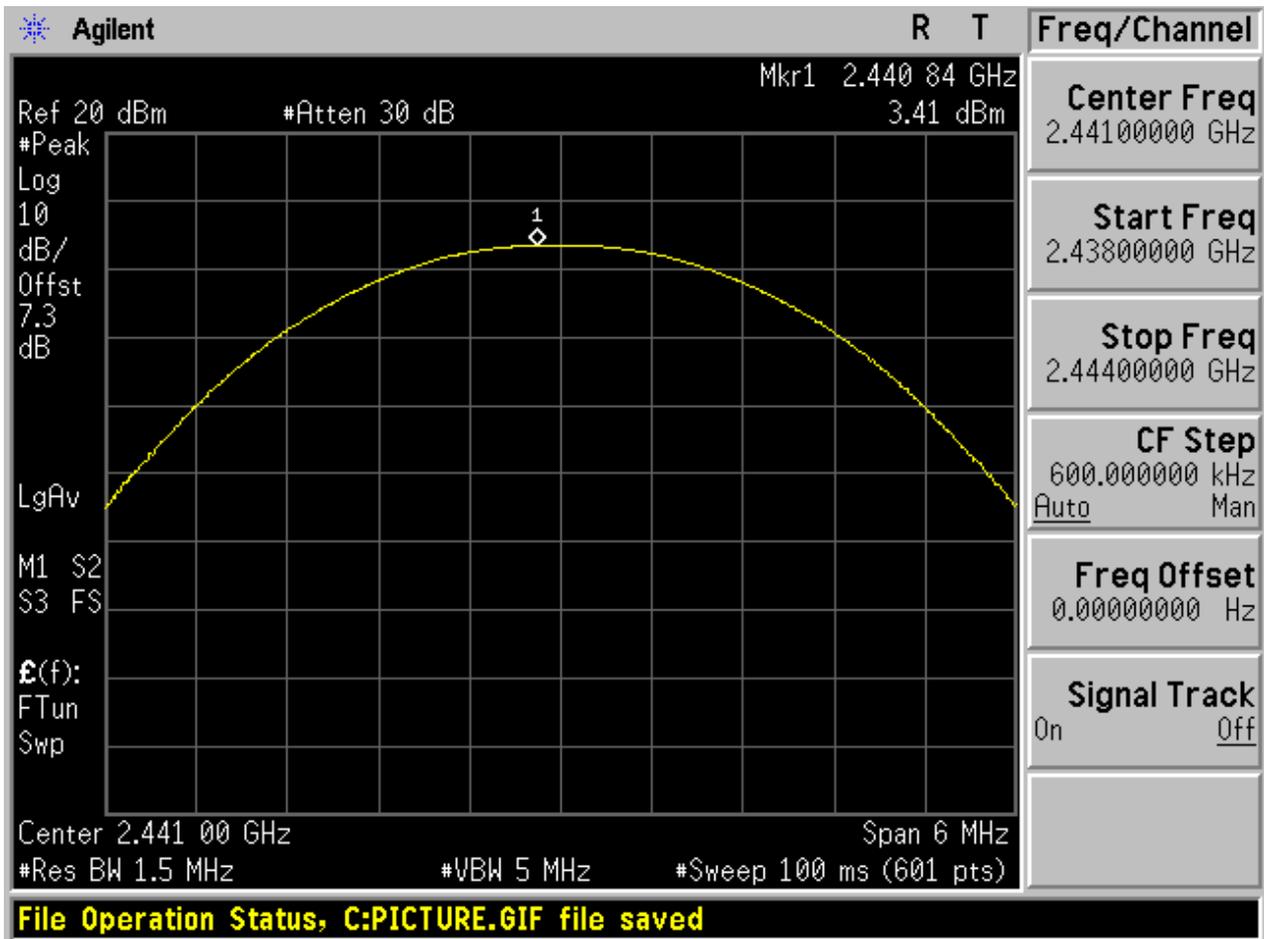


2.6 TM2_2DH5_Ch78

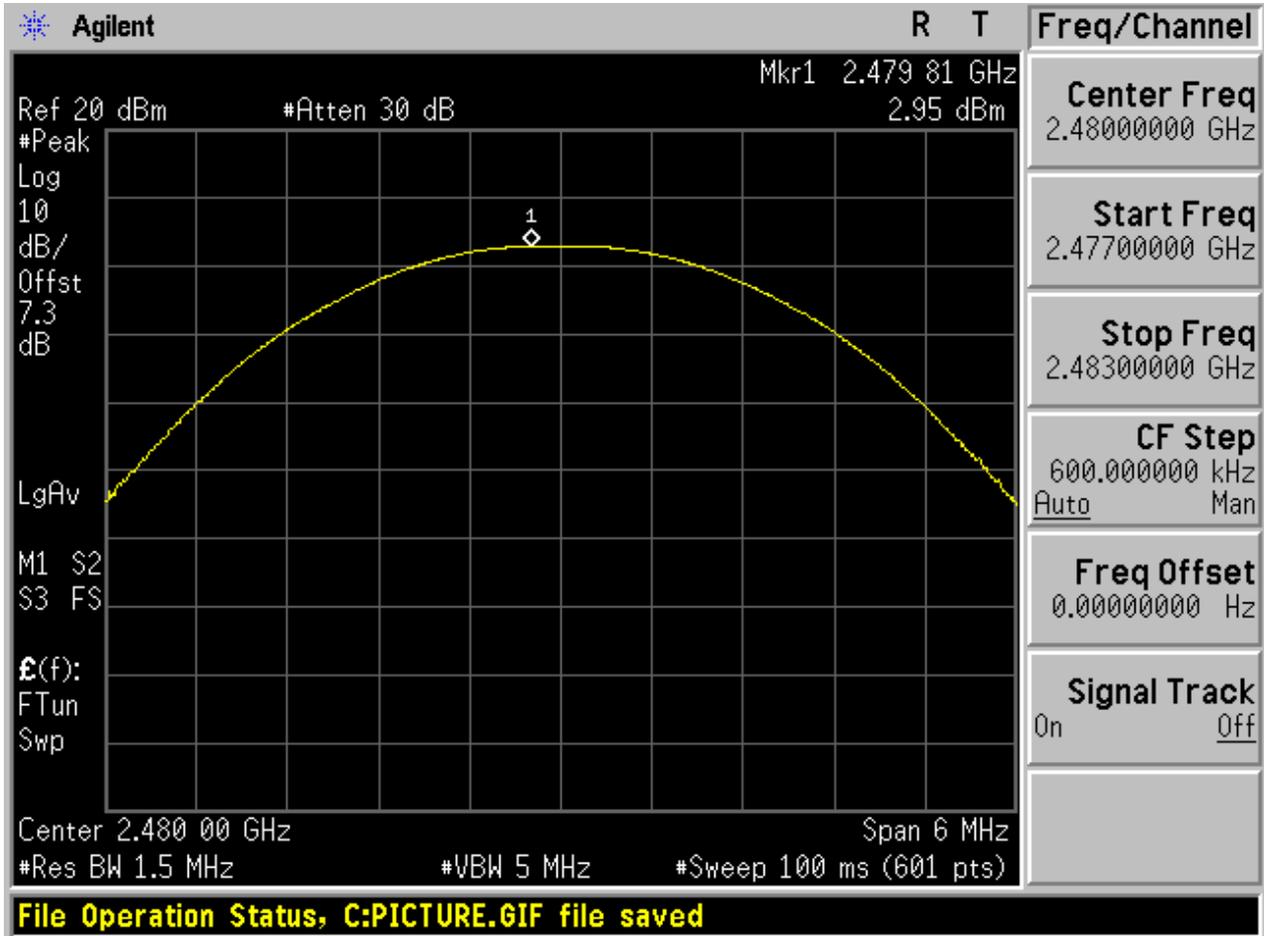


2.7 TM3_3DH5_Ch0

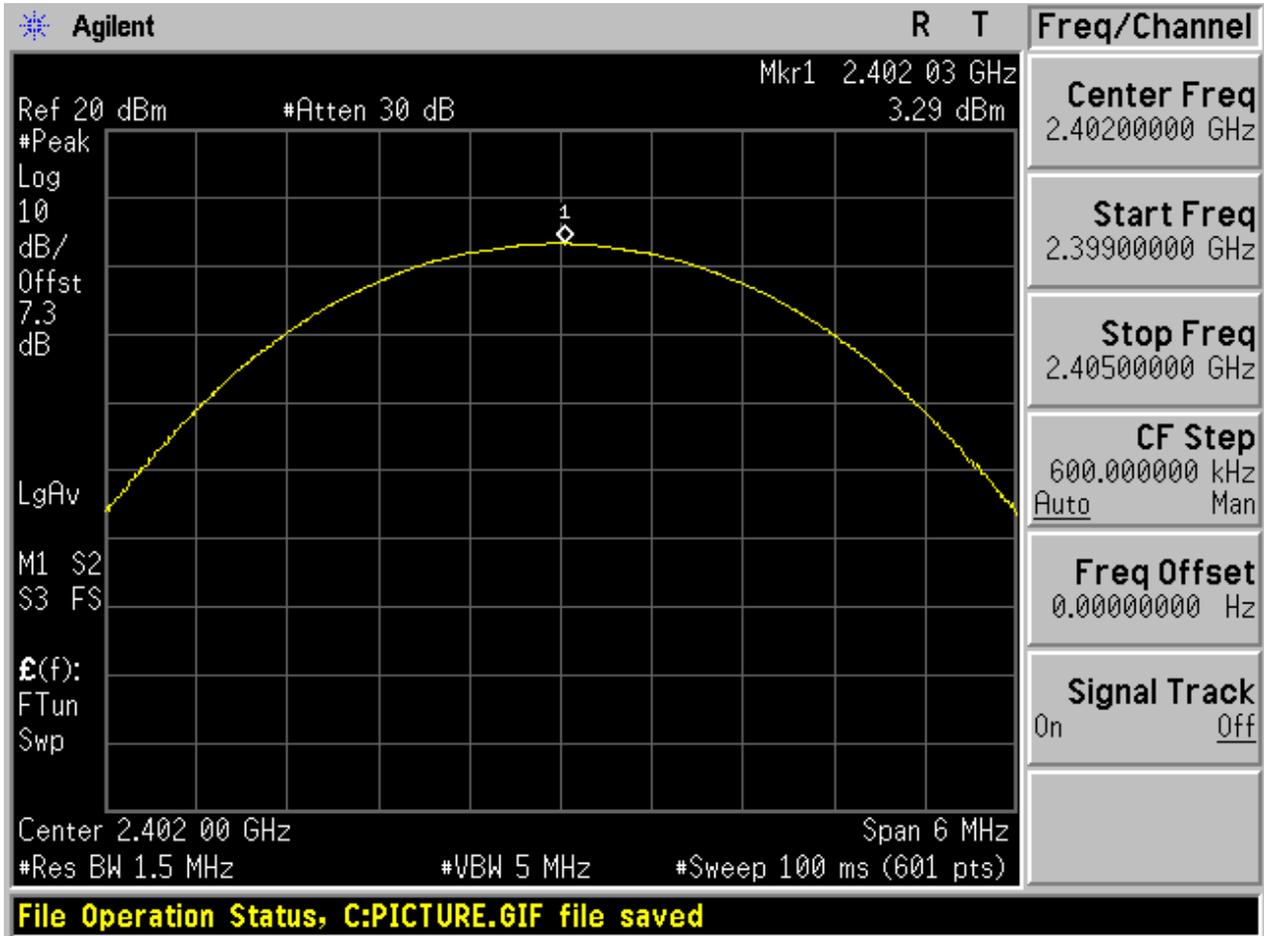

2.8 TM3_3DH5_Ch39

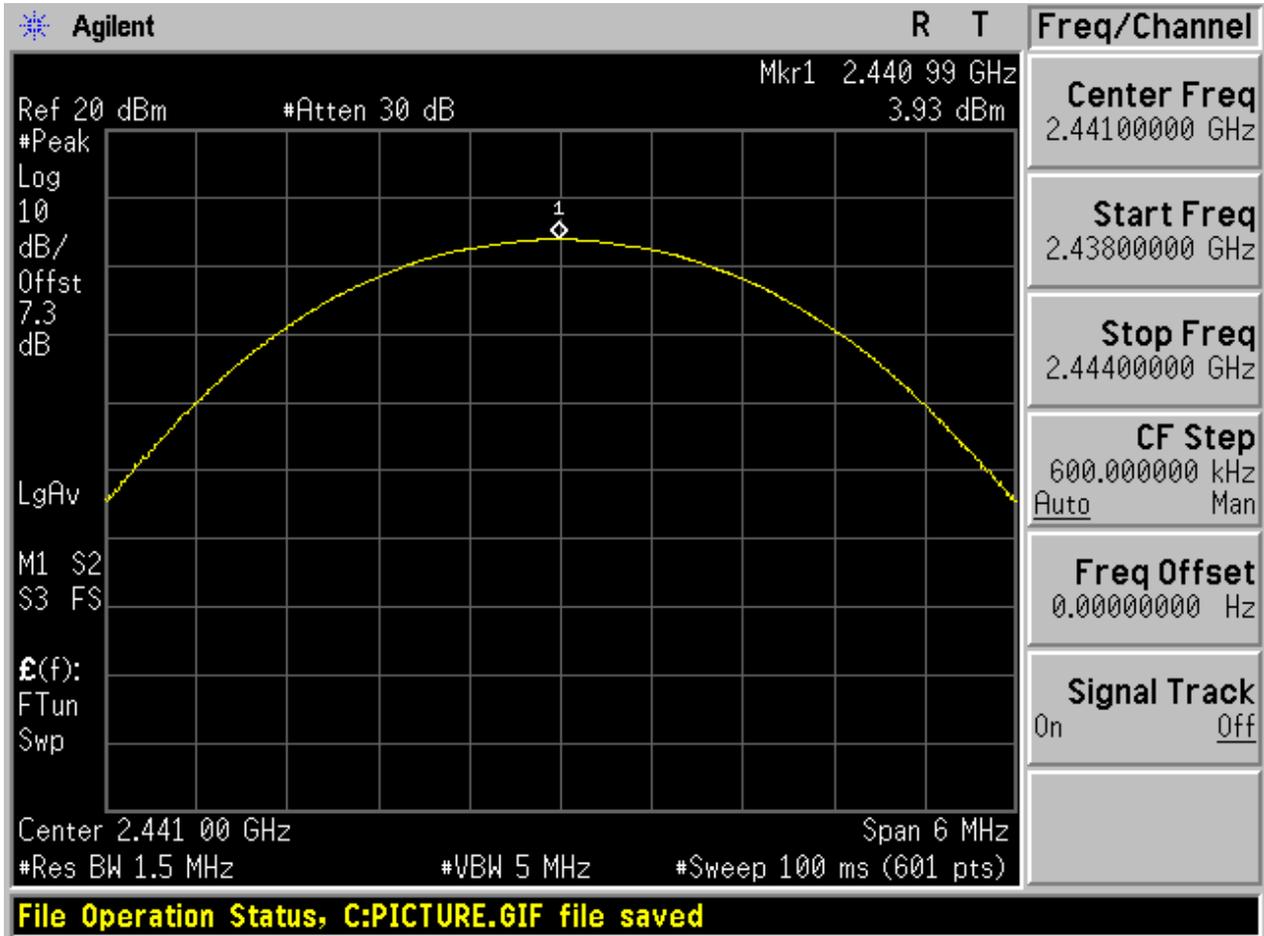

2.9 TM3_3DH5_Ch78

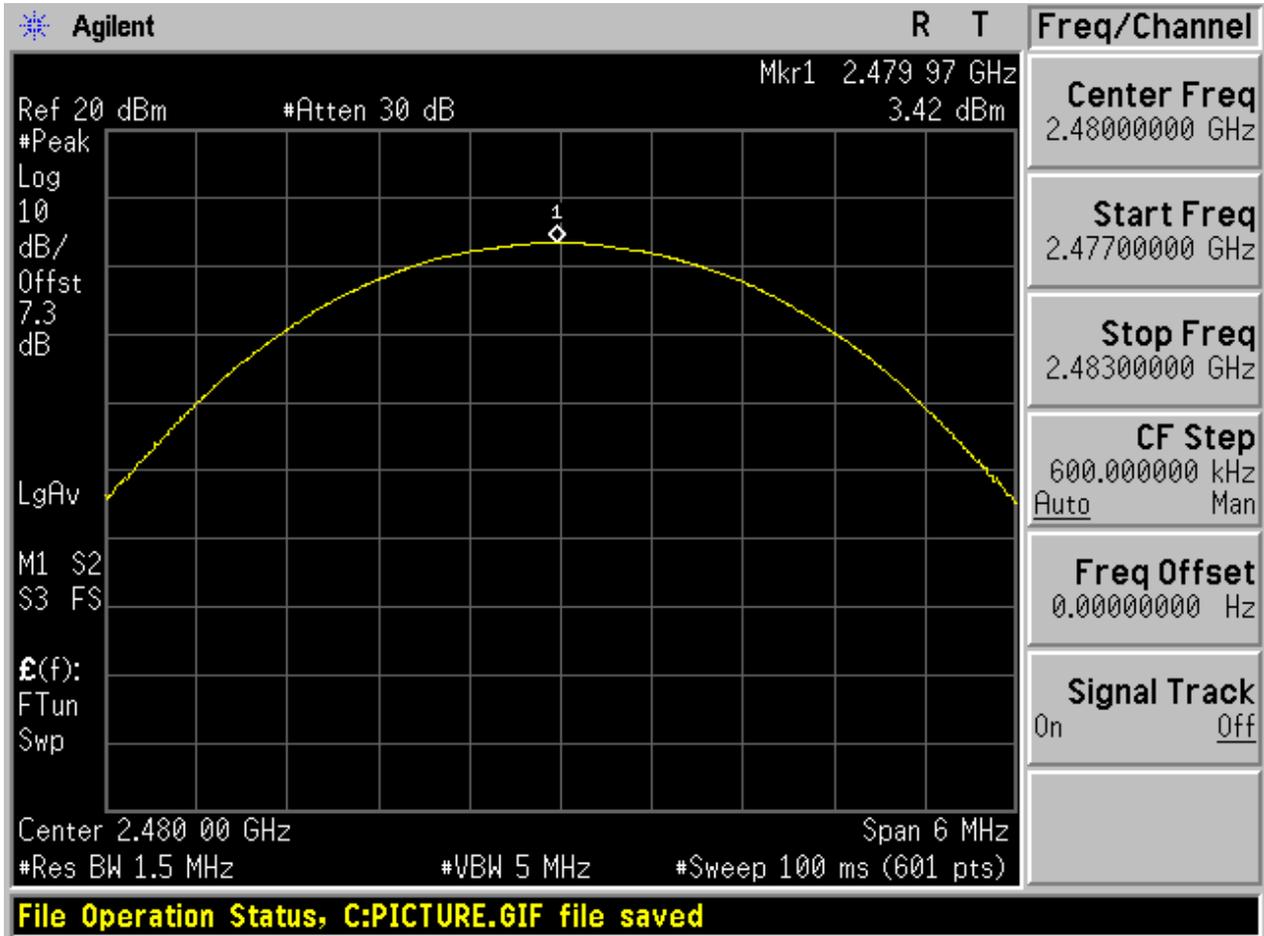



Appendix F: Band edge spurious emission


1 Result Table

EUT Conf.	Channel No.	Carrier Frequency [MHz]	Max. Spurious Level [dBm]	Frequency Hopping	Carrier Power [dBm]	Limit [dBm]	Result
TM1_DH5_Ch0	0	2402	-53.83	Off	0.12	-19.88	Pass
	-	-	-54.65	On	-0.14	-20.14	Pass
TM1_DH5_Ch78	78	2480	-54.57	Off	1.58	-18.42	Pass
	-	-	-54.34	On	1.50	-18.5	Pass
TM2_2DH_5_Ch0	0	2402	-54.67	Off	0.40	-19.6	Pass
	-	-	-54.23	On	0.25	-19.75	Pass
TM2_2DH_5_Ch78	78	2480	-53.87	Off	0.71	-19.29	Pass
	-	-	-54.45	On	-0.64	-20.64	Pass
TM3_3DH_5_Ch0	0	2402	-54.6	Off	0.43	-19.57	Pass
	-	-	-55.61	On	0.41	-19.59	Pass
TM3_3DH_5_Ch78	78	2480	-54.21	Off	0.80	-19.2	Pass
	-	-	-54.68	On	-0.45	-20.45	Pass


2 Test Plot

2.1 TM1_DH5_Ch0

No hopping

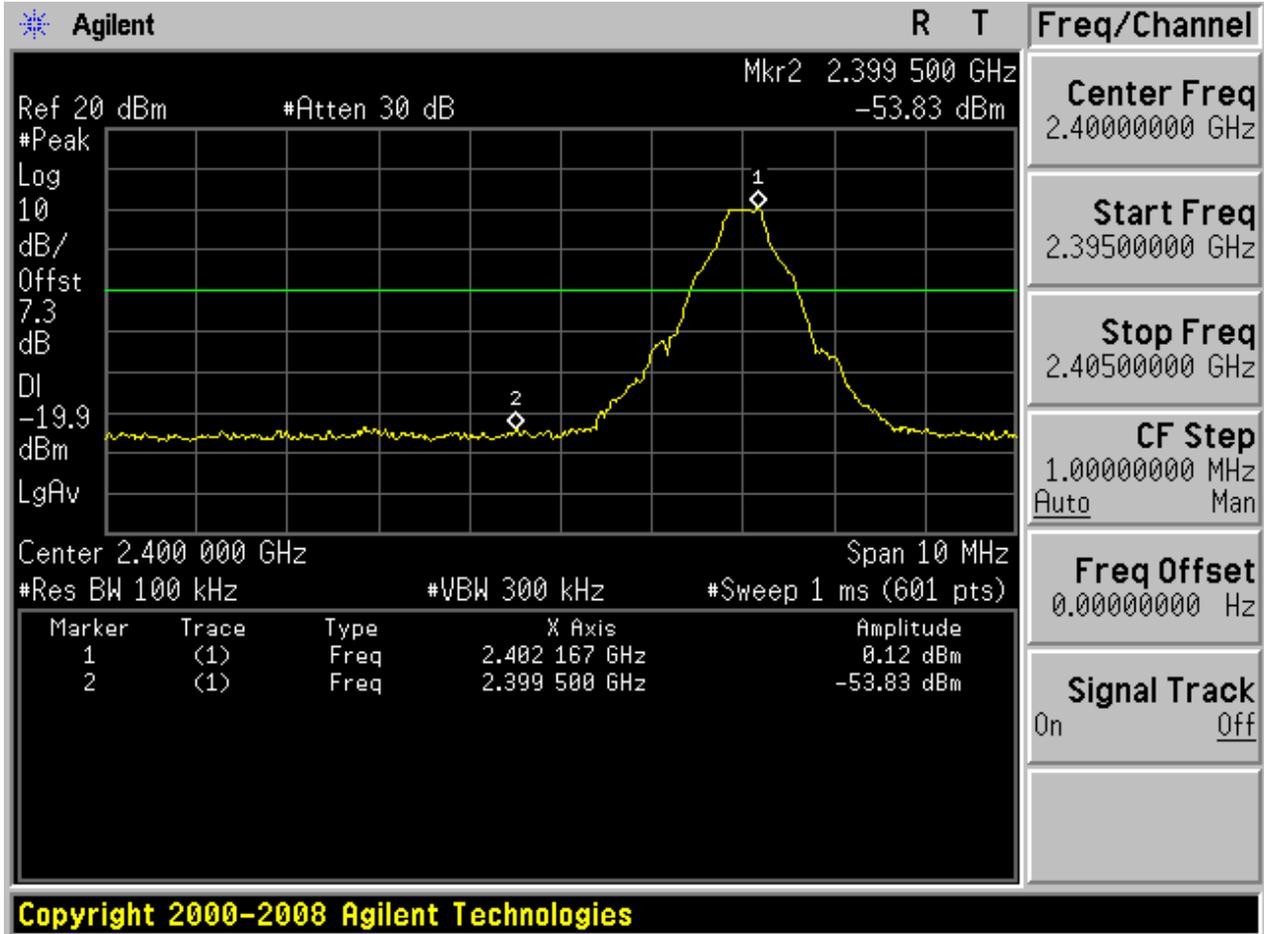


With hopping

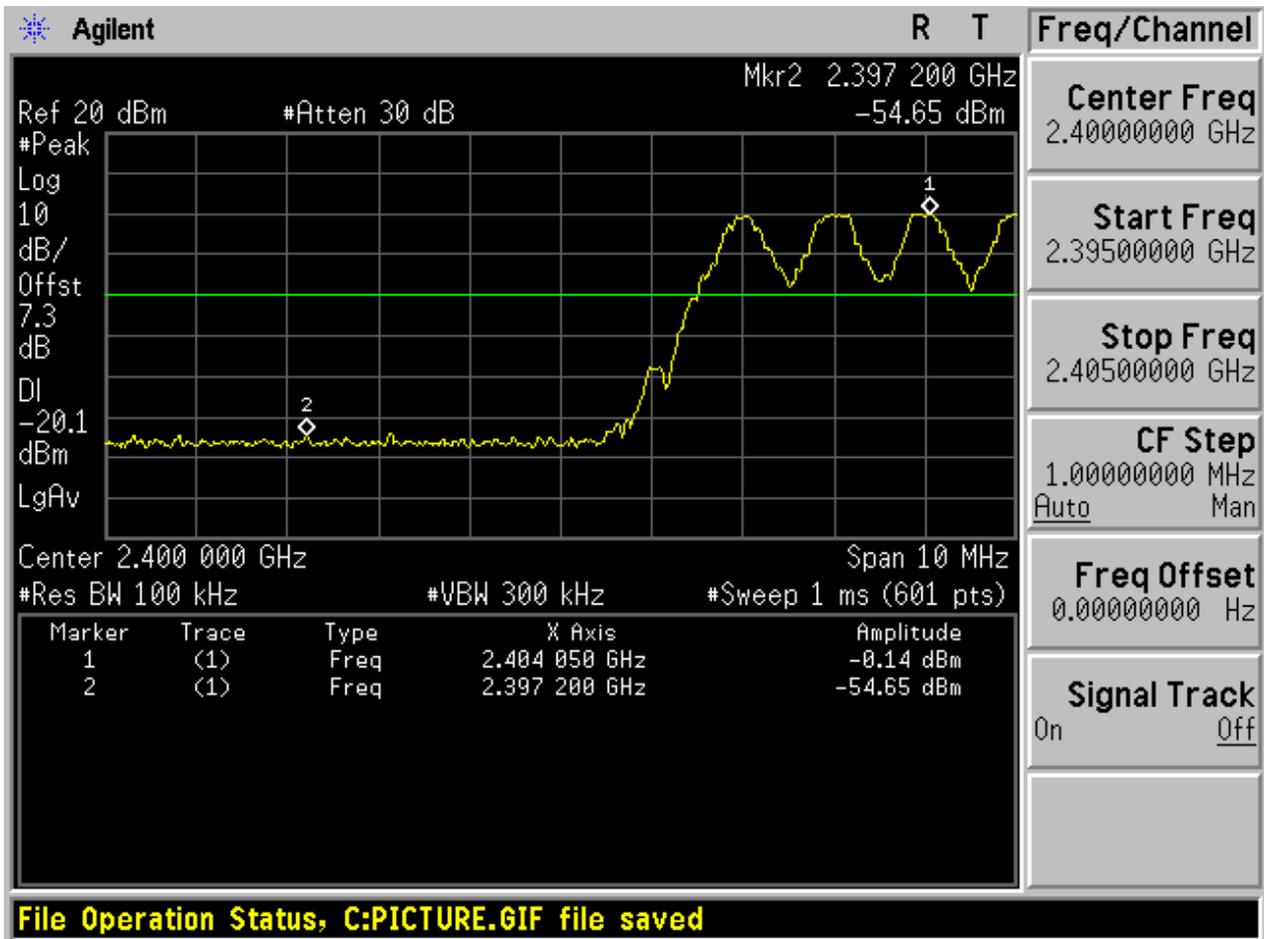


2.2 TM1_DH5_Ch78

No hopping

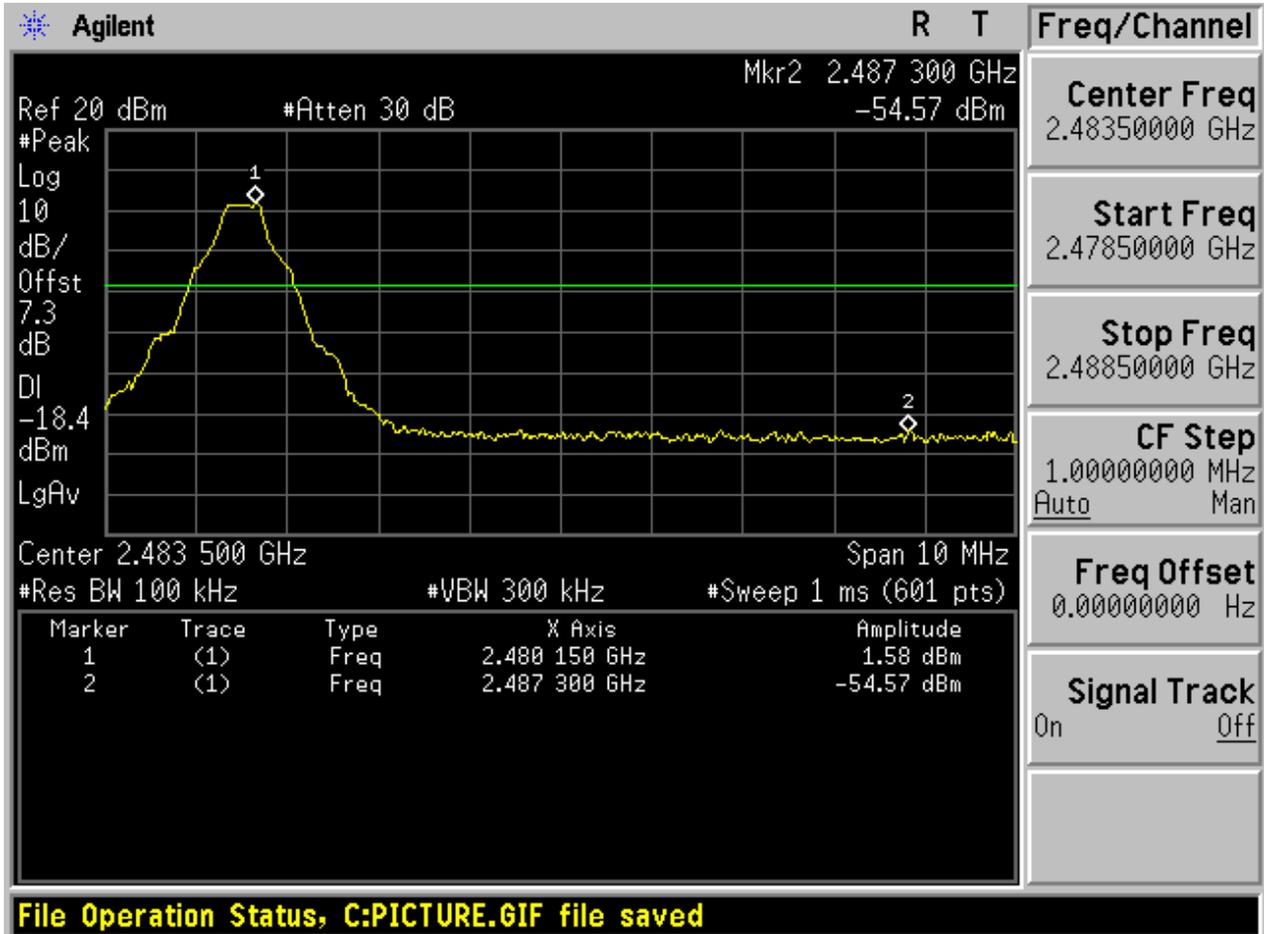


With hopping

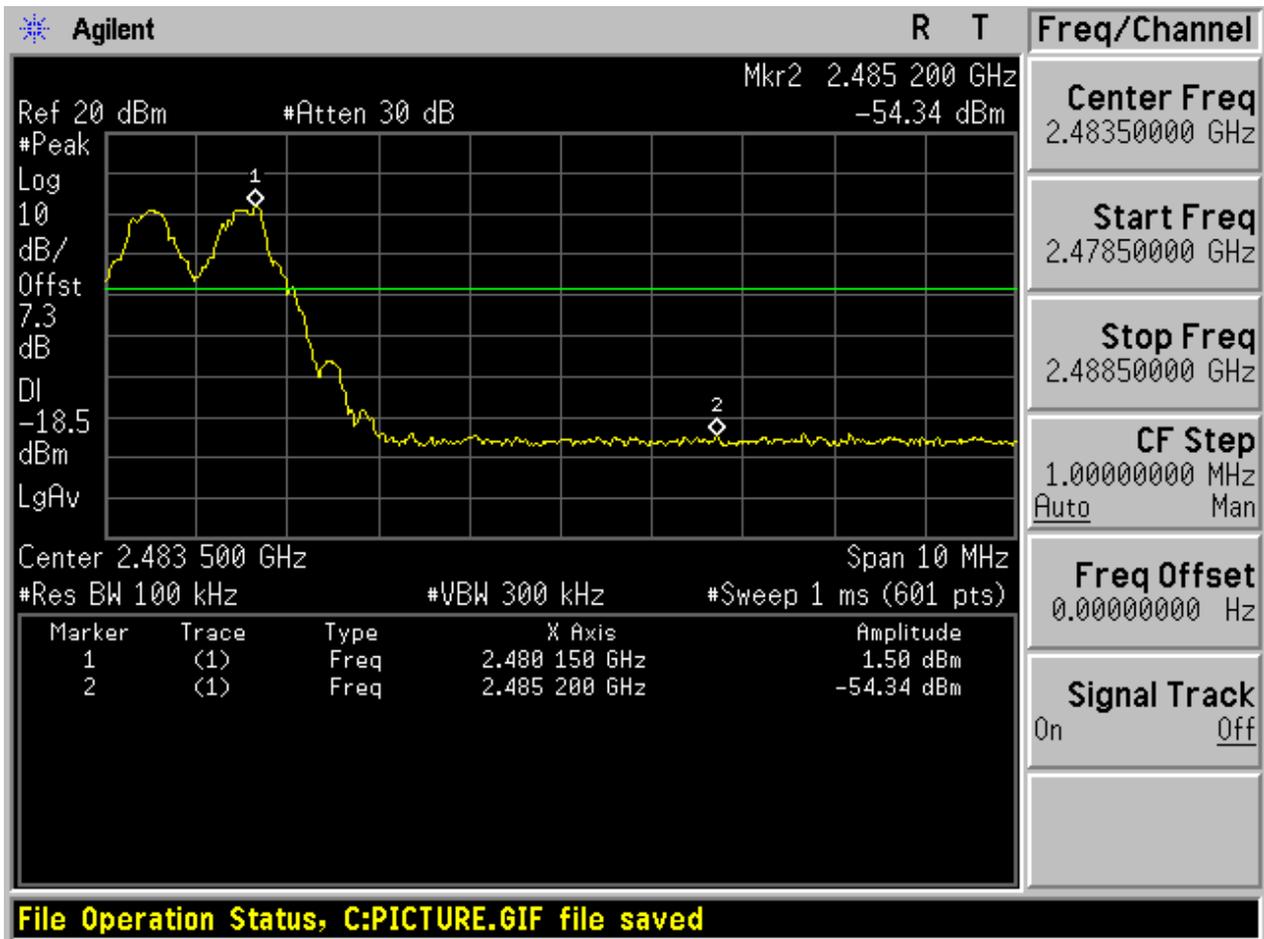


2.3 TM2_2DH5_Ch0

No hopping

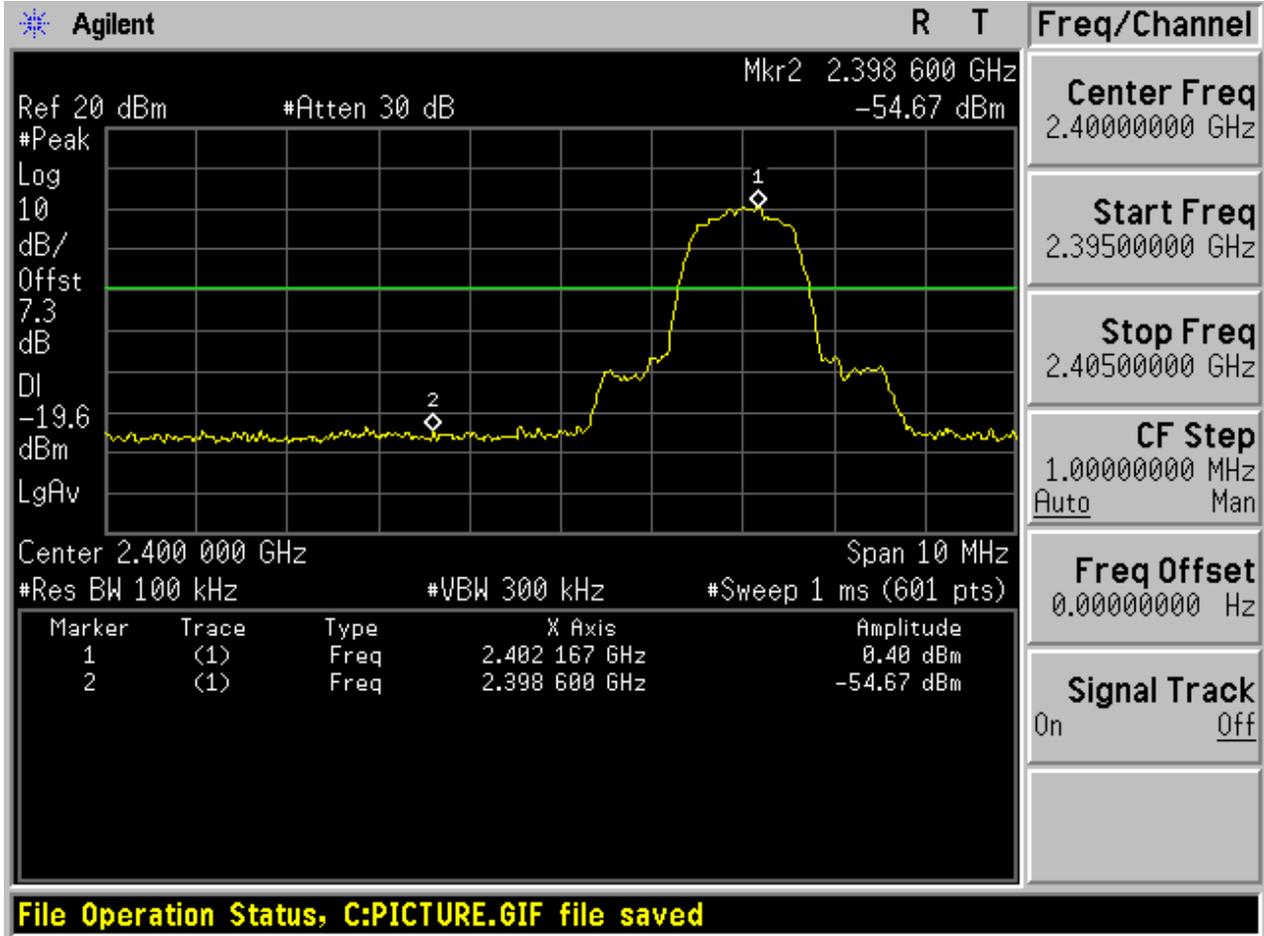


With hopping

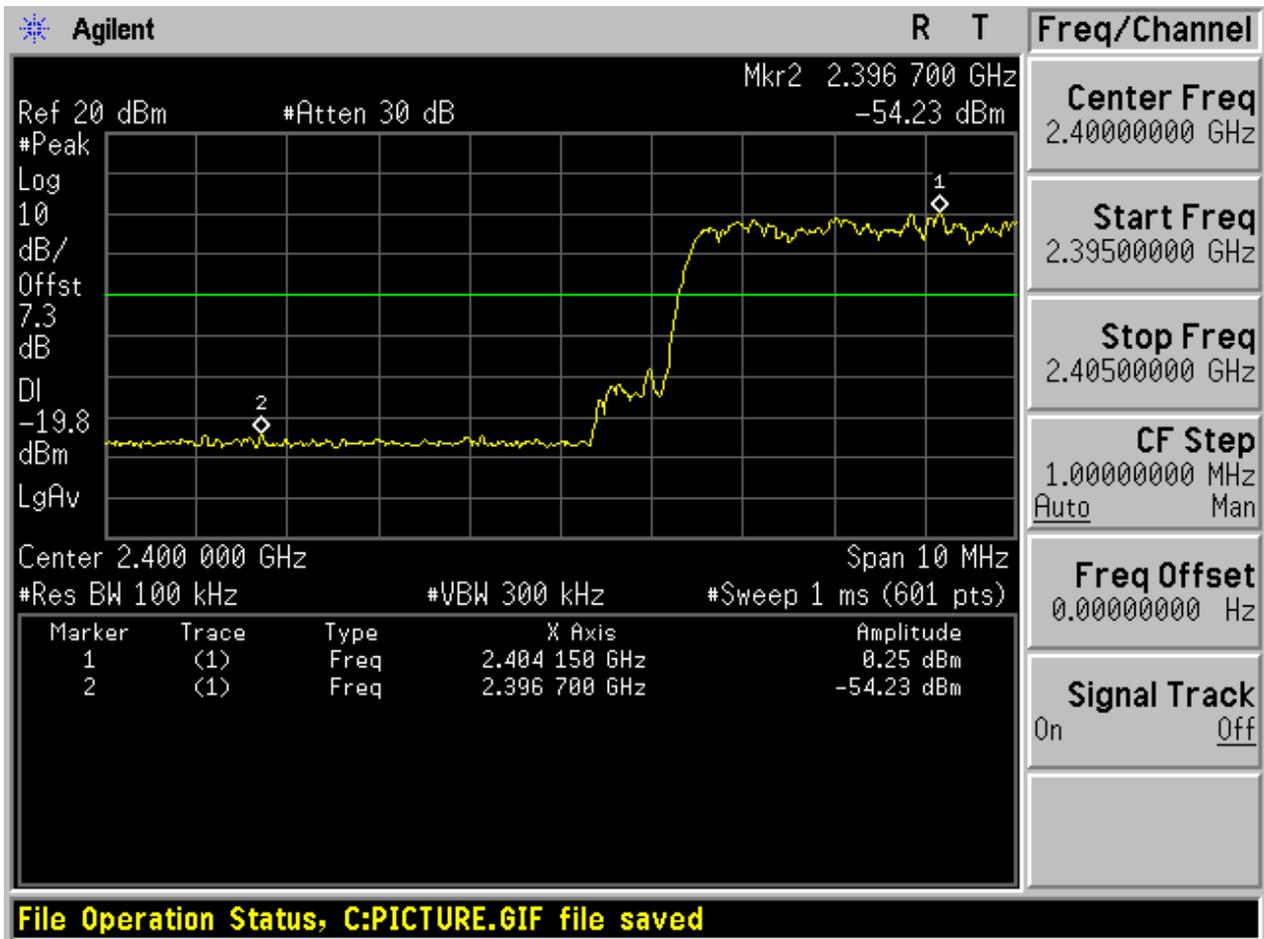


2.4 TM2_2DH5_Ch78

No hopping

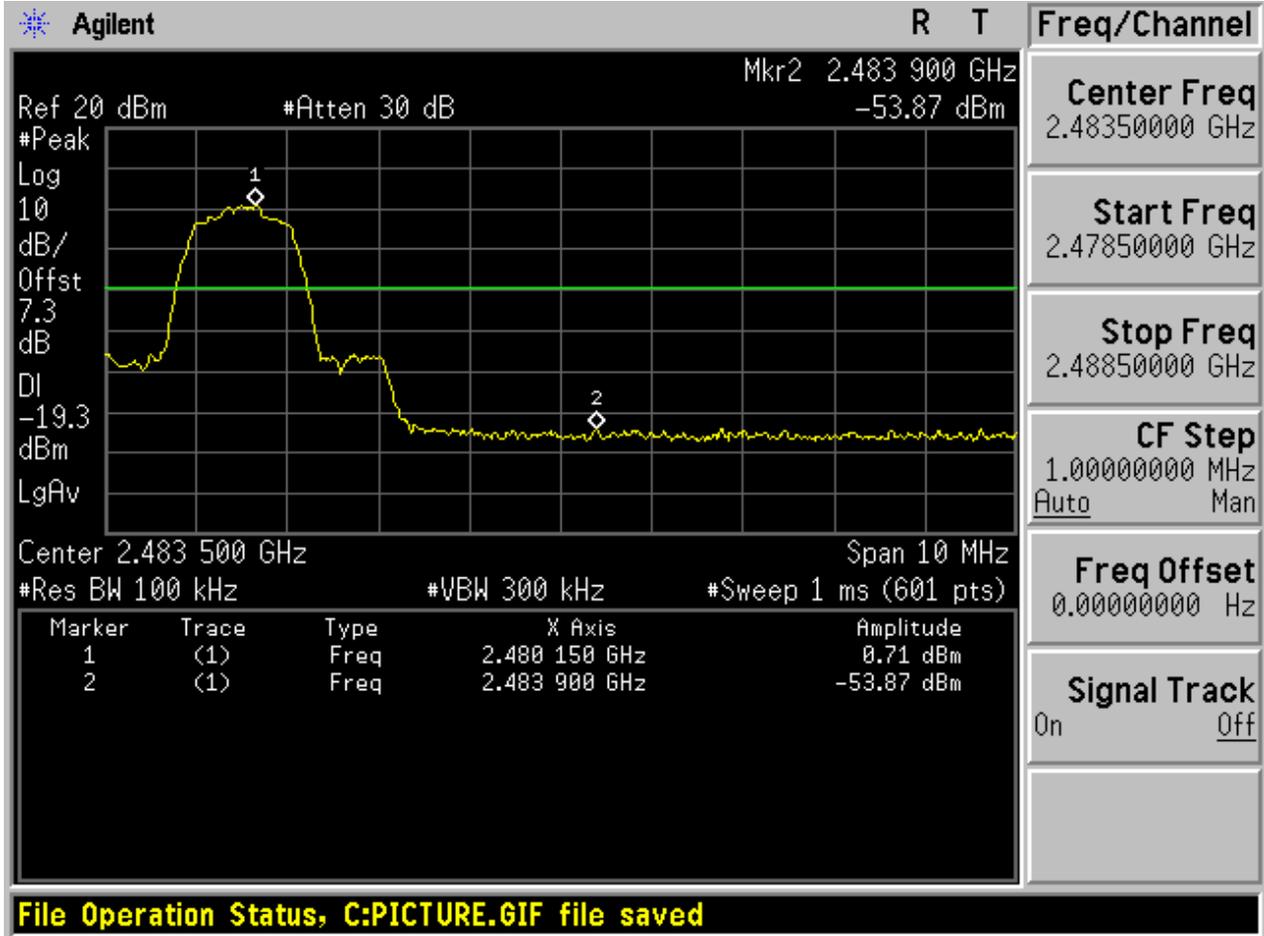


With hopping

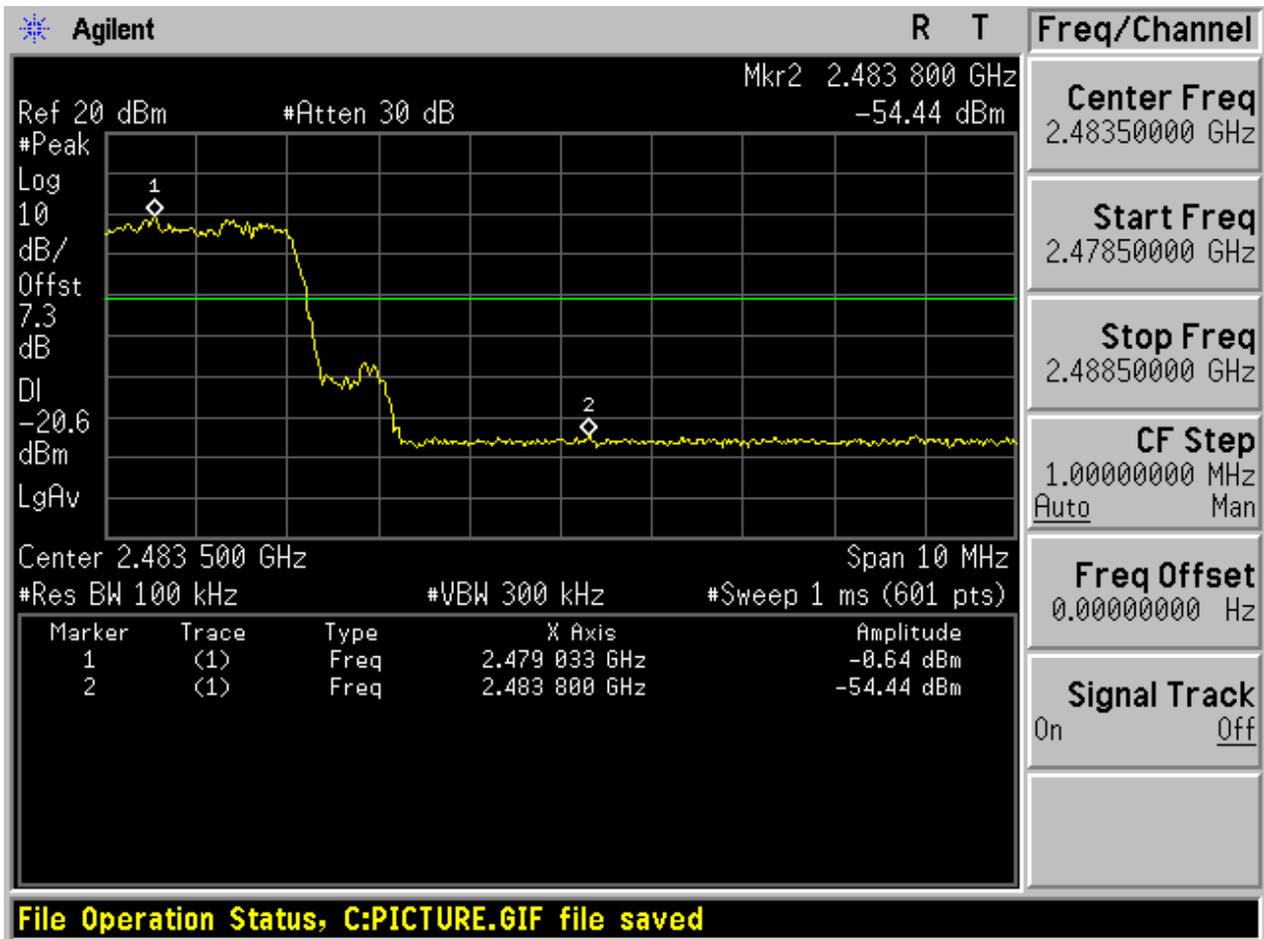


2.5 TM3_3DH5_Ch0

No hopping

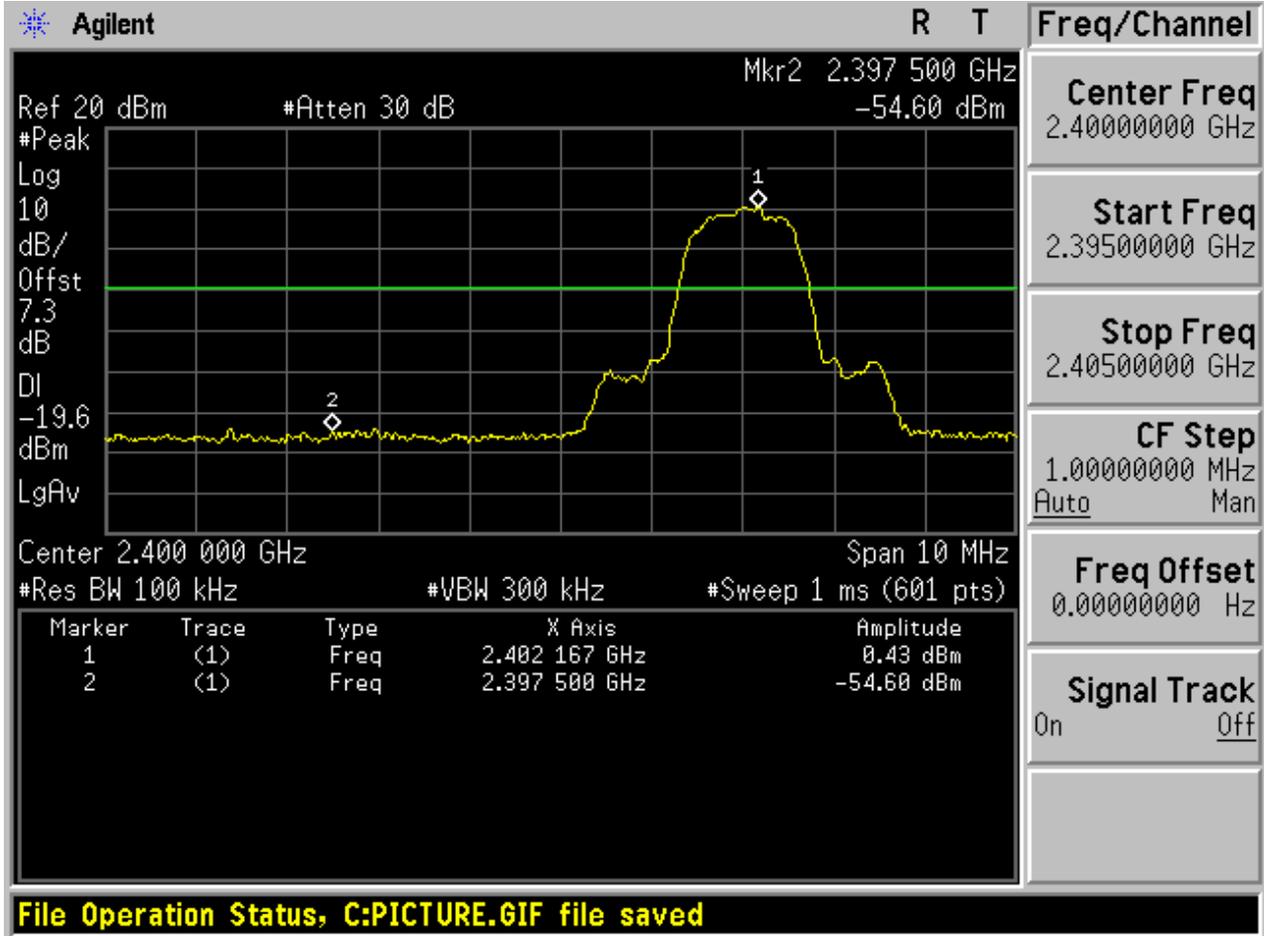


With hopping

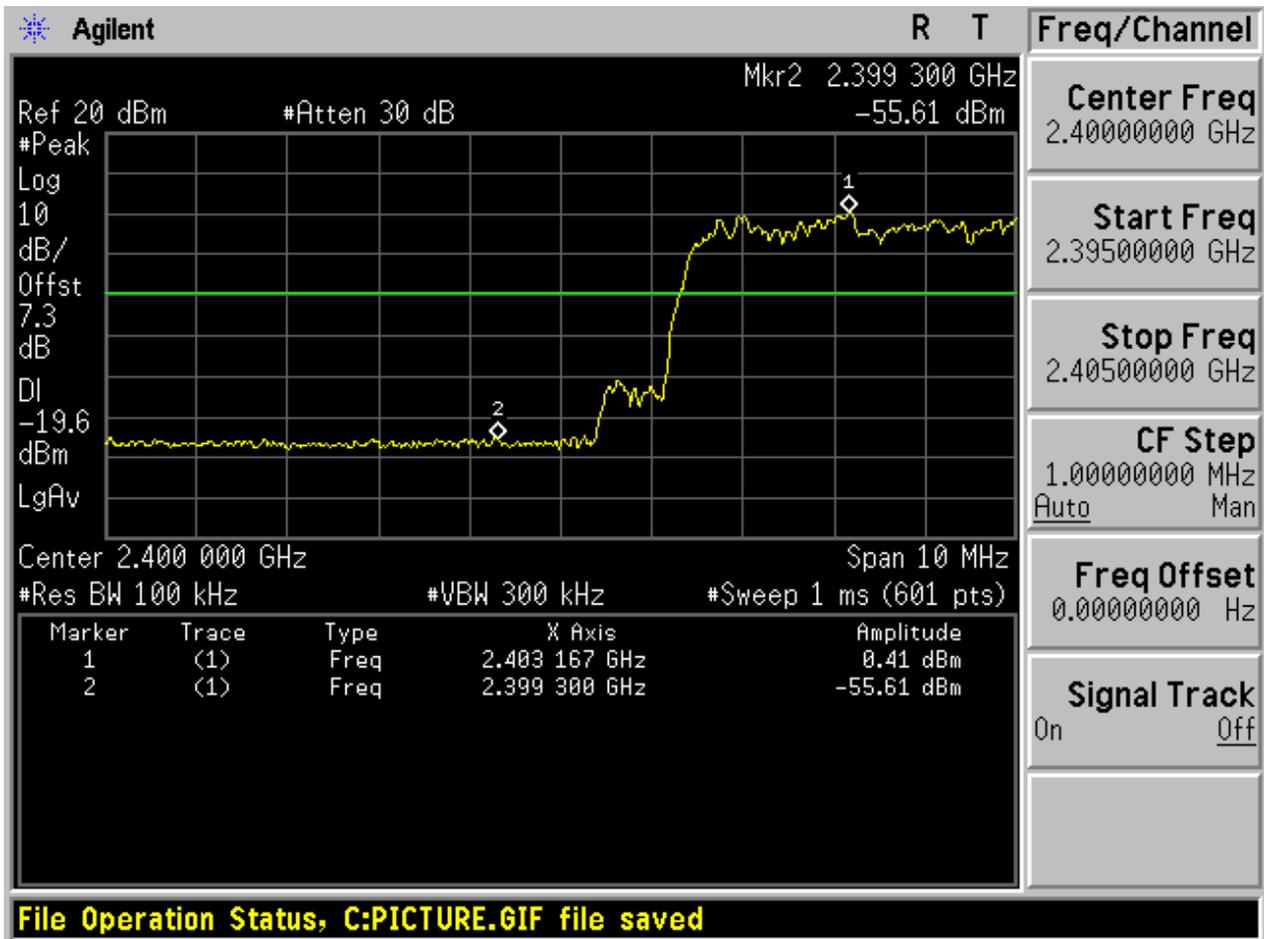


2.6 TM3_3DH5_Ch78

No hopping

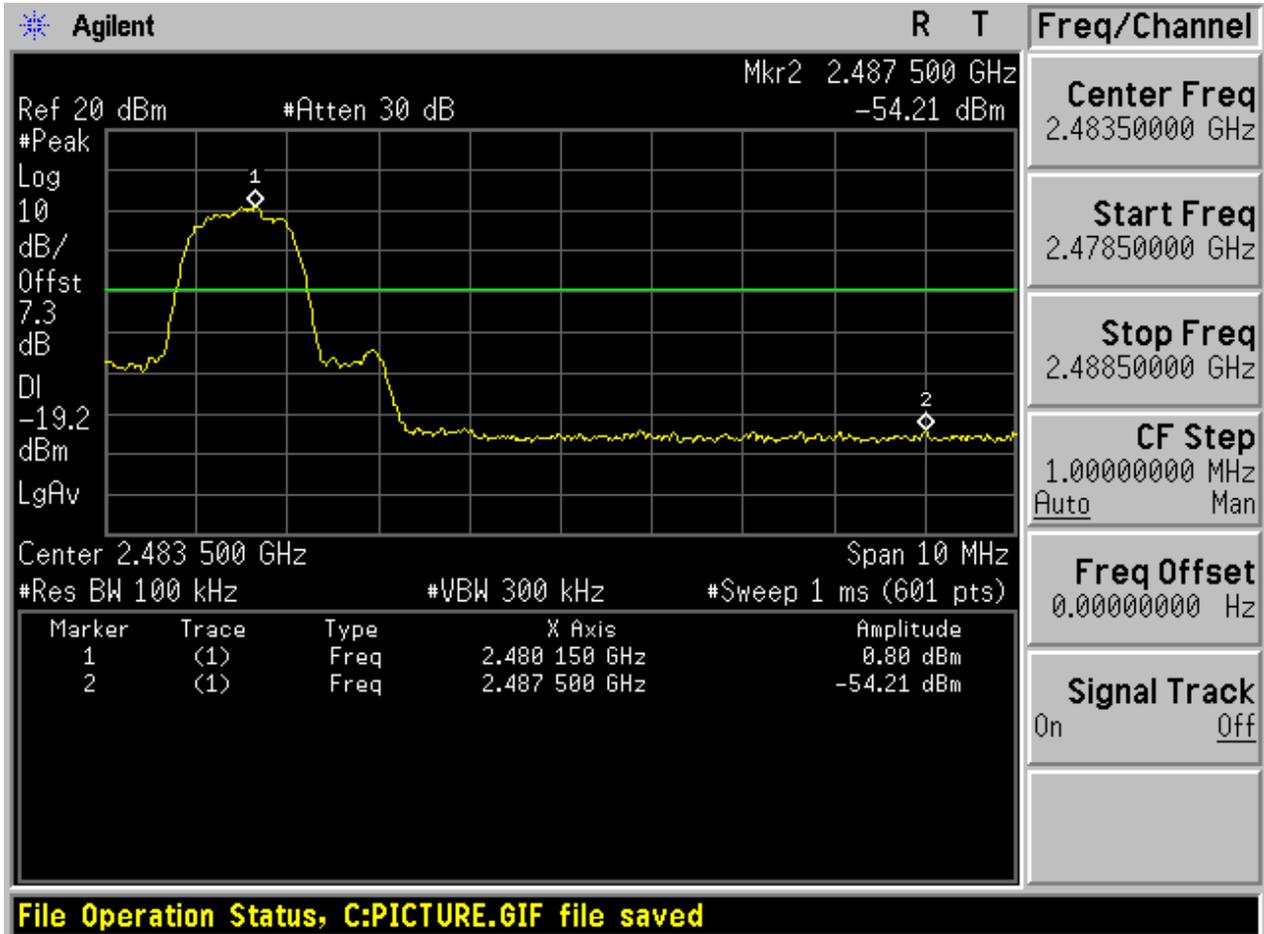

With hopping

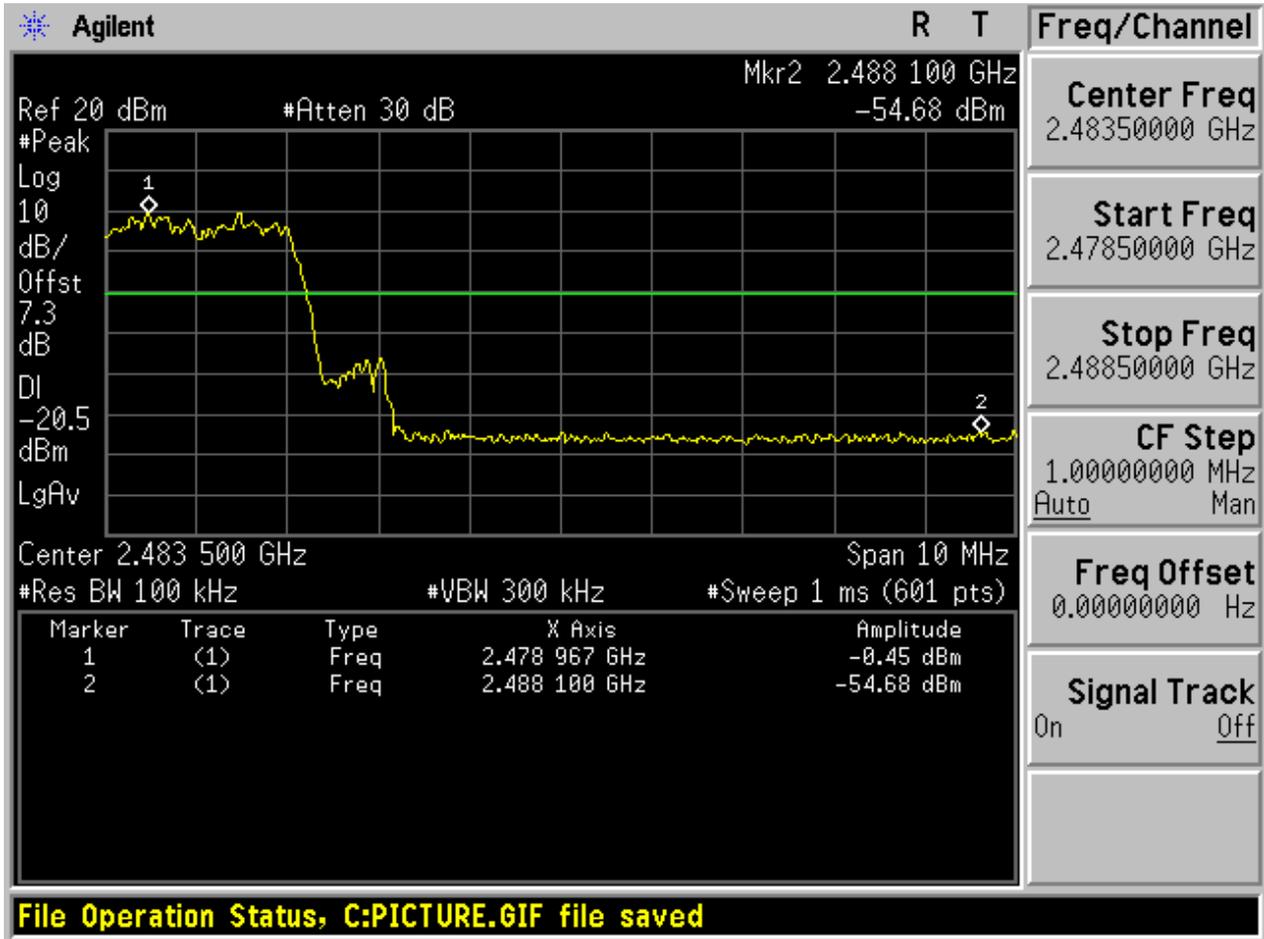



Appendix G: Conducted RF Spurious Emission

1 Result Table

In this Appendix, the “Pref” refers to the peak power level in any 100 kHz bandwidth within the fundamental emission which is used as the reference level, the “Puw” refers to the maximum emission power in 100 kHz band segments outside of the authorized frequency band.

Considering that the higher ratio of RBW to the span for the frequency ranges below 30 MHz makes the results determination be complicated, a narrower RBW other than 100 kHz is used for these ranges. The measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \times \lg(100 [kHz]/\text{narrower RBW [kHz]})$. As to this Appendix, the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.


In the result table, the “< Limit” denotes that “The Puw [dBm] is less than Pref [dBm] - 20 [dB], see test plots for detailed”.

EUT Conf.	Pref [dBm/100 kHz]	Puw [dBm/100 kHz]	Verdict
TM1_DH5_Ch0	0.07	< Limit	Pass
TM1_DH5_Ch39	1.32	< Limit	Pass
TM1_DH5_Ch78	1.49	< Limit	Pass
TM2_2DH5_Ch0	0.36	< Limit	Pass
TM2_2DH5_Ch39	1.04	< Limit	Pass
TM2_2DH5_Ch78	0.66	< Limit	Pass
TM3_3DH5_Ch0	0.36	< Limit	Pass
TM3_3DH5_Ch39	1.06	< Limit	Pass
TM3_3DH5_Ch78	0.68	< Limit	Pass


2 Test Plot


2.1 TM1_DH5_Ch0


2.1.1 Pref

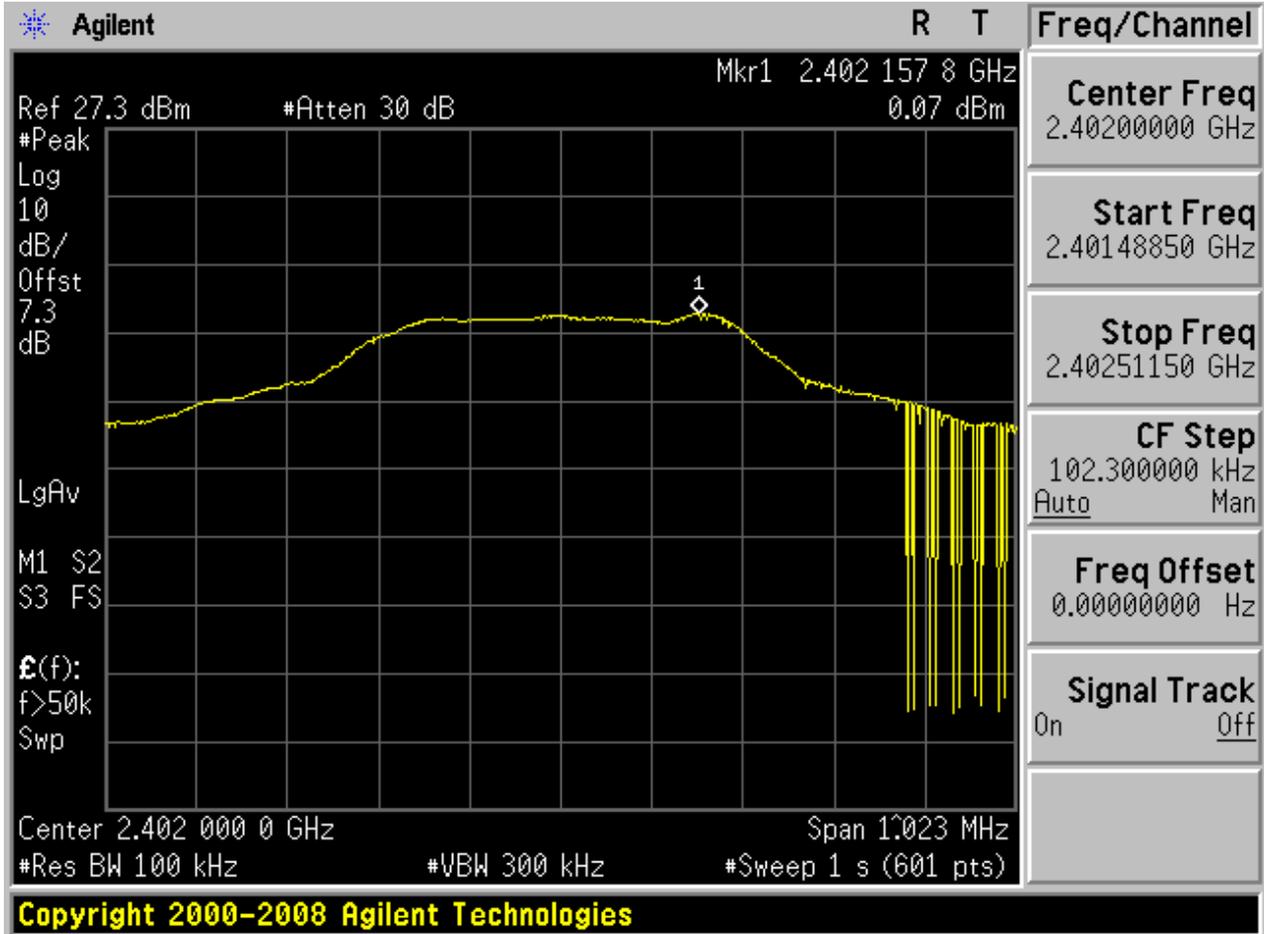



2.1.2 Puw

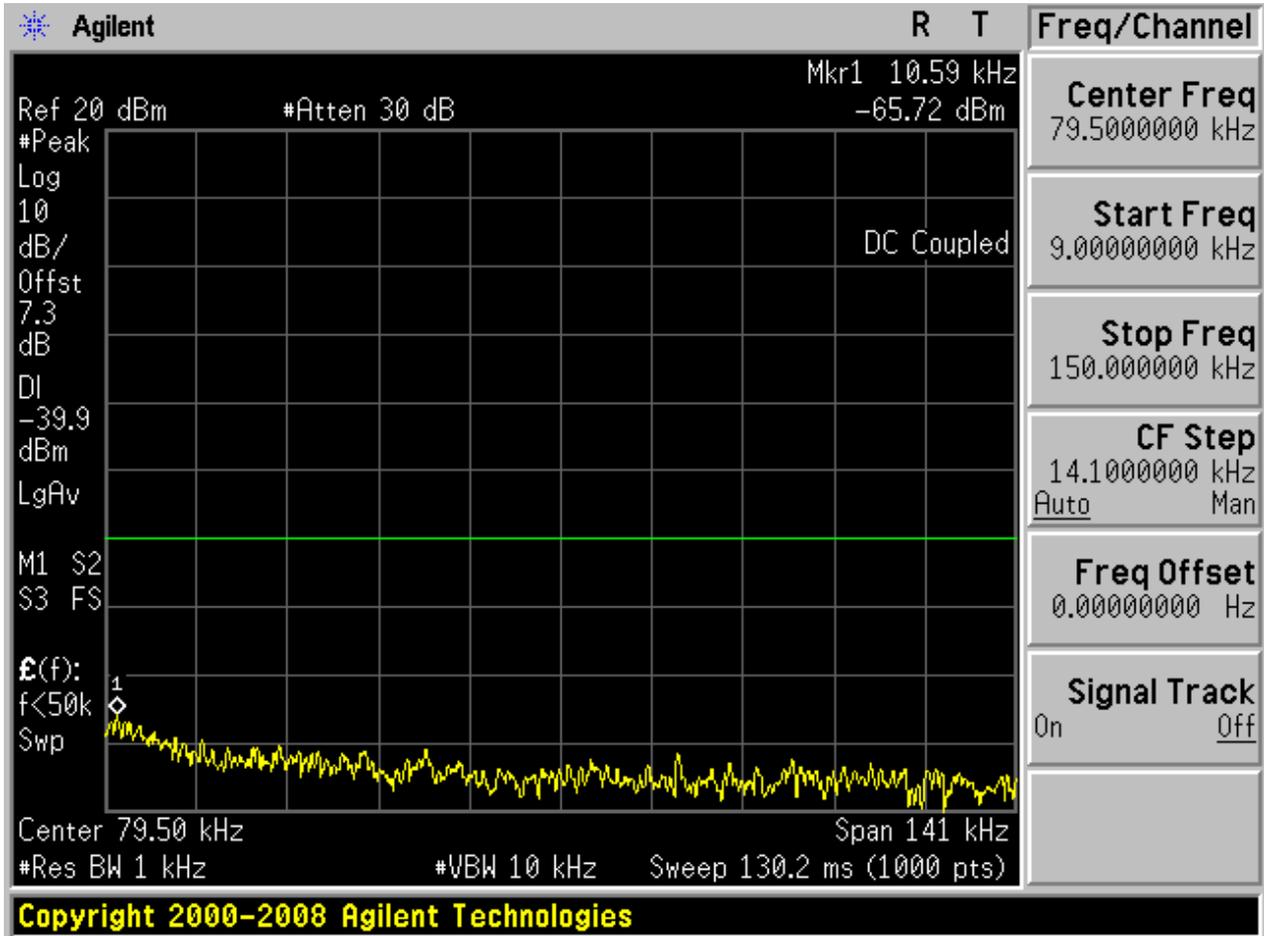


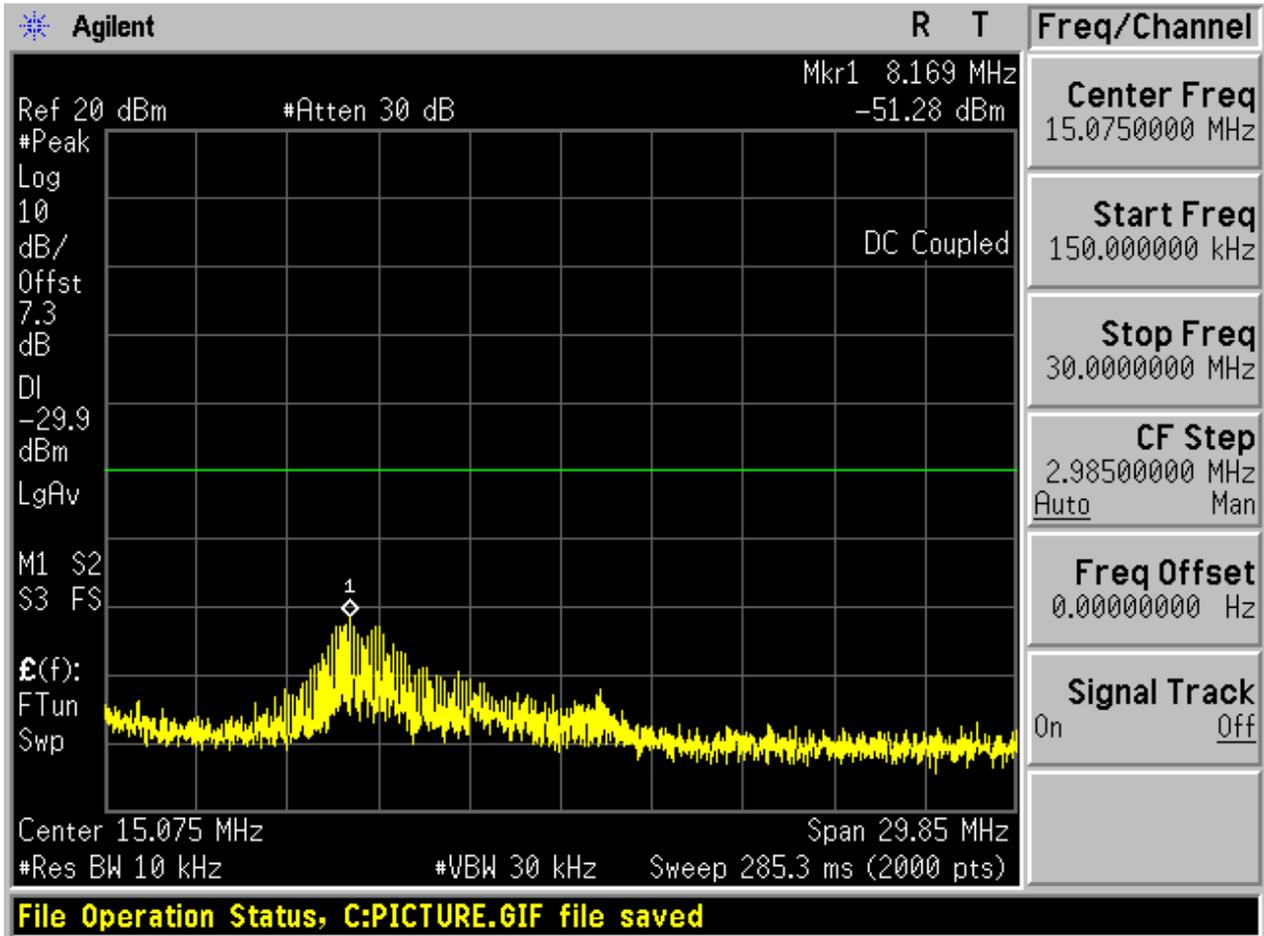

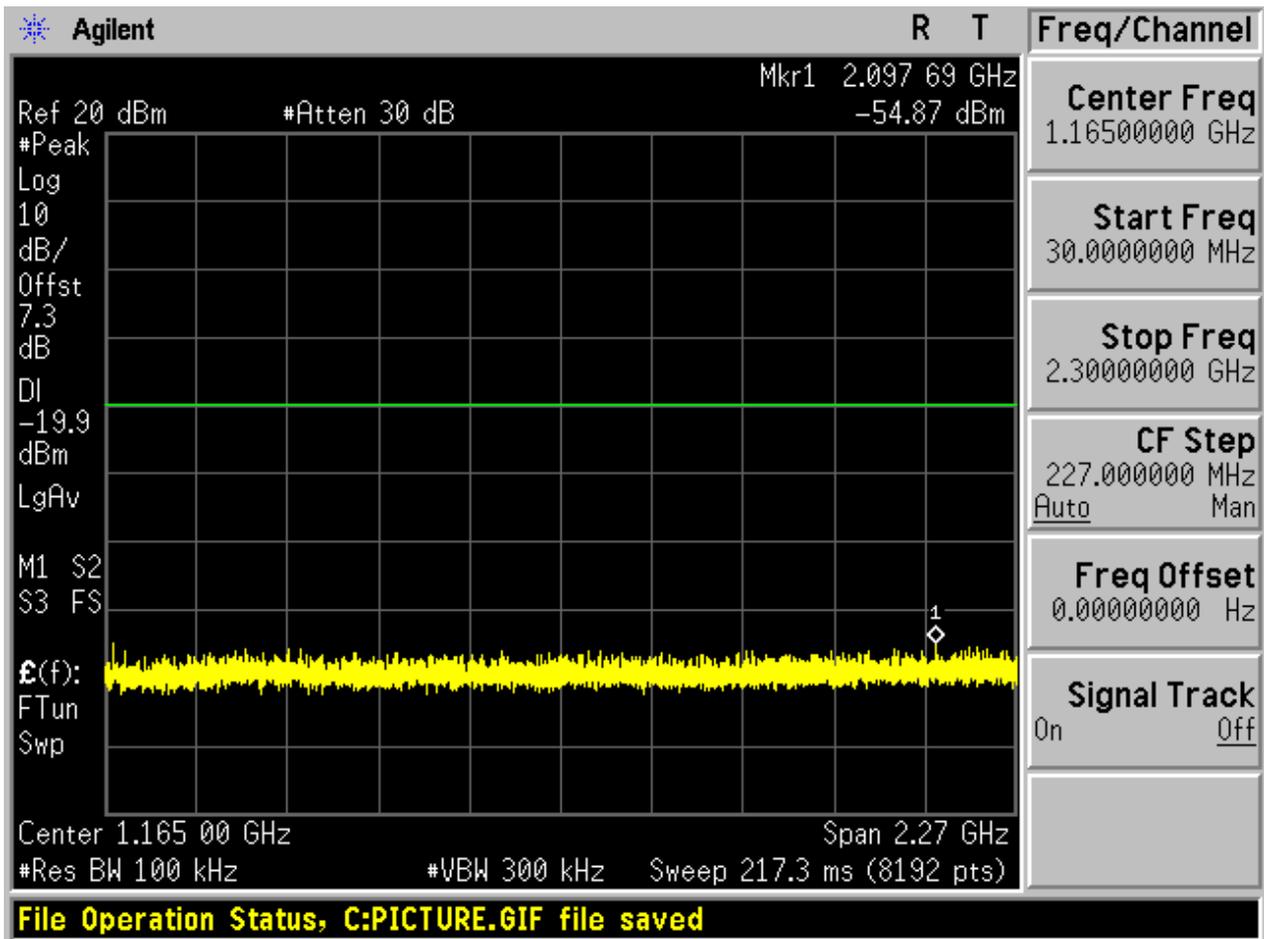

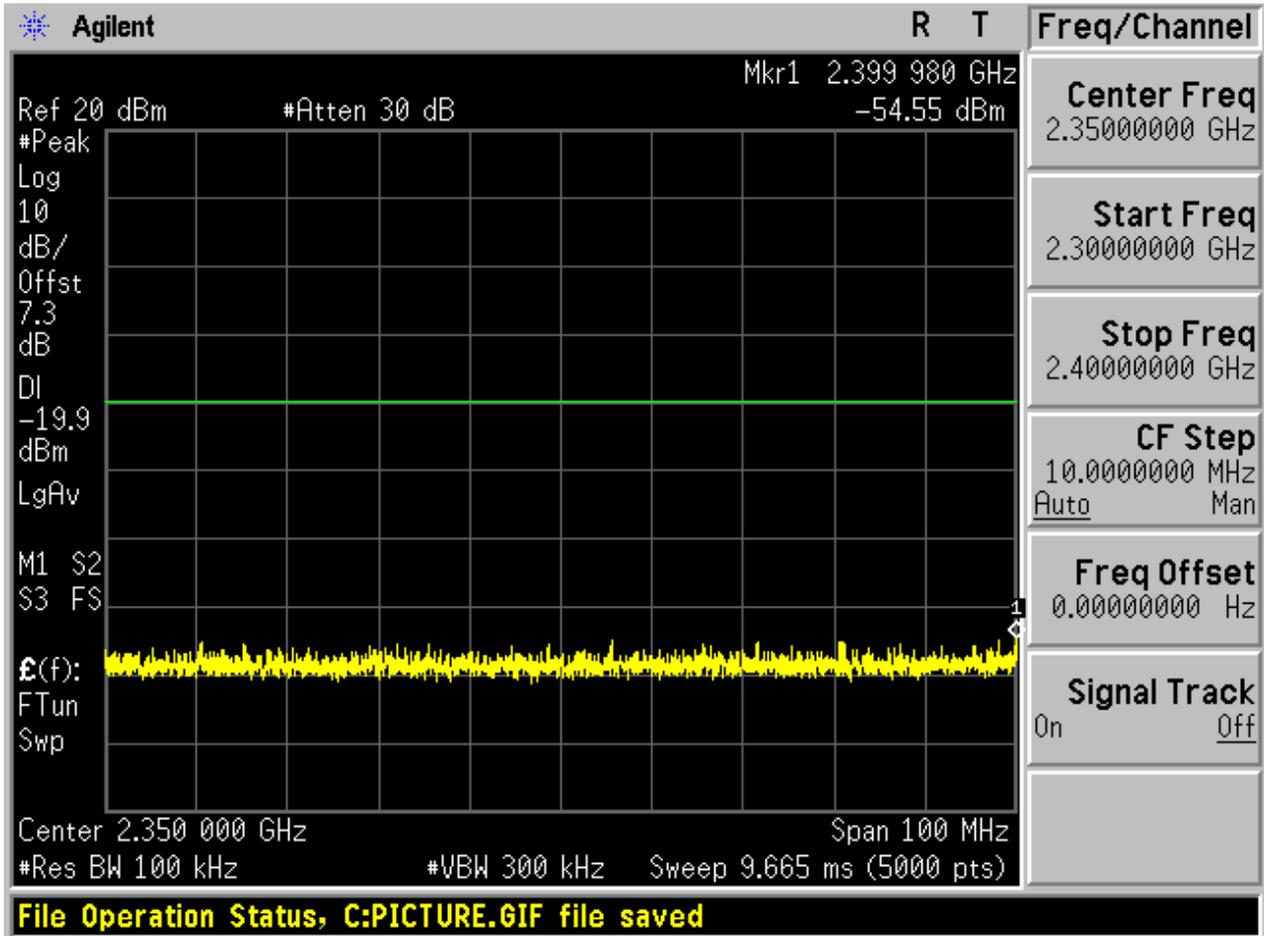


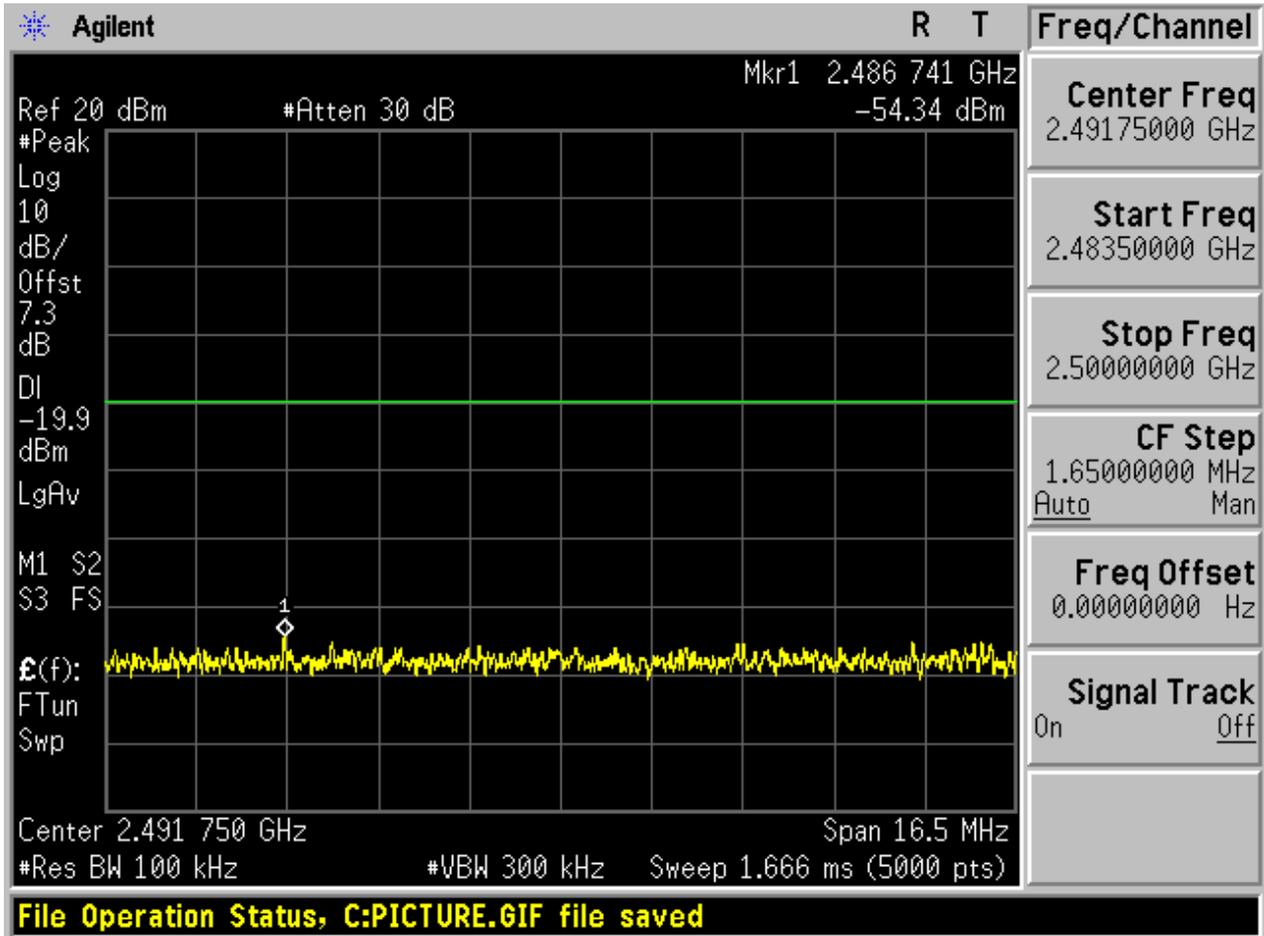

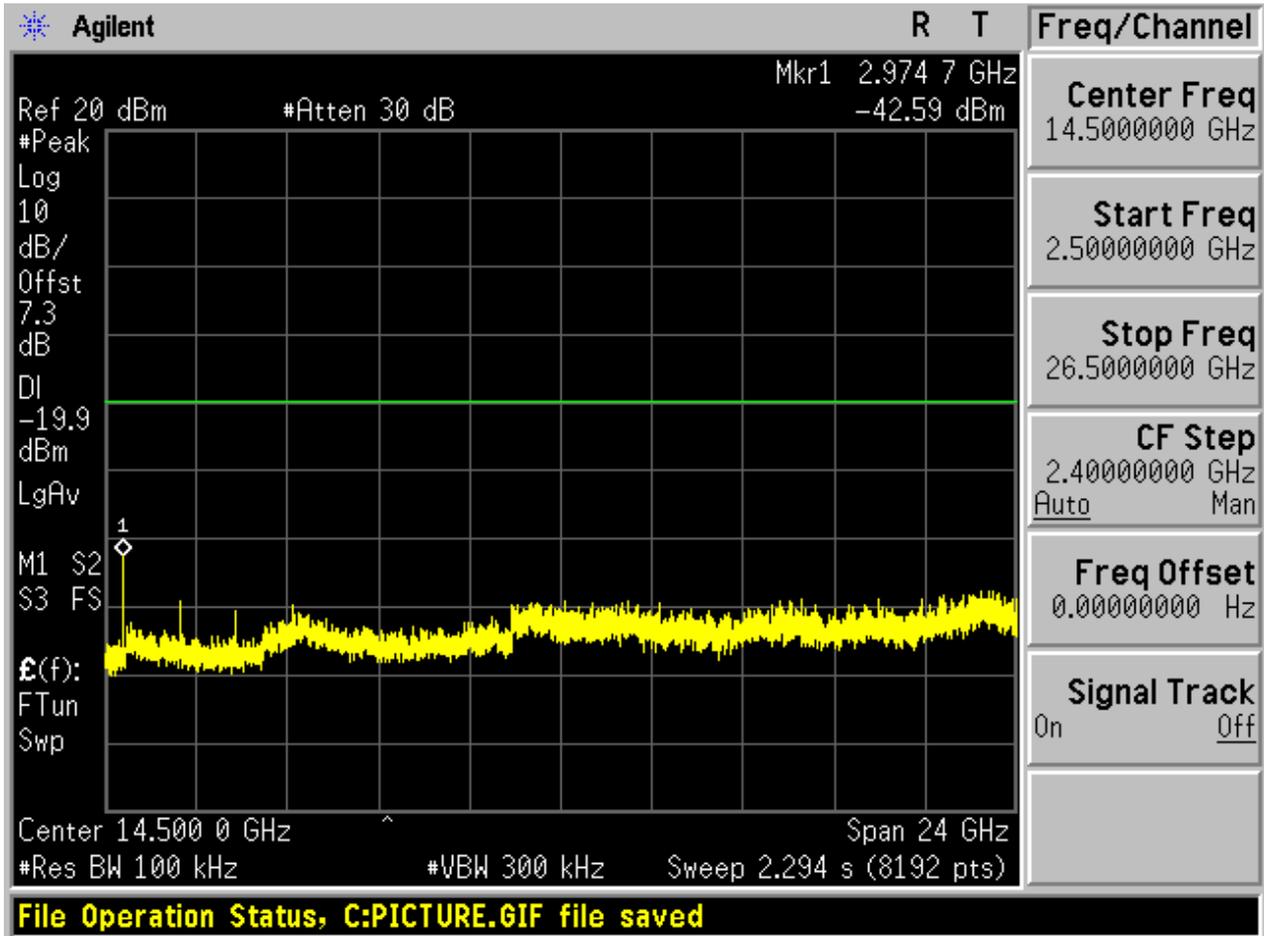



2.2 TM1_DH5_Ch39


2.2.1 Pref

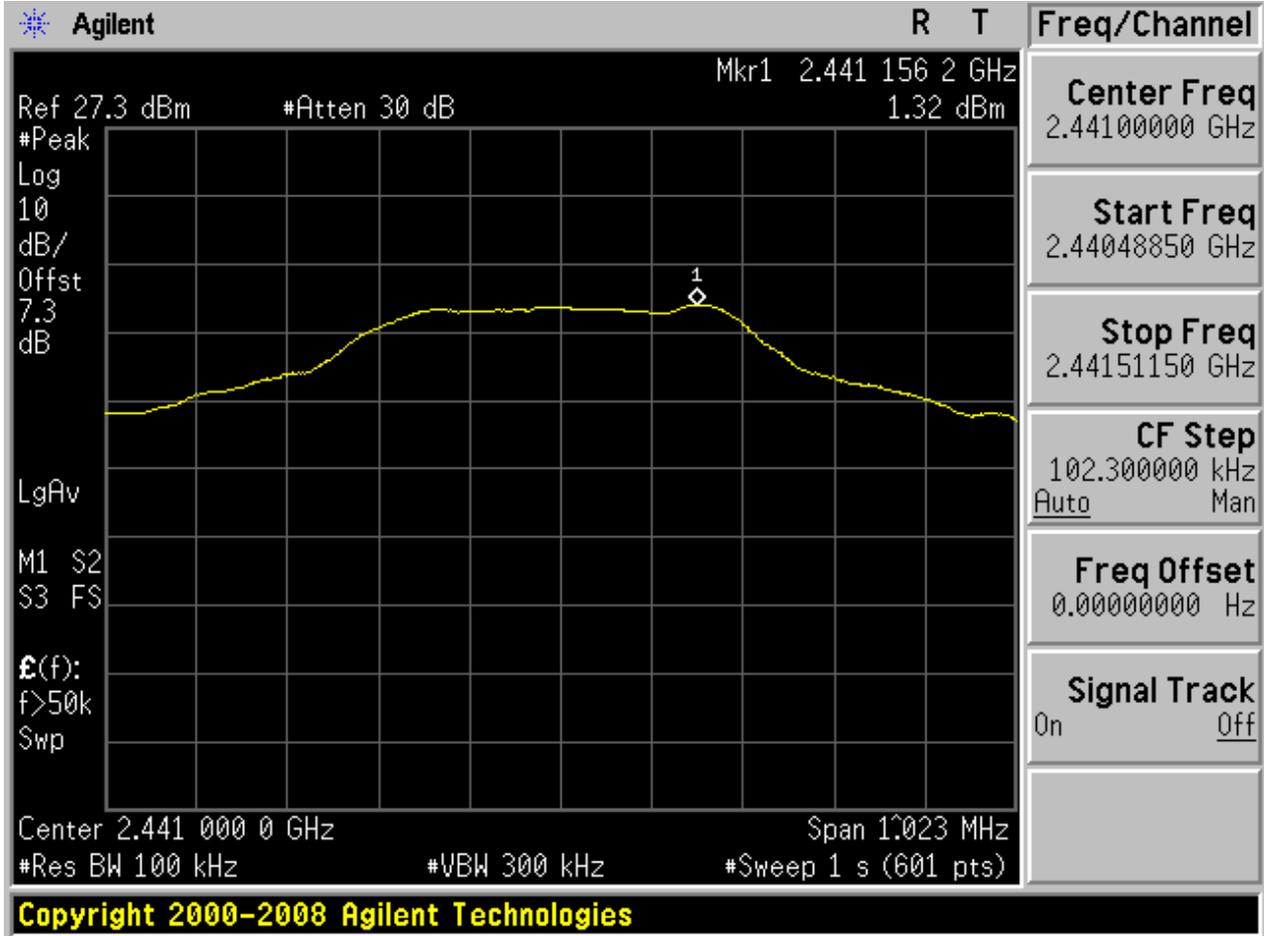



2.2.2 Puw

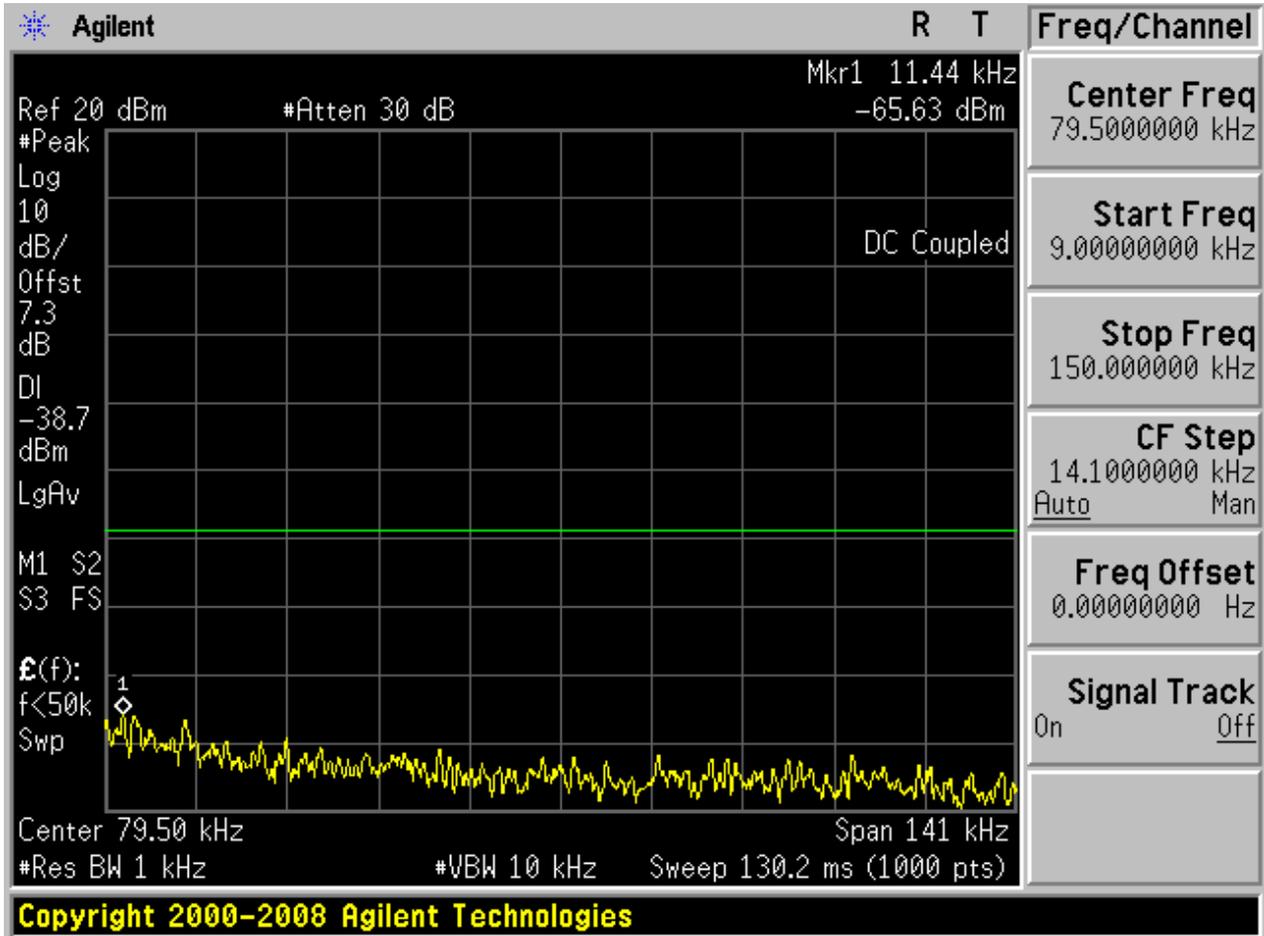


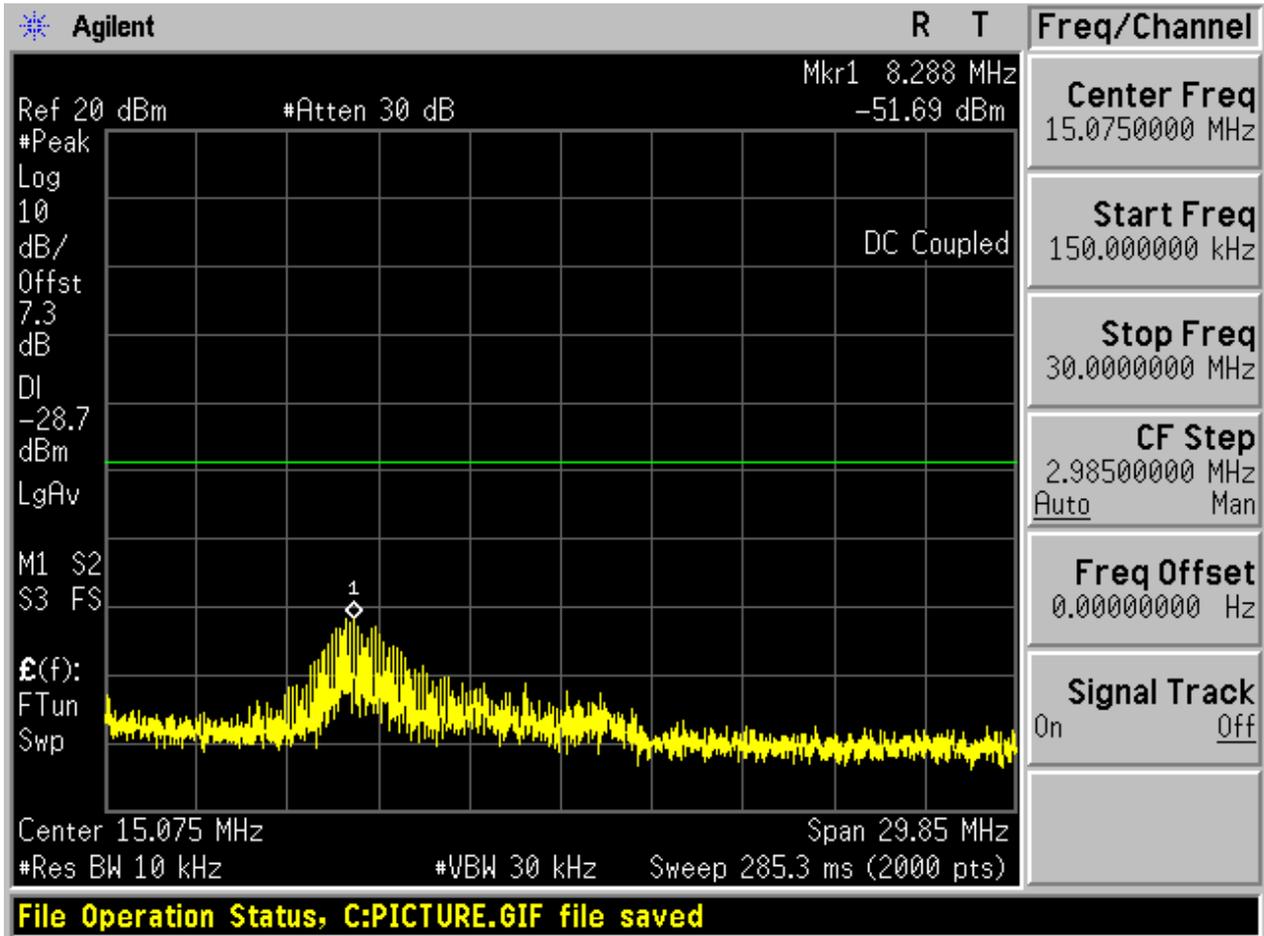

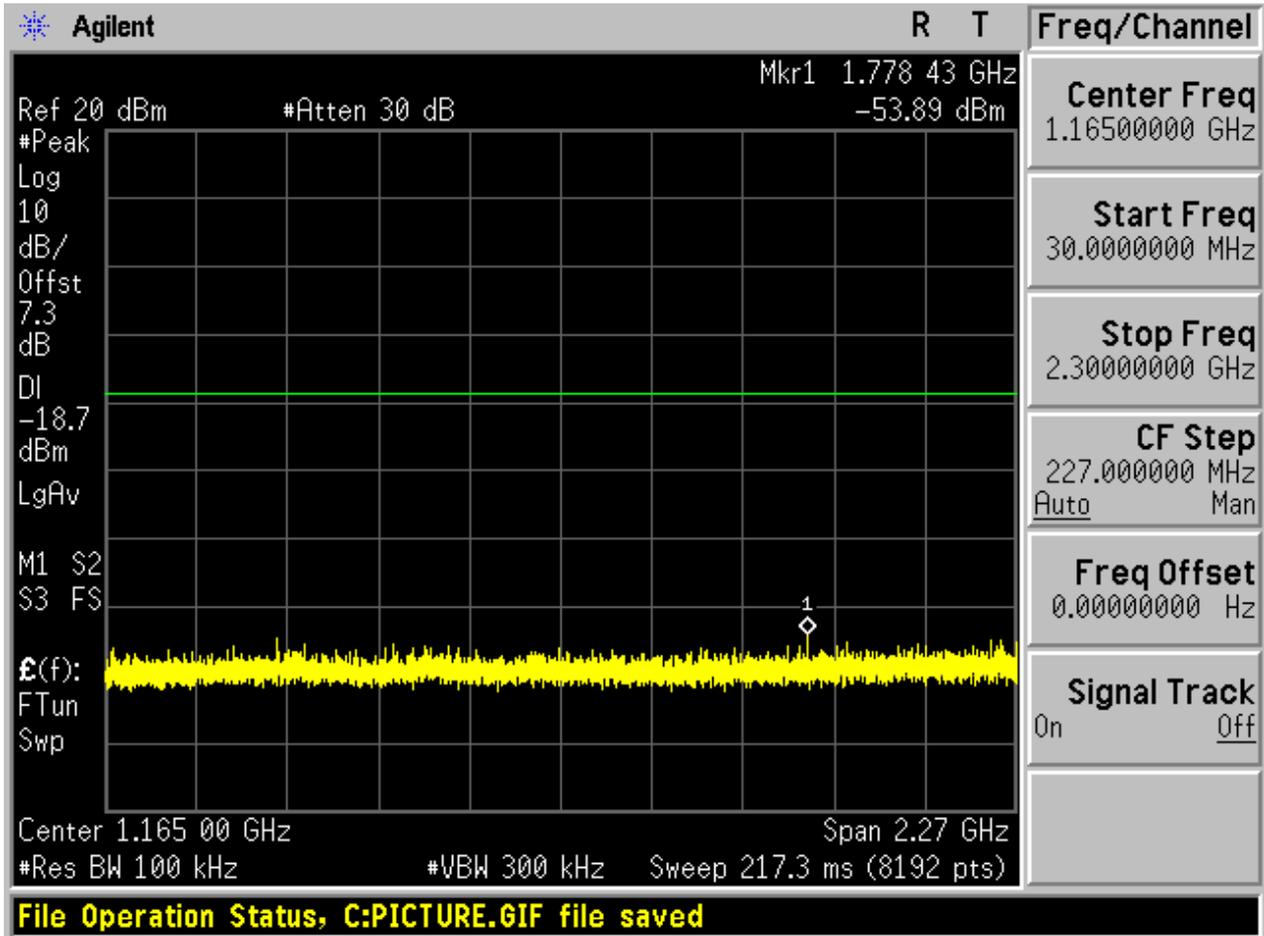

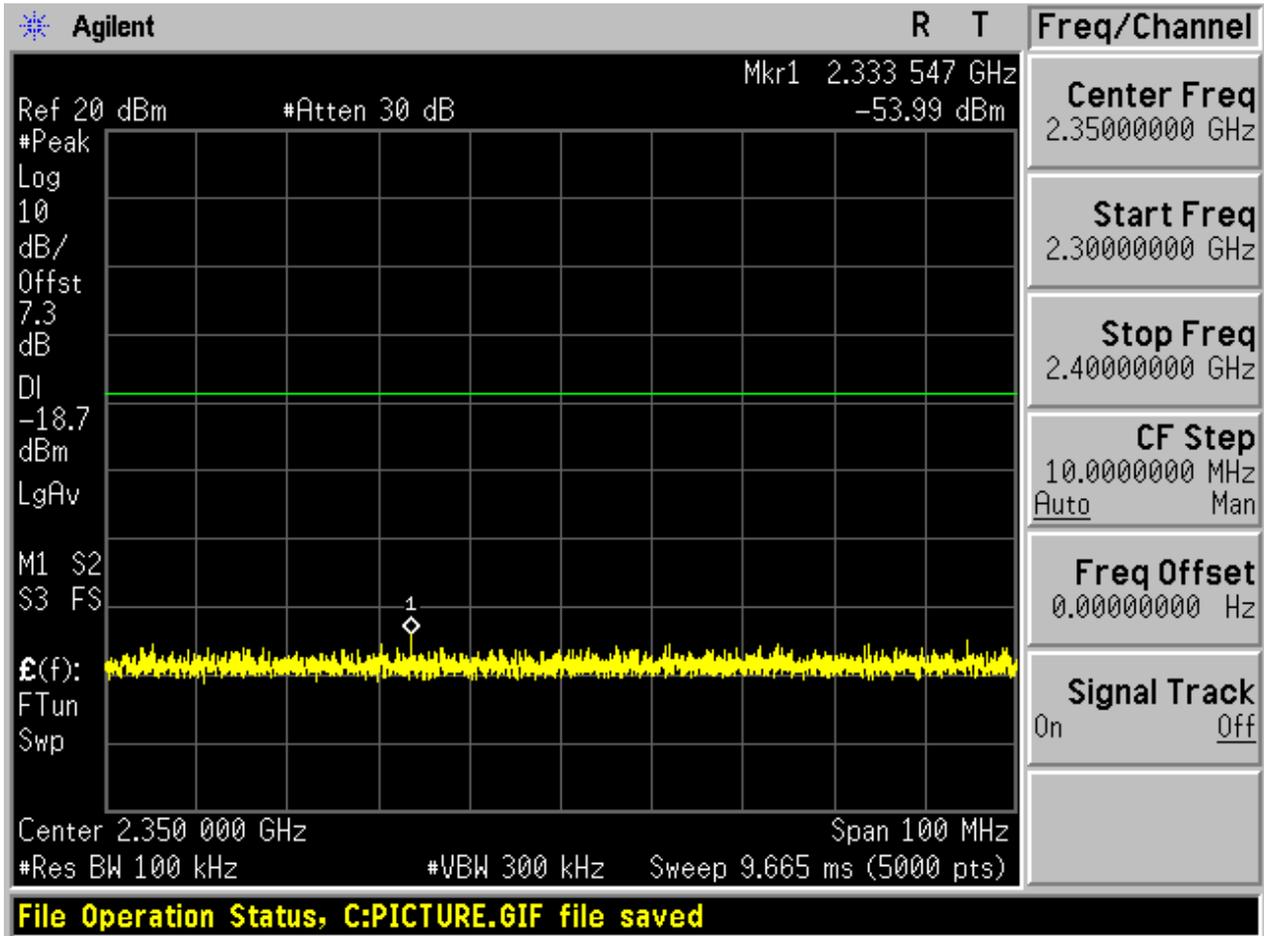


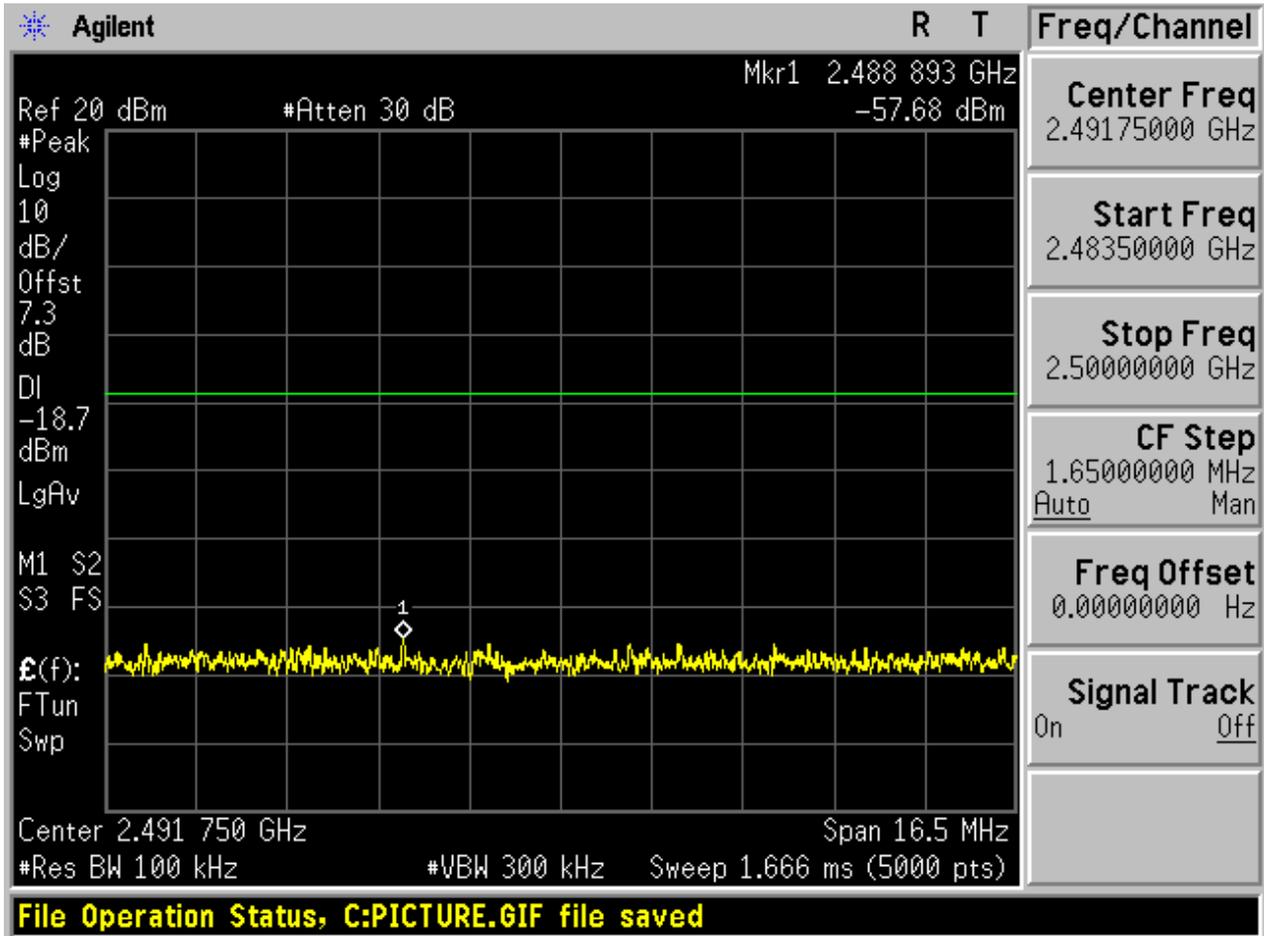

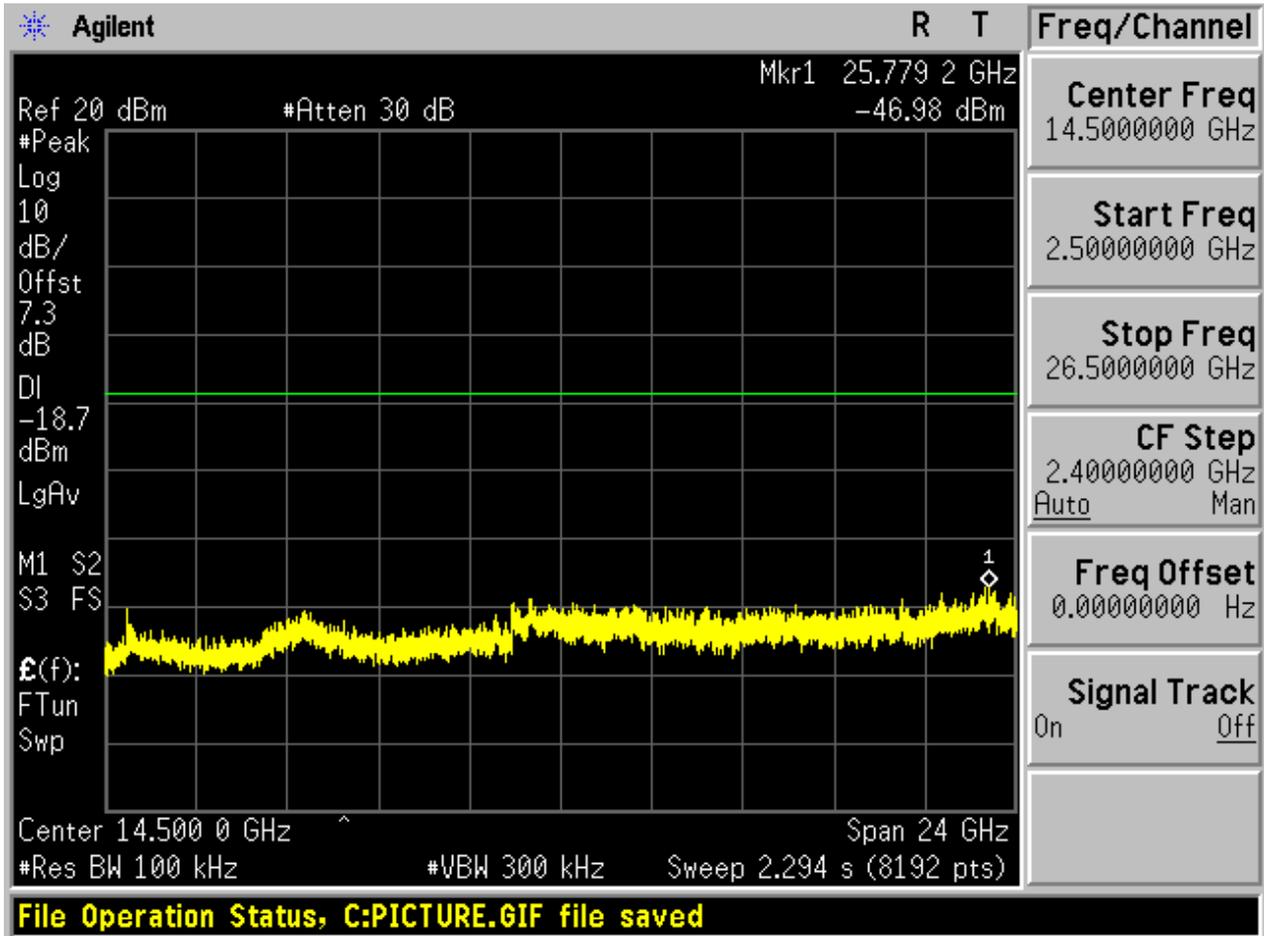



2.3 TM1_DH5_Ch78


2.3.1 Pref

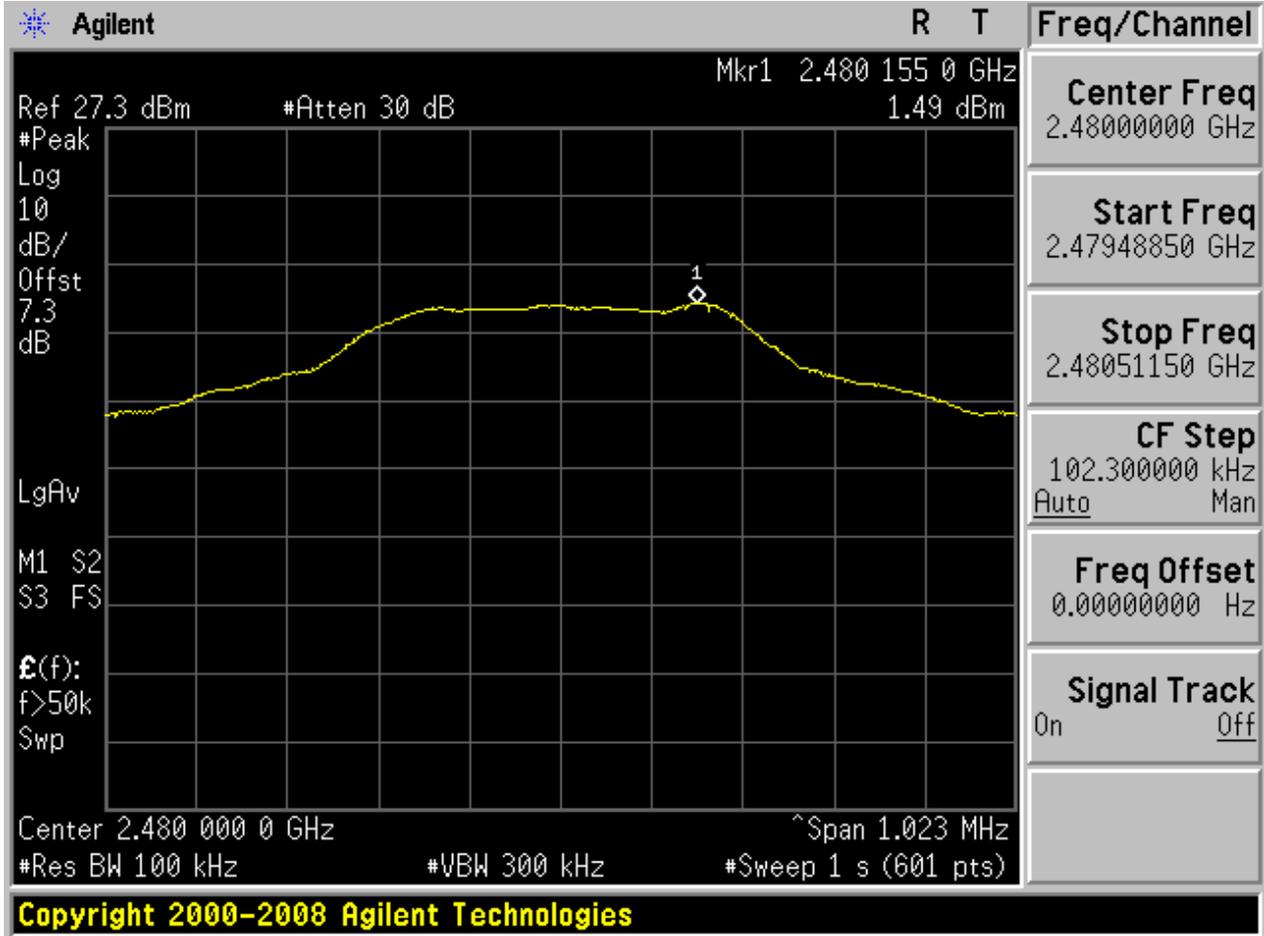



2.3.2 Puw

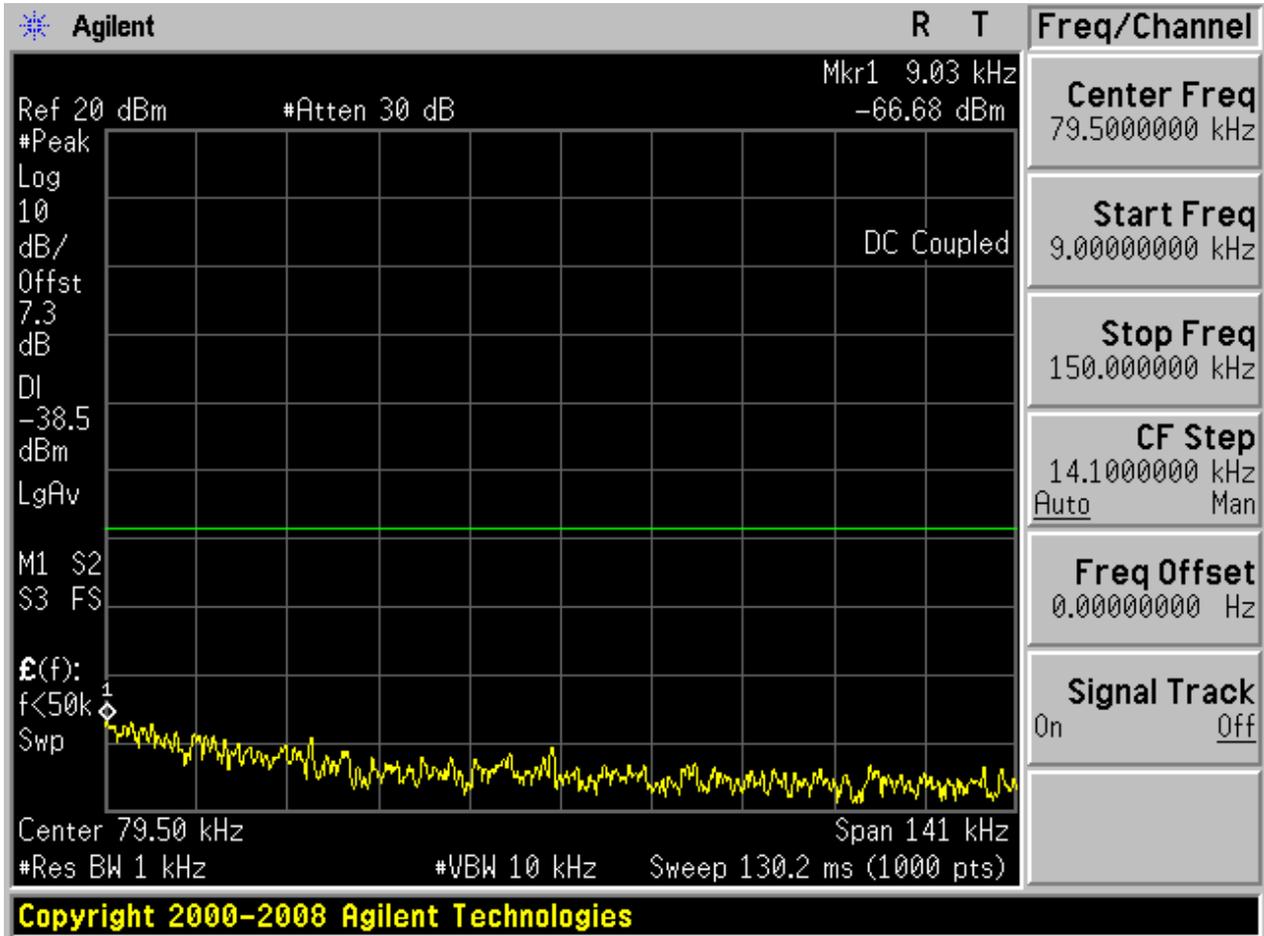


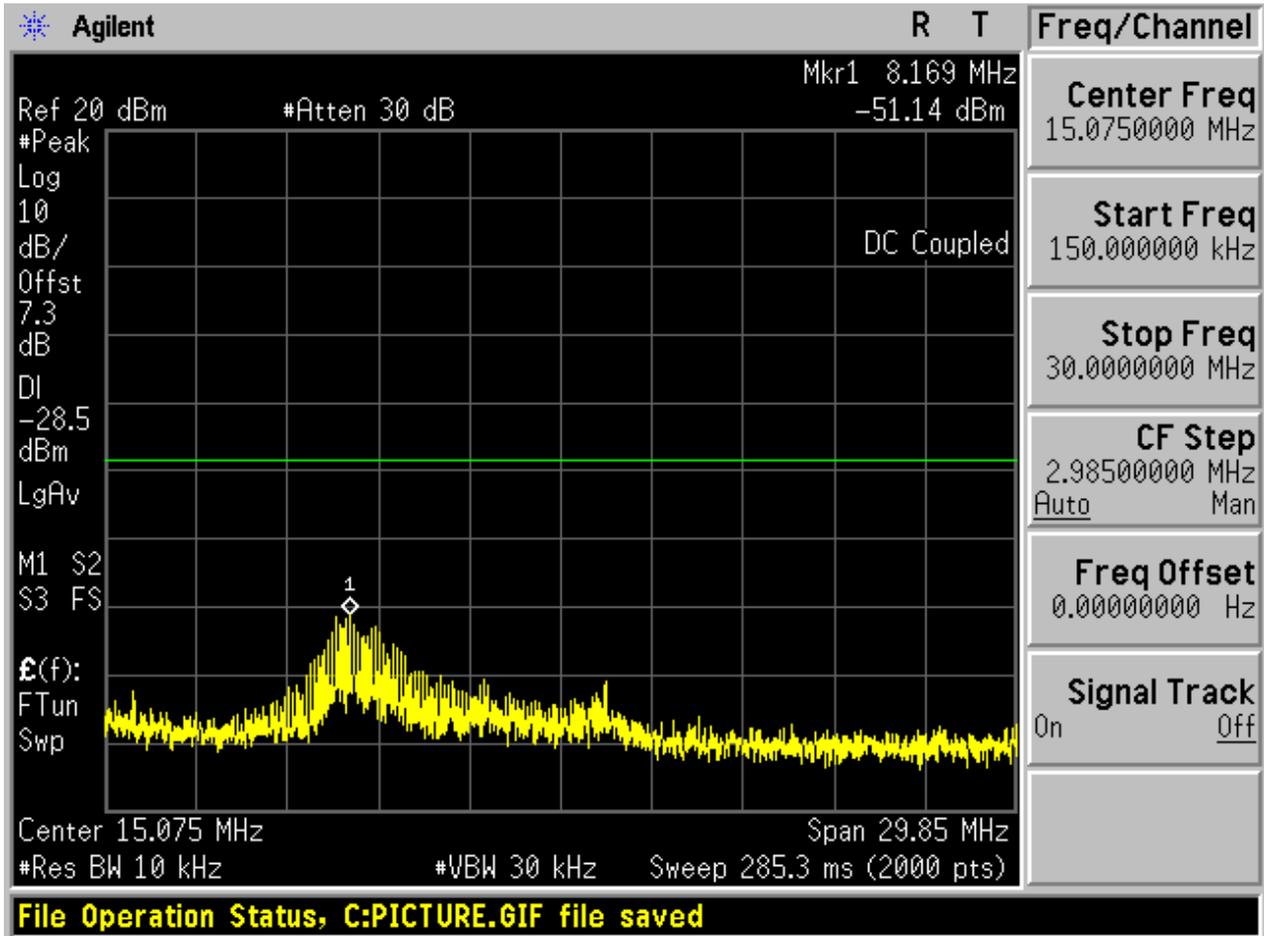

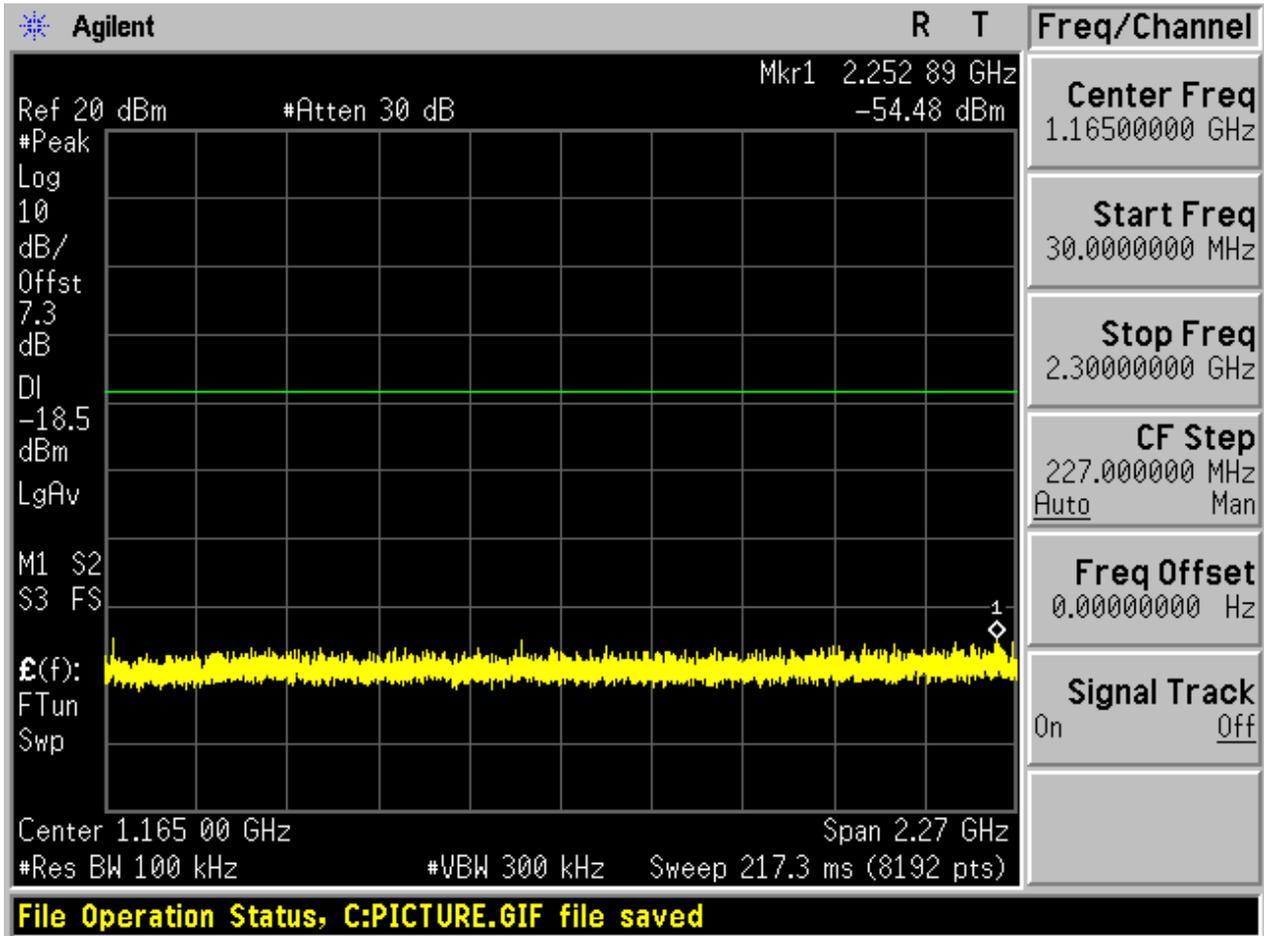

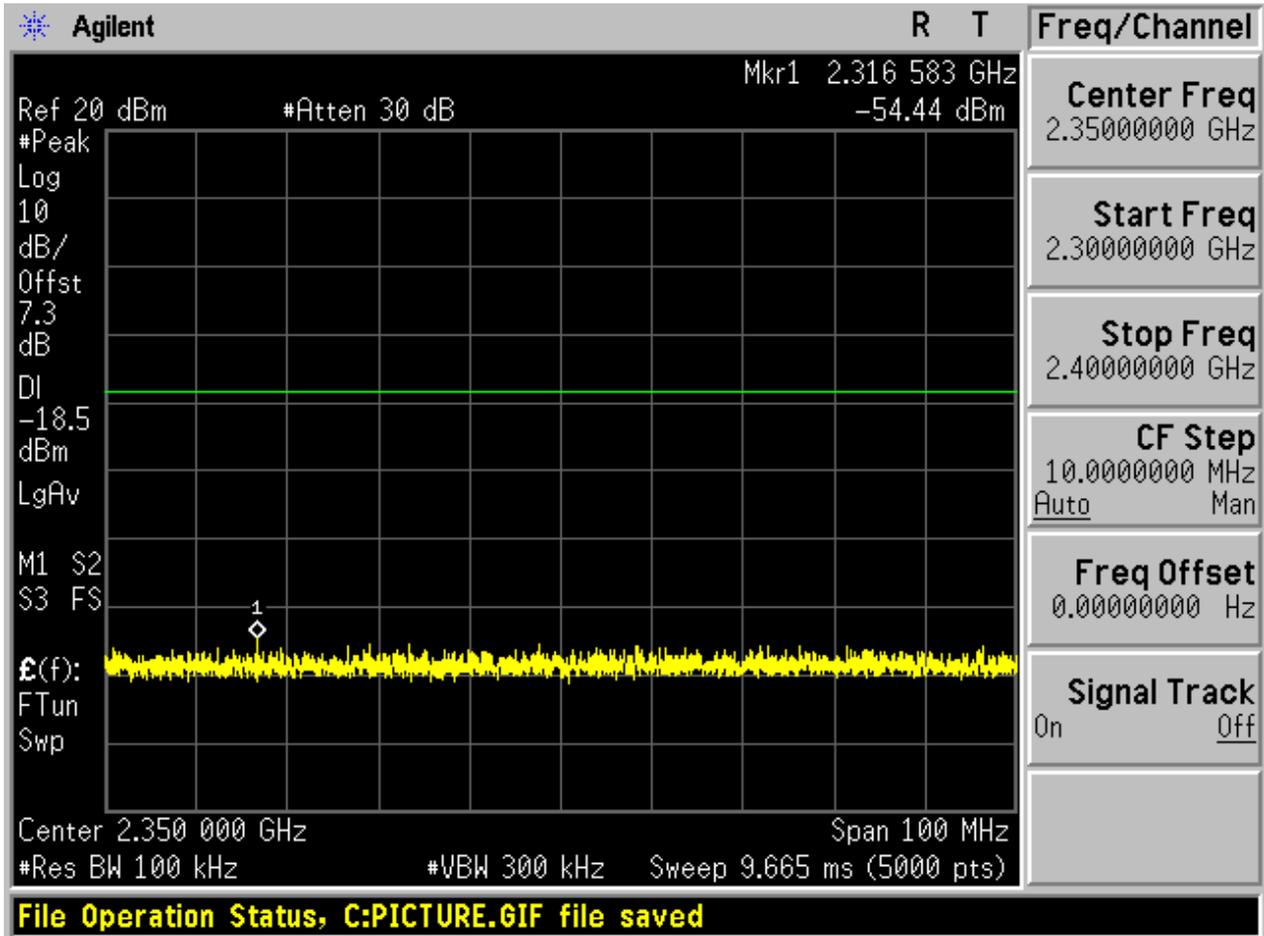


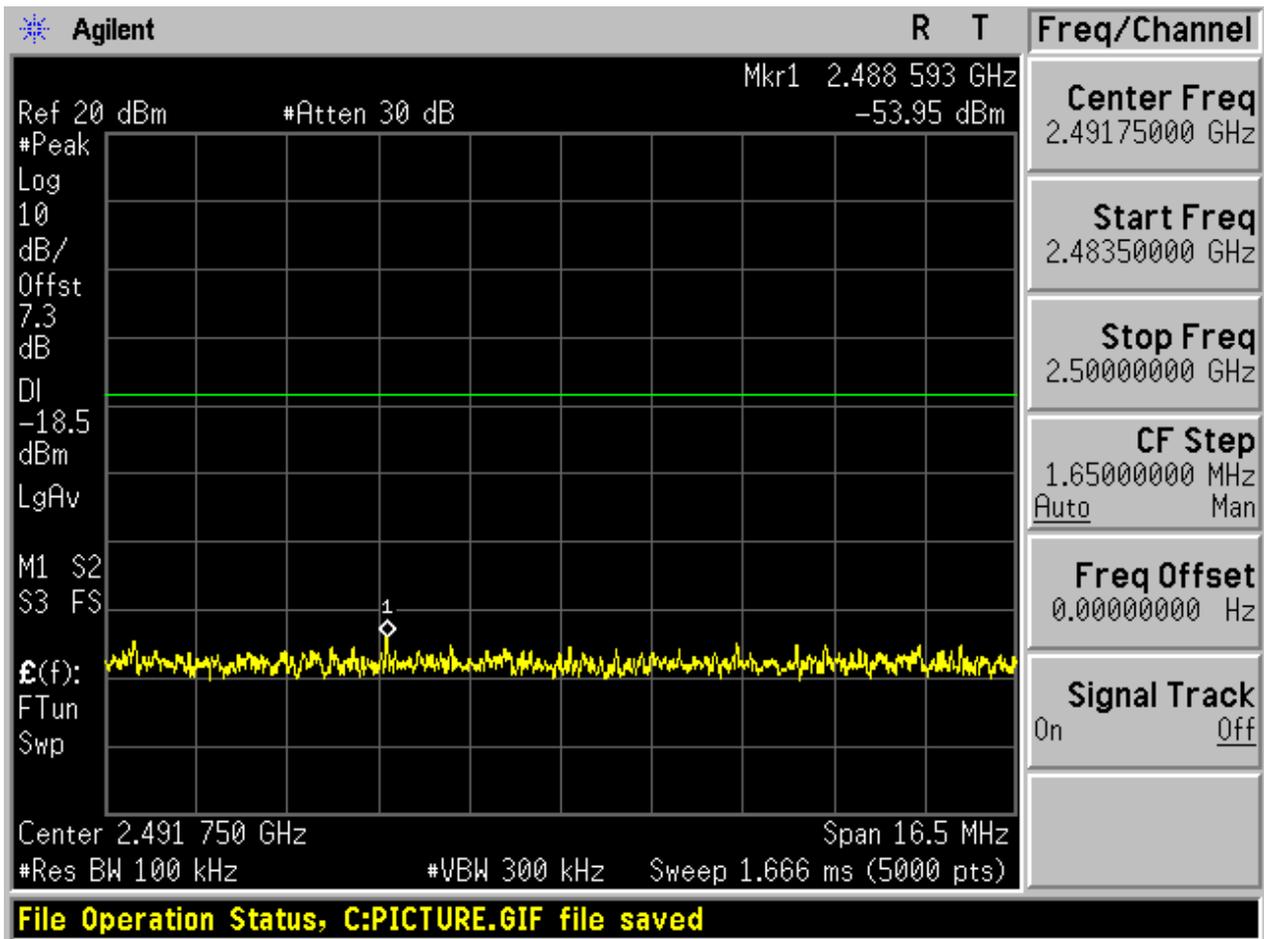

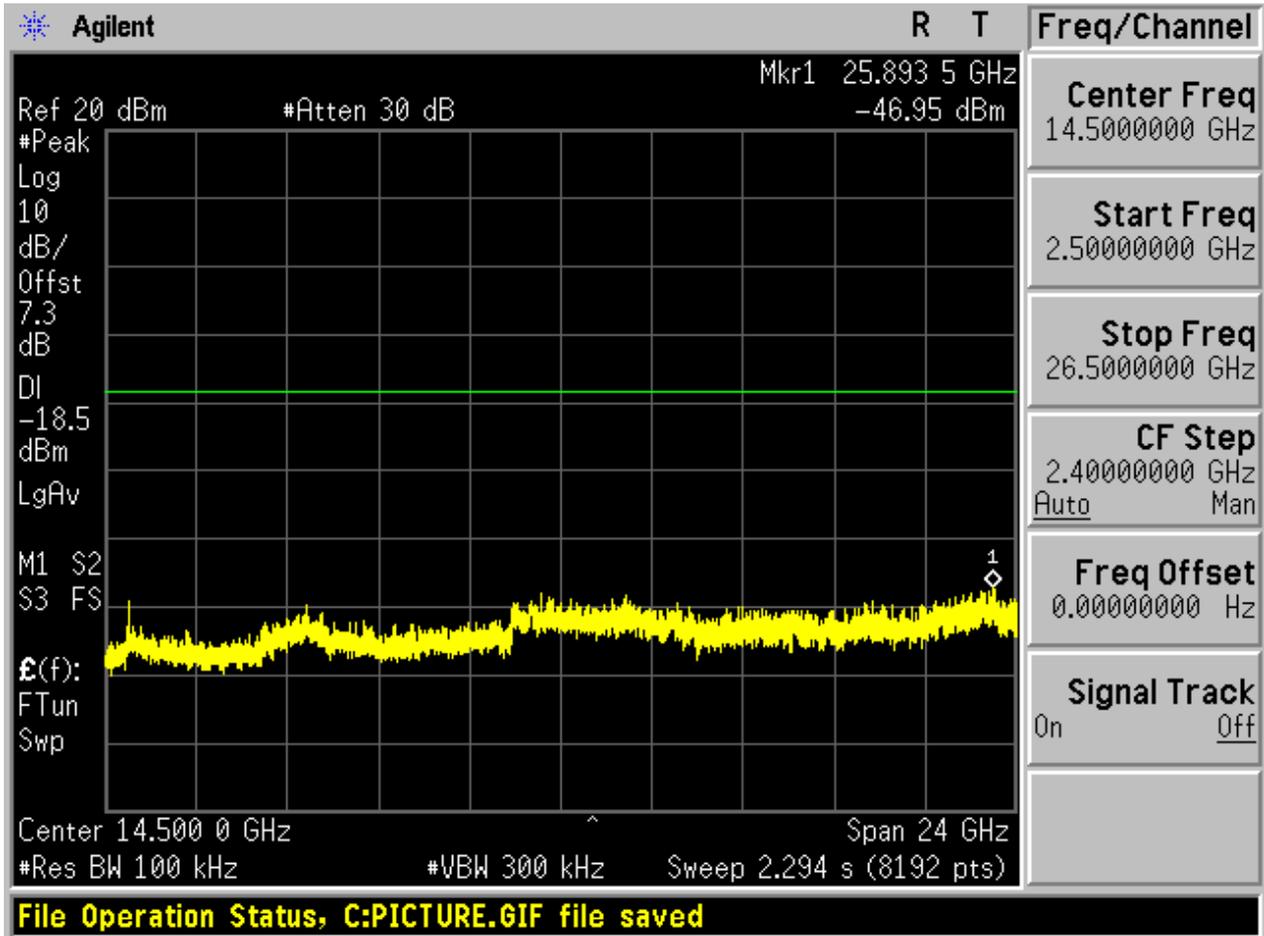



2.4 TM2_2DH5_Ch0


2.4.1 Pref

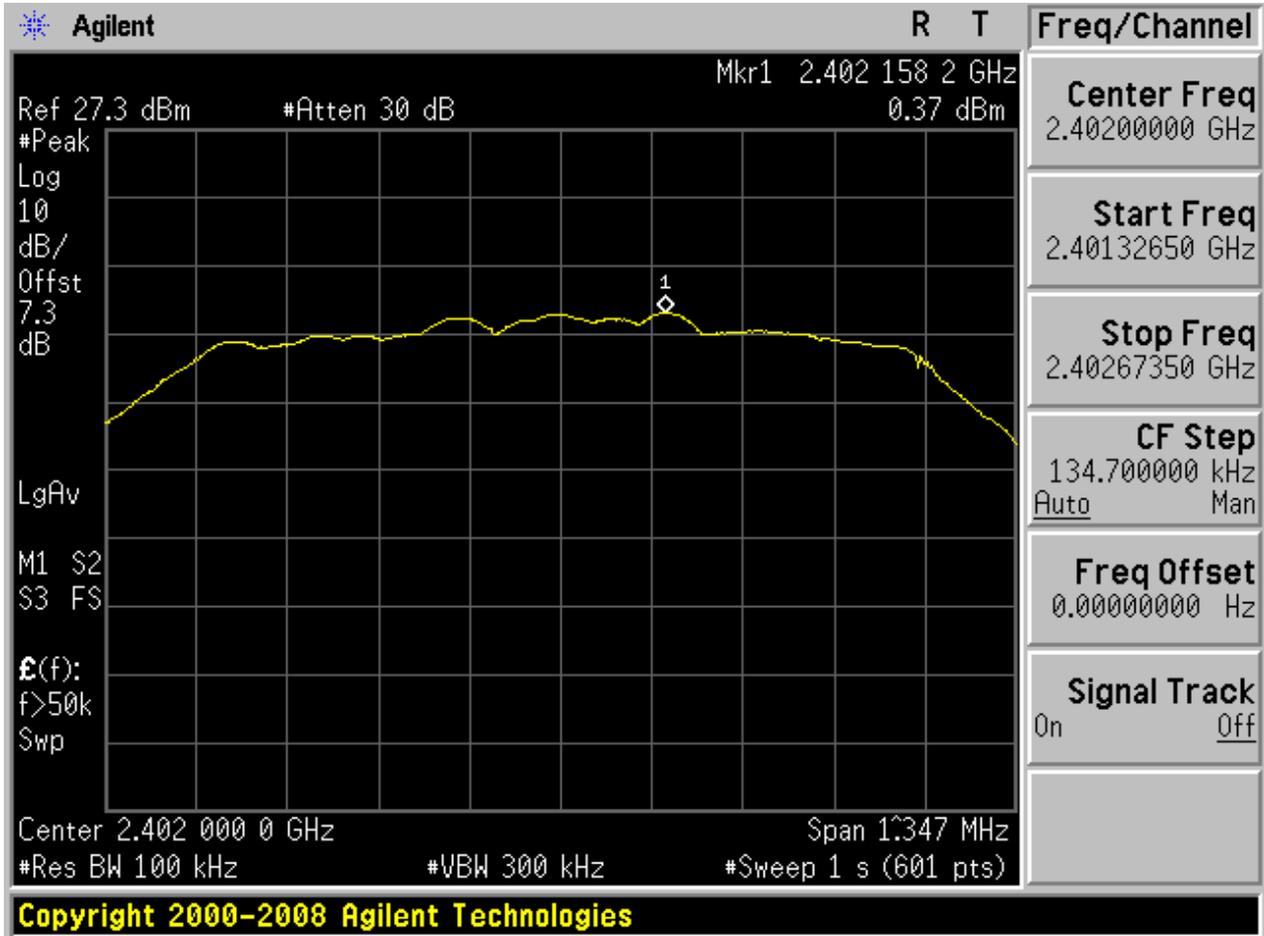



2.4.2 Puw

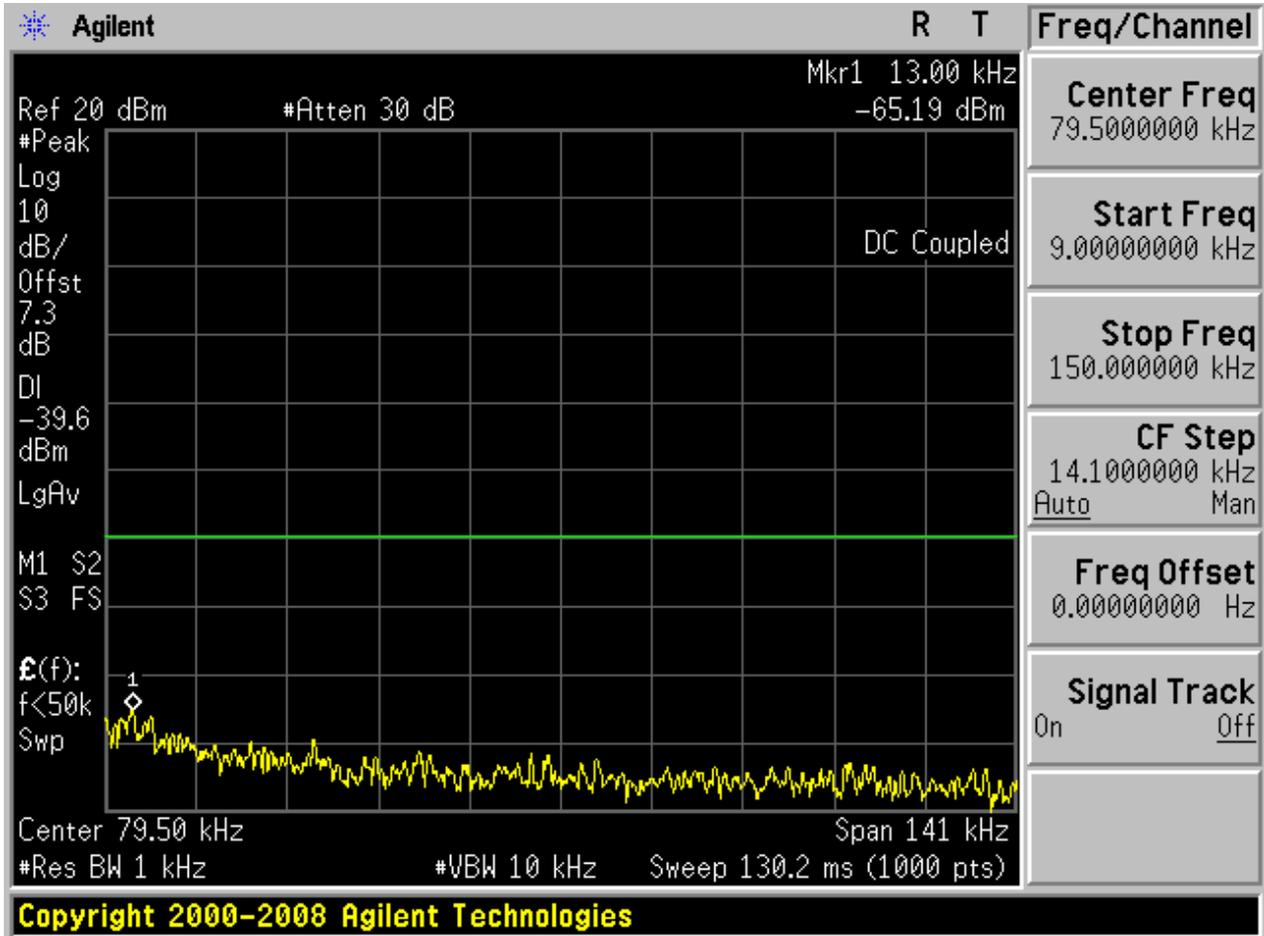


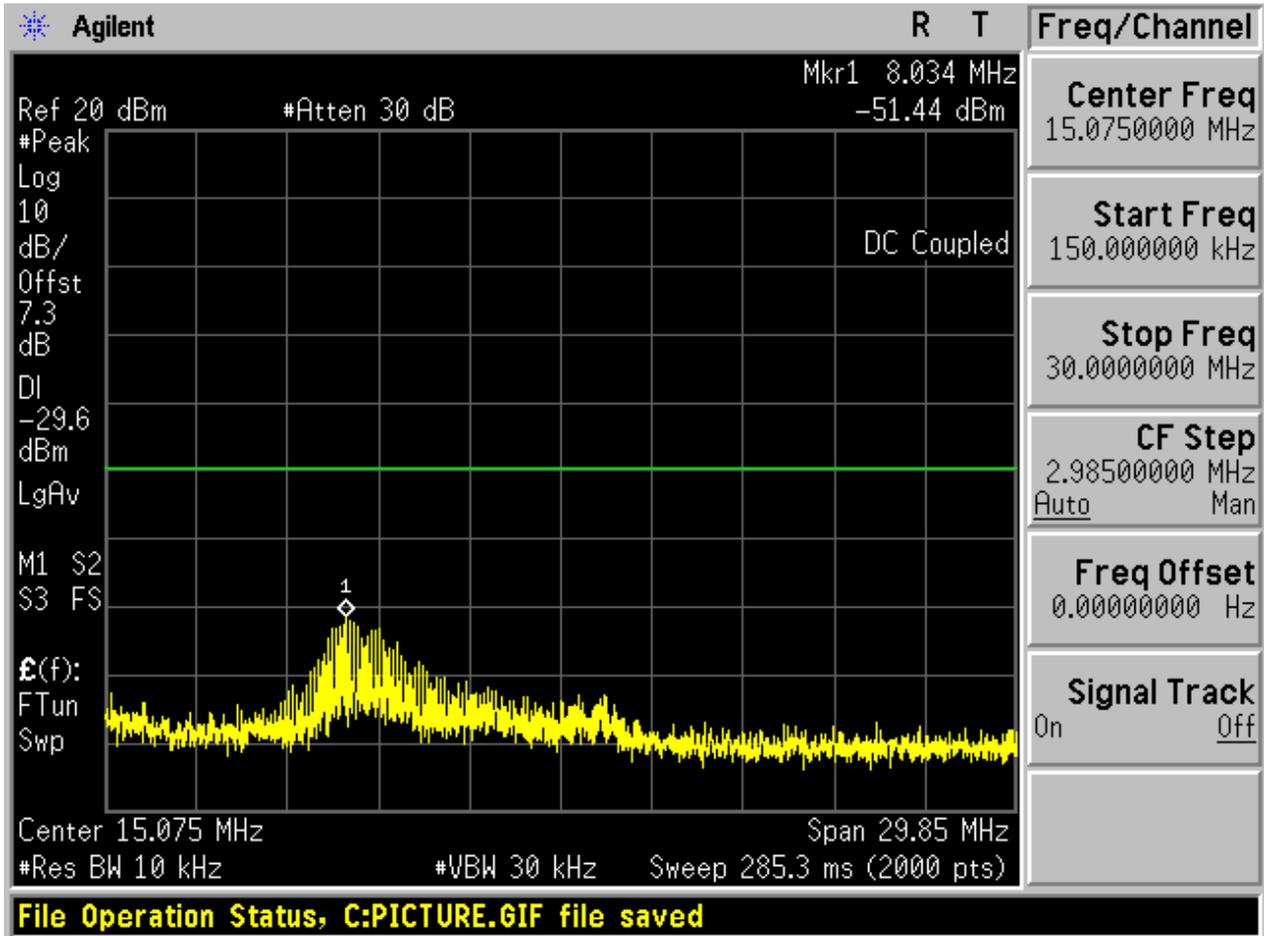

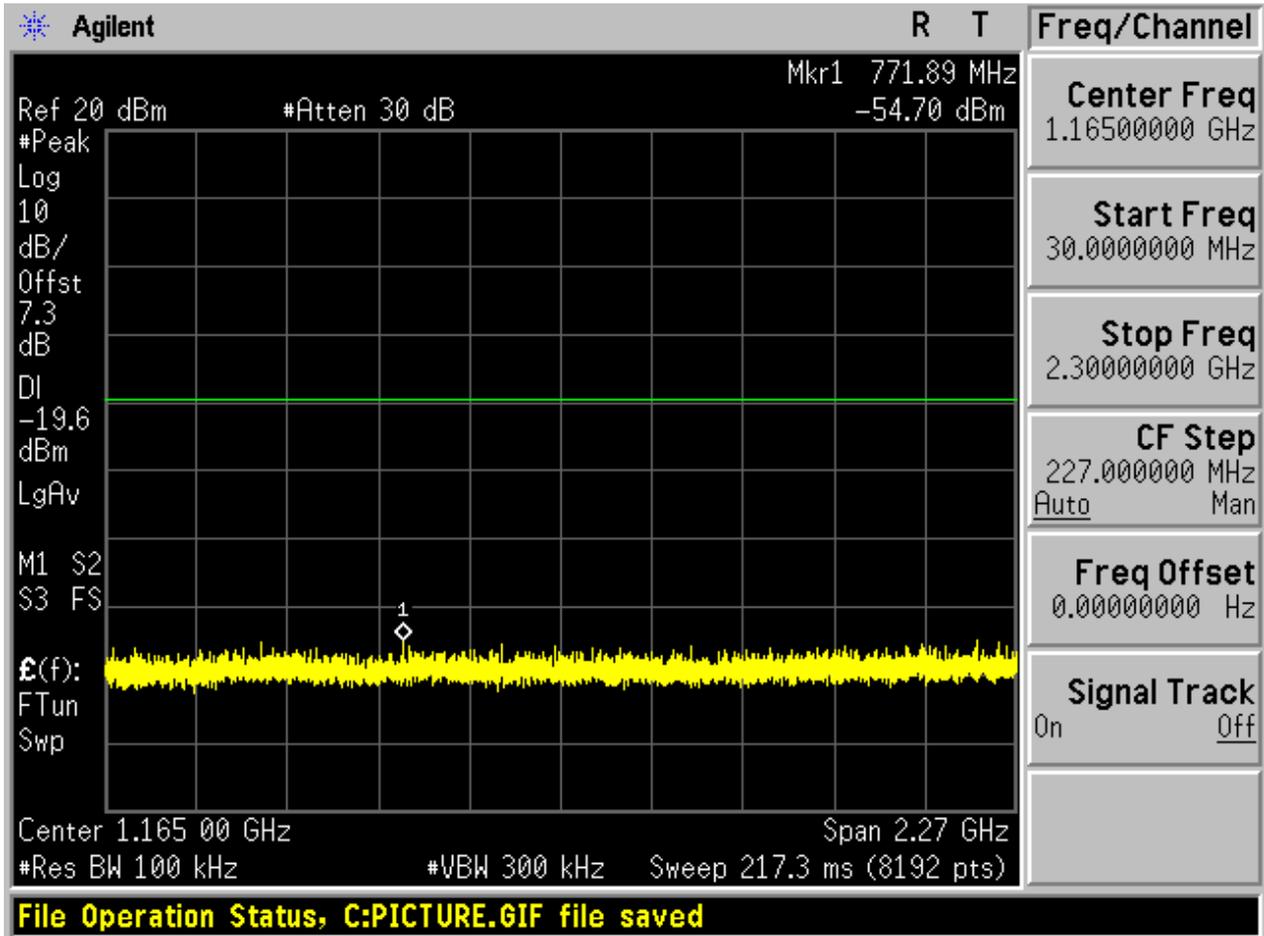

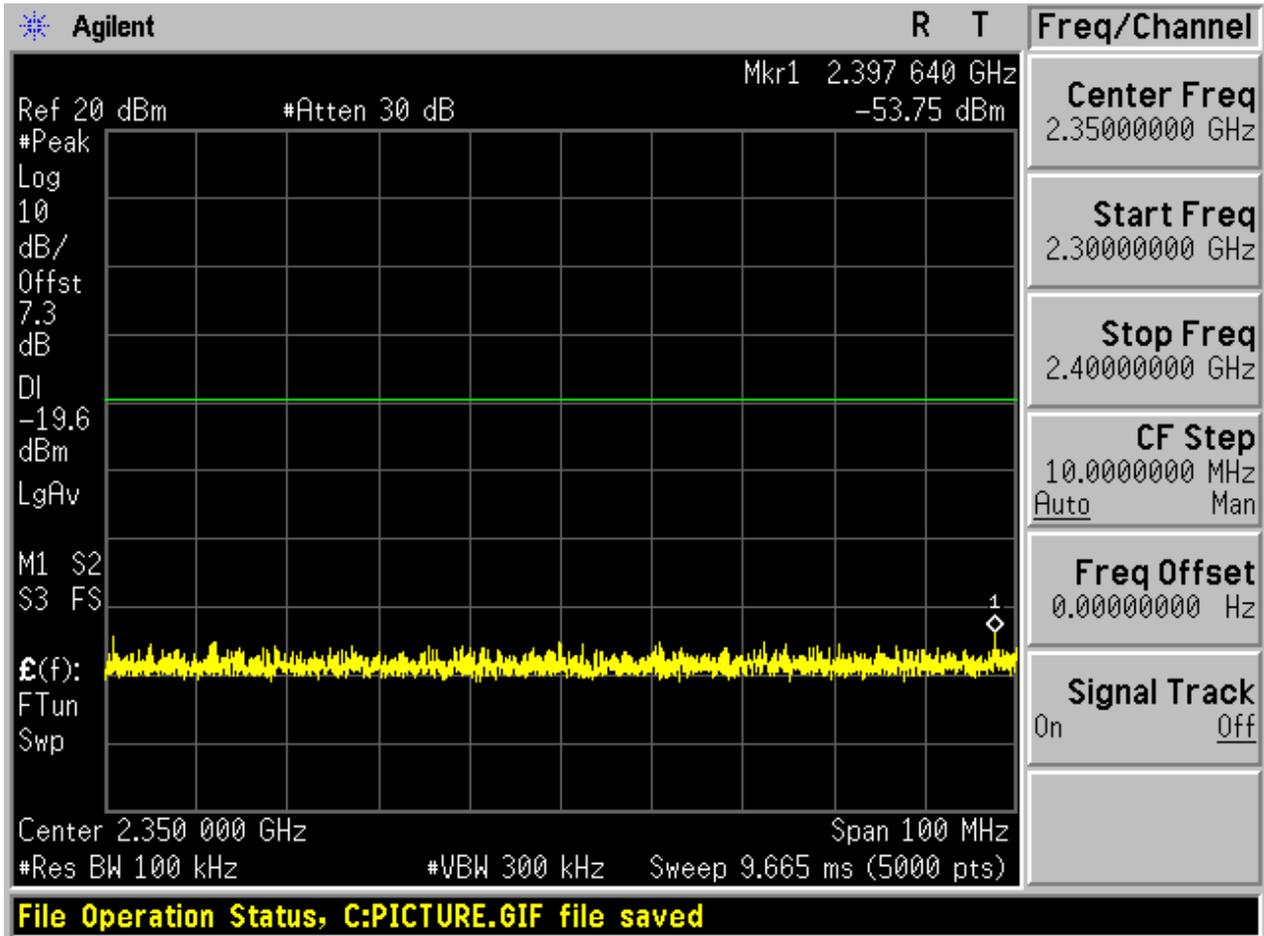


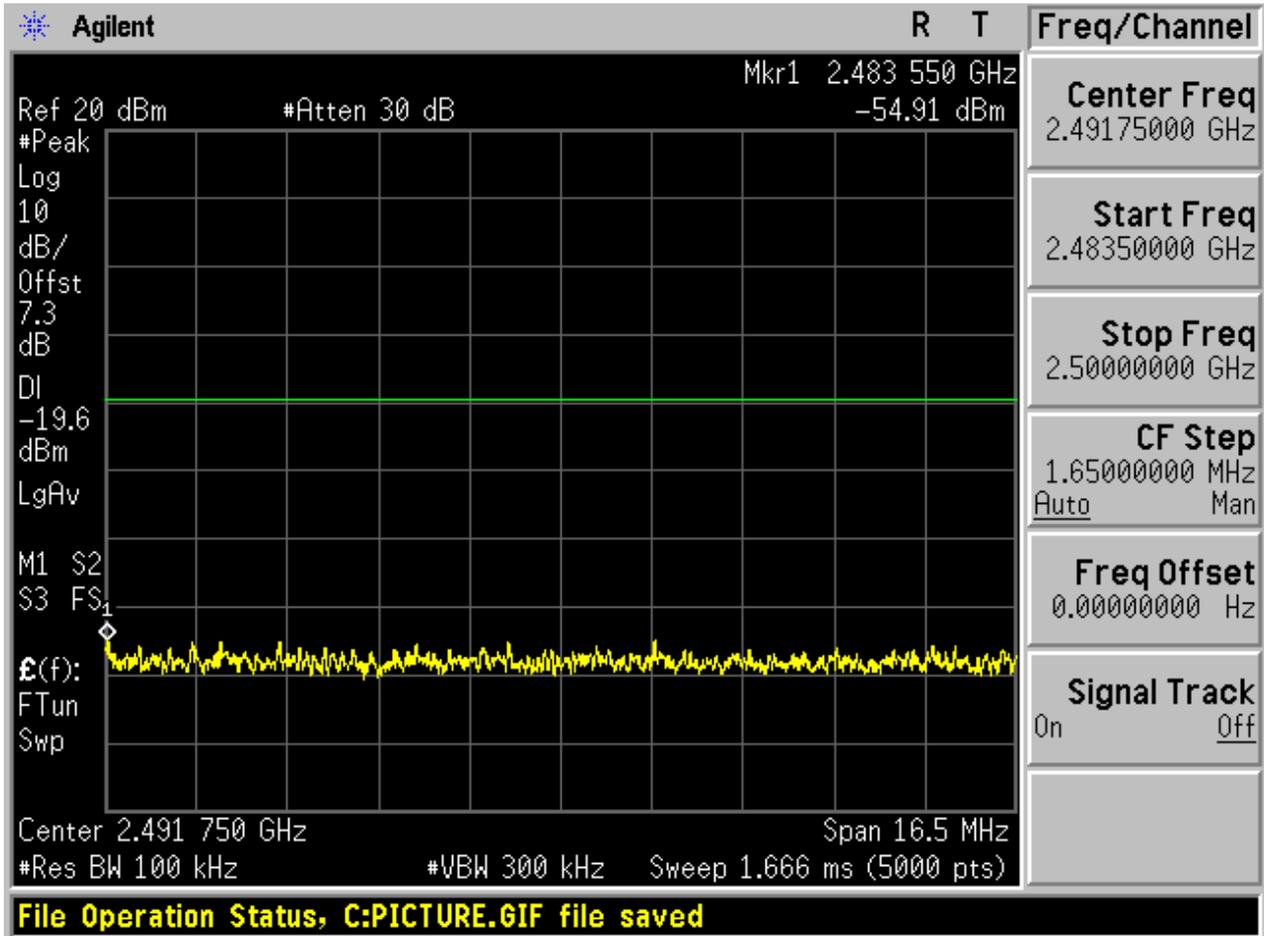

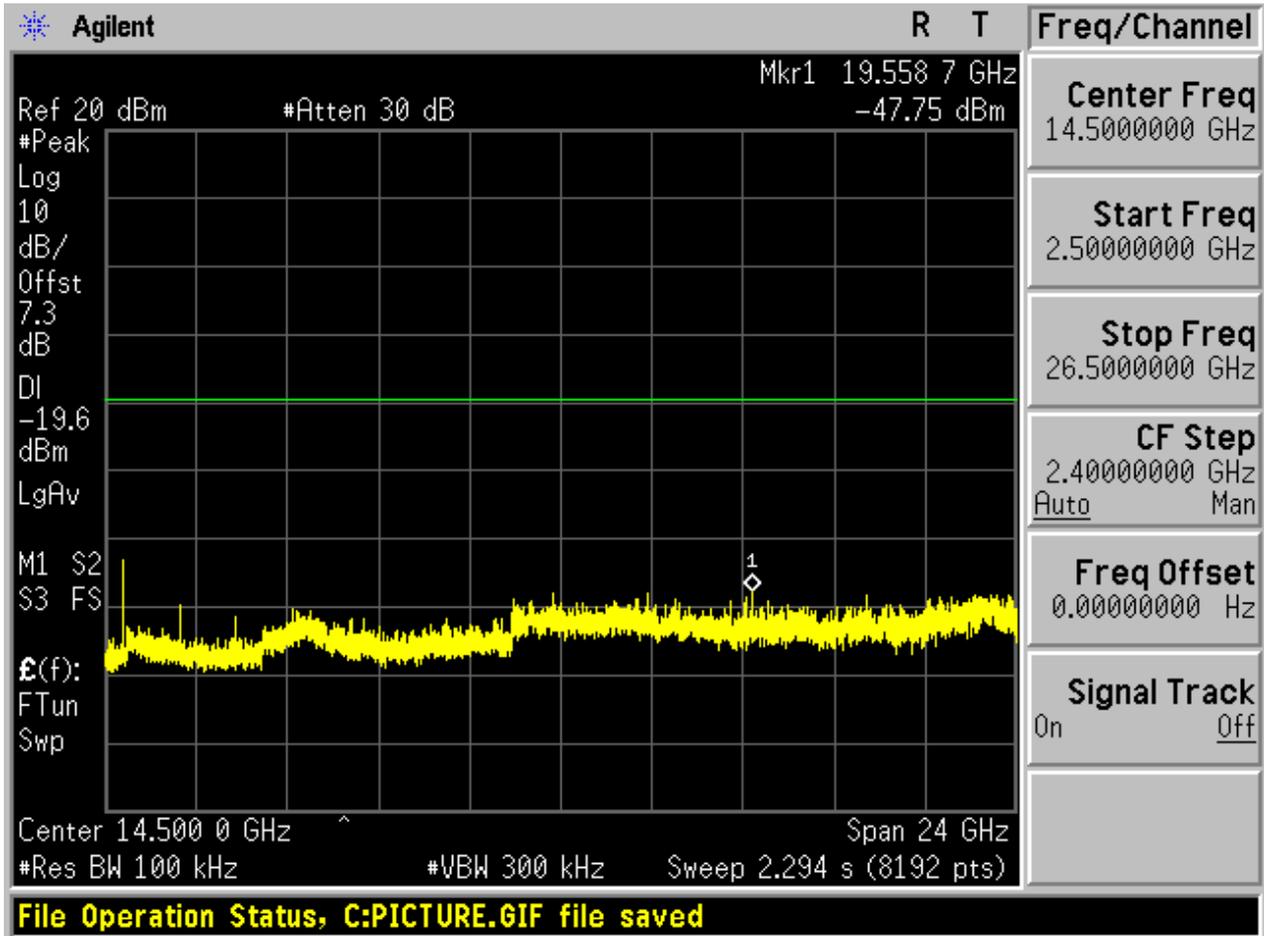



2.5 TM2_2DH5_Ch39


2.5.1 Pref

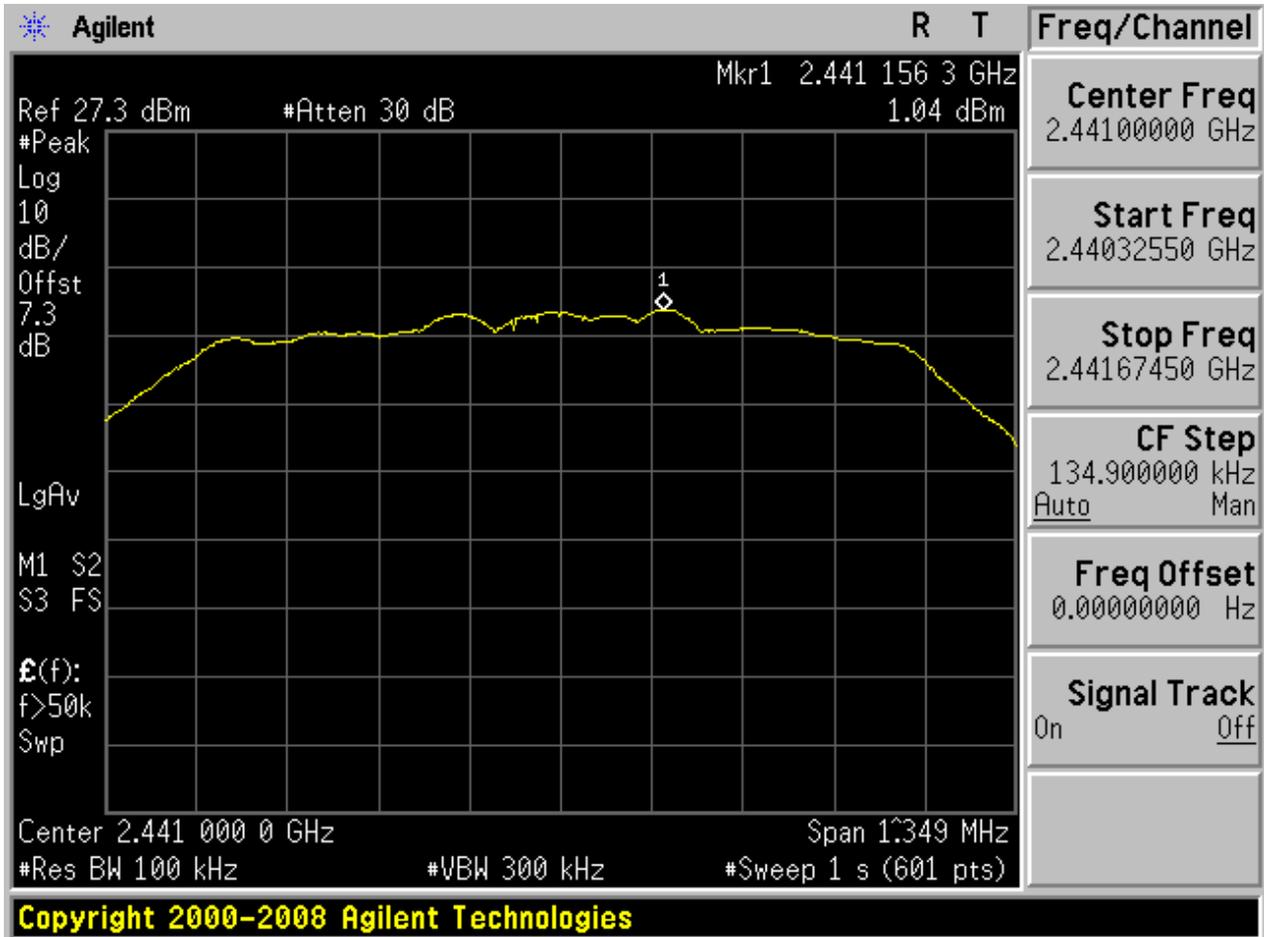



2.5.2 Puw

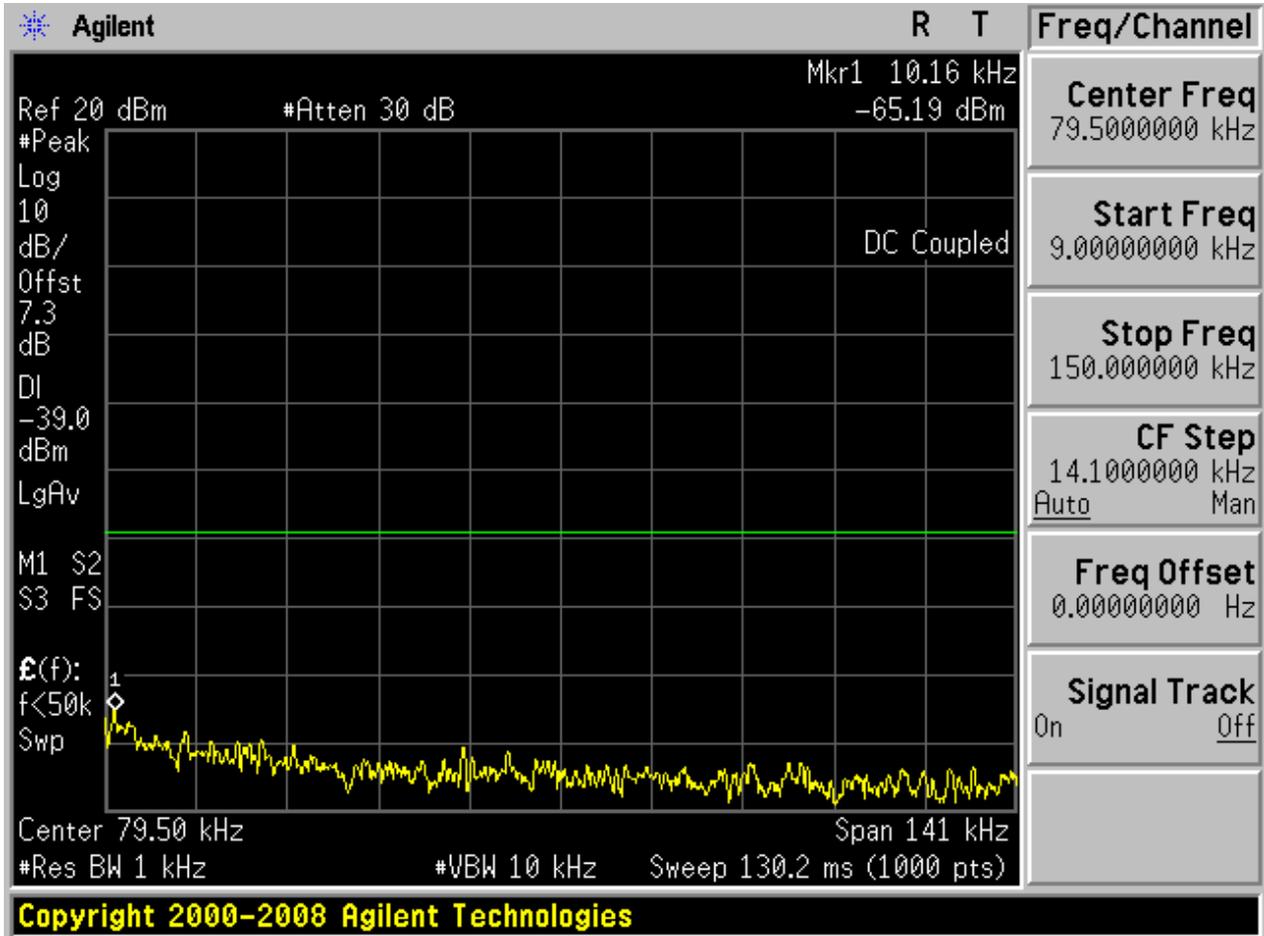


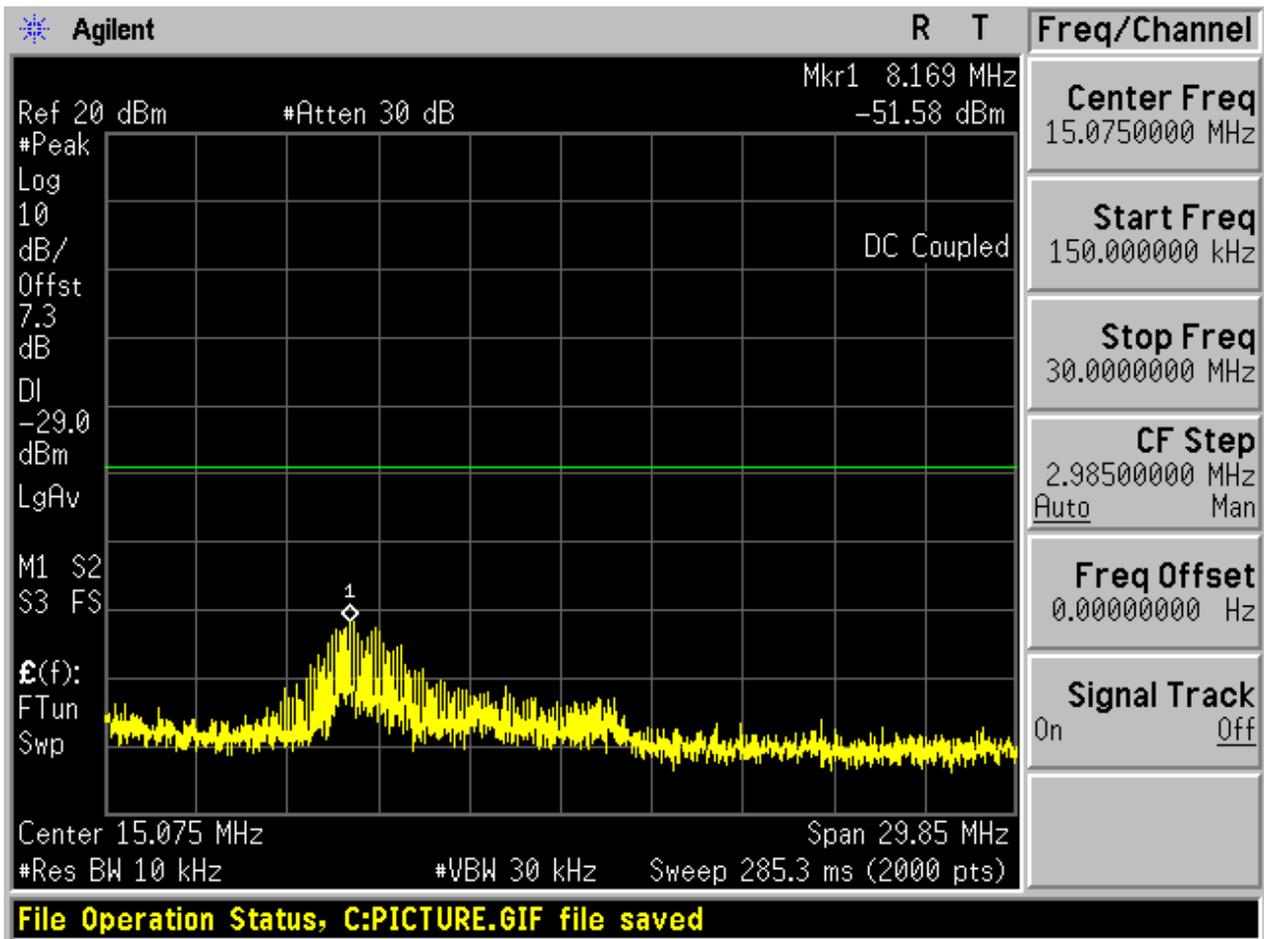

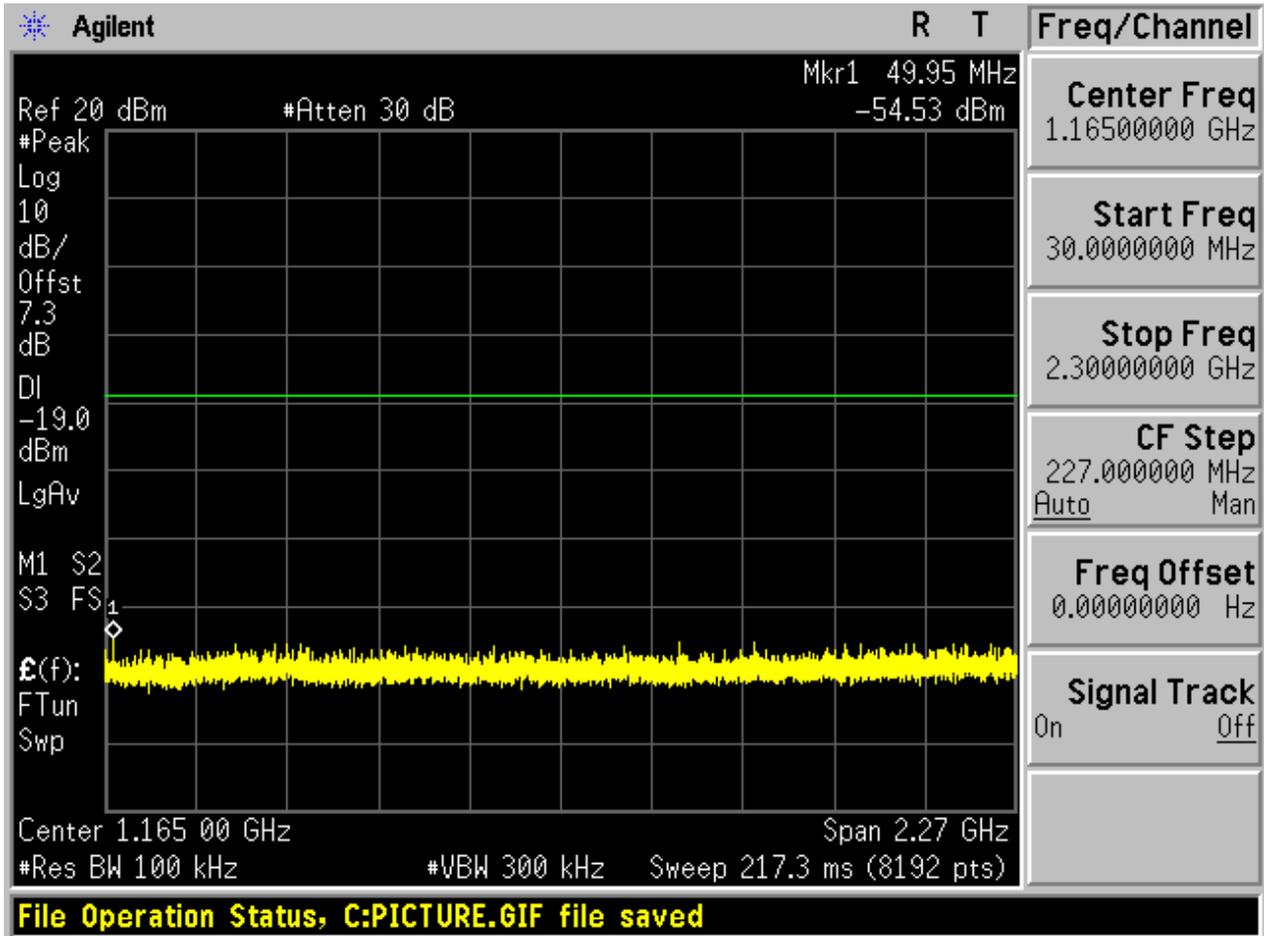

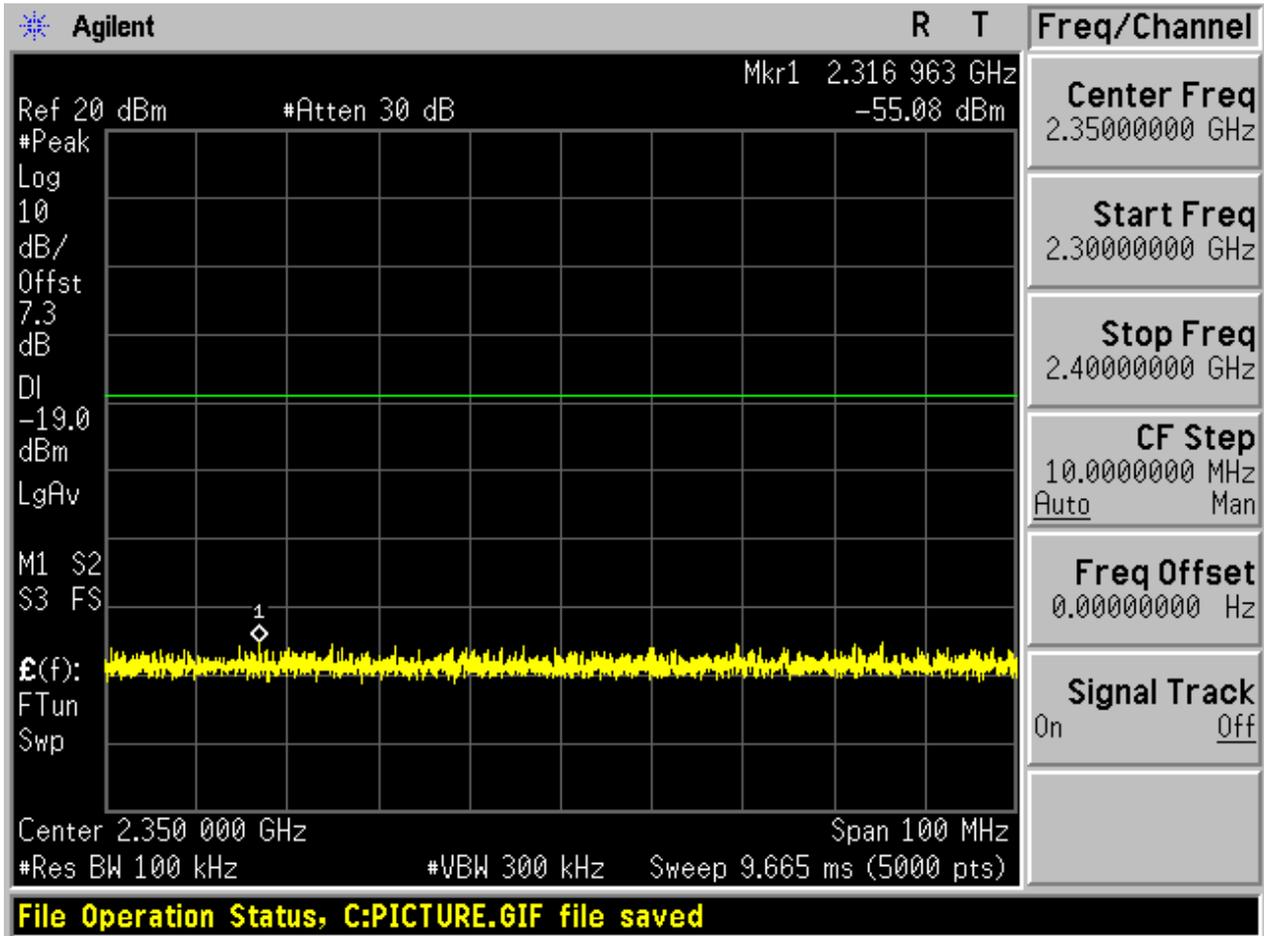


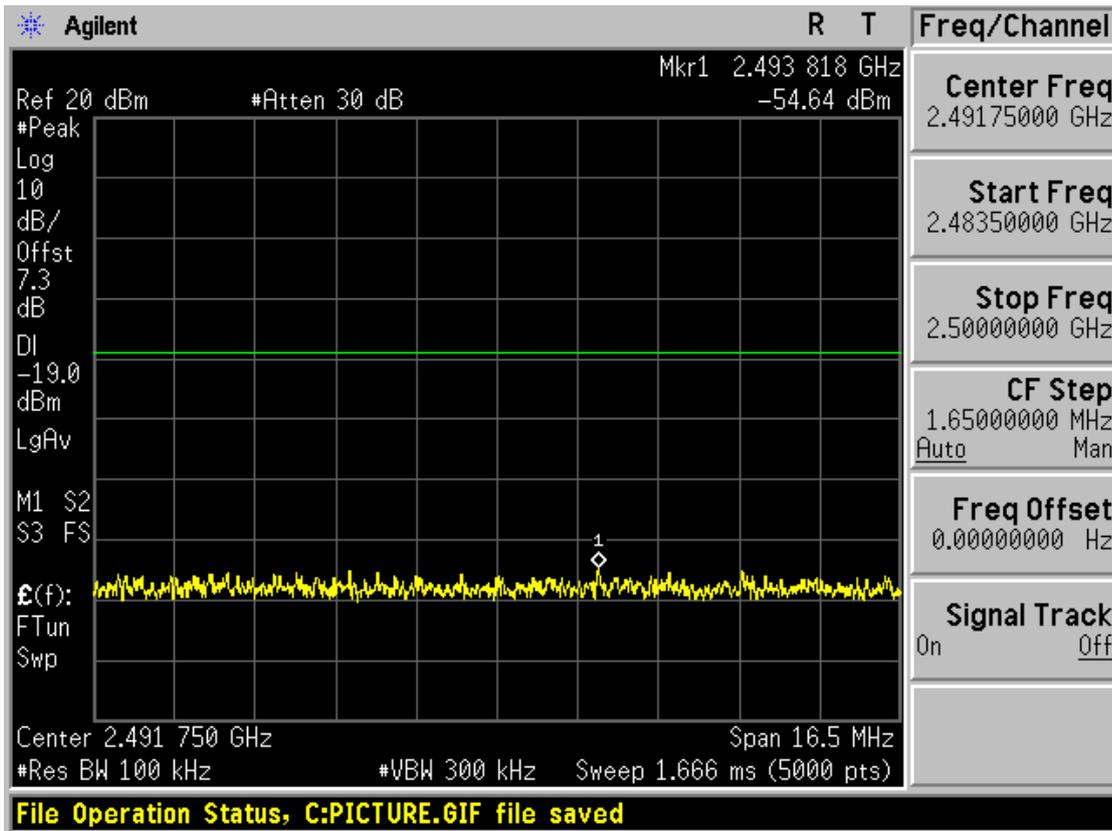

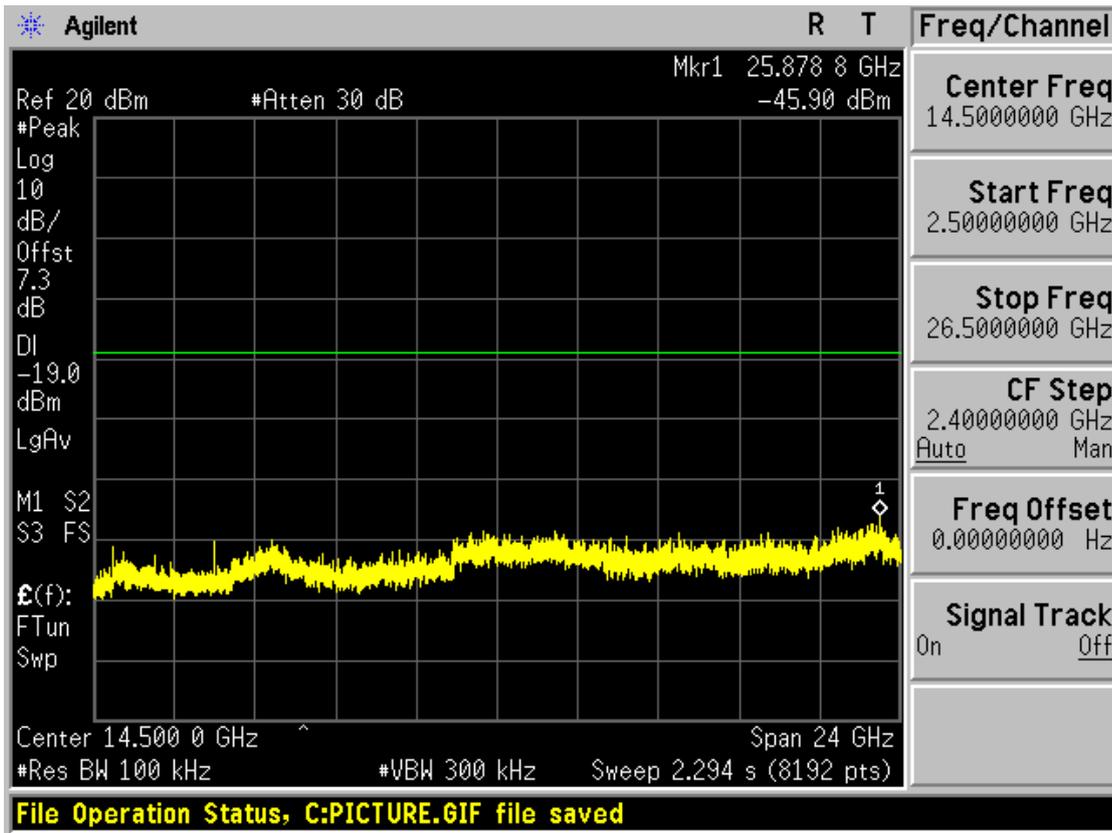



2.6 TM2_2DH5_Ch78


2.6.1 Pref

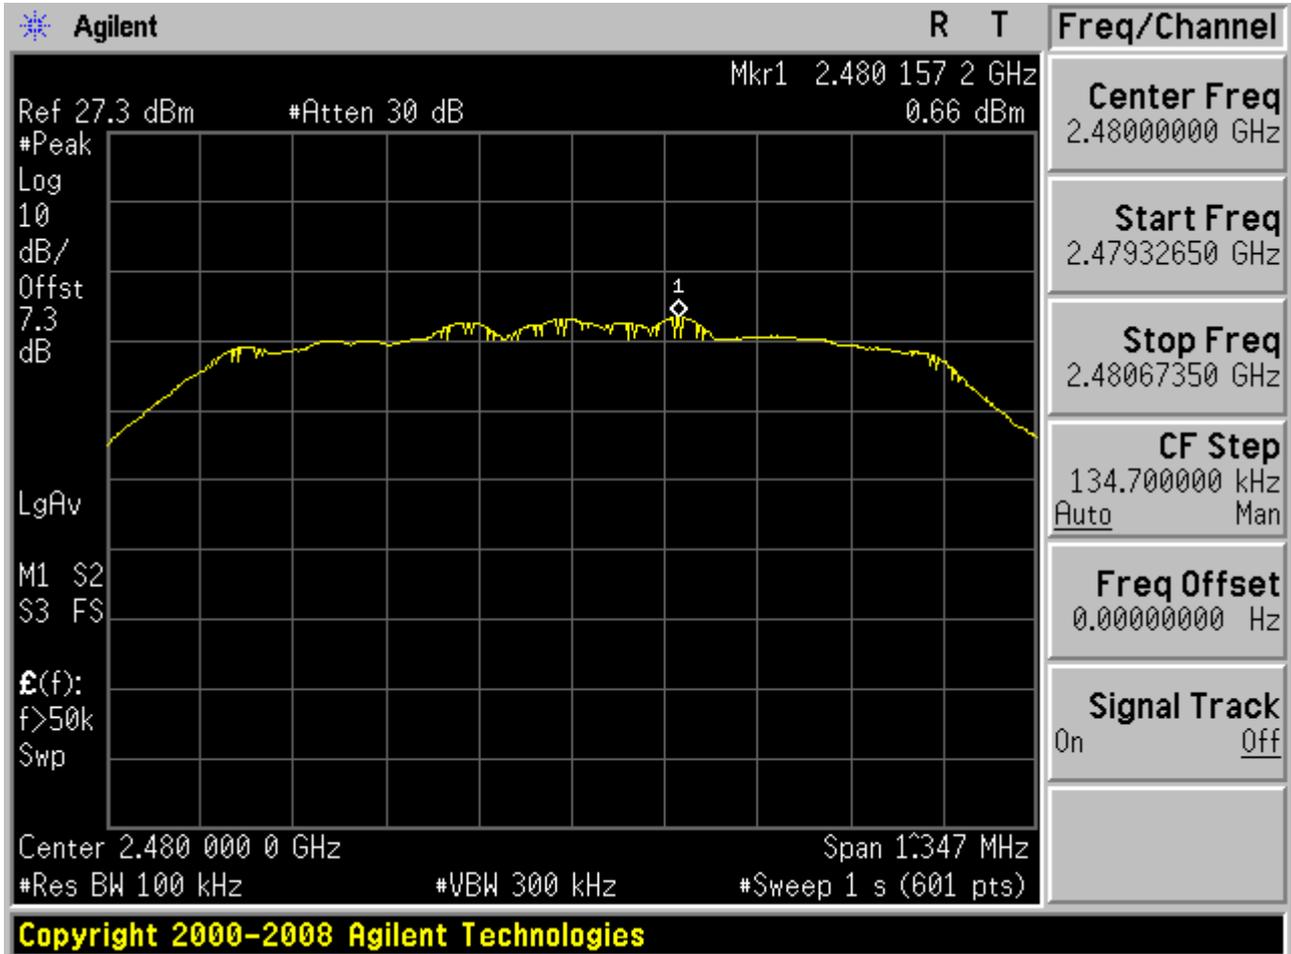



2.6.2 P_{uw}

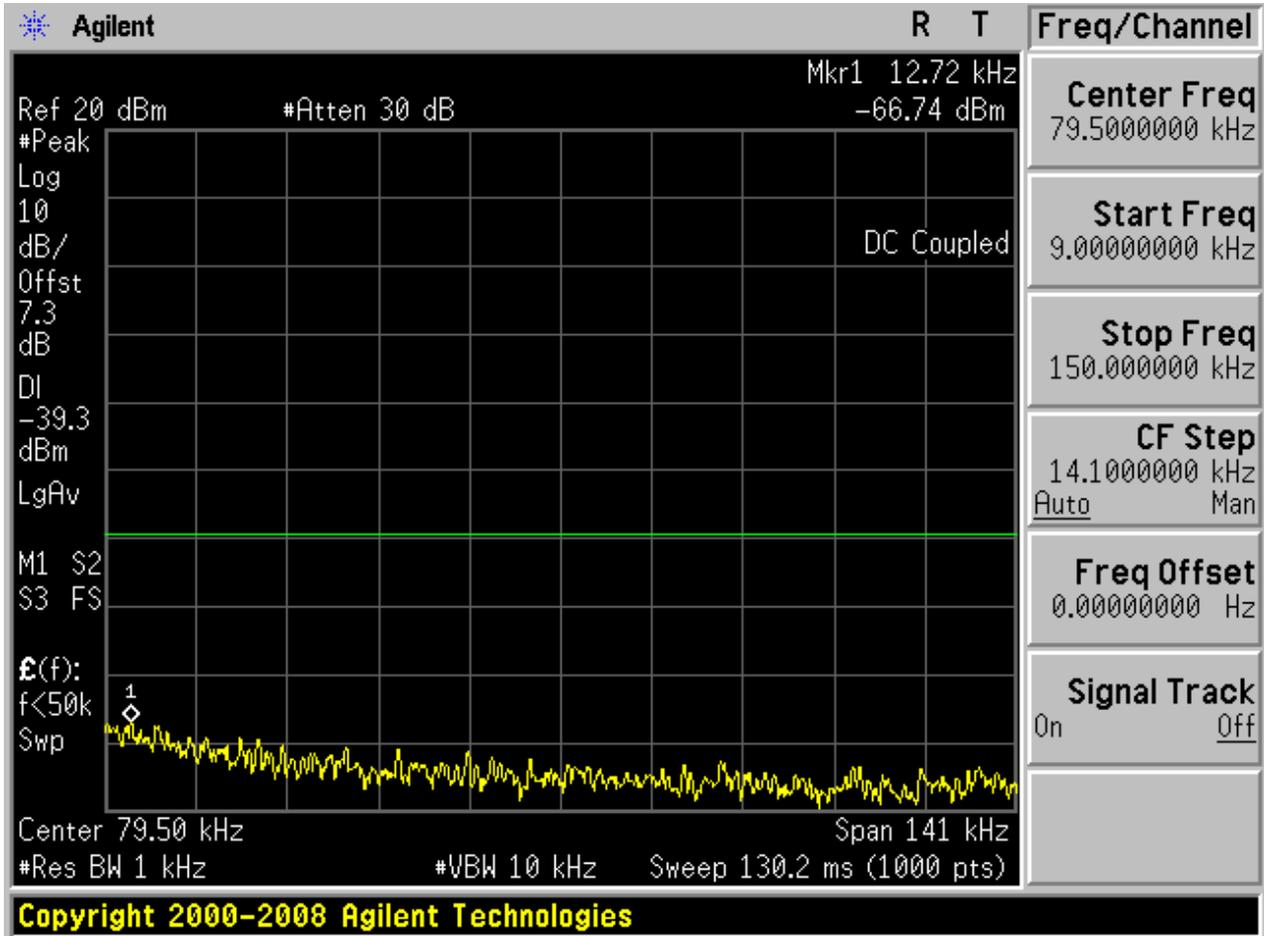


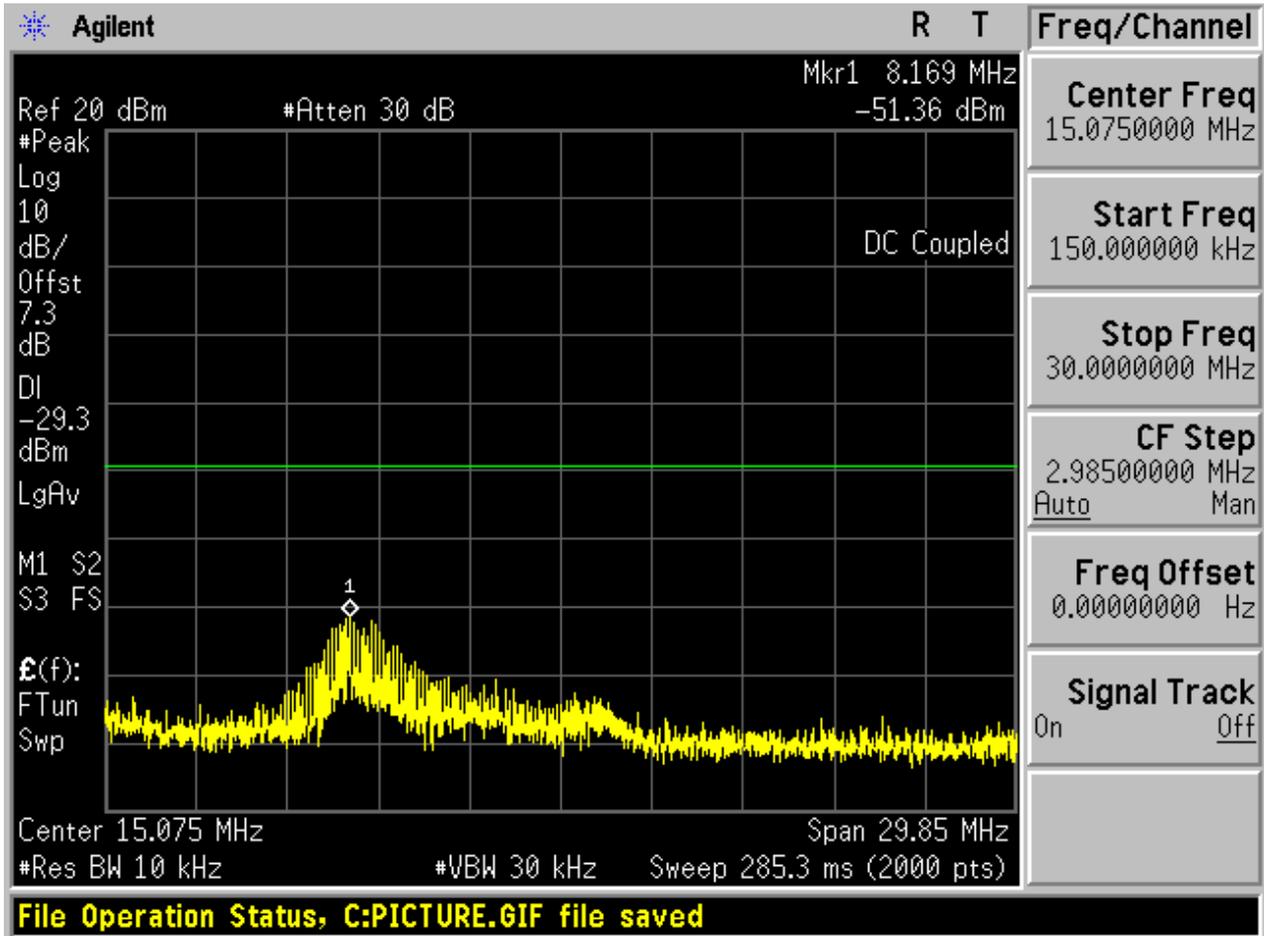

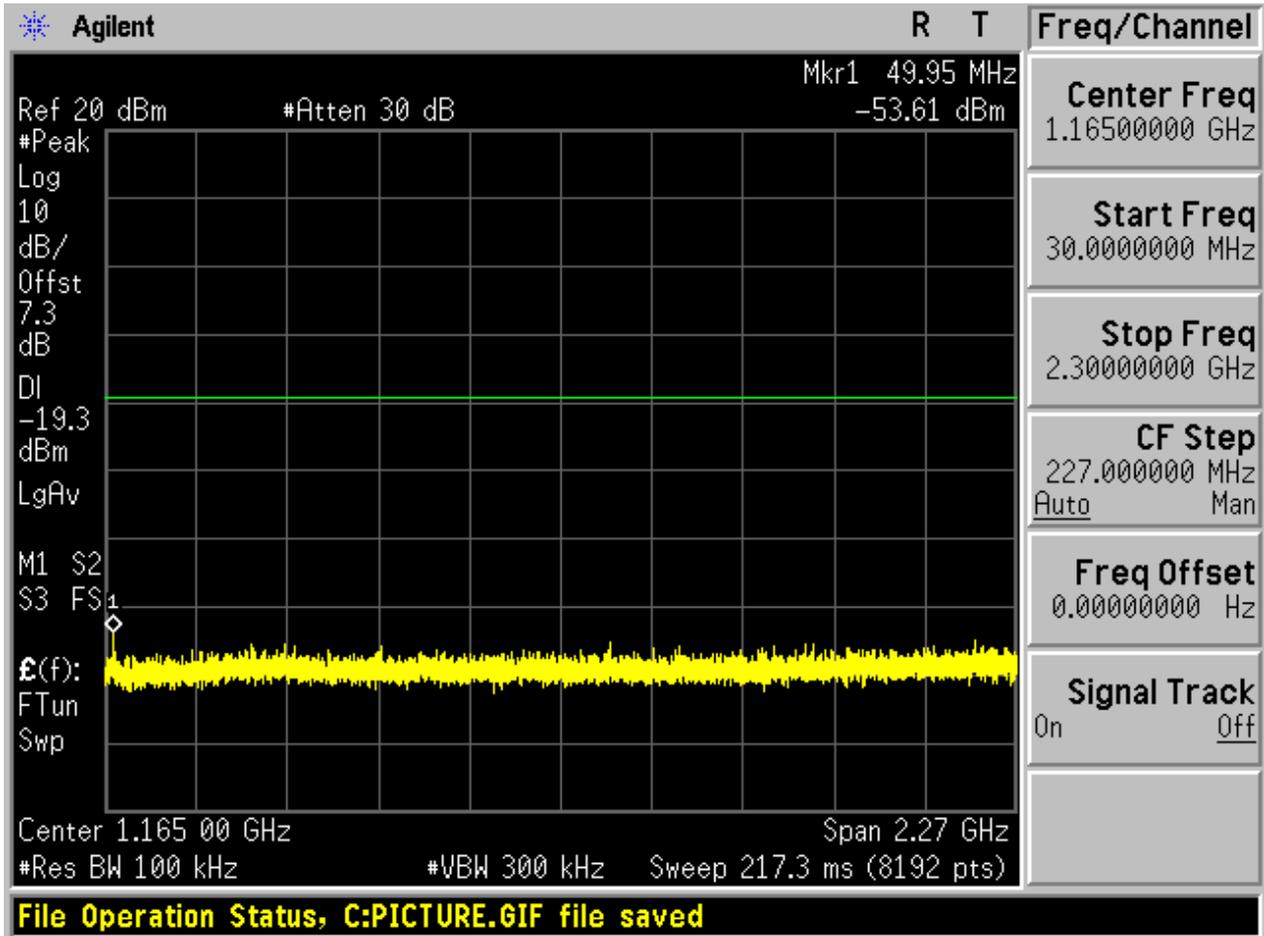

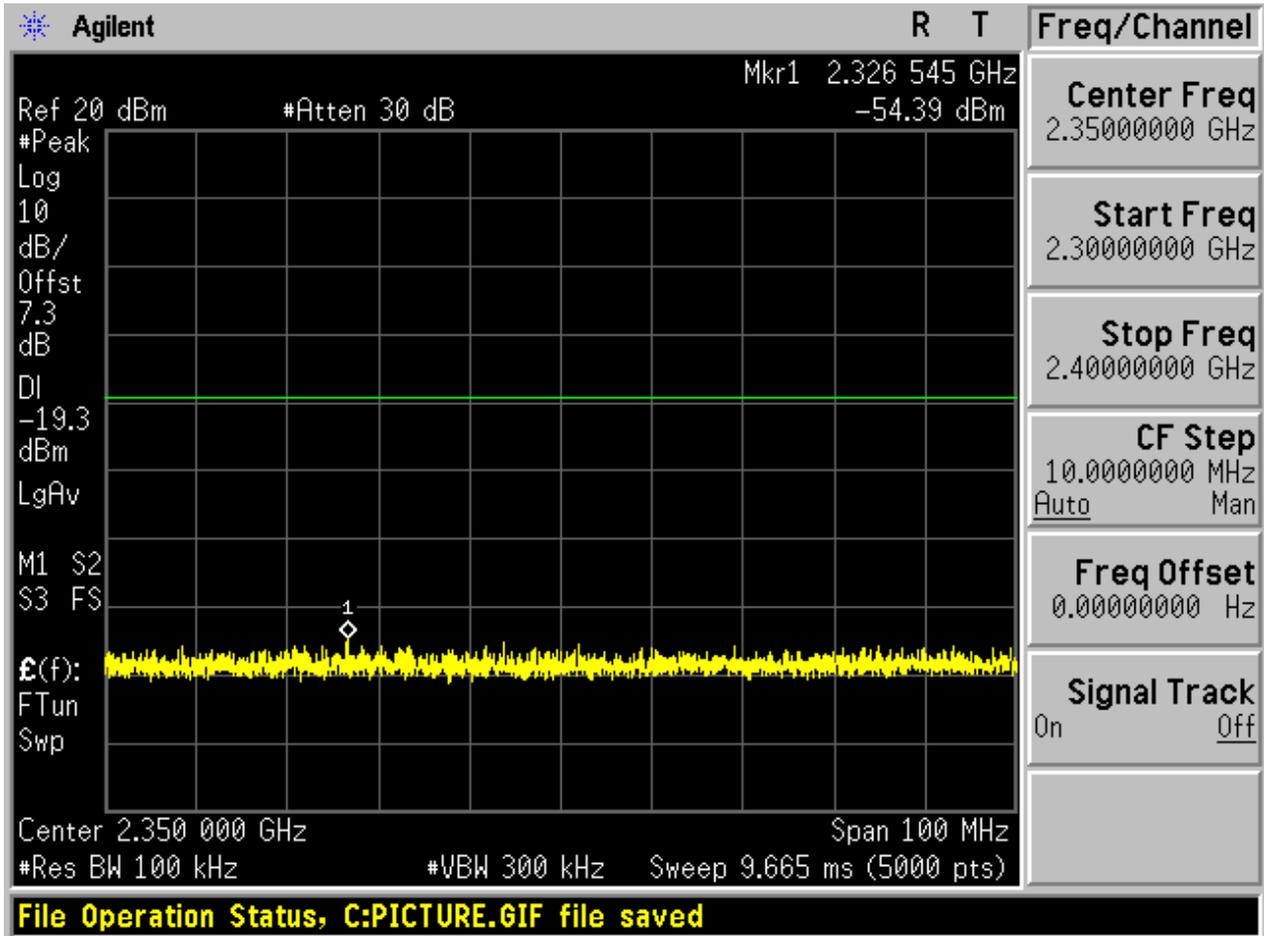


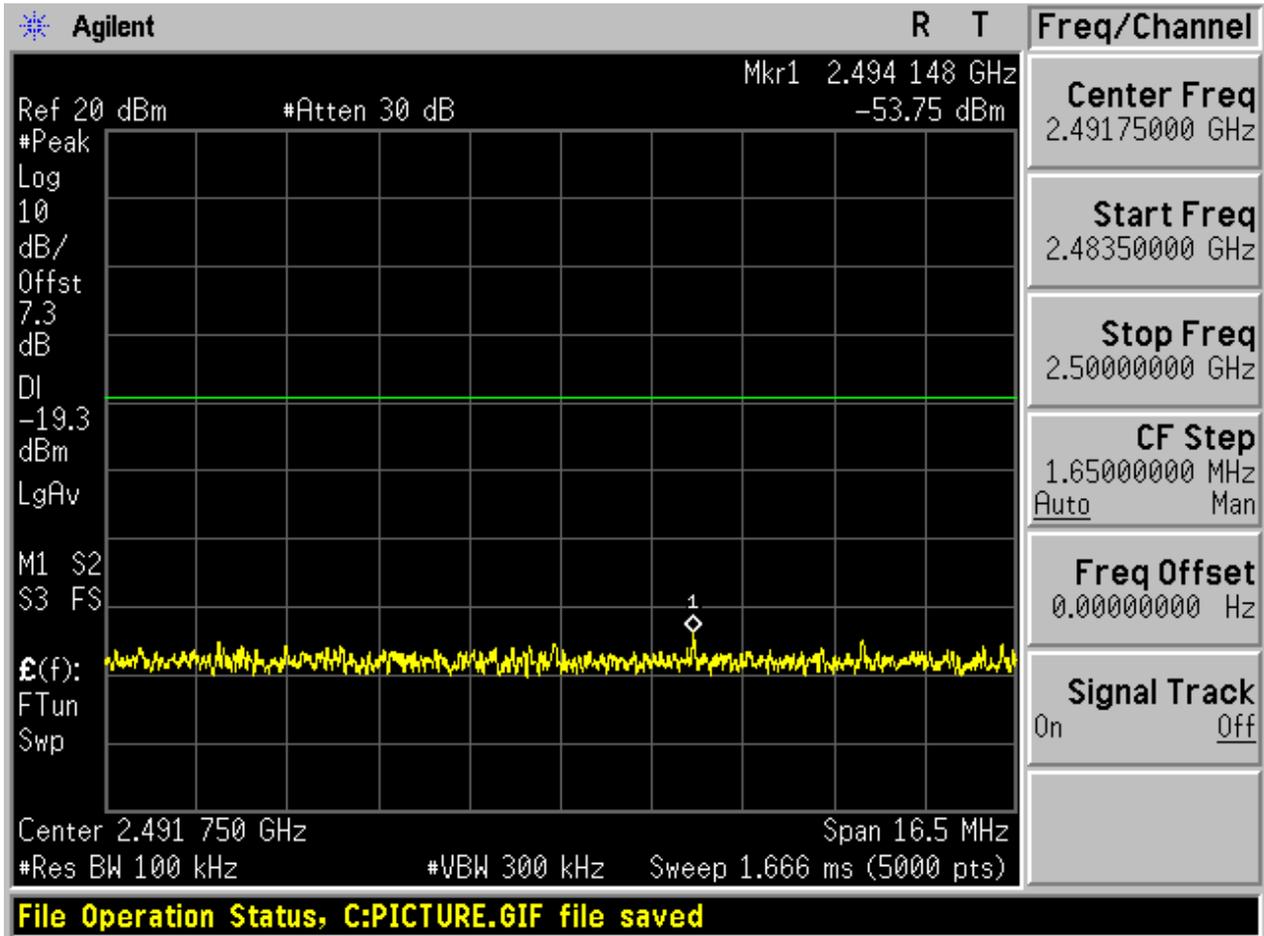

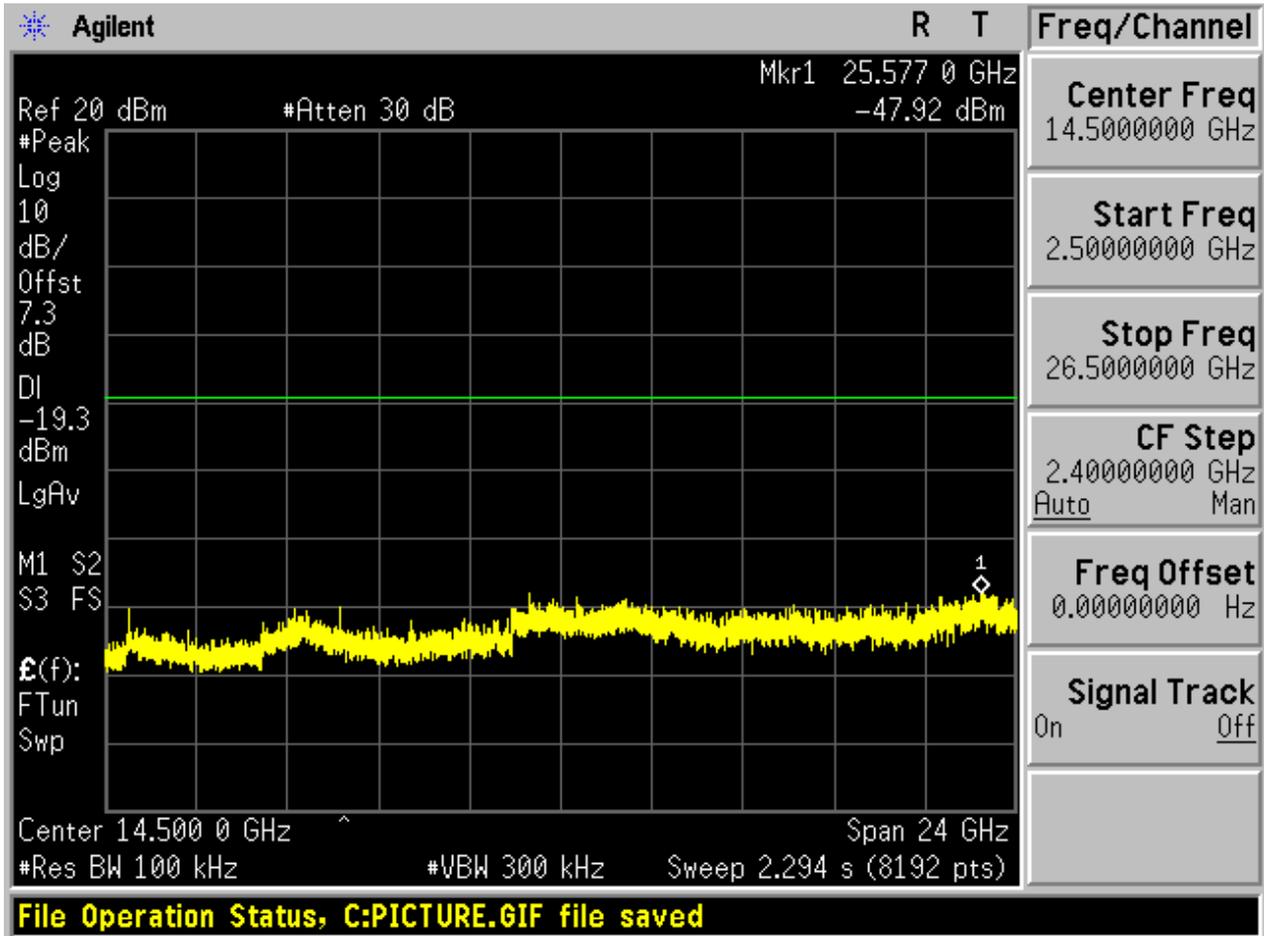



2.7 TM3_3DH5_Ch0


2.7.1 Pref

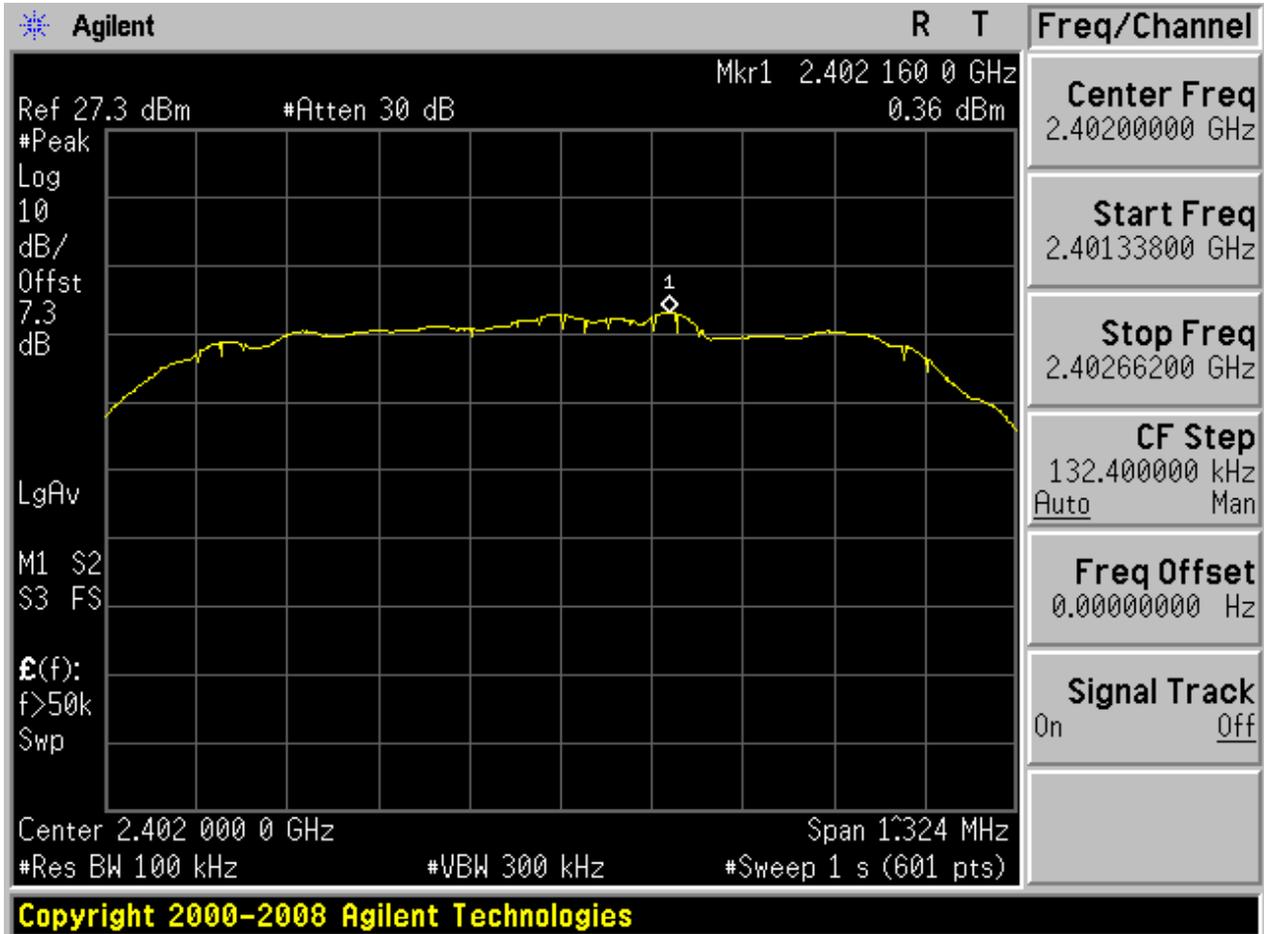



2.7.2 Puw

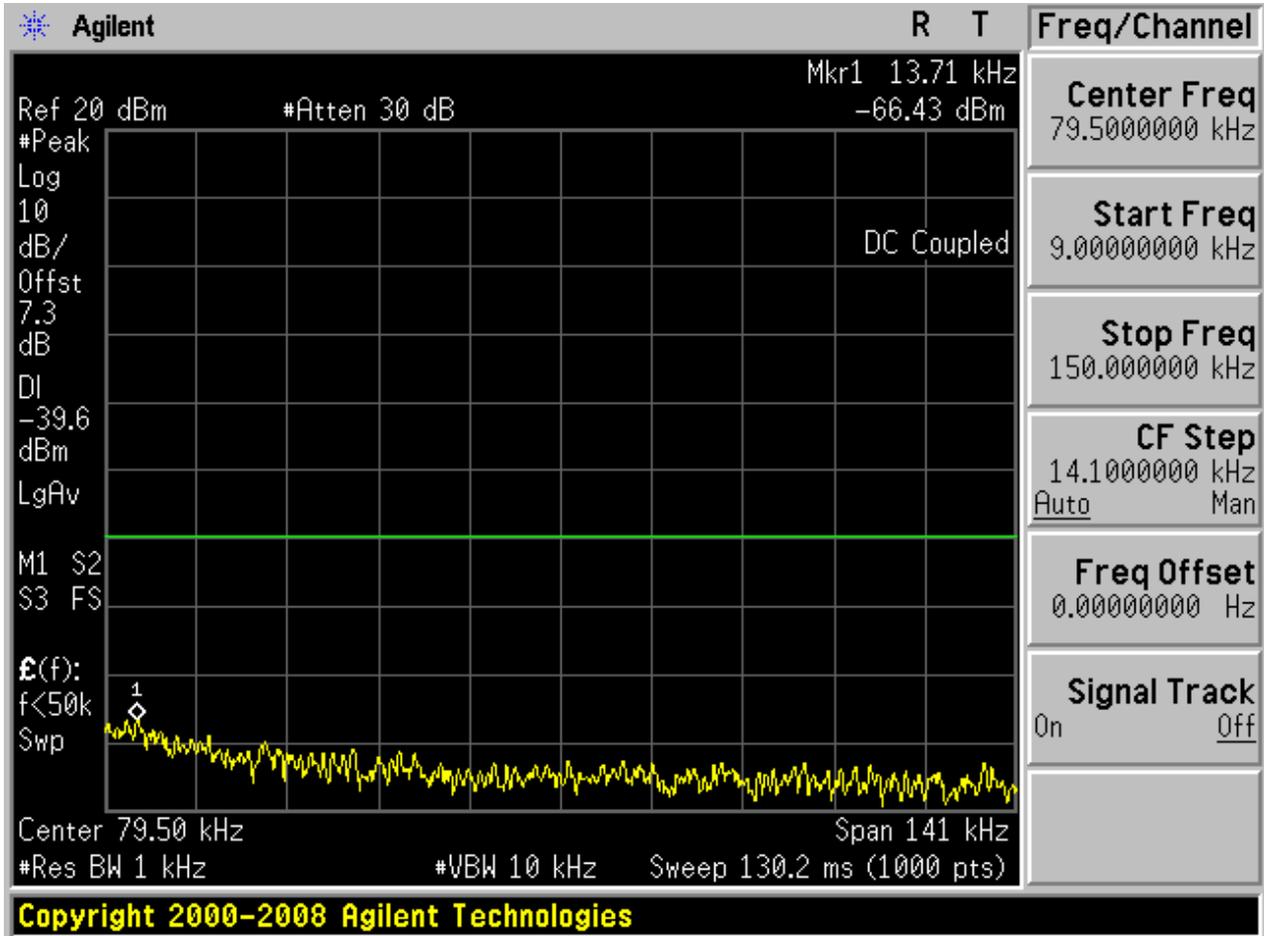


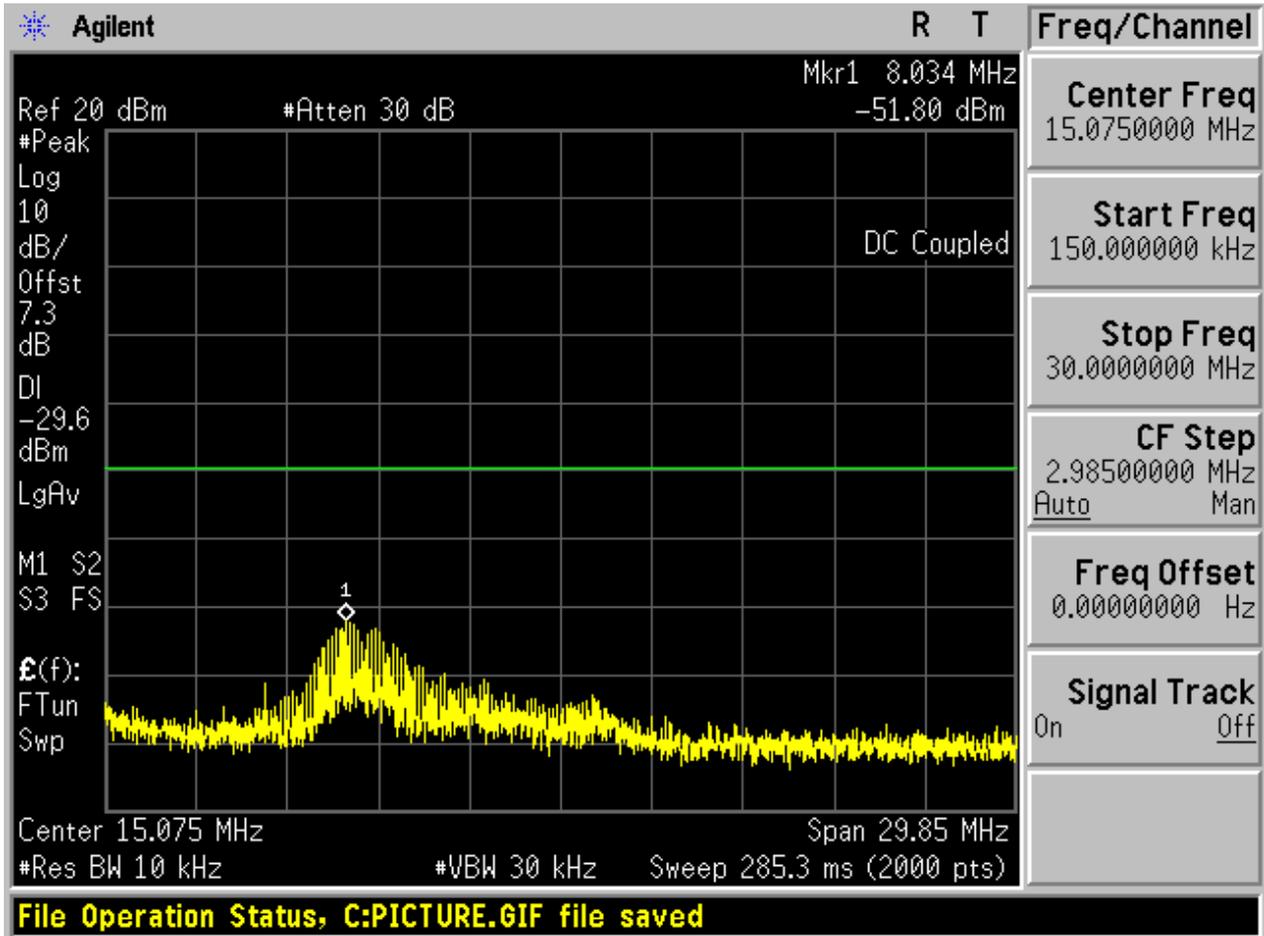

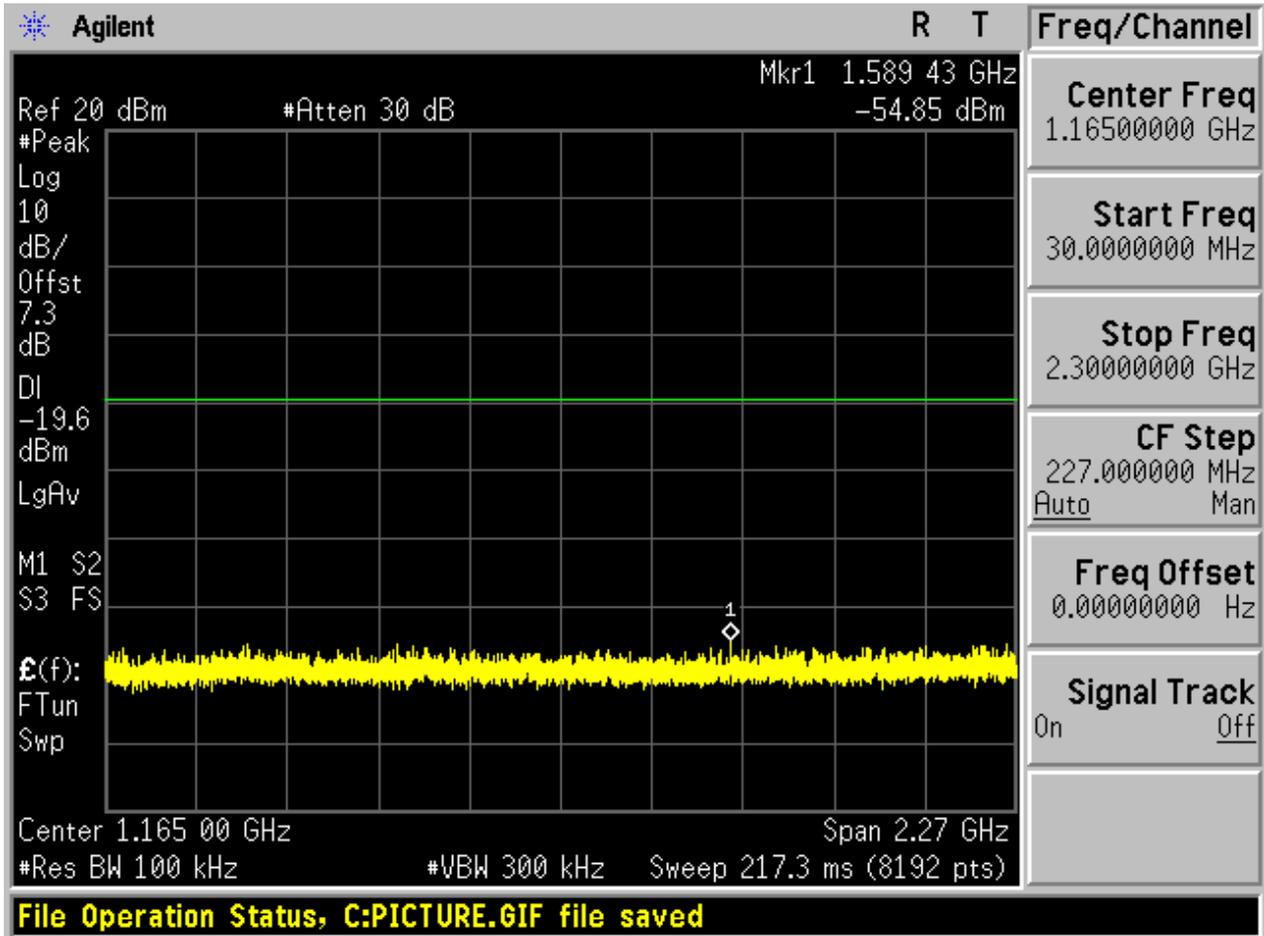

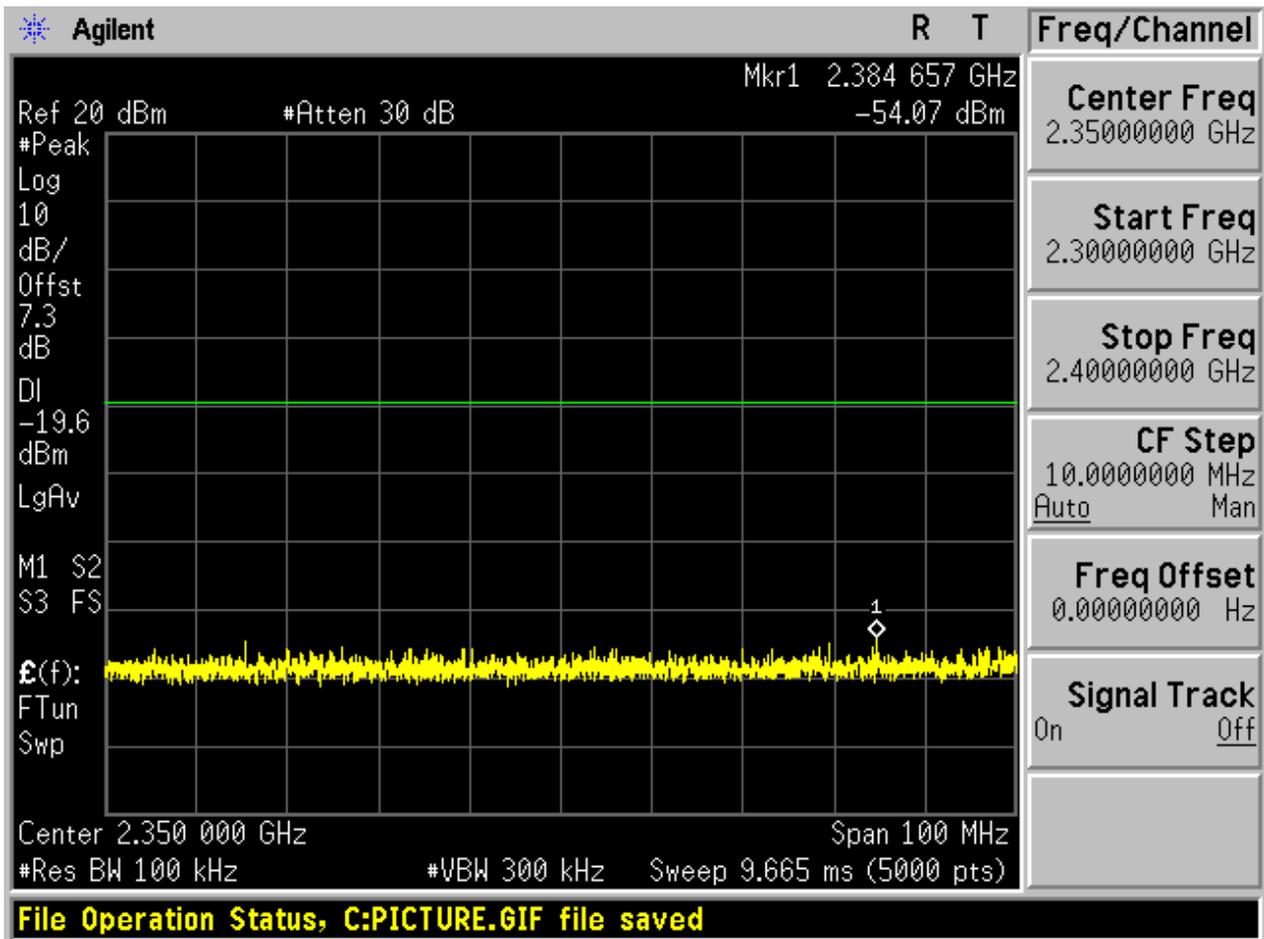


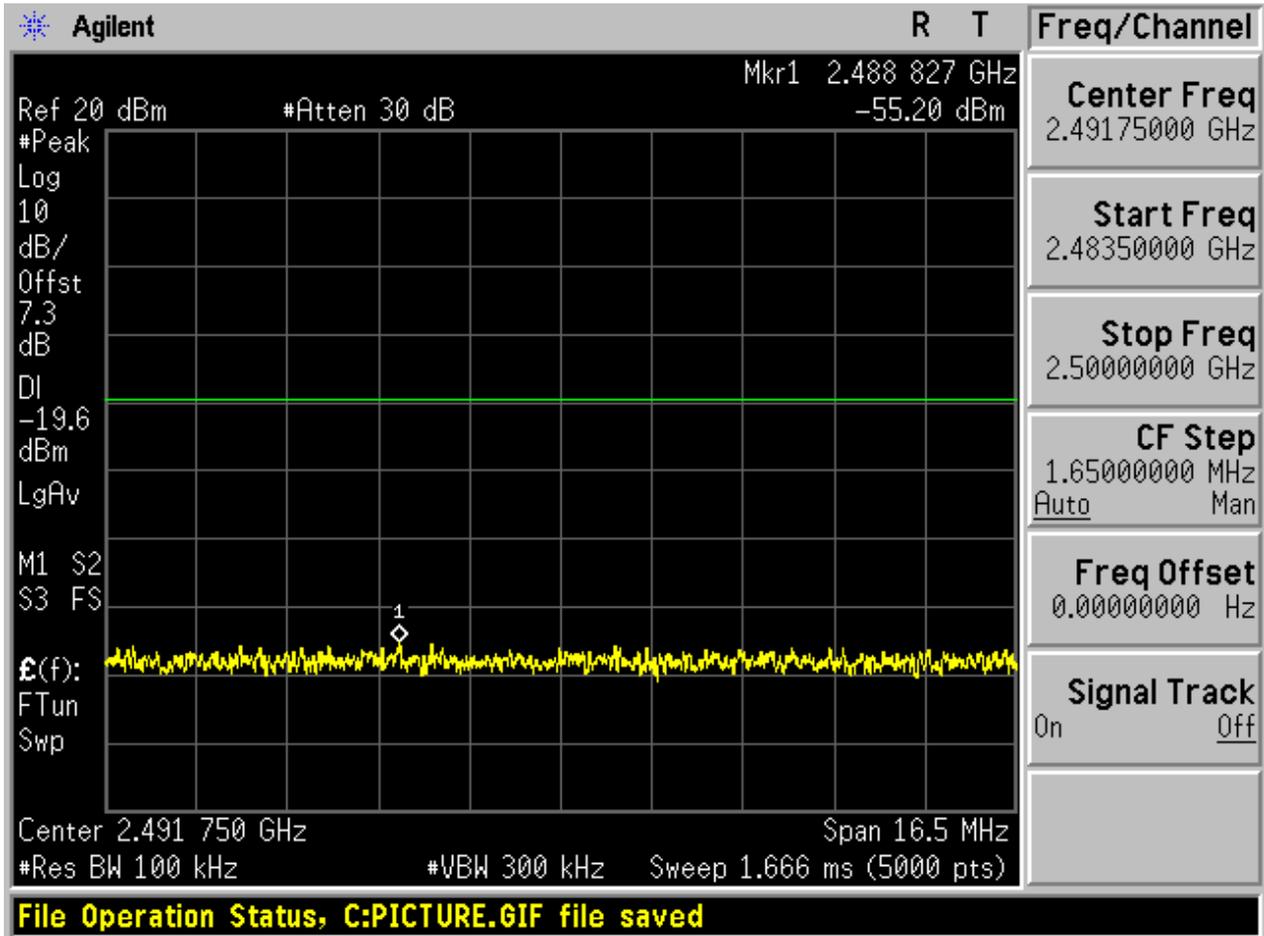

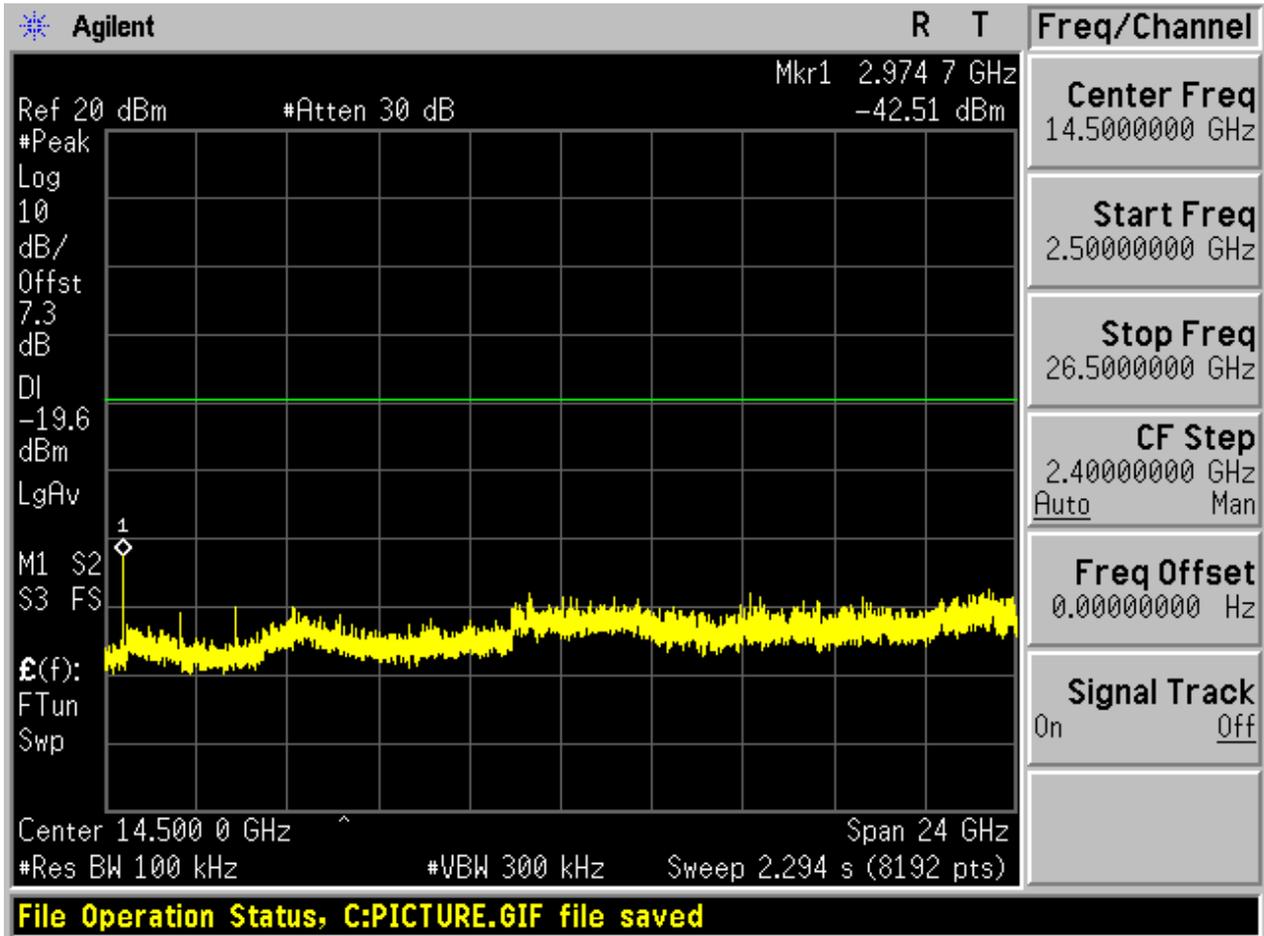



2.8 TM3_3DH5_Ch39


2.8.1 Pref

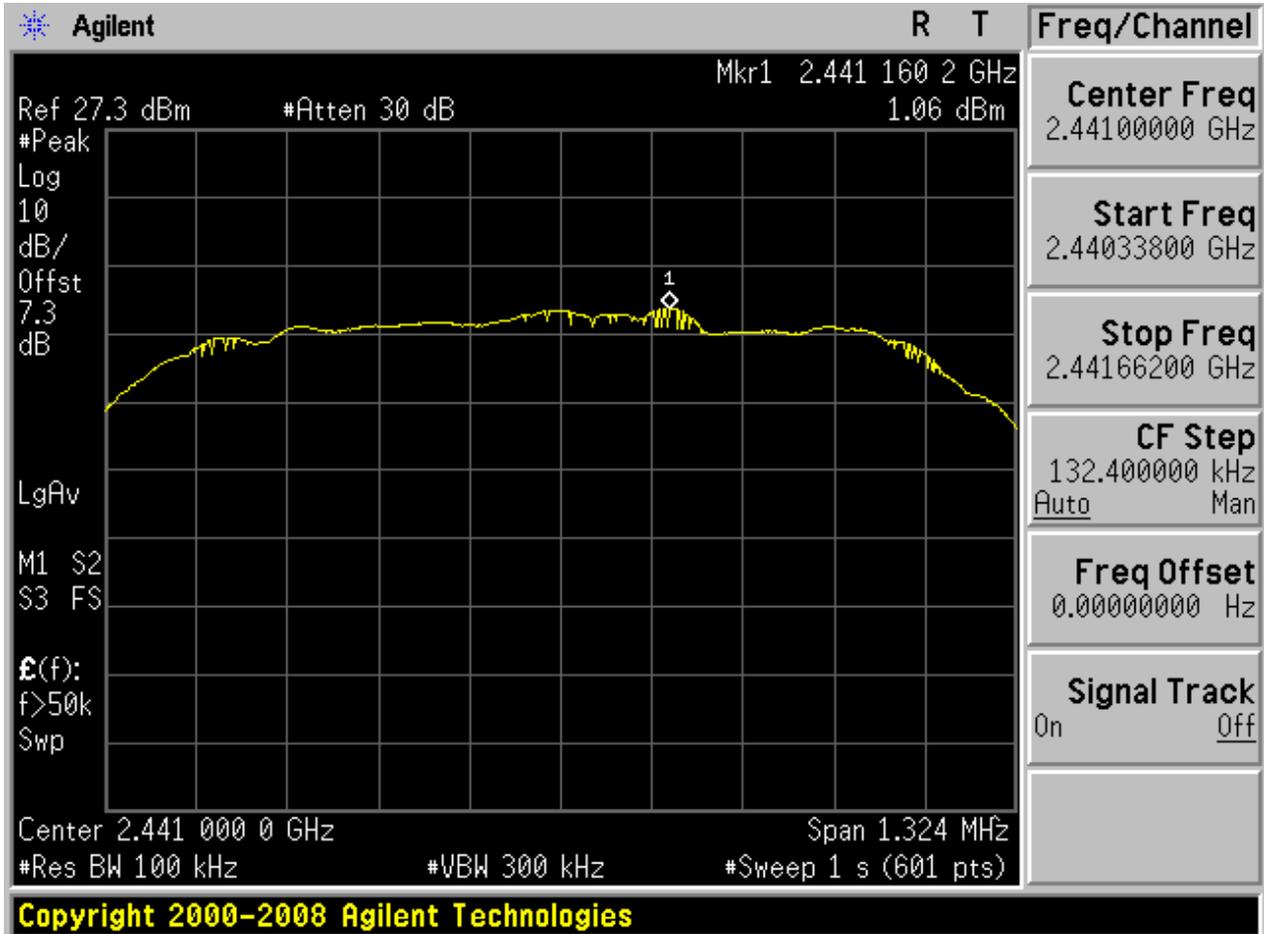



2.8.2 Puw

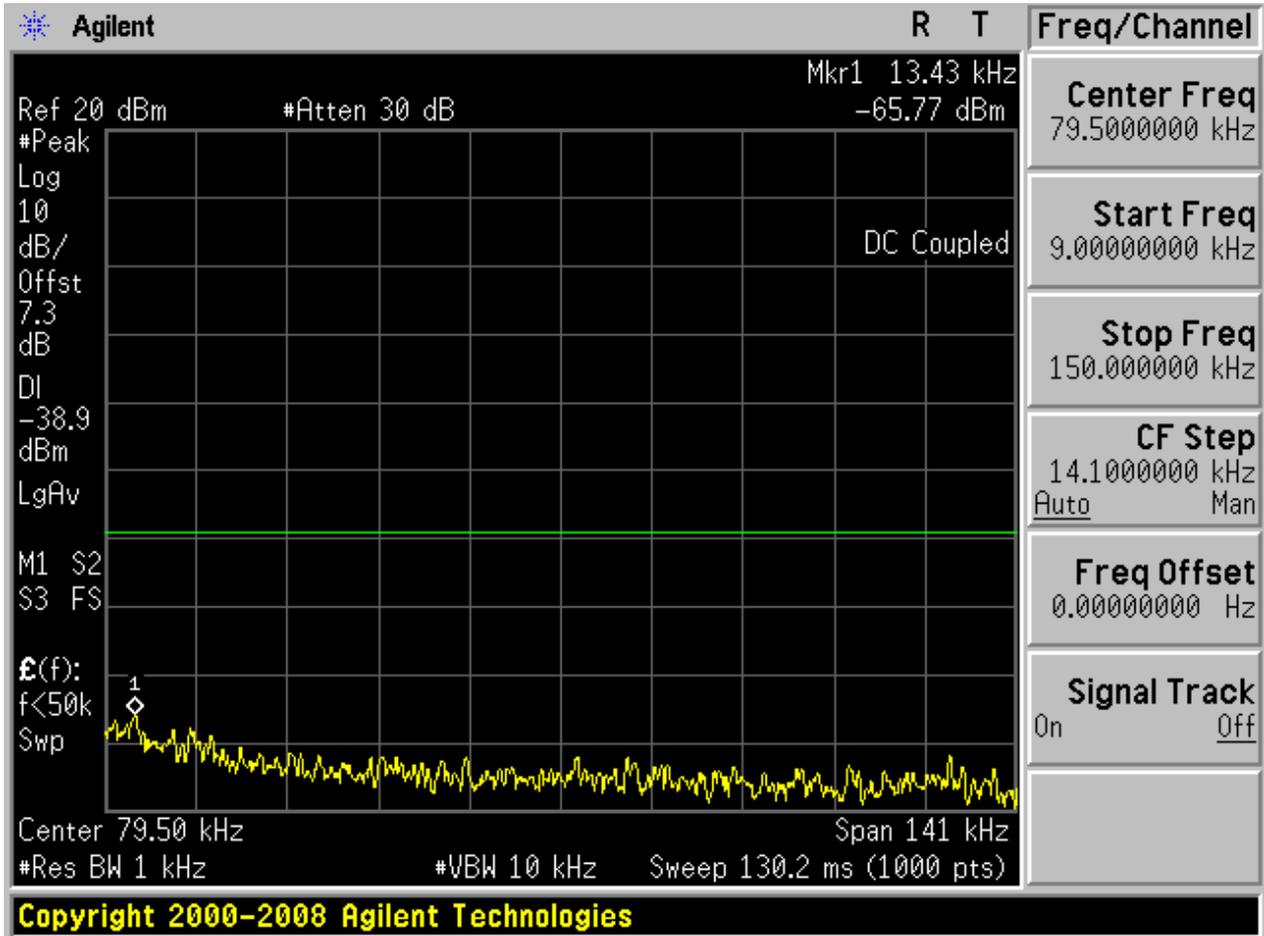


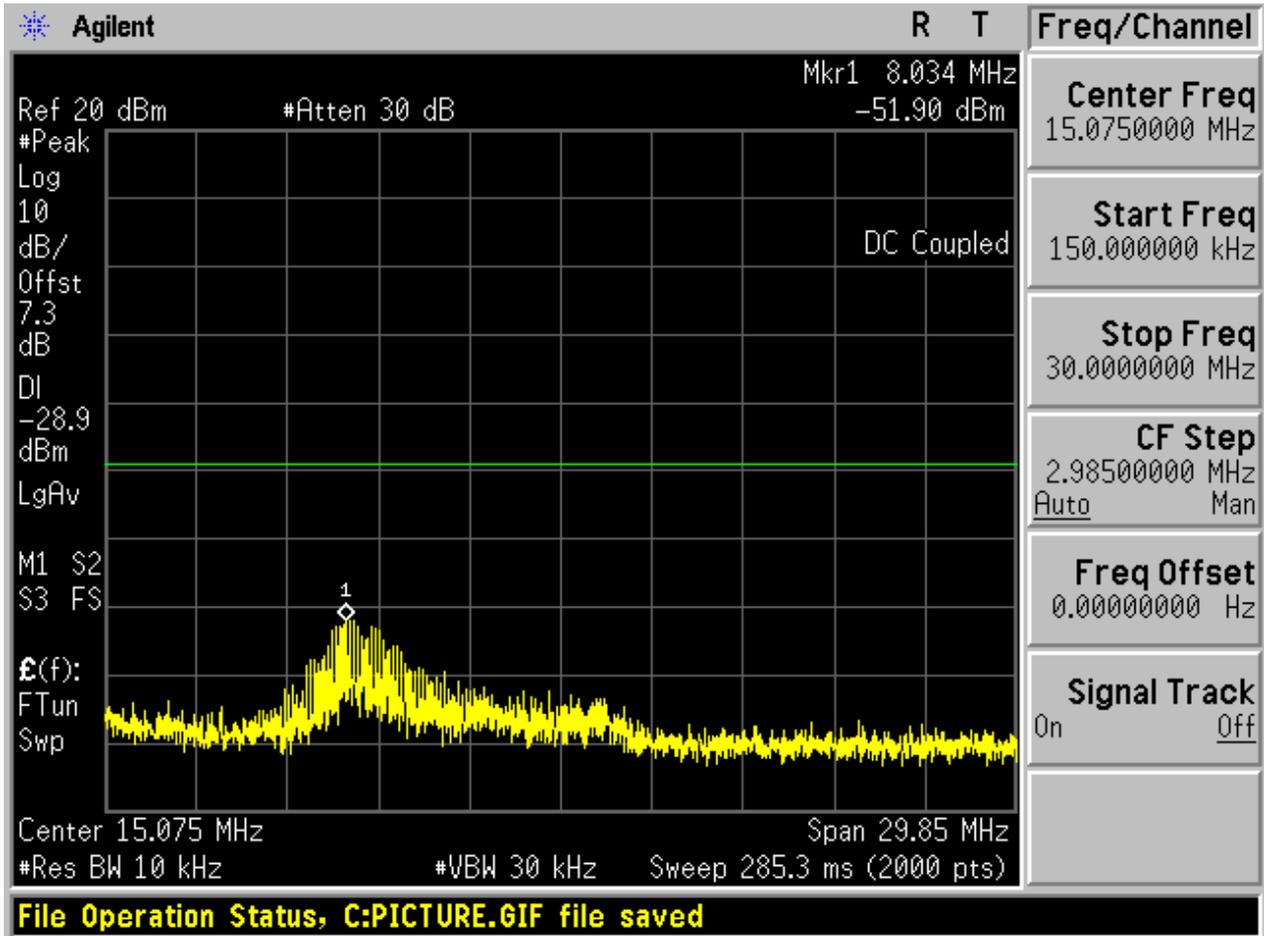

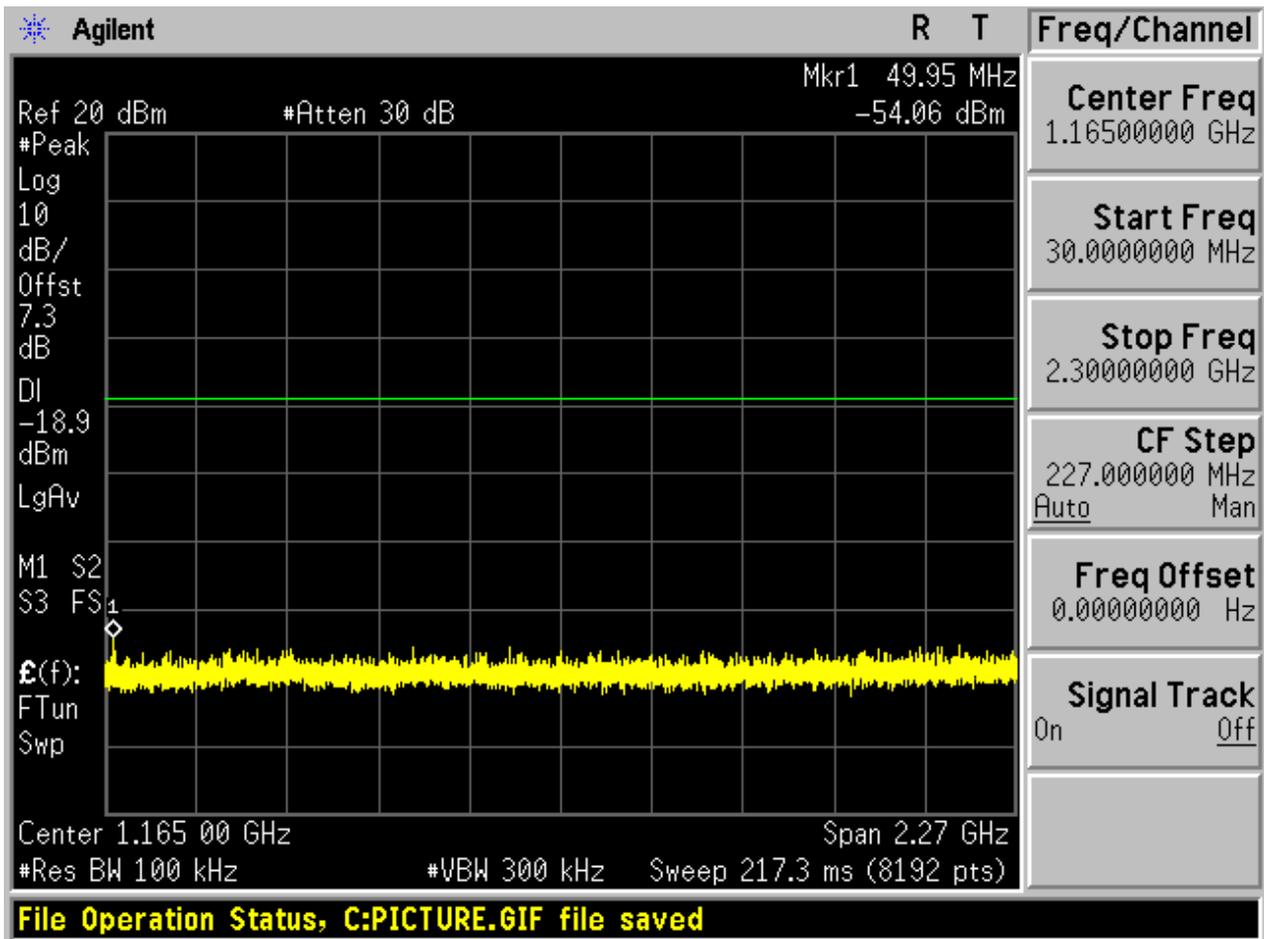

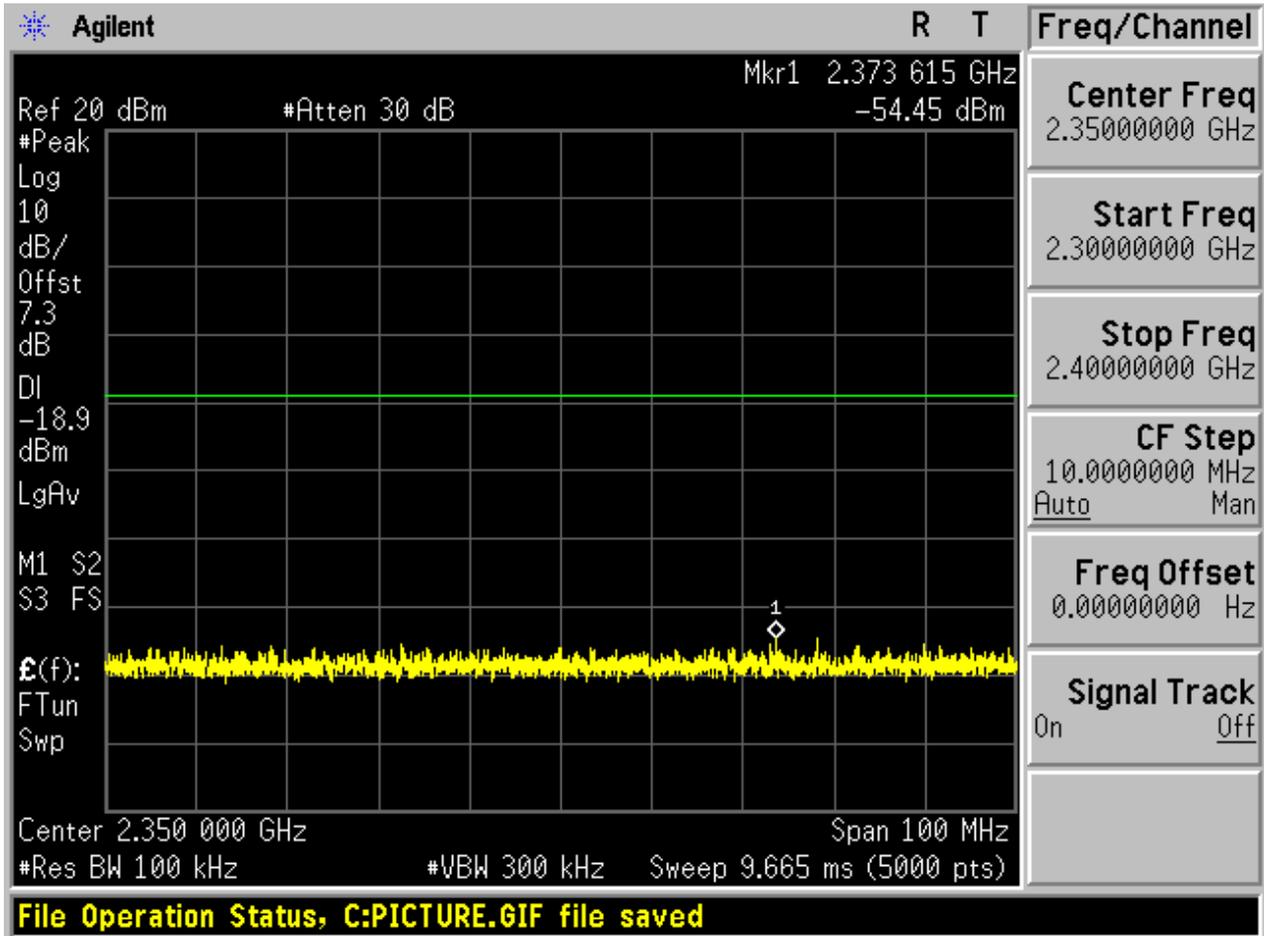


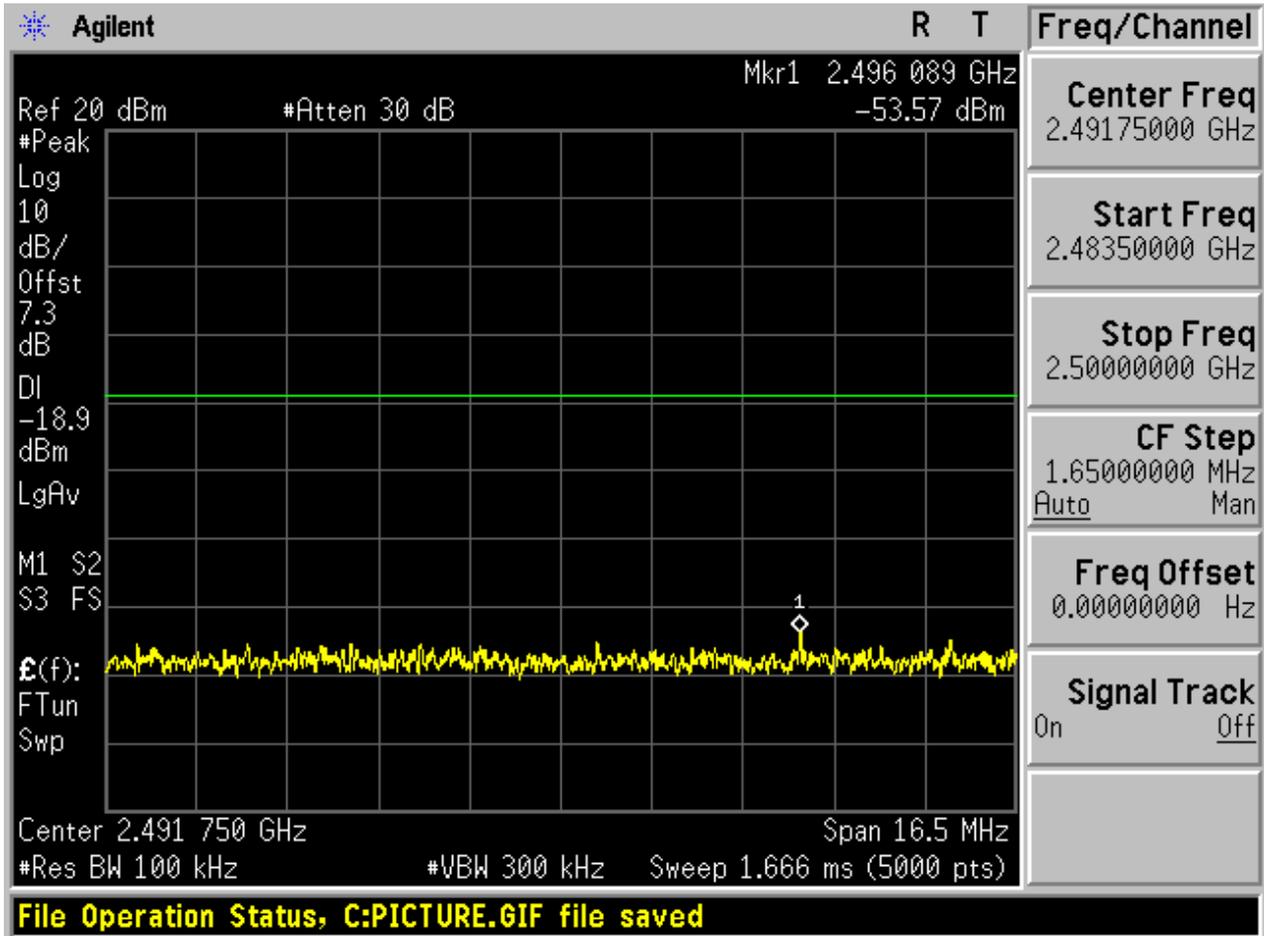

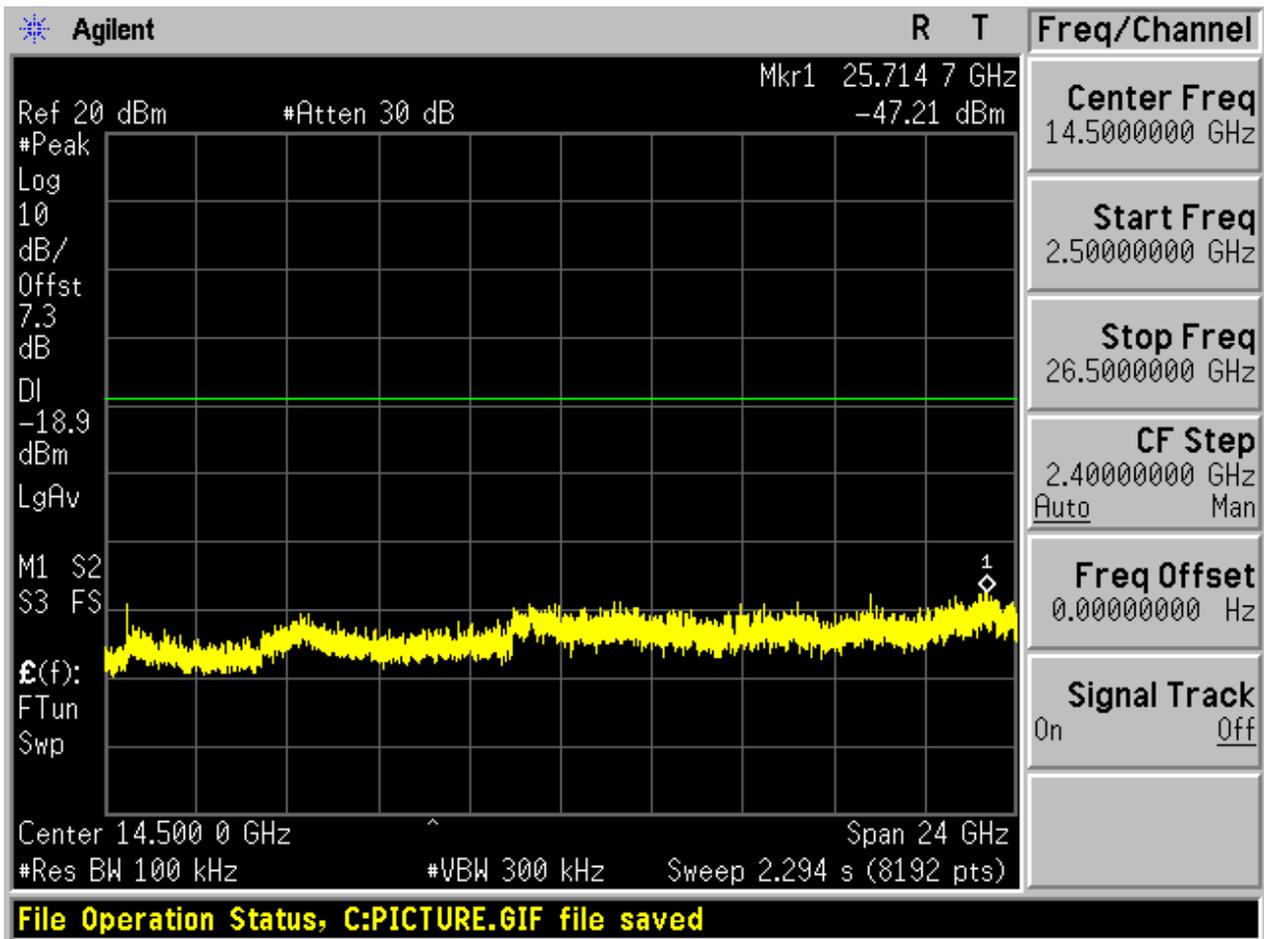



2.9 TM3_3DH5_Ch78


2.9.1 Pref

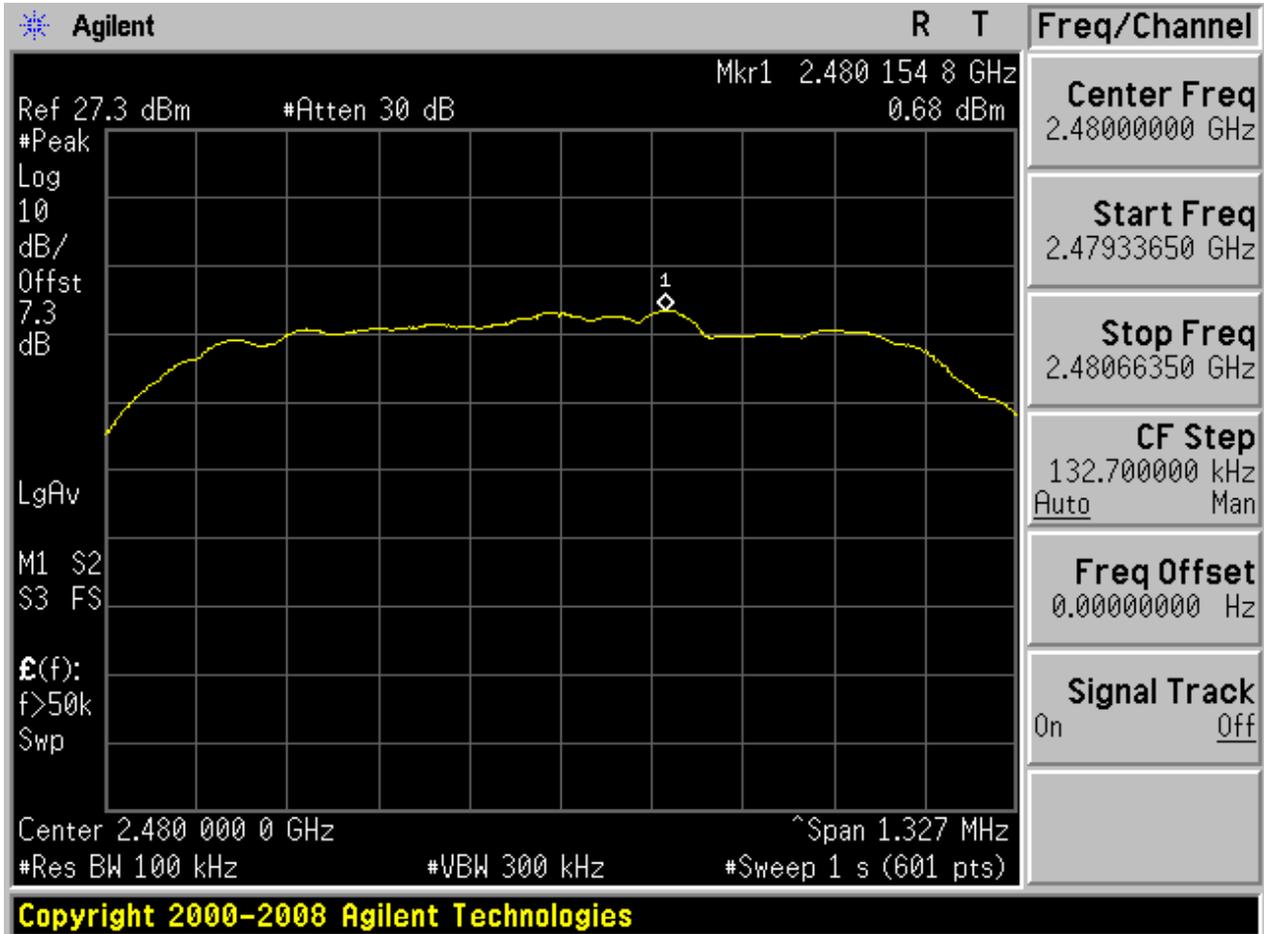



2.9.2 Puw

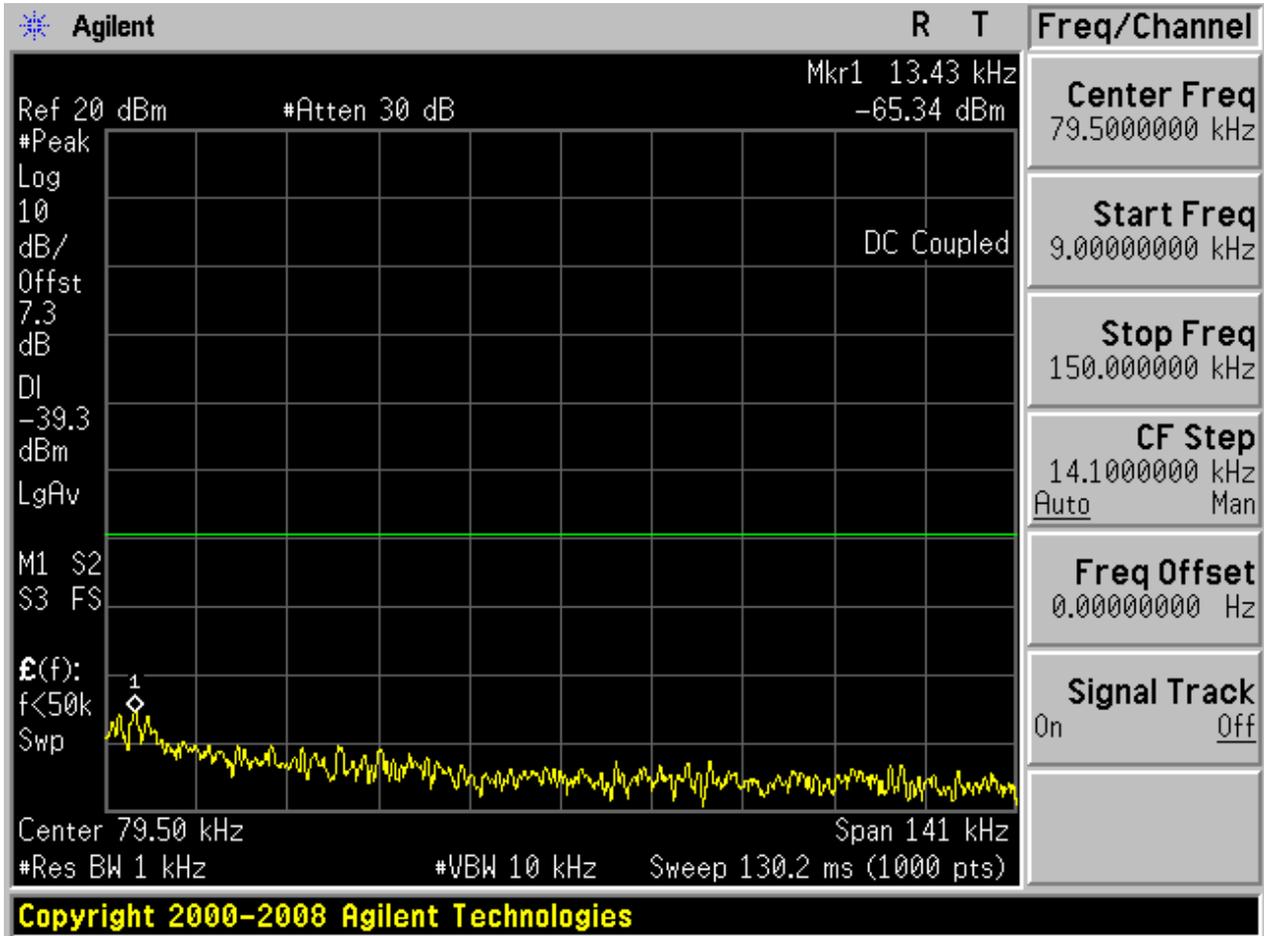


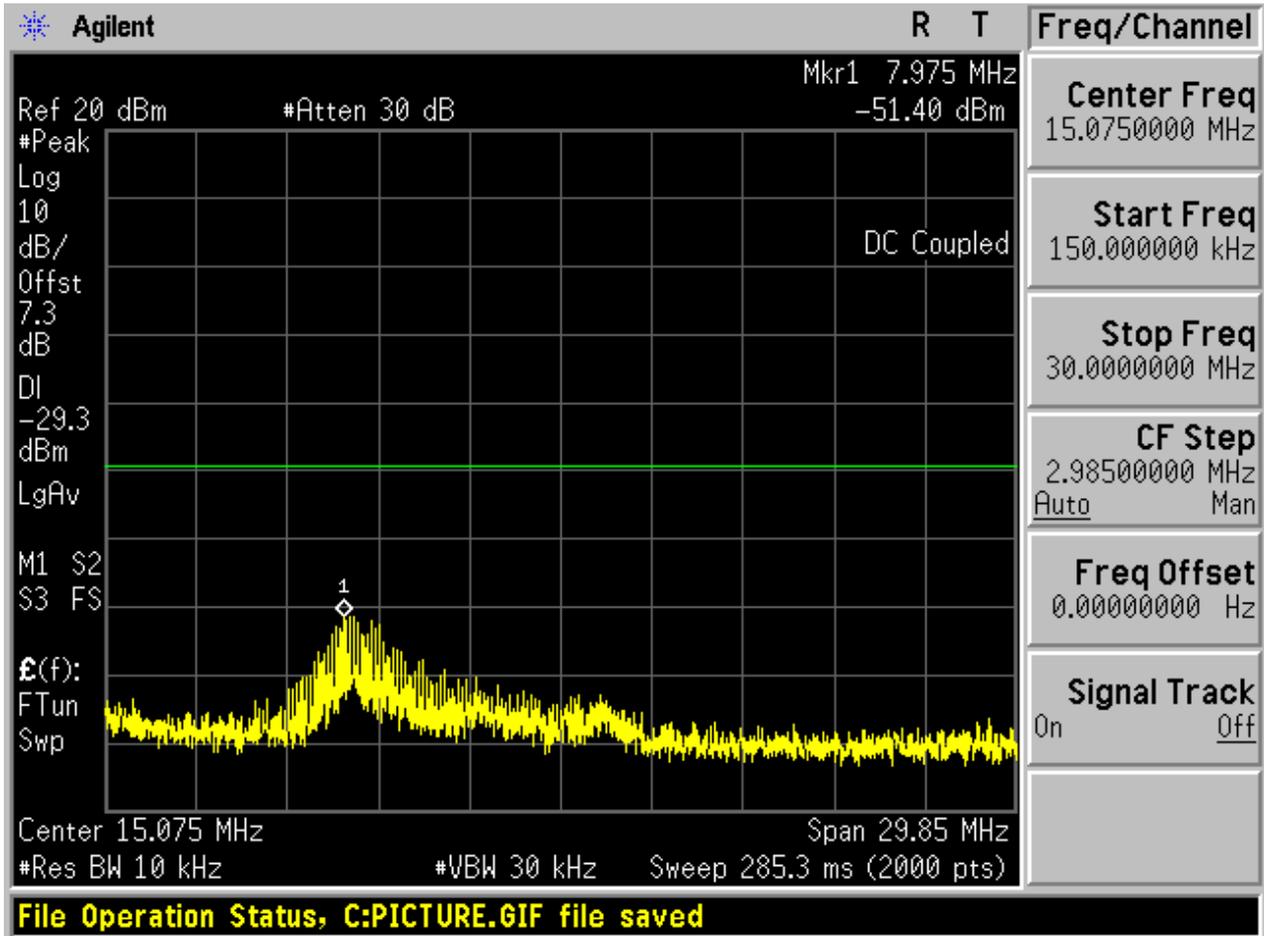

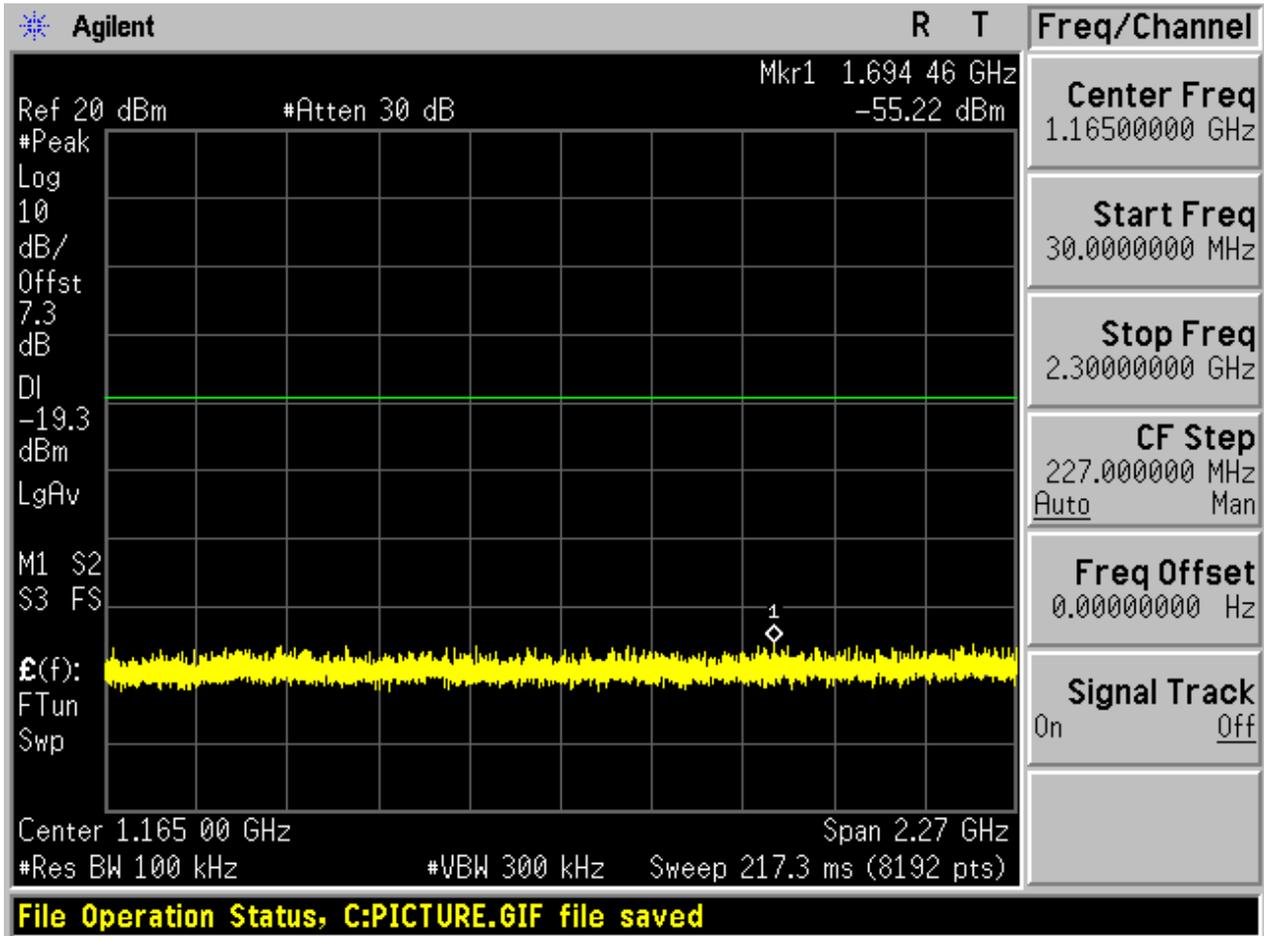

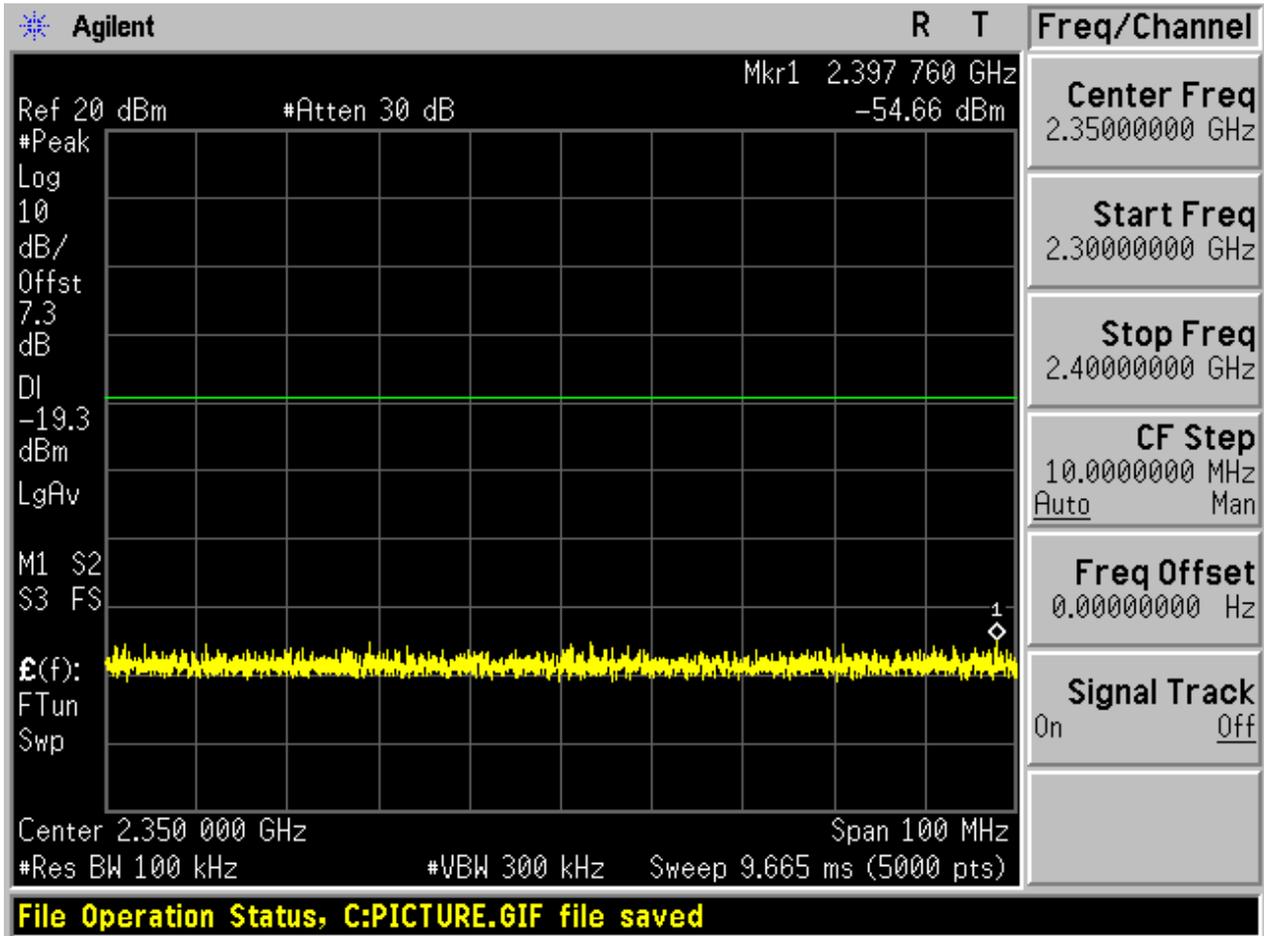

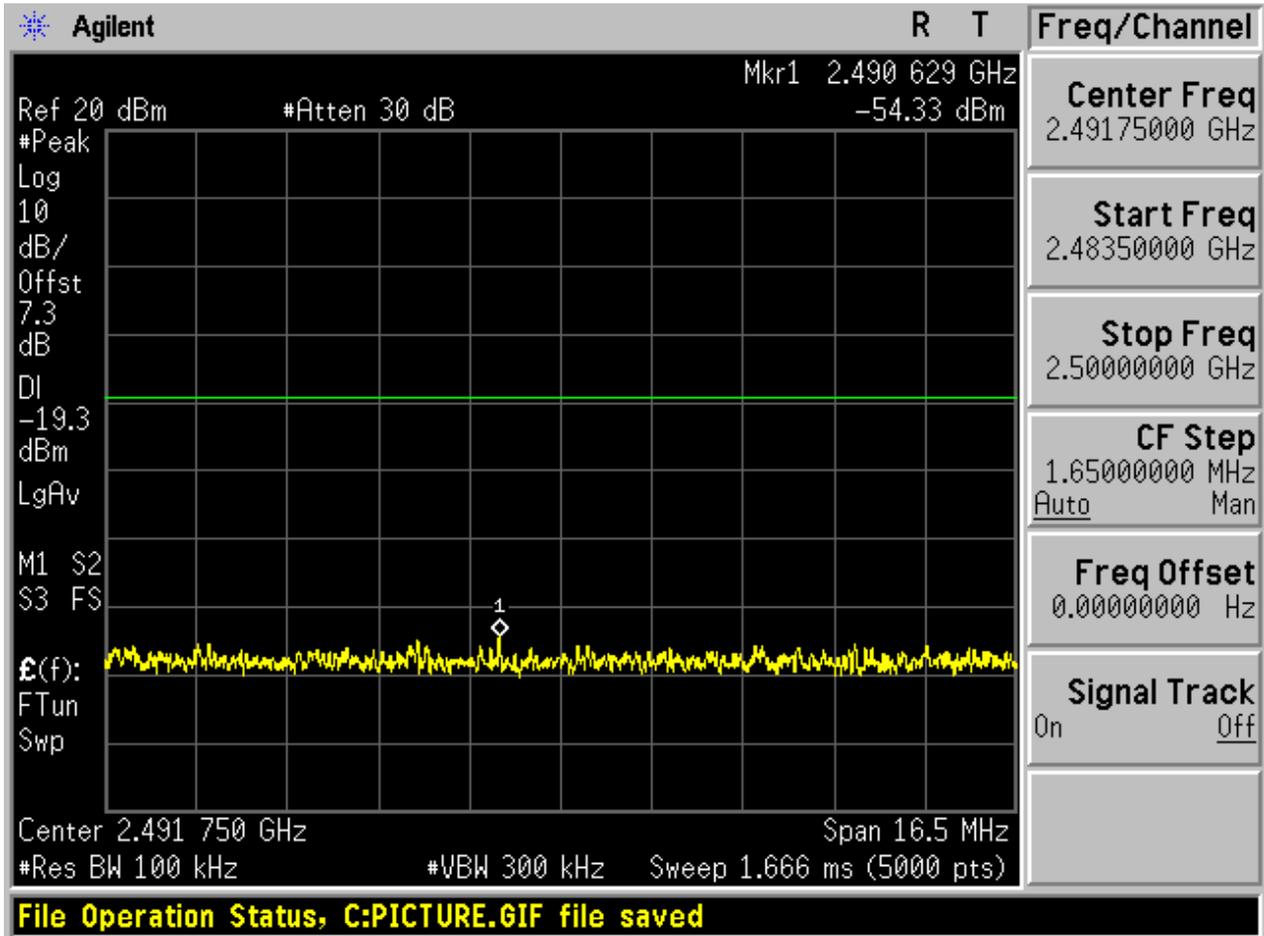

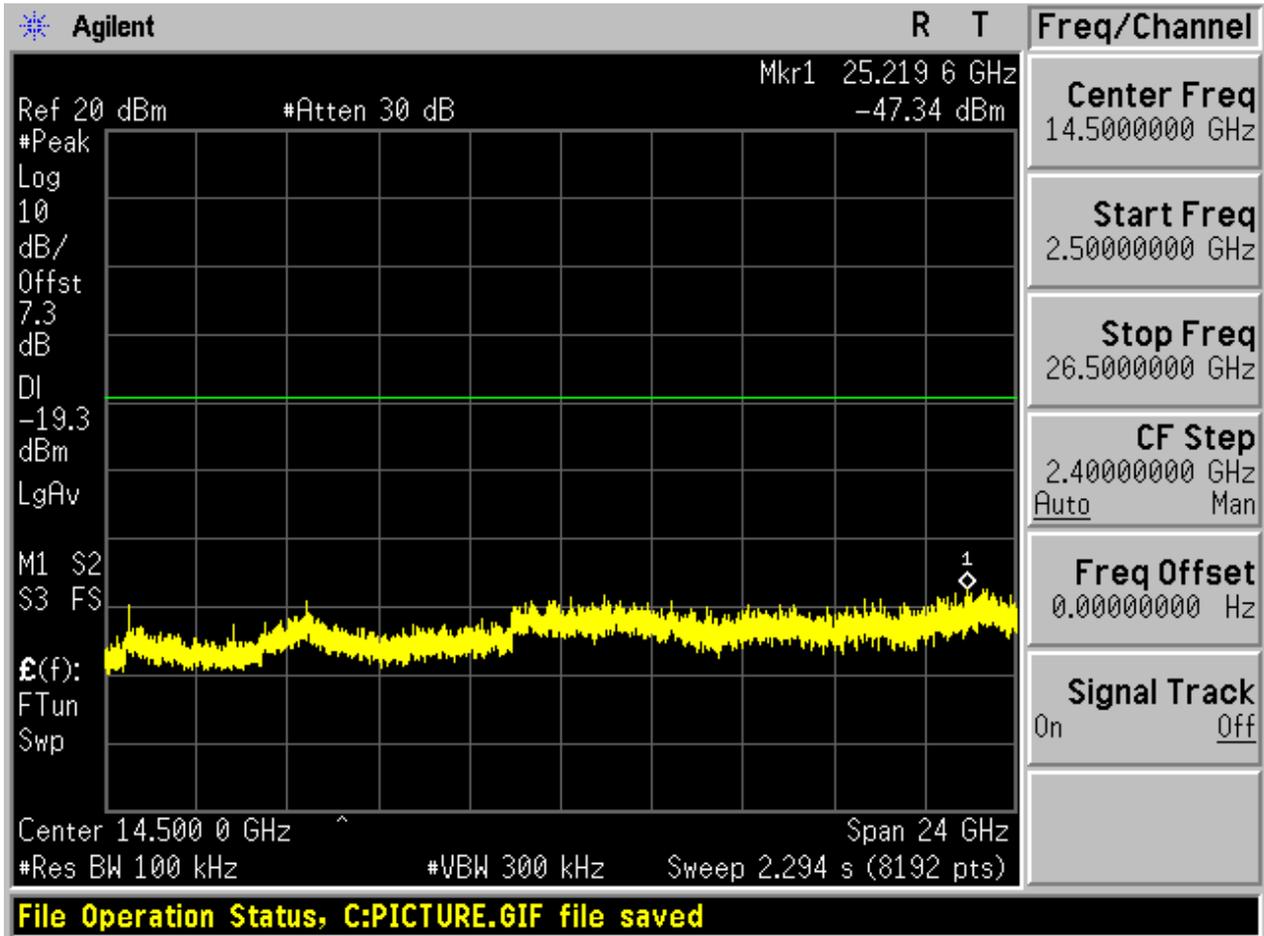

Appendix H: Radiated Emissions in the Restricted Bands

Note: We tested all modes, but the data presented below is the worst case.

3 Result Table

The whole testing range is from “30 MHz to 26.5 GHz (10th harmonics)” is divided into 4 parts according to the test site settings, which are:

- (Part 1): Test range of “9 KHz to 30 MHz”,
- (Part 2): Test range of “30 MHz to 1 GHz”,
- (Part 3): Test range of “18 GHz to 26.5 GHz”.
- (Part 4): Test range of “2.3 GHz to 2.5 GHz”, and
- (Part 5): Test range of “1 GHz to 18 GHz”.

In this Appendix, only the test results and plots under the worst case can be reported. In the result table, the “< Limit” denotes that “Not found obvious spikes or see marked spikes on plots and listed emissions records”.

Test Range	EUT Conf.	Emissions	Verdict
30 MHz to 1 GHz	TM1_DH5_Ch0 (Worst Conf.)	< Limit	Pass
18 GHz to 26.5 GHz	TM1_DH5_Ch0 (Worst Conf.)	< Limit	Pass
	TM1_DH5_Ch78 (Worst Conf.)	< Limit	Pass
2.3 GHz to 2.5 GHz	TM1_DH5_Ch0 (Worse Conf.)	< Limit	Pass
1 GHz to 18 GHz	TM1_DH5_Ch0 (Worst Conf.)	< Limit	Pass

4 Result Plot


Part 1: Testing Range of “9 kHz to 30MHz”

NOTE1: No peak found in the Test Range of “9 kHz to 30MHz”


Part 2: Testing Range of “30 MHz to 1 GHz”

Note 1: The test results and plot for testing range of “30 MHz to 1 GHz” showed as below is the WORST case for all Test Modes and Channels. This range will not be presented for each Test Mode and each Channel.

Note 2: The emissions in this range are mainly from the Platform Device (Notepad PC and its ancillary components).

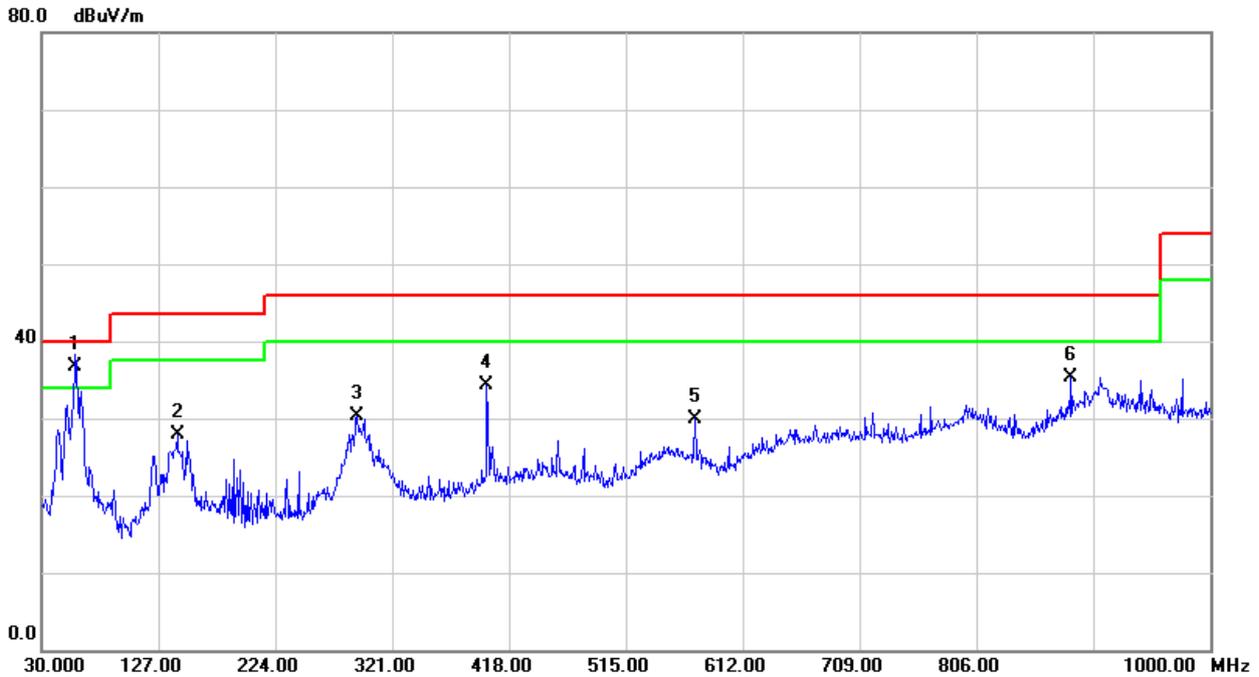


Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Plarization
58.1300	35.61	14.55	40.0	-4.39	VERTICAL
142.5200	27.96	14.34	43.50	-15.54	VERTICAL
291.9000	30.30	13.65	46.00	-15.70	VERTICAL
399.5700	34.21	11.10	46.00	-11.79	VERTICAL
572.2300	29.83	7.74	46.00	-16.17	VERTICAL
884.5700	35.30	3.15	46.00	-10.70	VERTICAL

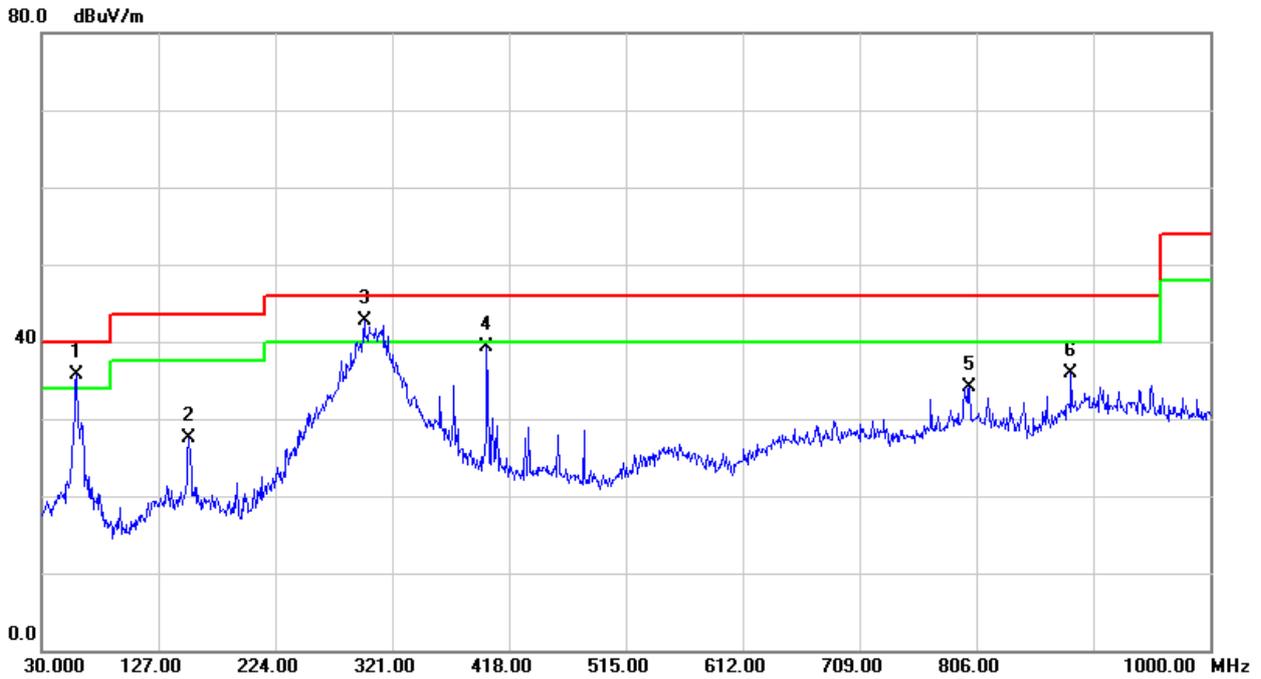


Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Plarization
59.1000	35.76	14.64	40.0	-4.24	HORIZONTAL
152.2200	27.41	14.03	43.50	-16.09	HORIZONTAL
297.7200	42.63	13.54	46.00	-3.37	HORIZONTAL
399.5700	39.34	11.10	46.00	-6.66	HORIZONTAL
572.2300	34.05	4.74	46.00	-11.95	HORIZONTAL
884.5700	35.95	3.15	46.00	-10.05	HORIZONTAL

Part 3: Testing Range of “18 GHz to 26.5 GHz”

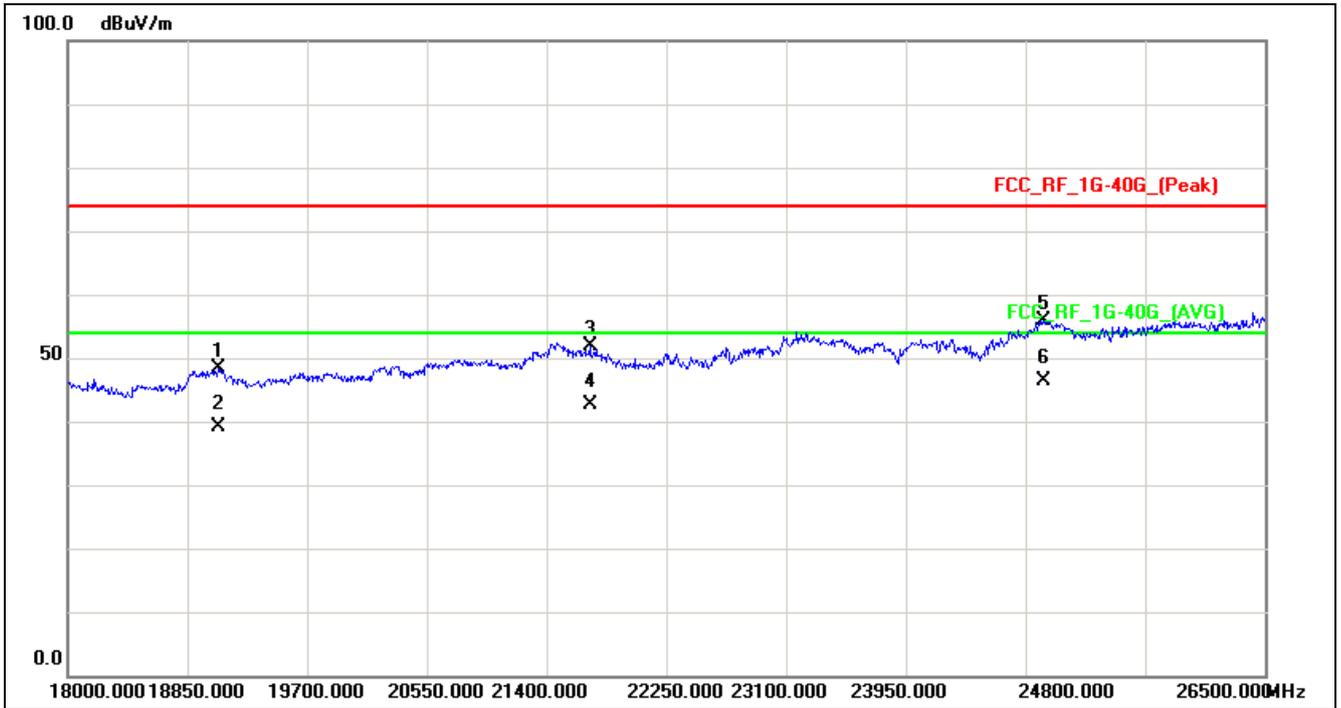

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
19066.750	V	26.86	21.61	48.47	74.00	-25.53	
19066.750	V	17.56	21.61	39.17	54.00	-14.83	
21706.000	V	29.69	22.14	51.83	74.00	-22.17	
21706.000	V	20.54	22.14	42.68	54.00	-11.32	
24931.750	V	30.12	25.76	55.88	74.00	-18.12	
24931.750	V	20.67	25.76	46.43	54.00	-7.57	

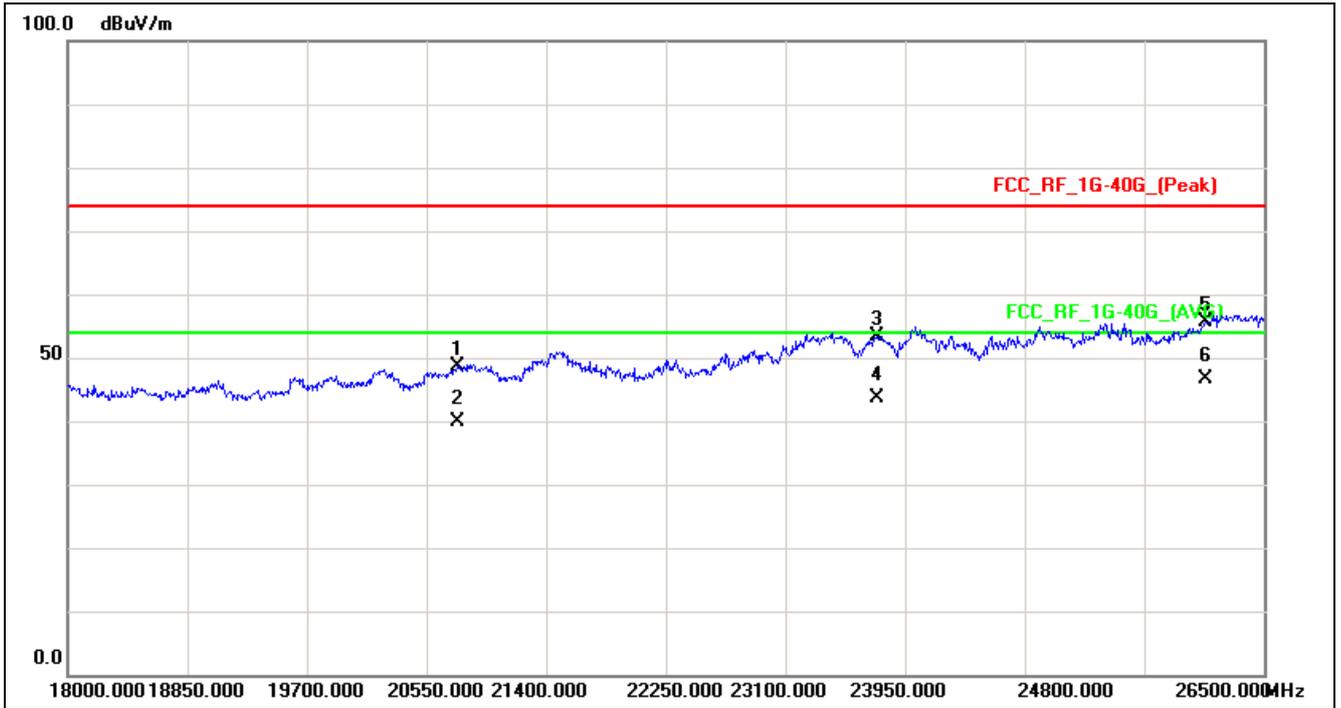


Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
20766.750	H	27.46	21.23	48.69	74.00	-25.31	
20766.750	H	18.67	21.23	39.90	54.00	-14.10	
23750.250	H	28.60	24.78	53.38	74.00	-20.62	
23750.250	H	18.86	24.78	43.64	54.00	-10.36	
26087.750	H	29.41	26.24	55.65	74.00	-18.35	
26087.750	H	20.27	26.24	46.51	54.00	-7.49	

Part 4: Testing Range of “2.3GHz to 2.5GHz”

- Note 1: The testing range of “2.3 GHz to 2.5 GHz” is for checking radiated emissions located in restricted bands near the EUT operating bands.
- Note 2: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dB μ V/m) and Average Limit (54 dB μ V/m).
- Note 3: The peak spike exceeds the limit line is EUT’s operating frequency.

Channel 0

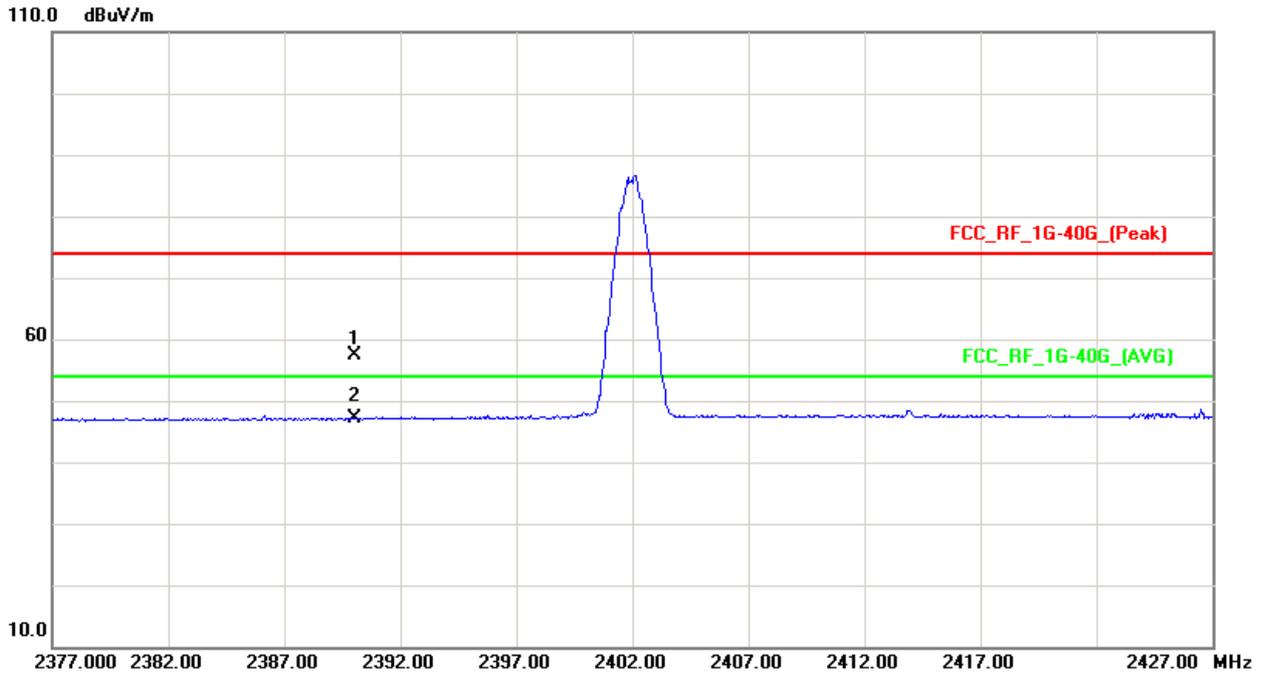


Note: The peak exceeds the limit line is carrier frequency.

MEASUREMENT RESULT: PK Detector

Frequency MHz	Level dB μ V/m	Transd dB	Limit dB μ V/m	Margin dB	Polarization
2390.000000	57.49	34.17	74.0	-16.51	VERTICAL

MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dB μ V/m	Transd dB	Limit dB μ V/m	Margin dB	Polarization
2390.000000	47.10	34.17	54.0	-6.90	VERTICAL

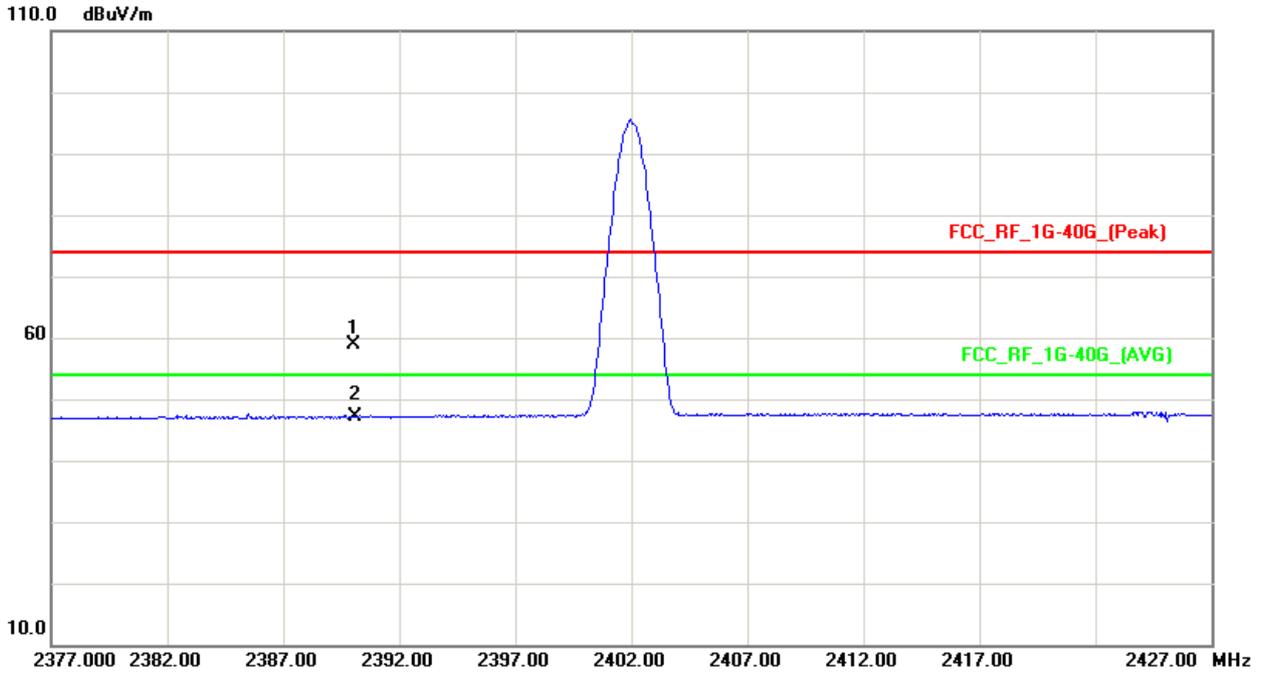

Note: The peak exceeds the limit line is carrier frequency.


MEASUREMENT RESULT: PK Detector

Frequency MHz	Level dB μ V/m	Transd dB	Limit dB μ V/m	Margin dB	Polarization
2390.000000	58.98	34.17	74.0	-15.02	HORIZONTAL

MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dB μ V/m	Transd dB	Limit dB μ V/m	Margin dB	Polarization
2390.000000	47.06	34.17	54.0	-6.94	HORIZONTAL

Channel 78

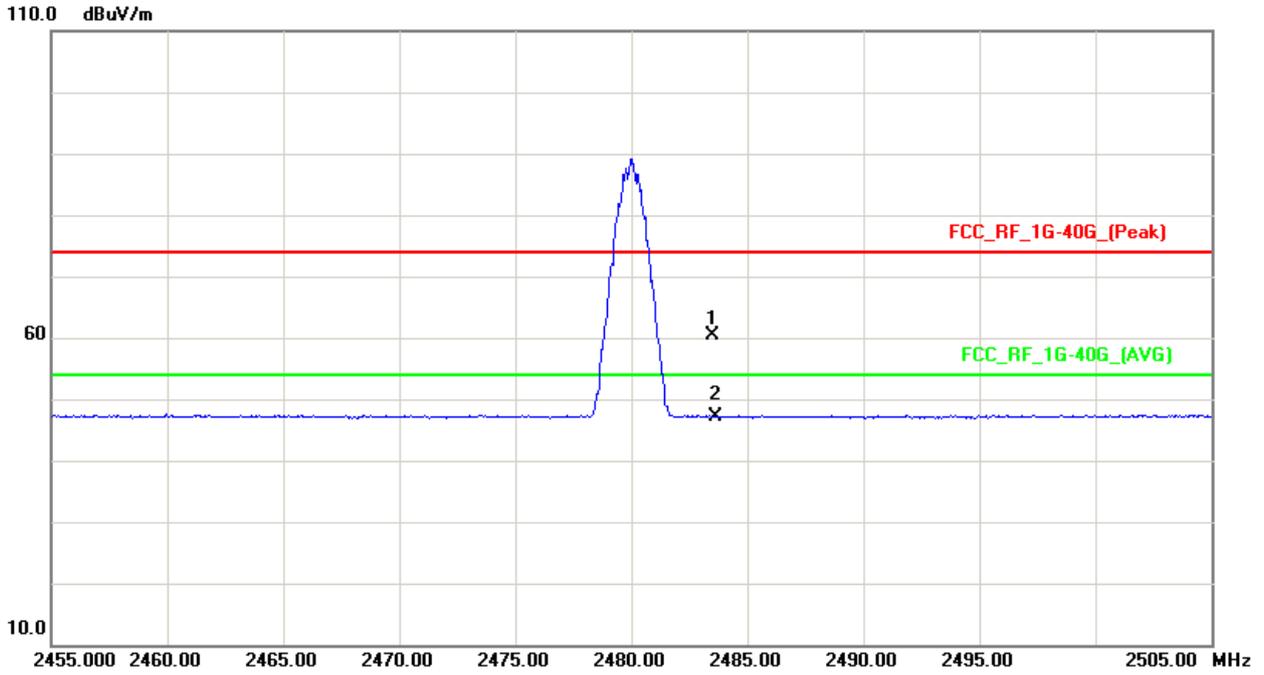


Note: The peak exceeds the limit line is carrier frequency.

MEASUREMENT RESULT: PK Detector

Frequency MHz	Level dB μ V/m	Transd dB	Limit dB μ V/m	Margin dB	Polarization
2483.500000	60.49	34.43	74.0	-13.51	VERTICAL

MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dB μ V/m	Transd dB	Limit dB μ V/m	Margin dB	Polarization
2483.500000	47.04	34.43	54.0	-6.96	VERTICAL

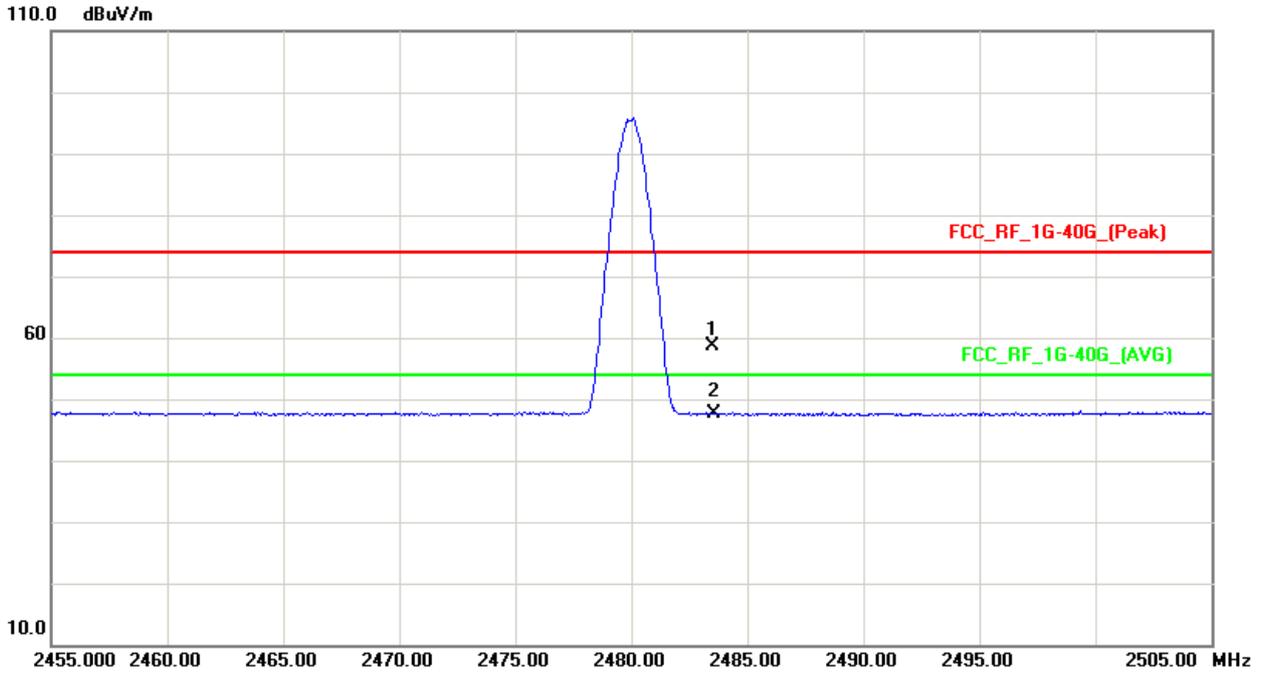

Note: The peak exceeds the limit line is carrier frequency.

MEASUREMENT RESULT: PK Detector

Frequency MHz	Level dB μ V/m	Transd dB	Limit dB μ V/m	Margin dB	Polarization
2483.500000	58.57	34.43	74.0	-15.43	HORIZONTAL


MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dB μ V/m	Transd dB	Limit dB μ V/m	Margin dB	Polarization
2483.500000	47.51	34.43	54.0	-6.49	HORIZONTAL

Part 5: Testing Range of “1 GHz to 18 GHz”


- Note 1: The test results and plot for testing range of “1 GHz to 18 GHz” showed as below is the WORST case for all Test Modes and Channels. This range will not be presented for each Test Mode and each Channel.
- Note 2: The testing range of “1 GHz to 18 GHz” is for checking radiated emissions located in restricted bands faraway from the EUT operating bands.
- Note 3: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dB μ V/m) and Average Limit (54 dB μ V/m).

Vertical

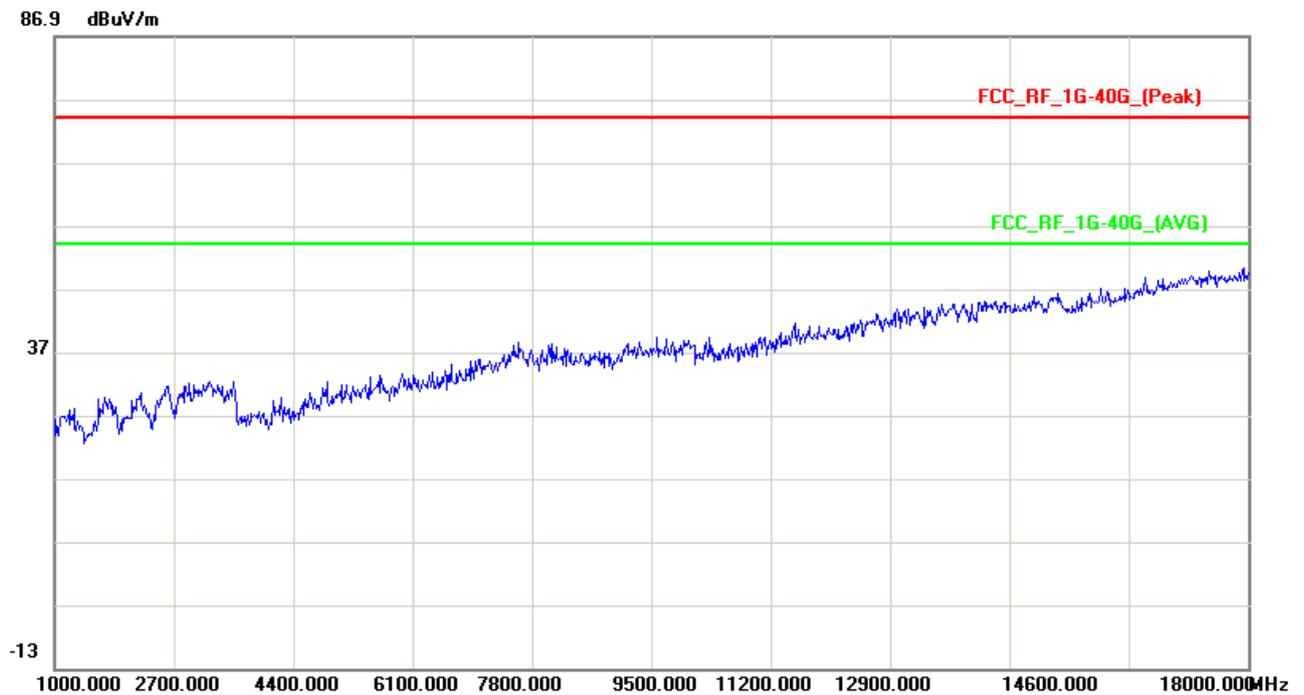

Horizontal

86.9 dBuV/m

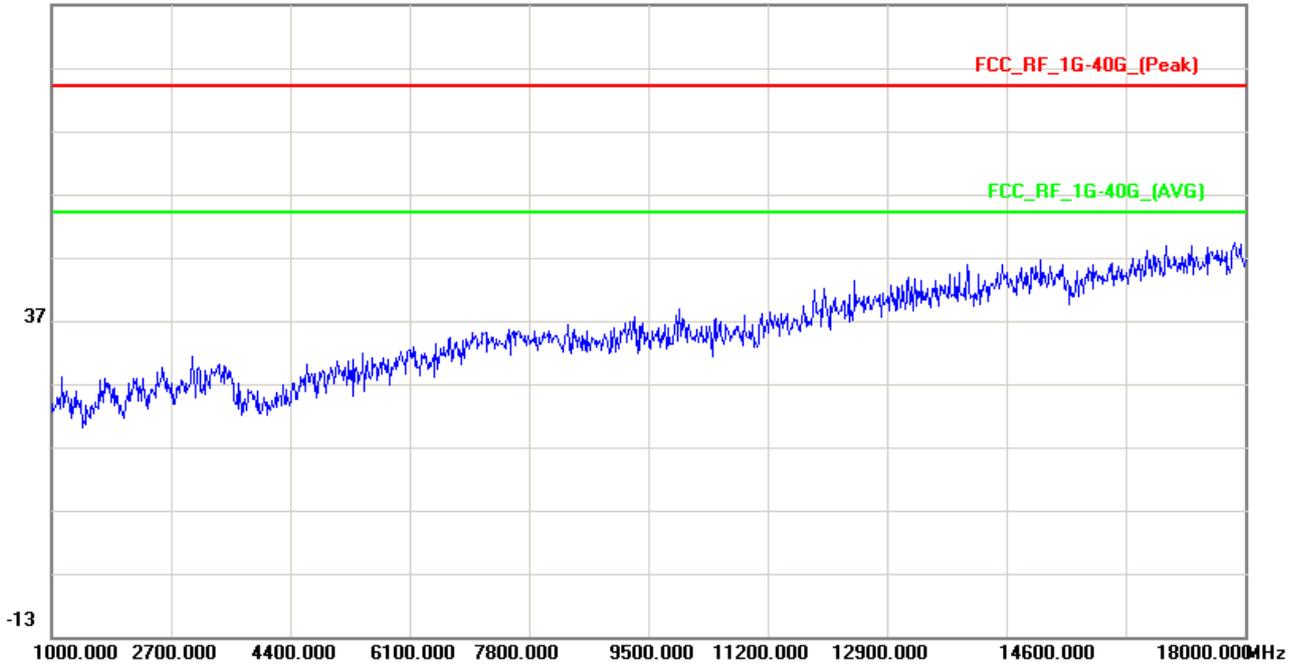



Appendix I: AC Power Line Conducted Emissions


5 Result Table

In this Appendix, only the test results and plots under the worst case can be reported.

EUT Conf.	Maximum Emissions	Verdict
TM1_DH5_Ch40	Not found obvious spikes or see marked spikes on plots and listed emissions records.	Pass

6 Result Plot

Channel 39

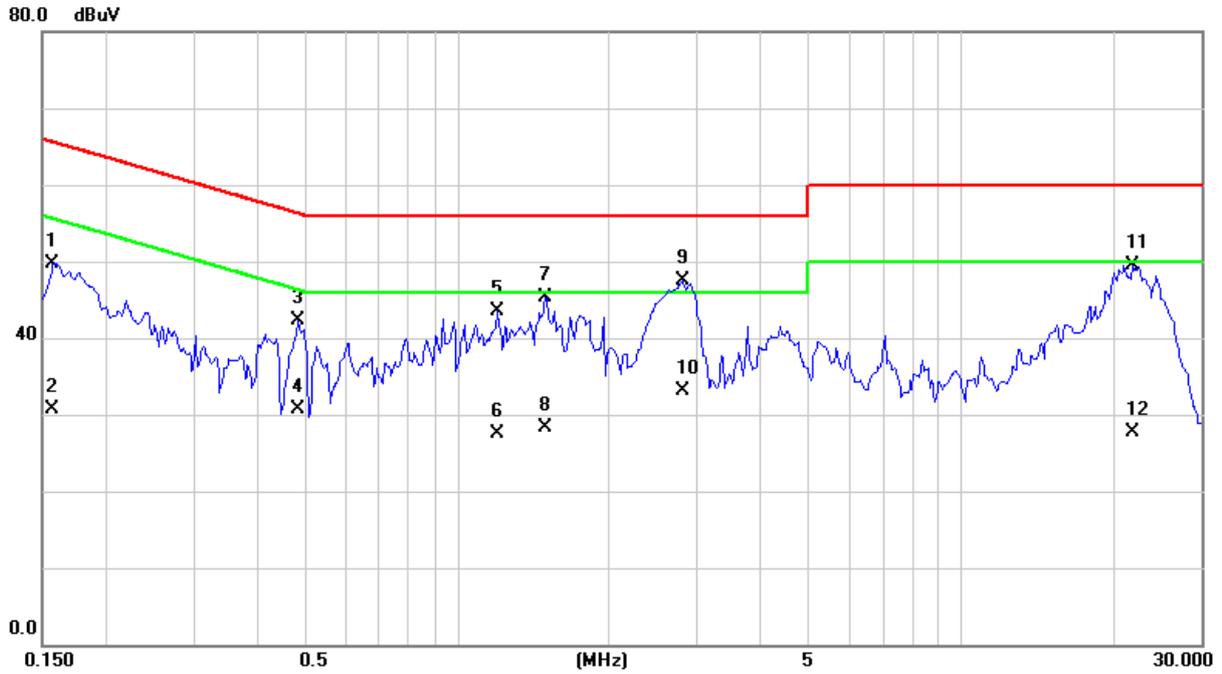


MEASUREMENT RESULT: QP Detector

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Line	PE
0.1578	49.76	9.48	65.58	-15.82	L1	FLO
0.4820	42.38	9.63	56.30	-13.92	L1	FLO
1.2008	43.44	9.63	56.0	-12.56	L1	FLO
1.5016	45.40	9.62	56.0	-10.06	L1	FLO
2.8062	47.41	9.62	56.0	-8.59	L1	FLO
21.9414	49.55	10.07	60.0	-10.45	L1	FLO

MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Line	PE
0.1578	30.78	9.48	55.58	-24.80	L1	FLO
0.4820	30.63	9.63	46.30	-15.67	L1	FLO
1.2008	27.53	9.63	46.0	-18.47	L1	FLO
1.5016	28.22	9.62	46.0	-17.78	L1	FLO
2.8062	33.02	9.62	46.0	-12.98	L1	FLO
21.9414	27.77	10.07	50.0	-22.23	L1	FLO

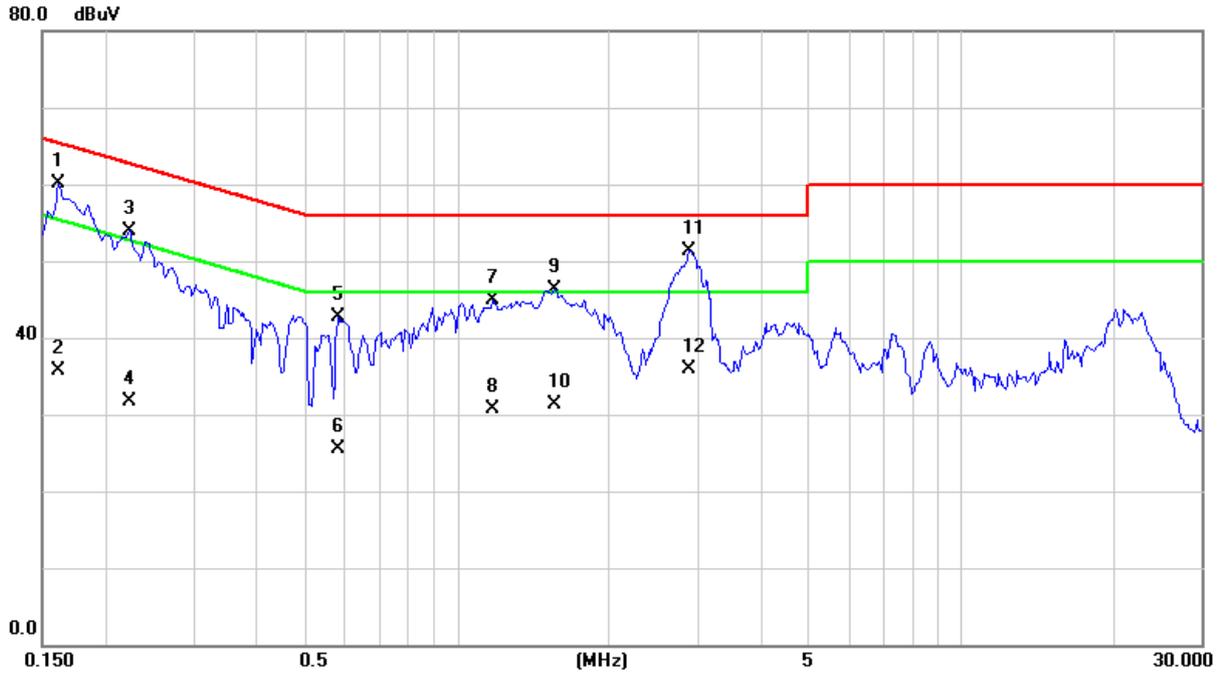

MEASUREMENT RESULT: QP Detector

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Line	PE
0.1617	60.06	9.59	65.38	-5.32	N	FLO
0.2242	53.90	9.57	62.66	-8.76	N	FLO
0.5797	42.66	9.58	56.0	-13.34	N	FLO
1.1773	44.90	9.61	56.0	-11.10	N	FLO
1.5680	46.38	9.62	56.0	9.62	N	FLO
2.8883	51.35	9.64	56.0	-4.65	N	FLO

MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Line	PE
0.1617	35.69	9.59	55.38	-19.69	N	FLO
0.2242	31.67	9.57	52.66	-20.99	N	FLO
0.5797	25.48	9.58	46.0	-20.52	N	FLO
1.1773	30.71	9.61	46.0	-15.29	N	FLO
1.5680	31.32	9.62	46.0	-14.68	N	FLO
2.8883	35.84	9.64	46.0	-10.16	N	FLO

END