



FCC&IC RF Test Report

Product Name:
**LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile
Phone with Bluetooth**

Model Number: HUAWEI U9202L-3, U9202L-3

Report No: SYBH(Z-RF)016082012-2001
FCC ID: QISU9202L-3
IC ID: 6369A-U9202L3

Reliability Laboratory of Huawei Technologies Co., Ltd.

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District,
Shenzhen, 518129, P.R.C

Tel: +86 755 28780808 Fax: +86 755 89652518

Notice

1. The laboratory has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS), and accreditation number: L0310.
2. The laboratory has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements. The site recognition number is 97456.
3. The laboratory has been listed by industry Canada to perform electromagnetic emission measurement. The site recognition number is 6369A-2.
4. The test report is invalid if not marked with "exclusive stamp for the test report".
5. The test report is invalid if not marked with the stamps or the signatures of the persons responsible for performing, revising and approving the test report.
6. The test report is invalid if there is any evidence of erasure and/or falsification.
7. If there is any dissidence for the test report, please file objection to the test centre within 15 days from the date of receiving the test report.
8. Normally, the test report is only responsible for the samples that have undergone the test.
9. Context of the test report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of the laboratory.



Contents

1	<u>General Information</u>	5
1.1	APPLIED STANDARD.....	5
1.2	TEST LOCATION.....	5
1.3	TEST ENVIRONMENT CONDITION	5
2	<u>Summary</u>	6
3	<u>Product Description</u>	7
3.1	PRODUCTION INFORMATION	7
4	<u>Test Description</u>	8
4.1	SUPPORTED FREQUENCY RANGE	8
4.2	TRANSMITTER / RECEIVER CHARACTERISTICS.....	8
4.3	ANTENNA GAIN.....	8
4.4	POWER SUPPLY	8
5	<u>General Test Conditions / Configurations</u>	9
5.1	RF CHANNELS UNDER TEST.....	9
5.2	TEST MODES.....	9
5.3	TEST ENVIRONMENTS	9
5.4	TEST SETUPS.....	11
5.5	TEST CONDITIONS	14
6	<u>Main Test Instruments</u>	16
7	<u>Test Results</u>	17
8	<u>Measurement Uncertainty</u>	17



1 General Information

1.1 Applied Standard	
Applied Rules:	47 CFR FCC Part 2:2011, Subpart J 47 CFR FCC Part 22:2011, Subpart H ANSI/TIA 603C:2004 RSS-Gen Issue 3 RSS-132 Issue 2
1.2 Test Location	
Test Location 1:	Reliability Laboratory of Huawei Technologies Co., Ltd.
Address:	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C
1.3 Test Environment Condition	
Ambient Temperature:	20 – 25 °C
Ambient Relative Humidity:	45 – 55 %
Atmospheric Pressure:	101 kPa

2 Summary

Table 1 Summary of results

Test Case	FCC Part No.	Requirements	Result
Cellular Band			
Transmitter Output Power	2.1046 & 22.913	ERP not exceed 7 W	Pass
Modulation Characteristics	2.1047	Digital modulation	Pass
Occupied Bandwidth	2.1049	(Not specified)	Pass
Band Edges Compliance	2.1051 & 22.917	Below -13 dBm/1%*EBW, in 1 MHz range	Pass
Spurious Emission at Antenna Terminals	2.1051 & 22.917	Below -33 dBm/1 kHz, 9 kHz to 150 kHz Below -23 dBm/10 kHz, 150 kHz to 30 MHz Below -13 dBm/100 kHz, 30 MHz to 10 th harmonics	Pass
Field Strength of Spurious Radiation	2.1053 & 22.917	Below -13 dBm/100 kHz	Pass
Frequency Stability	2.1055 & 22.355	Maintained within the tolerances of ± 2.5 ppm	Pass

Table 2 Summary of results

Test Case	IC Standard No.	Requirements	Result
Cellular Band			
Transmitter Output Power	RSS-Gen, §4.8; RSS-132, §4.4	EIRP not exceed 11.5 W	Pass
Modulation Characteristics	RSS-132, §4.2	Digital modulation	Pass
Occupied Bandwidth	RSS-Gen, §4.6	(Not specified)	Pass
Band Edges Compliance	RSS-Gen, §4.9; RSS-132, §4.5	Below -13 dBm/1%*EBW, in 1 MHz range	Pass
Spurious Emission at Antenna Terminals	RSS-Gen, §4.9; RSS-132, §4.5	Below -33 dBm/1 kHz, 9 kHz to 150 kHz Below -23 dBm/10 kHz, 150 kHz to 30 MHz Below -13 dBm/100 kHz (EBW \leq 4 MHz), 30 MHz to 5 th harmonics Below -43 dBm/1 kHz, 9 kHz to 150 kHz Below -33 dBm/10 kHz, 150 kHz to 30 MHz Below -13 dBm/1 MHz (EBW > 4 MHz), 30 MHz to 5 th harmonics	Pass
Field Strength of Spurious Radiation	RSS-Gen, §4.9; RSS-132, §4.5	Below -13 dBm/100 kHz (EBW \leq 4 MHz) Below -13 dBm/1 MHz (EBW > 4 MHz)	Pass
Frequency Stability	RSS-Gen, §4.7; RSS-132, §4.3	Maintained within the tolerances of ± 1.5 ppm	Pass
Receiver Spurious Emissions (Conducted)	RSS-Gen, §4.10; RSS-Gen, §6; RSS-132, §4.6	Below 2 nW/4 kHz (-57 dBm/4 kHz), for 30 MHz - 1000 MHz Below 5 nW/MHz (-53 dBm/MHz), for above 1 GHz	Pass

3 Product Description

3.1 Production Information

3.1.1 General Description

HUAWEI U9202L-3, U9202L-3 is subscriber equipment in the LTE/UMTS/GSM system. The LTE frequency band is Band IV and Band XVII. The HSPA+/HSUPA/HSDPA/UMTS frequency band is Band I, Band II, Band IV and Band V. Only Band V can be used in this report. The GSM/GPRS/EDGE frequency band includes GSM850 and DCS1800 and PCS1900, but only GSM850MHz band test data included in this report. The Mobile Phone implements such functions as RF signal receiving/transmitting, LTE/UMTS/GSM protocol processing, voice, video, MMS service, GPS, AGPS and WIFI etc. Externally it provides micro SD card interface, earphone port (to provide voice service) and USIM card interface. It also provides Bluetooth module to synchronize data between a PC and the phone, or to use the built-in modem of the phone to access the Internet with a PC, or to exchange data with other Bluetooth devices.

3.1.2 Board Information

Table 3 Board Information

LTE/HSPA+/HSUPA/HSDPA/UMTS/GSM/GPRS/EDGE Mobile Phone with Bluetooth		
HUAWEI U9202L-3, U9202L-3		
Board and Module		
Hardware Version	Software Version	Description
Ver.B	U9202L-3V100R001C00B116	Main board of Mobile Phone

3.1.3 Adapter Technical Data

AC/DCAdapter Model	HW-050100U3W
Input Voltage	~100-240V 50/60Hz 0.2A
Output Voltage	5V  1A
Rated Power	5W

3.1.4 Battery Technical Data

Name	Manufacture	Description
Rechargeable Li-ion	Huawei Technologies Co., Ltd.	Battery Model: HB5R1H Rated capacity: 1930mAh Nominal Voltage:  +3.7V Charging Voltage:  +4.2V

4 Test Description

4.1 Supported Frequency Range

Characteristics	Description
Downlink	869 to 894 MHz;
Uplink	824 to 849 MHz

4.2 Transmitter / Receiver Characteristics

Characteristics	Description
System Type	GSM UMTS
TX Output Power (per Antenna Port)	GSM system: 32dBm; UMTS system: 23dBm;
Channel Spacing(s) / Bandwidth(s)	GSM system: 200 kHz UMTS system: 5 MHz
Designation of Emissions	GSM system: 247KGXW (GMSK modulation), 254KG7W (8PSK modulation) UMTS system: 4M19F9W

4.3 Antenna Gain

Antenna Gain(dBi)	-2
Antenna Gain(dBd)	-4.15

4.4 Power Supply

Specification	Description
Power Supply Type	Directly Connected to DC /AC Power Supply
Input to EUT (DC power)	DC Voltage Nominal: \approx 3.7 V DC Voltage Range: \approx 3.5 V to 4.2 V
Input to EUT (AC power)	AC Voltage Nominal: ~ 120 V (50/60 Hz) AC Voltage Range: ~100-240V

5 General Test Conditions / Configurations

5.1 RF Channels under Test

Test Mode	TX / RX	RF Channel		
		Bottom (B)	Middle (M)	Top (T)
TM1/TM2	TX	Channel 128	Channel 192	Channel 251
		824.2MHz	837.0MHz	848.8MHz
	RX	Channel 128	Channel 192	Channel 251
		869.2MHz	882.0MHz	893.8MHz
TM3/TM4/TM5	TX	Channel 4132	Channel 4182	Channel 4233
		826.4MHz	836.4MHz	846.6MHz
	RX	Channel 4357	Channel 4407	Channel 4458
		871.4MHz	881.4MHz	891.6MHz

5.2 Test Modes

Test Mode	Test Modes Description
TM1	GSM/GPRS, GMSK modulation
TM2	EDGE, 8PSK modulation
TM3	WCDMA, QPSK modulation
TM4	HSDPA, QPSK modulation
TM5	HSUPA, QPSK modulation

Note:

HSPA+ implementation of this device, 16QAM is not used for uplink. The uplink Category and release number is same as HSUPA, RF test is evaluation is not required.

5.3 Test Environments

Environment Parameter	Selected Values During Tests	
Relative Humidity	Ambient	
Temperature	TN	Ambient
Voltage	VL	3.5V
	VN	3.7V
	VH	4.2V

NOTE: VL= lower extreme test voltages

VN= nominal voltage




VH= upper extreme test voltage
TN= normal temperature

5.4 Test Setups


5.4.1 General Test Setup Configurations

Configuration	Description
Test Antenna Ports	Until otherwise declared, all TX tests are ONLY performed at the main Transmitter antenna port (e.g. TRXA, TXA and so on) of the EUT, and all RX tests are ONLY performed at the main Receiver antenna port (e.g. TRXA, RXA and so on) of the EUT.
Multiple RF Sources	Other than the tested RF source of the EUT, other RF source(s) are disabled or shutdown during measurements.

5.4.2 Test Setup 1

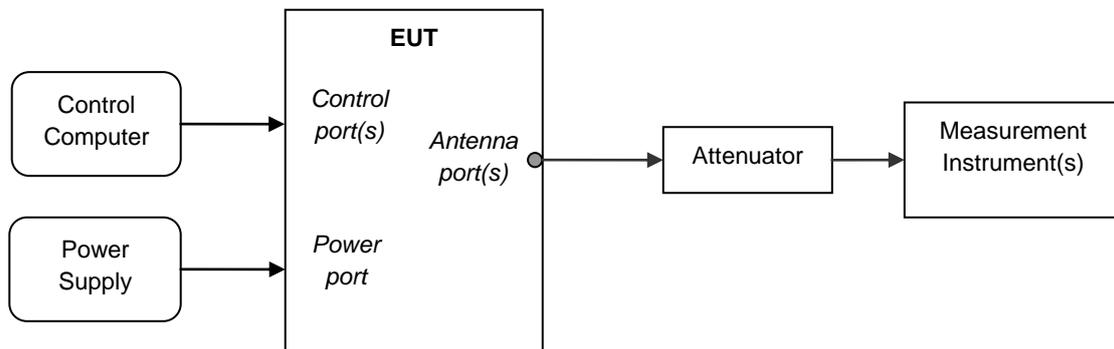

5.4.3 Test Setup 2

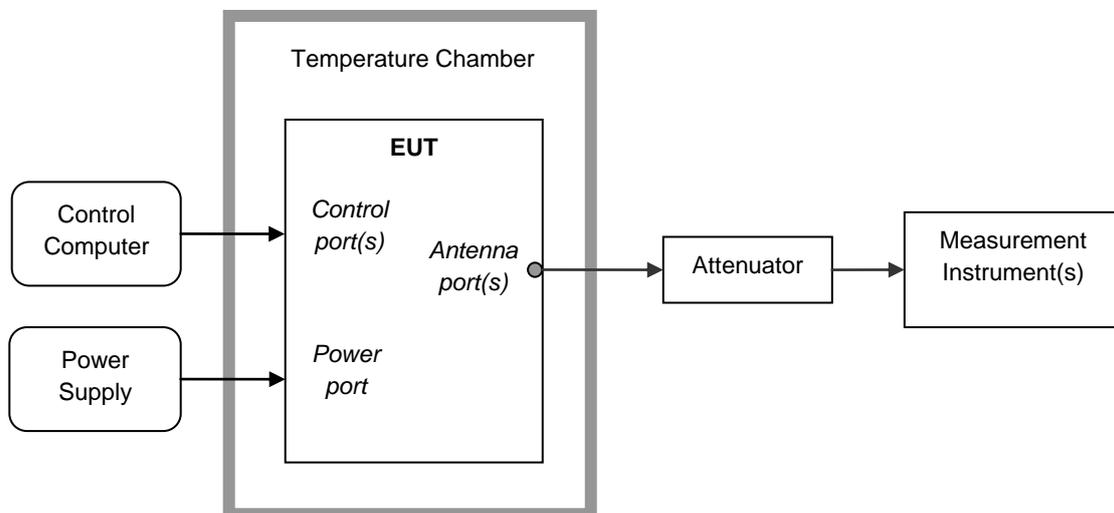

5.4.4 Test Setup 3


NOTE1: Effective radiated power (ERP) or Effective Isotropic radiated power (EIRP) refers to the EUT radiation power output, assuming all emissions are radiated from half-wave dipole antennas or horn antennas.

NOTE2: The EUT was set on insulator 80cm above the Ground Plane. The setup and test methods were according to ANSI-TIA-603C 2004. The measurements were carried through with a Rohde and Schwarz Test Receiver and control software.

Step 1: Pre-test

1. Connect the test system according to the following figure. EUT is running for 30 minutes before test, and measurement instruments are warming-up for 30 minutes.
2. Set up communication link between Universal radio communication tester and EUT, set EUT working frequency, and control EUT to transmit at maximum power.
3. Set the center frequency of the signal analyzer or receiver to the EUT's operating frequency, the RBW is equal to the emission bandwidth of the signal. Set RMS detector for the test, and the span is equal to 2 times of emission bandwidth, the other settings should remain automatic. Normally, the height range of antenna was 1m to 4m, the azimuth range of turntable was 0° to 360°. The receiver antenna has two polarizations V and H. A portable or small unlicensed wireless device shall be placed on a non-metallic test fixture or other non-metallic support during testing. The supporting fixture shall permit orientation of the EUT in each of three orthogonal (x, y, z) axis positions such that emissions from the EUT are maximized. Measure the EUT maximum RF power and record the result.
4. Changing EUT working frequency and measuring the RF power at channel T, M, B respectively. Complete the test data.


Step 1: Pre-test

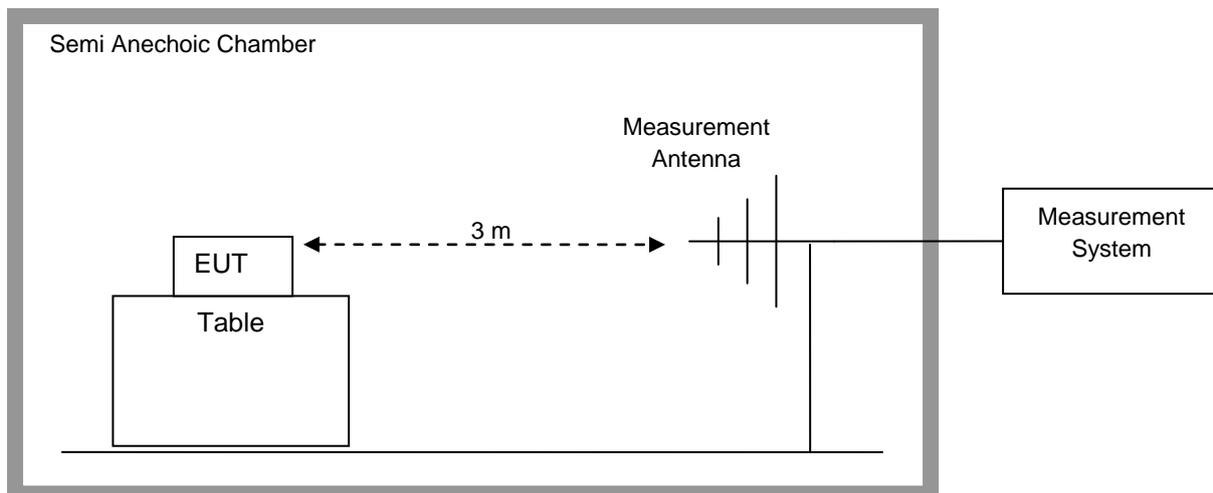

Step 2: Substitution method to verify the maximum ERP

1. Measurement setup is according to the following figure. EUT was substituted by antenna, and the polarization is identical with the test antenna; the signal generator was connected to the substitution antenna.
2. The radiated output power, measured by signal analyzer set, is the same as recorded in above. Then

this power level is matched by a signal from a calibrated signal generator which is substituted for EUT. The power supplied by the generator is then equal to the ERP or EIRP after corrected by the antenna gain and cable loss.

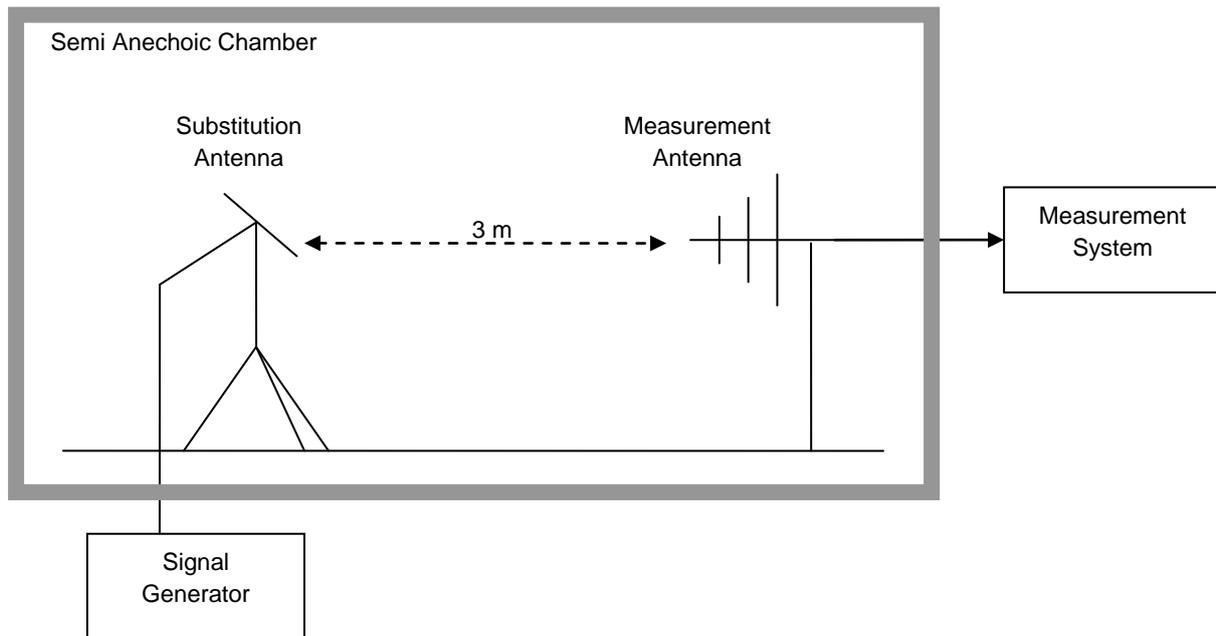

5.5 Test Conditions

Test Case	Test Conditions	
Transmitter Output Power	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1 & Test Setup 3
	Detector	RMS
	RF Channels (TX)	B, M, T
	Test Mode	TM1/TM2/TM3/TM4/TM5
Modulation Characteristics	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	RF Channels (TX)	M
	Test Mode	TM1/TM2/TM3
Occupied Bandwidth	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	Detector	RMS
	RF Channels (TX)	B, M, T
	Test Mode	TM1/TM2/TM3
Band Edges Compliance	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	Detector	RMS
	RF Channels (TX)	B, T
	Test Mode	TM1/TM2/TM3
Spurious Emission at Antenna Terminals	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	Detector	PK
	RF Channels (TX)	B, M, T
	Test Mode	TM1/TM2/TM3
Field Strength of Spurious Radiation	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 3
	Detector	PK
	RF Channels (TX)	M
	Test Mode	TM1/TM2/TM3/TM4/TM5
Frequency Stability	Test Configuration	(1) -30 °C to +50 °C with step 10 °C at Rated Voltage; (2) VL, VH and VN Voltage at Ambient Temperature.
	Test Setup	Test Setup 2
	RF Channels (TX)	M



Test Case	Test Conditions	
	Test Mode	TM1/TM2/TM3
Receiver Spurious Emissions	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 3
	Detector	QP,PK, AV
	RF Channels (TX)	M
	Test Mode	TM1/TM2/TM3/TM4/TM5

6 Main Test Instruments

Table 4 Main Test Equipments

Equipment Description	Manufacturer	Model	Serial Number	Calibrated until
Power supply	KEITHLEY	2303	1288003	Sept., 27,2012
Universal Radio Communication Tester	R&S	CMU200	117341	Jan., 12,2013
Universal Radio Communication Tester	Agilent	E5515C	MY50260239	Aug., 30,2013
Spectrum Analyzer	Agilent	E4440A	MY49420179	Jul., 17,2013
Signal Analyzer	Agilent	N9020A	MY52090652	Jul., 17,2013
Signal Analyzer	R&S	FSQ31	200021	Sept., 27,2012
Temperature Chamber	WEISS	WKL64	24600294	Feb.,13,2013
Signal generator	Agilent	E8257D	MY49281095	Jul.,09,2013
Spectrum analyzer	R&S	FSU3	200474	Mar., 05, 2013
Spectrum analyzer	R&S	FSU43	100144	Mar., 05, 2013
Double-Ridged Waveguide Horn Antenna (1G~18GHz)	R&S	HF907	100304	Apr., 05, 2013
Double-Ridged Waveguide Horn Antenna (1G~18GHz)	R&S	HF907	100391	Apr., 05, 2013
Trilog Broadband Antenna (30M~3GHz)	SCHWARZBECK	VULB 9163	9163-521	Jul., 07, 2013
Pyramidal Horn Antenna(26GHz-40GHz)	ETS-Lindgren	3160-10	00123940	Feb., 27, 2013
Pyramidal Horn Antenna(18GHz-26.5GHz)	ETS-Lindgren	3160-09	00125912	Feb., 27, 2013

Note: All the equipments are calibrated once a year. When it's almost due, we will arrange calibration again before the calibration deadline.



7 Test Results

No.	Test Item	Test Result
1	Transmitter Output Power	Appendix A
2	Modulation Characteristics	Appendix B
3	Occupied Bandwidth	Appendix C
4	Band Edges Compliance	Appendix D
5	Spurious Emission at Antenna Terminals	Appendix E
6	Field Strength of Spurious Radiation	Appendix F
7	Frequency Stability	Appendix G
8	Receiver Spurious Emissions	Appendix H
9	Photos of Test Setup	Appendix I

NOTE: The Appendix I is only photos Field Strength of Spurious Radiation and Receiver Spurious Emissions test setup, no test data.

8 Measurement Uncertainty

For a 95% confidence level (k=2), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

Test Item		Extended Uncertainty
Transmitter Output Power	Power (dBm)	U =0.39 dB
Occupied Bandwidth	Magnitude (%)	U=0.2%
Band Edge Compliance	Disturbance Power (dBm)	U=2.0 dB
Conducted Spurious Emissions	Disturbance Power (dBm)	U=2.0 dB
Field Strength of Spurious Radiation	ERP (dBm)	U=4.6 dB (30 MHz – 1GHz) U=3.0 dB (above 1 GHz)
Frequency Stability	Frequency Accuracy (ppm)	U=0.21 ppm

-----The END-----



Appendix A

Transmitter Output Power

According to FCC Part 2.1046 & Part22.913 & RSS-132



Conducted Power of Transmitter

TEST CONDITIONS		RF Output Power (Conducted)					
		Channel128(B) 824.2MHz		Channel192(M) 837.0MHz		Channel251(T) 848.8MHz	
		dBm		dBm		dBm	
T_{nom} / V_{nom}		Measured	Limit	Measured	Limit	Measured	Limit
TM1		32.01	38.5	31.91	38.5	31.79	38.5
TM2		26.79	38.5	26.77	38.5	26.71	38.5
TEST CONDITIONS		Channel4132(B) 826.4MHz		Channel4182(M) 836.4MHz		Channel4233(T) 846.6MHz	
		dBm		dBm		dBm	
		T_{nom} / V_{nom}		Measured	Limit	Measured	Limit
TM3		23.67	38.5	23.48	38.5	23.58	38.5
TM4	Case1	22.61	38.5	22.47	38.5	22.45	38.5
	Case2	22.28	38.5	22.19	38.5	22.24	38.5
	Case3	21.8	38.5	21.53	38.5	21.61	38.5
	Case4	21.83	38.5	21.52	38.5	21.57	38.5
TM5	Case1	21.82	38.5	21.77	38.5	22.04	38.5
	Case2	19.47	38.5	19.21	38.5	19.38	38.5
	Case3	20.99	38.5	20.32	38.5	21.17	38.5
	Case4	21.61	38.5	21.45	38.5	21.79	38.5
	Case5	21.66	38.5	21.62	38.5	22.08	38.5

Note: RBW > emission bandwidth, VBW > 3 x RBW.



Effective Radiated Power of Transmitter (ERP)

Test Mode	Freq. [MHz]	Meas. Level [dBm]	Substitution Antenna Type	SGP [dBm]	Substitution Gain [dBd]	Cable Loss [dB]	Substitution Level (ERP) [dBm]	FCC limit [dBm]	Result
TM1	824.2	27.86	Dipole Ant.	31.01	-2.75	0.6	27.66	38.5	Pass
TM1	837.0	27.76	Dipole Ant.	31.41	-2.87	0.6	27.94	38.5	Pass
TM1	848.8	27.64	Dipole Ant.	30.89	-2.85	0.6	27.44	38.5	Pass
TM2	824.2	22.64	Dipole Ant.	25.79	-2.75	0.6	22.44	38.5	Pass
TM2	837.0	22.62	Dipole Ant.	25.89	-2.87	0.6	22.42	38.5	Pass
TM2	848.8	22.56	Dipole Ant.	26.06	-2.85	0.6	22.61	38.5	Pass
TM3	826.4	19.52	Dipole Ant.	22.67	-2.75	0.6	19.32	38.5	Pass
TM3	836.4	19.33	Dipole Ant.	22.6	-2.87	0.6	19.13	38.5	Pass
TM3	846.6	19.43	Dipole Ant.	22.68	-2.85	0.6	19.23	38.5	Pass

Note1: a, For getting the ERP (Efficient Radiated Power) in substitution method, the following formula should take to calculate it,

$$\text{ERP [dBm]} = \text{SGP [dBm]} - \text{Cable Loss [dB]} + \text{Gain [dBd]}$$

b, SGP=Signal Generator Level

Note2: RBW > emission bandwidth, VBW > 3 x RBW.

-----The END-----

--



Appendix B

Modulation Characteristics

According to FCC Part 2.1047 & RSS-132



Channel 192 (TM1:GPRS/GSM)

GSM850 Modulation

P.D. CS 4
 ↓ ↑↑
 Test M. A

<< >>
 Connect Control

Max. Level: Auto Low Noise: --- PCL: --- Channel: 192 Meas Slot: 3
 +20 --- / Off --- / Off --- --- Off

Current Sym.

GSM 0 TSC (correlation o.k.)

	Current	Average	Max / Min
Phase Error — Peak	2.3 °	2.4 °	-4.4 °
RMS	0.6 °	0.6 °	0.8 °
Origin Offset	-59.5 dB	-57.6 dB	-48.0 dB
I/Q Imbalance	-60.9 dB	-60.2 dB	-49.2 dB
Frequency Error	-2 Hz	0 Hz	-8 Hz

-0.65 Sym.

Timing Advance Error

28.7 dBm

Avg. Burst Power (Cur.)

100 Bursts

Statistic Count

0.00 %


Bursts out of Tolerance

Slot Channel
 Config

Ext.Phase Err.GMSK
 Application
 Analyzer Level Trg.
 MS Signal
 BS Signal
 Network
 Marker
 Menus



Channel 192 (TM2:EDGE)

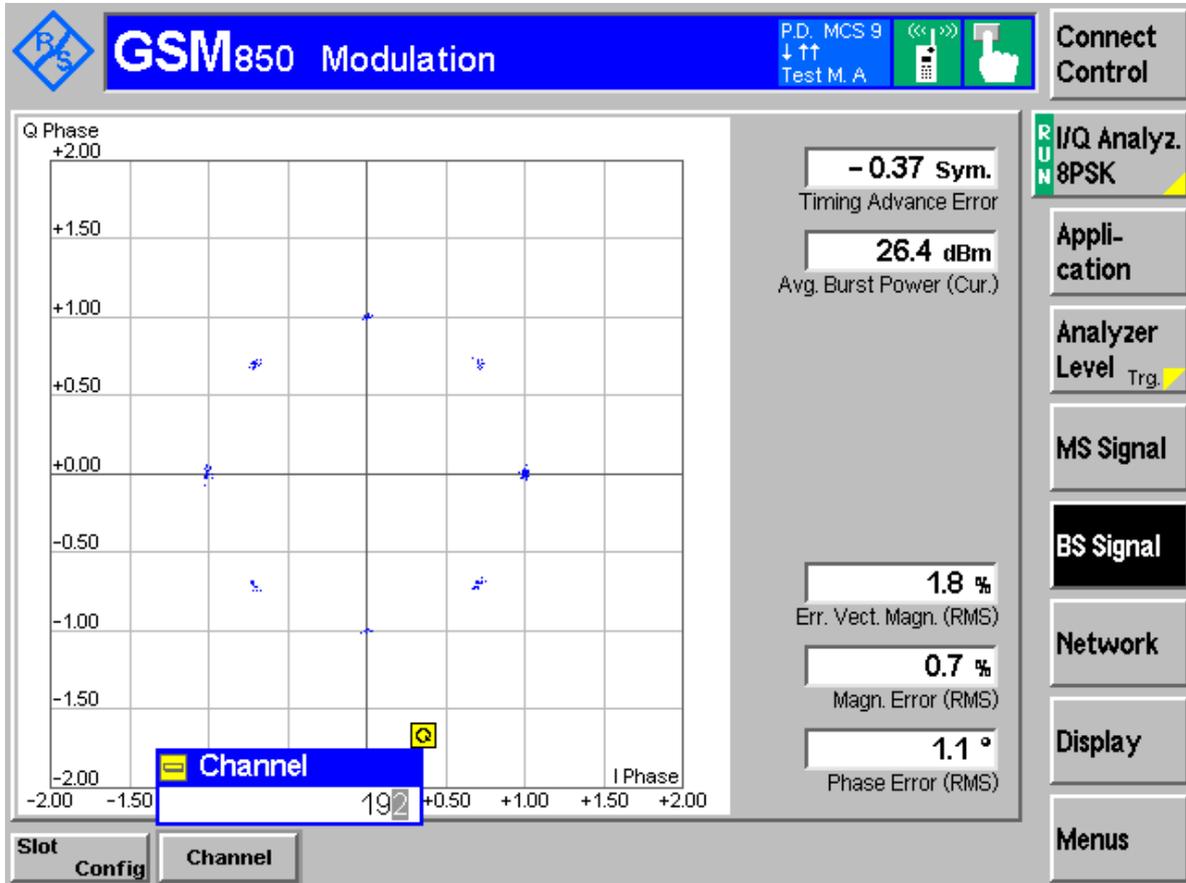



Appendix C

Occupied Bandwidth

According to FCC Part 2.1049 & RSS-132




Result Table

Table 1 Measurement Results

Test Mode	RF Channel	Occupied Bandwidth [kHz]	Verdict
TM1	128	241.99	Pass
	192	246.80	Pass
	251	246.80	Pass
TM2	128	245.20	Pass
	192	253.21	Pass
	251	241.99	Pass
Test Mode	RF Channel	Occupied Bandwidth [MHz]	Verdict
TM3	4132	4.19	Pass
	4182	4.17	Pass
	4233	4.16	Pass




Channel 128 (TM1:GPRS/GSM)

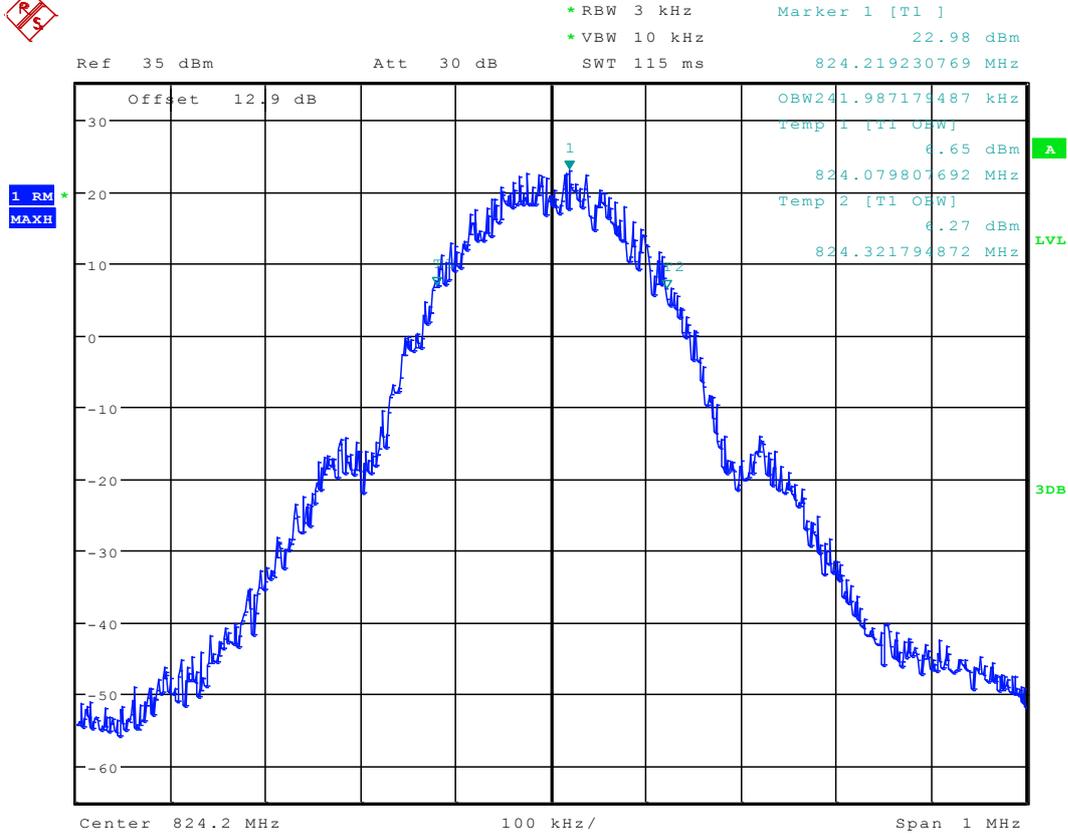

Date: 18.SEP.2012 15:44:54




Channel 128 (TM2:EDGE)

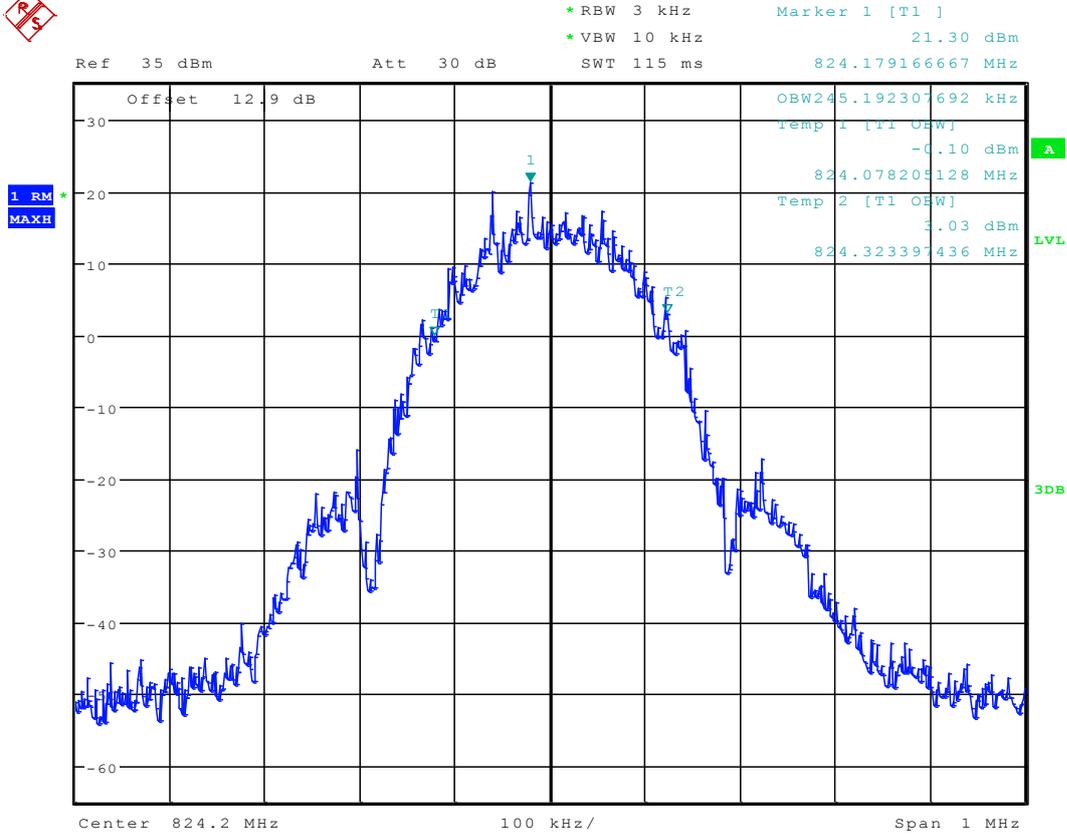

Date: 18.SEP.2012 15:48:39




Channel 4132 (TM3: WCDMA)

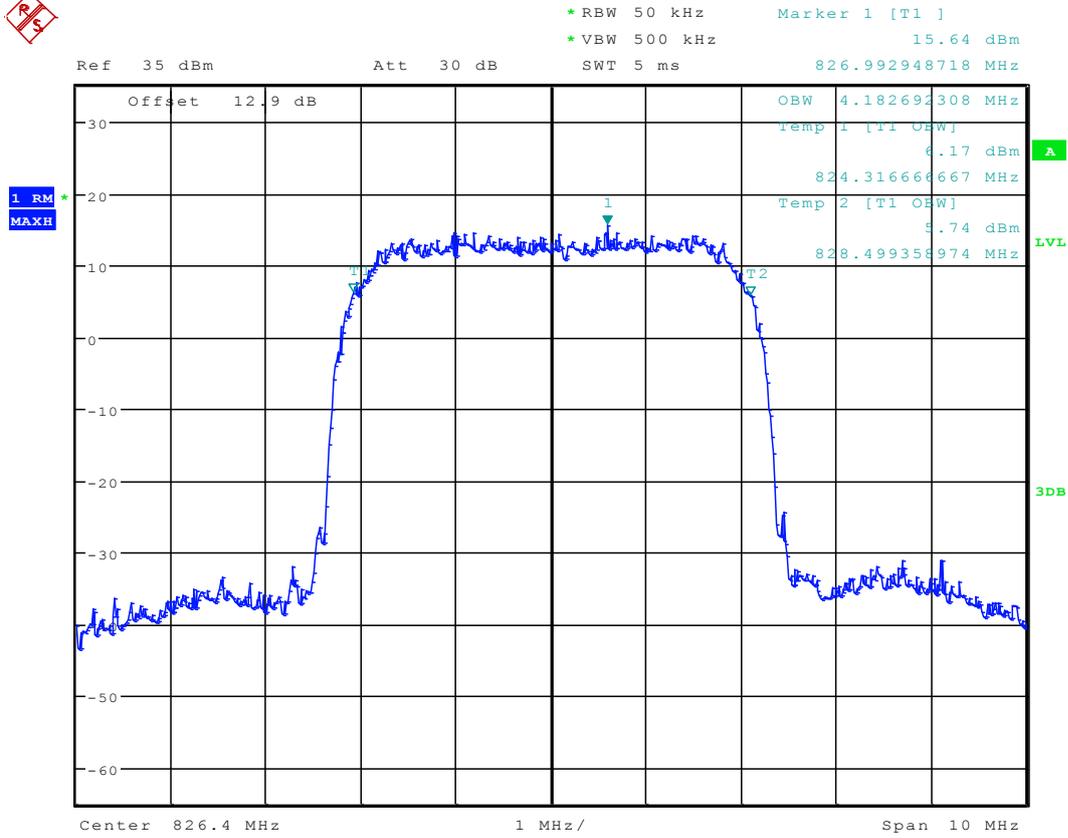

Date: 18.SEP.2012 15:51:02




Channel 192 (TM1:GPRS/GSM)

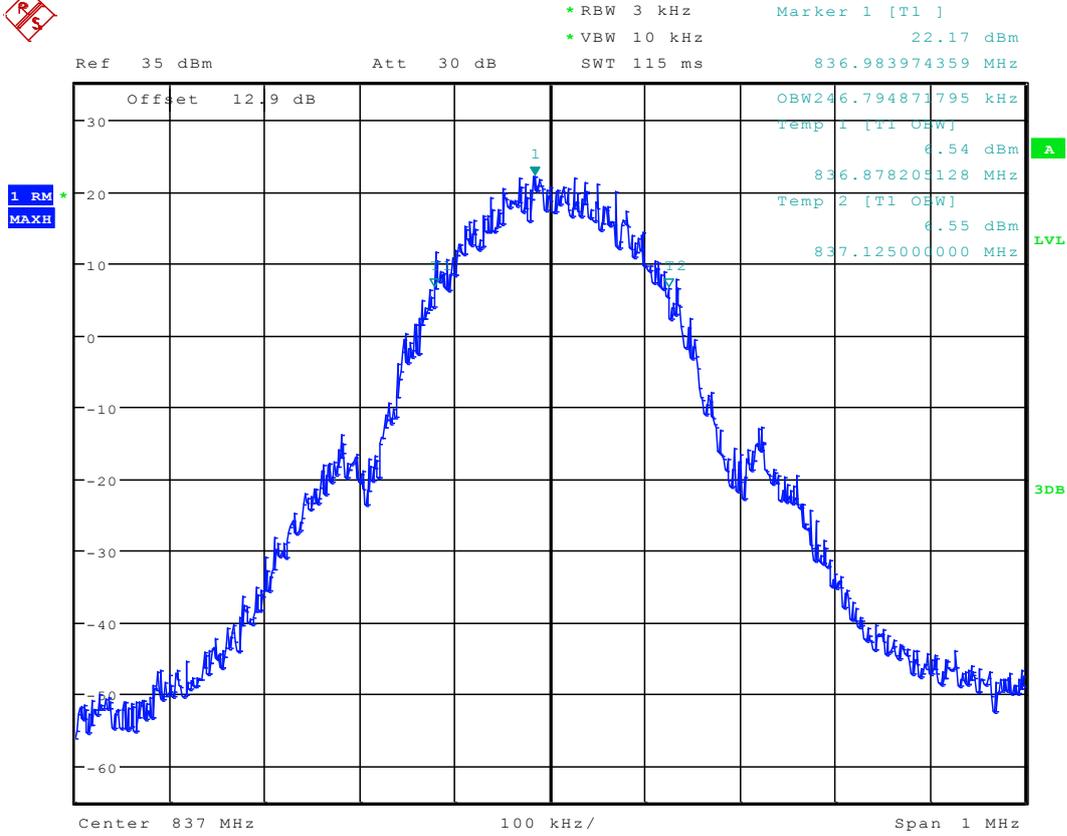

Date: 18.SEP.2012 15:45:08




Channel 192 (TM2:EDGE)

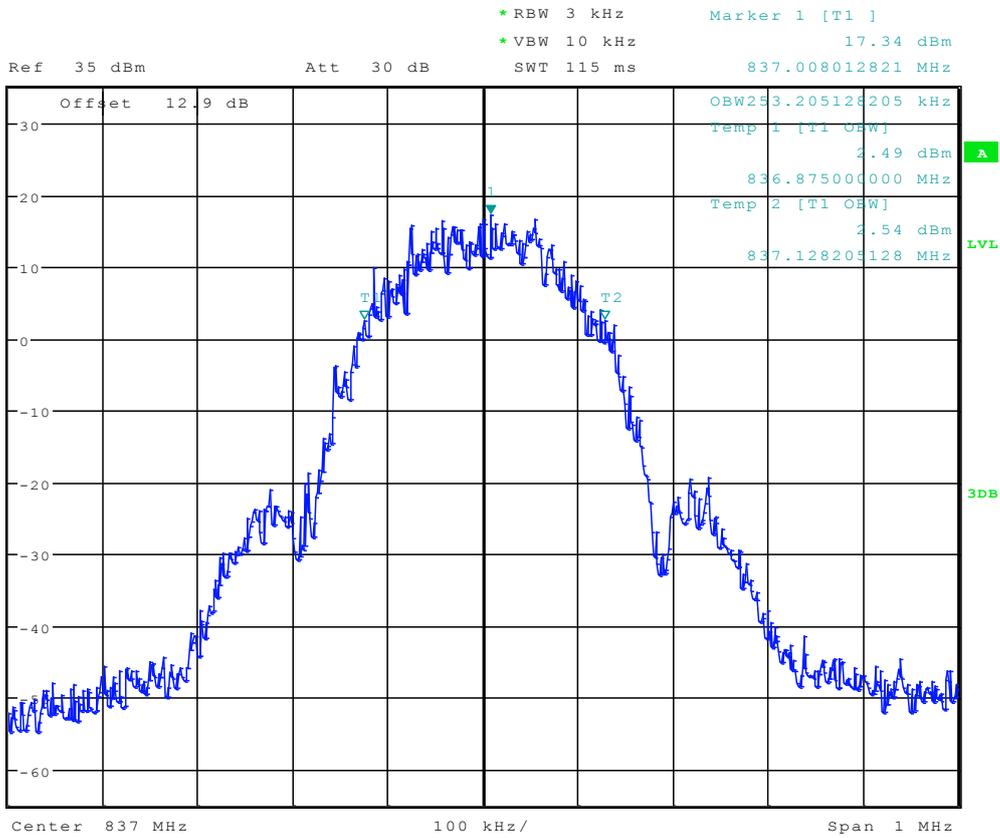

Date: 18.SEP.2012 15:48:52




Channel 4182 (TM3: WCDMA)

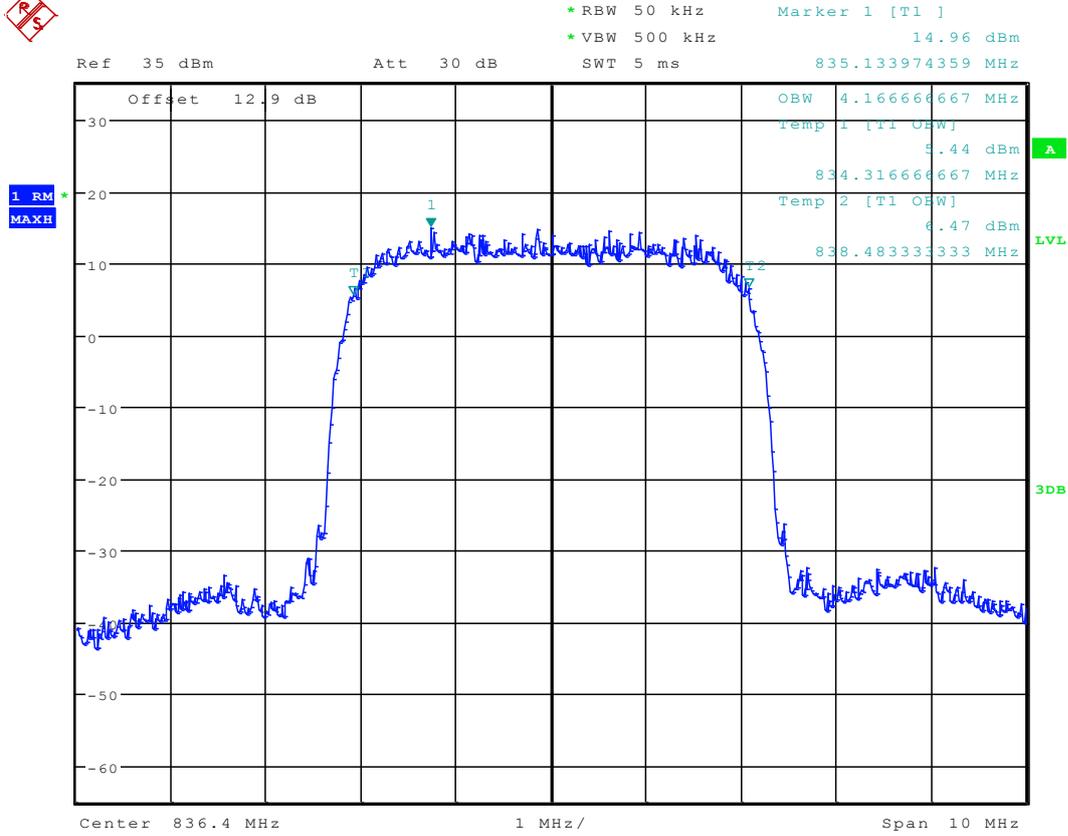

Date: 18.SEP.2012 15:51:15




Channel 251 (TM1:GPRS/GSM)

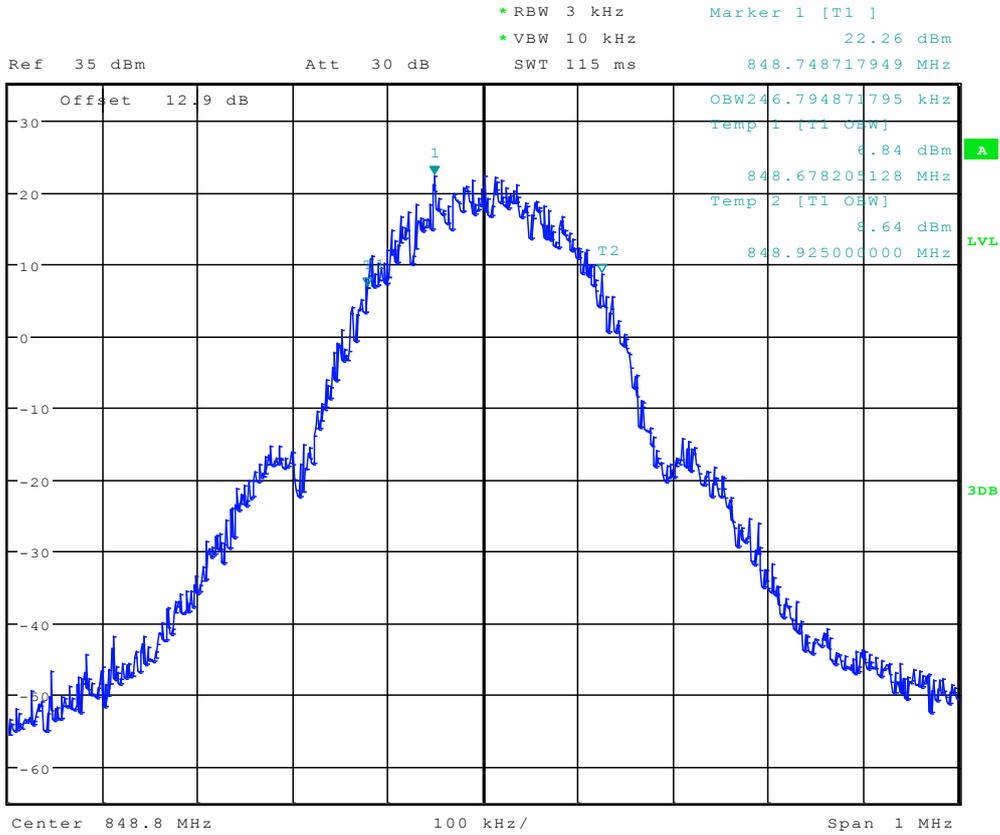

Date: 18.SEP.2012 15:45:21




Channel 251 (TM2:EDGE)

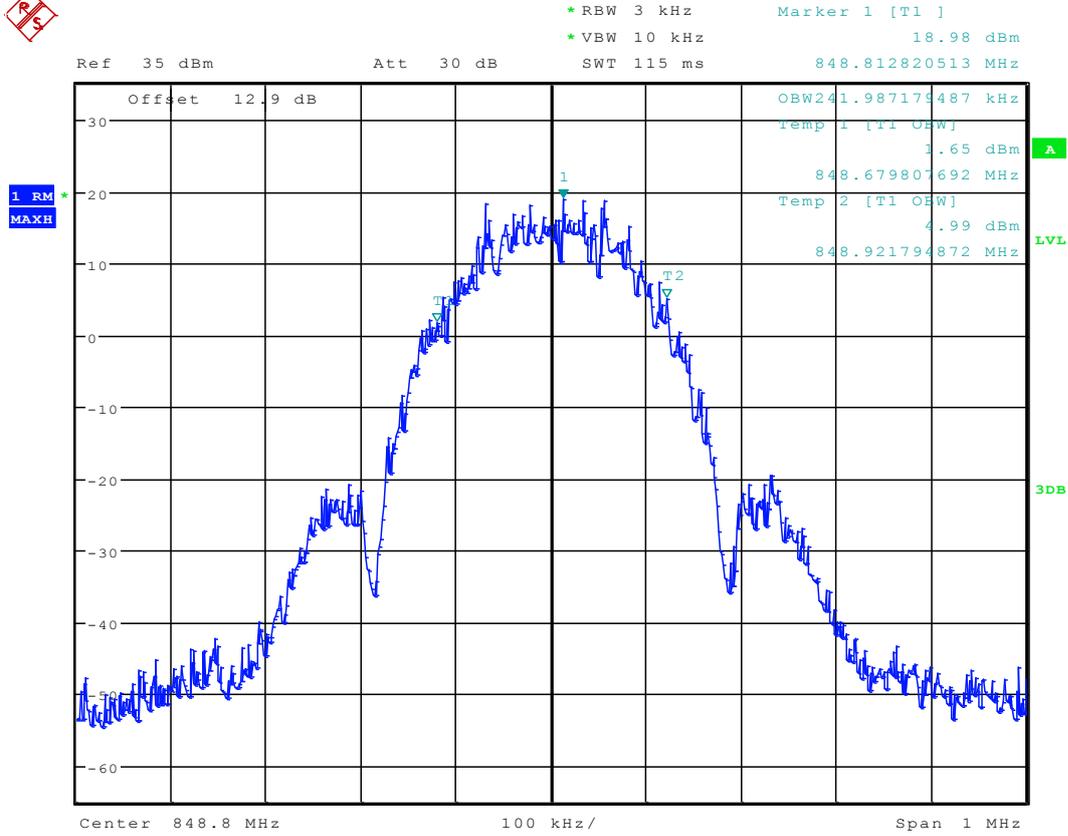

Date: 18.SEP.2012 15:49:06



Channel 4233 (TM3: WCDMA)

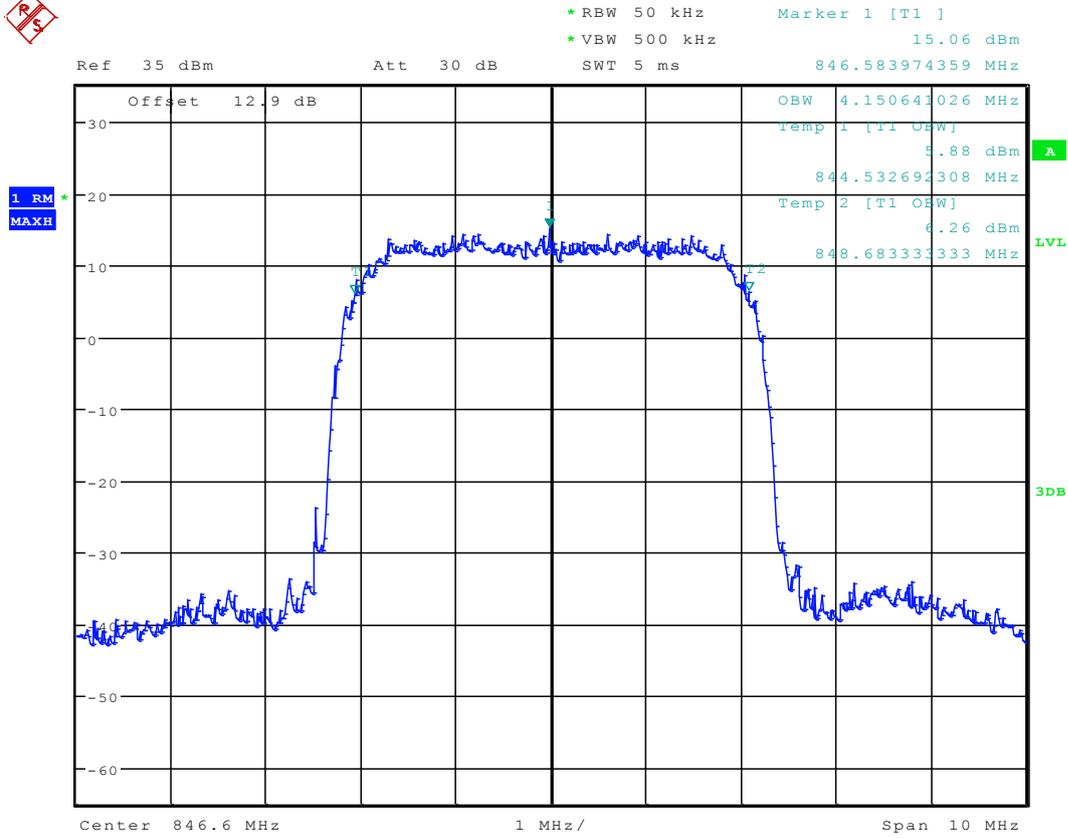

Date: 18.SEP.2012 15:51:29

-----The END-----

--



FCC Test Report of HUAWEI U9202L-3, U9202L-3
FCC ID: QISU9202L-3
IC ID: 6369A-U9202L3



Appendix D

Band Edges Compliance


According to FCC Part 2.1051 & Part 22.917 & RSS-132



TM1:GPRS/GSM

Left Edge

Channel 128

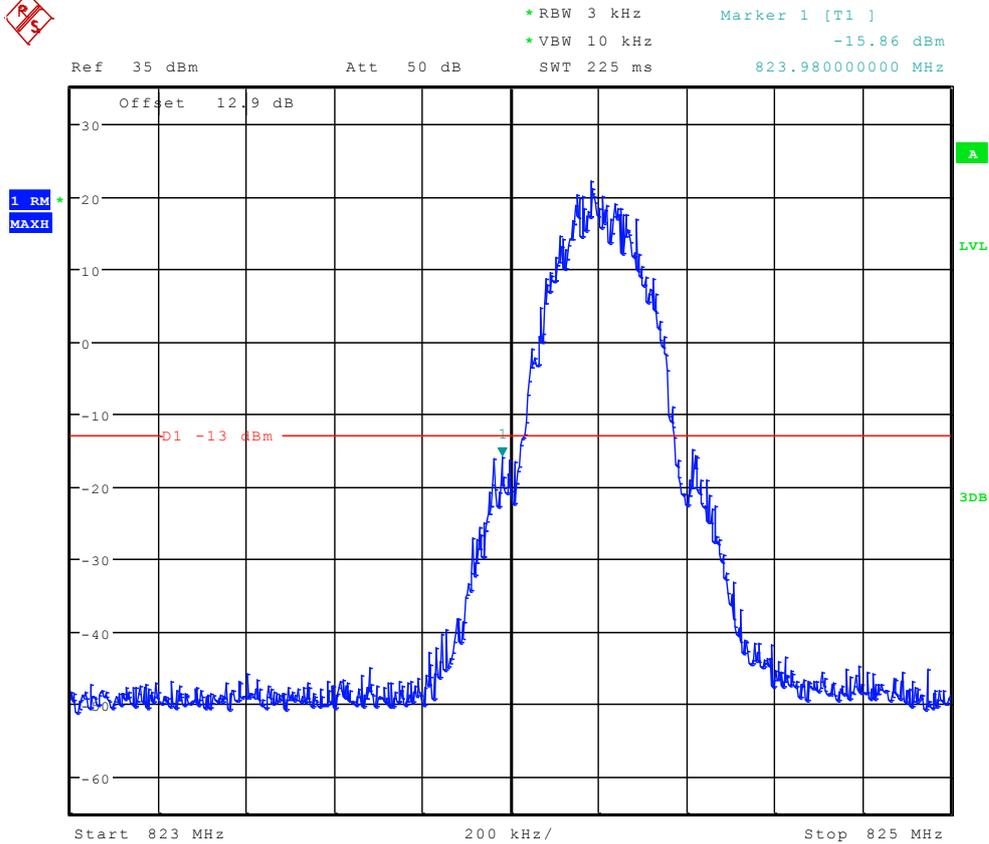


Date: 11.AUG.2012 16:30:01



Right Edge Channel 251



Ref 35 dBm Att 50 dB RBW 3 kHz Marker 1 [T1] -16.53 dBm
* VBW 10 kHz
SWT 225 ms 849.01000000 MHz

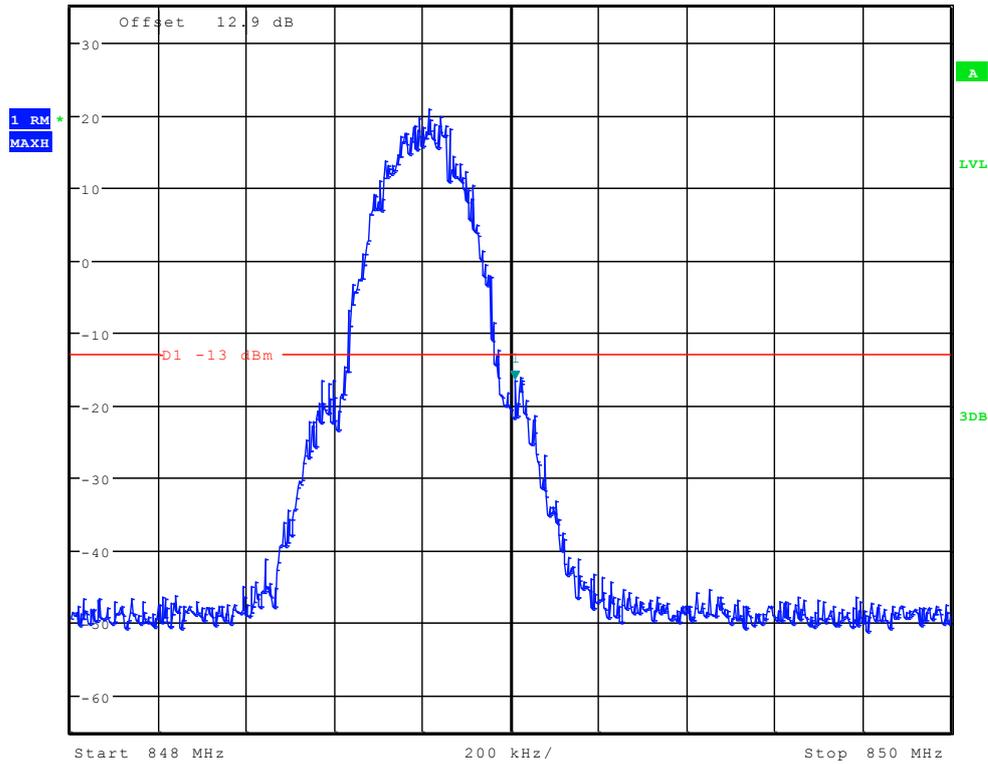

Date: 11.AUG.2012 16:30:14




TM2:EDGE

Left Edge

Channel 128



Ref 35 dBm Att 50 dB SWT 225 ms RBW 3 kHz VBW 10 kHz Marker 1 [T1] -23.18 dBm 823.990000000 MHz

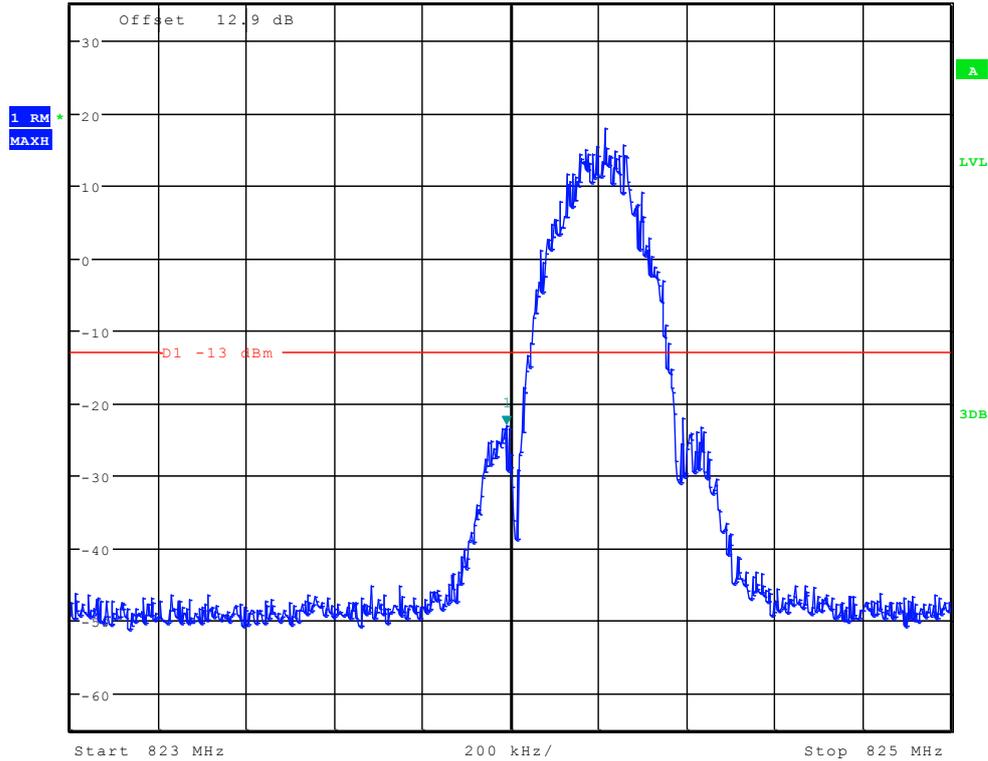


Date: 11.AUG.2012 16:34:03



Right Edge Channel 251



Ref 35 dBm Att 50 dB RBW 3 kHz Marker 1 [T1] -23.20 dBm
* VBW 10 kHz
SWT 225 ms 849.01000000 MHz

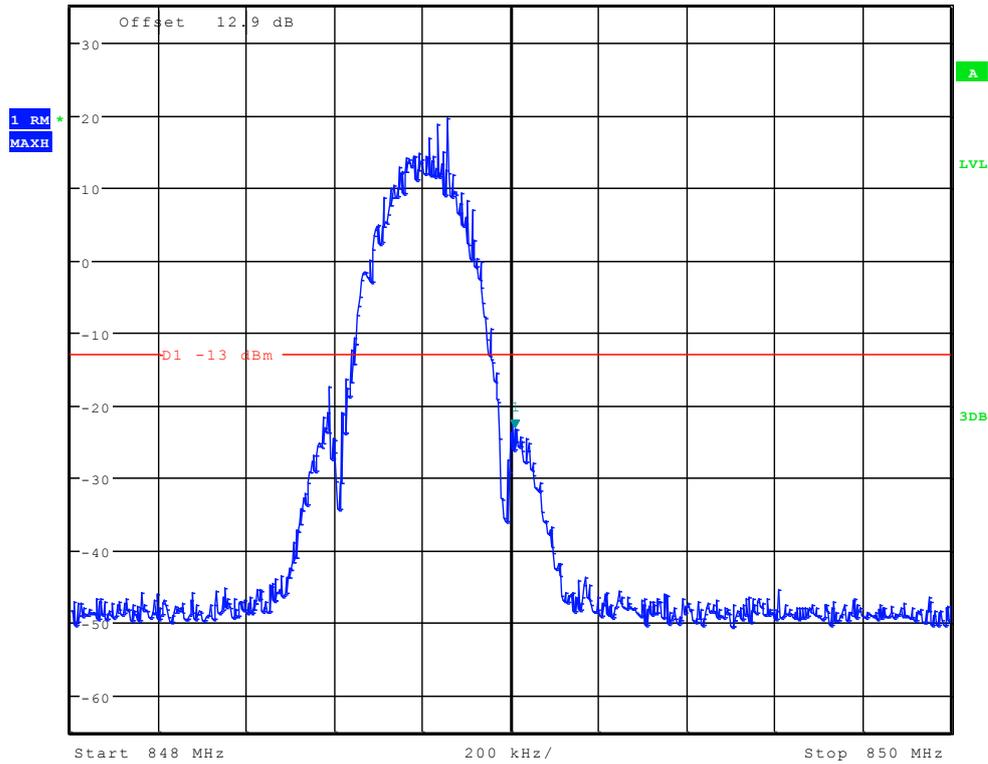


Date: 11.AUG.2012 16:34:21



TM3: WCDMA

Left Edge

Channel 4132

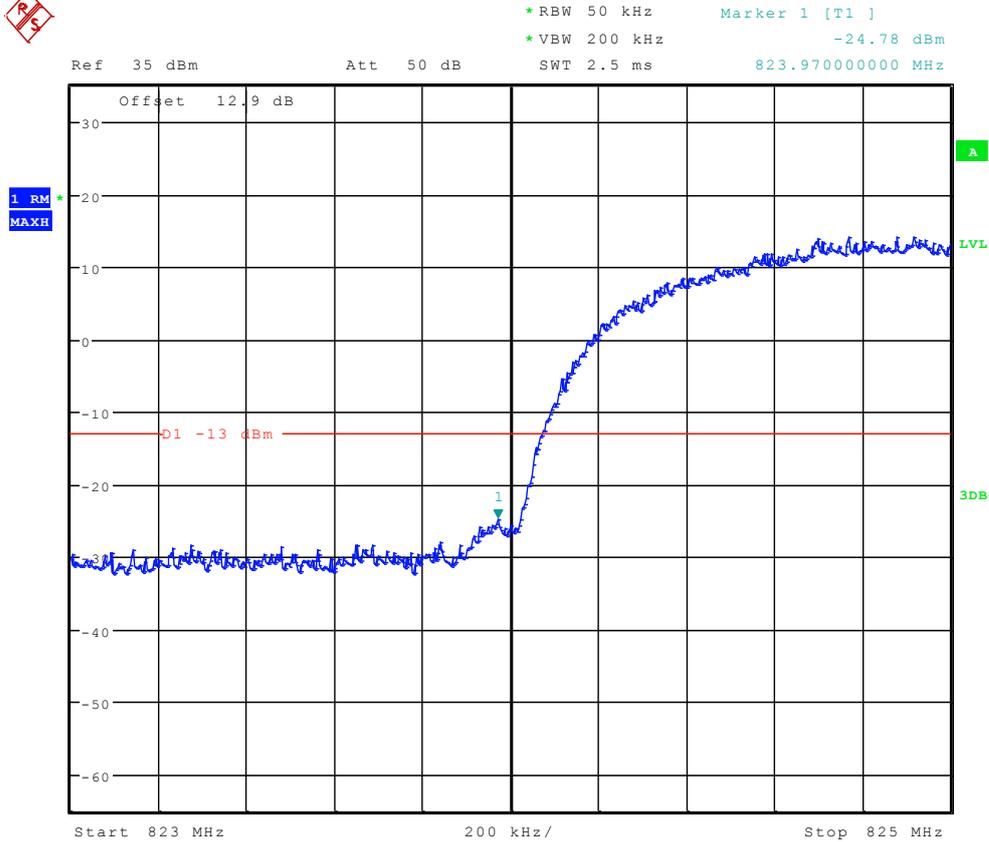


Date: 11.AUG.2012 16:40:42



Right Edge Channel 4233



*RBW 50 kHz Marker 1 [T1] -26.17 dBm
 *VBW 200 kHz
 Ref 35 dBm Att 50 dB SWT 2.5 ms 849.04000000 MHz

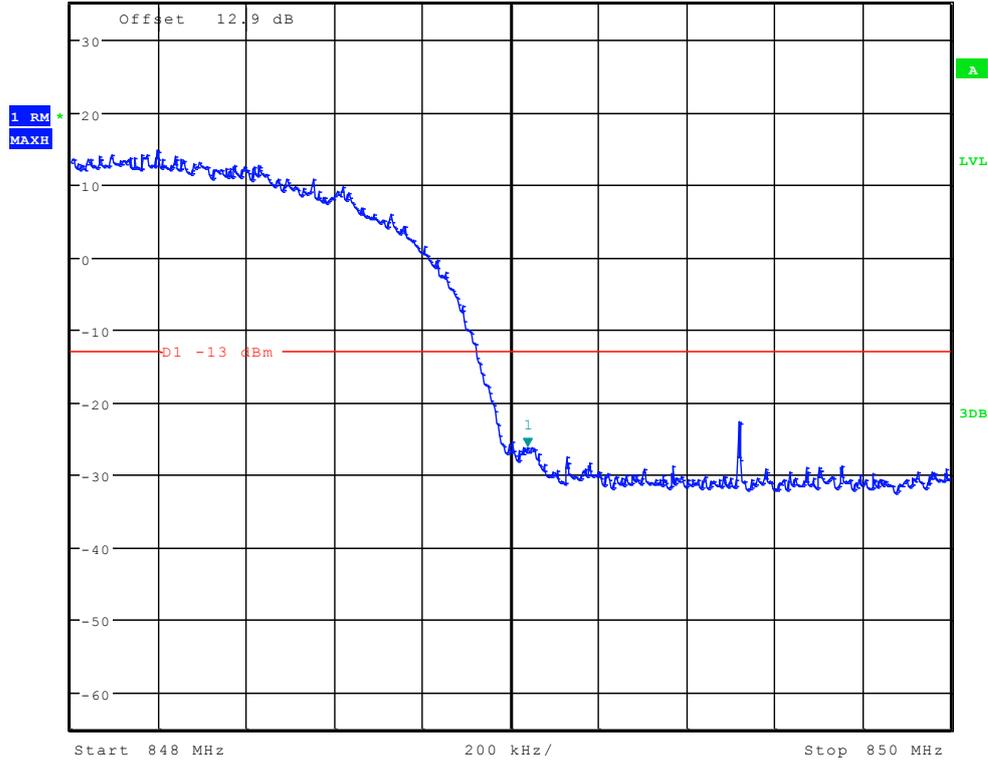

Date: 11.AUG.2012 16:40:55

-----The END-----

--



Appendix E


Spurious Emission at Antenna Terminal

According to FCC Part 2.1051 & Part 22.917 & RSS-132



TM1:GPRS/GSM


Channel 128

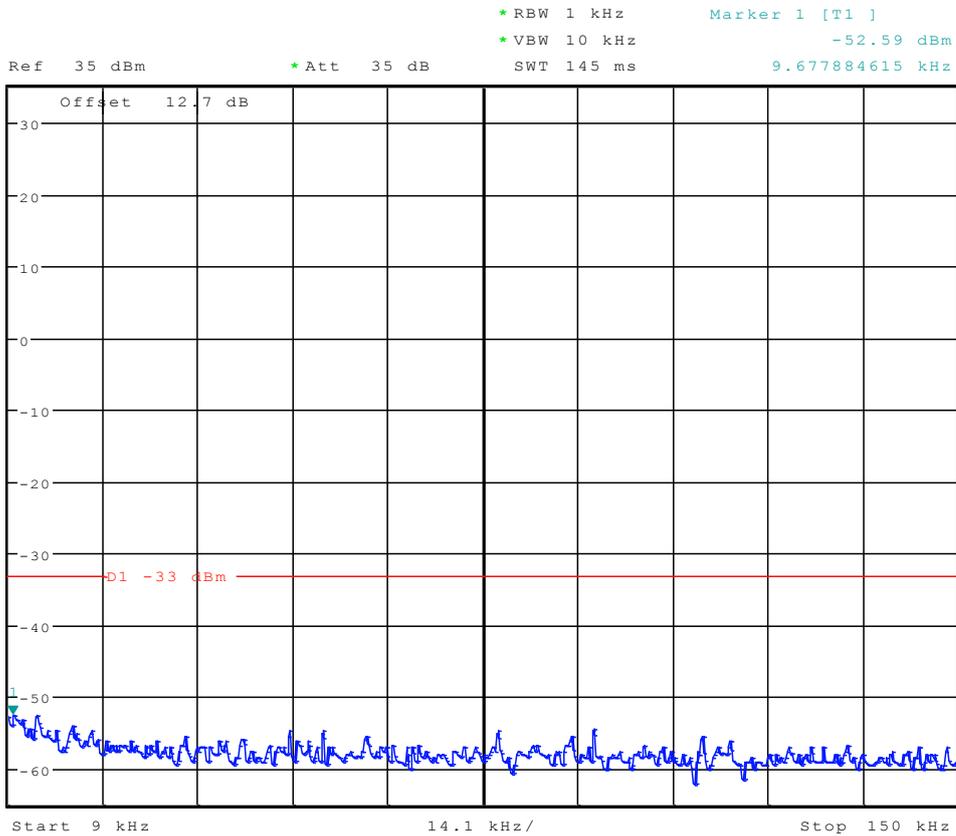


Date: 17.SEP.2012 09:59:22



* RBW 10 kHz Marker 1 [T1]
 * VBW 30 kHz -47.32 dBm
 Ref 35 dBm * Att 35 dB SWT 300 ms 197.836538462 kHz

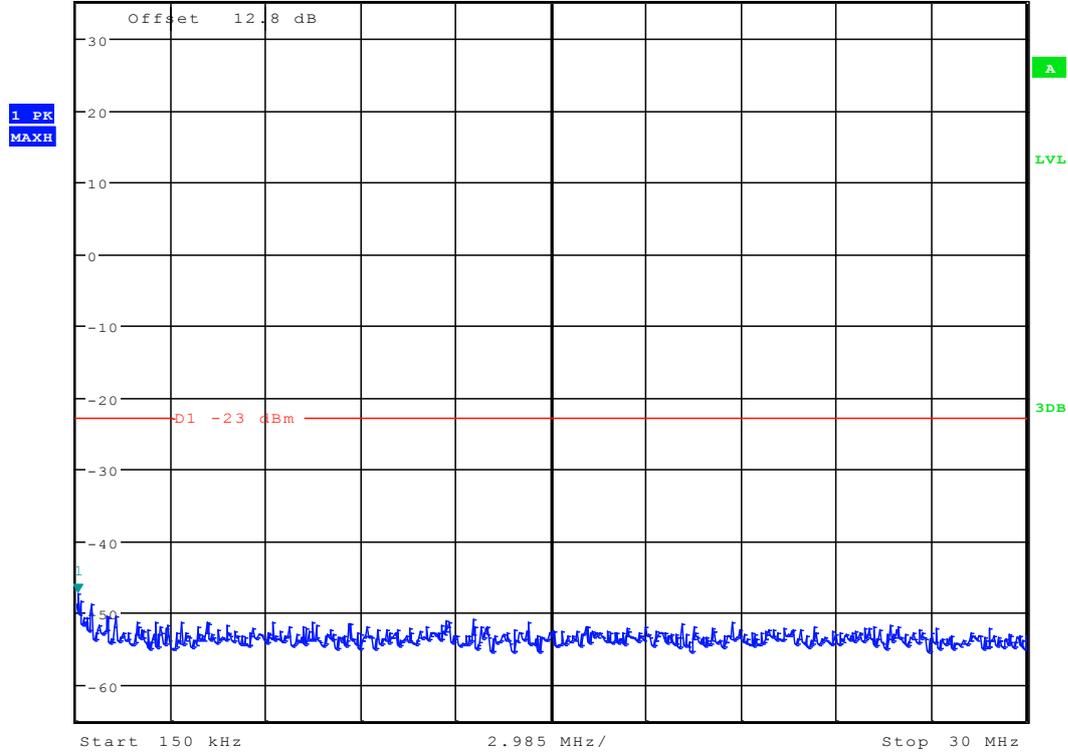

Date: 17.SEP.2012 10:00:06

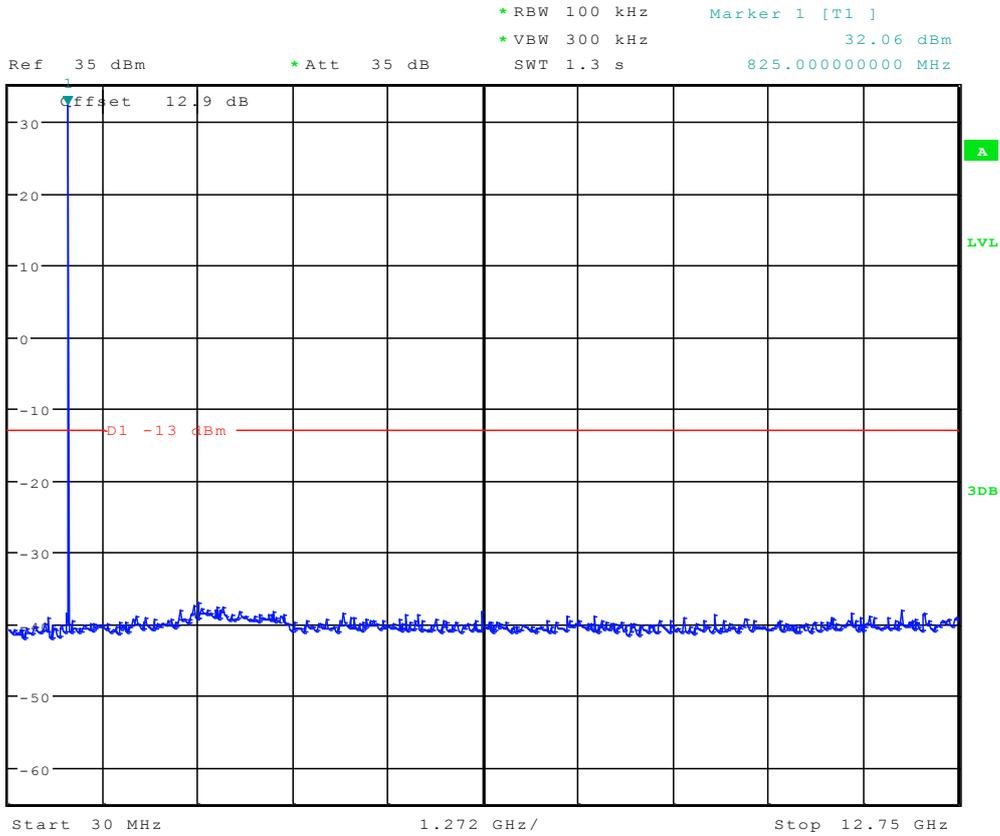


Date: 17.SEP.2012 10:01:03




Channel 192




*RBW 1 kHz Marker 1 [T1]
 *VBW 10 kHz -50.51 dBm
 *Att 35 dB 9.451923077 kHz
 Ref 35 dBm SWT 145 ms

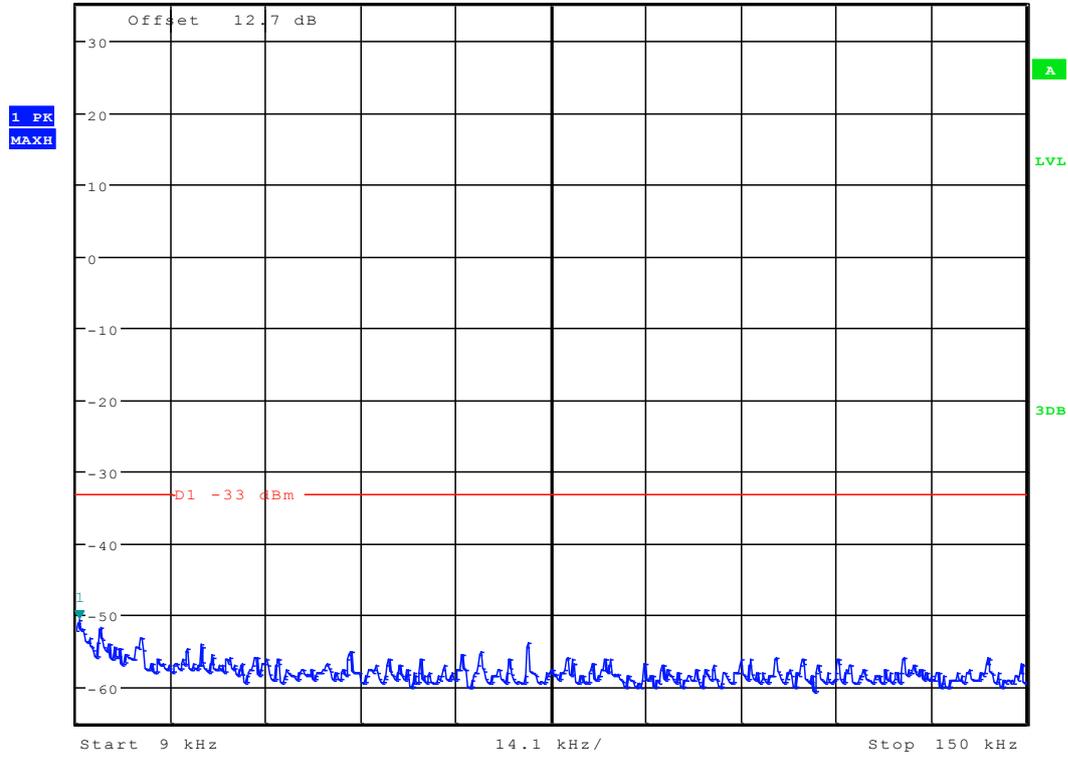

Date: 17.SEP.2012 09:59:36

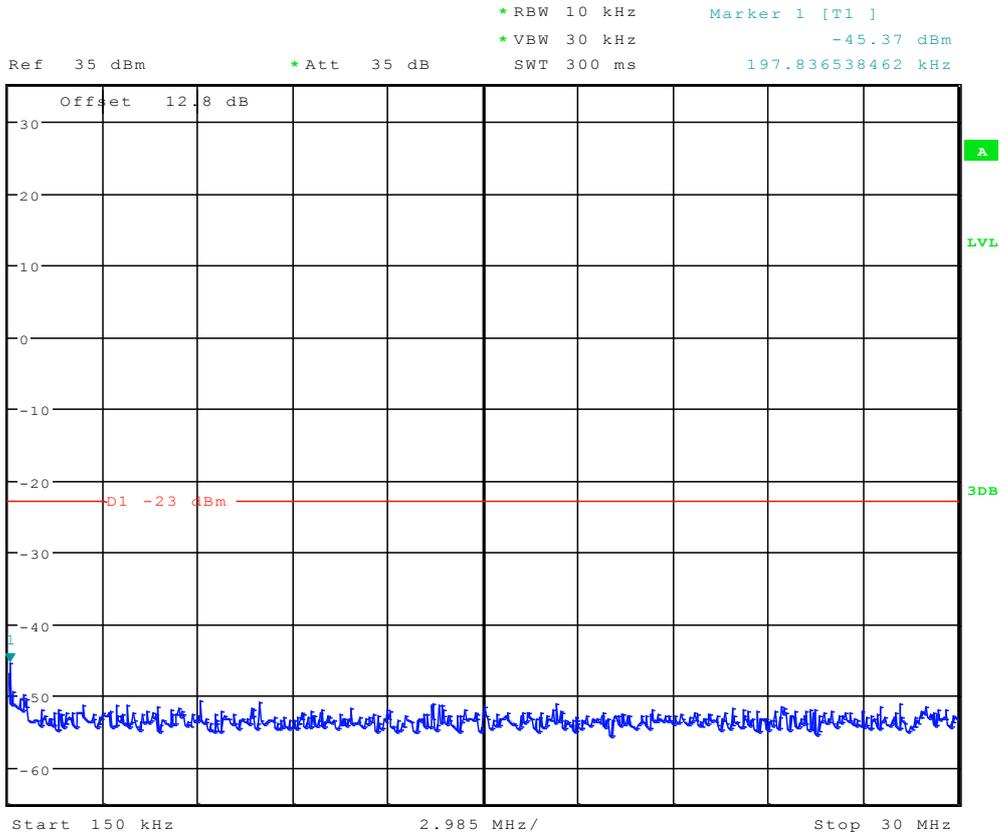


Date: 17.SEP.2012 10:00:20

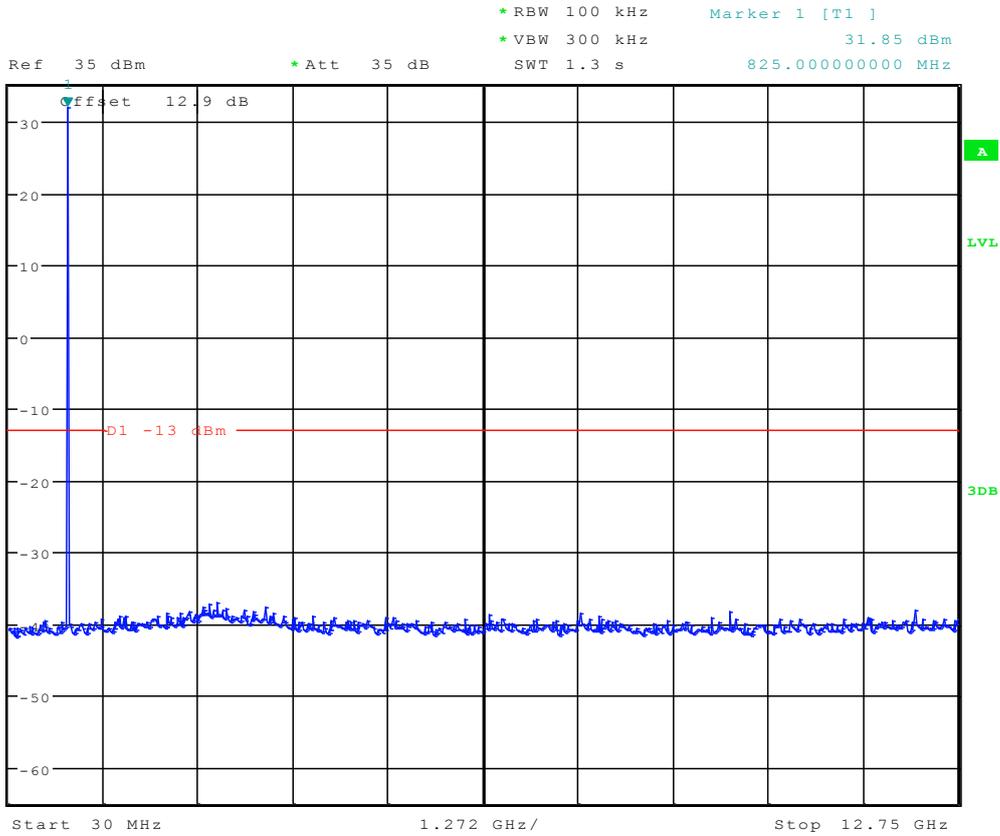

Date: 17.SEP.2012 10:01:28



Channel 251

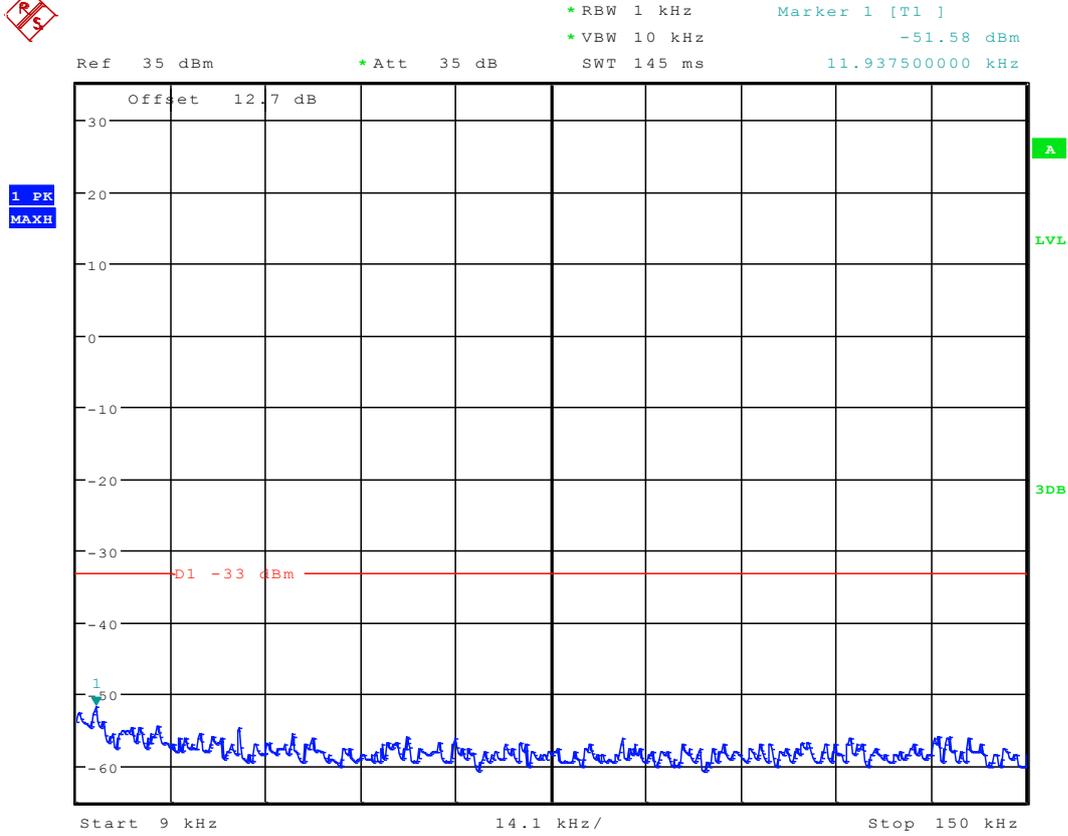


Date: 17.SEP.2012 09:59:51



* RBW 10 kHz Marker 1 [T1]
* VBW 30 kHz -47.86 dBm
SWT 300 ms 197.836538462 kHz

Ref 35 dBm

* Att 35 dB

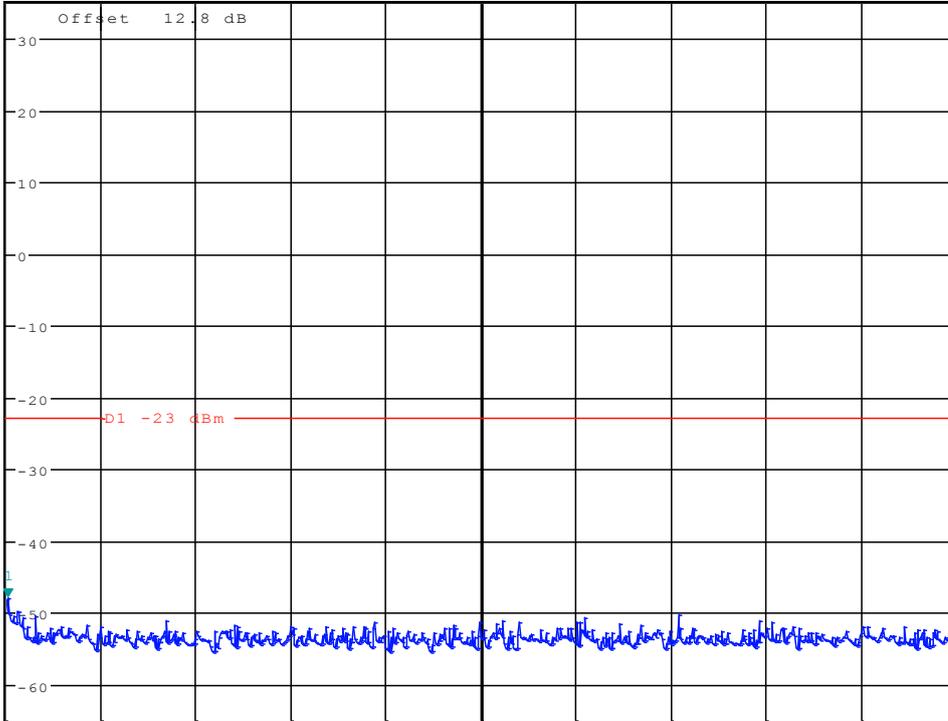


Start 150 kHz

2.985 MHz/

Stop 30 MHz

Date: 17.SEP.2012 10:00:35

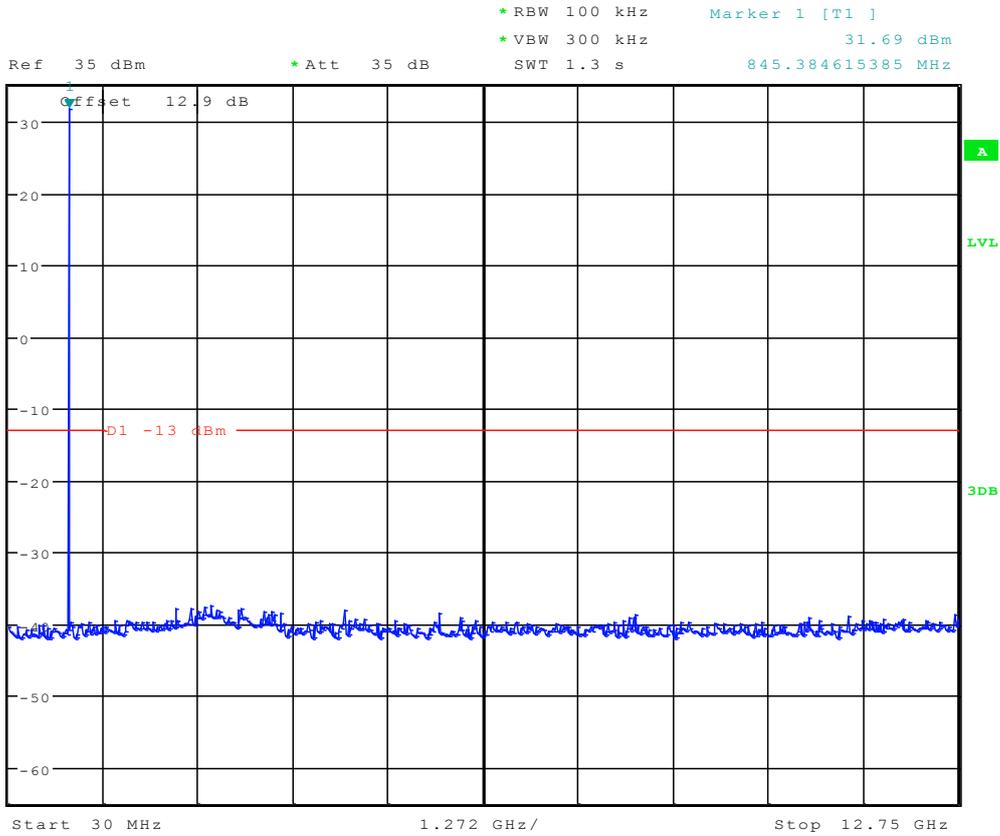

Date: 17.SEP.2012 10:02:02




TM2:EDGE

Channel 128



*RBW 1 kHz Marker 1 [T1]
 *VBW 10 kHz -52.59 dBm
 Ref 35 dBm *Att 35 dB SWT 145 ms 9.000000000 kHz

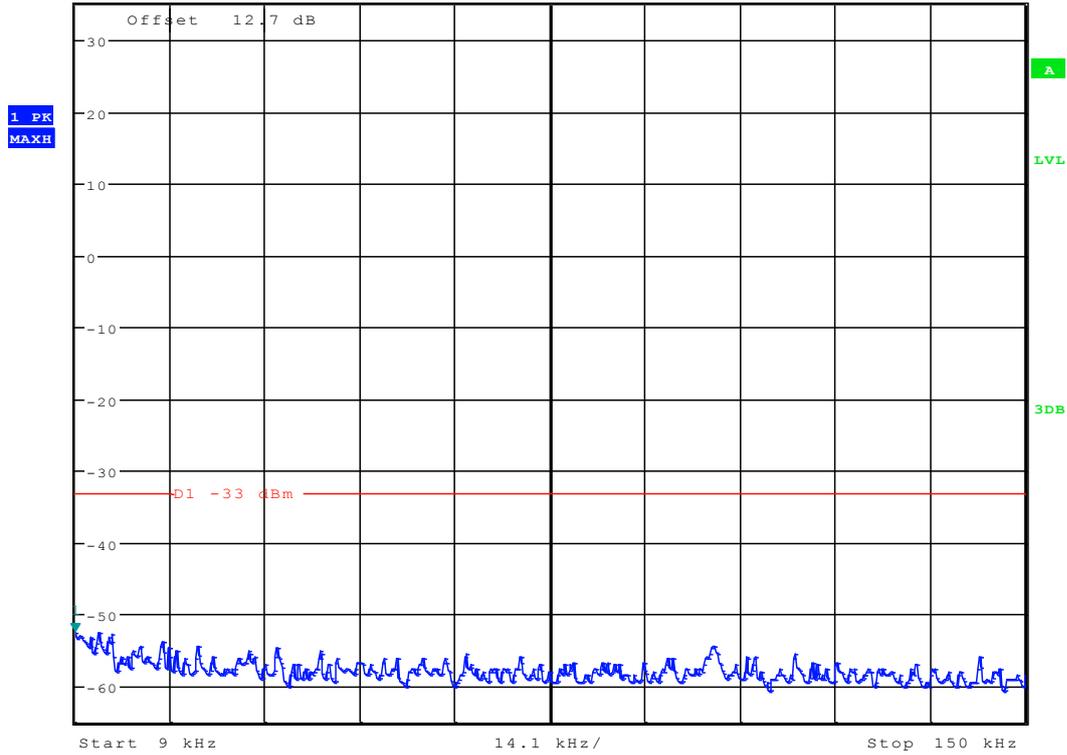


Date: 17.SEP.2012 10:04:41



* RBW 10 kHz Marker 1 [T1]
* VBW 30 kHz -47.44 dBm
SWT 300 ms 197.836538462 kHz

Ref 35 dBm

* Att 35 dB

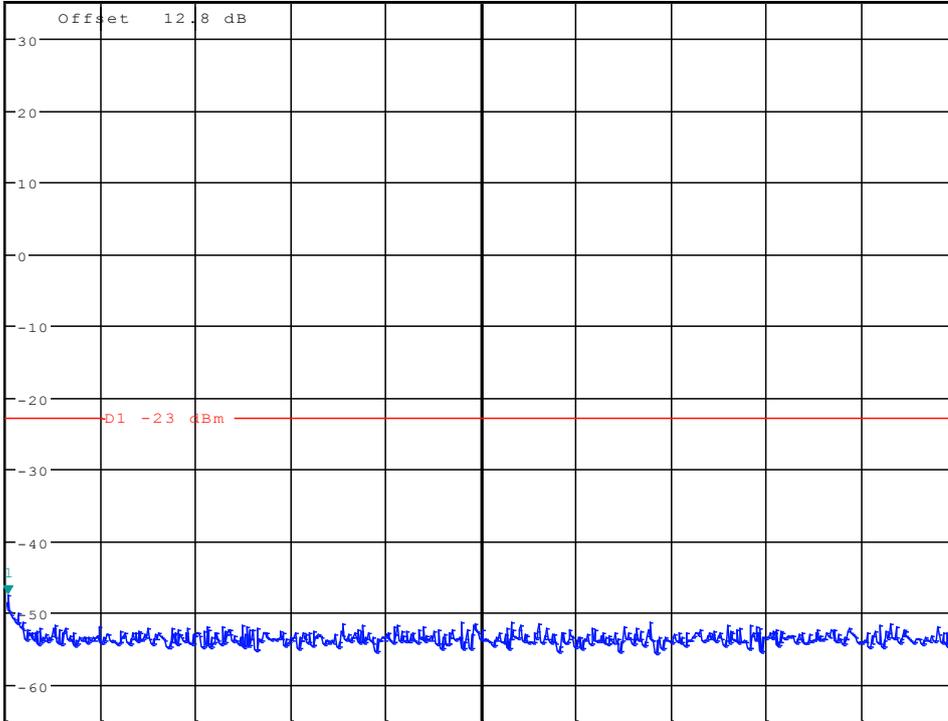


Start 150 kHz

2.985 MHz/

Stop 30 MHz

Date: 17.SEP.2012 10:05:25

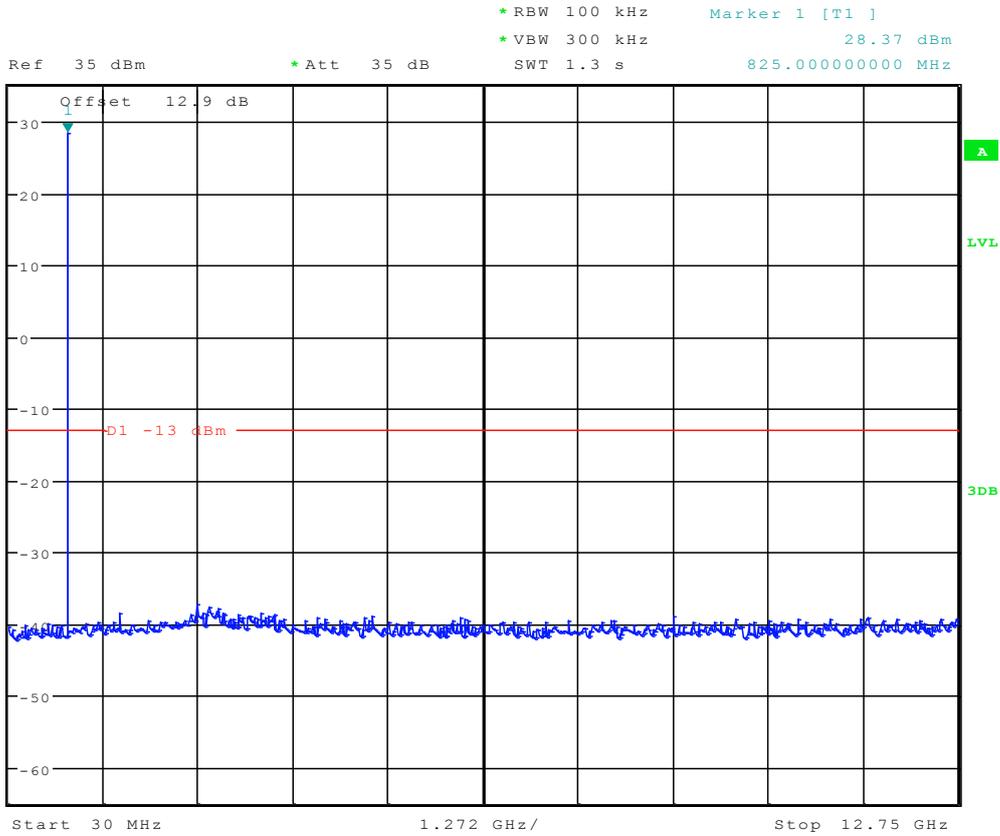


Date: 17.SEP.2012 10:06:09



Channel 192




*RBW 1 kHz Marker 1 [T1]
 *VBW 10 kHz -51.12 dBm
 Ref 35 dBm *Att 35 dB SWT 145 ms 10.129807692 kHz

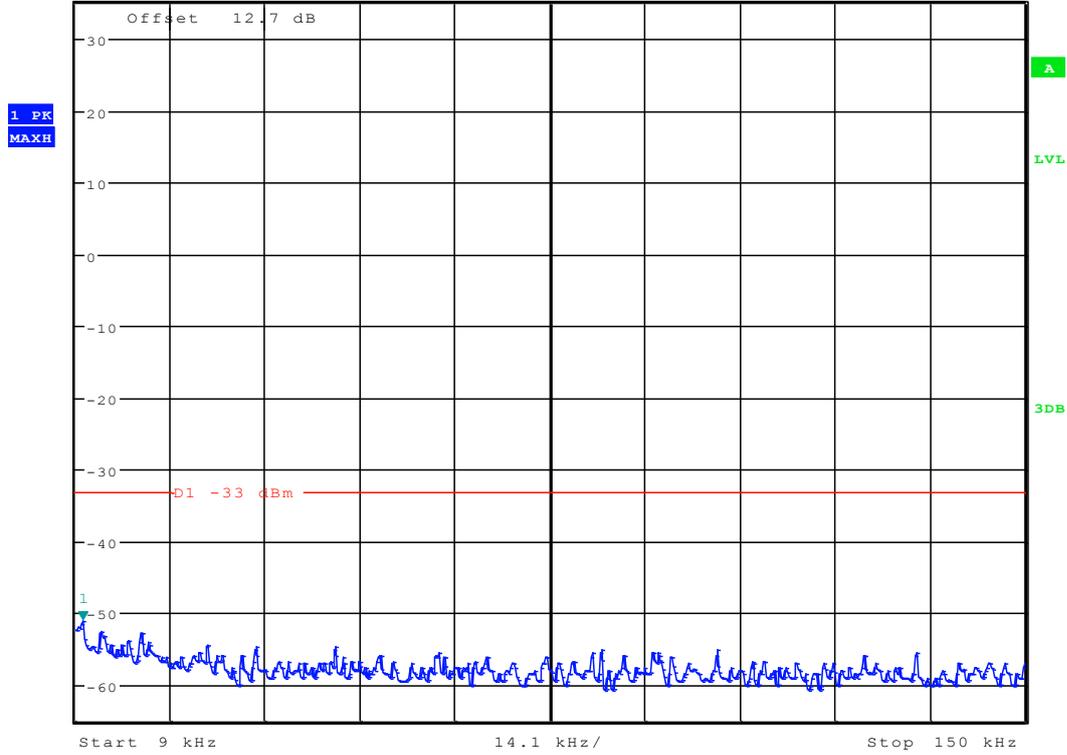

Date: 17.SEP.2012 10:04:56




* RBW 10 kHz Marker 1 [T1]
 * VBW 30 kHz -46.42 dBm
 Ref 35 dBm * Att 35 dB SWT 300 ms 197.836538462 kHz

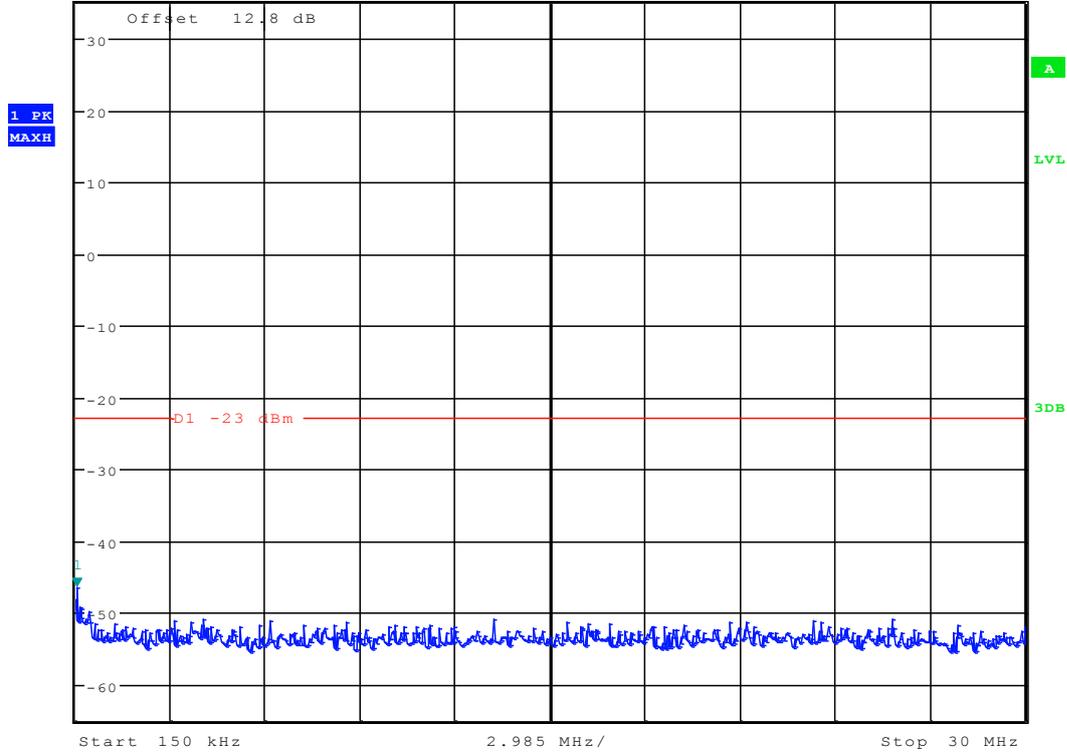

Date: 17.SEP.2012 10:05:40



Ref 35 dBm * Att 35 dB SWT 1.3 s Marker 1 [T1]
* RBW 100 kHz 28.97 dBm
* VBW 300 kHz 825.000000000 MHz

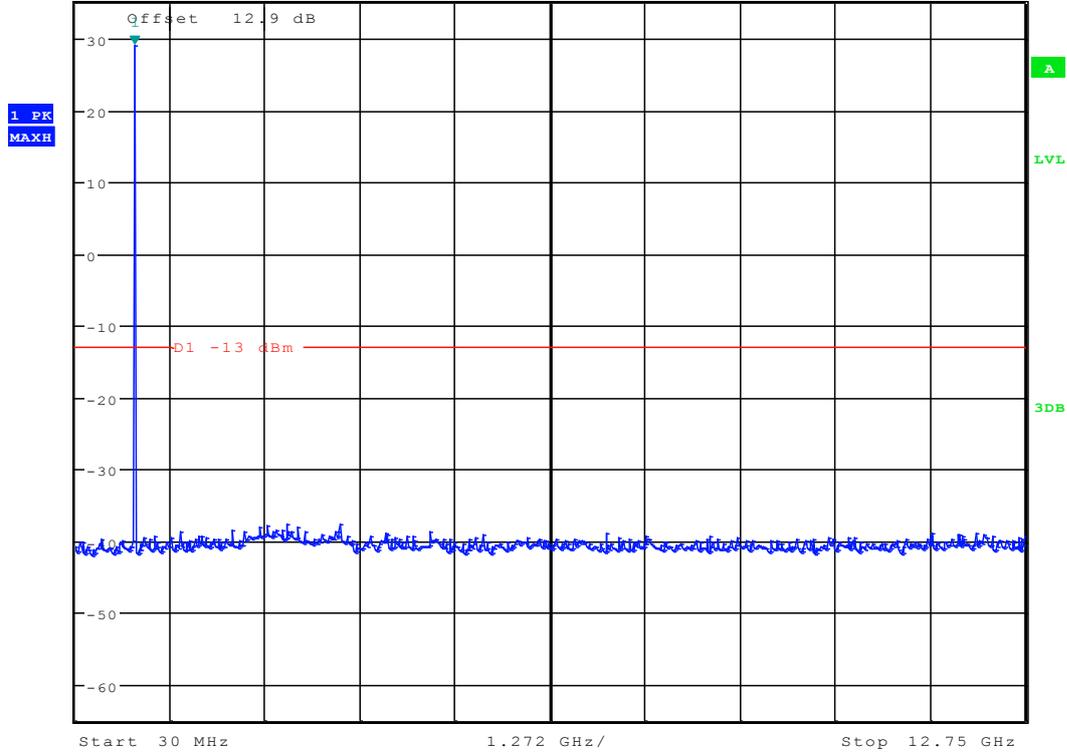


Date: 17.SEP.2012 10:06:26



Channel 251




* RBW 1 kHz Marker 1 [T1]
 * VBW 10 kHz -52.59 dBm
 Ref 35 dBm * Att 35 dB SWT 145 ms 9.225961538 kHz

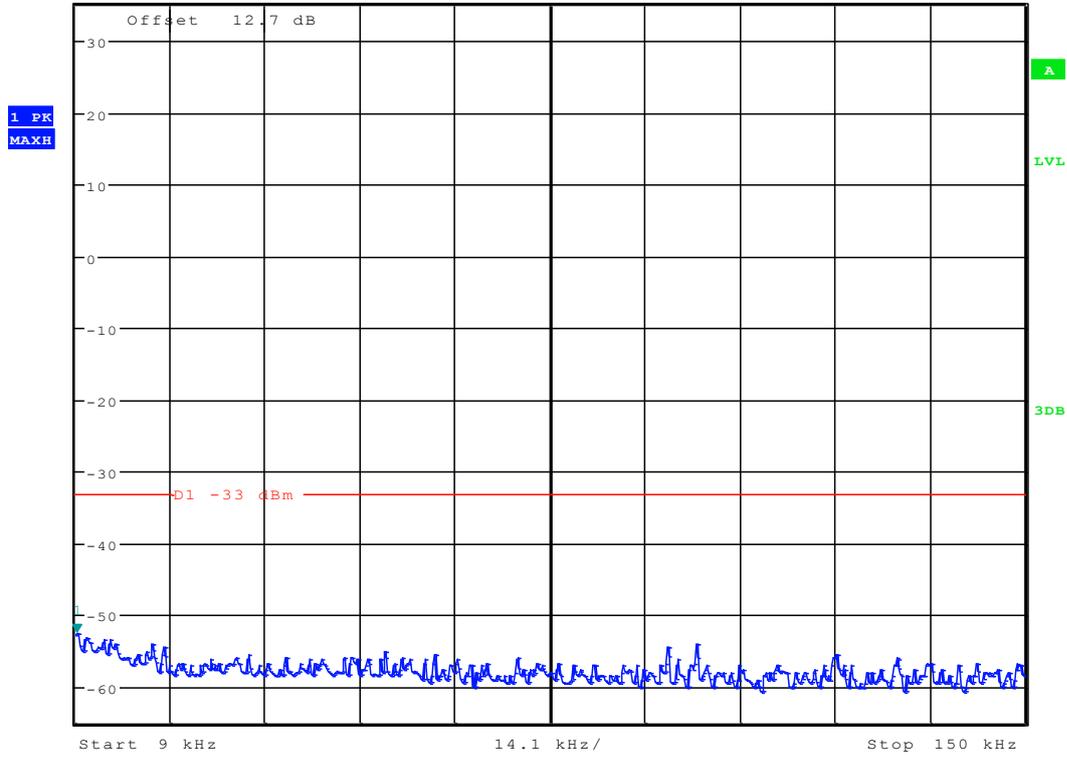

Date: 17.SEP.2012 10:05:10




* RBW 10 kHz Marker 1 [T1]
 * VBW 30 kHz -48.45 dBm
 Ref 35 dBm * Att 35 dB SWT 300 ms 197.836538462 kHz

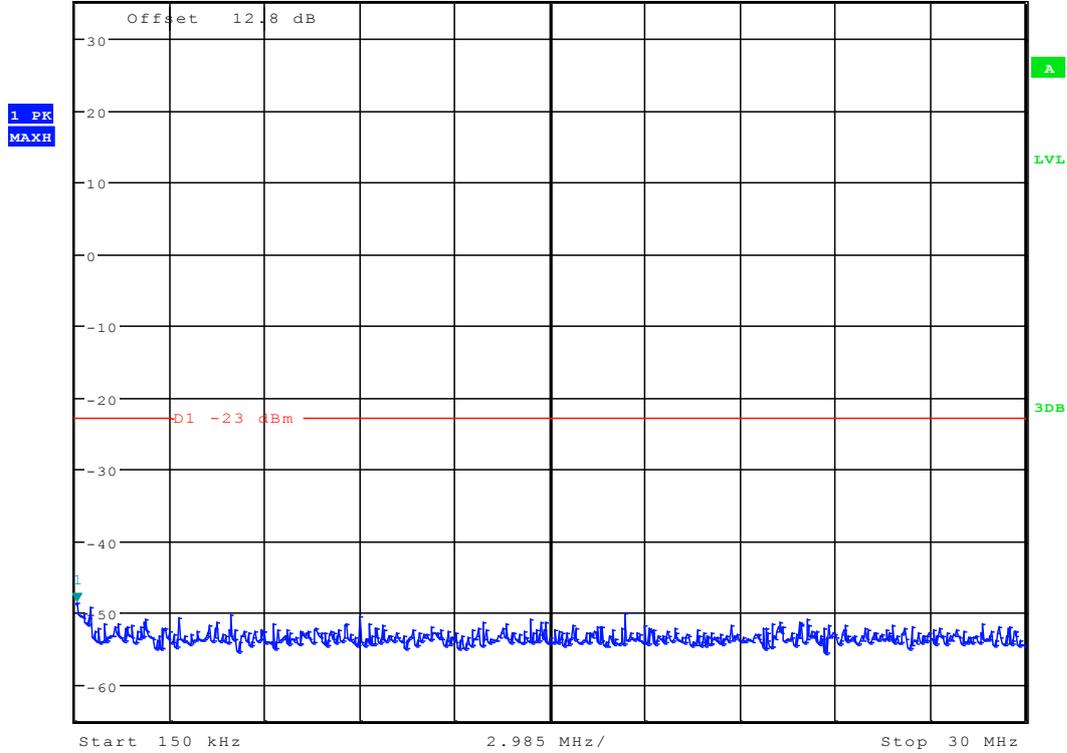

Date: 17.SEP.2012 10:05:54



* RBW 100 kHz Marker 1 [T1]
* VBW 300 kHz 23.35 dBm
Ref 35 dBm * Att 35 dB SWT 1.3 s 845.384615385 MHz

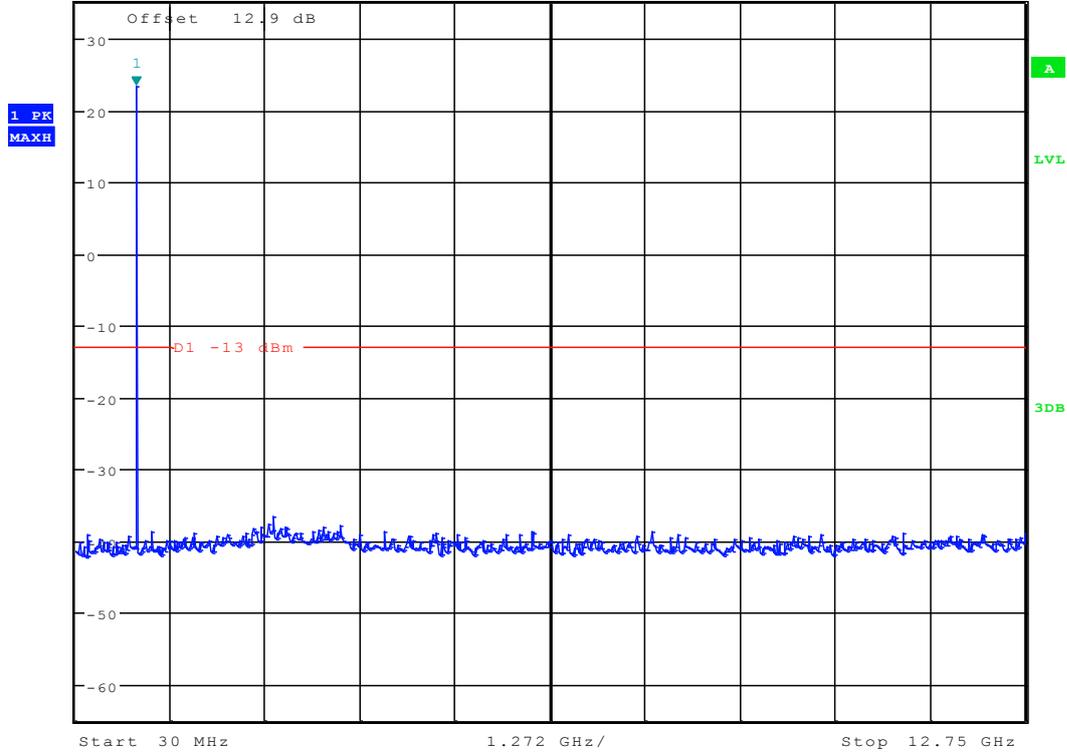

Date: 17.SEP.2012 10:06:41




TM3: WCDMA

Channel 4132




*RBW 1 kHz Marker 1 [T1]
*VBW 10 kHz -50.94 dBm
Ref 35 dBm *Att 35 dB SWT 145 ms 9.000000000 kHz

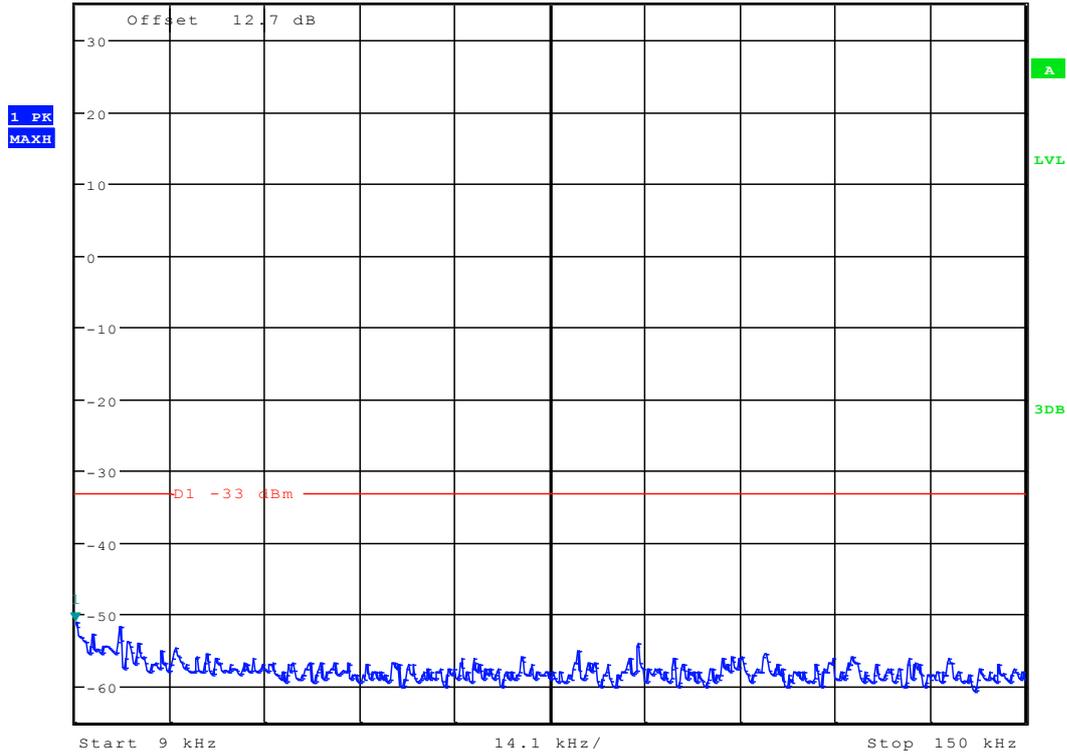

Date: 17.SEP.2012 10:09:08




Ref 35 dBm * Att 35 dB * RBW 10 kHz * VBW 30 kHz Marker 1 [T1] -45.23 dBm
SWT 300 ms 150.000000000 kHz

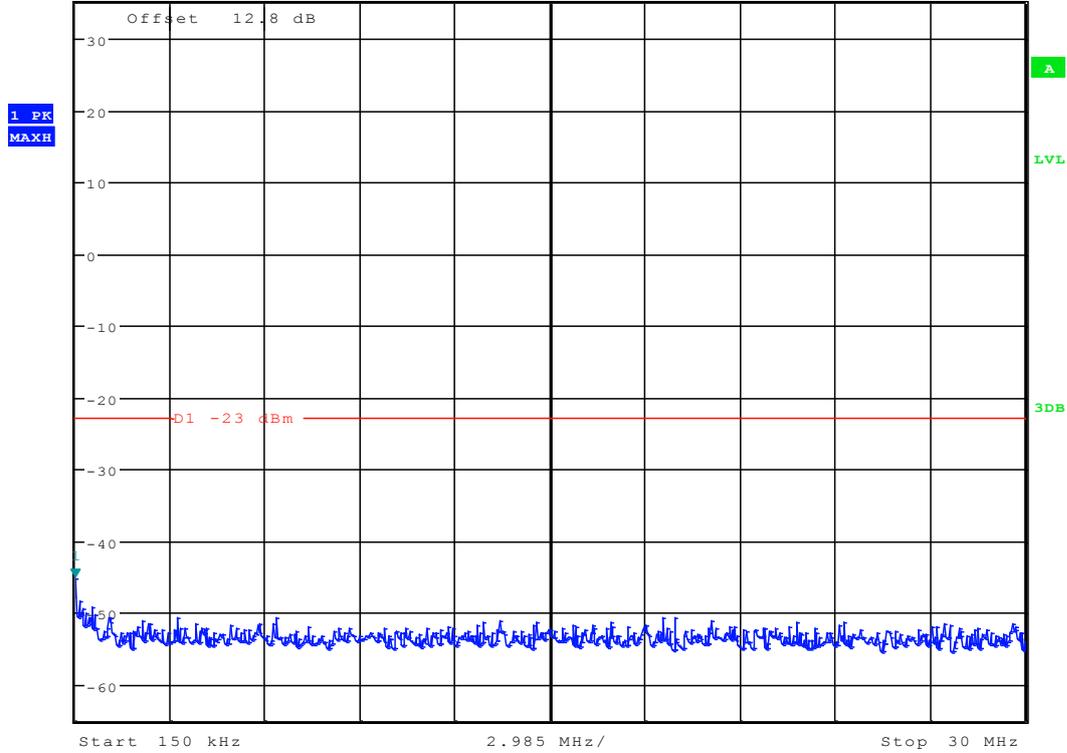

Date: 17.SEP.2012 10:09:52



* RBW 100 kHz Marker 1 [T1]
* VBW 300 kHz 16.61 dBm
Ref 35 dBm * Att 35 dB SWT 1.3 s 825.00000000 MHz

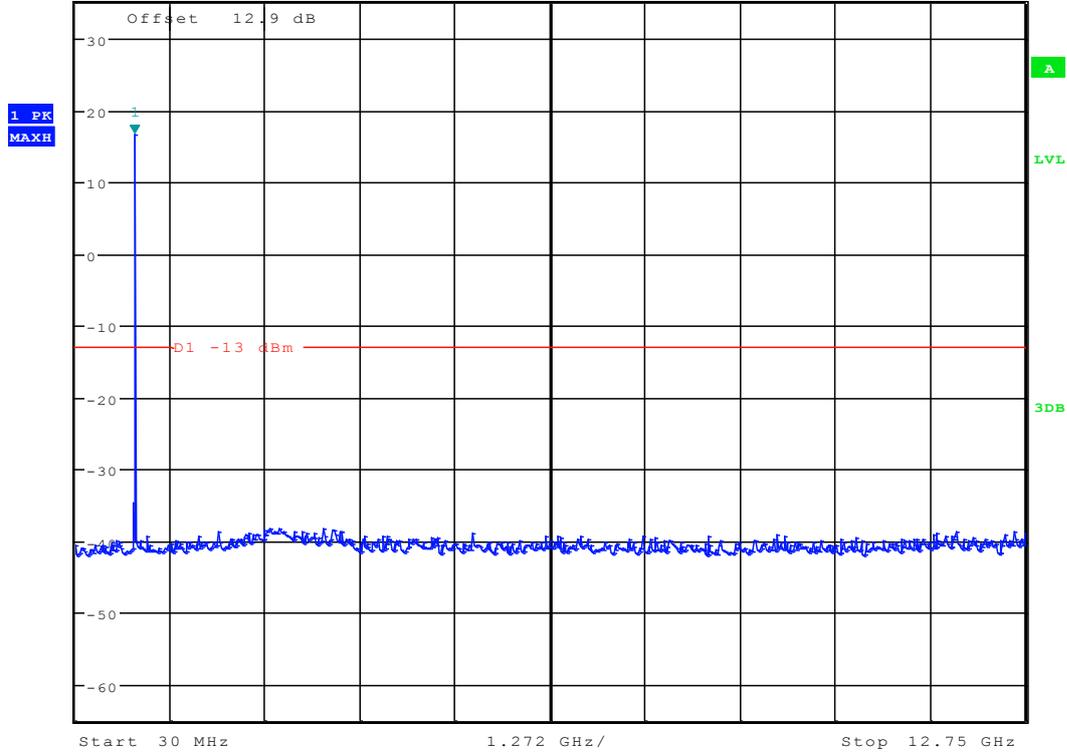


Date: 17.SEP.2012 10:10:36



Channel 4182



* RBW 1 kHz Marker 1 [T1]
 * VBW 10 kHz -50.94 dBm
 Ref 35 dBm * Att 35 dB SWT 145 ms 9.451923077 kHz

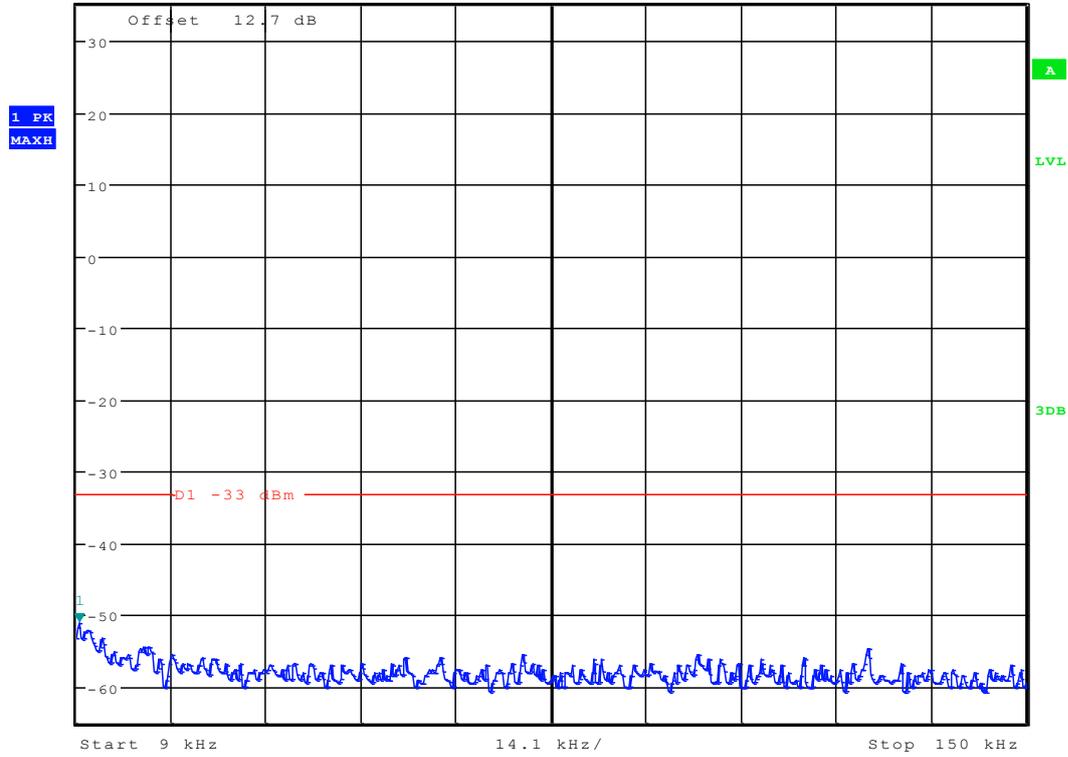


Date: 17.SEP.2012 10:09:22



* RBW 10 kHz Marker 1 [T1]
 * VBW 30 kHz -47.14 dBm
 SWT 300 ms 197.836538462 kHz

Ref 35 dBm

* Att 35 dB

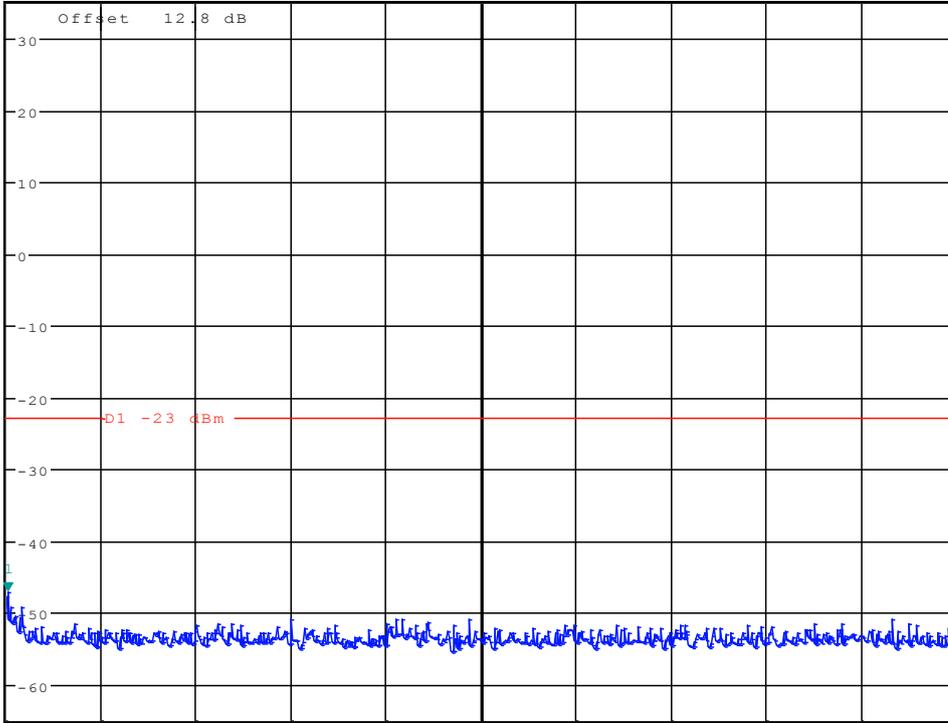

Start 150 kHz


2.985 MHz/

Stop 30 MHz

Date: 17.SEP.2012 10:10:07



* RBW 100 kHz Marker 1 [T1]
* VBW 300 kHz 15.88 dBm
Ref 35 dBm * Att 35 dB SWT 1.3 s 825.000000000 MHz

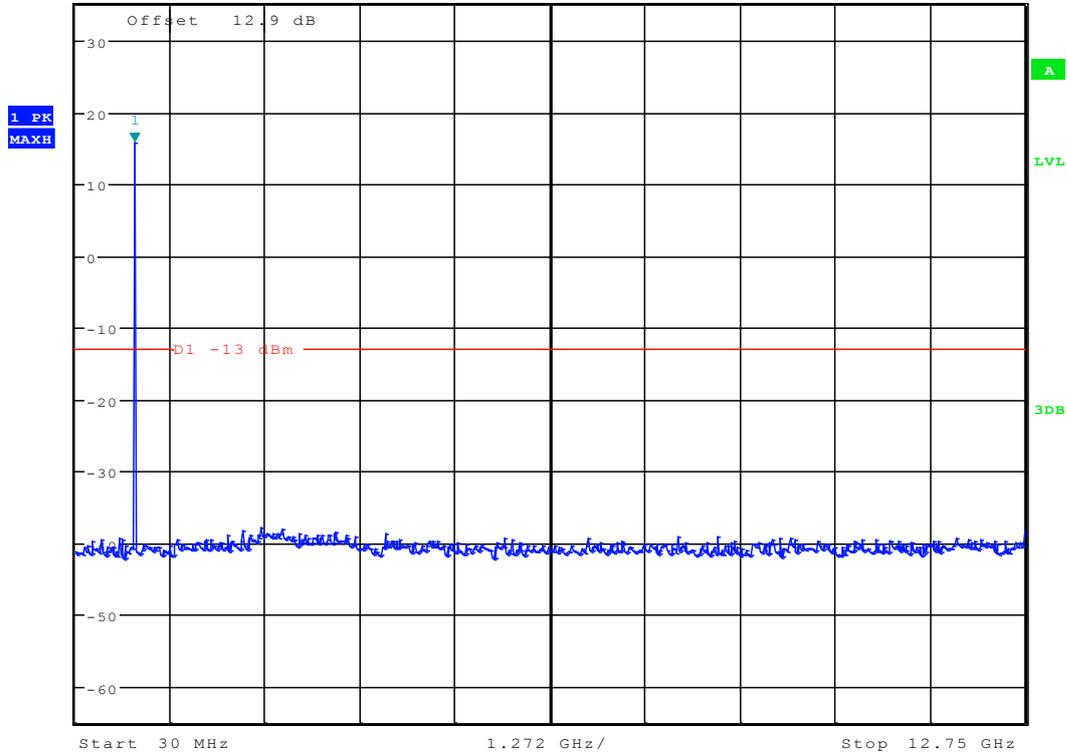


Date: 17.SEP.2012 10:10:51



Channel 4233



Ref 35 dBm *Att 35 dB *RBW 1 kHz Marker 1 [T1] -50.51 dBm
 *VBW 10 kHz SWT 145 ms 9.000000000 kHz

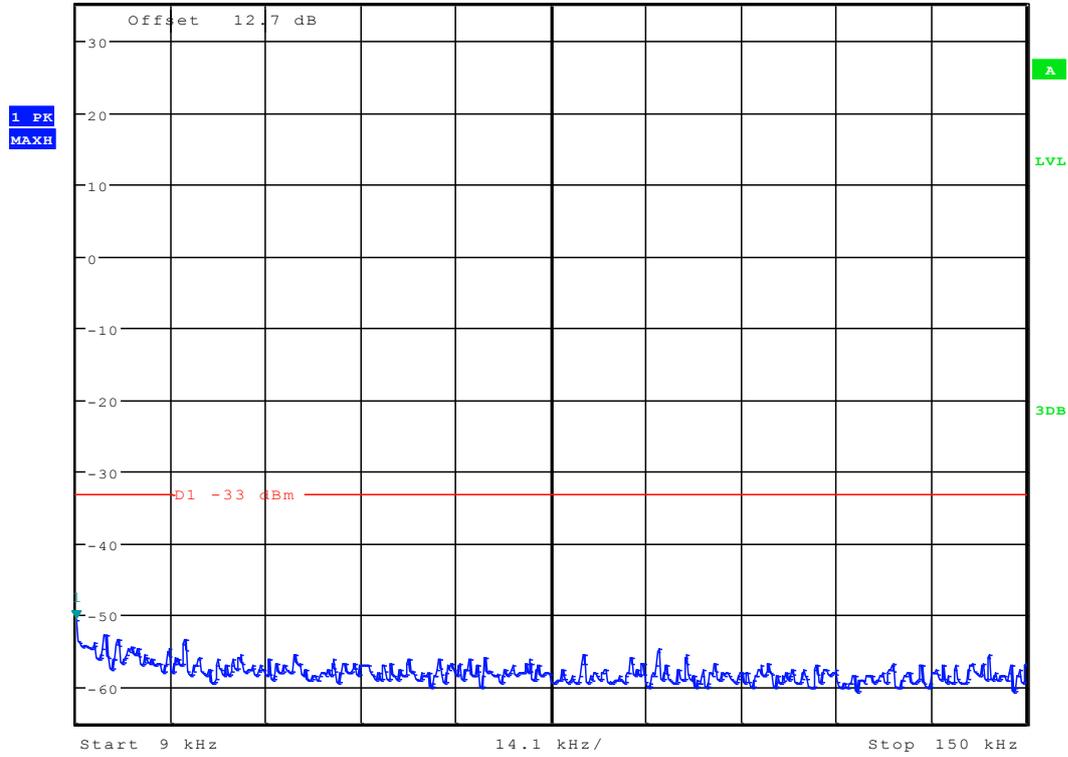


Date: 17.SEP.2012 10:09:37



* RBW 10 kHz Marker 1 [T1]
* VBW 30 kHz -46.47 dBm
SWT 300 ms 197.836538462 kHz

Ref 35 dBm

* Att 35 dB

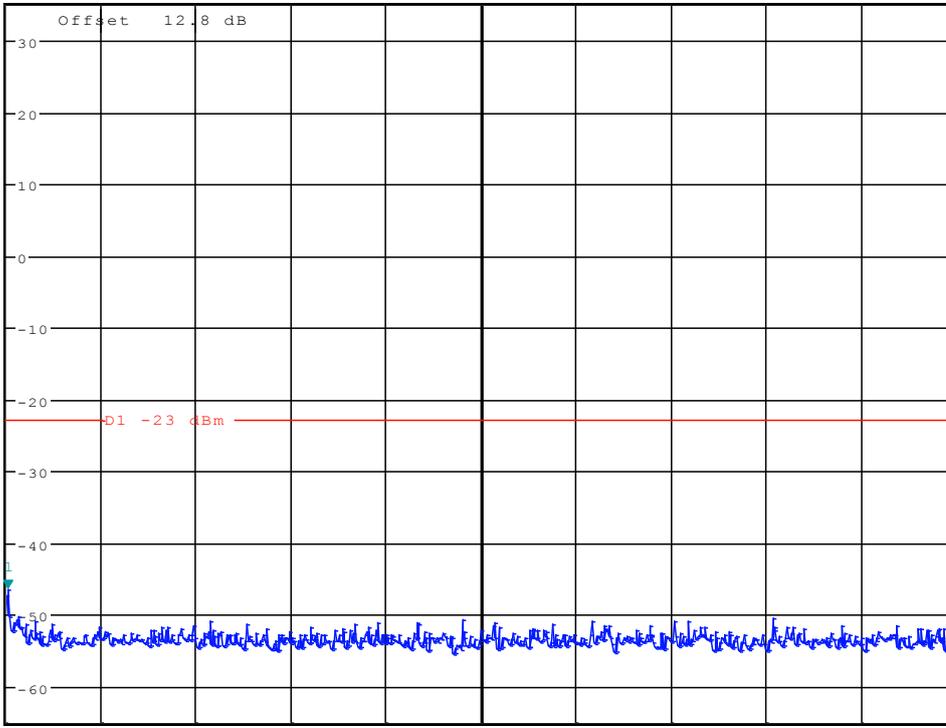

Start 150 kHz 2.985 MHz/ Stop 30 MHz

Date: 17.SEP.2012 10:10:21



Appendix F


Radiated spurious emission

According to FCC Part 2.1053 & Part 22.917 & RSS-132


Note: 1. Simultaneous transmission was investigated and no new emissions were found.
2. RBW \geq 1MHz, VBW > 3 x RBW.

GSM 850


Traffic Mode (9kHz~30MHz)

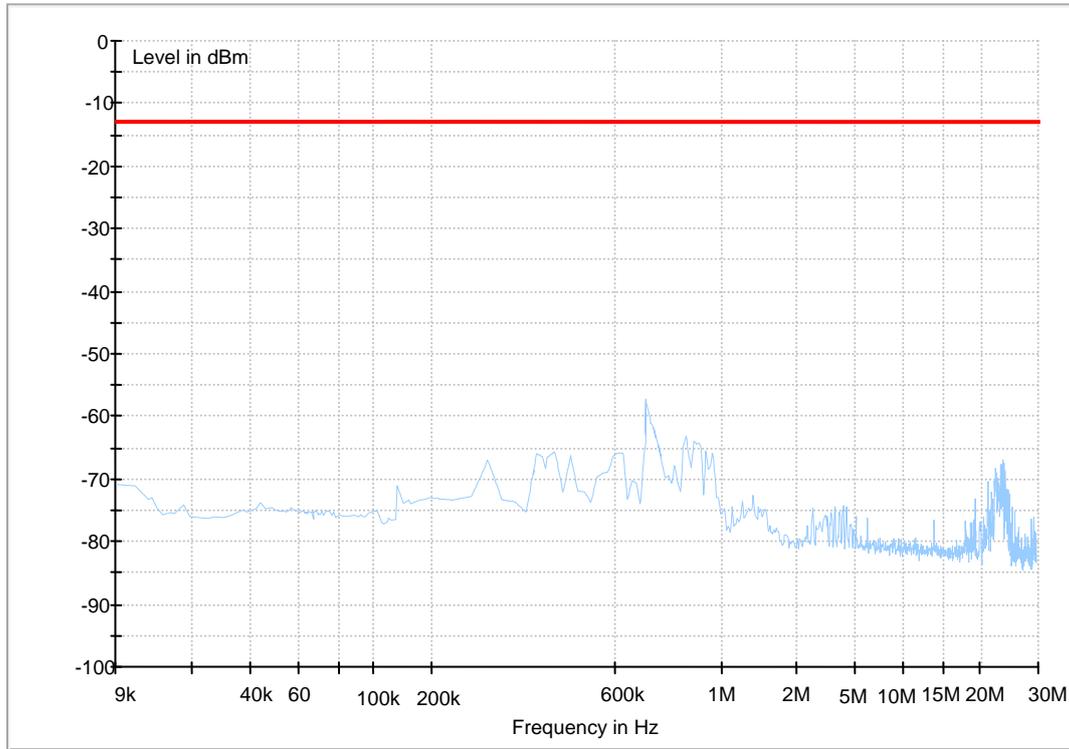

Traffic Mode (30MHz~3GHz)

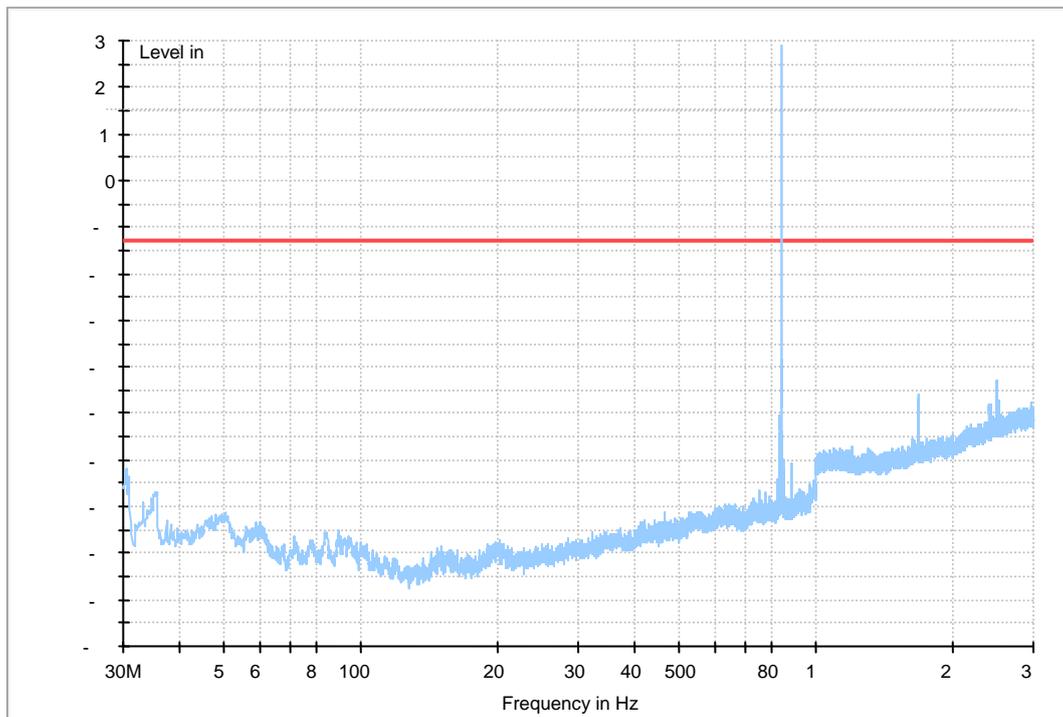


Traffic Mode (3GHz~18GHz)

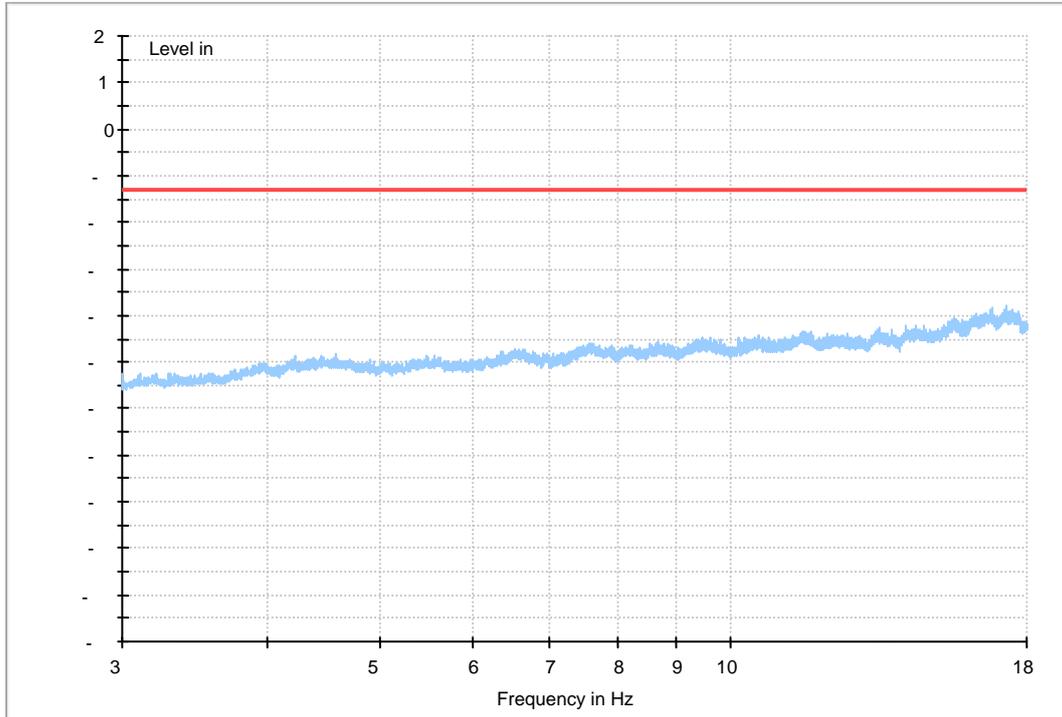


GPRS 850


Traffic Mode (9kHz~30MHz)

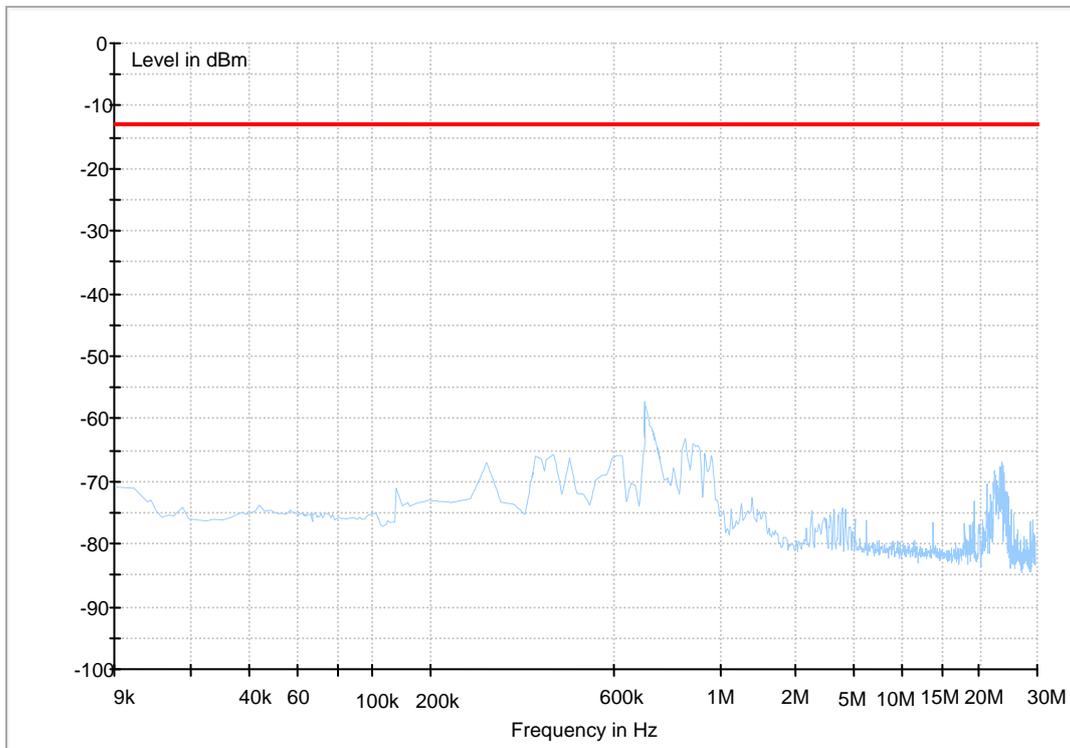

Traffic Mode (30MHz~3GHz)

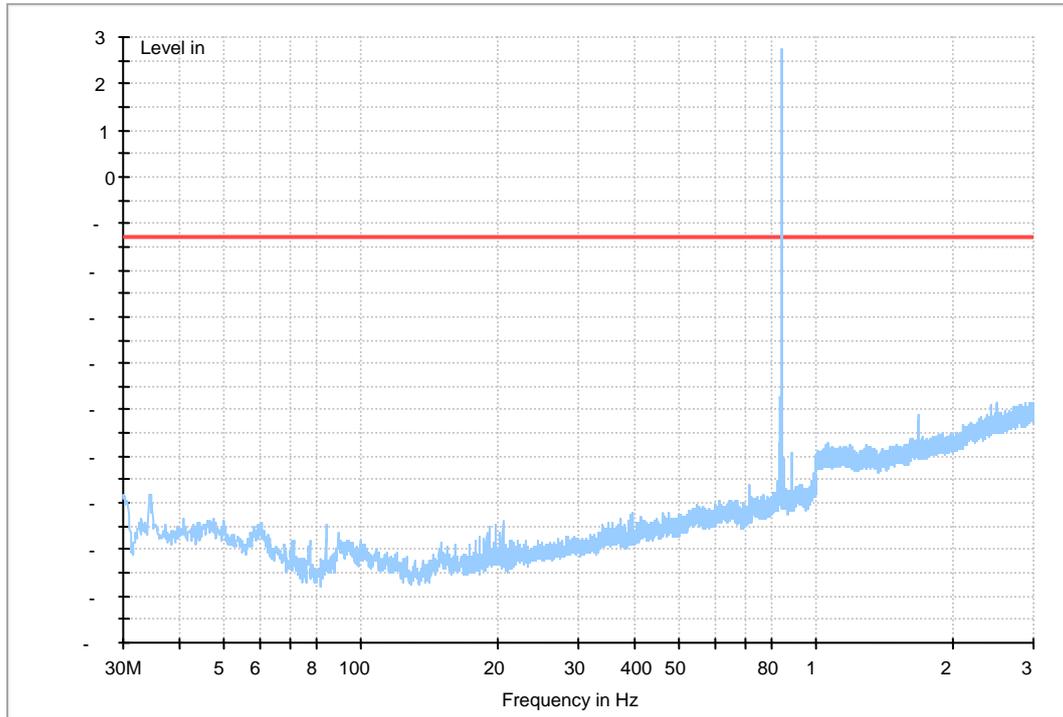


Traffic Mode (3GHz~18GHz)

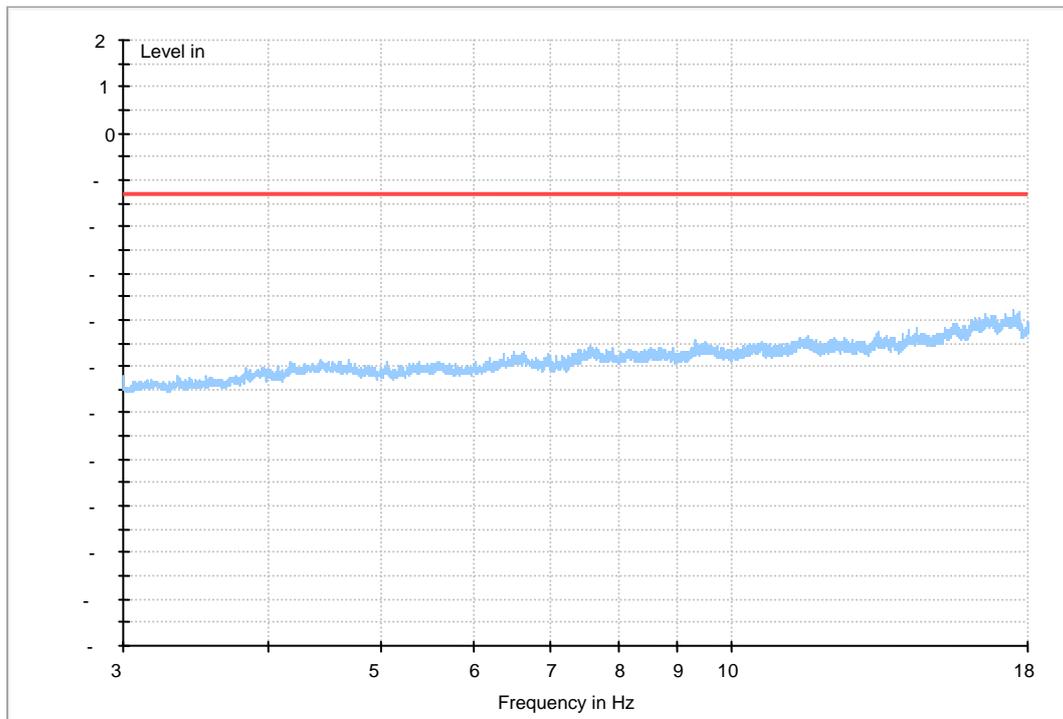


EDGE 850


Traffic Mode (9kHz~30MHz)

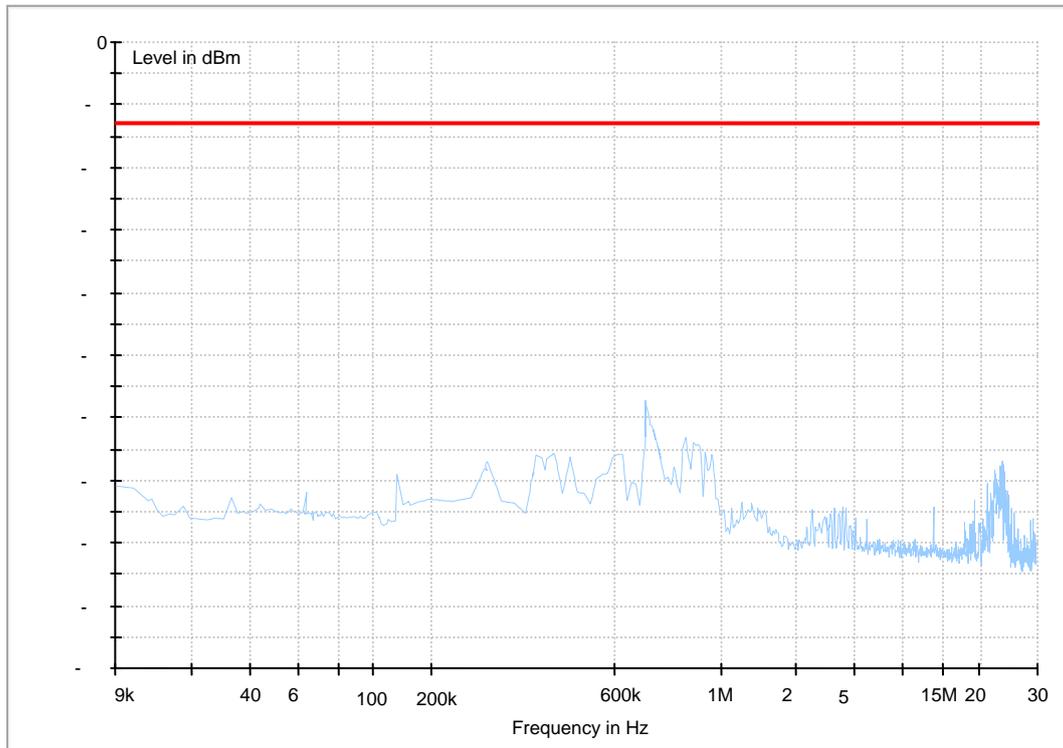

Traffic Mode (30MHz~3GHz)

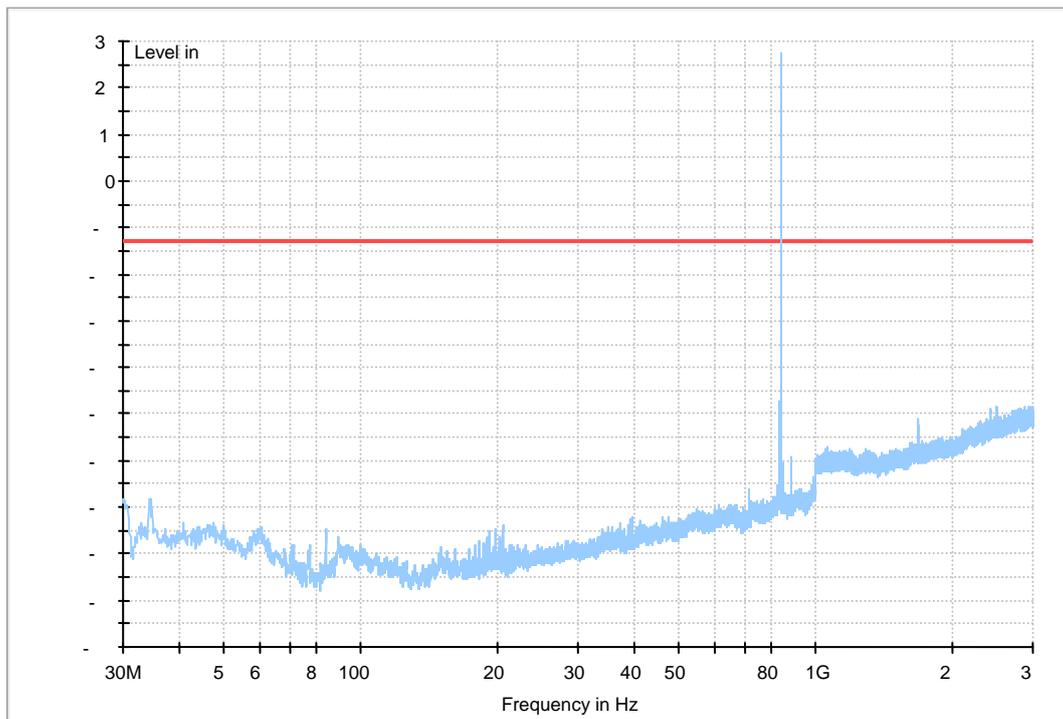


Traffic Mode (3GHz~18GHz)

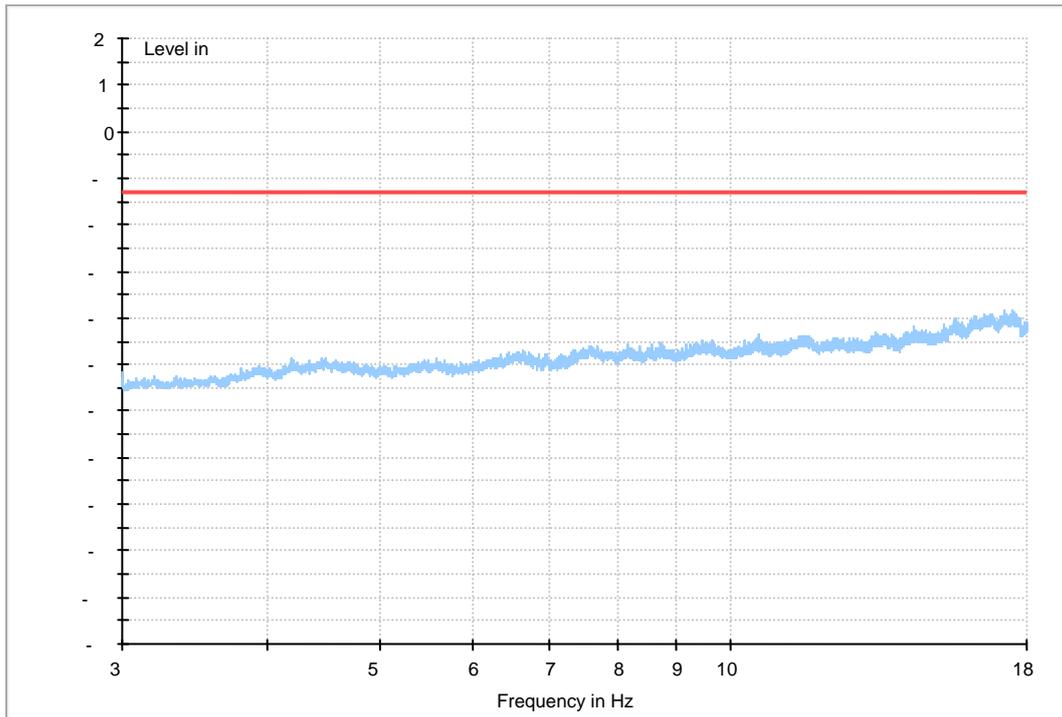


WCDMA Band V


Traffic Mode (9kHz-30MHz)

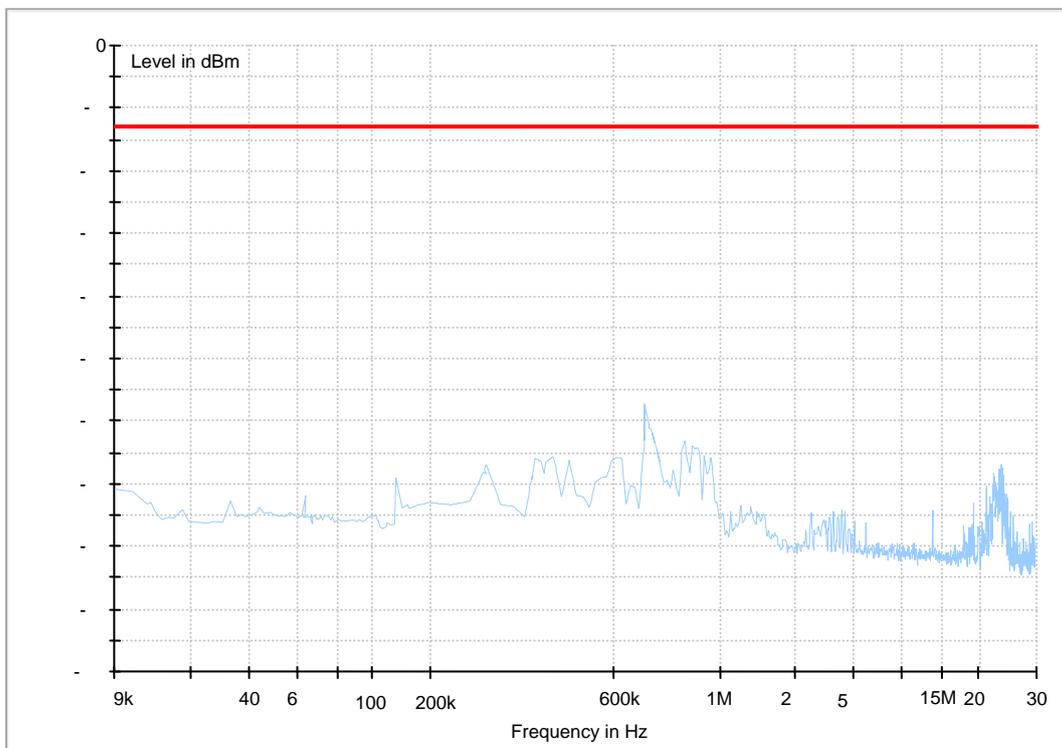

Traffic Mode (30MHz-3GHz)

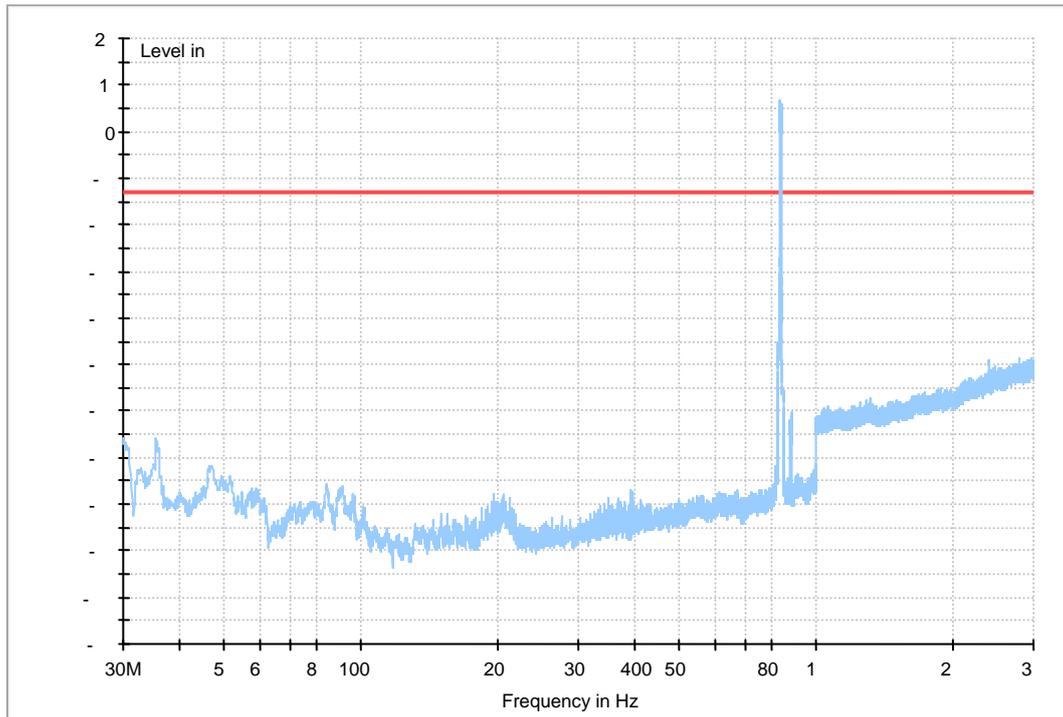


Traffic Mode (3GHz-18GHz)

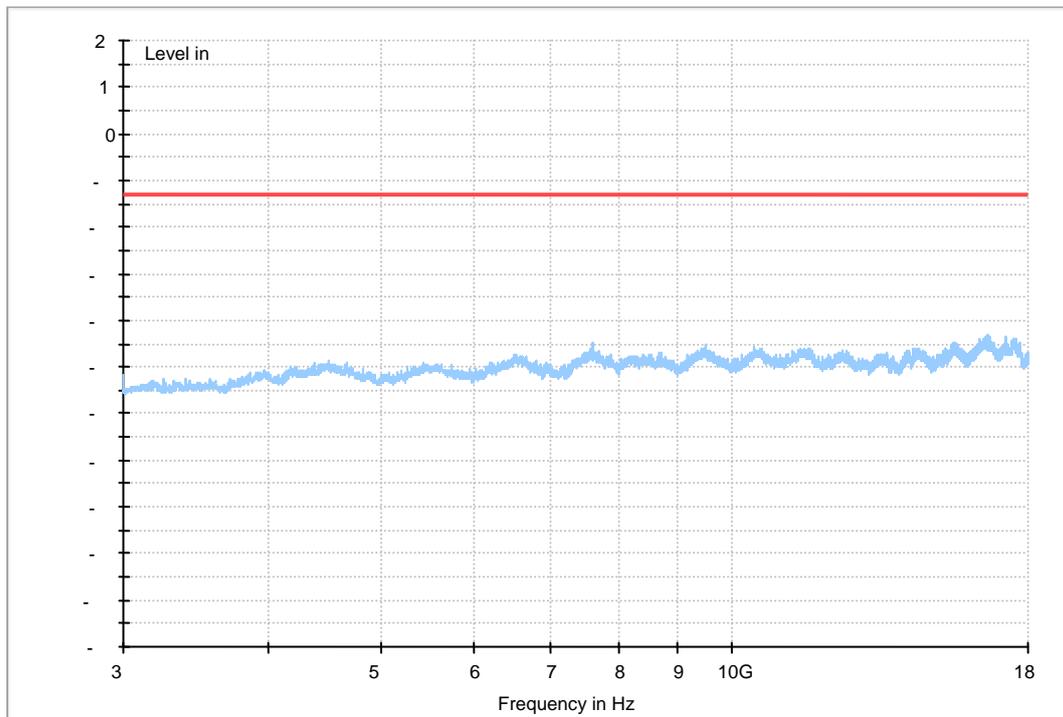


HSDPA Band V


Traffic Mode (9kHz-30MHz)

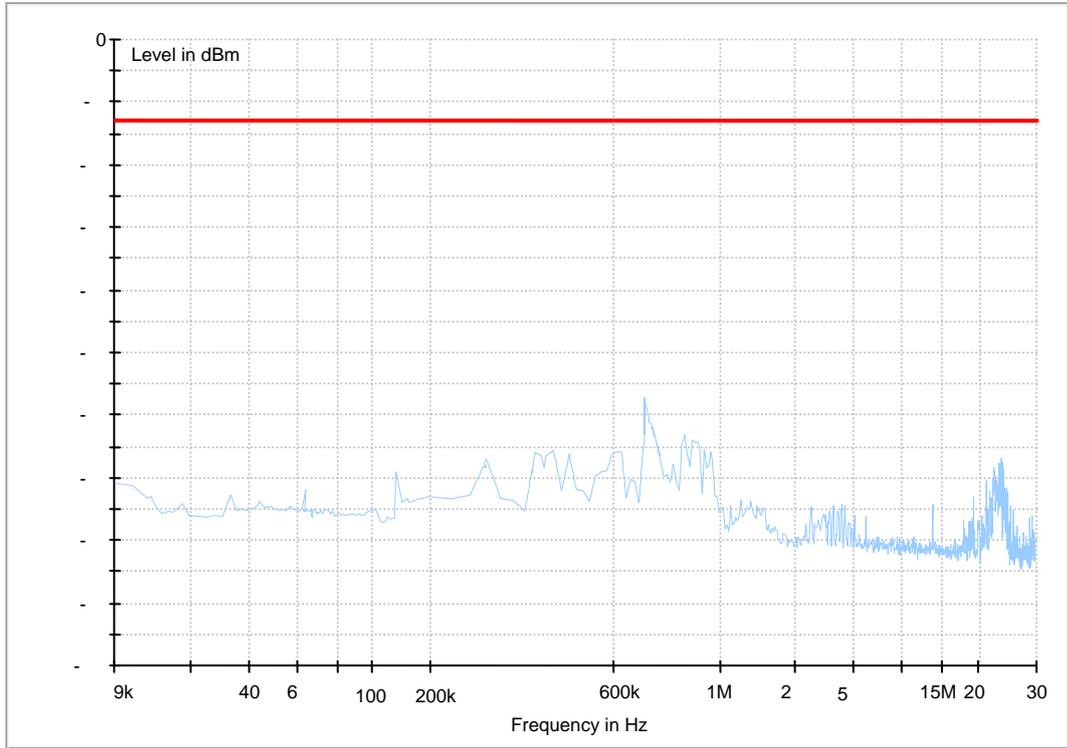

Traffic Mode (30MHz-3GHz)

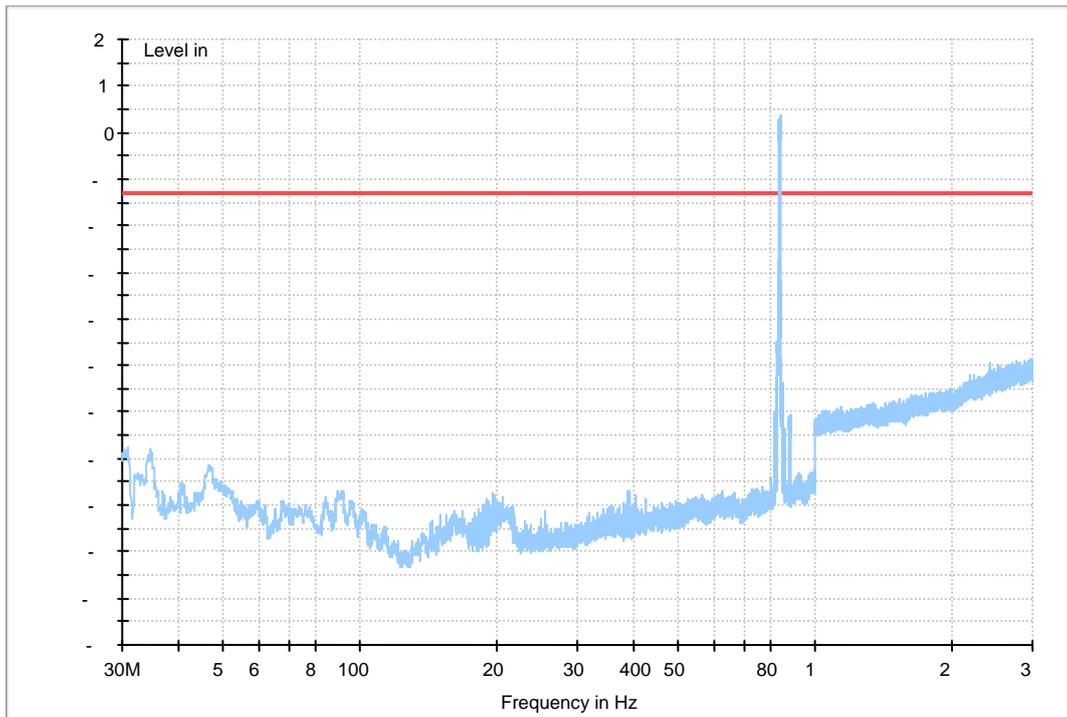


Traffic Mode (3GHz-18GHz)

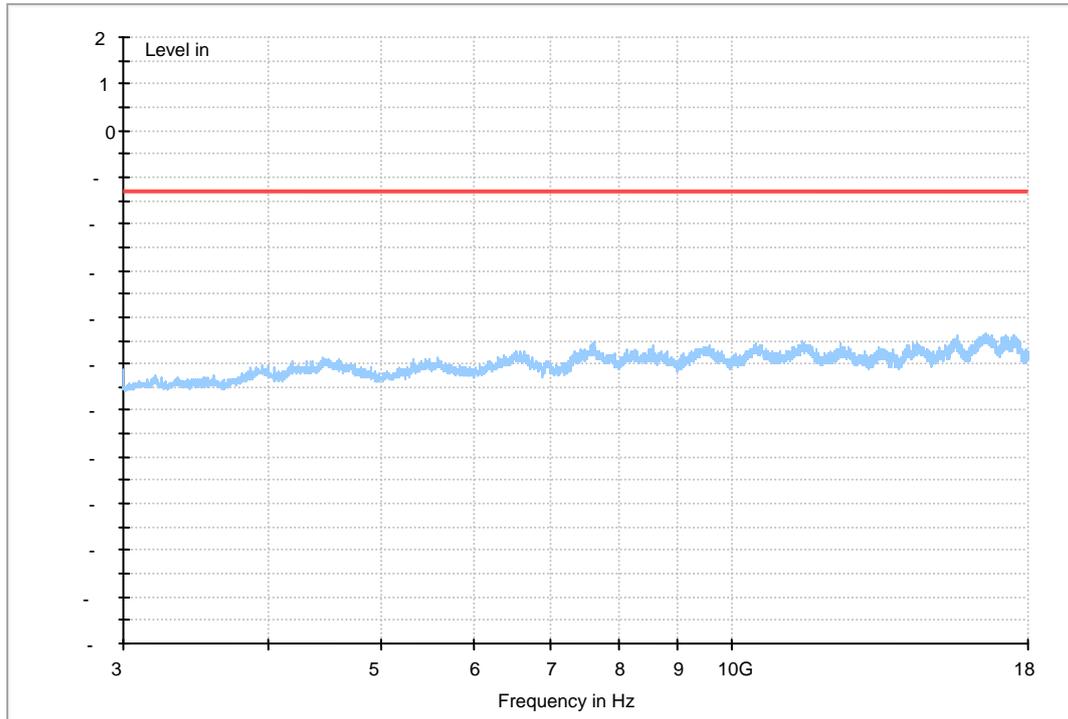


HSUPA Band V


Traffic Mode (9kHz-30MHz)

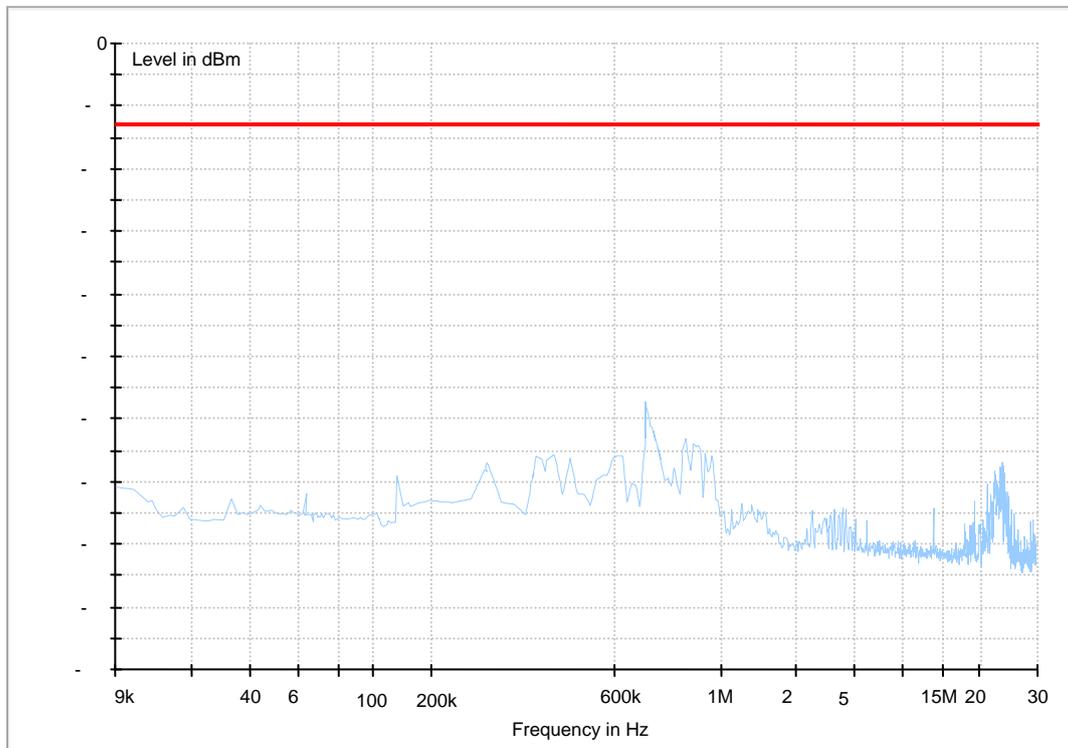

Traffic Mode (30MHz-3GHz)

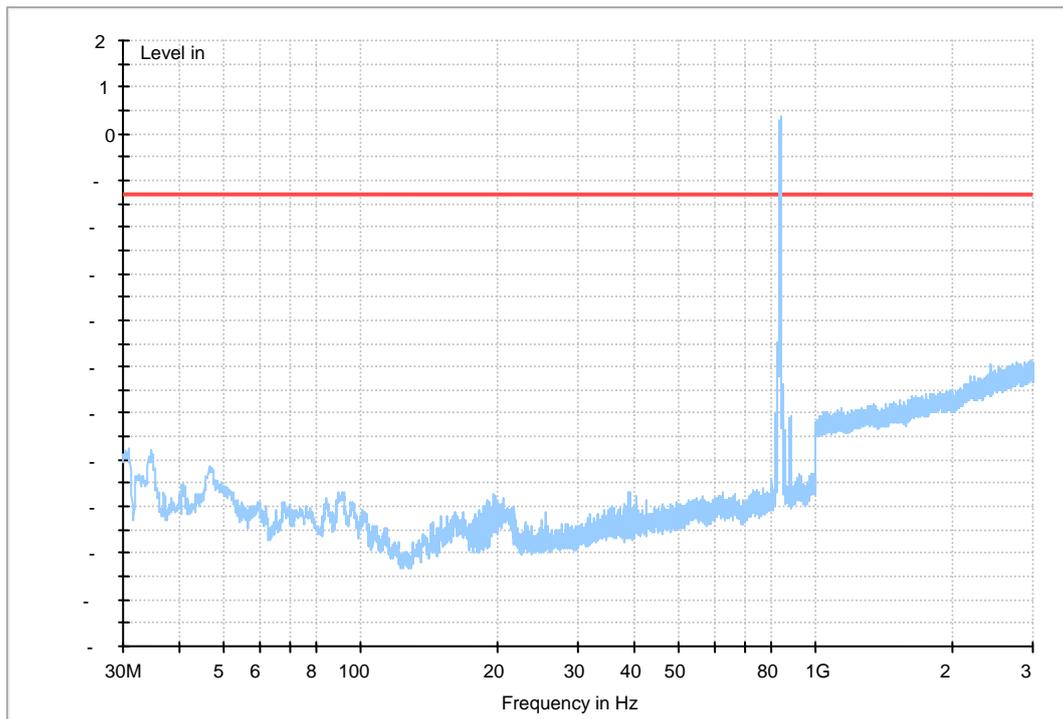

Traffic Mode (3GHz-18GHz)

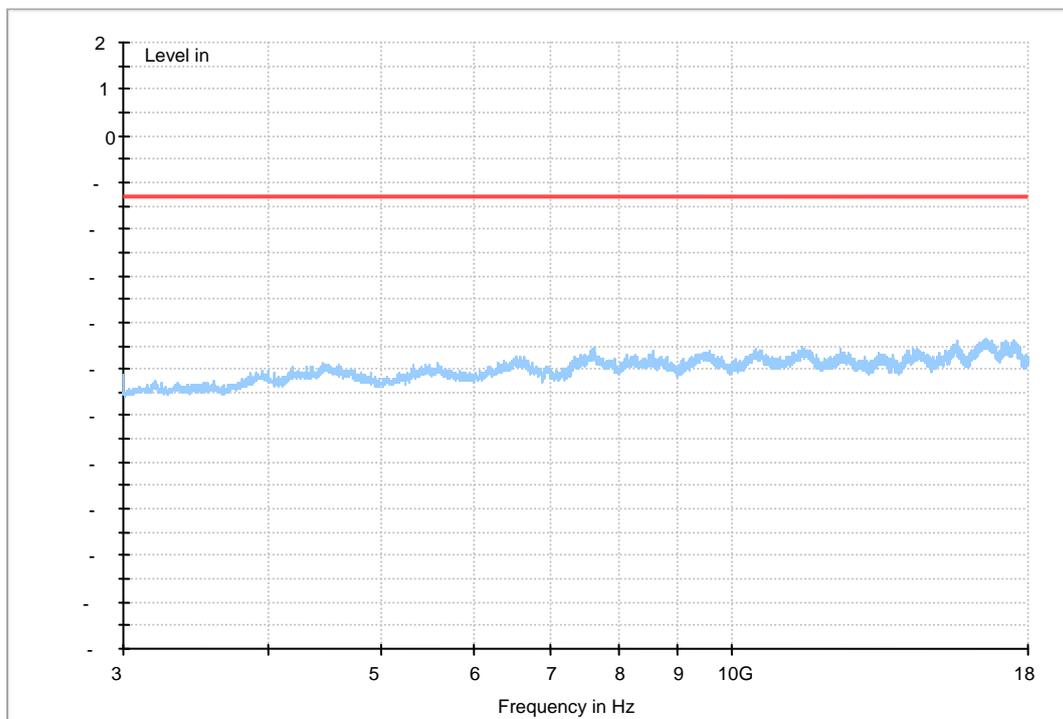

-----The END-----

--





Appendix G

Frequency Stability

According to FCC Part 2.1055& Part 22.355 & RSS-132



Frequency Error vs. Temperature:

Test Mode	RF Ch.	Volt.	Temp.	Freq. Error [Hz]	Freq. vs. rated [ppm]	Freq. vs. 20 °C [ppm]	Limit [ppm]	Verdict
TM 1	M	VN	-30 °C	-17	-0.02031	---	±2.5	Pass
			-20 °C	18	0.02151	---	±2.5	Pass
			-10 °C	27	0.03226	---	±2.5	Pass
			0 °C	26	0.03106	---	±2.5	Pass
			10 °C	28	0.03345	---	±2.5	Pass
			20 °C	12	0.01434	---	±2.5	Pass
			30 °C	-17	-0.02031	---	±2.5	Pass
			40 °C	-12	-0.01434	---	±2.5	Pass
			50 °C	9	0.01075	---	±2.5	Pass
TM 2	M	VN	-30 °C	10	0.01195	---	±2.5	Pass
			-20 °C	-8	-0.00956	---	±2.5	Pass
			-10 °C	-19	-0.02270	---	±2.5	Pass
			0 °C	-8	-0.00956	---	±2.5	Pass
			10 °C	27	0.03226	---	±2.5	Pass
			20 °C	-11	-0.01314	---	±2.5	Pass
TM 3	M	VN	30 °C	-9	-0.01075	---	±2.5	Pass
			40 °C	27	0.03226	---	±2.5	Pass
			50 °C	29	0.03465	---	±2.5	Pass
			-30 °C	-12	-0.01435	---	±2.5	Pass
			-20 °C	-15	-0.01793	---	±2.5	Pass
TM 3	M	VN	-10 °C	-9	-0.01076	---	±2.5	Pass
			0 °C	17	0.02033	---	±2.5	Pass
			10 °C	18	0.02152	---	±2.5	Pass
			20 °C	24	0.02869	---	±2.5	Pass
			30 °C	17	0.02033	---	±2.5	Pass
			40 °C	12	0.01435	---	±2.5	Pass
			50 °C	-16	-0.01913	---	±2.5	Pass



Frequency Error vs. Voltage:

Test Mode	RF Ch.	Temp.	Volt.	Freq. Error [Hz]	Freq. vs. rated [ppm]	Freq. vs. 20 °C [ppm]	Limit [ppm]	Verdict
TM 1	M	20 °C	VL	28	0.03345	---	±2.5	Pass
			VN	-22	-0.02628	---	±2.5	Pass
			VH	13	0.01553	---	±2.5	Pass
TM 2	M	20 °C	VL	28	0.03345	---	±2.5	Pass
			VN	24	0.02867	---	±2.5	Pass
			VH	-18	-0.02151	---	±2.5	Pass
TM 3	M	20 °C	VL	-23	-0.02750	---	±2.5	Pass
			VN	-6	-0.00717	---	±2.5	Pass
			VH	-15	-0.01793	---	±2.5	Pass

-----The END-----

--



Appendix H


Receiver Spurious Emissions

According to RSS-132



This test was carried out in all the test modes, Here only the worst test result was shown.

30MHz-1GHz

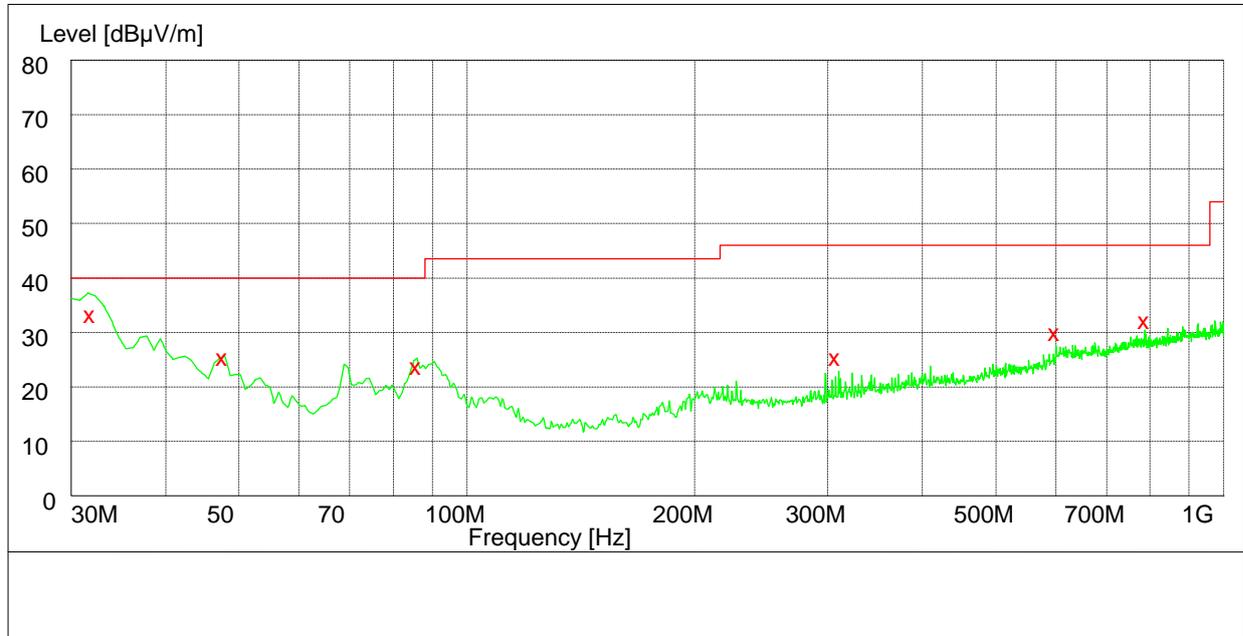


MEASUREMENT RESULT: QP Detector

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarisation
31.860000	32.40	14.6	40.0	7.6	100.0	318.00	VERTICAL
47.700000	24.60	15	40.0	15.4	100.0	72.00	VERTICAL
85.920000	22.90	11.2	40.0	17.1	146.0	115.00	VERTICAL
307.200000	24.60	15.2	46.0	21.4	100.0	276.00	HORIZONTAL
599.700000	29.10	21.3	46.0	16.9	147.0	357.00	VERTICAL
786.840000	31.40	23.4	46.0	14.6	100.0	346.00	VERTICAL



1GHz-18GHz

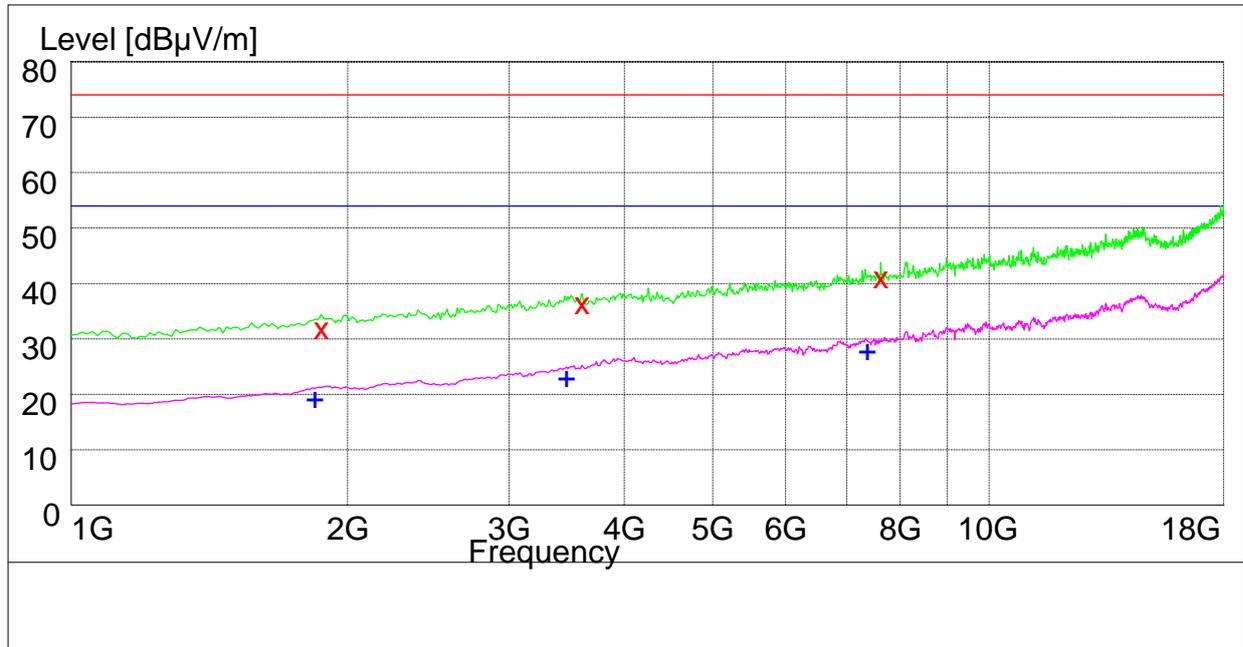

MEASUREMENT RESULT: PK Detector

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarisation
1874.900000	31.90	-12.3	74.0	42.1	100.0	104.00	HORIZONTAL
3602.600000	36.40	-5.6	74.0	37.6	100.0	261.00	VERTICAL
7624.200000	41.20	4.2	74.0	32.8	100.0	133.00	VERTICAL

MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarisation
1836.100000	19.40	-12.6	54.0	34.6	100.0	262.00	VERTICAL
3454.100000	23.10	-6.2	54.0	30.9	100.0	4.00	VERTICAL
7343.700000	28.00	3.1	54.0	26.0	100.0	229.00	VERTICAL

-----The END-----