



Worldwide Regulatory Approvals Experts

(A2LA Certificate Number 1627-01)

Technical Report

Company: Beltronics USA, Inc.
FRN: 0007600588
Models: Vector 990
FCC ID: QL4G2S7I
Equipment Code: CRD

Report prepared for:
Beltronics USA, Inc.
5442 West Chester Road
West Chester, OH 45069
Phone: (513)-870-8535
FAX: (513)-870-8523

Report prepared by:
Evan D. Gould
Curtis-Straus LLC
527 Great Road
Phone: (978)-486-8880
FAX: (978)-486-8828

A handwritten signature in black ink, appearing to read "Michael Bullard".

EMC Manager

Introduction

This report is an application for Certification of Radar Detectors operating pursuant to 47 CFR 15.109, as amended by ET Docket No. 01-278; FCC 02-211, published in the Federal Register Vol. 67, No. 145 on Monday July 29, 2002.

Statement of Conformity

47 CFR 15.109(h) states that "*Radar detectors shall comply with the emissions limits...of [section 15.109(a)] over the frequency range of 11.7 – 12.2GHz.*" The applicable limit being 500 μ V/m measured at a distance of 3m. The Beltronics Vector 990 has been tested and found to comply with this requirement.

Test Methodology

Radiated emission testing was performed according to the procedures in ANSI C63.4 (2001). The testing was performed at an antenna to EUT distance of 1 meter. Performance was investigated in the range 11.7-12.2GHz. The Vector 990 was powered by a R.O.C. SPN4025A 12VDC 400mA power supply. Since the device is a hand-held unit, the emissions were maximized around the three orthogonal axes and the maximum reading was recorded. The integrated antenna cannot be maximized separately.

Test Equipment

SPECTRUM ANALYZERS					
x	Analyzer	Model No.	Company	Serial No.	Calibration Due
X	ORANGE 9kHz-26.5GHz	E4407B	HP	US39440975	07-JUN-2003

OPEN AREA TEST SITES (OATS)

x	Site	FCC Code	IC Code	VCCI Code	Calibration Due
X	“T” Texas	93448	IC 2762-T	R-905/ C-480	04-FEB-2004

ANTENNAS

x	Antenna	Model No.	Company	Serial No.	Calibration Due
X	BLACK Horn: 1-18GHz	3115	EMCO	9703-5148	12-JUN-2003

PREAMPLIFIERS / ATTENUATORS

x	Preamplifier	Model No.	Company	Serial No.	Calibration Due
X	ORANGE-BLACK 1-20GHz	SMC-12A	MITEQ	690639	06-SEP-2002

Unless otherwise noted the calibration interval is one year. All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard. All Open Area Test Sites are located at 527 Great Road, Littleton, MA 01460.

Setup Photo



Model: Vector 990


Measurement Results

All measurements taken were peak detector readings of the noise floor.
There were no emissions detected from the EUTs.

Radiated Emissions Table							Curtis-Straus LLC						
Date: 08-Aug-02	Company: Beltronics				Table 1								
Engineer: Evan Gould	EUT Desc: various radar detector models				Work Order: C0610								
Frequency Range: 11.7-12.2GHz				Measurement Distance: 1 m									
Notes: Emissions maximized Horizontally and Vertically. All measurements are noise floor readings.													
Antenna Polarization (H / V)	Frequency (MHz)	Reading (dB μ V)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Reading (dB μ V/m)	47 CFR 15.209(a)						
V990	12190.0	31.4	20.0	38.9	4.7	55.0	63.5	-8.5	Pass				
Test Sites: "T"		Pre-Amp: Or-Blk		Cable: 3m Microflex		Analyzer: Orange		Antennas: Black Horn					

Emission Plot

* Agilent 13:34:51 Aug 8, 2002

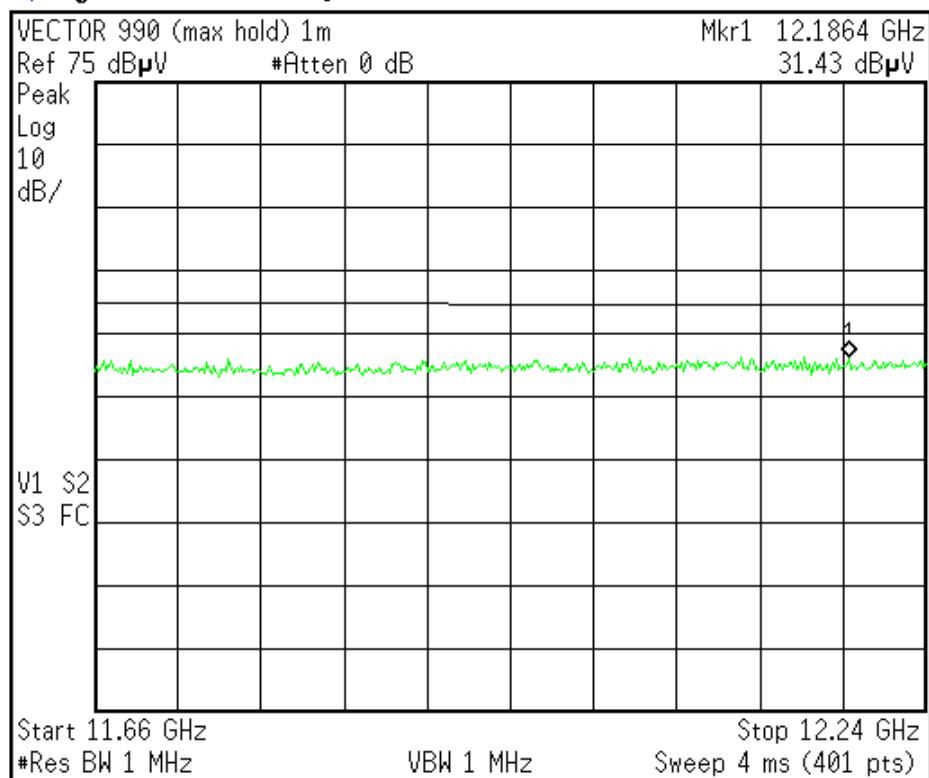

- Trace
- Trace 1 2 3
- Clear Write
- Max Hold
- Min Hold
- View
- Blank
- More 1 of 2