



**FCC CFR47 PART 15 SUBPART C
CERTIFICATION
TEST REPORT**

FOR

RECESSED DOOR/WINDOW SENSOR

MODEL NUMBER: EV-DW4955

FCC ID: QNPEV-DW4955

REPORT NUMBER: 05U3847-1B

ISSUE DATE: JANUARY 27, 2006

Prepared for

**SECURE WIRELESS, INC.
5817 DRYDEN PLACE, SUITE D
CARLSBAD, CA 92008, USA**

Prepared by

**COMPLIANCE CERTIFICATION SERVICES
561F MONTEREY ROAD
MORGAN HILL, CA 95037, USA
TEL: (408) 463-0885
FAX: (408) 463-0888**



Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
A	1/17/06	Initial Issue	Thu Chan
B	1/27/06	Revised Sections 5.2 and 7.4.1 Below 1GHz	Thu Chan

TABLE OF CONTENTS

1.	ATTESTATION OF TEST RESULTS	4
2.	TEST METHODOLOGY	5
3.	FACILITIES AND ACCREDITATION	5
4.	CALIBRATION AND UNCERTAINTY	5
4.1.	MEASURING INSTRUMENT CALIBRATION	5
4.2.	MEASUREMENT UNCERTAINTY	5
5.	EQUIPMENT UNDER TEST	6
5.1.	DESCRIPTION OF EUT	6
5.2.	SOFTWARE AND FIRMWARE	6
5.3.	MODIFICATIONS	6
5.4.	WORST-CASE CONFIGURATION AND MODE	6
5.5.	DESCRIPTION OF TEST SETUP	7
6.	TEST AND MEASUREMENT EQUIPMENT	9
7.	LIMITS AND RESULTS	10
7.1.	20dB BANDWIDTH	10
7.2.	MAXIMUM MODULATION PERCENTAGE (M%)	12
7.3.	LESS THAN 5 SECONDS PLOT	18
7.4.	RADIATED EMISSIONS	20
7.4.1.	TRANSMITTER RADIATED SPURIOUS EMISSIONS	20
8.	SETUP PHOTOS	25

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SECURE WIRELES SYSTEMS INC
5817 DRYDEN PLACE, SUITE D
CARLSBAD, CA 92008, U.S.A

EUT DESCRIPTION: RECESSED DOOR/WINDOW SENSOR

MODEL: EV-DW4955

SERIAL NUMBER: ESN25678A

DATE TESTED: NOVEMBER 18, 2005 & JANUARY 17, 2006

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:

Tested By:



THU CHAN
EMC SUPERVISOR
COMPLIANCE CERTIFICATION SERVICES

CHIN PANG
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The Recessed Door/Window Sensor is at a single fixed frequency of 433.92MHz, and is power by a 3V CR2450N Lithium.

Equipment Type	433.92MHz Transmitter
Fundamental Frequency	433.92 MHz
Power Source	3V Lithium Battery
Transmitting Time	Periodic ≤ 5 seconds
Manufacturer	Secure Wireless, Inc.

5.2. SOFTWARE AND FIRMWARE

To activate the EUT by using a magnet and make contact.

5.3. MODIFICATIONS

1. The C8 capacitor was replaced with 680 pF.
2. The C7 capacitor was replaced with 220 pF.

5.4. WORST-CASE CONFIGURATION AND MODE

The worst-case channel is determined by X, Y, and Z-axis. The highest measured output power was at Y-Axis.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

N/A


I/O CABLES

N/A

TEST SETUP

The EUT is stand-alone unit and is battery operated.

SETUP DIAGRAM FOR TESTS

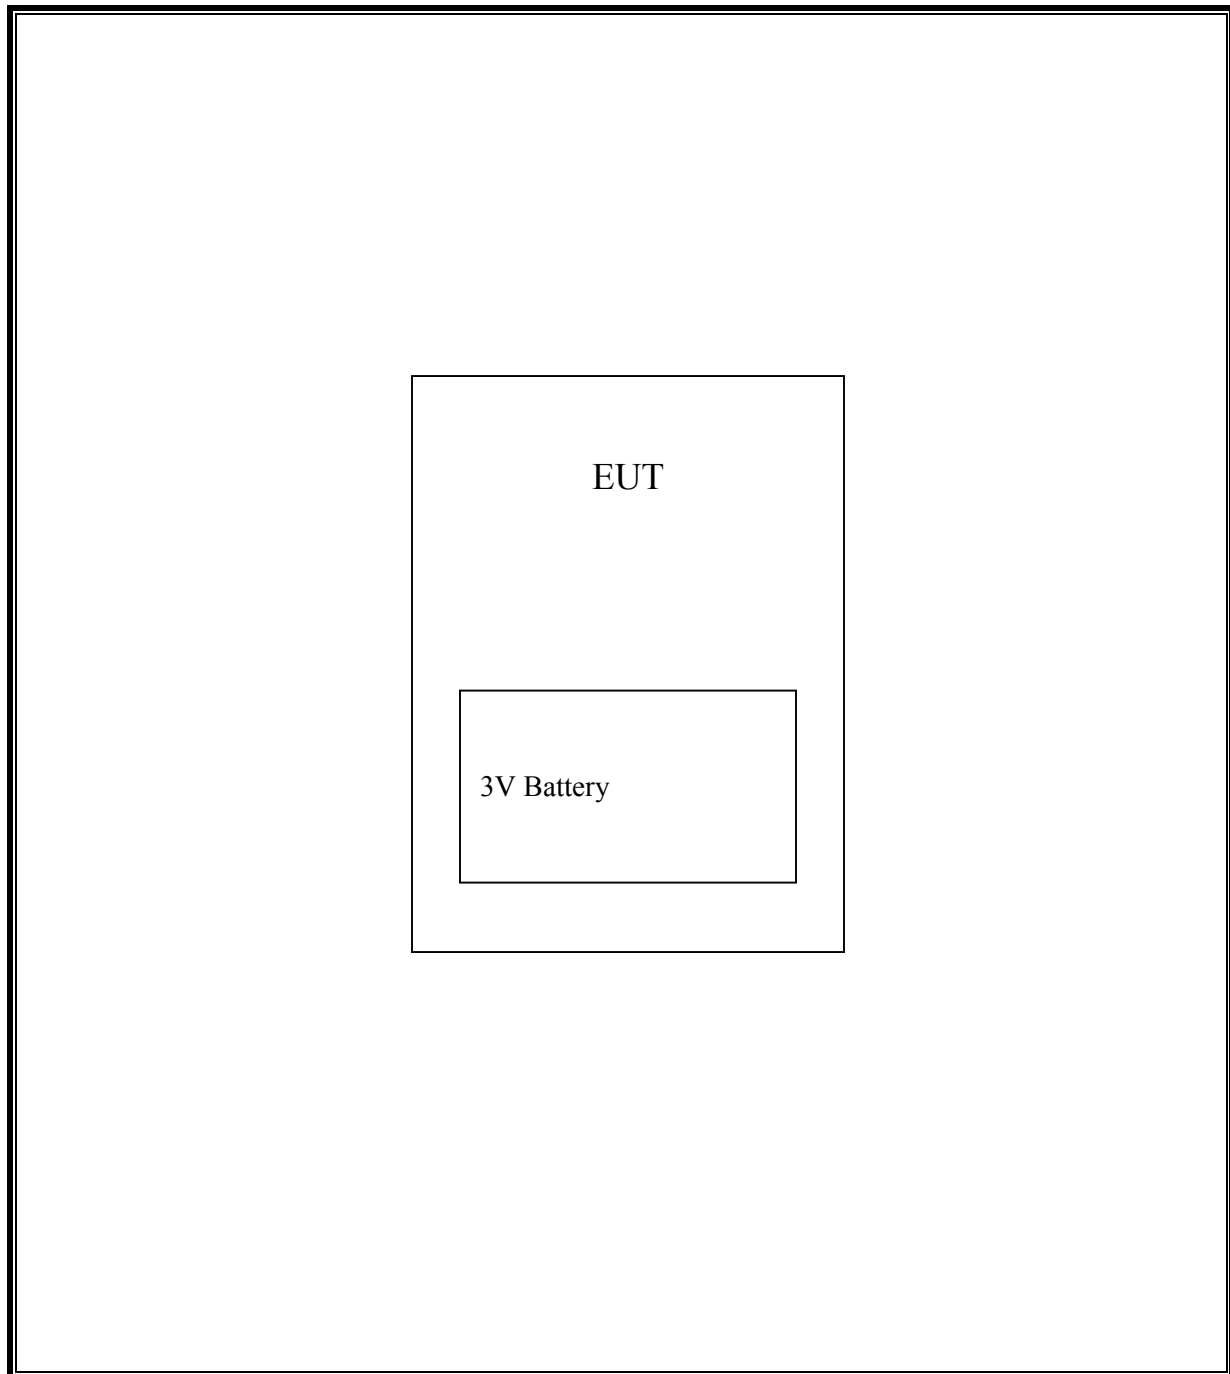

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	Cal Due
Antenna, Horn 1 ~ 18 GHz	Ertco	3115	6717	4/22/2006
Preamplifier, 1 ~ 26 GHz	Miteq	NSP2600-SP	924342	9/2/2006
Spectrum Analyzer 3 Hz ~ 44 GHz	Agilent	E4446A	MY43360112	3/28/2006
EMI Receiver, 9 kHz ~ 2.9 GHz	HP	8542E	3942A00286	3/29/2006
RF Filter Section	HP	85420E	3705A00256	3/29/2006
Antenna, Bilog 30MHz ~ 2Ghz	Solar	JB1	A121003	3/3/2006

7. LIMITS AND RESULTS

7.1. 20dB BANDWIDTH

LIMIT

§15.231 (c) The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer.

20dB Bandwidth: The RBW is set to 100 KHz. The VBW is set to 100 KHz. The sweep time is coupled. Bandwidth is determined at the points 20 dB down from the modulated carrier.


RESULTS

No non-compliance noted:

20dB Bandwidth

Frequency (MHz)	20dB Bandwidth (KHz)	Limit (KHz)	Margin (KHz)
433.92	263	1084.8	-821.8

20dB BANDWIDTH

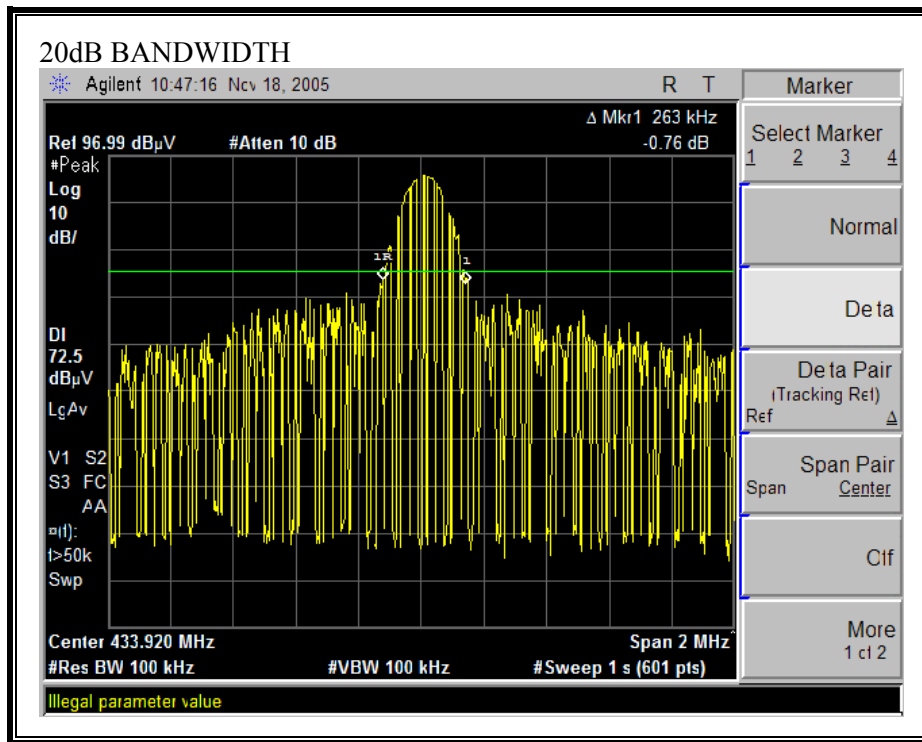

7.2. MAXIMUM MODULATION PERCENTAGE (M%)

LIMIT

§15.35 (c) the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification or shall be retained in the measurement data file for equipment subject to notification or verification.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer or radiated field strength. The RBW is set to 100 kHz and the VBW is set to 100 kHz. The sweep time is coupled and the span is set to 0 Hz. The number of pulses is measured and calculated in a 100 ms scan.

CALCULATION:

Average Reading = Peak Reading (dBuV/m) + $20 \log (\text{Duty Cycle})$, Where Duty Cycle is $(\# \text{ of long pulses} * \text{long pulse width}) + (\# \text{ of short pulses} * \text{short pulse width}) / 100$ or T


RESULTS

No non-compliance noted:


MAXIMUM MODULATION PERCENTAGE

One Period (ms)	Long Pulse Width (ms)	# of Long Pulses	Short Width (ms)	# of Short Pulses	Duty Cycle	20*Log Duty Cycle (dB)
314.2	2.508	1	0.23	27	0.088	-21.10


ONE PERIOD

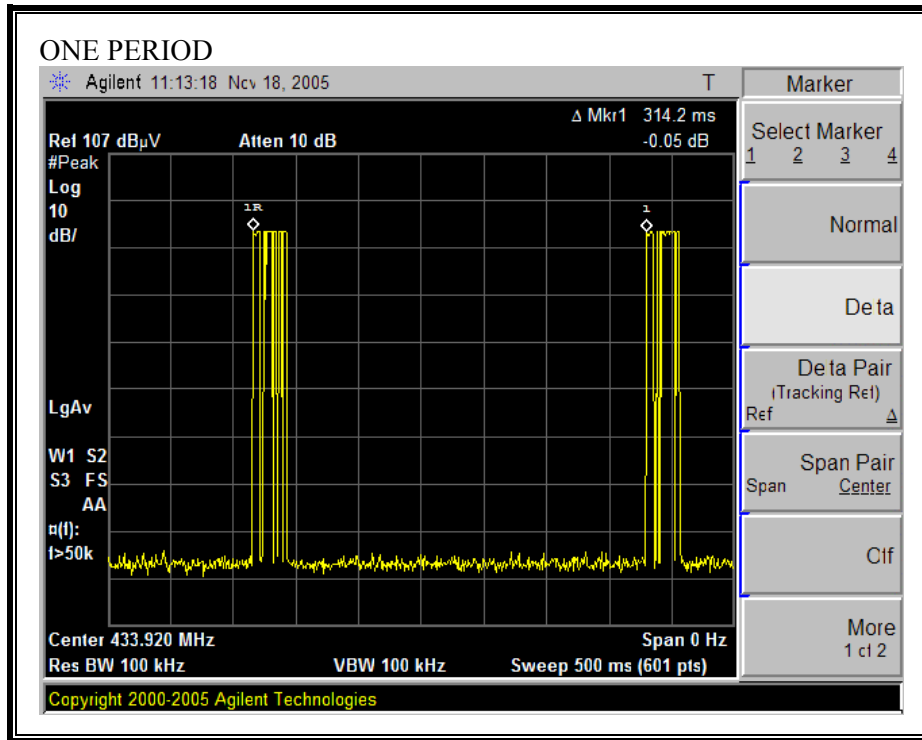


ON TIME

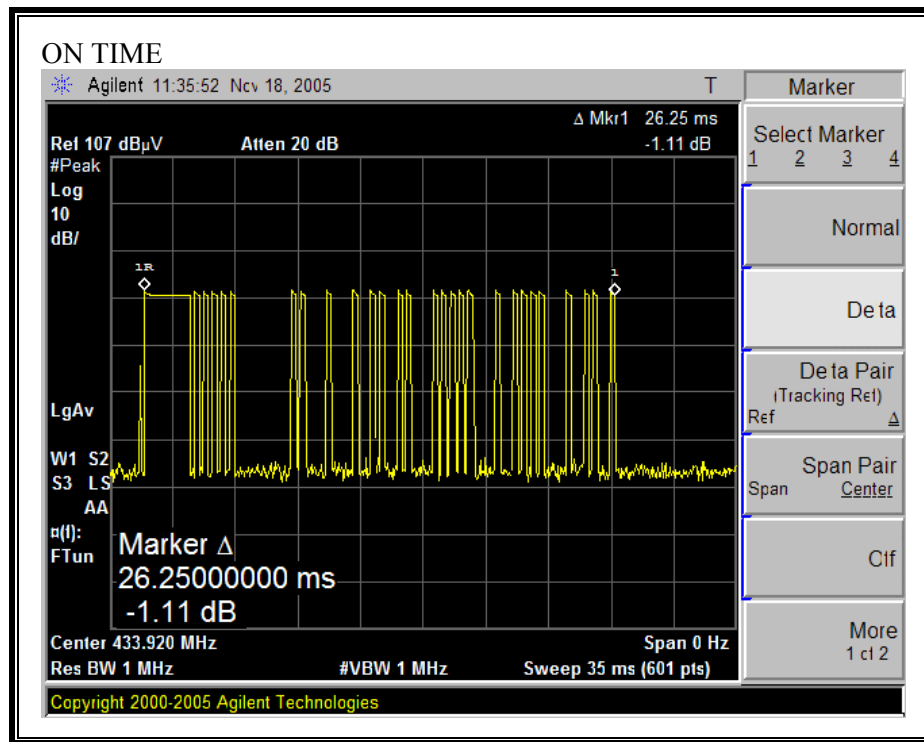

LONG PULSE WIDTH

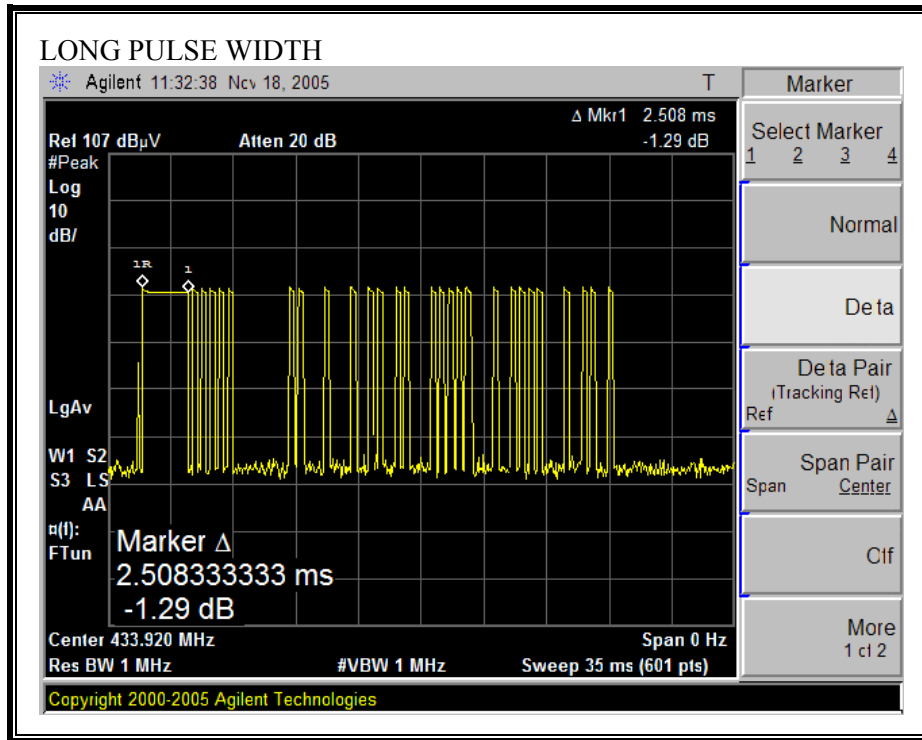

SHORT PULSE WIDTH

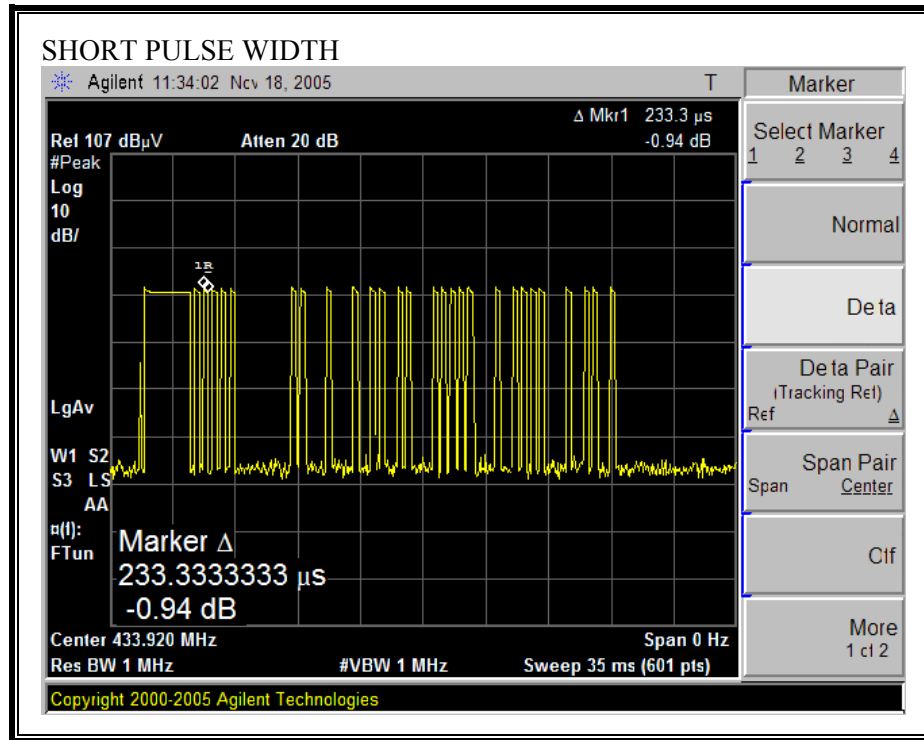

7.3. LESS THAN 5 SECONDS PLOT

LIMIT

§15.231 (a) (1) a manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

(a) (2) a transmitter activated automatically shall cease transmission within 5 seconds after activation.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer or radiated field strength. The RBW is set to 100 kHz and the VBW is set to 100 kHz. The sweep time is set to 10 seconds and the span is set to 0 Hz.

RESULTS

No non-compliance noted:

Transmission begins approximately 1.35 seconds after activation and transmission ceases approximately 4.083 seconds after activation.

LESS THAN 5 SECONDS

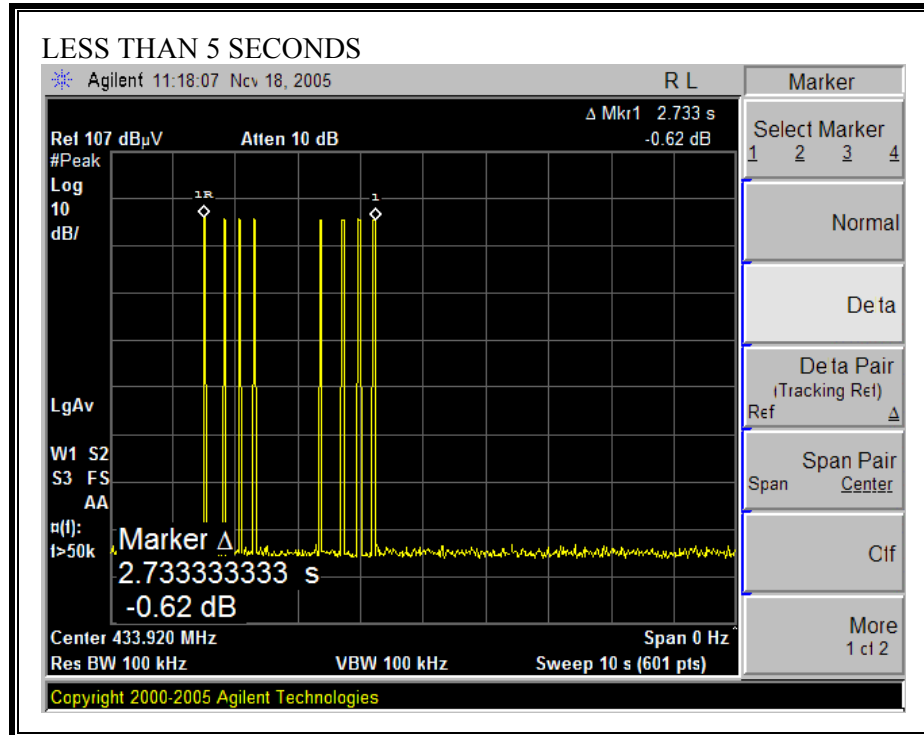

7.4. RADIATED EMISSIONS

7.4.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS

LIMITS

§15.231 (b) In addition to the provisions of § 15.205, the field strength of emissions from Intentional radiators operated under this section shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental Frequency (microvolts/meter)	Field Strength of Spurious Emissions (microvolts/meter)
40.66 - 40.70	2,250	225
70 - 130	1,250	125
130 - 174	1,250 to 3,750 ¹	125 to 375 ¹
174 - 260	3,750	375
260 - 470	3,750 to 12,500 ¹	375 to 1,250 ¹
Above 470	12,500	1,250

¹ Linear interpolation

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

FUNDAMENTAL, HARMONICS AND SPURIOUS EMISSIONS 30 – 1000 MHz

 FCC, VCCI, CISPR, CE, AUSTEL, NZ UL, CSA, TUV, BSMI, DHHS, NVLAP 561F MONTEREY ROAD, SAN JOSE, CA 95037-9001 PHONE: (408) 463-0885 FAX: (408) 463-0888														<i>Project #:</i> 05U3847-1 <i>Report #:</i> 060117Chmber1 <i>Date & Time:</i> 01/17/06 <i>Test Engr:</i> Thanh Nguyen	
<i>Company:</i> Secure Wireless Inc. <i>EUT Description:</i> Remote Wireless Sensor <i>Test Configuration:</i> EUT only <i>Type of Test:</i> FCC 15.231b <i>Mode of Operation:</i> Transmitting															
M% = ((t1+t2+t3+...)/T) * 66.83% = 8.8%														Av Reading = Pk Reading + 20*log(M%) 20 * log (M%) = -21.11	
Freq. (MHz)	Pk Rdg (dBuV)	Av Rdg (dBuV)	AF (dB)	Closs (dB)	Pre-amp (dB)	Pk Level (dBuV/m)	Av Level (dBuV/m)	Pk Limit FCC_B	Av Limit FCC_B	Pk Margin (dB)	Av Margin (dB)	Pol (H/V)	Az (Deg)	Height (Meter)	
429.175Mhz Fundamental frequency															
X-Position (EUT Lay down)															
433.92	94.66	74.66	17.01	1.83	27.51	85.99	65.99	100.83	80.83	-14.84	-14.84	3mV	0.00	1.00	
433.92	86.39	66.39	17.01	1.83	27.51	77.72	57.72	100.83	80.83	-23.11	-23.11	3mH	0.00	1.00	
Y-Position (EUT Standup)															
433.92	94.47	74.47	17.01	1.83	27.51	85.80	65.80	100.83	80.83	-15.03	-15.03	3mV	0.00	1.00	
433.92	89.34	69.34	17.01	1.83	27.51	80.67	60.67	100.83	80.83	-20.16	-20.16	3mH	0.00	1.00	
Z-Position (EUT Sideway)															
433.92	83.67	63.67	17.01	1.83	27.51	75.00	55.00	100.83	80.83	-25.83	-25.83	3mV	0.00	1.00	
433.92	91.92	71.92	17.01	1.83	27.51	83.25	63.25	100.83	80.83	-17.58	-17.58	3mH	0.00	1.00	
The Data show Y-Position is the worst case															
867.86	63.05	43.05	22.63	2.84	26.70	61.82	41.82	80.83	60.83	-19.01	-19.01	3mV	0.00	1.00	
867.86	58.04	38.04	22.63	2.84	26.70	56.81	36.81	80.83	60.83	-24.02	-24.02	3mH	0.00	1.50	

HARMONICS AND SPURIOUS EMISSIONS ABOVE 1GHz

01/17/06 High Frequency Measurement																
Compliance Certification Services, Morgan Hill Open Field Site																
Test Engr: Thanh Nguyen																
Project #:05U3847-1																
Company:Secure Wireless																
EUT Descr.:Recessed Door/ Window Sensor.																
EUT M/N:EV-DW455																
Test Target:FCC 15.231b																
Mode Oper:TX																
Test Equipment:																
Horn 1-18GHz			Pre-amplifer 1-26GHz			Pre-amplifer 26-40GHz			Horn > 18GHz			Limit				
T60; S/N: 2238 @3m			T87 Miteq 924342									FCC 15.205				
Hi Frequency Cables																
2 foot cable			3 foot cable			12 foot cable			HPF			Reject Filter				
			Thanh 187215003			Thanh 208946003										
Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz																
f	Dist	Read Pk	Read Avg	AF	CL	Amp	D Corr	Fctr	Peak	Avg	Pk Lim	Avg Lim	Pk Mar	Avg Mar	Notes	
GHz	(m)	dBuV	dBuV	dB/m	dB	dB	dB	dB	dBuV/m	dBuV/m	dBuV/m	dBuV/m	dB	dB	(V/H)	
Y position is the worst case																
1.305	3.0	74.0	54.0	25.3	1.7	-44.9	0.0	0.0	56.1	36.1	74	54	-17.9	-17.9	V	
1.743	3.0	63.4	43.4	26.9	1.8	-44.8	0.0	0.0	47.3	27.3	80.8	60.8	-33.5	-33.5	V	
2.175	3.0	80.2	60.2	28.1	2.0	-44.8	0.0	0.0	65.5	45.5	80.8	60.8	-15.4	-15.4	V	
2.608	3.0	88.1	68.1	28.9	2.1	-44.6	0.0	0.0	74.5	54.5	80.8	60.8	-6.3	-6.3	V	
3.037	3.0	76.4	56.4	30.2	2.2	-44.2	0.0	0.0	64.6	44.6	80.8	60.8	-16.2	-16.2	V	
3.475	3.0	65.6	45.6	31.3	2.3	-44.5	0.0	0.0	54.8	34.8	80.8	60.8	-26.1	-26.1	V	
3.909	3.0	72.3	52.3	32.5	2.4	-44.8	0.0	0.0	62.4	42.4	74	54	-11.6	-11.6	V	
4.343	3.0	77.3	57.3	33.1	2.5	-45.0	0.0	0.0	67.8	47.8	74	54	-6.2	-6.2	H	
1.305	3.0	73.9	53.9	25.3	1.7	-44.9	0.0	0.0	56.0	36.0	74	54	-18.0	-18.0	H	
1.743	3.0	60.7	40.7	26.9	1.8	-44.8	0.0	0.0	44.6	24.6	80.8	60.8	-36.2	-36.2	H	
2.167	3.0	80.9	60.9	28.1	2.0	-44.8	0.0	0.0	66.2	46.2	80.8	60.8	-14.7	-14.7	H	
2.680	3.0	88.9	68.9	29.2	2.1	-44.5	0.0	0.0	75.7	55.7	80.8	60.8	-5.2	-5.2	H	
3.040	3.0	67.4	47.4	30.2	2.2	-44.2	0.0	0.0	55.6	35.6	80.8	60.8	-25.2	-25.2	H	
3.475	3.0	68.8	48.8	31.3	2.3	-44.5	0.0	0.0	57.9	37.9	80.8	60.8	-22.9	-22.9	H	
3.909	3.0	68.5	48.5	32.5	2.4	-44.8	0.0	0.0	58.5	38.5	74	54	-15.5	-15.5	H	
4.345	3.0	62.6	42.6	33.1	2.5	-45.0	0.0	0.0	53.1	33.1	74	54	-20.9	-20.9	H	
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit			
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit			
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit			
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit			
CL	Cable Loss					HPF	High Pass Filter									

8. SETUP PHOTOS

RADIATED RF MEASUREMENT SETUP FOR PORTABLE CONFIGURATION





Z-AXIS



END OF REPORT