



TEST REPORT

Report Number: C20T00030-SRD01-V00

Applicant	MobiWire SAS
Product Name	4G Smart phone
Model Name	MobiWire Ituha, MBW Vodafone Smart N12
Brand Name	MobiWire
FCC ID	QPN-ITUHA

Industrial Internet Innovation Center (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in FCC Part15, ANSI C63.10, KDB 558074.

Prepared by	刘艳	Reviewed by	范送艳
Approved by	熊增莉	Issue Date	2021-03-15

Industrial Internet Innovation Center (Shanghai) Co., Ltd.

NOTE

1. This report is invalid without the signature of the writer, reviewer and authorizer.
2. This report is invalid if altered.
3. For the benefit of clients, if you have any objection to the report, please inform the testing laboratory within 15 days from the date of receiving this report.
4. Samples in the test report are provided by the client. The test results are only applicable to the samples received by the laboratory. The source information of samples (such as sample sender, manufacturer, etc.) in the test report is provided by the client, and the laboratory is not responsible for its authenticity.
5. The test report does not represent the identification of a product by a certification body or an authorized body.
6. This report is only valid as a whole, and no part of the report can be reproduced without the written approval of Industrial Internet Innovation Center (Shanghai) Co., Ltd.
7. Without the written permission of testing institutions and accreditation bodies, this report cannot be used in part or in whole for publicity or product introduction.
8. "N/A" is used in this report to indicate that it is not applicable or available.
9. Industrial Internet Innovation Center (Shanghai) Co., Ltd. assumes the legal responsibility for the report.
10. The measurement uncertainty is not taken into account when deciding conformity, and the results of measurement (or the average of measurement results) are directly used as the criterion for the stating conformity.

Test Laboratory:

Industrial Internet Innovation Center (Shanghai) Co., Ltd.

Add: Building 4, No. 766 Jingang Rd, Pudong, Shanghai, China

Tel: +86 21 63843300



Revision Version

Report Number	Revision	Date	Memo
C20T00030-SRD01-V00	00	2021-03-15	Initial creation of test report

CONTENTS

1.	TEST LABORATORY	6
1.1.	TESTING LOCATION	6
1.2.	TESTING ENVIRONMENT	6
1.3.	PROJECT INFORMATION	6
2.	CLIENT INFORMATION	7
2.1.	APPLICANT INFORMATION	7
2.2.	MANUFACTURER INFORMATION	7
3.	EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	8
3.1.	ABOUT EUT	8
3.2.	INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	8
3.3.	INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	8
4.	REFERENCE DOCUMENTS	9
4.1.	REFERENCE DOCUMENTS FOR TESTING	9
4.2.	REFERENCE INFORMATION FROM CLIENT	9
5.	TEST SUMMARY	10
5.1.	SUMMARY OF TEST RESULTS	10
5.2.	STATEMENTS	11
6.	MEASUREMENT RESULTS	12
6.1.	PEAK OUTPUT POWER-CONDUCTED	13
6.2.	FREQUENCY BAND EDGES-CONDUCTED	16
6.3.	CONDUCTED EMISSION	19
6.4.	RADIATED EMISSION	21
6.5.	TIME OF OCCUPANCY (DWELL TIME)	29
6.6.	20DB BANDWIDTH	31



6.7.	CARRIER FREQUENCY SEPARATION	33
6.8.	NUMBER OF HOPPING CHANNELS	35
6.9.	AC POWERLINE CONDUCTED EMISSION	37
7.	TEST EQUIPMENT LIST	39
7.1.	CONDUCTED TEST SYSTEM	39
7.2.	RADIATED EMISSION TEST SYSTEM	39
7.3.	CLIMATE CHAMBER	39
ANNEX A: MEASUREMENT UNCERTAINTY		40
ANNEX B: ACCREDITATION CERTIFICATE		41

1. Test Laboratory

1.1. Testing Location

Company Name	Industrial Internet Innovation Center (Shanghai) Co., Ltd.
Address	Building 4, No. 766 Jingang Rd, Pudong, Shanghai, China
FCC Registration No.	CN1177

1.2. Testing Environment

Normal Temperature	15°C~35°C
Relative Humidity	30%RH~60%RH
Supply Voltage	120V/60Hz

1.3. Project Information

Project Leader	Xu Yuting
Testing Start Date	2021-03-01
Testing End Date	2021-03-06

2. Client Information

2.1. Applicant Information

Company Name	MobiWire SAS
Address	79 AVENUE FRANCOIS ARAGO 92017 NANTERRE France
Telephone	+33 625 028 368-33

2.2. Manufacturer Information

Company Name	MobiWire SAS
Address	79 AVENUE FRANCOIS ARAGO 92017 NANTERRE France
Telephone	+33 625 028 368-33

3. Equipment under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Product Name	4G Smart phone
Model name	MobiWire Ituha, MBW Vodafone Smart N12
Supported Radio Technology and Bands	GSM850/GSM900/GSM1800/GSM1900 WCDMA Band I/ II/V/VIII LTE Band 1/3/7/8/20/28B BT5.1 WLAN 802.11b/g/n GNSS GLONASS G1/GPS L1
BT Frequency	2402MHz-2480MHz
BT Channel	Ch0-78
BT type of modulation	GFSK/ $\pi/4$ DQPSK/8DPSK
Hardware Version	V00A
Software Version	VFD_NZ_SMART_N12_SS_O_T_L_V01
FCC ID	QPN-ITUHA
Extreme Temperature	-10°C~55°C
Nominal Voltage	3.80V
Extreme High Voltage	4.35V
Extreme Low Voltage	3.60V

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version	Date of receipt
N03	352110690002937	V00A	VFD_NZ_SMART_N12_SS_O_T_L_V01	2020-12-03
N04	352110690004057	V00A	VFD_NZ_SMART_N12_SS_O_T_L_V01	2020-12-03

*EUT ID: is internally used to identify the test sample in the lab.

3.3. Internal Identification of AE used during the test

AE ID*	Description	Model	SN/Remark
AE1	RF cable	---	AE1

*AE ID: is internally used to identify the test sample in the lab.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.	2018-10-01
ANSI C63.10	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices	2013
KDB 558074	Guidance for Performing Compliance Measurements on Frequency Hopping Spread Spectrum systems (DSS) Operating Under §15.247	v05r02

4.2. Reference Information from client

Antenna gain Information of the test sample provided by MobiWire SAS.

Maximum of Antenna Gain: -1.5 dBi

5. Test Summary

5.1. Summary of Test Results

Measurement Items	Sub-clause of Part15C	Verdict
Maximum Peak Output Power	15.247(b)	Pass
20dB Occupied Bandwidth	15.247(a)	Pass
Band Edges Compliance	15.247(b)	Pass
Time Of Occupancy (Dwell Time)	15.247(a)	Pass
Carrier Frequency Separation	15.247(a)	Pass
Number Of Hopping Channels	15.247(a)	Pass
Transmitter Spurious Emission-Conducted	15.247	Pass
Transmitter Spurious Emission-Radiated	15.209/15.247	Pass
AC Powerline Conducted Emission	15.107/15.207	Pass

Note: please refer to Annex A in this test report for the detailed test results.

Test Conditions

Tnom	Normal Temperature
Tmin	Low Temperature
Tmax	High Temperature
Vnom	Normal Voltage
Vmin	Low Voltage
Vmax	High Voltage
Hnom	Norm Humidity
Anom	Norm Air Pressure

For this report, all the test case listed above are tested under Normal Temperature and Normal Voltage, and also under norm humidity, the specific conditions as following:

Temperature	Tnom	25°C
Voltage	Vnom	3.80V
Humidity	Hnom	48%
Air Pressure	Anom	1010hPa

Note:

- All the test data for each data were verified, but only the worst case was reported.
- The GFSK, $\pi/4$ DQPSK and 8DPSK were set in DH1 for GFSK, 2-DH1 for $\pi/4$ DQPSK, 3-DH1 for 8DPSK.
- The DC and low frequency voltages' measurement uncertainty is $\pm 2\%$.



5.2. Statements

The MobiWire Ituha, MBW Vodafone Smart N12, manufactured by MobiWire SAS is a new product for testing.

Industrial Internet Innovation Center (Shanghai) Co., Ltd. only performed test cases which identified with Pass/Fail/Inc result in section 5.1.

Industrial Internet Innovation Center (Shanghai) Co., Ltd. has verified that the compliance of the tested device specified in section 3 of this test report is successfully evaluated according to the procedure and test methods as defined in type certification requirement listed in section 4 of this test report.

6. Measurement Results

Shielding Room1 (6.0 meters×3.0 meters×2.7 meters) did not exceed following limits along the conducted RF performance testing:

Temperature	Min. = 15 °C , Max. = 35 °C
Relative humidity	Min. = 20 % , Max. = 75 %
Shielding effectiveness	> 100 dB
Ground system resistance	< 0.5 Ω

Control room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C , Max. = 35 °C
Relative humidity	Min. =30 % , Max. = 60 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

Fully-anechoic chamber1 (6.9 meters×10.9 meters×5.4 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C , Max. = 35 °C
Relative humidity	Min. = 25 % , Max. = 75 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
VSWR	Between 0 and 6 dB, from 1GHz to 18GHz
Site Attenuation Deviation	Between -4 and 4 dB,30MHz to 1GHz
Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz

6.1. Peak Output Power-Conducted

A.1.1 Measurement Limit

Standard	Limit (dBm)
FCC 47 Part 15.247(b)(1)	< 21

A.1.2 Test Condition:

Hopping Mode	RBW	VBW	Span	Sweptime
Hopping OFF	3MHz	10MHz	9MHz	Auto




A.1.3 Test procedure

The measurement is according to ANSI C63.10 clause 7.8.5.

1. The output power of EUT was connected to the spectrum analyzer and CBT32 by cable and divide. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.
3. Measure the conducted output power and record the results it.

Measurement Results:

Peak Conducted Output Power CH0, DH5(dBm)	6.87	Peak Conducted Output Power CH39, DH5(dBm)	7.67
Date: 29.FEB.2021 15:50:34		Date: 29.FEB.2021 15:51:29	
Peak Conducted Output Power CH78, DH5(dBm)	6.31	Peak Conducted Output Power CH0, 2DH5(dBm)	5.81
Date: 29.FEB.2021 16:40:17		Date: 29.FEB.2021 16:40:10	
Peak Conducted Output Power CH39, 2DH5(dBm)	6.60	Peak Conducted Output Power CH78, 2DH5(dBm)	5.29
Date: 29.FEB.2021 15:59:58		Date: 29.FEB.2021 15:54:49	

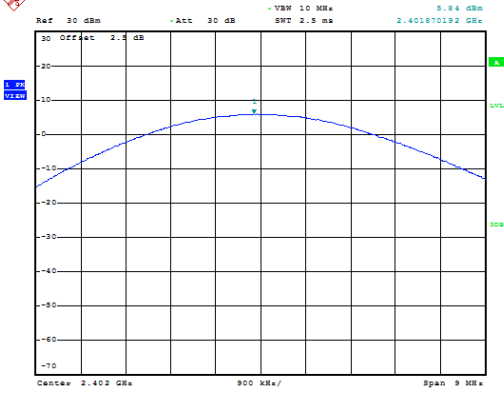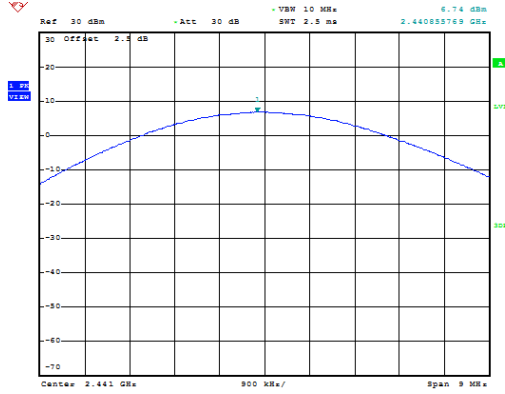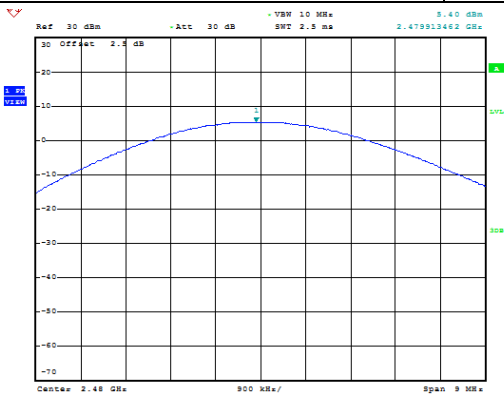Peak Conducted Output Power CH0, 3DH5(dBm)	5.84	Peak Conducted Output Power CH39, 3DH5(dBm)	6.74
 Date: 28.FEB.2021 15:55:49		 Date: 28.FEB.2021 15:56:03	
Peak Conducted Output Power CH78, 3DH5(dBm)	5.40	/	
 Date: 28.FEB.2021 15:56:03			

6.2. Frequency Band Edges-Conducted

6.2.1 Measurement Limit:


Standard	Limited(dBc)
FCC 47 CFR Part 15.247(d)	>20

6.2.2 Test procedure


The measurement is according to ANSI C63.10 clause 7.8.6.

1. Connect the EUT to spectrum analyzer.
2. Set RBW=100KHz, VBW=300KHz, span more than 1.5 times channel bandwidth (2MHz).
3. Detector =peak, sweep time=auto couple, trace mode=max hold.
4. Allow sweep to continue until the trace stabilizes.

Measurement results:

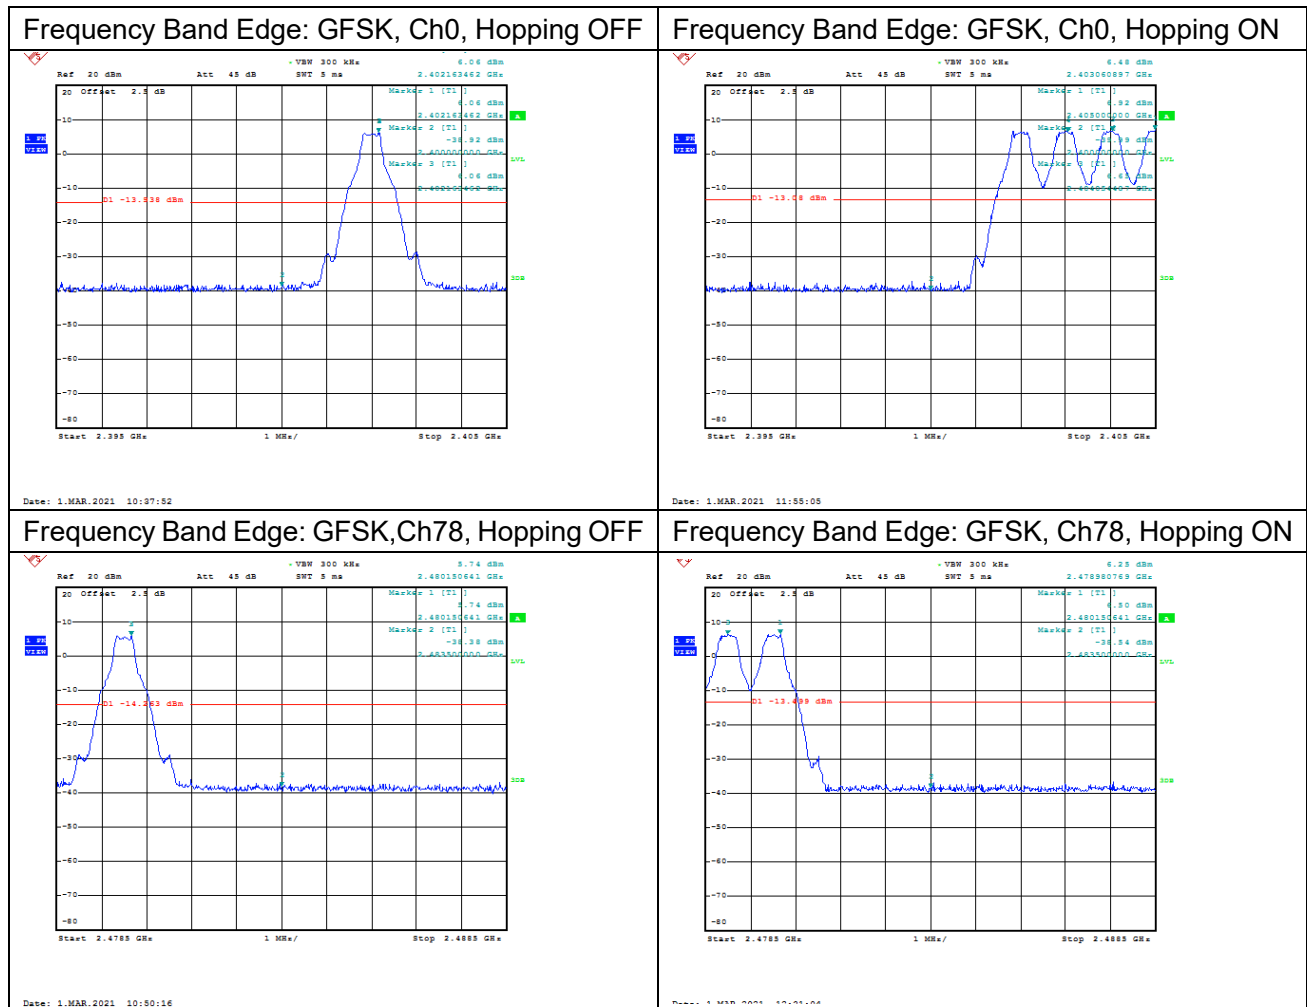


Frequency Band Edge: $\pi/4$ DQPSK,
Ch0, Hopping OFF

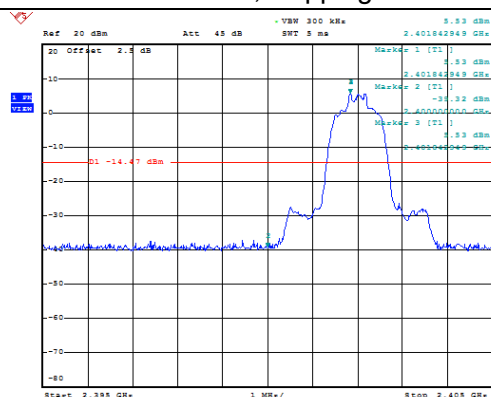


Date: 1.MAR.2021 10:58:32

Frequency Band Edge: $\pi/4$ DQPSK,
Ch0, Hopping ON

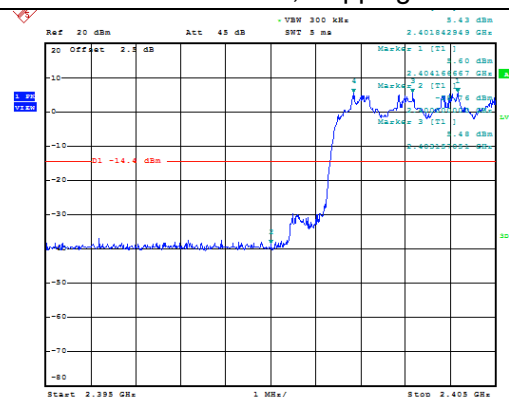


Date: 1.MAR.2021 12:01:30

Frequency Band Edge: $\pi/4$ DQPSK,
Ch78, Hopping OFF

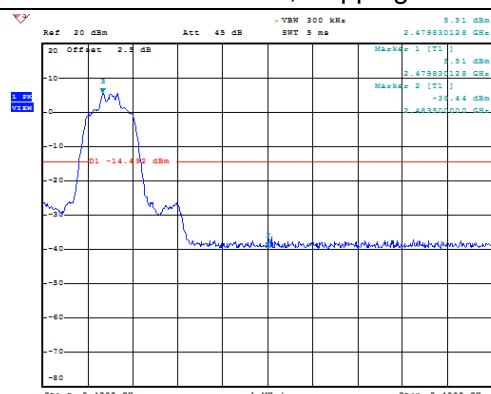


Page: 1 MID 2021 11-11-22

Frequency Band Edge: $\pi/4$ DQPSK,
Ch78, Hopping ON

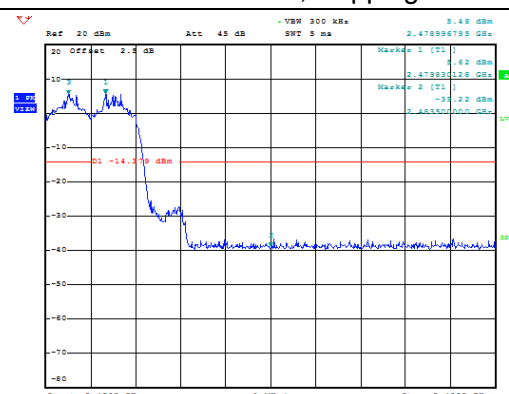


Page: 4 MSN 0000 00.00.00

Frequency Band Edge: 8DPSK,Ch0, Hopping OFF

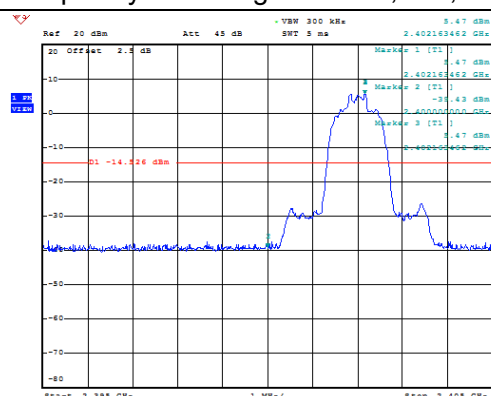


Page: 1 MJD 2021 11-17-51

Frequency Band Edge: 8DPSK, Ch0, Hopping ON

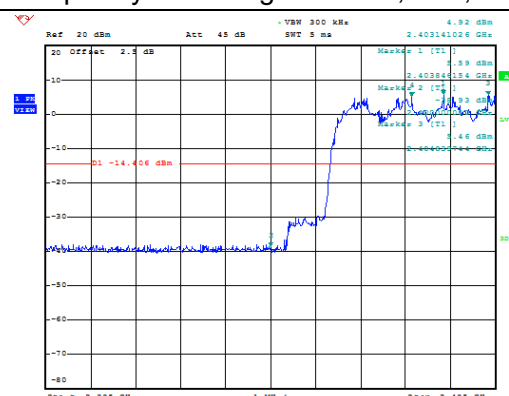

Date: 1 MAR 2021 12:07:46

Frequency Band Edge: 8DPSK,
Ch78, Hopping ON

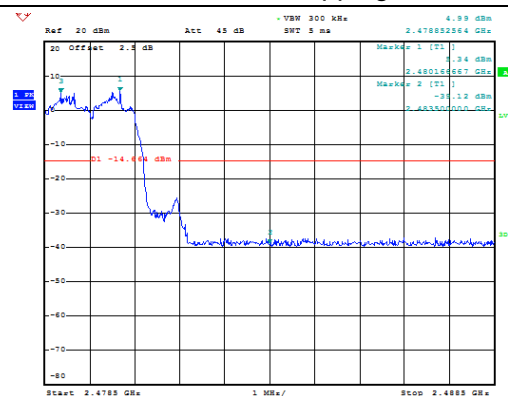

6.3. Conducted Emission

6.3.1 Measurement Limit:


Standard	Limit
FCC 47 CFR Part15.247 (d)	20dB below peak output power in 100KHz bandwidth

6.3.2 Test procedures


The measurement is according to ANSI C63.10 clause 7.8.8.

1. Connect the EUT to spectrum analyzer.
2. Set RBW=100KHz, VBW=300KHz.
3. Detector =peak, sweep time=auto couple, trace mode=max hold.

Measurement Results:

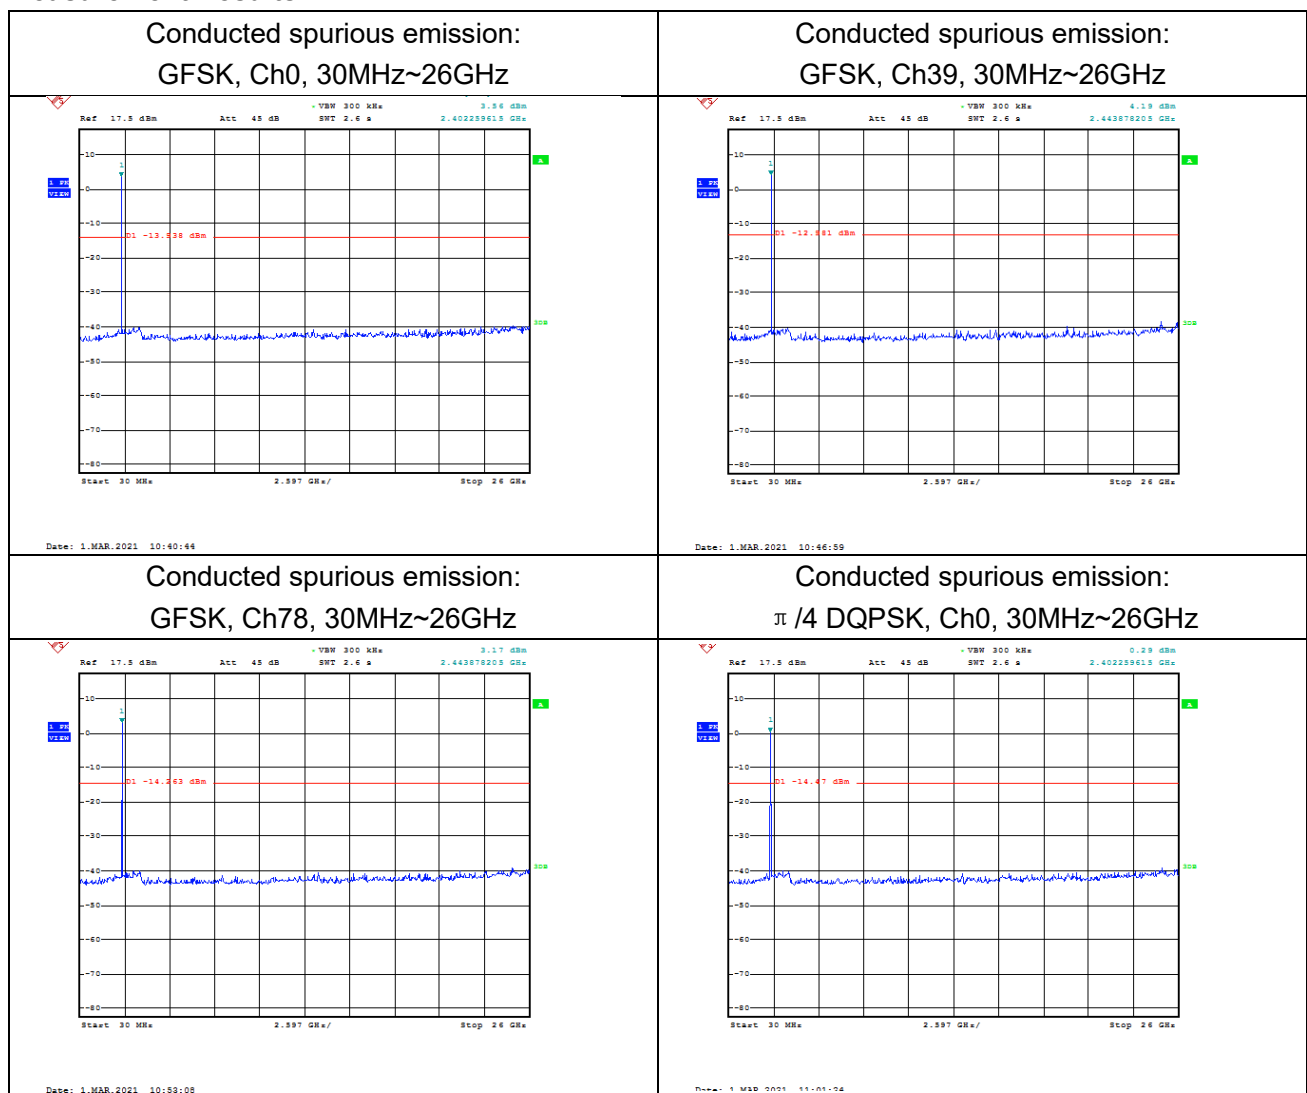


Conducted spurious emission:
 $\pi/4$ DQPSK, Ch39, 30MHz~26GHz

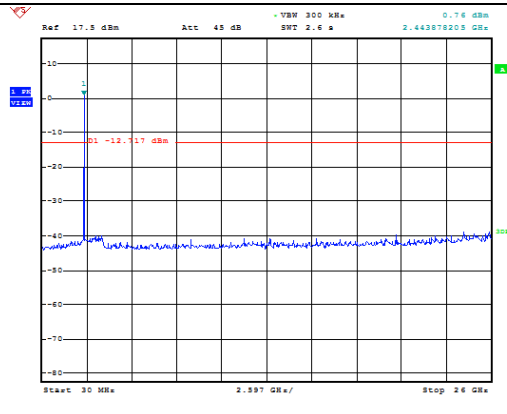


Date: 1.MAR.2021 11:07:36

Conducted spurious emission:
 $\pi/4$ DQPSK, Ch78, 30MHz~26GHz

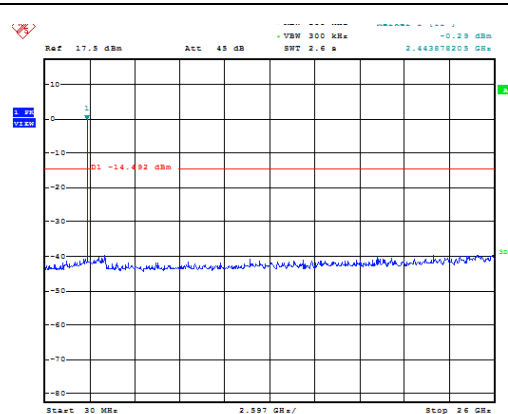


Date: 1.MAR.2021 11:14:24

Conducted spurious emission:
8DPSK, Ch0, 30MHz~26GHz

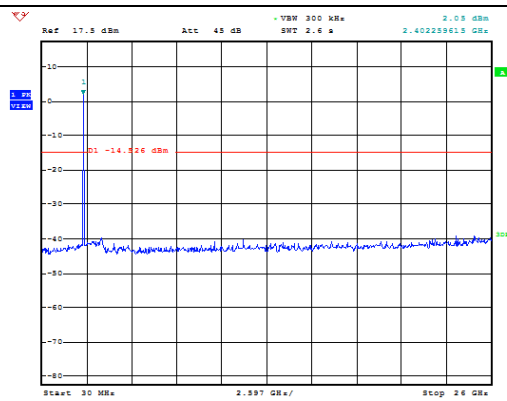


Date: 1 MAR 2021 11:20:40

Conducted spurious emission:
8DPSK, Ch39, 30MHz~26GHz

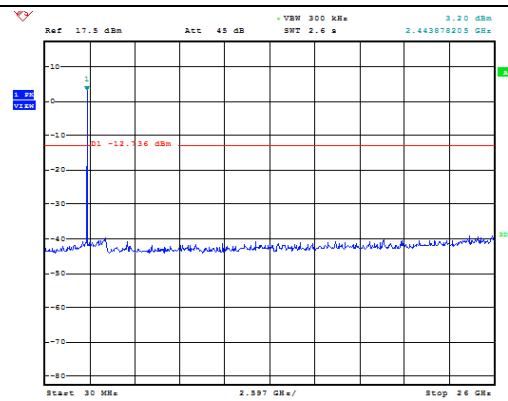

Date: 1 MAR 2021 11:42:03

Conducted spurious emission:
8DPSK, Ch78, 30MHz~26GHz

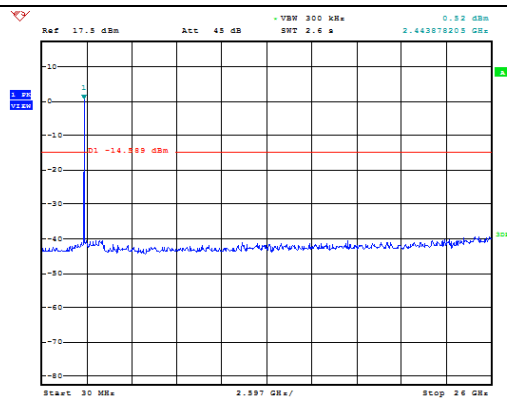

Date: 1 MAR 2021 11:48:10

/

/

6.4. Radiated Emission

6.4.1 Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see 15.205(c)).

Limit in restricted band:

Frequency of emission	Field strength (uV/m)	Field strength (dBuV/m)
30~88	100	40
88~216	150	43.5
216~960	200	46
Above 960	500	54

6.4.2 Test Method

Portable, small, lightweight, or modular devices that may be handheld, worn on the body, or placed on a table during operation shall be positioned on a non-conducting platform, the top of which is 80 cm above the reference ground plane. The preferred area occupied by the EUT arrangement is 1 m by 1.5 m. For emissions testing at or below 1 GHz, the table height shall be 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. but it may be larger or smaller to accommodate various sized EUTs. For testing purposes, ceiling- and wall-mounted devices also shall be positioned on a tabletop (see also ANSI C63.10-2013 section 6.3.4 and 6.3.5). In making any tests involving handheld, body-worn, or ceiling-mounted equipment, it is essential to recognize that the measured levels may be dependent on the orientation (attitude) of the three orthogonal axes of the EUT. Thus, exploratory tests as specified in 8.3.1 shall be carried out for various axes orientations to determine the attitude having maximum or near-maximum emission level.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission	RBW/VBW	Sweep Time (s)
30~1000	100KHz/300KHz	5
1000~4000	1MHz/3MHz	15
4000~18000	1MHz/3MHz	40
18000~26500	1MHz/3MHz	20


6.4.3 Measurement Results:

A “reference path loss” is established and A_{Rpi} is the attenuation of “reference path loss”, and including the gain of receive antenna, the gain of the preamplifier, the cable loss.


The measurement results are obtained as described below:

A_{Rpi} = Cable loss + Antenna Gain - Preamplifier gain


Result = $P_{Mea} + A_{Rpi}$

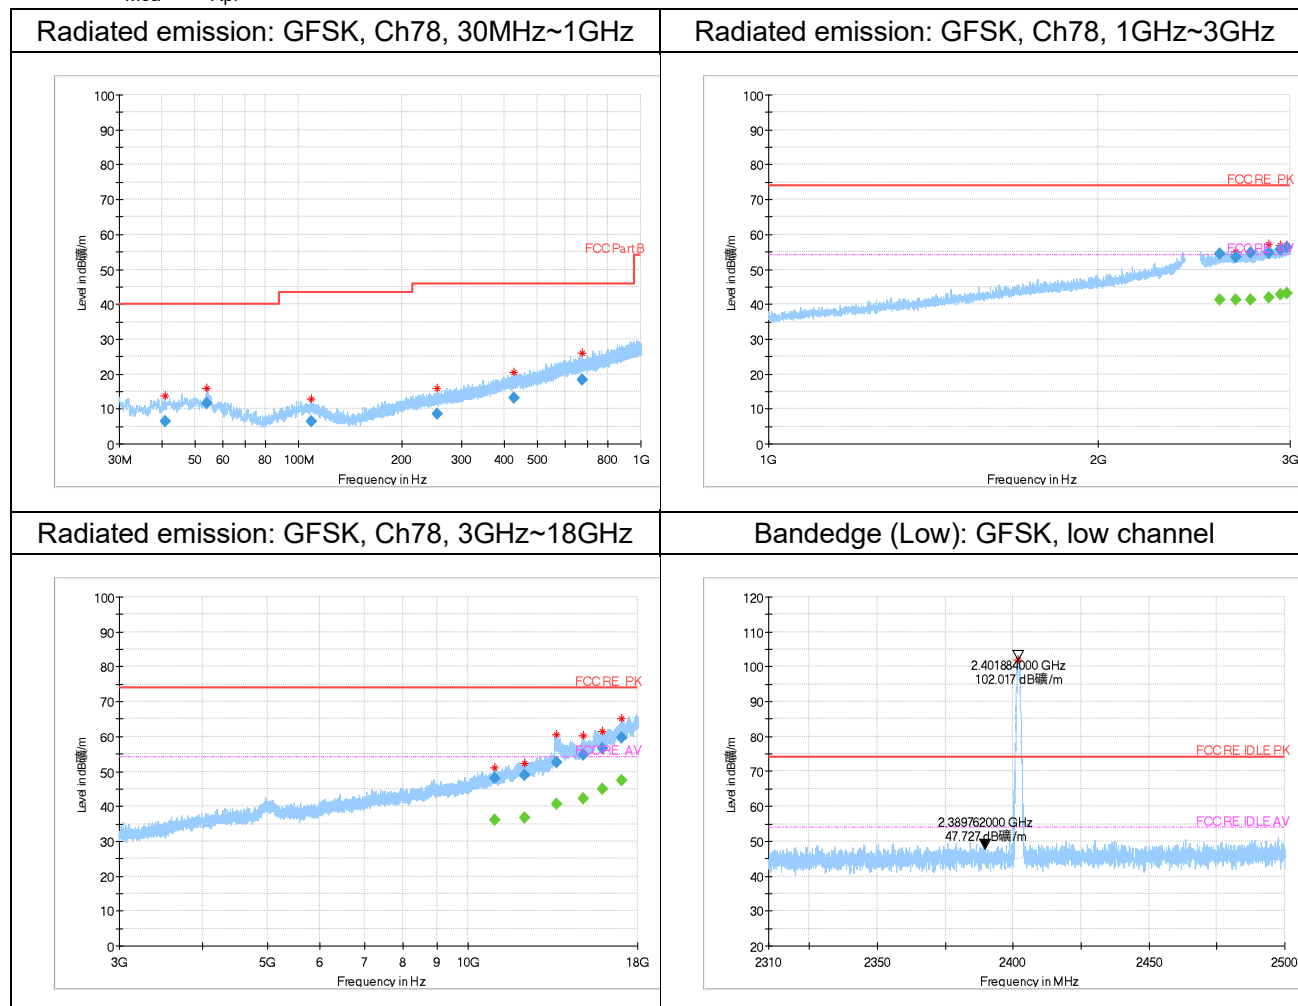


Bandedge (High): GFSK, high channel

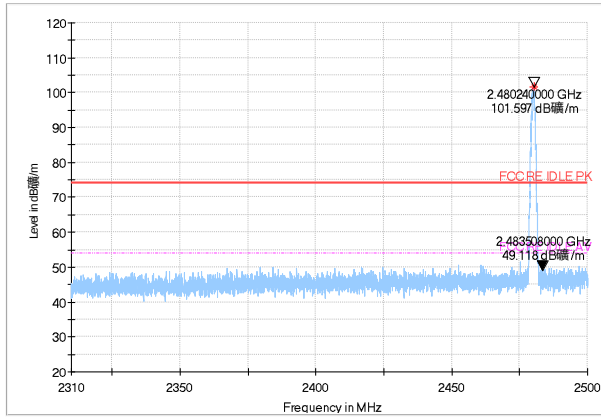


Radiated emission: $\pi/4$ DQPSK, Ch78,
30MHz~1GHz

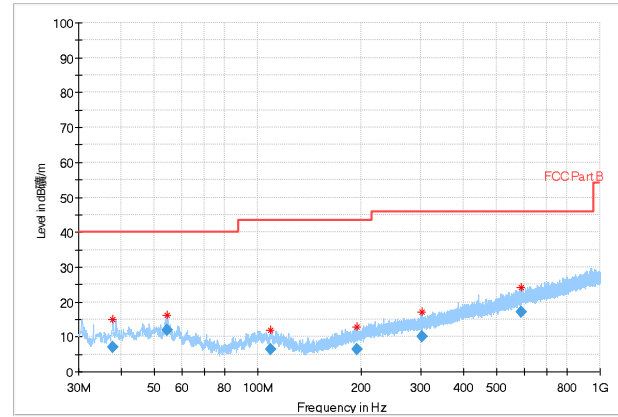


Radiated emission: $\pi/4$ DQPSK, Ch78,
1GHz~3GHz

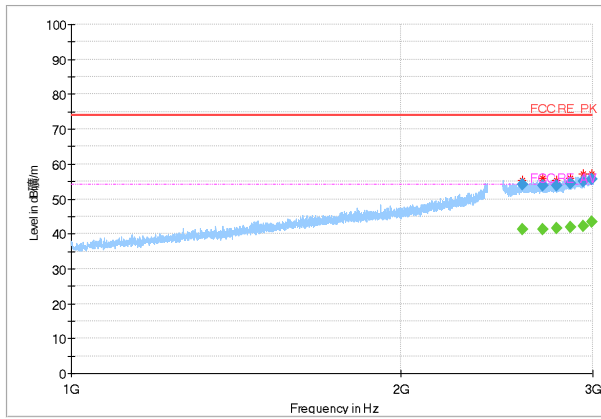


Radiated emission: $\pi/4$ DQPSK, Ch78,
3GHz~18GHz

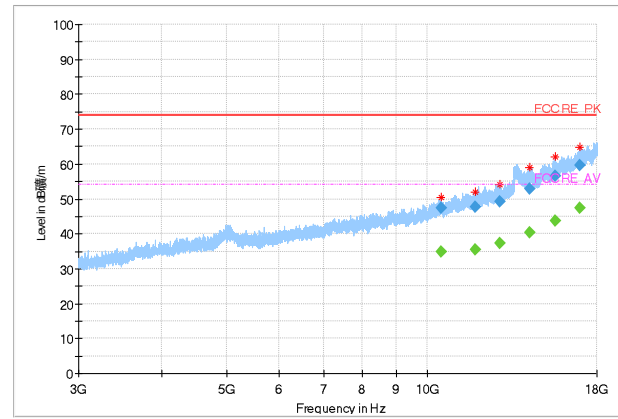


Bandedge (Low): $\pi/4$ DQPSK, low channel

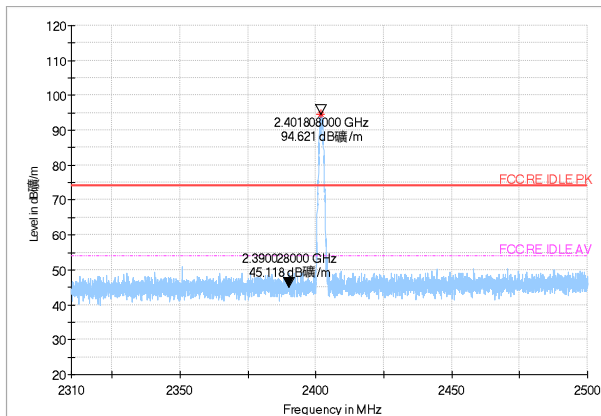


Bandedge (High): $\pi/4$ DQPSK, high channel

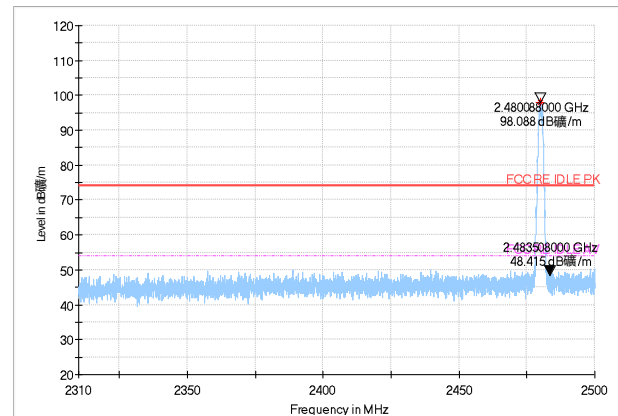


Radiated emission: 8DPSK, Ch78, 30MHz~1GHz

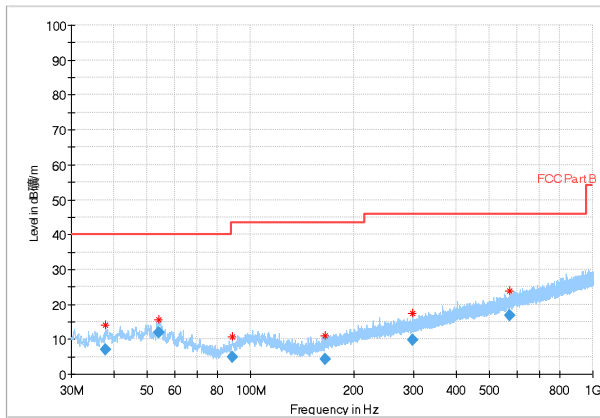


Radiated emission: 8DPSK, Ch78, 1GHz~3GHz

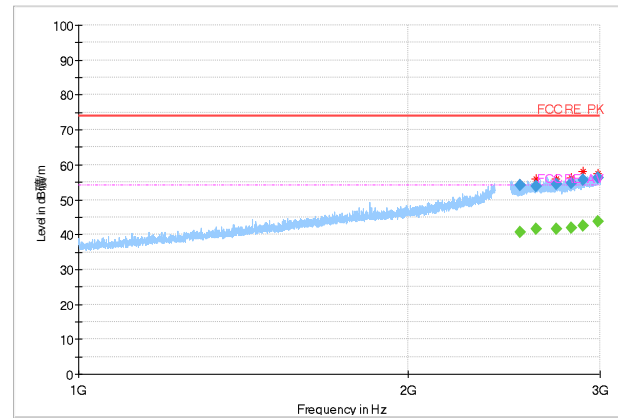


Radiated emission: 8DPSK, Ch78, 3GHz~18GHz

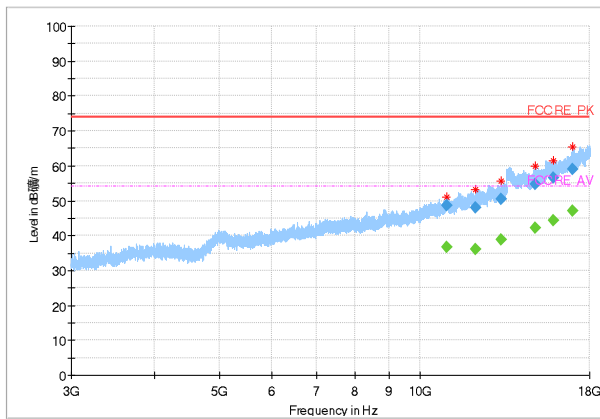


Bandedge (Low): 8DPSK, low channel

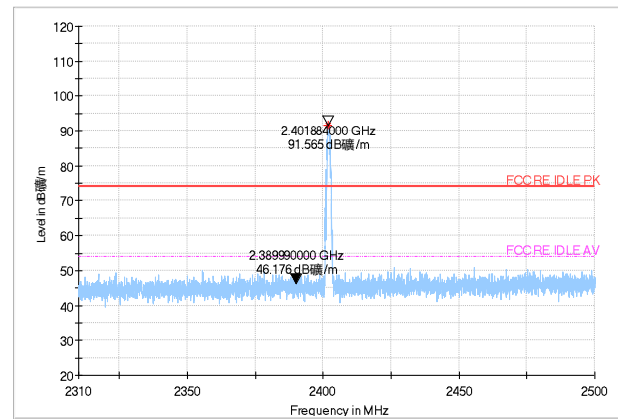

Bandedge (High): 8DPSK, high channel

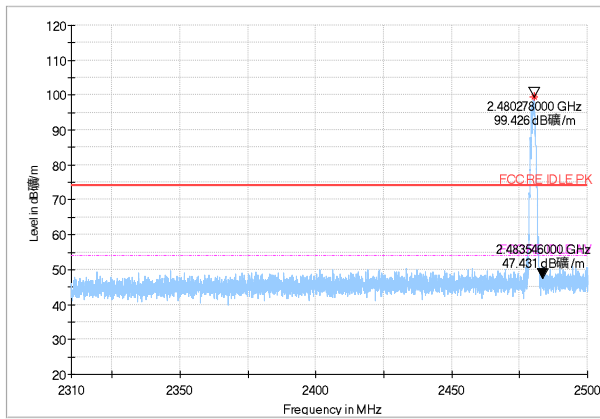

ALL Channel 18GHz~26GHz

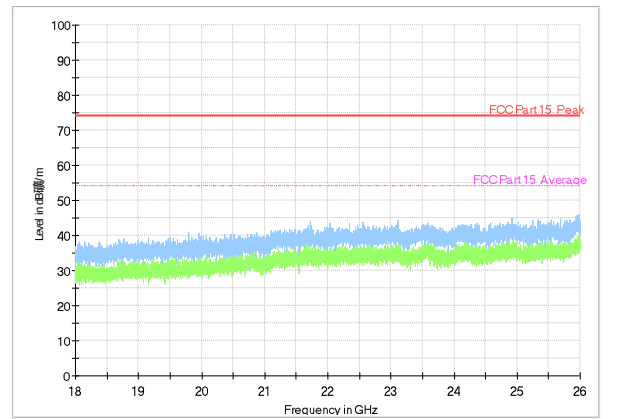

GFSK Ch0 30MHz-1GHz

Frequency(MHz)	Result(dBuV/m)	ARpl(dB)	PMea(dBuV/m)	Polarity
54.4	11.82	-15.8	27.62	V
100.2	5.86	-16.7	22.56	H
183.7	5.57	-16.6	22.17	V
306.4	10.14	-12.4	22.54	H
501.5	14.71	-7.8	22.51	H
751.9	19.27	-2.7	21.97	V

GFSK Ch0 1GHz-3GHz (Peak)

Frequency(MHz)	Result(dBuV/m)	ARpl(dB)	PMea(dBuV/m)	Polarity
2545.7	53.44	16.5	36.94	H
2627.9	53.8	17.3	36.5	V
2719.9	53.89	17.3	36.59	H
2806.3	54.41	17.6	36.81	H
2884.6	55.51	18.2	37.31	H
2964.0	55.77	18.8	36.97	V

GFSK Ch0 1GHz-3GHz (Average)

Frequency(MHz)	Result(dBuV/m)	ARpl(dB)	PMea(dBuV/m)	Polarity
2806.3	41.62	17.6	24.02	H
2884.6	42.04	18.2	23.84	H
2964.0	42.78	18.8	23.98	V

GFSK Ch0 3GHz-18GHz (Peak)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
10179.8	46.16	10.2	35.96	H
11460.0	48.67	13.5	35.17	H
12773.1	49.06	16.6	32.46	V
13707.4	53.05	18.5	34.55	H
15590.4	56.24	24.5	31.74	H
16992.3	59.75	28.3	31.45	V

$\pi/4$ DQPSK Ch0 30MHz-1GHz

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
50.0	8.89	-15.2	24.09	V
100.1	5.84	-16.7	22.54	V
207.5	6.99	-15.2	22.19	H
323.6	10.39	-11.5	21.89	H
510.7	15.05	-7.4	22.45	V
822.6	20.48	-1.4	21.88	H

$\pi/4$ DQPSK Ch0 1GHz-3GHz (Peak)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
2549.6	52.95	16.6	36.35	H
2632.7	53.89	17.3	36.59	H
2718.3	53.28	17.3	35.98	H
2808.9	54.45	17.7	36.75	H
2874.1	53.9	18.1	35.8	V
2949.9	55.76	18.6	37.16	V

$\pi/4$ DQPSK Ch0 1GHz-3GHz (Average)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
2808.9	41.54	17.7	23.84	H
2949.9	42.72	18.6	24.12	V

$\pi/4$ DQPSK Ch0 3GHz-18GHz (Peak)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
10426.9	46.73	11.1	35.63	H
11752.5	48.14	13.1	35.04	V
12782.3	49.14	16.5	32.64	V
13688.5	53.22	18.4	34.82	H
15506.3	55.18	23.6	31.58	V
16980.6	59.31	28.2	31.11	H

8DPSK Ch0 30MHz-1GHz

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
53.5	19.59	-15.7	35.29	V
94.0	5.77	-17.7	23.47	V
163.2	11.91	-18	29.91	H
316.7	10.72	-11.9	22.62	V
522.4	14.99	-7	21.99	V
805.7	19.88	-1.8	21.68	V

8DPSK Ch0 1GHz-3GHz (Peak)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
2500.4	52.84	16.6	36.24	V
2585.6	53.67	17.1	36.57	H
2655.7	53.42	17.3	36.12	V
2747.7	54.15	17.4	36.75	H
2877.8	55.01	18.1	36.91	V
2940.0	55.02	18.5	36.52	V

8DPSK Ch0 1GHz-3GHz (Average)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
2747.7	41.64	17.4	24.24	H
2877.8	42.04	18.1	23.94	V
2940.0	42.52	18.5	24.02	V

8DPSK Ch0 3GHz-18GHz (Peak)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
12660.0	50.05	16.4	33.65	H
13546.9	53.46	18.1	35.36	H
14325.4	52.3	19.5	32.8	V
14973.0	53.83	21.6	32.23	H
16229.0	56.79	24.6	32.19	V
16988.9	60.2	28.2	32	H

8DPSK Ch0 3GHz-18GHz (Average)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
16229.0	43.67	24.6	19.07	V
16988.9	47.54	28.2	19.34	H

Note: Only the worst case is written in the report.

6.5. Time Of Occupancy (Dwell Time)

6.5.1 Measurement Limit:

Standard	Limit (ms)
FCC 47 Part 15.247 (a) (1) (iii)	< 400

6.5.2 Test procedures

The measurement is according to ANSI C63.10 clause 7.8.4

1. Connect the EUT through cable and divide with CBT32 and spectrum analyzer.
2. Enable the EUT transmit maximum power.
3. Set the spectrum analyzer as step 4 to step 8.
4. Span: Zero span, centered on a hopping channel.
5. RBW shall be $\leq$ channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel.
6. Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
7. Detector function: Peak.
8. Trace: Max hold.
9. Use the marker-delta function, and record it.

Note: For AFH mode, Test Period = 0.4 (second/ channel) x 20 Channel = 8 sec,

For FHSS mode, Test Period = 0.4 (second/ channel) x 79 Channel = 31.6 sec,

So the Time of Occupancy (Dwell Time) of AFH mode= Time of Occupancy (Dwell Time) of FHSS mode / 79 Channel x 20 Channel

Modulation type	Frequency(M Hz)	Time slot length(ms)	Dwell Time (ms)	Limit(ms)	Conclusion
GFSK DH5	2402-2480	2.88	368.64	400	P
$\pi/4$ DQPSK	2402-2480	2.90	371	400	P
8DPSK DH5	2402-2480	2.90	371	400	P

Note: Dwell time = time slot length * hop rate * 0.4s (hop rate=320/s)

Measurement Result:

For GFSK, Ch39,Packet DH5 Time of occupancy (Dwell Time):2.88 ms Date: 26.FEB.2021 16:16:44	For $\pi/4$ DQPSK, Ch39,Packet 2DH5 Time of occupancy (Dwell Time):2.90 ms Date: 26.FEB.2021 16:40:20
For 8DPSK, Ch39,Packet 3DH5 Time of occupancy (Dwell Time):2.90 ms Date: 26.FEB.2021 17:05:24	/ /



6.6. 20dB Bandwidth

6.6.1 Measurement Limit:





Standard	Limit
FCC 47 Part 15.247 (a) (1)	N/A

6.6.2 Test procedures

The measurement is according to ANSI C63.10 clause 7.8.7

1. Connect the EUT through cable and divide with CBT32 and spectrum analyzer.
2. Enable the EUT transmit maximum power.
3. Set the spectrum analyzer as step 4 to step 7.
4. Span: two or five times of OBW
5. RBW= 1% to 5% of the OBW; VBW is approximately three times of RBW; Max Hold.
6. Select the max peak, and N DB DOWN=20dB.
7. Record the results.

Measurement Result:

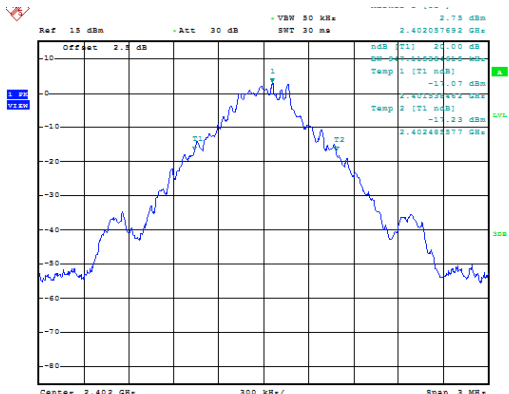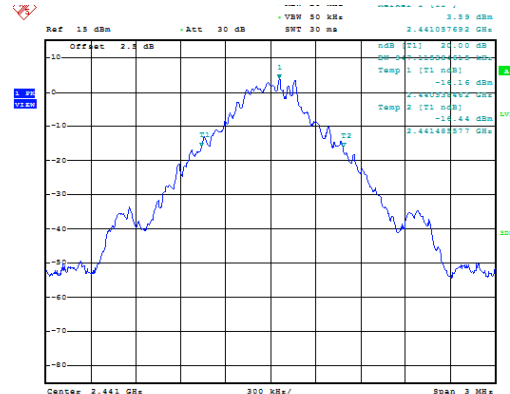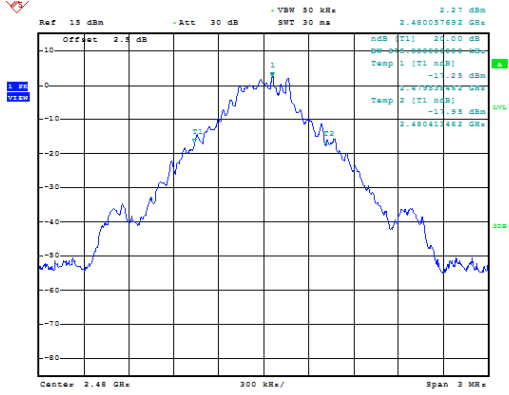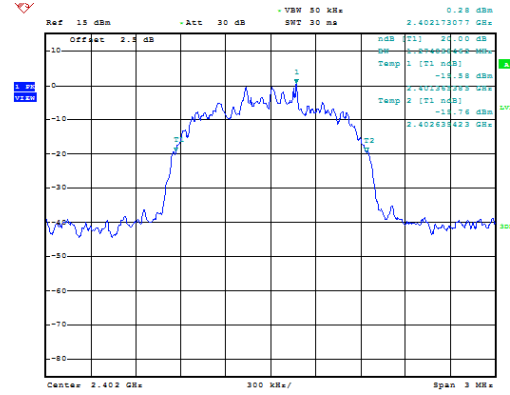20dB Bandwidth: GFSK, Ch0(MHz)	0.95	20dB Bandwidth: GFSK, Ch39(MHz)	0.95
 Date: 26.FEB.2021 15:01:06		 Date: 26.FEB.2021 15:02:06	
20dB Bandwidth: GFSK, Ch78(MHz)	0.87	20dB Bandwidth: $\pi/4$ DQPSK, Ch0(MHz)	1.27
 Date: 26.FEB.2021 15:03:03		 Date: 26.FEB.2021 15:04:44	

20dB Bandwidth: $\pi/4$ DQPSK, Ch39(MHz)	1.27	20dB Bandwidth: $\pi/4$ DQPSK, Ch78(MHz)	1.26
Ref: 15 dBm, Att: 30 dB, VSW: 50 kHz, SWT: 30 ms, Center: 2.441163462 GHz, Span: 3 MHz. The plot shows a signal with a peak at approximately -10 dBm and a noise floor around -40 dBm.		Ref: 15 dBm, Att: 30 dB, VSW: 50 kHz, SWT: 30 ms, Center: 2.480163462 GHz, Span: 3 MHz. The plot shows a signal with a peak at approximately -10 dBm and a noise floor around -40 dBm.	
20dB Bandwidth: 8PSK, Ch0(MHz)	1.27	20dB Bandwidth: 8PSK, Ch39(MHz)	1.27
Ref: 15 dBm, Att: 30 dB, VSW: 50 kHz, SWT: 30 ms, Center: 2.402163462 GHz, Span: 3 MHz. The plot shows a signal with a peak at approximately -10 dBm and a noise floor around -40 dBm.		Ref: 15 dBm, Att: 30 dB, VSW: 50 kHz, SWT: 30 ms, Center: 2.441163462 GHz, Span: 3 MHz. The plot shows a signal with a peak at approximately -10 dBm and a noise floor around -40 dBm.	
20dB Bandwidth: 8PSK, Ch78(MHz)	1.27	/	
Ref: 15 dBm, Att: 30 dB, VSW: 50 kHz, SWT: 30 ms, Center: 2.480163462 GHz, Span: 3 MHz. The plot shows a signal with a peak at approximately -10 dBm and a noise floor around -40 dBm.		/	

6.7. Carrier Frequency Separation

6.7.1 Measurement Limit:

Standard	Limit (KHz)
FCC 47 Part 15.247 (a) (1)	Over 25KHz or $(2/3) \times 20\text{dB}$ bandwidth

6.7.2 Test procedures

The measurement is according to ANSI C63.10 clause 7.8.2.

1. Connect the EUT through cable and divide with CBT32 and spectrum analyzer.
2. Enable the EUT transmit in hopping mode.
3. Span: Wide enough to capture the peaks of two adjacent channels.
4. RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
5. Video (or average) bandwidth (VBW) $\geq$ RBW.
6. Sweep: Auto.
7. Detector function: Peak.
8. Trace: Max hold.
9. Allow the trace to stabilize.

Measurement Result:

Carrier separation measurement: GFSK, Ch39(KHz)	1193.6	Carrier separation measurement: $\pi/4$ DQPSK, Ch39(KHz)	1148.8
Carrier separation measurement: 8DPSK, Ch39(KHz)	1014.4	/	
		/	

6.8. Number Of Hopping Channels

6.8.1 Measurement Limit:


Standard	Limit
FCC 47 CFR Part 15.247 (a)(1)(iii)	At least 15 non-overlapping channels

6.8.2 Test procedure


The measurement is according to ANSI C63.10 clause 7.8.3.

1. Connect the EUT through cable and divide with CBT32 and spectrum analyzer.
2. Enable the EUT transmit in hopping mode.
3. Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
4. RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
5. VBW $\geq$ RBW.
6. Sweep: Auto.
7. Detector function: Peak.
8. Trace: Max hold.
9. Allow the trace to stabilize.
10. Record the test results.


Measurement Result:

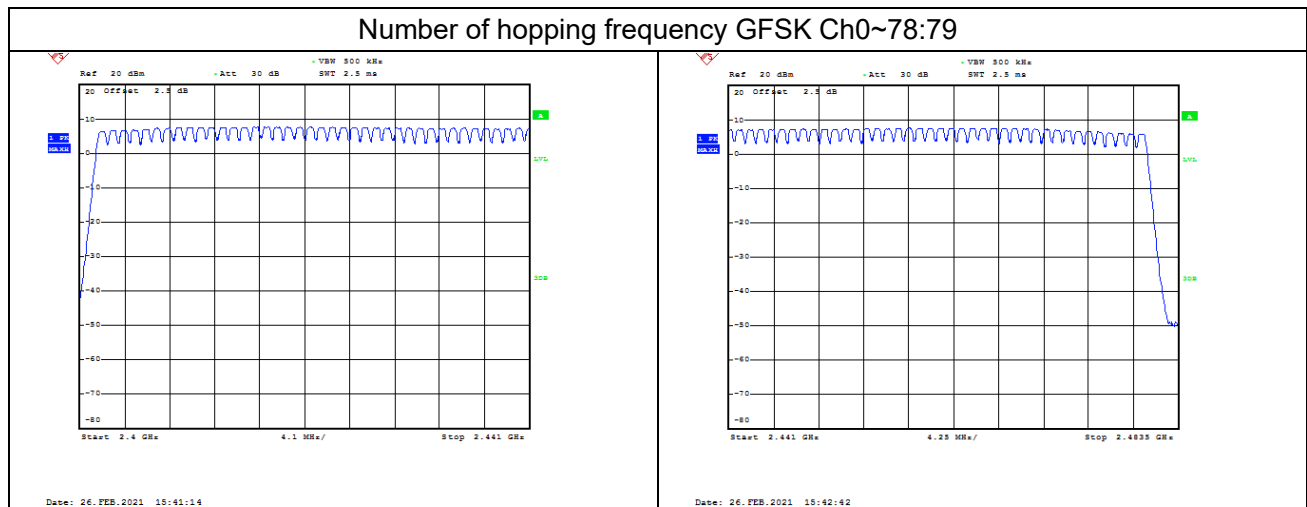

Number of hopping frequency $\pi/4$ DQPSK Ch0~78:79

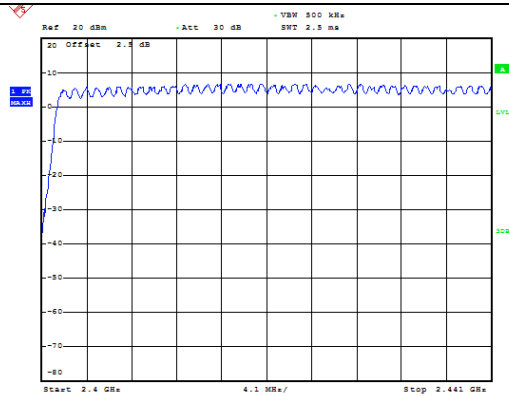


Date: 26.FEB.2021 15:51:35

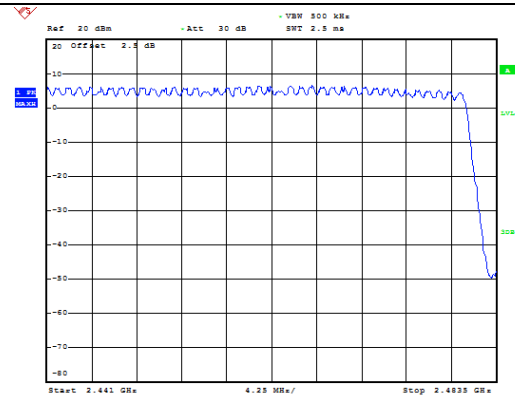


Date: 26.FEB.2021 15:53:03

Number of hopping frequency 8PSK Ch0~78:79

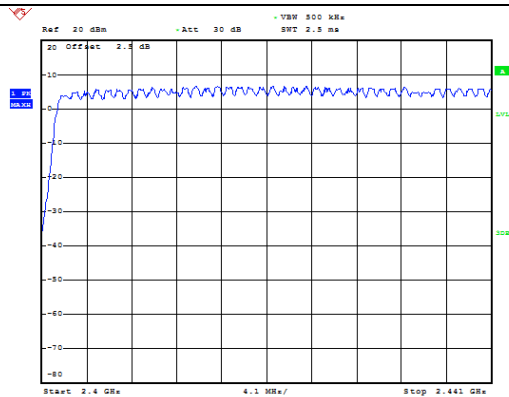

Date: 26.FEB.2021 15:55:09

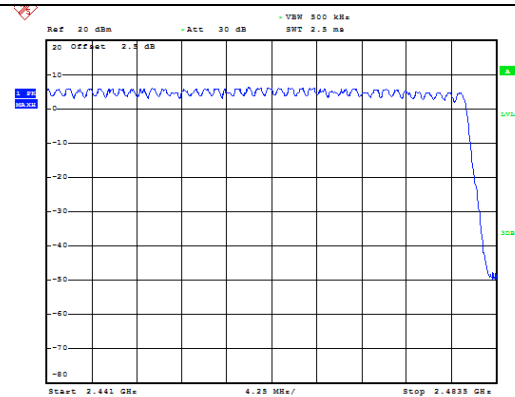

Date: 26.FEB.2021 15:56:37

6.9. AC Powerline Conducted Emission

Method of Measurement: ANSI C63.10-2013-clause 6.2

- 1 The one EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit is selected for the final measurement, while applying the appropriate modulating signal to the EUT.
- 2 If the EUT is relocated from an exploratory test site to a final test site, the highest emissions shall be remaximized at the final test location before final ac power-line conducted emission measurements are performed.
- 3 The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) is then performed for the full frequency range for which the EUT is being tested for compliance without further variation of the EUT arrangement, cable positions, or EUT mode of operation.
- 4 If the EUT is comprised of equipment units that have their own separate ac power connections, e.g., floor-standing equipment with independent power cords for each shelf that are able to connect directly to the ac power network, each current-carrying conductor of one unit is measured while the other units are connected to a second (or more) LISN(s). All units shall be separately measured. If a power strip is provided by the manufacturer, to supply all of the units making up the EUT, only the conductors in the power cord of the power strip shall be measured.

If the EUT uses a detachable antenna, these measurements shall be made with a suitable dummy load connected to the antenna output terminals; otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended. When measuring the ac conducted emissions from a device that operates between 150 kHz and 30 MHz a non-detachable antenna may be replaced with a dummy load for the measurements within the fundamental emission band of the transmitter, but only for those measurements.³⁶ Record the six highest EUT emissions relative to the limit of each of the current-carrying conductors of the power cords of the equipment that comprises the EUT over the frequency range specified by the procuring or regulatory agency. Diagram or photograph the test setup that was used. See Clause 8 for full reporting requirements.

Test Condition:


Voltage (V)	Frequency (Hz)
120	60

Measurement Result and limit:

(Quasi-peak-average Limit)

Frequency range (MHz)		Average Limit (dB μ V)	Conclusion
	Quasi-peak Limit (dB μ V)		
0.15 to 0.5	66 to 56	56 to 46	P
0.5 to 5	56	46	
5 to 30	60	50	

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

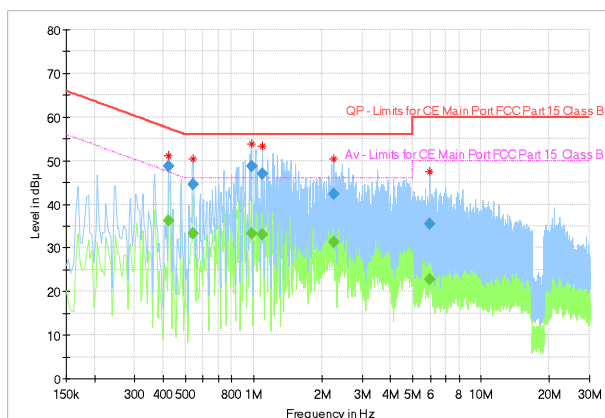

Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.422381	---	36.18	47.40	11.22	15000.0	9.000	L1	ON	9.6
0.422381	48.69	---	57.40	8.71	15000.0	9.000	L1	ON	9.6
0.541781	---	33.28	46.00	12.72	15000.0	9.000	L1	ON	9.6
0.541781	44.62	---	56.00	11.38	15000.0	9.000	L1	ON	9.6
0.978338	---	33.39	46.00	12.61	15000.0	9.000	L1	ON	9.6
0.978338	48.58	---	56.00	7.42	15000.0	9.000	L1	ON	9.6
1.097738	---	33.00	46.00	13.00	15000.0	9.000	L1	ON	9.7
1.097738	46.98	---	56.00	9.02	15000.0	9.000	L1	ON	9.7
2.250694	---	31.22	46.00	14.78	15000.0	9.000	L1	ON	9.7
2.250694	42.22	---	56.00	13.78	15000.0	9.000	L1	ON	9.7
5.933438	---	22.75	50.00	27.25	15000.0	9.000	L1	ON	9.8
5.933438	35.47	---	60.00	24.53	15000.0	9.000	L1	ON	9.8

7. Test Equipment List

7.1. Conducted Test System

Item	Equipment Name	Type	Serial Number	Manufacturer	Cal. Date	Cal. interval
1	Vector Signal Analyzer	FSQ26	101091	R&S	2020-05-10	1 year
2	DC Power Supply	ZUP60-14	LOC-220Z006-0007	TDL-Lambda	2020-05-10	1 year
3	Eagle Test Software	Eagle V3.1 FCC BT/WIFI	N/A	ECIT	N/A	N/A

7.2. Radiated Emission Test System

Item	Equipment Name	Type	Serial Number	Manufacturer	Cal. Date	Cal. interval
1	Universal Radio Communication Tester	CMU200	123123	R&S	2020-05-10	1 year
2	EMI Test Receiver	ESU40	100307	R&S	2020-05-10	1 year
3	TRILOG Broadband Antenna	VULB9163	VULB9163-515	Schwarzbeck	2020-02-28	2 years
4	Double- ridged Waveguide Antenna	ETS-3117	00135890	ETS	2020-02-28	2 years
5	2-Line V-Network	ENV216	101380	R&S	2020-05-10	1 year
6	EMI Test Software	EMC32 V 9.15.00	N/A	R&S	N/A	N/A

7.3. Climate chamber

Item	Equipment Name	Type	Serial Number	Manufacturer	Cal. Date	Cal. interval
1	Climate chamber	UT333 BT	C191995461	UNI-T	2020-05-10	1 year

Anechoic chamber

Fully anechoic chamber by ETS.

Annex A: Measurement Uncertainty

Measurement uncertainty for all the testing in this report are within the limit specified in 3IN documents. The detailed measurement uncertainty is defined in 3IN documents.

Measurement Items	Range	Confidence Level	Calculated Uncertainty
Peak Output Power-Conducted	2412MHz-2462MHz	95%	0.544dB
Peak Power Spectral Density	2412MHz-2462MHz	95%	0.502dB
Occupied 6dB Bandwidth	2412MHz-2462MHz	95%	69.26kHz
Band Edges-Conducted	2412MHz-2462MHz	95%	0.544dB
Conducted Emission	30MHz-2GHz	95%	0.90dB
Conducted Emission	2GHz-3.6GHz	95%	0.88dB
Conducted Emission	3.6GHz-8GHz	95%	0.96dB
Conducted Emission	8GHz-20GHz	95%	0.94dB
Conducted Emission	20GHz-22GHz	95%	0.88dB
Conducted Emission	22GHz-26GHz	95%	0.86dB
Transmitter Spurious Emission-Radiated	9KHz-30MHz	95%	5.66dB
Transmitter Spurious Emission-Radiated	30MHz-1000MHz	95%	4.98dB
Transmitter Spurious Emission-Radiated	1000MHz -18000MHz	95%	5.06dB
Transmitter Spurious Emission-Radiated	18000MHz -40000MHz	95%	5.20dB
AC Power line Conducted Emission	0.15MHz-30MHz	95%	3.66 dB

Annex B: Accreditation Certificate



Accredited Laboratory

A2LA has accredited

Industrial Internet Innovation Center (Shanghai) Co., Ltd.

Shanghai, People's Republic of China

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 *General requirements for the competence of testing and calibration laboratories*. This laboratory also meets the requirements of any additional program requirements in the «field» field. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).



Presented this 6th day of May 2019.



Vice President, Accreditation Services
For the Accreditation Council
Certificate Number 3682.01
Valid to April 30, 2021
Revised February 17, 2021

For the tests to which this accreditation applies, please refer to the laboratory's Electrical «field» Scope of Accreditation.

*****END OF REPORT*****