

FCC Part 15C Compliance Test Report

Test Report no.:	FCC15CWLAN_RM-835_11.docx	Date of Report:	17-Feb-2012
Number of pages:	29	Customer's Contact person:	Hu Dongji (dohu)
Testing laboratory:	TCC Nokia Tampere Laboratory P.O. Box 68 Sinitaival 5 FIN-33720 TAMPERE, FINLAND Tel. +358 (0) 7180 46800 Fax. +358 (0) 7180 46880	Customer:	Nokia, Inc. 16620 West Bernardo Drive San Diego, CA 92127 USA Tel. +1 858 831 5000 Fax. +1 858 385 1598
FCC listing no.:	94436		
IC recognition no.:	661AK-1		
Tested devices/ accessories:	Phone RM-835 / Battery BP-3L		
FCC ID:	QTLRM-835	IC:	661AB-RM835
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), Public Notice DA 00-705, DTS procedures KDB 558074, IC standards, RSS-210 (Issue 8, December 2010). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Date and signature for the contents:			

Jari Jantunen, System Manager, EMC

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	06-Feb-2012
Testing completed	07-Feb-2012
The customer's contact person	Hu Dongji (dohu)
Test Plan referred to	T:\Projects\RM-835\TestPlan\RS_testplan_RM-835.xls
Notes	-
Document name	T:\Projects\RM-835\EMC\FCC15CWLAN_RM-835_11.docx

1.1. EUT and Accessory Information

The EUT is a mobile phone with following features:

GSM/WCDMA/WLAN/Bluetooth

The EUT is tested with maximum rated TX power, modulated with pseudo random bit sequence (PRBS9).

Devices under tests

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-835	004402136881533;059N247	2011	-	1052.0000.8741.12030_33.GCF	42779
Battery	BP-3L	4955501503210101386	-	-	-	42767

1.2. Summary of Test Results

WLAN:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8(0.4(4))	Conducted peak output power	PASSED
15.247(d), 15.205(b)	A8(0.5)	Band edge compliance of RF emissions	NP
15.247(d)	A8(0.5)	Spurious RF conducted emissions	PASSED
15.247(d), 15.209	A8(0.5)	Spurious radiated emissions	NP
15.207	7.2.2	AC powerline conducted emissions	NP
15.247(a)(2)	A8(0.1(1))	6dB(bandwidth)	PASSED
15.247(e)	A8(0.1(2))	Power spectral density	PASSED

PASSED

FAILED

NP

The EUT complies with the essential requirements in the standard.

The EUT does not comply with the essential requirements in the standard.

The test was not performed by the TCC Nokia Laboratory.


CONTENTS

1. Summary for FCC Part 15C Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Conducted peak output power (15.247(b)(1), RSS-210 A8.4 (4)).....	4
2.1. Test Setup	4
2.2. Test method and limit	4
2.3. WLAN Test results.....	5
3. Spurious RF conducted emissions (FCC §15.247(d), RSS-210 A8.5)	10
3.1. Test Setup	10
3.2. Test method and limit	10
3.3. WLAN Test results.....	11
4. 6 dB bandwidth (FCC §15.247(a)(2), RSS-210 A8.2 (1))	16
4.1. Test Setup	16
4.2. Test method and limit	16
4.3. WLAN Test results.....	17
5. Power spectral density (FCC §15.247(e), RSS-210 A8.2 (2)).....	22
5.1. Test Setup	22
5.2. Test method and limit	22
5.3. WLAN Test results.....	23
6. Test Equipment.....	28
6.1. Conducted measurements	28
6.2. Radiated measurements	28

2. Conducted peak output power (15.247(b)(1), RSS-210 A8.4 (4))

EUT with DUT number	RM-835, DUT 42779
Accessories with DUT numbers	BP-3L, DUT 42767
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22-26 / 32-35 / 98.5-102.2
Date of measurements	07and 17-Feb-2012
Measured by	Jari Jantunen

2.1. Test Setup

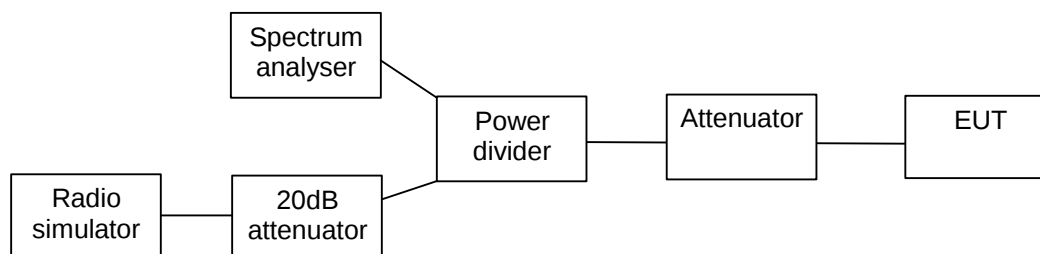

2.2. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210.

Limits for conducted peak output power measurements


Frequency range [MHz]	Limit [W]	Limit [dBm]
2400 – 2483.5	<= 1	<= 30

2.3. WLAN Test results


2.3.1 DSSS mode, QPSK modulation, 11 Mbps data rate

Channel / f _C [MHz]	P [dBm]	P [mW]	Result
1 / 2412	21.28	134.276	PASSED
6 / 2437	20.91	123.31	PASSED
11 / 2462	20.25	105.925	PASSED


Channel 1 / 2412 MHz

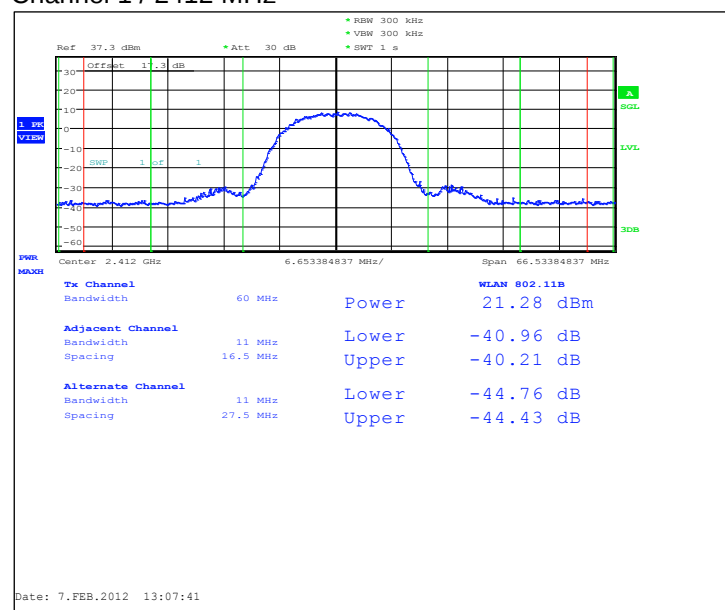

Channel 6 / 2437 MHz

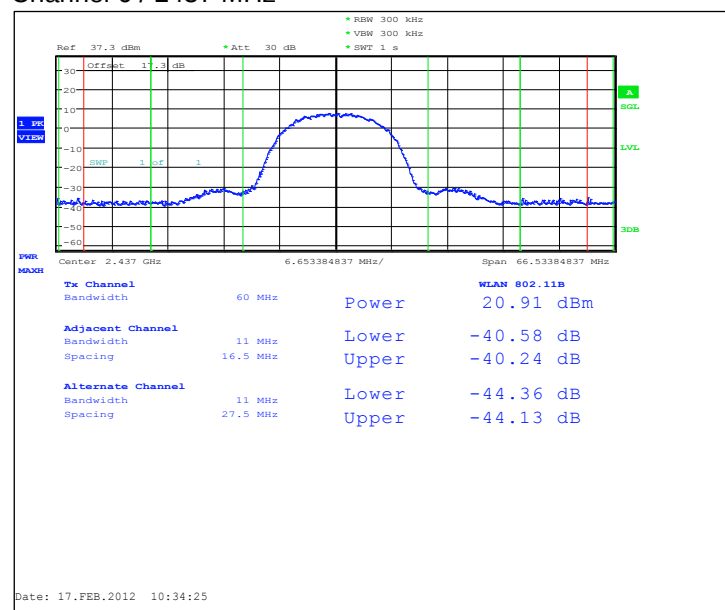


Channel 11 / 2462 MHz

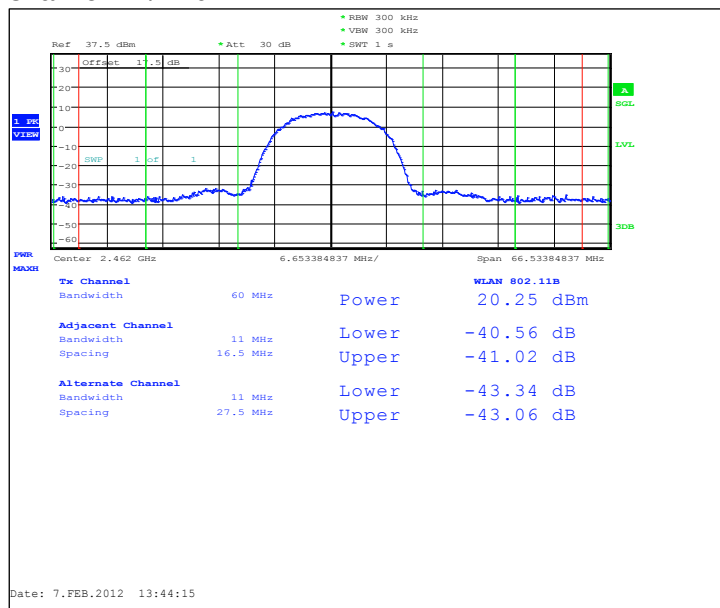


2.3.2 OFDM mode, BPSK modulation, 6 Mbps data rate

Channel / f _c [MHz]	P [dBm]	P [mW]	Result
1 / 2412	18.84	76.56	PASSED
6 / 2437	18.51	70.958	PASSED
11 / 2462	18.1	64.565	PASSED


Channel 1 / 2412 MHz

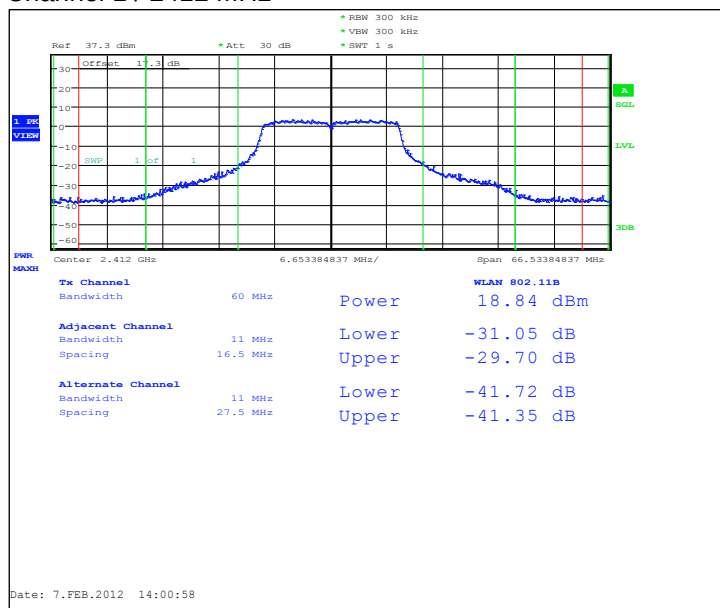

Channel 6 / 2437 MHz

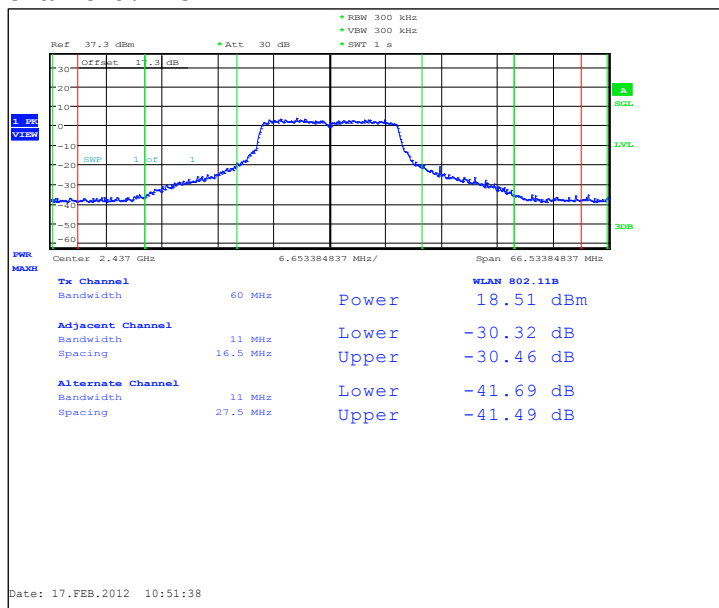


Channel 11 / 2462 MHz

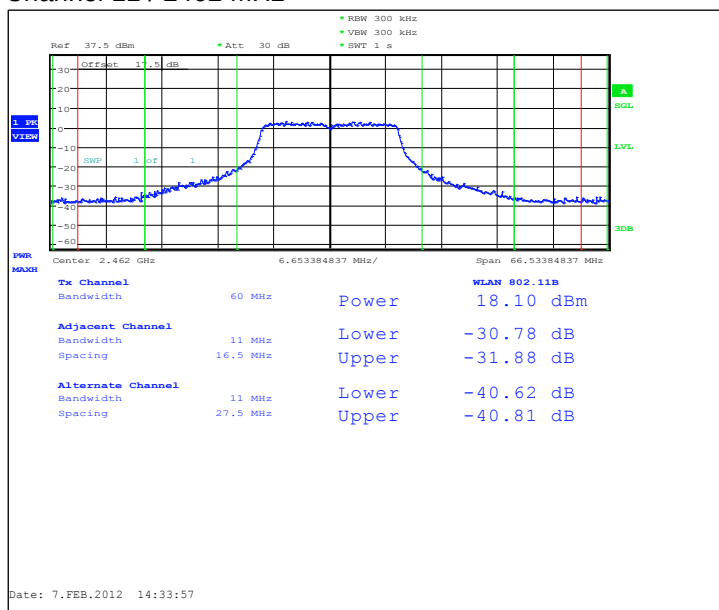


2.3.3 802.11n mode, HT20 modulation, MCS0 Mbps data rate

Channel / f_c [MHz]	P [dBm]	P [mW]	Result
1 / 2412	16.01	39.902	PASSED
6 / 2437	15.69	37.068	PASSED
11 / 2462	15.08	32.211	PASSED


Channel 1 / 2412 MHz

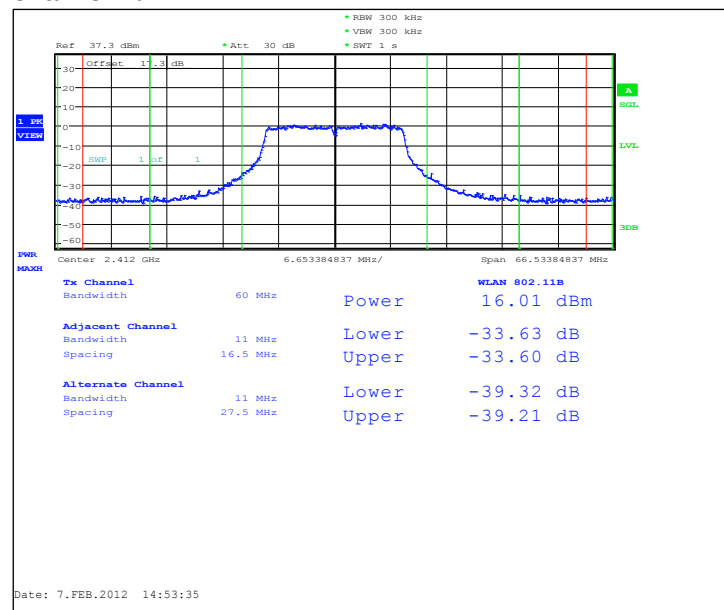

Channel 6 / 2437 MHz

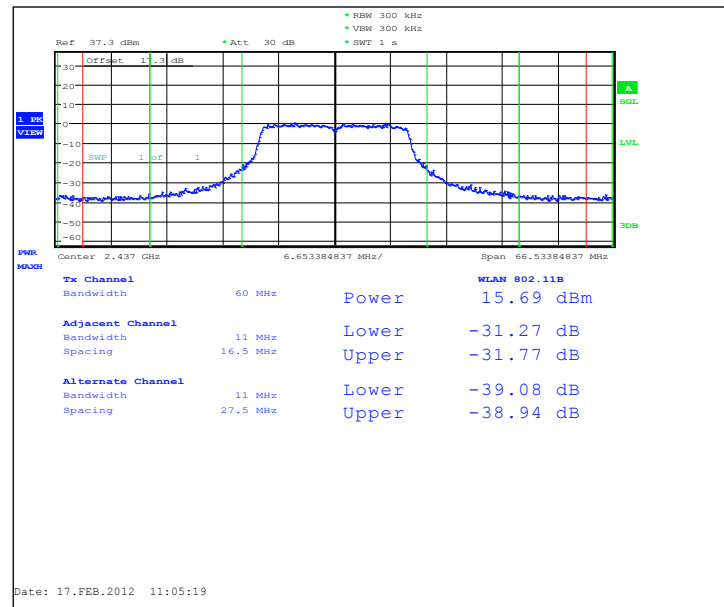


Channel 11 / 2462 MHz

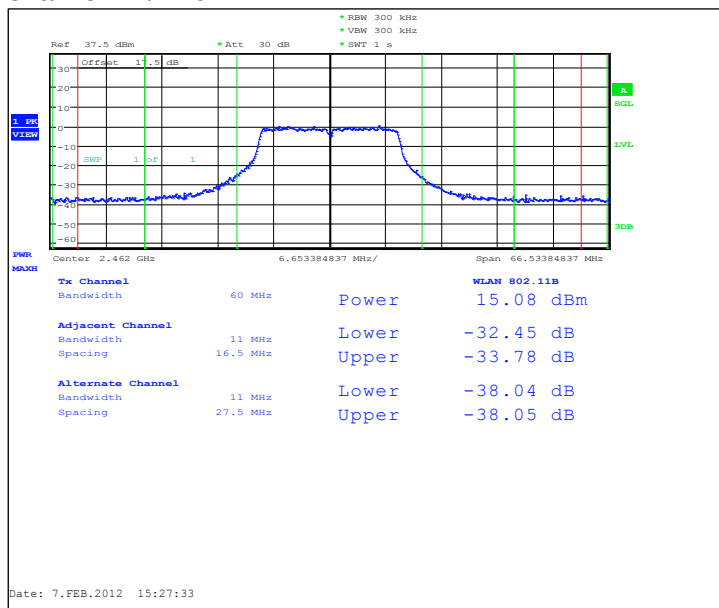

3. Spurious RF conducted emissions (FCC §15.247(d), RSS-210 A8.5)

EUT with DUT number	RM-835, DUT 42779
Accessories with DUT numbers	BP-3L, DUT 42767
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22-26 / 32-35 / 98.5-102.2
Date of measurements	07and 17-Feb-2012
Measured by	Jari Jantunen

3.1. Test Setup

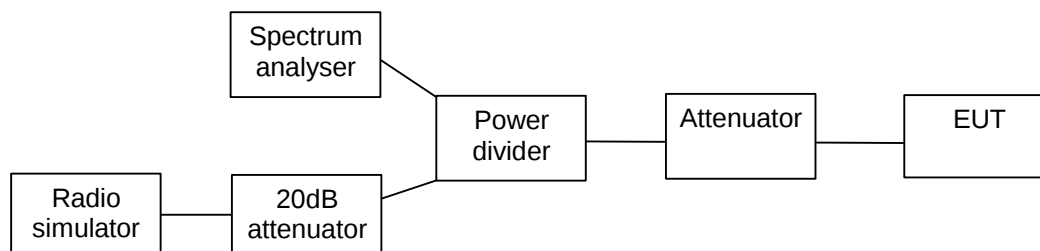

3.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.


Limits for spurious RF conducted emissions measurements

Frequency range [MHz]	Limit [dBc]
1 – 25000	<= -20

3.3. WLAN Test results

3.3.1 DSSS mode, QPSK modulation, 11 Mbps data rate


Channel 1 / 2412 MHz

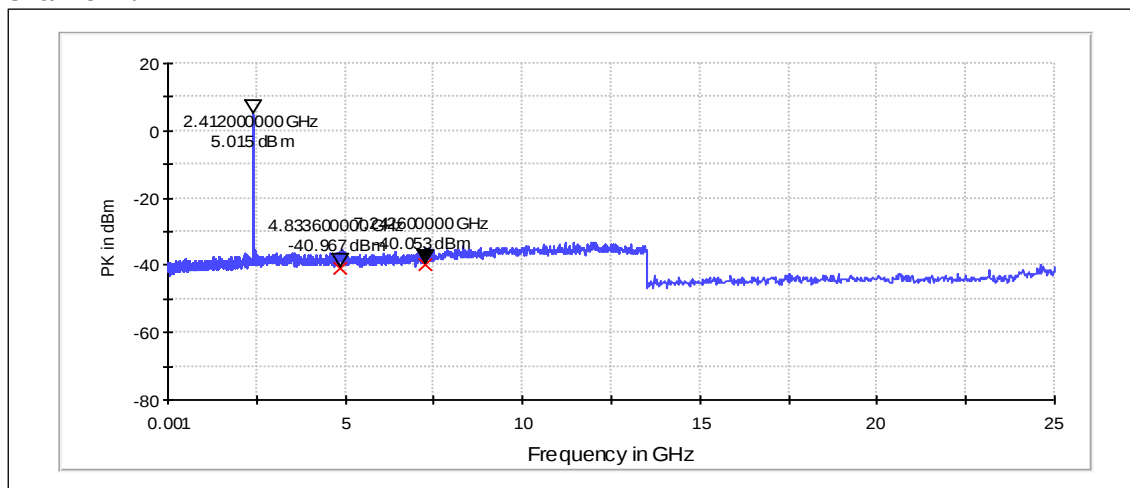

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4833.6	-40.97	PASSED
7242.6	-40.05	PASSED


Channel 6 / 2437 MHz

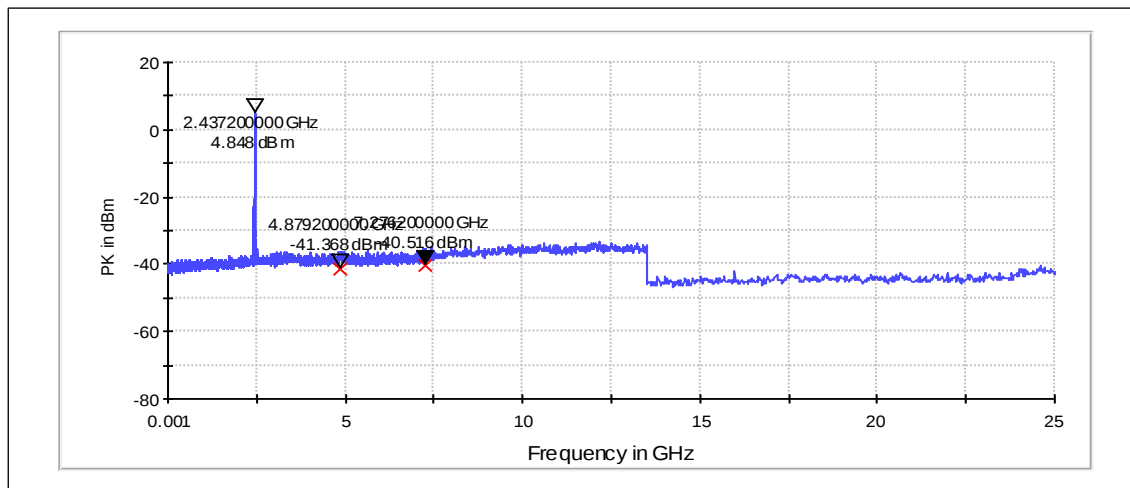

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4879.2	-41.37	PASSED
7276.2	-40.52	PASSED

Channel 11 / 2462 MHz

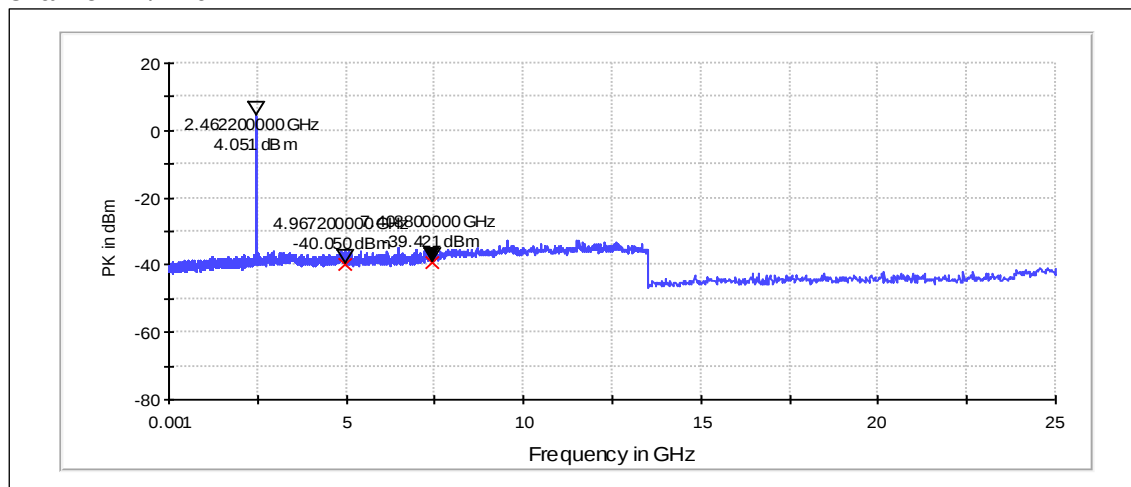


Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4967.2	-40.05	PASSED
7408.8	-39.42	PASSED

3.3.2 OFDM mode, BPSK modulation, 6 Mbps data rate


Channel 1 / 2412 MHz

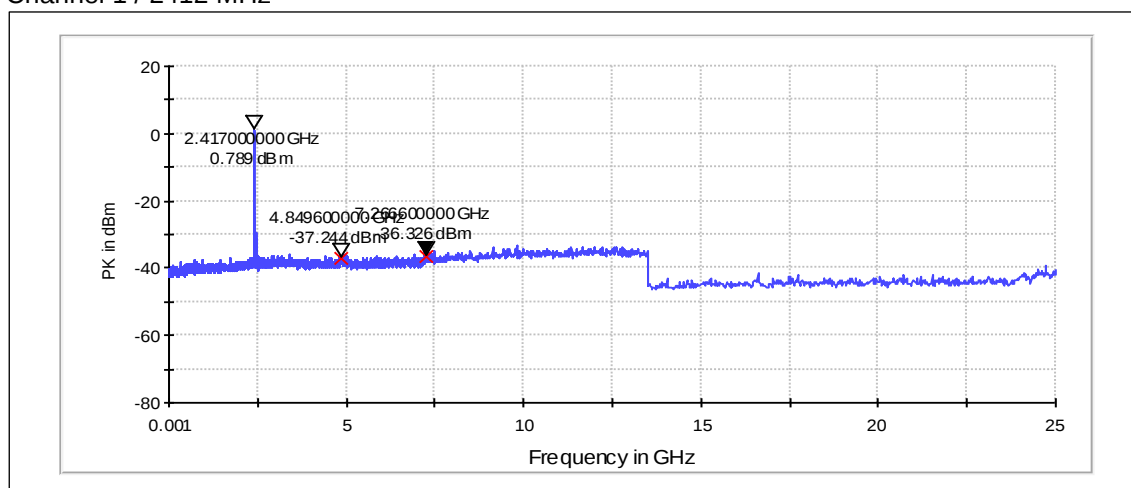

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4849.6	-37.24	PASSED
7266.6	-36.33	PASSED


Channel 6 / 2437 MHz

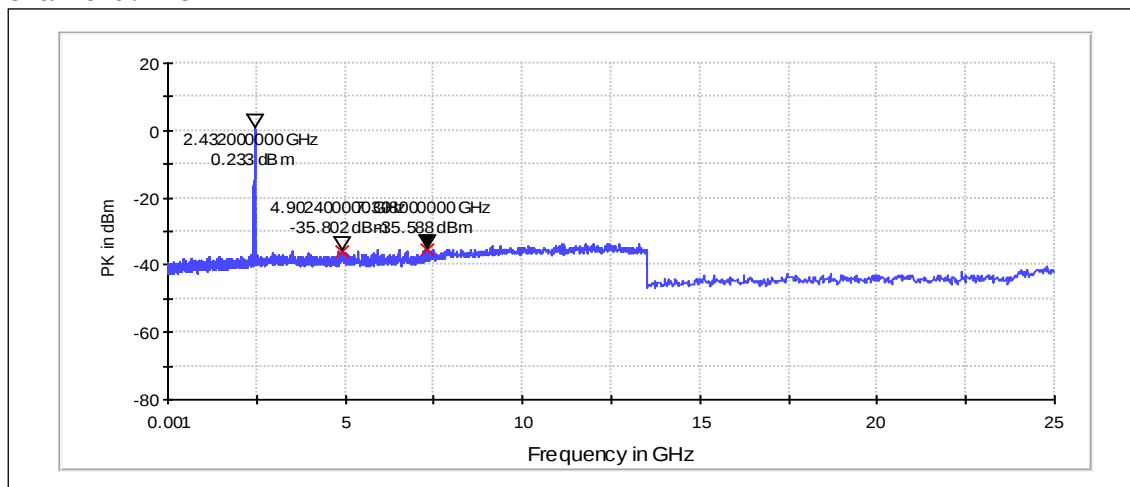

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4902.4	-35.8	PASSED
7308	-35.59	PASSED

Channel 11 / 2462 MHz

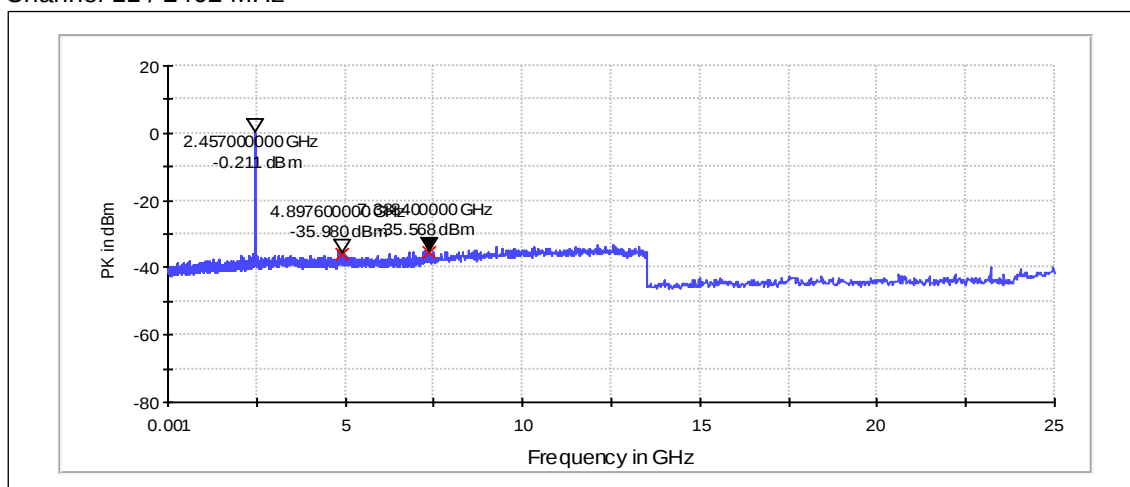


Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4897.6	-35.98	PASSED
7388.4	-35.57	PASSED

3.3.3 802.11n mode, HT20 modulation, MCS0 Mbps data rate


Channel 1 / 2412 MHz

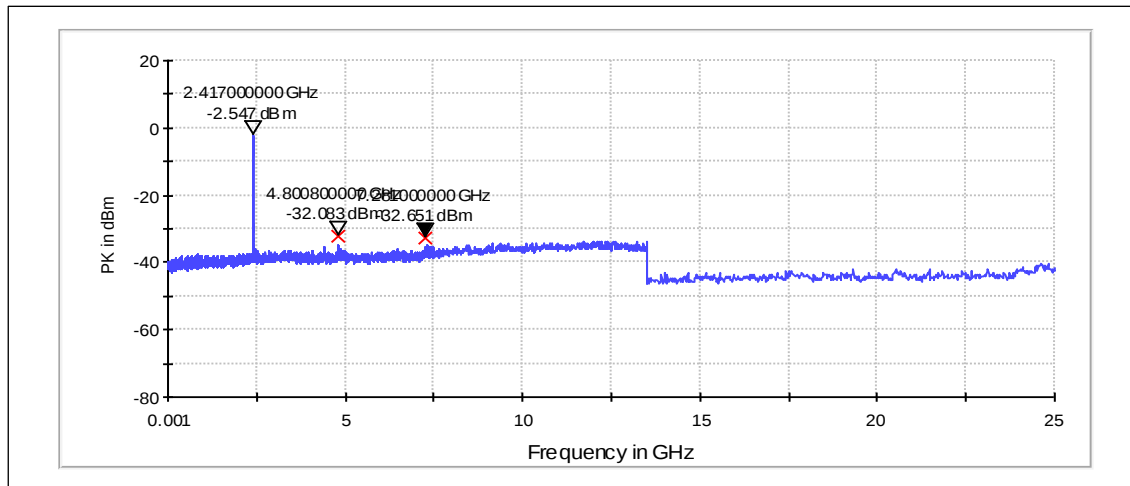

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4800.8	-32.08	PASSED
7281	-32.65	PASSED


Channel 6 / 2437 MHz

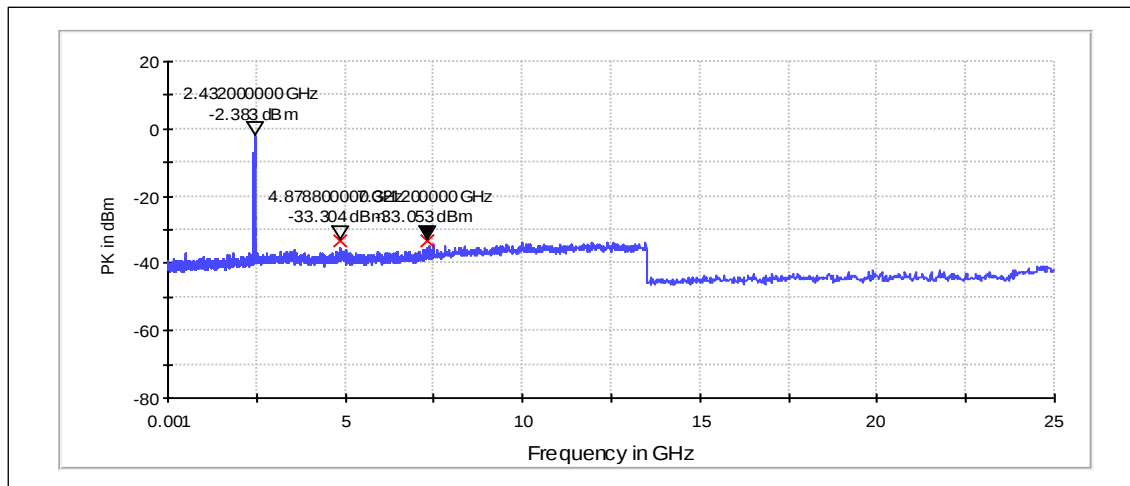

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4878.8	-33.3	PASSED
7321.2	-33.05	PASSED

Channel 11 / 2462 MHz

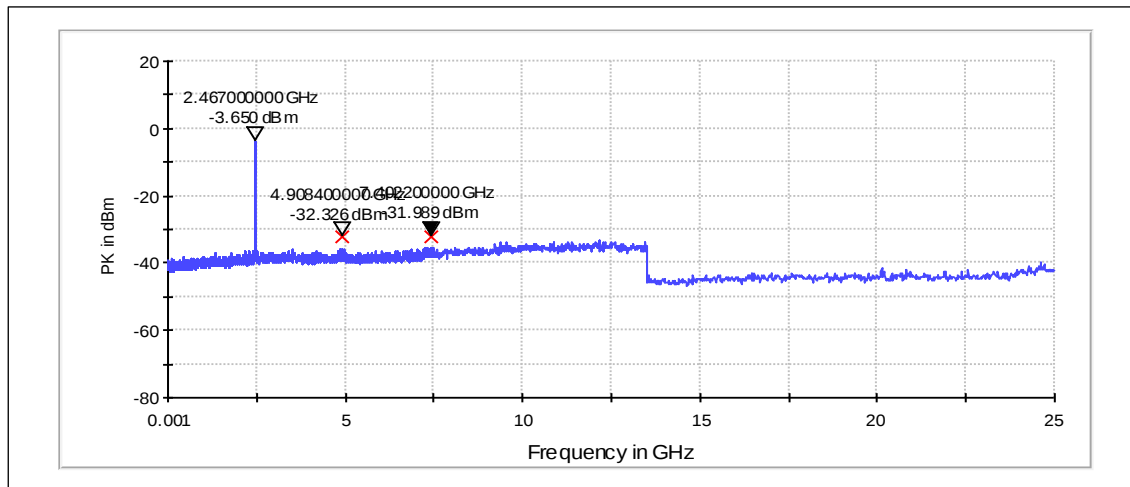


Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4908.4	-32.33	PASSED
7402.2	-31.99	PASSED

4. 6 dB bandwidth (FCC §15.247(a)(2), RSS-210 A8.2 (1))

EUT with DUT number	RM-835, DUT 42779
Accessories with DUT numbers	BP-3L, DUT 42767
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22-26 / 32-35 / 98.5-102.2
Date of measurements	07and 17-Feb-2012
Measured by	Jari Jantunen

4.1. Test Setup

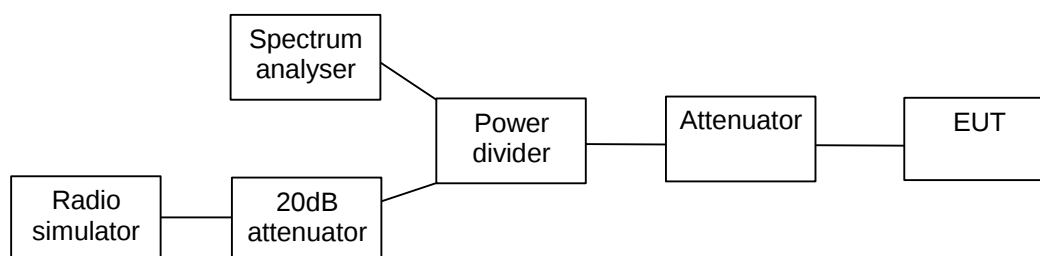

4.2. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210.

Limits for 6 dB bandwidth measurements


Limit [kHz]
≥ 500

4.3. WLAN Test results


4.3.1 DSSS mode, QPSK modulation, 11 Mbps data rate

Channel / f _c [MHz]	6 dB bandwidth [kHz]	Result
1 / 2412	10336.5	PASSED
6 / 2437	10416.7	PASSED
11 / 2462	10336.5	PASSED


Channel 1 / 2412 MHz

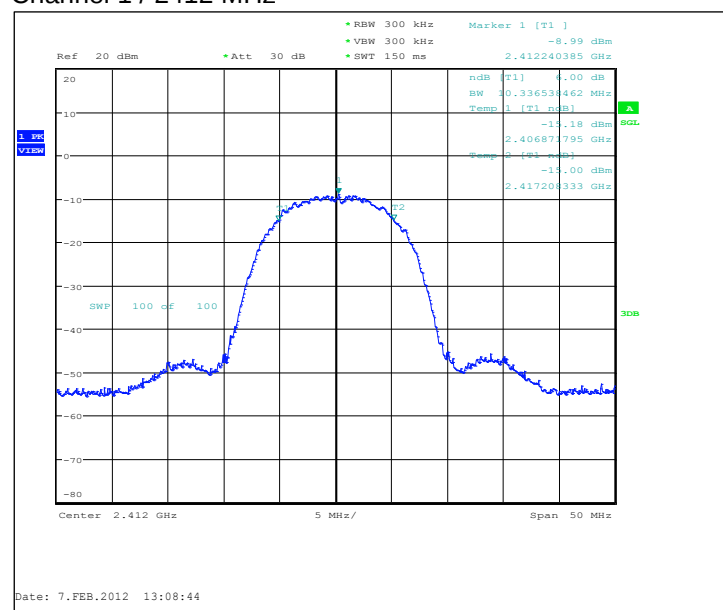

Channel 6 / 2437 MHz

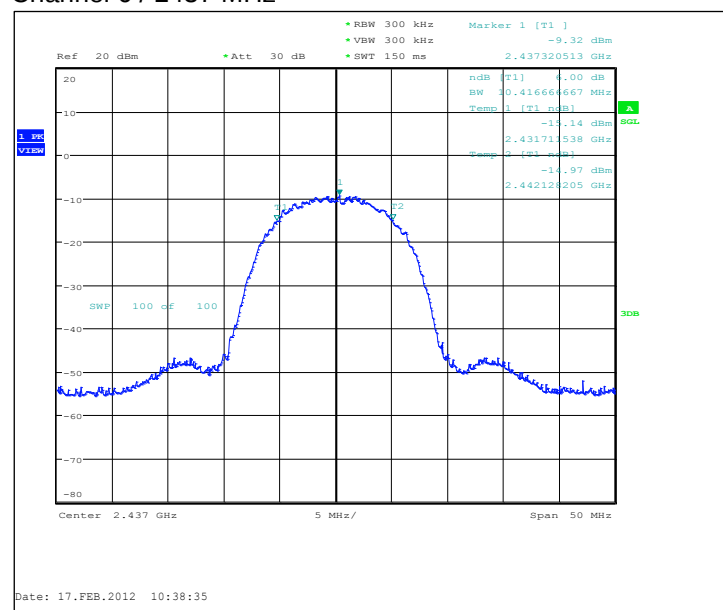


Channel 11 / 2462 MHz

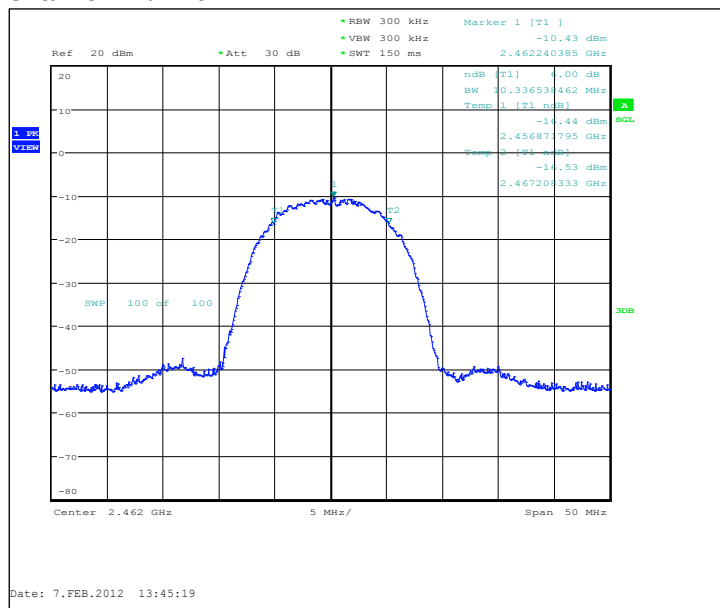


4.3.2 OFDM mode, BPSK modulation, 6 Mbps data rate

Channel / f _c [MHz]	6 dB bandwidth [kHz]	Result
1 / 2412	16506.4	PASSED
6 / 2437	16506.4	PASSED
11 / 2462	16506.4	PASSED


Channel 1 / 2412 MHz

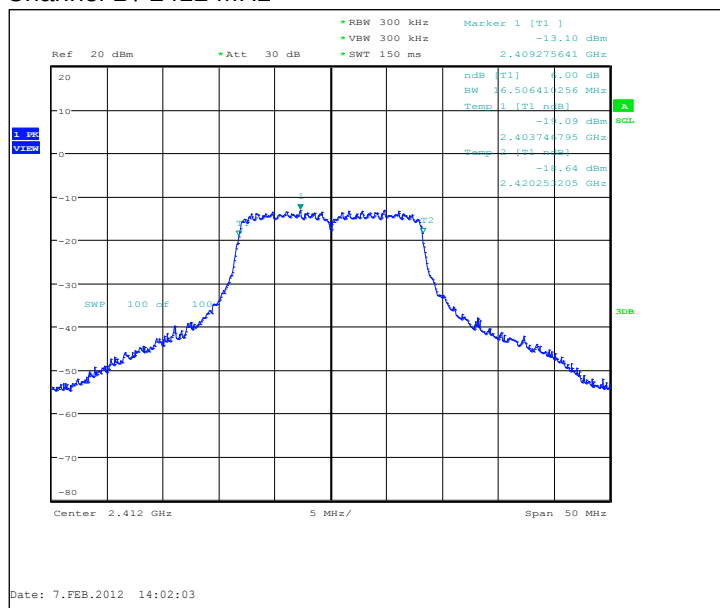

Channel 6 / 2437 MHz

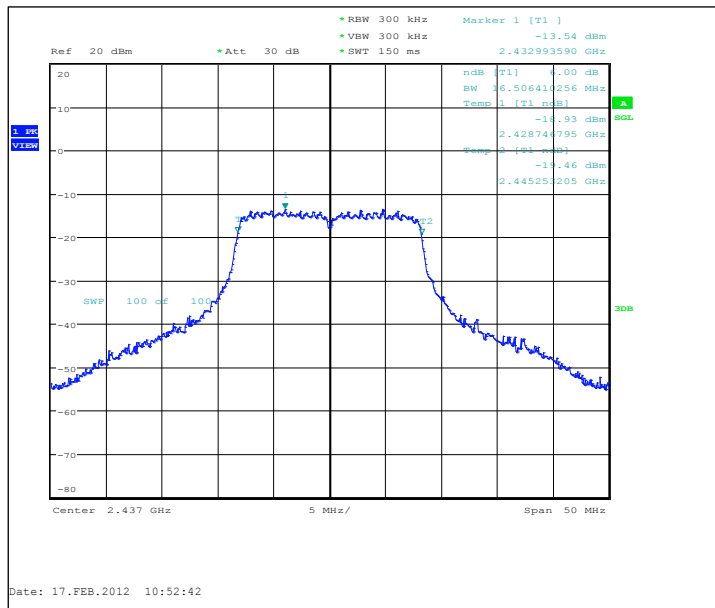


Channel 11 / 2462 MHz

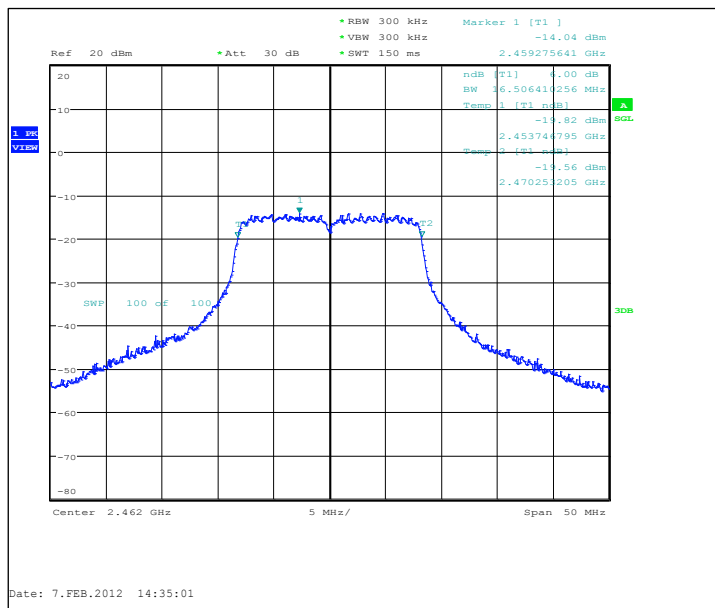


4.3.3 802.11n mode, HT20 modulation, MCS0 Mbps data rate

Channel / f _c [MHz]	6 dB bandwidth [kHz]	Result
1 / 2412	16666.7	PASSED
6 / 2437	17708.3	PASSED
11 / 2462	16666.7	PASSED


Channel 1 / 2412 MHz

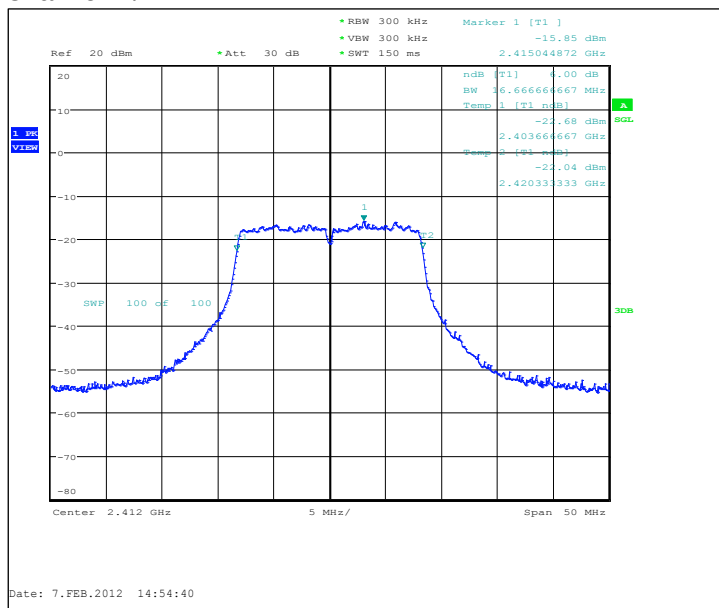

Channel 6 / 2437 MHz

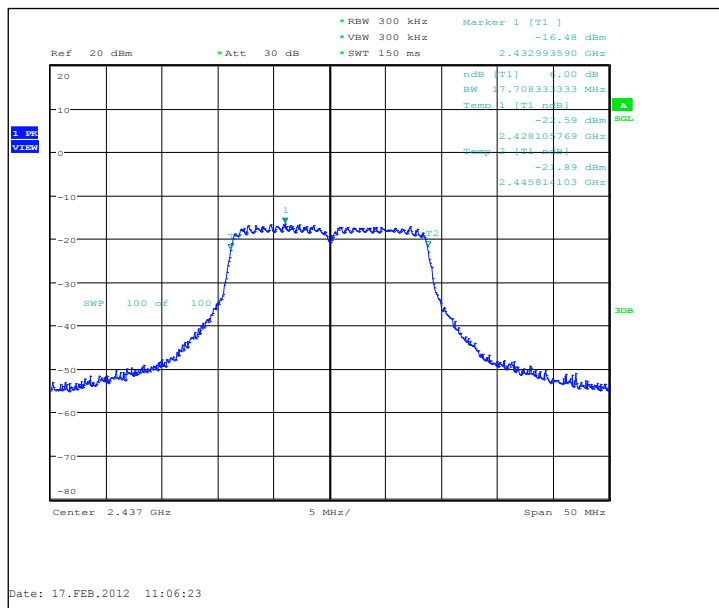


Channel 11 / 2462 MHz

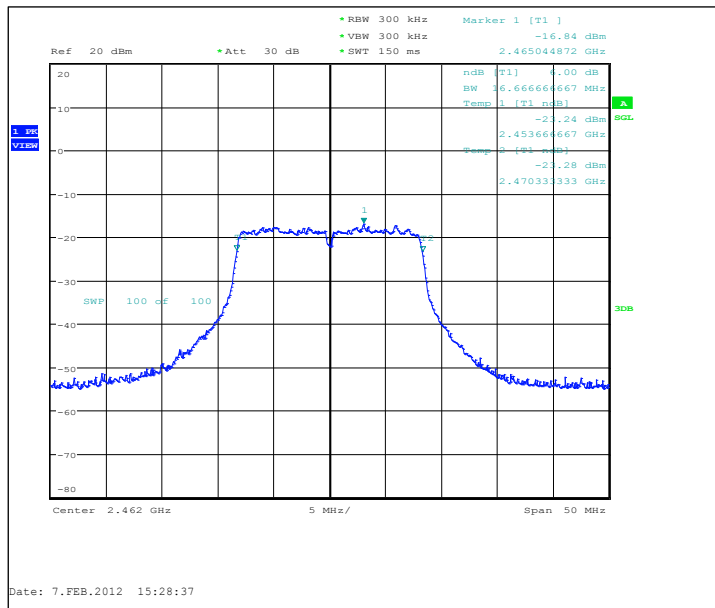

5. Power spectral density (FCC §15.247(e), RSS-210 A8.2 (2))

EUT with DUT number	RM-835, DUT 42779
Accessories with DUT numbers	BP-3L, DUT 42767
Operation Voltage [V] / [Hz]	Nominal
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22-26 / 32-35 / 98.5-102.2
Date of measurements	07and 17-Feb-2012
Measured by	Jari Jantunen

5.1. Test Setup

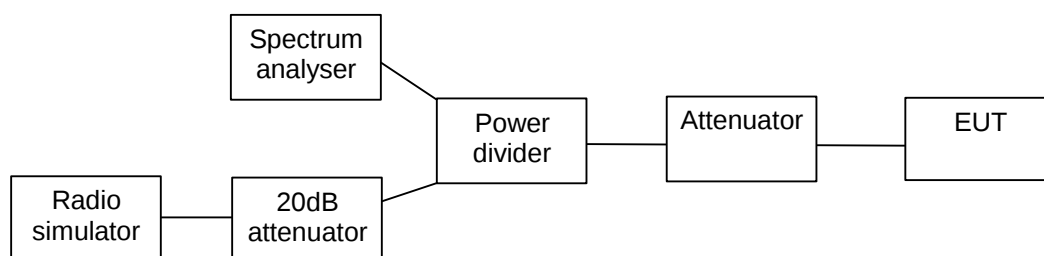

5.2. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210.

Limits for power spectral density measurements


Limit [dBm] @ 3 kHz
<= 8

5.3. WLAN Test results


5.3.1 DSSS mode, QPSK modulation, 11 Mbps data rate

Channel / f_c [MHz]	P [dBm]	Result
1 / 2412	-10.52	PASSED
6 / 2437	-10.86	PASSED
11 / 2462	-11.38	PASSED


Channel 1 / 2412 MHz

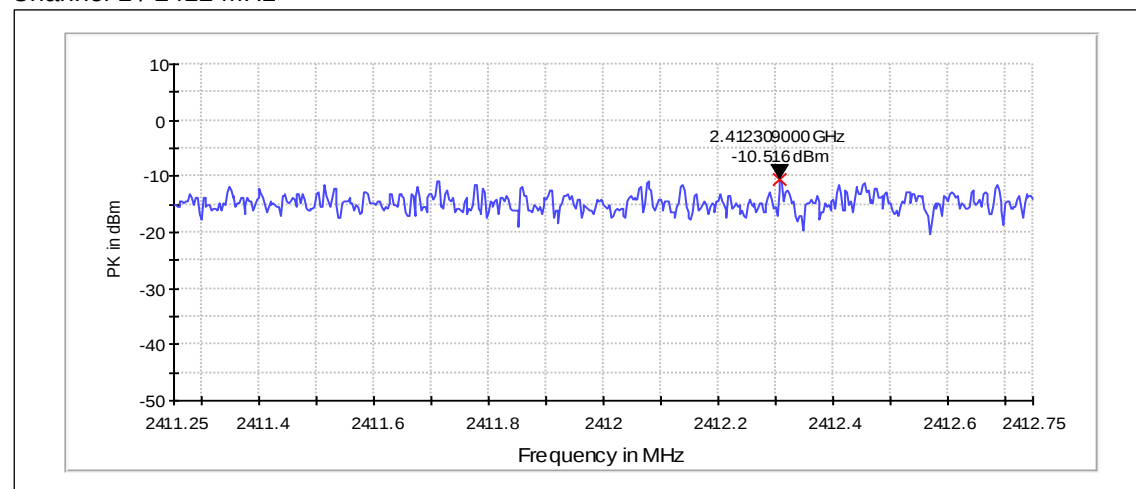

Channel 6 / 2437 MHz

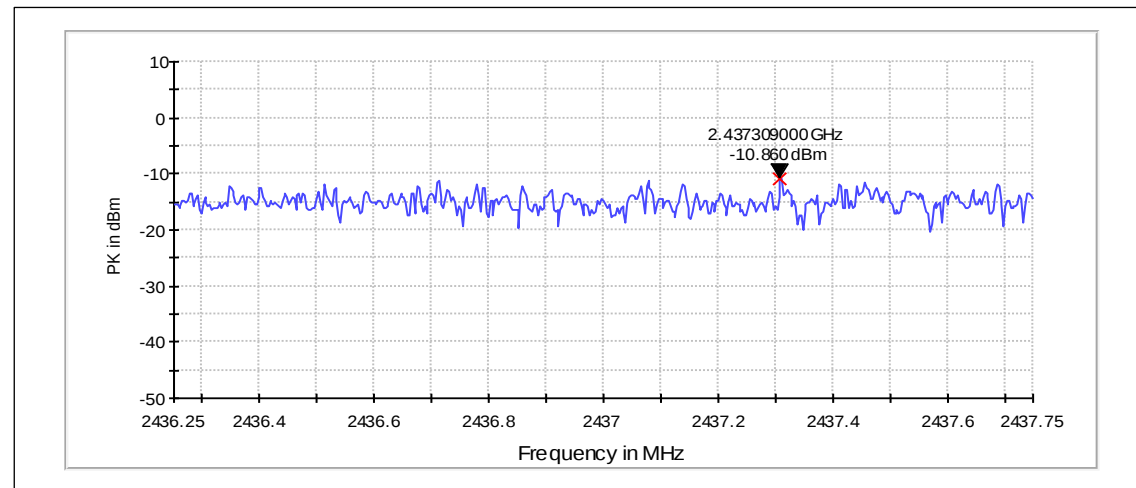


Channel 11 / 2462 MHz

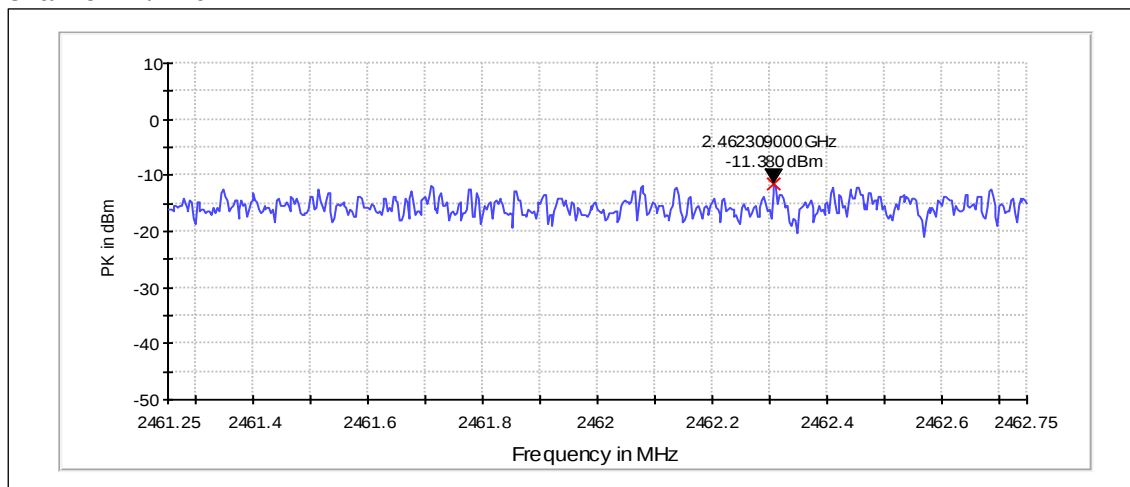


5.3.2 OFDM mode, BPSK modulation, 6 Mbps data rate

Channel / f_c [MHz]	P [dBm]	Result
1 / 2412	-12.84	PASSED
6 / 2437	-13.74	PASSED
11 / 2462	-13.9	PASSED


Channel 1 / 2412 MHz

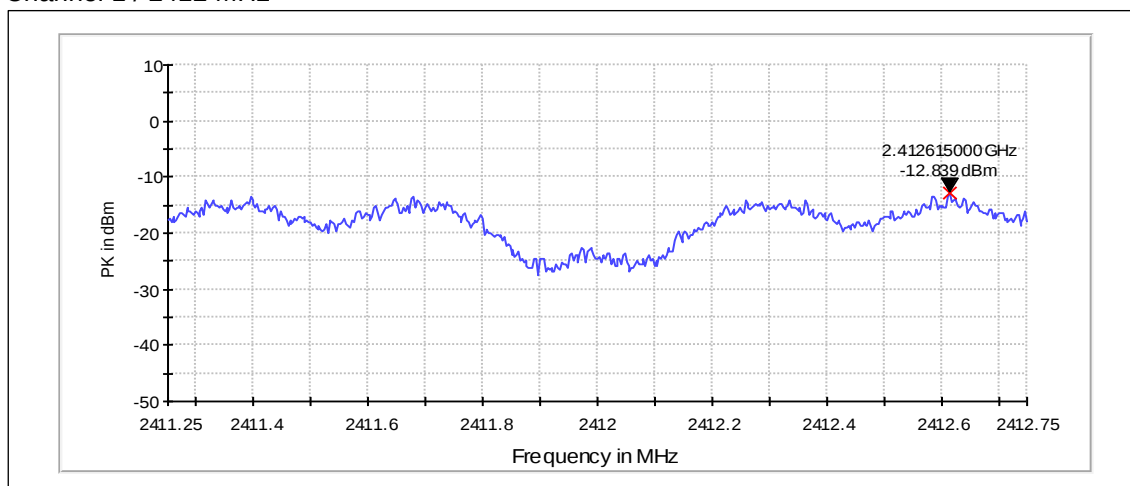

Channel 6 / 2437 MHz

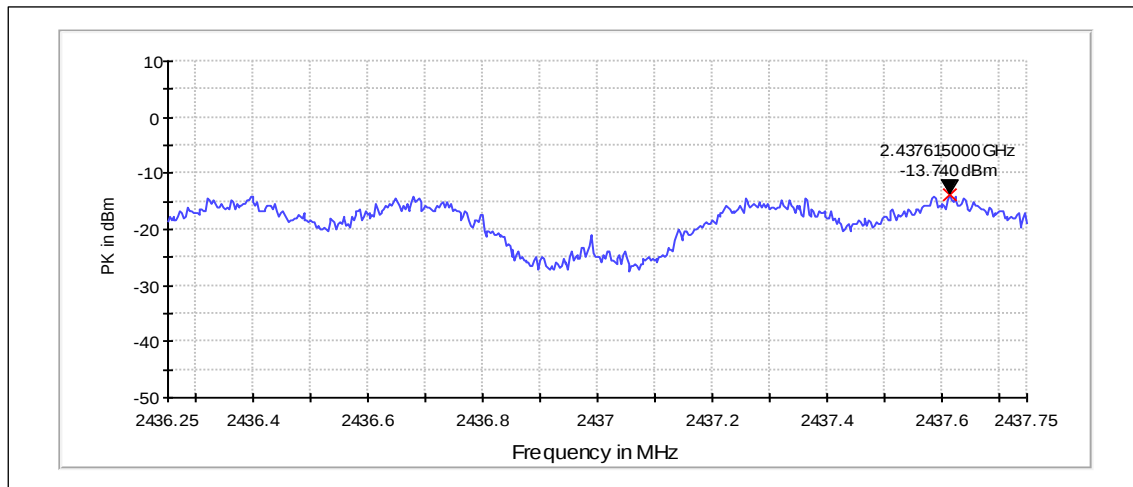


Channel 11 / 2462 MHz

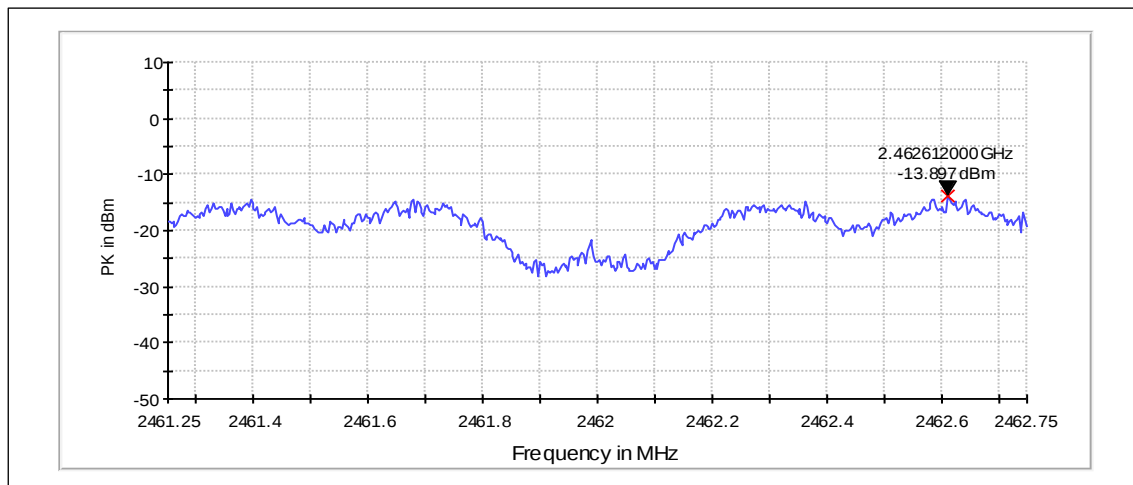


5.3.3 802.11n mode, HT20 modulation, MCS0 Mbps data rate

Channel / f_c [MHz]	P [dBm]	Result
1 / 2412	-15.23	PASSED
6 / 2437	-13.79	PASSED
11 / 2462	-16.16	PASSED


Channel 1 / 2412 MHz

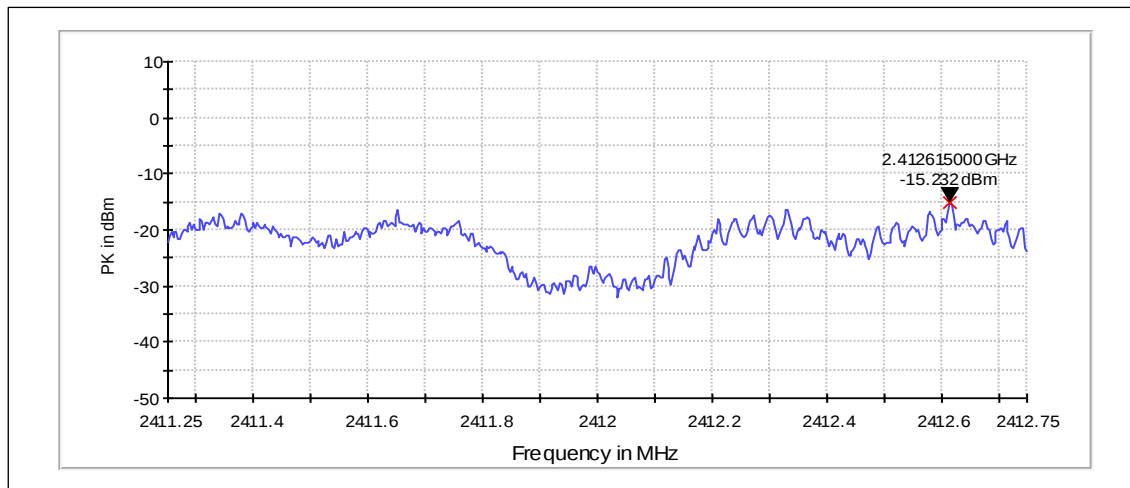

Channel 6 / 2437 MHz

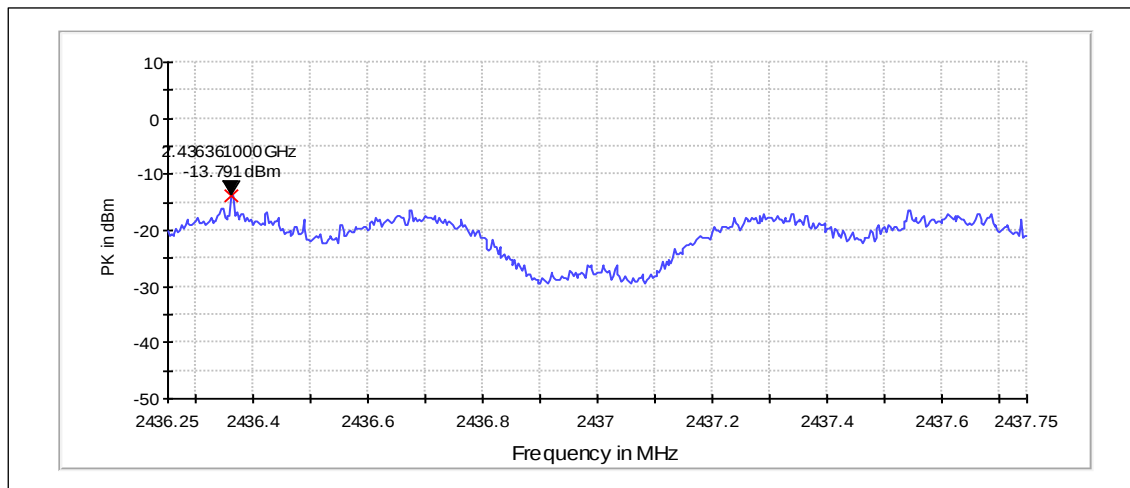

Channel 11 / 2462 MHz

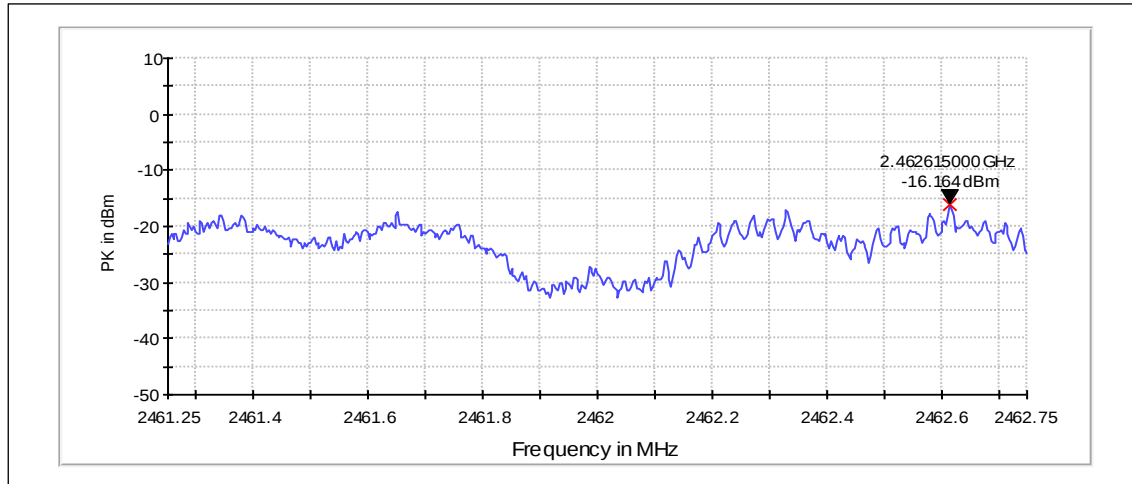

6. Test Equipment

6.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM38112	Power supply	6632A	Agilent	22/24/27, 15C
TM38631	Signal Generator	83640L	Agilent	22/24/27, 15C, 15B
OM06312	Signal Generator	E4422B	Agilent	22/24
TM37678	Communication Tester	CMU200	R&S	15C, 15B
TM30600	Impulse limiter	ESH3-Z2	R&S	15C, 15B
TM26490	LISN 50 μ H	ESH3-Z5	R&S	15C, 15B
TM26491	LISN 50 μ H	ESH3-Z5	R&S	15C, 15B
TM37610	Spectrum Analyzer	FSU26	R&S	22/24/27, 15C
TM22806	Battery	BAT 20/E	Fiskars	15C, 15B
TM22805	UPS	PS 20/1.2	Fiskars	15C, 15B
-	Temperature and humidity logger	175-H2	Testo	15C, 15B
-	Temperature and humidity logger	175-H2	Testo	22/24/27, 15C
-	Air pressure and temperature logger	635-2	Testo	22/24/27, 15C, 15B
-	Air pressure sensor	0638-1835	Testo	22/24/27, 15C, 15B
-	Temperature test chamber	VT 4002	Vötsch	22/24
2058	Receiver	ESPC	R&S	15C, 15B
2001	Bluetooth tester	CBT	R&S	22/24/27, 15C, 15B
2002	Communication Tester	CMU200	R&S	22/24/27, 15C
2009	LISN 50 μ H	ENV216	R&S	15C, 15B
2010	LISN 50 μ H	ENV216	R&S	15C, 15B
2012	Power splitter	11667B	Agilent	22/24/27, 15C
2013	Attenuator	8493C	Agilent	22/24/27, 15C
2014	Attenuator	8493C	Agilent	22/24/27, 15C
2019	Power splitter	ZN2PD-9G-S+	Mini-Circuits	15E
2020	Power splitter	ZN2PD-9G-S+	Mini-Circuits	15E

6.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM38114	Power supply	6632A	Agilent	22/24/27, 15C, 15B
TM38631	Signal Generator	83640L	Agilent	22/24/27, 15C, 15B
TM38323	Preamplifier	PA-02 18-26 GHz	EMC Automation	22/24/27, 15C, 15B
-	Antenna	BBHA 9120 D	Schwarzbeck	22/24/27, 15C
TM26497	Antenna	3115	Emco	22/24/27, 15C, 15B
TM37773	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
TM38845	Receiver	ESIB 26	R&S	22/24/27, 15C, 15B
-	Antenna	HL562	R&S	22/24/27, 15C, 15B
-	Turntable	2188	EMCO	22/24/27, 15C, 15B
-	Turntable controller	2090	EMCO	22/24/27, 15C, 15B
-	RF system panel	TS-RSP	R&S	22/24/27, 15C, 15B
-	RF system panel	TS-RSP	R&S	22/24/27, 15C, 15B
-	Mini mast	2075-2	ETS Lindgren	22/24/27, 15C, 15B
TM38843	Mini mast	2075	Emco	22/24/27, 15C, 15B
TM38842	Antenna mast controller	2090	Emco	22/24/27, 15C, 15B
TM30643	LISN 50 μ H	LISN-5-20-2	FCC	22/24/27, 15C, 15B
TM30644	LISN 50 μ H	LISN-5-20-2	FCC	22/24/27, 15C, 15B
-	Temperature and humidity logger	175-H2	Testo	22/24/27, 15C, 15B
-	Air pressure and temperature logger	635-2	Testo	22/24/27, 15C, 15B
-	Air pressure sensor	0638-1835	Testo	22/24/27, 15C, 15B
TM39180	Laser distance meter	Disto Pro	Leica	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
TM37523	Preamplifier	AMF-4D-10M-3G-25-20P	Miteq	22/24/27, 15C, 15B
TM37498	Preamplifier	AMF-5D-020180-26-10P	Miteq	22/24/27, 15C, 15B
TM30599	Semi anechoic chambre	UNKNOWN	TDK	22/24/27, 15C, 15B
TM22638	Power supply	OL63743-901	-	22/24/27, 15C, 15B
TM38066	High pass filter	4HC3000/18000-3-KK	Trilithic	22/24/27, 15C, 15B
-	High pass filter	WHKX 1.6/15G-12SS	Wainwright	22/24/27, 15C, 15B
TM37545	Tunable notch filter	800.0/960.0-0.2/40-8SSK	Wainwright	22
TM26512	Tunable notch filter	WRCD1850/1910-0.2/40-10SSK	Wainwright	24
-	Band reject filter	WRCG1877/1883-1870/1890-40/6EE	Wainwright	24
-	Band reject filter	WRCG1729.4/1735.4-1722.4/1742.4-40/6SS	Wainwright	27
-	Band reject filter	WRCG832/838-825/848-40/5SS	Wainwright	22
TM23892	Controller	G-1000SDX	Yaesu	22/24/27
2001	Bluetooth tester	CBT	R&S	22/24/27, 15C, 15B
6023	Antenna	VUBA 9117	Schwarzbeck	22/24/27, 15C