

NOTES:

1. APPROVED MATERIALS OR APPROVED EQUIVALANT:

HTYL 50 (50U POLYESTER FILM WHITE MATTE LABEL)
 MATERIAL SGS NO.: CANEC 1405581101
 ADHESIVE: F07D
 ADHESIVE SGS NO.: CANEC1417538801
 COLOR: WHITE

MATERIAL: 3M 7871, 0.002" POLYESTER GLOSS WHITE
 ADHESIVE: 0.002" #350
 ADHESIVE COLOR: GLOSS WHITE
 FINISH: 0.002" CLEAR POLYESTER, GLOSS

MATERIAL: 3M 7815, 0.002" POLYESTER WHITE
 ADHESIVE: 0.001" PRESSURE SENSITIVE ADHESIVE
 COLOR: WHITE
 FINISH: 0.001" CLEAR POLYESTER, MATTE FINISH


MATERIAL: 3M 7816 .002" WHITE POLYESTER WITH 0.8 MIL
 ACRYLIC ADHESIVE 310 ON A 55 LB DENSIFIED KRAFT LINE
 AND COMPUCL II OM 100 CLEAR MTC-329 L-29 71B PMO-8 S
 TOP COATING FILM
 NOTE: THIS TOP COATING FILM NOT UV STABLE, DO NOT USE
 IN AREAS EXPOSED TO SUNLIGHT.

MATERIAL: LGI-1199 RADIANT WHITE POLYESTER 2.0 MIL FILM
 WITH GLOSS TOPCOAT AND 1.8 MIL ACRYLIC ADHESIVE ON 55#
 DENSIFIED KRAFT LINER (UL RECOGNIZED AND CSA ACCEPTED)
 WITH LG-1068 CLEAR GLOSS POLYESTER OVERLAMINATE
 (1.0MIL THICK WITH 0.8MIL ADHESIVE) FOR THERMAL TRANSFER
 TOPCOAT. SEE LGI SPECIFICATION DOCUMENTS FOR APPLICATION
 DETAILS CONCERNING TEMPERATURE AND CLEANLINESS.


2. MANUFACTURING CODE (MC) ENCODED IN DATAMATRIX (ECC-200)
 FORMAT. CELL DOT (MODULE) SIZE = 8, TEXT FONT = 6PT.

3. MUST BE ROHS COMPLIANT PER DIRECTIVE 2011/65/EU OF THE
 EUROPEAN PARLIAMENT AND OF THE COUNCIL OF JUNE 2011.111.

4. ALL DIMENSIONS ARE EXPRESSED IN MM[INCH].



REV	DATE	SC ECO	ACTION SUMMARY	ENG
1W	12/21/21	-	RELEASE FOR TOOLING	MLuebeck
A	09/21/22	47665004	ENGR RELEASE	MLuebeck
-	-	-	-	-
-	-	-	-	-

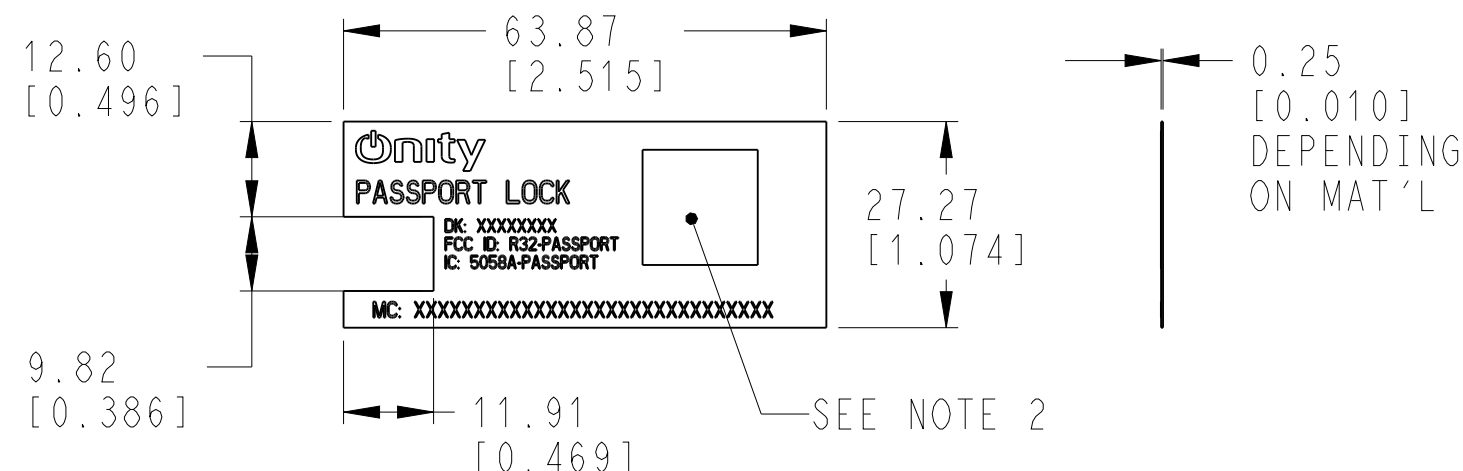

This document contains technical data subject to EAR.
 U.S. Export Control Classification Number: EAR99

STANDARD TOLERANCE dual dim: mm [in]		Onity A Carrier Company						
.XX	± .254 .010	TITLE: LBL, BLANK, POLY, WHT, SELF ADHESIVE, ROHS, PASSPORT						
.XXX	± .127 .005	This document is the property of Onity Inc., a subsidiary of Carrier Global Corporation, and contains proprietary information of Onity Inc. This document is loaned on the express condition that neither it nor the information contained therein shall be disclosed to others without the express written consent of Onity Inc., and that the information shall be used by the recipient only as approved expressly by Onity Inc. This document shall be returned to Onity Inc. upon its request. This document may be subject to certain restrictions under U.S. export control laws and regulations.						
FRACTION	± .762 .03	THIRD ANGLE PROJECTION						
ANGLES	± 1 DEG							
SURFACE FINISH	1.6m 63	DRAWN BY: MLuebeck	DATE: 12/17/21	MATERIAL: SEE NOTES	FINISH: SEE NOTES	SHT: 1/1	SIZE: B	SCALE: 1:32
UNLESS OTHERWISE NOTED		MODEL NAME: 10108220P1		DRAWING NUMBER: 10108220P1		REVISION: A		RELEASE LEVEL: Design
All parts and assemblies must use ROHS, REACH and PROP 65 compliant materials and processes.								