



# FCC TEST REPORT

Issued to

**TCT Mobile Limited**

For

**Tablet PC**

|            |                                 |
|------------|---------------------------------|
| Model Name | one touch T60                   |
| Trade Name | alcatel one touch               |
| Brand Name | alcatel one touch               |
| FCC ID     | RAD189                          |
| Standard   | 47 CFR Part 15 Subpart C        |
| Test date  | April 16, 2011 – April 24, 2011 |
| Issue date | May 11, 2011                    |

Shenzhen Morlab Communications Technology Co., Ltd.



Tested by Tu Lang  
Tu Lang

Date 2011.5.11

Approved by Shu Luan  
Shu Luan

Date 2011.5.11

Review by Huang Pulong  
Huang Pulong

Date 2011.5.11

CTIA Authorized Test Lab  
LAB CODE 20081223-00  
IEEE 1725

OFTA  
電訊管理局



GCF  
Official Observer of  
Global Certification Forum

Bluetooth  
BQTF

FCC  
Reg. No.  
741109

The report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen MORLAB Communication Technology Co., Ltd. It may not be reproduced in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the Shenzhen MORLAB Telecommunication Co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen MORLAB Telecommunication Co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. In the event of the improper use of the report, Shenzhen MORLAB Telecommunication Co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

## TABLE OF CONTENTS

|            |                                            |           |
|------------|--------------------------------------------|-----------|
| <b>1.</b>  | <b>GENERAL INFORMATION .....</b>           | <b>4</b>  |
| <b>1.1</b> | <b>EUT Description .....</b>               | <b>4</b>  |
| <b>1.2</b> | <b>Test Standards and Results .....</b>    | <b>5</b>  |
| <b>1.3</b> | <b>Facilities and Accreditations .....</b> | <b>6</b>  |
| 1.3.1      | Facilities .....                           | 6         |
| 1.3.2      | Test Environment Conditions .....          | 6         |
| <b>2.</b>  | <b>47 CFR PART 15C REQUIREMENTS .....</b>  | <b>7</b>  |
| <b>2.1</b> | <b>Peak Output Power .....</b>             | <b>7</b>  |
| 2.1.1      | Requirement .....                          | 7         |
| 2.1.2      | Test Description .....                     | 7         |
| 2.1.3      | Test Result .....                          | 8         |
| <b>2.2</b> | <b>Bandwidth .....</b>                     | <b>9</b>  |
| 2.2.1      | Definition .....                           | 9         |
| 2.2.2      | Test Description .....                     | 9         |
| <b>2.3</b> | <b>Conducted Spurious Emissions .....</b>  | <b>16</b> |
| 2.3.1      | Requirement .....                          | 16        |
| 2.3.2      | Test Description .....                     | 16        |
| 2.3.3      | Test Result .....                          | 16        |
| <b>2.4</b> | <b>Power spectral density (PSD) .....</b>  | <b>21</b> |
| 2.4.1      | Requirement .....                          | 21        |
| 2.4.2      | Test Description .....                     | 21        |
| 2.4.3      | Test Result .....                          | 21        |
| <b>2.5</b> | <b>Band Edge .....</b>                     | <b>28</b> |
| 2.5.1      | Requirement .....                          | 28        |
| 2.5.2      | Test Description .....                     | 28        |
| 2.5.3      | Test Result .....                          | 29        |
| <b>2.6</b> | <b>Conducted Emission .....</b>            | <b>37</b> |
| 2.6.1      | Requirement .....                          | 37        |
| 2.6.2      | Test Description .....                     | 37        |
| 2.6.3      | Test Result .....                          | 38        |



|            |                                |           |
|------------|--------------------------------|-----------|
| <b>2.7</b> | <b>Radiated Emission .....</b> | <b>40</b> |
| 2.7.1      | Requirement .....              | 40        |
| 2.7.2      | Test Description .....         | 40        |
| 2.7.3      | Test Result .....              | 42        |

## 1. GENERAL INFORMATION

### 1.1 EUT Description

EUT Type .....: Tablet PC  
Serial No.....: (n.a, marked #1 by test site)  
Hardware Version .....: V1.1  
Software Version .....: tablet-eng 2.2.1 MASTER 257 Magnet II 1312  
Applicant .....: TCT Mobile Limited  
5F, E building, No. 232, Liang Jing Road ZhangJiang High-Tech  
Park, Pudong Area Shanghai, P.R. China  
Manufacturer .....: TCT Mobile Limited  
16F/B, TCL Tower, Gaoxin Nanyi Road, Nanshan District,  
Shenzhen, Guangdong, P. R. China 518057  
Frequency Range.....: 802.11b/g/n-20MHz: 2.412GHz - 2.462GHz  
Modulation Type.....: DSSS  
Power Supply .....: Battery  
Model Name: CAB14G0000C1  
Brand name: TCL  
Capacitance: 3000mAh  
Rated voltage: 3.7V  
Ancillary Equipments.....: AC Adapter (Charger for Battery)  
Model Name: S005SC0500100  
Brand Name: NA  
Serial No.: (n.a. marked #1 by test site)  
Rated Input: ~ 100-240V, 60Hz, 150mA  
Rated Output: = 5.0V, 1000mA

*Note 1:* The EUT is a Tablet PC, it contains WIFI Module operating at 2.4GHz ISM band; It supports 802.11b, 802.11g and 802.11n, and they are all tested in this report.

*Note 2:* The frequencies allocated is  $F(\text{MHz})=2412+5*(n-1)$  ( $1 \leq n \leq 11$ ). The lowest, middle, highest channel numbers of the EUT used and tested in this report are separately 1 (2412MHz), 6 (2437MHz) and 11 (2462MHz).

*Note 3:* For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

## 1.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C (Wi-Fi, 2.4GHz ISM band radiators) for the EUT FCC ID Certification:

| No. | Identity                            | Document Title          |
|-----|-------------------------------------|-------------------------|
| 1   | 47 CFR Part 15<br>(10-1-09 Edition) | Radio Frequency Devices |

Test detailed items/section required by FCC rules and results are as below:

| No. | Section          | Description                    | Result |
|-----|------------------|--------------------------------|--------|
| 1   | 15.247(a)        | Number of Hopping Frequency    | (n.a)  |
| 2   | 15.247(b)        | Peak Output Power              | PASS   |
| 3   | 15.247(a)        | Bandwidth                      | PASS   |
| 4   | 15.247(a)        | Carrier Frequency Separation   | (n.a)  |
| 5   | 15.247(a)        | Time of Occupancy (Dwell time) | (n.a)  |
| 6   | 15.247(c)        | Conducted Spurious Emission    | PASS   |
| 7   | 15.247(c)        | Band Edge                      | PASS   |
| 8   | 15.207           | Conducted Emission             | PASS   |
| 9   | 15.209 15.247(c) | Radiated Emission              | PASS   |
| 10  | 15.247(d)        | Power spectral density (PSD)   | PASS   |

The tests of Conducted Emission and Radiated Emission were performed according to the method of measurements prescribed in ANSI C63.4 2003.

## 1.3 Facilities and Accreditations

### 1.3.1 Facilities

Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L1659.

All measurement facilities used to collect the measurement data are located at 3/F, Electronic Testing Building, Shahe Road, Xili, Nanshan District, Shenzhen, 518055 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22; the FCC registration number is 741109.

### 1.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

|                             |         |
|-----------------------------|---------|
| Temperature (°C):           | 20 - 25 |
| Relative Humidity (%):      | 40 - 60 |
| Atmospheric Pressure (kPa): | 96      |

## 2. 47 CFR PART 15C REQUIREMENTS

### 2.1 Peak Output Power


#### 2.1.1 Requirement

According to FCC section 15.247(b)(1), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 1Watts.

#### 2.1.2 Test Description

The measured output power was calculated by the reading of the Power Meter and calibration.

##### A. Test Setup:

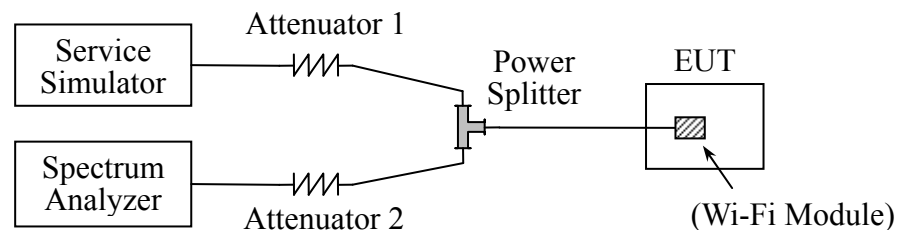

The EUT of the 3G Mobile Phone, which is powered by the Battery, is coupled to the Power Meter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

### 2.1.3 Test Result

The EUT operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

#### 3.1.3.1 802.11b Test mode

##### A. Test Verdict:

| Channel | Frequency (MHz) | Measured Output Peak Power |          | Limit |   | Verdict |
|---------|-----------------|----------------------------|----------|-------|---|---------|
|         |                 | dBm                        | W        | dBm   | W |         |
| 1       | 2412            | 16.21                      | 0.041783 | 30    | 1 | PASS    |
| 6       | 2437            | 16.10                      | 0.040738 |       |   | PASS    |
| 11      | 2462            | 15.96                      | 0.039446 |       |   | PASS    |

#### 3.1.3.2 802.11g Test mode

| Channel | Frequency (MHz) | Measured Output Peak Power |          | Limit |   | Verdict |
|---------|-----------------|----------------------------|----------|-------|---|---------|
|         |                 | dBm                        | W        | dBm   | W |         |
| 1       | 2412            | 14.27                      | 0.02673  | 30    | 1 | PASS    |
| 6       | 2437            | 14.18                      | 0.026182 |       |   | PASS    |
| 11      | 2462            | 14.25                      | 0.026607 |       |   | PASS    |

#### 3.1.3.3 802.11n Test mode

| Channel | Frequency (MHz) | Measured Output Peak Power |          | Limit |   | Verdict |
|---------|-----------------|----------------------------|----------|-------|---|---------|
|         |                 | dBm                        | W        | dBm   | W |         |
| 1       | 2412            | 15.79                      | 0.037931 | 30    | 1 | PASS    |
| 6       | 2437            | 15.77                      | 0.037757 |       |   | PASS    |
| 11      | 2462            | 12.67                      | 0.018493 |       |   | PASS    |




## 2.2 Bandwidth

### 2.2.1 Definition

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW. The 6 dB bandwidth must be greater than 500 kHz.

### 2.2.2 Test Description

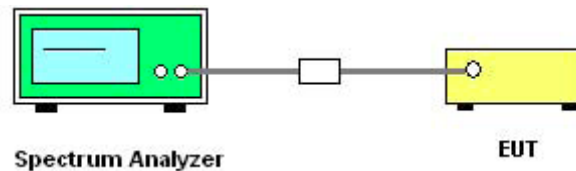

The EUT of the EUT, which is powered by the Battery, is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

#### 2.2.2.1 Test Result


The lowest, middle and highest channels are selected to perform testing to record the 6 dB bandwidth of the Module.

### 3.2.3.1 802.11b Test mode


#### A. Test Verdict:

| Channel | Frequency (MHz) | 6 dB Bandwidth (MHz) | Refer to Plot | Limits(kHz) | Result |
|---------|-----------------|----------------------|---------------|-------------|--------|
| 1       | 2412            | 10.20                | Plot A        | $\geq 500$  | PASS   |
| 6       | 2437            | 11.20                | Plot B        | $\geq 500$  | PASS   |
| 11      | 2462            | 11.55                | Plot C        | $\geq 500$  | PASS   |


#### B. Test Plot:

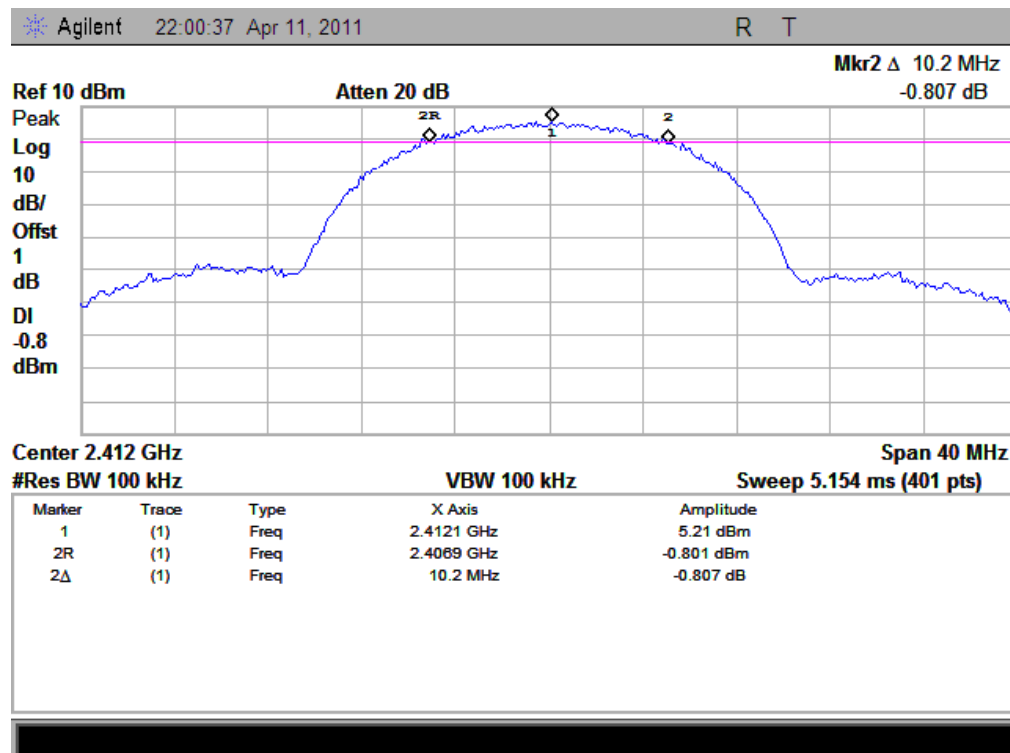

(Plot A: Channel 1: 2412MHz)

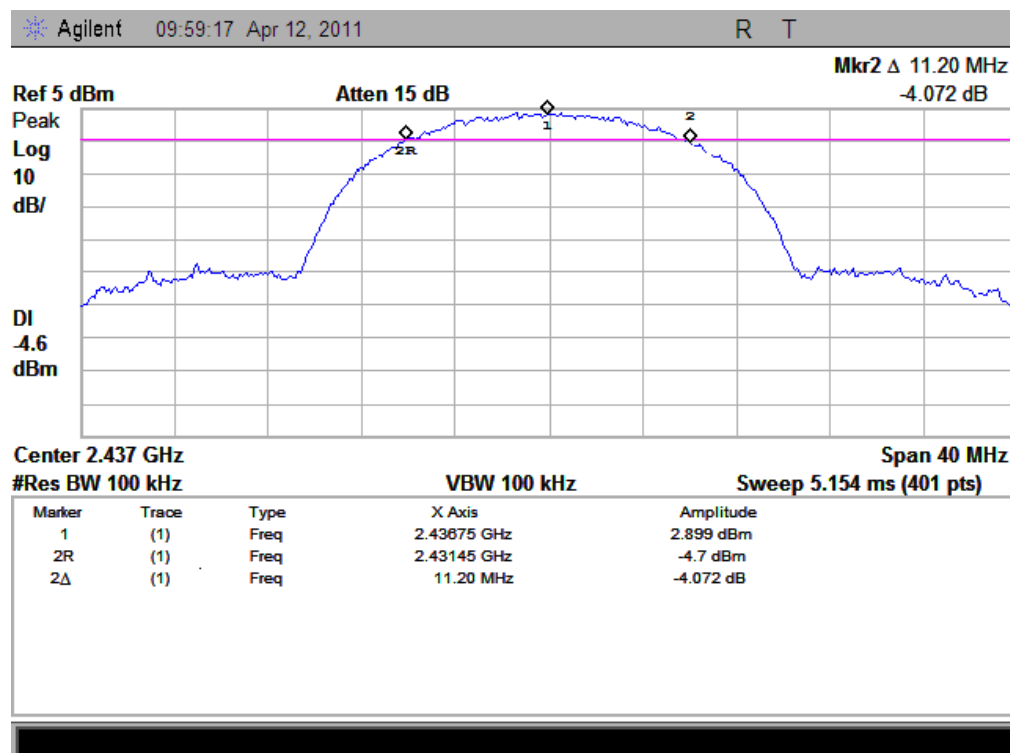

(Plot B: Channel 6: 2437 MHz)

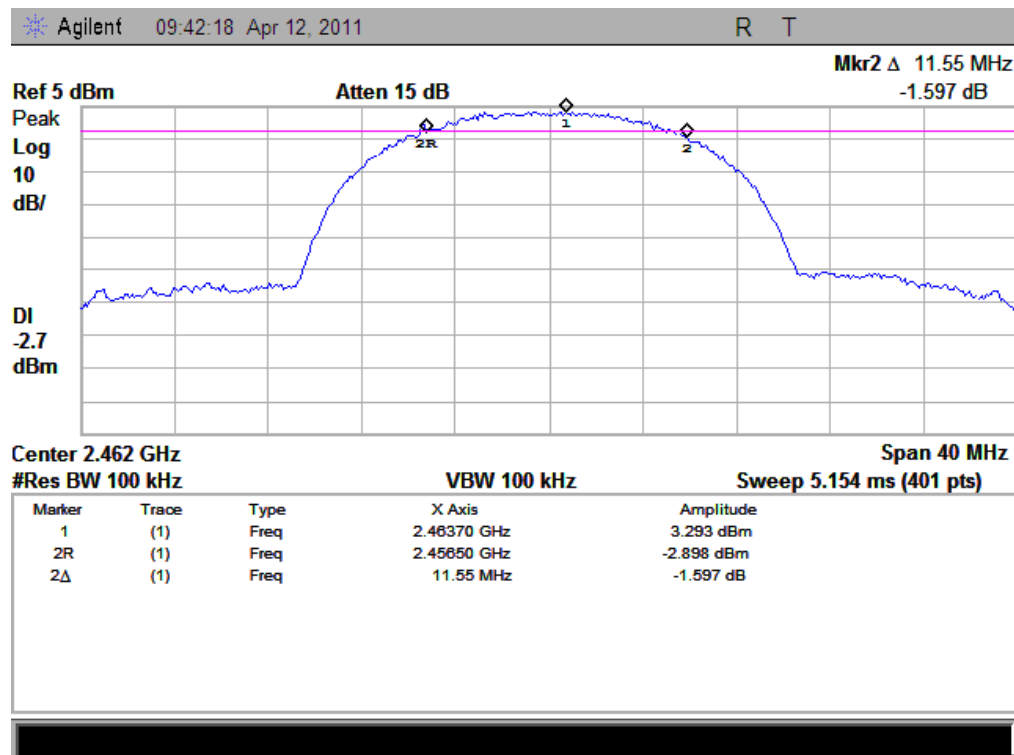


(Plot C: Channel 11: 2462MHz)

### 3.2.3.2 802.11g Test mode


#### A. Test Verdict:

| Channel | Frequency (MHz) | 6 dB Bandwidth (MHz) | Refer to Plot | Limits (kHz) | Result |
|---------|-----------------|----------------------|---------------|--------------|--------|
| 1       | 2412            | 16.3                 | Plot A        | $\geq 500$   | PASS   |
| 6       | 2437            | 16.6                 | Plot B        | $\geq 500$   | PASS   |
| 11      | 2462            | 16.6                 | Plot C        | $\geq 500$   | PASS   |


#### B. Test Plot:

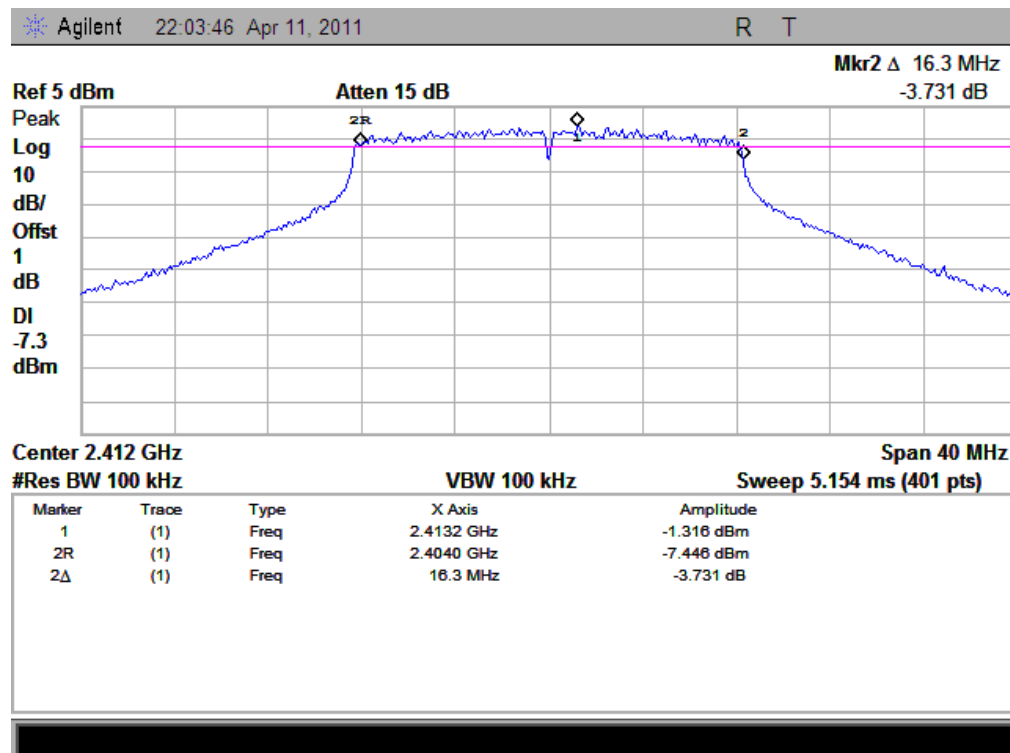

(Plot A: Channel 1: 2412MHz)

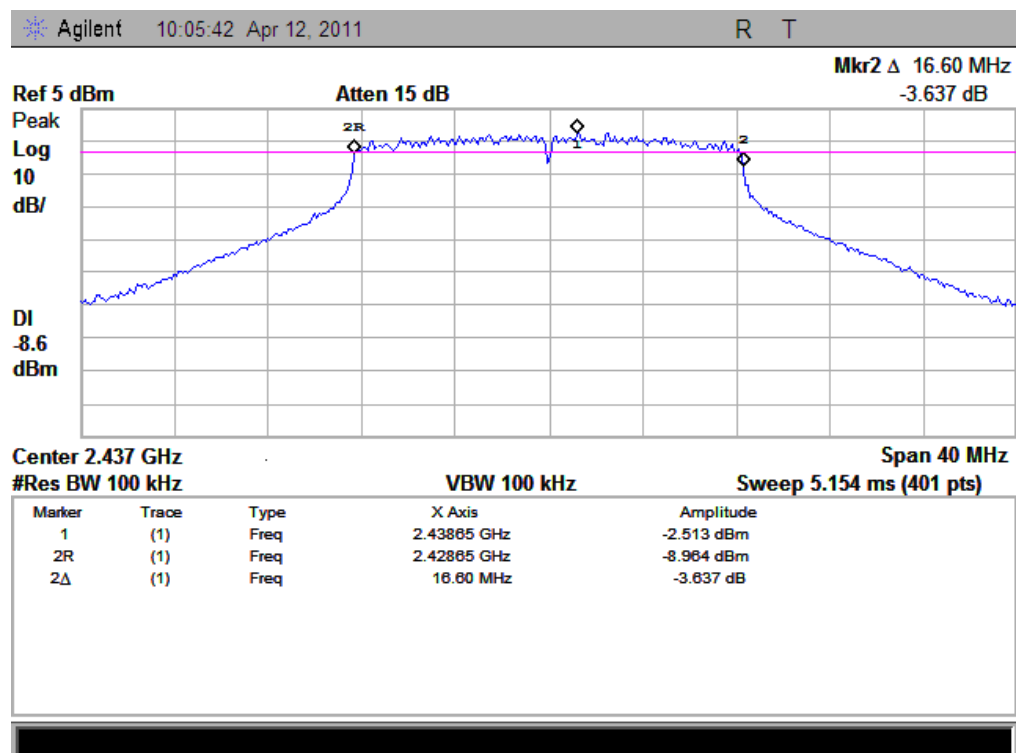

(Plot B: Channel 6: 2437MHz)

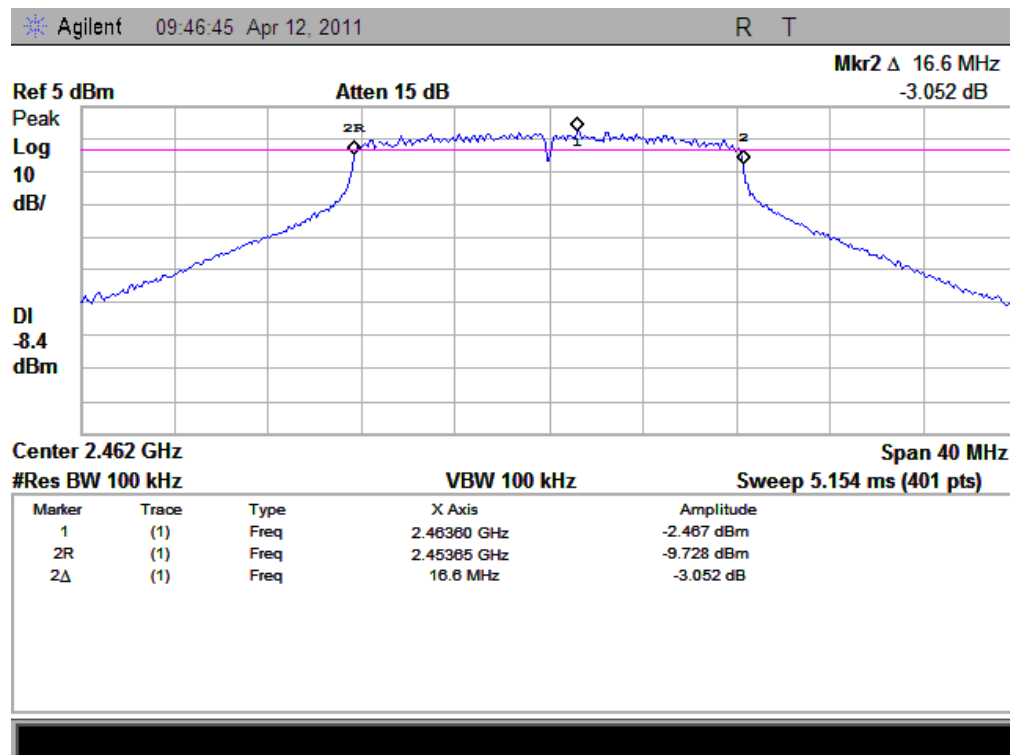


(Plot C: Channel 11: 2462MHz)

### 3.2.3.3 802.11n Test mode


#### A. Test Verdict:

| Channel | Frequency (MHz) | 6 dB Bandwidth (MHz) | Refer to Plot | Limits (kHz) | Result |
|---------|-----------------|----------------------|---------------|--------------|--------|
| 1       | 2412            | 17.6                 | Plot A        | $\geq 500$   | PASS   |
| 6       | 2437            | 17.6                 | Plot B        | $\geq 500$   | PASS   |
| 11      | 2462            | 17.8                 | Plot C        | $\geq 500$   | PASS   |


#### B. Test Plot:

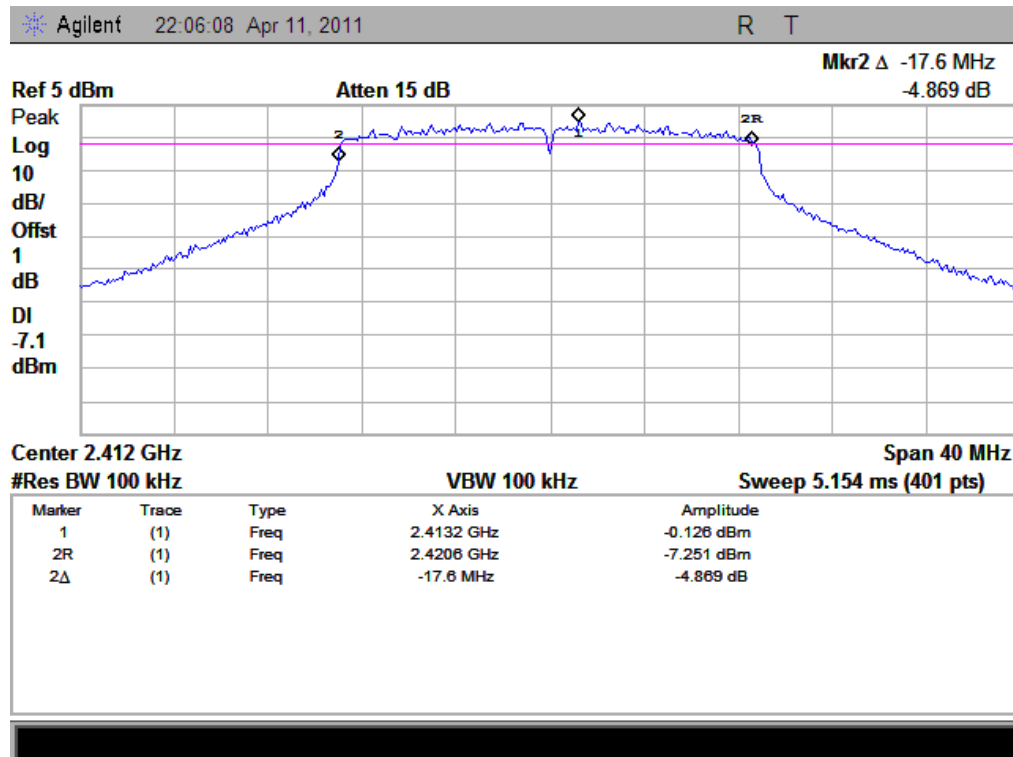

(Plot A: Channel 1: 2412MHz)

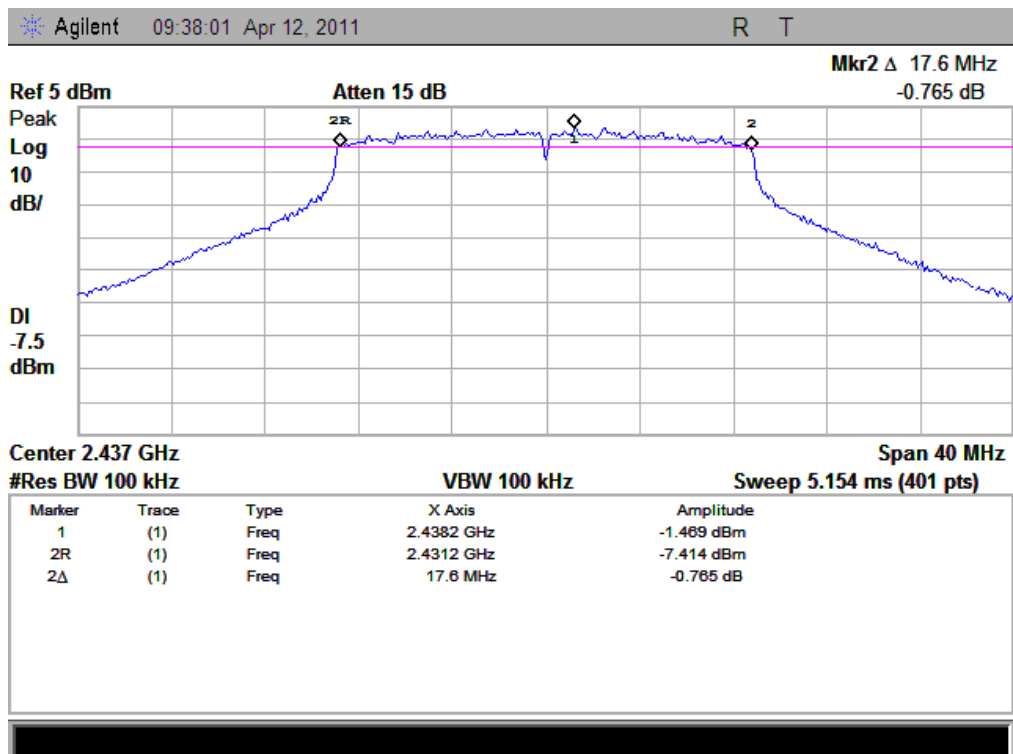

(Plot B: Channel 6: 2437MHz)

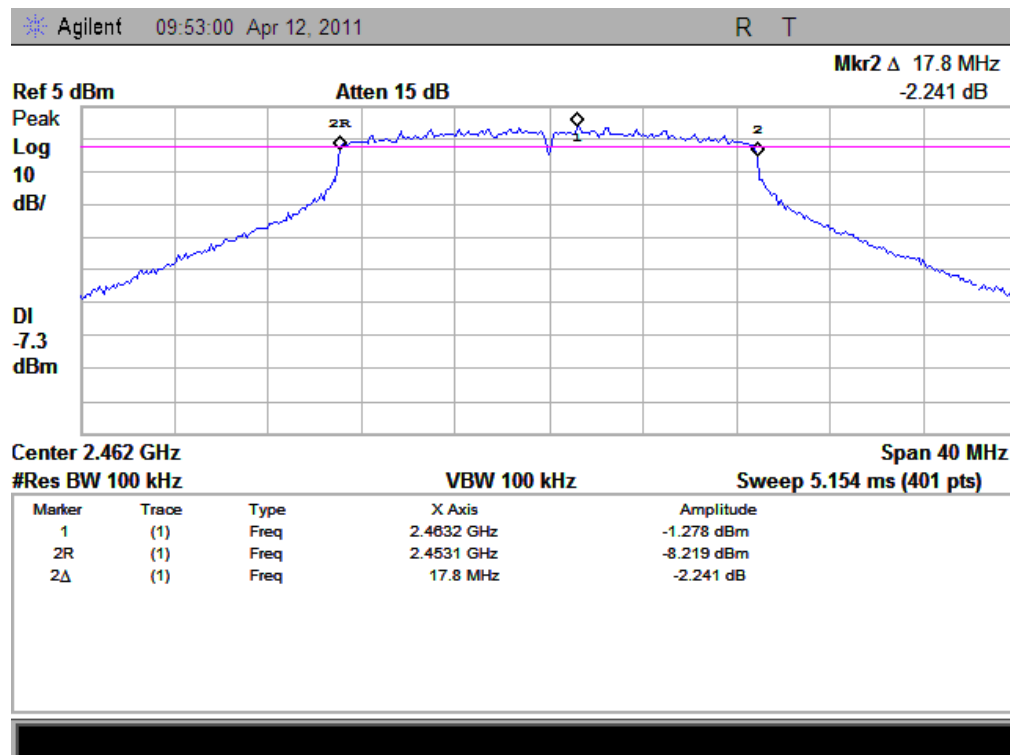

(Plot C: Channel 11: 2462MHz)

## 2.3 Conducted Spurious Emissions

### 2.3.1 Requirement

According to FCC section 15.247(c), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 2.3.2 Test Description

See section 2.2.2 of this report.

### 2.3.3 Test Result

The EUT operates at hopping-off test mode. The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.

#### 3.3.3.1 802.11b Test mode


##### A. Test Verdict:

| Channel | Frequency (MHz) | Measured Out of Band Emission (dBm) | Max. Band | Refer to Plot | Limit (dBm)   |                         | Verdict |
|---------|-----------------|-------------------------------------|-----------|---------------|---------------|-------------------------|---------|
|         |                 |                                     |           |               | Carrier Level | Calculated -20dBc Limit |         |
| 1       | 2412            | -31.3                               |           | Plot A.1/A.2  | 10.9          | -9.1                    | PASS    |
| 6       | 2437            | -56.01                              |           | Plot B.1/B.2  | 10.29         | -9.7                    | PASS    |
| 11      | 2462            | -57.08                              |           | Plot C.1/C.2  | 10.12         | -9.9                    | PASS    |


##### B. Test Plot:

Note: the power of the Module transmitting frequency should be ignored.




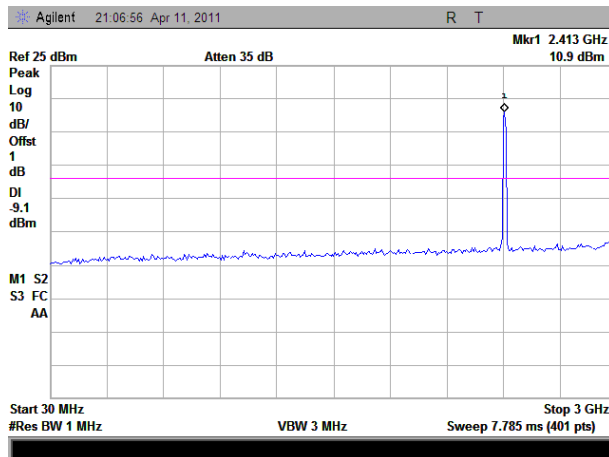


(Plot A.1: Channel = 1, 30MHz to 3GHz)

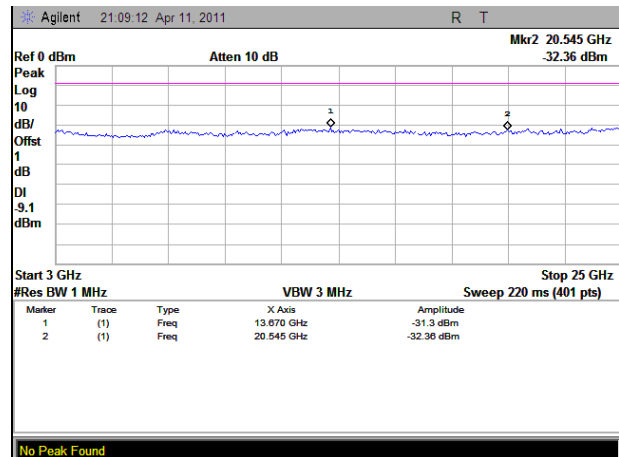


(Plot A.2: Channel = 1, 3GHz to 25GHz)

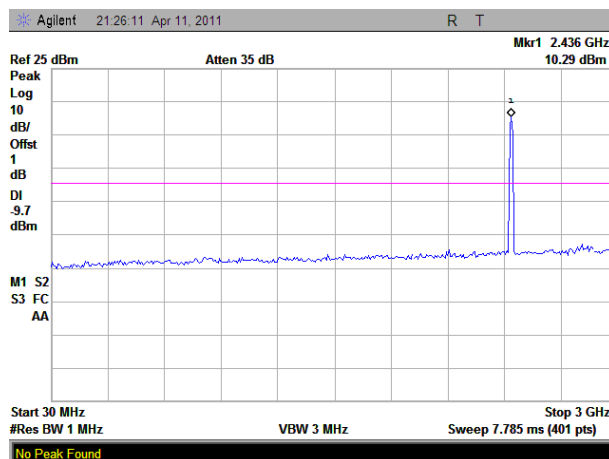


(Plot B.1: Channel = 6, 30MHz to 3GHz)

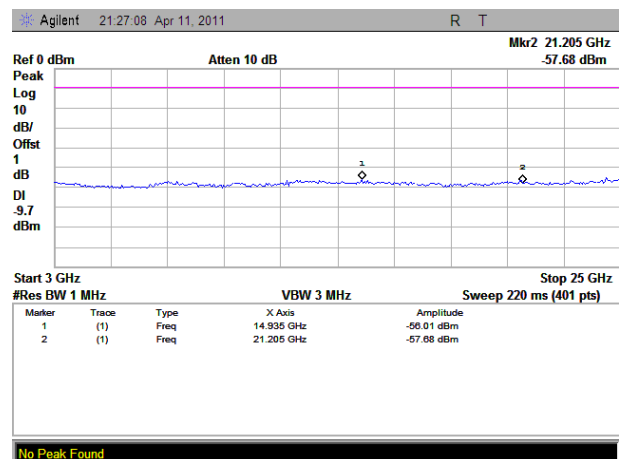

(Plot B.2: Channel = 6, 3GHz to 25GHz)

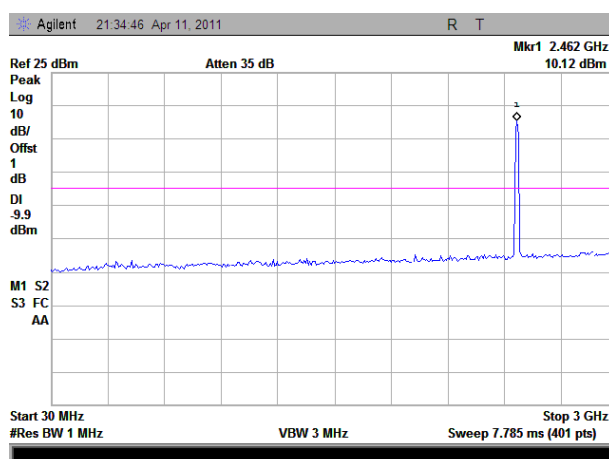

(Plot C.1: Channel = 11, 30MHz to 3GHz)

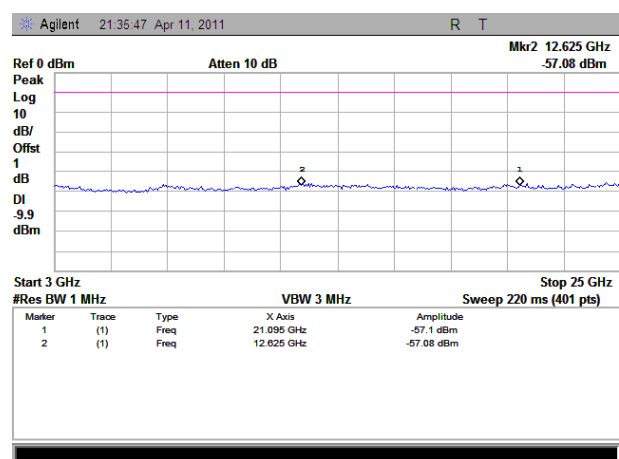

(Plot C.2: Channel = 11, 3GHz to 25GHz)


### 3.3.3.2 802.11g Test mode

#### A. Test Verdict:


| Channel | Frequency (MHz) | Measured Out of Band Emission (dBm) | Refer to Plot | Limit (dBm)   |                         | Verdict |
|---------|-----------------|-------------------------------------|---------------|---------------|-------------------------|---------|
|         |                 |                                     |               | Carrier Level | Calculated -20dBc Limit |         |
| 1       | 2412            | -57.73                              | Plot A.1/A.2  | 6.324         | -13.7                   | PASS    |
| 6       | 2437            | -55.99                              | Plot B.1/B.2  | 5.954         | -14.0                   | PASS    |
| 11      | 2462            | -57.34                              | Plot C.1/C.2  | 5.781         | -14.2                   | PASS    |

## B. Test Plot:


Note: the power of the Module transmitting frequency should be ignored.

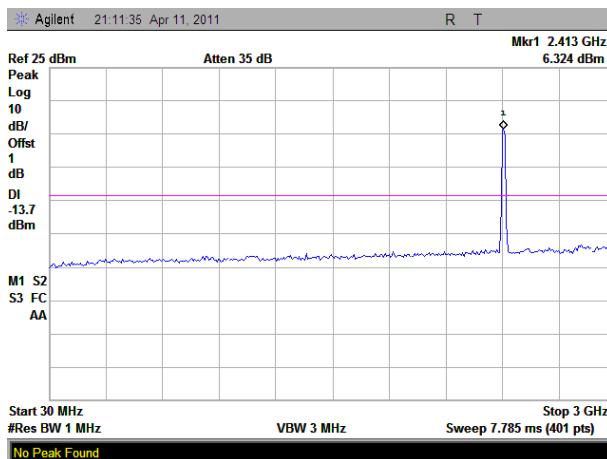


(Plot A.1: Channel = 1, 30MHz to 3GHz)

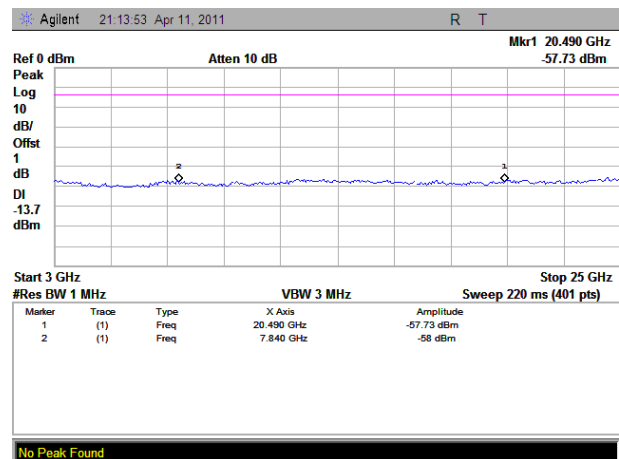


(Plot A.2: Channel = 1, 3GHz to 25GHz)

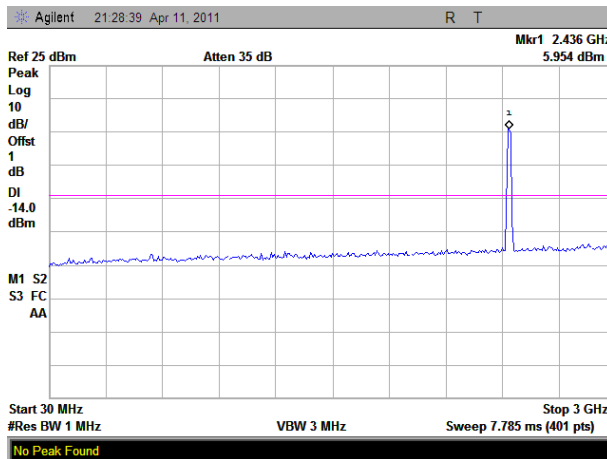


(Plot B.1: Channel = 6, 30MHz to 3GHz)

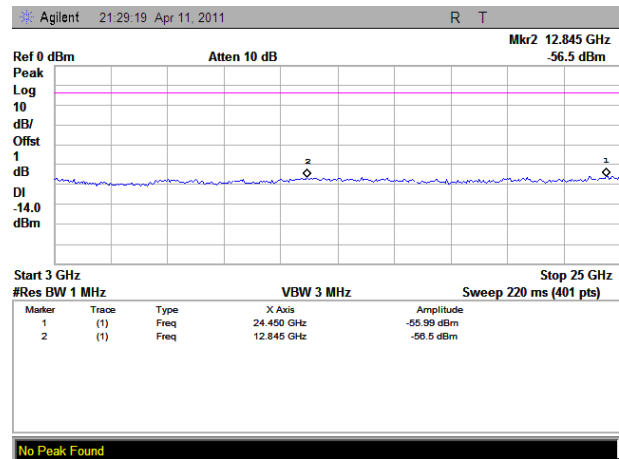

(Plot B.2: Channel = 6, 3GHz to 25GHz)

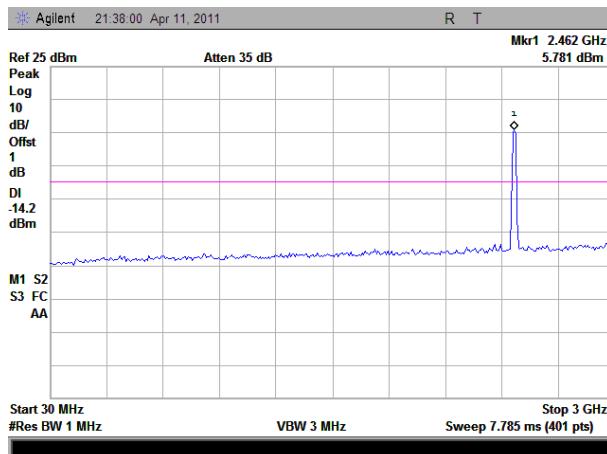

(Plot C.1: Channel = 11, 30MHz to 3GHz)

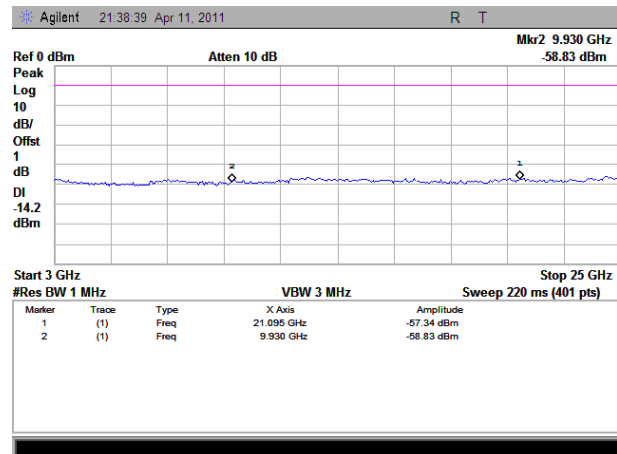

(Plot C.2: Channel = 11, 3GHz to 25GHz)


### 3.3.3.3 802.11n Test mode

#### C. Test Verdict:


| Channel | Frequency (MHz) | Measured Out of Band Emission (dBm) | Refer to Plot | Limit (dBm)   |                         | Verdict |
|---------|-----------------|-------------------------------------|---------------|---------------|-------------------------|---------|
|         |                 |                                     |               | Carrier Level | Calculated -20dBc Limit |         |
| 1       | 2412            | -56.91                              | Plot A.1/A.2  | 6.29          | -13.7                   | PASS    |
| 6       | 2437            | -57.7                               | Plot B.1/B.2  | 5.999         | -14.0                   | PASS    |
| 11      | 2462            | -57.28                              | Plot C.1/C.2  | 7.945         | -12.1                   | PASS    |

#### D. Test Plot:


Note: the power of the Module transmitting frequency should be ignored.

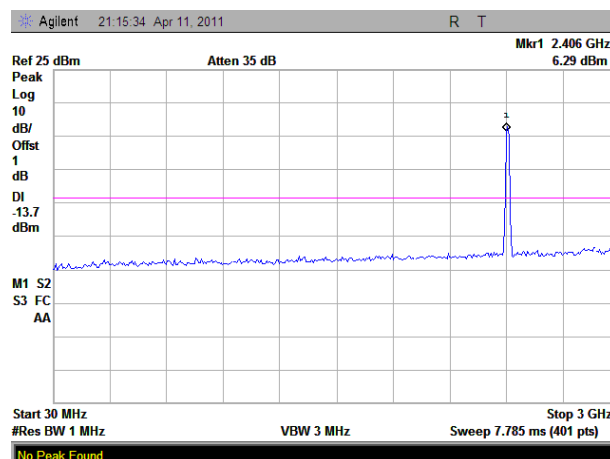


(Plot A.1: Channel = 1, 30MHz to 3GHz)

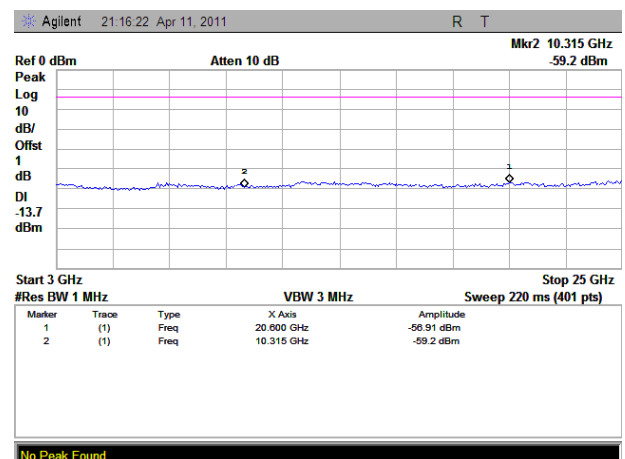


(Plot A.2: Channel = 1, 3GHz to 25GHz)

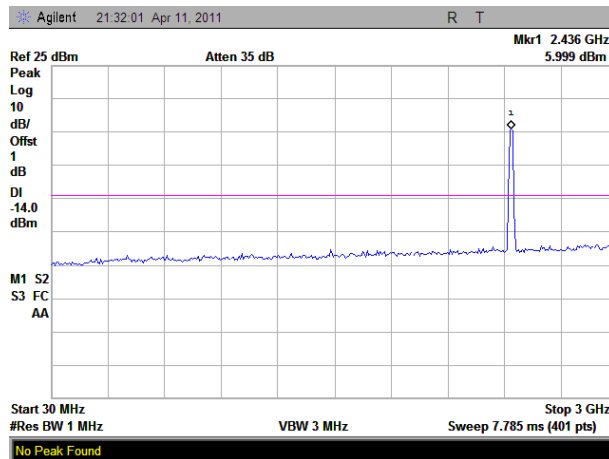


(Plot B.1: Channel = 6, 30MHz to 3GHz)

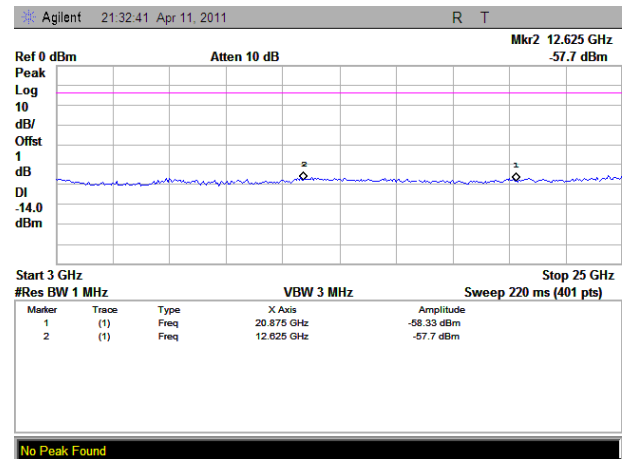

(Plot B.2: Channel = 6, 3GHz to 25GHz)

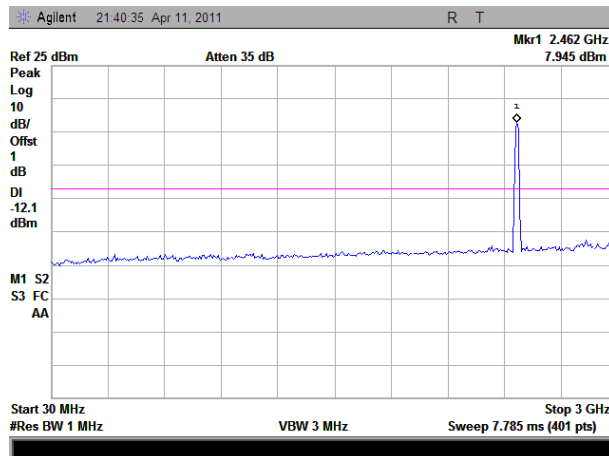

(Plot C.1: Channel = 11, 30MHz to 3GHz)

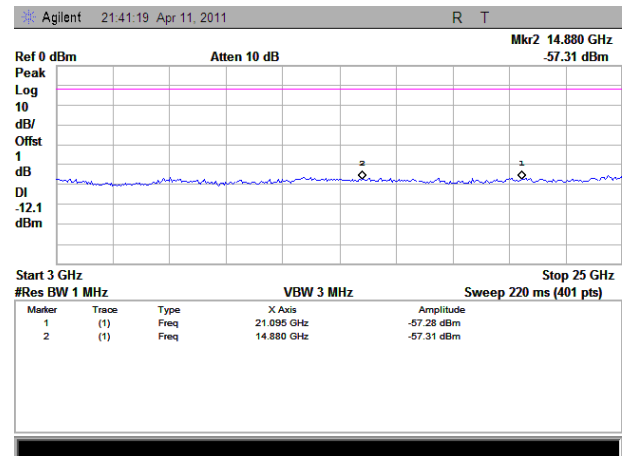

(Plot C.2: Channel = 11, 3GHz to 25GHz)

## 2.4 Power spectral density (PSD)

### 2.4.1 Requirement

According to FCC section 15.247(d), the same method of determining the conducted output power shall be used to determine the power spectral density. If a peak output power is measured, then a peak power spectral density measurement is required. If an average output power is measured, then an average power spectral density measurement should be used.

### 2.4.2 Test Description

See section 2.2.2 of this report.

### 2.4.3 Test Result



The lowest, middle and highest channels are tested to verify the band edge emissions.


#### 3.4.3.1 802.11b Test mode

##### A. Test Verdict:

| Spectral power density (dBm/MHz)            |           |                                  |           |                                   |           |
|---------------------------------------------|-----------|----------------------------------|-----------|-----------------------------------|-----------|
| Channel: 1<br>Frequency, 2412MHz            |           | Channel: 6<br>Frequency, 2437MHz |           | Channel: 11<br>Frequency, 2462MHz |           |
| Test Result                                 | Test plot | Test Result                      | Test plot | Test Result                       | Test plot |
| -13.56                                      | Plot A    | -10.58                           | Plot B    | -13.51                            | Plot C    |
| Measurement uncertainty: $\pm 1.3\text{dB}$ |           |                                  |           |                                   |           |

Test Plot:

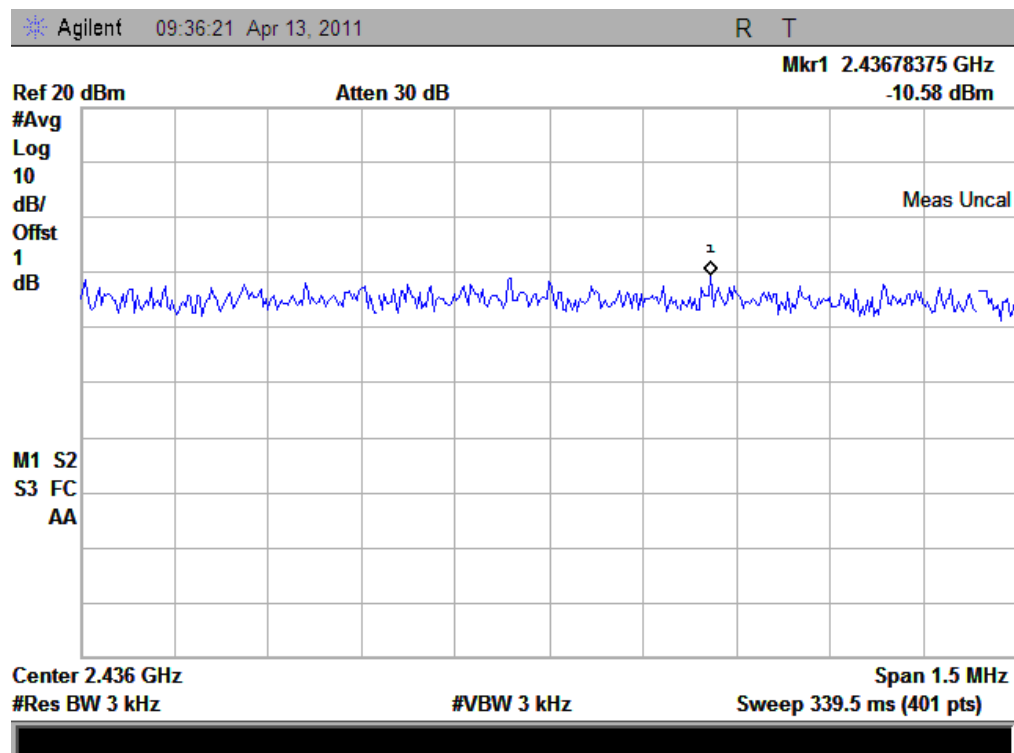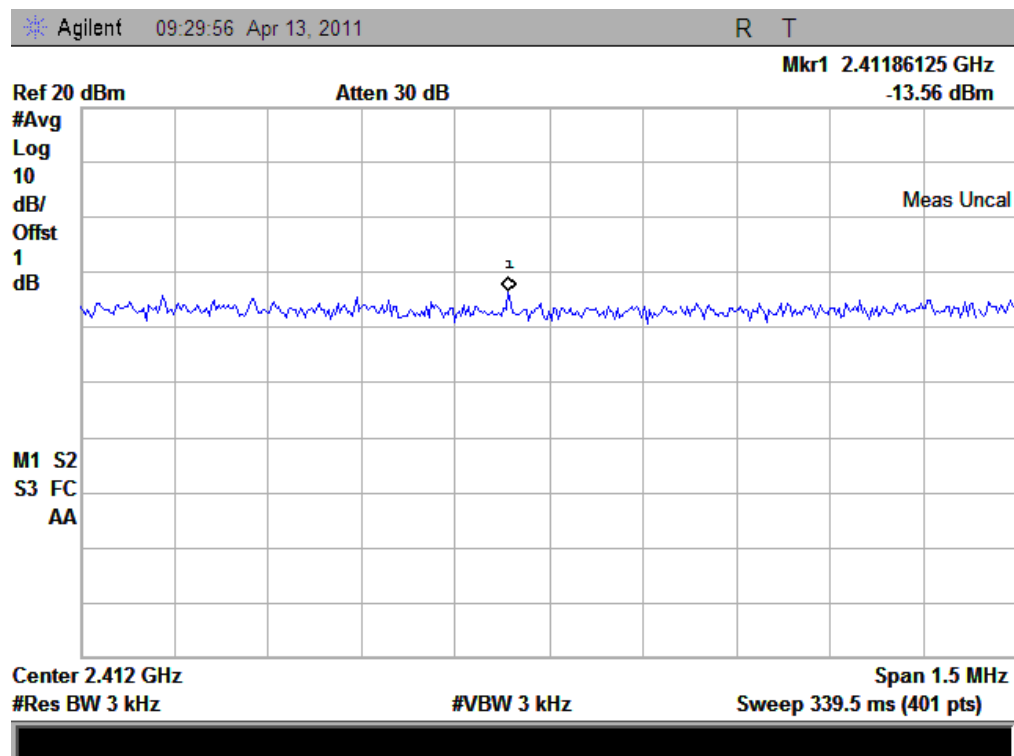

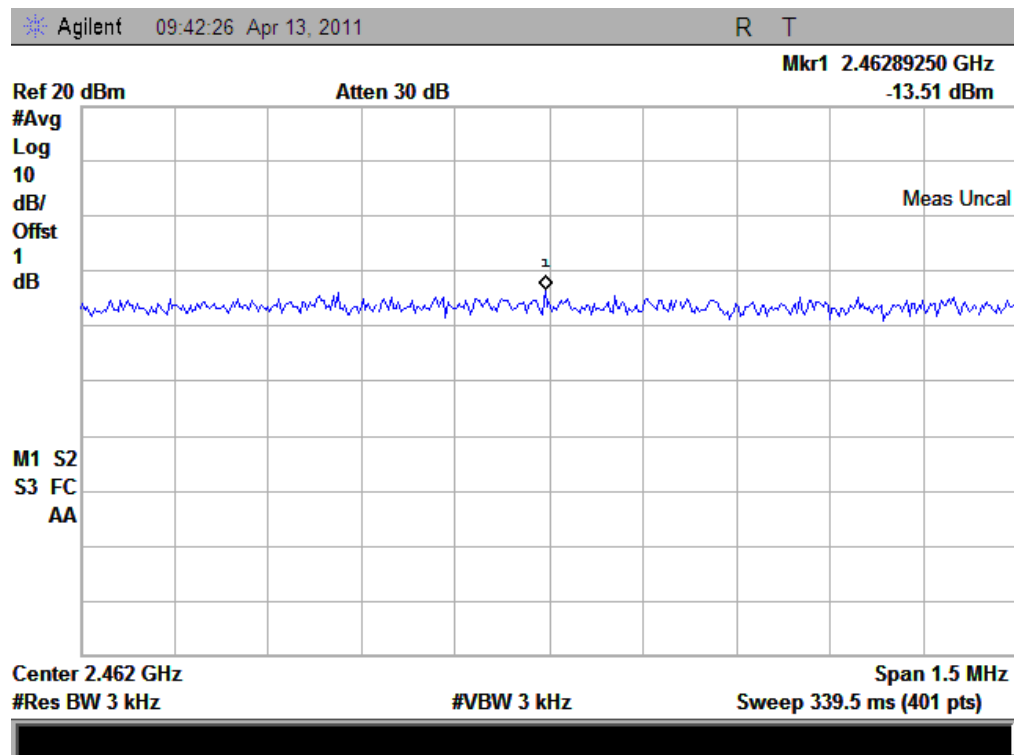


(Plot C: Channel = 11)

### 3.4.3.2 802.11g Test mode


#### B. Test Verdict:

| Spectral power density (dBm)          |           |                    |           |                    |           |
|---------------------------------------|-----------|--------------------|-----------|--------------------|-----------|
| Channel: 1                            |           | Channel: 6         |           | Channel: 11        |           |
| Frequency, 2412MHz                    |           | Frequency, 2437MHz |           | Frequency, 2462MHz |           |
| Test Result                           | Test plot | Test Result        | Test plot | Test Result        | Test plot |
| -19.14                                | Plot D    | -16.23             | Plot E    | -16.07             | Plot F    |
| Measurement uncertainty: $\pm 1.3$ dB |           |                    |           |                    |           |

Test Plot:

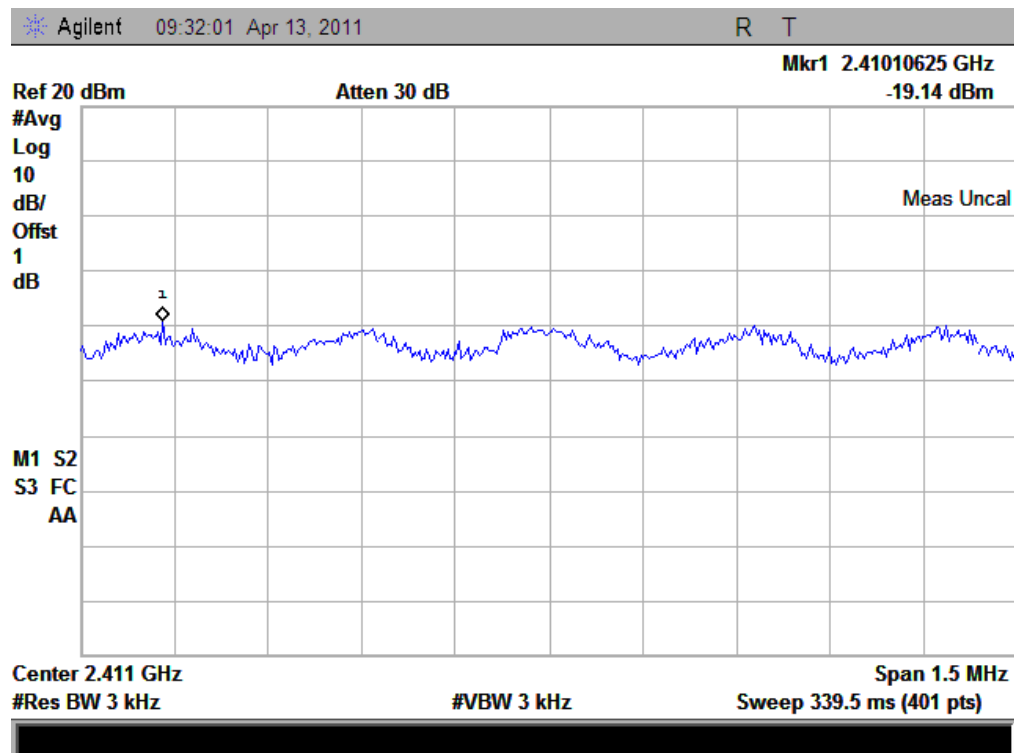


(Plot D: Channel = 1)

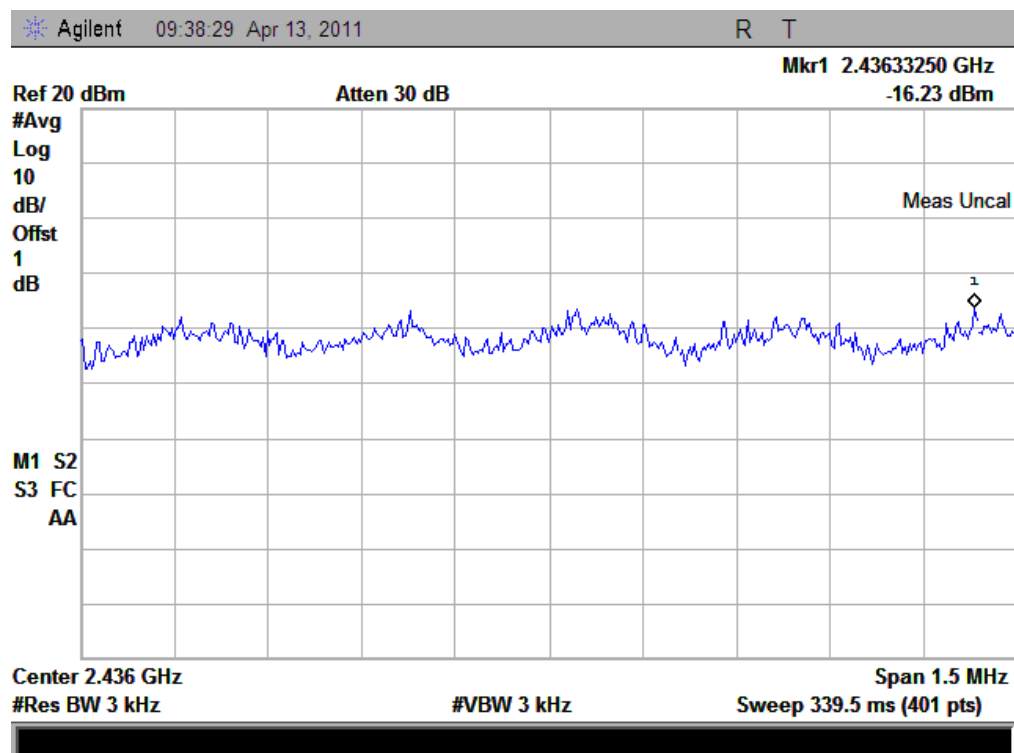

(Plot E: Channel = 6)



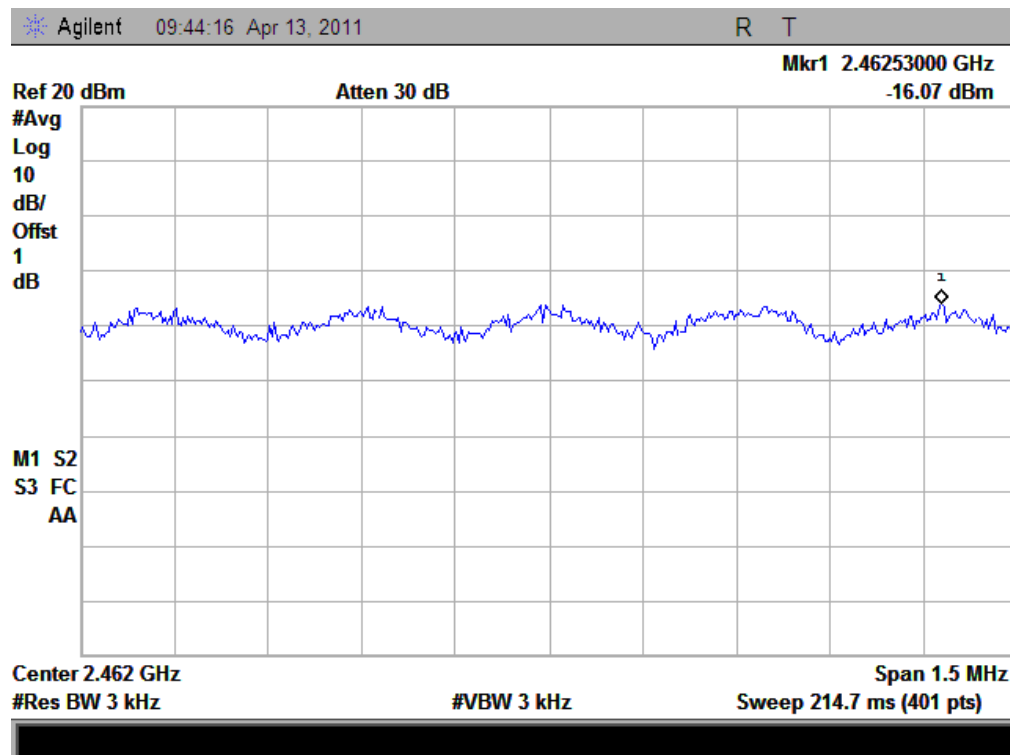


(Plot F: Channel = 11)

### 3.4.3.3 802.11n Test mode


#### C. Test Verdict:

| Spectral power density (dBm/MHz)      |           |                    |           |                    |           |
|---------------------------------------|-----------|--------------------|-----------|--------------------|-----------|
| Channel: 1                            |           | Channel: 6         |           | Channel: 11        |           |
| Frequency, 2412MHz                    |           | Frequency, 2437MHz |           | Frequency, 2462MHz |           |
| Test Result                           | Test plot | Test Result        | Test plot | Test Result        | Test plot |
| -18.65                                | Plot G    | -16.23             | Plot H    | -16.49             | Plot I    |
| Measurement uncertainty: $\pm 1.3$ dB |           |                    |           |                    |           |


Test Plot:

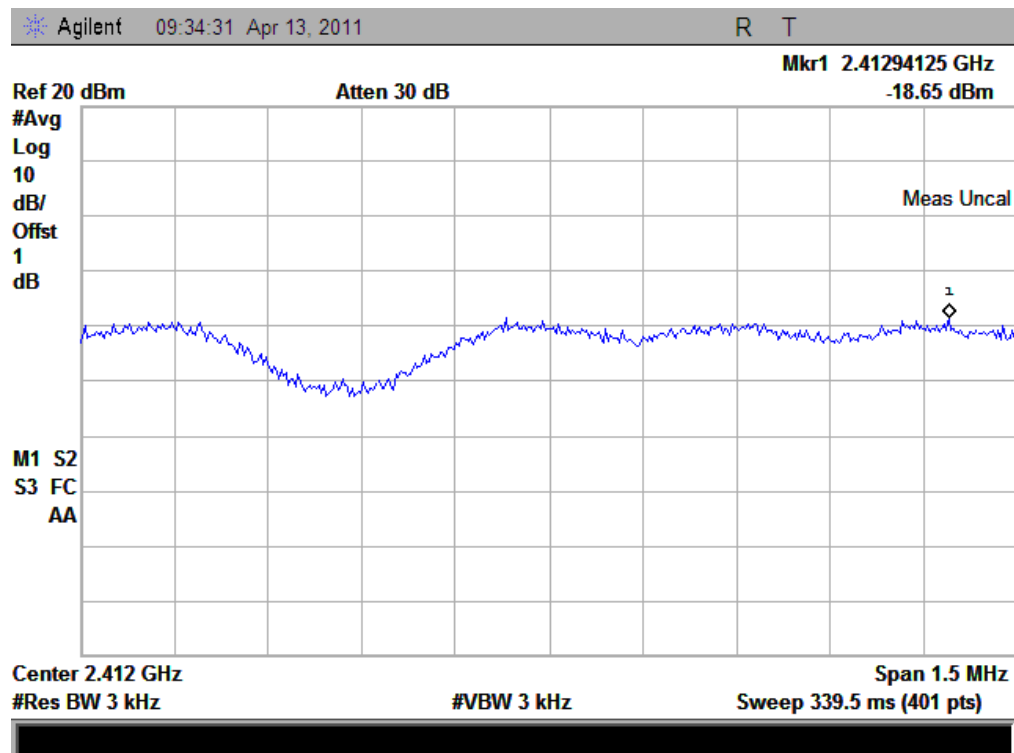

(Plot G: Channel = 1)

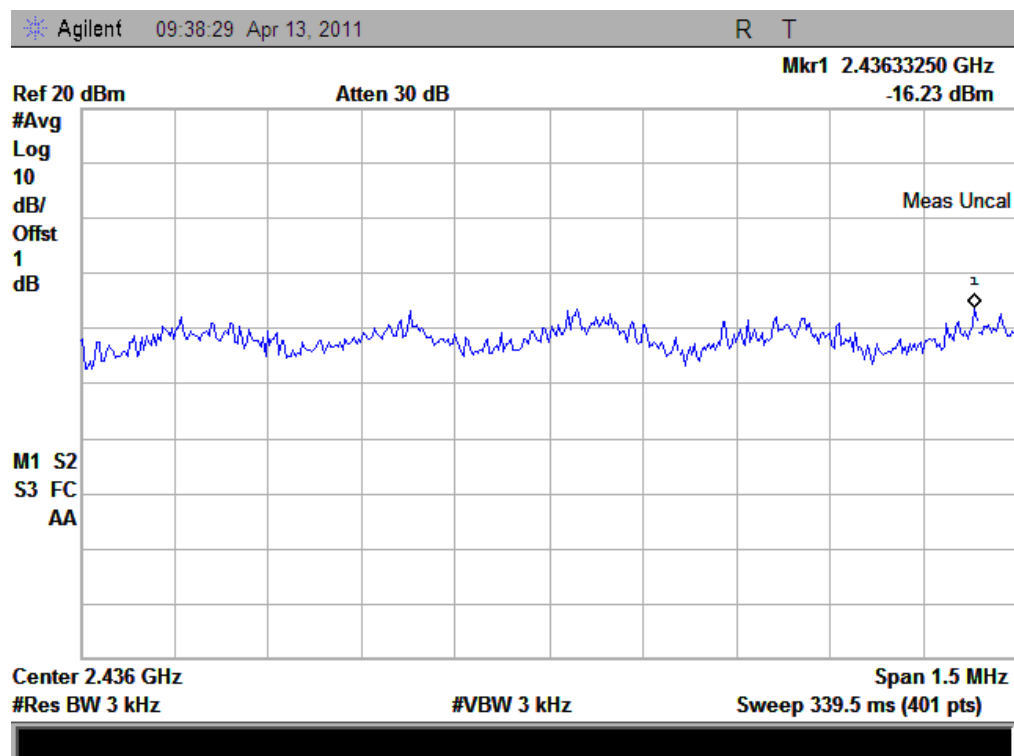

(Plot H: Channel = 6)

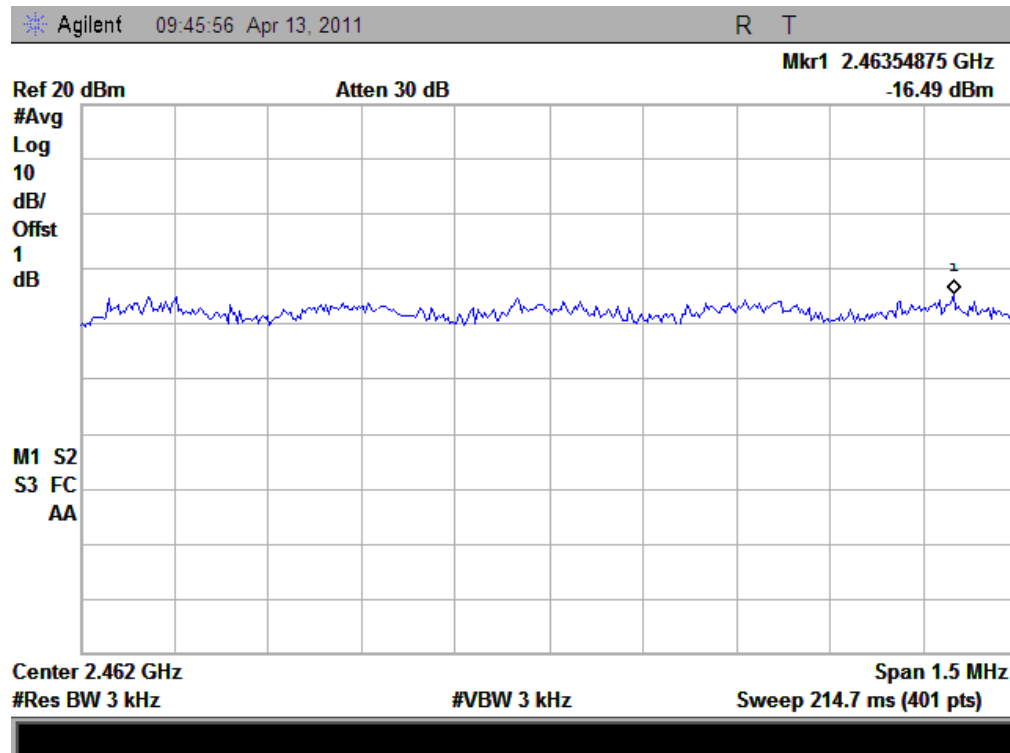

(Plot I: Channel = 11)


## 2.5 Band Edge

### 2.5.1 Requirement

According to FCC section 15.247(c), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 2.5.2 Test Description

#### A. Test Setup

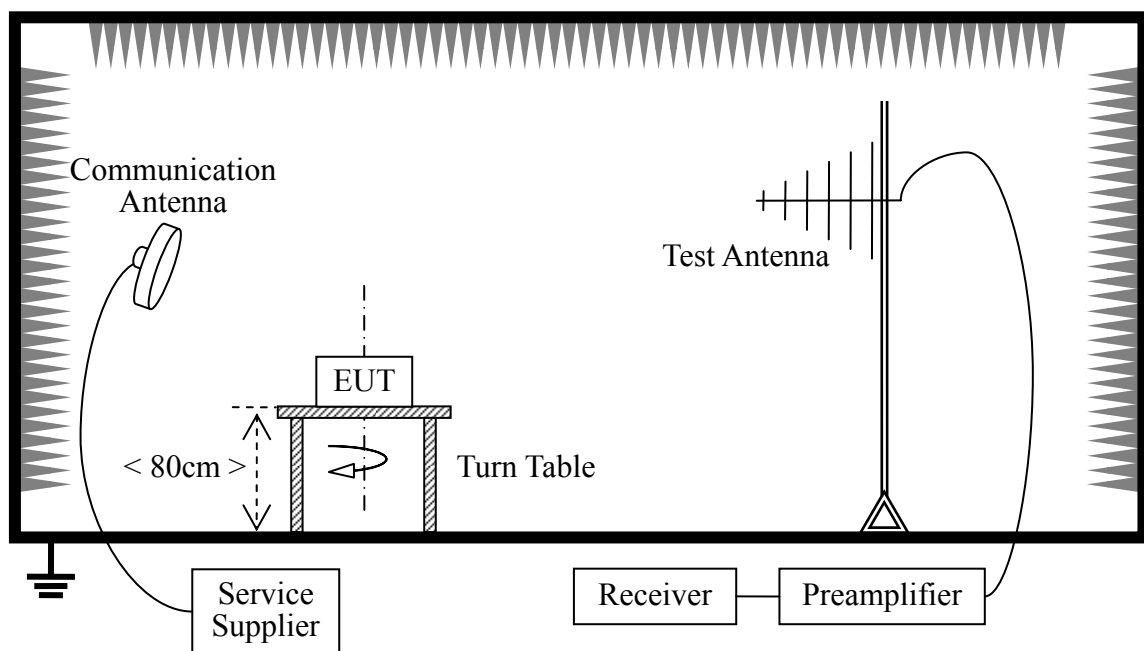

The Module of the EUT is powered by the Battery charged with the AC Adapter. The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength..

#### D. Equipments List:

| Description | Manufacturer | Model | Serial No. | Cal. Date | Cal. Due |
|-------------|--------------|-------|------------|-----------|----------|
|-------------|--------------|-------|------------|-----------|----------|

| Description           | Manufacturer | Model      | Serial No. | Cal. Date | Cal. Due |
|-----------------------|--------------|------------|------------|-----------|----------|
| Receiver              | Agilent      | E7405A     | US44210471 | 2010.9    | 1year    |
| Full-Anechoic Chamber | Albatross    | 9m*6m*6m   | (n.a.)     | 2010.8    | 1year    |
| Test Antenna          | Schwarzbeck  | BBHA 9120C | 9120C-384  | 2010.8    | 1year    |

### 2.5.3 Test Result

The EUT operates at hopping-off test mode. The lowest and highest channels are tested to verify the band edge emissions.


#### 3.5.3.1 802.11b Test mode

The lowest and highest channels are tested to verify the band edge emissions.


#### E. Test Verdict:

| Channel | Frequency (MHz) | Max. Emission in the Restricted Bands (dB $\mu$ V/m) |       | Limit (dB $\mu$ V/m) |    | Verdict |
|---------|-----------------|------------------------------------------------------|-------|----------------------|----|---------|
|         |                 | PK                                                   | AV    | PK                   | AV |         |
| 1       | 2412            | 60.41                                                | 32.79 | 74                   | 54 | PASS    |
| 11      | 2462            | 60.98                                                | 36.69 | 74                   | 54 | PASS    |


#### F. Test Plot:

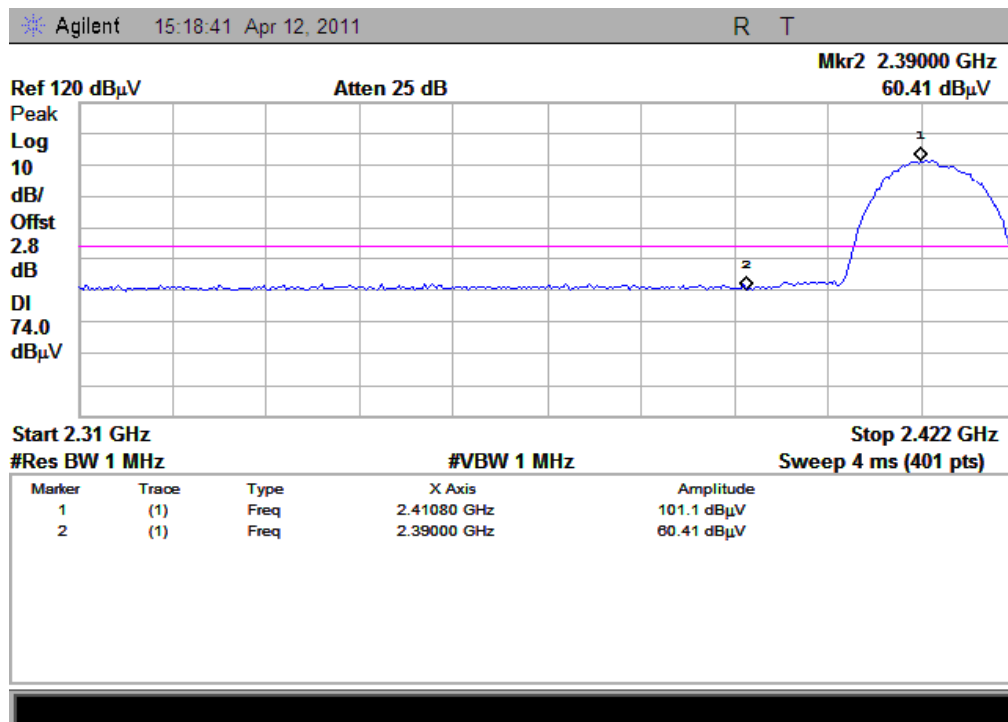


(Plot A1: Channel = 1 PEAK)

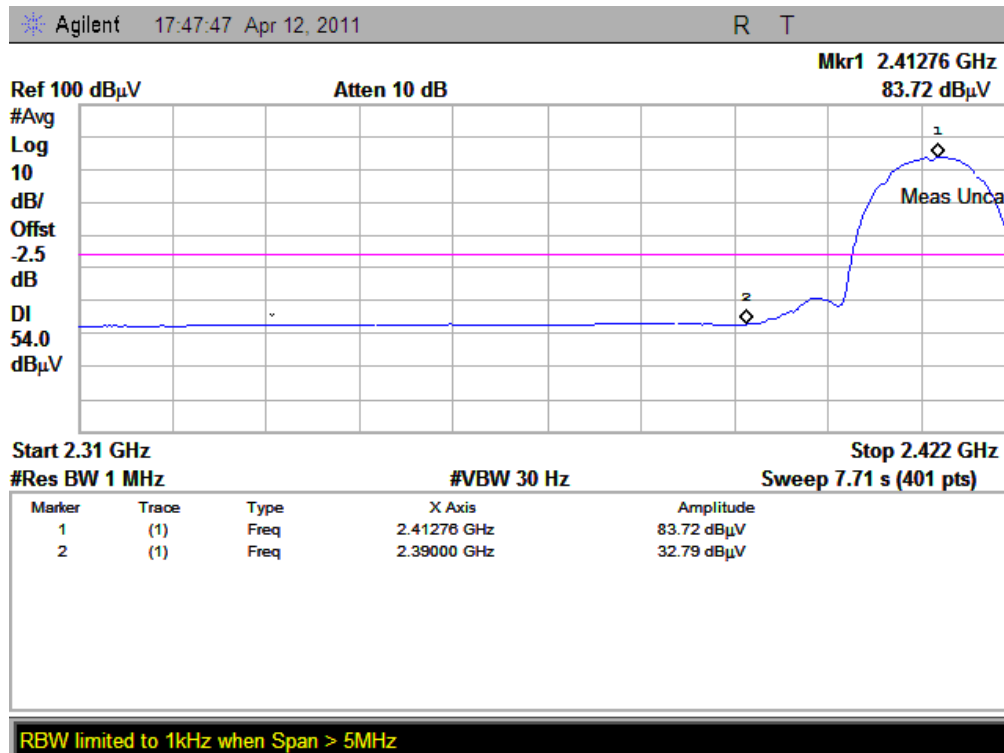

(Plot A2: Channel = 1 AVG)

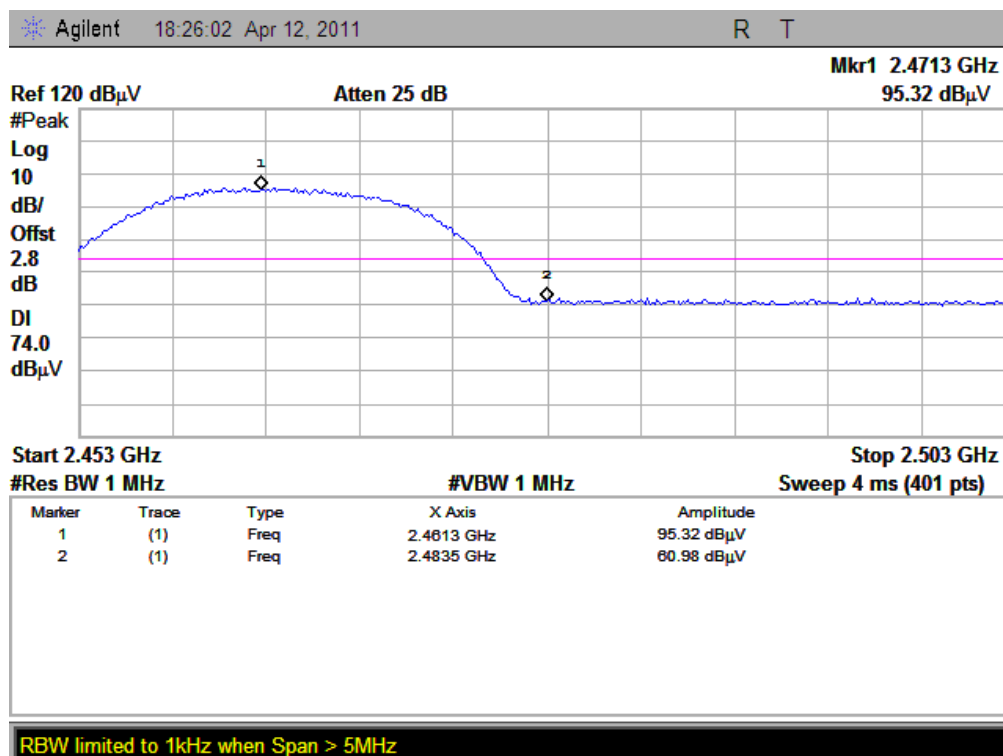

(Plot B1: Channel = 11 PEAK)

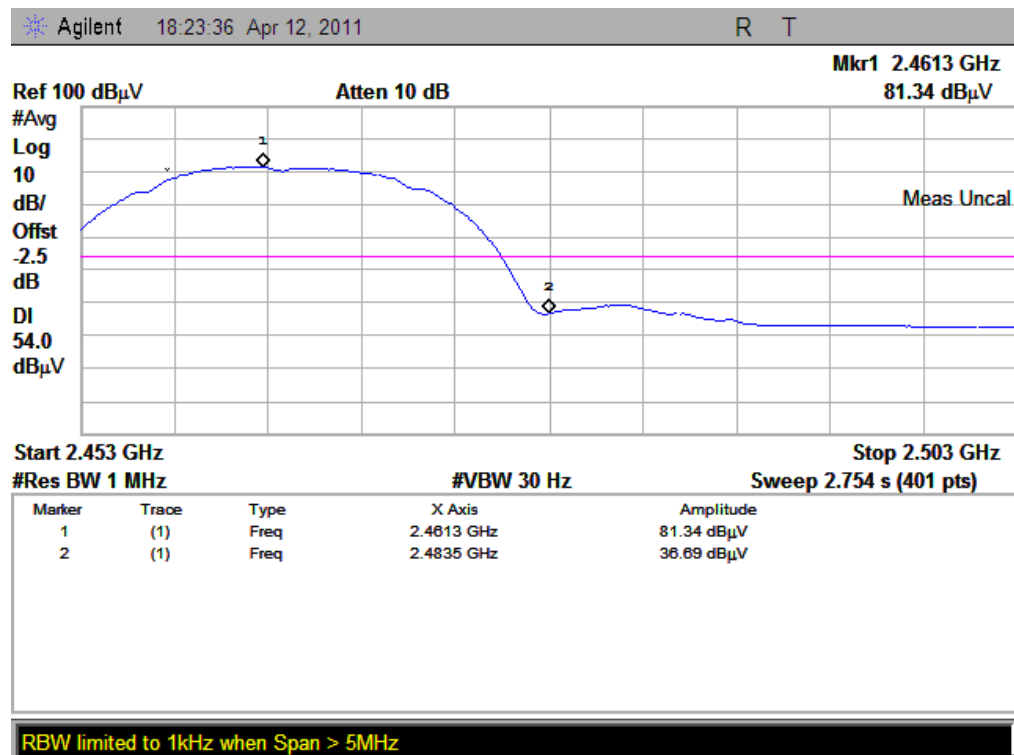

(Plot B2: Channel = 11 AVG)


### 3.5.3.2 802.11g Test mode

The lowest and highest channels are tested to verify the band edge emissions.


#### A. Test Verdict:.

| Channel | Frequency (MHz) | Max. Emission in the Restricted Bands (dBμV/m) |       | Limit (dBμV/m) |    | Verdict |
|---------|-----------------|------------------------------------------------|-------|----------------|----|---------|
|         |                 | PK                                             | AV    | PK             | AV |         |
| 1       | 2412            | 60.73                                          | 32.73 | 74             | 54 | PASS    |
| 11      | 2462            | 61.95                                          | 36.88 | 74             | 54 | PASS    |

#### B. Test Plot:

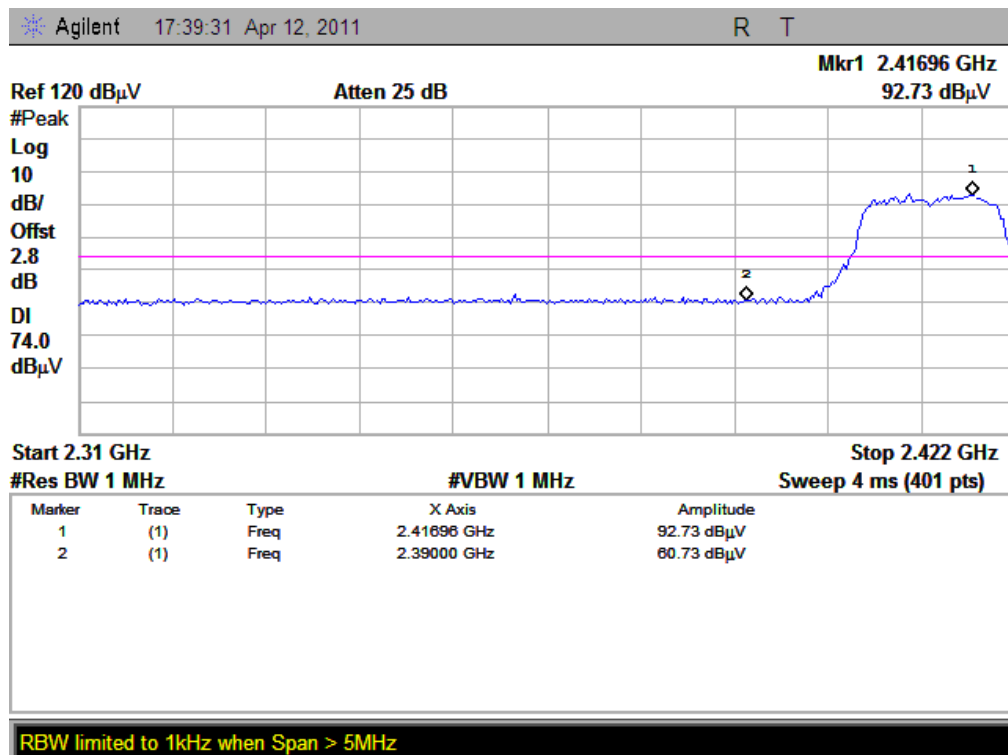


(Plot A1: Channel = 1 PEAK)

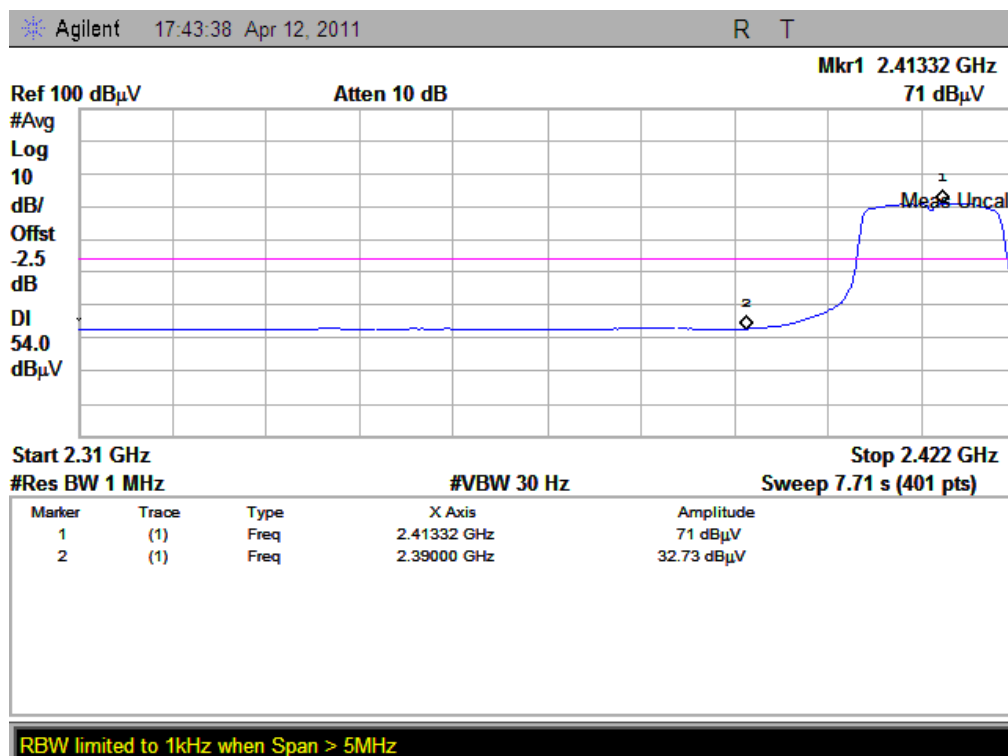


(Plot A2: Channel = 1 AVG)



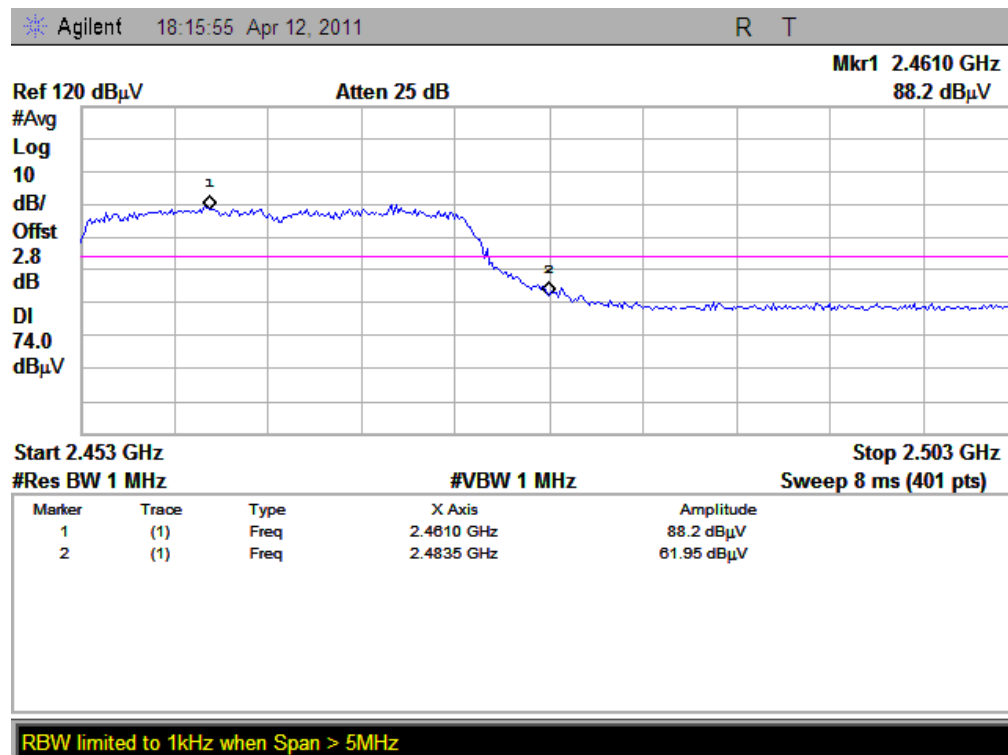

(Plot B1: Channel = 11 PEAK)

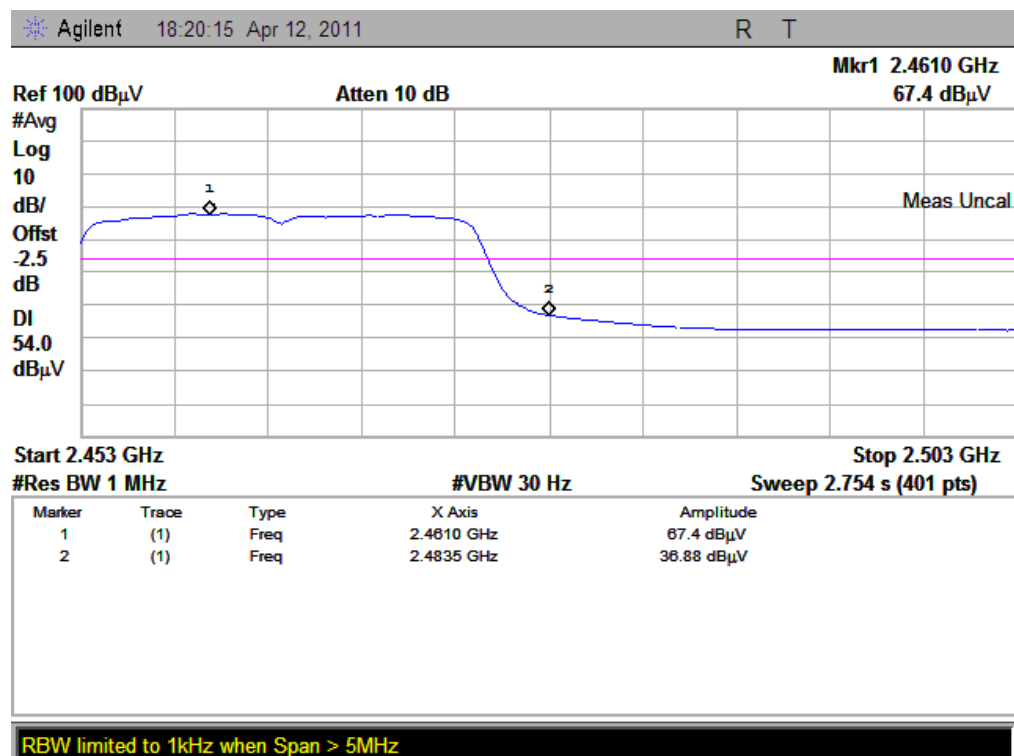

(Plot B2: Channel = 11 AVG)


### 3.5.3.3 802.11n Test mode

The lowest and highest channels are tested to verify the band edge emissions.


### C. Test Verdict:.

| Channel | Frequency (MHz) | Max. Emission in the Restricted Bands (dB $\mu$ V/m) |       | Limit (dB $\mu$ V/m) |    | Verdict |
|---------|-----------------|------------------------------------------------------|-------|----------------------|----|---------|
|         |                 | PK                                                   | AV    | PK                   | AV |         |
| 1       | 2412            | 59.75                                                | 33.47 | 74                   | 54 | PASS    |
| 11      | 2462            | 65.92                                                | 41.63 | 74                   | 54 | PASS    |


### D. Test Plot:

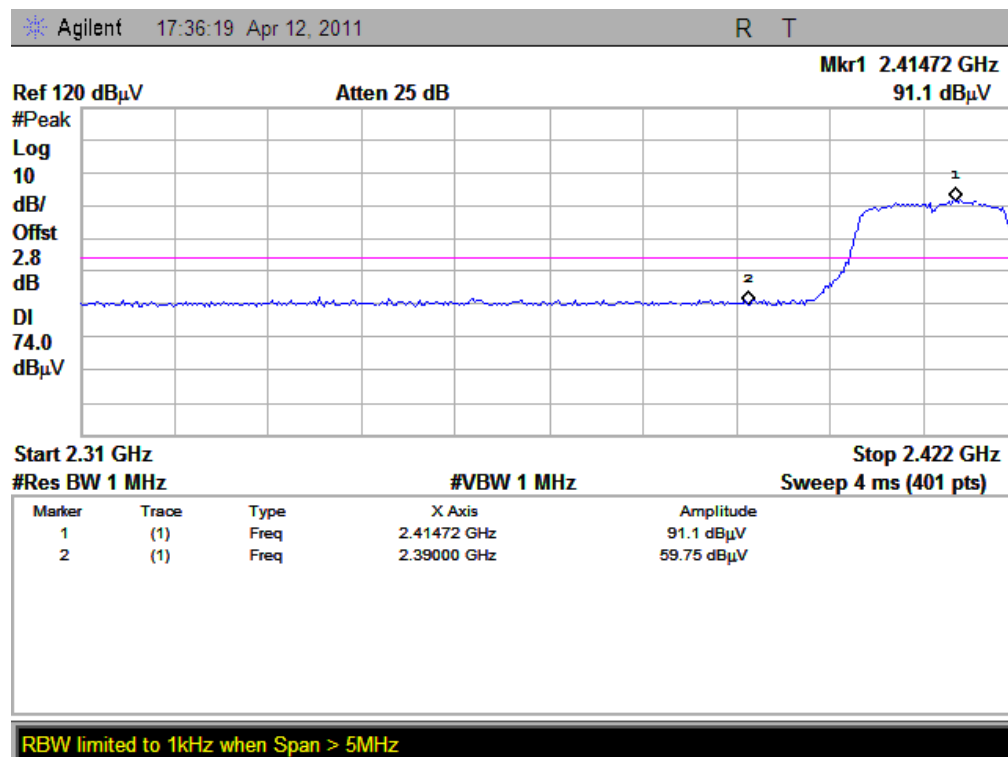


(Plot A1: Channel = 1 PEAK)

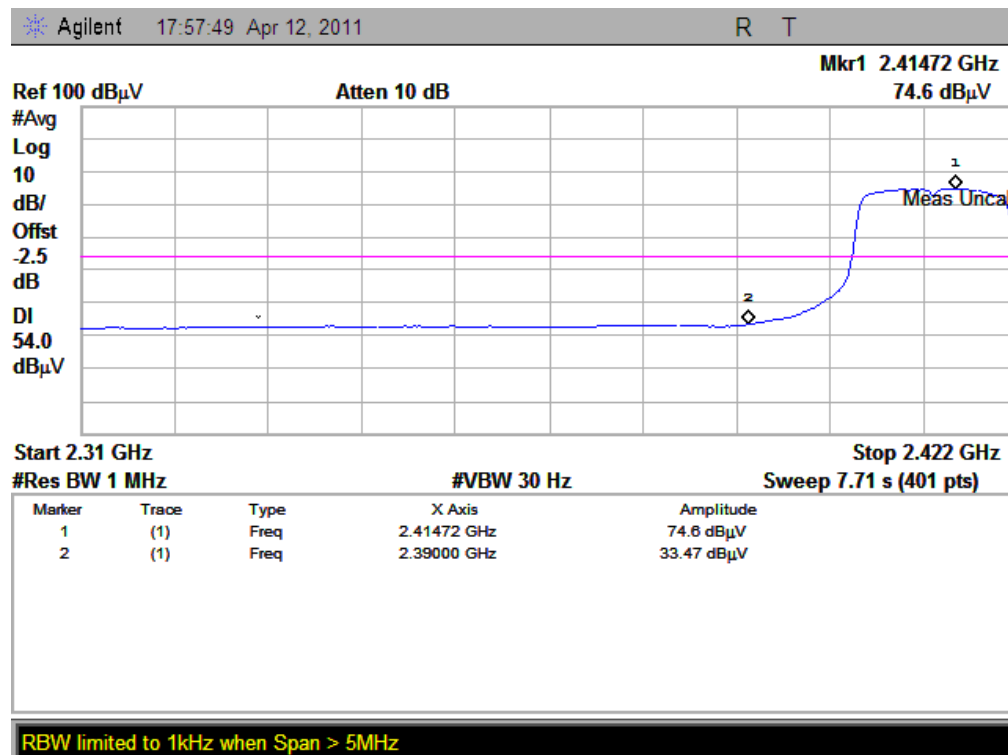

(Plot A2: Channel = 1 AVG)

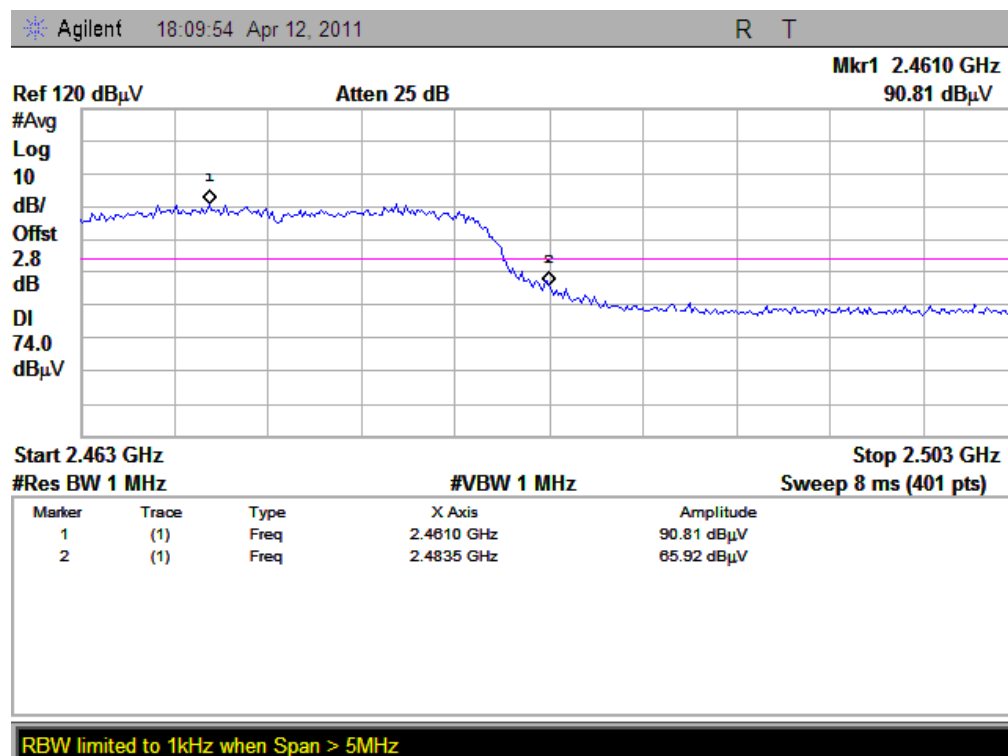

(Plot B1: Channel = 11 PEAK)

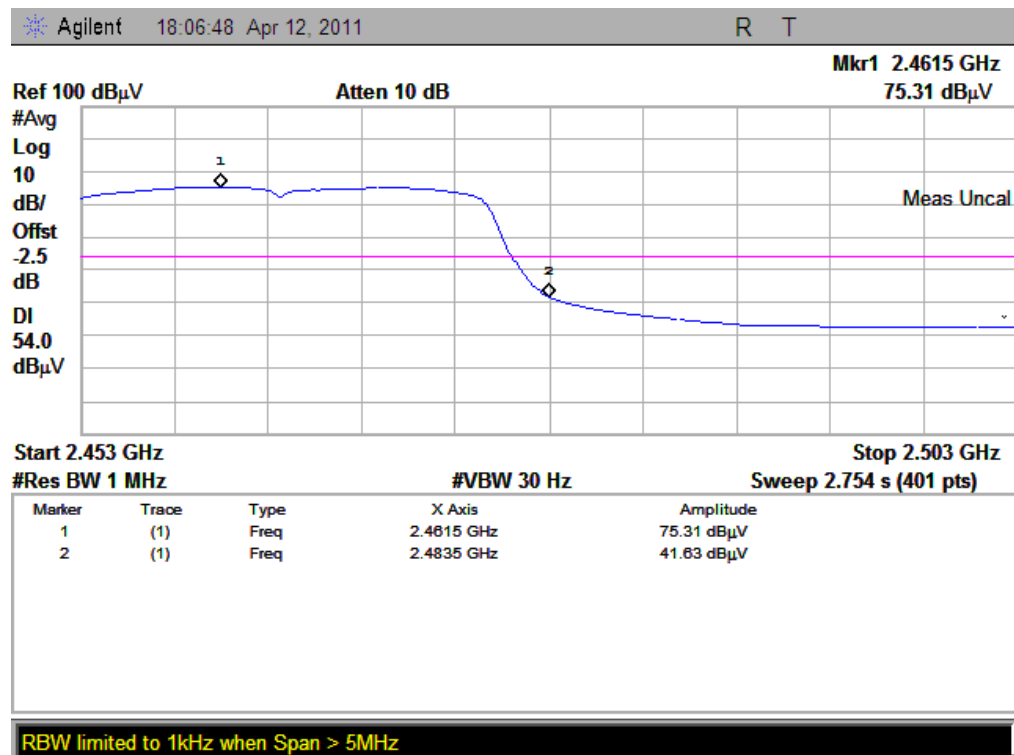

(Plot B2: Channel = 11 AVG)

## 2.6 Conducted Emission

### 2.6.1 Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 $\Omega$  line impedance stabilization network (LISN).


| Frequency range (MHz) | Conducted Limit (dB $\mu$ V) |          |
|-----------------------|------------------------------|----------|
|                       | Quai-peak                    | Average  |
| 0.15 - 0.50           | 66 to 56                     | 56 to 46 |
| 0.50 - 5              | 56                           | 46       |
| 5 - 30                | 60                           | 50       |

NOTE:

- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

### 2.6.2 Test Description

#### A. Test Setup:

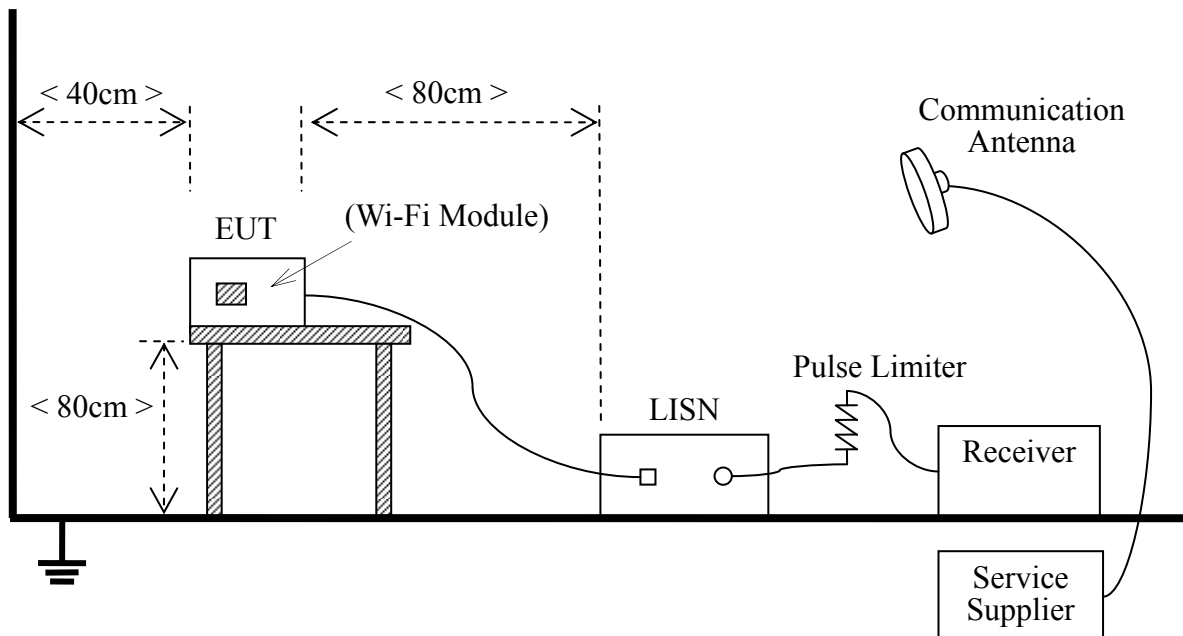

The EUT of the EUT is powered by the Battery charged with the AC Adapter which is powered by 120V, 60Hz AC mains supply. The factors of the site are calibrated to correct the reading. During the measurement, the EUT is activated and controlled by the Wi-Fi Service Supplier (SS) via a Common

Antenna, and is set to operate under hopping-on test mode transmitting 339 bytes DH5 packages at maximum power.

### B. Equipments List:

| Description          | Manufacturer | Model       | Serial No. | Cal. Date | Cal. Due |
|----------------------|--------------|-------------|------------|-----------|----------|
| Receiver             | Agilent      | E7405A      | US44210471 | 2010.07   | 2year    |
| LISN                 | Schwarzbeck  | NSLK 8127   | 812744     | 2010.08   | 2year    |
| Service Supplier     | R&S          | CMU200      | 100448     | 2010.10   | 2year    |
| Pulse Limiter (20dB) | Schwarzbeck  | VTSD 9561-D | 9391       | (n.a.)    | (n.a.)   |


### 2.6.3 Test Result

The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.


#### 2.6.3.1 Test mode (WI-FI)

**A. Test setup: The EUT configuration of the emission tests is EUT + Charger.**

### B. Test Plot:

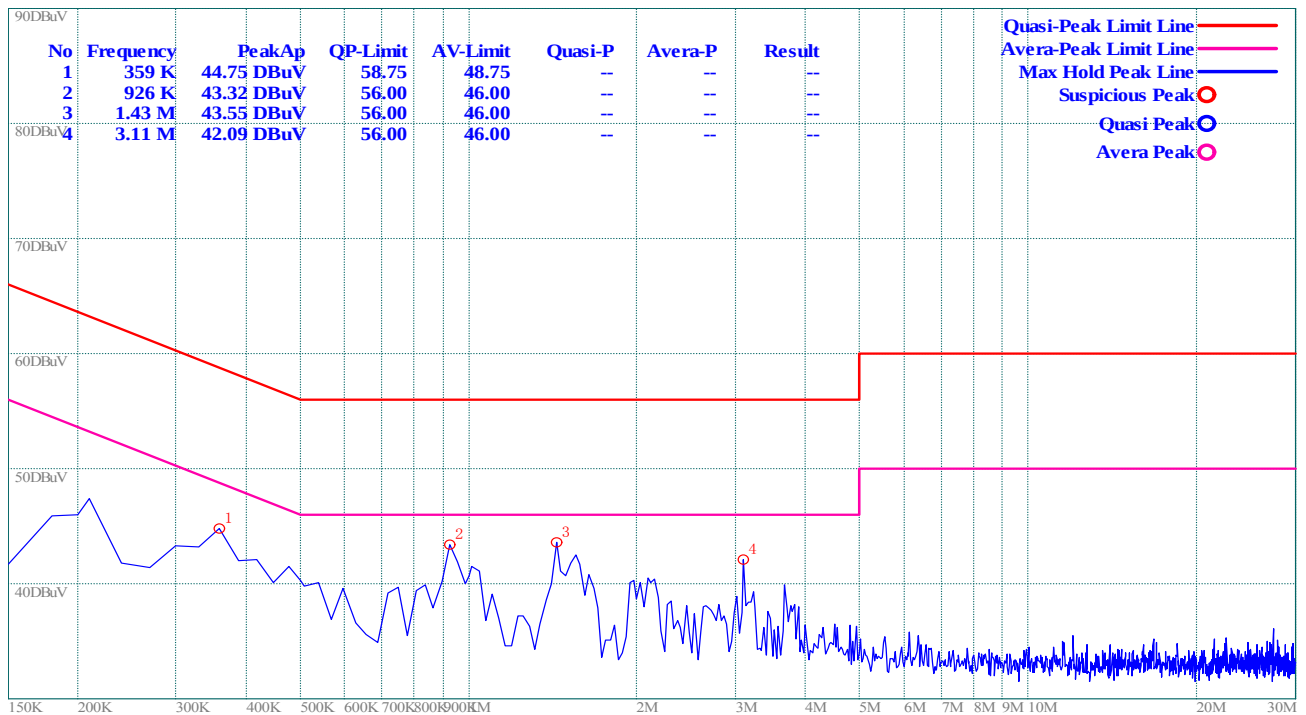

(Plot A: L Phase)

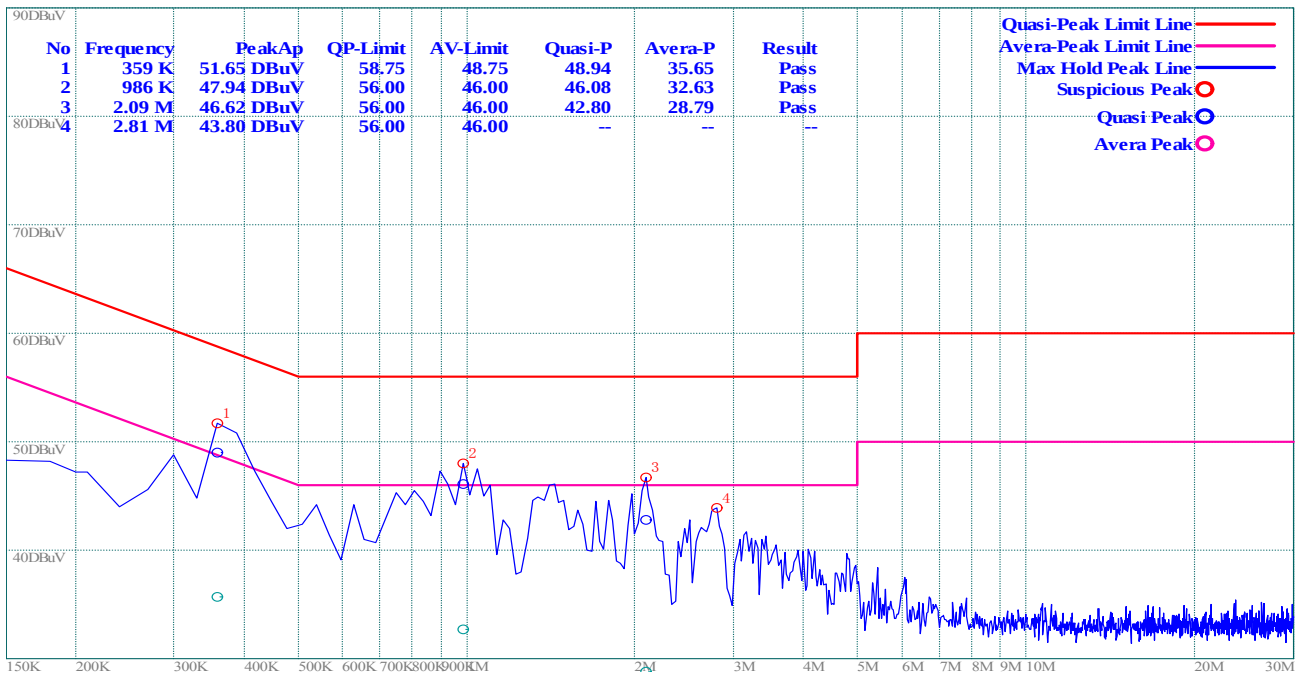

(Plot B: N Phase)

## 2.7 Radiated Emission

### 2.7.1 Requirement

According to FCC section 15.247(c), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:


| Frequency (MHz) | Field Strength ( $\mu\text{V/m}$ ) | Measurement Distance (m) |
|-----------------|------------------------------------|--------------------------|
| 0.009 - 0.490   | 2400/F(kHz)                        | 300                      |
| 0.490 - 1.705   | 24000/F(kHz)                       | 30                       |
| 1.705 - 30.0    | 30                                 | 30                       |
| 30 - 88         | 100                                | 3                        |
| 88 - 216        | 150                                | 3                        |
| 216 - 960       | 200                                | 3                        |
| Above 960       | 500                                | 3                        |

As shown in FCC section 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector. When average radiated emission measurements are specified in this part, including emission measurements below 1000MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

### 2.7.2 Test Description

#### A. Test Setup:



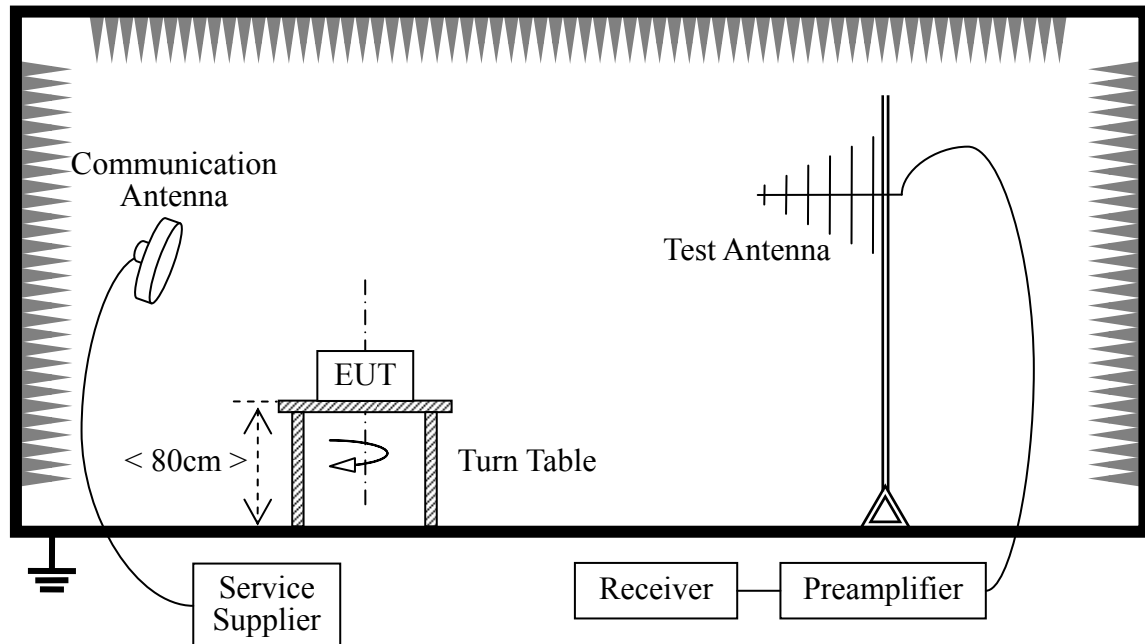

The EUT of the EUT is powered by the Battery charged with the AC Adapter which is powered by 120V, 60Hz AC mains supply. The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. During the measurement, the EUT is activated and controlled by the Wireless Router via a Common Antenna, and is set to operate under hopping-on test mode.

For the Test Antenna:

- In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

## B. Equipments List:

| Description           | Manufacturer | Model      | Serial No. | Cal. Date | Cal. Due |
|-----------------------|--------------|------------|------------|-----------|----------|
| System Simulator      | R&S          | CMU200     | 100448     | 2010.10   | 1year    |
| Receiver              | Agilent      | E7405A     | US44210471 | 2010.07   | 1year    |
| Semi-Anechoic Chamber | Albatross    | 9m*6m*6m   | (n.a.)     | 2010.08   | 1year    |
| Test Antenna - Bi-Log | Schwarzbeck  | VULB 9163  | 9163-274   | 2010.07   | 1year    |
| Test Antenna - Horn   | Schwarzbeck  | BBHA 9120C | 9120C-384  | 2010.07   | 1year    |

## 2.7.3 Test Result

### 3.7.3.1 802.11b Test mode

The maximum radiated emission is searched using PK, QP and AV detectors; the emission levels more than the limits, and that have narrow margins from the limits will be re-measured with AV and QP detectors.

#### A. Test Verdict for Harmonics:

##### The Fundamental Emissions


The field strength of {Fundamental Emission} listed below is recorded, and used in the next table.

| Channel | Frequency (MHz) | Fundamental Emission (dB $\mu$ V/m) |      | Antenna Polarization | Refer to Plot |
|---------|-----------------|-------------------------------------|------|----------------------|---------------|
|         |                 | PK                                  | AV   |                      |               |
| 1       | 2412            | 91.8                                | 85.3 | Horizontal           | Plot A.2      |
|         |                 | 92.7                                | 86.9 | Vertical             | Plot A.3      |
| 6       | 2437            | 96.4                                | 90.5 | Horizontal           | Plot B.2      |
|         |                 | 92.3                                | 87.6 | Vertical             | Plot B.3      |
| 11      | 2462            | 95.6                                | 87.7 | Horizontal           | Plot C.2      |
|         |                 | 96.3                                | 90.8 | Vertical             | Plot C.3      |


Also refer to following plots for the emissions falling in the restricted bands.

#### B. Test Plot for the Whole Measurement Frequency Range:


##### Plots for Channel = 1

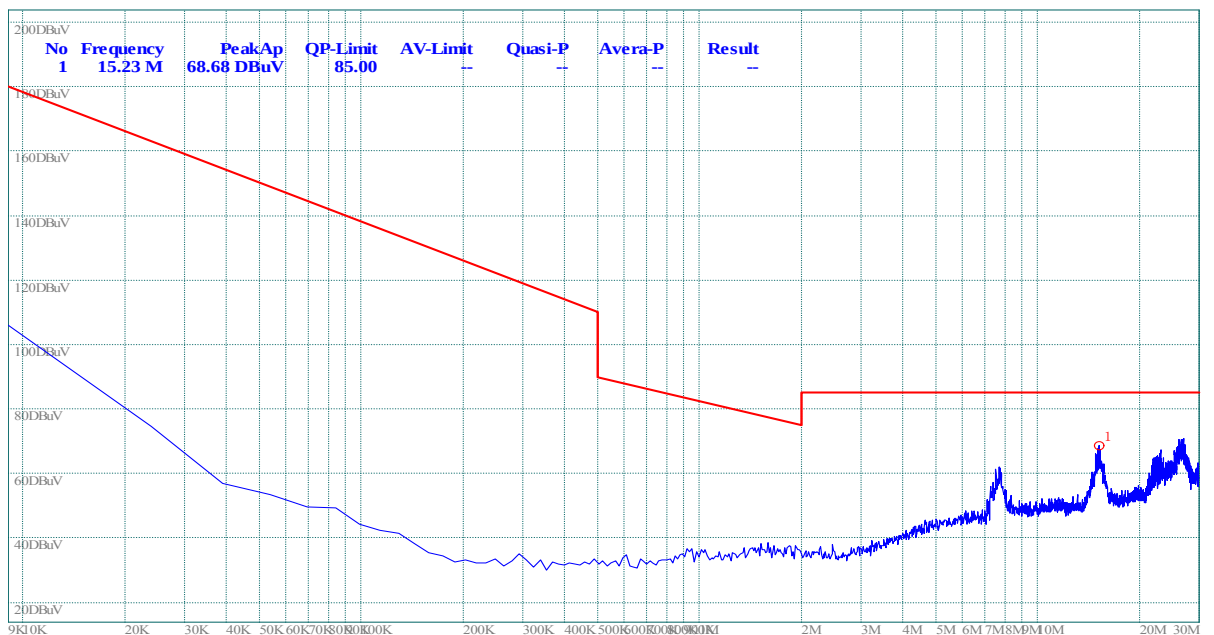

(Plot A.1: 9kHz to 30MHz)

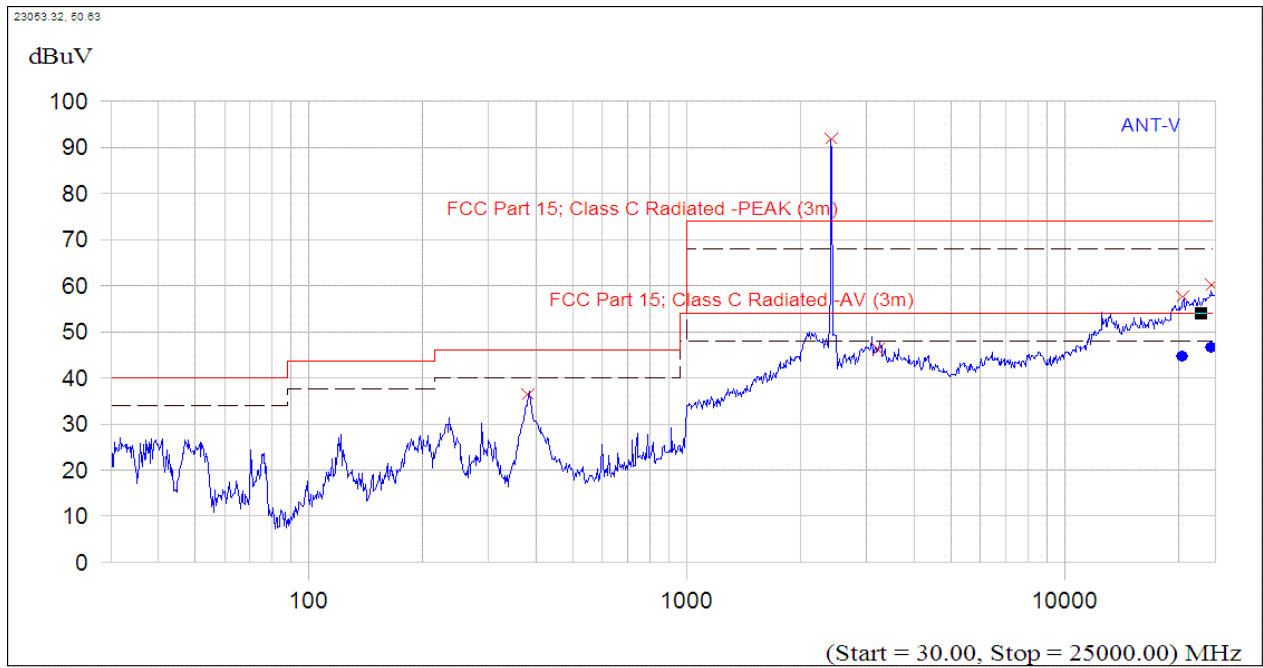


(Plot A.2: Antenna Horizontal, 30MHz to 25GHz)

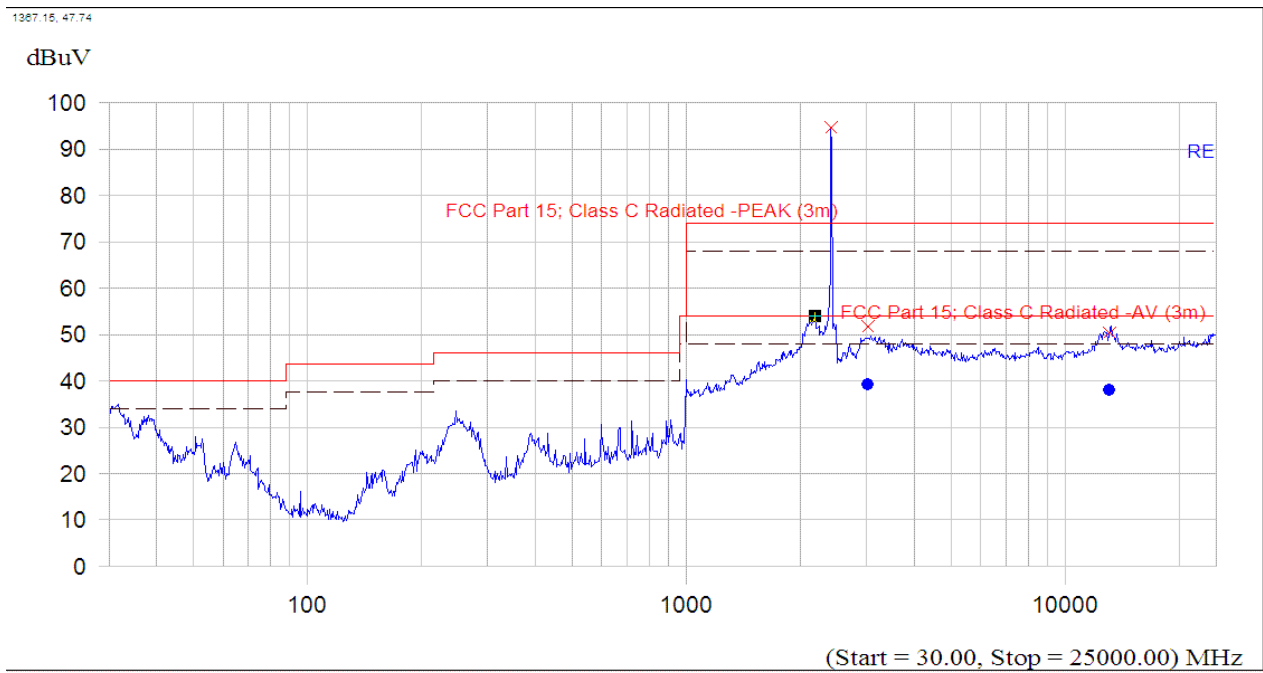


(Plot A.3: Antenna Vertical, 30MHz to 25GHz)


Plot for Channel = 6

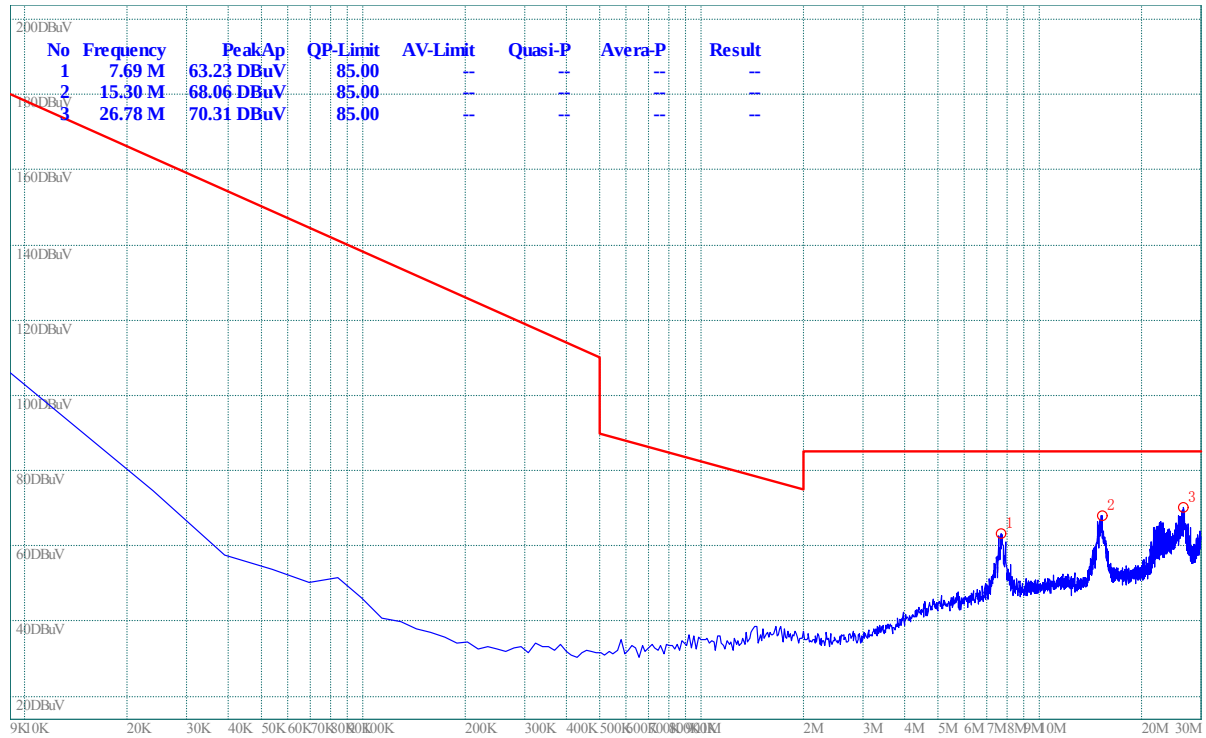

(Plot B.1: 9kHz to 30MHz)

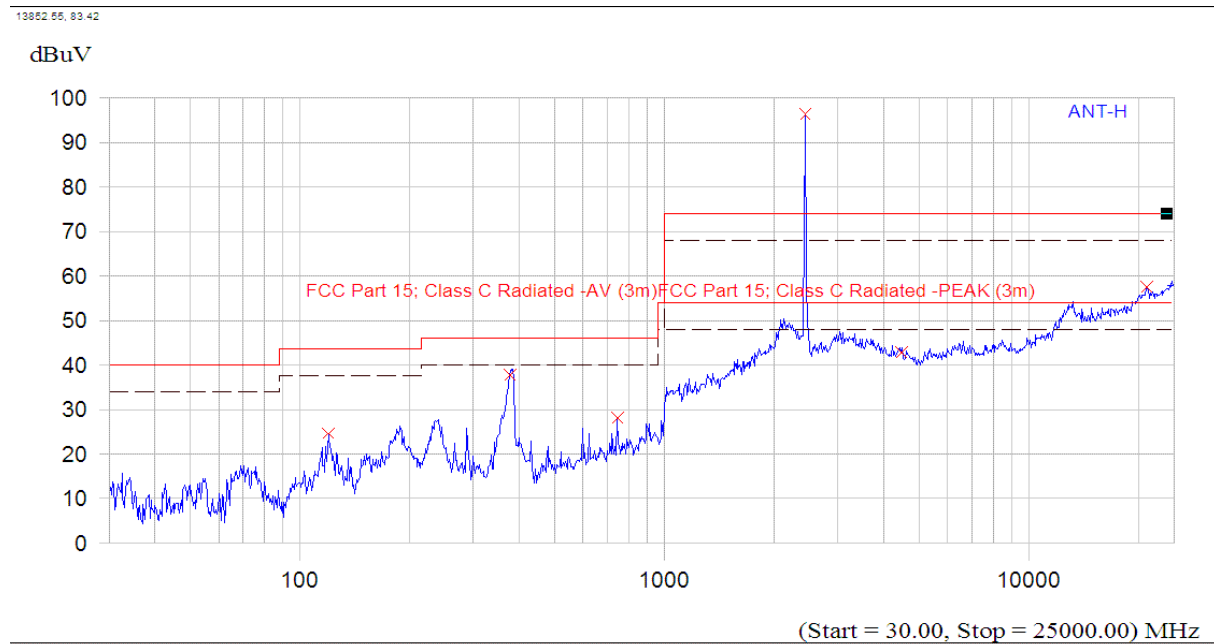


(Plot B.2: Antenna Horizontal, 30MHz to 25GHz)

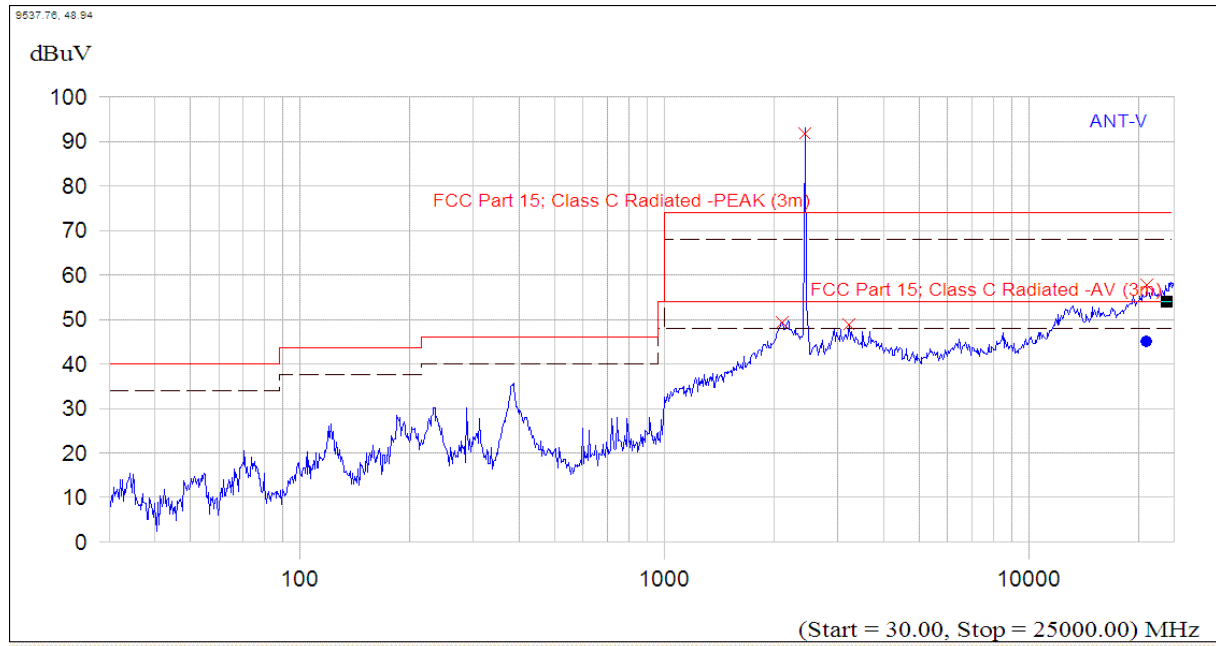


(Plot B.3: Antenna Vertical, 30MHz to 25GHz)


Plot for Channel = 11

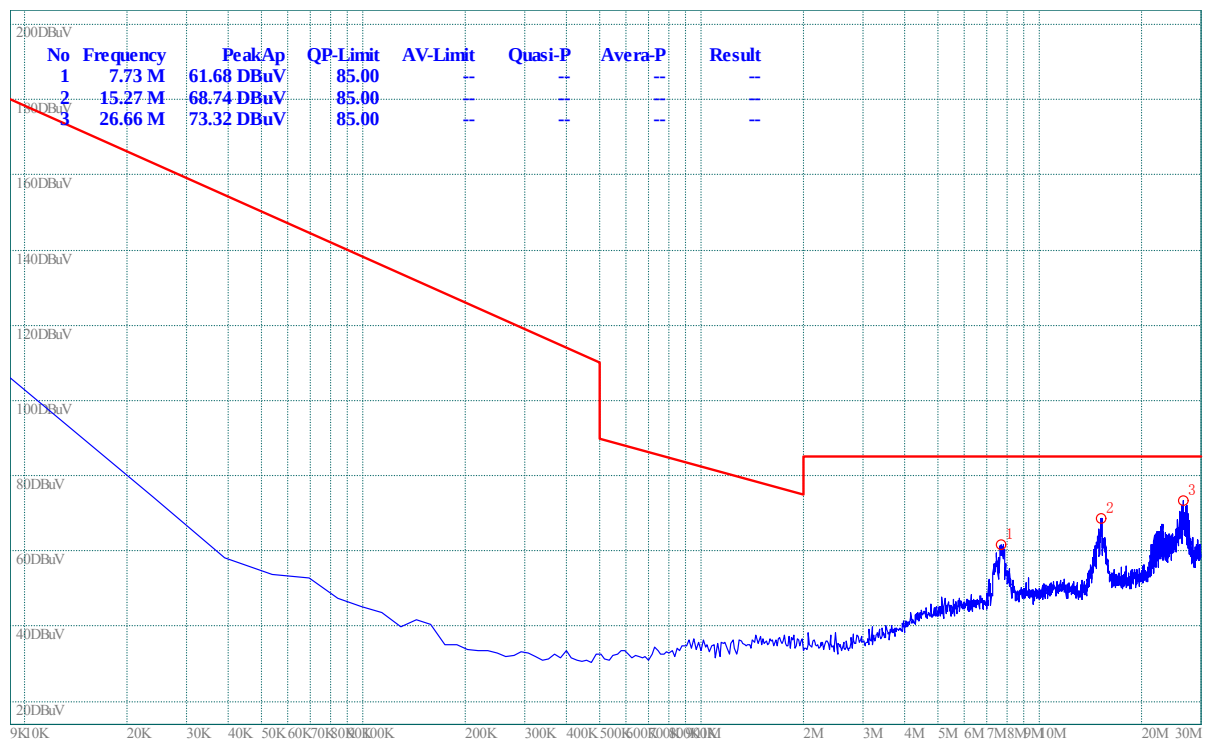

(Plot C.1: 9kHz to 30MHz)

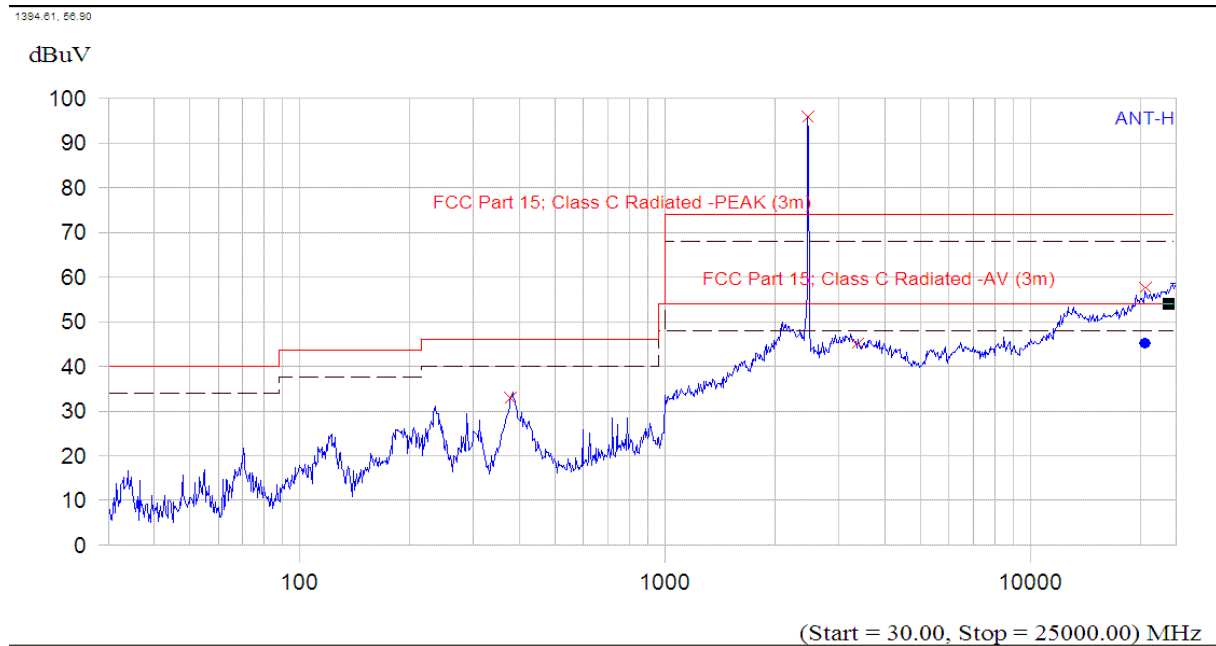

(Plot C.2: Antenna Horizontal, 30MHz to 25GHz)

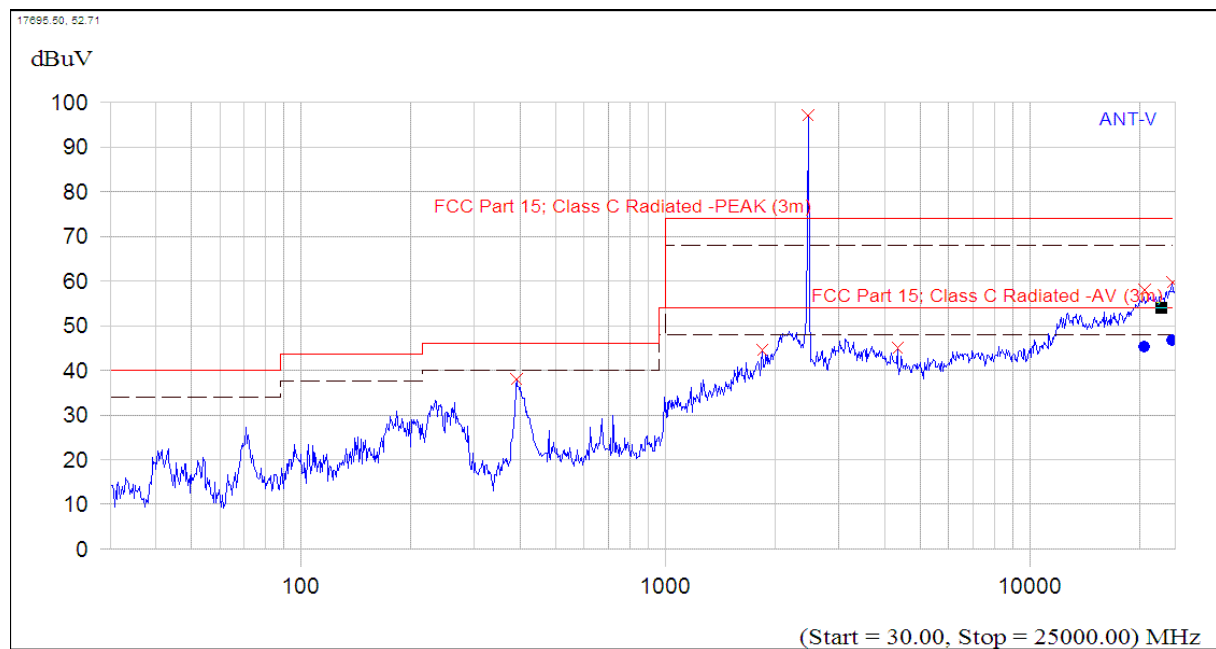

(Plot C.5: Antenna Vertical, 30MHz to 25GHz)

### 3.7.3.2 802.11g Test mode

The maximum radiated emission is searched using PK, QP and AV detectors; the emission levels more than the limits, and that have narrow margins from the limits will be re-measured with AV and QP detectors.

### C. Test Verdict for Harmonics:

#### The Fundamental Emissions


The field strength of {Fundamental Emission} listed below is recorded, and used in the next table.

| Channel | Frequency (MHz) | Fundamental Emission (dB $\mu$ V/m) |      | Antenna Polarization | Refer to Plot |
|---------|-----------------|-------------------------------------|------|----------------------|---------------|
|         |                 | PK                                  | AV   |                      |               |
| 1       | 2412            | 95.3                                | 89.1 | Horizontal           | Plot A.2      |
|         |                 | 94.4                                | 87.2 | Vertical             | Plot A.3      |
| 6       | 2437            | 96.8                                | 90.7 | Horizontal           | Plot B.2      |
|         |                 | 91.9                                | 83.6 | Vertical             | Plot B.3      |
| 11      | 2462            | 81.9                                | 77.1 | Horizontal           | Plot C.2      |
|         |                 | 89.7                                | 83.4 | Vertical             | Plot C.3      |


Also refer to following plots for the emissions falling in the restricted bands.

### D. Test Plot for the Whole Measurement Frequency Range:


#### Plots for Channel = 1

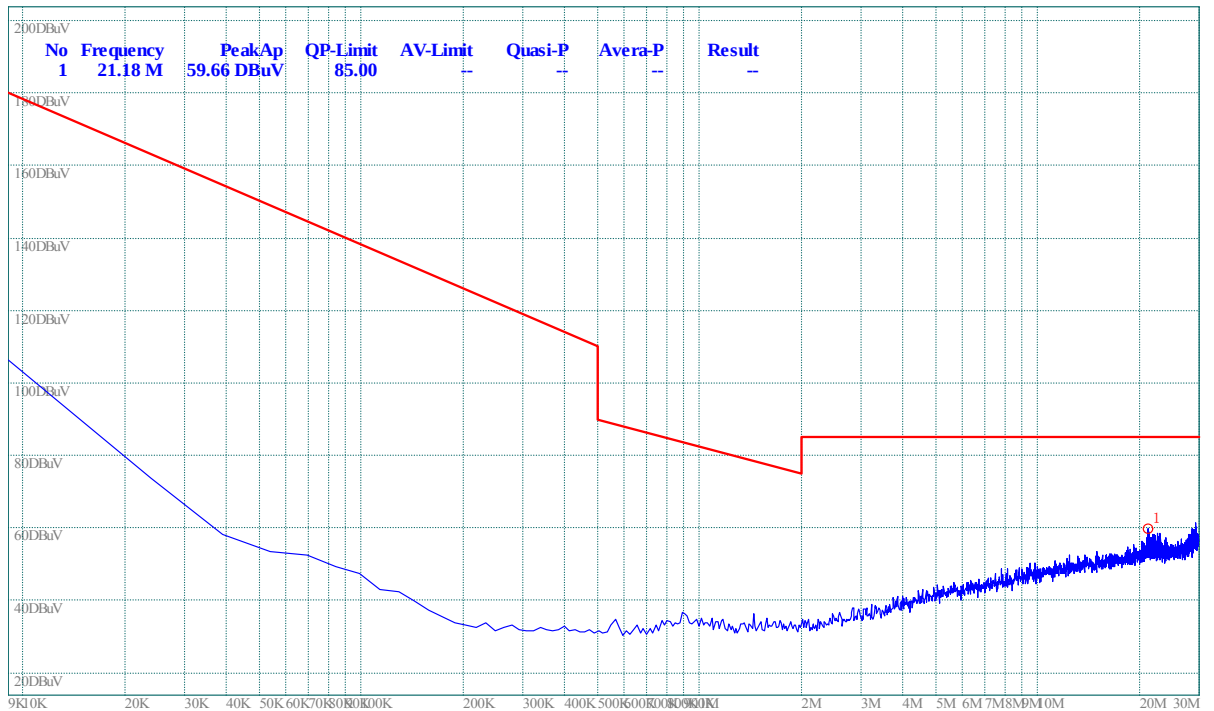

(Plot A.1: 9kHz to 30MHz)

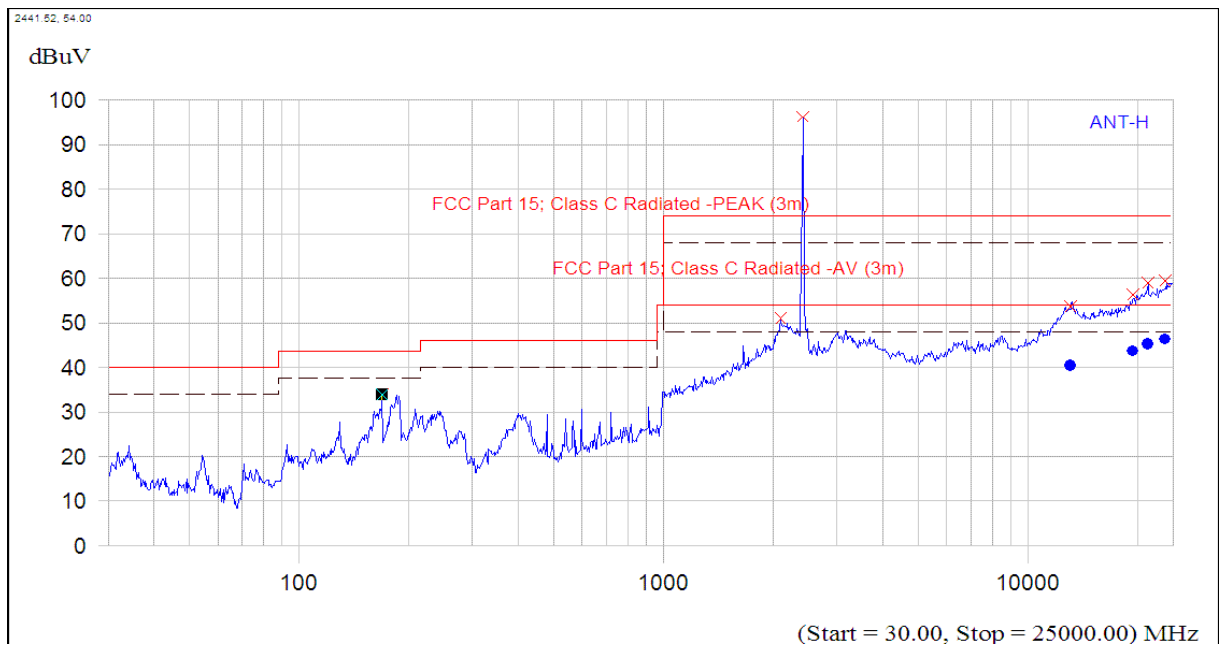

(Plot A.2: Antenna Horizontal, 30MHz to 25GHz)

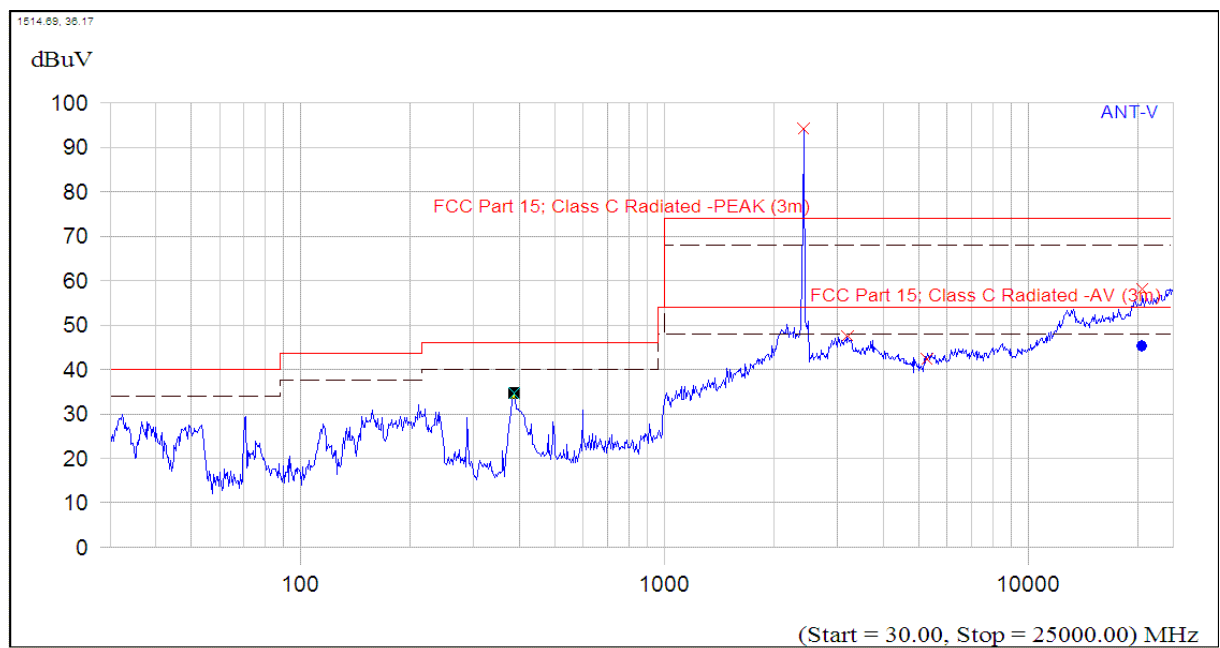


(Plot A.3: Antenna Vertical, 30MHz to 25GHz)

Plot for Channel = 6






(Plot B.1: 9kHz to 30MHz)

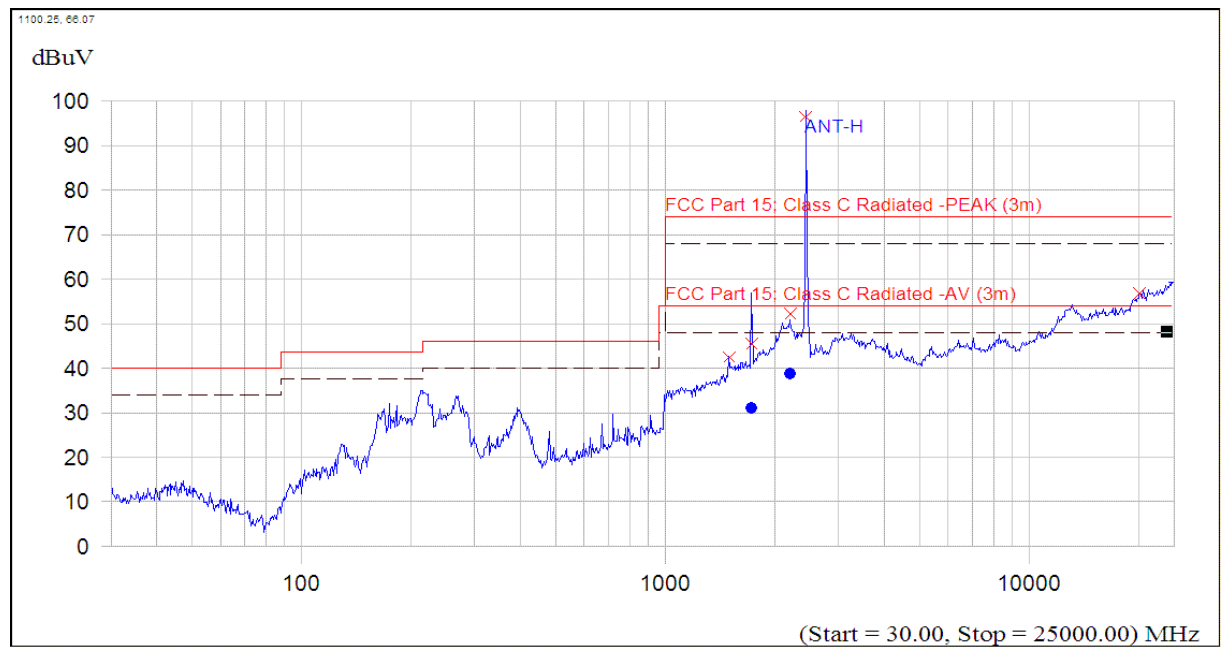


(Plot B.2: Antenna Horizontal, 30MHz to 25GHz)

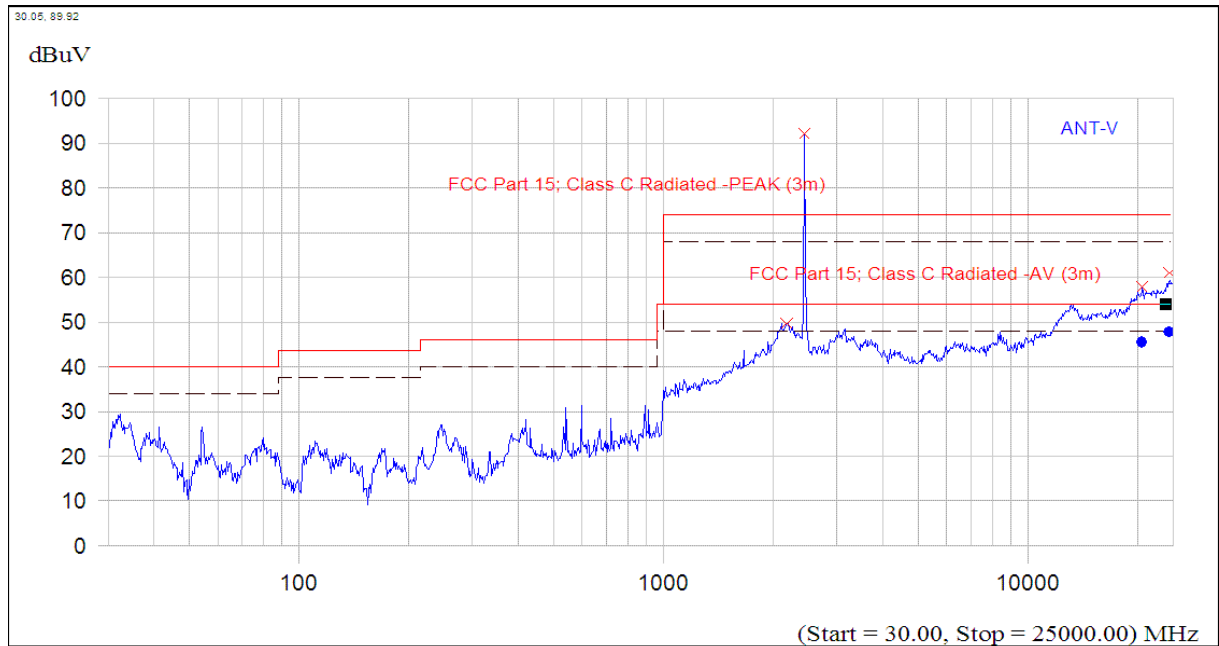


(Plot B.3: Antenna Vertical, 30MHz to 25GHz)


Plot for Channel = 11

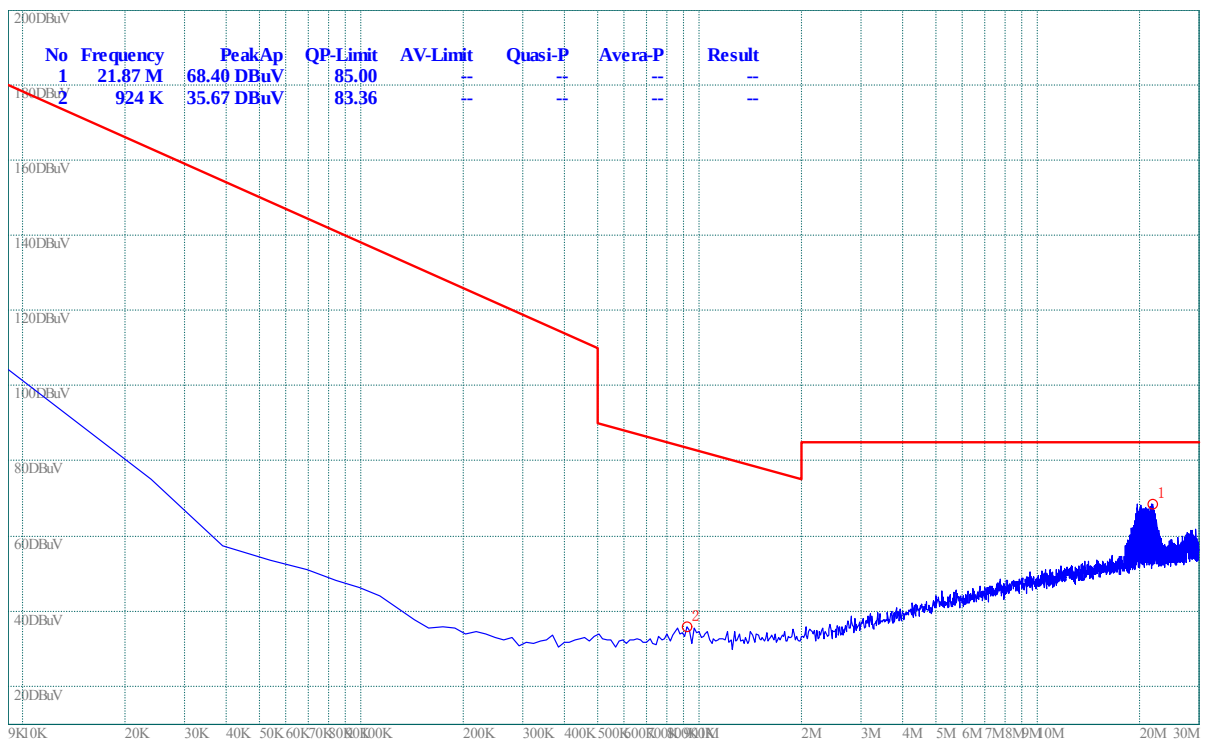

(Plot C.1: 9kHz to 30MHz)

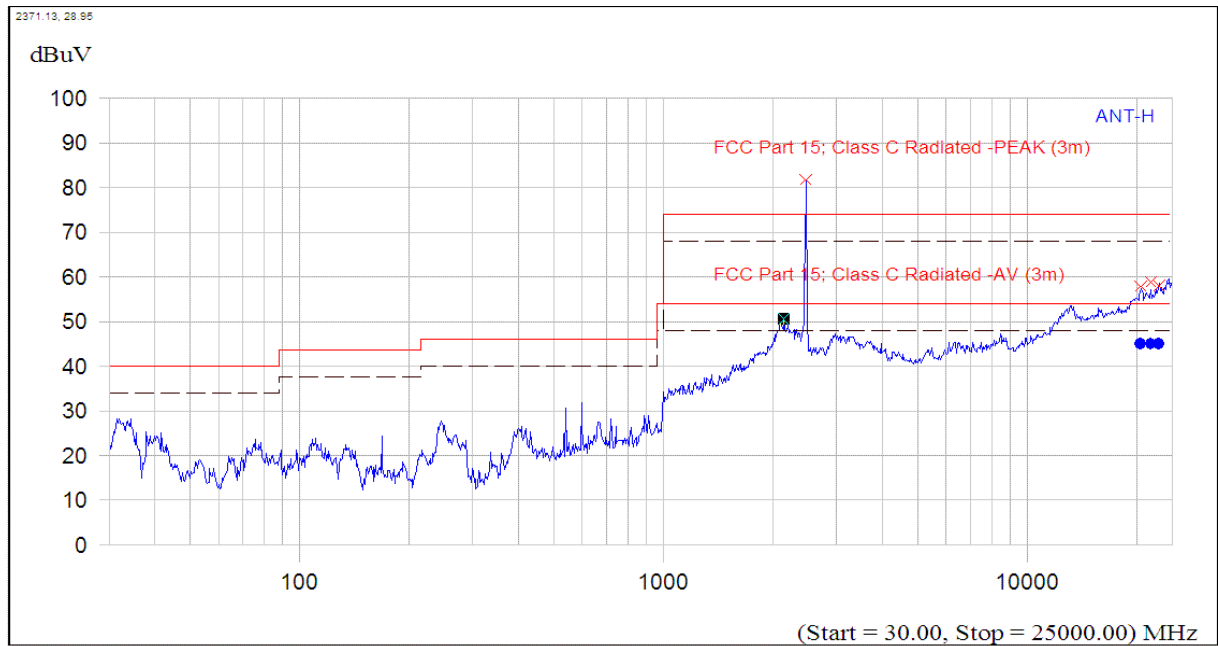

(Plot C.2: Antenna Horizontal, 30MHz to 25GHz)

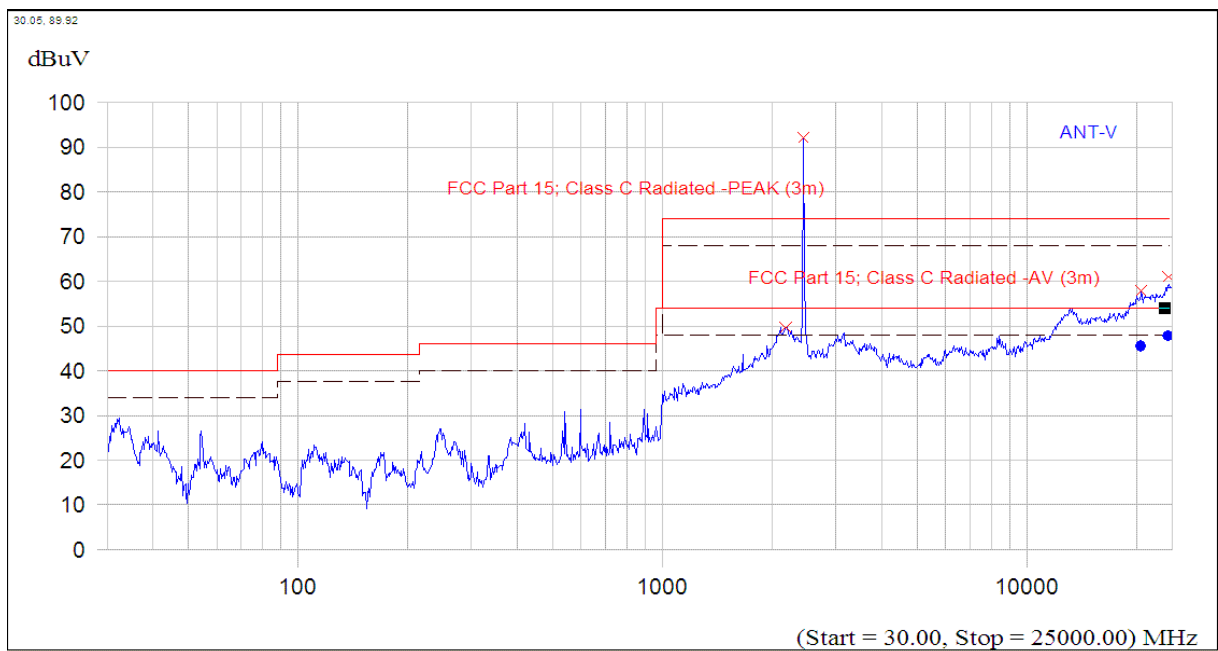

(Plot C.3: Antenna Vertical, 30MHz to 25GHz)

### 3.7.3.3 802.11n Test mode

The maximum radiated emission is searched using PK, QP and AV detectors; the emission levels more than the limits, and that have narrow margins from the limits will be re-measured with AV and QP detectors.

## E. Test Verdict for Harmonics:

### The Fundamental Emissions


The field strength of {Fundamental Emission} listed below is recorded, and used in the next table.

| Channel | Frequency (MHz) | Fundamental Emission (dB $\mu$ V/m) |      | Antenna Polarization | Refer to Plot |
|---------|-----------------|-------------------------------------|------|----------------------|---------------|
|         |                 | PK                                  | AV   |                      |               |
| 1       | 2412            | 96.3                                | 90.2 | Horizontal           | Plot A.2      |
|         |                 | 96.1                                | 90.3 | Vertical             | Plot A.3      |
| 6       | 2437            | 97.1                                | 91.0 | Horizontal           | Plot B.2      |
|         |                 | 97.7                                | 91.7 | Vertical             | Plot B.3      |
| 11      | 2462            | 96.9                                | 92.1 | Horizontal           | Plot C.2      |
|         |                 | 96.7                                | 90.8 | Vertical             | Plot C.3      |


Also refer to following plots for the emissions falling in the restricted bands.

## F. Test Plot for the Whole Measurement Frequency Range:


### Plots for Channel = 1

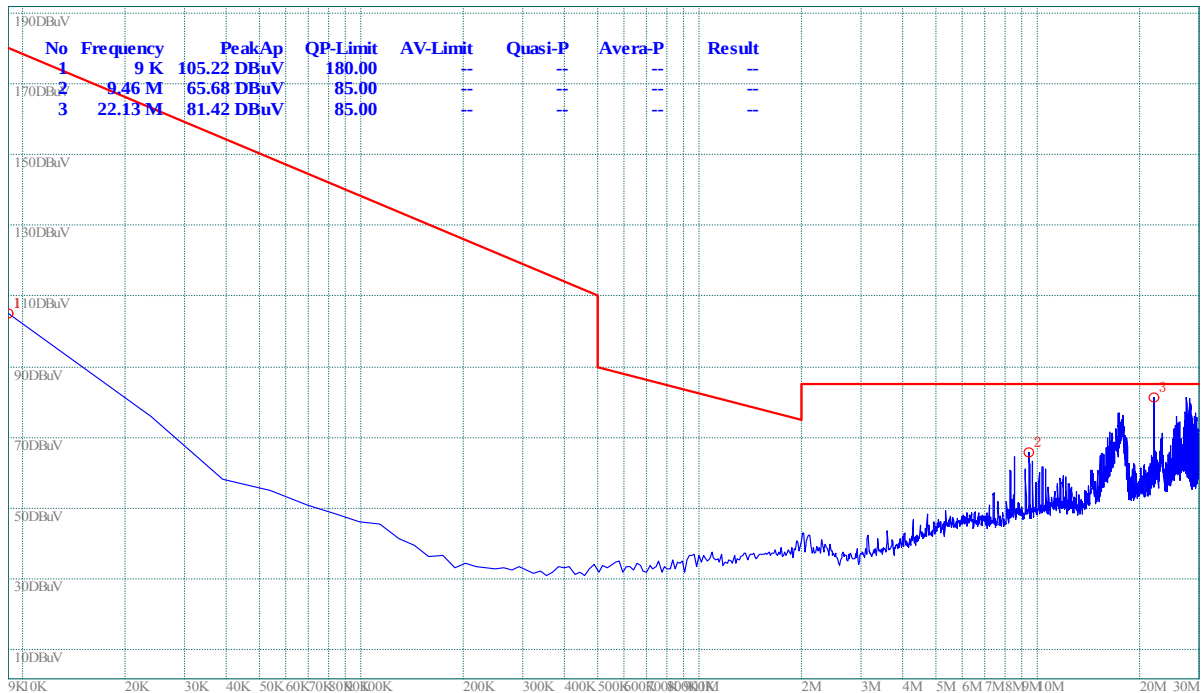

(Plot A.1: 9kHz to 30MHz)

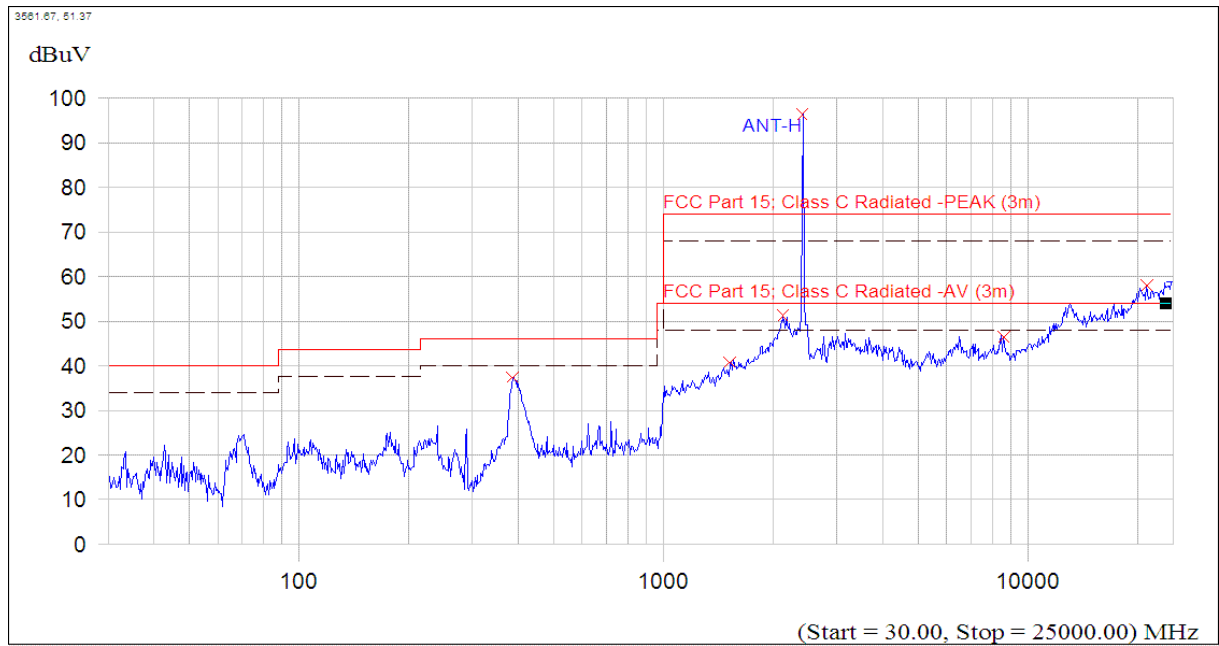


(Plot A.2: Antenna Horizontal, 30MHz to 25GHz)

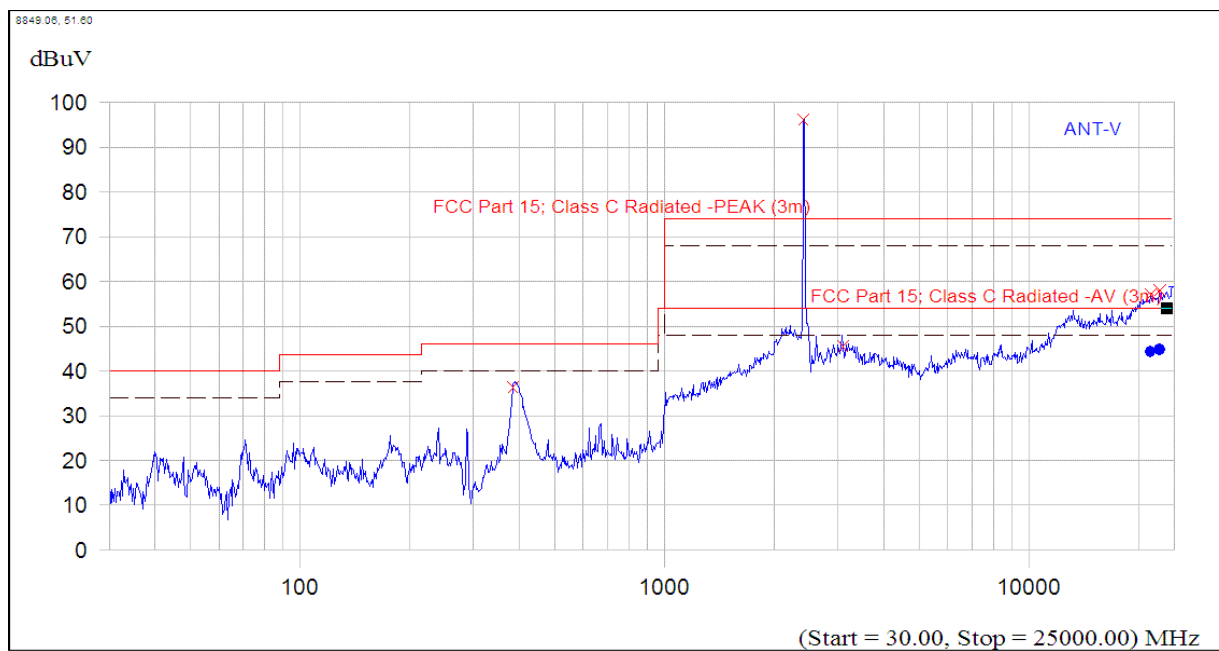


(Plot A.3: Antenna Vertical, 30MHz to 25GHz)


Plot for Channel = 6

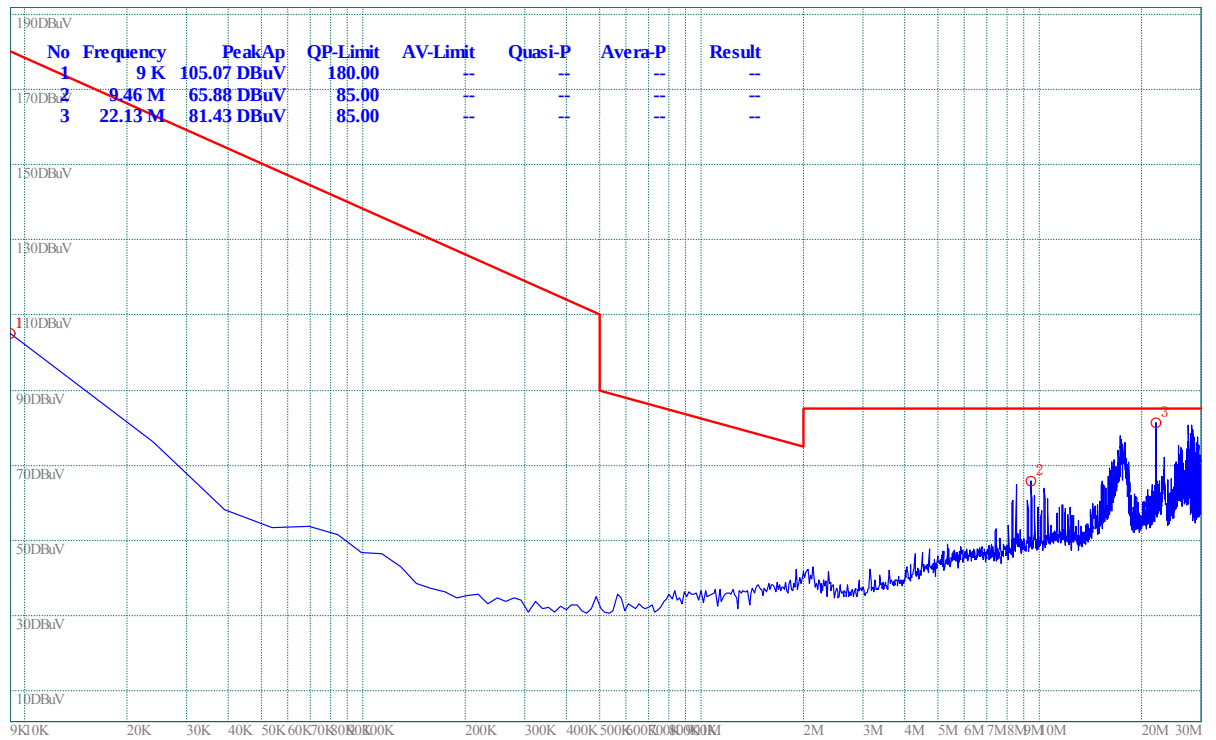

(Plot B.1: 9kHz to 30MHz)

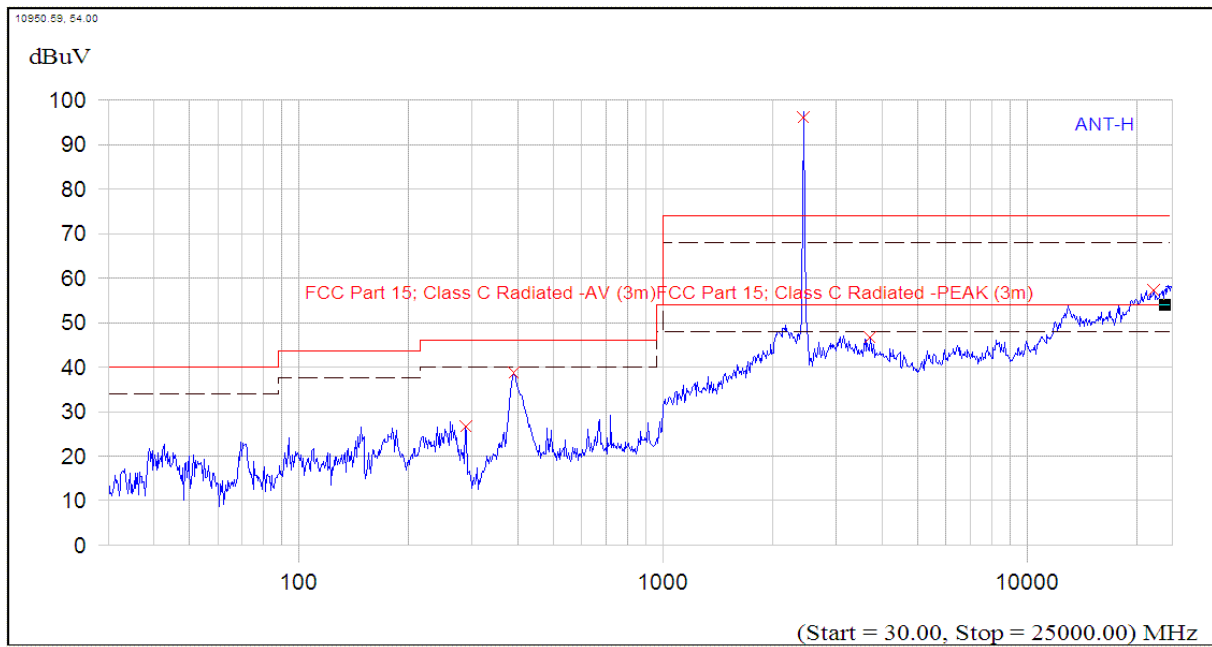


(Plot B.2: Antenna Horizontal, 30MHz to 25GHz)

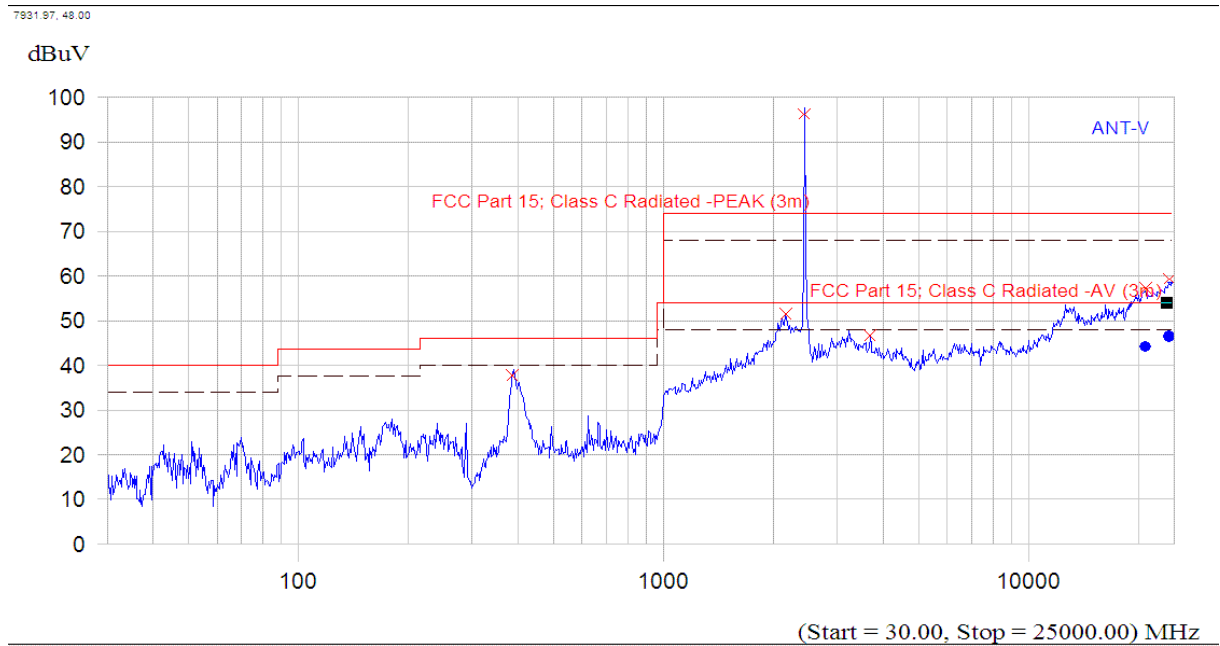


(Plot B.5: Antenna Vertical, 30MHz to 25GHz)


Plot for Channel = 11

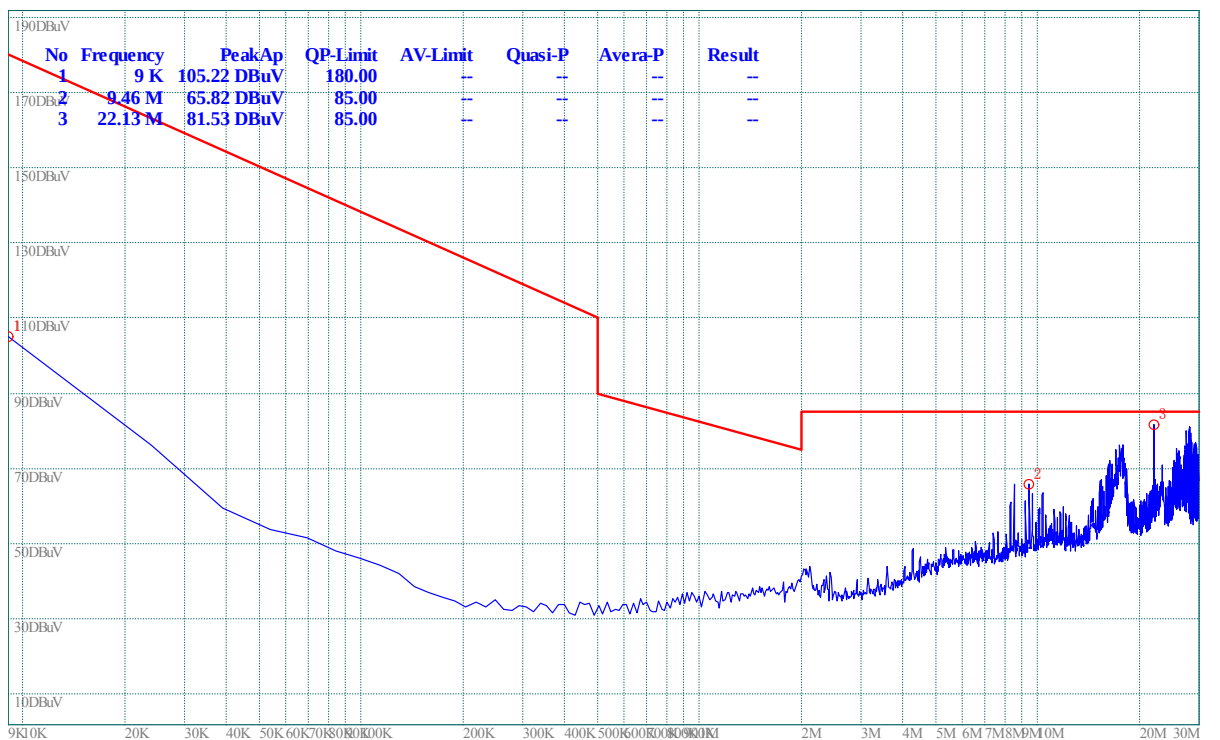

(Plot C.1: 9kHz to 30MHz)

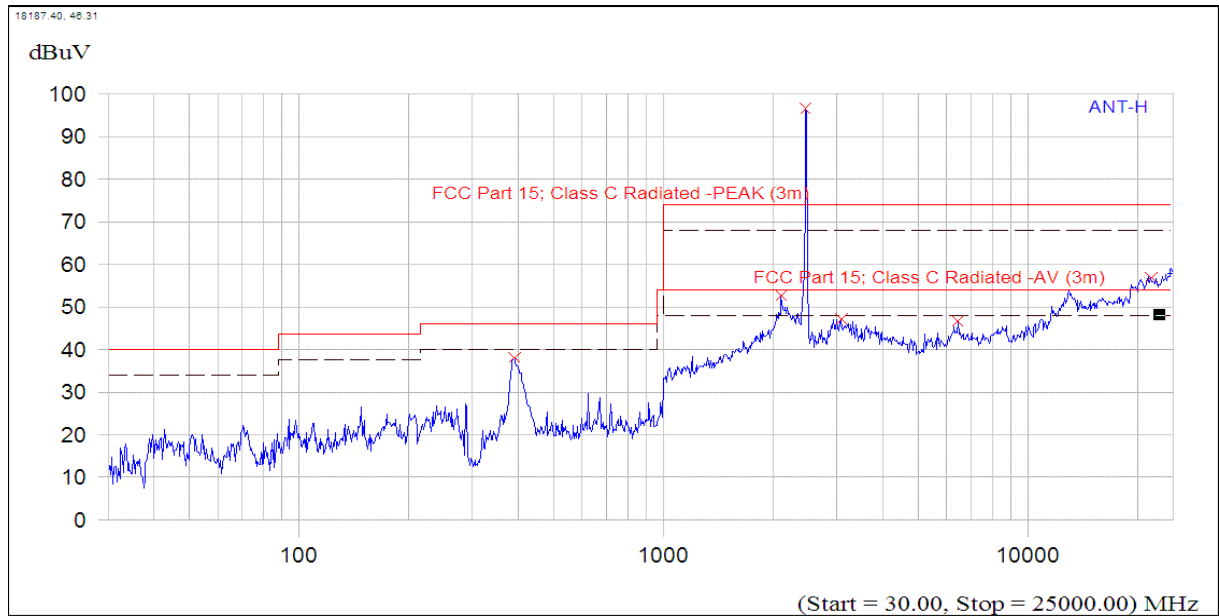

(Plot C.2: Antenna Horizontal, 30MHz to 25GHz)

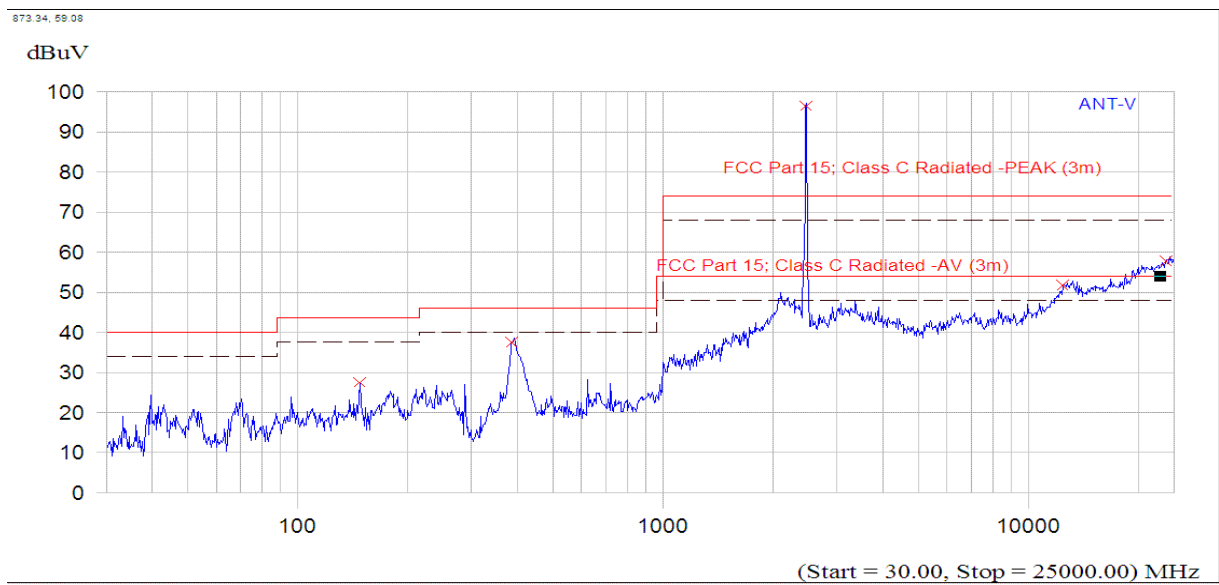

(Plot C.5: Antenna Vertical, 30MHz to 25GHz)

\*\* END OF REPORT \*\*