

**FCC PART 15 Subpart C**  
**EMI MEASUREMENT AND TEST REPORT**

For

**COBY MANUFACTURING CO., LTD**

Unit C-E, 8.F., Po Shau Centre, 115 How Ming Street, Kwun Tong  
Kowloon, Hongkong

**FCC ID: RMVCT-P7250B**

2004-01-30

<b>This Report Concerns:</b> <input checked="checked" type="checkbox"/> Original Report	<b>Equipment Type:</b> 2.4GHz & 5.8 GHz Cordless Phone – Base
<b>Test Engineer:</b> Benjamin Jin	
<b>Report No.:</b> R0401061(Base)	
<b>Test Date:</b> 2004-01-21	
<b>Reviewed By:</b> Ling Zhang	
<b>Prepared By:</b> Bay Area Compliance Laboratory Corporation 230 Commercial Street Sunnyvale, CA 94085 Tel (408) 732-9162 Fax (408) 732-9164	

**Note:** This test report is specially limited to the above client company and the product model only. It may not be duplicated without prior written consent of Bay Area Compliance Laboratory Corporation. This report **must not** be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

**TABLE OF CONTENTS**

<b>GENERAL INFORMATION.....</b>	<b>3</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	3
OBJECTIVE .....	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY .....	3
TEST FACILITY .....	3
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS .....	4
EXTERNAL I/O CABLING LIST AND DETAILS .....	4
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>5</b>
DESCRIPTION OF TEST CONFIGURATION .....	5
EQUIPMENT MODIFICATIONS .....	5
CONFIGURATION OF TEST SYSTEM .....	5
TEST SETUP BLOCK DIAGRAM.....	6
<b>SUMMARY OF TEST RESULTS .....</b>	<b>7</b>
<b>§ 15.207 - CONDUCTED EMISSIONS TEST DATA.....</b>	<b>8</b>
MEASUREMENT UNCERTAINTY .....	8
EUT SETUP.....	8
SPECTRUM ANALYZER SETUP.....	8
TEST EQUIPMENT LIST AND DETAILS.....	8
TEST PROCEDURE .....	8
ENVIRONMENTAL CONDITIONS .....	9
SUMMARY OF TEST RESULTS .....	9
CONDUCTED EMISSIONS TEST DATA .....	9
PLOT OF CONDUCTED EMISSIONS TEST DATA .....	9
<b>§15.209(A), §15.205 &amp; §15.249 - RADIATED EMISSION DATA .....</b>	<b>12</b>
MEASUREMENT UNCERTAINTY .....	12
EUT SETUP.....	12
SPECTRUM ANALYZER SETUP.....	12
TEST EQUIPMENT LIST AND DETAILS.....	12
ENVIRONMENTAL CONDITIONS .....	13
TEST PROCEDURE .....	13
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	13
SUMMARY OF TEST RESULTS .....	13
RADIATED EMISSIONS TEST RESULT DATA .....	14
<b>§15.249(C) - BAND EDGES TESTING.....</b>	<b>16</b>
STANDARD APPLICABLE .....	16
TEST PROCEDURE .....	16
TEST EQUIPMENT LIST AND DETAILS.....	16
ENVIRONMENTAL CONDITIONS .....	16
TEST RESULTS .....	16

---

## GENERAL INFORMATION

---

### Product Description for Equipment Under Test (EUT)

The *COBY MANUFACTURING CO., LTD*'s product, model name: CT-P7250 or the "EUT" as referred to in this report is the base unit of a 2.4GHz & 5.8GHz cordless telephone, which measures approximately 6.1"L x 5.6" W x 3.1"H.

The EUT utilized Bell South power adapter, M/N: U090015D12.

*\* The test data gathered are from production sample, serial number: 01A, provided by the manufacturer.*

### Objective

This document is a test report based on the Electromagnetic Interference (EMI) tests performed on the EUT. The EMI measurements were performed according to the measurement procedure described in ANSI C63.4 - 2001.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.205, 15.207, and 15.249, 15.203, 15.209 rules.

### Related Submittal(s)/Grant(s)

No Related Submittals

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.4 - 2001, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratory, Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

### Test Facility

The Open Area Test site used by Bay Area Compliance Laboratory Corporation to collect radiated and conducted emission measurement data is located in the back parking lot of the building at 230 Commercial Street, Sunnyvale, California, USA.

Test site at Bay Area Compliance Laboratory Corporation has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports has been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997 and Article 8 of the VCCI regulations on December 25, 1997. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2001.

The Federal Communications Commission and Voluntary Control Council for Interference has the reports on file and is listed under FCC file 31040/SIT 1300F2 and VCCI Registration No.: C-1298 and R-1234. The test site has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratory Corporation is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (NVLAP). The scope of the accreditation covers the FCC Method - 47 CFR Part 15 - Digital Devices, CISPR 22:1997 and AS/NZS 3548: Electromagnetic Interference - Limits and Methods of Measurement of Information Technology Equipment test methods under NVLAP Lab Code 200167-0.

### Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number	FCC ID
Southern Telecom	Telephone	None	None	None
Teltone Corp	Simulator	TLS-3B-01	80071	None

### External I/O Cabling List and Details

Cable Description	Length (M)	Port/From	To
None-Shielded RJ-11 Cable	1.8	RJ-11 Port/EUT	Simulator RJ11Port
Headset Cable	N/A	Headset /EUT	Base /EUT

## SYSTEM TEST CONFIGURATION

---

### Description of Test Configuration


The EUT was configured for testing according to ANSI C63.4-2001.

Base being tested: The Base unit was placed on the wooden table. The Low, middle, and high channels were tested. The base was connected to the line simulator and an AC adapter via its Tel Line and power ports, respectively. The base was transmitting and receiving from the Handset. The conducted as well as radiated data was taken in this mode of operation. All initial and final investigations were performed with the EMI receiver in manual mode scanning the frequency range continuously.


### Equipment Modifications

No modifications were made to the EUT.

### Configuration of Test System

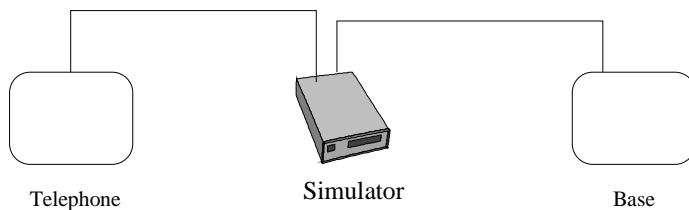

## Test Setup Block Diagram

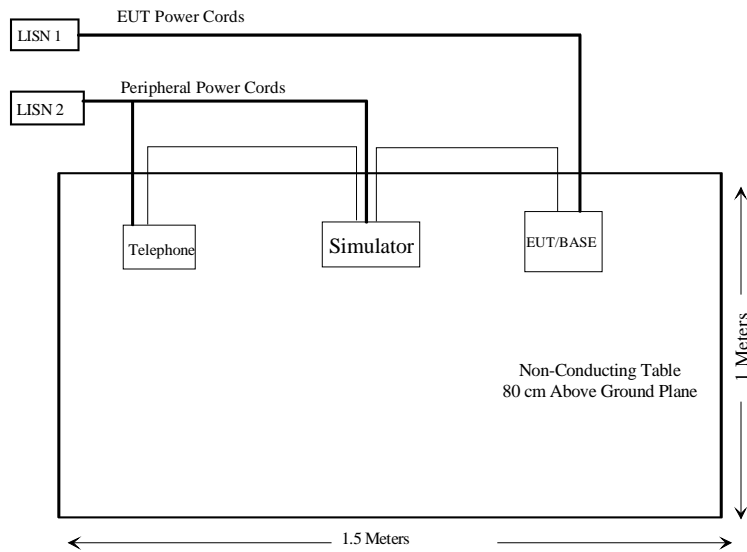

---

**SUMMARY OF TEST RESULTS**

---

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.207 (a)	Conducted Emission	Compliant
§15.209 (a)	Radiated Emission	Compliant
§15.249 (c)	Band Edge Testing	Compliant
§15.203	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§15.214	Cordless Telephone	Compliant

## § 15.207 - CONDUCTED EMISSIONS TEST DATA

### Measurement Uncertainty

All measurements involve certain levels of uncertainties. These uncertainties are attributed to: Spectrum analyzer, Cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the estimated uncertainty of any conducted emission measurement at BACL is  $\pm 2.4$  dB.

### EUT Setup

The measurement was performed in the shielded room, using the same setup per ANSI C63.4-2001 measurement procedure. The specification used was FCC 15 Subpart C limits.

The spacing between the peripherals was 10 centimeters.

External I/O cables were draped along the edge of the test table and bundle as required.

The EUT was connected with 120Vac/60Hz power source.

### Spectrum Analyzer Setup

The spectrum analyzer was set to investigate the spectrum from 150 kHz to 30Mhz.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Cal. Due Date
Rohde & Schwarz	Artificial LISN	ESH2-Z5	871884/039	2003-03-28
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2003-05-06

\* **Statement of Traceability:** BACL Corp. certifies that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

### Test Procedure

During the conducted emission test, the power cord of the host system was connected to the auxiliary outlet of the first LISN.

Maximizing procedure were performed on the six (6) highest emissions of the EUT.

All data was recorded in the peak detection mode, quasi-peak and average. Qusi-Peak readings are distinguished with an "QP". Average readings are distinguished with an "Ave".



## Environmental Conditions

Temperature:	13 ° C
Relative Humidity:	50%
ATM Pressure:	1027 mbar

## Summary of Test Results

According to the recorded data in following table, the EUT complies with the FCC Conducted limit for a Class B device, with the *worst* margin reading of:

-26.1 dB $\mu$ V at 0.225 MHz in the Neutral mode

## Conducted Emissions Test Data

LINE CONDUCTED EMISSIONS				FCC CLASS B	
Frequency MHz	Amplitude dB $\mu$ V	Detector Qp/Ave/Peak	Phase Line/Neutral	Limit dB $\mu$ V	Margin dB
0.225	26.9	AVG	Neutral	53	-26.1
17.300	19.9	AVG	Neutral	46	-26.1
17.300	19.6	AVG	Line	46	-26.4
0.225	27.5	QP	Neutral	63	-35.5
17.300	19.8	QP	Line	56	-36.2
17.300	19.7	QP	Neutral	56	-36.3
5.800	3.9	AVG	Line	46	-42.1
6.100	3.7	AVG	Neutral	46	-42.3
5.800	7.6	QP	Line	56	-48.4
6.100	6.3	QP	Neutral	56	-49.7
0.160	4.8	AVG	Line	55	-50.2
0.160	11.7	QP	Line	65	-53.3

## Plot of Conducted Emissions Test Data

Plot of Conducted Emissions test data was presented hereinafter as reference.

Bay Area Compliance Laboratory Corp  
Class B


22. Jan 04 13:07

EUT: P7250  
Manuf: Coby  
Op Cond: Normal  
Operator: Ming  
Comment: L

## Scan Settings (3 Ranges)

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
150k	1M	5k	9k	QP+AV	20ms	15dB LN	OFF
1M	5M	10k	9k	QP+AV	1ms	15dB LN	OFF
5M	30M	100k	9k	QP+AV	1ms	15dB LN	OFF

Final Measurement: x QP / + AV  
Meas Time: 1 s  
Subranges: 25  
Acc Margin: 6dB

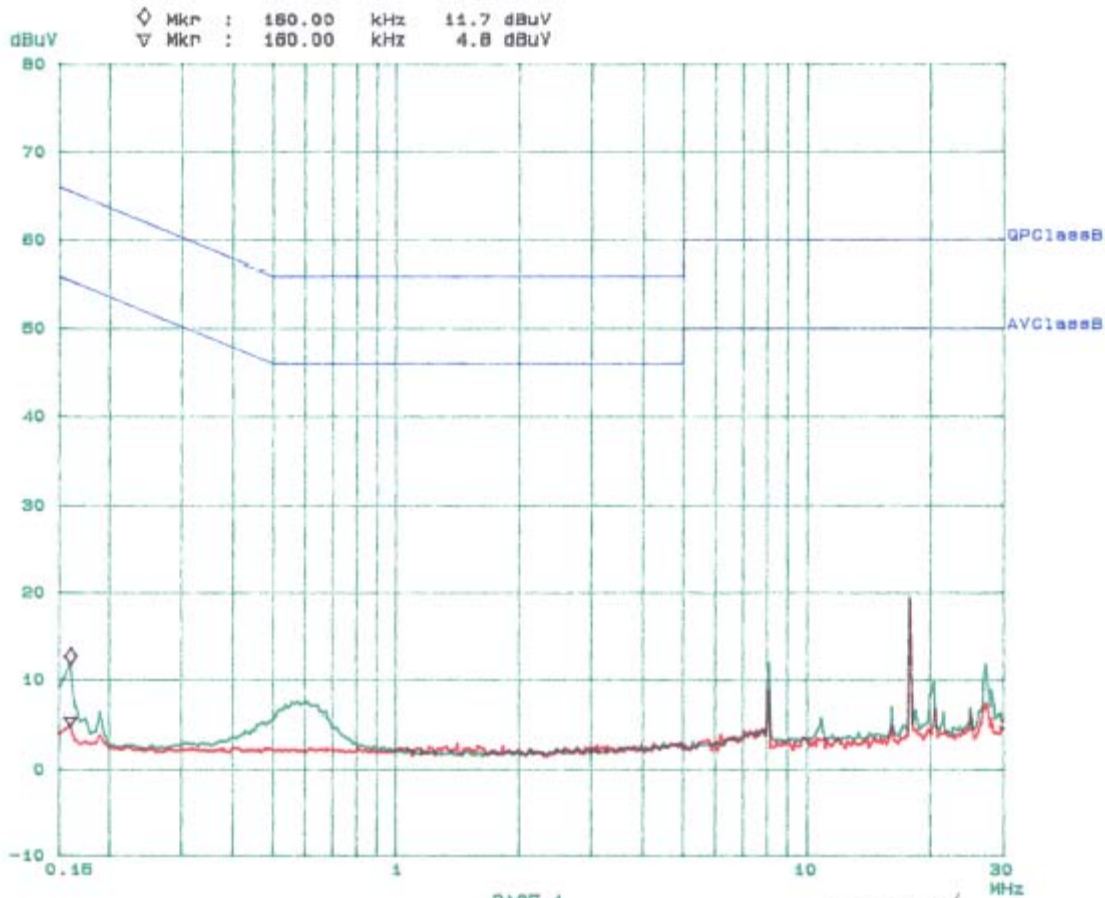

PAGE 1

Bay Area Compliance Laboratory Corp  
Class B


22. Jan 04 10:20

EUT: P7250  
Manuf: Coby  
Op Cond: Normal  
Operator: Ming  
Comment: N

## Scan Settings (3 Ranges)

Frequencies			Receiver Settings				
Start	Stop	Stop	IF BW	Detector	M-Time	Atten	Preamp
150k	1M	5k	9k	QP+AV	20ms	15dB LN	OFF
1M	5M	10k	9k	QP+AV	1ms	15dB LN	OFF
5M	30M	100k	9k	QP+AV	1ms	15dB LN	OFF

Final Measurement: x QP / + AV  
Meas Time: 1 s  
Subranges: 25  
Acc Margin: 6dB

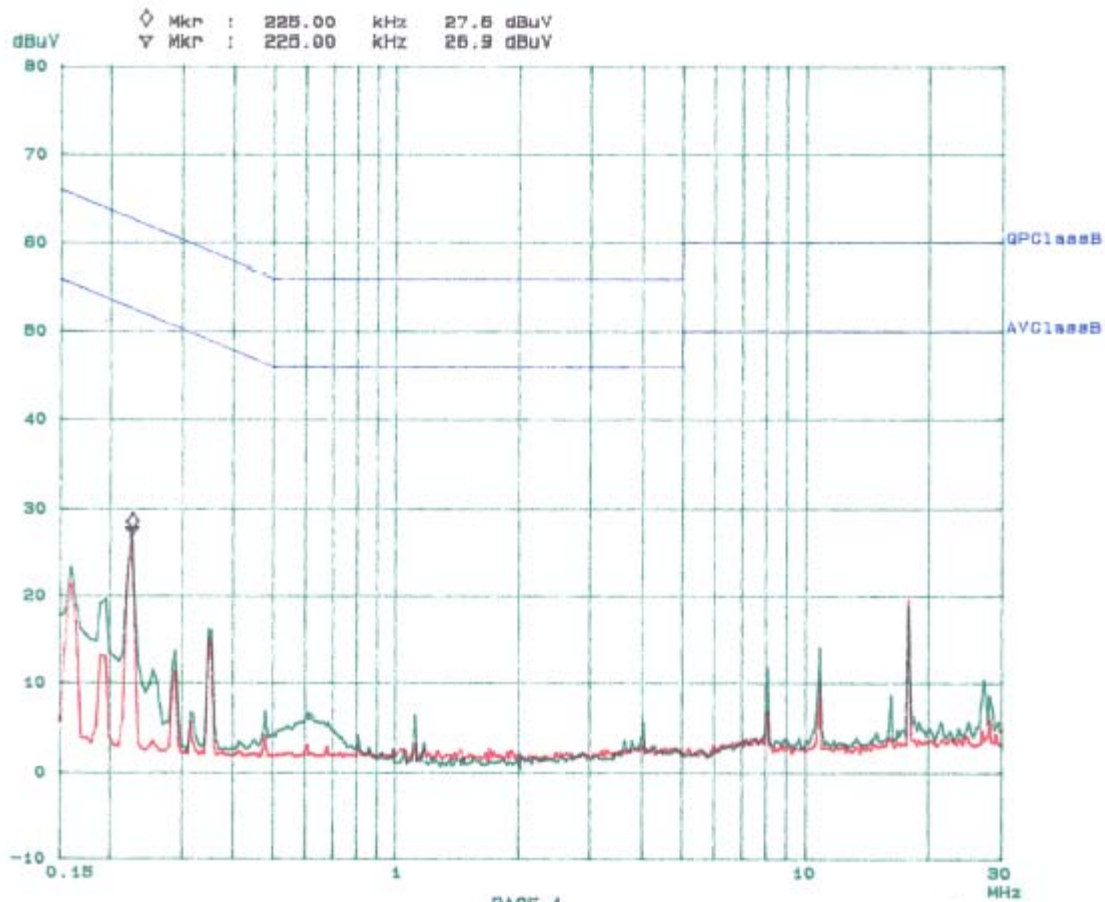

## **§15.209(a), §15.205 & §15.249 - RADIATED EMISSION DATA**

### **Measurement Uncertainty**

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at BACL is  $\pm 4.0$  dB.

### **EUT Setup**

The radiated emission tests were performed in the open area 3-meter test site, using the setup in accordance with ANSI C63.4-2001. The specification used was the FCC 15 Subpart C limits.

The spacing between the peripherals was 10 centimeters.

External I/O cables were draped along the edge of the test table and bundle as required.

The EUT was connected with 120Vac/60Hz power source.

### **Spectrum Analyzer Setup**

According to FCC Rules, 47 CFR 15.33 (a) (1), the system was tested to 40GHz.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

<i><b>Frequency Range</b></i>	<i><b>RBW</b></i>	<i><b>Video B/W</b></i>
Below 30MHz	10kHz	10kHz
30 – 1000MHz	100kHz	100kHz
Above 1000MHz	1MHz	1MHz

### **Test Equipment List and Details**

<b>Manufacturer</b>	<b>Description</b>	<b>Model</b>	<b>Serial Number</b>	<b>Cal. Date</b>
HP	Spectrum Analyzer	8568B	2601A02165	2003-06-13
HP	Spectrum Analyzer Display	85662A	3026A20081	2003-06-13
HP	Quasi-Peak Adapter	85650A	3019A05393	2003-09-30
Agilent	Amplifier	8447D	2944A10187	2003-09-23
Electro-Metrics	Biconical Antenna	EM-6912	585	2003-04-17
Electro-Metrics	Logperiodic Antenna	EM-6950	788	2003-04-15
HP	Spectrum Analyzer	8565EC	3946A00131	2003-06-30

**\* Statement of Traceability: BACL Corp.** certifies that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

## Environmental Conditions

Temperature:	13 ° C
Relative Humidity:	50%
ATM Pressure:	1027bar

## Test Procedure

For the radiated emissions test, the power cord of the host system and all support equipment were connected to the AC floor outlet.

Maximizing procedure was performed on the six (6) highest emissions to ensure EUT is compliant with all installation combinations.

All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dBμV of specification limits), and are distinguished with a "Qp" in the data table.

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "**Margin**" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dBμV means the emission is 7dBμV below the maximum limit for applicable limits. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Applicable Limit}$$

## Summary of Test Results

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209, and 15.249 after tested to 10<sup>th</sup> harmonics as required by FCC and had the worst margin of:

### Base, 30MHz - 40GHz, 3 Meters

- 3.3 dB at 1160.60MHz in the Vertical polarization at Low Frequency
- 3.4 dB at 1162.20 MHz in the Vertical polarization at Mid Frequency
- 3.6 dB at 1163.20 MHz in the Vertical polarization at High Frequency
- 8.9 dB at 821.50 MHz in the Horizontal polarization at Unintentional Emission

**Radiated Emissions Test Result Data****Base Unit, 30 MHz to 40GHz, 3 meters**

INDICATED			TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 Subpart C	
Frequency MHz	Ampl. dBμV/m	Comments	Angle Degree	Height Meter	Polar H/ V	Antenna dBμV/m	Cable DB	Amp. dB	Corr. Ampl. dBμV/m	Limit dBμV/m	Margin dB
Low Channel											
1160.60	59.6	TxLo /Ave	0	1.6	v	23.7	4.2	36.8	50.7	54	-3.3
1160.60	59.3	TxLo /Ave	90	1.2	h	23.7	4.2	36.8	50.4	54	-3.6
5803.02	79.4	Fund/Ave	180	1.5	v	34.1	5.4	33.0	85.9	94	-8.1
5803.02	79.3	Fund/Ave	15	1.2	h	34.1	5.4	33.0	85.8	94	-8.2
11606.04	32.9	Ave	210	1.5	v	35.1	5.6	34.5	39.1	54	-14.9
11606.04	32.7	Ave	200	1.5	h	35.1	5.6	34.5	38.9	54	-15.1
11606.04	45.4	Peak	210	1.5	v	35.1	5.6	34.5	51.6	74	-22.4
1160.60	60.4	TxLo /Peak	0	1.6	v	23.7	4.2	36.8	51.5	74	-22.5
11606.04	45.2	Peak	200	1.5	h	35.1	5.6	34.5	51.4	74	-22.6
1160.60	59.9	TxLo /Peak	90	1.2	h	23.7	4.2	36.8	51.0	74	-23.0
5803.02	80.7	Fund/Peak	180	1.5	v	34.1	5.4	33.0	87.2	114	-26.8
5803.02	80.5	Fund/Peak	15	1.2	h	34.1	5.4	33.0	87.0	114	-27.0
Mid Channel											
1162.20	59.5	TxLo /Ave	110	1.5	v	23.7	4.2	36.8	50.6	54	-3.4
1162.20	59.1	TxLo /Ave	200	1.5	h	23.7	4.2	36.8	50.2	54	-3.8
5811.02	79.2	Fund/Ave	0	1.8	v	34.1	5.4	33.0	85.7	94	-8.3
5811.02	79.0	Fund/Ave	270	1.8	h	34.1	5.4	33.0	85.5	94	-8.5
11622.04	32.8	Ave	15	1.6	v	35.1	5.6	34.5	39.0	54	-15.0
11622.04	32.6	Ave	200	1.3	h	35.1	5.6	34.5	38.8	54	-15.2
11622.04	45.3	Peak	15	1.6	v	35.1	5.6	34.5	51.5	74	-22.5
11622.04	45.1	Peak	200	1.3	h	35.1	5.6	34.5	51.3	74	-22.7
1162.20	60.2	TxLo /Peak	110	1.5	v	23.7	4.2	36.8	51.3	74	-22.7
1162.20	59.7	TxLo /Peak	200	1.5	h	23.7	4.2	36.8	50.8	74	-23.2
5811.02	80.5	Fund/Peak	0	1.8	v	34.1	5.4	33.0	87.0	114	-27.0
5811.02	80.4	Fund/Peak	270	1.8	h	34.1	5.4	33.0	86.9	114	-27.1

High Channel											
1163.20	59.3	TxLo /Ave	0	1.6	v	23.7	4.2	36.8	50.4	54	-3.6
1163.20	58.8	TxLo /Ave	90	1.0	h	23.7	4.2	36.8	49.9	54	-4.1
5816.02	79.1	Fund/Ave	310	1.5	v	34.1	5.4	33.0	85.6	94	-8.4
5816.02	78.8	Fund/Ave	15	1.2	h	34.1	5.4	33.0	85.3	94	-8.7
11632.04	32.6	Ave	210	1.5	v	35.1	5.6	34.5	38.8	54	-15.2
11632.04	32.4	Ave	200	1.5	h	35.1	5.6	34.5	38.6	54	-15.4
11632.04	45.1	Peak	210	1.5	v	35.1	5.6	34.5	51.3	74	-22.7
11632.04	44.9	Peak	200	1.5	h	35.1	5.6	34.5	51.1	74	-22.9
1163.20	60.0	TxLo /Peak	0	1.6	v	23.7	4.2	36.8	51.1	74	-22.9
1163.20	59.5	TxLo /Peak	90	1.0	h	23.7	4.2	36.8	50.6	74	-23.4
5816.02	80.3	Fund/Peak	310	1.5	v	34.1	5.4	33.0	86.8	114	-27.2
5816.02	80.1	Fund/Peak	15	1.2	h	34.1	5.4	33.0	86.6	114	-27.4
Unintentional Emission, 30MHz to 1000MHz											
821.50	39.7	RxLo	210	1.5	h	22.3	3.7	28.6	37.1	46	-8.9
821.50	36.8	RxLo	0	1.8	v	22.3	3.7	28.6	34.2	46	-11.8
195.45	33.7	/	0	1.5	v	14.2	2.1	28.5	21.5	43.5	-22.0
226.55	34.2	/	180	1.2	v	11.8	2.2	28.2	20.0	46	-26.0
210.10	30.5	/	110	1.6	h	11.9	2.2	28.2	16.4	43.5	-27.1
129.33	31.4	/	30	1.2	h	11.9	1.6	28.5	16.3	43.5	-27.2

Ave.: Average

Note: This test was performed by placing the handset on 3 orthogonal axis.

## §15.249(c) - BAND EDGES TESTING

### Standard Applicable

Requirements: FCC 15.249 (c), the emission power at the START and STOP frequencies shall be at least 50 dB below the level of the fundamental or to the general radiated emission limits in FCC 15.209, whichever is the lesser attenuation.

### Test Procedure

With the EUT's antenna attached, the EUT's radiated emission power was received by the test antenna which was connected to the spectrum analyzer with the START and STOP frequencies set to the EUT's operation band.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Cal. Date
HP	Spectrum Analyzer	8565EC	3946A00131	2003-06-30

\* **Statement of Traceability: BACL Corp.** certifies that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

### Environmental Conditions

Temperature:	13 ° C
Relative Humidity:	50%
ATM Pressure:	1027bar

### Test Results

Refer to the attached plots.



