



Report No.: 05032961
Model No.: WMC ER (Base)
Talk (2 Handsets) Mode


Tested By:Hong, Report No.:05032961

Scan Settings (1 Range)

Frequencies				Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement: x QP / + AV
Meas Time: 1 s
Subranges: 16
Acc Margin: 20dB

Transducer No.	Start	Stop	Name
21	9k	30M	EW0698

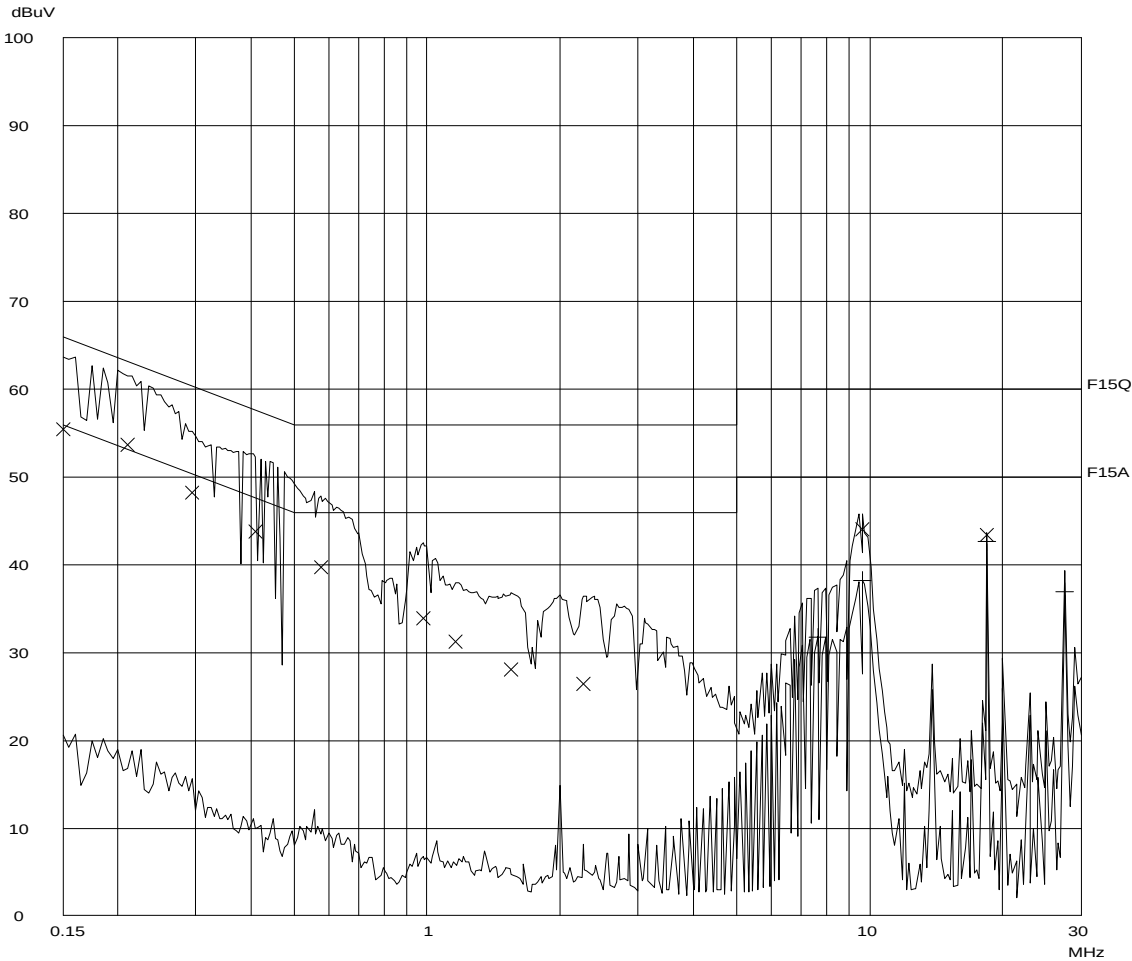

Report No.: 05032961
 Model No.: WMC ER (Base)
 Talk (2 Handsets) Mode

Tested By: Hong, Report No.: 05032961

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement Results:

Frequency	QP Level	QP Limit
MHz	dBuV	dBuV

0.15000	55.4	66.0
0.21000	53.6	63.2
0.29500	48.2	60.3
0.41000	43.8	57.7
0.57500	39.7	56.0
0.98000	33.9	56.0
1.16000	31.2	56.0
1.55000	28.0	56.0
2.26000	26.4	56.0
9.60500	44.0	60.0
18.43000	43.4	60.0

Frequency	AV Level	AV Limit
MHz	dBuV	dBuV

7.65500	31.7	50.0
9.61000	38.2	50.0
18.43000	42.6	50.0
27.65000	36.9	50.0

* limit



Report No.: 05032961
Model No.: WMC ER (Base)
Standby with PC Mode


Tested By:Hong, Report No.:05032961

Scan Settings (1 Range)

Frequencies -----				Receiver Settings -----				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement: x QP / + AV
Meas Time: 1 s
Subranges: 16
Acc Margin: 20dB

Transducer No.	Start	Stop	Name
21	9k	30M	EW0698

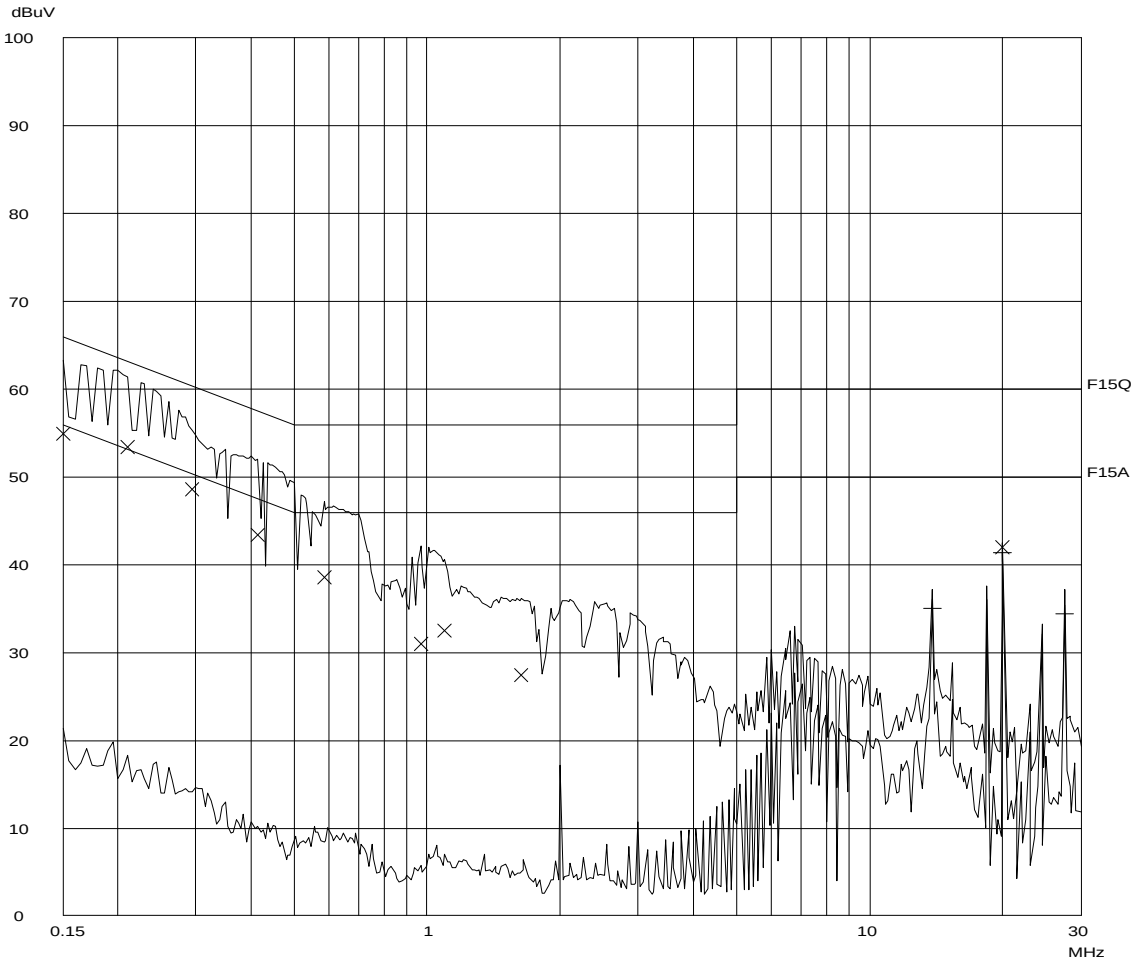

Report No.: 05032961
 Model No.: WMC ER (Base)
 Standby with PC Mode

Tested By: Hong, Report No.: 05032961

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement Results:

Frequency	QP Level	QP Limit
MHz	dBuV	dBuV

0.15000	55.0	66.0
0.21000	53.3	63.2
0.29500	48.6	60.3
0.41500	43.4	57.6
0.58500	38.5	56.0
0.97000	31.0	56.0
1.09500	32.5	56.0
1.63500	27.4	56.0
20.00000	42.0	60.0

Frequency	AV Level	AV Limit
MHz	dBuV	dBuV

13.82500	35.0	50.0
20.00000	41.4	50.0
27.65000	34.3	50.0

* limit



Report No.: 05032961
Model No.: WDE ER (Desktop)
Handset On line Mode
(External Music On Hold)

Tested By:Hong, Report No.:05032961

Scan Settings (1 Range)

----- Frequencies -----||----- Receiver Settings -----|

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement: x QP / + AV


Meas Time: 1 s

Subranges: 16

Acc Margin: 20dB

Transducer No. Start Stop Name

21 9k 30M EW0698

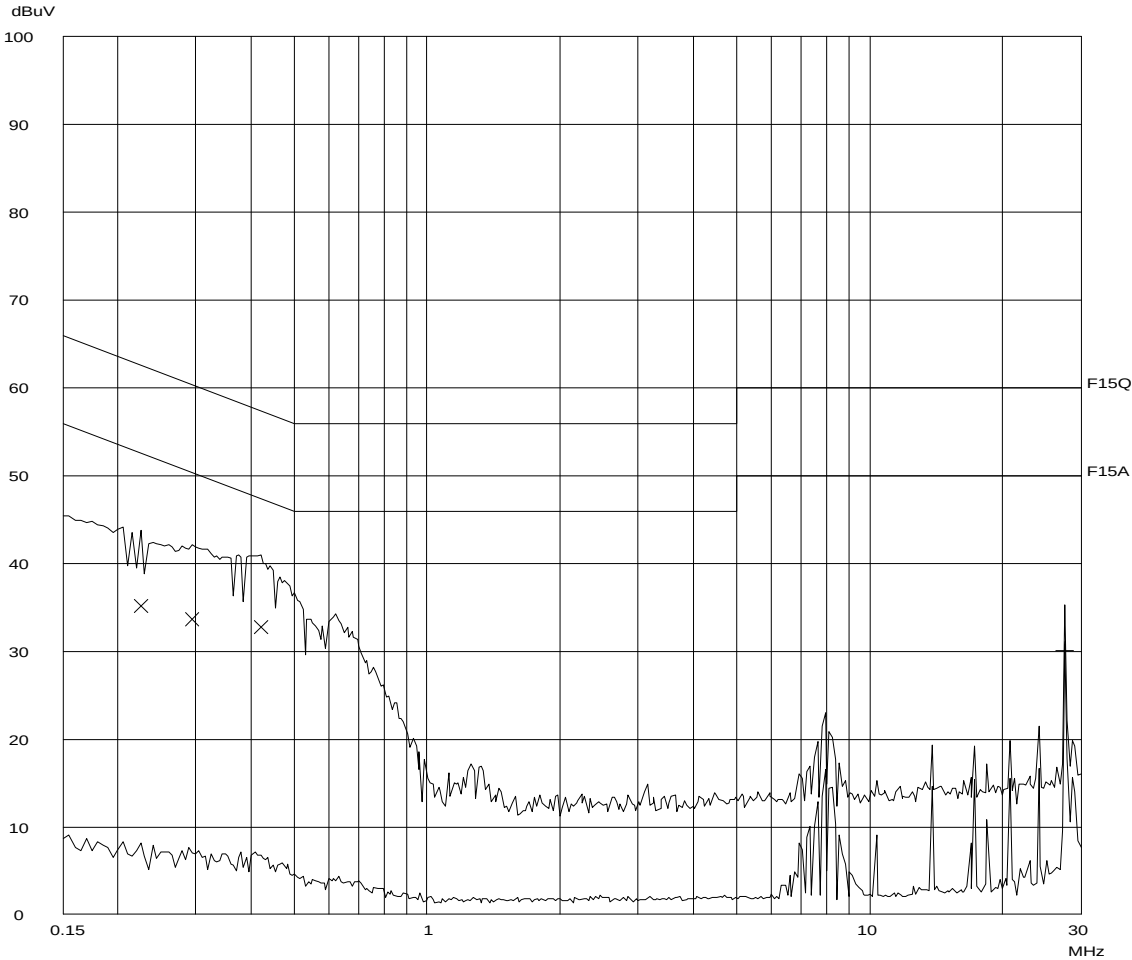

Report No.: 05032961
 Model No.: WDE ER (Desktop)
 Handset On line Mode
 (External Music On Hold)

Tested By: Hong, Report No.: 05032961

Scan Settings (1 Range)

----- Frequencies -----			----- Receiver Settings -----					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement Results:

Frequency	QP Level	QP Limit
MHz	dBuV	dBuV

0.22500	35.1	62.7
0.29500	33.7	60.3
0.42000	32.8	57.5

Frequency	AV Level	AV Limit
MHz	dBuV	dBuV

27.65000	30.1	50.0
----------	------	------

* limit