




FCC Radio Test Report


FCC ID: RWO-RZ060554

This report concerns: Original Grant

Project No. : 2502C217
Equipment : Gaming Controller
Brand Name : 
RAZER,
Test Model : RZ06-0554
Series Model : RZ06-0554XXXX-XXXX (X can be 0-9 or A-Z)
Applicant : Razer Inc.
Address : 9 Pasteur, Irvine, CA 92618, USA
Manufacturer : RAZER (ASIA-PACIFIC) PTE. LTD.
Address : Razer SEA HQ, 1 One-north Crescent, #02-01, Singapore 138538
Factory : RAZER TECHNOLOGY AND DEVELOPMENT (SHENZHEN) CO., LTD
Address : East Wing, 3rd Floor, Block 2, Phase 1 of Vision Shenzhen Business Park Keji South Road, Hi-Tech Industrial Park, Shenzhen 518057, China
Date of Receipt : Mar. 14, 2025
Date of Test : Mar. 17, 2025 ~ Apr. 17, 2025
Issued Date : Apr. 23, 2025
Report Version : R00
Test Sample : Sample No.: DG20250314188 for radiated and AC power line conducted emissions and radiated, DG20250314189 for others.
Standard(s) : FCC CFR Title 47, Part 15, Subpart C

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

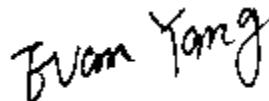Prepared by : 
Evan Yang

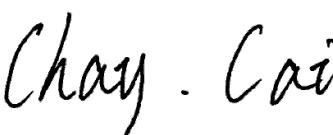Approved by : 
Chay Cai

Room 108-116, 309-310, Building 2, No.1, Yile Road, Songshan Lake Zone, Dongguan City, Guangdong, People's Republic of China.

Tel: +86-769-8318-3000 Web: www.newbtl.com Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacturer's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** assumes no responsibility for the data provided by the customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by **BTL**. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the ISO/IEC 17025: 2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REPORT ISSUED HISTORY	6
1 . APPLICABLE STANDARDS	7
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
2.3 TEST ENVIRONMENT CONDITIONS	9
3 . GENERAL INFORMATION	10
3.1 GENERAL DESCRIPTION OF EUT	10
3.2 DESCRIPTION OF TEST MODES	11
3.3 PARAMETERS OF TEST SOFTWARE	11
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	12
3.5 SUPPORT UNITS	12
3.6 CUSTOMER INFORMATION DESCRIPTION	13
4 . AC POWER LINE CONDUCTED EMISSIONS	14
4.1 LIMIT	14
4.2 TEST PROCEDURE	14
4.3 DEVIATION FROM TEST STANDARD	14
4.4 TEST SETUP	15
4.5 EUT OPERATING CONDITIONS	15
4.6 TEST RESULTS	15
5 . RADIATED EMISSIONS	16
5.1 LIMIT	16
5.2 TEST PROCEDURE	17
5.3 DEVIATION FROM TEST STANDARD	17
5.4 TEST SETUP	18
5.5 EUT OPERATING CONDITIONS	20
5.6 TEST RESULT - 9 KHZ TO 30 MHZ	20
5.7 TEST RESULT - 30 MHZ TO 1000 MHZ	20
5.8 TEST RESULT - ABOVE 1000 MHZ	20
6 . BANDWIDTH	21
6.1 LIMIT	21
6.2 TEST PROCEDURE	21

Table of Contents	Page
6.3 DEVIATION FROM STANDARD	21
6.4 TEST SETUP	21
6.5 EUT OPERATION CONDITIONS	21
6.6 TEST RESULTS	21
7 . MAXIMUM OUTPUT POWER	22
7.1 LIMIT	22
7.2 TEST PROCEDURE	22
7.3 DEVIATION FROM STANDARD	22
7.4 TEST SETUP	22
7.5 EUT OPERATION CONDITIONS	22
7.6 TEST RESULTS	22
8 . CONDUCTED SPURIOUS EMISSION	23
8.1 LIMIT	23
8.2 TEST PROCEDURE	23
8.3 DEVIATION FROM STANDARD	23
8.4 TEST SETUP	23
8.5 EUT OPERATION CONDITIONS	23
8.6 TEST RESULTS	23
9 . POWER SPECTRAL DENSITY	24
9.1 LIMIT	24
9.2 TEST PROCEDURE	24
9.3 DEVIATION FROM STANDARD	24
9.4 TEST SETUP	24
9.5 EUT OPERATION CONDITIONS	24
9.6 TEST RESULTS	24
10 . MEASUREMENT INSTRUMENTS LIST	25
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	27
APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ	30
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	35
APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ	38
APPENDIX E - BANDWIDTH	46
APPENDIX F - MAXIMUM OUTPUT POWER	48

Table of Contents	Page
APPENDIX G - CONDUCTED SPURIOUS EMISSION	50
APPENDIX H - POWER SPECTRAL DENSITY	52

REPORT ISSUED HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-1-2502C217	R00	Original Report.	Apr. 23, 2025	Valid

1. APPLICABLE STANDARDS

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

ANSI C63.10-2013

The following reference test guidance is not within the scope of accreditation of A2LA:

KDB 558074 D01 15.247 Meas Guidance v05r02

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart C				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.247(d) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.247(a)(2)	Bandwidth	APPENDIX E	PASS	-----
15.247(b)(3)	Maximum Output Power	APPENDIX F	PASS	-----
15.247(d)	Conducted Spurious Emission	APPENDIX G	PASS	-----
15.247(e)	Power Spectral Density	APPENDIX H	PASS	-----
15.203	Antenna Requirement	-----	PASS	Note(2)

Note:

(1) "N/A" denotes test is not applicable to this device.

(2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report:

For Radiated Emissions 30MHz to 1GHz and Above 18GHz Items: Room 102 & Room 702, Building 3, No.9, Jinshagang 1st Road, Dalang Town, Dongguan City, Guangdong People's Republic of China.

For Other Items: 1-2/F, 4/F, Building A, 1-2/F, Building B, 3/F, Building C, No.3, Jinshagang 1st Road, Dalang Town, Dongguan City, Guangdong People's Republic of China.

BTL's Registration Number for FCC: 747969

BTL's Designation Number for FCC: CN1377

2.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95.45% confidence level (based on a coverage factor (k=2))

The BTL measurement uncertainty as below table:

A. AC power line conducted emissions Measurement:

Test Site	Method	Measurement Frequency Range	$U_{\text{(dB)}}$
DG-C02	CISPR	150kHz ~ 30MHz	2.88

B. Radiated emissions Measurement:

Test Site	Method	Measurement Frequency Range	$U_{\text{(dB)}}$
DG-CB01	CISPR	9kHz ~ 30MHz	2.36

Test Site	Method	Measurement Frequency Range	Ant. H / V	$U_{\text{(dB)}}$
DG-CB17 (3m)	CISPR	30MHz ~ 200MHz	V	4.22
		30MHz ~ 200MHz	H	3.46
		200MHz ~ 1,000MHz	V	5.02
		200MHz ~ 1,000MHz	H	4.22

Test Site	Method	Measurement Frequency Range	$U_{\text{(dB)}}$
DG-CB03 (3m)	CISPR	1GHz ~ 6GHz	4.08
		6GHz ~ 18GHz	4.62

Test Site	Method	Measurement Frequency Range	$U_{\text{(dB)}}$
DG-CB18 (1m)	CISPR	18 ~ 26.5 GHz	3.56

C. Other Measurement:

Test Item	Uncertainty
Bandwidth	0.90 %
Maximum Output Power	1.3 dB
Conducted Spurious Emission	1.9 dB
Power Spectral Density	1.4 dB
Temperature	0.8 °C
Humidity	2.2 %

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

2.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By	Test Date
AC Power Line Conducted Emissions	23°C	55%	AC 120V/60Hz	Hayden Chen	Mar. 28, 2025
Radiated Emissions -9 kHz to 30 MHz	20°C	50%	DC 5V	Hayden Chen	Mar. 31, 2025
Radiated Emissions -30 MHz to 1000 MHz	24°C	51%	DC 5V	Chen Mo	Mar. 25, 2025
Radiated Emissions -Above 1000 MHz	23°C	42%	DC 5V	Jensen Zhou	Mar. 29, 2025
	23°C	50%	DC 5V	Allen Tong	Mar. 24, 2025
Bandwidth	23°C	53%	DC 5V	Steve Zhou	Mar. 29, 2025
	23°C	53%	DC 5V	Arvin Tong	Apr. 16, 2025
Maximum Output Power	23°C	53%	DC 5V	Steve Zhou	Mar. 29, 2025
	23°C	53%	DC 5V	Arvin Tong	Apr. 16, 2025
Conducted Spurious Emission	23°C	53%	DC 5V	Steve Zhou	Mar. 29, 2025
	23°C	53%	DC 5V	Arvin Tong	Apr. 16, 2025
Power Spectral Density	23°C	53%	DC 5V	Steve Zhou	Mar. 29, 2025
	23°C	53%	DC 5V	Arvin Tong	Apr. 16, 2025

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Gaming Controller
Brand Name	 RAZER,
Test Model	RZ06-0554
Series Model	RZ06-0554XXXX-XXXX (X can be 0-9 or A-Z)
Model Difference(s)	Only differ in model name.
Hardware Version	V1
Software Version	V1.00.02.00
Power Source	1# Supplied from Type-C port. 2# Battery Supply. Model: FT103049P
Power Rating	1# 5V 900mA 2# DC 3.8V, 2150mAh, 8.17Wh
Operation Frequency	2406 MHz ~ 2476 MHz
Modulation Type	GFSK
Bit Rate of Transmitter	4Mbps
Max. Output Power	11.63 dBm (0.0146 W)

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. The system model number is RZ06-0554XXXX-XXXX. This system consists of Gaming Controller (Model: RZ06-0554) and Wireless Dongle (Model: RC30-0554), X can be 0-9 or A-Z.
3. Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2406	17	2446
01	2408	18	2448
02	2410	19	2450
03	2412	20	2452
04	2414	21	2454
05	2416	22	2456
06	2418	23	2458
07	2420	24	2460
08	2422	25	2462
09	2430	26	2464
10	2432	27	2466
11	2434	28	2468
12	2436	29	2470
13	2438	30	2472
14	2440	31	2474
15	2442	32	2476
16	2444		

4. Table for Filed Antenna:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	RAZER	RZ06-0554	PCB	N/A	2.86

3.2 DESCRIPTION OF TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX Mode_4Mbps Channel 00/14/32
Mode 2	TX Mode_4Mbps Channel 00

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode	Description
Mode 2	TX Mode_4Mbps Channel 00

Radiated emissions test - Below 1GHz & Above 18GHz	
Final Test Mode	Description
Mode 2	TX Mode_4Mbps Channel 00

Radiated emissions test - 1GHz - 18GHz	
Final Test Mode	Description
Mode 1	TX Mode_4Mbps Channel 00/14/32

Conducted test	
Final Test Mode	Description
Mode 1	TX Mode_4Mbps Channel 00/14/32

Note:


- (1) For radiated emission above 1 GHz test, the spurious points of 1GHz~26.5GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.
- (2) For AC power line conducted emissions and radiated emissions below 1 GHz test, the 4Mbps Channel 00 is found to be the worst case and recorded.
- (3) For radiated emission Harmonic 18-26.5GHz test, only tested the worst case and recorded.
- (4) For radiated emissions 1-18GHz test, the polarization of Vertical and Horizontal are evaluated, the worst case is Horizontal and recorded.

3.3 PARAMETERS OF TEST SOFTWARE

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

Test Software Version	AB157x_Airoha_Tool_Kit(ATK)_v5.5.0.101		
Frequency (MHz)	2406	2440	2476
4Mbps	60	60	60

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

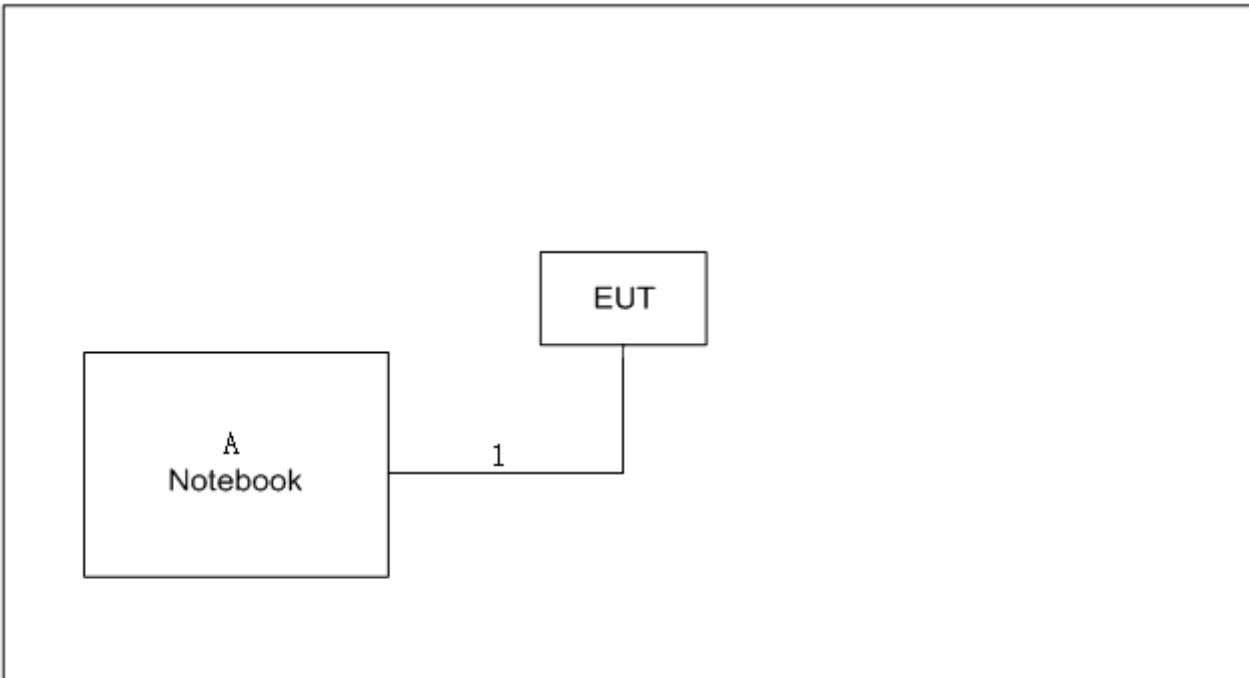

3.5 SUPPORT UNITS

Radiated emissions above 1GHz

Item	Equipment	Brand	Model No.	Series No.
A	Notebook	HUAWEI	WFH9	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	USB Cable	NO	NO	1.5m

AC power line conducted emissions & Radiated emissions 30MHz to 1GHz

Item	Equipment	Brand	Model No.	Series No.
A	Notebook	Lenovo	Pro 13	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	USB Cable	NO	NO	1.5m

Radiated emissions below 30MHz

Item	Equipment	Brand	Model No.	Series No.
A	Notebook	Honor	14SER5 3500	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	USB Cable	NO	NO	1.5m

3.6 CUSTOMER INFORMATION DESCRIPTION

- 1) The antenna gain is provided by the manufacturer.
- 2) Except for AC power line conducted emissions and radiated emissions, the results of all test items include cable losses. Part of the cable losses (0.5dB) are provided by the manufacturer, while the other parts of the cable losses are provided by the testing laboratory.

4. AC POWER LINE CONDUCTED EMISSIONS

4.1 LIMIT

Frequency of Emission (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor (if use)
Margin Level = Measurement Value – Limit Value

4.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.


The following table is the setting of the receiver:

Receiver Parameters	Setting
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.3 DEVIATION FROM TEST STANDARD

No deviation.

4.4 TEST SETUP

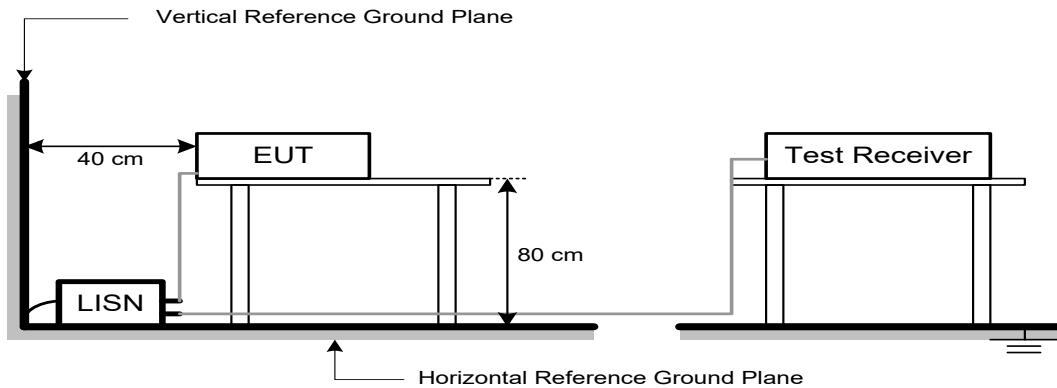

4.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

4.6 TEST RESULTS

Please refer to the APPENDIX A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』 . If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ * ” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150 kHz to 30 MHz.

5. RADIATED EMISSIONS

5.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000 MHz)

Frequency (MHz)	Band edge/ Harmonic at 3m (dB μ V/m)		Harmonic at 1m (dB μ V/m)	
	Peak	Average	Peak	Average
Above 1000	74	54	83.5 (Note 5)	63.5 (Note 5)

Note:

(1) The limit for radiated test was performed according to FCC CFR Title 47, Part 15, Subpart C.

(2) The tighter limit applies at the band edges.

(3) Emission level (dB μ V/m)=20log Emission level (uV/m).

(4) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)

Margin Level = Measurement Value - Limit Value

(5)

$$FS_{\text{limit}} = FS_{\text{max}} - 20\log\left(\frac{d_{\text{limit}}}{d_{\text{measure}}}\right)$$

20log (d_{limit}/d_{measure})=20log (3/1)=9.5 dB.

FS_{limit}: Harmonic at 3m Peak and Average limit.

FS_{max}: Harmonic at 1m Peak and Average Maximum value.

d_{limit}: Harmonic at 3m test distance.

d_{measure}: Harmonic Actual test distance.

5.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
- b. The measuring distance of 3 m or 1 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

The following table is the setting of the receiver:

Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~150 kHz for RBW 200 Hz
Start ~ Stop Frequency	0.15 MHz~30 MHz for RBW 9 kHz
Start ~ Stop Frequency	30 MHz~1000 MHz for RBW 100 kHz

Spectrum Parameters	Setting
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for PK value 1 MHz / 1/T Hz for AVG value


Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector
Start ~ Stop Frequency	1 GHz~26.5 GHz for PK/AVG detector

5.3 DEVIATION FROM TEST STANDARD


No deviation.

5.4 TEST SETUP


9 kHz to 30 MHz

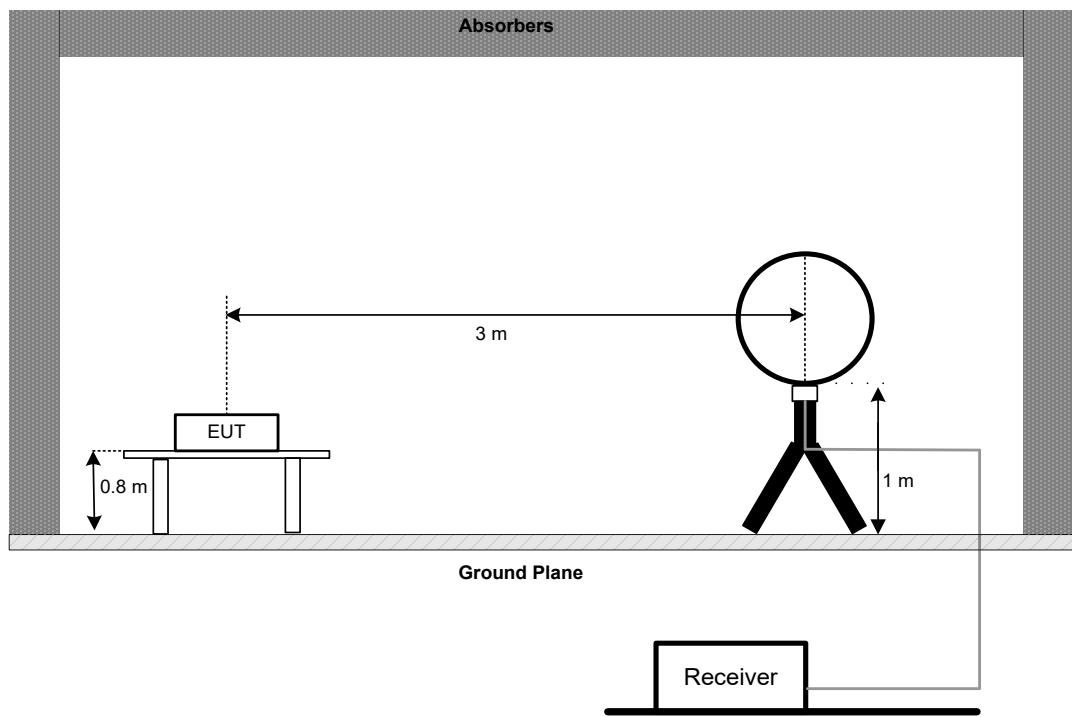


30 MHz to 1 GHz

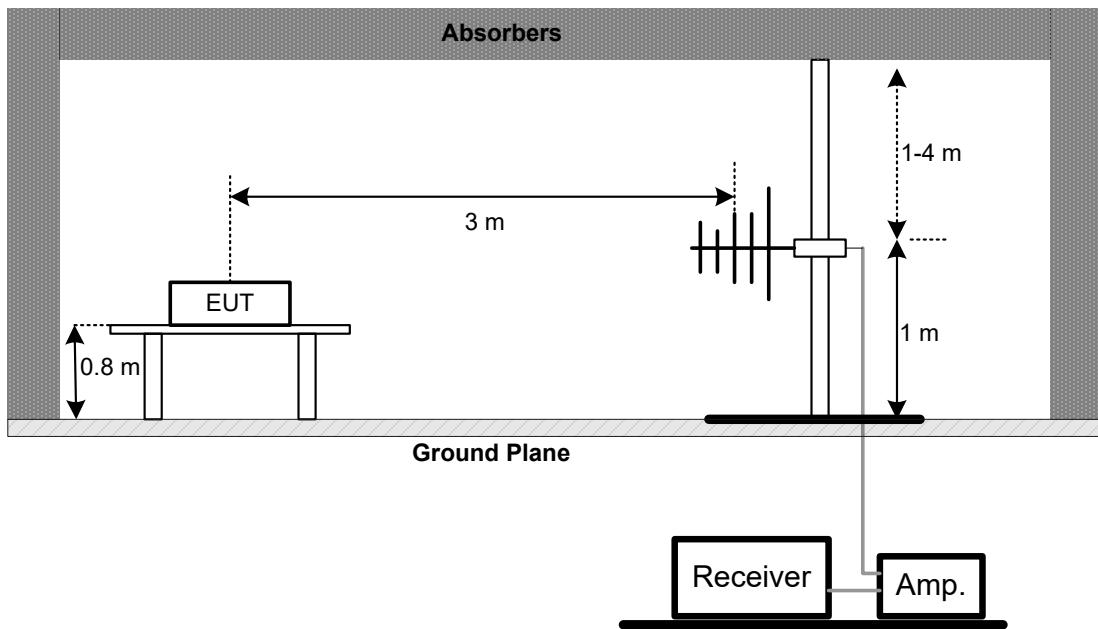

Above 1 GHz
Band edge & Harmonic(1 GHz to 18 GHz)

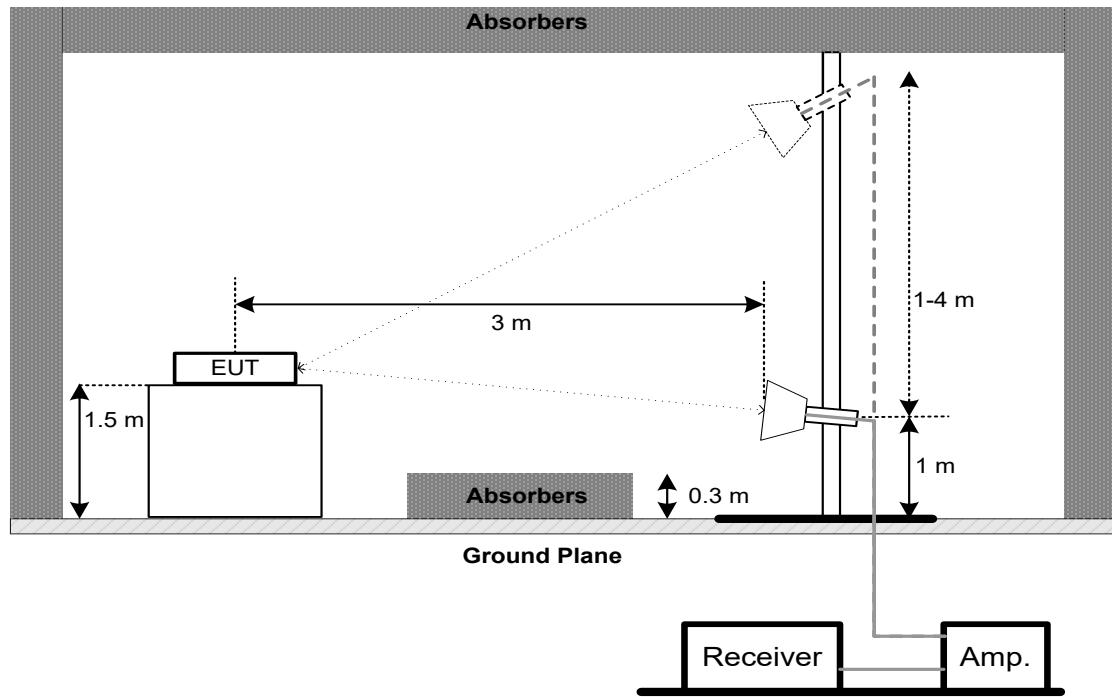

Harmonic(18 GHz to 26.5 GHz)

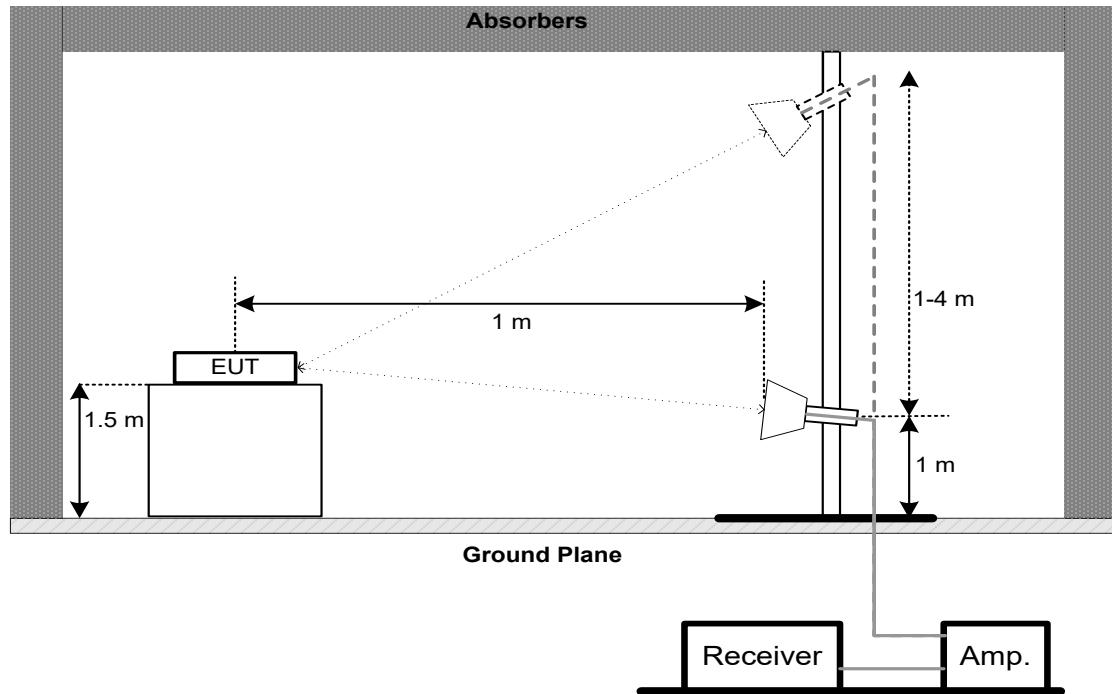

5.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULT - 9 kHz TO 30 MHz

Please refer to the APPENDIX B.

Remark:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

5.7 TEST RESULT - 30 MHz TO 1000 MHz

Please refer to the APPENDIX C.

5.8 TEST RESULT - ABOVE 1000 MHz

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

6. BANDWIDTH

6.1 LIMIT

Section	Test Item	Limit
FCC 15.247(a)(2)	6 dB Bandwidth	>= 500 kHz
	99% Emission Bandwidth	-

6.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

For 6 dB Bandwidth:

Spectrum Parameters	Setting
Span	> Measurement Bandwidth
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For 99% Emission Bandwidth:

Spectrum Parameters	Setting
Span	Between 1.5 times and 5.0 times the OBW
RBW	30 kHz
VBW	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULTS

Please refer to the APPENDIX E.

7. MAXIMUM OUTPUT POWER

7.1 LIMIT

Section	Test Item	Limit
FCC 15.247(b)(3)	Maximum Output Power	1.0000 watt or 30.00 dBm

7.2 TEST PROCEDURE


- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Span	$\geq 3 \times \text{RBW}$
RBW	3 MHz
VBW	3 MHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

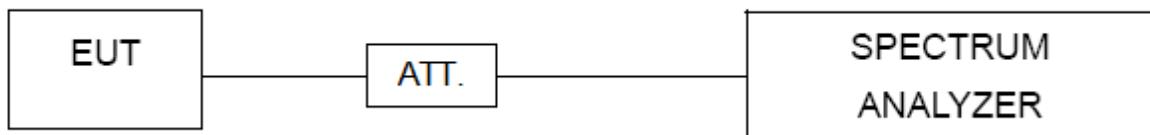

7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULTS

Please refer to the APPENDIX F.

8. CONDUCTED SPURIOUS EMISSION

8.1 LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak Output Power limits. If the transmitter complies with the Output Power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required.

8.2 TEST PROCEDURE


- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Start Frequency	30 MHz
Stop Frequency	26.5 GHz
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP

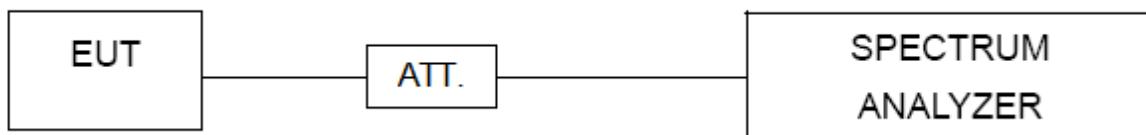

8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.6 TEST RESULTS

Please refer to the APPENDIX G.

9. POWER SPECTRAL DENSITY

9.1 LIMIT

Section	Test Item	Limit
FCC 15.247(e)	Power Spectral Density	8 dBm (in any 3 kHz)

9.2 TEST PROCEDURE


- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Span	8 MHz
RBW	3 kHz
VBW	10 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP

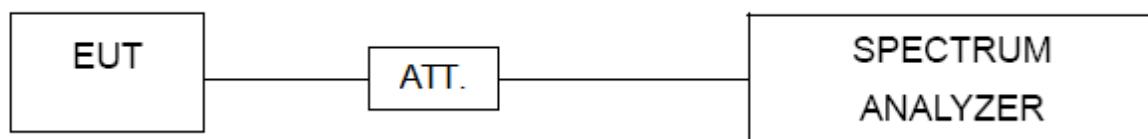

9.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

9.6 TEST RESULTS

Please refer to the APPENDIX H.

10. MEASUREMENT INSTRUMENTS LIST

AC Power Line Conducted Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI TEST RECEIVER	R&S	ESCI	100382	Dec. 06, 2025
2	TWO-LINE V-NETWORK	R&S	ENV216	101447	Dec. 06, 2025
3	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
4	Cable	N/A	SFT205-NMNM-9M -001	9M	Nov. 11, 2025
5	643 Shield Room	ETS	6*4*3	N/A	N/A

Radiated Emissions - 9 kHz to 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Active Loop Antenna	Schwarzbeck	FMZB 1513-60B	0034	Mar. 30, 2025
2	MXE EMI Receiver	Keysight	N9038A	MY56400091	Dec. 06, 2025
3	Cable	N/A	RW4950-3.8A-NMS M-1.5	N/A	Nov. 12, 2025
4	Cable	N/A	LMR400-NMNM-8 M	N/A	Nov. 12, 2025
5	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
6	966 Chamber room	ETS	9*6*6	N/A	May 16, 2025

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	1587	Apr. 25, 2025
2	Attenuator	EMC INSTRUMENT	EMCI-N-6-06	AT-06010	Apr. 25, 2025
3	Preamplifier	EMC INSTRUMENT	EMC001330	980865	Oct. 29, 2025
4	Cable	RegalWay	LMR400-NMNM-2. 5m	N/A	Jan. 07, 2026
5	Cable	RegalWay	LMR400-NMNM-7 m	N/A	Jan. 07, 2026
6	Cable	RegalWay	LMR400-NMNM-3 m	N/A	Jan. 07, 2026
7	Receiver	Agilent	N9038A	MY52130039	Jan. 10, 2026
8	Multi-Device Controller	ETS-Lindgren	N/A	N/A	N/A
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
10	966 Chamber room	ETS	9*6*6	N/A	Jan. 02, 2026

Radiated Emissions - Above 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Receiver	Agilent	N9038A	MY52130039	Jan. 10, 2026
2	Preamplifier	EMC INSTRUMENT	EMC118A45SE	980888	Oct. 29, 2025
3	EXA Spectrum Analyzer	Keysight	N9010A	MY55150209	Aug. 20, 2025
4	Double Ridged Guide Antenna	ETS	3115	75846	Mar. 02, 2026
5	Cable	RegalWay	RWLP50-4.0A-SMS M-12.5M	N/A	Jul. 03, 2025
6	Cable	RegalWay	RWLP50-4.0A-NM RASM-2.5M	N/A	Jul. 03, 2025
7	Cable	RegalWay	RWLP50-4.0A-NM RASMRA-0.8M	N/A	Jul. 03, 2025
8	966 Chamber room	CM	9*6*6	N/A	Dec. 28, 2025
9	Attenuator	Talent Microwave	TA10A2-S-18	N/A	N/A
10	Filter	STI	STI15-9912	N/A	May 31, 2025
11	Positioning Controller	MF	MF-7802	N/A	N/A
12	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emissions - Above 18 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Multi-Device Controller	ETS-Lindgren	N/A	N/A	N/A
2	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
3	MXA Signal Analyzer	KEYSIGHT	N9020B	MY63430227	Oct. 29, 2025
4	966 Chamber room	ETS	RFD-100 (SVSWR)	Q2179	Jan. 07, 2026
5	Cable	RegalWay	RWLP50-2.6A-2.92 M2.92M-2M	N/A	Jan. 07, 2026
6	Cable	RegalWay	RWLP50-2.6A-3.5 M2.92MMRA-6M	N/A	Jan. 07, 2026
7	Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	1227	Oct. 20, 2025
8	Preamplifier	EMC INSTRUMENT	EMC184045SE	980905	Oct. 29, 2025


Bandwidth & Maximum Output Power & Power Spectral Density & Conducted Spurious Emission					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP38	100852	May 31, 2025
2	Measurement Software	BTL	BTL Conducted Test	N/A	N/A
3	Isolation attenuator	Z-Link	ASMA-16-18-2W	N/A	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Mode	TX Mode_4Mbps Channel 00	Phase	Line
-----------	--------------------------	-------	------

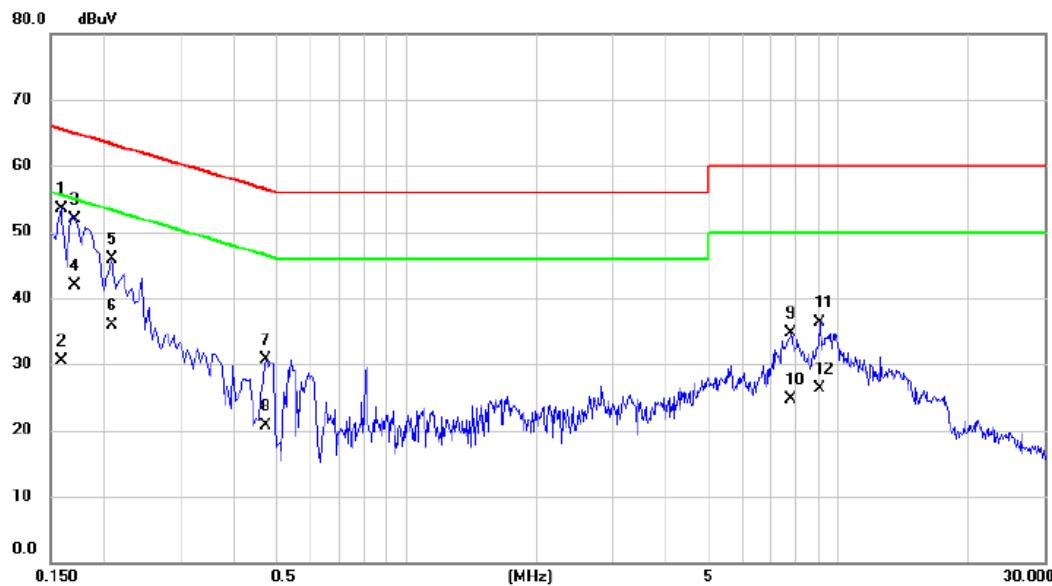


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
1	*	0.1590	43.89	9.68	53.57	65.52	-11.95	QP	
2		0.1590	20.90	9.68	30.58	55.52	-24.94	AVG	
3		0.1712	42.23	9.67	51.90	64.90	-13.00	QP	
4		0.1712	32.20	9.67	41.87	54.90	-13.03	AVG	
5		0.2085	36.25	9.67	45.92	63.26	-17.34	QP	
6		0.2085	26.20	9.67	35.87	53.26	-17.39	AVG	
7		0.4740	21.03	9.70	30.73	56.44	-25.71	QP	
8		0.4740	11.00	9.70	20.70	46.44	-25.74	AVG	
9		7.7775	24.60	10.01	34.61	60.00	-25.39	QP	
10		7.7775	14.60	10.01	24.61	50.00	-25.39	AVG	
11		9.0285	26.26	10.04	36.30	60.00	-23.70	QP	
12		9.0285	16.20	10.04	26.24	50.00	-23.76	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_4Mbps Channel 00	Phase	Neutral
-----------	--------------------------	-------	---------

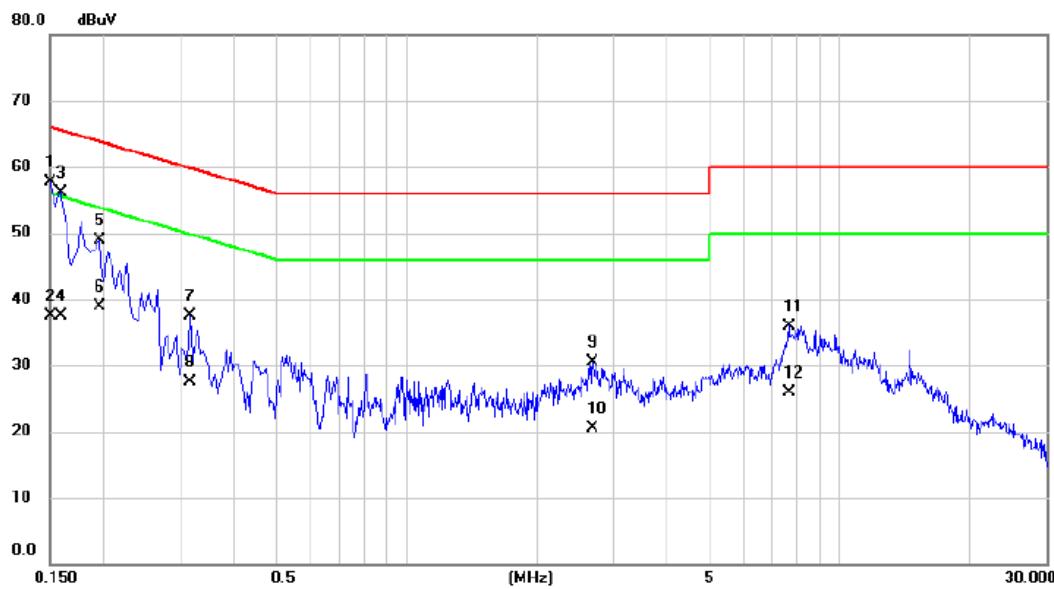


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
1	*	0.1500	48.02	9.68	57.70	66.00	-8.30	QP	
2		0.1500	27.80	9.68	37.48	56.00	-18.52	AVG	
3		0.1590	46.51	9.69	56.20	65.52	-9.32	QP	
4		0.1590	27.90	9.69	37.59	55.52	-17.93	AVG	
5		0.1950	39.23	9.69	48.92	63.82	-14.90	QP	
6		0.1950	29.20	9.69	38.89	53.82	-14.93	AVG	
7		0.3165	27.85	9.67	37.52	59.80	-22.28	QP	
8		0.3165	17.80	9.67	27.47	49.80	-22.33	AVG	
9		2.6835	20.64	9.86	30.50	56.00	-25.50	QP	
10		2.6835	10.60	9.86	20.46	46.00	-25.54	AVG	
11		7.6245	25.98	10.02	36.00	60.00	-24.00	QP	
12		7.6245	15.90	10.02	25.92	50.00	-24.08	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ

Test Mode	TX Mode_4Mbps Channel 00	Polarization	Ant 0°
-----------	--------------------------	--------------	--------

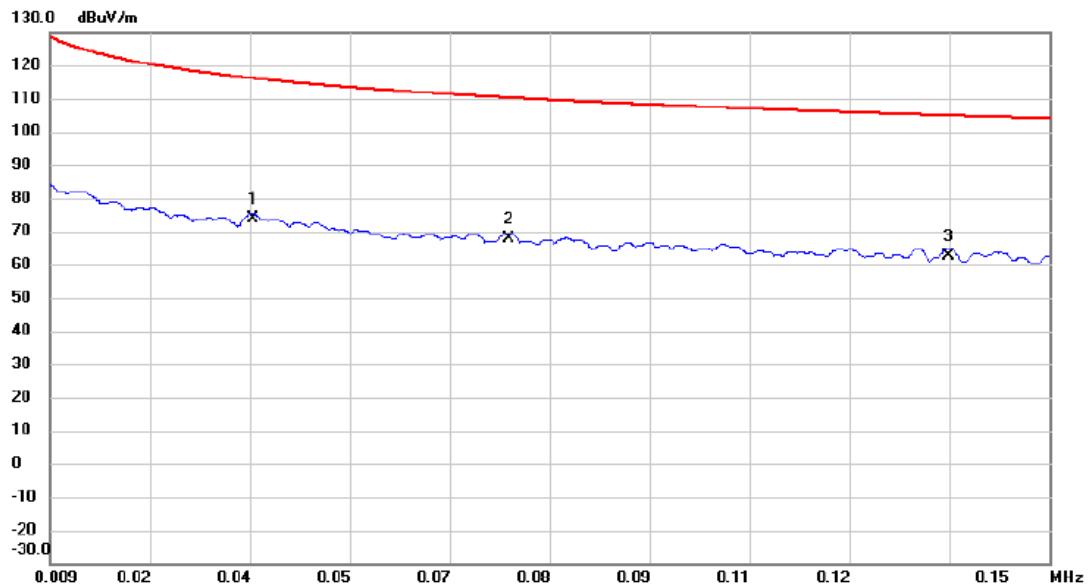


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		0.0376	52.48	21.18	73.66	116.10	-42.44	AVG	
2		0.0737	46.34	21.32	67.66	110.26	-42.60	AVG	
3	*	0.1358	41.41	21.29	62.70	104.95	-42.25	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_4Mbps Channel 00	Polarization	Ant 0°
-----------	--------------------------	--------------	--------

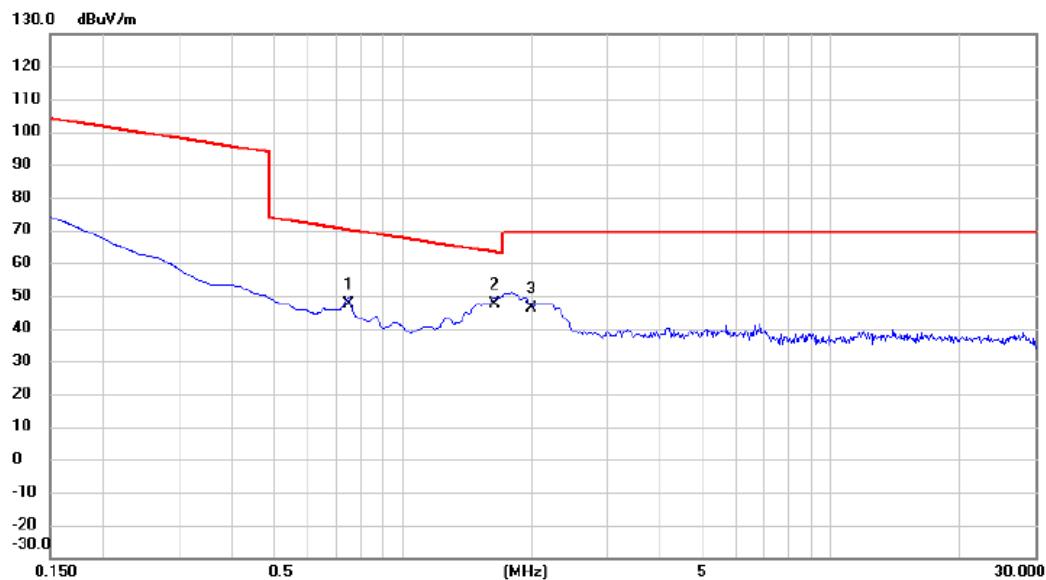


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin
			Level	Factor	ment		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB
1		0.7470	26.31	21.14	47.45	70.14	-22.69
2	*	1.6425	26.17	21.15	47.32	63.29	-15.97
3		2.0007	24.92	21.11	46.03	69.54	-23.51

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_4Mbps Channel 00	Polarization	Ant 90°
-----------	--------------------------	--------------	---------

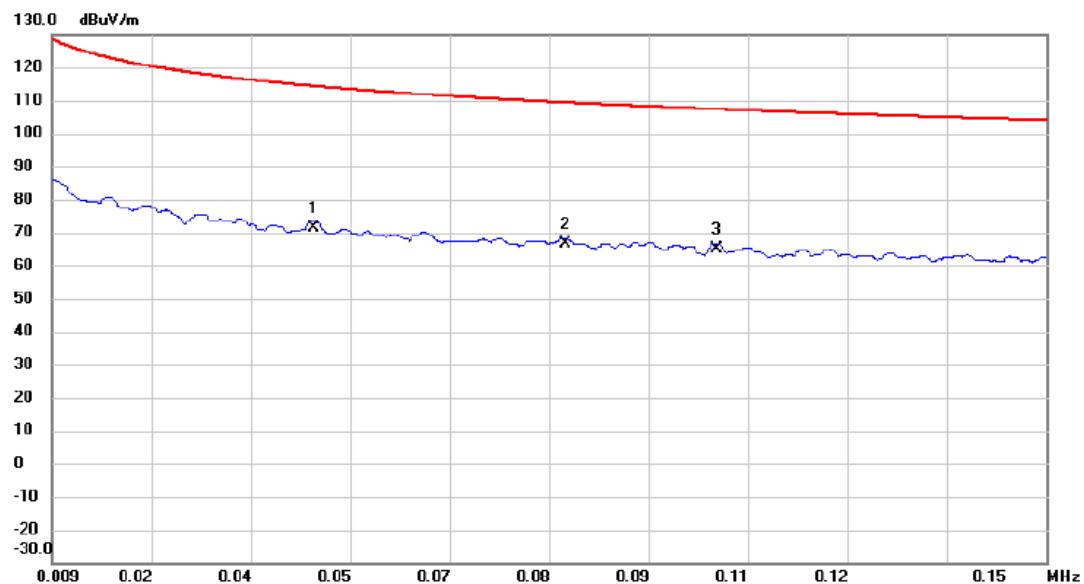


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.0461	50.23	21.22	71.45	114.33	-42.88	AVG	
2		0.0818	45.15	21.34	66.49	109.35	-42.86	AVG	
3	*	0.1032	43.64	21.34	64.98	107.33	-42.35	QP	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_4Mbps Channel 00	Polarization	Ant 90°
-----------	--------------------------	--------------	---------

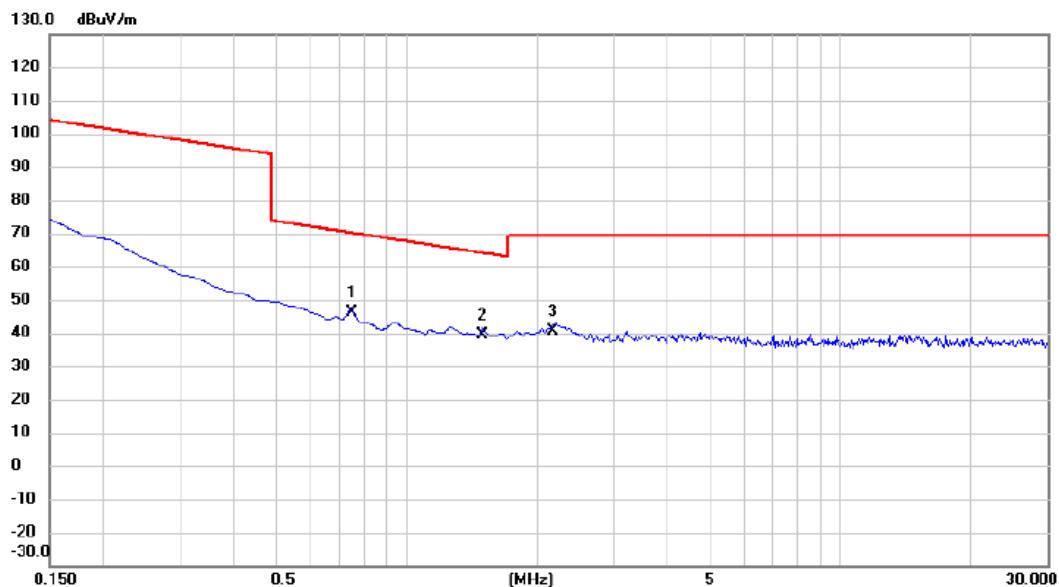


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.7470	25.16	21.14	46.30	70.14	-23.84	QP	
2		1.4932	18.25	21.15	39.40	64.12	-24.72	QP	
3		2.1798	19.64	21.11	40.75	69.54	-28.79	QP	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode	TX Mode_4Mbps Channel 00	Polarization	Vertical
-----------	--------------------------	--------------	----------

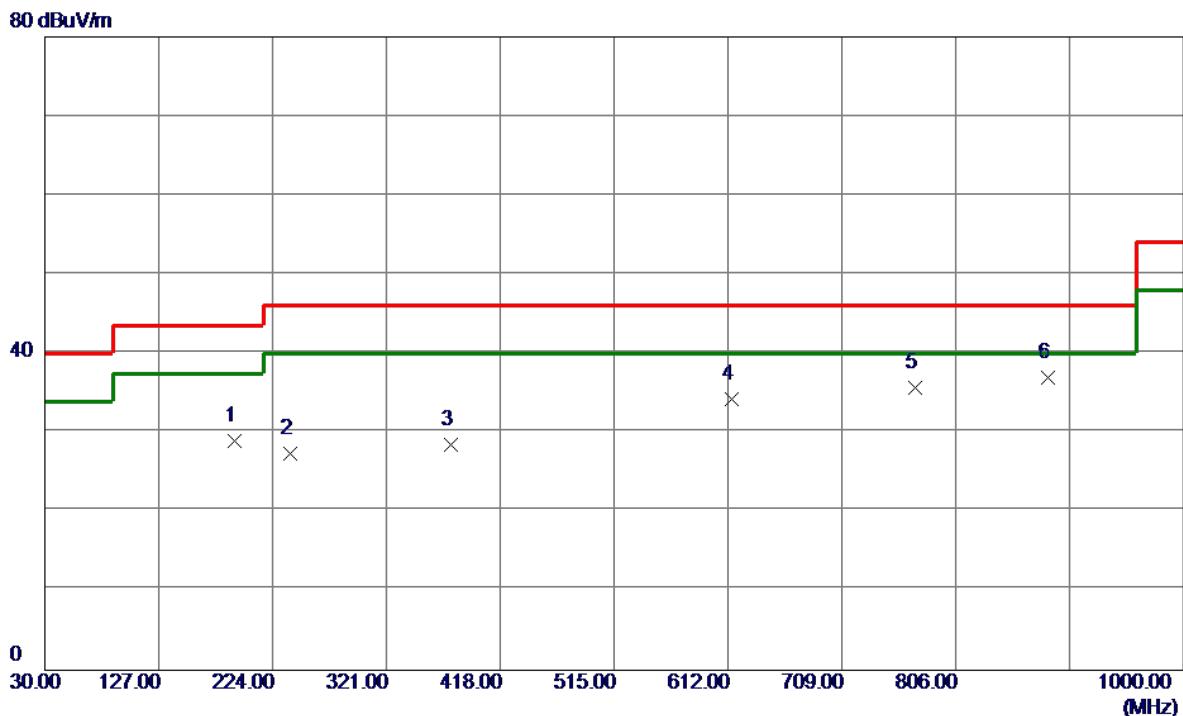


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector		Comment
							Detector	Comment	
1	191.9900	43.22	-14.19	29.03	43.50	-14.47	Peak		
2	239.5200	40.32	-12.97	27.35	46.00	-18.65	Peak		
3	376.2900	37.54	-9.12	28.42	46.00	-17.58	Peak		
4	614.9099	37.96	-3.69	34.27	46.00	-11.73	Peak		
5	771.0800	37.36	-1.67	35.69	46.00	-10.31	Peak		
6 *	884.5700	37.35	-0.38	36.97	46.00	-9.03	Peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_4Mbps Channel 00	Polarization	Horizontal
-----------	--------------------------	--------------	------------

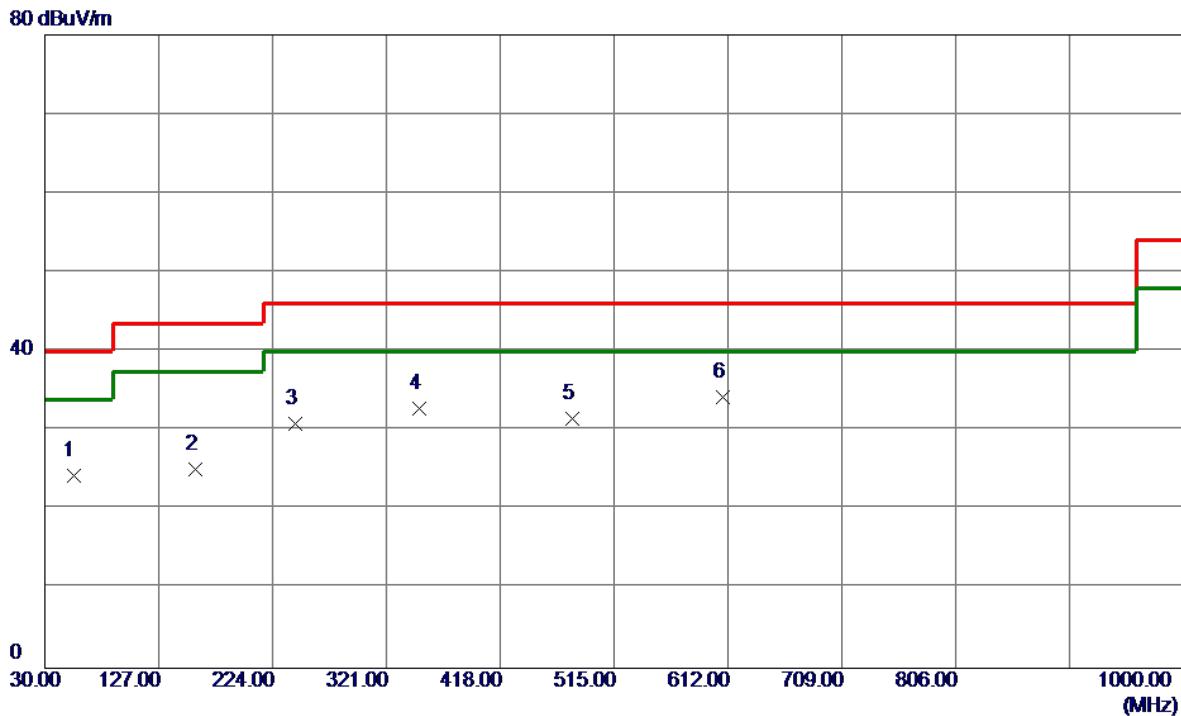


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	54.2500	36.02	-11.64	24.38	40.00	-15.62	Peak	
2	158.0399	36.36	-11.21	25.15	43.50	-18.35	Peak	
3	243.4000	43.79	-12.84	30.95	46.00	-15.05	Peak	
4	349.1300	42.53	-9.77	32.76	46.00	-13.24	Peak	
5	479.1100	38.12	-6.60	31.52	46.00	-14.48	Peak	
6 *	608.1200	37.91	-3.72	34.19	46.00	-11.81	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ

Test Mode	TX 2406 MHz _CH00_4Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

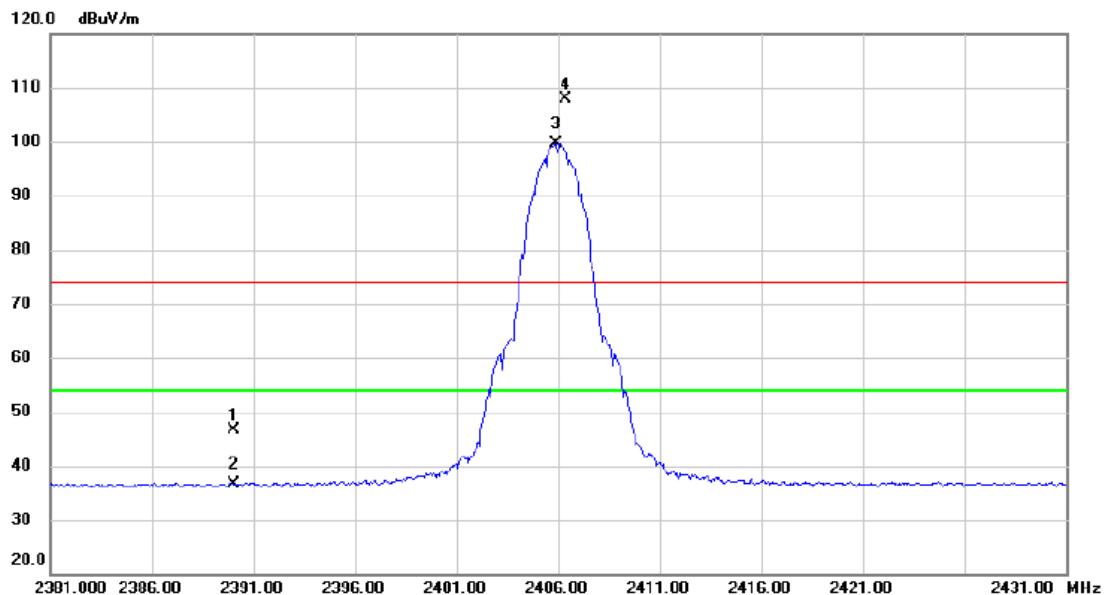


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2390.000	39.87	6.75	46.62	74.00	-27.38	peak	
2		2390.000	29.99	6.75	36.74	54.00	-17.26	AVG	
3	*	2405.900	92.93	6.79	99.72	54.00	45.72	AVG	
4	X	2406.350	101.14	6.79	107.93	74.00	33.93	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2406 MHz _CH00_4Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

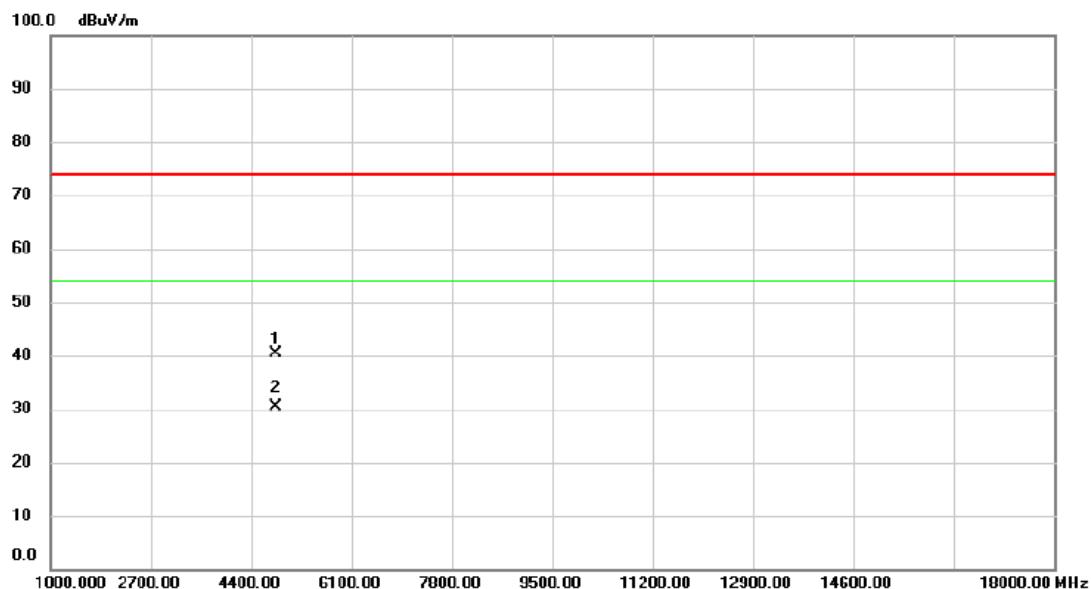


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1		4809.260	37.73	2.62	40.35	74.00	-33.65	peak
2 *		4815.500	27.63	2.63	30.26	54.00	-23.74	AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2440 MHz _CH14_4Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

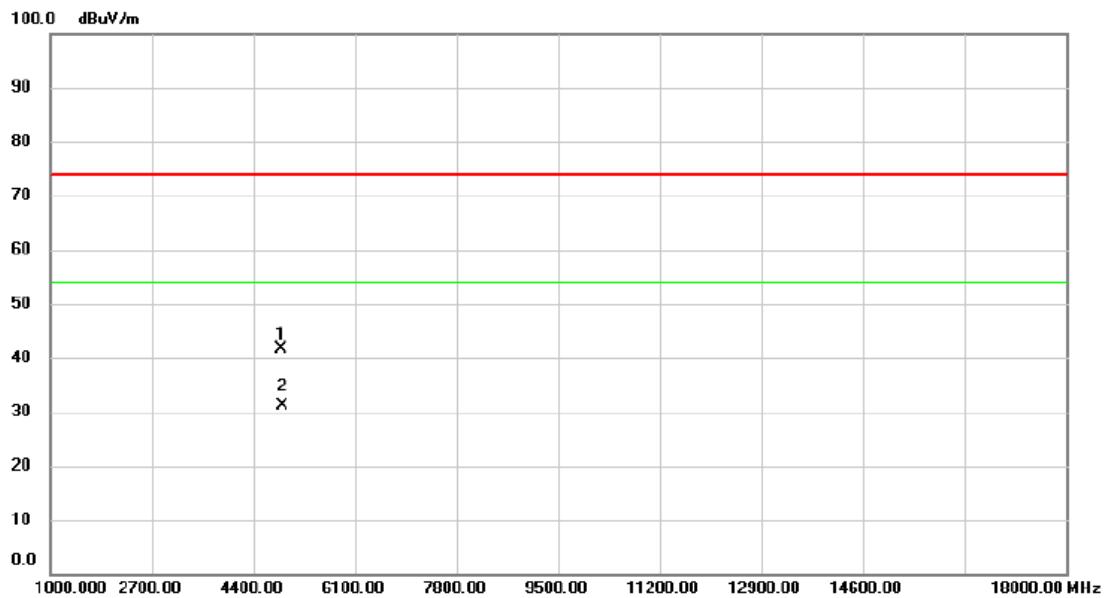


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1		4870.100	39.08	2.66	41.74	74.00	-32.26	peak
2	*	4889.120	28.49	2.68	31.17	54.00	-22.83	AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2476 MHz _CH32_4Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

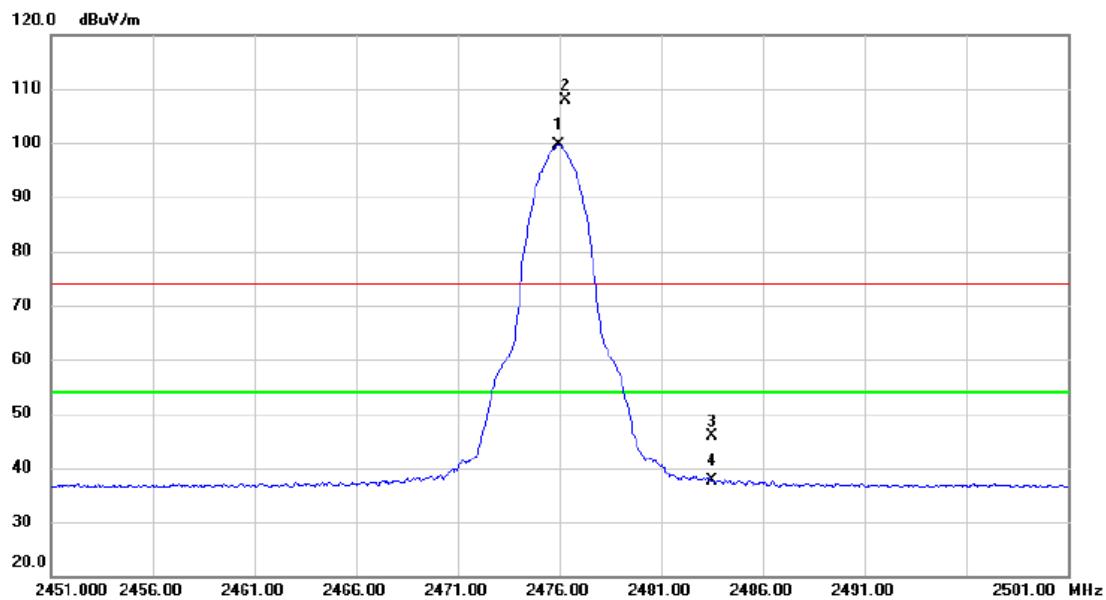


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	2475.950	92.64	6.92	99.56	54.00	45.56	AVG	
2	X	2476.300	100.86	6.92	107.78	74.00	33.78	peak	
3		2483.500	39.04	6.93	45.97	74.00	-28.03	peak	
4		2483.500	30.74	6.93	37.67	54.00	-16.33	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX 2476 MHz _CH32_4Mbps	Polarization	Horizontal
-----------	-------------------------	--------------	------------

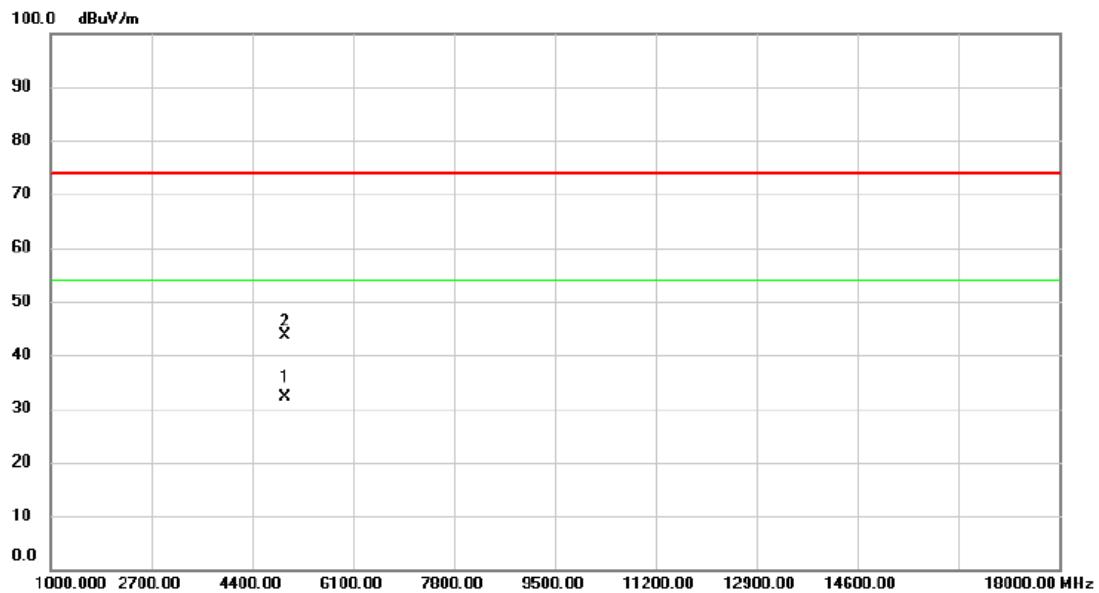


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1	*	4945.040	29.55	2.70	32.25	54.00	-21.75	AVG
2		4946.500	40.90	2.70	43.60	74.00	-30.40	peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_4Mbps Channel 00	Polarization	Vertical
-----------	--------------------------	--------------	----------

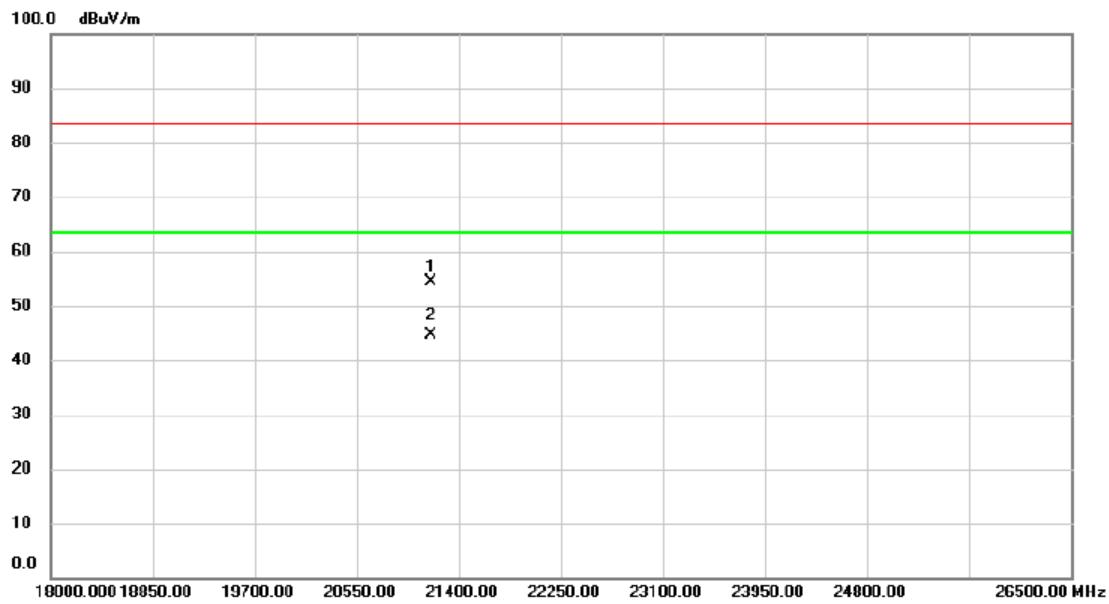


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1		21162.000	51.11	3.36	54.47	83.50	-29.03	peak
2	*	21162.000	41.25	3.36	44.61	63.50	-18.89	AVG

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_4Mbps Channel 00	Polarization	Horizontal
-----------	--------------------------	--------------	------------

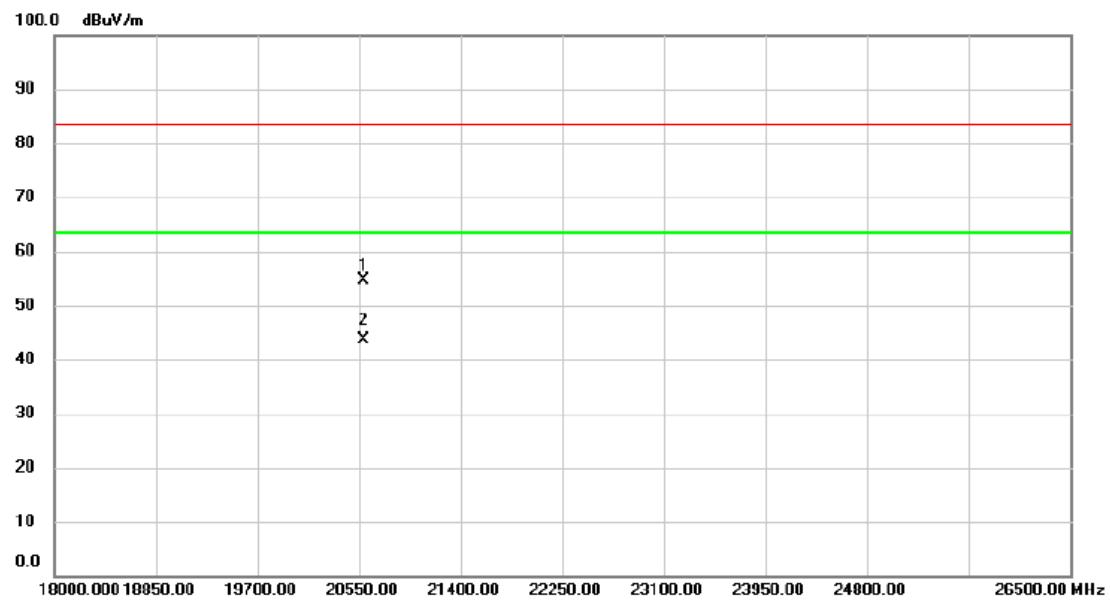

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
1		20592.500	51.39	3.20	54.59	83.50	-28.91	peak	
2	*	20592.500	40.33	3.20	43.53	63.50	-19.97	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.


APPENDIX E - BANDWIDTH

Test Mode	TX Mode _4Mbps
-----------	----------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Test Result
00	2406	2.072	4.048	0.5	Pass
14	2440	2.022	4.064	0.5	Pass
32	2476	2.430	4.080	0.5	Pass

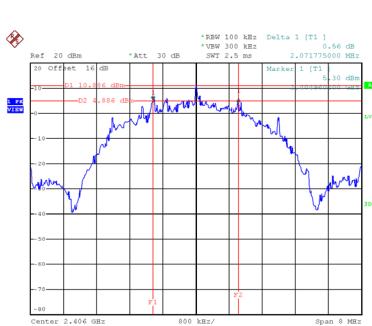CH00


Date: 16.APR.2025 15:42:29

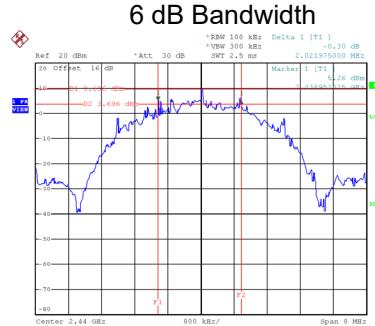CH14
6 dB Bandwidth


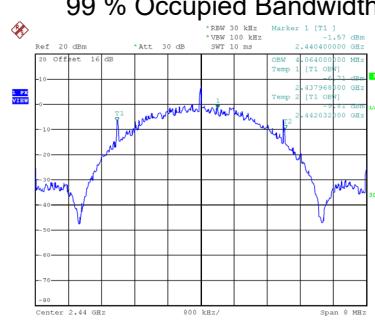
Date: 16.APR.2025 15:43:11

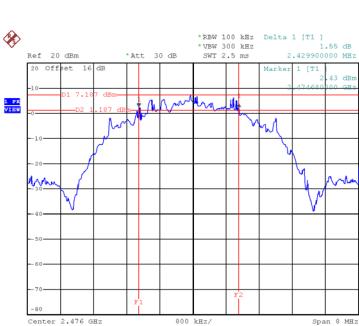CH32


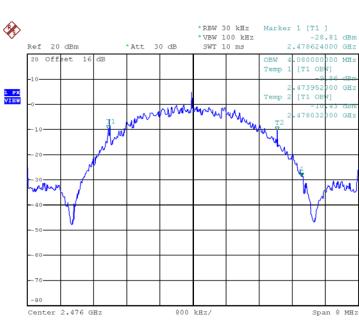
Date: 16.APR.2025 15:44:11

99 % Occupied Bandwidth


Date: 16.APR.2025 15:41:39



Date: 16.APR.2025 15:43:17






Date: 16.APR.2025 15:44:17

APPENDIX F - MAXIMUM OUTPUT POWER

Test Mode	TX Mode _4Mbps
-----------	----------------

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Max. Limit (dBm)	Max. Limit (W)	Test Result
00	2406	11.63	0.0146	30.00	1.0000	Pass
14	2440	11.53	0.0142	30.00	1.0000	Pass
32	2476	11.51	0.0142	30.00	1.0000	Pass

Note: Output power = Measure result + Cable loss

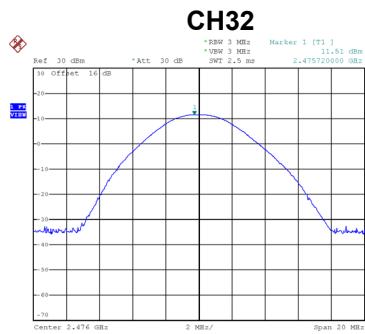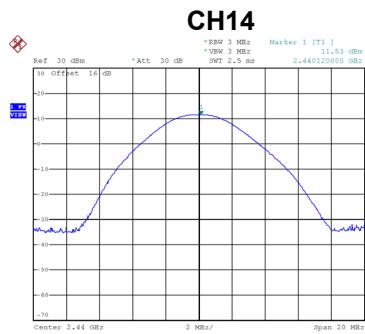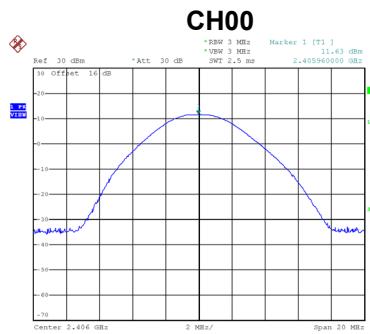

Date: 29.MAR.2025 19:00:34

Date: 29.MAR.2025 19:03:44


Date: 29.MAR.2025 19:08:36

APPENDIX G - CONDUCTED SPURIOUS EMISSION

Test Mode


TX Mode _4Mbps

Bandedge CH00 (Lower)

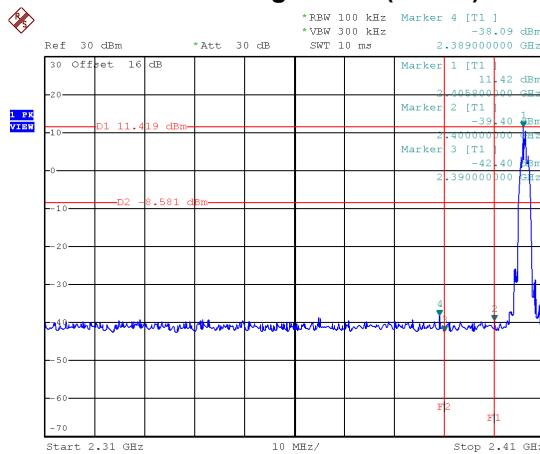


Date: 29.MAR.2025 19:11:06

Bandedge CH32 (Upper)

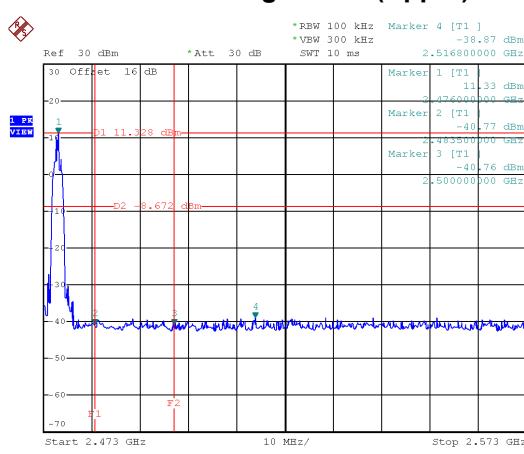

Date: 29.MAR.2025 19:05:57

CH00 – 10th Harmonic of the fundamental frequency

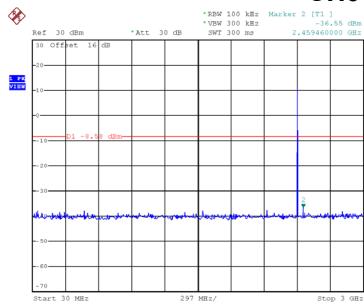


Date: 29.MAR.2025 19:13:02

Date: 29.MAR.2025 19:13:09


Date: 29.MAR.2025 19:13:17

CH14 – 10th Harmonic of the fundamental frequency

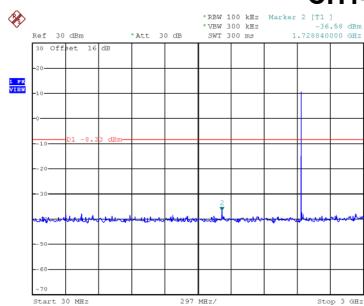


Date: 29.MAR.2025 19:03:15

Date: 29.MAR.2025 19:03:23

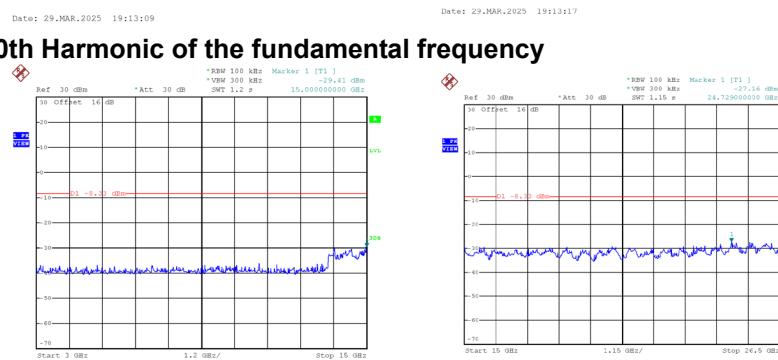


Date: 29.MAR.2025 19:03:31

CH32 – 10th Harmonic of the fundamental frequency

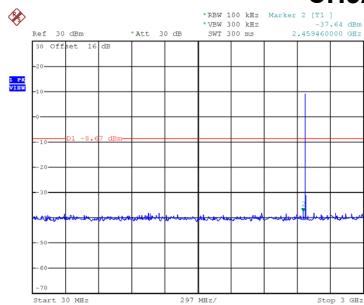

Date: 29.MAR.2025 19:06:11

Date: 29.MAR.2025 19:06:19


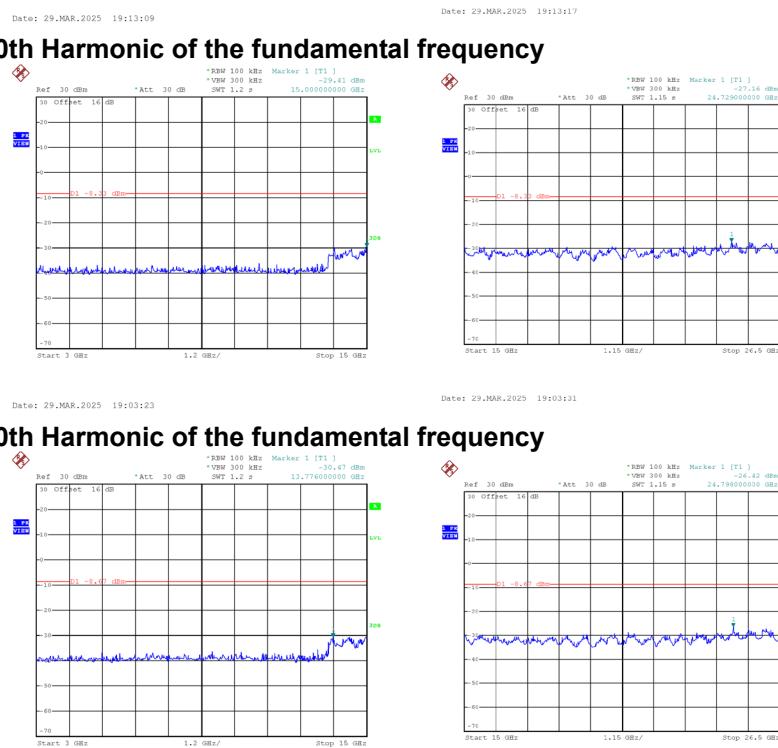


Date: 29.MAR.2025 19:06:17

APPENDIX H - POWER SPECTRAL DENSITY

Test Mode TX Mode _4Mbps

Channel	Frequency (MHz)	Power Spectral Density (dBm/3 kHz)	Max. Limit (dBm/3 kHz)	Test Result
00	2406	-9.92	8.00	Pass
14	2440	-10.21	8.00	Pass
32	2476	-10.05	8.00	Pass

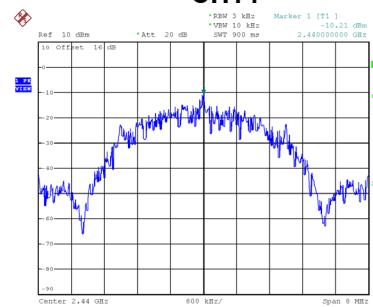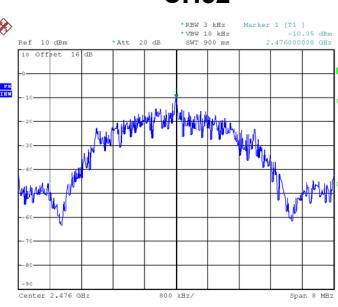CH00**CH14****CH32**

Date: 17.APR.2025 09:54:00

Date: 17.APR.2025 09:54:13

Date: 17.APR.2025 09:54:51

End of Test Report