

# FCC REPORT

Applicant: COBY COMMUNICATIONS LTD.

Address of Applicant: Unit C-E, 8/F , PO Shau Centre, 115 How Ming Stree,  
Kowloon, Hong Kong

Equipment Under Test (EUT)

Product Name: NETBOOK

Model No.: NBPC1165

FCC ID: S7INBPC1165-1025B

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247:2010

Date of sample receipt: 19 Jun., 2012

Date of Test: 20 Jun., to 20 Aug., 2012

Date of report issued: 23 Aug., 2012

Test Result : PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang  
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

## 2 Version

Version No.	Date	Description
00	23 Aug., 2012	Original

**Prepared By:**

*Joe. Zhou*

**Project Engineer**

**Date:**

23 Aug., 2012

**Check By:**

*Bruce Zhang*

**Reviewer**

**Date:**

23 Aug., 2012

## 3 Contents

	Page
1 COVER PAGE .....	1
2 VERSION .....	2
3 CONTENTS .....	3
4 TEST SUMMARY .....	4
5 GENERAL INFORMATION .....	5
5.1 CLIENT INFORMATION .....	5
5.2 GENERAL DESCRIPTION OF E.U.T. ....	5
5.3 TEST ENVIRONMENT AND MODE.....	7
5.4 TEST FACILITY.....	7
5.5 TEST LOCATION .....	7
5.6 OTHER INFORMATION REQUESTED BY THE CUSTOMER .....	7
5.7 TEST INSTRUMENTS LIST .....	8
6 TEST RESULTS AND MEASUREMENT DATA.....	9
6.1 ANTENNA REQUIREMENT: .....	9
6.2 CONDUCTED EMISSIONS.....	10
6.3 CONDUCTED PEAK OUTPUT POWER.....	13
6.4 6dB OCCUPY BANDWIDTH.....	18
6.5 POWER SPECTRAL DENSITY.....	23
6.6 BAND EDGE.....	28
6.6.1 Conducted Emission Method.....	28
6.6.2 Radiated Emission Method.....	31
6.7 SPURIOUS EMISSION .....	36
6.7.1 Conducted Emission Method.....	36
7 TEST SETUP PHOTO .....	57
8 EUT CONSTRUCTIONAL DETAILS .....	59

## 4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(3)	Pass
6dB Occupied Bandwidth	15.247 (a)(2)	Pass
Power Spectral Density	15.247 (e)	Pass
Band Edge	15.247(d)	Pass
Spurious Emission	15.205/15.209	Pass

*Pass: The EUT complies with the essential requirements in the standard.*

## 5 General Information

### 5.1 Client Information

Applicant:	COBY COMMUNICATIONS LTD.
Address of Applicant:	Unit C-E, 8/F , PO Shau Centre, 115 How Ming Stree, Kowloon, Hong Kong
Manufacturer/ Factory:	SHENZHEN COBY COMMUNICATIONS CO., LTD
Address of Manufacturer/ Factory:	Block2-3,2nd Industrial Zone.Taoxia Residents' Committee, DaLang Sub-district, Bao An District, ShenZhen city, China

### 5.2 General Description of E.U.T.

Product Name:	NETBOOK
Model No.:	NBPC1165
Operation Frequency:	2412MHz~2462MHz (802.11b/802.11g/802.11n(H20)) 2422MHz~2452MHz (802.11n(H40))
Channel numbers:	11 for 802.11b/802.11g/802.11(H20)/ 802.11n(H40)
Channel separation:	5MHz
Modulation technology: (IEEE 802.11b)	Direct Sequence Spread Spectrum (DSSS)
Modulation technology: (IEEE 802.11g/802.11n)	Orthogonal Frequency Division Multiplexing(OFDM)
Data speed (IEEE 802.11b):	1Mbps, 2Mbps, 5.5Mbps, 11Mbps
Data speed (IEEE 802.11g):	6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps,54Mbps
Data speed (IEEE 802.11n):	Up to 150Mbps
Antenna Type:	Integral
Antenna gain:	-1.68dBi
AC adapter 1:	Model:PS36IBFAK2400U Input:AC100-240V~50/60Hz 1.0A Output:DC15.0V/2400mA
AC adapter 2:	Model: PS36IBFAY2400S Input: AC100-240V~50/60Hz 1.0A Output: DC15.0V/2400mA
Remark:	Based on pre-scan, the adapter 1 was the worst case, so all test items were performed with adapter 1.

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

802.11b/802.11g/802.11n (H20)

Channel	Frequency
The lowest channel	2412MHz
The middle channel	2437MHz
The Highest channel	2462MHz

802.11n (H40)

Channel	Frequency
The lowest channel	2422MHz
The middle channel	2437MHz
The Highest channel	2452MHz

## 5.3 Test environment and mode

<b>Operating Environment:</b>	
Temperature:	24.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010 mbar
<b>Test mode:</b>	
Operation mode	Keep the EUT in transmitting with modulation.

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

**Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.**

Mode	Data rate
802.11b	1Mbps
802.11g	6Mbps
802.11n(H20)	6.5Mbps
802.11n(H40)	13.5Mbps

### Final Test Mode:

According to ANSI C63.4 standards, the test results are both the “worst case” and “worst setup” 1Mbps for 802.11b, 6Mbps for 802.11g, 6.5Mbps for 802.11n(H20) and 13.5 Mbps for 802.11n(H40).

## 5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.:** 817957

China Certification & Inspection Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 817957, February 27, 2012

- **Industry Canada (IC)**

The 3m Semi-anechoic chamber of China Certification & Inspection Services Co., Ltd. Has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

## 5.5 Test Location

All tests were performed at:

China Certification & Inspection Services Co., Ltd.

Address: 1st Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District, Shenzhen, China

Tel: 0755-23118282

Fax: 0755-23116366

## 5.6 Other Information Requested by the Customer

None.

## 5.7 Test Instruments list


Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (dd-mm-yy)	Cal.Due date (dd-mm-yy)
1	3m Semi- Anechoic Chamber	SAEMC	9(L)*6(W)* 6(H)	CCIS0001	June 09 2012	June 09 2013
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	CCIS0002	N/A	N/A
3	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	CCIS0005	June 04 2012	June 04 2013
4	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	CCIS0006	May 30 2012	May 30 2013
5	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
6	Coaxial Cable	CCIS	N/A	CCIS0016	Apr. 01 2012	Apr. 01 2013
7	Coaxial Cable	CCIS	N/A	CCIS0017	Apr. 01 2012	Apr. 01 2013
8	Coaxial cable	CCIS	N/A	CCIS0018	Apr. 01 2012	Apr. 01 2013
9	Coaxial Cable	CCIS	N/A	CCIS0019	Apr. 01 2012	Apr. 01 2013
10	Coaxial Cable	CCIS	N/A	CCIS0087	Apr. 01 2012	Apr. 01 2013
11	Amplifier(10KHz-1.3GHz)	HP	8447D	CCIS0003	Apr. 01 2012	Apr. 01 2013
12	Amplifier(1GHz-18GHz)	Compliance Direction Systems Inc.	PAP-1G18	CCIS0011	June 09 2012	June 09 2013
13	Pre-amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	Apr. 01 2012	Mar. 31 2013
14	Horn Antenna	ETS-LINDGREN	3160	GTS217	Mar. 30 2012	Mar. 29 2013
15	Printer	Hp	HP LaserJet P1007	N/A	N/A	N/A
16	Positioning Controller	UC	UC3000	CCIS0015	N/A	N/A

Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (dd-mm-yy)	Cal.Due date (dd-mm-yy)
1	Shielding Room	ZhongShuo Electron	11.0(L)x4.0(W)x3.0(H)	CCIS0061	June 09 2012	June 09 2013
2	EMI Test Receiver	Rohde & Schwarz	ESPI	CCIS0022	Apr 01 2012	Apr 01 2013
3	LISN	CHASE	MN2050D	CCIS0074	Apr 01 2012	Apr 01 2013
4	Coaxial Cable	CCIS	N/A	CCIS0086	Apr. 01 2012	Apr. 01 2013
5	Shielding Room	ZhongShuo Electron	11.0(L)x4.0(W)x3.0(H)	CCIS0061	June 09 2012	June 09 2013
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A



## 6 Test results and Measurement Data

### 6.1 Antenna requirement:

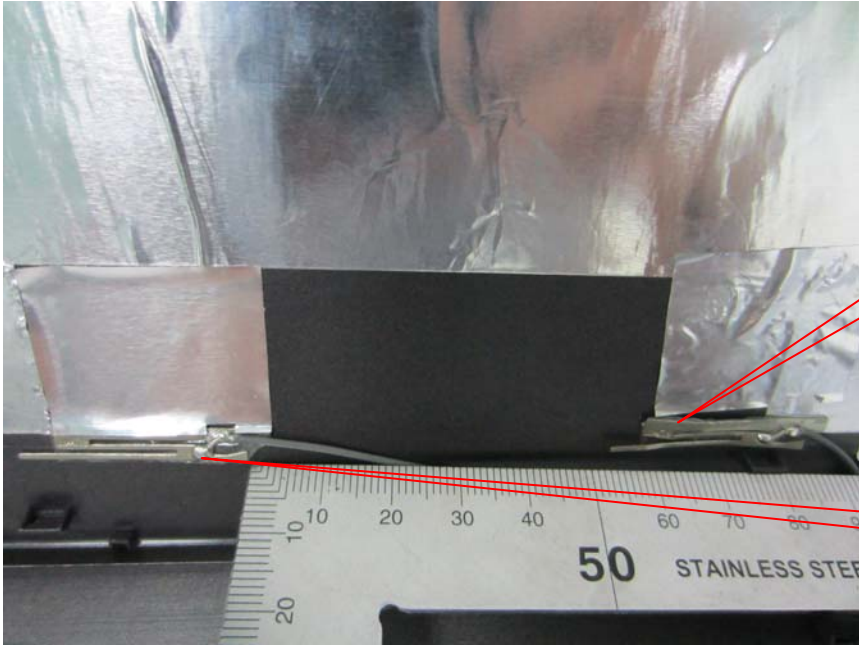
<b>Standard requirement:</b>	FCC Part15 C Section 15.203 /247(c)
<p><i>15.203 requirement:</i>  <i>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</i></p> <p><i>15.247(c) (1)(i) requirement:</i>  <i>(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.</i></p>	
<b>E.U.T Antenna:</b>	
<p><i>The antenna port is an inverted, unconventional port; the best case gain of the antenna is -1.68 dBi.</i></p>	
	

## 6.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.4: 2003														
Test Frequency Range:	150kHz to 30MHz														
Class / Severity:	Class B														
Receiver setup:	RBW=9kHz, VBW=30kHz														
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> <p>* Decreases with the logarithm of the frequency.</p>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test procedure	<ol style="list-style-type: none"> <li>The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). The provide a 50ohm/50uH coupling impedance for the measuring equipment.</li> <li>The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</li> <li>Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2003 on conducted measurement.</li> </ol>														
Test setup:	<p><i>Remark:</i>  <i>E.U.T: Equipment Under Test</i>  <i>LISN: Line Impedance Stabilization Network</i>  <i>Test table height=0.8m</i></p>														
Test Instruments:	Refer to section 5.7 for details														
Test mode:	Refer to section 5.3 for details														
Test results:	Passed														

### Measurement Data

Live Line:

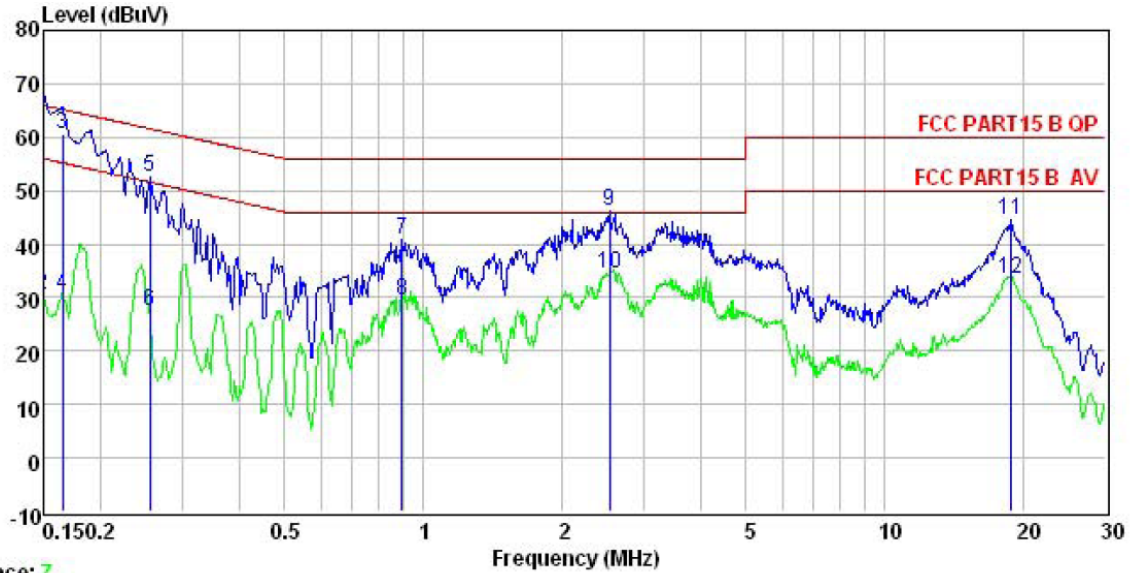


Trace: 7

Site : CCIS Conducted Test Site  
 Condition : FCC PART15 B QP LISN LINE  
 Job NO. : 093RF  
 Test Mode : wifi mode  
 Test engineer: Joe

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.150	48.49	10.25	0.79	59.53	66.00	-6.47	QP
2	0.150	19.32	10.25	0.79	30.36	56.00	-25.64	Average
3	0.165	49.61	10.24	0.78	60.63	65.21	-4.58	QP
4	0.165	19.33	10.24	0.78	30.35	55.21	-24.86	Average
5	0.255	41.61	10.24	0.75	52.60	61.60	-9.00	QP
6	0.255	16.35	10.24	0.75	27.34	51.60	-24.26	Average
7	0.899	29.77	10.20	0.85	40.82	56.00	-15.18	QP
8	0.899	18.35	10.20	0.85	29.40	46.00	-16.60	Average
9	2.527	34.84	10.28	0.94	46.06	56.00	-9.94	QP
10	2.527	23.36	10.28	0.94	34.58	46.00	-11.42	Average
11	18.721	33.26	10.31	0.93	44.50	60.00	-15.50	QP
12	18.721	22.35	10.31	0.93	33.59	50.00	-16.41	Average

**Neutral Line:**

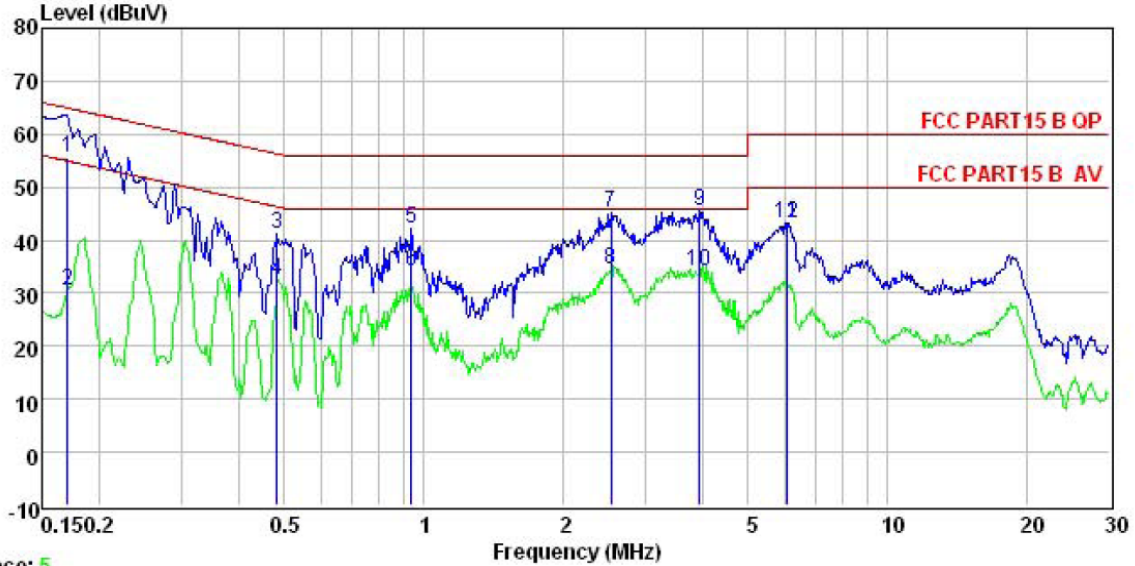

**Trace: 5**


Site : CCIS Conducted Test Site  
 Condition : FCC PART15 B QP LISN NEUTRAL  
 Job NO. : 093RF  
 Test Mode : wifi mode  
 Test engineer: Joe

	Read Freq	Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.170	44.60	10.25	0.78	55.63	64.94	-9.31	QP
2	0.170	19.59	10.25	0.78	30.62	54.94	-24.32	Average
3	0.481	30.31	10.28	0.76	41.35	56.32	-14.97	QP
4	0.481	21.34	10.28	0.76	32.38	46.32	-13.94	Average
5	0.938	31.08	10.19	0.86	42.13	56.00	-13.87	QP
6	0.938	23.15	10.19	0.86	34.20	46.00	-11.80	Average
7	2.527	34.13	10.27	0.94	45.34	56.00	-10.66	QP
8	2.527	23.33	10.27	0.94	34.54	46.00	-11.46	Average
9	3.922	34.36	10.28	0.89	45.53	56.00	-10.47	QP
10	3.922	23.15	10.28	0.89	34.32	46.00	-11.68	Average
11	6.056	32.26	10.27	0.82	43.35	60.00	-16.65	QP
12	6.056	32.13	10.27	0.82	43.22	50.00	-6.78	Average

**Notes:**

1. An initial pre-scan was performed on the live and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss

## 6.3 Conducted Peak Output Power

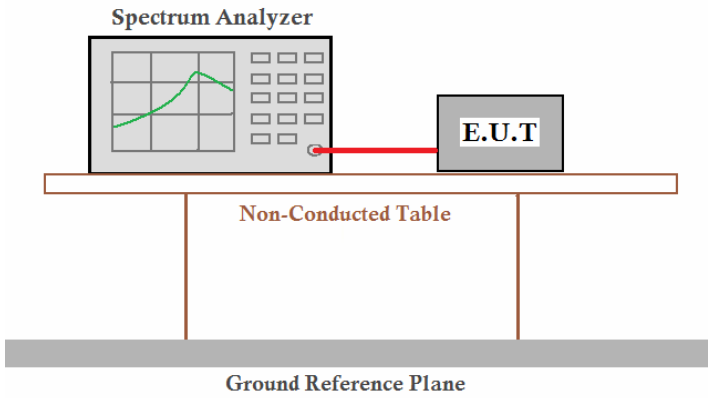
Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	ANSI C63.4:2003 and KDB558074
Limit:	30dBm
Test setup:	
Test Instruments:	Refer to section 5.7 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

### Measurement Data


Test CH	Peak Output Power (dBm)				Limit(dBm)	Result
	802.11b	802.11g	802.11n(H20)	802.11n(H40)		
Lowest	12.83	11.99	11.23	10.46	30.00	Pass
Middle	12.39	11.52	11.09	10.50		
Highest	12.08	11.29	10.77	10.73		

Test plot as follows:


Test mode: 802.11b

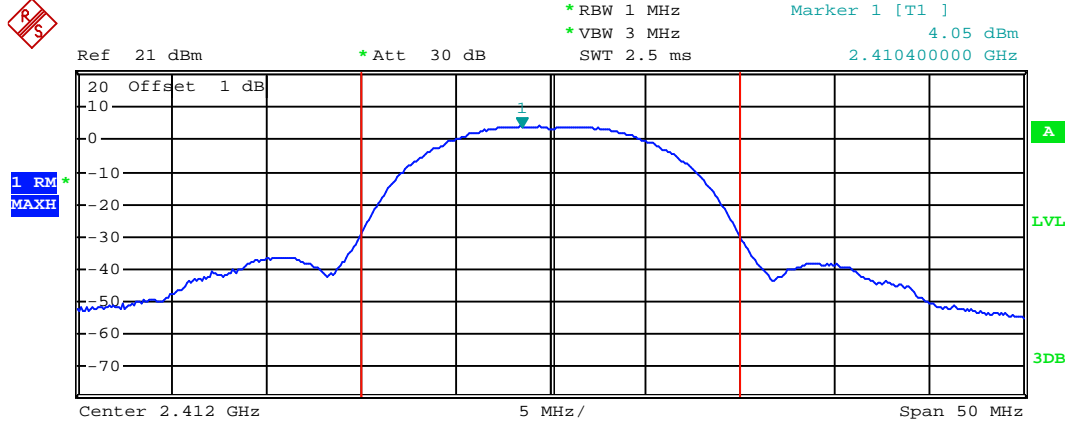

### Lowest channel

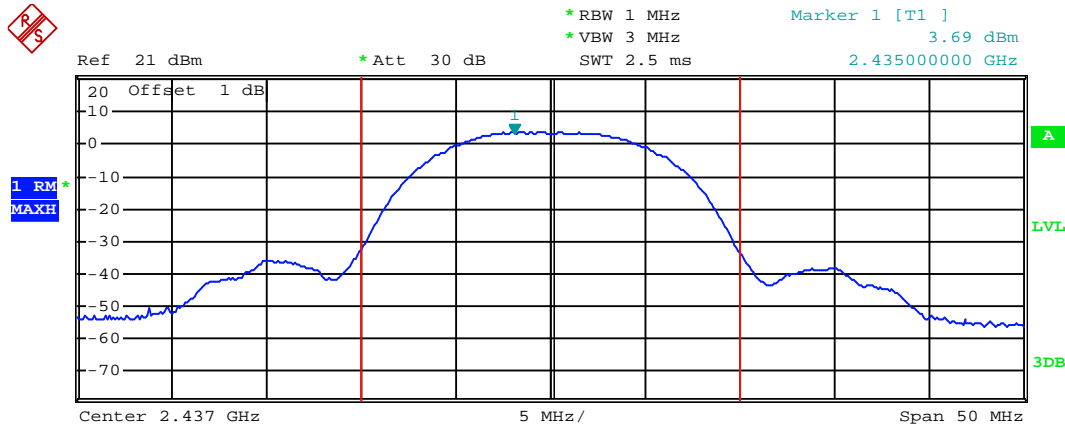

### Middle channel

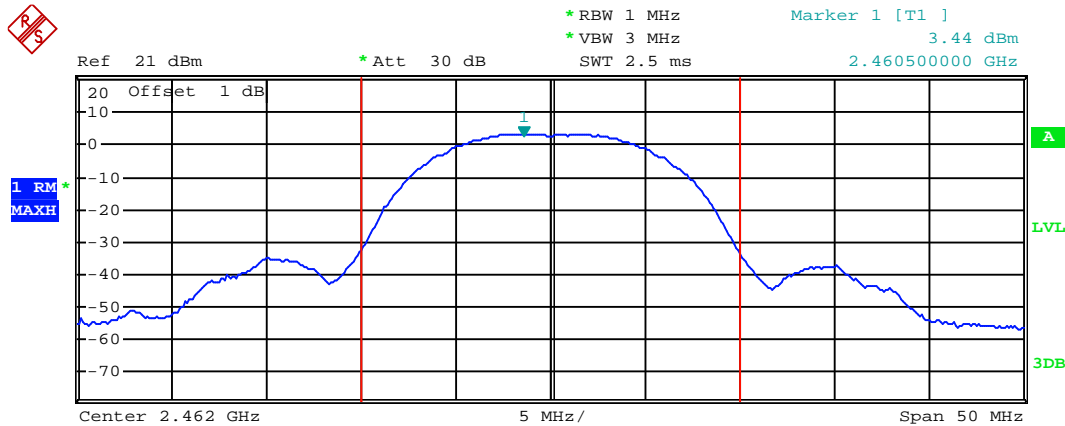


### Highest channel

Test mode: 802.11g




Ref 21 dBm \* Att 30 dB \* RBW 1 MHz \* VBW 3 MHz \* SWT 2.5 ms Marker 1 [T1] 2.02 dBm 2.413300000 GHz

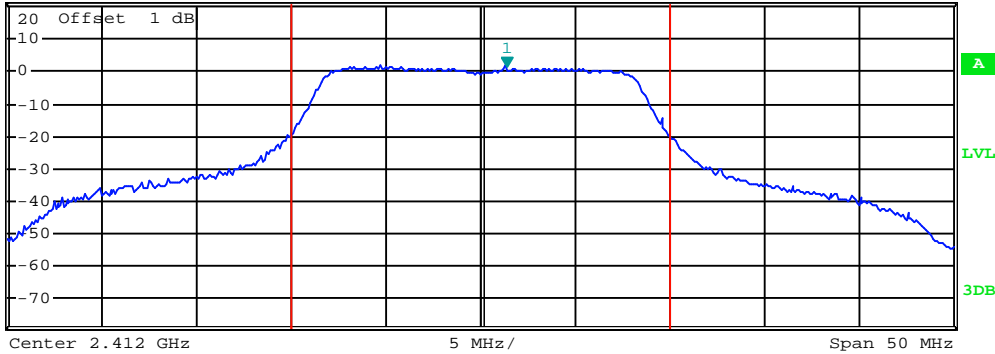

### Lowest channel




Ref 21 dBm \* Att 30 dB \* RBW 1 MHz \* VBW 3 MHz \* SWT 2.5 ms Marker 1 [T1] 1.07 dBm 2.430100000 GHz

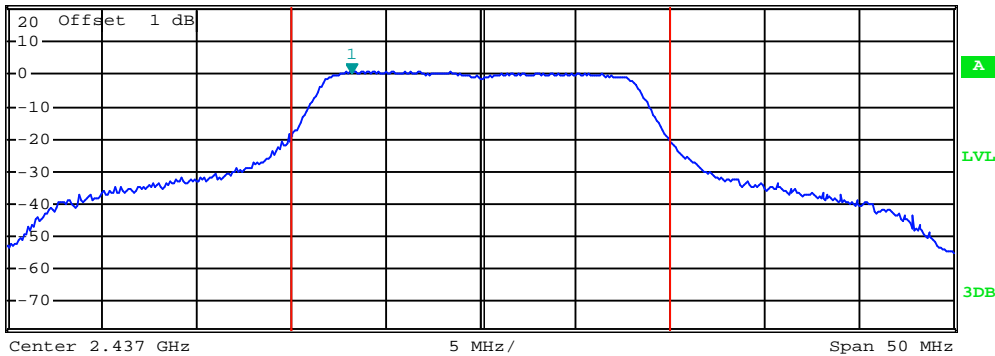

### Middle channel




Ref 21 dBm \* Att 30 dB \* RBW 1 MHz \* VBW 3 MHz \* SWT 2.5 ms Marker 1 [T1] 1.12 dBm 2.457500000 GHz

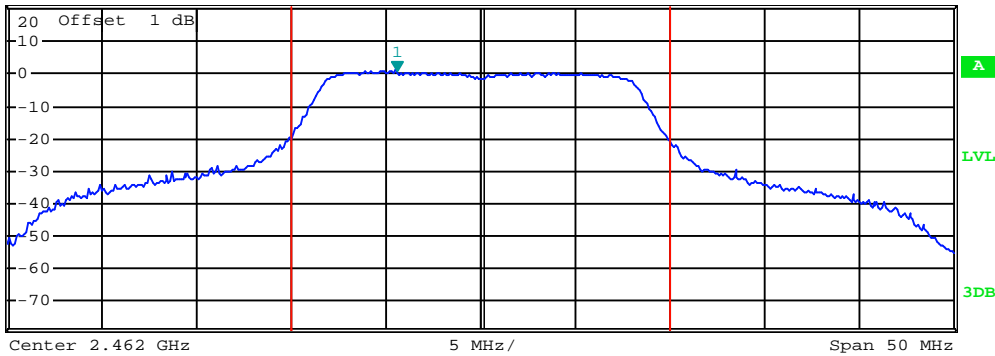


### Highest channel

Test mode: 802.11n(H20)

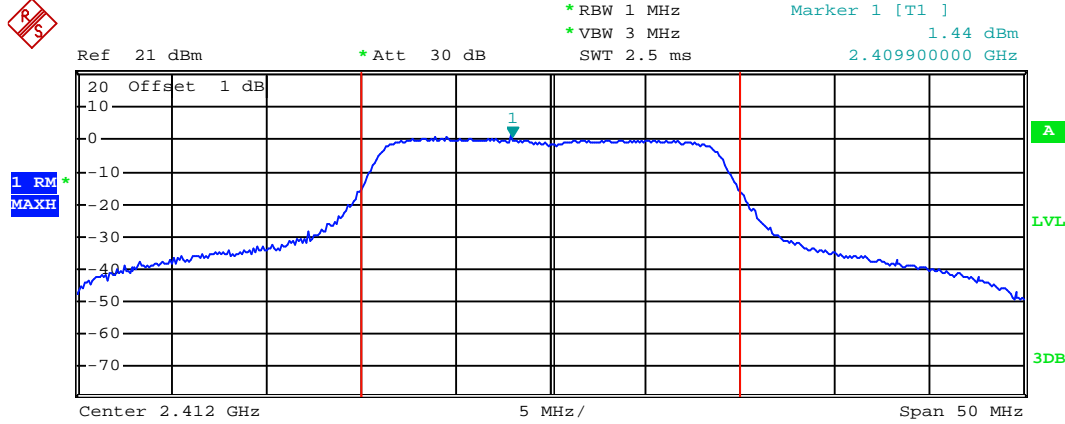


**Tx Channel**  
 Bandwidth 20 MHz      Power 11.23 dBm

### Lowest channel

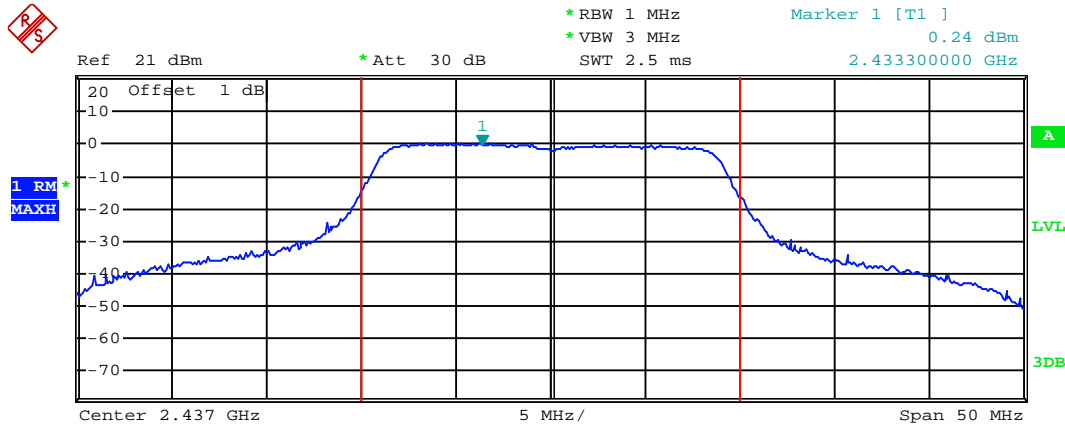

**Tx Channel**  
 Bandwidth 20 MHz      Power 11.09 dBm

### Middle channel

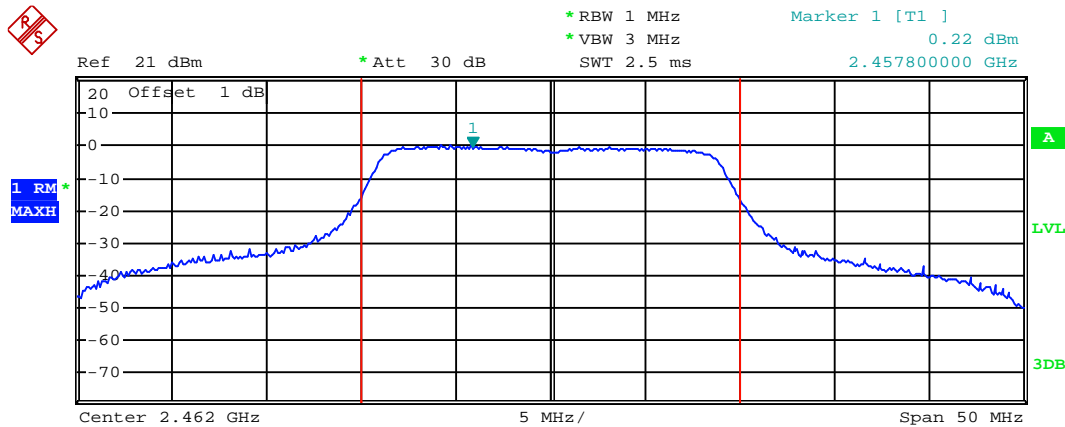


**Tx Channel**  
 Bandwidth 20 MHz      Power 10.77 dBm


### Highest channel




Test mode: 802.11n(H40)

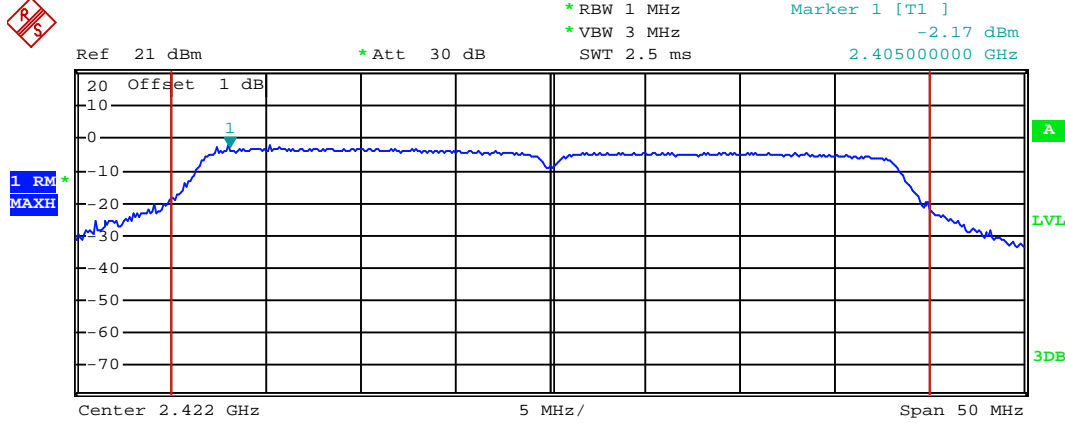

Lowest channel

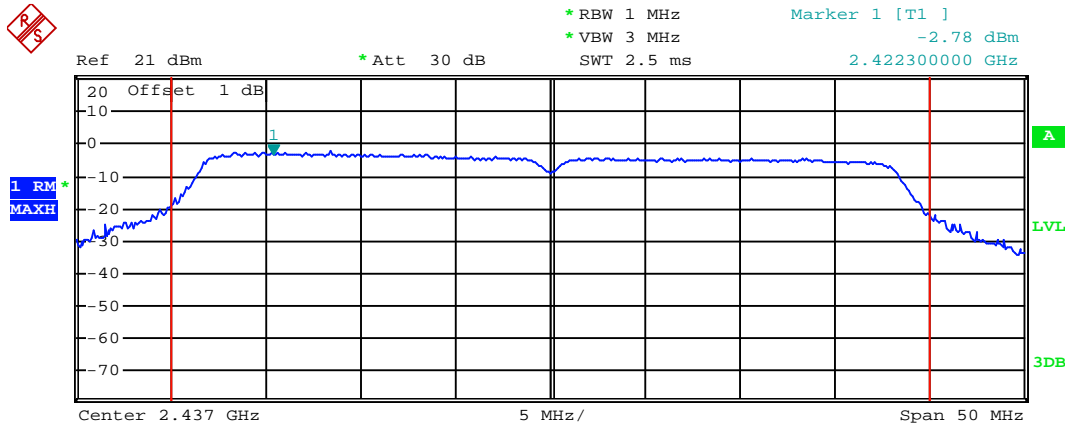


Middle channel

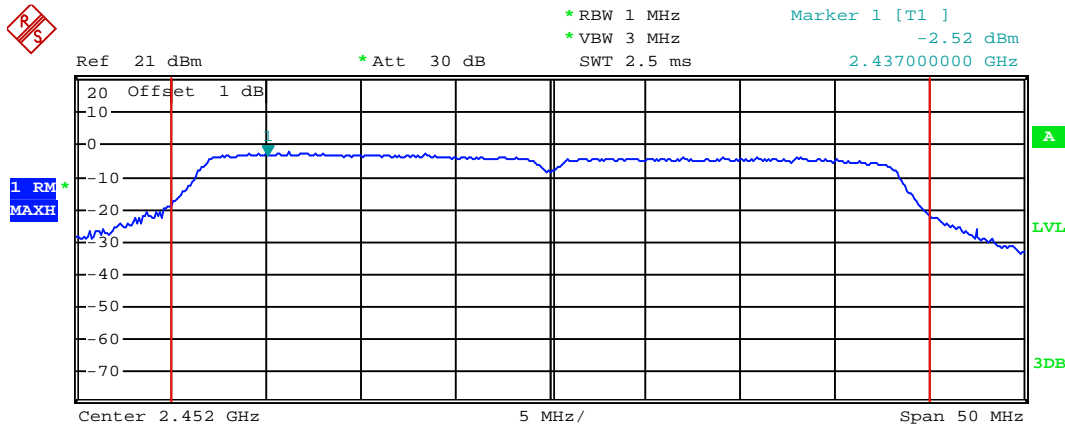

Highest channel

## 6.4 6dB Occupy Bandwidth

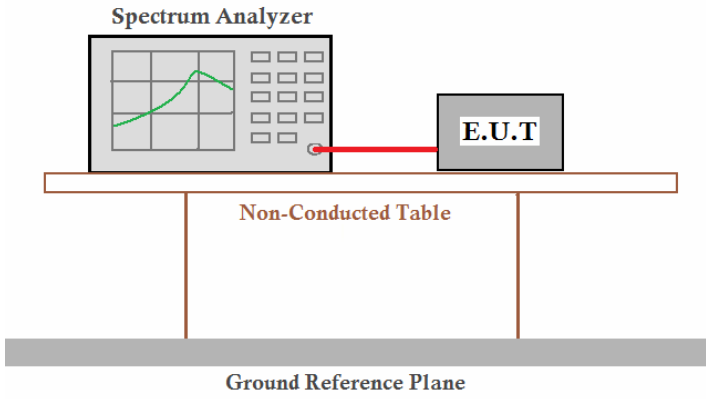
Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	ANSI C63.4:2003 and KDB558074
Limit:	>500KHz
Test setup:	
Test Instruments:	Refer to section 5.7 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

### Measurement Data


Test CH	6dB Occupy Bandwidth (MHz)				Limit(kHz)	Result
	802.11b	802.11g	802.11n(H20)	802.11n(H40)		
Lowest	10.30	16.60	17.70	36.60	>500	Pass
Middle	10.27	16.60	17.70	36.70		
Highest	10.40	16.50	16.60	36.50		

Test plot as follows:


Test mode: 802.11b

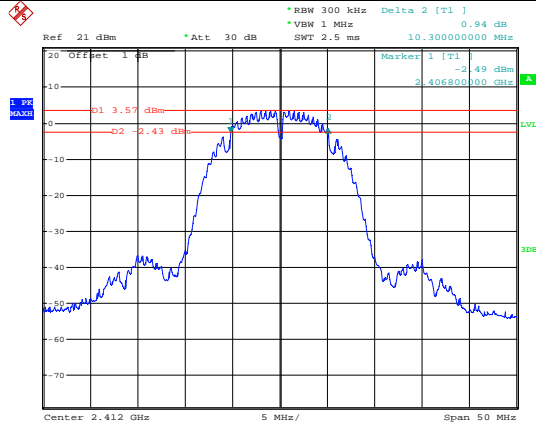

Lowest channel

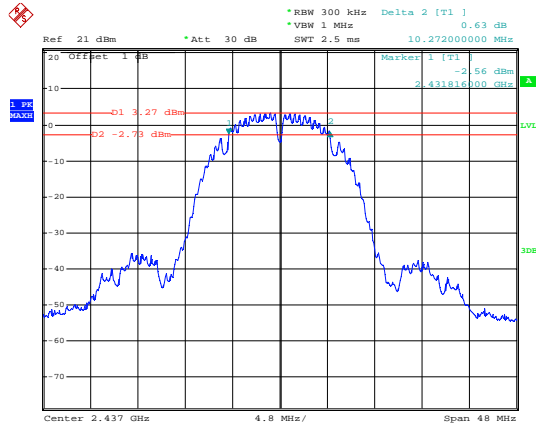


Middle channel

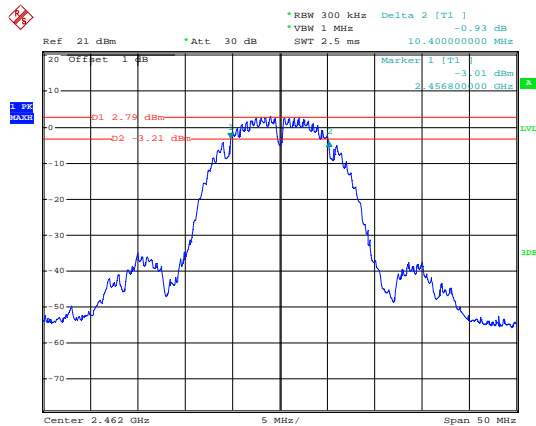


Highest channel


Test mode: 802.11g

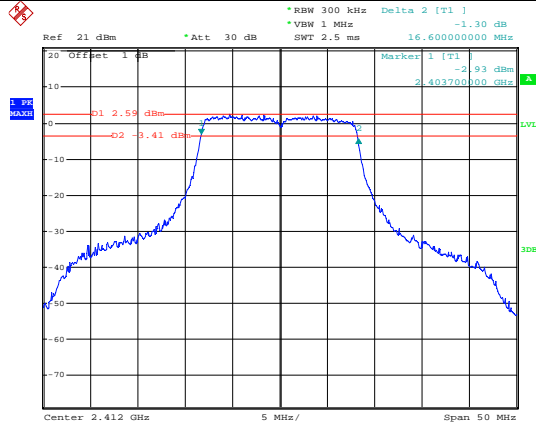

Lowest channel

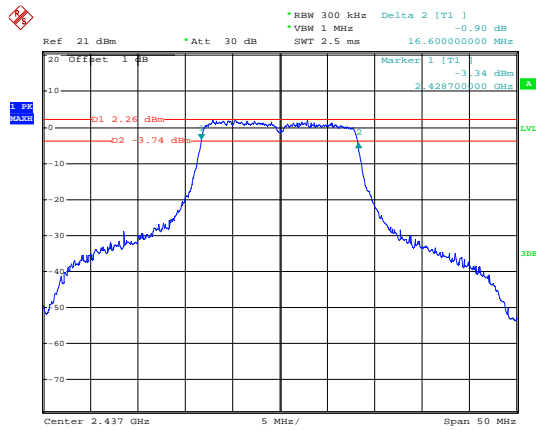


Middle channel

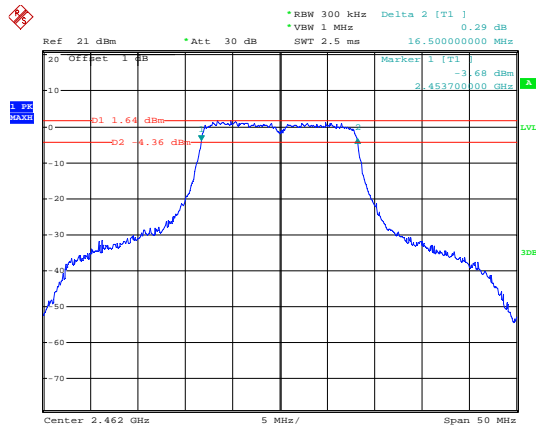


Highest channel


Test mode: 802.11n(H20)

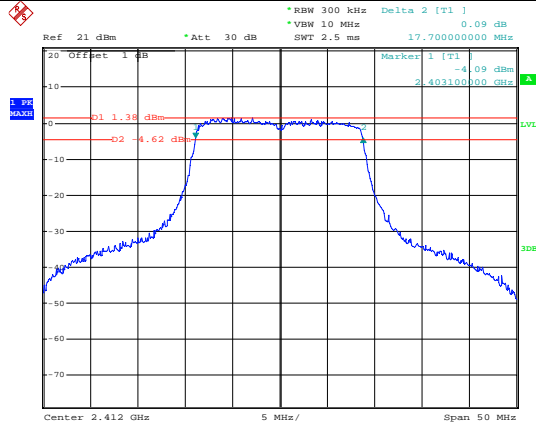

Lowest channel

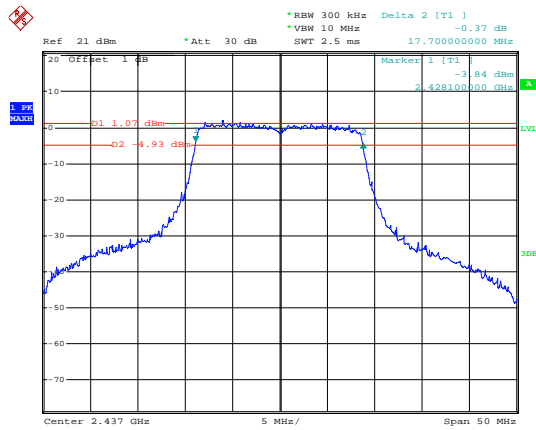


Middle channel

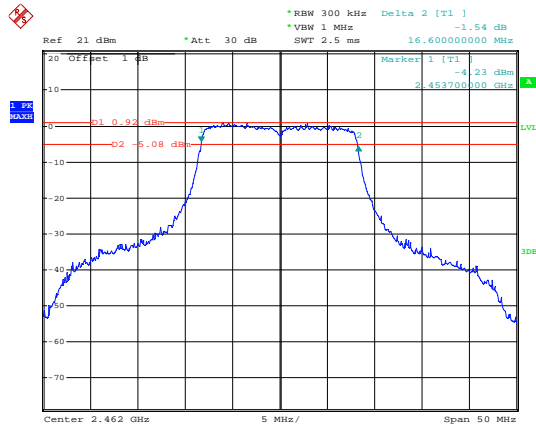


Highest channel


Test mode: 802.11n(H40)

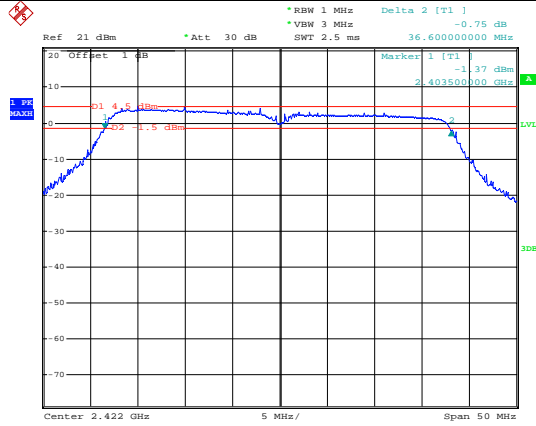

Lowest channel

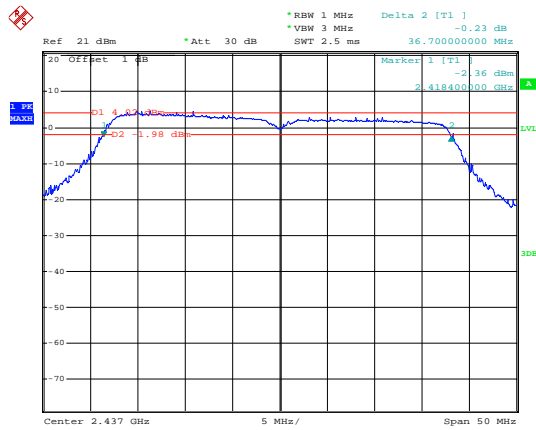


Middle channel

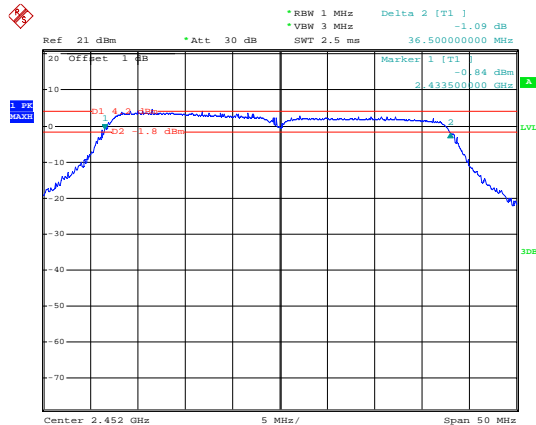

Highest channel

## 6.5 Power Spectral Density

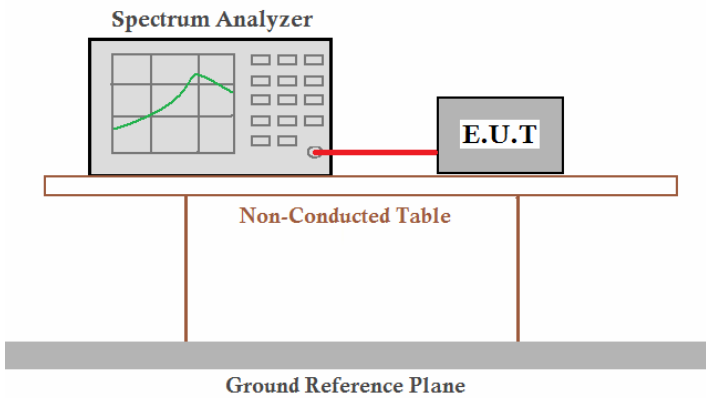Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	ANSI C63.4:2003 and KDB558074
Limit:	8dBm
Test setup:	
Test Instruments:	Refer to section 5.7 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

### Measurement Data

Test CH	Power Spectral Density (dBm)				Limit(dBm)	Result
	802.11b	802.11g	802.11n(H20)	802.11n(H40)		
Lowest	-11.85	-15.91	-17.3	-20.06	8.00	Pass
Middle	-12.34	-16.07	-16.84	-20.06		
Highest	-12.99	-16.37	-16.96	-20.01		


Remark: PSD=Value + BWCF

\*BWCF =  $10\log(3\text{ kHz}/100\text{kHz}) = 15.2\text{ dB}$ .


\*Value is the data what we test from the spectrum.

Test plot as follows:

Test mode:	802.11b
------------	---------

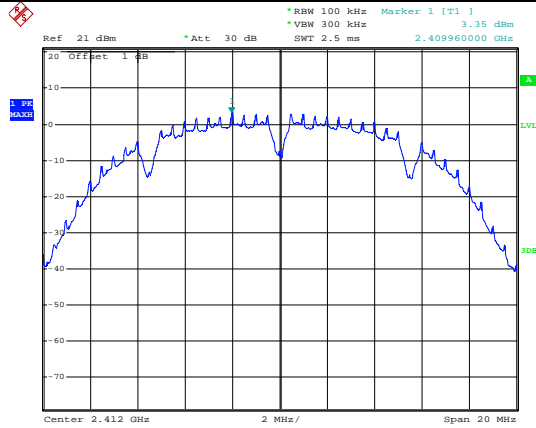


Lowest channel

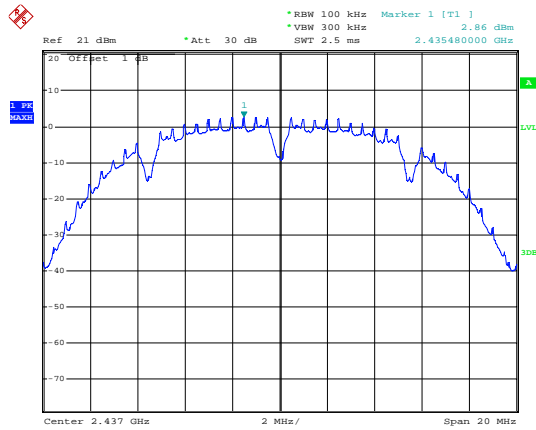

Date: 17.AUG.2012 10:30:35

Middle channel

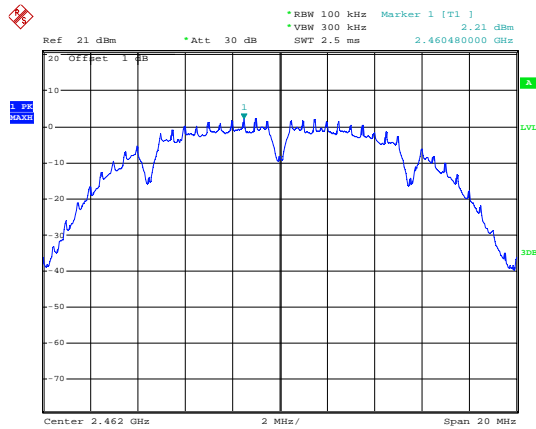


Date: 17.AUG.2012 10:26:01


Highest channel




Test mode:	802.11g
------------	---------

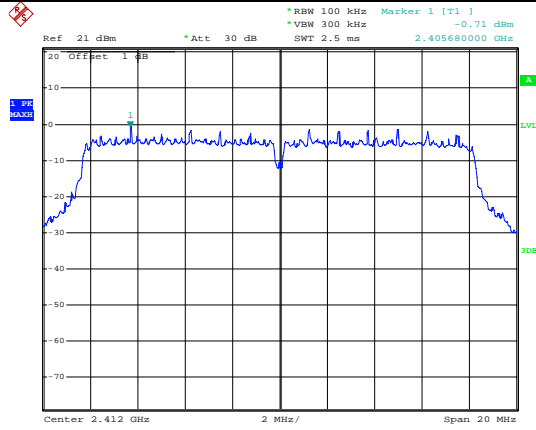

Lowest channel

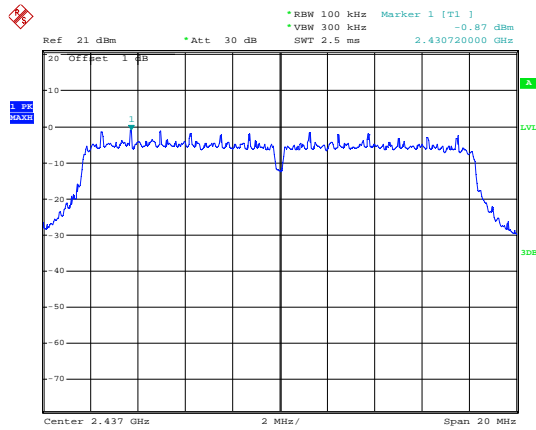


Middle channel

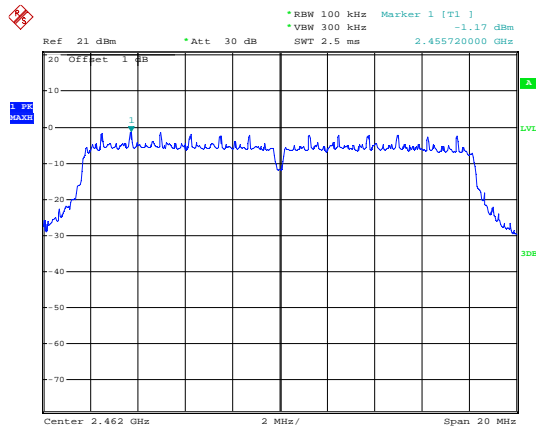


Highest channel


Test mode:	802.11n(H20)
------------	--------------

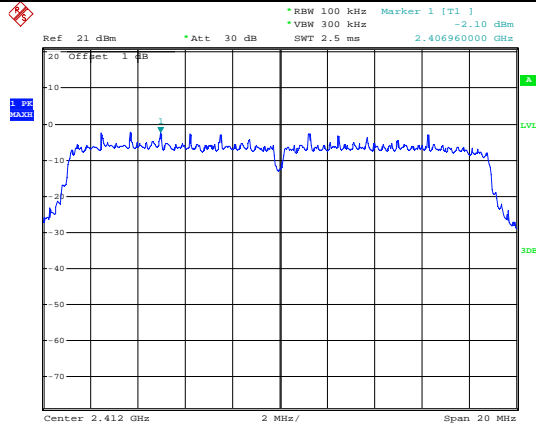

Lowest channel



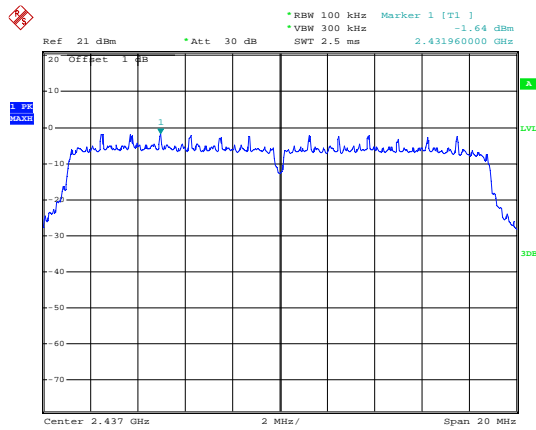


Middle channel

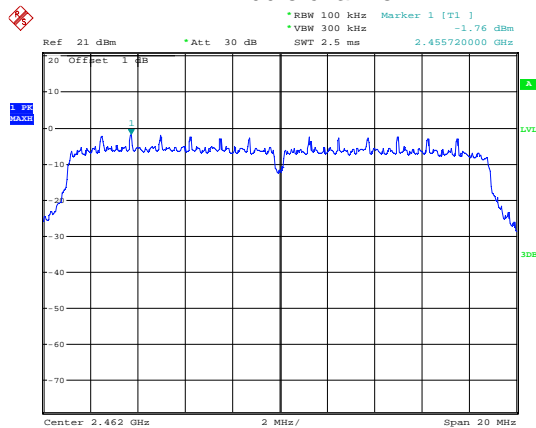


Highest channel

Test mode:	802.11n(H40)
------------	--------------

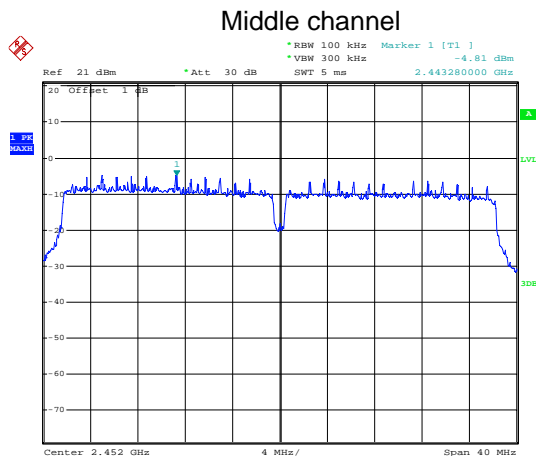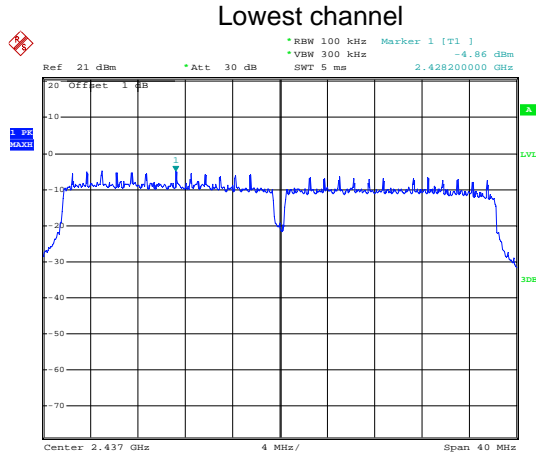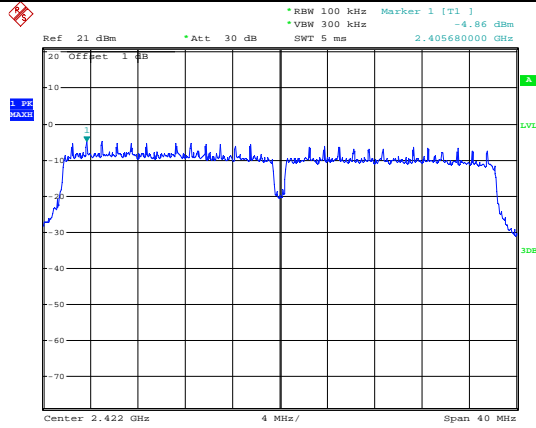


## 6.6 Band Edge

### 6.6.1 Conducted Emission Method

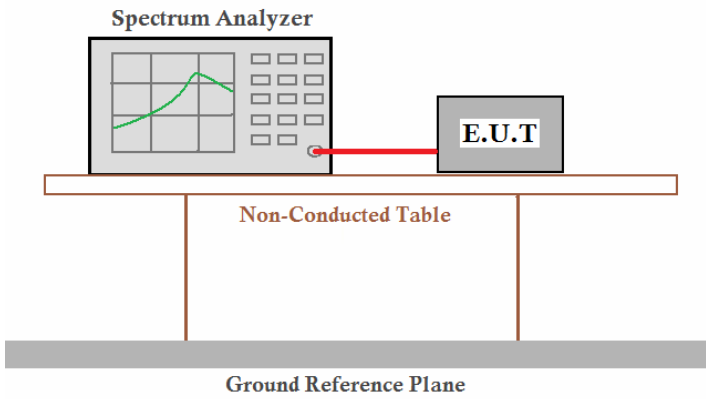
Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.4:2003 and KDB558074
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by two legs. Below the table is a Ground Reference Plane.</p>
Test Instruments:	Refer to section 5.7 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Test plot as follows:

Test mode: 802.11b

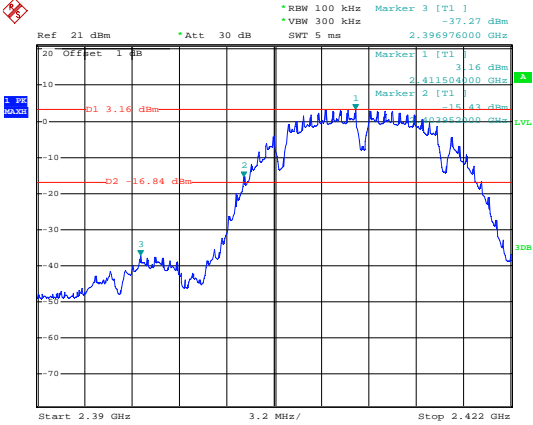


Lowest channel

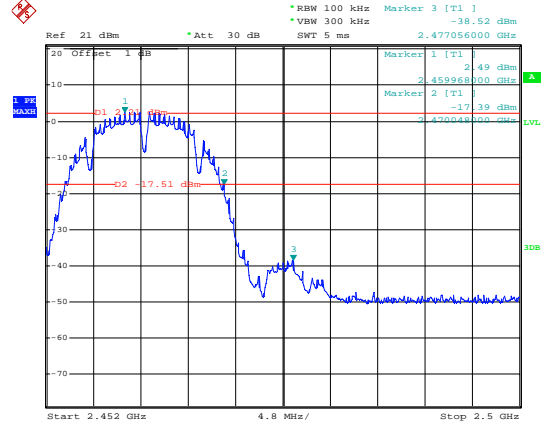


Highest channel

Test mode: 802.11g

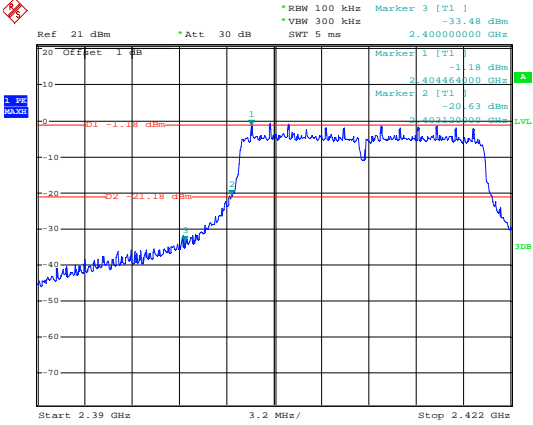


Lowest channel

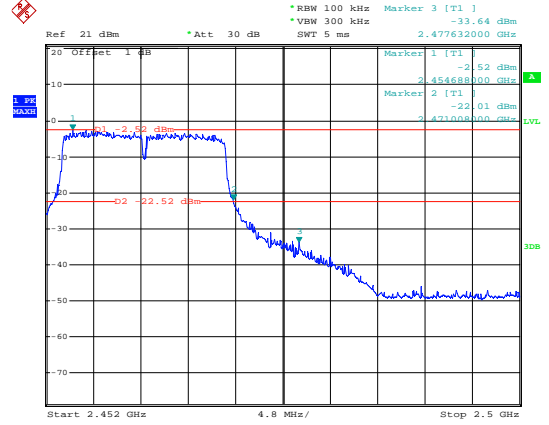


Highest channel

Test mode: 802.11n(H20)

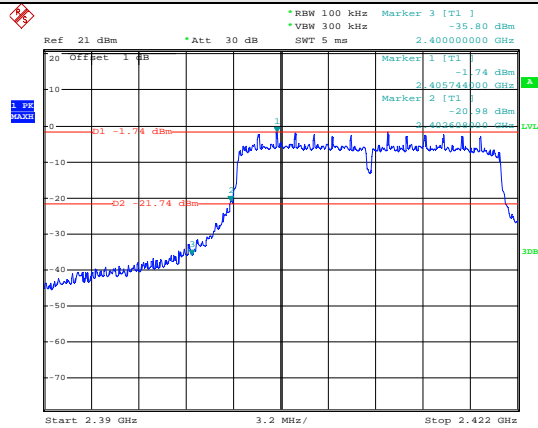


Lowest channel

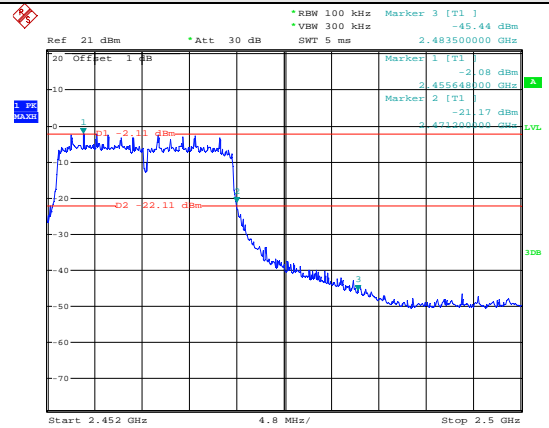


Highest channel

Test mode: 802.11n(H40)

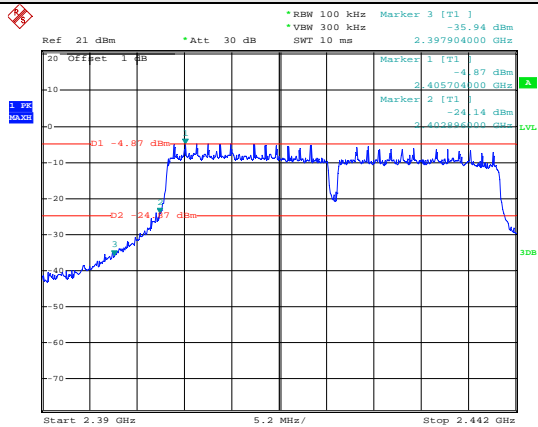

Lowest channel

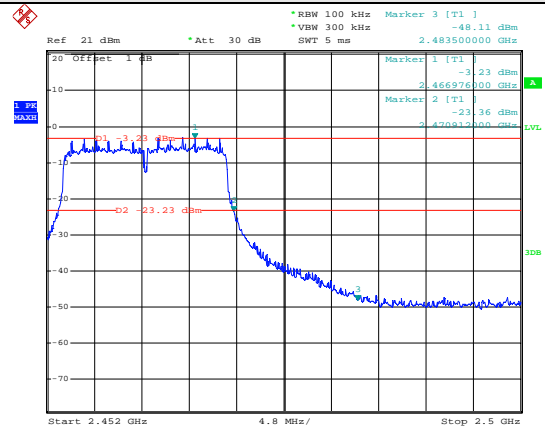

Highest channel

## 6.6.2 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209 and 15.205														
Test Method:	ANSI C63.4: 2003														
Test Frequency Range:	2.3GHz to 2.5GHz														
Test site:	Measurement Distance: 3m														
Receiver setup:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Detector</th> <th>RBW</th> <th>VBW</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Above 1GHz</td> <td>Peak</td> <td>1MHz</td> <td>3MHz</td> <td>Peak Value</td> </tr> <tr> <td>Peak</td> <td>1MHz</td> <td>10Hz</td> <td>Average Value</td> </tr> </tbody> </table>	Frequency	Detector	RBW	VBW	Remark	Above 1GHz	Peak	1MHz	3MHz	Peak Value	Peak	1MHz	10Hz	Average Value
Frequency	Detector	RBW	VBW	Remark											
Above 1GHz	Peak	1MHz	3MHz	Peak Value											
	Peak	1MHz	10Hz	Average Value											
Limit:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Limit (dBuV/m @3m)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Above 1GHz</td> <td>54.00</td> <td>Average Value</td> </tr> <tr> <td>74.00</td> <td>Peak Value</td> </tr> </tbody> </table>	Frequency	Limit (dBuV/m @3m)	Remark	Above 1GHz	54.00	Average Value	74.00	Peak Value						
Frequency	Limit (dBuV/m @3m)	Remark													
Above 1GHz	54.00	Average Value													
	74.00	Peak Value													
Test Procedure:	<ol style="list-style-type: none"> <li>The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> </ol>														
Test setup:															
Test Instruments:	Refer to section 5.7 for details														
Test mode:	Refer to section 5.3 for details														
Test results:	Passed														

802.11b

Test channel:		Lowest			Level:		Peak	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	40.25	27.58	3.81	36.81	36.81	74.00	-37.19	Horizontal
2400.00	40.79	27.58	3.83	34.83	37.37	74.00	-36.63	Horizontal
2390.00	41.28	27.58	3.81	34.83	37.84	74.00	-36.16	Vertical
2400.00	41.79	27.58	3.83	34.83	38.37	74.00	-35.63	Vertical

Test channel:		Lowest			Level:		Average	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	30.90	27.58	3.81	34.83	27.46	54.00	-26.54	Horizontal
2400.00	31.18	27.58	3.83	34.83	27.76	54.00	-26.24	Horizontal
2390.00	31.92	27.58	3.81	34.83	28.48	54.00	-25.52	Vertical
2400.00	32.21	27.58	3.83	34.83	28.79	54.00	-25.21	Vertical

Test channel:		Highest			Level:		Peak	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	40.13	27.52	3.89	34.86	36.68	74.00	-37.32	Horizontal
2500.00	40.54	27.55	3.90	34.87	37.12	74.00	-36.88	Horizontal
2483.50	41.17	27.52	3.89	34.86	37.72	74.00	-36.28	Vertical
2500.00	41.55	27.55	3.90	34.87	38.13	74.00	-35.87	Vertical

Test channel:		Highest			Level:		Average	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	31.17	27.52	3.89	34.86	27.72	54.00	-26.28	Horizontal
2500.00	31.74	27.55	3.90	34.87	28.32	54.00	-25.68	Horizontal
2483.50	32.19	27.52	3.89	34.86	28.74	54.00	-25.26	Vertical
2500.00	32.76	27.55	3.90	34.87	29.34	54.00	-24.66	Vertical



802.11g

Test channel:		Lowest			Level:		Peak	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	48.26	27.58	3.81	34.83	44.82	74.00	-29.18	Horizontal
2400.00	45.26	27.58	3.83	34.83	41.84	74.00	-32.16	Horizontal
2390.00	45.35	27.58	3.81	34.83	41.91	74.00	-32.09	Vertical
2400.00	48.26	27.58	3.83	34.83	44.84	74.00	-29.16	Vertical

Test channel:		Lowest			Level:		Average	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	39.25	27.58	3.81	34.83	35.81	54.00	-18.19	Horizontal
2400.00	32.15	27.58	3.83	34.83	28.73	54.00	-25.27	Horizontal
2390.00	32.62	27.58	3.81	34.83	29.18	54.00	-24.82	Vertical
2400.00	39.26	27.58	3.83	34.83	35.84	54.00	-18.16	Vertical

Test channel:		Highest			Level:		Peak	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	52.24	27.52	3.89	34.86	48.79	74.00	-25.21	Horizontal
2500.00	42.35	27.55	3.90	34.87	38.93	74.00	-35.07	Horizontal
2483.50	46.25	27.52	3.89	34.86	42.80	74.00	-31.20	Vertical
2500.00	42.15	27.55	3.90	34.87	38.73	74.00	-35.27	Vertical

Test channel:		Highest			Level:		Average	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	42.36	27.52	3.89	34.86	38.91	54.00	-15.09	Horizontal
2500.00	40.21	27.55	3.90	34.87	36.79	54.00	-17.21	Horizontal
2483.50	38.24	27.52	3.89	34.86	34.79	54.00	-19.21	Vertical
2500.00	36.25	27.55	3.90	34.87	32.83	54.00	-21.17	Vertical

802.11n(H20)

Test channel:		Lowest			Level:		Peak	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	53.23	27.58	3.81	34.83	49.79	74.00	-24.21	Horizontal
2400.00	46.23	27.58	3.83	34.83	42.81	74.00	-31.19	Horizontal
2390.00	52.32	27.58	3.81	34.83	48.88	74.00	-25.12	Vertical
2400.00	45.32	27.58	3.83	34.83	41.90	74.00	-32.10	Vertical

Test channel:		Lowest			Level:		Average	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	45.35	27.58	3.81	34.83	41.91	54.00	-12.09	Horizontal
2400.00	34.26	27.58	3.83	34.83	30.84	54.00	-23.16	Horizontal
2390.00	45.32	27.58	3.81	34.83	41.88	54.00	-12.12	Vertical
2400.00	32.21	27.58	3.83	34.83	28.79	54.00	-25.21	Vertical

Test channel:		Highest			Level:		Peak	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	52.36	27.52	3.89	34.86	48.91	74.00	-25.09	Horizontal
2500.00	48.32	27.55	3.90	34.87	44.90	74.00	-29.10	Horizontal
2483.50	53.23	27.52	3.89	34.86	49.78	74.00	-24.22	Vertical
2500.00	46.32	27.55	3.90	34.87	42.90	74.00	-31.10	Vertical

Test channel:		Highest			Level:		Average	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	46.32	27.52	3.89	34.86	42.87	54.00	-11.13	Horizontal
2500.00	36.35	27.55	3.90	34.87	32.93	54.00	-21.07	Horizontal
2483.50	41.35	27.52	3.89	34.86	37.90	54.00	-16.10	Vertical
2500.00	35.21	27.55	3.90	34.87	31.79	54.00	-22.21	Vertical

802.11n(H40)

Test channel:		Lowest			Level:		Peak	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	56.32	27.58	3.81	34.83	52.88	74.00	-21.12	Horizontal
2400.00	49.32	27.58	3.83	34.83	45.90	74.00	-28.10	Horizontal
2390.00	53.62	27.58	3.81	34.83	50.18	74.00	-23.82	Vertical
2400.00	42.35	27.58	3.83	34.83	38.93	74.00	-35.07	Vertical

Test channel:		Lowest			Level:		Average	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	45.32	27.58	3.81	34.83	41.88	54.00	-12.12	Horizontal
2400.00	38.32	27.58	3.83	34.83	34.90	54.00	-19.10	Horizontal
2390.00	45.35	27.58	3.81	34.83	41.91	54.00	-12.09	Vertical
2400.00	35.26	27.58	3.83	34.83	31.84	54.00	-22.16	Vertical

Test channel:		Highest			Level:		Peak	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	59.32	27.52	3.89	34.86	55.87	74.00	-18.13	Horizontal
2500.00	49.22	27.55	3.90	34.87	45.80	74.00	-28.20	Horizontal
2483.50	56.35	27.52	3.89	34.86	52.90	74.00	-21.10	Vertical
2500.00	47.26	27.55	3.90	34.87	43.84	74.00	-30.16	Vertical


Test channel:		Highest			Level:		Average	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	48.32	27.52	3.89	34.86	44.87	54.00	-9.13	Horizontal
2500.00	36.35	27.55	3.90	34.87	32.93	54.00	-21.07	Horizontal
2483.50	48.56	27.52	3.89	34.86	45.11	54.00	-8.89	Vertical
2500.00	36.26	27.55	3.90	34.87	32.84	54.00	-21.16	Vertical

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
- The emission levels of other frequencies are very lower than the limit and not show in test report.

## 6.7 Spurious Emission


### 6.7.1 Conducted Emission Method

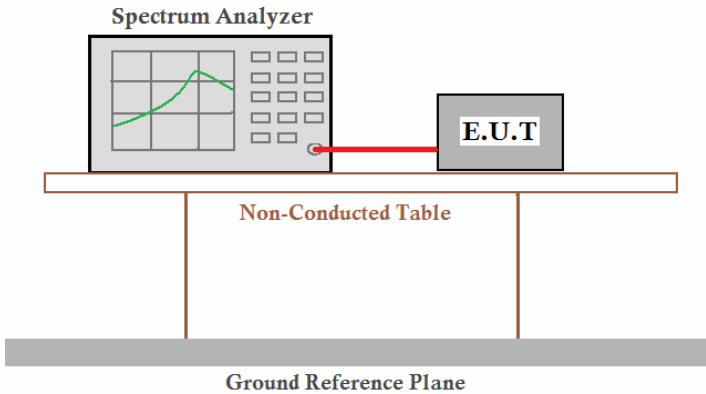Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.4:2003 and KDB558074
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by two legs. Below the table is a Ground Reference Plane.</p>
Test Instruments:	Refer to section 5.7 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed


Test plot as follows:

Test mode:	802.11b
------------	---------

Lowest channel

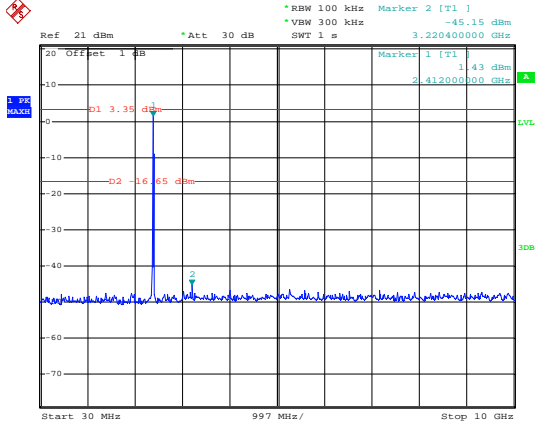


30MHz~10GHz

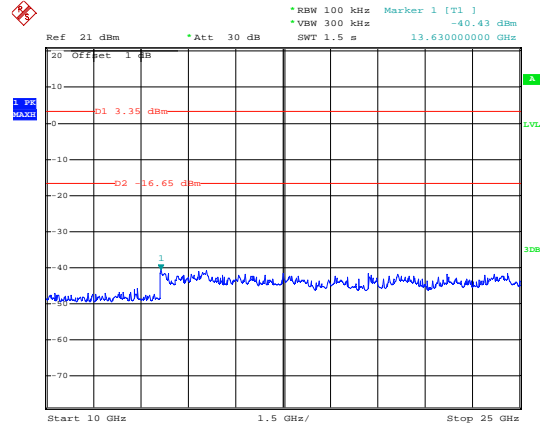


10GHz~25GHz

Middle channel

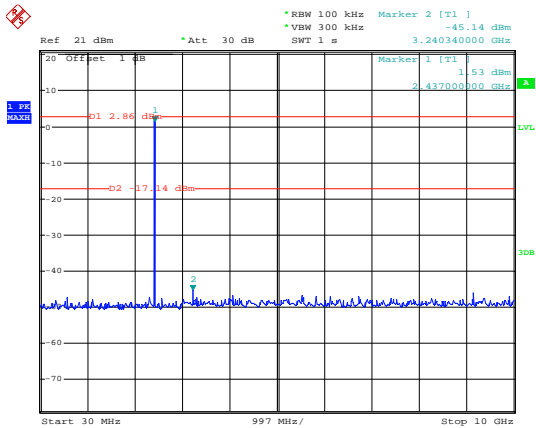


30MHz~10GHz

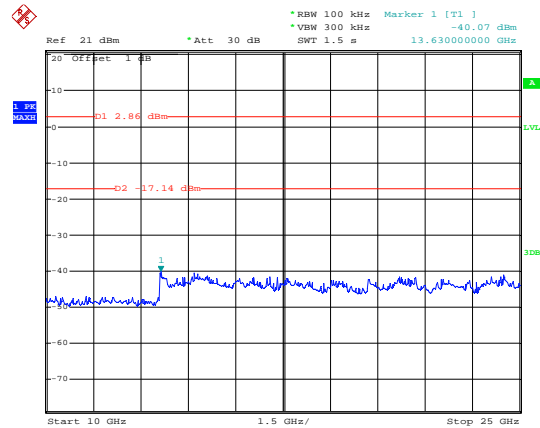


10GHz~25GHz

### Highest channel

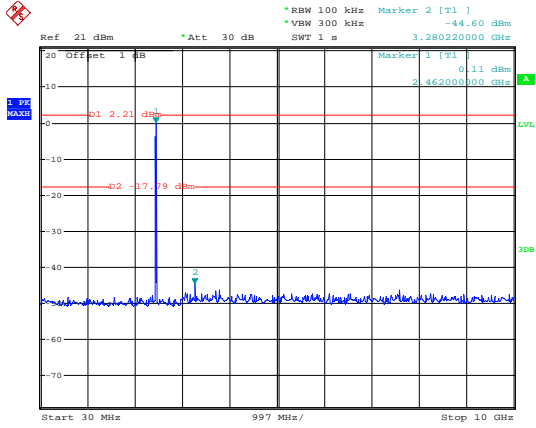

30MHz~10GHz

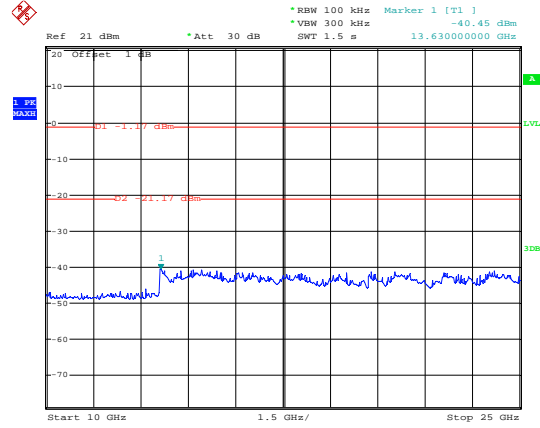


10GHz~25GHz


Test mode:

802.11g

### Lowest channel

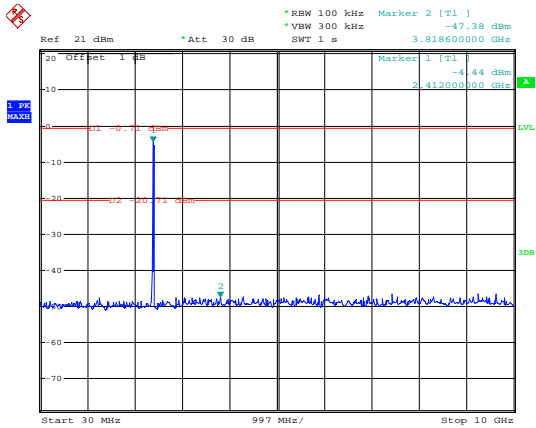


30MHz~10GHz

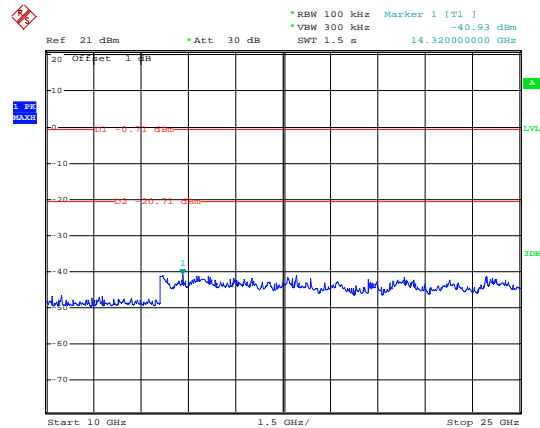


10GHz~25GHz

Middle channel

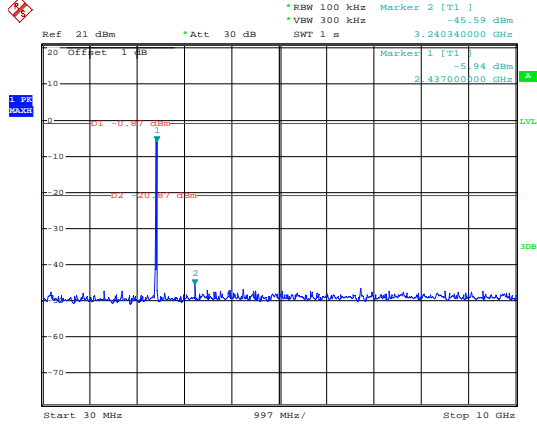


30MHz~10GHz

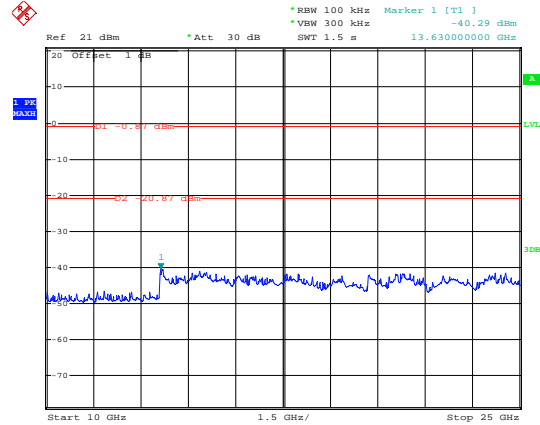


10GHz~25GHz

Highest channel

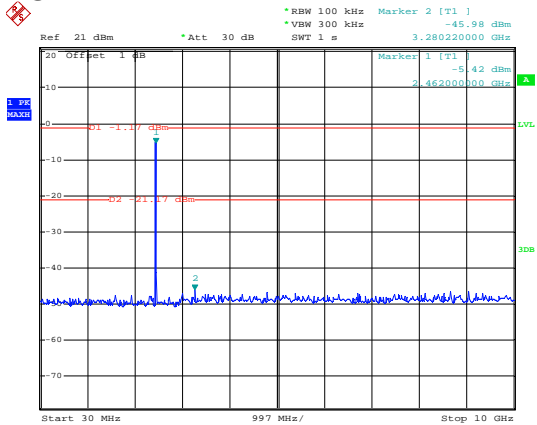


30MHz~10GHz

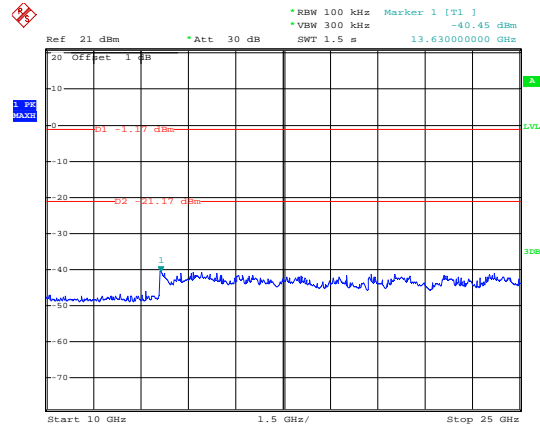


10GHz~25GHz

Test mode:	802.11n(H20)
------------	--------------

Lowest channel

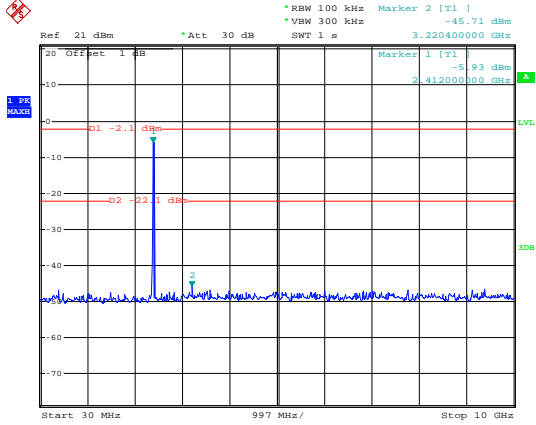


30MHz~10GHz

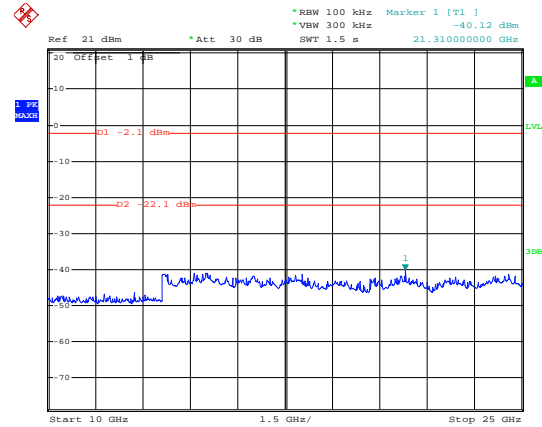


10GHz~25GHz

Middle channel

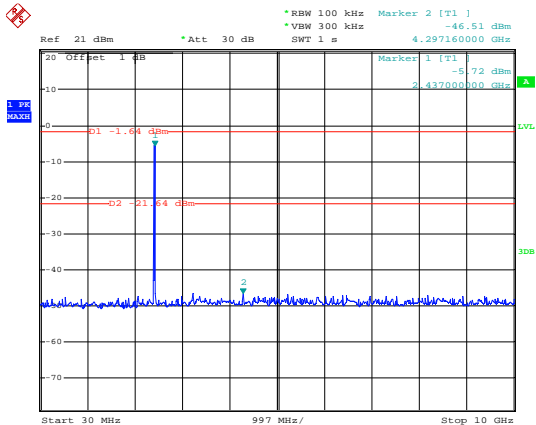


30MHz~10GHz

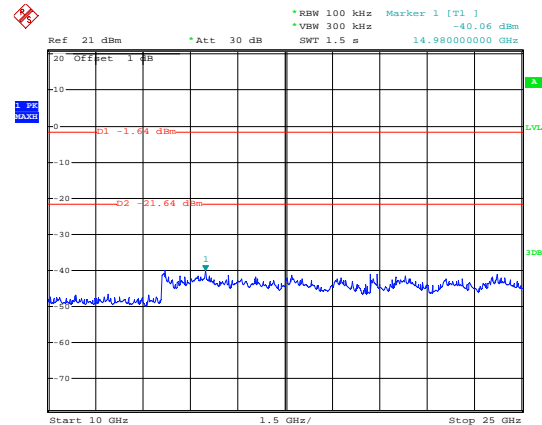


10GHz~25GHz



### Highest channel

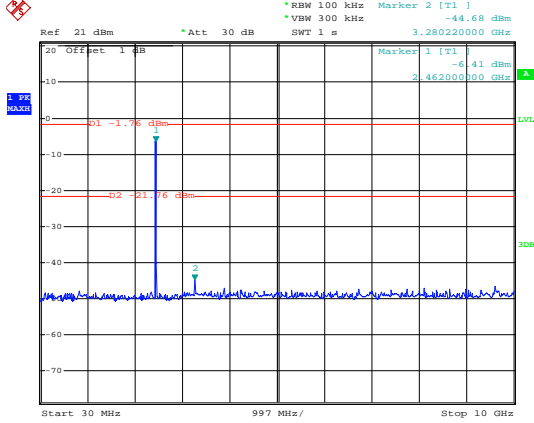

30MHz~10GHz

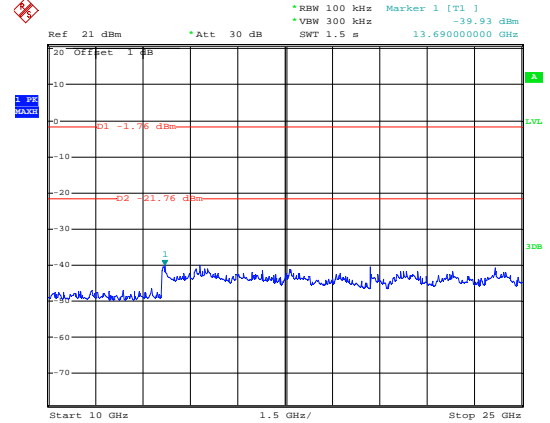


10GHz~25GHz


Test mode:

802.11n(H40)

### Lowest channel

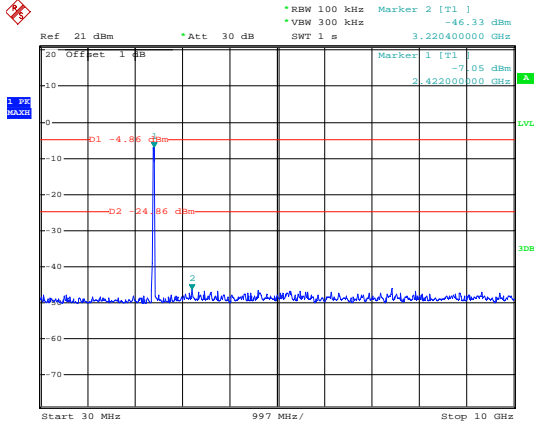


30MHz~10GHz

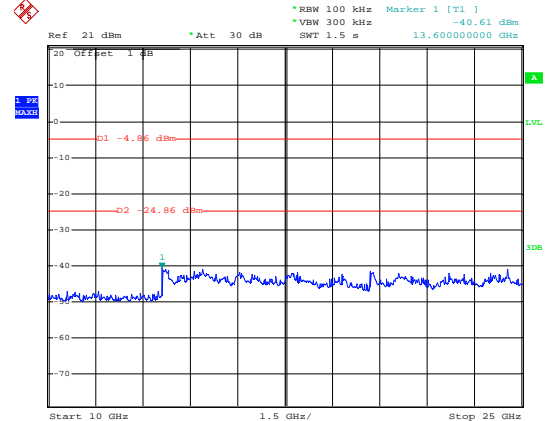


10GHz~25GHz

## Middle channel


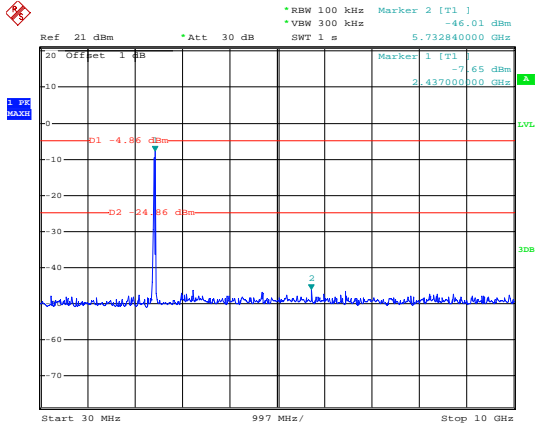


30MHz~10GHz

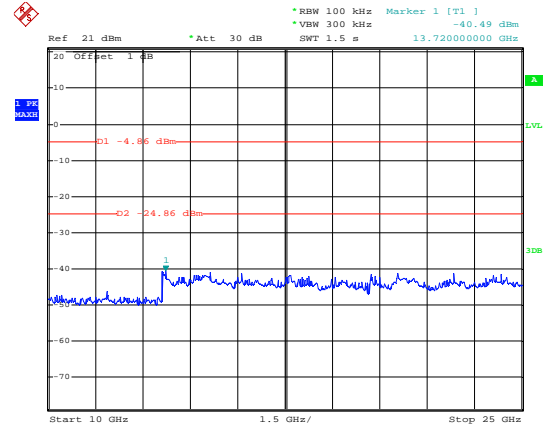



10GHz~25GHz

## Highest channel

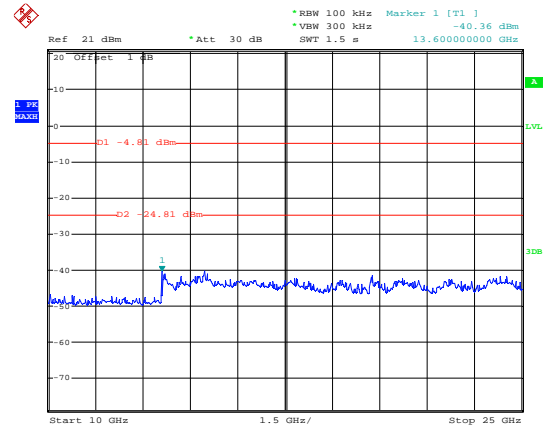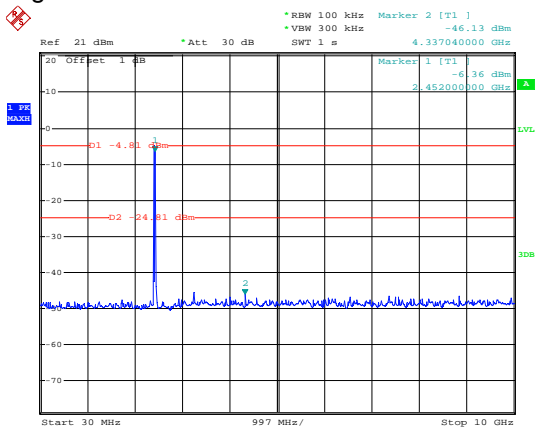

## 6.7.2 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209 and 15.205			
Test Method:	ANSI C63.4:2003			
Test Frequency Range:	30MHz to 25GHz			
Test site:	Measurement Distance: 3m			
Receiver setup:	Frequency	Detector	RBW	VBW
	30MHz-1GHz	Quasi-peak	100KHz	300KHz
	Above 1GHz	Peak	1MHz	3MHz
		Peak	1MHz	10Hz
Remark	Quasi-peak Value			
	Peak Value			
	Average Value			
Limit:	Frequency	Limit (dBuV/m @3m)		Remark
	30MHz-88MHz	40.0		Quasi-peak Value
	88MHz-216MHz	43.5		Quasi-peak Value
	216MHz-960MHz	46.0		Quasi-peak Value
	960MHz-1GHz	54.0		Quasi-peak Value
	Above 1GHz	54.0		Average Value
		74.0		Peak Value
Test Procedure:	<ol style="list-style-type: none"> <li>1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> </ol>			
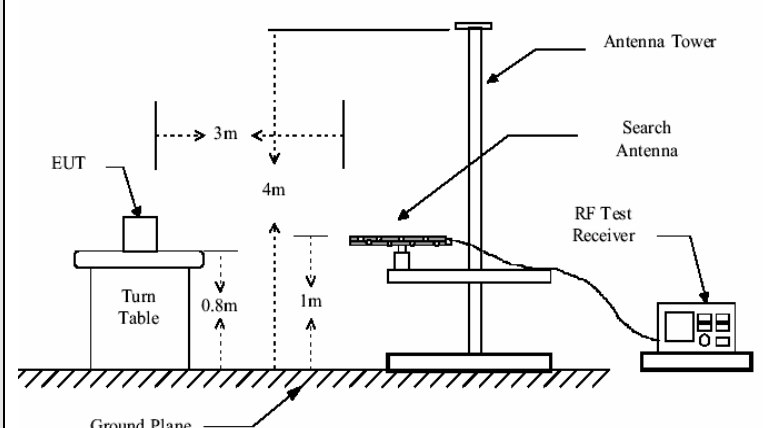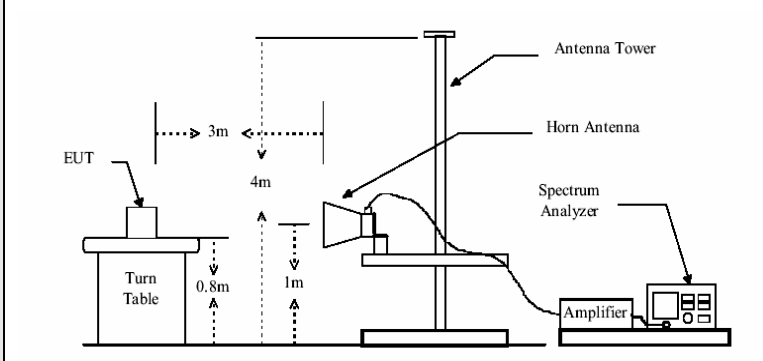
<p>Test setup:</p>	<p><b>Below 1GHz</b></p>  <p><b>Above 1GHz</b></p> 
<p>Test Instruments:</p>	<p>Refer to section 5.7 for details</p>
<p>Test mode:</p>	<p>Refer to section 5.3 for details</p>
<p>Test results:</p>	<p>Passed</p>

**Below 1GHz**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
33.62	44.93	14.37	0.60	32.27	27.63	40.00	-12.37	Vertical
57.26	45.96	15.84	0.68	31.99	30.49	40.00	-9.51	Vertical
135.26	52.06	10.30	1.34	31.83	31.87	43.50	-11.63	Vertical
326.14	56.13	12.71	2.10	32.30	38.64	46.00	-7.36	Vertical
384.26	52.69	14.20	2.26	32.32	36.83	46.00	-9.17	Vertical
663.25	46.75	19.98	2.89	31.64	37.98	46.00	-8.02	Vertical
33.62	44.06	15.88	0.60	32.27	28.27	40.00	-11.73	Horizontal
57.26	46.05	10.66	0.76	31.93	25.54	40.00	-14.46	Horizontal
135.26	53.15	10.52	1.34	31.83	33.18	43.50	-10.32	Horizontal
326.14	54.24	10.82	1.83	32.27	34.62	43.50	-8.88	Horizontal
384.26	49.51	13.09	2.08	32.30	32.38	46.00	-13.62	Horizontal
663.25	44.78	19.45	2.34	31.92	34.65	46.00	-11.35	Horizontal

Above 1GHz

Test mode:	802.11b		Test channel:	Lowest		Remark:	Peak	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	38.07	31.79	5.34	24.07	51.13	74.00	22.87	Vertical
7236.00	27.27	36.19	6.88	26.44	43.9	74.00	-30.1	Vertical
9648.00	27.04	38.07	8.96	25.36	48.71	74.00	25.29	Vertical
12060.00	24.56	39.05	10.35	25.15	48.81	74.00	25.19	Vertical
14472.00	*					74.00		Vertical
16884.00	*					74.00		Vertical
4824.00	39.11	31.79	5.34	24.07	52.17	74.00	21.83	Horizontal
7236.00	28.96	36.19	6.88	26.44	45.59	74.00	28.41	Horizontal
9648.00	29.48	38.07	8.96	25.36	51.15	74.00	22.85	Horizontal
12060.00	27.75	39.05	10.35	25.15	52.00	74.00	-22	Horizontal
14472.00	*					74.00		Horizontal
16884.00	*					74.00		Horizontal

Test mode:	802.11b		Test channel:	Lowest		Remark:	Average	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	22.82	31.79	5.34	24.07	35.88	54.00	18.12	Vertical
7236.00	17.40	36.19	6.88	26.44	34.03	54.00	19.97	Vertical
9648.00	16.35	38.07	8.96	25.36	38.02	54.00	15.98	Vertical
12060.00	14.54	39.05	10.35	25.15	38.79	54.00	15.21	Vertical
14472.00	*					54.00		Vertical
16884.00	*					54.00		Vertical
4824.00	24.43	31.79	5.34	24.07	37.49	54.00	16.51	Horizontal
7236.00	18.86	36.19	6.88	26.44	35.49	54.00	18.51	Horizontal
9648.00	17.66	38.07	8.96	25.36	39.33	54.00	14.67	Horizontal
12060.00	15.70	39.05	10.35	25.15	39.95	54.00	14.05	Horizontal
14472.00	*					54.00		Horizontal
16884.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “\*”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

Test mode:	802.11b		Test channel:	Middle		Remark:		Peak
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874	41.46	31.85	5.40	24.01	54.7	74.00	-19.3	Vertical
7311	28.56	36.37	6.90	26.58	45.25	74.00	28.75	Vertical
9688	29.67	38.13	8.98	25.34	51.44	74.00	22.56	Vertical
12185	25.58	38.92	10.38	25.04	49.84	74.00	24.16	Vertical
14682	*					74.00		Vertical
17179	*					74.00		Vertical
4874	43.6	31.85	5.40	24.01	56.84	74.00	17.16	Horizontal
7311	30.59	36.37	6.90	26.58	47.28	74.00	26.72	Horizontal
9688	31.59	38.13	8.98	25.34	53.36	74.00	20.64	Horizontal
12185	27.39	38.92	10.38	25.04	51.65	74.00	22.35	Horizontal
14682	*					74.00		Horizontal
17179	*					74.00		Horizontal

Test mode:	802.11b		Test channel:	Middle		Remark:		Peak
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	23.34	31.85	5.40	24.01	36.58	54.00	17.42	Vertical
7311.00	16.41	36.37	6.90	26.58	33.10	54.00	20.90	Vertical
9688.00	12.64	38.13	8.98	25.34	34.41	54.00	19.59	Vertical
12185.00	13.41	38.92	10.38	25.04	37.67	54.00	16.33	Vertical
14682.00	*					54.00		Vertical
17179.00	*					54.00		Vertical
4874.00	25.38	31.85	5.40	24.01	38.62	54.00	15.38	Horizontal
7311.00	18.29	36.37	6.90	26.58	34.98	54.00	19.02	Horizontal
9688.00	14.36	38.13	8.98	25.34	36.13	54.00	17.87	Horizontal
12185.00	14.97	38.92	10.38	25.04	39.23	54.00	14.77	Horizontal
14682.00	*					54.00		Horizontal
17179.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. “\*”, means this data is too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

Test mode:	802.11b		Test channel:	Highest		Remark:		Peak
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	40.07	31.89	5.46	23.96	53.46	74.00	20.54	Vertical
7386.00	34.33	36.49	6.93	26.79	50.96	74.00	23.04	Vertical
9848.00	30.78	38.24	9.05	25.30	52.77	74.00	21.23	Vertical
12310.00	30.40	38.83	10.41	24.90	54.74	74.00	19.26	Vertical
14772.00	*					74.00		Vertical
17234.00	*					74.00		Vertical
4924.00	42.11	31.89	5.46	23.96	55.50	74.00	18.50	Horizontal
7386.00	36.28	36.49	6.93	26.79	52.91	74.00	21.09	Horizontal
9848.00	32.64	38.24	9.05	25.30	54.63	74.00	19.37	Horizontal
12310.00	32.17	38.83	10.41	24.90	56.51	74.00	17.49	Horizontal
14772.00	*					74.00		Horizontal
17234.00	*					74.00		Horizontal

Test mode:	802.11b		Test channel:	Highest		Remark:		Average
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	24.31	31.89	5.46	23.96	37.70	54.00	16.30	Vertical
7386.00	19.67	36.49	6.93	26.79	36.30	54.00	17.70	Vertical
9848.00	21.22	38.24	9.05	25.30	43.21	54.00	10.79	Vertical
12310.00	17.61	38.83	10.41	24.90	41.95	54.00	12.05	Vertical
14772.00	*					54.00		Vertical
17234.00	*					54.00		Vertical
4924.00	26.27	31.89	5.46	23.96	39.66	54.00	14.34	Horizontal
7386.00	21.46	36.49	6.93	26.79	38.09	54.00	15.91	Horizontal
9848.00	22.84	38.24	9.05	25.30	44.83	54.00	-9.17	Horizontal
12310.00	19.06	38.83	10.41	24.90	43.40	54.00	10.60	Horizontal
14772.00	*					54.00		Horizontal
17234.00	*					54.00		Horizontal

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. “\*”, means this data is too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

Test mode:	802.11g		Test channel:	Lowest		Remark:		Peak
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	38.93	31.79	5.34	24.07	51.99	74.00	22.01	Vertical
7236.00	35.04	36.19	6.88	26.44	51.67	74.00	22.33	Vertical
9648.00	31.96	38.07	8.96	25.36	53.63	74.00	20.37	Vertical
12060.00	30.45	39.05	10.35	25.15	54.70	74.00	19.30	Vertical
14472.00	*					74.00		Vertical
16884.00	*					74.00		Vertical
4824.00	39.34	31.79	5.34	24.07	52.40	74.00	21.60	Horizontal
7236.00	34.40	36.19	6.88	26.44	51.03	74.00	22.97	Horizontal
9648.00	33.06	38.07	8.96	25.36	54.73	74.00	19.27	Horizontal
12060.00	31.29	39.05	10.35	25.15	55.54	74.00	18.46	Horizontal
14472.00	*					74.00		Horizontal
16884.00	*					74.00		Horizontal

Test mode:	802.11g		Test channel:	Lowest		Remark:		Average
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	25.63	31.79	5.34	24.07	38.69	54.00	15.31	Vertical
7236.00	22.31	36.19	6.88	26.44	38.94	54.00	15.06	Vertical
9648.00	18.28	38.07	8.96	25.36	39.95	54.00	14.05	Vertical
12060.00	17.02	39.05	10.35	25.15	41.27	54.00	12.73	Vertical
14472.00	*					54.00		Vertical
16884.00	*					54.00		Vertical
4824.00	27.24	31.79	5.34	24.07	40.30	54.00	13.70	Horizontal
7236.00	23.77	36.19	6.88	26.44	40.40	54.00	13.60	Horizontal
9648.00	19.59	38.07	8.96	25.36	41.26	54.00	12.74	Horizontal
12060.00	18.18	39.05	10.35	25.15	42.43	54.00	11.57	Horizontal
14472.00	*					54.00		Horizontal
16884.00	*					54.00		Horizontal

Remark:

1. Final Level =Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. “\*”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.



Test mode:	802.11g		Test channel:	Middle		Remark:	Peak	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	35.34	31.85	5.40	24.01	48.58	74.00	25.42	Vertical
7311.00	29.87	36.37	6.90	26.58	46.56	74.00	27.44	Vertical
9688.00	26.39	38.13	8.98	25.34	48.16	74.00	25.84	Vertical
12185.00	26.13	38.92	10.38	25.04	50.39	74.00	23.61	Vertical
14472.00	*					74.00		Vertical
16884.00	*					74.00		Vertical
4874.00	37.47	31.85	5.40	24.01	50.71	74.00	23.29	Horizontal
7311.00	31.20	36.37	6.90	26.58	47.89	74.00	26.11	Horizontal
9688.00	26.53	38.13	8.98	25.34	48.30	74.00	25.70	Horizontal
12185.00	26.08	38.92	10.38	25.04	50.34	74.00	23.66	Horizontal
14472.00	*					74.00		Horizontal
16884.00	*					74.00		Horizontal

Test mode:	802.11g		Test channel:	Middle		Remark:		Average
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	21.65	31.85	5.40	24.01	34.89	54.00	19.11	Vertical
7311.00	19.58	36.37	6.90	26.58	36.27	54.00	17.73	Vertical
9688.00	15.21	38.13	8.98	25.34	36.98	54.00	17.02	Vertical
12185.00	12.88	38.92	10.38	25.04	37.14	54.00	16.86	Vertical
14472.00	*					54.00		Vertical
16884.00	*					54.00		Vertical
4874.00	23.69	31.85	5.40	24.01	36.93	54.00	17.07	Horizontal
7311.00	21.46	36.37	6.90	26.58	38.15	54.00	15.85	Horizontal
9688.00	16.93	38.13	8.98	25.34	38.70	54.00	15.30	Horizontal
12185.00	14.44	38.92	10.38	25.04	38.70	54.00	15.30	Horizontal
14472.00	*					54.00		Horizontal
16884.00	*					54.00		Horizontal

Remark:

1. Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “\*\*”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

Test mode:	802.11g		Test channel:	Highest		Remark:		Peak
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	38.42	31.89	5.46	23.96	51.81	74.00	22.19	Vertical
7386.00	35.19	36.49	6.93	26.79	51.82	74.00	22.18	Vertical
9848.00	32.94	38.24	9.05	25.30	54.93	74.00	19.07	Vertical
12310.00	30.17	38.83	10.41	24.90	54.51	74.00	19.49	Vertical
14772.00	*					74.00		Vertical
17234.00	*					74.00		Vertical
4924.00	41.14	31.89	5.46	23.96	54.53	74.00	19.47	Horizontal
7386.00	35.37	36.49	6.93	26.79	52.00	74.00	22.00	Horizontal
9848.00	32.84	38.24	9.05	25.30	54.83	74.00	19.17	Horizontal
12310.00	29.81	38.83	10.41	24.90	54.15	74.00	19.85	Horizontal
14772.00	*					74.00		Horizontal
17234.00	*					74.00		Horizontal

Test mode:	802.11g		Test channel:	Highest		Remark:		Average
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	23.52	31.89	5.46	23.96	36.91	54.00	17.09	Vertical
7386.00	22.50	36.49	6.93	26.79	39.13	54.00	14.87	Vertical
9848.00	19.54	38.24	9.05	25.30	41.53	54.00	12.47	Vertical
12310.00	18.00	38.83	10.41	24.90	42.34	54.00	11.66	Vertical
14772.00	*					54.00		Vertical
17234.00	*					54.00		Vertical
4924.00	25.48	31.89	5.46	23.96	38.87	54.00	15.13	Horizontal
7386.00	24.29	36.49	6.93	26.79	40.92	54.00	13.08	Horizontal
9848.00	21.16	38.24	9.05	25.30	43.15	54.00	10.85	Horizontal
12310.00	19.45	38.83	10.41	24.90	43.79	54.00	10.21	Horizontal
14772.00	*					54.00		Horizontal
17234.00	*					54.00		Horizontal

Remark:

1. Final Level =Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. “\*”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

Test mode:	802.11n(H20)		Test channel:	Lowest		Remark:		Peak
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	36.70	31.79	5.34	24.07	49.76	74.00	24.24	Vertical
7236.00	33.34	36.19	6.88	26.44	49.97	74.00	24.03	Vertical
9648.00	32.23	38.07	8.96	25.36	53.90	74.00	20.10	Vertical
12060.00	30.69	39.05	10.35	25.15	54.94	74.00	19.06	Vertical
14472.00	*					74.00		Vertical
16884.00	*					74.00		Vertical
4824.00	38.31	31.79	5.34	24.07	51.37	74.00	22.63	Horizontal
7236.00	34.80	36.19	6.88	26.44	51.43	74.00	22.57	Horizontal
9648.00	33.54	38.07	8.96	25.36	55.21	74.00	18.79	Horizontal
12060.00	31.85	39.05	10.35	25.15	56.10	74.00	17.90	Horizontal
14472.00	*					74.00		Horizontal
16884.00	*					74.00		Horizontal

Test mode:	802.11n(H20)		Test channel:	Lowest		Remark:		Average
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	25.56	31.79	5.34	24.07	38.62	54.00	15.38	Vertical
7236.00	24.54	36.19	6.88	26.44	41.17	54.00	12.83	Vertical
9648.00	20.77	38.07	8.96	25.36	42.44	54.00	11.56	Vertical
12060.00	18.03	39.05	10.35	25.15	42.28	54.00	11.72	Vertical
14472.00	*					54.00		Vertical
16884.00	*					54.00		Vertical
4824.00	27.17	31.79	5.34	24.07	40.23	54.00	13.77	Horizontal
7236.00	26.00	36.19	6.88	26.44	42.63	54.00	11.37	Horizontal
9648.00	22.08	38.07	8.96	25.36	43.75	54.00	10.25	Horizontal
12060.00	19.19	39.05	10.35	25.15	43.44	54.00	10.56	Horizontal
14472.00	*					54.00		Horizontal
16884.00	*					54.00		Horizontal

Remark:

1. Final Level =Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. “\*”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

Test mode:	802.11n(H20)		Test channel:	Middle		Remark:		Peak
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	34.48	31.85	5.40	24.01	47.72	74.00	26.28	Vertical
7311.00	29.48	36.37	6.90	26.58	46.17	74.00	27.83	Vertical
9688.00	25.62	38.13	8.98	25.34	47.39	74.00	26.61	Vertical
12185.00	24.41	38.92	10.38	25.04	48.67	74.00	25.33	Vertical
14472.00	*					74.00		Vertical
16884.00	*					74.00		Vertical
4874.00	36.52	31.85	5.40	24.01	49.76	74.00	24.24	Horizontal
7311.00	31.36	36.37	6.90	26.58	48.05	74.00	25.95	Horizontal
9688.00	27.34	38.13	8.98	25.34	49.11	74.00	24.89	Horizontal
12185.00	25.97	38.92	10.38	25.04	50.23	74.00	23.77	Horizontal
14472.00	*					74.00		Horizontal
16884.00	*					74.00		Horizontal

Test mode:	802.11n(H20)		Test channel:	Middle		Remark:		Average
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	21.95	31.85	5.40	24.01	35.19	54.00	18.81	Vertical
7311.00	21.36	36.37	6.90	26.58	38.05	54.00	15.95	Vertical
9688.00	17.47	38.13	8.98	25.34	39.24	54.00	14.76	Vertical
12185.00	12.89	38.92	10.38	25.04	37.15	54.00	16.85	Vertical
14472.00	*					54.00		Vertical
16884.00	*					54.00		Vertical
4874.00	23.99	31.85	5.40	24.01	37.23	54.00	16.77	Horizontal
7311.00	23.24	36.37	6.90	26.58	39.93	54.00	14.07	Horizontal
9688.00	19.19	38.13	8.98	25.34	40.96	54.00	13.04	Horizontal
12185.00	15.95	38.92	10.38	25.04	40.21	54.00	13.79	Horizontal
14472.00	*					54.00		Horizontal
16884.00	*					54.00		Horizontal

Remark:

1. Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “\*”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

Test mode:	802.11n(H20)		Test channel:	Highest		Remark:		Peak
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	36.35	31.89	5.46	23.96	49.74	74.00	24.26	Vertical
7386.00	33.39	36.49	6.93	26.79	50.02	74.00	23.98	Vertical
9848.00	31.12	38.24	9.05	25.30	53.11	74.00	20.89	Vertical
12310.00	28.41	38.83	10.41	24.90	52.75	74.00	21.25	Vertical
14772.00	*					74.00		Vertical
17234.00	*					74.00		Vertical
4924.00	38.51	31.89	5.46	23.96	51.90	74.00	22.10	Horizontal
7386.00	35.28	36.49	6.93	26.79	51.91	74.00	22.09	Horizontal
9848.00	32.84	38.24	9.05	25.30	54.83	74.00	19.17	Horizontal
12310.00	29.96	38.83	10.41	24.90	54.30	74.00	19.70	Horizontal
14772.00	*					74.00		Horizontal
17234.00	*					74.00		Horizontal

Test mode:	802.11n(H20)		Test channel:	Highest		Remark:		Average
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	25.69	31.89	5.46	23.96	39.08	54.00	14.92	Vertical
7386.00	24.61	36.49	6.93	26.79	41.24	54.00	12.76	Vertical
9848.00	21.26	38.24	9.05	25.30	43.25	54.00	10.75	Vertical
12310.00	20.24	38.83	10.41	24.90	44.58	54.00	-9.42	Vertical
14772.00	*					54.00		Vertical
17234.00	*					54.00		Vertical
4924.00	27.75	31.89	5.46	23.96	41.14	54.00	12.86	Horizontal
7386.00	26.50	36.49	6.93	26.79	43.13	54.00	10.87	Horizontal
9848.00	22.98	38.24	9.05	25.30	44.97	54.00	-9.03	Horizontal
12310.00	21.79	38.83	10.41	24.90	46.13	54.00	-7.87	Horizontal
14772.00	*					54.00		Horizontal
17234.00	*					54.00		Horizontal

Remark:

1. Final Level =Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. “\*”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

Test mode:	802.11n(H40)		Test channel:	Lowest		Remark:	Peak	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4844.00	42.12	31.79	5.34	24.07	55.18	74.00	18.82	Vertical
7266.00	41.84	36.19	6.88	26.44	58.47	74.00	15.53	Vertical
9688.00	36.43	38.07	8.96	25.36	58.10	74.00	15.90	Vertical
12110.00	35.49	39.05	10.35	25.15	59.74	74.00	14.26	Vertical
14532.00	*					74.00		Vertical
16954.00	*					74.00		Vertical
4844.00	43.71	31.79	5.34	24.07	56.77	74.00	17.23	Horizontal
7266.00	43.30	36.19	6.88	26.44	59.93	74.00	14.07	Horizontal
9688.00	37.74	38.07	8.96	25.36	59.41	74.00	14.59	Horizontal
12110.00	36.65	39.05	10.35	25.15	60.90	74.00	13.10	Horizontal
14532.00	*					74.00		Horizontal
16954.00	*					74.00		Horizontal

Test mode:	802.11n(H40)		Test channel:	Lowest		Remark:	Average	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4844.00	30.96	31.79	5.34	24.07	44.02	54.00	9.98	Vertical
7266.00	33.04	36.19	6.88	26.44	49.67	54.00	4.33	Vertical
9688.00	24.97	38.07	8.96	25.36	46.64	54.00	7.36	Vertical
12110.00	22.83	39.05	10.35	25.15	47.08	54.00	6.92	Vertical
14532.00	*					54.00		Vertical
16954.00	*					54.00		Vertical
4844.00	32.57	31.79	5.34	24.07	45.63	54.00	8.37	Horizontal
7266.00	34.50	36.19	6.88	26.44	51.13	54.00	2.87	Horizontal
9688.00	26.28	38.07	8.96	25.36	47.95	54.00	6.05	Horizontal
12110.00	23.99	39.05	10.35	25.15	48.24	54.00	5.76	Horizontal
14532.00	*					54.00		Horizontal
16954.00	*					54.00		Horizontal

Remark:

1. Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “\*”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

Test mode:	802.11n(H40)		Test channel:	Middle		Remark:		Peak
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	42.38	31.85	5.40	24.01	55.62	74.00	18.38	Vertical
7311.00	40.28	36.37	6.90	26.58	56.97	74.00	17.03	Vertical
9688.00	32.32	38.13	8.98	25.34	54.09	74.00	19.91	Vertical
12185.00	32.81	38.92	10.38	25.04	57.07	74.00	16.93	Vertical
14472.00	*					74.00		Vertical
16884.00	*					74.00		Vertical
4874.00	44.42	31.85	5.40	24.01	57.66	74.00	16.34	Horizontal
7311.00	42.16	36.37	6.90	26.58	58.85	74.00	15.15	Horizontal
9688.00	34.04	38.13	8.98	25.34	55.81	74.00	18.19	Horizontal
12185.00	34.37	38.92	10.38	25.04	58.63	74.00	15.37	Horizontal
14472.00	*					74.00		Horizontal
16884.00	*					74.00		Horizontal

Test mode:	802.11n(H40)		Test channel:	Middle		Remark:		Average
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	23.05	31.85	5.40	24.01	36.29	54.00	17.71	Vertical
7311.00	20.72	36.37	6.90	26.58	37.41	54.00	16.59	Vertical
9688.00	17.17	38.13	8.98	25.34	38.94	54.00	15.06	Vertical
12185.00	14.09	38.92	10.38	25.04	38.35	54.00	15.65	Vertical
14472.00	*					54.00		Vertical
16884.00	*					54.00		Vertical
4874.00	25.09	31.85	5.40	24.01	38.33	54.00	15.67	Horizontal
7311.00	22.60	36.37	6.90	26.58	39.29	54.00	14.71	Horizontal
9688.00	18.89	38.13	8.98	25.34	40.66	54.00	13.34	Horizontal
12185.00	17.15	38.92	10.38	25.04	41.41	54.00	12.59	Horizontal
14472.00	*					54.00		Horizontal
16884.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. “\*”, means this data is too weak; instrument or signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not shown in test report.

Test mode:	802.11n(H40)		Test channel:	Highest		Remark:	Peak	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4904.00	34.95	31.89	5.46	23.96	48.34	74.00	25.66	Vertical
7356.00	30.45	36.49	6.93	26.79	47.08	74.00	26.92	Vertical
9808.00	28.32	38.24	9.05	25.30	50.31	74.00	23.69	Vertical
12260.00	26.01	38.83	10.41	24.90	50.35	74.00	23.65	Vertical
14712.00	*					74.00		Vertical
17164.00	*					74.00		Vertical
4904.00	37.11	31.89	5.46	23.96	50.50	74.00	23.50	Horizontal
7356.00	32.34	36.49	6.93	26.79	48.97	74.00	25.03	Horizontal
9808.00	30.04	38.24	9.05	25.30	52.03	74.00	21.97	Horizontal
12260.00	27.56	38.83	10.41	24.90	51.90	74.00	22.10	Horizontal
14712.00	*					74.00		Horizontal
17164.00	*					74.00		Horizontal

Test mode:	802.11n(H40)		Test channel:	Highest		Remark:	Average	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4904.00	24.29	31.89	5.46	23.96	37.68	54.00	16.32	Vertical
7356.00	21.67	36.49	6.93	26.79	38.30	54.00	15.70	Vertical
9808.00	18.46	38.24	9.05	25.30	40.45	54.00	13.55	Vertical
12260.00	17.84	38.83	10.41	24.90	42.18	54.00	11.82	Vertical
14712.00	*					54.00		Vertical
17164.00	*					54.00		Vertical
4904.00	26.35	31.89	5.46	23.96	39.74	54.00	14.26	Horizontal
7356.00	23.56	36.49	6.93	26.79	40.19	54.00	13.81	Horizontal
9808.00	20.18	38.24	9.05	25.30	42.17	54.00	11.83	Horizontal
12260.00	19.39	38.83	10.41	24.90	43.73	54.00	10.27	Horizontal
14712.00	*					54.00		Horizontal
17164.00	*					54.00		Horizontal

Remark:

1. Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “\*”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.