




802.11n HT20

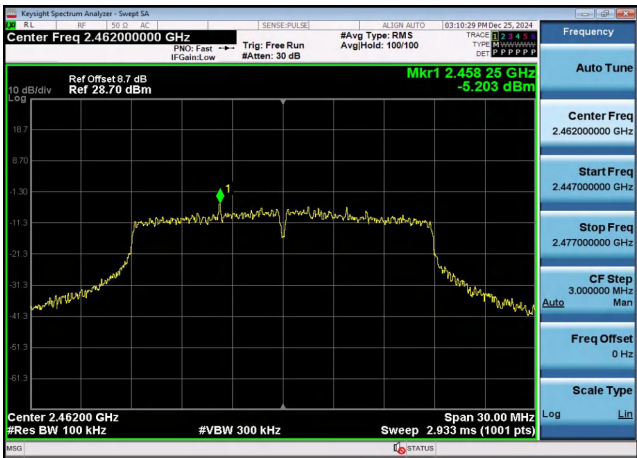


802.11n HT40

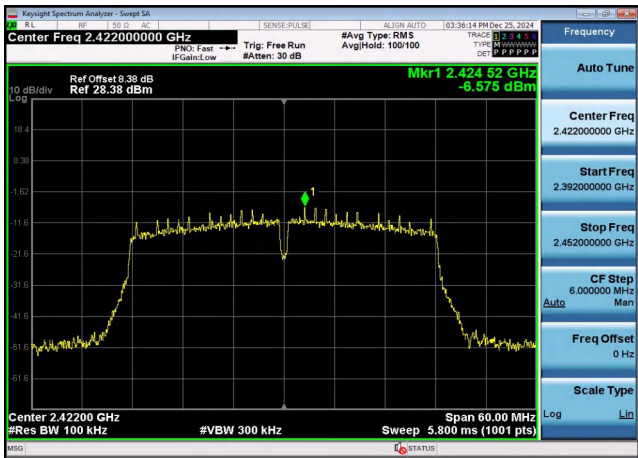


CH11

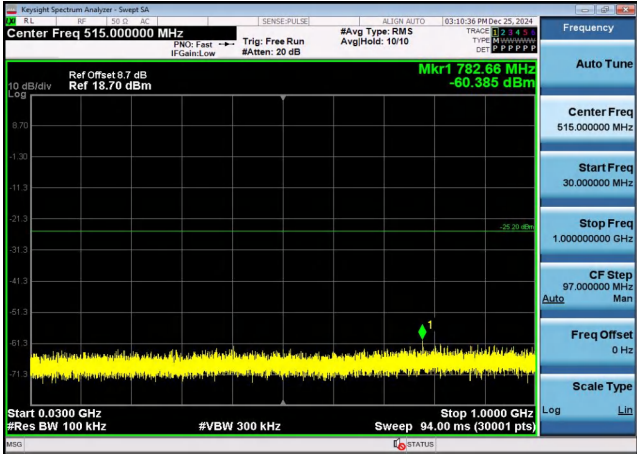

CH03

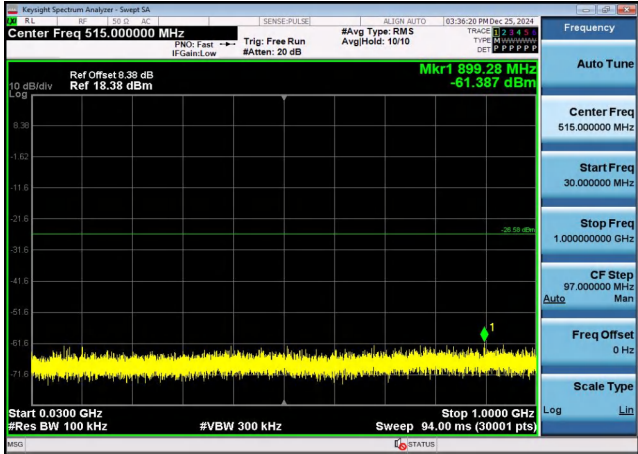

30MHz-1GHz

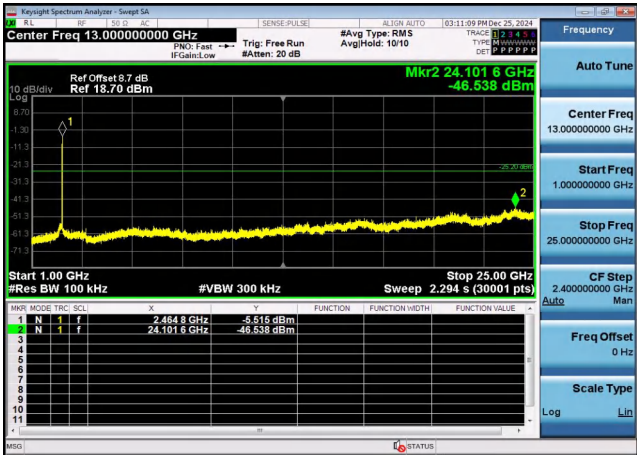


30MHz-1GHz





1GHz -25GHz

1GHz -25GHz

802.11n HT40


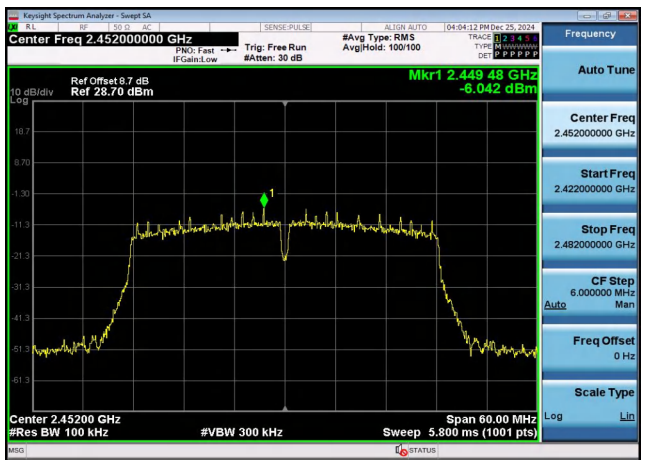


CH06

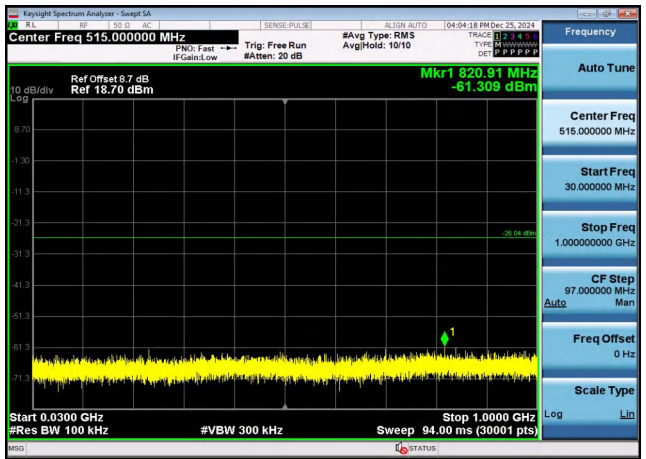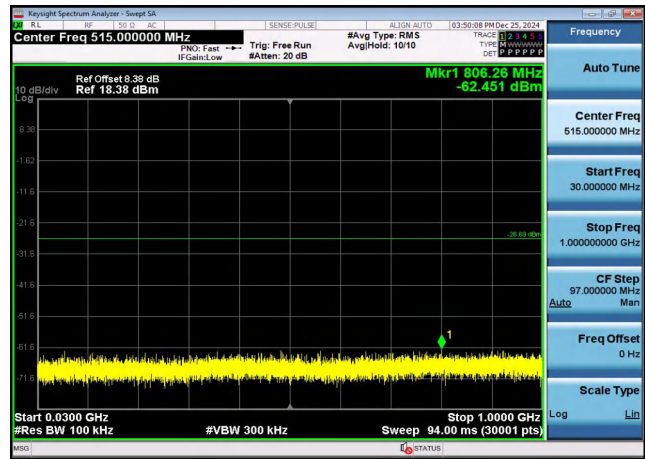

30MHz-1GHz



30MHz-1GHz

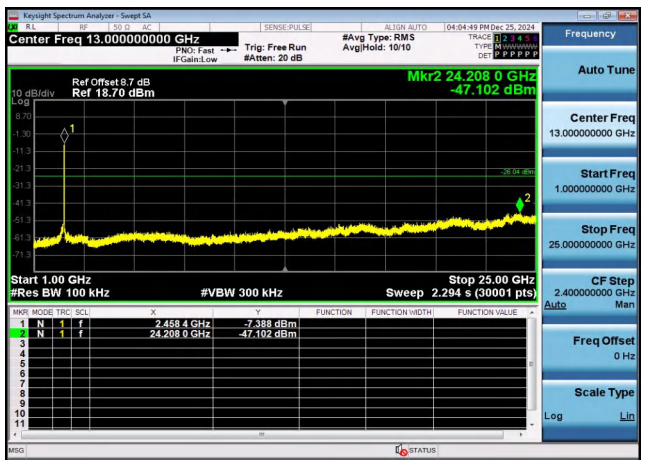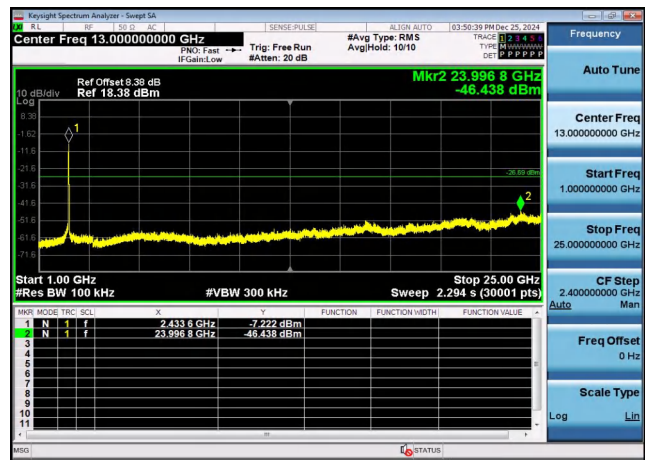



1GHz -25GHz

1GHz -25GHz

802.11ax HE20

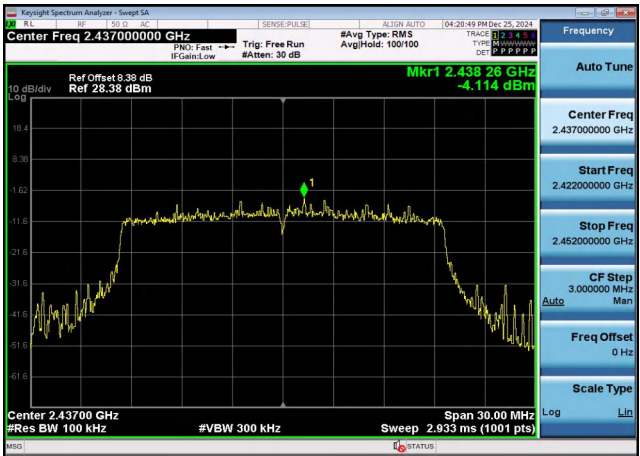
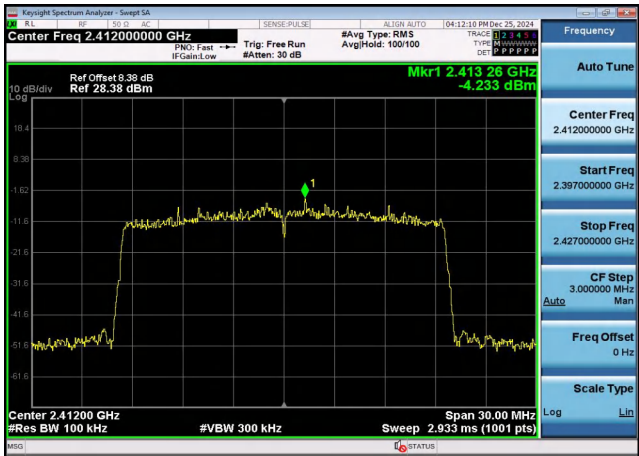


CH01

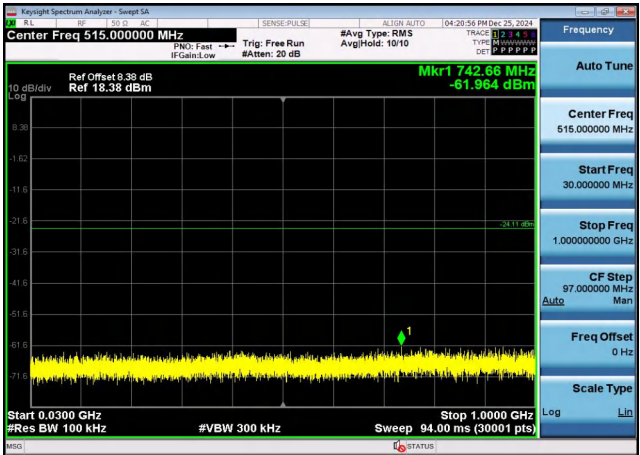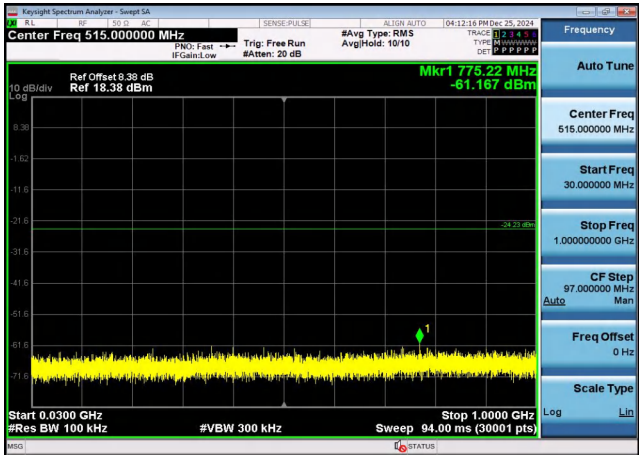

30MHz-1GHz


30MHz-1GHz

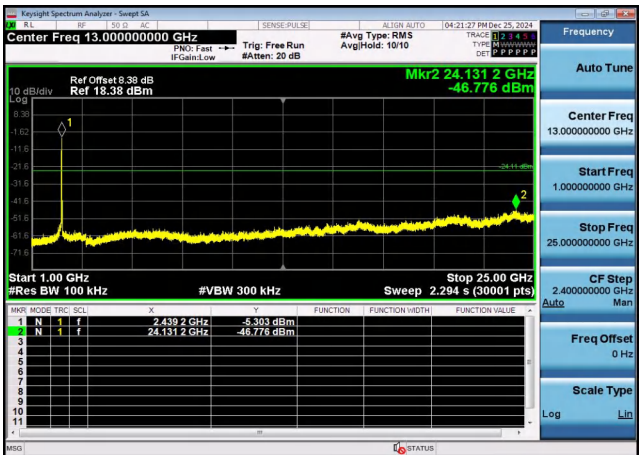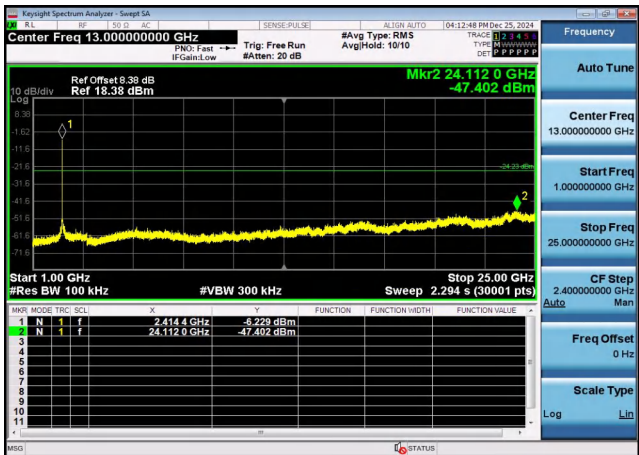


1GHz -25GHz

1GHz -25GHz


802.11ax HE20

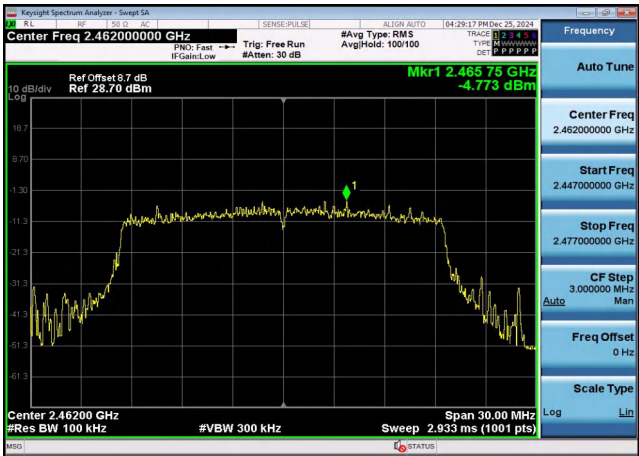


802.11ax HE40

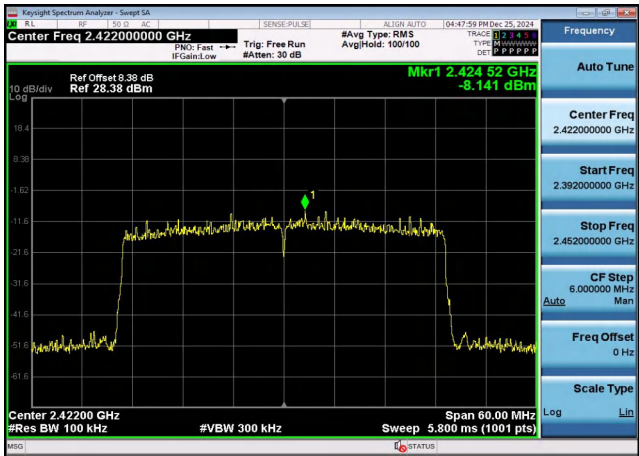


CH11

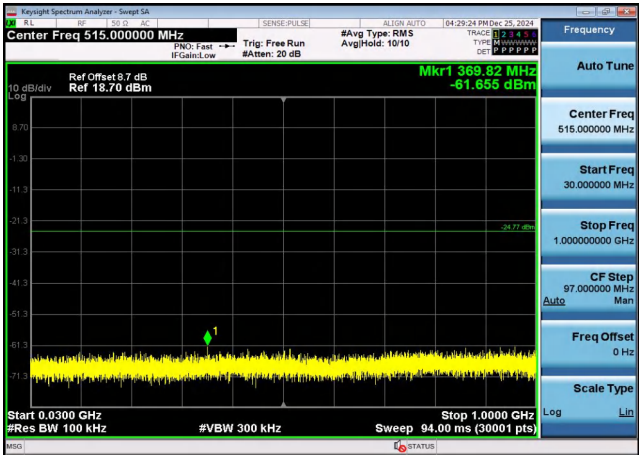


CH03

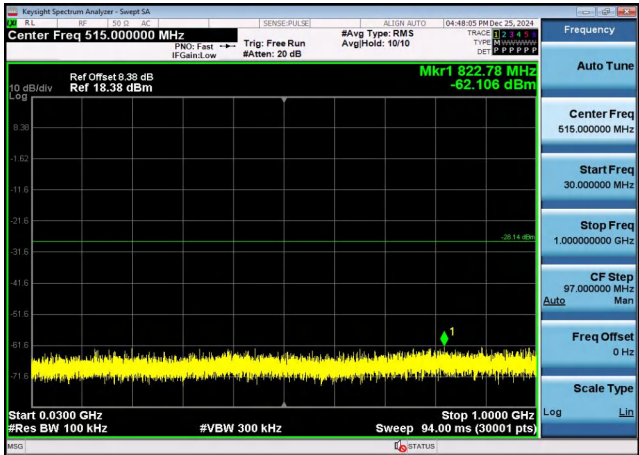

30MHz-1GHz

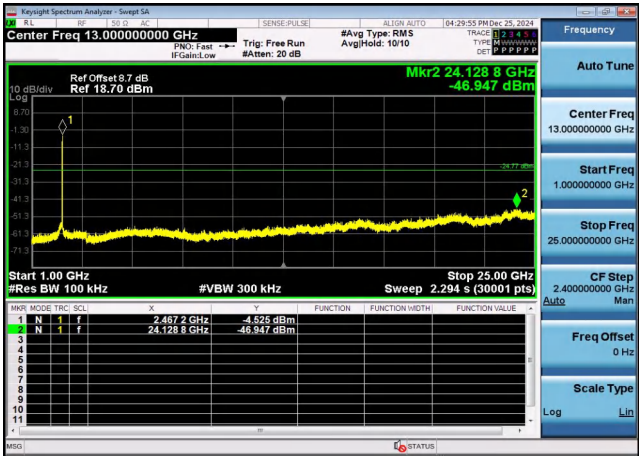



30MHz-1GHz

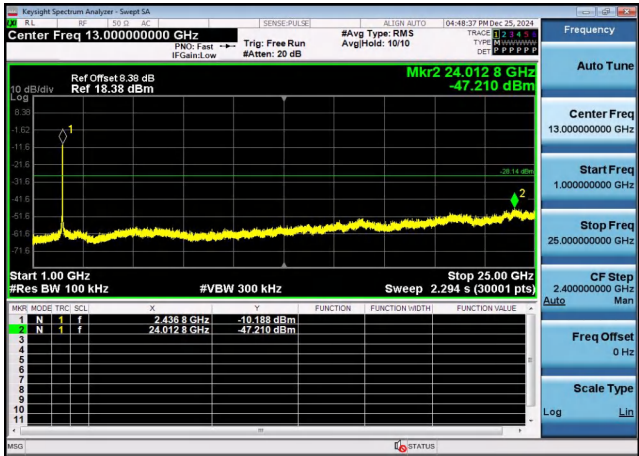



1GHz -25GHz

1GHz -25GHz

802.11ax HE40

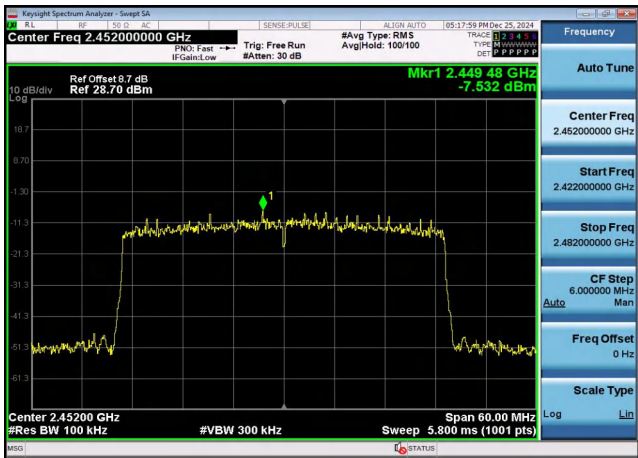
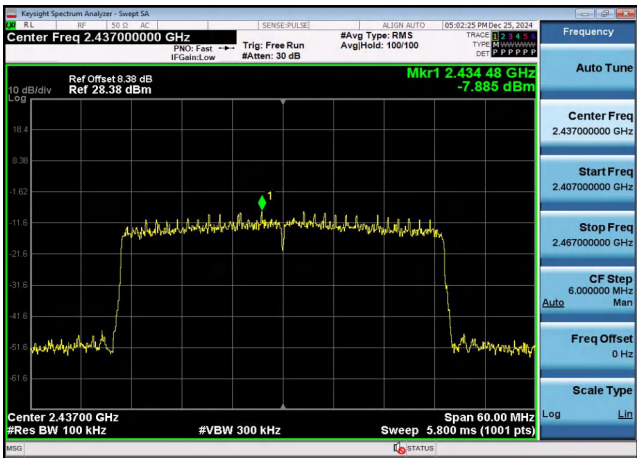


CH06

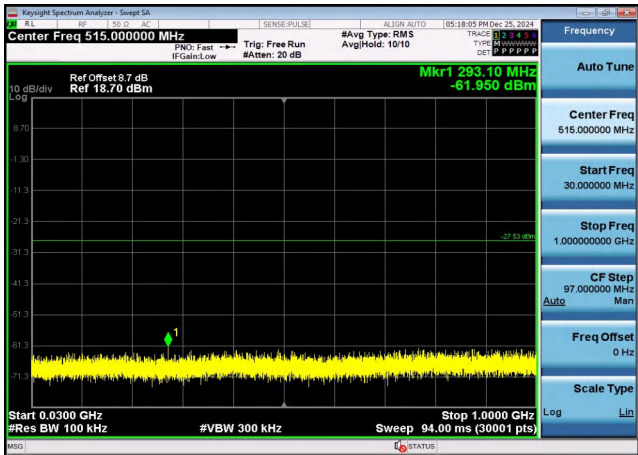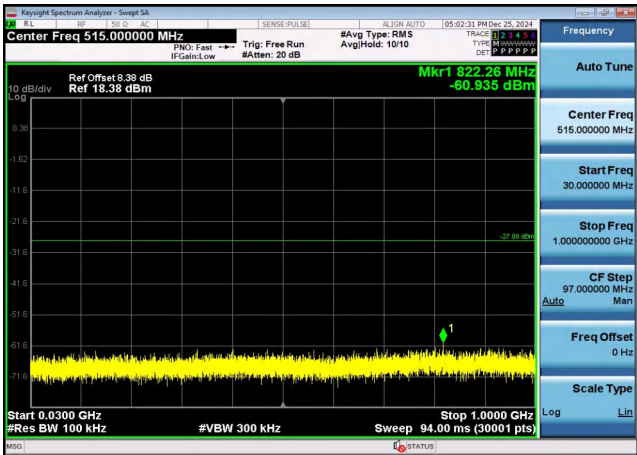

30MHz-1GHz

30MHz-1GHz

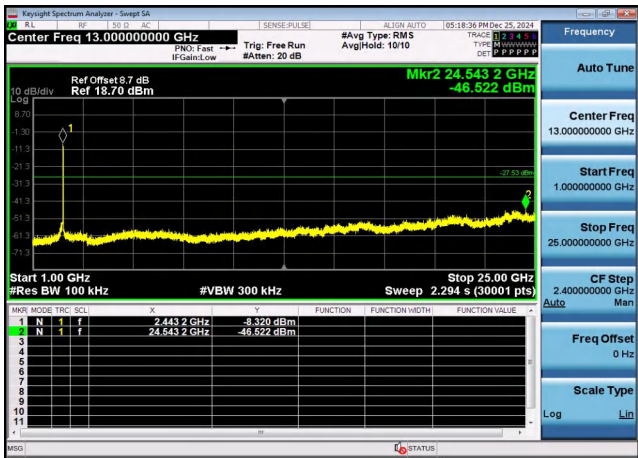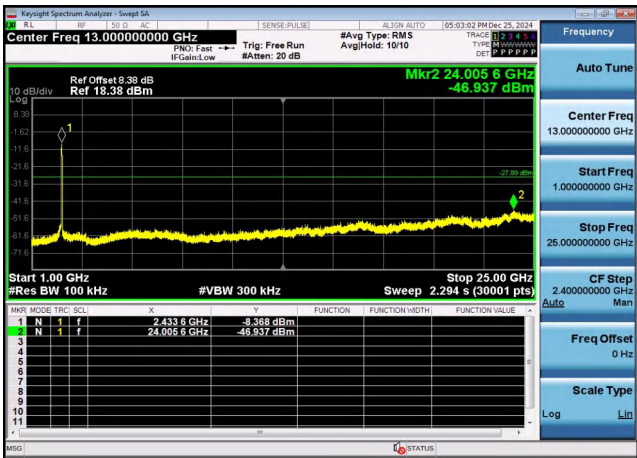


1GHz -25GHz

1GHz -25GHz


Band-edge Measurements for RF Conducted Emissions:

Ant 1

802.11b

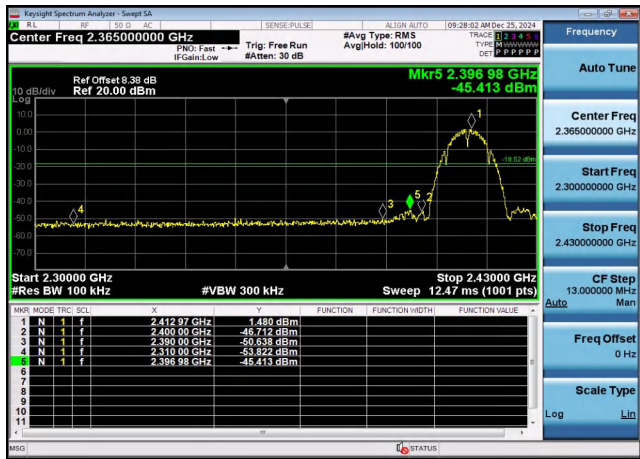


Left bandedge

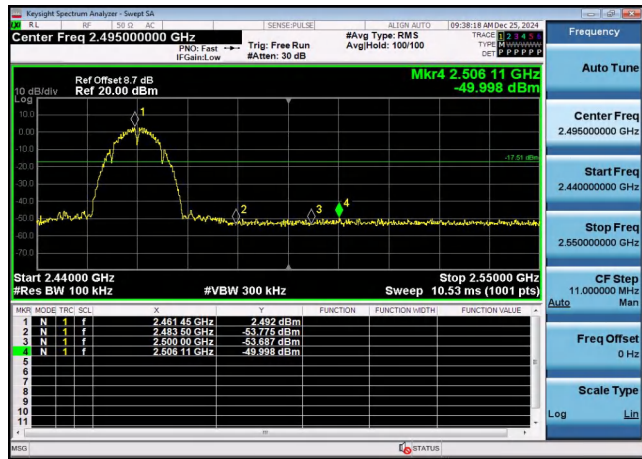


Right bandedge

802.11g

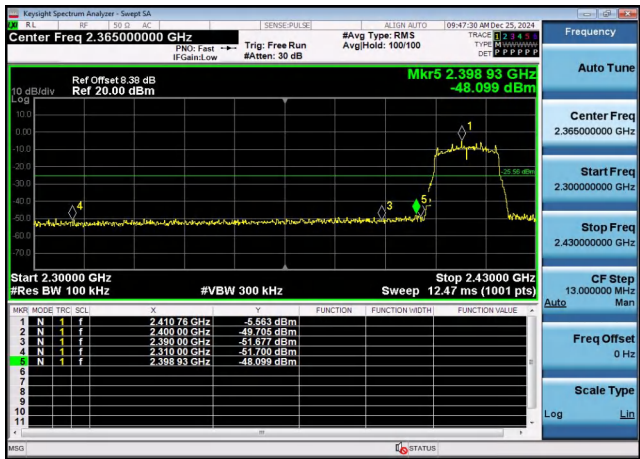


Left bandedge

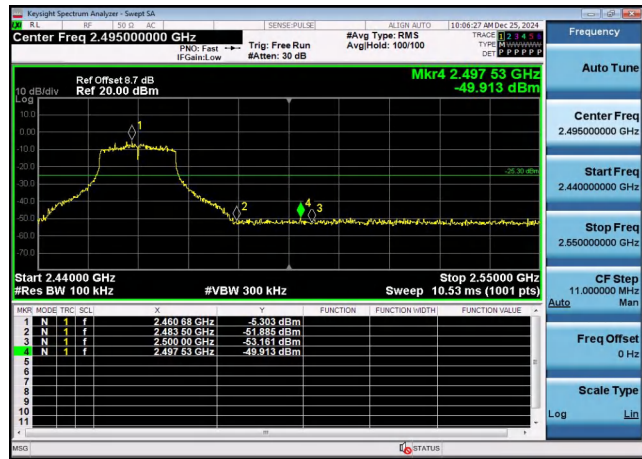

Right bandedge

802.11n HT20

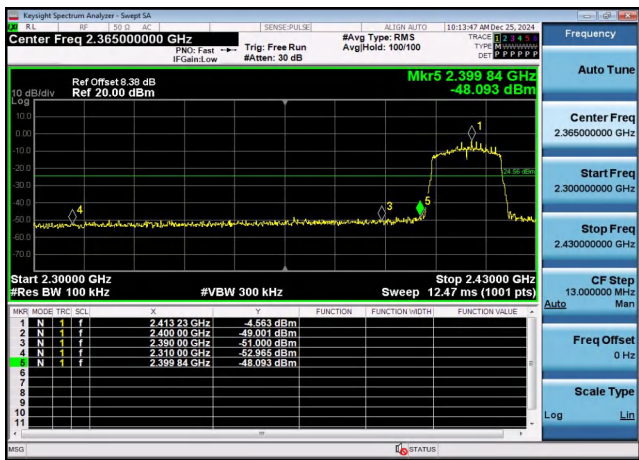


Left bandedge




Right bandedge

802.11n HT40

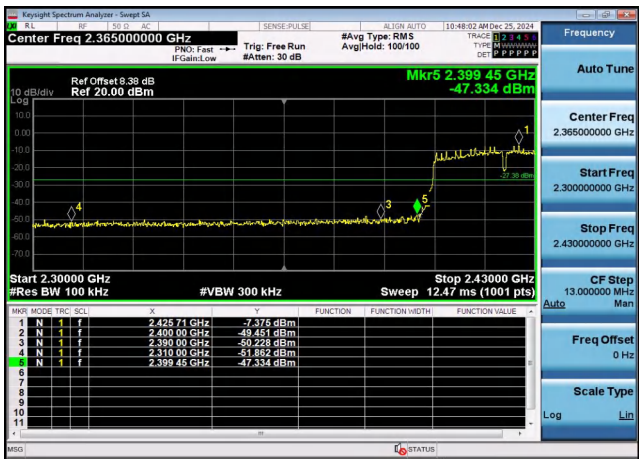


Left bandedge

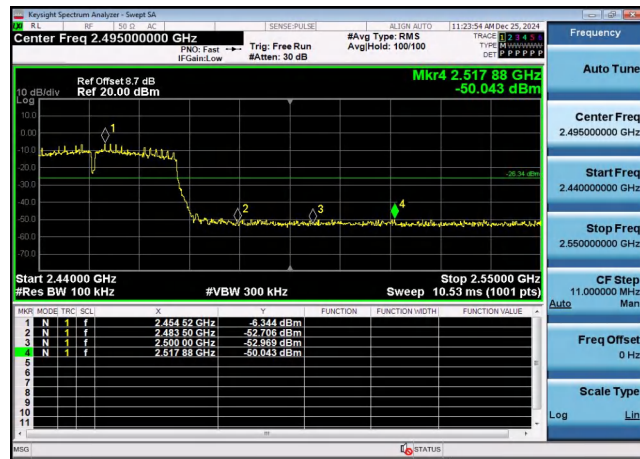

Right bandedge

802.11ax HE20

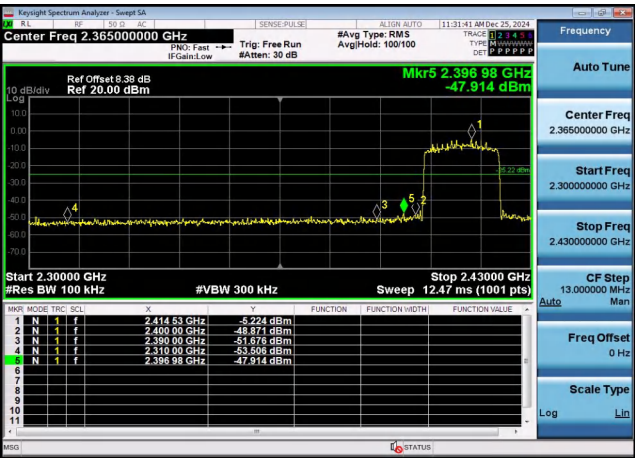


Left bandedge




Right bandedge

802.11ax HE40

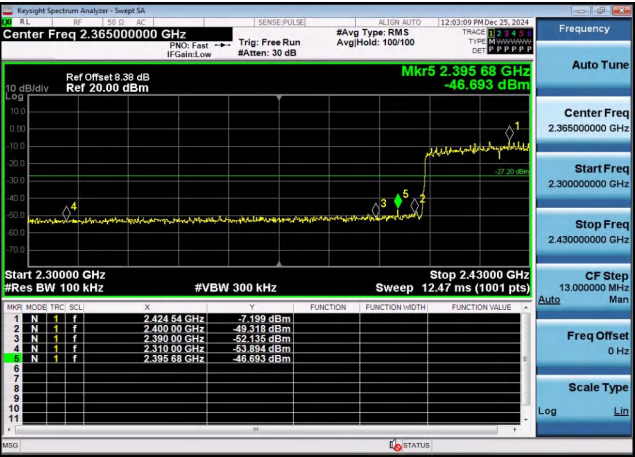


Left bandedge

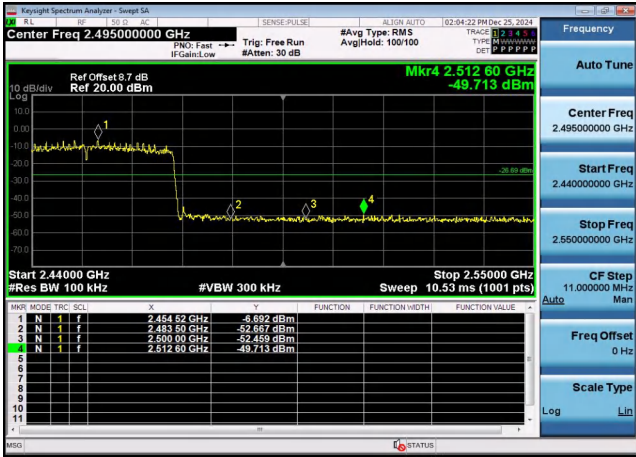


Right bandedge

Ant 2

802.11b

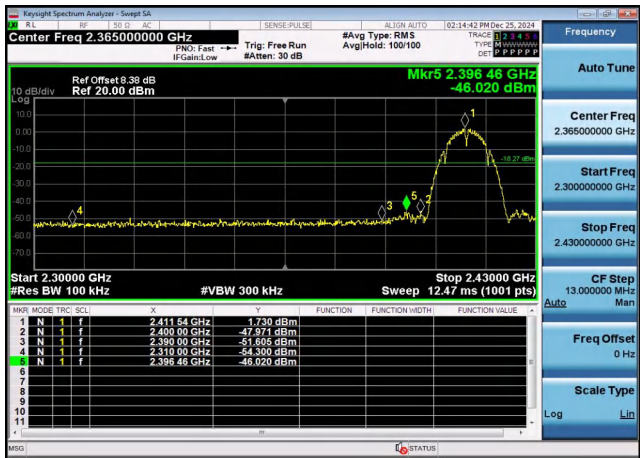


Left bandedge

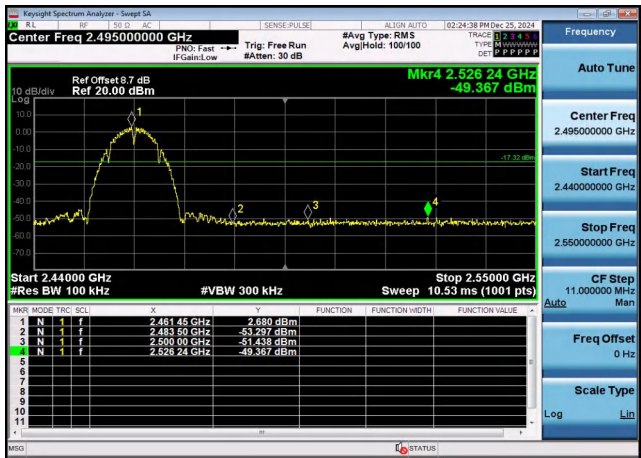

Right bandedge

802.11g

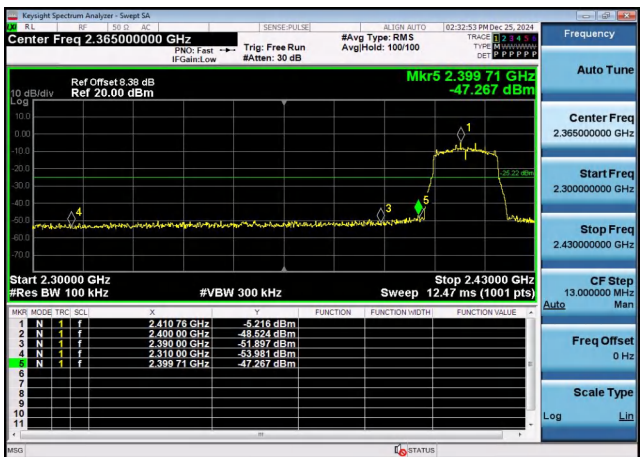


Left bandedge



Right bandedge

802.11n HT20

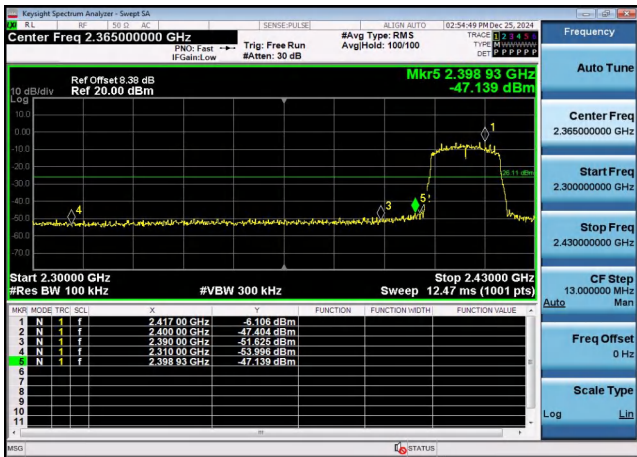


Left bandedge




Right bandedge

802.11n HT40

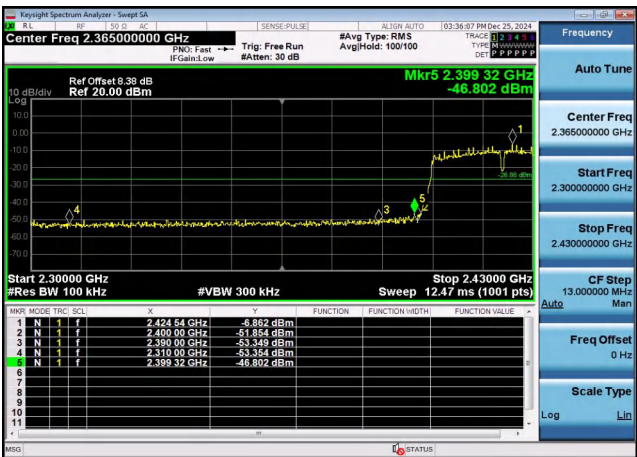


Left bandedge

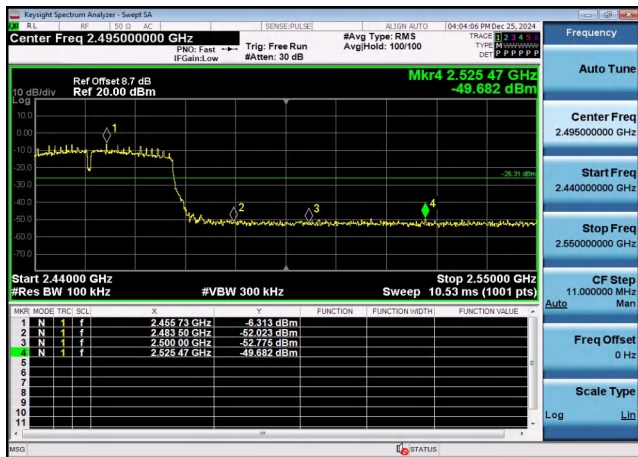

Right bandedge

802.11ax HE20

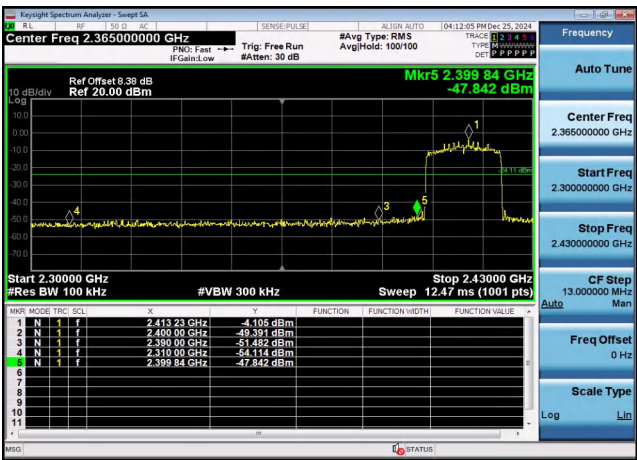


Left bandedge




Right bandedge

802.11ax HE40

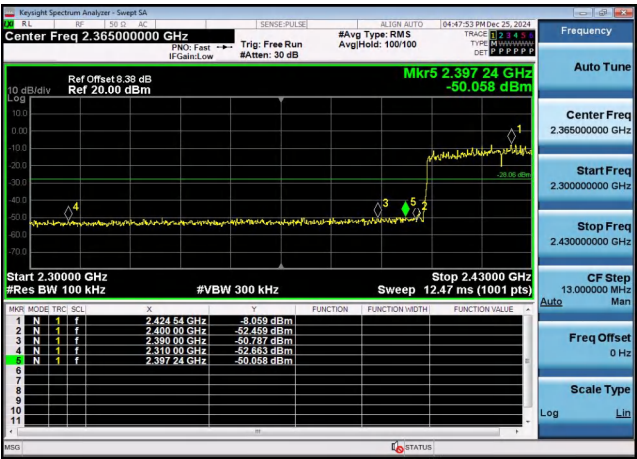

Left bandedge

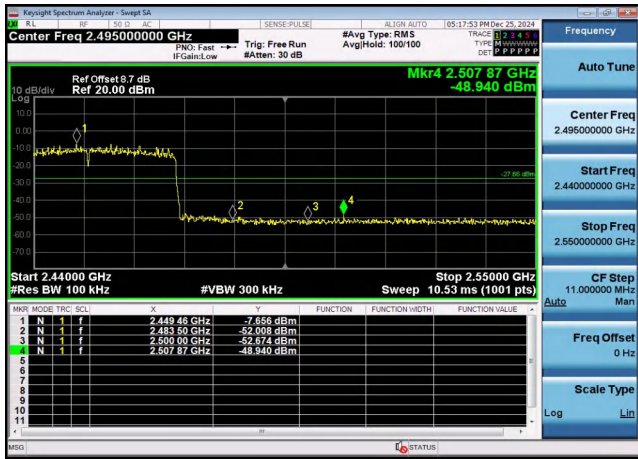

Right bandedge

4.7 Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1) (I):



(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

Test Result:

The maximum gain of antenna was 1.9 dBi for 2.4GHz WIFI Ant 1, the maximum gain of antenna was 1.9 dBi for 2.4GHz WIFI Ant 2.

Remark: The antenna gain is provided by the customer, if the data provided by the customer is not accurate, Shenzhen GUOREN Certification Technology Service Co., Ltd. does not assume any responsibility.

5 Test Setup Photos of the EUT

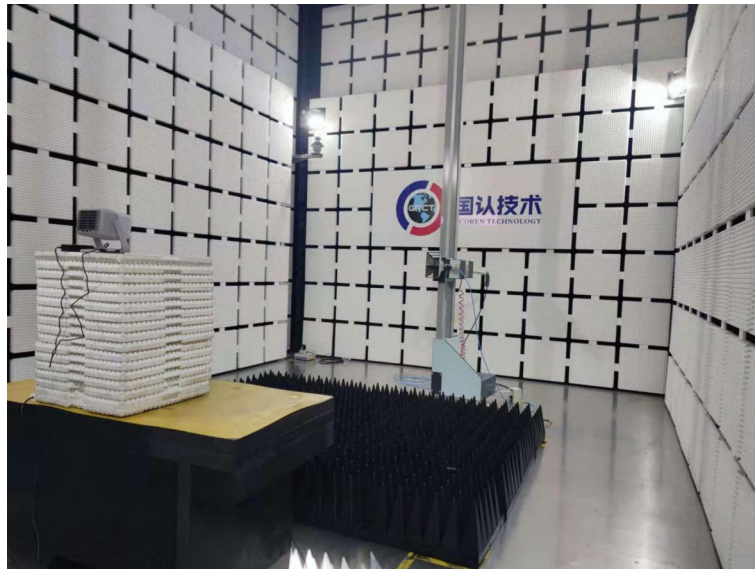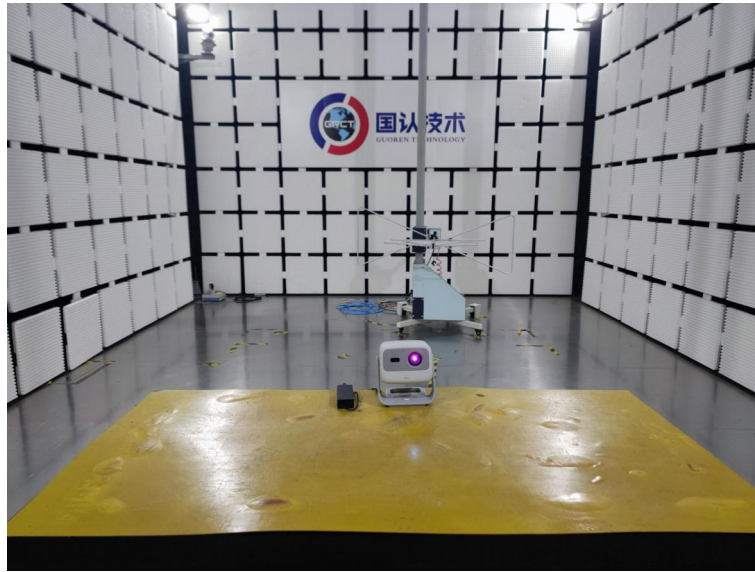

6 Photos of the EUT

Reference to the test report No. GRCTR241202012-01.

***** End of Report *****