

FCC RF Test Report

APPLICANT : ZTE CORPORATION
EQUIPMENT : Ufi
BRAND NAME : ZTE
MODEL NAME : MF915
FCC ID : SRQ-MF915
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Jun. 05, 2014 and testing was completed on Jul. 20, 2014. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.



Reviewed by: Joseph Lin / Supervisor



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification subjective to this standard	6
1.5 Modification of EUT	7
1.6 Testing Location	7
1.7 Applicable Standards.....	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Carrier Frequency and Channel	8
2.2 Pre-Scanned RF Power.....	9
2.3 Test Mode.....	10
2.4 Connection Diagram of Test System.....	11
2.5 Support Unit used in test configuration and system	12
2.6 EUT Operation Test Setup	12
2.7 Measurement Results Explanation Example.....	12
3 TEST RESULT.....	13
3.1 6dB Bandwidth Measurement	13
3.2 Peak Output Power Measurement	15
3.3 Power Spectral Density Measurement	18
3.4 Conducted Band Edges and Spurious Emission Measurement	21
3.5 Radiated Band Edges and Spurious Emission Measurement	37
3.6 AC Conducted Emission Measurement.....	58
3.7 Antenna Requirements.....	62
4 LIST OF MEASURING EQUIPMENT	64
5 UNCERTAINTY OF EVALUATION	65
APPENDIX A. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR460501	Rev. 01	Initial issue of report	Jul. 25, 2014



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm/3kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 1.12 dB at 2484.01 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 14.38 dB at 0.450 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.2 Manufacturer

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Ufi
Brand Name	ZTE
Model Name	MF915
FCC ID	SRQ-MF915
EUT supports Radios application	GPRS/EGPRS/WCDMA/HSPA/HSPA+(Downlink Only)/DC-HSDPA/LTE WLAN2.4GHz 802.11b/g/n HT20
HW Version	xw5A
SW Version	BD_TMOMF915V0.0.0B02
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification subjective to this standard

Product Specification subjective to this standard																	
Tx/Rx Channel Frequency Range	802.11b/g/n : 2412 MHz ~ 2462 MHz																
Maximum (Peak) Output Power to antenna	802.11b for Chain Port 0: 16.72 dBm (0.0470 W) 802.11b for Chain Port 1: 16.42 dBm (0.0439 W) 802.11g for Chain Port 0: 21.86 dBm (0.1535 W) 802.11g for Chain Port 1: 21.68 dBm (0.1472 W) 802.11n HT20 for Chain Port 0: 21.33 dBm (0.1358 W) 802.11n HT20 for Chain Port 1: 20.87 dBm (0.1222 W) 802.11n HT20 for Chain Port 0+1: 22.05 dBm (0.1603 W)																
Antenna Type	WLAN for Chain Port 0: PIFA Antenna with gain 1.80 dBi WLAN for Chain Port 1: PIFA Antenna with gain 3.10 dBi																
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)																
Antenna Function for Transmitter	<table border="1"> <thead> <tr> <th></th><th>Chain Port 0</th><th>Chain Port 1</th></tr> </thead> <tbody> <tr> <td>802.11 b</td><td>V</td><td>V</td></tr> <tr> <td>802.11 g</td><td>V</td><td>V</td></tr> <tr> <td>802.11 n SISO</td><td>V</td><td>V</td></tr> <tr> <td>802.11 n MIMO</td><td>V</td><td>V</td></tr> </tbody> </table>			Chain Port 0	Chain Port 1	802.11 b	V	V	802.11 g	V	V	802.11 n SISO	V	V	802.11 n MIMO	V	V
	Chain Port 0	Chain Port 1															
802.11 b	V	V															
802.11 g	V	V															
802.11 n SISO	V	V															
802.11 n MIMO	V	V															

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.			
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C. TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958			
Test Site No.	Sporton Site No.			FCC Registration No.
	TH01-KS	CO01-KS	03CH01-KS	149928

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02
- FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ANSI C63.4-2003

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		

2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test shown in the following tables.

2.4GHz 802.11b Peak Power (dBm)					
Channel	Data Rate (MHz)	1M bps	2M bps	5.5M bps	11M bps
CH11	Chain Port 0	16.72	16.62	16.68	16.71
CH06	Chain Port 1	16.42	16.39	16.37	16.31

2.4GHz 802.11g Peak Power (dBm)									
Channel	Data Rate (MHz)	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
CH06	Chain Port 0	21.86	21.79	21.76	21.84	21.47	21.61	21.61	21.58
CH06	Chain Port 1	21.68	21.59	21.48	21.47	21.44	21.52	21.59	21.63

2.4GHz 802.11n HT20 Peak Power (dBm)									
Channel	Data Rate (MHz)	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH11	Chain Port 0	21.33	21.25	21.02	21.31	20.87	20.87	21.12	20.96
CH06	Chain Port 1	20.87	20.75	20.65	20.69	20.82	20.62	20.21	20.38
Channel	Data Rate (MHz)	MCS8	MCS9	MCS10	MCS11	MCS12	MCS13	MCS14	MCS15
CH11	Chain Port 0+1(0)	19.86	19.74	19.61	19.59	19.13	19.41	19.52	19.38
CH11	Chain Port 0+1(1)	18.02	17.87	17.40	16.79	16.92	16.69	17.02	16.87
CH11	Chain Port 0+1	22.05	21.92	21.65	21.42	21.17	21.27	21.46	21.31


2.3 Test Mode

Final results of test modes, data rates and test channels are shown as following table.


Test Cases				
Conducted TCs	Test Items	Mode	Data Rate	Test Channel
	6dB BW Power Spectral Density	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	6.5 Mbps	1/6/11
	Output Power	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	6.5 Mbps	1/6/11
	Conducted Band Edge	802.11b	1 Mbps	1/11
		802.11g	6 Mbps	1/11
		802.11n HT20	6.5 Mbps	1/11
	Conducted Spurious Emission	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	6.5 Mbps	1/6/11
Radiated TCs	Radiated Band Edge	802.11b	1 Mbps	1/11
		802.11g	6 Mbps	1/11
		802.11n HT20	6.5 Mbps	1/11
	Radiated Spurious Emission	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	6.5 Mbps	1/6/11
AC Conducted Emission	Mode 1 : GPRS850 Idle + WLAN (2.4GHz) Link + USB Cable (Charging from Adapter)			

2.4 Connection Diagram of Test System

<WLAN Tx Mode>

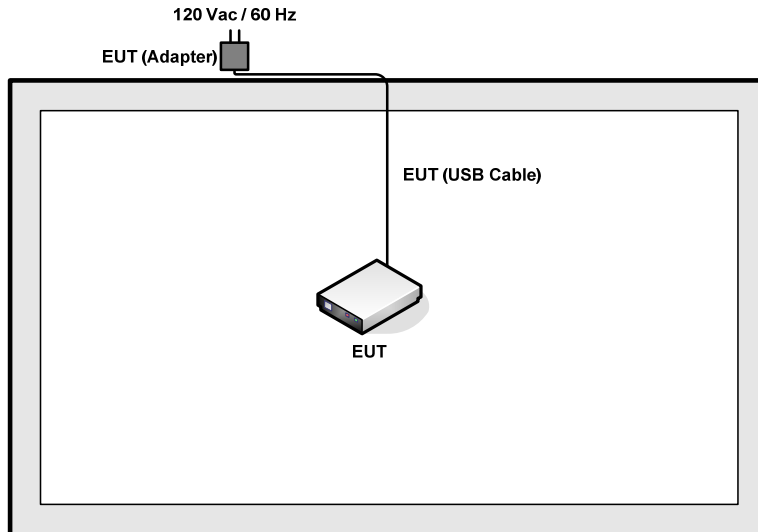

<AC Conducted Emission Mode>

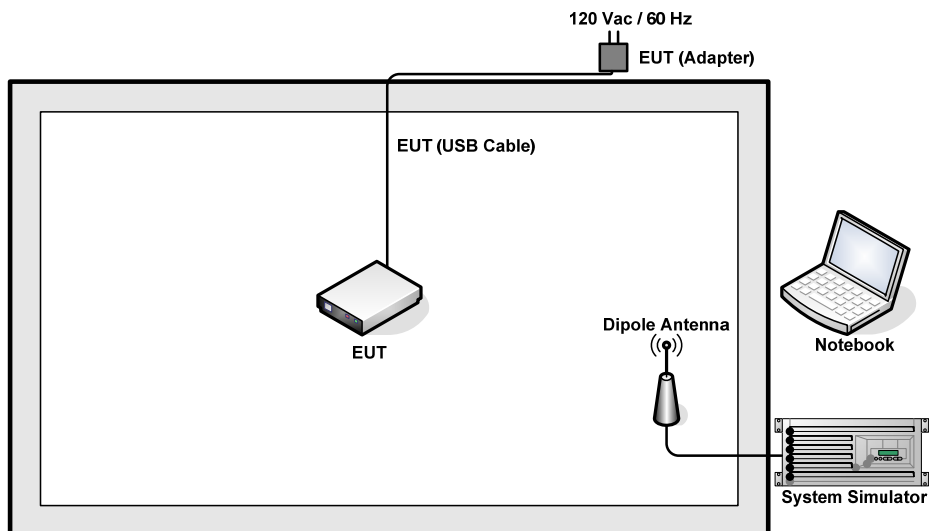

2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	Notebook	Lenovo	G480	PRC4	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m

2.6 EUT Operation Test Setup

For WLAN function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the Notebook under large package sizes transmission.

2.7 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 6 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 6 + 10 = 16 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB Bandwidth Measurement

3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v03r02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. Measure and record the results in the test report.


3.1.4 Test Setup

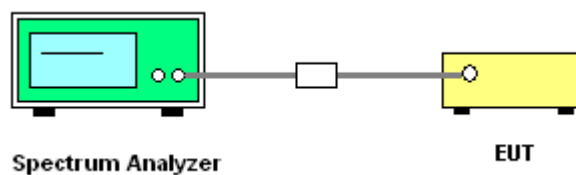

3.1.5 Test Result of 6dB Bandwidth

Test Band :	2.4GHz	Temperature :	23~25°C
Test Engineer :	Steven Hao	Relative Humidity :	47~48%

Mod.	Data Rate	N _{TX}	Channel	Freq. (MHz)	6dB Bandwidth (MHz)		6dB Bandwidth Min. Limit (MHz)	Pass/Fail
					Chain Port 0	Chain Port 1		
11b	1Mbps	1	1	2412	8.54		0.5	Pass
11b	1Mbps	1	6	2437	8.52		0.5	Pass
11b	1Mbps	1	11	2462	8.56		0.5	Pass
11g	6Mbps	1	1	2412	15.46		0.5	Pass
11g	6Mbps	1	6	2437	15.70		0.5	Pass
11g	6Mbps	1	11	2462	16.08		0.5	Pass
HT20	MCS0	1	1	2412	15.66		0.5	Pass
HT20	MCS0	1	6	2437	15.96		0.5	Pass
HT20	MCS0	1	11	2462	16.30		0.5	Pass
HT20	MCS0	2	1	2412	15.68	16.32	0.5	Pass
HT20	MCS0	2	6	2437	15.94	16.30	0.5	Pass
HT20	MCS0	2	11	2462	16.50	16.66	0.5	Pass

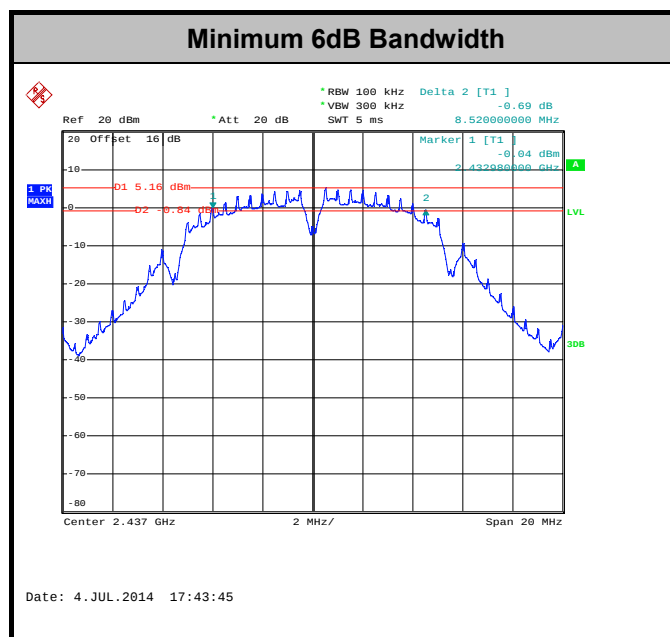

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Peak Output Power Measurement

3.2.1 Limit of Peak Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r02.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

3.2.4 Test Setup

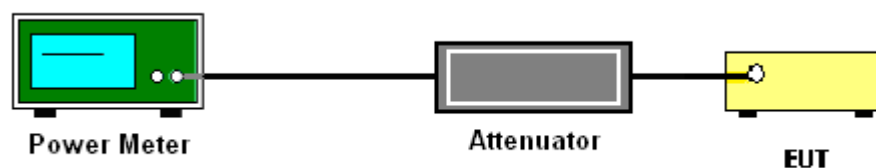



3.2.5 Test Result of Peak Output Power

Test Band :	2.4GHz	Temperature :	23~25℃
Test Engineer :	Steven Hao	Relative Humidity :	47~48%

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak Conducted Power (dBm)			Max. Limit (dBm)		DG (dBi)		Pass/Fail
					Chain Port 0	Chain Port 1	SUM	Chain Port 0	Chain Port 1	Chain Port 0	Chain Port 1	
11b	1Mbps	1	1	2412	16.02	15.25	-	30.00	30.00	1.80	3.10	Pass
11b	1Mbps	1	6	2437	16.53	16.42		30.00	30.00	1.80	3.10	Pass
11b	1Mbps	1	11	2462	16.72	15.89		30.00	30.00	1.80	3.10	Pass
11g	6Mbps	1	1	2412	21.36	21.64		30.00	30.00	1.80	3.10	Pass
11g	6Mbps	1	6	2437	21.86	21.68		30.00	30.00	1.80	3.10	Pass
11g	6Mbps	1	11	2462	21.67	21.52		30.00	30.00	1.80	3.10	Pass
HT20	MCS0	1	1	2412	20.78	20.61		30.00	30.00	1.80	3.10	Pass
HT20	MCS0	1	6	2437	21.13	20.87		30.00	30.00	1.80	3.10	Pass
HT20	MCS0	1	11	2462	21.33	20.66		30.00	30.00	1.80	3.10	Pass
HT20	MCS0	2	1	2412	19.26	17.23	21.37	30.00		5.48		Pass
HT20	MCS0	2	6	2437	19.52	17.73	21.73	30.00		5.48		Pass
HT20	MCS0	2	11	2462	19.86	18.02	22.05	30.00		5.48		Pass

Note: Measured power (dBm) has offset with cable loss.



3.2.6 Test Result of Average output Power (Reporting Only)

Test Band :	2.4GHz	Temperature :	23~25℃
Test Engineer :	Steven Hao	Relative Humidity :	47~48%

Mod.	Data Rate	N _{TX}	Channel	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)		
					Chain Port 0	Chain Port 1	Chain Port 0	Chain Port 1	Sum Power
11b	1Mbps	1	1	2412	0.00	0.00	12.55	11.91	-
11b	1Mbps	1	6	2437	0.00	0.00	13.02	12.94	
11b	1Mbps	1	11	2462	0.00	0.00	13.35	12.52	
11g	6Mbps	1	1	2412	0.20	0.20	12.06	11.75	
11g	6Mbps	1	6	2437	0.20	0.20	12.77	12.27	
11g	6Mbps	1	11	2462	0.20	0.20	12.58	11.91	
HT20	MCS0	1	1	2412	0.22	0.22	11.12	10.53	
HT20	MCS0	1	6	2437	0.22	0.22	11.79	11.01	
HT20	MCS0	1	11	2462	0.22	0.22	11.84	10.80	
HT20	MCS0	2	1	2412	0.41	0.42	9.33	7.24	11.42
HT20	MCS0	2	6	2437	0.41	0.42	9.79	7.33	11.74
HT20	MCS0	2	11	2462	0.41	0.42	10.16	7.39	12.00

Note: Measured power (dBm) has offset with cable loss and duty factor.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.


If measurements performed using method (2) plus $10 \log(N)$ exceeds the emission limit, the test should choose method (1) before declaring that the device fails the emission limit.

Method (1): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points, the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.

Method (2): Measure and add $10 \log(N)$ dB, where N is the number of outputs. (N=2)

3.3.4 Test Setup

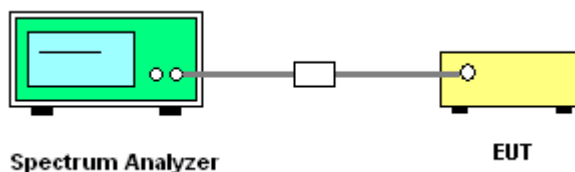


3.3.5 Test Result of Power Spectral Density

Test Band :	2.4GHz	Temperature :	23~25℃
Test Engineer :	Steven Hao	Relative Humidity :	47~48%

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak Power Density (dBm/3kHz)			Max. Limit (dBm/3kHz)		DG (dBi)		Pass/Fail
					Chain Port 0	Chain Port 1	Worst +10log(2)	Chain Port 0	Chain Port 1	Chain Port 0	Chain Port 1	
11b	1Mbps	1	1	2412	-8.30		-	8.00	8.00	1.80	3.10	Pass
11b	1Mbps	1	6	2437	-7.60			8.00	8.00	1.80	3.10	Pass
11b	1Mbps	1	11	2462	-8.84			8.00	8.00	1.80	3.10	Pass
11g	6Mbps	1	1	2412	-12.73			8.00	8.00	1.80	3.10	Pass
11g	6Mbps	1	6	2437	-12.16			8.00	8.00	1.80	3.10	Pass
11g	6Mbps	1	11	2462	-11.65			8.00	8.00	1.80	3.10	Pass
HT20	MCS0	1	1	2412	-13.59			8.00	8.00	1.80	3.10	Pass
HT20	MCS0	1	6	2437	-13.34			8.00	8.00	1.80	3.10	Pass
HT20	MCS0	1	11	2462	-13.16			8.00	8.00	1.80	3.10	Pass
HT20	MCS0	2	1	2412	-14.92	-19.10	-11.91	8.00		5.48		Pass
HT20	MCS0	2	6	2437	-14.63	-18.75	-11.62	8.00		5.48		Pass
HT20	MCS0	2	11	2462	-14.78	-17.55	-11.77	8.00		5.48		Pass

Note: Measured power density (dBm) has offset with cable loss.

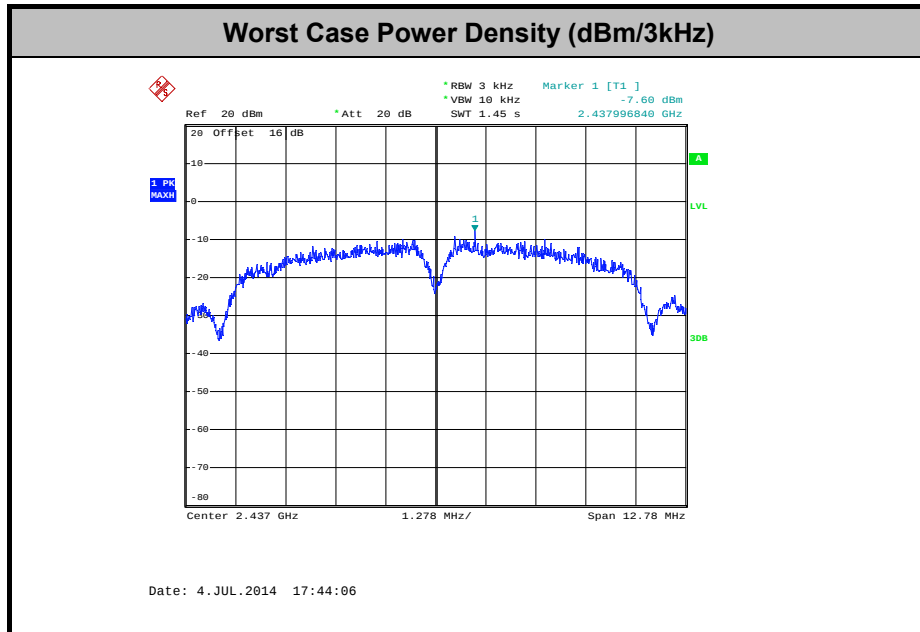

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

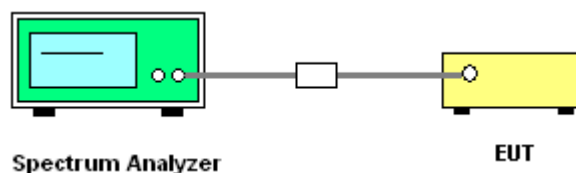




3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Number of TX = 1, Chain Port 0 (Measured)

Number of TX	1	Chain Port:	0
Test Mode :	802.11b	Temperature :	23~25°C
Test Band :	2.4GHz Low	Relative Humidity :	47~48%
Test Channel :	01	Test Engineer :	Steven Hao


WLAN 802.11b Channel 01

100kHz PSD reference Level

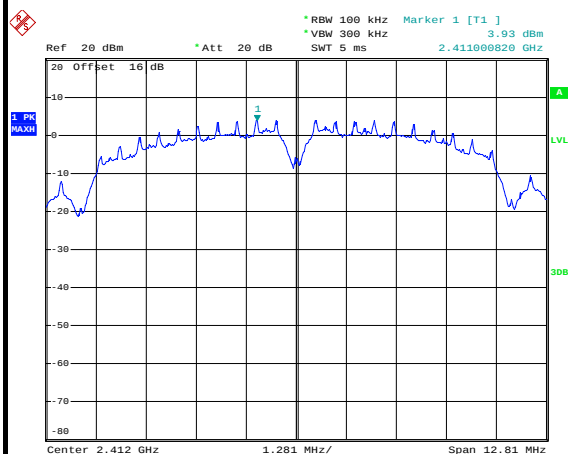


Date: 4.JUL.2014 17:41:14

Low Channel Plot

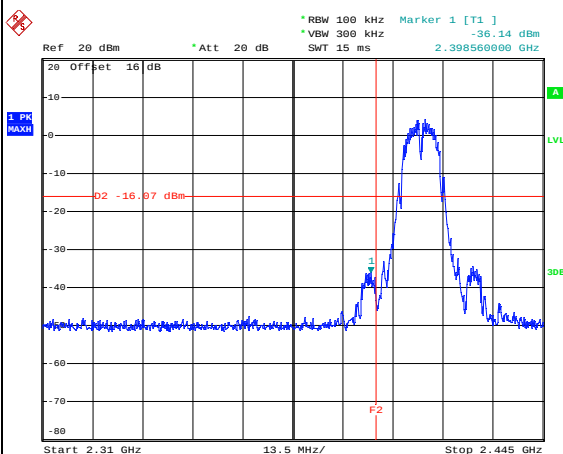


Date: 4.JUL.2014 17:41:28

Spurious Emission 30MHz~3GHz

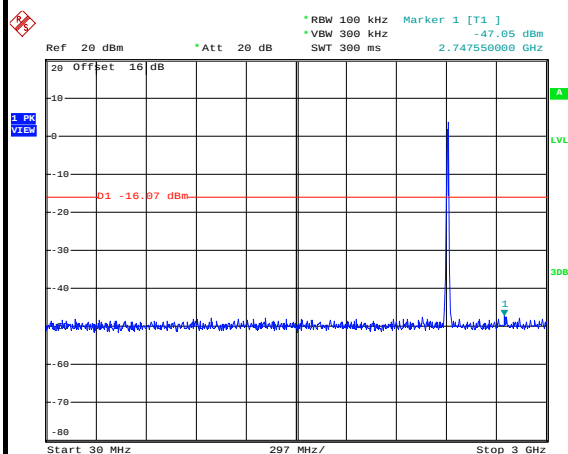

Date: 4.JUL.2014 17:41:47

Spurious Emission 2GHz~25GHz

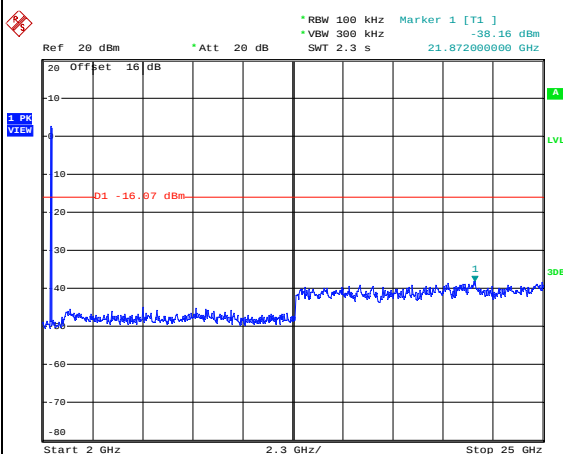


Date: 4.JUL.2014 17:42:06



Number of TX :	1	Chain Port:	0
Test Mode :	802.11b	Temperature :	23~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	47~48%
Test Channel :	06	Test Engineer :	Steven Hao


WLAN 802.11b Channel 06

100kHz PSD reference Level

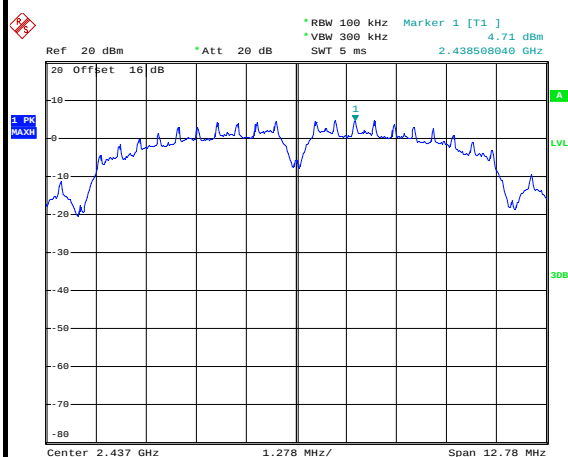


Date: 4.JUL.2014 17:44:15

Spurious Emission 30MHz~3GHz

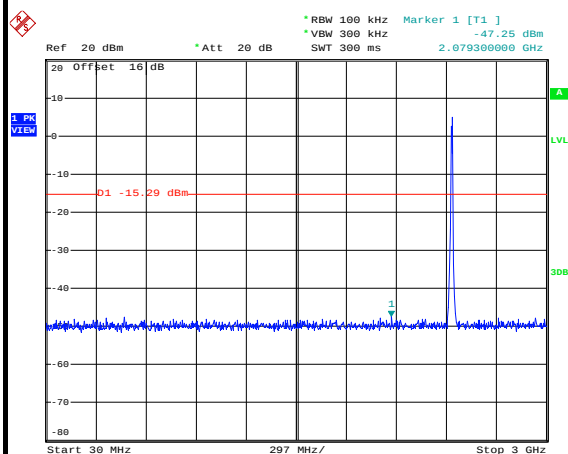

Date: 4.JUL.2014 17:45:28

Spurious Emission 2GHz~25GHz

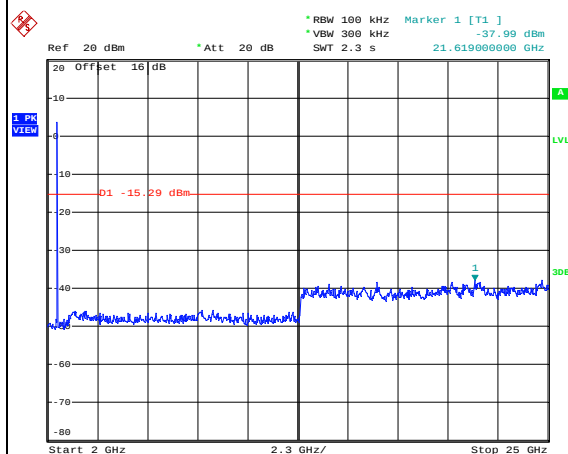


Date: 4.JUL.2014 17:45:47



Number of TX :	1	Chain Port:	0
Test Mode :	802.11b	Temperature :	23~25°C
Test Band :	2.4GHz High	Relative Humidity :	47~48%
Test Channel :	11	Test Engineer :	Steven Hao


WLAN 802.11b Channel 11

100kHz PSD reference Level

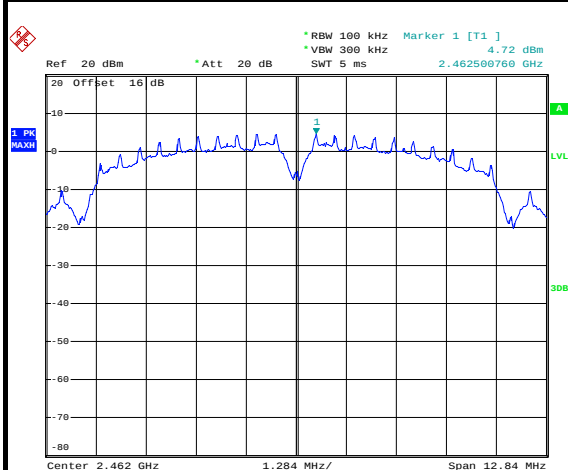


Date: 4.JUL.2014 17:47:47

High Channel Plot

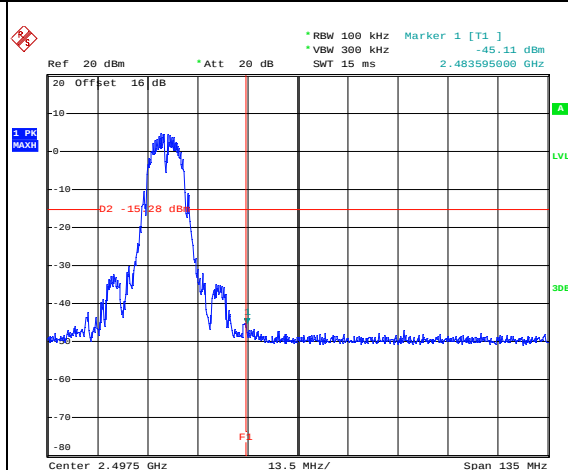


Date: 4.JUL.2014 17:52:43

Spurious Emission 30MHz~3GHz

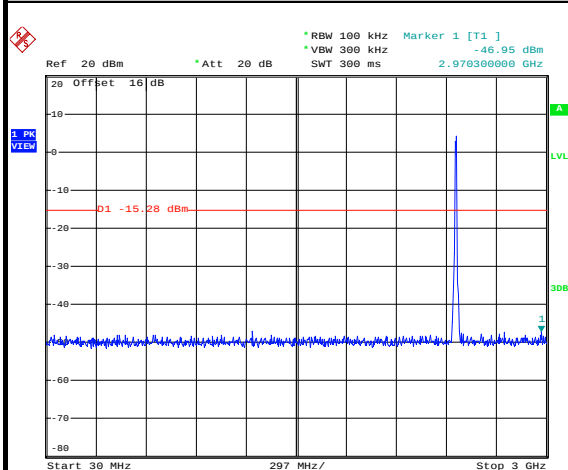

Date: 4.JUL.2014 17:48:20

Spurious Emission 2GHz~25GHz

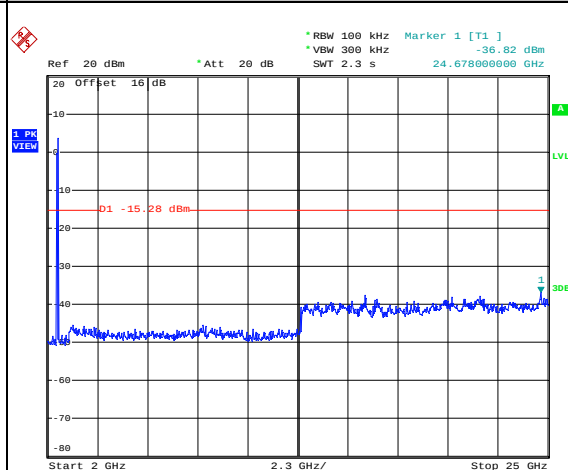


Date: 4.JUL.2014 17:48:38



Number of TX :	1	Chain Port:	0
Test Mode :	802.11g	Temperature :	23~25°C
Test Band :	2.4GHz Low	Relative Humidity :	47~48%
Test Channel :	01	Test Engineer :	Steven Hao


WLAN 802.11g Channel 01

100kHz PSD reference Level

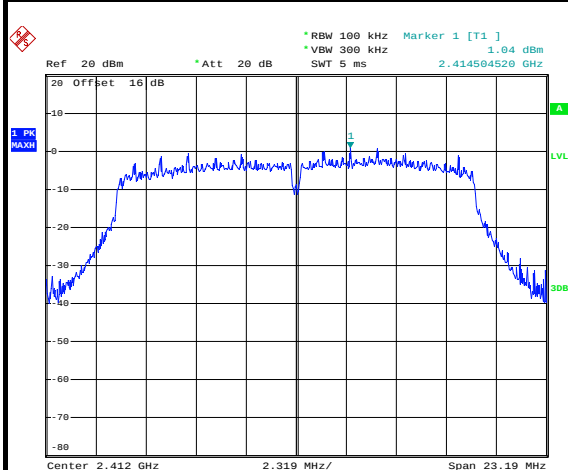


Date: 4.JUL.2014 17:56:11

Low Channel Plot

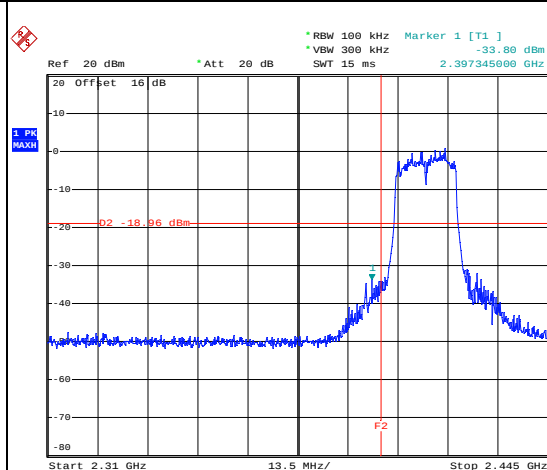


Date: 4.JUL.2014 17:57:37

Spurious Emission 30MHz~3GHz

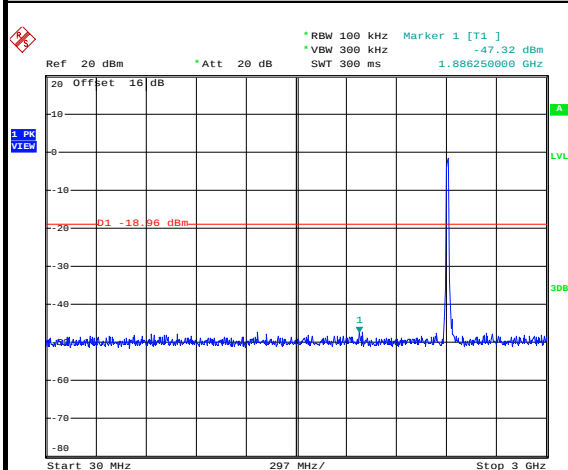

Date: 4.JUL.2014 17:57:56

Spurious Emission 2GHz~25GHz

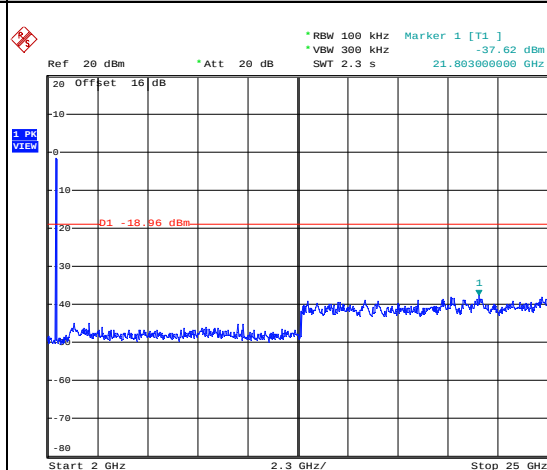


Date: 4.JUL.2014 17:58:14



Number of TX :	1	Chain Port:	0
Test Mode :	802.11g	Temperature :	23~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	47~48%
Test Channel :	06	Test Engineer :	Steven Hao


WLAN 802.11g Channel 06

100kHz PSD reference Level

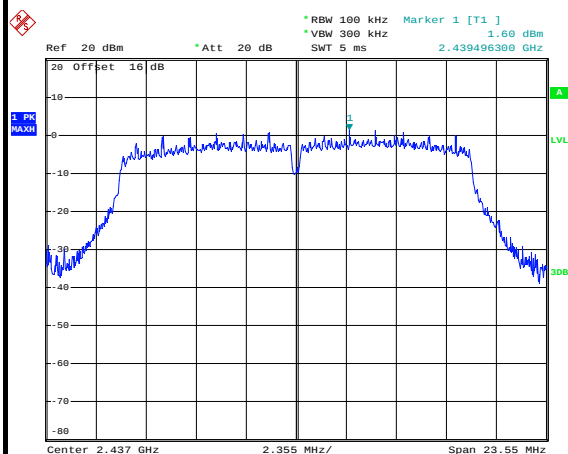


Date: 4.JUL.2014 18:00:30

Spurious Emission 30MHz~3GHz

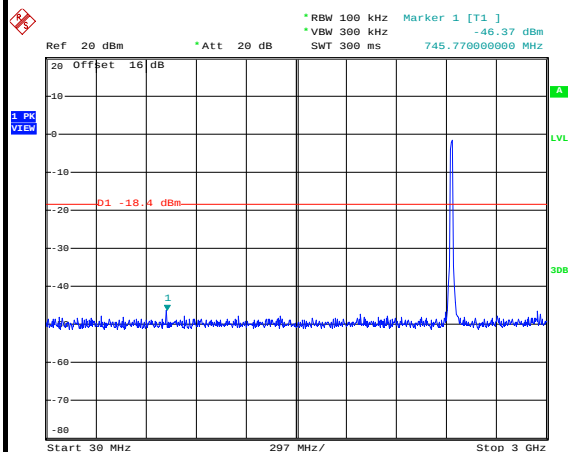

Date: 4.JUL.2014 18:00:50


Spurious Emission 2GHz~25GHz

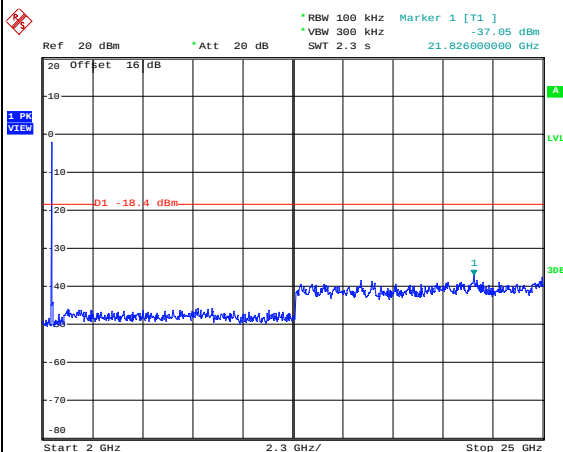


Date: 4.JUL.2014 18:01:09




Number of TX :	1	Chain Port:	0
Test Mode :	802.11g	Temperature :	23~25°C
Test Band :	2.4GHz High	Relative Humidity :	47~48%
Test Channel :	11	Test Engineer :	Steven Hao

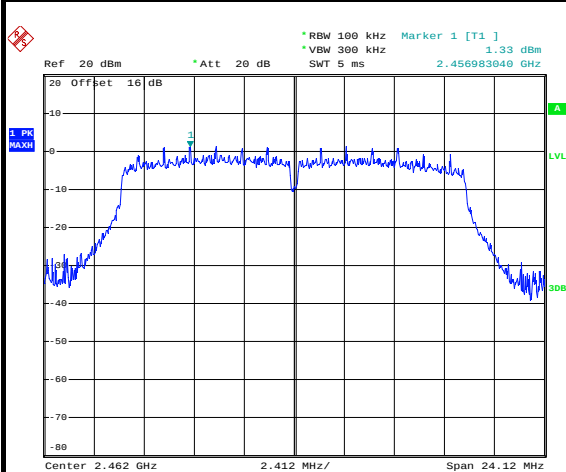WLAN 802.11g Channel 11**100kHz PSD reference Level**


Date: 4.JUL.2014 18:04:48

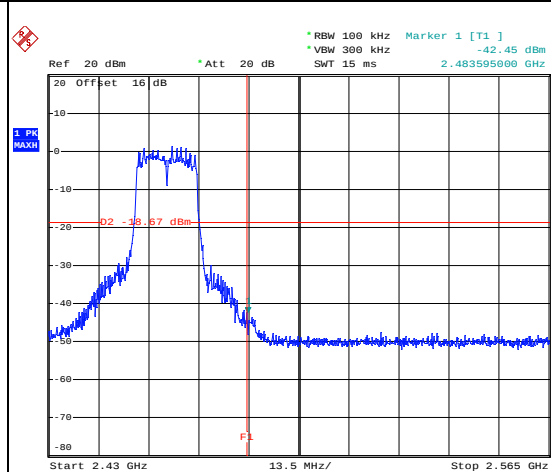High Channel Plot

Date: 4.JUL.2014 18:05:02

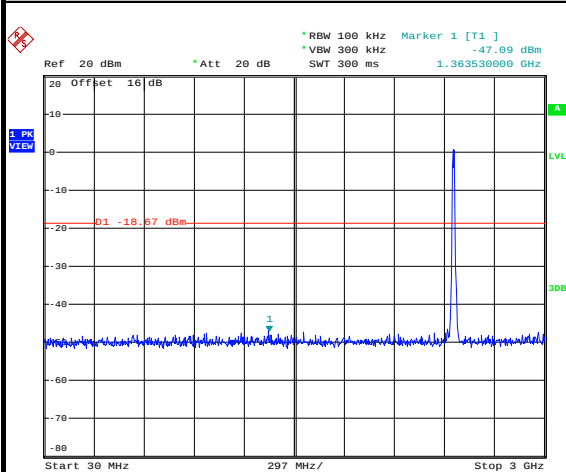Spurious Emission 30MHz~3GHz


Date: 4.JUL.2014 18:05:21

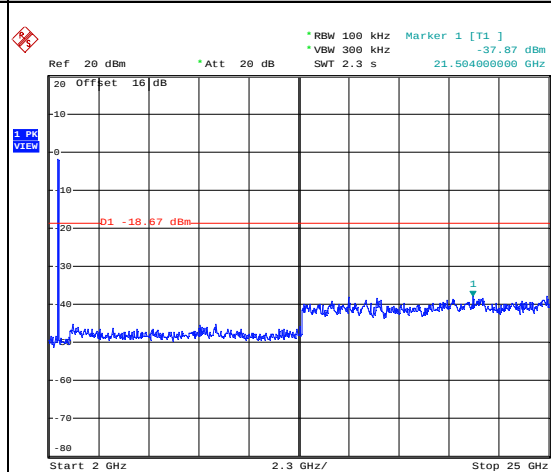Spurious Emission 2GHz~25GHz


Date: 4.JUL.2014 18:05:40




Number of TX :	1	Chain Port:	0
Test Mode :	802.11n HT20	Temperature :	23~25°C
Test Band :	2.4GHz Low	Relative Humidity :	47~48%
Test Channel :	01	Test Engineer :	Steven Hao

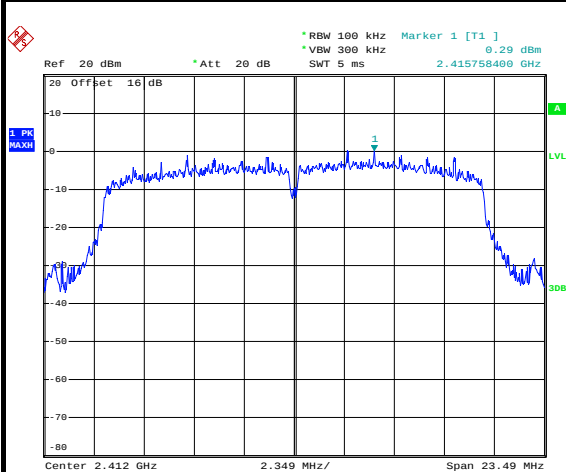WLAN 802.11n HT20 Channel 01**100kHz PSD reference Level**


Date: 4.JUL.2014 18:17:01

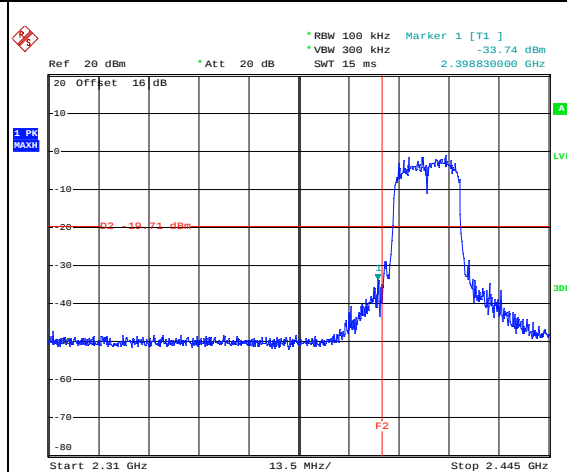Low Channel Plot

Date: 4.JUL.2014 18:17:15

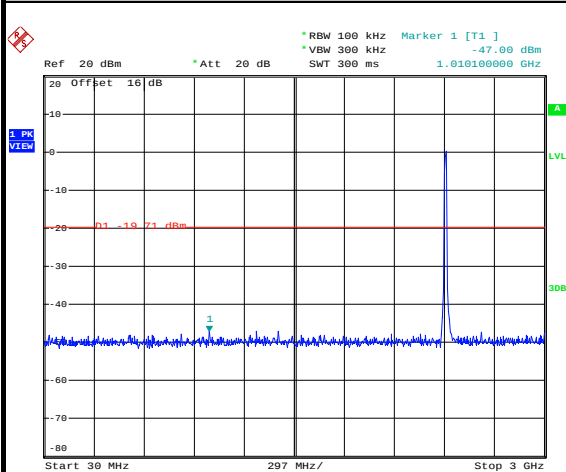Spurious Emission 30MHz~3GHz

Date: 4.JUL.2014 18:17:34

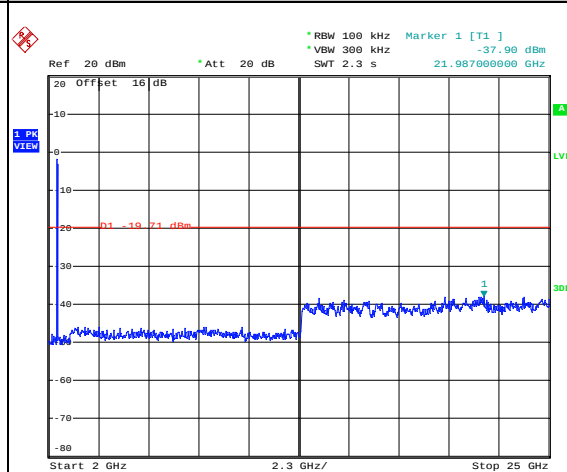Spurious Emission 2GHz~25GHz


Date: 4.JUL.2014 18:17:52



Number of TX :	1	Chain Port:	0
Test Mode :	802.11n HT20	Temperature :	23~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	47~48%
Test Channel :	06	Test Engineer :	Steven Hao


WLAN 802.11n HT20 Channel 06

100kHz PSD reference Level

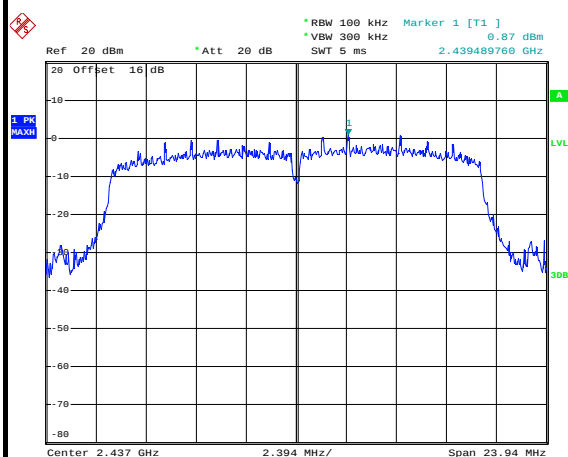


Date: 4.JUL.2014 18:21:36

Spurious Emission 30MHz~3GHz

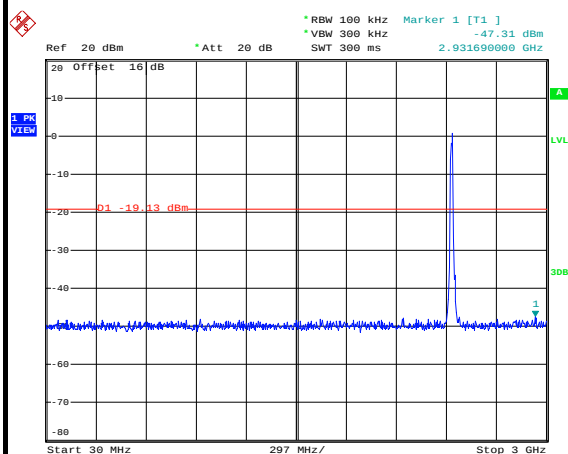

Date: 4.JUL.2014 18:21:56

Spurious Emission 2GHz~25GHz

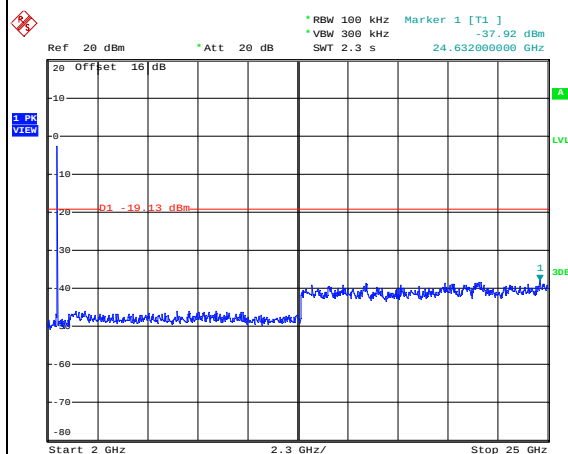


Date: 4.JUL.2014 18:22:14



Number of TX :	1	Chain Port:	0
Test Mode :	802.11n HT20	Temperature :	23~25°C
Test Band :	2.4GHz High	Relative Humidity :	47~48%
Test Channel :	11	Test Engineer :	Steven Hao


WLAN 802.11n HT20 Channel 11

100kHz PSD reference Level

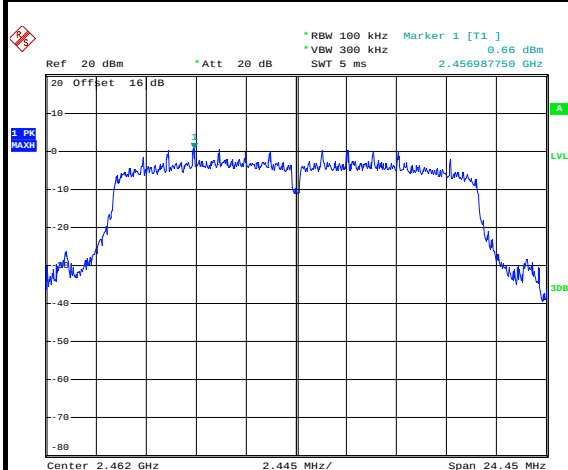


Date: 4.JUL.2014 18:24:44

High Channel Plot

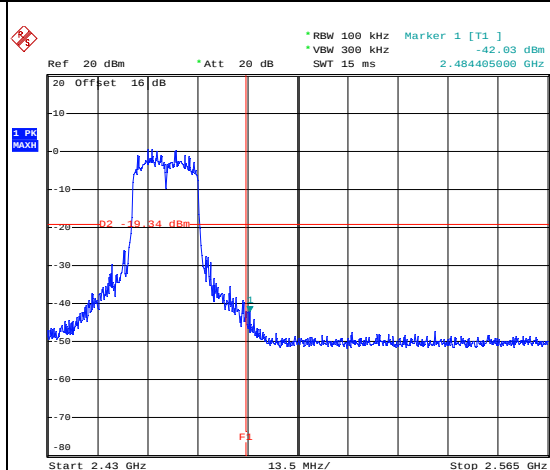


Date: 4.JUL.2014 18:24:58

Spurious Emission 30MHz~3GHz

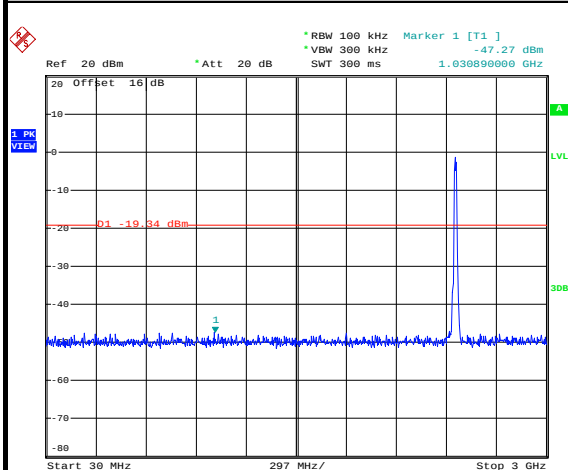

Date: 4.JUL.2014 18:25:17

Spurious Emission 2GHz~25GHz

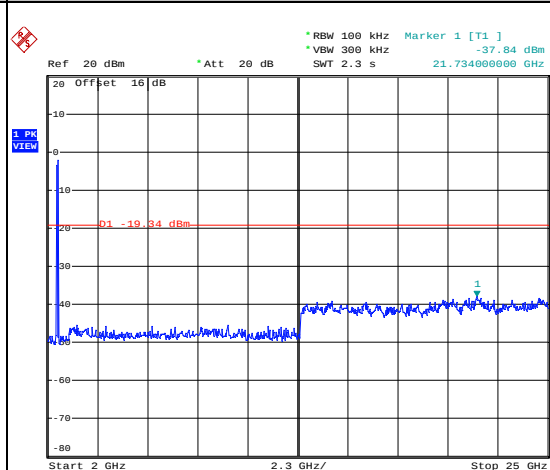

Date: 4.JUL.2014 18:25:36




Number of TX = 2, Chain Port 0 (Measured)

Number of TX :	2	Chain Port:	0
Test Mode :	802.11n HT20	Temperature :	23~25°C
Test Band :	2.4GHz Low	Relative Humidity :	47~48%
Test Channel :	01	Test Engineer :	Steven Hao


WLAN 802.11n HT20 Channel 01

100kHz PSD reference Level

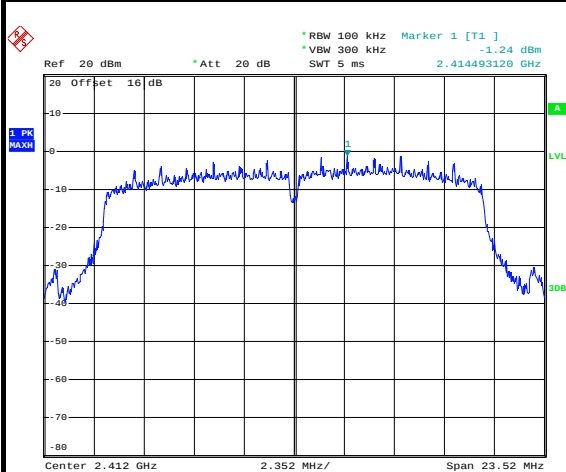


Date: 4.JUL.2014 18:31:13

Low Channel Plot

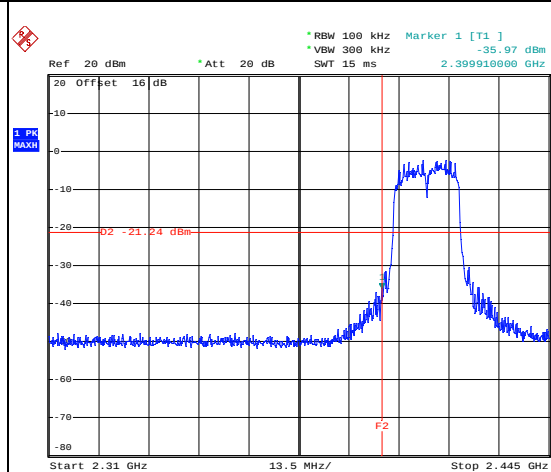


Date: 4.JUL.2014 18:31:27

Spurious Emission 30MHz~3GHz

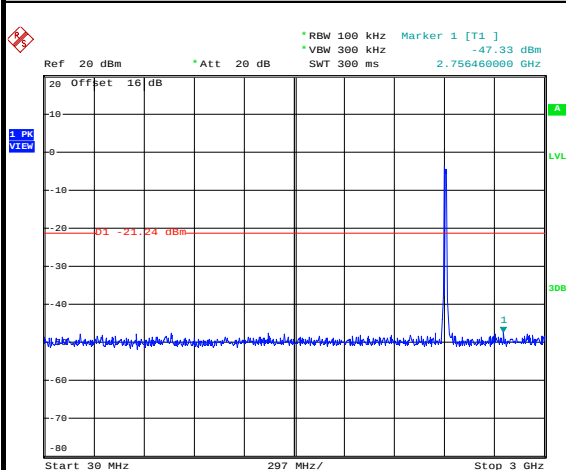

Date: 4.JUL.2014 18:36:23

Spurious Emission 2GHz~25GHz

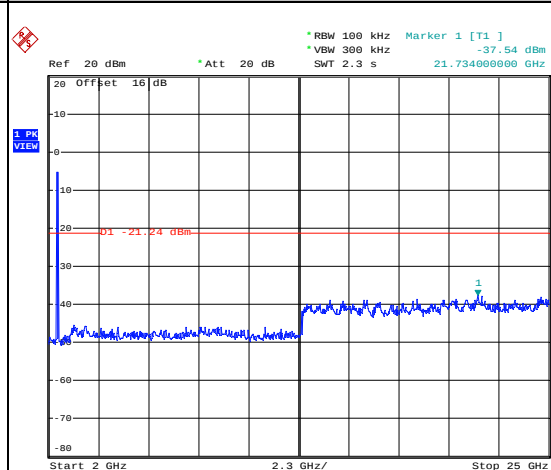


Date: 4.JUL.2014 18:36:42



Number of TX :	2	Chain Port:	0
Test Mode :	802.11n HT20	Temperature :	23~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	47~48%
Test Channel :	06	Test Engineer :	Steven Hao


WLAN 802.11n HT20 Channel 06

100kHz PSD reference Level

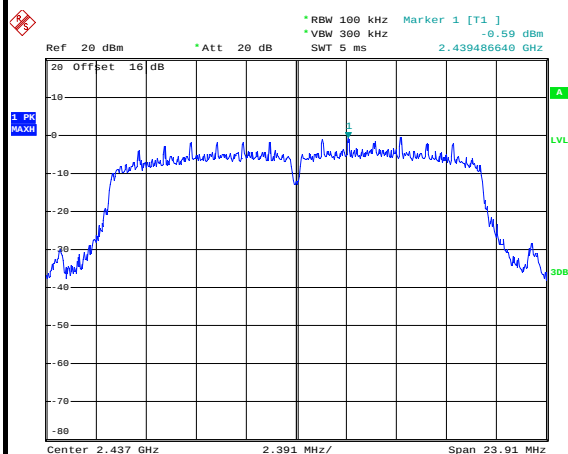


Date: 4.JUL.2014 18:40:17

Spurious Emission 30MHz~3GHz

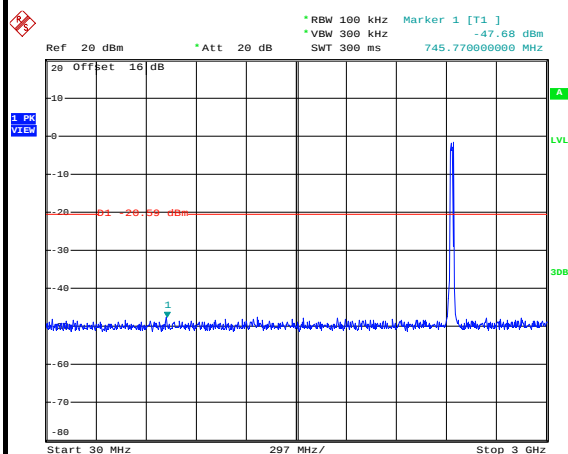

Date: 4.JUL.2014 18:42:11

Spurious Emission 2GHz~25GHz

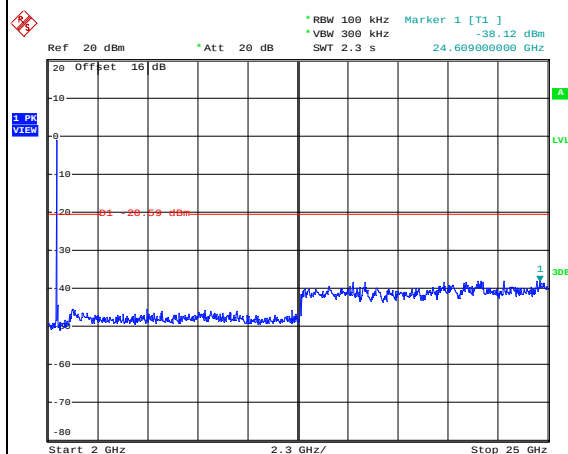


Date: 4.JUL.2014 18:42:30



Number of TX :	2	Chain Port:	0
Test Mode :	802.11n HT20	Temperature :	23~25°C
Test Band :	2.4GHz High	Relative Humidity :	47~48%
Test Channel :	11	Test Engineer :	Steven Hao


WLAN 802.11n HT20 Channel 11

100kHz PSD reference Level

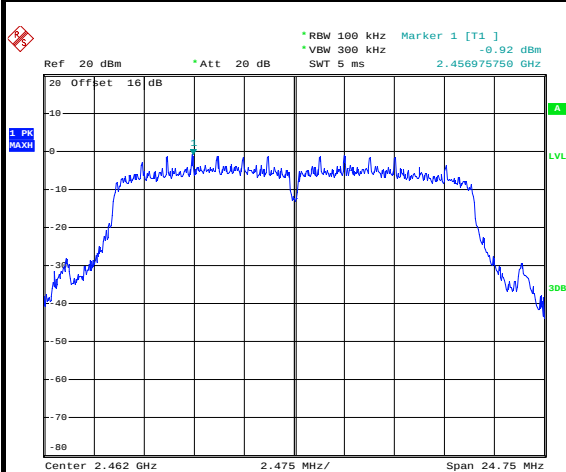


Date: 4.JUL.2014 19:10:20

High Channel Plot

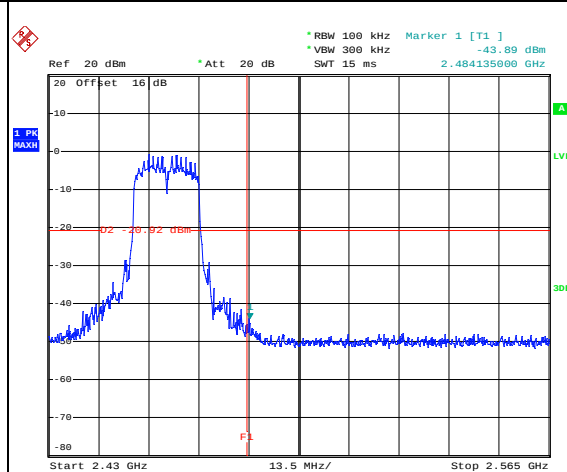


Date: 4.JUL.2014 19:10:34

Spurious Emission 30MHz~3GHz

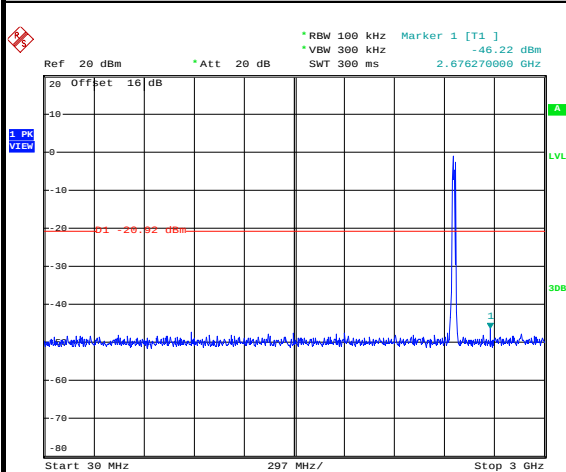

Date: 4.JUL.2014 19:10:53


Spurious Emission 2GHz~25GHz

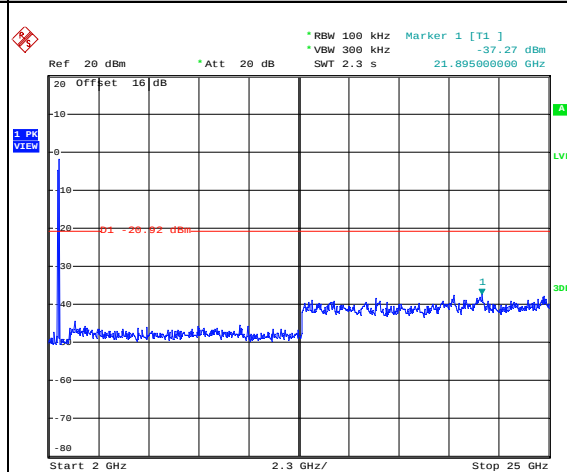


Date: 4.JUL.2014 19:11:11

**Number of TX = 2, Chain Port 1 (Measured)**


Number of TX :	2	Chain Port:	1
Test Mode :	802.11n HT20	Temperature :	23~25°C
Test Band :	2.4GHz Low	Relative Humidity :	47~48%
Test Channel :	01	Test Engineer :	Steven Hao

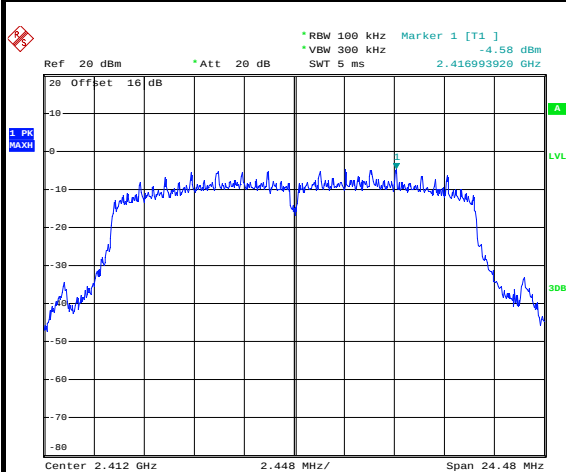WLAN 802.11n HT20 Channel 01**100kHz PSD reference Level**


Date: 4.JUL.2014 19:18:53

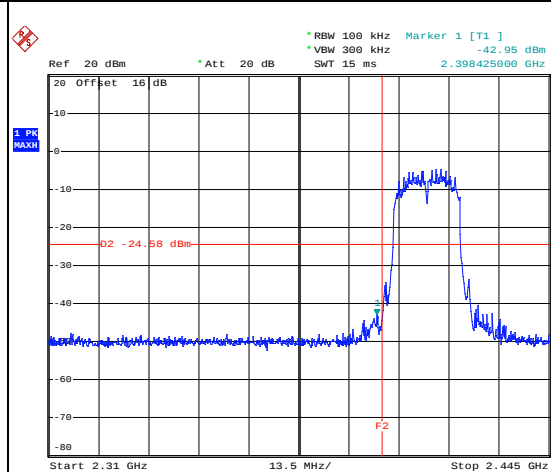Low Channel Plot

Date: 4.JUL.2014 19:19:07

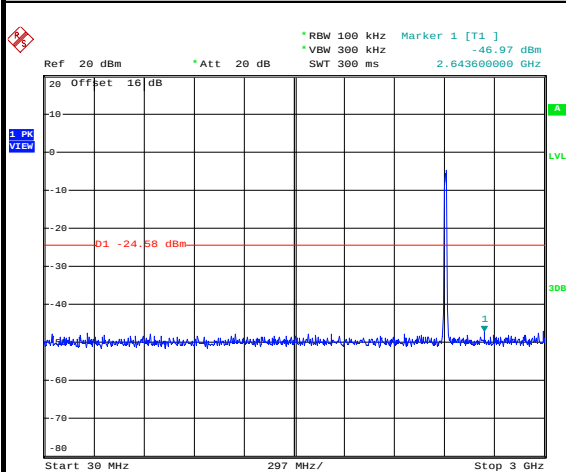Spurious Emission 30MHz~3GHz

Date: 4.JUL.2014 19:19:26

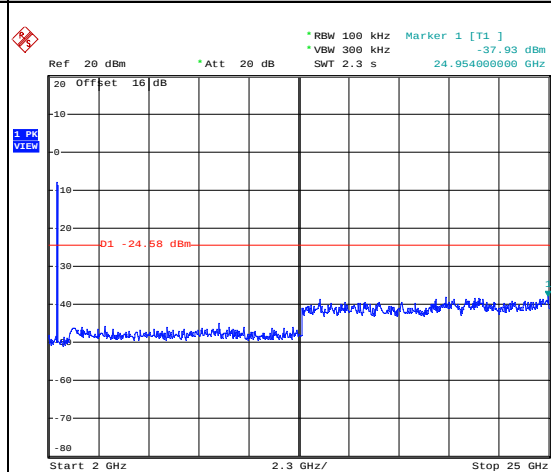
Spurious Emission 2GHz~25GHz

Date: 4.JUL.2014 19:19:45

Number of TX :	2	Chain Port:	1
Test Mode :	802.11n HT20	Temperature :	23~25℃
Test Band :	2.4GHz Mid	Relative Humidity :	47~48%
Test Channel :	06	Test Engineer :	Steven Hao


WLAN 802.11n HT20 Channel 06

100kHz PSD reference Level

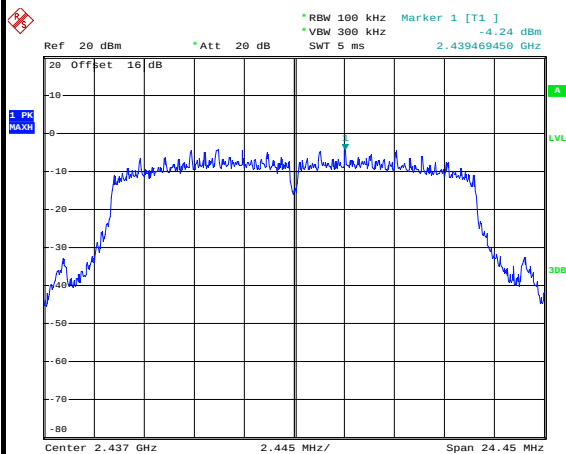


Date: 4.JUL.2014 19:21:52

Spurious Emission 30MHz~3GHz

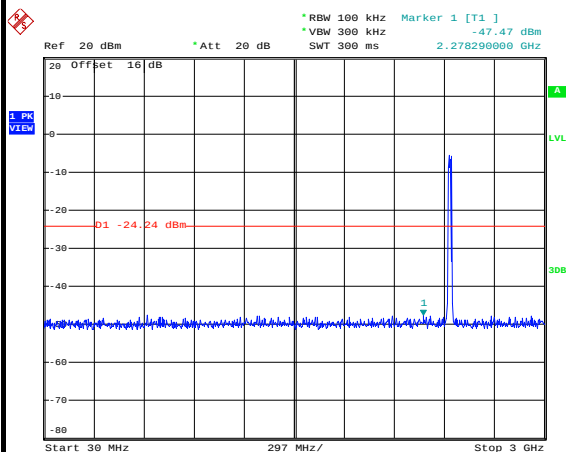

Date: 4.JUL.2014 19:22:12


Spurious Emission 2GHz~25GHz

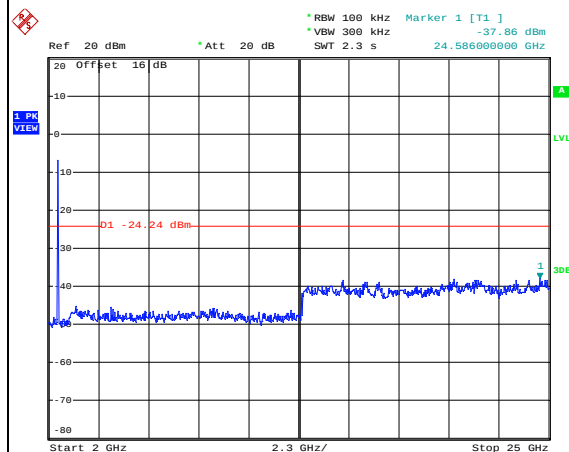


Date: 4.JUL.2014 19:22:30




Number of TX :	2	Chain Port:	1
Test Mode :	802.11n HT20	Temperature :	23~25°C
Test Band :	2.4GHz High	Relative Humidity :	47~48%
Test Channel :	11	Test Engineer :	Steven Hao

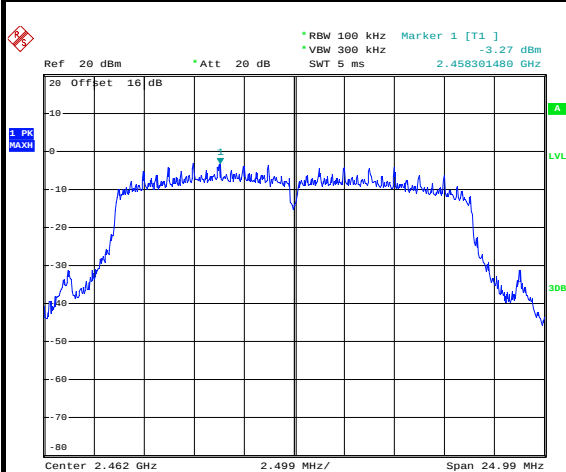WLAN 802.11n HT20 Channel 11**100kHz PSD reference Level**


Date: 4.JUL.2014 19:14:00

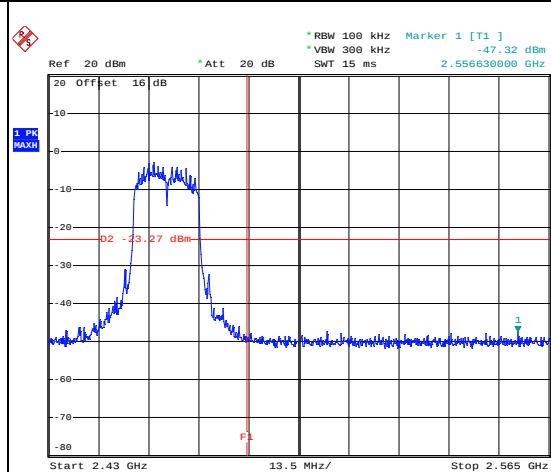High Channel Plot

Date: 4.JUL.2014 19:14:14

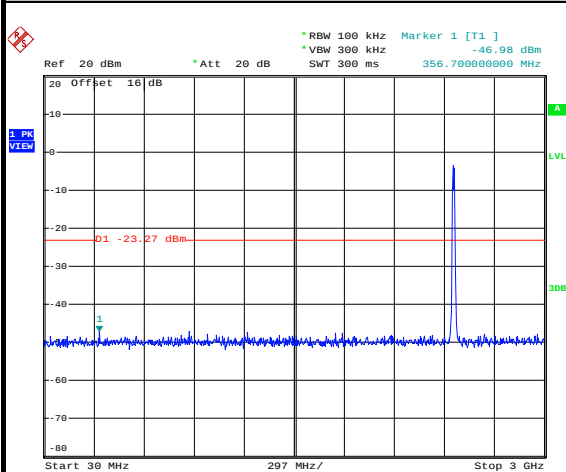Spurious Emission 30MHz~3GHz

Date: 4.JUL.2014 19:15:29

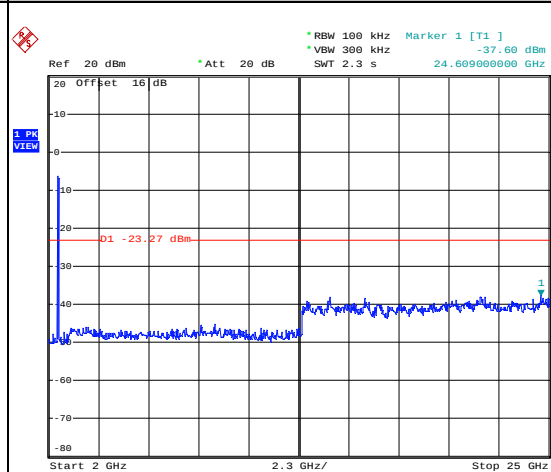Spurious Emission 2GHz~25GHz

Date: 4.JUL.2014 19:15:48

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedure

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.


For average measurement:

 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


Chain Port	Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
0	802.11b	100%	-	-	10Hz
0	802.11g	95.39	2.068	0.483	1kHz
0	2.4GHz 802.11n HT20	95.07	1.928	0.518	1kHz
0+1	2.4GHz 802.11n HT20	91.04	0.996	1.004	3kHz

3.5.4 Test Setup


For radiated emissions below 30MHz

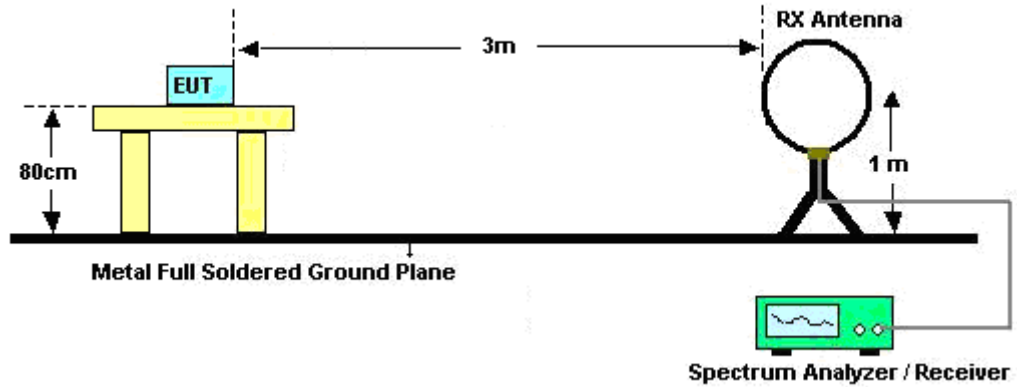

For radiated emissions from 30MHz to 1GHz

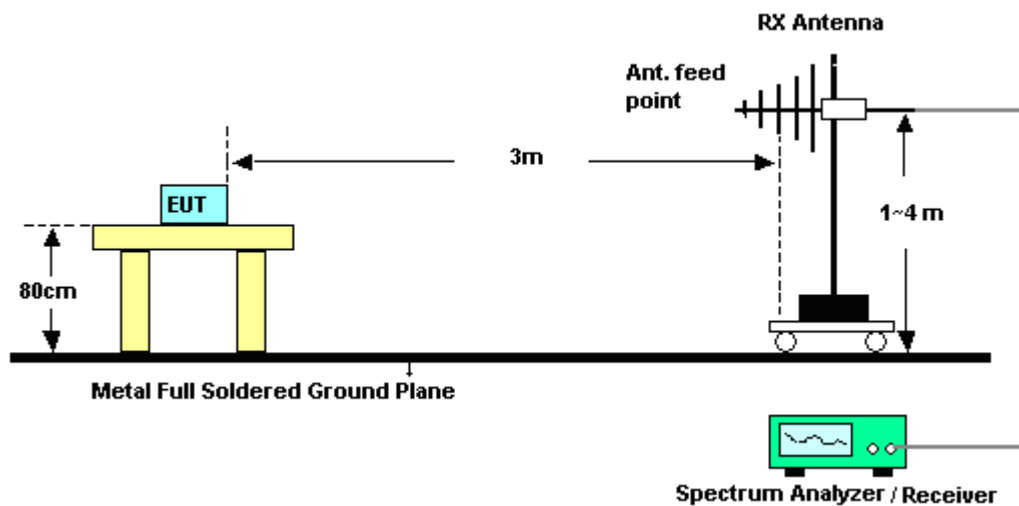

For radiated emissions above 1GHz

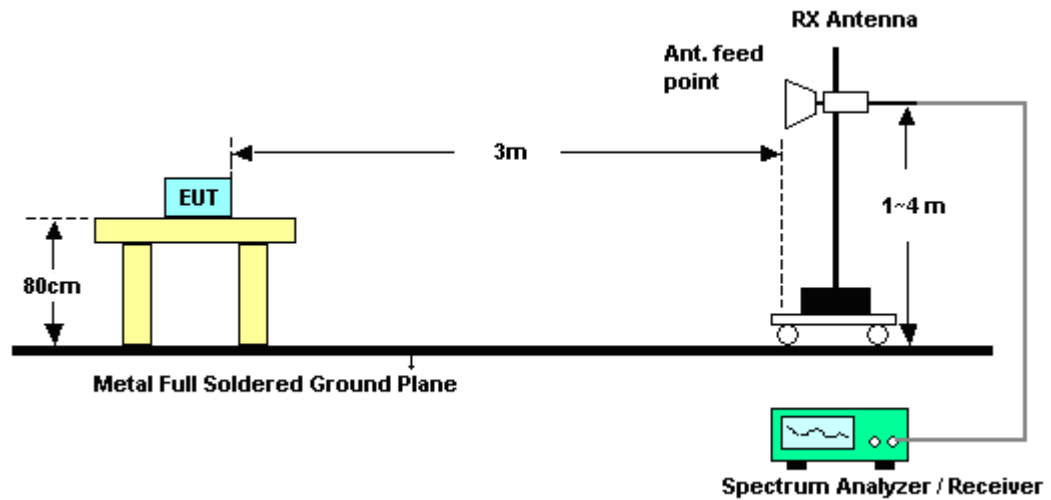

3.5.5 Test Results of Radiated Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.



3.5.6 Test Result of Radiated Spurious at Band Edges

< Chain Port 0 >

Test Mode :	802.11b	Temperature :	21~22°C
Test Band :	Low	Relative Humidity :	43~44%
Test Channel :	01	Test Engineer :	Star Wei

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.38	49.09	-24.91	74	45.9	32.86	3.59	33.26	181	335	Peak
2390.00	38.14	-15.86	54	34.95	32.86	3.59	33.26	181	335	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.65	52.12	-21.88	74	48.93	32.86	3.59	33.26	100	295	Peak
2390.00	41.82	-12.18	54	38.63	32.86	3.59	33.26	100	295	Average

Test Mode :	802.11b	Temperature :	21~22°C
Test Band :	High	Relative Humidity :	43~44%
Test Channel :	11	Test Engineer :	Star Wei

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.53	53.65	-20.35	74	50.28	33.01	3.65	33.29	176	310	Peak
2483.50	47.13	-6.87	54	43.76	33.01	3.65	33.29	176	310	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.59	55.08	-18.92	74	51.71	33.01	3.65	33.29	100	275	Peak
2483.50	49.47	-4.53	54	46.1	33.01	3.65	33.29	100	275	Average



Test Mode :	802.11g	Temperature :	21~22°C
Test Band :	Low	Relative Humidity :	43~44%
Test Channel :	01	Test Engineer :	Star Wei

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.20	68.94	-5.06	74	65.75	32.86	3.59	33.26	182	309	Peak
2389.92	40.69	-13.31	54	37.5	32.86	3.59	33.26	182	309	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2388.57	70.06	-3.94	74	66.87	32.86	3.59	33.26	100	281	Peak
2390.00	42.54	-11.46	54	39.35	32.86	3.59	33.26	100	281	Average

Test Mode :	802.11g	Temperature :	21~22°C
Test Band :	High	Relative Humidity :	43~44%
Test Channel :	11	Test Engineer :	Star Wei

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.59	69.96	-4.04	74	66.59	33.01	3.65	33.29	143	343	Peak
2483.56	44.03	-9.97	54	40.66	33.01	3.65	33.29	143	343	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.59	72.72	-1.28	74	69.35	33.01	3.65	33.29	100	292	Peak
2483.53	46.45	-7.55	54	43.08	33.01	3.65	33.29	100	292	Average



Test Mode :	802.11n HT20	Temperature :	21~22°C
Test Band :	Low	Relative Humidity :	43~44%
Test Channel :	01	Test Engineer :	Star Wei

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2388.21	67.73	-6.27	74	64.54	32.86	3.59	33.26	183	311	Peak
2390.00	41.52	-12.48	54	38.33	32.86	3.59	33.26	183	311	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2388.84	70.17	-3.83	74	66.98	32.86	3.59	33.26	100	277	Peak
2390.00	43.59	-10.41	54	40.4	32.86	3.59	33.26	100	277	Average

Test Mode :	802.11n HT20	Temperature :	21~22°C
Test Band :	High	Relative Humidity :	43~44%
Test Channel :	11	Test Engineer :	Star Wei

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.65	70.84	-3.16	74	67.47	33.01	3.65	33.29	174	333	Peak
2483.56	44.20	-9.80	54	40.83	33.01	3.65	33.29	174	333	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2484.01	72.88	-1.12	74	69.51	33.01	3.65	33.29	100	293	Peak
2483.65	46.72	-7.28	54	43.35	33.01	3.65	33.29	100	293	Average



< Chain Port 0+1>

Test Mode :	802.11n HT20	Temperature :	21~22°C
Test Band :	Low	Relative Humidity :	43~44%
Test Channel :	01	Test Engineer :	Star Wei

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.74	63.25	-10.75	74	60.06	32.86	3.59	33.26	182	345	Peak
2389.02	39.89	-14.11	54	36.7	32.86	3.59	33.26	182	345	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2390.00	67.3	-6.70	74	64.11	32.86	3.59	33.26	100	275	Peak
2388.84	42.46	-11.54	54	39.27	32.86	3.59	33.26	100	275	Average

Test Mode :	802.11n HT20	Temperature :	21~22°C
Test Band :	High	Relative Humidity :	43~44%
Test Channel :	11	Test Engineer :	Star Wei

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.56	65.21	-8.79	74	61.84	33.01	3.65	33.29	184	355	Peak
2483.62	43.24	-10.76	54	39.87	33.01	3.65	33.29	184	355	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.98	70.46	-3.54	74	67.09	33.01	3.65	33.29	100	295	Peak
2483.53	46.98	-7.02	54	43.61	33.01	3.65	33.29	100	295	Average

3.5.7 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Note: Pre-scanned all test modes and only choose the worst case mode recorded in the test report for radiated spurious emission below 1GHz.

< Chain Port 0>

Test Mode :	802.11b	Temperature :	21~22°C
Test Channel :	01	Relative Humidity :	43~44%
Test Engineer :	Star Wei	Polarization :	Horizontal
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2412	105.91	-	-	102.68	32.89	3.61	33.27	181	335	Peak
2412	100.03	-	-	96.80	32.89	3.61	33.27	181	335	Average
4824	47.54	-26.46	74	40.92	35.17	5.25	33.8	100	206	Peak

Test Mode :	802.11b	Temperature :	21~22°C
Test Channel :	01	Relative Humidity :	43~44%
Test Engineer :	Star Wei	Polarization :	Vertical
Remark :	1. 2412 MHz is Fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2412	107.52	-	-	104.29	32.89	3.61	33.27	100	295	Peak
2412	101.87	-	-	98.64	32.89	3.61	33.27	100	295	Average
4824	47.40	-26.60	74	40.78	35.17	5.25	33.8	100	48	Peak

Test Mode :	802.11b	Temperature :	21~22°C
Test Channel :	06	Relative Humidity :	43~44%
Test Engineer :	Star Wei	Polarization :	Horizontal
Remark :	1. 2437 MHz is Fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	105.91	-	-	102.61	32.95	3.63	33.28	178	312	Peak
2437	100.75	-	-	97.45	32.95	3.63	33.28	178	312	Average
4874	46.51	-27.49	74	39.85	35.18	5.28	33.8	100	61	Peak
7312	48.93	-25.07	74	40.25	36.20	6.61	34.13	100	195	Peak

Test Mode :	802.11b	Temperature :	21~22°C
Test Channel :	06	Relative Humidity :	43~44%
Test Engineer :	Star Wei	Polarization :	Vertical
Remark :	1. 2437 MHz is Fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	107.59	-	-	104.29	32.95	3.63	33.28	100	275	Peak
2437	102.19	-	-	98.89	32.95	3.63	33.28	100	275	Average
4874	46.88	-27.12	74	40.22	35.18	5.28	33.8	100	51	Peak
7312	49.02	-24.98	74	40.34	36.2	6.61	34.13	100	162	Peak

Test Mode :	802.11b	Temperature :	21~22°C
Test Channel :	11	Relative Humidity :	43~44%
Test Engineer :	Star Wei	Polarization :	Horizontal
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	104.29	-	-	100.96	32.98	3.64	33.29	176	310	Peak
2462	99.26	-	-	95.93	32.98	3.64	33.29	176	310	Average
4924	46.54	-27.46	74	39.84	35.19	5.31	33.8	100	61	Peak
7386	48.72	-25.28	74	39.94	36.24	6.7	34.16	100	59	Peak

Test Mode :	802.11b	Temperature :	21~22°C
Test Channel :	11	Relative Humidity :	43~44%
Test Engineer :	Star Wei	Polarization :	Vertical
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	106.09	-	-	102.76	32.98	3.64	33.29	100	275	Peak
2462	100.49	-	-	97.16	32.98	3.64	33.29	100	275	Average
4924	49.22	-24.78	74	42.52	35.19	5.31	33.8	100	192	Peak
7386	50.61	-23.39	74	41.83	36.24	6.7	34.16	100	61	Peak



Test Mode :	802.11g	Temperature :	21~22°C
Test Channel :	01	Relative Humidity :	43~44%
Test Engineer :	Star Wei	Polarization :	Horizontal
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2412	107.65	-	-	104.42	32.89	3.61	33.27	182	309	Peak
2412	96.25	-	-	93.02	32.89	3.61	33.27	182	309	Average
4824	47.02	-26.98	74	40.4	35.17	5.25	33.8	100	261	Peak

Test Mode :	802.11g	Temperature :	21~22°C
Test Channel :	01	Relative Humidity :	43~44%
Test Engineer :	Star Wei	Polarization :	Vertical
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2412	108.25	-	-	105.02	32.89	3.61	33.27	100	281	Peak
2412	96.26	-	-	93.03	32.89	3.61	33.27	100	281	Average
4824	46.78	-27.22	74	40.16	35.17	5.25	33.8	100	58	Peak



Test Mode :	802.11g	Temperature :	21~22°C
Test Channel :	06	Relative Humidity :	43~44%
Test Engineer :	Star Wei	Polarization :	Horizontal
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	106.69	-	-	103.39	32.95	3.63	33.28	181	322	Peak
2437	95.30	-	-	92.00	32.95	3.63	33.28	181	322	Average
4874	46.47	-27.53	74	39.81	35.18	5.28	33.80	100	61	Peak
7312	48.98	-25.02	74	40.30	36.20	6.61	34.13	100	15	Peak

Test Mode :	802.11g	Temperature :	21~22°C
Test Channel :	06	Relative Humidity :	43~44%
Test Engineer :	Star Wei	Polarization :	Vertical
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	109.47	-	-	106.17	32.95	3.63	33.28	100	271	Peak
2437	97.75	-	-	94.45	32.95	3.63	33.28	100	271	Average
4874	47.30	-26.70	74	40.64	35.18	5.28	33.8	100	126	Peak
7312	49.65	-24.35	74	40.97	36.2	6.61	34.13	100	59	Peak



Test Mode :	802.11g	Temperature :	21~22°C
Test Channel :	11	Relative Humidity :	43~44%
Test Engineer :	Star Wei	Polarization :	Horizontal
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	107.31	-	-	103.98	32.98	3.64	33.29	143	343	Peak
2462	95.75	-	-	92.42	32.98	3.64	33.29	143	343	Average
4924	46.32	-27.68	74	39.62	35.19	5.31	33.8	100	169	Peak
7386	49.1	-24.90	74	40.32	36.24	6.7	34.16	100	184	Peak

Test Mode :	802.11g	Temperature :	21~22°C
Test Channel :	11	Relative Humidity :	43~44%
Test Engineer :	Star Wei	Polarization :	Vertical
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	108.56	-	-	105.23	32.98	3.64	33.29	100	292	Peak
2462	96.51	-	-	93.18	32.98	3.64	33.29	100	292	Average
4924	46.31	-27.69	74	39.61	35.19	5.31	33.8	100	49	Peak
7386	50.17	-23.83	74	41.39	36.24	6.7	34.16	100	98	Peak



Test Mode :	802.11n HT20	Temperature :	21~22°C
Test Channel :	01	Relative Humidity :	43~44%
Test Engineer :	Star Wei	Polarization :	Horizontal
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2412	106.96	-	-	103.73	32.89	3.61	33.27	183	311	Peak
2412	95.68	-	-	92.45	32.89	3.61	33.27	183	311	Average
4824	46.22	-27.78	74	39.6	35.17	5.25	33.8	100	51	Peak

Test Mode :	802.11n HT20	Temperature :	21~22°C
Test Channel :	01	Relative Humidity :	43~44%
Test Engineer :	Star Wei	Polarization :	Vertical
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2412	107.95	-	-	104.72	32.89	3.61	33.27	100	277	Peak
2412	96.94	-	-	93.71	32.89	3.61	33.27	100	277	Average
4824	46.05	-27.95	74	39.43	35.17	5.25	33.8	100	169	Peak



Test Mode :	802.11n HT20	Temperature :	21~22°C
Test Channel :	06	Relative Humidity :	43~44%
Test Engineer :	Star Wei	Polarization :	Horizontal
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	106.2	-	-	102.9	32.95	3.63	33.28	181	340	Peak
2437	95.13	-	-	91.83	32.95	3.63	33.28	181	340	Average
4874	46.93	-27.07	74	40.27	35.18	5.28	33.80	100	151	Peak
7312	48.34	-25.66	74	39.66	36.20	6.61	34.13	100	194	Peak

Test Mode :	802.11n HT20	Temperature :	21~22°C
Test Channel :	06	Relative Humidity :	43~44%
Test Engineer :	Star Wei	Polarization :	Vertical
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	108.72	-	-	105.42	32.95	3.63	33.28	100	291	Peak
2437	96.85	-	-	93.55	32.95	3.63	33.28	100	291	Average
4874	46.20	-27.80	74	39.54	35.18	5.28	33.80	100	64	Peak
7312	48.55	-25.45	74	39.87	36.2	6.61	34.13	100	326	Peak



Test Mode :	802.11n HT20	Temperature :	21~22°C
Test Channel :	11	Relative Humidity :	43~44%
Test Engineer :	Star Wei	Polarization :	Horizontal
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
37.76	23.32	-16.68	40	42.67	13.7	0.58	33.63	100	126	Peak
107.6	21.4	-22.10	43.5	42.48	11.56	0.97	33.61	-	-	Peak
265.71	22.27	-23.73	46	41.91	12.27	1.51	33.42	-	-	Peak
620.73	21.83	-24.17	46	33.81	18.71	2.26	32.95	-	-	Peak
852.56	22.18	-23.82	46	31.76	20.51	2.63	32.72	-	-	Peak
929.19	23.59	-22.41	46	32.62	20.63	2.78	32.44	-	-	Peak
2462	106.86	-	-	103.53	32.98	3.64	33.29	141	328	Peak
2462	94.48	-	-	91.15	32.98	3.64	33.29	141	328	Average
4924	47.33	-26.67	74	40.63	35.19	5.31	33.8	100	65	Peak
7386	49.59	-24.41	74	40.81	36.24	6.7	34.16	100	109	Peak



Test Mode :	802.11n HT20	Temperature :	21~22°C
Test Channel :	11	Relative Humidity :	43~44%
Test Engineer :	Star Wei	Polarization :	Vertical
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
42.61	28.27	-11.73	40	50.80	10.48	0.62	33.63	100	39	Peak
77.53	26.84	-13.16	40	53.43	6.2	0.81	33.6	-	-	Peak
249.22	20.21	-25.79	46	40.24	11.96	1.45	33.44	-	-	Peak
581.93	22.99	-23.01	46	35.19	18.57	2.2	32.97	-	-	Peak
909.79	24.04	-21.96	46	33.23	20.49	2.75	32.43	-	-	Peak
992.24	23.08	-30.92	54	31.57	21.06	2.88	32.43	-	-	Peak
2462	107.27	-	-	103.94	32.98	3.64	33.29	100	293	Peak
2462	95.51	-	-	92.18	32.98	3.64	33.29	100	293	Average
4924	46.66	-27.34	74	39.96	35.19	5.31	33.8	100	126	Peak
7386	48.37	-25.63	74	39.59	36.24	6.7	34.16	100	205	Peak

**< Chain Port 0+1>**

Test Mode :	802.11n HT20	Temperature :	21~22°C
Test Channel :	01	Relative Humidity :	43~44%
Test Engineer :	Star Wei	Polarization :	Horizontal
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2412	105.82	-	-	102.59	32.89	3.61	33.27	182	345	Peak
2412	94.98	-	-	91.75	32.89	3.61	33.27	182	345	Average
4824	47.26	-26.74	74	40.64	35.17	5.25	33.8	100	61	Peak

Test Mode :	802.11n HT20	Temperature :	21~22°C
Test Channel :	01	Relative Humidity :	43~44%
Test Engineer :	Star Wei	Polarization :	Vertical
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2412	107.58	-	-	104.35	32.89	3.61	33.27	100	275	Peak
2412	96.35	-	-	93.12	32.89	3.61	33.27	100	275	Average
4824	46.94	-27.06	74	40.32	35.17	5.25	33.8	100	145	Peak



Test Mode :	802.11n HT20	Temperature :	21~22°C
Test Channel :	06	Relative Humidity :	43~44%
Test Engineer :	Star Wei	Polarization :	Horizontal
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	105.28	-	-	101.98	32.95	3.63	33.28	179	330	Peak
2437	94.93	-	-	91.63	32.95	3.63	33.28	179	330	Average
4874	46.86	-27.14	74	40.2	35.18	5.28	33.8	100	261	Peak
7312	48.99	-25.01	74	40.31	36.2	6.61	34.13	100	205	Peak

Test Mode :	802.11n HT20	Temperature :	21~22°C
Test Channel :	06	Relative Humidity :	43~44%
Test Engineer :	Star Wei	Polarization :	Vertical
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	108.6	-	-	105.3	32.95	3.63	33.28	100	287	Peak
2437	97.32	-	-	94.02	32.95	3.63	33.28	100	287	Average
4874	45.70	-28.30	74	39.04	35.18	5.28	33.8	100	69	Peak
7312	47.98	-26.02	74	39.3	36.2	6.61	34.13	100	66	Peak



Test Mode :	802.11n HT20	Temperature :	21~22°C
Test Channel :	11	Relative Humidity :	43~44%
Test Engineer :	Star Wei	Polarization :	Horizontal
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	104.70	-	-	101.37	32.98	3.64	33.29	184	355	Peak
2462	93.28	-	-	89.95	32.98	3.64	33.29	184	355	Average
4924	45.91	-28.09	74	39.21	35.19	5.31	33.8	100	91	Peak
7386	48.62	-25.38	74	39.84	36.24	6.7	34.16	100	306	Peak

Test Mode :	802.11n HT20	Temperature :	21~22°C
Test Channel :	11	Relative Humidity :	43~44%
Test Engineer :	Star Wei	Polarization :	Vertical
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	107.34	-	-	104.01	32.98	3.64	33.29	100	295	Peak
2462	94.73	-	-	91.40	32.98	3.64	33.29	100	295	Average
4924	46.95	-27.05	74	40.25	35.19	5.31	33.8	100	162	Peak
7386	48.83	-25.17	74	40.05	36.24	6.7	34.16	100	41	Peak

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.6.4 Test Setup

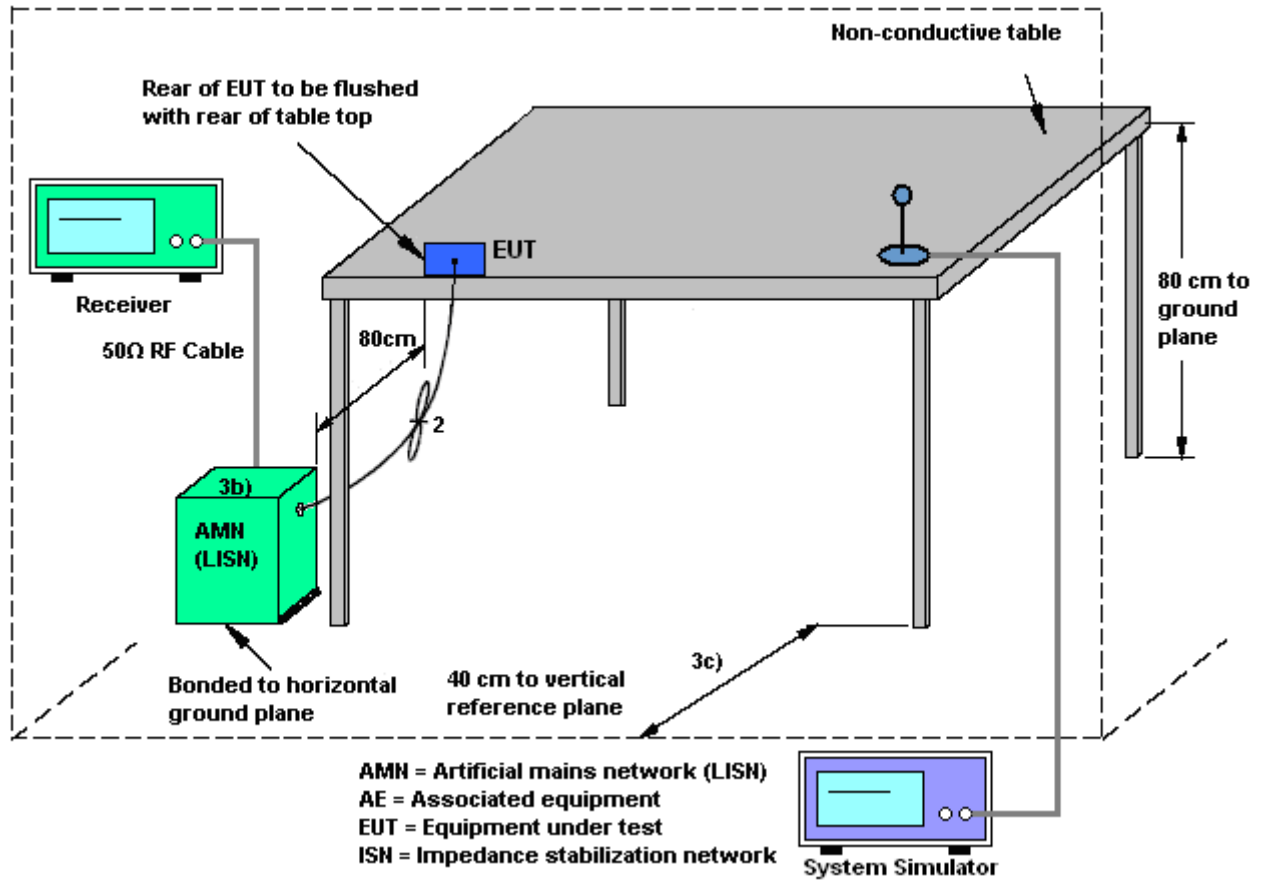




3.6.5 Test Result of AC Conducted Emission

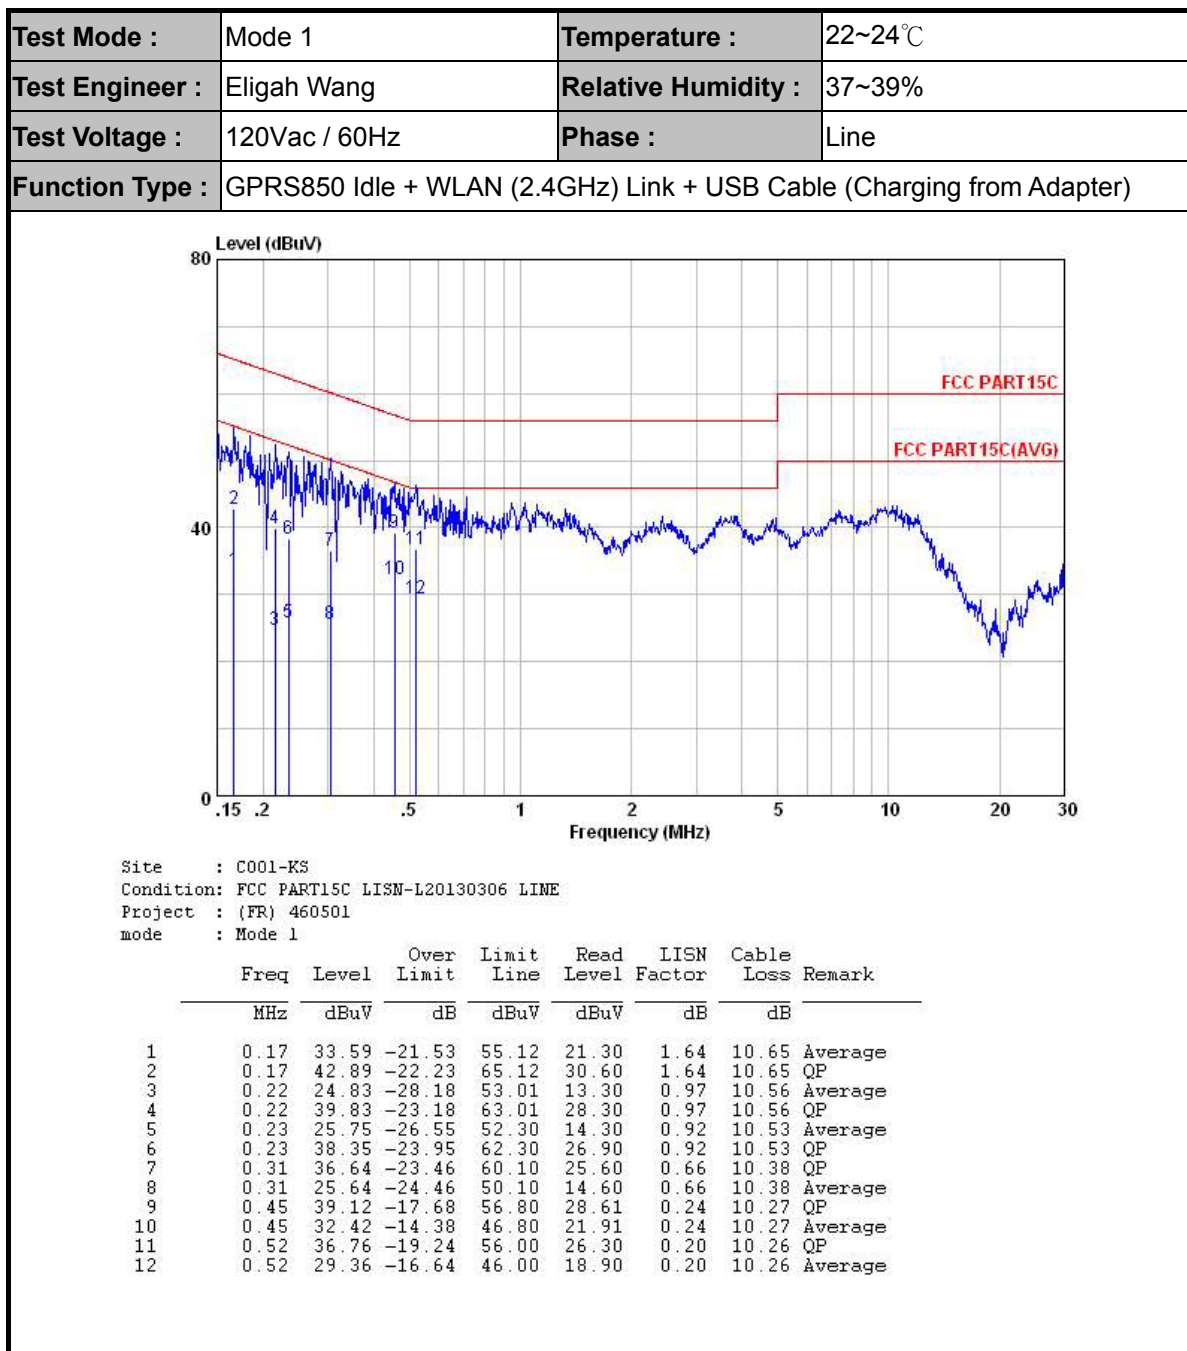



Test Mode :	Mode 1	Temperature :	22~24°C
Test Engineer :	Eligah Wang	Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GPRS850 Idle + WLAN (2.4GHz) Link + USB Cable (Charging from Adapter)		

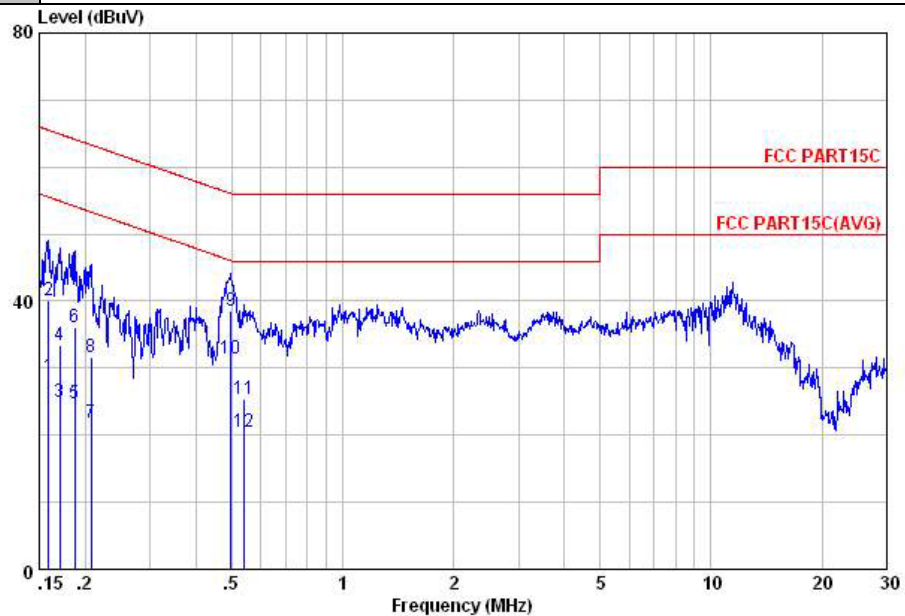

Site : C001-KS
 Condition: FCC PART15C LISN-N20130306 NEUTRAL
 Project : (FR) 460501
 mode : Mode 1

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.16	28.84	-26.68	55.52	16.40	1.76	10.68	Average
2	0.16	40.04	-25.48	65.52	27.60	1.76	10.68	QP
3	0.17	25.06	-29.88	54.94	12.90	1.52	10.64	Average
4	0.17	33.46	-31.48	64.94	21.30	1.52	10.64	QP
5	0.19	24.66	-29.49	54.15	12.90	1.16	10.60	Average
6	0.19	36.06	-28.09	64.15	24.30	1.16	10.60	QP
7	0.21	21.85	-31.47	53.32	10.29	0.99	10.57	Average
8	0.21	31.65	-31.67	63.32	20.09	0.99	10.57	QP
9	0.50	38.47	-17.58	56.05	27.91	0.30	10.26	QP
10	0.50	31.37	-14.68	46.05	20.81	0.30	10.26	Average
11	0.54	25.34	-30.66	56.00	14.80	0.28	10.26	QP
12	0.54	20.44	-25.56	46.00	9.90	0.28	10.26	Average

3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the Antenna exceeds 6 dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

For CDD transmissions, directional gain is calculated as

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

N_{SS} = the number of independent spatial streams of data;

N_{ANT} = the total number of antennas

$g_{j,k} = 10^{G_k / 20}$ if the k th antenna is being fed by spatial stream j , or zero if it is not;
 G_k is the gain in dBi of the k th antenna.

The EUT supports CDD mode

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.



			DG	DG	Power	PSD
			for	for	Limit	Limit
	Chain Port 0	Chain Port 1	Power	PSD	Reduction	Reduction
	(dBi)	(dBi)	(dBi)	(dBi)	(dB)	(dB)
2.4 GHz	1.80	3.10	5.48	5.48	0.00	0.00

Power Limit Reduction = DG(Power) – 6dBi, (min = 0)

PSD Limit Reduction = DG(PSD) – 6dBi, (min = 0)



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Dec. 28, 2013	Jul. 04, 2014	Dec. 27, 2014	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	30MHz~40GHz	Feb. 27, 2014	Jul. 04, 2014	Feb. 26, 2015	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Feb. 27, 2014	Jul. 04, 2014	Feb. 26, 2015	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESCI	100534	9kHz~3GHz	Nov. 05, 2013	Jul. 20, 2014	Nov. 04, 2014	Radiation (03CH01-KS)
Spectrum Analyzer	R&S	FSP30	101399	9kHz~30GHz	May 04, 2014	Jul. 20, 2014	May 03, 2015	Radiation (03CH01-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 09, 2013	Jul. 20, 2014	Oct. 08, 2014	Radiation (03CH01-KS)
Bilog Antenna	SCHAFFNER	CBL6112D	23182	25MHz~2GHz	Jan. 08, 2014	Jul. 20, 2014	Jan. 07, 2015	Radiation (03CH01-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75959	1GHz~18GHz	Jan. 08, 2014	Jul. 20, 2014	Jan. 07, 2015	Radiation (03CH01-KS)
Active Horn Antenna	com-power	AHA-118	701030	1GHz~18GHz	Nov. 18, 2013	Jul. 20, 2014	Nov. 17, 2014	Radiation (03CH01-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA170249	15GHz~40GHz	Mar. 10, 2014	Jul. 20, 2014	Mar. 09, 2015	Radiation (03CH01-KS)
Amplifier	com-power	PA-103A	161073	1MHz~1GHz	May 04, 2014	Jul. 20, 2014	May 03, 2015	Radiation (03CH01-KS)
Amplifier	Agilent	8449B	3008A02371	1GHz~26.5GHz	Dec. 10, 2013	Jul. 20, 2014	Dec. 09, 2014	Radiation (03CH01-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Jul. 20, 2014	NCR	Radiation (03CH01-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Jul. 20, 2014	NCR	Radiation (03CH01-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Jul. 20, 2014	NCR	Radiation (03CH01-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	May 04, 2014	Jul. 06, 2014	May 03, 2015	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Dec. 10, 2013	Jul. 06, 2014	Dec. 09, 2014	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Dec. 10, 2013	Jul. 06, 2014	Dec. 09, 2014	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000811	AC 0V~300V, 45Hz~1000Hz	Nov. 12, 2013	Jul. 06, 2014	Nov. 11, 2014	Conduction (CO01-KS)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.3
---	-----

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.5
---	-----