



Test Report No.: RF160801W004-2



FCC TEST REPORT

(WIFI + BT LE)

Product: LTE Digital Mobile Phone

Model Name: NX529J/nubia Z11 mini/BGH nubia Z11 mini

FCC ID: SRQ-NX529J-US

Applicant: ZTE Corporation

Address: ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, P.R.China

Manufacturer: ZTE Corporation

Address: ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, P.R.China

Prepared by: Bureau Veritas Shenzhen Co., Ltd. Dongguan Branch

Lab Location: No. 34, Chenwulu Section, Guantai Rd., Houjie Town, Dongguan City, Guangdong 523942, China

TEL: +86 769 8593 5656

FAX: +86 769 8593 1080

E-MAIL: customerservice.dg@cn.bureauveritas.com

Report No.: RF160801W004-2

Received Date: Jun. 14, 2016

Test Date: Jun. 15, 2016 ~ July 05, 2016

Issued Date: Aug. 12, 2016

This report should not be used by the client to claim product certification, approval, or endorsement by A2LA or any government agencies.

Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.



TABLE OF CONTENTS

RELEASE CONTROL RECORD 4

1 CERTIFICATION 5

2 SUMMARY OF TEST RESULTS..... 6

2.1 MEASUREMENT UNCERTAINTY 6

3 GENERAL INFORMATION 7

3.1 GENERAL DESCRIPTION OF EUT..... 7

3.2 DESCRIPTION OF TEST MODES..... 9

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST 10

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL..... 10

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS..... 13

3.4 DESCRIPTION OF SUPPORT UNITS..... 13

4 TEST TYPES AND RESULTS..... 14

4.1 CONDUCTED EMISSION MEASUREMENT 14

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT 14

4.1.2 TEST INSTRUMENTS..... 14

4.1.3 TEST PROCEDURES 15

4.1.4 DEVIATION FROM TEST STANDARD 15

4.1.5 TEST SETUP..... 16

4.1.6 EUT OPERATING CONDITIONS 16

4.1.7 TEST RESULTS 17

4.2 RADIATED EMISSION MEASUREMENT 19

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT 19

4.2.2 TEST INSTRUMENTS..... 20

4.2.3 TEST PROCEDURES 21

4.2.4 DEVIATION FROM TEST STANDARD 21

4.2.5 TEST SETUP..... 22

4.2.6 EUT OPERATING CONDITIONS 23

4.2.7 TEST RESULTS 24

4.3 6DB BANDWIDTH MEASUREMENT..... 40

4.3.1 LIMITS OF 6DB BANDWIDTH MEASUREMENT 40

4.3.2 TEST INSTRUMENTS..... 40

4.3.3 TEST PROCEDURE..... 40

4.3.4 DEVIATION FROM TEST STANDARD 41

4.3.5 TEST SETUP..... 41

4.3.6 EUT OPERATING CONDITIONS 41



4.3.7	TEST RESULTS	42
4.4	CONDUCTED OUTPUT POWER	46
4.4.1	LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT	46
4.4.2	TEST SETUP	46
4.4.3	TEST INSTRUMENTS.....	46
4.4.4	TEST PROCEDURES	46
4.4.5	DEVIATION FROM TEST STANDARD	46
4.4.6	EUT OPERATING CONDITIONS	46
4.4.7	TEST RESULTS	47
4.4.7.1	MAXIMUM PEAK OUTPUT POWER	47
4.4.7.2	AVERAGE OUTPUT POWER (FOR REFERENCE).....	48
4.5	POWER SPECTRAL DENSITY MEASUREMENT	49
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	49
4.5.2	TEST SETUP	49
4.5.3	TEST INSTRUMENTS.....	49
4.5.4	TEST PROCEDURE	49
4.5.5	DEVIATION FROM TEST STANDARD	49
4.5.6	EUT OPERATING CONDITION	49
4.5.7	TEST RESULTS	50
4.6	OUT OF BAND EMISSION MEASUREMENT	53
4.6.1	LIMITS OF OUT OF BAND EMISSION MEASUREMENT	54
4.6.2	TEST SETUP	54
4.6.3	TEST INSTRUMENTS.....	54
4.6.4	TEST PROCEDURE	54
4.6.5	DEVIATION FROM TEST STANDARD	55
4.6.6	EUT OPERATING CONDITION	55
4.6.7	TEST RESULTS	55
4.6.8	TEST RESULTS	56
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	60
6	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	61



BUREAU
VERITAS

Test Report No.: RF160801W004-2

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF160614W011-2	Original release	July 06, 2016
RF160801W004-2	Based on the original report RF160614W011-2 adding one model name & LTE Band 28.	Aug. 12, 2016



1 CERTIFICATION

PRODUCT: LTE Digital Mobile Phone
BRAND NAME: ZTE
MODEL NAME: NX529J/nubia Z11 mini/BGH nubia Z11 mini
APPLICANT: ZTE Corporation
TESTED: Jun. 15, 2016 ~ July 05, 2016
TEST SAMPLE: Identical Prototype
STANDARDS: **FCC Part 15, Subpart C. Section 15.247**
ANSI C63.10-2013

The above equipment has been tested by **Bureau Veritas Shenzhen Co., Ltd. Dongguan Branch** and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Yuqiang Yin, **DATE:** Aug. 12, 2016
(Yuqiang Yin / Engineer)

APPROVED BY : Bill Yao, **DATE:** Aug. 12, 2016
(Bill Yao / Manager)



2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is 6.70dB at 12.600000MHz.
15.205 15.209	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -2.04dB at 2483.50MHz.
15.247(d)	Out of band Emission Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted Output power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.66dB
Radiated emissions	9KHz ~ 30MHz	2.74dB
	30MHz ~ 1GMHz	3.55dB
	1GHz ~ 18GHz	4.84dB
	18GHz ~ 40GHz	1.94dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k = 2.



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	LTE Digital Mobile Phone
MODEL NAME	NX529J/nubia Z11 mini/BGH nubia Z11 mini
NOMINAL VOLTAGE	5.0Vdc (adapter or host equipment) 3.85Vdc dc (Li-ion, battery)
MODULATION TECHNOLOGY	DSSS, OFDM, DTS
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM BT-LE(GFSK) for DTS
TRANSMISSION RATE	802.11b: 11/ 5.5/ 2.0 / 1.0 Mbps 802.11g: 54/ 48/ 36 / 24 / 18 / 9/ 6 Mbps 802.11n: up to 135 Mbps
OPERATING FREQUENCY	2412-2462MHz for 11b/g/n(HT20) 2402-2480MHz for BT-LE(GFSK)
MAX. OUTPUT POWER	WLAN: 94.624mW (Maximum) BT-LE: 1.730mW (Maximum)
ANTENNA TYPE	PIFA Antenna with -2dBi gain
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	USB cable: non-shielded, detachable, 1.0m

NOTE:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- The EUT was powered by the following adapters:

ADAPTER 1	
BRAND:	RUIDE
MODEL:	STC-A515A-Z
INPUT:	AC 100-240V, 600mA
OUTPUT:	DC 5V, 1500mA

ADAPTER 2	
BRAND:	DOKOCOM
MODEL:	STC-A515A-Z
INPUT:	AC 100-240V, 600mA
OUTPUT:	DC 5V, 1500mA

ADAPTER 3	
BRAND:	Salcomp
MODEL:	STC-A515A-Z
INPUT:	AC 100-240V, 600mA
OUTPUT:	DC 5V, 1500mA



3. The EUT matched the following USB cable:

USB CABLE	
BRAND:	LIXUN
MODEL:	ZXMT1511003
SIGNAL LINE:	1.0 METER

4. The EUT incorporates a SISO function. Physically, the EUT provides one transmitter and one receiver.

MODULATION MODE	TX/RX FUNCTION
802.11b	1TX /1RX
802.11g	1TX /1RX
802.11n (20MHz)	1TX /1RX

5. The above models are identical except the model name for marketing purpose.
6. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.



3.2 DESCRIPTION OF TEST MODES

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

40 channels are provided for BT-LE (GFSK):

CHANNEL	FREQ. (MHZ)						
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480



3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

Please see section 5 photographs of the test configuration for reference.

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports

The worst case was found when positioned on Y axis for radiated emission. Following test modes were selected for the final test, and the final worst case is marked in boldface and recorded in the report:

EUT CONFIGURE MODE	APPLICABLE TO				MODE
	RE<1G	RE≥1G	PLC	APCM	
-	√	√	√	√	-

Where **RE<1G**: Radiated Emission below 1GHz **RE≥1G**: Radiated Emission above 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

NOTE: No need to concern of Conducted Emission due to the EUT is powered by battery.

RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1	CCK	DBPSK	1.0
BT-LE	0 to 39	39	DTS	GFSK	1

For the test results, only the worst case was shown in test report.



RADIATED EMISSION TEST (ABOVE 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	CCK	DBPSK	1.0
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5
BT-LE	0 to 39	0,19, 39	DTS	GFSK	1

POWER LINE CONDUCTED EMISSION TEST:

The EUT was tested with the following mode

EUT CONFIGURE MODE	TESTED CONDITION
-	BT Link+ WIFI (2.4G) Link + USB Cable + Adapter

BANDEDGE MEASUREMENT:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 11	CCK	DBPSK	1.0
802.11g	1 to 11	1, 11	OFDM	BPSK	6.0
802.11n HT20	1 to 11	1, 11	OFDM	BPSK	6.5
BT-LE	0 to 39	0, 39	DTS	GFSK	1



ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	CCK	DBPSK	1.0
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5
BT-LE	0 to 39	0, 19, 39	DTS	GFSK	1

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE	TESTED BY
RE<1G	22deg. C, 54%RH	DC 5V from adaptor	Alex Chen
RE≥1G	22deg. C, 54%RH	DC 5V from adaptor	Alex Chen
PLC	25deg. C, 60%RH	DC 5V from adaptor	Yuqiang Yin
APCM	25deg. C, 60%RH	3.85Vdc from battery	Yuqiang Yin



3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C, Section 15.247

KDB 558074 D01 DTS Meas Guidance v03r05

ANSI C63.10-2013

Note:

1. All test items have been performed and recorded as per the above standards.
2. The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (Certification). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	DC source	LONG WEI	PS-6403D	010934269	N/A
2	PC	HP	A6608CN	3CR83825X3	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	DC Line: Unshielded, Detachable 1.0m
2	AC Line: Unshielded, Detachable 1.5m



4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBµV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESCS30	100340	May 11,15	May 10,17
Artificial Mains Network	Rohde&Schwarz	ENV216	101173	Mar. 04,16	Mar. 03,17
Artificial Mains Network	Rohde&Schwarz	ESH3-Z5	100317	Apr. 05,16	Apr. 04,17
Voltage probe	SCHWARZBECK	TK 9421	TK 9421-176	Jan. 08,16	Jan. 07,17
Test software	ADT	ADT_Cond_V7.3.7	N/A	N/A	N/A

NOTE:

1. The test was performed in shielded room 553.
2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.



4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.


NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.



4.1.5 TEST SETUP

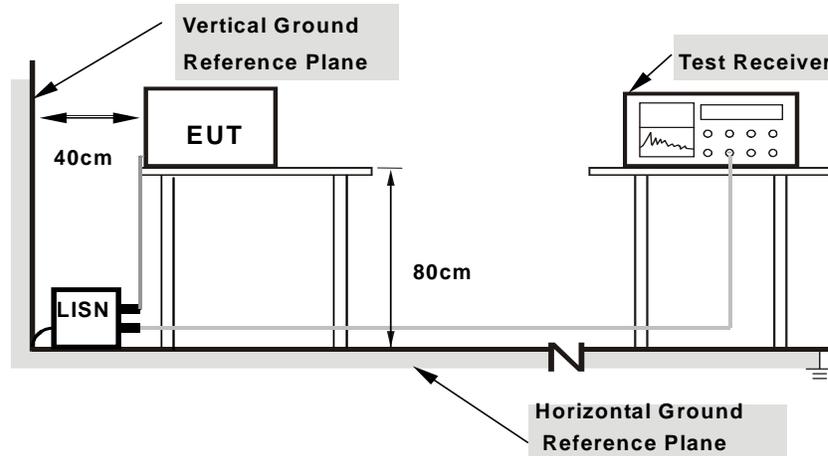

- Note:**
- 1.Support units were connected to second LISN.
 - 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- a. Turned on the power and connected of all equipment.
- b. EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.



4.1.7 TEST RESULTS


CONDUCTED WORST-CASE DATA:

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

Frequency (MHz)	QuasiPeak (dB μ V)	CAverage (dB μ V)	Limit (dB μ V)	Margin (dB)	Line	Filter	Corr. (dB)
0.452000	---	27.94	46.84	18.90	L	ON	9.7
0.452000	35.36	---	56.84	21.48	L	ON	9.7
1.088000	---	20.57	46.00	25.43	L	ON	9.7
1.088000	29.65	---	56.00	26.35	L	ON	9.7
1.900000	---	22.13	46.00	23.87	L	ON	9.7
1.900000	29.01	---	56.00	26.99	L	ON	9.7
5.856000	---	35.12	50.00	14.88	L	ON	9.8
5.856000	41.13	---	60.00	18.87	L	ON	9.8
6.236000	---	32.55	50.00	17.45	L	ON	9.8
6.236000	40.11	---	60.00	19.89	L	ON	9.8
12.392000	---	31.61	50.00	18.39	L	ON	9.9
12.392000	41.50	---	60.00	18.50	L	ON	9.9

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

Full Spectrum

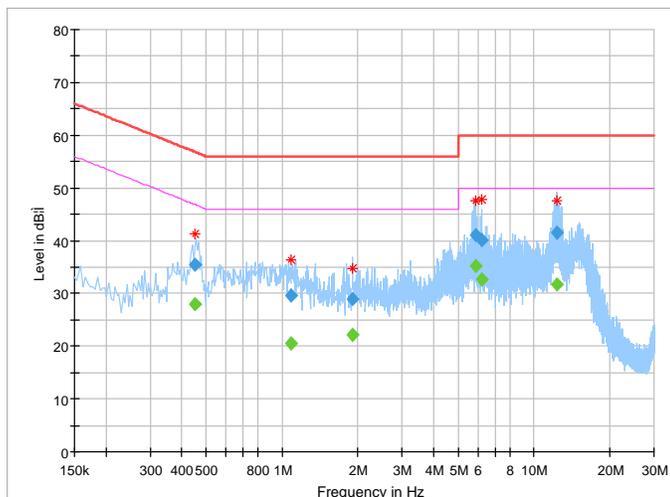




Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
--------------	-------------	--------------------------	--------------------------------

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.460000	---	34.82	46.69	11.87	N	ON	10.1
0.460000	44.29	---	56.69	12.40	N	ON	10.1
0.464000	---	34.68	46.62	11.94	N	ON	10.1
0.464000	44.17	---	56.62	12.45	N	ON	10.1
5.844000	---	40.50	50.00	9.50	N	ON	9.8
5.844000	47.33	---	60.00	12.67	N	ON	9.8
6.148000	---	38.29	50.00	11.71	N	ON	9.8
6.148000	45.46	---	60.00	14.54	N	ON	9.8
12.600000	---	40.25	50.00	9.75	N	ON	9.9
12.600000	53.30	---	60.00	6.70	N	ON	9.9
19.360000	---	29.37	50.00	20.63	N	ON	10.0
19.360000	45.64	---	60.00	14.36	N	ON	10.0

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

Full Spectrum

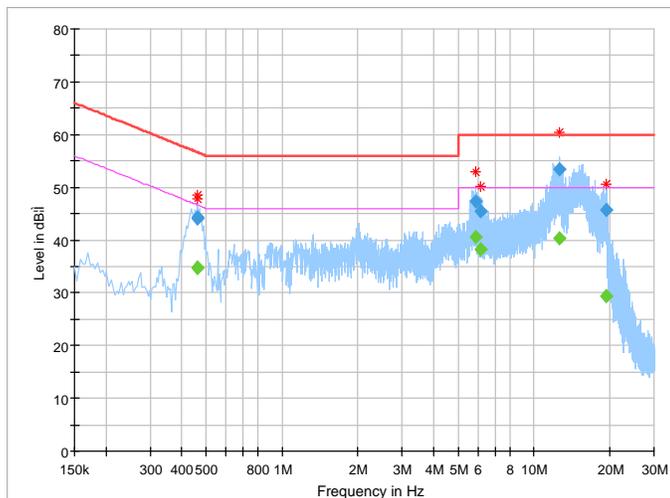



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	101494	Apr. 05, 16	Apr. 04, 17
Bilog Antenna	Teseq	CBL 6111D	30643	Jul. 16, 15	Jul. 15, 16
Loop Antenna	Daze	ZN30900A	0708	Dec. 30, 15	Dec. 29, 16
Horn Antenna (1GHz -18GHz)	ETS -Lindgren	3117	00062558	May 30, 15	May 29, 17
Amplifier	Burgeon	BPA-530	100220	Apr. 05, 16	Apr. 04, 17
Pre-Amplifier (18GHz-40GHz)	EMCI	EMC 184045	980102	Nov. 20, 15	Nov. 19, 17
Pre-Amplifier	HP	8449B	3008A00409	Apr. 25, 15	Apr. 24, 17
GPS Generator+ Antenna	TOJOIN	GNSS-5000A	E1-010119	Aug. 08, 14	Aug. 07, 16
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	NSEMC003	Mar. 12, 16	Mar. 11, 18
Test Software	ADT	ADT_Radiated _V7.6.15.9.2	N/A	N/A	N/A

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed in 966 Chamber.
3. The FCC Site Registration No. is 502831.



4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.


4.2.4 DEVIATION FROM TEST STANDARD

No deviation




4.2.5 TEST SETUP

<Frequency Range below 1GHz>

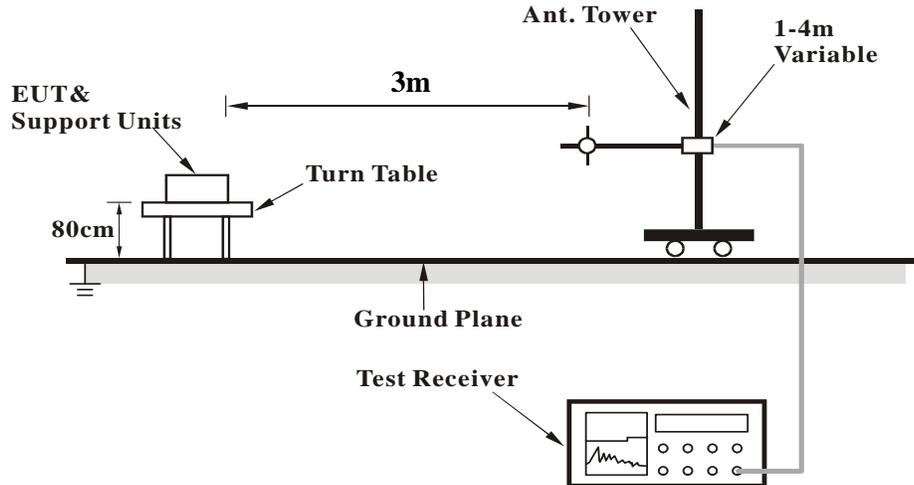

<Frequency Range above 1GHz>

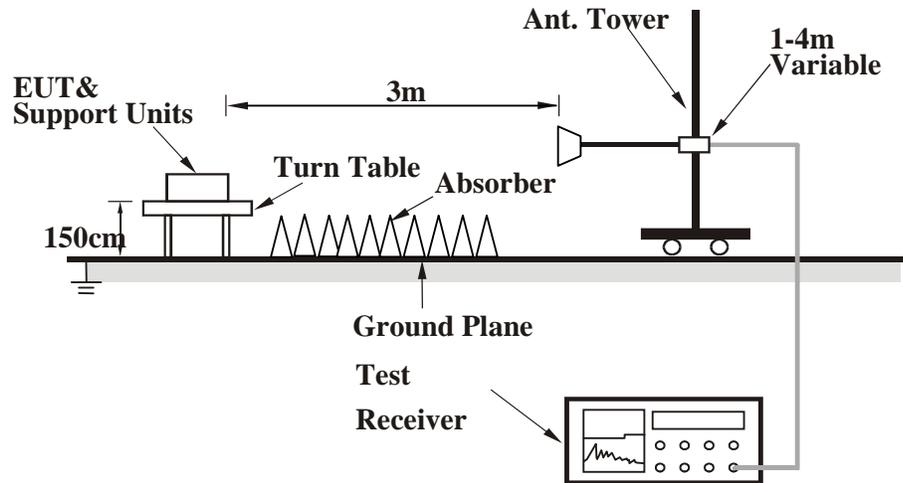

For the actual test configuration, please refer to the attached file (Test Setup Photo).



**BUREAU
VERITAS**

Test Report No.: RF160801W004-2

4.2.6 EUT OPERATING CONDITIONS

- a. Set the EUT under full load condition and placed them on a testing table.
- b. Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- c. The necessary accessories enable the EUT in full functions.



4.2.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA:

9 KHz – 30 KHz data: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.


30 MHz – 1GHz data:
802.11g

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	MARGIN (dB)	LIMIT (dBuV/m)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
37.76	17.72	42.56	-22.28	40.00	11.75	0.91	37.50	101	236	QP
91.11	15.38	43.92	-28.12	43.50	7.02	1.47	37.03	101	112	QP
202.66	22.00	46.14	-21.50	43.50	10.22	2.18	36.54	101	37	QP
264.74	22.28	43.68	-23.72	46.00	12.58	2.53	36.51	101	142	QP
358.83	21.85	40.04	-24.15	46.00	15.47	2.97	36.63	101	264	QP
570.29	20.05	33.62	-25.95	46.00	19.74	3.85	37.16	101	300	QP

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.

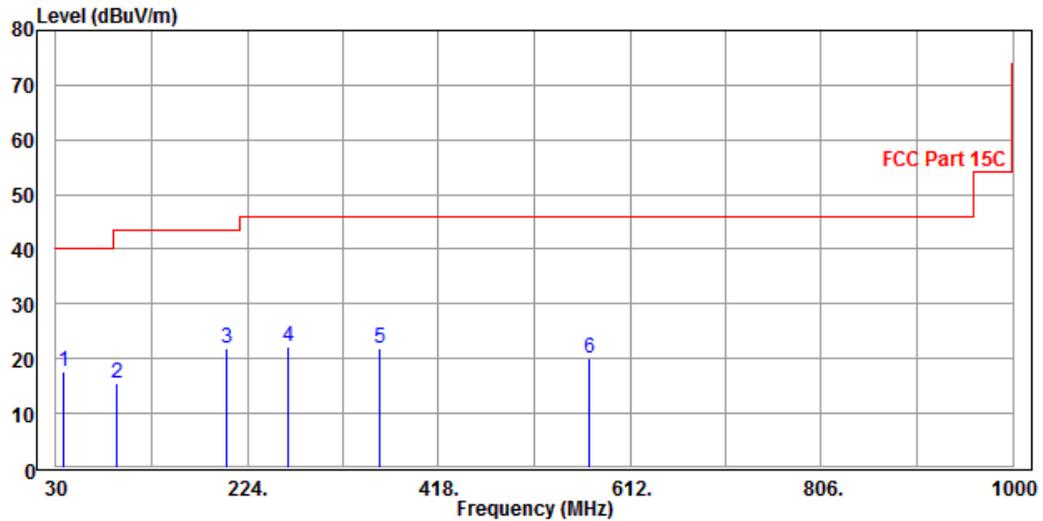




CHANNEL	TX Channel 0	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	MARGIN (dB)	LIMIT (dBuV/m)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
32.91	36.25	57.86	-3.75	40.00	15.09	0.84	37.54	101	100	QP
88.20	20.73	49.49	-22.77	43.50	6.85	1.45	37.06	101	265	QP
202.66	12.69	36.83	-30.81	43.50	10.22	2.18	36.54	101	159	QP
270.56	15.52	36.82	-30.48	46.00	12.65	2.56	36.51	101	72	QP
364.65	17.96	35.88	-28.04	46.00	15.72	3.00	36.64	101	35	QP
515.00	18.87	33.65	-27.13	46.00	18.68	3.54	37.00	101	188	QP

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.

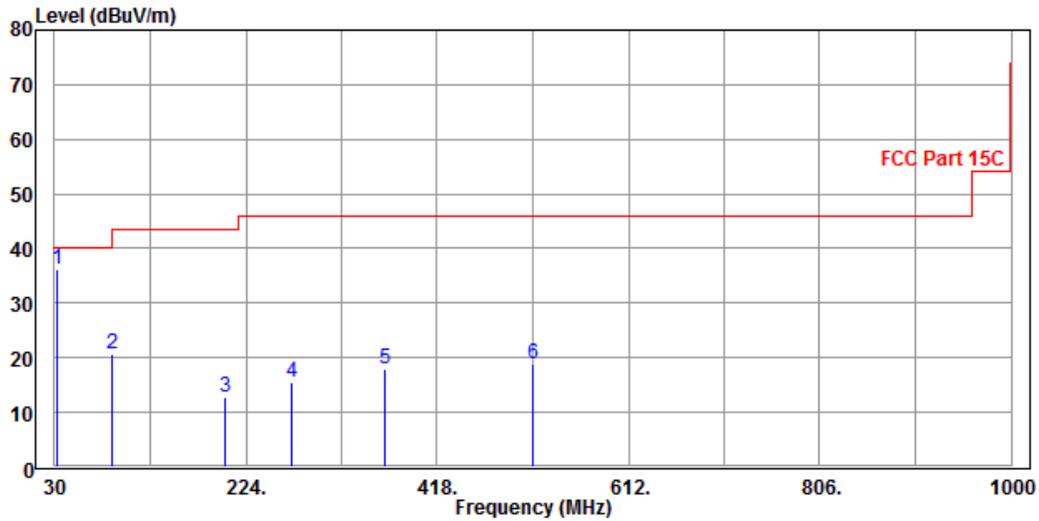



ABOVE 1GHz DATA

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2386.5	49.54	57.41	54.00	-4.46	32.29	8.15	48.31	100	180	Average
2386.5	54.74	62.61	74.00	-19.26	32.29	8.15	48.31	100	180	Peak
*2412	101.98	109.79			32.31	8.19	48.31	100	180	Average
*2412	104.71	112.52			32.31	8.19	48.31	100	180	Peak
2483.5	32.17	39.77	54.00	-21.83	32.38	8.32	48.30	100	180	Peak
2483.5	54.68	62.28	74.00	-19.32	32.38	8.32	48.30	100	180	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2386.4	44.95	52.82	54.00	-9.05	32.29	8.15	48.31	155	300	Average
2386.4	50.90	58.77	74.00	-23.10	32.29	8.15	48.31	155	300	Peak
*2412	100.96	108.77			32.31	8.19	48.31	155	300	Average
*2412	103.77	111.58			32.31	8.19	48.31	155	300	Peak
2485.2	34.64	42.23	54.00	-19.36	32.39	8.32	48.3	155	300	Average
2485.2	44.14	51.73	74.00	-29.86	32.39	8.32	48.3	155	300	Peak

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2389.76	37.88	45.75	54.00	-16.12	32.29	8.15	48.31	152	35	Average
2389.76	48.38	56.25	74.00	-25.62	32.29	8.15	48.31	152	35	Peak
*2437	103	110.73			32.34	8.24	48.31	152	35	Average
*2437	106.14	113.87			32.34	8.24	48.31	152	35	Peak
2484.49	37.41	45.01	54.00	-16.59	32.38	8.32	48.3	152	35	Peak
2484.49	48.48	56.08	74.00	-25.52	32.38	8.32	48.3	152	35	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	35.37	43.24	54.00	-18.63	32.29	8.15	48.31	150	300	Average
2390	46.1	53.97	74.00	-27.9	32.29	8.15	48.31	150	300	Peak
*2437	102.18	109.91			32.34	8.24	48.31	150	300	Average
*2437	104.33	112.06			32.34	8.24	48.31	150	300	Peak
2483.7	35.15	42.75	54.00	-18.85	32.38	8.32	48.3	150	300	Average
2483.7	44.93	52.53	74.00	-29.07	32.38	8.32	48.3	150	300	Peak

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	33.62	41.49	54.00	-20.38	32.29	8.15	48.31	141	30	Average
2390	43.41	51.28	74.00	-30.59	32.29	8.15	48.31	141	30	Peak
*2462	102.54	110.20			32.36	8.28	48.30	141	30	Average
*2462	105.77	113.43			32.36	8.28	48.30	141	30	Peak
2487.69	51.49	59.07	54.00	-2.51	32.39	8.33	48.30	141	30	Peak
2487.69	57.91	65.49	74.00	-16.09	32.39	8.33	48.30	141	30	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	33.94	41.81	54.00	-20.06	32.29	8.15	48.31	150	75	Average
2390	45.57	53.44	74.00	-28.43	32.29	8.15	48.31	150	75	Peak
*2462	101.9	109.56			32.36	8.28	48.3	150	75	Average
*2462	104.83	112.49			32.36	8.28	48.3	150	75	Peak
2487.66	51.55	59.13	54.00	-2.45	32.39	8.33	48.3	150	75	Average
2487.66	56.51	64.09	74.00	-17.49	32.39	8.33	48.3	150	75	Peak

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	50.62	58.49	54.00	-3.38	32.29	8.15	48.31	100	180	Average
2390	68.74	76.61	74.00	-5.26	32.29	8.15	48.31	100	180	Peak
*2412	93.92	101.73			32.31	8.19	48.31	100	180	Average
*2412	104.19	112.00			32.31	8.19	48.31	100	180	Peak
2488.5	35.31	42.89	54.00	-18.69	32.39	8.33	48.30	100	180	Peak
2488.5	44.39	51.97	74.00	-29.61	32.39	8.33	48.30	100	180	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	43.16	51.03	54.00	-10.84	32.29	8.15	48.31	130	250	Average
2390	58.26	66.13	74.00	-15.74	32.29	8.15	48.31	130	250	Peak
*2412	89.79	97.60			32.31	8.19	48.31	130	250	Average
*2412	100.22	108.03			32.31	8.19	48.31	130	250	Peak
2484.02	34.73	42.33	54.00	-19.27	32.38	8.32	48.30	130	250	Average
2484.02	45.35	52.95	74.00	-28.65	32.38	8.32	48.30	130	250	Peak

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	36.08	43.95	54.00	-17.92	32.29	8.15	48.31	100	180	Average
2390	48.91	56.78	74.00	-25.09	32.29	8.15	48.31	100	180	Peak
*2437	95.78	103.51			32.34	8.24	48.31	100	180	Average
*2437	106.44	114.17			32.34	8.24	48.31	100	180	Peak
2483.5	35.91	43.51	54.00	-18.09	32.38	8.32	48.30	100	180	Peak
2483.5	51.23	58.83	74.00	-22.77	32.38	8.32	48.30	100	180	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2384.96	34.70	42.59	54.00	-19.30	32.28	8.14	48.31	150	280	Average
2384.96	44.46	52.35	74.00	-29.54	32.28	8.14	48.31	150	280	Peak
*2437	92.49	100.22			32.34	8.24	48.31	150	280	Average
*2437	103.15	110.88			32.34	8.24	48.31	150	280	Peak
2483.5	35.03	42.63	54.00	-18.97	32.38	8.32	48.30	150	280	Average
2483.5	46.08	53.68	74.00	-27.92	32.38	8.32	48.30	150	280	Peak

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2389.92	34.82	42.69	54.00	-19.18	32.29	8.15	48.31	100	178	Average
2389.92	46.06	53.93	74.00	-27.94	32.29	8.15	48.31	100	178	Peak
*2462	92.91	100.57			32.36	8.28	48.30	100	178	Average
*2462	103.61	111.27			32.36	8.28	48.30	100	178	Peak
2483.5	51.87	59.47	54.00	-2.13	32.38	8.32	48.30	100	178	Peak
2483.5	69.93	77.53	74.00	-4.07	32.38	8.32	48.30	100	178	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	33.00	40.87	54.00	-21.00	32.29	8.15	48.31	100	240	Average
2390	44.09	51.96	74.00	-29.91	32.29	8.15	48.31	100	240	Peak
*2462	87.56	95.22			32.36	8.28	48.30	100	240	Average
*2462	98.07	105.73			32.36	8.28	48.30	100	240	Peak
2483.5	40.72	48.32	54.00	-13.28	32.38	8.32	48.30	100	240	Average
2483.5	58.22	65.82	74.00	-15.78	32.38	8.32	48.30	100	240	Peak

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



802.11n (20MHz)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2389.92	51.16	59.03	54.00	-2.84	32.29	8.15	48.31	100	170	Average
2389.92	69.60	77.47	74.00	-4.40	32.29	8.15	48.31	100	170	Peak
*2412	92.76	100.57			32.31	8.19	48.31	100	170	Average
*2412	102.67	110.48			32.31	8.19	48.31	100	170	Peak
2483.5	33.25	40.85	54.00	-20.75	32.38	8.32	48.30	100	170	Peak
2483.5	43.06	50.66	74.00	-30.94	32.38	8.32	48.30	100	170	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	48.42	56.29	54.00	-5.58	32.29	8.15	48.31	100	245	Average
2390	67.29	75.16	74.00	-6.71	32.29	8.15	48.31	100	245	Peak
*2412	90.46	98.27			32.31	8.19	48.31	100	245	Average
*2412	101.97	109.78			32.31	8.19	48.31	100	245	Peak
2483.6	33.30	40.90	54.00	-20.70	32.38	8.32	48.30	100	245	Average
2483.6	46.16	53.76	74.00	-27.84	32.38	8.32	48.30	100	245	Peak

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2385.6	37.82	45.70	54.00	-16.18	32.29	8.14	48.31	100	175	Average
2385.6	50.35	58.23	74.00	-23.65	32.29	8.14	48.31	100	175	Peak
*2437	96.07	103.80			32.34	8.24	48.31	100	175	Average
*2437	106.24	113.97			32.34	8.24	48.31	100	175	Peak
2483.5	37.19	44.79	54.00	-16.81	32.38	8.32	48.30	100	175	Peak
2483.5	55.53	63.13	74.00	-18.47	32.38	8.32	48.30	100	175	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2385.28	35.74	43.62	54.00	-18.26	32.29	8.14	48.31	100	240	Average
2385.28	46.70	54.58	74.00	-27.30	32.29	8.14	48.31	100	240	Peak
*2437	90.11	97.84			32.34	8.24	48.31	100	240	Average
*2437	102.96	110.69			32.34	8.24	48.31	100	240	Peak
2488.43	35.94	43.52	54.00	-18.06	32.39	8.33	48.30	100	240	Average
2488.43	46.49	54.07	74.00	-27.51	32.39	8.33	48.30	100	240	Peak

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	35.51	43.38	54.00	-18.49	32.29	8.15	48.31	100	170	Average
2390	47.00	54.87	74.00	-27.00	32.29	8.15	48.31	100	170	Peak
*2462	92.01	99.67			32.36	8.28	48.30	100	170	Average
*2462	102.38	110.04			32.36	8.28	48.30	100	170	Peak
2483.5	51.82	59.42	54.00	-2.18	32.38	8.32	48.30	100	170	Peak
2483.5	71.00	78.60	74.00	-3.00	32.38	8.32	48.30	100	170	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2338.48	33.12	41.14	54.00	-20.88	32.24	8.06	48.32	280	100	Average
2338.48	45.81	53.83	74.00	-28.19	32.24	8.06	48.32	280	100	Peak
*2462	92.08	99.74			32.36	8.28	48.30	280	100	Average
*2462	102.05	109.71			32.36	8.28	48.30	280	100	Peak
2483.5	51.96	59.56	54.00	-2.04	32.38	8.32	48.30	280	100	Average
2483.5	68.60	76.20	74.00	-5.40	32.38	8.32	48.30	280	100	Peak

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



BELOW 1GHz WORST-CASE DATA:

9 KHz – 30 KHz data: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

30 MHz – 1GHz data:


BT-LE (GFSK)

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	MARGIN (dB)	LIMIT (dBuV/m)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
32.91	17.60	39.21	-22.40	40.00	15.09	0.84	37.54	101	256	QP
88.20	15.39	44.15	-28.11	43.50	6.85	1.45	37.06	101	158	QP
194.90	20.26	44.65	-23.24	43.50	10.05	2.14	36.58	101	72	QP
260.86	18.61	40.09	-27.39	46.00	12.53	2.51	36.52	101	59	QP
366.59	17.84	35.68	-28.16	46.00	15.80	3.01	36.65	101	300	QP
524.70	18.73	33.29	-27.27	46.00	18.87	3.60	37.03	101	240	QP

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

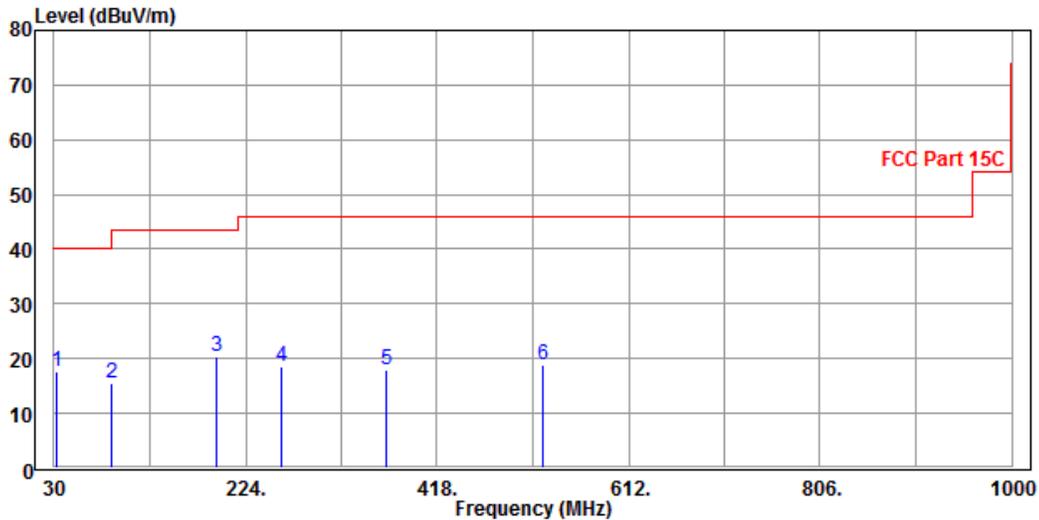




CHANNEL	TX Channel 39	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	MARGIN (dB)	LIMIT (dBuV/m)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
32.91	32.29	53.90	-7.71	40.00	15.09	0.84	37.54	101	56	QP
80.44	19.97	49.13	-20.03	40.00	6.61	1.38	37.15	101	158	QP
193.93	15.10	39.51	-28.40	43.50	10.04	2.14	36.59	101	242	QP
229.82	17.29	40.01	-28.71	46.00	11.47	2.34	36.53	101	128	QP
404.42	19.24	35.56	-26.76	46.00	17.25	3.16	36.73	101	36	QP
579.02	21.43	34.83	-24.57	46.00	19.90	3.89	37.19	101	69	QP

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

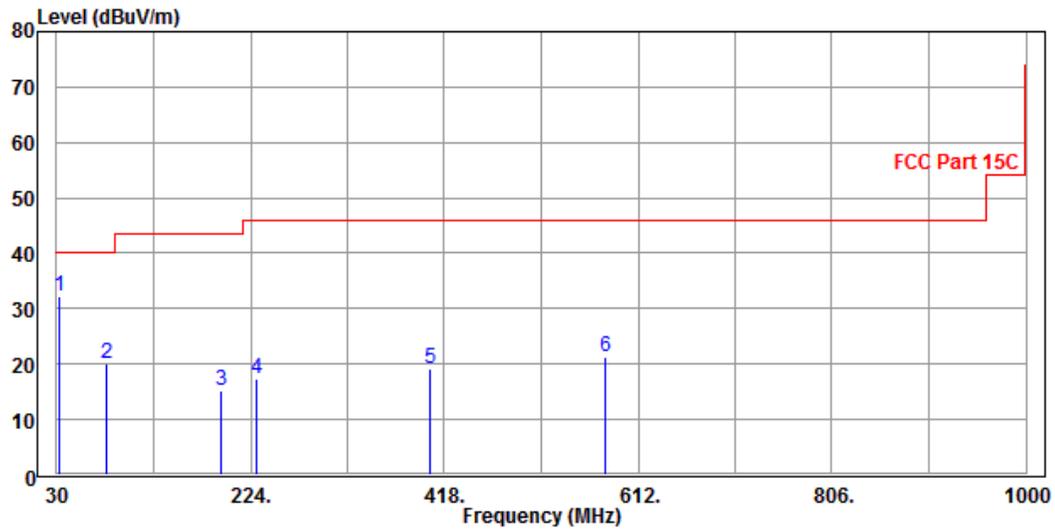



BUREAU VERITAS Test Report No.: RF160801W004-2

ABOVE 1GHz TEST DATA:

BT-LE (GFSK)

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	MARGIN (dB)	LIMIT (dBuV/m)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2389	33.64	41.51	-20.36	54.00	32.29	8.15	48.31	150	167	Average
2389	45.46	53.33	-28.54	74.00	32.29	8.15	48.31	150	167	Peak
*2402	96.88	104.72			32.30	8.17	48.31	150	167	Average
*2402	101.83	109.67			32.30	8.17	48.31	150	167	Peak
2498	33.94	41.49	-20.06	54.00	32.40	8.35	48.30	150	167	Peak
2498	46.37	53.92	-27.63	74.00	32.40	8.35	48.30	150	167	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	MARGIN (dB)	LIMIT (dBuV/m)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	33.18	41.05	-20.82	54.00	32.29	8.15	48.31	101	280	Average
2390	46.49	54.36	-27.51	74.00	32.29	8.15	48.31	101	280	Peak
*2402	91.17	99.01			32.30	8.17	48.31	101	280	Average
*2402	96.94	104.78			32.30	8.17	48.31	101	280	Peak
2499	33.77	41.32	-20.23	54.00	32.40	8.35	48.30	101	280	Average
2499	45.52	53.07	-28.48	74.00	32.40	8.35	48.30	101	280	Peak

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	MARGIN (dB)	LIMIT (dBuV/m)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2358	33.43	41.39	-20.57	54.00	32.26	8.09	48.31	146	150	Average
2358	45.55	53.51	-28.45	74.00	32.26	8.09	48.31	146	150	Peak
*2440	97.62	105.34			32.34	8.25	48.31	146	150	Average
*2440	102.46	110.18			32.34	8.25	48.31	146	150	Peak
2499	33.92	41.47	-20.08	54.00	32.40	8.35	48.30	146	150	Average
2499	45.91	53.46	-28.09	74.00	32.40	8.35	48.30	146	150	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	MARGIN (dB)	LIMIT (dBuV/m)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2338	33.42	41.44	-20.58	54.00	32.24	8.06	48.32	150	240	Average
2338	45.85	53.87	-28.15	74.00	32.24	8.06	48.32	150	240	Peak
*2440	93.23	100.95			32.34	8.25	48.31	150	240	Average
*2440	99.50	107.22			32.34	8.25	48.31	150	240	Peak
2499	34.02	41.57	-19.98	54.00	32.40	8.35	48.30	150	240	Average
2499	46.64	54.19	-27.36	74.00	32.40	8.35	48.30	150	240	Peak

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	MARGIN (dB)	LIMIT (dBuV/m)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2377	33.61	41.51	-20.39	54.00	32.28	8.13	48.31	148	156	Average
2377	45.82	53.72	-28.18	74.00	32.28	8.13	48.31	148	156	Peak
*2480	94.94	102.55			32.38	8.31	48.30	148	156	Average
*2480	99.80	107.41			32.38	8.31	48.30	148	156	Peak
2483.5	34.31	41.91	-19.69	54.00	32.38	8.32	48.30	148	156	Average
2483.5	48.07	55.67	-25.93	74.00	32.38	8.32	48.30	148	156	Peak

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	33.23	41.10	-20.77	54.00	32.29	8.15	48.31	149	250	Average
2390	46.46	54.33	-27.54	74.00	32.29	8.15	48.31	149	250	Peak
*2480	90.82	98.43			32.38	8.31	48.30	149	250	Average
*2480	96.70	104.31			32.38	8.31	48.30	149	250	Peak
2483.5	34.10	41.70	-19.90	54.00	32.38	8.32	48.30	149	250	Average
2483.5	46.74	54.34	-27.26	74.00	32.38	8.32	48.30	149	250	Peak

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



4.3 6 dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Spectrum Analyzer (10Hz-40GHz)	Rohde&Schwarz	FSV40	101003	Apr. 05,16	Apr. 04,17
Power Meter	Anritsu	ML2495A	1139001	Feb.19,16	Feb. 18,17
Power Sensor	Anritsu	MA2411B	1126068	Feb.19,16	Feb. 18,17
Power Sensor	Keysight	U2021XA	MY55060016	May 27,15	May 26,17
Power Sensor	Keysight	U2021XA	MY55060018	May 27,15	May 26,17
Digital Multimeter	FLUKE	15B	A1220010DG	Oct. 12, 15	Oct.11, 16

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed in RF Oven room.

4.3.3 TEST PROCEDURE


1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

4.3.5 TEST SETUP

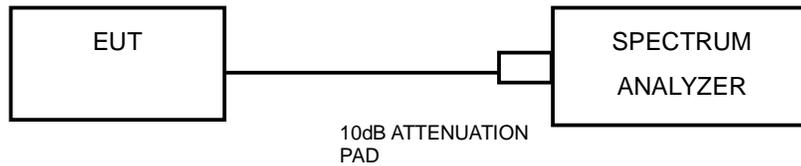

4.3.6 EUT OPERATING CONDITIONS


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



4.3.7 TEST RESULTS

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	8.56	0.5	PASS
6	2437	8.54	0.5	PASS
11	2462	9.01	0.5	PASS

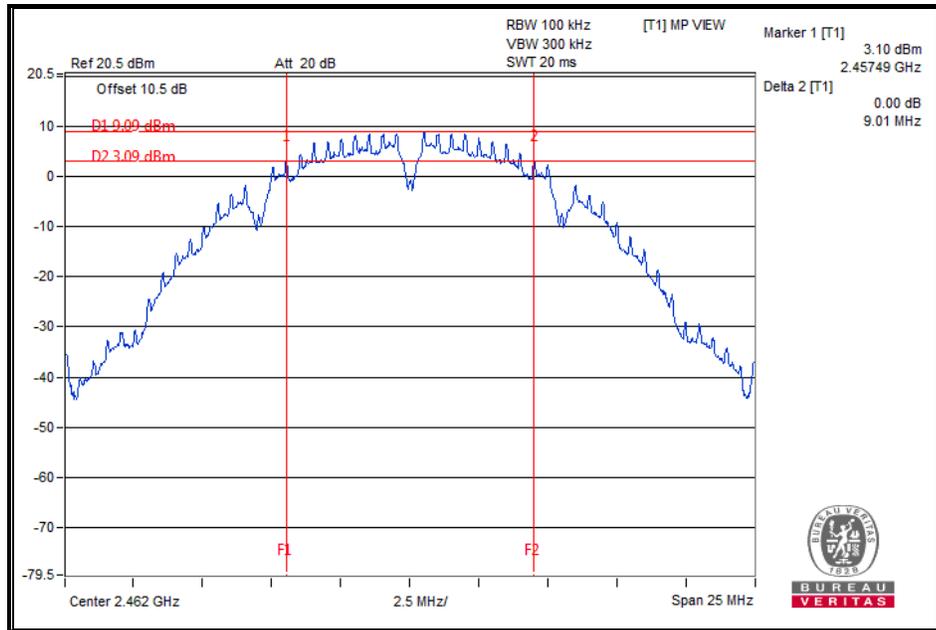




**BUREAU
VERITAS**

Test Report No.: RF160801W004-2

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	16.35	0.5	PASS
6	2437	16.36	0.5	PASS
11	2462	16.36	0.5	PASS

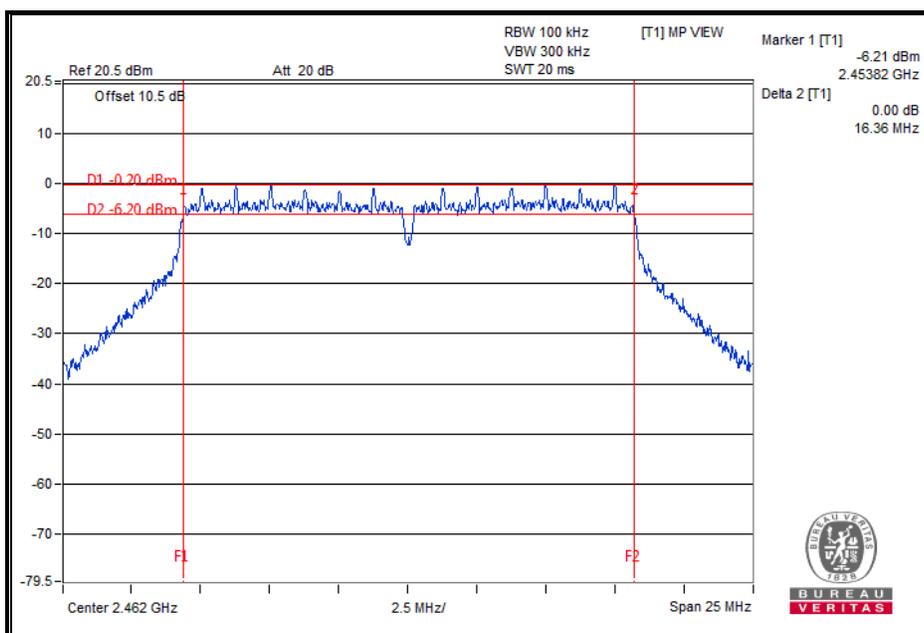

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie
Town, Dongguan City, Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com




**BUREAU
VERITAS**

Test Report No.: RF160801W004-2

802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	17.59	0.5	PASS
6	2437	17.59	0.5	PASS
11	2462	17.59	0.5	PASS

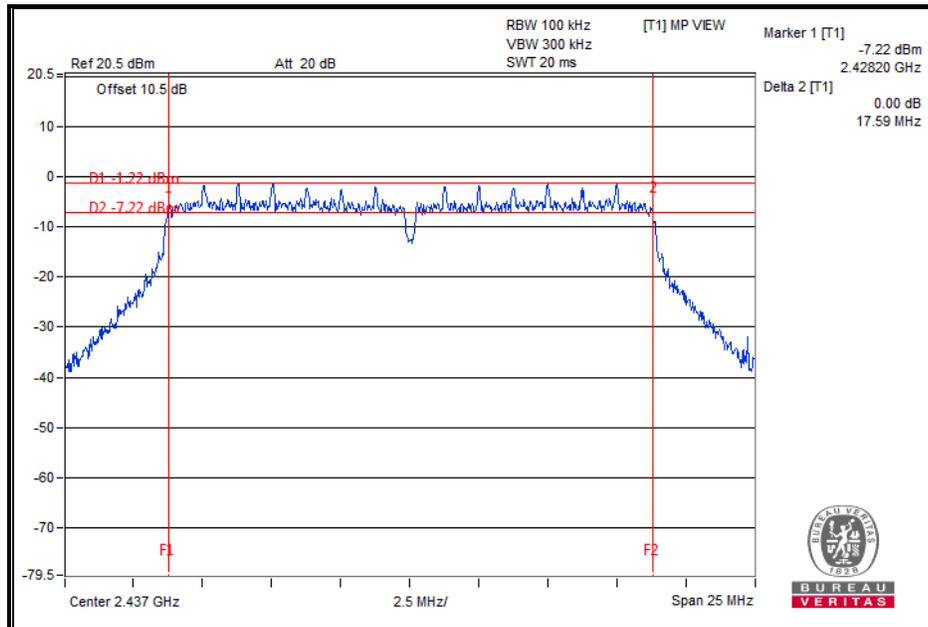

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie
Town, Dongguan City, Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com




**BUREAU
VERITAS**

Test Report No.: RF160801W004-2

BT-LE (GFSK)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
0	2402	0.67	0.5	PASS
19	2440	0.67	0.5	PASS
39	2480	0.67	0.5	PASS

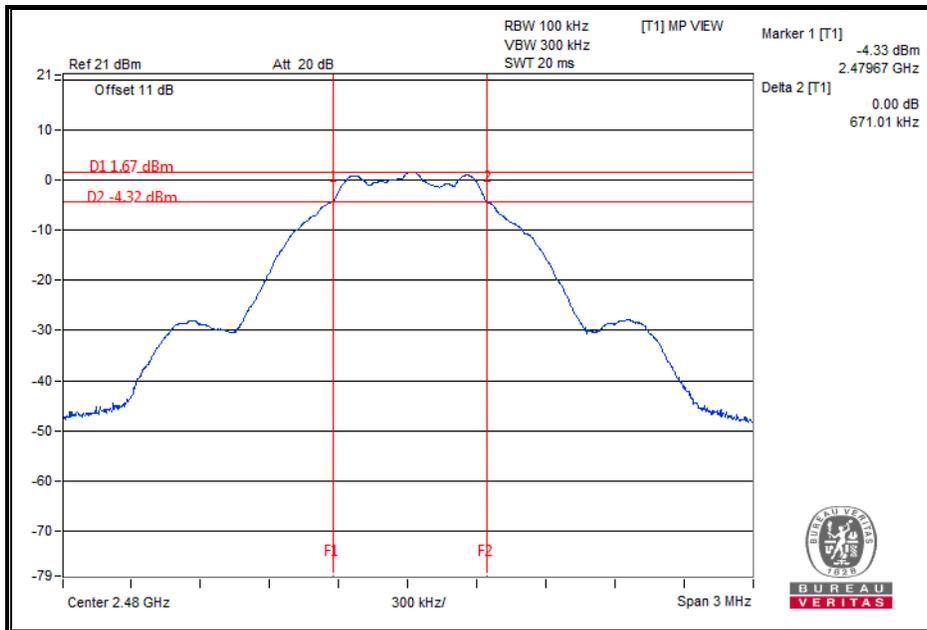

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie
Town, Dongguan City, Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com




4.4 CONDUCTED OUTPUT POWER

4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm)

4.4.2 TEST SETUP

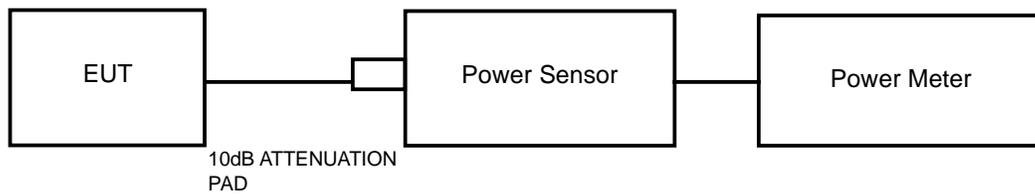

4.4.3 TEST INSTRUMENTS

Refer to section 4.3.3 to get information of above instrument.

4.4.4 TEST PROCEDURES

A power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

4.4.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



4.4.7 TEST RESULTS

4.4.7.1 MAXIMUM PEAK OUTPUT POWER

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT(W)	PASS/FAIL
1	2412	19.76	94.624	1	PASS
6	2437	19.57	90.573	1	PASS
11	2462	19.51	89.331	1	PASS

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT(W)	PASS/FAIL
1	2412	17.84	60.814	1	PASS
6	2437	18.86	76.913	1	PASS
11	2462	17.55	56.885	1	PASS

802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT(W)	PASS/FAIL
1	2412	15.04	31.915	1	PASS
6	2437	15.72	37.325	1	PASS
11	2462	16.09	40.644	1	PASS

BT-LE (GFSK)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT(W)	PASS/FAIL
0	2402	2.02	1.592	1	PASS
19	2440	2.38	1.730	1	PASS
39	2480	1.10	1.288	1	PASS



4.4.7.2 AVERAGE OUTPUT POWER (FOR REFERENCE)

The average power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	PASS/FAIL
1	2412	17.76	N/A
6	2437	17.54	N/A
11	2462	17.41	N/A

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	PASS/FAIL
1	2412	11.19	N/A
6	2437	11.31	N/A
11	2462	11.35	N/A

802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	PASS/FAIL
1	2412	10.61	N/A
6	2437	10.62	N/A
11	2462	10.54	N/A

BT-LE (GFSK)

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	PASS/FAIL
0	2402	1.90	N/A
19	2440	2.23	N/A
39	2480	0.93	N/A




4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm/3KHz.

4.5.2 TEST SETUP

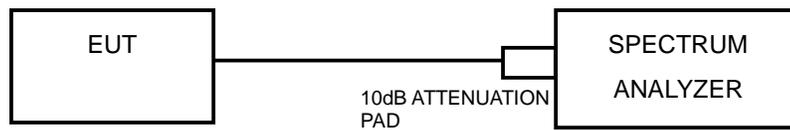

4.5.3 TEST INSTRUMENTS

Refer to section 4.3.2 to get information of above instrument.

4.5.4 TEST PROCEDURE

1. Set the span to 1.5 times the DTS bandwidth
2. Set the RBW = 3 kHz, VBW $\geq 3 \times$ RBW, Detector = peak.
3. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.

4.5.5 DEVIATION FROM TEST STANDARD

No deviation.

4.5.6 EUT OPERATING CONDITION


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



4.5.7 TEST RESULTS

802.11b


Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-5.80	8	PASS
6	2437	-5.32	8	PASS
11	2462	-6.07	8	PASS

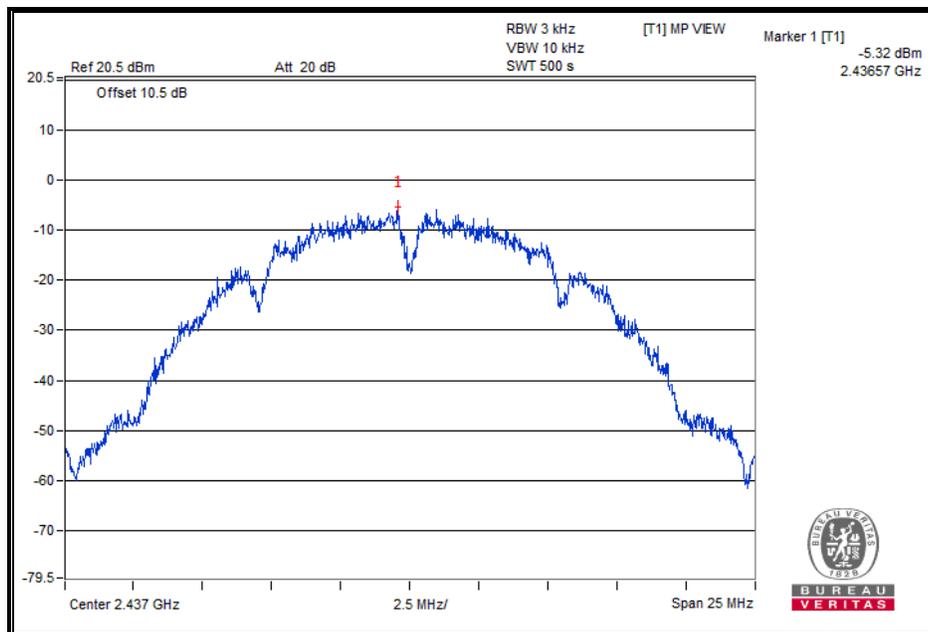



802.11g

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-14.56	8	PASS
6	2437	-13.77	8	PASS
11	2462	-14.16	8	PASS

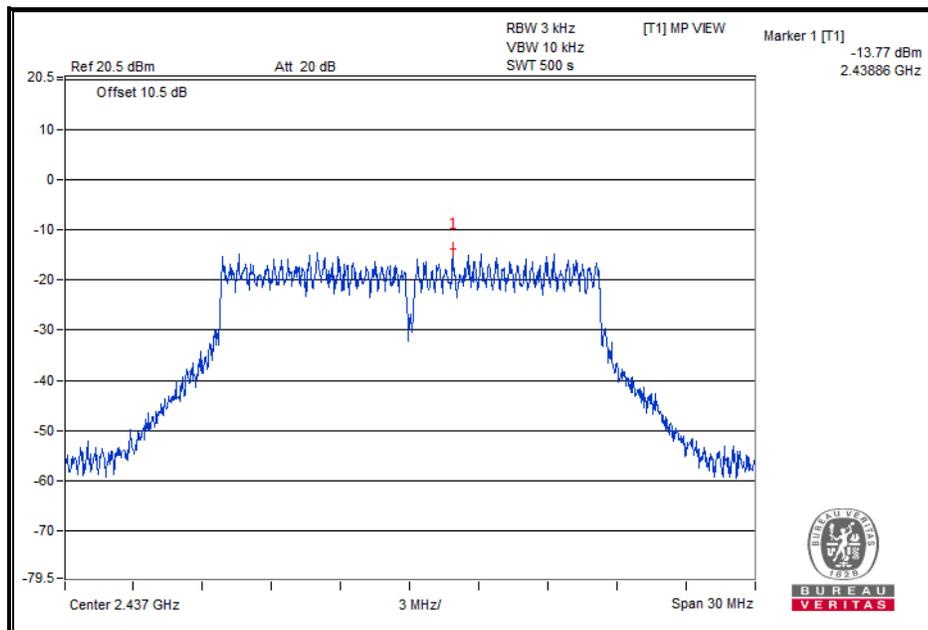




**BUREAU
VERITAS**

Test Report No.: RF160801W004-2

802.11n (20MHz)

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-15.43	8	PASS
6	2437	-15.91	8	PASS
11	2462	-15.74	8	PASS

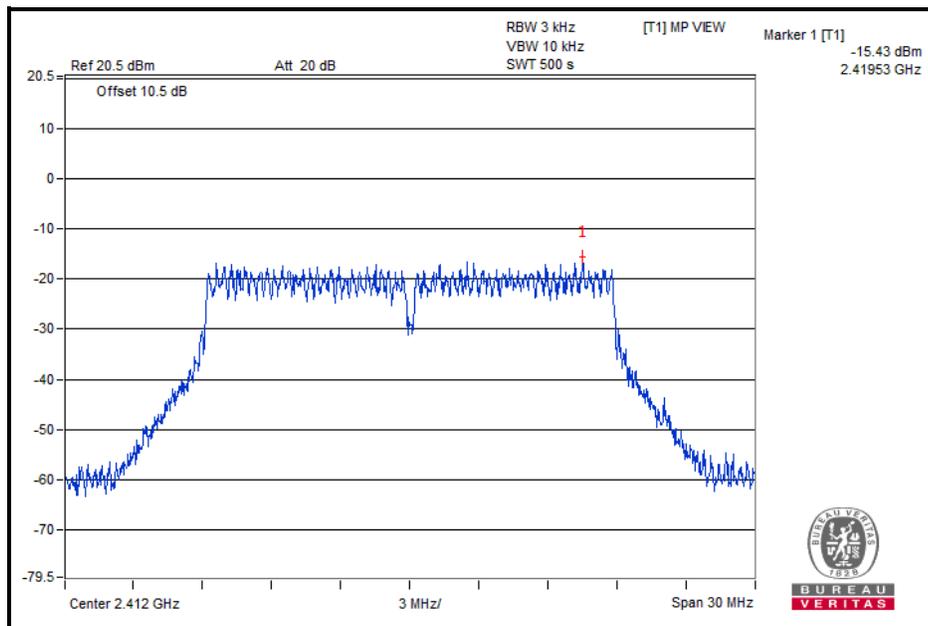

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie
Town, Dongguan City, Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com




**BUREAU
VERITAS**

Test Report No.: RF160801W004-2

BT-LE (GFSK)

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	2402	-11.39	8	PASS
19	2440	-11.31	8	PASS
39	2480	-12.45	8	PASS

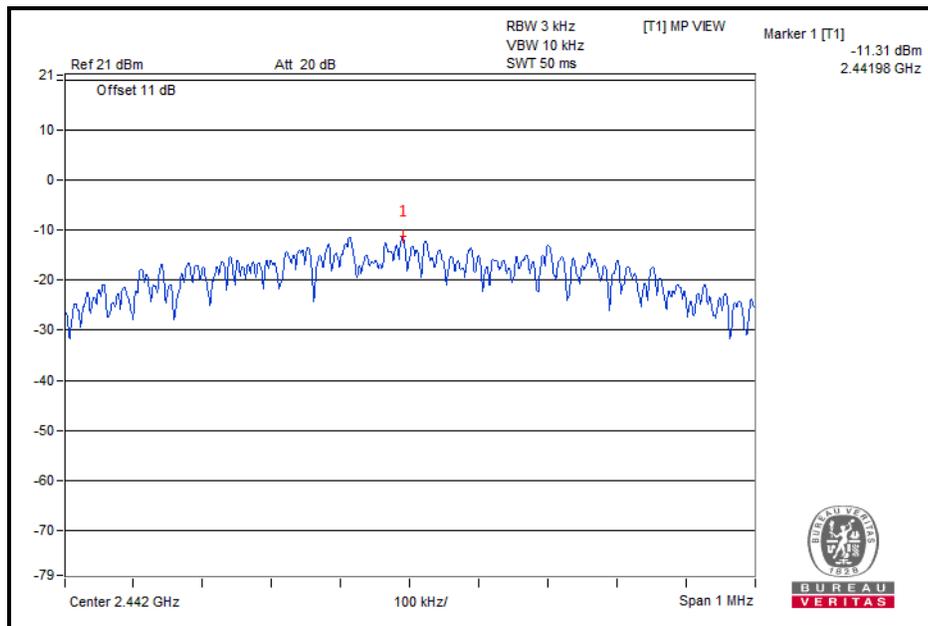

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie
Town, Dongguan City, Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com




4.6 OUT OF BAND EMISSION MEASUREMENT

4.6.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST SETUP

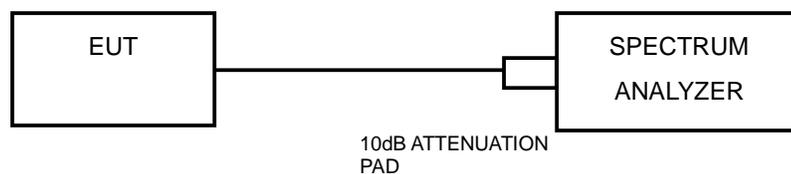

4.6.3 TEST INSTRUMENTS

Refer to section 4.3.2 to get information of above instrument.

4.6.4 TEST PROCEDURE

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.



MEASUREMENT PROCEDURE OOBE

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

4.6.5 DEVIATION FROM TEST STANDARD

No deviation.

4.6.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


4.6.7 TEST RESULTS

The spectrum plots are attached on the following images. D1 line indicates the highest level. D2 line indicates the 20dB offset below D1. It shows compliance to the requirement.



4.6.8 TEST RESULTS

802.11b

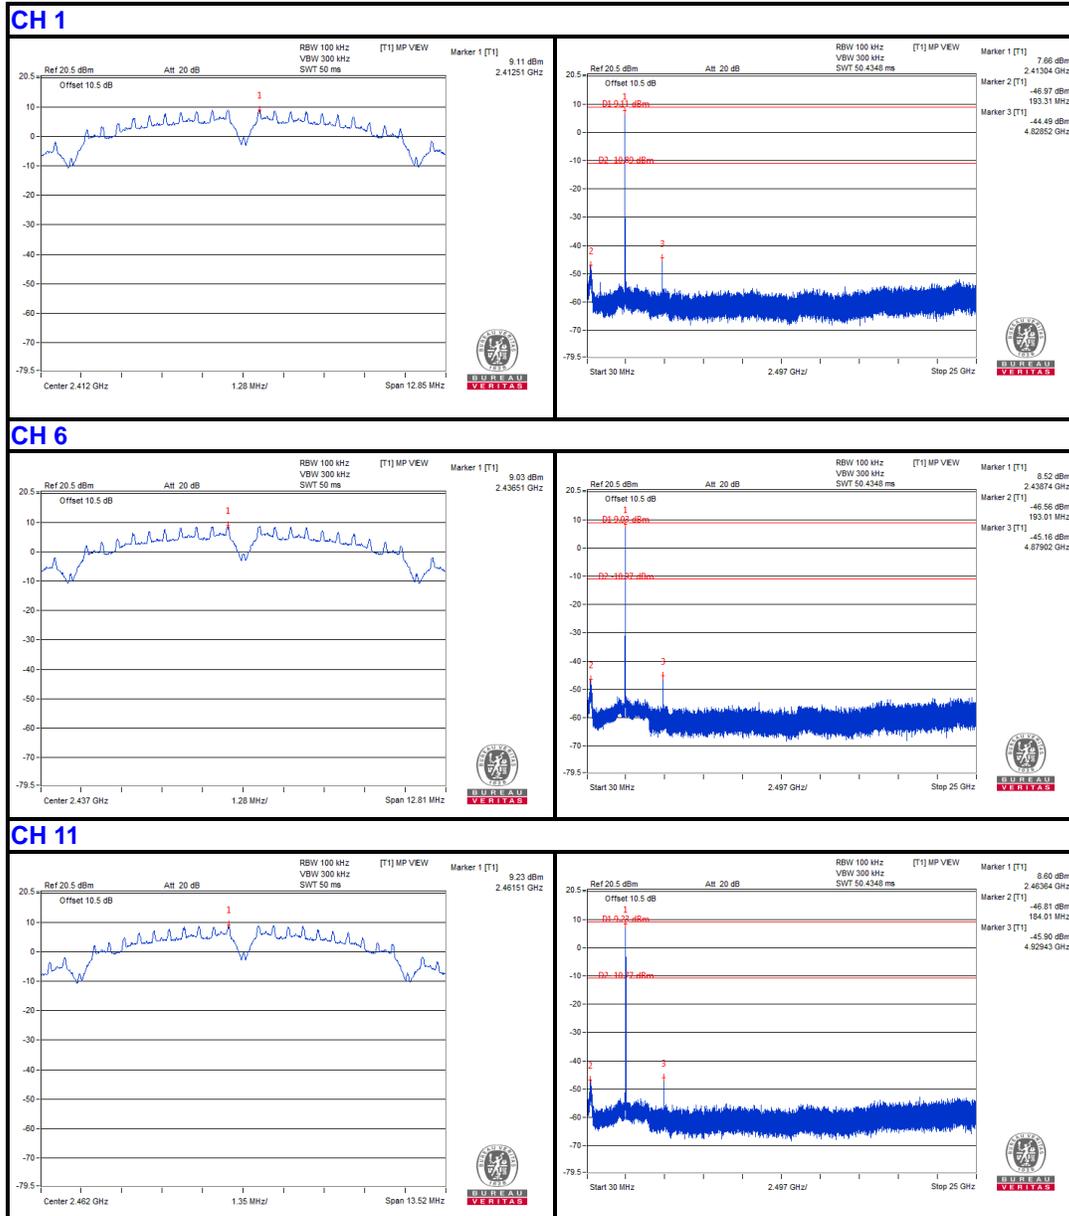




BUREAU
VERITAS


Test Report No.: RF160801W004-2

802.11g


CH 1

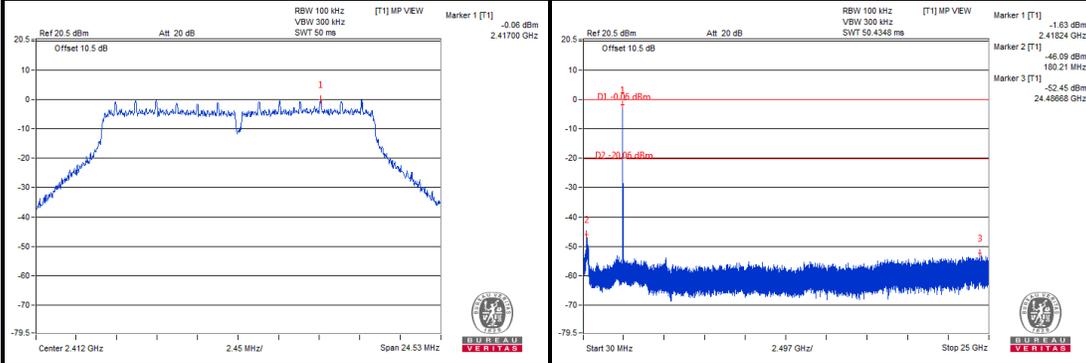

CH 6

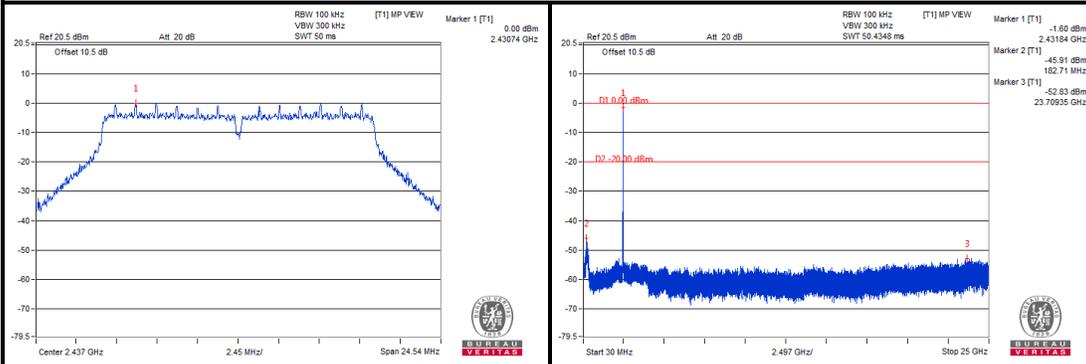

CH 11

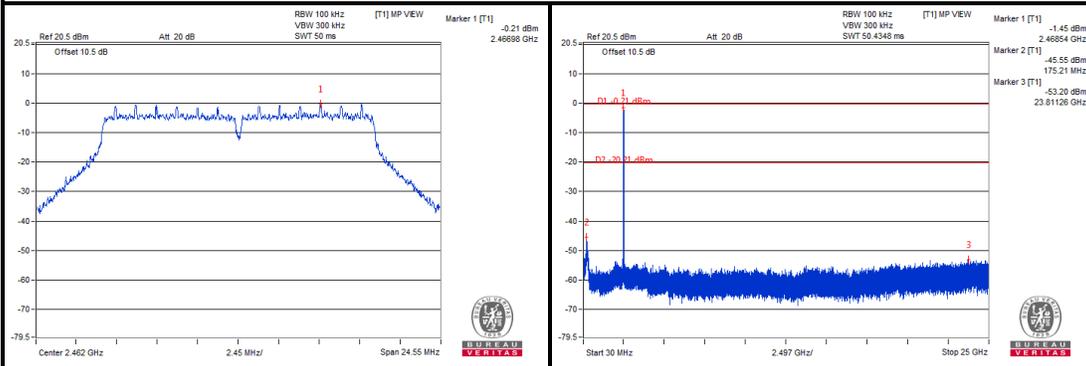

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie
Town, Dongguan City, Guangdong 523942, China


Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com



BUREAU
VERITAS

Test Report No.: RF160801W004-2

802.11n (20MHz)

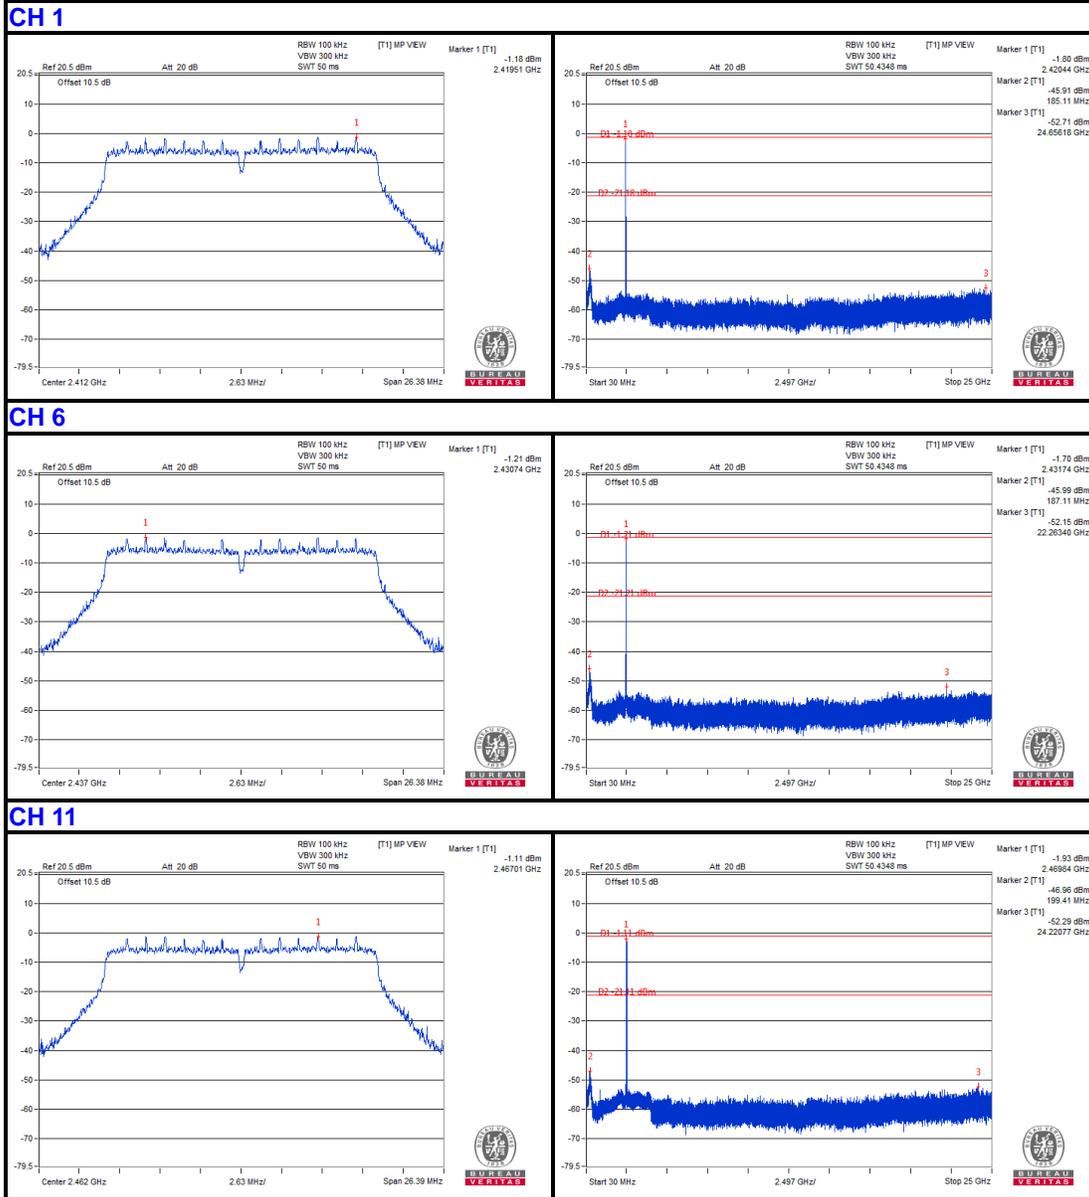

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie
Town, Dongguan City, Guangdong 523942, China


Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com



BUREAU VERITAS

Test Report No.: RF160801W004-2

BT-LE (GFSK)

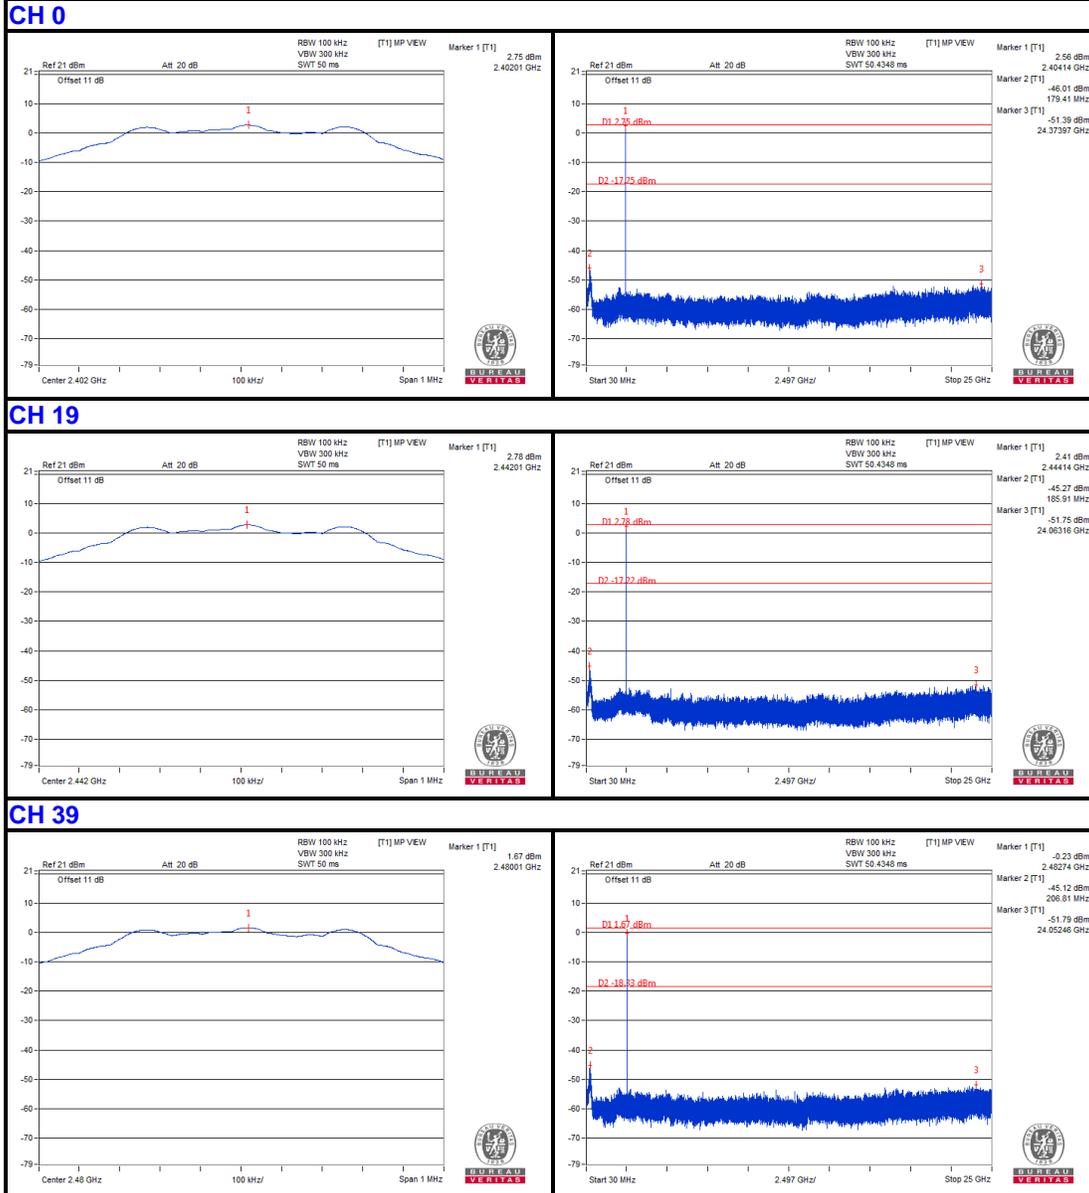

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie
Town, Dongguan City, Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com



Test Report No.: RF160801W004-2

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---