



FCC RF Test Report

APPLICANT : ZTE CORPORATION
EQUIPMENT : WCDMA/LTE Multi-mode Digital Mobile Phone
BRAND NAME : ZTE
MODEL NAME : VFD 600, Vodafone Smart prime 7, Vodacom Smart prime 7
MARKETING NAME : Vodafone Smart prime 7, Vodacom Smart prime 7
FCC ID : SRQ-VFD600
STANDARD : FCC Part 15 Subpart C §15.225
CLASSIFICATION : (DXX) Low Power Communication Device Transmitter

The product was received on Dec. 02, 2015 and testing was completed on Jan. 03, 2016. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Prepared by: James Huang / Manager

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China



Table of Contents

REVISION HISTORY 3
SUMMARY OF THE TEST RESULT 4
1. GENERAL INFORMATION 5
1.1 Applicant 5
1.2 Manufacturer 5
1.3 Product Details 5
1.4 Modification of EUT 5
1.5 Testing Location 5
1.6 Applicable Standards 6
1.7 Test Modes 6
1.8 Test Configurations 6
1.9 Table for Supporting Units 7
2. CONDUCTED EMISSION TEST 8
2.1 Measuring Instruments 8
2.2 Test setup 8
2.3 Test Result of Conducted Emission Test 8
2.4 AC Power Line Conducted Emissions Measurement 9
3. CONDUCTED TEST ITEMS 10
3.1 Measuring Instruments 10
3.2 Test Setup 10
3.3 Test Result of Conducted Test Items 10
3.4 20dB and 99% OBW Spectrum Bandwidth Measurement 11
3.5 Frequency Stability Measurement 11
4. RADIATED TEST ITEMS 12
4.1 Measuring Instruments 12
4.2 Test Setup 12
4.3 Test Result of Radiated Test Items 12
4.4 Field Strength of Fundamental Emissions and Mask Measurement 13
4.5 Radiated Emissions Measurement 14
5. LIST OF MEASURING EQUIPMENT 16
APPENDIX A. TEST RESULTS OF CONDUCTED EMISSION TEST
APPENDIX B. TEST RESULTS OF CONDUCTED TEST ITEMS
B.1. Test Result of 20dB Spectrum Bandwidth
B.2 Test Result of Frequency Stability
APPENDIX C. TEST RESULTS OF RADIATED TEST ITEMS
C.1 Test Result of Field Strength of Fundamental Emissions
C.2 Results of Radiated Emissions (9 kHz~30MHz)
C.3 Results of Radiated Emissions (30MHz~1GHz)
APPENDIX D. SETUP PHOTOGRAPHS OF EUT



SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	FCC Rule	Description of Test	Result	Under Limit
3.1	15.207	AC Power Line Conducted Emissions	Complies	16.69 dB at 6.630MHz
3.2	15.225(a)(b)(c)	Field Strength of Fundamental Emissions	Complies	63.66 dB at 13.560 MHz
3.3	2.1049	20dB Spectrum Bandwidth	Complies	-
3.3	-	99% OBW Spectrum Bandwidth	Complies	-
3.4	15.225(d) 15.209	Radiated Emissions	Complies	11.30 dB at 30.000 MHz
3.5	15.225(e)	Frequency Stability	Complies	-
3.6	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3 dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±5.1 dB	Confidence levels of 95%



1. GENERAL INFORMATION

1.1 Applicant

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.2 Manufacturer

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.3 Product Details

Items	Description
Tx/Rx Frequency Range	13.553 ~ 13.567MHz
Channel Number	1
20dBW	2.49 KHz
99%OBW	2.11 KHz
Antenna Type	PIFA Antenna
Type of Modulation	ASK

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Modification of EUT

No modifications are made to the EUT during all test items.

1.5 Testing Location

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.			
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958			
Test Site No.	Sporton Site No.			FCC Registration No. 418269
	TH01-KS	CO01-KS	03CH02-KS	
Test Engineer	Issac Song	Eko Guan	Star Wei	
Temperature	24~25°C	22~24°C	22~23°C	
Relative Humidity	49~51%	44~46%	42~43%	

Note: The test site complies with ANSI C63.4 2009 requirement.

1.6 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.225
- ♦ ANSI C63.10-2013


1.7 Test Modes

Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.


Test Items	
AC Power Line Conducted Emissions	Field Strength of Fundamental Emissions
20dB Spectrum Bandwidth	Frequency Stability
Radiated Emissions 9kHz~30MHz	Radiated Emissions 30MHz~1GHz
Note:	
1. The EUT was programmed to be in continuously transmitting mode.	
2. The ancillary equipment, NFC card, is used to make the EUT (NFC) continuously transmit at 13.56MHz and is placed around 3 cm gap to the EUT.	

1.8 Test Configurations

<AC Conducted Emissions>

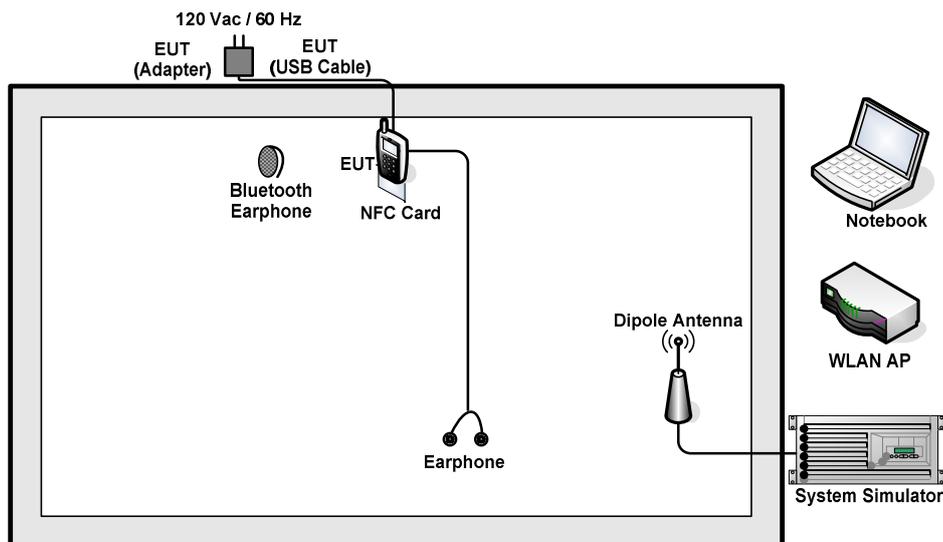

< For Fundamental Emissions and Mask and Radiated Emissions Measurement >

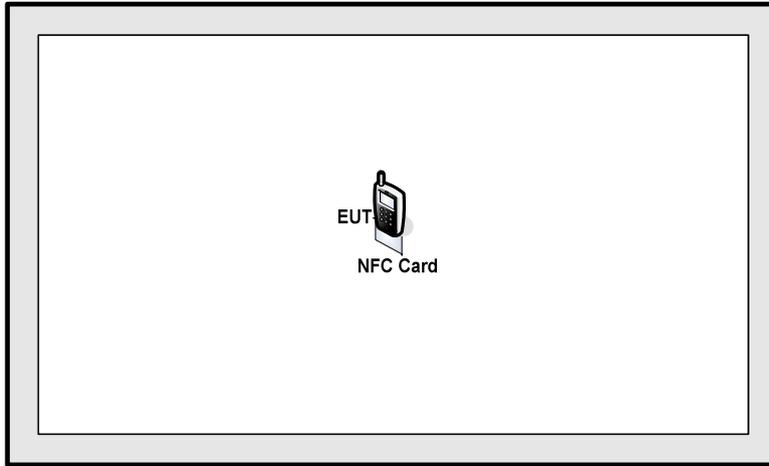

1.9 Table for Supporting Units


Support Unit	Manufacturer	Model	FCC ID
NFC Card	N/A	N/A	N/A
WLAN AP	LINKSYS	WRT600N	Q87-WRT600NV11
System Simulator	R&S	CMU 200	N/A
Notebook	Lenovo	G480	N/A
Bluetooth Earphone	Nokia	BH-102	PYAHS-107W
Earphone	Lenovo	SH100	N/A

2. CONDUCTED EMISSION TEST

2.1 Measuring Instruments

See list of measuring instruments of this test report.

2.2 Test setup

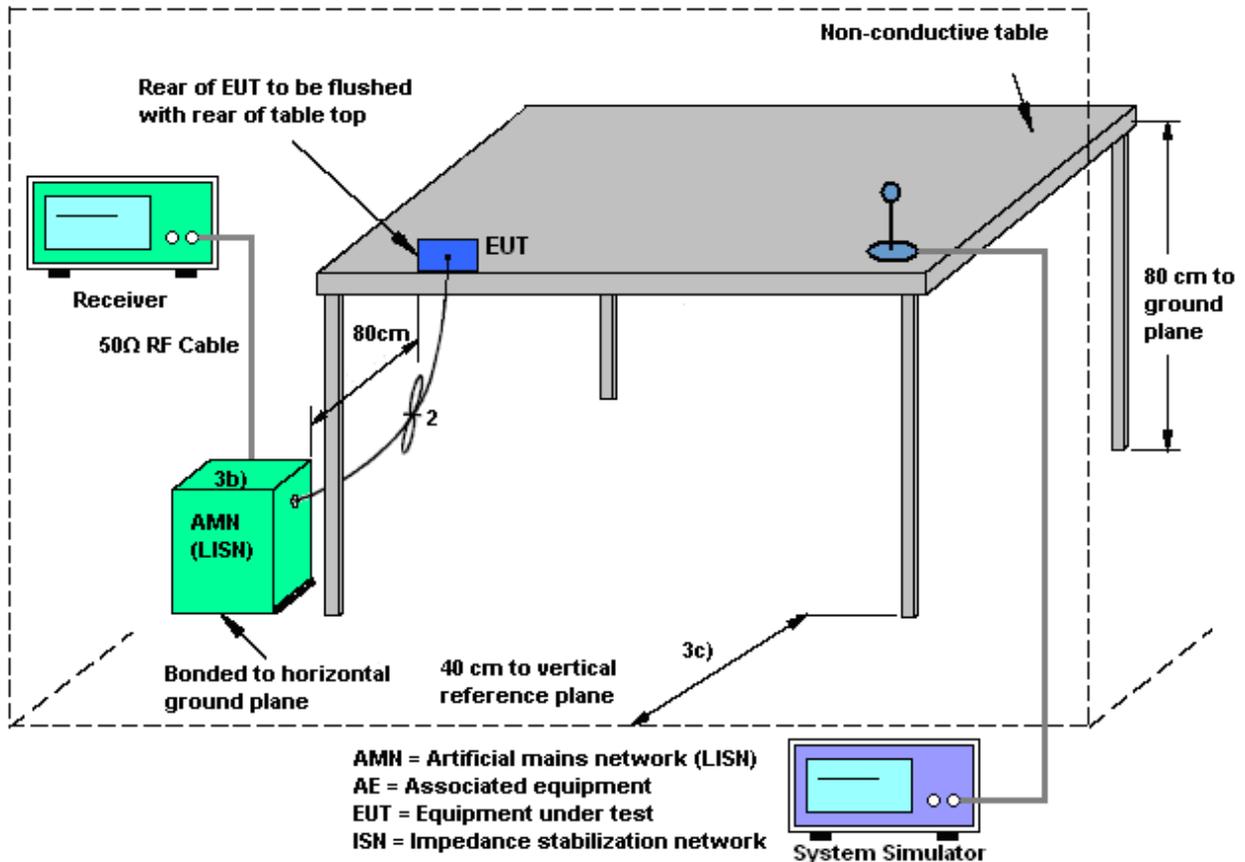

2.3 Test Result of Conducted Emission Test

Please refer to Appendix A.



2.4 AC Power Line Conducted Emissions Measurement

Limit

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


3. CONDUCTED TEST ITEMS

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup

20dB and 99% OBW Spectrum Bandwidth

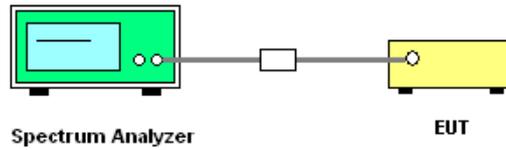

Frequency Stability

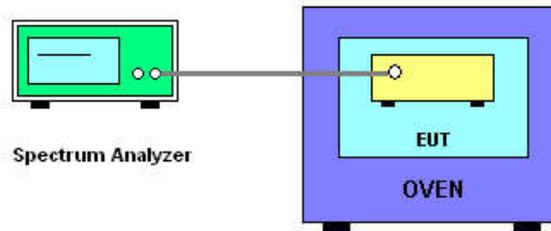

3.3 Test Result of Conducted Test Items

Please refer to Appendix B.

3.4 20dB and 99% OBW Spectrum Bandwidth Measurement

Limit

Intentional radiators must be designed to ensure that the 20dB and 99% emission bandwidth in the specific band 13.553~13.567MHz

Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak Max hold mode.
2. The resolution bandwidth of 1 kHz and the video bandwidth of 3 kHz were used.
3. Measured the spectrum width with power higher than 20dB below carrier.
4. Measured the 99% OBW.

3.5 Frequency Stability Measurement

Limit

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% (100ppm) of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

Test Procedures

1. The spectrum analyzer connected via a receive antenna placed near the EUT.
2. EUT have transmitted signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire emissions bandwidth.
4. Set RBW = 1 kHz, VBW = 3 kHz with peak detector and maxhold settings.
5. The f_c is declaring of channel frequency. Then the frequency error formula is $(f_c-f)/f_c \times 10^6$ ppm and the limit is less than ± 100 ppm.
6. Extreme temperature rule is -20°C~50°C.


4. RADIATED TEST ITEMS

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

For radiated emissions below 30MHz

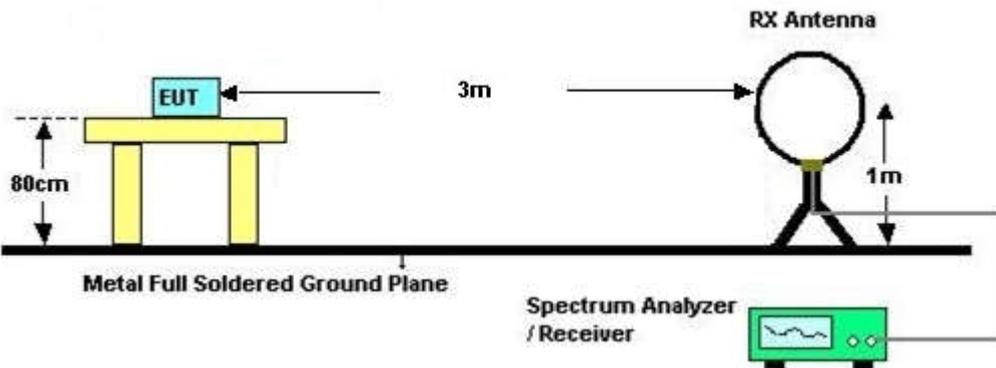

For radiated emissions above 30MHz

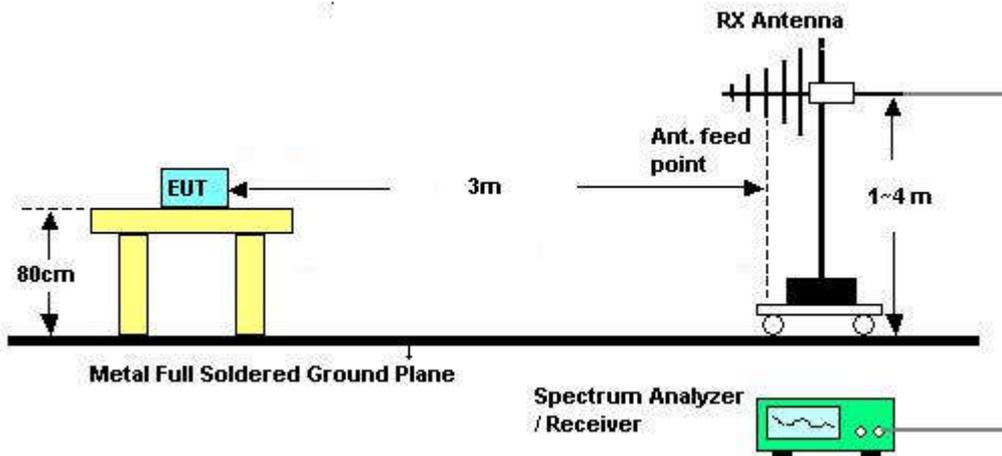

4.3 Test Result of Radiated Test Items

Please refer to Appendix C.



4.4 Field Strength of Fundamental Emissions and Mask Measurement

Limit

Rules and specifications	FCC CFR 47 Part 15 section 15.225			
Description	Compliance with the spectrum mask is tested with RBW set to 9kHz.			
Freq. of Emission (MHz)	Field Strength (μV/m) at 30m	Field Strength (dBμV/m) at 30m	Field Strength (dBμV/m) at 10m	Field Strength (dBμV/m) at 3m
1.705~13.110	30	29.5	48.58	69.5
13.110~13.410	106	40.5	59.58	80.5
13.410~13.553	334	50.5	69.58	90.5
13.553~13.567	15848	84.0	103.08	124.0
13.567~13.710	334	50.5	69.58	90.5
13.710~14.010	106	40.5	59.58	80.5
14.010~30.000	30	29.5	48.58	69.5

Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the loop receiving antenna mounted antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the receiving antenna was fixed at one meter above ground to find the maximum emissions field strength.
4. For Fundamental emissions, use the receiver to measure QP reading.
5. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
6. Compliance with the spectrum mask is tested with RBW set to 9kHz.

Note: Emission level (dBμV/m) = 20 log Emission level (μV/m).



4.5 Radiated Emissions Measurement

Limit

The field strength of any emissions which appear outside of 13.553~13.567MHz band shall not exceed the general radiated emissions limits.

Frequencies (MHz)	Field Strength (µV/m)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Measuring Instrument Setting

The following table is the setting of receiver.

Receiver Parameter	Setting
Attenuation	Auto
Frequency Range: 9kHz~150kHz	RBW 200Hz for QP
Frequency Range: 150kHz~30MHz	RBW 9kHz for QP
Frequency Range: 30MHz~1000MHz	RBW 120kHz for Peak

Note: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

**Test Procedures**

1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
7. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. Antenna Requirements

Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Anti-Replacement Construction

An embedded-in antenna design is used.




5. LIST OF MEASURING EQUIPMENT

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Oct. 24, 2015	Dec. 30, 2015	Oct. 23, 2016	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	-40~+150°C	Oct. 24, 2015	Dec. 30, 2015	Oct. 23, 2016	Conducted (TH01-KS)
AC Power Source	Chroma	61602	ABP000000 811	AC 0V~300V, 45Hz~1000Hz	Oct. 24, 2015	Dec. 30, 2015	Oct. 23, 2016	Conducted (TH01-KS)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	May 04, 2015	Dec. 26, 2015	May 03, 2016	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 24, 2015	Dec. 26, 2015	Oct. 23, 2016	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Oct. 24, 2015	Dec. 26, 2015	Oct. 23, 2016	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000 811	AC 0V~300V, 45Hz~1000Hz	Oct. 24, 2015	Dec. 26, 2015	Oct. 23, 2016	Conduction (CO01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Max 30dBm	Sep. 10, 2015	Jan. 03, 2016	Sep. 09, 2016	Radiation (03CH02-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 07, 2015	Jan. 03, 2016	Nov. 06, 2016	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6112D	37879	30MHz~2GHz	Sep. 12, 2015	Jan. 03, 2016	Sep. 11, 2016	Radiation (03CH02-KS)
Amplifier	com-power	PA-103A	161069	1kHz ~1000MHz	May 04, 2015	Jan. 03, 2016	May 03, 2016	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	6160100024 73	N/A	NCR	Jan. 03, 2016	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Jan. 03, 2016	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Jan. 03, 2016	NCR	Radiation (03CH02-KS)

NCR: No Calibration Required

Appendix A. Test Results of Conducted Emission Test

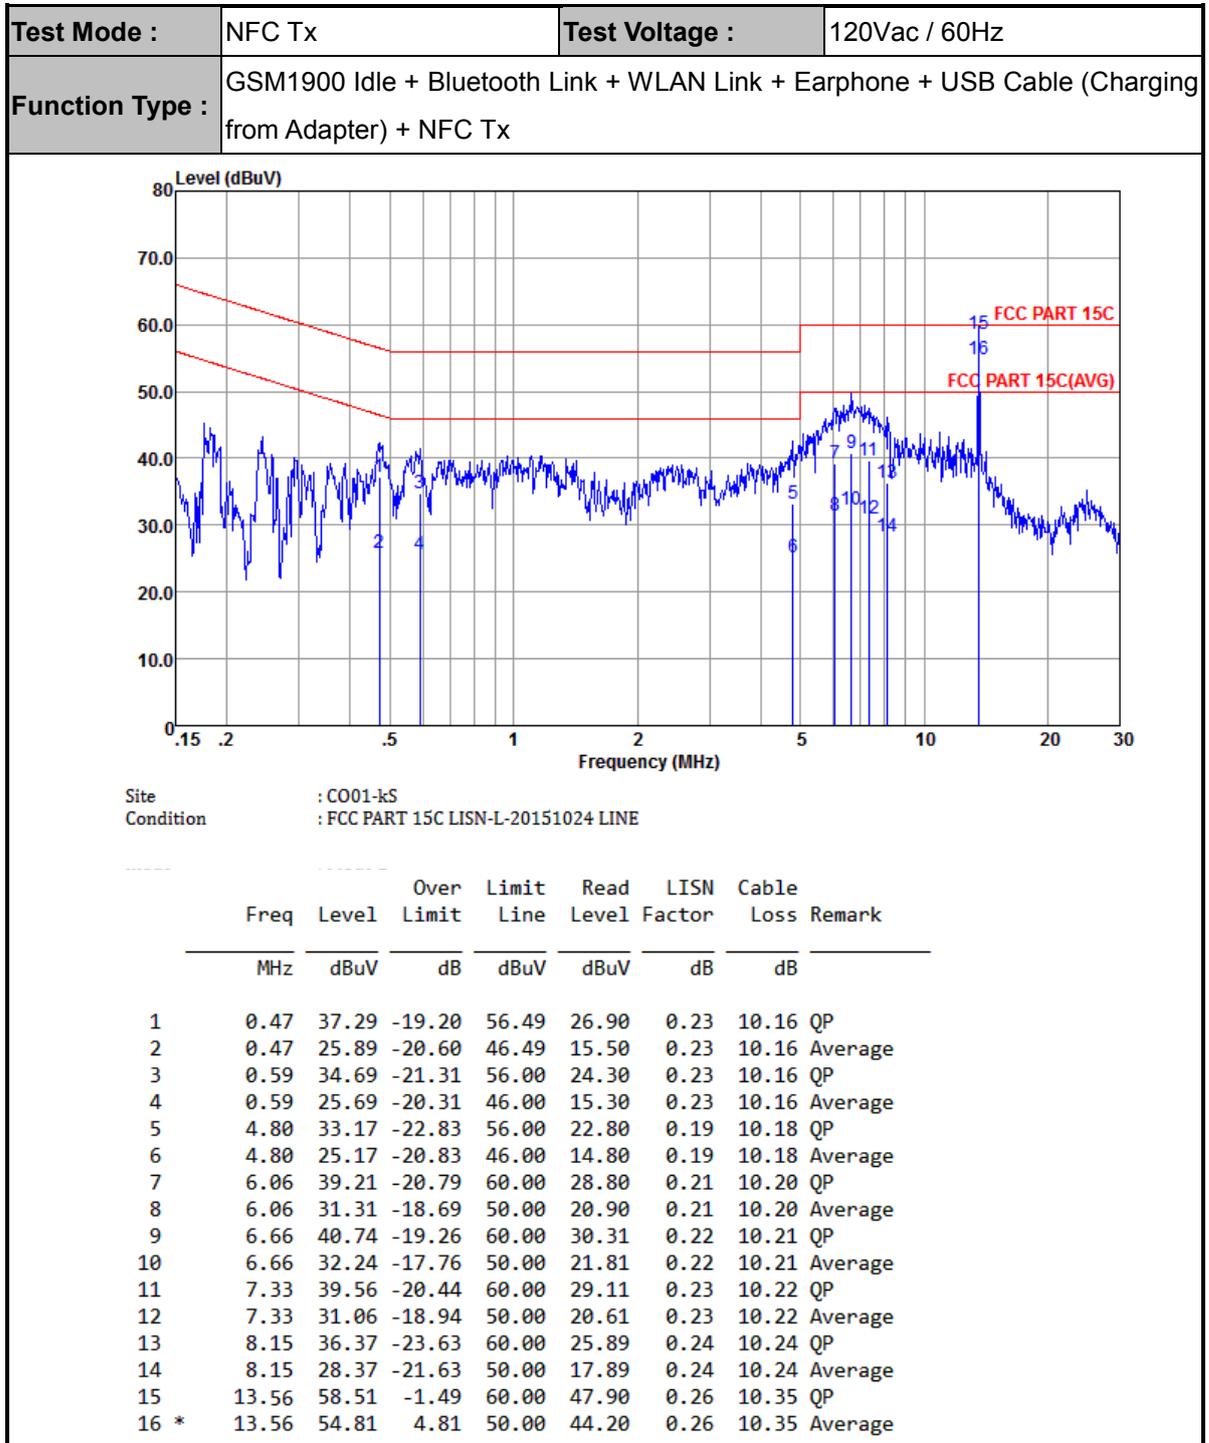


(1) with antenna

Remark: 13.56MHz is the NFC RF fundamental signal.



Test Mode :	NFC Tx	Test Voltage :	120Vac / 60Hz
Function Type :	GSM1900 Idle + Bluetooth Link + WLAN Link + Earphone + USB Cable (Charging from Adapter) + NFC Tx		

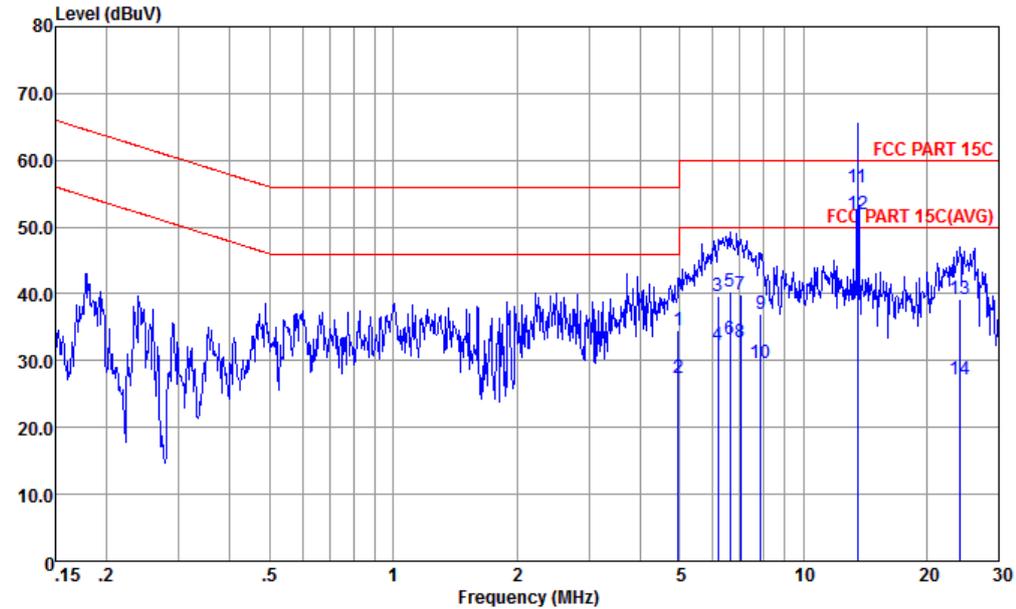

Site : CO01-kS
 Condition : FCC PART 15C LISN-N-20151024 NEUTRAL


	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	4.95	34.44	-21.56	56.00	23.90	0.36	10.18	QP
2	4.95	27.34	-18.66	46.00	16.80	0.36	10.18	Average
3	6.19	39.72	-20.28	60.00	29.20	0.32	10.20	QP
4	6.19	32.32	-17.68	50.00	21.80	0.32	10.20	Average
5	6.63	40.41	-19.59	60.00	29.90	0.30	10.21	QP
6	6.63	33.31	-16.69	50.00	22.80	0.30	10.21	Average
7	7.02	39.81	-20.19	60.00	29.30	0.29	10.22	QP
8	7.02	32.71	-17.29	50.00	22.20	0.29	10.22	Average
9	7.89	37.02	-22.98	60.00	26.50	0.29	10.23	QP
10	7.89	29.72	-20.28	50.00	19.20	0.29	10.23	Average
11	13.56	55.82	-4.18	60.00	45.20	0.27	10.35	QP
12 *	13.56	51.92	1.92	50.00	41.30	0.27	10.35	Average
13	24.14	39.20	-20.80	60.00	28.30	0.24	10.66	QP
14	24.14	27.10	-22.90	50.00	16.20	0.24	10.66	Average

(1) with antenna

Remark: 13.56MHz is the NFC RF fundamental signal.



Test Mode :	NFC Tx	Test Voltage :	120Vac / 60Hz
Function Type :	GSM1900 Idle + Bluetooth Link + WLAN Link + Earphone + USB Cable (Charging from Adapter) + NFC Tx		

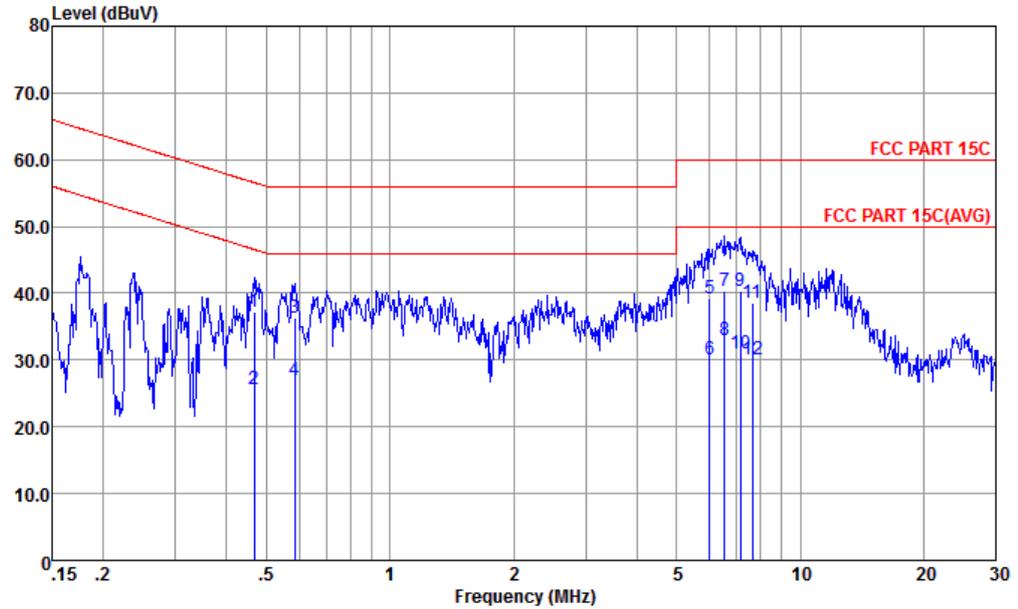


Site : CO01-kS
 Condition : FCC PART 15C LISN-L-20151024 LINE
 Project : (FR) 5D0215

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.47	37.19	-19.39	56.58	26.80	0.23	10.16	QP
2	0.47	25.69	-20.89	46.58	15.30	0.23	10.16	Average
3	0.59	36.29	-19.71	56.00	25.90	0.23	10.16	QP
4	0.59	26.99	-19.01	46.00	16.60	0.23	10.16	Average
5	6.02	39.31	-20.69	60.00	28.90	0.21	10.20	QP
6	6.02	30.01	-19.99	50.00	19.60	0.21	10.20	Average
7	6.56	40.33	-19.67	60.00	29.90	0.22	10.21	QP
8 *	6.56	33.03	-16.97	50.00	22.60	0.22	10.21	Average
9	7.14	40.25	-19.75	60.00	29.80	0.23	10.22	QP
10	7.14	31.05	-18.95	50.00	20.60	0.23	10.22	Average
11	7.65	38.56	-21.44	60.00	28.10	0.23	10.23	QP
12	7.65	30.06	-19.94	50.00	19.60	0.23	10.23	Average

(2) with dummy load



Test Mode :	NFC Tx	Test Voltage :	120Vac / 60Hz
Function Type :	GSM1900 Idle + Bluetooth Link + WLAN Link + Earphone + USB Cable (Charging from Adapter) + NFC Tx		

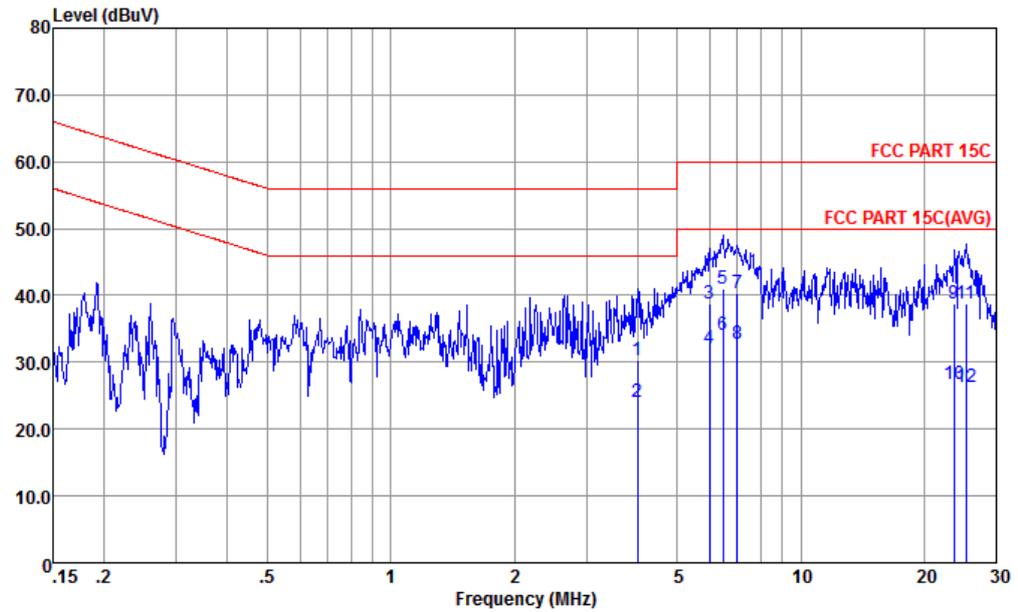

Site : CO01-kS
 Condition : FCC PART 15C LISN-N-20151024 NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	4.01	30.33	-25.67	56.00	19.80	0.36	10.17	QP
2	4.01	24.13	-21.87	46.00	13.60	0.36	10.17	Average
3	5.99	38.82	-21.18	60.00	28.30	0.32	10.20	QP
4	5.99	32.12	-17.88	50.00	21.60	0.32	10.20	Average
5	6.45	41.01	-18.99	60.00	30.49	0.31	10.21	QP
6 *	6.45	34.11	-15.89	50.00	23.59	0.31	10.21	Average
7	6.99	40.31	-19.69	60.00	29.80	0.29	10.22	QP
8	6.99	32.71	-17.29	50.00	22.20	0.29	10.22	Average
9	23.64	38.79	-21.21	60.00	27.90	0.24	10.65	QP
10	23.64	26.79	-23.21	50.00	15.90	0.24	10.65	Average
11	25.32	38.74	-21.26	60.00	27.80	0.24	10.70	QP
12	25.32	26.24	-23.76	50.00	15.30	0.24	10.70	Average

(2) with dummy load



Appendix B. Test Results of Conducted Test Items

B.1 Test Result of 20dB Spectrum Bandwidth

Test mode	NFC Tx	Test Frequency (MHz)	13.56																																																																
<table border="1"> <thead> <tr> <th>Marker</th> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td></td> <td>13.5593920 MHz</td> <td>-26.74 dBm</td> <td>ndB</td> <td>2.489 kHz</td> </tr> <tr> <td>T1</td> <td>1</td> <td></td> <td></td> <td>13.558148 MHz</td> <td>-46.87 dBm</td> <td>ndB</td> <td>20.00 dB</td> </tr> <tr> <td>T2</td> <td>1</td> <td></td> <td></td> <td>13.560637 MHz</td> <td>-46.81 dBm</td> <td>Q factor</td> <td>5447.4</td> </tr> </tbody> </table>		Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1			13.5593920 MHz	-26.74 dBm	ndB	2.489 kHz	T1	1			13.558148 MHz	-46.87 dBm	ndB	20.00 dB	T2	1			13.560637 MHz	-46.81 dBm	Q factor	5447.4	<table border="1"> <thead> <tr> <th>Marker</th> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td></td> <td>13.5593490 MHz</td> <td>-28.42 dBm</td> <td>Occ Bw</td> <td>2.112879884 kHz</td> </tr> <tr> <td>T1</td> <td>1</td> <td></td> <td></td> <td>13.5582923 MHz</td> <td>-42.44 dBm</td> <td></td> <td></td> </tr> <tr> <td>T2</td> <td>1</td> <td></td> <td></td> <td>13.5604052 MHz</td> <td>-42.44 dBm</td> <td></td> <td></td> </tr> </tbody> </table>		Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1			13.5593490 MHz	-28.42 dBm	Occ Bw	2.112879884 kHz	T1	1			13.5582923 MHz	-42.44 dBm			T2	1			13.5604052 MHz	-42.44 dBm		
Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result																																																												
M1	1			13.5593920 MHz	-26.74 dBm	ndB	2.489 kHz																																																												
T1	1			13.558148 MHz	-46.87 dBm	ndB	20.00 dB																																																												
T2	1			13.560637 MHz	-46.81 dBm	Q factor	5447.4																																																												
Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result																																																												
M1	1			13.5593490 MHz	-28.42 dBm	Occ Bw	2.112879884 kHz																																																												
T1	1			13.5582923 MHz	-42.44 dBm																																																														
T2	1			13.5604052 MHz	-42.44 dBm																																																														
20dB Bandwidth (kHz)	2.49	99% Occupied BW (kHz)	2.11																																																																
Frequency range (MHz)	$f_L > 13.553$	13.558148	Test Result																																																																
	$f_H < 13.567$	13.560637	Complies																																																																




B.2 Test Result of Frequency Stability

Voltage vs. Frequency Stability		Temperature vs. Frequency Stability	
Voltage (Vac)	Measurement Frequency (MHz)	Temperature (°C)	Measurement Frequency (MHz)
120	13.559335	-20	13.559436
102	13.559342	-10	13.559450
138	13.559335	0	13.559422
-	-	10	13.559422
-	-	20	13.559422
-	-	30	13.559407
-	-	40	13.559364
-	-	50	13.559306
Max.Deviation (MHz)	-0.000665	Max.Deviation (MHz)	-0.000694
Max.Deviation (ppm)	-49.0782	Max.Deviation (ppm)	-51.2168
Limit	FS < ±100 ppm	Limit	FS < ±100 ppm
Test Result	PASS	Test Result	PASS



Appendix C. Test Results of Radiated Test Items

C.1 Test Result of Field Strength of Fundamental Emissions

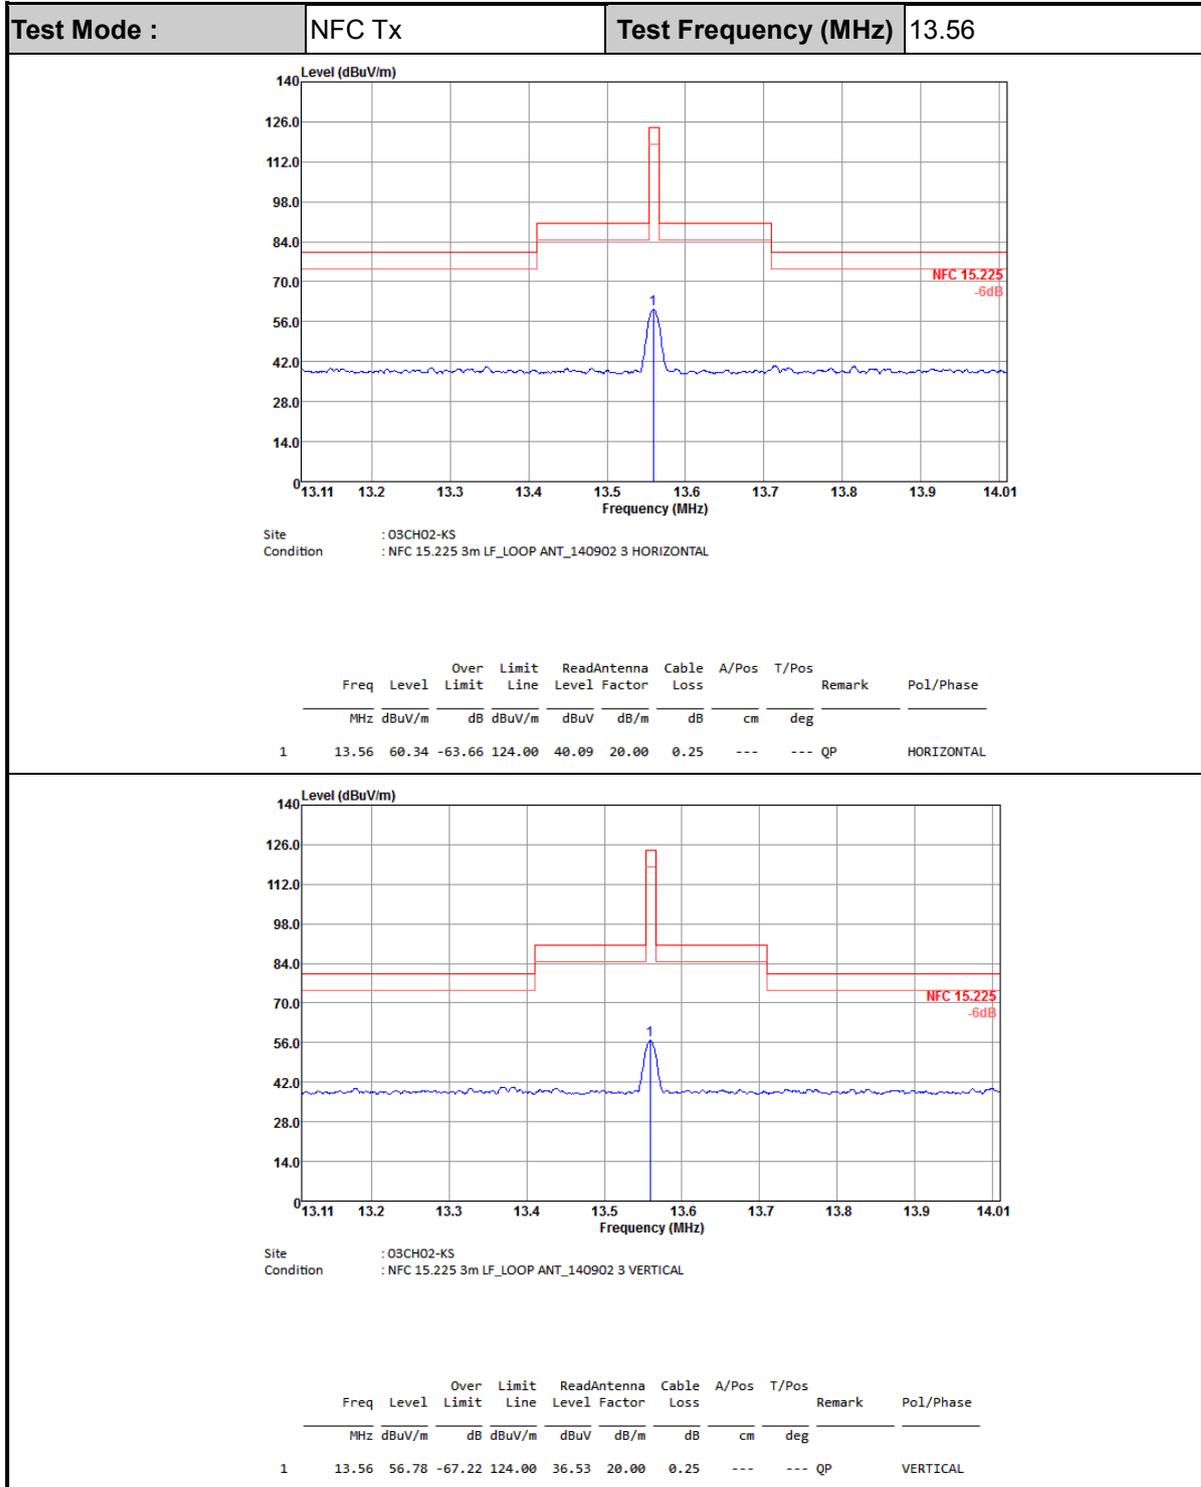

Note: All NFC's spurious emissions are below 20dB of limits.

C.2 Results of Radiated Emissions (9 kHz~30MHz)

Test Mode :		NFC Tx			Polarization :		Horizontal		
Frequency (MHz)	Level (dB μ V/m)	Over Limit (dB)	Limit Line (dB μ V/m)	Read Level (dB μ V)	Antenna Factor (dB)	Cable Loss (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
0.00999	55.22	-72.4	127.62	35.16	20	0.06	-	-	Average
0.01802	53.26	-69.22	122.48	33.2	20	0.06	-	-	Average
1.397	49.93	-14.76	64.69	29.88	20	0.05	-	-	QP
1.68	52.54	-10.55	63.09	32.48	20	0.06	-	-	QP
2.072	44.82	-24.72	69.54	24.76	20	0.06	-	-	QP
8.391	36.67	-32.87	69.54	16.47	20	0.2	-	-	QP
19.866	37.05	-32.49	69.54	16.75	20	0.3	-	-	QP
25.08	38.8	-30.74	69.54	18.47	20	0.33	-	-	QP

Test Mode :		NFC Tx			Polarization :		Vertical		
Frequency (MHz)	Level (dB μ V/m)	Over Limit (dB)	Limit Line (dB μ V/m)	Read Level (dB μ V)	Antenna Factor (dB)	Cable Loss (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
0.009	56.41	-72.11	128.52	36.35	20	0.06	-	-	Average
0.01394	52.5	-72.22	124.72	32.44	20	0.06	-	-	Average
0.03974	43.91	-71.7	115.61	23.9	20	0.01	-	-	Average
0.07146	44.52	-65.99	110.51	24.51	20	0.01	-	-	Average
0.3572	49.47	-47.06	96.53	29.46	20	0.01	-	-	Average
3.176	41.62	-27.92	69.54	21.53	20	0.09	-	-	QP
17.928	39.49	-30.05	69.54	19.2	20	0.29	-	-	QP
25.39	45.67	-23.87	69.54	25.34	20	0.33	-	-	QP

Note:

- 13.56 MHz is fundamental signal which can be ignored.
- The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
- Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB);
- Limit line = specific limits (dB μ V) + distance extrapolation factor.

C.3 Results of Radiated Emissions (30MHz~1GHz)

Test Mode :		NFC Tx			Polarization :		Horizontal			
Frequency (MHz)	Level (dB μ V/m)	Over Limit (dB)	Limit Line (dB μ V/m)	Read Level (dB μ V)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
30	28.7	-11.3	40	39.65	19.2	0.95	31.1	162	144	Peak
45.52	27.11	-12.89	40	45.54	11.25	1.12	30.8	-	-	Peak
56.19	26.93	-13.07	40	49.22	7.14	1.24	30.67	-	-	Peak
322.94	14.06	-31.94	46	27.69	13.92	3	30.55	-	-	Peak
590.66	20.16	-25.84	46	27.42	18.82	4.14	30.22	-	-	Peak
702.21	21.31	-24.69	46	27.02	20.01	4.68	30.4	-	-	Peak

Test Mode :		NFC Tx			Polarization :		Vertical			
Frequency (MHz)	Level (dB μ V/m)	Over Limit (dB)	Limit Line (dB μ V/m)	Read Level (dB μ V)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
30	27.9	-12.1	40	38.85	19.2	0.95	31.1	100	145	Peak
43.58	26.93	-13.07	40	44.39	12.26	1.1	30.82	-	-	Peak
225.94	24.17	-21.83	46	41.13	10.99	2.5	30.45	-	-	Peak
437.4	17.26	-28.74	46	27.21	17.1	3.5	30.55	-	-	Peak
586.78	21.5	-24.5	46	28.78	18.83	4.12	30.23	-	-	Peak
838.01	23.07	-22.93	46	27.71	20.84	4.94	30.42	-	-	Peak

Note:

1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Emission level (dB μ V/m) = 20 log Emission level (μ V/m).
3. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor= Level.