

# FCC SAR Test Report

APPLICANT : ZTE CORPORATION  
EQUIPMENT : LTE/WCDMA/GSM (GPRS) Multi-Mode  
Digital Mobile Phone  
BRAND NAME : ZTE  
MODEL NAME : Z320  
FCC ID : SRQ-Z320  
STANDARD : FCC 47 CFR Part 2 (2.1093)  
ANSI/IEEE C95.1-1992  
IEEE 1528-2013

We, SPORTON INTERNATIONAL (XI'AN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (XI'AN) INC., the test report shall not be reproduced except in full.



Prepared by: Mark Qu / Manager



Approved by: Jones Tsai / Manager



**SPORTON INTERNATIONAL (XI'AN) INC.**

1F, Building A3, No. 39 Chuangye Rd., Xi'an Hi-tech Zone, Shanxi Province, P. R. China



**Table of Contents**

**1. Statement of Compliance ..... 4**

**2. Administration Data ..... 5**

**3. Guidance Standard ..... 5**

**4. Equipment Under Test (EUT) Information ..... 6**

    4.1 General Information ..... 6

    4.2 General LTE SAR Test and Reporting Considerations ..... 7

**5. RF Exposure Limits..... 8**

    5.1 Uncontrolled Environment..... 8

    5.2 Controlled Environment..... 8

**6. Specific Absorption Rate (SAR)..... 9**

    6.1 Introduction ..... 9

    6.2 SAR Definition..... 9

**7. System Description and Setup .....10**

    7.1 E-Field Probe ..... 11

    7.2 Data Acquisition Electronics (DAE) ..... 11

    7.3 Phantom..... 12

    7.4 Device Holder..... 13

**8. Measurement Procedures .....14**

    8.1 Spatial Peak SAR Evaluation ..... 14

    8.2 Power Reference Measurement..... 15

    8.3 Area Scan ..... 15

    8.4 Zoom Scan..... 16

    8.5 Volume Scan Procedures..... 16

    8.6 Power Drift Monitoring..... 16

**9. Test Equipment List .....17**

**10. System Verification .....18**

    10.1 Tissue Verification ..... 18

    10.2 System Performance Check Results..... 19

**11. RF Exposure Positions .....20**

    11.1 Ear and handset reference point ..... 20

    11.2 Definition of the cheek position..... 21

    11.3 Definition of the tilt position..... 22

    11.4 Body Worn Accessory ..... 23

**12. Conducted RF Output Power (Unit: dBm).....24**

**13. Bluetooth Exclusions Applied .....38**

**14. Antenna Location .....39**

**15. SAR Test Results .....41**

    15.1 Head SAR ..... 43

    15.2 Body Worn Accessory SAR..... 46

**16. Simultaneous Transmission Analysis.....48**

    16.1 Body-Worn Accessory Exposure Conditions ..... 49

**17. Uncertainty Assessment .....50**

**18. References .....52**

**Appendix A. Plots of System Performance Check**

**Appendix B. Plots of High SAR Measurement**

**Appendix C. DASy Calibration Certificate**

**Appendix D. Test Setup Photos**



**1. Statement of Compliance**

The maximum results of Specific Absorption Rate (SAR) found during testing for **ZTE CORPORATION, LTE/WCDMA/GSM (GPRS) Multi-Mode Digital Mobile Phone, Z320** are as follows.

Equipment Class	Frequency Band		Highest 1g SAR Summary		Highest Simultaneous Transmission 1g SAR (W/kg)
			Head (Separation 0mm)	Body-worn (Separation 15mm)	
			1g SAR (W/kg)		
Licensed	GSM	GSM850	0.65	<b>0.83</b>	0.96
		GSM1900	0.54	0.48	
	WCDMA	Band V	0.61	0.57	
		Band IV	0.34	0.56	
		Band II	0.72	0.57	
	LTE	Band 12	0.24	0.17	
		Band 4	0.31	0.63	
		Band 2	<b>0.75</b>	0.58	
	DSS	Bluetooth			
Date of Testing:			2016/06/26 ~ 2016/07/01		

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications

## **2. Administration Data**

<b>Testing Laboratory</b>	
<b>Test Site</b>	SPORTON INTERNATIONAL (XI'AN) INC.
<b>Test Site Location</b>	1F, Building A3, No. 39 Chuangye Rd., Xi'an Hi-tech Zone, Shanxi Province, P. R. C. TEL: +86-029-8860-8767 FAX: +86-029-8860-8791

<b>Applicant</b>	
<b>Company Name</b>	ZTE CORPORATION
<b>Address</b>	ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

<b>Manufacturer</b>	
<b>Company Name</b>	ZTE CORPORATION
<b>Address</b>	ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

## **3. Guidance Standard**

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05



### 4. Equipment Under Test (EUT) Information

#### 4.1 General Information

Product Feature & Specification	
Equipment Name	LTE/WCDMA/GSM (GPRS) Multi-Mode Digital Mobile Phone
Brand Name	ZTE
Model Name	Z320
FCC ID	SRQ-Z320
IMEI Code	860550030009149
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WCDMA Band IV: 1712.4 MHz ~ 1752.6 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 12: 699 MHz ~ 716 MHz Bluetooth: 2402 MHz ~ 2480 MHz
Mode	<ul style="list-style-type: none"> <li>· GSM/GPRS/EGPRS</li> <li>· RMC/AMR 12.2Kbps</li> <li>· HSDPA</li> <li>· HSUPA</li> <li>· DC-HSDPA</li> <li>· HSPA+ (16QAM uplink is not supported)</li> <li>· LTE: QPSK, 16QAM</li> <li>· Bluetooth v3.0+EDR, Bluetooth v4.0 LE</li> </ul>
HW Version	u79B
SW Version	Z320_MPCSV1.0.0B06
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Production Unit
<b>Remark:</b>	
<ol style="list-style-type: none"> <li>1. This device supported VoIP in GPRS, EGPRS, WCDMA and LTE (e.g. 3rd party VoIP).</li> <li>2. This device supports GRPS/EGPRS mode up to multi-slot class 12 and does not support DTM operation.</li> </ol>	



**4.2 General LTE SAR Test and Reporting Considerations**

Summarized necessary items addressed in KDB 941225 D05 v02r05																																							
FCC ID	SRQ-Z320																																						
Equipment Name	LTE/WCDMA/GSM (GPRS) Multi-Mode Digital Mobile Phone																																						
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 12: 699 MHz ~ 716 MHz																																						
Channel Bandwidth	LTE Band 2: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 12: 1.4MHz, 3MHz, 5MHz, 10MHz																																						
uplink modulations used	QPSK, and 16QAM																																						
LTE Voice / Data requirements	Voice and Data																																						
LTE MPR permanently built-in by design	<p align="center"><b>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3</b></p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (RB)</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>&gt;5</td> <td>&gt;4</td> <td>&gt;8</td> <td>&gt;12</td> <td>&gt;16</td> <td>&gt;18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>&gt;5</td> <td>&gt;4</td> <td>&gt;8</td> <td>&gt;12</td> <td>&gt;16</td> <td>&gt;18</td> <td>≤ 2</td> </tr> </tbody> </table>	Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	>5	>4	>8	>12	>16	>18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	>5	>4	>8	>12	>16	>18	≤ 2
Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)																																
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																	
QPSK	>5	>4	>8	>12	>16	>18	≤ 1																																
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																
16 QAM	>5	>4	>8	>12	>16	>18	≤ 2																																
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																						
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																						
LTE Release Version	R10, Cat 4																																						
CA Support	NO																																						

Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 12												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	23017	699.7	23025	700.5	23035	701.5	23060	704				
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5				
H	23173	715.3	23165	714.5	23155	713.5	23130	711				

**5. RF Exposure Limits**

**5.1 Uncontrolled Environment**

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

**5.2 Controlled Environment**

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Limits for Occupational/Controlled Exposure (W/kg)**

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

**Limits for General Population/Uncontrolled Exposure (W/kg)**

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

## **6. Specific Absorption Rate (SAR)**

### **6.1 Introduction**

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### **6.2 SAR Definition**

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the RMS electrical field strength.

## 7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

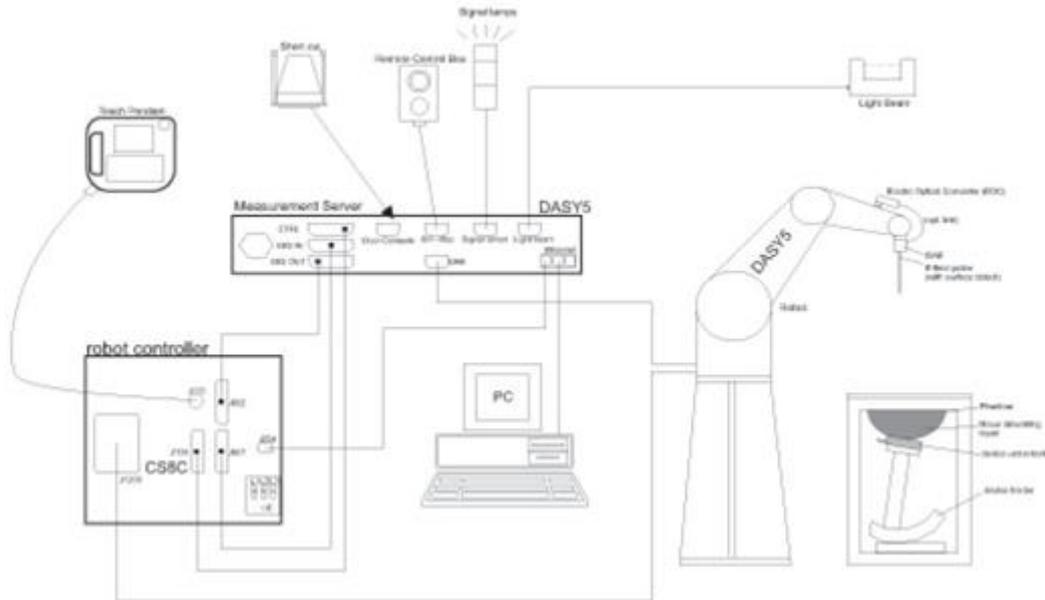

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

**7.1 E-Field Probe**

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG).The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

**<EX3DV4 Probe>**

<b>Construction</b>	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
<b>Frequency</b>	10 MHz – >6 GHz Linearity: ±0.2 dB (30 MHz – 6 GHz)	
<b>Directivity</b>	±0.3 dB in TSL (rotation around probe axis) ±0.5 dB in TSL (rotation normal to probe axis)	
<b>Dynamic Range</b>	10 µW/g – >100 mW/g Linearity: ±0.2 dB (noise: typically <1 µW/g)	
<b>Dimensions</b>	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

**7.2 Data Acquisition Electronics (DAE)**

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



**Fig 5.1 Photo of DAE**

**7.3 Phantom**

**<SAM Twin Phantom>**


<b>Shell Thickness</b>	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm
<b>Filling Volume</b>	Approx. 25 liters
<b>Dimensions</b>	Length: 1000 mm; Width: 500 mm; Height: adjustable feet
<b>Measurement Areas</b>	Left Hand, Right Hand, Flat Phantom



The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

**<ELI Phantom>**

<b>Shell Thickness</b>	2 ± 0.2 mm (sagging: <1%)
<b>Filling Volume</b>	Approx. 30 liters
<b>Dimensions</b>	Major ellipse axis: 600 mm Minor axis: 400 mm

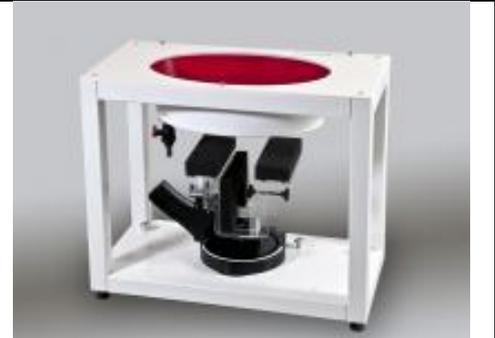

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

### 7.4 Device Holder

#### <Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

#### <Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

## **8. Measurement Procedures**

The measurement procedures are as follows:

### <Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For BT power measurement, use engineering software to configure EUT BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure BT output power

### <SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

### **8.1 Spatial Peak SAR Evaluation**

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

**8.2 Power Reference Measurement**

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

**8.3 Area Scan**

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0 is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{Area}$ , $\Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

### 8.4 Zoom Scan

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		$\leq 2$ GHz: $\leq 8$ mm $2 - 3$ GHz: $\leq 5$ mm*	$3 - 4$ GHz: $\leq 5$ mm* $4 - 6$ GHz: $\leq 4$ mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	$\leq 5$ mm	$3 - 4$ GHz: $\leq 4$ mm $4 - 5$ GHz: $\leq 3$ mm $5 - 6$ GHz: $\leq 2$ mm	
	graded grid	$\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	$\leq 4$ mm	$3 - 4$ GHz: $\leq 3$ mm $4 - 5$ GHz: $\leq 2.5$ mm $5 - 6$ GHz: $\leq 2$ mm
		$\Delta z_{Zoom}(n>1)$ : between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	$\geq 30$ mm	$3 - 4$ GHz: $\geq 28$ mm $4 - 5$ GHz: $\geq 25$ mm $5 - 6$ GHz: $\geq 22$ mm	
Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is $\leq 1.4$ W/kg, $\leq 8$ mm, $\leq 7$ mm and $\leq 5$ mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

### 8.5 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

### 8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



## 9. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1087	2016/3/16	2017/3/15
SPEAG	835MHz System Validation Kit	D835V2	4d151	2016/3/16	2017/3/15
SPEAG	1750MHz System Validation Kit	D1750V2	1090	2016/3/22	2017/3/21
SPEAG	1900MHz System Validation Kit	D1900V2	5d170	2016/3/21	2017/3/20
SPEAG	Data Acquisition Electronics	DAE4	1358	2015/8/27	2016/8/26
SPEAG	Dosimetric E-Field Probe	EX3DV4	3935	2015/11/27	2016/11/26
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CD	TP-1753	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CD	TP-1754	NCR	NCR
Agilent	Wireless Communication Test Set	E5515C	MY52102600	2015/12/8	2016/12/7
Anritsu	Radio communication analyzer	MT8820C	6201074235	2015/10/15	2016/10/14
Agilent	ENA Series Network Analyzer	E5071C	MY46317418	2015/12/8	2016/12/7
Agilent	Dielectric Probe Kit	85070E	MY44300751	NCR	NCR
Anritsu	Power Sensor	MA2411B	0917070	2016/1/20	2017/1/19
Anritsu	Power Meter	ML2495A	1005002	2016/1/20	2017/1/19
Anritsu	Power Sensor	MA2411B	1339206	2016/1/20	2017/1/19
Anritsu	Power Meter	ML2495A	1438004	2016/1/20	2017/1/19
R&S	Signal Generator	N5182A	MY50145381	2016/1/12	2017/1/11
R&S	Spectrum Analyzer	FSV 7	101632	2015/12/8	2016/12/7
ARRA	Power Divider	A3200-2	NA	Note1	
Agilent	Dual Directional Coupler	778D	50422	Note1	
Woken	Attenuation1	WK0602-XX	N/A	Note1	
PE	Attenuation2	PE7005-10	N/A	Note1	
PE	Attenuation3	PE7005-3	N/A	Note1	
AR	Amplifier	5S1G4	342137	Note1	

### General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.

## 10. System Verification

### 10.1 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
For Body								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3


### <Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )	Conductivity Target ( $\sigma$ )	Permittivity Target ( $\epsilon_r$ )	Delta ( $\sigma$ ) (%)	Delta ( $\epsilon_r$ ) (%)	Limit (%)	Date
750	Head	22.5	0.891	42.417	0.89	41.90	0.11	1.23	±5	2016/6/27
835	Head	22.4	0.900	41.959	0.90	41.50	0.00	1.11	±5	2016/7/1
1750	Head	22.3	1.352	40.879	1.37	40.10	-1.31	1.94	±5	2016/6/26
1900	Head	22.5	1.445	40.117	1.40	40.00	3.21	0.29	±5	2016/6/30
750	Body	22.5	0.977	53.884	0.96	55.50	1.77	-2.91	±5	2016/6/26
835	Body	22.5	0.994	54.412	0.97	55.20	2.47	-1.43	±5	2016/6/26
1750	Body	22.6	1.517	53.127	1.49	53.40	1.81	-0.51	±5	2016/6/26
1900	Body	22.6	1.575	52.001	1.52	53.30	3.62	-2.44	±5	2016/6/26

**10.2 System Performance Check Results**

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2016/6/27	750	Head	250	D750V3-1087	EX3DV4 – SN3935	DAE4 Sn1358	2.03	8.30	8.12	-2.17
2016/7/1	835	Head	250	D835V2-4d151	EX3DV4 – SN3935	DAE4 Sn1358	2.43	9.26	9.72	4.97
2016/6/26	1750	Head	250	D1750V2-1090	EX3DV4 – SN3935	DAE4 Sn1358	9.02	35.10	36.08	2.79
2016/6/30	1900	Head	250	D1900V2-5d170	EX3DV4 – SN3935	DAE4 Sn1358	9.59	38.10	38.36	0.68
2016/6/26	750	Body	250	D750V3-1087	EX3DV4 – SN3935	DAE4 Sn1358	2.37	8.64	9.48	9.72
2016/6/26	835	Body	250	D835V2-4d151	EX3DV4 – SN3935	DAE4 Sn1358	2.51	9.52	10.04	5.46
2016/6/26	1750	Body	250	D1750V2-1090	EX3DV4 – SN3935	DAE4 Sn1358	9.80	35.90	39.2	9.19
2016/6/26	1900	Body	250	D1900V2-5d170	EX3DV4 – SN3935	DAE4 Sn1358	10.50	38.90	42	7.97

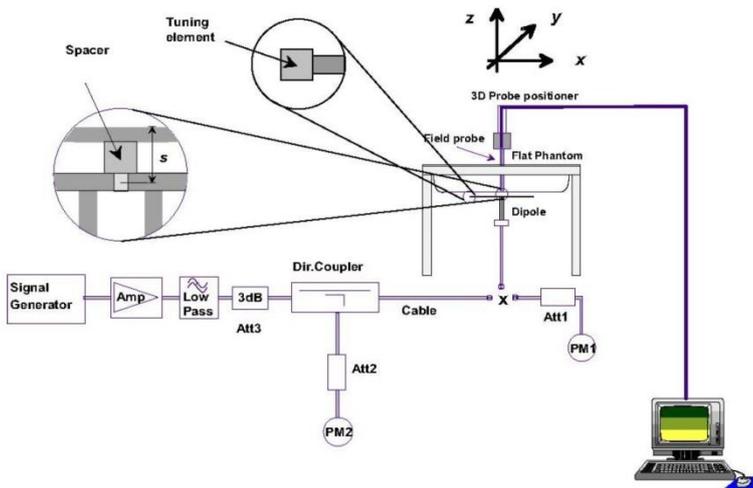

**Fig 8.3.1 System Performance Check Setup**



**Fig 8.3.2 Setup Photo**

## 11. RF Exposure Positions

### 11.1 Ear and handset reference point

Figure 9.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M,” the left ear reference point (ERP) is marked “LE,” and the right ERP is marked “RE.” Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 9.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 9.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 9.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

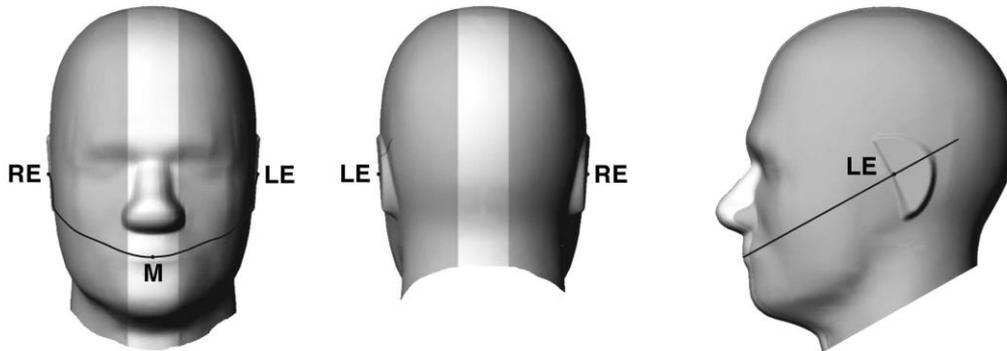


Fig 9.1.1 Front, back, and side views of SAM twin phantom

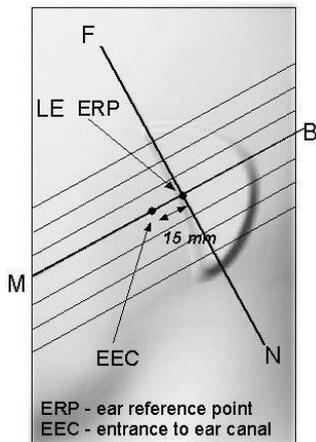


Fig 9.1.2 Close-up side view of phantom showing the ear region.


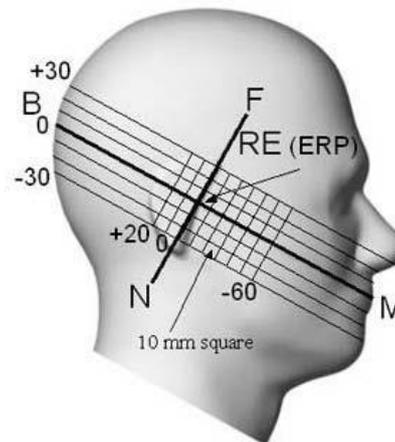



Fig 9.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

**11.2 Definition of the cheek position**


1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width  $w_t$  of the handset at the level of the acoustic output (point A in Figure 9.2.1 and Figure 9.2.2), and the midpoint of the width  $w_b$  of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 9.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 9.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 9.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 9.2.3. The actual rotation angles should be documented in the test report.

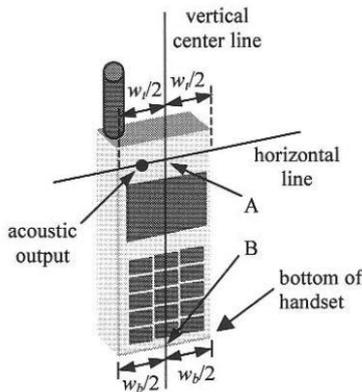

**Fig 9.2.1 Handset vertical and horizontal reference lines—“fixed case”**

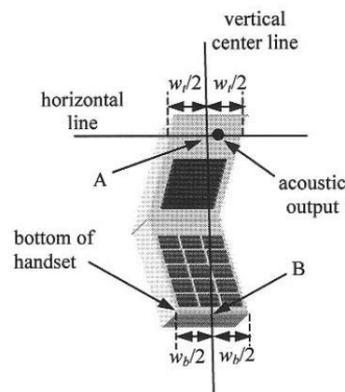


**Fig 9.2.2 Handset vertical and horizontal reference lines—“clam-shell case”**

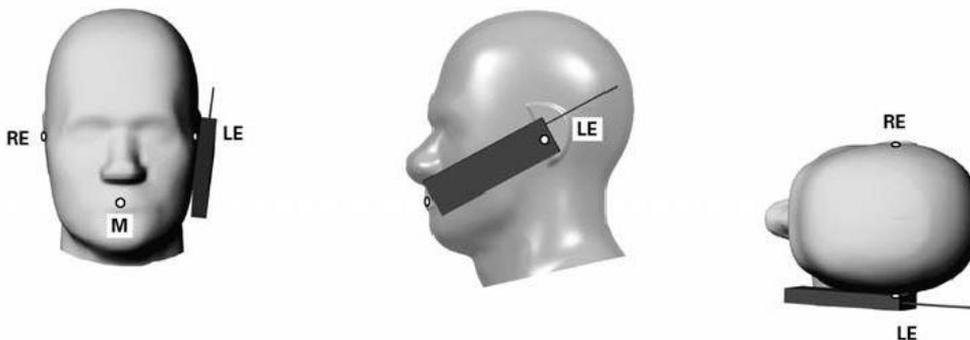

**Fig 9.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.**

**11.3 Definition of the tilt position**

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 9.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

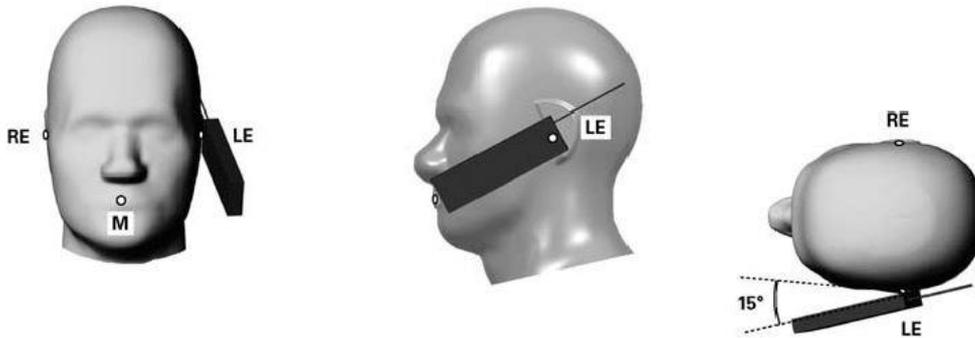


**Fig 9.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.**

### **11.4 Body Worn Accessory**

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is  $< 1.2 \text{ W/kg}$ , the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-chip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

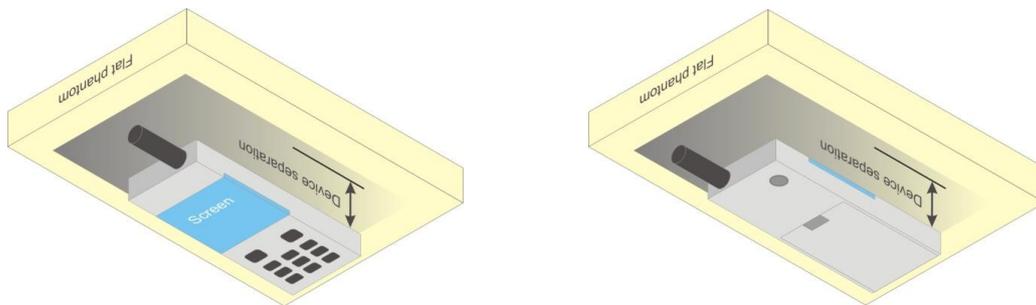

**Fig 9.4 Body Worn Position**



## 12. Conducted RF Output Power (Unit: dBm)

### <GSM Conducted Power>

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (2Tx slots) for GSM850 and GPRS (3Tx slots) for GSM1900 are considered as the primary mode.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode, SAR measurement is not required for the secondary mode

GSM850 TX Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	128	189	251		128	189	251	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GSM 1 Tx slot	32.63	32.73	<b>32.88</b>	33.00	23.63	23.73	23.88	24.00
GPRS 1 Tx slot	32.62	32.68	32.84	33.00	23.62	23.68	23.84	24.00
GPRS 2 Tx slots	30.70	30.67	30.45	31.00	<b>24.70</b>	24.67	24.45	25.00
GPRS 3 Tx slots	28.41	28.29	28.46	29.00	24.15	24.03	24.20	24.74
GPRS 4 Tx slots	26.46	26.06	26.16	27.00	23.46	23.06	23.16	24.00
EDGE 1 Tx slot	26.56	26.62	26.52	27.00	17.56	17.62	17.52	18.00
EDGE 2 Tx slots	26.52	26.44	26.47	27.00	20.52	20.44	20.47	21.00
EDGE 3 Tx slots	26.38	26.40	26.30	26.50	22.12	22.14	22.04	22.24
EDGE 4 Tx slots	25.27	25.20	25.17	25.50	22.27	22.20	22.17	22.50

**Remark:** The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.  
The calculated method are shown as below:  
Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB  
Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB  
Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB  
Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

GSM1900 TX Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	29.83	29.76	<b>29.84</b>	30.00	20.83	20.76	20.84	21.00
GPRS 1 Tx slot	29.67	29.74	29.74	30.00	20.67	20.74	20.74	21.00
GPRS 2 Tx slots	27.63	27.73	27.78	28.00	21.63	21.73	21.78	22.00
GPRS 3 Tx slots	26.57	26.62	26.73	27.00	22.31	22.36	<b>22.47</b>	22.74
GPRS 4 Tx slots	24.58	24.67	24.64	25.00	21.58	21.67	21.64	22.00
EDGE 1 Tx slot	24.77	24.83	24.85	25.00	15.77	15.83	15.85	16.00
EDGE 2 Tx slots	24.70	24.67	24.72	25.00	18.70	18.67	18.72	19.00
EDGE 3 Tx slots	23.70	23.76	23.69	24.00	19.44	19.50	19.43	19.74
EDGE 4 Tx slots	21.61	21.62	21.64	22.00	18.61	18.62	18.64	19.00

**Remark:** The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.  
The calculated method are shown as below:  
Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB  
Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB  
Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB  
Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

**<WCDMA Conducted Power>**

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

**HSDPA Setup Configuration:**

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
  - i. Set Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters were set according to each
  - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
  - iii. Set RMC 12.2Kbps + HSDPA mode.
  - iv. Set Cell Power = -86 dBm
  - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
  - vi. Select HSDPA Uplink Parameters
  - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
  - viii. Set Ack-Nack Repetition Factor to 3
  - ix. Set CQI Feedback Cycle (k) to 4 ms
  - x. Set CQI Repetition Factor to 2
  - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

**Table C.10.1.4:  $\beta$  values for transmitter characteristics tests with HS-DPCCH**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}$ (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1:  $\Delta_{ACK}, \Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{HS} = 30/15 * \beta_c$ .

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA,  $\Delta_{ACK}$  and  $\Delta_{NACK} = 30/15$  with  $\beta_{HS} = 30/15 * \beta_c$ , and  $\Delta_{CQI} = 24/15$  with  $\beta_{HS} = 24/15 * \beta_c$ .

Note 3: CM = 1 for  $\beta_c/\beta_d = 12/15, \beta_{HS}/\beta_c = 24/15$ . For all other combinations of DPCCH, DPDCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$ .

**Setup Configuration**

**HSUPA Setup Configuration:**

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting \* :
  - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
  - ii. Set the Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
  - iii. Set Cell Power = -86 dBm
  - iv. Set Channel Type = 12.2k + HSPA
  - v. Set UE Target Power
  - vi. Power Ctrl Mode= Alternating bits
  - vii. Set and observe the E-TFCl
  - viii. Confirm that E-TFCl is equal to the target E-TFCl of 75 for sub-test 1, and other subtest's E-TFCl
- d. The transmitted maximum output power was recorded.

**Table C.11.1.3:  $\beta$  values for transmitter characteristics tests with HS-DPCCH and E-DCH**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}$ (Note 1)	$\beta_{ec}$	$\beta_{ed}$ (Note 5) (Note 6)	$\beta_{ed}$ (SF)	$\beta_{ed}$ (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCl
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1:  $\Delta_{ACK}, \Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{hs} = 30/15 * \beta_c$ .

Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS- DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 10/15$  and  $\beta_d = 15/15$ .

Note 4: For subtest 5 the  $\beta_c/\beta_d$  ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 14/15$  and  $\beta_d = 15/15$ .

Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 6:  $\beta_{ed}$  can not be set directly, it is set by Absolute Grant Value.

**Setup Configuration**

**DC-HSDPA 3GPP release 8 Setup Configuration:**


- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
  - i. Set RMC 12.2Kbps + HSDPA mode.
  - ii. Set Cell Power = -25 dBm
  - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
  - iv. Select HSDPA Uplink Parameters
  - v. Set Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
    - a). Subtest 1:  $\beta_c/\beta_d=2/15$
    - b). Subtest 2:  $\beta_c/\beta_d=12/15$
    - c). Subtest 3:  $\beta_c/\beta_d=15/8$
    - d). Subtest 4:  $\beta_c/\beta_d=15/4$
  - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
  - vii. Set Ack-Nack Repetition Factor to 3
  - viii. Set CQI Feedback Cycle (k) to 4 ms
  - ix. Set CQI Repetition Factor to 2
  - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

**C.8.1.12 Fixed Reference Channel Definition H-Set 12**

**Table C.8.1.12: Fixed Reference Channel H-Set 12**

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload ( $N_{INF}$ )	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

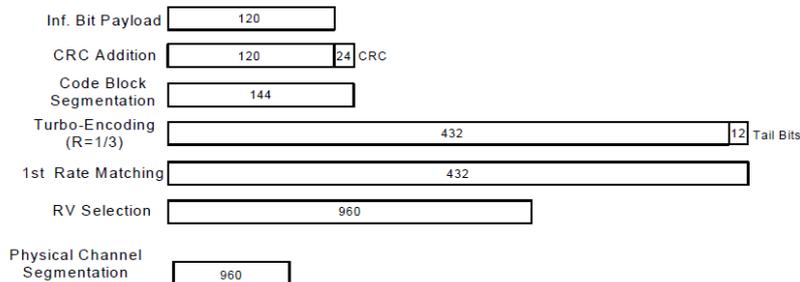

**Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)**

**Setup Configuration**



<WCDMA Conducted Power>

General Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. If the maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is  $\leq \frac{1}{4}$  dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

Band		WCDMA Band II			Tune-up Limit (dBm)	WCDMA Band IV			Tune-up Limit (dBm)	WCDMA Band V			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938		1537	1638	1738		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6	1712.4	1732.6	1752.6	826.4	836.4	846.6			
3GPP Rel 99	AMR 12.2Kbps	23.78	23.76	23.85	24.00	23.80	23.97	23.84	24.00	23.24	23.39	23.30	24.00
3GPP Rel 99	RMC 12.2Kbps	23.81	23.80	23.86	24.00	23.81	23.98	23.85	24.00	23.25	23.41	23.31	24.00
3GPP Rel 6	HSDPA Subtest-1	22.92	22.90	22.95	23.50	22.87	22.95	22.91	23.50	22.21	22.38	22.39	23.00
3GPP Rel 6	HSDPA Subtest-2	22.96	22.91	22.99	23.50	22.89	23.00	22.94	23.50	22.20	22.39	22.44	23.00
3GPP Rel 6	HSDPA Subtest-3	22.54	22.39	22.48	23.00	22.41	22.44	22.53	23.00	21.74	21.88	21.79	22.50
3GPP Rel 6	HSDPA Subtest-4	22.57	22.43	22.51	23.00	22.43	22.46	22.60	23.00	21.75	21.92	21.87	22.50
3GPP Rel 8	DC-HSDPA Subtest-1	22.47	22.59	22.71	23.00	22.33	22.31	22.33	23.00	22.68	22.71	22.64	23.00
3GPP Rel 8	DC-HSDPA Subtest-2	22.38	22.57	22.28	23.00	22.35	22.36	22.34	23.00	22.65	22.66	22.59	23.00
3GPP Rel 8	DC-HSDPA Subtest-3	21.93	22.06	22.39	22.50	21.91	21.87	21.89	22.50	21.66	22.11	22.06	22.50
3GPP Rel 8	DC-HSDPA Subtest-4	21.98	22.10	22.40	22.50	21.96	21.83	21.82	22.50	22.25	22.16	22.06	22.50
3GPP Rel 6	HSUPA Subtest-1	22.21	22.25	22.31	22.50	22.85	22.70	22.76	23.00	21.29	21.42	21.35	22.00
3GPP Rel 6	HSUPA Subtest-2	21.86	21.88	21.99	22.50	21.42	21.31	21.40	22.00	20.60	20.76	20.65	21.00
3GPP Rel 6	HSUPA Subtest-3	20.91	20.95	20.98	21.50	21.92	21.81	21.85	22.00	20.55	20.62	20.60	21.00
3GPP Rel 6	HSUPA Subtest-4	21.16	21.18	21.25	21.50	21.70	21.64	21.66	22.00	20.35	21.46	20.43	22.00
3GPP Rel 6	HSUPA Subtest-5	21.44	21.47	21.62	22.00	21.91	21.82	21.85	22.50	21.06	21.13	21.10	22.00



**<LTE Conducted Power>**

**General Note:**

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B12 / B4 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.



<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	22.79	22.55	22.67	23.50	0
20	QPSK	1	49	22.86	22.96	22.83		
20	QPSK	1	99	22.34	22.75	22.66		
20	QPSK	50	0	21.79	21.80	21.75	22.50	1
20	QPSK	50	24	21.67	21.77	21.67		
20	QPSK	50	50	21.61	21.68	21.74		
20	QPSK	100	0	21.70	21.75	21.64	22.50	1
20	16QAM	1	0	22.24	21.97	22.13		
20	16QAM	1	49	21.83	22.01	21.79		
20	16QAM	1	99	21.73	22.02	21.91	21.50	2
20	16QAM	50	0	20.83	20.57	20.78		
20	16QAM	50	24	20.58	20.66	20.67		
20	16QAM	50	50	20.63	20.58	20.70	21.50	2
20	16QAM	100	0	20.66	20.55	20.68		
Channel				18675	18900	19125		
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	22.71	22.68	22.70	23.50	0
15	QPSK	1	37	22.94	22.71	22.43		
15	QPSK	1	74	22.65	22.62	22.49		
15	QPSK	36	0	21.83	21.72	21.58	22.50	1
15	QPSK	36	20	21.68	21.78	21.62		
15	QPSK	36	39	21.60	21.62	21.64		
15	QPSK	75	0	21.67	21.63	21.57	22.50	1
15	16QAM	1	0	21.97	21.96	22.13		
15	16QAM	1	37	21.76	21.86	21.94		
15	16QAM	1	74	21.52	21.92	22.06	21.50	2
15	16QAM	36	0	20.58	20.65	20.58		
15	16QAM	36	20	20.42	20.77	20.61		
15	16QAM	36	39	20.52	20.63	20.74	21.50	2
15	16QAM	75	0	20.68	20.55	20.57		



Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	22.74	22.37	22.70	23.50	0
10	QPSK	1	25	22.88	22.66	22.80		
10	QPSK	1	49	22.58	22.56	22.56		
10	QPSK	25	0	21.75	21.76	21.62	22.50	1
10	QPSK	25	12	21.83	21.81	21.75		
10	QPSK	25	25	21.71	21.75	21.64		
10	QPSK	50	0	21.83	21.72	21.68	22.50	1
10	16QAM	1	0	22.04	21.87	21.97		
10	16QAM	1	25	22.11	21.97	22.07		
10	16QAM	1	49	21.79	21.86	22.05	21.50	2
10	16QAM	25	0	20.71	20.58	20.62		
10	16QAM	25	12	20.79	20.62	20.78		
10	16QAM	25	25	20.65	20.57	20.67	21.50	2
10	16QAM	50	0	20.76	20.61	20.69		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	22.67	22.57	22.69	23.50	0
5	QPSK	1	12	23.00	22.89	22.83		
5	QPSK	1	24	22.77	22.59	22.62		
5	QPSK	12	0	21.70	21.64	21.65	22.50	1
5	QPSK	12	7	21.63	21.71	21.64		
5	QPSK	12	13	21.69	21.80	21.70		
5	QPSK	25	0	21.69	21.71	21.67	22.50	1
5	16QAM	1	0	22.07	21.84	22.03		
5	16QAM	1	12	22.08	21.98	21.95		
5	16QAM	1	24	22.06	21.90	21.97	21.50	2
5	16QAM	12	0	20.69	20.59	20.67		
5	16QAM	12	7	20.63	20.64	20.74		
5	16QAM	12	13	20.67	20.71	20.74	21.50	2
5	16QAM	25	0	20.74	20.70	20.84		



Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	22.84	22.82	22.66	23.50	0
3	QPSK	1	8	22.74	22.70	22.50		
3	QPSK	1	14	22.78	22.51	22.56		
3	QPSK	8	0	21.83	21.78	21.67	22.50	1
3	QPSK	8	4	21.82	21.73	21.74		
3	QPSK	8	7	21.83	21.79	21.71		
3	QPSK	15	0	21.74	21.63	21.65	22.50	1
3	16QAM	1	0	22.08	22.03	22.01		
3	16QAM	1	8	21.82	21.95	21.94		
3	16QAM	1	14	22.07	22.03	21.99	21.50	2
3	16QAM	8	0	20.83	20.89	20.74		
3	16QAM	8	4	20.85	20.69	20.73		
3	16QAM	8	7	20.84	20.64	20.89	21.50	2
3	16QAM	15	0	20.77	20.65	20.78		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	22.70	22.59	22.58	23.50	0
1.4	QPSK	1	3	22.75	22.66	22.54		
1.4	QPSK	1	5	22.71	22.64	22.41		
1.4	QPSK	3	0	22.67	22.66	22.66		
1.4	QPSK	3	1	22.71	22.61	22.64		
1.4	QPSK	3	3	22.69	22.71	22.56	22.50	1
1.4	QPSK	6	0	21.66	21.63	21.66		
1.4	16QAM	1	0	22.05	22.00	21.72	22.50	1
1.4	16QAM	1	3	22.03	22.09	22.10		
1.4	16QAM	1	5	22.06	21.98	21.73		
1.4	16QAM	3	0	22.01	21.99	22.05		
1.4	16QAM	3	1	22.03	22.04	21.89		
1.4	16QAM	3	3	21.98	22.03	22.02	21.50	2
1.4	16QAM	6	0	20.73	20.71	20.58		



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	23.35	23.36	23.24	24.00	0
20	QPSK	1	49	22.91	22.95	22.91		
20	QPSK	1	99	22.94	23.08	23.05		
20	QPSK	50	0	21.94	22.02	21.96	23.00	1
20	QPSK	50	24	21.85	21.93	21.75		
20	QPSK	50	50	21.85	21.93	21.78		
20	QPSK	100	0	21.90	21.92	21.91	23.00	1
20	16QAM	1	0	22.97	22.63	22.48		
20	16QAM	1	49	21.83	21.73	21.77		
20	16QAM	1	99	22.19	22.19	22.18	22.00	2
20	16QAM	50	0	20.87	21.06	20.90		
20	16QAM	50	24	20.79	20.86	20.71		
20	16QAM	50	50	20.81	20.84	20.73	22.00	2
20	16QAM	100	0	20.98	20.96	20.90		
Channel				20025	20175	20325		
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	23.32	23.27	23.20	24.00	0
15	QPSK	1	37	22.82	22.92	22.74		
15	QPSK	1	74	22.91	23.06	22.96		
15	QPSK	36	0	21.95	22.01	22.05	23.00	1
15	QPSK	36	20	21.89	21.92	21.76		
15	QPSK	36	39	21.98	21.94	21.78		
15	QPSK	75	0	21.95	22.01	21.83	23.00	1
15	16QAM	1	0	22.58	22.56	22.59		
15	16QAM	1	37	22.00	21.69	21.52		
15	16QAM	1	74	22.35	22.26	22.34	22.00	2
15	16QAM	36	0	20.98	21.05	20.99		
15	16QAM	36	20	20.75	20.97	20.80		
15	16QAM	36	39	20.95	20.91	20.81	22.00	2
15	16QAM	75	0	20.89	21.05	20.77		



Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	23.16	23.09	22.97	24.00	0
10	QPSK	1	25	22.84	22.94	22.89		
10	QPSK	1	49	22.96	22.80	23.15		
10	QPSK	25	0	22.05	21.96	21.86	23.00	1
10	QPSK	25	12	21.95	21.92	21.80		
10	QPSK	25	25	21.93	21.97	21.90		
10	QPSK	50	0	21.89	21.92	21.82	23.00	1
10	16QAM	1	0	22.40	22.27	22.27		
10	16QAM	1	25	21.95	21.99	21.77		
10	16QAM	1	49	22.28	22.11	22.37	22.00	2
10	16QAM	25	0	20.99	21.09	20.83		
10	16QAM	25	12	20.88	20.98	20.76		
10	16QAM	25	25	20.87	21.13	20.85	22.00	2
10	16QAM	50	0	20.94	20.90	20.75		
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	23.09	23.06	23.08	24.00	0
5	QPSK	1	12	23.24	23.18	23.01		
5	QPSK	1	24	22.96	23.00	23.18		
5	QPSK	12	0	21.92	22.00	21.99	23.00	1
5	QPSK	12	7	22.09	21.88	21.78		
5	QPSK	12	13	21.93	21.89	22.05		
5	QPSK	25	0	21.97	22.02	21.92	23.00	1
5	16QAM	1	0	22.71	22.34	22.34		
5	16QAM	1	12	21.79	21.65	21.98		
5	16QAM	1	24	22.13	22.32	22.27	22.00	2
5	16QAM	12	0	20.97	20.95	20.82		
5	16QAM	12	7	20.78	20.82	20.79		
5	16QAM	12	13	20.89	20.92	20.99	22.00	2
5	16QAM	25	0	20.84	20.82	20.74		



Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	23.04	22.86	23.18	24.00	0
3	QPSK	1	8	22.95	22.92	22.80		
3	QPSK	1	14	22.95	22.90	23.04		
3	QPSK	8	0	22.03	21.99	21.81	23.00	1
3	QPSK	8	4	21.97	22.01	21.86		
3	QPSK	8	7	21.99	22.02	21.90		
3	QPSK	15	0	21.96	22.02	21.87	23.00	1
3	16QAM	1	0	22.65	22.47	22.41		
3	16QAM	1	8	22.04	21.72	22.19		
3	16QAM	1	14	22.21	22.33	22.42	22.00	2
3	16QAM	8	0	20.78	20.90	20.79		
3	16QAM	8	4	20.88	20.92	20.94		
3	16QAM	8	7	20.84	20.93	20.82	22.00	2
3	16QAM	15	0	21.12	20.70	20.69		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	22.88	22.92	22.80	24.00	0
1.4	QPSK	1	3	22.89	22.88	22.91		
1.4	QPSK	1	5	22.89	22.81	22.84		
1.4	QPSK	3	0	22.91	22.98	22.86		
1.4	QPSK	3	1	22.95	23.10	22.95		
1.4	QPSK	3	3	22.93	23.08	22.94	23.00	1
1.4	QPSK	6	0	21.89	22.01	21.94		
1.4	16QAM	1	0	22.09	21.94	21.90	23.00	1
1.4	16QAM	1	3	22.00	22.02	22.03		
1.4	16QAM	1	5	22.09	21.49	22.03		
1.4	16QAM	3	0	21.69	21.80	22.06		
1.4	16QAM	3	1	21.72	22.11	22.09		
1.4	16QAM	3	3	22.21	21.97	21.92		
1.4	16QAM	6	0	20.80	20.75	20.85	22.00	2



<LTE Band 12>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23060	23095	23130		
Frequency (MHz)				704	707.5	711		
10	QPSK	1	0	23.80	23.86	24.04	24.50	0
10	QPSK	1	25	23.99	24.06	24.10		
10	QPSK	1	49	23.86	23.78	24.08		
10	QPSK	25	0	22.71	22.79	22.96	23.50	1
10	QPSK	25	12	22.85	22.83	22.97		
10	QPSK	25	25	22.86	22.81	22.96		
10	QPSK	50	0	22.84	22.89	22.98	23.50	1
10	16QAM	1	0	23.02	23.10	23.31		
10	16QAM	1	25	22.98	23.08	23.39		
10	16QAM	1	49	23.21	23.08	23.38	22.50	2
10	16QAM	25	0	21.80	21.79	22.16		
10	16QAM	25	12	21.96	21.86	22.05		
10	16QAM	25	25	21.96	21.84	22.19	22.50	2
10	16QAM	25	25	21.96	21.84	22.19		
10	16QAM	50	0	21.94	21.93	22.02		
Channel				23035	23095	23155		
Frequency (MHz)				701.5	707.5	713.5		
5	QPSK	1	0	23.79	23.87	23.75	24.50	0
5	QPSK	1	12	24.10	24.13	24.01		
5	QPSK	1	24	23.83	23.86	24.02		
5	QPSK	12	0	22.71	22.91	22.96	23.50	1
5	QPSK	12	7	22.78	22.96	22.92		
5	QPSK	12	13	22.91	22.88	22.73		
5	QPSK	25	0	22.83	22.77	22.93	23.50	1
5	16QAM	1	0	23.01	23.24	23.23		
5	16QAM	1	12	23.12	23.33	23.29		
5	16QAM	1	24	23.21	23.05	23.28	23.50	1
5	16QAM	12	0	21.75	21.94	22.01		
5	16QAM	12	7	21.75	22.08	22.01		
5	16QAM	12	13	21.95	21.86	22.07	22.50	2
5	16QAM	12	13	21.95	21.86	22.07		
5	16QAM	25	0	22.00	22.00	22.08		



Channel				23025	23095	23165	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				700.5	707.5	714.5		
3	QPSK	1	0	23.89	24.04	23.91	24.50	0
3	QPSK	1	8	23.82	23.82	23.92		
3	QPSK	1	14	23.81	23.82	23.95		
3	QPSK	8	0	22.88	23.00	22.91	23.50	1
3	QPSK	8	4	22.89	22.98	22.93		
3	QPSK	8	7	22.93	23.01	22.84		
3	QPSK	15	0	22.86	23.05	22.91	23.50	1
3	16QAM	1	0	23.08	23.21	23.19		
3	16QAM	1	8	23.15	23.24	23.16		
3	16QAM	1	14	22.99	23.18	23.16	22.50	2
3	16QAM	8	0	21.91	21.98	22.02		
3	16QAM	8	4	22.15	22.15	22.09		
3	16QAM	8	7	22.18	22.08	22.00	22.50	2
3	16QAM	15	0	22.10	21.91	22.03		
Channel				23017	23095	23173	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				699.7	707.5	715.3		
1.4	QPSK	1	0	23.84	23.88	23.86	24.50	0
1.4	QPSK	1	3	23.72	23.98	23.85		
1.4	QPSK	1	5	23.69	23.78	23.81		
1.4	QPSK	3	0	23.71	23.92	23.99		
1.4	QPSK	3	1	23.78	24.03	24.05		
1.4	QPSK	3	3	23.85	24.02	24.02	23.50	1
1.4	QPSK	6	0	22.80	22.99	22.94		
1.4	16QAM	1	0	23.04	23.40	23.19	23.50	1
1.4	16QAM	1	3	23.03	23.42	23.19		
1.4	16QAM	1	5	22.92	23.14	23.08		
1.4	16QAM	3	0	23.05	23.15	23.11		
1.4	16QAM	3	1	23.08	23.25	23.15		
1.4	16QAM	3	3	23.00	23.26	23.23	22.50	2
1.4	16QAM	6	0	21.82	21.98	21.78		



### 13. Bluetooth Exclusions Applied

Mode Band	Average power(dBm)	
	Bluetooth v3.0+EDR	Bluetooth v4.0 LE
2.4GHz Bluetooth	9.5	9.5

**Note:**

- Per KDB 447498 D01v06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:  

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$$
for 1-g SAR and ≤ 7.5 for 10-g extremity SAR
  - f(GHz) is the RF channel transmit frequency in GHz
  - Power and distance are rounded to the nearest mW and mm before calculation
  - The result is rounded to one decimal place for comparison


Bluetooth Max Power (dBm)	Separation Distance (mm)	Frequency (GHz)	exclusion thresholds
9.5	15	2.48	0.9

**Note:**

Per KDB 447498 D01v06, the test exclusion threshold is 0.9 which is ≤ 3, SAR testing is not required.

### 14. Antenna Location


<Flip-Open Mode>

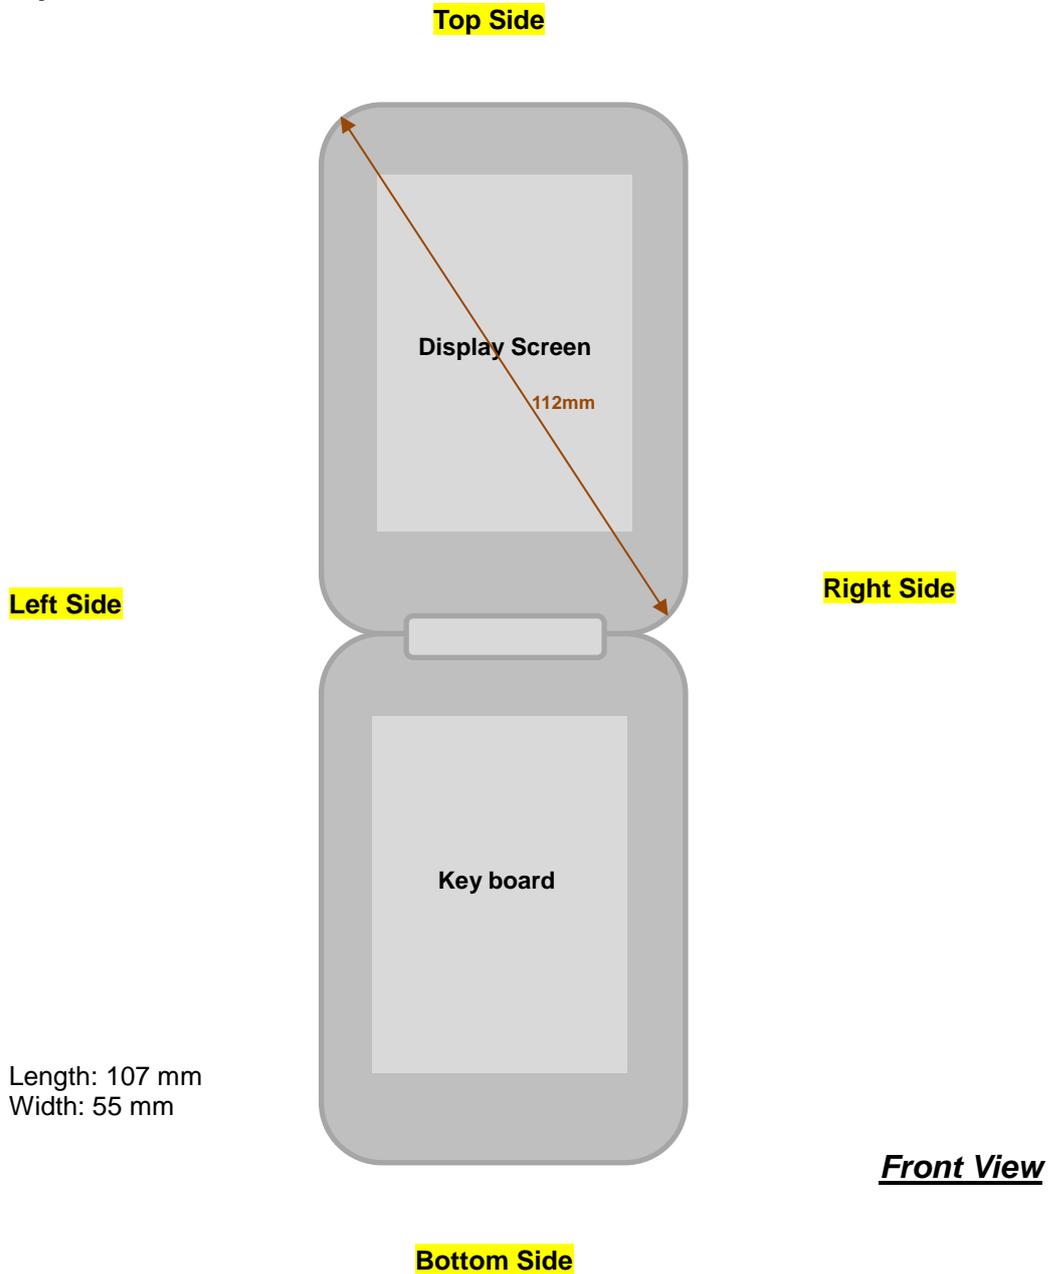

<Flip-Close Mode>

Top Side

Right Side

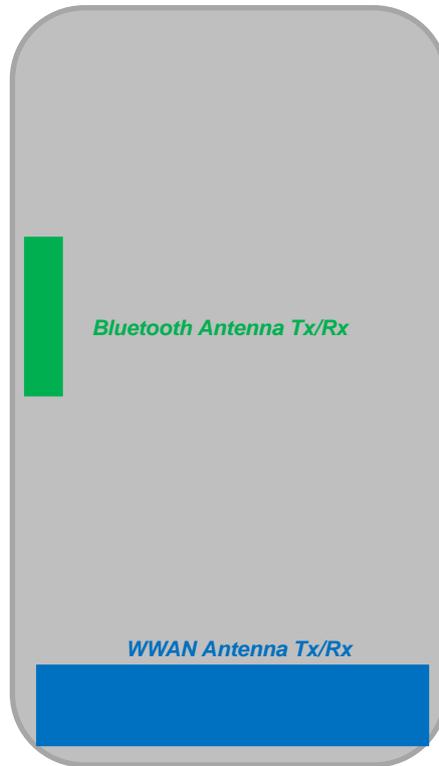

Left Side

Back View

Bottom Side



## **15. SAR Test Results**

### **General Note:**

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
  - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
  - b. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)\*Tune-up Scaling Factor
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz
  - $\leq 0.6$  W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
  - $\leq 0.4$  W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\geq 200$  MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8$ W/kg.
4. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is  $\leq 1.2$  W/kg, SAR testing with a headset connected to the handset is not required.

### **GSM Note:**

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (2Tx slots) for GSM850 and GPRS (3Tx slots) for GSM1900 are considered as the primary mode.
2. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq 1/4$  dB higher than the primary mode, SAR measurement is not required for the secondary mode.

### **UMTS Note:**

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. If the maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is  $\leq 1/4$  dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.



**LTE Note:**

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B12 / B4 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.



15.1 Head SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Flip Configuration	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
01	GSM850	GPRS (2 Tx slots)	Right Cheek	Open	0mm	128	824.2	30.70	31.00	1.072	0.02	0.605	0.648
	GSM850	GPRS (2 Tx slots)	Right Tilted	Open	0mm	128	824.2	30.70	31.00	1.072	-0.01	0.245	0.263
	GSM850	GPRS (2 Tx slots)	Left Cheek	Open	0mm	128	824.2	30.70	31.00	1.072	0.03	0.585	0.627
	GSM850	GPRS (2 Tx slots)	Left Tilted	Open	0mm	128	824.2	30.70	31.00	1.072	-0.03	0.246	0.264
	GSM1900	GPRS (3 Tx slots)	Right Cheek	Open	0mm	810	1909.8	26.73	27.00	1.064	0.02	0.231	0.246
	GSM1900	GPRS (3 Tx slots)	Right Tilted	Open	0mm	810	1909.8	26.73	27.00	1.064	-0.13	0.095	0.101
	GSM1900	GPRS (3 Tx slots)	Left Cheek	Open	0mm	810	1909.8	26.73	27.00	1.064	0	n.a	n.a
	GSM1900	GPRS (3 Tx slots)	Left Tilted	Open	0mm	810	1909.8	26.73	27.00	1.064	0.14	0.100	0.106
02	GSM1900	GPRS (3 Tx slots)	SAR at Mouth Area	Open	10mm	810	1909.8	26.73	27.00	1.064	-0.01	0.506	0.538

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Flip Configuration	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
03	WCDMA Band V	RMC 12.2Kbps	Right Cheek	Open	0mm	4182	836.4	23.41	24.00	1.146	0.06	0.530	0.607
	WCDMA Band V	RMC 12.2Kbps	Right Tilted	Open	0mm	4182	836.4	23.41	24.00	1.146	0.02	0.218	0.250
	WCDMA Band V	RMC 12.2Kbps	Left Cheek	Open	0mm	4182	836.4	23.41	24.00	1.146	0.03	0.512	0.587
	WCDMA Band V	RMC 12.2Kbps	Left Tilted	Open	0mm	4182	836.4	23.41	24.00	1.146	-0.07	0.224	0.257
	WCDMA Band IV	RMC 12.2Kbps	Right Cheek	Open	0mm	1413	1732.6	23.98	24.00	1.005	0.03	0.317	0.318
	WCDMA Band IV	RMC 12.2Kbps	Right Tilted	Open	0mm	1413	1732.6	23.98	24.00	1.005	-0.06	0.250	0.251
04	WCDMA Band IV	RMC 12.2Kbps	Left Cheek	Open	0mm	1413	1732.6	23.98	24.00	1.005	0.14	0.336	0.338
	WCDMA Band IV	RMC 12.2Kbps	Left Tilted	Open	0mm	1413	1732.6	23.98	24.00	1.005	-0.08	0.294	0.295
	WCDMA Band II	RMC 12.2Kbps	Right Cheek	Open	0mm	9538	1907.6	23.86	24.00	1.033	-0.11	0.318	0.328
	WCDMA Band II	RMC 12.2Kbps	Right Tilted	Open	0mm	9538	1907.6	23.86	24.00	1.033	-0.13	0.129	0.133
	WCDMA Band II	RMC 12.2Kbps	Left Cheek	Open	0mm	9538	1907.6	23.86	24.00	1.033	0	n.a	n.a
	WCDMA Band II	RMC 12.2Kbps	Left Tilted	Open	0mm	9538	1907.6	23.86	24.00	1.033	-0.07	0.132	0.136
05	WCDMA Band II	RMC 12.2Kbps	SAR at Mouth Area	Open	10mm	9538	1907.6	23.86	24.00	1.033	-0.04	0.701	0.724



<LTE SAR>

Plot No.	Band	BW (MHz)	RB Size	RB offset	Test Position	Flip Configuration	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
06	LTE Band 12	10M	1RB	25offset	Right Cheek	Open	0mm	23095	707.5	24.06	24.50	1.107	-0.13	0.074	0.082
	LTE Band 12	10M	1RB	25offset	Right Tilted	Open	0mm	23095	707.5	24.06	24.50	1.107	0.11	0.070	0.077
	LTE Band 12	10M	1RB	25offset	Left Cheek	Open	0mm	23095	707.5	24.06	24.50	1.107	0.06	0.216	0.239
	LTE Band 12	10M	1RB	25offset	Left Tilted	Open	0mm	23095	707.5	24.06	24.50	1.107	0.09	0.068	0.075
	LTE Band 12	10M	25RB	12offset	Right Cheek	Open	0mm	23095	707.5	22.83	23.50	1.167	0.1	0.067	0.078
	LTE Band 12	10M	25RB	12offset	Right Tilted	Open	0mm	23095	707.5	22.83	23.50	1.167	-0.02	0.020	0.023
	LTE Band 12	10M	25RB	12offset	Left Cheek	Open	0mm	23095	707.5	22.83	23.50	1.167	0.08	0.205	0.239
	LTE Band 12	10M	25RB	12offset	Left Tilted	Open	0mm	23095	707.5	22.83	23.50	1.167	0.14	0.050	0.058
07	LTE Band 4	20M	1RB	0offset	Right Cheek	Open	0mm	20175	1732.5	23.36	24.00	1.159	-0.06	0.268	0.311
	LTE Band 4	20M	1RB	0offset	Right Tilted	Open	0mm	20175	1732.5	23.36	24.00	1.159	0.1	0.174	0.202
	LTE Band 4	20M	1RB	0offset	Left Cheek	Open	0mm	20175	1732.5	23.36	24.00	1.159	0.03	0.228	0.264
	LTE Band 4	20M	1RB	0offset	Left Tilted	Open	0mm	20175	1732.5	23.36	24.00	1.159	0.17	0.183	0.212
	LTE Band 4	20M	50RB	0offset	Right Cheek	Open	0mm	20175	1732.5	22.02	23.00	1.253	0.02	0.193	0.242
	LTE Band 4	20M	50RB	0offset	Right Tilted	Open	0mm	20175	1732.5	22.02	23.00	1.253	-0.06	0.128	0.160
	LTE Band 4	20M	50RB	0offset	Left Cheek	Open	0mm	20175	1732.5	22.02	23.00	1.253	0.05	0.165	0.207
	LTE Band 4	20M	50RB	0offset	Left Tilted	Open	0mm	20175	1732.5	22.02	23.00	1.253	-0.19	0.134	0.168



Plot No.	Band	BW (MHz)	RB Size	RB offset	Test Position	Flip Configuration	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2	20M	1RB	49offset	Right Cheek	Open	0mm	18900	1880	22.96	23.50	1.132	0.07	0.258	0.292
	LTE Band 2	20M	1RB	49offset	Right Tilted	Open	0mm	18900	1880	22.96	23.50	1.132	-0.02	0.126	0.143
	LTE Band 2	20M	1RB	49offset	Left Cheek	Open	0mm	18900	1880	22.96	23.50	1.132	0	n.a	n.a
	LTE Band 2	20M	1RB	49offset	Left Tilted	Open	0mm	18900	1880	22.96	23.50	1.132	-0.05	0.137	0.155
08	LTE Band 2	20M	1RB	49offset	SAR at Mouth Area	Open	10mm	18900	1880	22.96	23.50	1.132	0.06	0.662	<b>0.750</b>
	LTE Band 2	20M	50RB	0offset	Right Cheek	Open	0mm	18900	1880	21.80	22.50	1.175	-0.04	0.192	0.226
	LTE Band 2	20M	50RB	0offset	Right Tilted	Open	0mm	18900	1880	21.80	22.50	1.175	-0.02	0.096	0.113
	LTE Band 2	20M	50RB	0offset	Left Cheek	Open	0mm	18900	1880	21.80	22.50	1.175	0	n.a	n.a
	LTE Band 2	20M	50RB	0offset	Left Tilted	Open	0mm	18900	1880	21.80	22.50	1.175	-0.04	0.108	0.127
	LTE Band 2	20M	50RB	0offset	SAR at Mouth Area	Open	10mm	18900	1880	21.80	22.50	1.175	0.05	0.519	0.610

**Note:**

1. "n.a" stands for there is no full 1g SAR cube for antenna is located near the bottom and the measured head SAR distribution was clipped.
2. The device antenna is located near the bottom and the measured head SAR distribution was clipped. According to KDB 648474 D04 v01r03 section 10, EUT was positioned under the flat phantom with a separation distance of 4 mm between the ear reference point (ERP) and the outer surface of the flat phantom shell, the low bottom of the phone was lowered from the phantom to establish the same separation distance at the peak SAR location identified by the truncated partial SAR distribution measured with the SAM phantom. The distance from the peak SAR location to the phone was determined by the straight line passing perpendicularly through the phantom surface. The procedure to determine the separation for EUT positioning under the flat phantom is illustrated in the SAR test setup photo exhibit.



**15.2 Body Worn Accessory SAR**

**<GSM SAR>**

Plot No.	Band	Mode	Test Position	Flip Configuration	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS (2 Tx slots)	Front	Close	15mm	128	824.2	30.70	31.00	1.072	-0.18	0.266	0.285
09	GSM850	GPRS (2 Tx slots)	Back	Close	15mm	128	824.2	30.70	31.00	1.072	0.03	0.777	<b>0.833</b>
	GSM850	GPRS (2 Tx slots)	Back	Close	15mm	189	836.4	30.67	31.00	1.079	0.06	0.581	0.627
	GSM850	GPRS (2 Tx slots)	Back	Close	15mm	251	848.8	30.45	31.00	1.135	-0.03	0.450	0.511
	GSM1900	GPRS (3 Tx slots)	Front	Close	15mm	810	1909.8	26.73	27.00	1.064	-0.07	0.216	0.230
10	GSM1900	GPRS (3 Tx slots)	Back	Close	15mm	810	1909.8	26.73	27.00	1.064	-0.06	0.453	<b>0.482</b>

**<WCDMA SAR>**

Plot No.	Band	Mode	Test Position	Flip Configuration	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA Band V	RMC 12.2Kbps	Front	Close	15mm	4182	836.4	23.41	24.00	1.146	-0.12	0.150	0.172
11	WCDMA Band V	RMC 12.2Kbps	Back	Close	15mm	4182	836.4	23.41	24.00	1.146	0.06	0.497	<b>0.569</b>
	WCDMA Band IV	RMC 12.2Kbps	Front	Close	15mm	1413	1732.6	23.98	24.00	1.005	-0.02	0.369	0.371
12	WCDMA Band IV	RMC 12.2Kbps	Back	Close	15mm	1413	1732.6	23.98	24.00	1.005	0.09	0.557	<b>0.560</b>
	WCDMA Band II	RMC 12.2Kbps	Front	Close	15mm	9538	1907.6	23.86	24.00	1.033	-0.09	0.298	0.308
13	WCDMA Band II	RMC 12.2Kbps	Back	Close	15mm	9538	1907.6	23.86	24.00	1.033	-0.1	0.551	<b>0.569</b>



<LTE SAR>

Plot No.	Band	BW (MHz)	RB Size	RB offset	Test Position	Flip Configuration	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
14	LTE Band 12	10M	1RB	25offset	Front	Close	15mm	23095	707.5	24.06	24.50	1.107	-0.05	0.051	0.056
	LTE Band 12	10M	1RB	25offset	Back	Close	15mm	23095	707.5	24.06	24.50	1.107	0.19	0.149	<b>0.165</b>
	LTE Band 12	10M	25RB	12offset	Front	Close	15mm	23095	707.5	22.83	23.50	1.167	0.05	0.048	0.056
	LTE Band 12	10M	25RB	12offset	Back	Close	15mm	23095	707.5	22.83	23.50	1.167	0.03	0.107	0.125
15	LTE Band 4	20M	1RB	0offset	Front	Close	15mm	20175	1732.5	23.36	24.00	1.159	-0.04	0.315	0.365
	LTE Band 4	20M	1RB	0offset	Back	Close	15mm	20175	1732.5	23.36	24.00	1.159	0.07	0.544	<b>0.630</b>
	LTE Band 4	20M	50RB	0offset	Front	Close	15mm	20175	1732.5	22.02	23.00	1.253	-0.08	0.245	0.307
	LTE Band 4	20M	50RB	0offset	Back	Close	15mm	20175	1732.5	22.02	23.00	1.253	-0.04	0.416	0.521
16	LTE Band 2	20M	1RB	49offset	Front	Close	15mm	18900	1880	22.96	23.50	1.132	-0.14	0.258	0.292
	LTE Band 2	20M	1RB	49offset	Back	Close	15mm	18900	1880	22.96	23.50	1.132	-0.02	0.510	<b>0.578</b>
	LTE Band 2	20M	50RB	0offset	Front	Close	15mm	18900	1880	21.80	22.50	1.175	-0.15	0.174	0.204
	LTE Band 2	20M	50RB	0offset	Back	Close	15mm	18900	1880	21.80	22.50	1.175	0.12	0.375	0.441

**16. Simultaneous Transmission Analysis**

NO.	Simultaneous Transmission Configurations	Mobile Phone		Note
		Head	Body	
1.	GSM (Voice) + Bluetooth		Yes	
2.	WCDMA (Voice)+ Bluetooth		Yes	
3.	LTE (Voice) + Bluetooth		Yes	
4.	GPRS/EDGE(Data) + Bluetooth		Yes	WWAN VoIP
5.	WCDMA(Data) + Bluetooth		Yes	WWAN VoIP
6.	LTE(Data) + Bluetooth		Yes	WWAN VoIP

**General Note:**

1. This device supported VoIP in GPRS, EGPRS, WCDMA and LTE (e.g. 3rd party VoIP).
2. The Scaled SAR summation is calculated based on the same configuration and test position.
3. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
  - i) Scalar SAR summation < 1.6W/kg.
  - ii)  $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$ , and the peak separation distance is determined from the square root of  $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$ , where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
  - iii) If  $SPLSR \leq 0.04$ , simultaneously transmission SAR measurement is not necessary.
  - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.
4. For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01v06 based on the formula below.
  - i)  $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x] \text{ W/kg}$  for test separation distances  $\leq 50 \text{ mm}$ ; where  $x = 7.5$  for 1-g SAR, and  $x = 18.75$  for 10-g SAR.
  - ii) When the minimum separation distance is < 5mm, the distance is used 5mm to determine SAR test exclusion.
  - iii) 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

Bluetooth Max Power	Exposure Position	Body worn
	Test separation	15 mm
9.5 dBm	Estimated SAR (W/kg)	0.126 W/kg

**16.1 Body-Worn Accessory Exposure Conditions**

WWAN Band		Exposure Position	1	2	1+2 Summed 1g SAR (W/kg)
			WWAN	Bluetooth	
			1g SAR (W/kg)	Estimated 1g SAR (W/kg)	
GSM	GSM850	Front	0.285	0.126	0.41
		Back	0.833	0.126	<b>0.96</b>
	GSM1900	Front	0.230	0.126	0.36
		Back	0.482	0.126	0.61
WCDMA	Band V	Front	0.172	0.126	0.30
		Back	0.569	0.126	0.70
	Band IV	Front	0.371	0.126	0.50
		Back	0.560	0.126	0.69
	Band II	Front	0.308	0.126	0.43
		Back	0.569	0.126	0.70
LTE	Band 12	Front	0.056	0.126	0.18
		Back	0.165	0.126	0.29
	Band 4	Front	0.365	0.126	0.49
		Back	0.630	0.126	0.76
	Band 2	Front	0.292	0.126	0.42
		Back	0.578	0.126	0.70

Test Engineer : Kat Yin

## **17. Uncertainty Assessment**

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture’s specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

<b>Uncertainty Distributions</b>	<b>Normal</b>	<b>Rectangular</b>	<b>Triangular</b>	<b>U-Shape</b>
Multi-plying Factor <sup>(a)</sup>	1/k <sup>(b)</sup>	1/√3	1/√6	1/√2

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b)  $\kappa$  is the coverage factor

**Table 17.1. Standard Uncertainty for Assumed Distribution**

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual “root-sum-squares” (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
<b>Measurement System</b>							
Probe Calibration	6.0	N	1	1	1	6.0	6.0
Axial Isotropy	4.7	R	1.732	0.7	0.7	1.9	1.9
Hemispherical Isotropy	9.6	R	1.732	0.7	0.7	3.9	3.9
Boundary Effects	1.0	R	1.732	1	1	0.6	0.6
Linearity	4.7	R	1.732	1	1	2.7	2.7
System Detection Limits	1.0	R	1.732	1	1	0.6	0.6
Modulation Response	3.2	R	1.732	1	1	1.8	1.8
Readout Electronics	0.3	N	1	1	1	0.3	0.3
Response Time	0.0	R	1.732	1	1	0.0	0.0
Integration Time	2.6	R	1.732	1	1	1.5	1.5
RF Ambient Noise	3.0	R	1.732	1	1	1.7	1.7
RF Ambient Reflections	3.0	R	1.732	1	1	1.7	1.7
Probe Positioner	0.4	R	1.732	1	1	0.2	0.2
Probe Positioning	2.9	R	1.732	1	1	1.7	1.7
Max. SAR Eval.	2.0	R	1.732	1	1	1.2	1.2
<b>Test Sample Related</b>							
Device Positioning	3.0	N	1	1	1	3.0	3.0
Device Holder	3.6	N	1	1	1	3.6	3.6
Power Drift	5.0	R	1.732	1	1	2.9	2.9
Power Scaling	0.0	R	1.732	1	1	0.0	0.0
<b>Phantom and Setup</b>							
Phantom Uncertainty	6.1	R	1.732	1	1	3.5	3.5
SAR correction	0.0	R	1.732	1	0.84	0.0	0.0
Liquid Conductivity Repeatability	0.2	N	1	0.78	0.71	0.1	0.1
Liquid Conductivity (target)	5.0	R	1.732	0.78	0.71	2.3	2.0
Liquid Conductivity (mea.)	2.5	R	1.732	0.78	0.71	1.1	1.0
Temp. unc. - Conductivity	3.4	R	1.732	0.78	0.71	1.5	1.4
Liquid Permittivity Repeatability	0.15	N	1	0.23	0.26	0.0	0.0
Liquid Permittivity (target)	5.0	R	1.732	0.23	0.26	0.7	0.8
Liquid Permittivity (mea.)	2.5	R	1.732	0.23	0.26	0.3	0.4
Temp. unc. - Permittivity	0.83	R	1.732	0.23	0.26	0.1	0.1
<b>Combined Std. Uncertainty</b>						<b>11.4%</b>	<b>11.4%</b>
<b>Coverage Factor for 95 %</b>						<b>K=2</b>	<b>K=2</b>
<b>Expanded STD Uncertainty</b>						<b>22.9%</b>	<b>22.7%</b>

**Table 17.2. Uncertainty Budget for frequency range 300 MHz to 3 GHz**

## **18. References**

- [1] FCC 47 CFR Part 2 “Frequency Allocations and Radio Treaty Matters; General Rules and Regulations”
- [2] ANSI/IEEE Std. C95.1-1992, “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz”, September 1992
- [3] IEEE Std. 1528-2013, “IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”, Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 447498 D01 v06, “Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies”, Oct 2015
- [6] FCC KDB 648474 D04 v01r03, “SAR Evaluation Considerations for Wireless Handsets”, Oct 2015.
- [7] FCC KDB 941225 D01 v03r01, “3G SAR MEAUREMENT PROCEDURES”, Oct 2015
- [8] FCC KDB 941225 D05 v02r05, “SAR Evaluation Considerations for LTE Devices”, Dec 2015
- [9] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [10] FCC KDB 865664 D02 v01r02, “RF Exposure Compliance Reporting and Documentation Considerations” Oct 2015.



## **Appendix A. Plots of System Performance Check**

The plots are shown as follows.

**System Check\_Head\_750MHz\_20160627**

**DUT: D750V3-SN:1087**

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: HSL\_750\_2016/06/27 Medium parameters used:  $f = 750 \text{ MHz}$ ;  $\sigma = 0.891 \text{ S/m}$ ;  $\epsilon_r = 42.417$ ;

$\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $23.4 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.5 \text{ }^\circ\text{C}$

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3935; ConvF(10.72, 10.72, 10.72); Calibrated: 2015/11/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2015/8/27
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1753
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) =  $2.56 \text{ W/kg}$


**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $54.51 \text{ V/m}$ ; Power Drift =  $0.04 \text{ dB}$

Peak SAR (extrapolated) =  $3.03 \text{ W/kg}$

**SAR(1 g) =  $2.03 \text{ W/kg}$ ; SAR(10 g) =  $1.33 \text{ W/kg}$**

Maximum value of SAR (measured) =  $2.58 \text{ W/kg}$

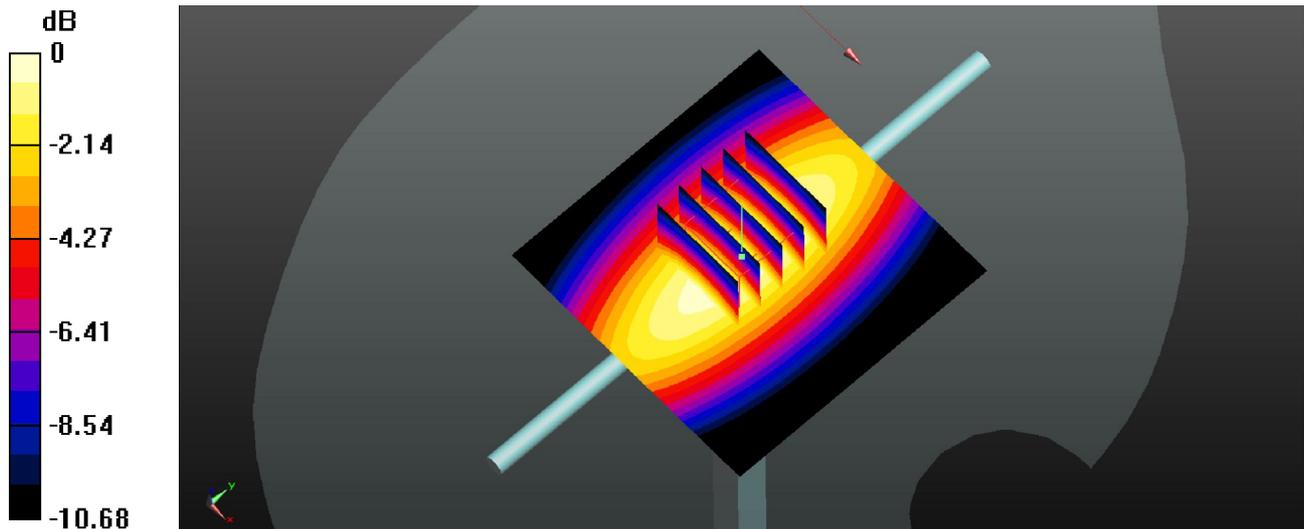

0 dB =  $2.58 \text{ W/kg}$

### System Check\_Head\_835MHz\_20160701

#### DUT: D835V2-SN:4d151

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL\_835\_2016/07/01 Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.9$  S/m;  $\epsilon_r = 41.959$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.4 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(10.15, 10.15, 10.15); Calibrated: 2015/11/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2015/8/27
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1753
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 3.07 W/kg


**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 56.59 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 3.57 W/kg

**SAR(1 g) = 2.43 W/kg; SAR(10 g) = 1.6 W/kg**

Maximum value of SAR (measured) = 3.06 W/kg

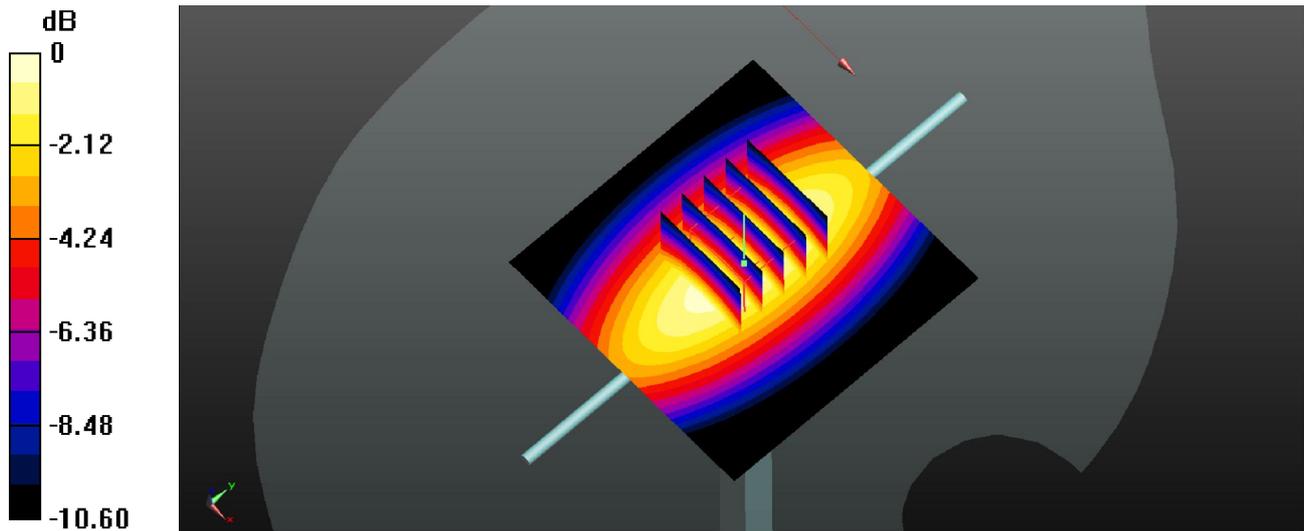

0 dB = 3.06 W/kg

**System Check\_Head\_1750MHz\_20160626**

**DUT: D1750V2-SN:1090**

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: HSL\_1750\_2016/06/26 Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.352$  S/m;  $\epsilon_r = 40.879$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.3 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3935; ConvF(8.69, 8.69, 8.69); Calibrated: 2015/11/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2015/8/27
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1754
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 13.0 W/kg


**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 98.93 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 16.3 W/kg

**SAR(1 g) = 9.02 W/kg; SAR(10 g) = 4.78 W/kg**

Maximum value of SAR (measured) = 12.7 W/kg

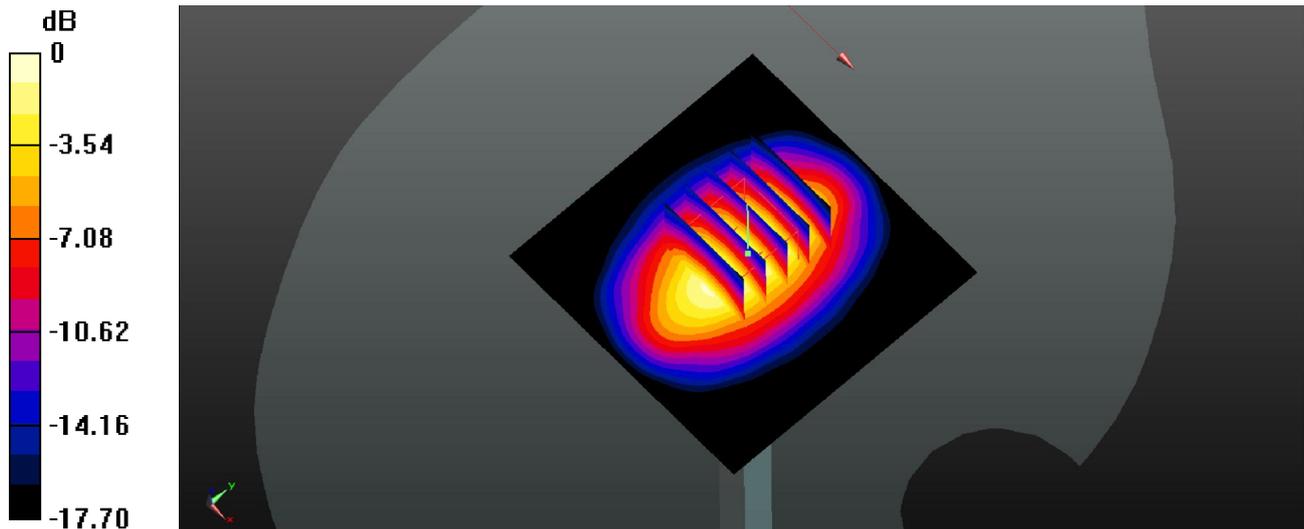

0 dB = 12.7 W/kg

### System Check\_Head\_1900MHz\_20160630

#### DUT: D1900V2-SN:5d170

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL\_1900\_2016/06/30 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.445$  S/m;  $\epsilon_r = 40.117$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.5 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(8.37, 8.37, 8.37); Calibrated: 2015/11/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2015/8/27
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1753
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 13.6 W/kg


**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 85.83 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 16.6 W/kg

**SAR(1 g) = 9.59 W/kg; SAR(10 g) = 5.14 W/kg**

Maximum value of SAR (measured) = 13.3 W/kg

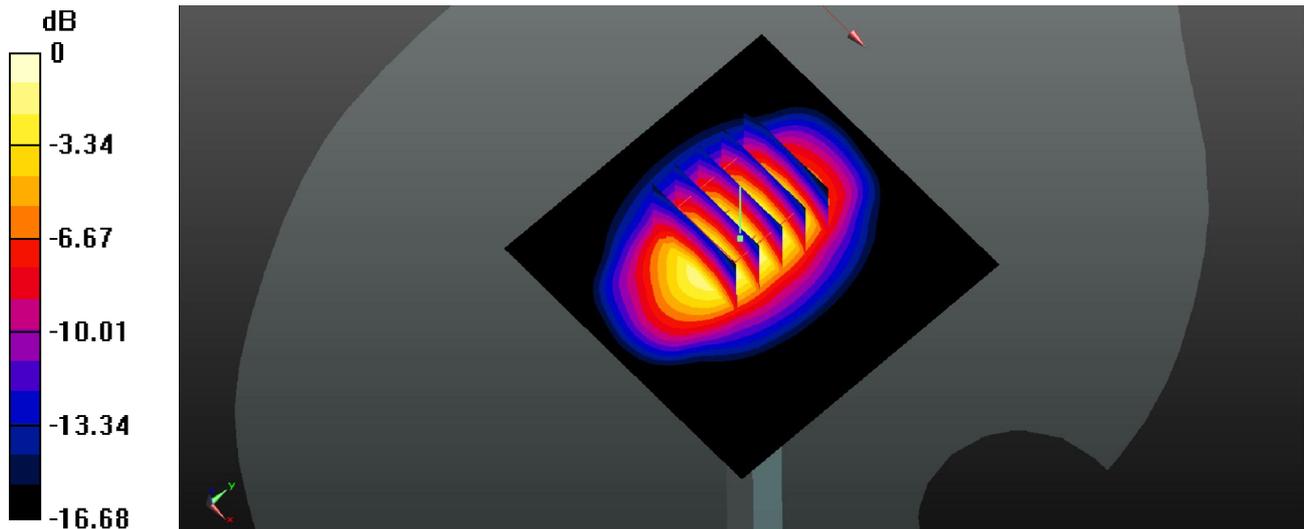

0 dB = 13.3 W/kg

### System Check\_Body\_750MHz\_20160626

#### DUT: D750V3-SN:1087

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: MSL\_750\_2016/06/26 Medium parameters used:  $f = 750 \text{ MHz}$ ;  $\sigma = 0.977 \text{ S/m}$ ;  $\epsilon_r = 53.884$ ;

$\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $23.5 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.5 \text{ }^\circ\text{C}$

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(10.59, 10.59, 10.59); Calibrated: 2015/11/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2015/8/27
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1754
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) =  $2.98 \text{ W/kg}$


**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $50.77 \text{ V/m}$ ; Power Drift =  $0.02 \text{ dB}$

Peak SAR (extrapolated) =  $3.52 \text{ W/kg}$

**SAR(1 g) =  $2.37 \text{ W/kg}$ ; SAR(10 g) =  $1.57 \text{ W/kg}$**

Maximum value of SAR (measured) =  $2.98 \text{ W/kg}$

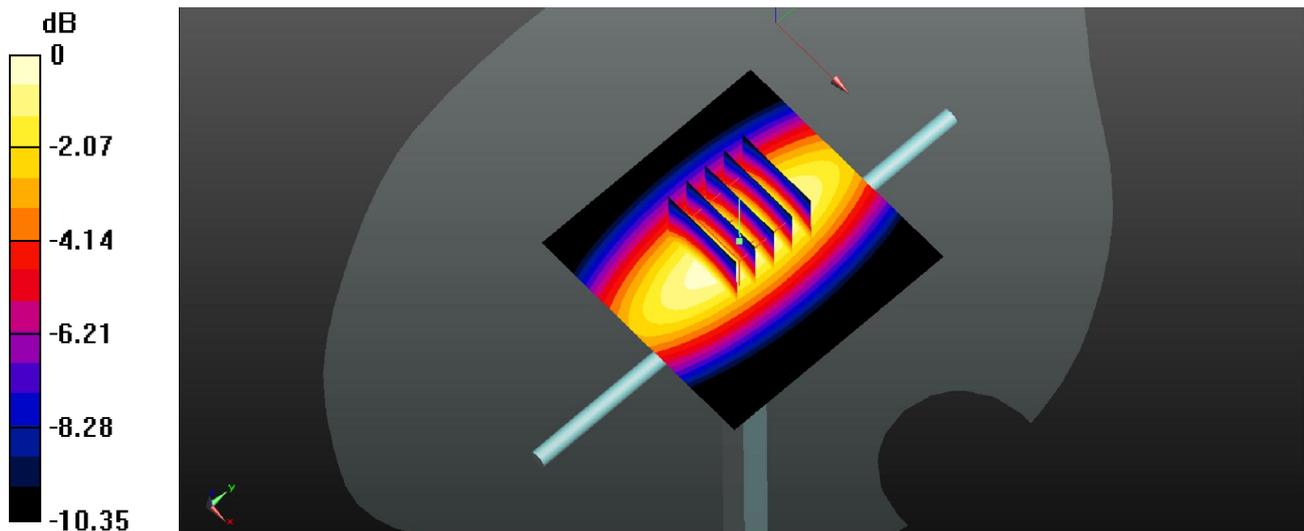

0 dB =  $2.98 \text{ W/kg}$

### System Check\_Body\_835MHz\_20160626

#### DUT: D835V2-SN:4d151

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL\_835\_2016/06/26 Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.994 \text{ S/m}$ ;  $\epsilon_r = 54.412$ ;

$\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $23.5 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.5 \text{ }^\circ\text{C}$

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(10.3, 10.3, 10.3); Calibrated: 2015/11/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2015/8/27
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1754
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) =  $3.16 \text{ W/kg}$


**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $51.63 \text{ V/m}$ ; Power Drift =  $0.05 \text{ dB}$

Peak SAR (extrapolated) =  $3.73 \text{ W/kg}$

**SAR(1 g) =  $2.51 \text{ W/kg}$ ; SAR(10 g) =  $1.64 \text{ W/kg}$**

Maximum value of SAR (measured) =  $3.17 \text{ W/kg}$

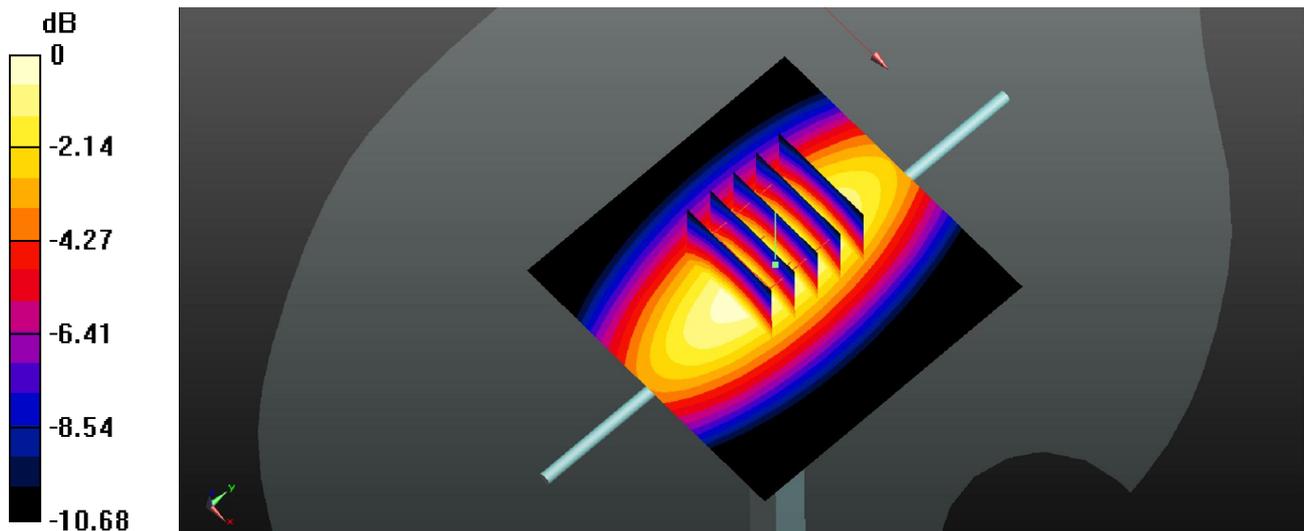

0 dB =  $3.17 \text{ W/kg}$

**System Check\_Body\_1750MHz\_20160626**

**DUT: D1750V2-SN:1090**

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: MSL\_1750\_2016/06/26 Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.517$  S/m;  $\epsilon_r = 53.127$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(8.24, 8.24, 8.24); Calibrated: 2015/11/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2015/8/27
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1753
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 13.9 W/kg


**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 96.20 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 17.3 W/kg

**SAR(1 g) = 9.8 W/kg; SAR(10 g) = 5.18 W/kg**

Maximum value of SAR (measured) = 13.9 W/kg

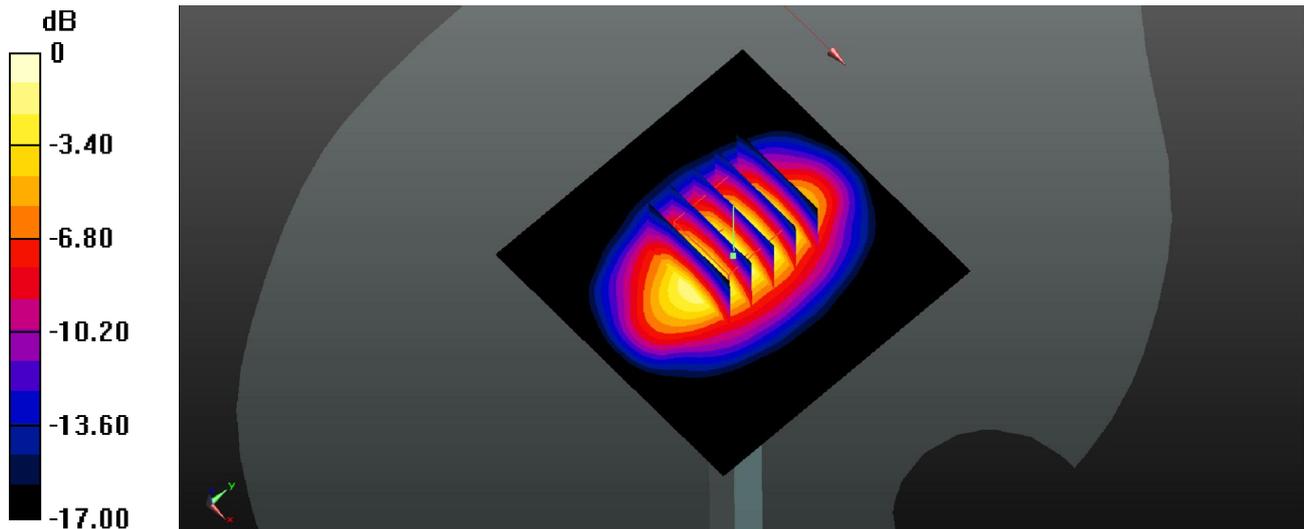

0 dB = 13.9 W/kg

**System Check\_Body\_1900MHz\_20160626**

**DUT: D1900V2-SN:5d170**

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL\_1900\_2016/06/26 Medium parameters used:  $f = 1900 \text{ MHz}$ ;  $\sigma = 1.575 \text{ S/m}$ ;  $\epsilon_r = 52.001$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $23.5 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.6 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(7.99, 7.99, 7.99); Calibrated: 2015/11/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2015/8/27
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1753
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) =  $15.3 \text{ W/kg}$


**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $84.65 \text{ V/m}$ ; Power Drift =  $0.16 \text{ dB}$

Peak SAR (extrapolated) =  $19.8 \text{ W/kg}$

**SAR(1 g) =  $10.5 \text{ W/kg}$ ; SAR(10 g) =  $5.62 \text{ W/kg}$**

Maximum value of SAR (measured) =  $15.6 \text{ W/kg}$

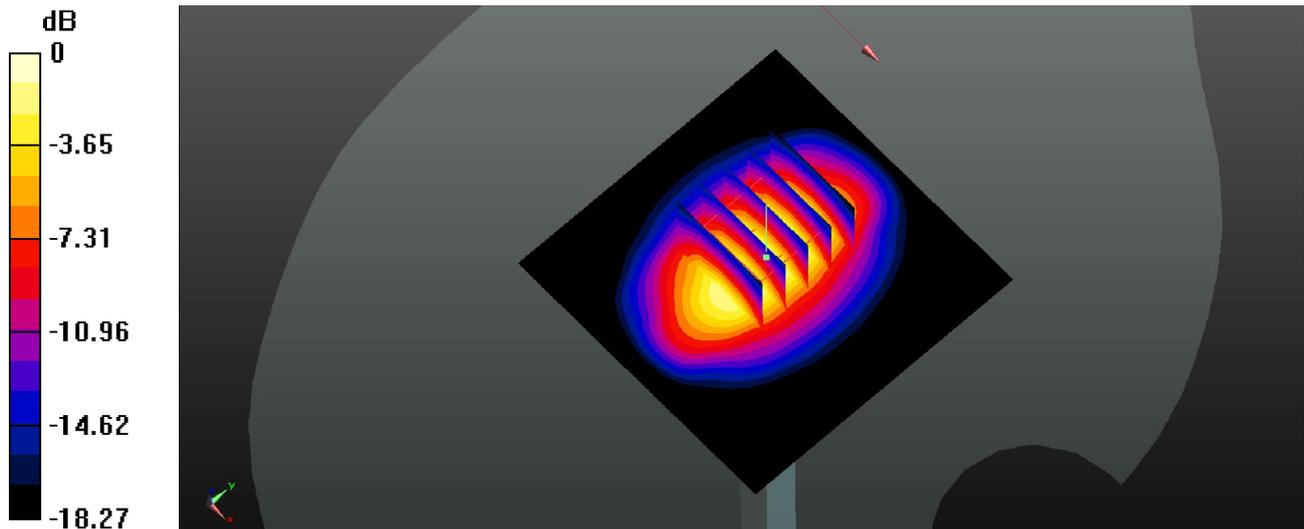

0 dB =  $15.6 \text{ W/kg}$



**Appendix B. Plots of High SAR Measurement**

The plots are shown as follows.

### 01\_GSM850\_GPRS (2 Tx slots)\_Right Cheek\_0mm\_Ch128

Communication System: UID 0, GPRS (GMSK 2 Tx slot) (0); Frequency: 824.2 MHz; Duty Cycle: 1:4.15

Medium: HSL\_850\_2016/07/01 Medium parameters used:  $f = 824.2$  MHz;  $\sigma = 0.89$  S/m;  $\epsilon_r = 42.092$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(10.15, 10.15, 10.15); Calibrated: 2015/11/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2015/8/27
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1753
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch128/Area Scan (51x151x1):** Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.823 W/kg


**Ch128/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.387 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.920 W/kg

**SAR(1 g) = 0.605 W/kg; SAR(10 g) = 0.407 W/kg**

Maximum value of SAR (measured) = 0.810 W/kg

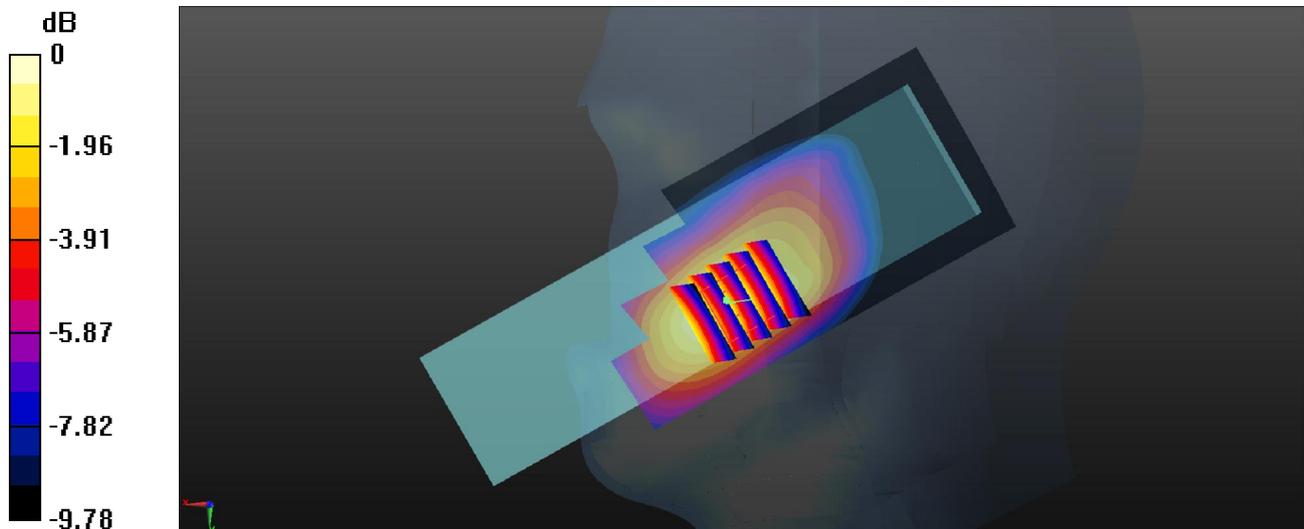

0 dB = 0.810 W/kg

**02\_GSM1900\_GPRS (3 Tx slots)\_Mouth Area\_10mm\_Ch810**

Communication System: UID 0, GPRS (GMSK 3 Tx slot) (0); Frequency: 1909.8 MHz; Duty Cycle: 1:2.77

Medium: HSL\_1900\_2016/06/30 Medium parameters used:  $f = 1909.8 \text{ MHz}$ ;  $\sigma = 1.455 \text{ S/m}$ ;  $\epsilon_r = 40.084$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $23.4 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.5 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(8.37, 8.37, 8.37); Calibrated: 2015/11/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2015/8/27
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1753
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch810/Area Scan (51x151x1):** Interpolated grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) =  $0.667 \text{ W/kg}$


**Ch810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $15.01 \text{ V/m}$ ; Power Drift =  $-0.01 \text{ dB}$

Peak SAR (extrapolated) =  $0.915 \text{ W/kg}$

**SAR(1 g) =  $0.506 \text{ W/kg}$ ; SAR(10 g) =  $0.286 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.750 \text{ W/kg}$

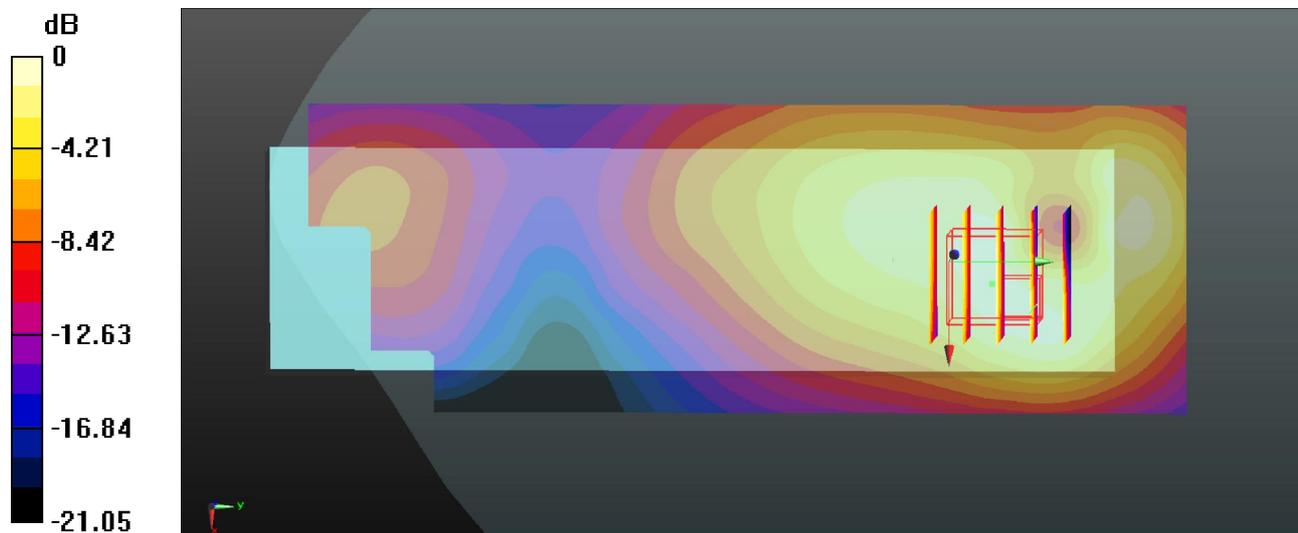

0 dB =  $0.750 \text{ W/kg}$

### 03\_WCDMA Band V\_RMC 12.2Kbps\_Right Cheek\_0mm\_Ch4182


Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1  
Medium: HSL\_850\_2016/07/01 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.901$  S/m;  $\epsilon_r = 41.942$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.4 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(10.15, 10.15, 10.15); Calibrated: 2015/11/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2015/8/27
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1753
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch4182/Area Scan (51x151x1):** Interpolated grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 0.707 W/kg

**Ch4182/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 5.969 V/m; Power Drift = 0.06 dB  
Peak SAR (extrapolated) = 0.803 W/kg  
**SAR(1 g) = 0.530 W/kg; SAR(10 g) = 0.358 W/kg**  
Maximum value of SAR (measured) = 0.705 W/kg

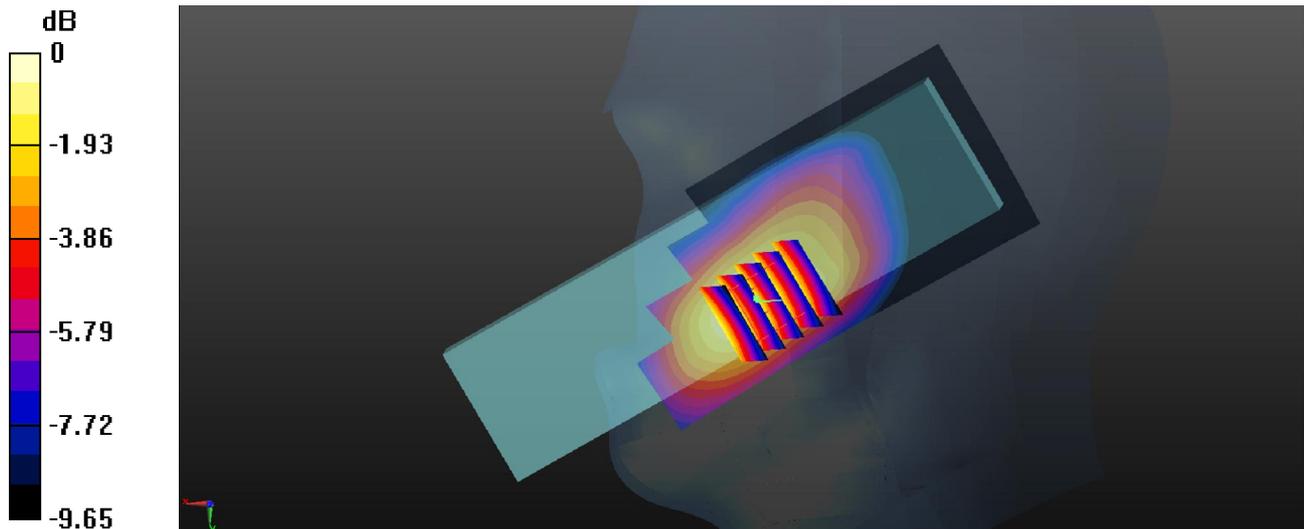

0 dB = 0.705 W/kg

### 04\_WCDMA Band IV\_RMC 12.2Kbps\_Left Cheek\_0mm\_Ch1413


Communication System: UID 0, WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1  
Medium: HSL\_1750\_2016/06/26 Medium parameters used:  $f = 1732.6$  MHz;  $\sigma = 1.334$  S/m;  $\epsilon_r = 40.94$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.3 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(8.69, 8.69, 8.69); Calibrated: 2015/11/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2015/8/27
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1754
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch1413/Area Scan (51x151x1):** Interpolated grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 0.490 W/kg

**Ch1413/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 3.435 V/m; Power Drift = 0.14 dB  
Peak SAR (extrapolated) = 0.556 W/kg  
**SAR(1 g) = 0.336 W/kg; SAR(10 g) = 0.196 W/kg**  
Maximum value of SAR (measured) = 0.476 W/kg

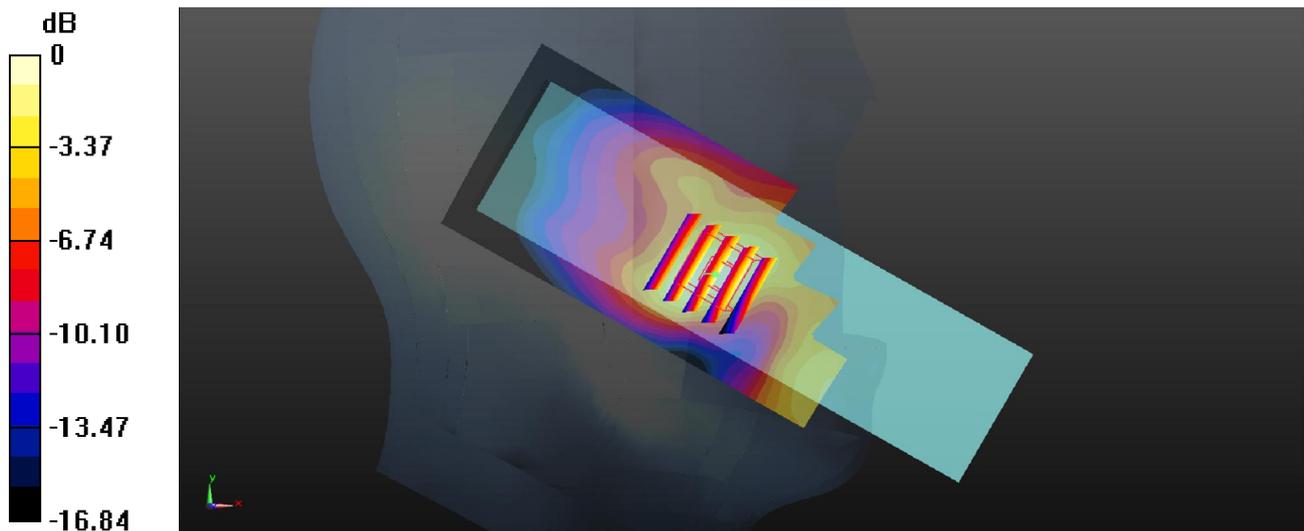

0 dB = 0.476 W/kg

### 05\_WCDMA Band II\_RMC 12.2Kbps\_Mouth Area\_10mm\_Ch9538


Communication System: UID 0, WCDMA (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1  
Medium: HSL\_1900\_2016/06/30 Medium parameters used:  $f = 1907.6$  MHz;  $\sigma = 1.453$  S/m;  $\epsilon_r = 40.089$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.5 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(8.37, 8.37, 8.37); Calibrated: 2015/11/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2015/8/27
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1753
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch9838/Area Scan (51x151x1):** Interpolated grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 1.04 W/kg

**Ch9838/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 17.67 V/m; Power Drift = -0.04 dB  
Peak SAR (extrapolated) = 1.28 W/kg  
**SAR(1 g) = 0.701 W/kg; SAR(10 g) = 0.396 W/kg**  
Maximum value of SAR (measured) = 1.00 W/kg

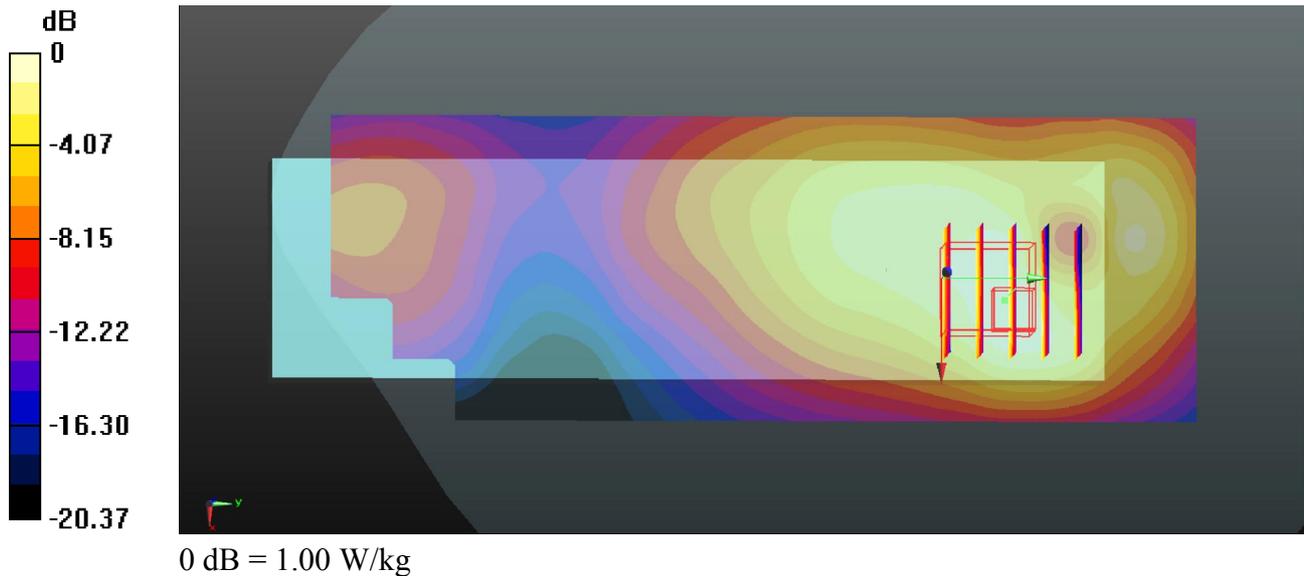

### 06\_LTE Band 12\_10M\_QPSK\_1RB\_25offset\_Left Cheek\_0mm\_Ch23095


Communication System: UID 0, FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium: HSL\_750\_2016/06/27 Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.852$  S/m;  $\epsilon_r = 43.01$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.5 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(10.72, 10.72, 10.72); Calibrated: 2015/11/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2015/8/27
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1753
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch23095/Area Scan (51x151x1):** Interpolated grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 0.276 W/kg

**Ch23095/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 2.757 V/m; Power Drift = 0.06 dB  
Peak SAR (extrapolated) = 0.292 W/kg  
**SAR(1 g) = 0.216 W/kg; SAR(10 g) = 0.157 W/kg**  
Maximum value of SAR (measured) = 0.270 W/kg

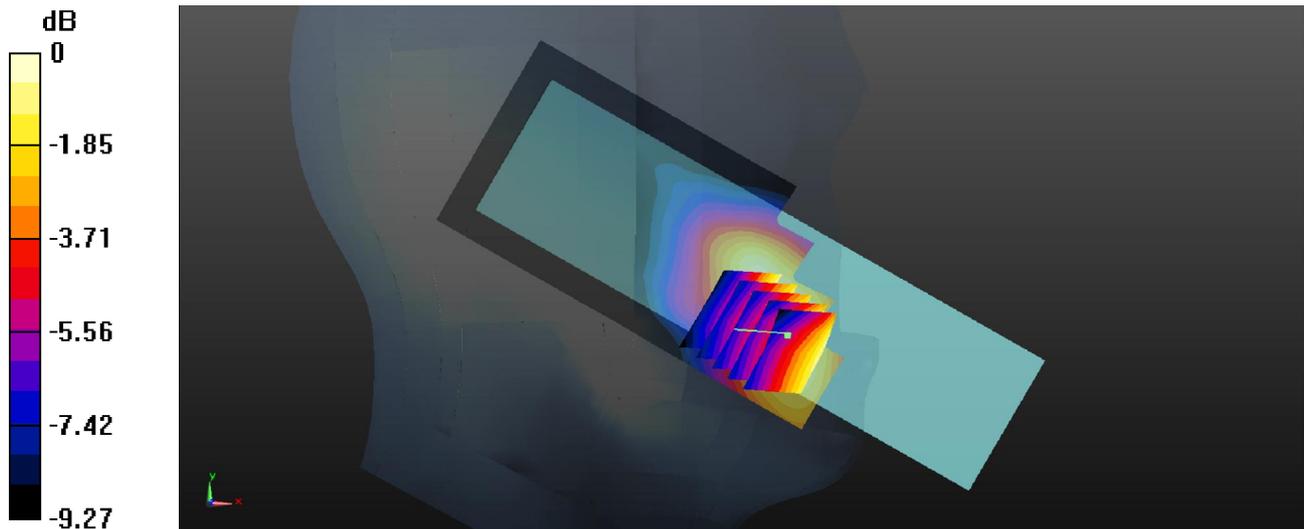

0 dB = 0.270 W/kg

**07\_LTE Band 4\_20M\_QPSK\_1RB\_0offset\_Right Cheek\_0mm\_Ch20175**


Communication System: UID 0, FDD-LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1  
Medium: HSL\_1750\_2016/06/26 Medium parameters used:  $f = 1732.5$  MHz;  $\sigma = 1.334$  S/m;  $\epsilon_r = 40.943$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3935; ConvF(8.69, 8.69, 8.69); Calibrated: 2015/11/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2015/8/27
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1754
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch20175/Area Scan (51x151x1):** Interpolated grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 0.355 W/kg

**Ch20175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 3.249 V/m; Power Drift = -0.06 dB  
Peak SAR (extrapolated) = 0.440 W/kg  
**SAR(1 g) = 0.268 W/kg; SAR(10 g) = 0.161 W/kg**  
Maximum value of SAR (measured) = 0.362 W/kg

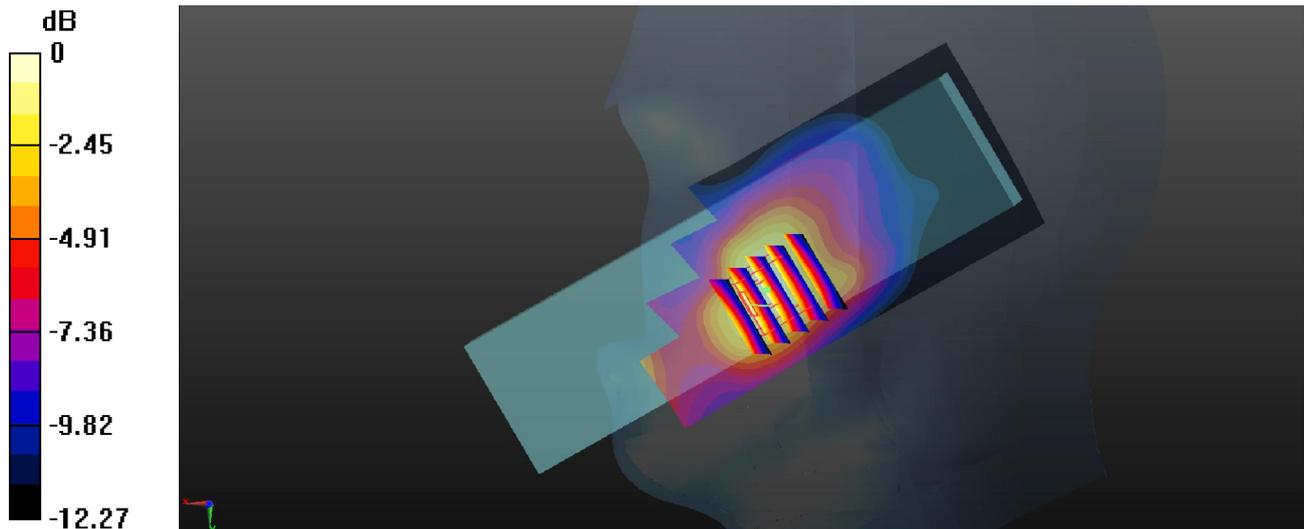

0 dB = 0.362 W/kg

**08\_LTE Band 2\_20M\_QPSK\_1RB\_49offset\_Mouth Area\_10mm\_Ch18900**


Communication System: UID 0, FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium: HSL\_1900\_2016/06/30 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.423$  S/m;  $\epsilon_r = 40.193$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.5 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3935; ConvF(8.37, 8.37, 8.37); Calibrated: 2015/11/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2015/8/27
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1753
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch18900/Area Scan (51x151x1):** Interpolated grid: dx=15mm, dy=15mm  
 Maximum value of SAR (interpolated) = 1.04 W/kg

**Ch18900/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 17.25 V/m; Power Drift = 0.06 dB  
 Peak SAR (extrapolated) = 1.22 W/kg  
**SAR(1 g) = 0.662 W/kg; SAR(10 g) = 0.383 W/kg**  
 Maximum value of SAR (measured) = 0.977 W/kg

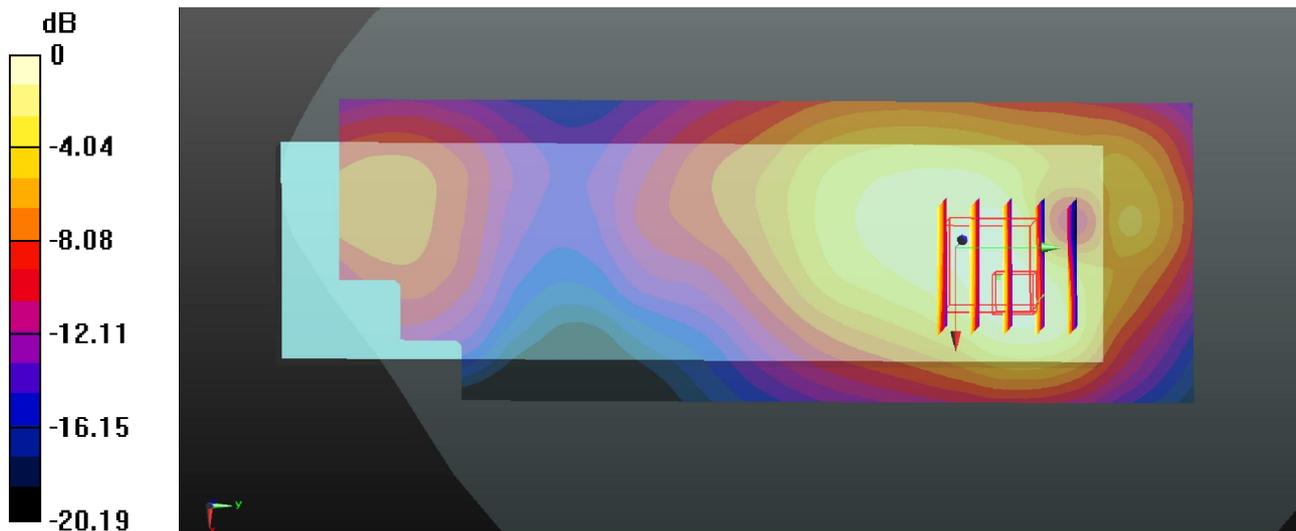

0 dB = 0.977 W/kg