

FCC RF Test Report

APPLICANT : ZTE CORPORATION
EQUIPMENT : WCDMA/GSM (GPRS) Dual-Mode
Digital Mobile Phone
BRAND NAME : ZTE
MODEL NAME : Z791
FCC ID : SRQ-Z791
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Nov. 26, 2014 and testing was completed on Jan. 05, 2015. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.



Reviewed by: Joseph Lin / Supervisor



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification subjective to this standard	6
1.5 Modification of EUT	6
1.6 Testing Location	7
1.7 Applicable Standards.....	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Carrier Frequency Channel	8
2.2 Pre-Scanned RF Power.....	9
2.3 Test Mode.....	10
2.4 Connection Diagram of Test System.....	11
2.5 Support Unit used in test configuration and system.....	12
2.6 EUT Operation Test Setup	12
2.7 Measurement Results Explanation Example.....	12
3 TEST RESULT	13
3.1 6dB Bandwidth Measurement	13
3.2 Output Power Measurement.....	15
3.3 Power Spectral Density Measurement	18
3.4 Conducted Band Edges and Spurious Emission Measurement	20
3.5 Radiated Band Edges and Spurious Emission Measurement	30
3.6 AC Conducted Emission Measurement.....	34
3.7 Antenna Requirements.....	38
4 LIST OF MEASURING EQUIPMENT	39
5 UNCERTAINTY OF EVALUATION	40
APPENDIX A. RADIATED SPURIOUS EMISSION	
APPENDIX B. SETUP PHOTOGRAPHS	

**REVISION HISTORY**

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR4N2609C	Rev. 01	Initial issue of report	Jan. 22, 2015

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.48 dB at 2389.470 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 10.68 dB at 0.480 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.2 Manufacturer

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone
Brand Name	ZTE
Model Name	Z791
FCC ID	SRQ-Z791
EUT supports Radios application	GSM/GPRS/EGPRS/ WCDMA/HSPA/DC-HSDPA/HSPA+ (Downlink Only) WLAN 2.4GHz 802.11b/g/n HT20/ Bluetooth v2.1+EDR/ Bluetooth v4.0 LE
HW Version	wtjA
SW Version	Z791V1.0.0B01
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
Tx/Rx Channel Frequency Range	802.11b/g/n : 2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to Antenna	802.11b : 22.37 dBm (0.1726 W) 802.11g : 23.56 dBm (0.2270 W) 802.11n HT20 : 23.11 dBm (0.2046 W)
Antenna Type	802.11b/g/n : PIFA Antenna with gain -4.00 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.			
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958			
Test Site No.	Sporton Site No.			FCC Registration No.
	TH01-KS	03CH01-KS	CO01-KS	149928

Note: The test site complies with ANSI C63.4 2009 requirement.

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.4-2009
- ♦ ANSI C63.10-2009

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-



2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test shown in the following tables.

Channel	Frequency	2.4GHz 802.11b RF Power (dBm)			
		DSSS Data Rate			
		1 Mbps	2 Mbps	5.5 Mbps	11 Mbps
CH 01	2412 MHz	16.75	16.74	16.80	16.98
CH 02	2417 MHz	18.79	18.77	18.82	19.02
CH 03	2422 MHz	20.55	20.54	20.57	20.76
CH 04	2427 MHz	21.59	21.58	21.61	21.76
CH 05	2432 MHz	22.19	22.17	22.18	22.35
CH 06	2437 MHz	22.37	21.98	21.99	22.16
CH 07	2442 MHz	22.02	22.05	22.04	22.18
CH 08	2447 MHz	21.28	21.26	21.28	21.48
CH 09	2452 MHz	19.94	19.93	19.97	20.18
CH 10	2457 MHz	18.23	18.24	18.28	18.48
CH 11	2462 MHz	15.75	15.73	15.79	15.94

Channel	Frequency	2.4GHz 802.11g RF Power (dBm)							
		OFDM Data Rate							
		6 Mbps	9 Mbps	12 Mbps	18 Mbps	24 Mbps	36 Mbps	48 Mbps	54 Mbps
CH 01	2412 MHz	22.37	22.46	22.52	22.29	22.44	22.38	22.47	22.20
CH 02	2417 MHz	22.75	22.70	22.71	22.83	22.82	22.95	22.77	22.84
CH 03	2422 MHz	23.07	23.10	23.16	23.09	23.23	23.15	23.30	23.21
CH 04	2427 MHz	23.32	23.32	23.35	23.31	23.45	23.43	23.41	23.55
CH 05	2432 MHz	23.30	23.34	23.34	23.40	23.36	23.46	23.48	23.46
CH 06	2437 MHz	23.56	23.31	23.33	23.48	23.39	23.38	23.42	23.32
CH 07	2442 MHz	23.30	23.41	23.36	23.38	23.42	23.46	23.43	23.39
CH 08	2447 MHz	23.25	23.32	23.36	23.34	23.38	23.43	23.46	23.40
CH 09	2452 MHz	22.91	22.84	23.05	23.08	23.02	23.13	23.14	23.12
CH 10	2457 MHz	22.66	22.58	22.80	22.78	22.85	22.98	22.79	22.83
CH 11	2462 MHz	22.38	22.48	22.35	22.40	22.34	22.32	22.49	22.43

2.4GHz 802.11n HT20 RF Output Power (dBm)										
Power vs. Channel			Power vs. MCS Index							
Channel I	Frequency (MHz)	MCS Index MCS0	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 01	2412 MHz	21.76	CH 06	22.70	22.83	23.02	22.96	22.86	22.98	22.97
CH 06	2437 MHz	23.11								
CH 11	2462 MHz	21.67								


2.3 Test Mode

Final results of test modes, data rates and test channels are shown as following table.


Test Cases				
Conducted TCs	Test Items	Mode	Data Rate	Test Channel
	6dB BW Power Spectral Density	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	MCS0	1/6/11
	Output Power	802.11b	1 Mbps	1/2/3/4/5/6/7/8/9/10/11
		802.11g	6 Mbps	1/2/3/4/5/6/7/8/9/10/11
		802.11n HT20	MCS0	1/6/11
	Conducted Band Edge	802.11b	1 Mbps	1/11
		802.11g	6 Mbps	1/11
		802.11n HT20	MCS0	1/11
	Conducted Spurious Emission	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	MCS0	1/6/11
Radiated TCs	Radiated Band Edge	802.11b	1 Mbps	1/2/3/6/9/10/11
		802.11g	6 Mbps	1/11
		802.11n HT20	MCS0	1/11
	Radiated Spurious Emission	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	MCS0	1/6/11
Test Cases				
AC Conducted Emission	Mode 1 : GSM850 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter) + Earphone			
Remark: For radiated test cases, the tests were performance with adapter, earphone and USB cable.				

2.4 Connection Diagram of Test System

<WLAN Tx Mode>

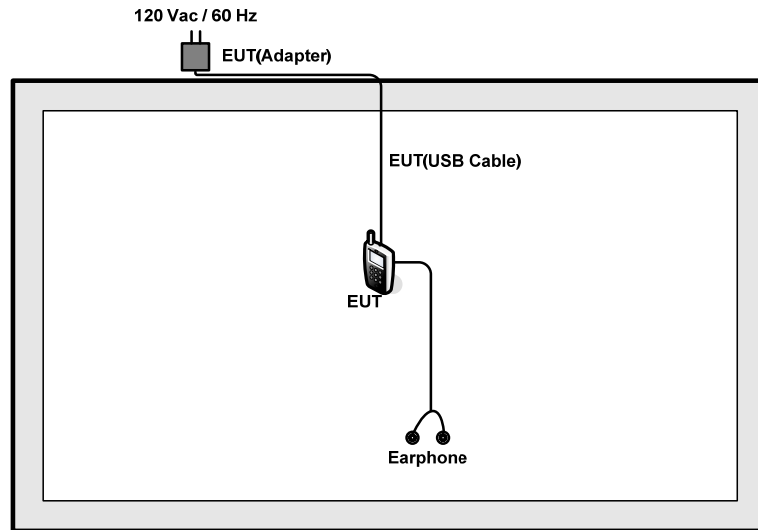

<AC Conducted Emission Mode>

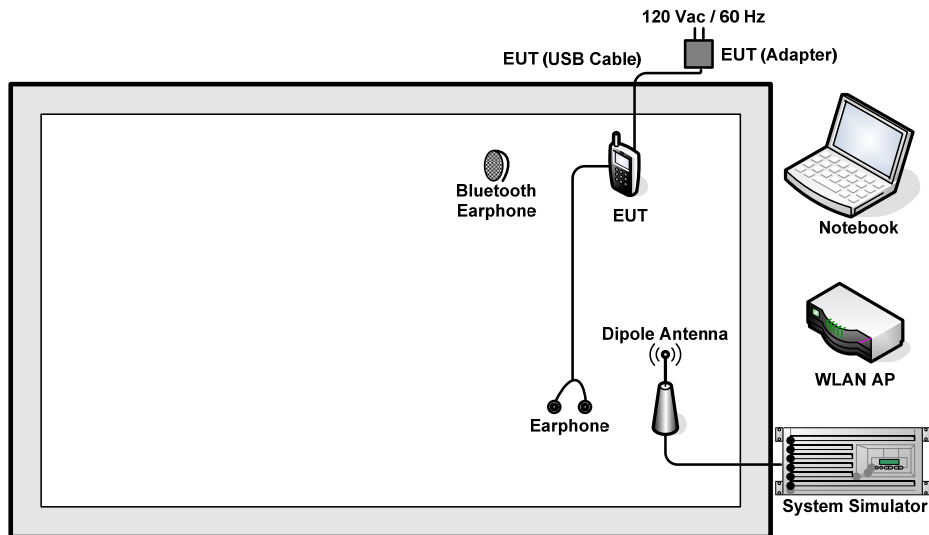

2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	D-Link	DIR-815	KA2IR815A1	N/A	Unshielded, 1.8 m
2.	Notebook	Lenovo	G480	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
3.	Bluetooth Earphone	Nokia	BH-108	PYAHS-107W	N/A	N/A
4.	Bluetooth Earphone	Nokia	BH-102	PYAHS-107W	N/A	N/A
5.	Earphone	Lenovo	SH100	N/A	N/A	N/A

2.6 EUT Operation Test Setup

For WLAN function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.7 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 6 dB and 10dB attenuator.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
 &= 6 + 10 = 16 \text{ (dB)}
 \end{aligned}$$

3 Test Result

3.1 6dB Bandwidth Measurement

3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v03r02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. Measure and record the results in the test report.

3.1.4 Test Setup

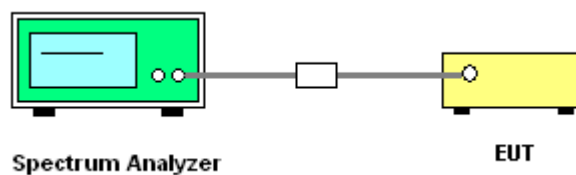




3.1.5 Test Result of 6dB Occupied Bandwidth

Test Band :	2.4GHz	Temperature :	22~24°C
Test Engineer :	Issac Song	Relative Humidity :	37~39%

Mod.	Data Rate	N _{TX}	Channel	Freq. (MHz)	6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	7.08	0.50	Pass
11b	1Mbps	1	6	2437	8.04	0.50	Pass
11b	1Mbps	1	11	2462	7.52	0.50	Pass
11g	6Mbps	1	1	2412	16.32	0.50	Pass
11g	6Mbps	1	6	2437	16.32	0.50	Pass
11g	6Mbps	1	11	2462	16.40	0.50	Pass
HT20	MCS0	1	1	2412	17.56	0.50	Pass
HT20	MCS0	1	6	2437	17.56	0.50	Pass
HT20	MCS0	1	11	2462	17.56	0.50	Pass

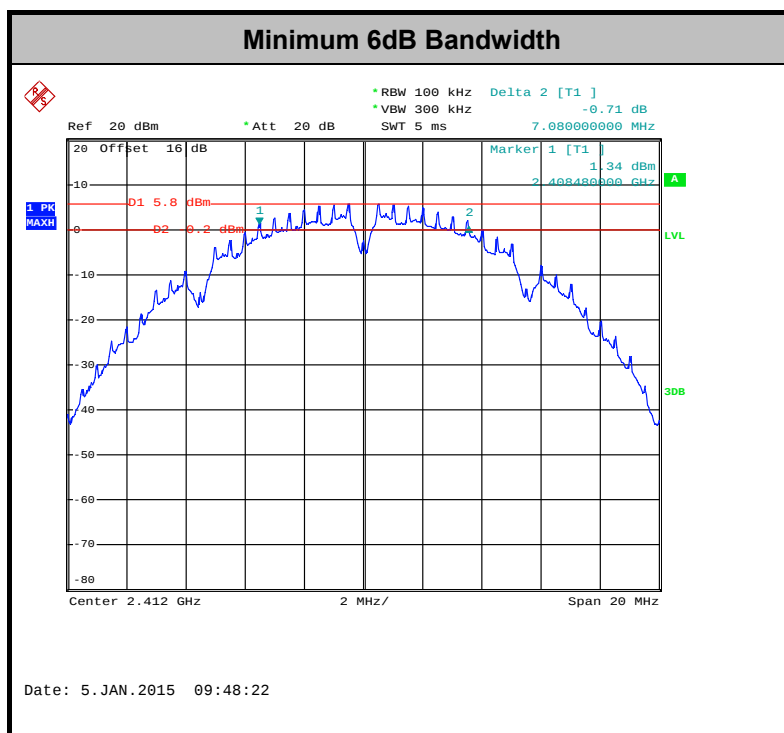

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting Antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the Antenna exceeds 6dBi.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r02.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup



**3.2.5 Test Result of Peak Output Power**

Test Mode :	2.4GHz	Temperature :	22~24℃
Test Engineer :	Issac Song	Relative Humidity :	37~39%

Mod.	Data Rate	N _{TX}	Channel	Freq. (MHz)	RF Output Power (dBm)	Power Limit (dBm)	DG (dBi)	Pass/Fail
11b	1Mbps	1	1	2412	16.75	30	-4.00	Pass
11b	1Mbps	1	6	2437	22.37	30	-4.00	Pass
11b	1Mbps	1	11	2462	15.75	30	-4.00	Pass
11g	6Mbps	1	1	2412	22.37	30	-4.00	Pass
11g	6Mbps	1	6	2437	23.56	30	-4.00	Pass
11g	6Mbps	1	11	2462	22.38	30	-4.00	Pass
HT20	MCS0	1	1	2412	21.76	30	-4.00	Pass
HT20	MCS0	1	6	2437	23.11	30	-4.00	Pass
HT20	MCS0	1	11	2462	21.67	30	-4.00	Pass

Note: Measured power (dBm) has offset with cable loss.

**3.2.6 Test Result of Average output Power (Reporting Only)**

Test Mode :	2.4GHz	Temperature :	22~24℃
Test Engineer :	Issac Song	Relative Humidity :	37~39%

Mod.	Data Rate	N _{TX}	Channel	Freq. (MHz)	Duty Factor (dB)	Average Output Power (dBm)	Power Limit (dBm)	DG (dBi)	Pass/Fail
11b	1Mbps	1	1	2412	0.10	13.38	30	-4.00	Pass
11b	1Mbps	1	6	2437	0.10	20.09	30	-4.00	Pass
11b	1Mbps	1	11	2462	0.10	12.65	30	-4.00	Pass
11g	6Mbps	1	1	2412	0.60	15.15	30	-4.00	Pass
11g	6Mbps	1	6	2437	0.60	18.88	30	-4.00	Pass
11g	6Mbps	1	11	2462	0.60	14.35	30	-4.00	Pass
HT20	MCS0	1	1	2412	0.63	14.17	30	-4.00	Pass
HT20	MCS0	1	6	2437	0.63	16.15	30	-4.00	Pass
HT20	MCS0	1	11	2462	0.63	13.32	30	-4.00	Pass

Note: Measured power (dBm) has offset with cable loss and duty factor.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup

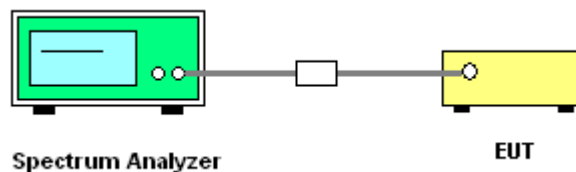


3.3.5 Test Result of Power Spectral Density

Test Mode :	2.4GHz	Temperature :	22~24℃
Test Engineer :	Issac Song	Relative Humidity :	37~39%

Mod.	Data Rate	N _{TX}	Channel	Freq. (MHz)	Peak Power Density (dBm/3kHz)	Max. Limits (dBm/3kHz)	DG (dBi)	Pass/Fail
11b	1Mbps	1	1	2412	-8.06	8	-4.00	Pass
11b	1Mbps	1	6	2437	-2.22	8	-4.00	Pass
11b	1Mbps	1	11	2462	-10.52	8	-4.00	Pass
11g	6Mbps	1	1	2412	-9.39	8	-4.00	Pass
11g	6Mbps	1	6	2437	-6.57	8	-4.00	Pass
11g	6Mbps	1	11	2462	-11.46	8	-4.00	Pass
HT20	MCS0	1	1	2412	-10.92	8	-4.00	Pass
HT20	MCS0	1	6	2437	-8.69	8	-4.00	Pass
HT20	MCS0	1	11	2462	-12.84	8	-4.00	Pass

Note: Measured power density (dBm) has offset with cable loss.

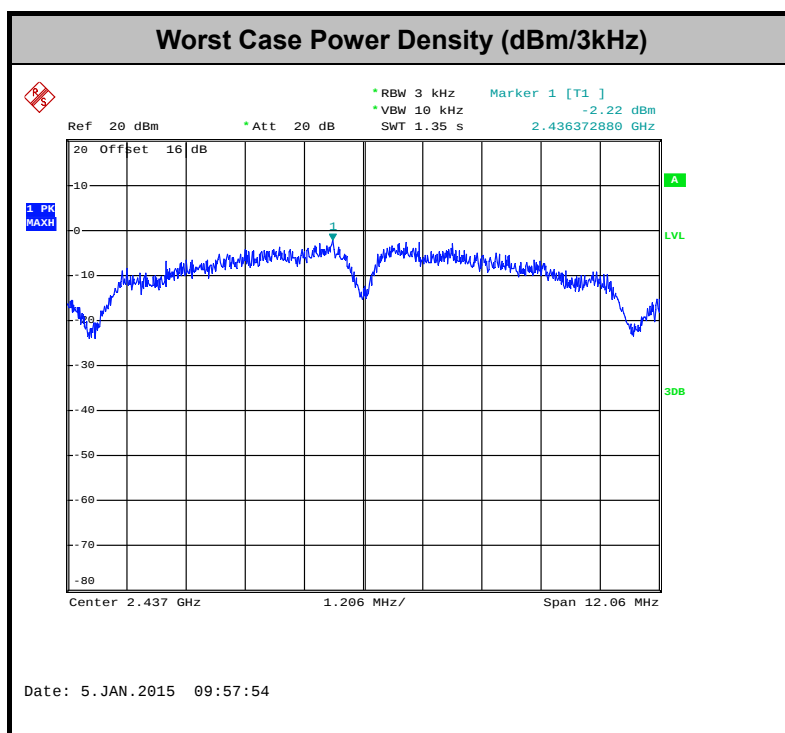

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

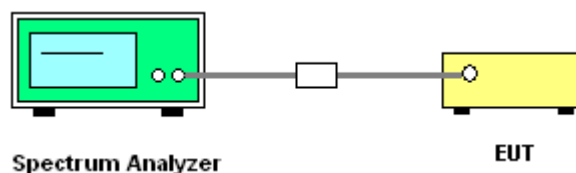




3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Mode :	802.11b	Temperature :	22~24℃
Test Band :	2.4GHz Low	Relative Humidity :	37~39%
Test Channel :	01	Test Engineer :	Issac Song


WLAN 802.11b Channel 01

100kHz PSD reference Level

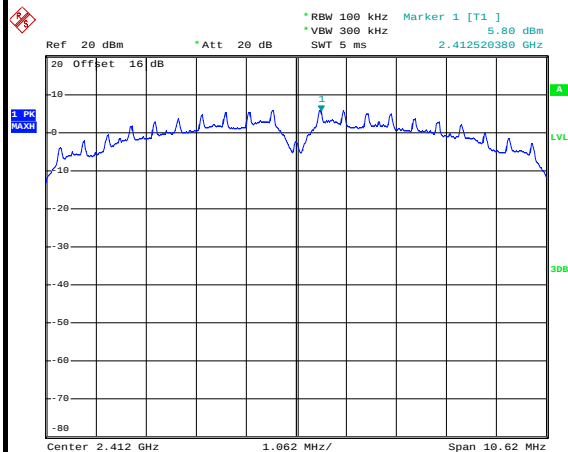


Date: 5.JAN.2015 09:49:52

Low Channel Plot

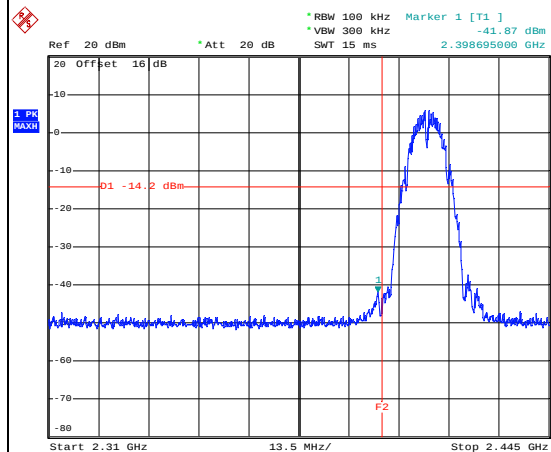


Date: 5.JAN.2015 09:50:18

Spurious Emission 30MHz~3GHz

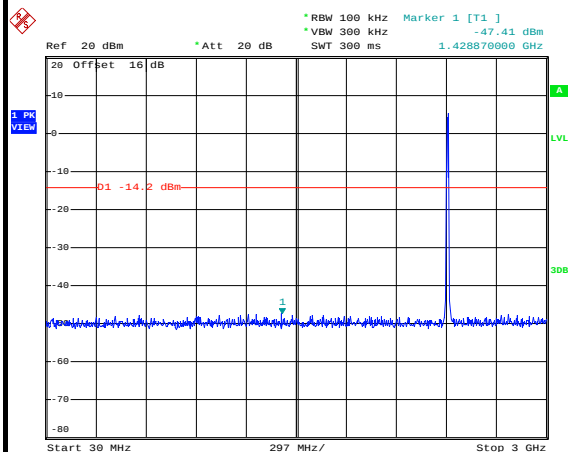

Date: 5.JAN.2015 09:50:48

Spurious Emission 2GHz~25GHz

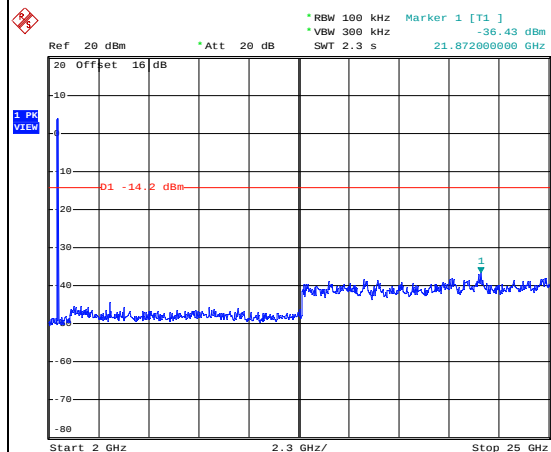


Date: 5.JAN.2015 09:51:06



Test Mode :	802.11b	Temperature :	22~24℃
Test Band :	2.4GHz Mid	Relative Humidity :	37~39%
Test Channel :	06	Test Engineer :	Issac Song


WLAN 802.11b Channel 06

100kHz PSD reference Level

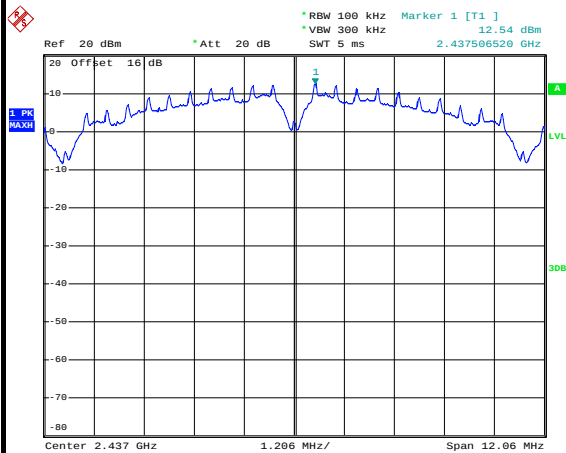


Date: 5.JAN.2015 09:58:17

Spurious Emission 30MHz~3GHz

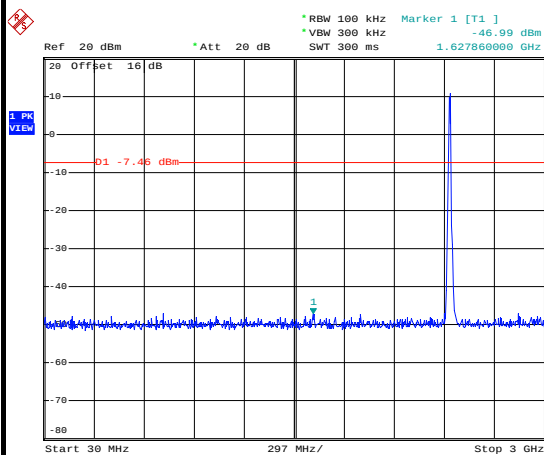

Date: 5.JAN.2015 09:58:41

Spurious Emission 2GHz~25GHz

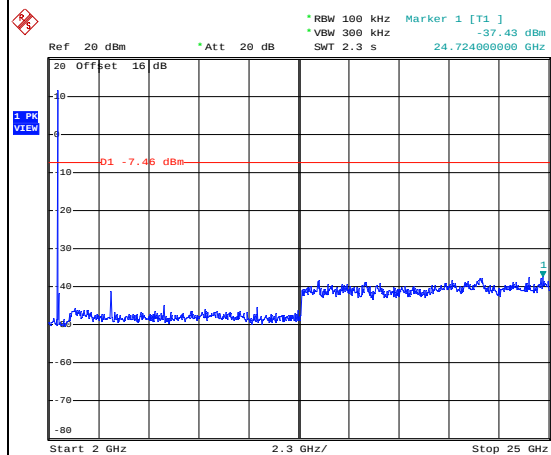


Date: 5.JAN.2015 09:58:59



Test Mode :	802.11b	Temperature :	22~24℃
Test Band :	2.4GHz High	Relative Humidity :	37~39%
Test Channel :	11	Test Engineer :	Issac Song


WLAN 802.11b Channel 11

100kHz PSD reference Level

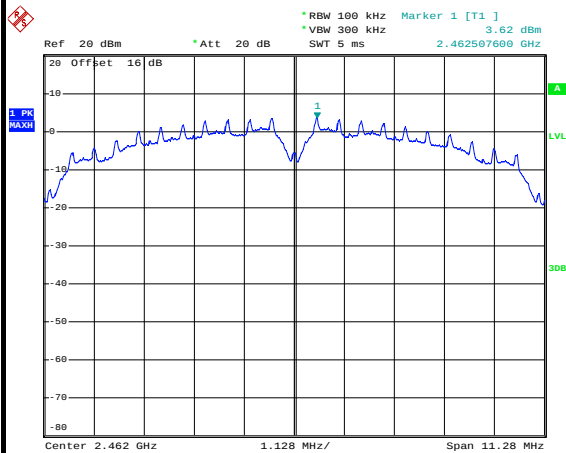


Date: 5.JAN.2015 10:02:15

High Channel Plot

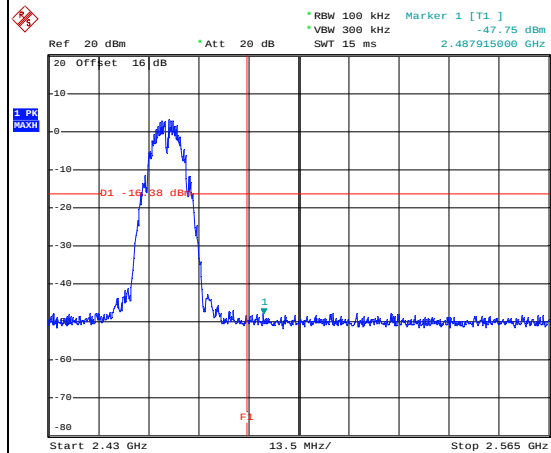


Date: 5.JAN.2015 10:02:54

Spurious Emission 30MHz~3GHz

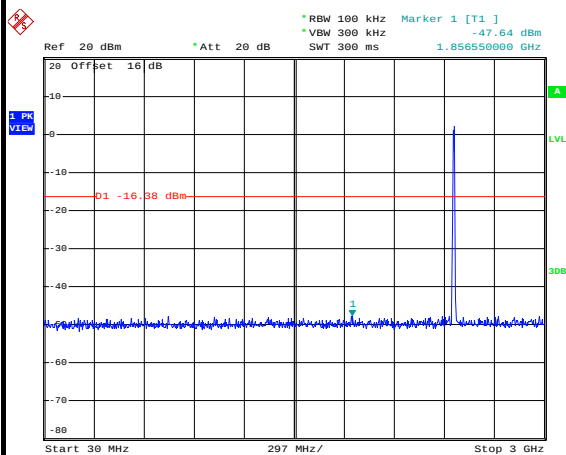

Date: 5.JAN.2015 10:03:37

Spurious Emission 2GHz~25GHz

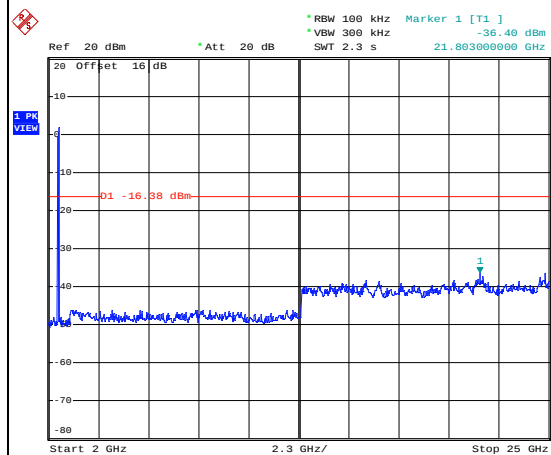


Date: 5.JAN.2015 10:03:55



Test Mode :	802.11g	Temperature :	22~24°C
Test Band :	2.4GHz Low	Relative Humidity :	37~39%
Test Channel :	01	Test Engineer :	Issac Song


WLAN 802.11g Channel 01

100kHz PSD reference Level

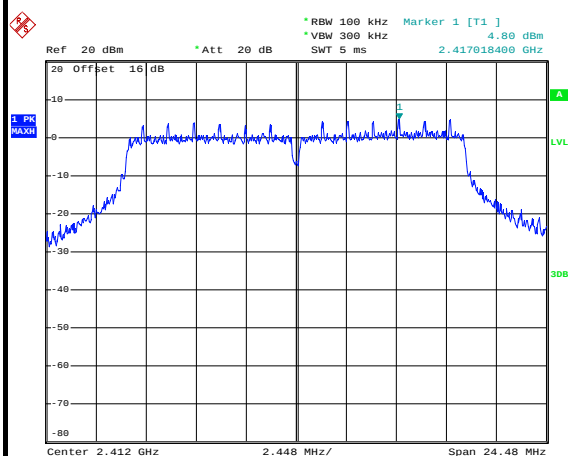


Date: 5.JAN.2015 10:09:01

Low Channel Plot

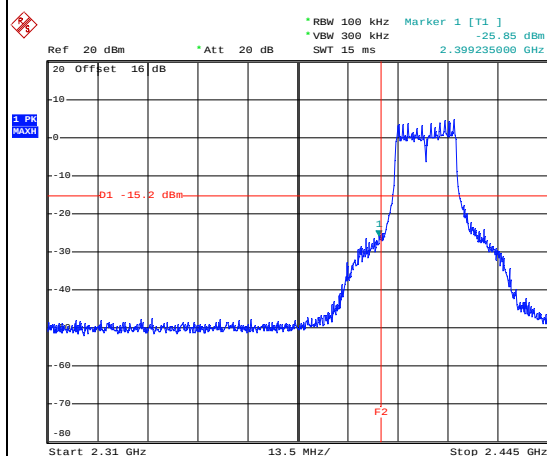


Date: 5.JAN.2015 10:09:26

Spurious Emission 30MHz~3GHz

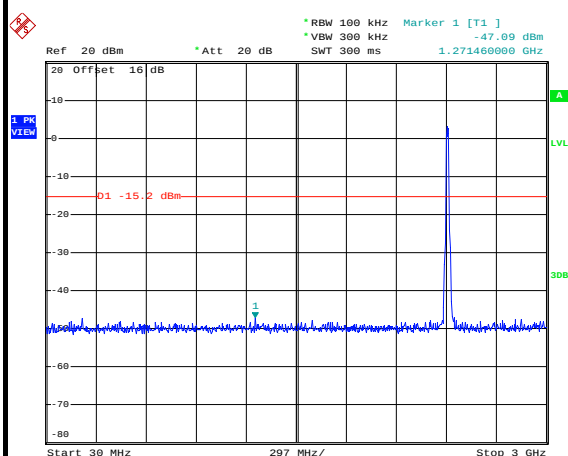

Date: 5.JAN.2015 10:09:52

Spurious Emission 2GHz~25GHz

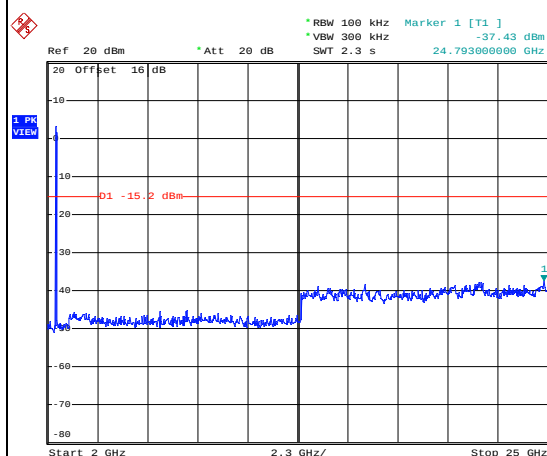


Date: 5.JAN.2015 10:10:09



Test Mode :	802.11g	Temperature :	22~24°C
Test Band :	2.4GHz Mid	Relative Humidity :	37~39%
Test Channel :	06	Test Engineer :	Issac Song


WLAN 802.11g Channel 06

100kHz PSD reference Level

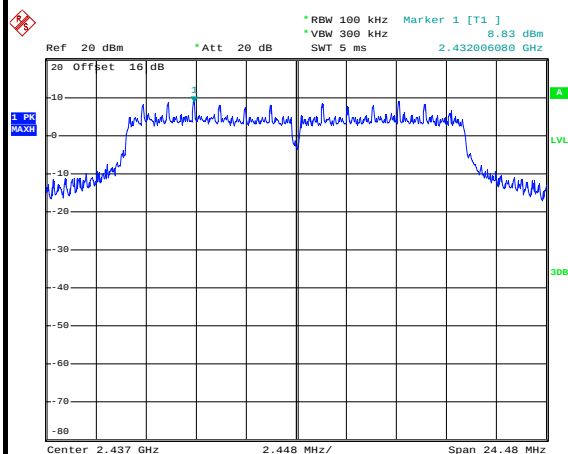


Date: 5.JAN.2015 10:15:33

Spurious Emission 30MHz~3GHz

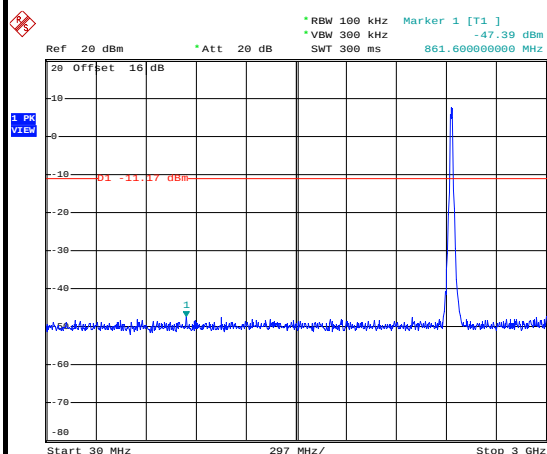

Date: 5.JAN.2015 10:16:00

Spurious Emission 2GHz~25GHz

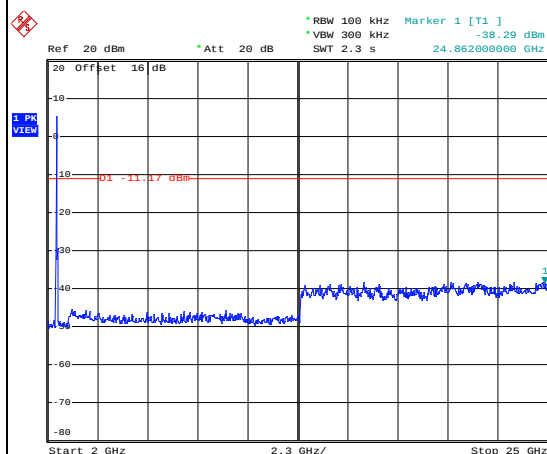


Date: 5.JAN.2015 10:16:17



Test Mode :	802.11g	Temperature :	22~24°C
Test Band :	2.4GHz High	Relative Humidity :	37~39%
Test Channel :	11	Test Engineer :	Issac Song


WLAN 802.11g Channel 11

100kHz PSD reference Level

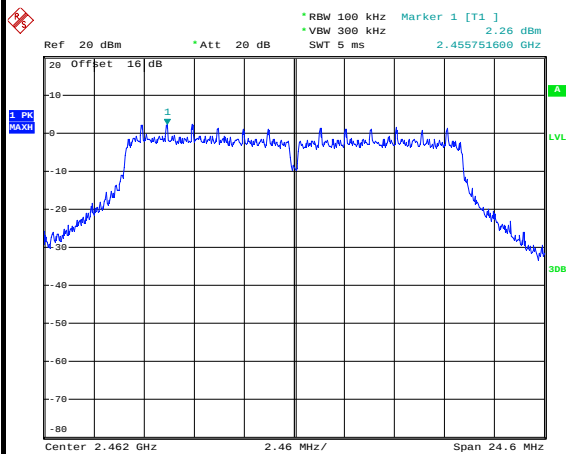


Date: 5.JAN.2015 10:20:23

High Channel Plot

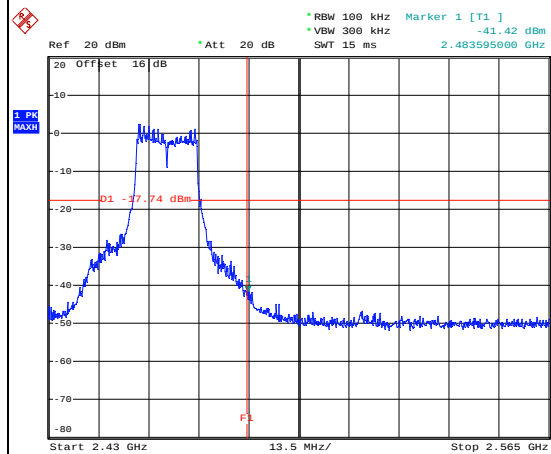


Date: 5.JAN.2015 10:22:09

Spurious Emission 30MHz~3GHz

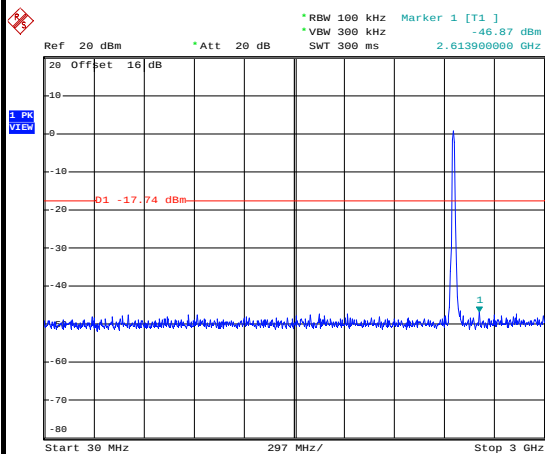

Date: 5.JAN.2015 10:22:42

Spurious Emission 2GHz~25GHz

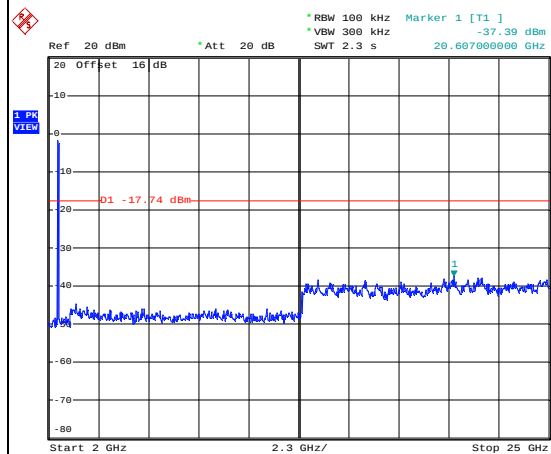


Date: 5.JAN.2015 10:23:00



Test Mode :	802.11n HT20	Temperature :	22~24℃
Test Band :	2.4GHz Low	Relative Humidity :	37~39%
Test Channel :	01	Test Engineer :	Issac Song


WLAN 802.11n HT20 Channel 01

100kHz PSD reference Level

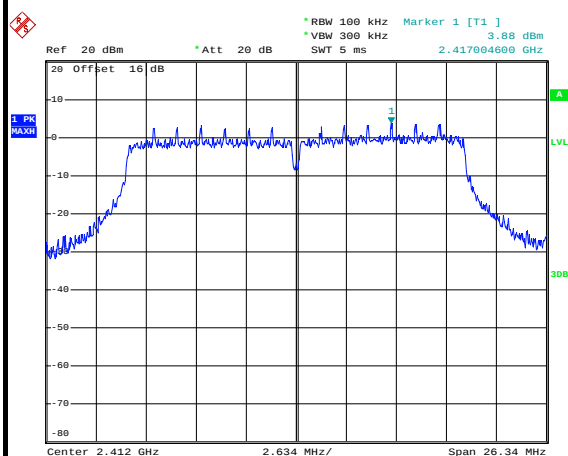


Date: 5.JAN.2015 10:28:19

Low Channel Plot

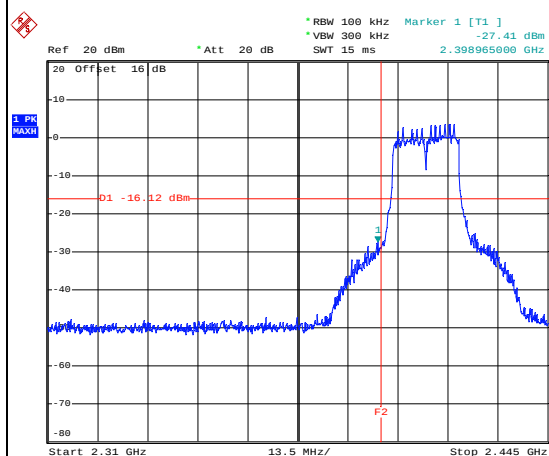


Date: 5.JAN.2015 10:28:42

Spurious Emission 30MHz~3GHz

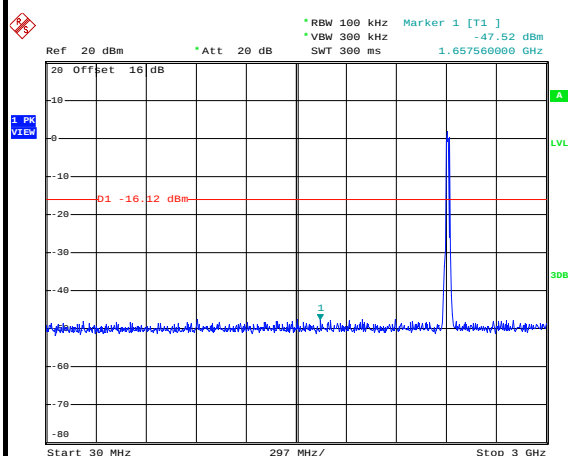

Date: 5.JAN.2015 10:29:16

Spurious Emission 2GHz~25GHz

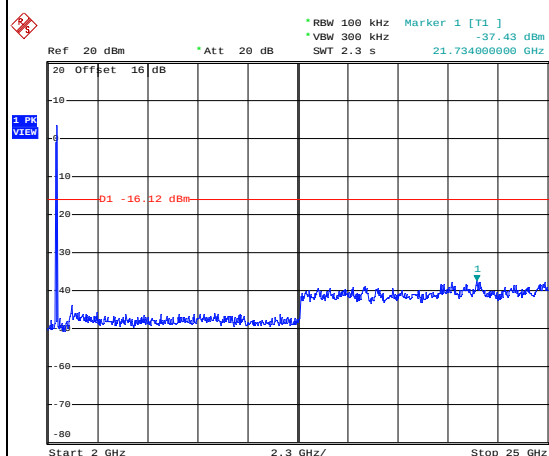


Date: 5.JAN.2015 10:29:34

Test Mode :	802.11n HT20	Temperature :	22~24℃
Test Band :	2.4GHz Mid	Relative Humidity :	37~39%
Test Channel :	06	Test Engineer :	Issac Song


WLAN 802.11n HT20 Channel 06

100kHz PSD reference Level

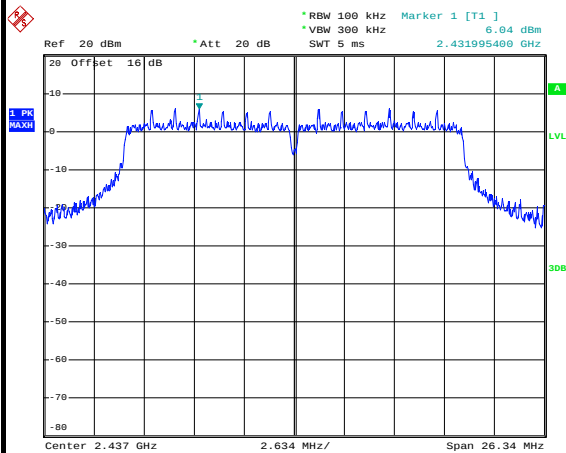


Date: 5.JAN.2015 10:35:36

Spurious Emission 30MHz~3GHz

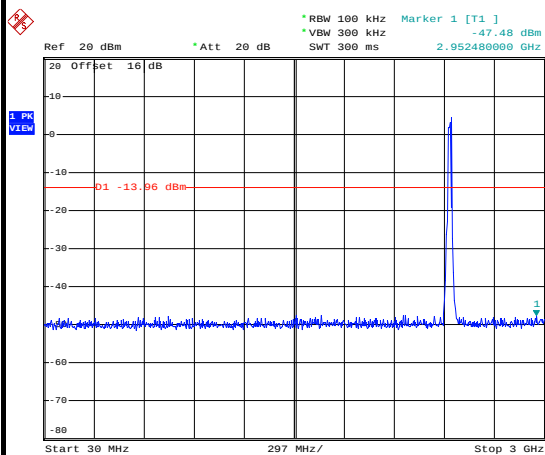

Date: 5.JAN.2015 10:37:11

Spurious Emission 2GHz~25GHz

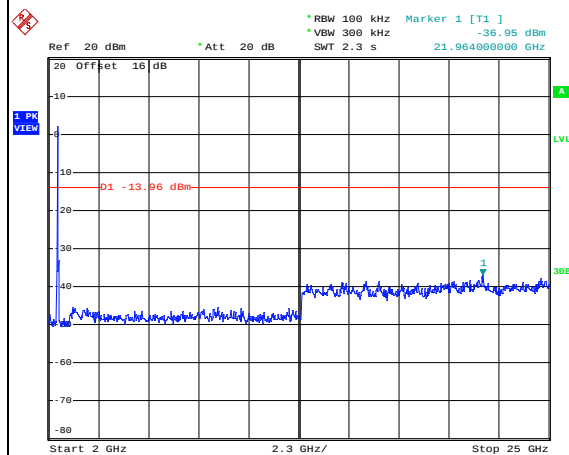


Date: 5.JAN.2015 10:37:29



Test Mode :	802.11n HT20	Temperature :	22~24°C
Test Band :	2.4GHz High	Relative Humidity :	37~39%
Test Channel :	11	Test Engineer :	Issac Song


WLAN 802.11n HT20 Channel 11

100kHz PSD reference Level

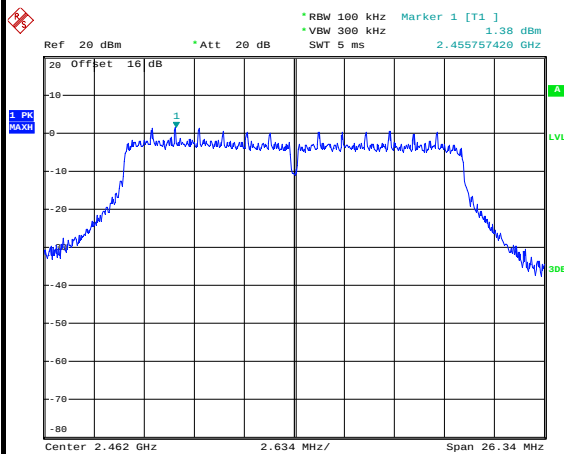


Date: 5.JAN.2015 10:44:04

High Channel Plot

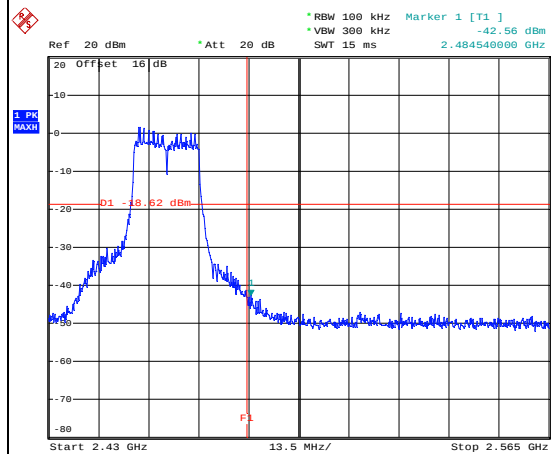


Date: 5.JAN.2015 10:44:26

Spurious Emission 30MHz~3GHz

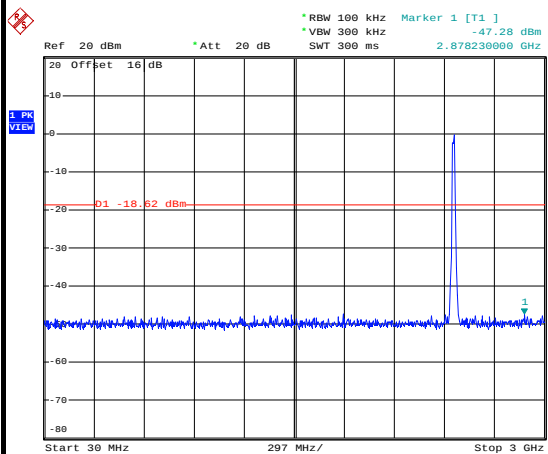

Date: 5.JAN.2015 10:45:50

Spurious Emission 2GHz~25GHz

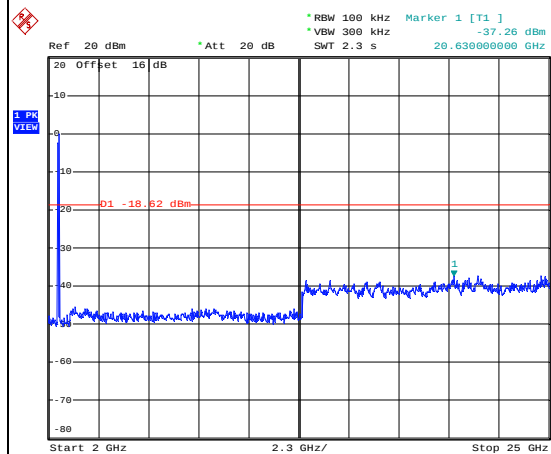

Date: 5.JAN.2015 10:46:08

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 0.8 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.


For average measurement:

 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	97.63	8.24	0.12	300Hz
802.11g	87.18	1.36	0.74	1kHz
802.11n HT20	86.45	1.28	0.78	1kHz

3.5.4 Test Setup


For radiated emissions below 30MHz

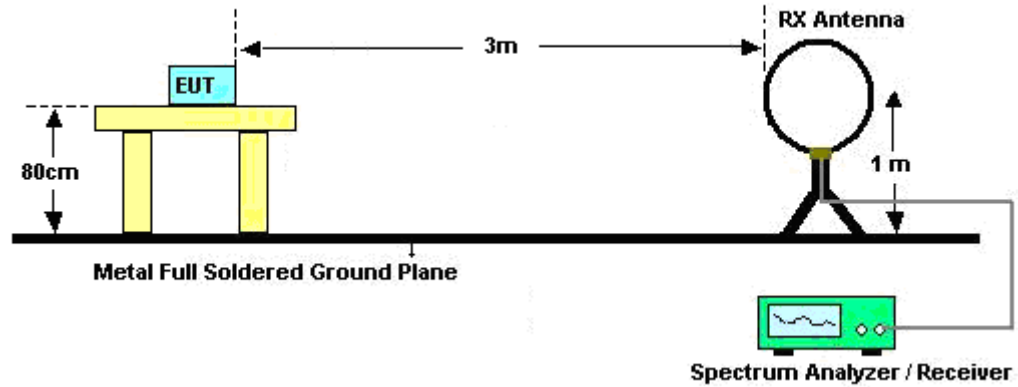

For radiated emissions from 30MHz to 1GHz

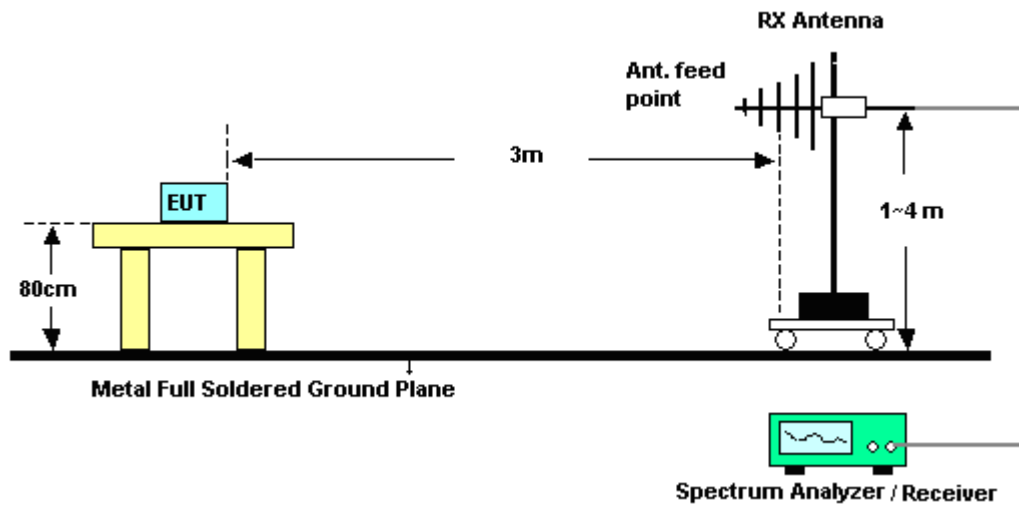

For radiated emissions above 1GHz

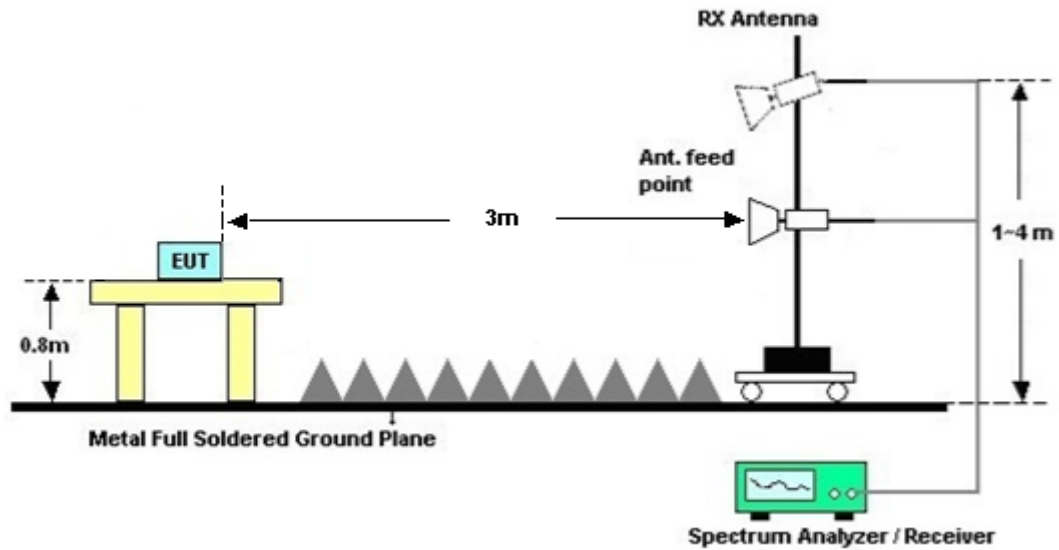

3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix A.

3.5.7 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix A.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

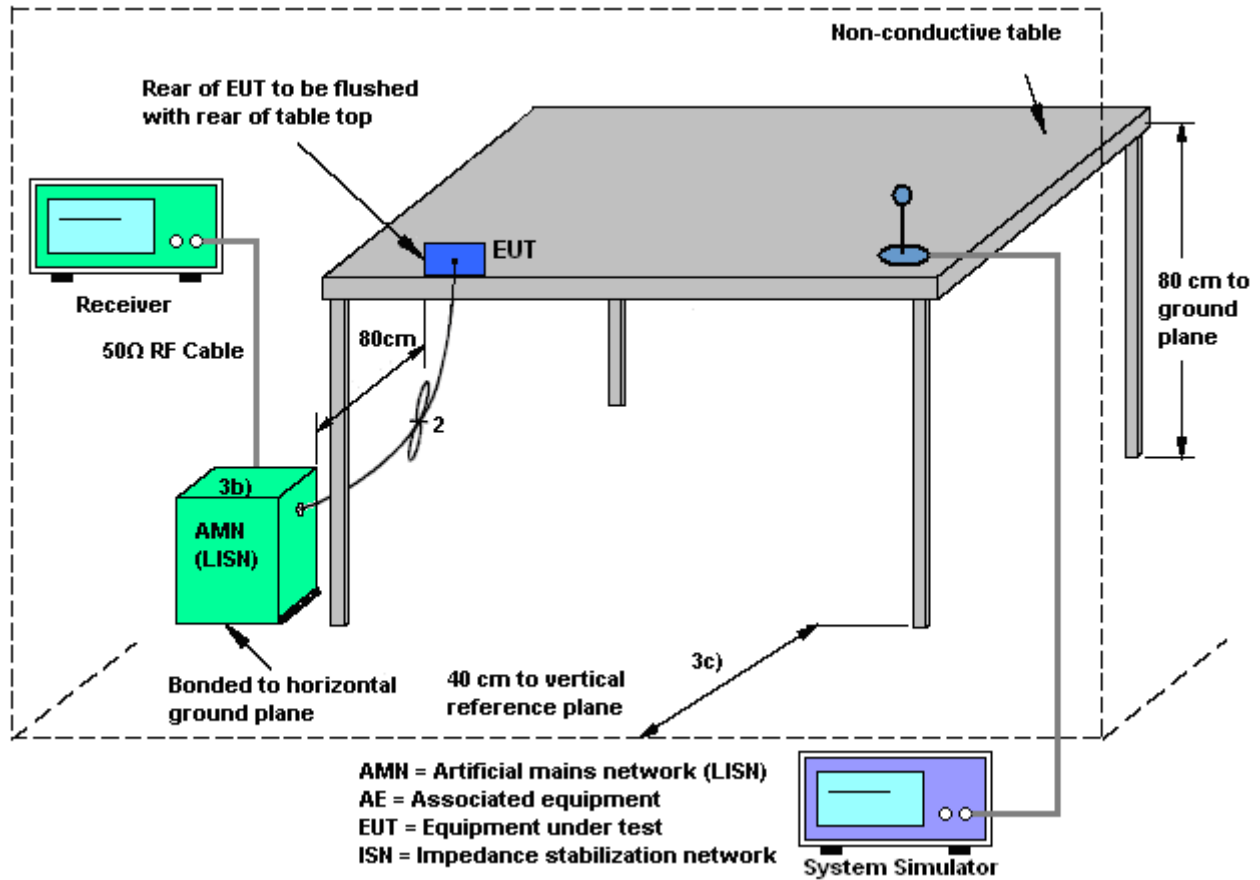

3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	22~24℃
Test Engineer :	Eligan Wang	Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter) + Earphone		

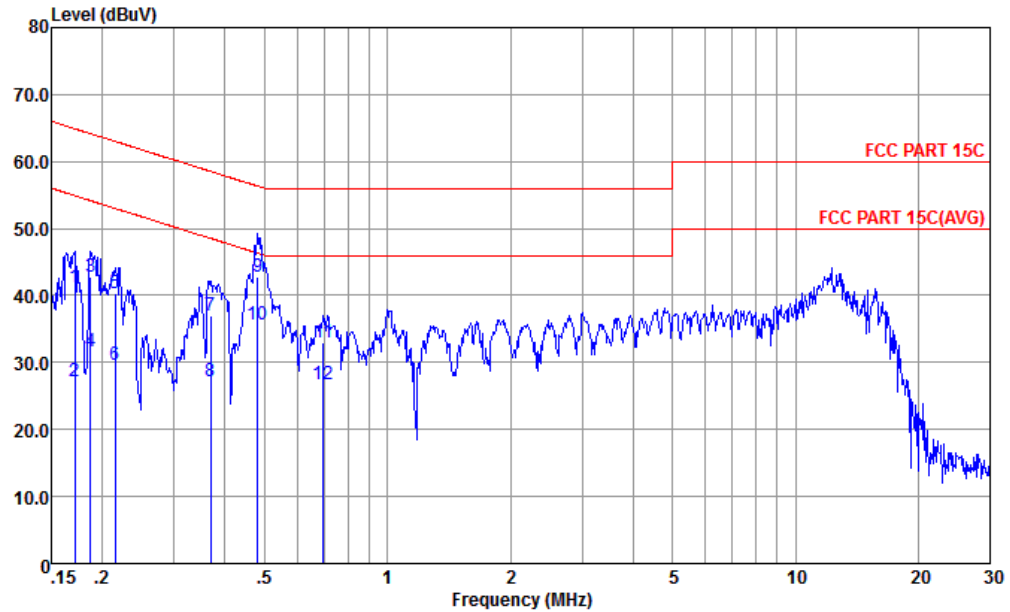


Site : CO01-KS
Condition : FCC PART 15C LISN-L20140306 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.17	41.16	-23.74	64.90	29.20	1.53	10.43	QP
2	0.17	27.16	-27.74	54.90	15.20	1.53	10.43	Average
3	0.19	42.84	-21.31	64.15	31.20	1.16	10.48	QP
4	0.19	31.54	-22.61	54.15	19.90	1.16	10.48	Average
5	0.22	40.27	-22.74	63.01	28.79	0.97	10.51	QP
6	0.22	29.57	-23.44	53.01	18.09	0.97	10.51	Average
7	0.37	37.09	-21.43	58.52	26.10	0.38	10.61	QP
8	0.37	27.19	-21.33	48.52	16.20	0.38	10.61	Average
9	0.48	42.74	-13.58	56.32	31.90	0.22	10.62	QP
10 *	0.48	35.64	-10.68	46.32	24.80	0.22	10.62	Average
11	0.70	33.04	-22.96	56.00	22.20	0.20	10.64	QP
12	0.70	26.64	-19.36	46.00	15.80	0.20	10.64	Average



Test Mode :	Mode 1	Temperature :	22~24℃
Test Engineer :	Eligan Wang	Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter) + Earphone		

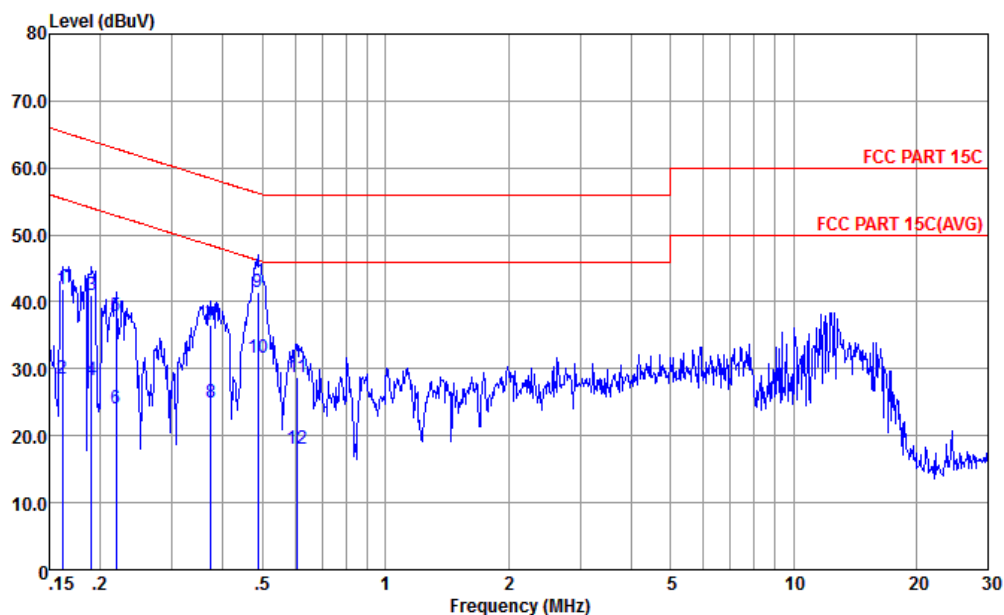

Site : CO01-KS
Condition : FCC PART 15C LISN-N20140306 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.16	41.91	-23.47	65.38	29.80	1.71	10.40	QP
2	0.16	28.61	-26.77	55.38	16.50	1.71	10.40	Average
3	0.19	40.90	-23.12	64.02	29.31	1.11	10.48	QP
4	0.19	28.40	-25.62	54.02	16.81	1.11	10.48	Average
5	0.22	37.77	-25.11	62.88	26.30	0.96	10.51	QP
6	0.22	24.07	-28.81	52.88	12.60	0.96	10.51	Average
7	0.37	36.56	-21.87	58.43	25.50	0.45	10.61	QP
8	0.37	24.96	-23.47	48.43	13.90	0.45	10.61	Average
9	0.49	41.43	-14.80	56.23	30.50	0.31	10.62	QP
10 *	0.49	31.73	-14.50	46.23	20.80	0.31	10.62	Average
11	0.61	28.77	-27.23	56.00	17.90	0.24	10.63	QP
12	0.61	18.07	-27.93	46.00	7.20	0.24	10.63	Average



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Oct. 28, 2014	Jan. 05, 2015	Oct. 27, 2015	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	30MHz~40GHz	Feb. 27, 2014	Jan. 05, 2015	Feb. 26, 2015	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Feb. 27, 2014	Jan. 05, 2015	Feb. 26, 2015	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESCI	100534	9kHz~3GHz	Nov. 05, 2013	Dec. 22, 2014	Oct. 24, 2015	Radiation (03CH01-KS)
Spectrum Analyzer	R&S	FSP30	101399	9kHz~30GHz	Oct. 25, 2014	Dec. 22, 2014	Oct. 24, 2015	Radiation (03CH01-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 08, 2014	Dec. 22, 2014	Oct. 07, 2015	Radiation (03CH01-KS)
Bilog Antenna	SCHAFFNER	CBL6112D	23182	25MHz~2GHz	Jan. 08, 2014	Dec. 22, 2014	Jan. 07, 2015	Radiation (03CH01-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75959	1GHz~18GHz	Jan. 08, 2014	Dec. 22, 2014	Jan. 07, 2015	Radiation (03CH01-KS)
Active Horn Antenna	com-power	AHA-118	701030	1GHz~18GHz	Nov. 08, 2014	Dec. 22, 2014	Nov. 07, 2015	Radiation (03CH01-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA170249	15GHz~40GHz	Mar. 10, 2014	Dec. 22, 2014	Mar. 09, 2015	Radiation (03CH01-KS)
Amplifier	com-power	PA-103A	161073	1MHz~1GHz	May 04, 2014	Dec. 22, 2014	May 03, 2015	Radiation (03CH01-KS)
Amplifier	Agilent	8449B	3008A02371	1GHz~26.5GHz	Oct. 28, 2014	Dec. 22, 2014	Oct. 27, 2015	Radiation (03CH01-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Dec. 22, 2014	NCR	Radiation (03CH01-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Dec. 22, 2014	NCR	Radiation (03CH01-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Dec. 22, 2014	NCR	Radiation (03CH01-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	May 04, 2014	Dec. 02, 2014	May 03, 2015	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 25, 2014	Dec. 02, 2014	Oct. 24, 2015	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Oct. 25, 2014	Dec. 02, 2014	Oct. 24, 2015	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000811	AC 0V~300V, 45Hz~1000Hz	Oct. 25, 2014	Dec. 02, 2014	Oct. 24, 2015	Conduction (CO01-KS)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.3dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.5dB
---	-------



Appendix A. Radiated Spurious Emission

15C 2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz	*	2412	98.4	-	-	93.96	32.89	4.82	33.27	100	198	P	H
	*	2412	84.73	-	-	80.29	32.89	4.82	33.27	100	198	A	H
	!	2389.47	70.52	-3.48	74	66.11	32.86	4.81	33.26	100	198	P	H
		2390	44.4	-9.6	54	39.99	32.86	4.81	33.26	100	198	A	H
	*	2412	97.29	-	-	92.85	32.89	4.82	33.27	200	0	P	V
	*	2412	84.02	-	-	79.58	32.89	4.82	33.27	200	0	A	V
	!	2389.02	68.43	-5.57	74	64.02	32.86	4.81	33.26	200	0	P	V
		2389.83	45.34	-8.66	54	40.93	32.86	4.81	33.26	200	0	A	V
802.11b CH 02 2417MHz		2388.93	49.59	-24.41	74	48.2	31.3	6.17	36.08	100	165	P	H
		2388.03	36.44	-17.56	54	35.05	31.3	6.17	36.08	100	165	A	H
		2418.37	92.04	-	-	90.53	31.31	6.22	36.02	100	165	P	H
		2416.199	87.63	-	-	86.12	31.31	6.22	36.02	100	165	A	H
		2340.06	49.05	-24.95	74	48.02	31.25	6.12	36.34	196	36	P	V
		2387.4	36.37	-17.63	54	34.98	31.3	6.17	36.08	196	36	A	V
		2415.615	88.7	-	-	87.19	31.31	6.22	36.02	196	36	P	V
		2416.199	84.32	-	-	82.81	31.31	6.22	36.02	196	36	A	V
802.11b CH 03 2422MHz		2366.25	49.87	-24.13	74	48.69	31.26	6.17	36.25	100	166	P	H
		2387.85	36.41	-17.59	54	35.02	31.3	6.17	36.08	100	166	A	H
		2420.958	94.08	-	-	92.49	31.33	6.22	35.96	100	166	P	H
		2421.125	89.67	-	-	88.08	31.33	6.22	35.96	100	166	A	H
		2379.93	49.46	-24.54	74	48.17	31.28	6.17	36.16	196	60	P	V
		2386.41	36.38	-17.62	54	34.99	31.3	6.17	36.08	196	60	A	V
		2423.129	91.22	-	-	89.63	31.33	6.22	35.96	196	60	P	V
		2421.209	86.82	-	-	85.23	31.33	6.22	35.96	196	60	A	V



802.11b CH 06 2437MHz	*	2437	108.5	-	-	103.98	32.95	4.85	33.28	169	153	P	H
	*	2437	103.87	-	-	99.35	32.95	4.85	33.28	169	153	A	H
		2382.18	48.35	-25.65	74	43.99	32.83	4.79	33.26	240	167	P	H
		2381.19	37.76	-16.24	54	33.4	32.83	4.79	33.26	240	167	A	H
		2489.35	48.46	-25.54	74	43.81	33.05	4.9	33.3	100	326	P	H
		2492.89	36.34	-17.66	54	31.69	33.05	4.9	33.3	100	326	A	H
	*	2437	109.03	-	-	104.51	32.95	4.85	33.28	188	82	P	V
	*	2437	104.72	-	-	100.2	32.95	4.85	33.28	188	82	A	V
		2381.28	48.57	-25.43	74	44.21	32.83	4.79	33.26	185	100	P	V
		2381.1	36.83	-17.17	54	32.47	32.83	4.79	33.26	184	100	A	V
		2493.04	49.52	-24.48	74	44.87	33.05	4.9	33.3	165	221	P	V
		2492.8	38.87	-15.13	54	34.22	33.05	4.9	33.3	165	221	A	V
802.11b CH 09 2452MHz		2450.685	93.55	-	-	91.84	31.34	6.28	35.91	100	157	P	H
		2451.269	89.27	-	-	87.56	31.34	6.28	35.91	100	157	A	H
		2499.08	49.26	-24.74	74	47.28	31.39	6.33	35.74	100	157	P	H
		2488.28	36.52	-17.48	54	34.54	31.39	6.33	35.74	100	157	A	H
		2450.768	87.9	-	-	86.19	31.34	6.28	35.91	154	189	P	V
		2451.269	83.61	-	-	81.9	31.34	6.28	35.91	154	189	A	V
		2499.56	49.64	-24.36	74	47.66	31.39	6.33	35.74	154	189	P	V
		2484.68	36.46	-17.54	54	34.55	31.37	6.33	35.79	154	189	A	V
802.11b CH 10 2457MHz		2455.611	91.18	-	-	89.39	31.36	6.28	35.85	100	159	P	H
		2456.196	86.84	-	-	85.05	31.36	6.28	35.85	100	159	A	H
		2486.92	49.26	-24.74	74	47.35	31.37	6.33	35.79	100	159	P	H
		2484.52	36.55	-17.45	54	34.64	31.37	6.33	35.79	100	159	A	H
		2455.528	86.03	-	-	84.24	31.36	6.28	35.85	115	191	P	V
		2456.279	81.78	-	-	79.99	31.36	6.28	35.85	115	191	A	V
		2486.04	49.48	-24.52	74	47.57	31.37	6.33	35.79	115	191	P	V
		2486.4	36.44	-17.56	54	34.53	31.37	6.33	35.79	115	191	A	V



802.11b CH 11 2462MHz	*	2462	94.91	-	-	90.35	32.98	4.87	33.29	105	188	P	H
	*	2462	80.93	-	-	76.37	32.98	4.87	33.29	105	188	A	H
		2484.55	58.86	-15.14	74	54.26	33.01	4.88	33.29	105	188	P	H
		2483.5	37.95	-16.05	54	33.35	33.01	4.88	33.29	105	188	A	H
	*	2462	93.26	-	-	88.7	32.98	4.87	33.29	193	347	P	V
	*	2462	80.03	-	-	75.47	32.98	4.87	33.29	193	347	A	V
		2483.8	55.23	-18.77	74	50.63	33.01	4.88	33.29	154	347	P	V
		2483.5	36.13	-17.87	54	31.53	33.01	4.88	33.29	154	347	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		4824	49.88	-24.12	74	41.94	35.17	6.57	33.8	100	152	P	H
		4824	50.41	-23.59	74	42.47	35.17	6.57	33.8	100	105	P	V
802.11b CH 06 2437MHz		4874	50.01	-23.99	74	42.01	35.18	6.62	33.8	100	152	P	H
		7312	50.05	-23.95	74	39.81	36.2	8.17	34.13	102	332	P	H
		4874	47.05	-26.95	74	39.05	35.18	6.62	33.8	100	266	P	V
		7312	50.3	-23.7	74	40.06	36.2	8.17	34.13	100	203	P	V
802.11b CH 11 2462MHz		4924	47.79	-26.21	74	39.78	35.19	6.62	33.8	100	120	P	H
		7386	48	-26	74	37.64	36.24	8.28	34.16	110	203	P	H
		4924	47.2	-26.8	74	39.19	35.19	6.62	33.8	100	215	P	V
		7386	50.74	-23.26	74	40.38	36.24	8.28	34.16	100	212	P	V
Remark	1. Average measurement was not performed if peak level went lower than the average limit. 2. All results are PASS against limit line.												



15C 2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11g CH 01 2412MHz	*	2412	97.4	-	-	92.96	32.89	4.82	33.27	112	208	P	H
	*	2412	87.31	-	-	82.87	32.89	4.82	33.27	112	208	A	H
		2389.74	63.95	-10.05	74	59.54	32.86	4.81	33.26	112	208	P	H
		2389.74	44.87	-9.13	54	40.46	32.86	4.81	33.26	112	208	A	H
	*	2412	100.11	-	-	95.67	32.89	4.82	33.27	200	304	P	V
	*	2412	88.62	-	-	84.18	32.89	4.82	33.27	200	304	A	V
	!	2389.92	69.43	-4.57	74	65.02	32.86	4.81	33.26	200	304	P	V
	!	2390	48.94	-5.06	54	44.53	32.86	4.81	33.26	200	304	A	V
802.11g CH 06 2437MHz	*	2437	101.19	-	-	96.67	32.95	4.85	33.28	100	0	P	H
	*	2437	89.62	-	-	85.1	32.95	4.85	33.28	100	0	A	H
		2389.83	53.3	-20.7	74	48.89	32.86	4.81	33.26	100	15	P	H
		2384.7	38.64	-15.36	54	34.28	32.83	4.79	33.26	100	15	A	H
		2485.18	53.68	-20.32	74	49.08	33.01	4.88	33.29	100	22	P	H
		2489.5	36.47	-17.53	54	31.82	33.05	4.9	33.3	100	22	A	H
	*	2437	100.68	-	-	96.16	32.95	4.85	33.28	300	169	P	V
	*	2437	89.71	-	-	85.19	32.95	4.85	33.28	300	169	A	V
		2385.24	54.13	-19.87	74	49.77	32.83	4.79	33.26	200	152	P	V
		2384.61	39.63	-14.37	54	35.27	32.83	4.79	33.26	200	152	A	V
		2488.75	53	-21	74	48.35	33.05	4.9	33.3	352	189	P	V
		2489.35	37.69	-16.31	54	33.04	33.05	4.9	33.3	354	189	A	V



802.11g CH 11 2462MHz	*	2462	94.59	-	-	90.03	32.98	4.87	33.29	107	198	P	H
	*	2462	83.33	-	-	78.77	32.98	4.87	33.29	107	198	A	H
		2483.58	60.62	-13.38	74	56.02	33.01	4.88	33.29	107	198	P	H
		2483.71	38.92	-15.08	54	34.32	33.01	4.88	33.29	107	198	A	H
	*	2462	96.69	-	-	92.13	32.98	4.87	33.29	200	50	P	H
	*	2462	85.32	-	-	80.76	32.98	4.87	33.29	200	50	A	H
		2484.28	60.07	-13.93	74	55.47	33.01	4.88	33.29	200	50	P	V
		2483.53	39.65	-14.35	54	35.05	33.01	4.88	33.29	200	50	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz
WIFI 802.11g (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11g CH 01 2412MHz		4824	46.84	-27.16	74	38.9	35.17	6.57	33.8	100	120	P	H
		4822	48.38	-25.62	74	40.44	35.17	6.57	33.8	100	91	P	V
802.11g CH 06 2437MHz		4874	47.16	-26.84	74	39.16	35.18	6.62	33.8	102	112	P	H
		7312	50.05	-23.95	74	39.81	36.2	8.17	34.13	100	102	P	H
		4874	46.9	-27.1	74	38.9	35.18	6.62	33.8	100	116	P	V
		7312	49.28	-24.72	74	39.04	36.2	8.17	34.13	120	1	P	V
802.11g CH 11 2462MHz		4924	47.23	-26.77	74	39.22	35.19	6.62	33.8	112	230	P	H
		7386	49.69	-24.31	74	39.33	36.24	8.28	34.16	116	26	P	H
		4924	46.7	-27.3	74	38.69	35.19	6.62	33.8	132	263	P	V
		7386	49.28	-24.72	74	38.92	36.24	8.28	34.16	115	120	P	V
Remark	1. Average measurement was not performed if peak level went lower than the average limit. 2. All results are PASS against limit line.												



15C 2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 CH 01 2412MHz	*	2412	92.56	-	-	88.12	32.89	4.82	33.27	147	317	P	H
	*	2412	81.36	-	-	76.92	32.89	4.82	33.27	147	317	A	H
		2389.83	66.46	-7.54	74	62.05	32.86	4.81	33.26	147	317	P	H
		2390	45.78	-8.22	54	41.37	32.86	4.81	33.26	147	317	A	H
	*	2412	98.76	-	-	94.32	32.89	4.82	33.27	200	320	P	V
	*	2412	87.28	-	-	82.84	32.89	4.82	33.27	200	320	A	V
	!	2389.56	68.69	-5.31	74	64.28	32.86	4.81	33.26	200	320	P	V
	!	2390	48.7	-5.3	54	44.29	32.86	4.81	33.26	200	320	A	V
802.11n HT20 CH 06 2437MHz	*	2437	98.15	-	-	93.63	32.95	4.85	33.28	100	0	P	H
	*	2437	86.47	-	-	81.95	32.95	4.85	33.28	100	0	A	H
		2389.2	53.17	-20.83	74	48.76	32.86	4.81	33.26	100	0	P	H
		2385.6	38.68	-15.32	54	34.27	32.86	4.81	33.26	100	0	A	H
		2483.89	52.96	-21.04	74	48.36	33.01	4.88	33.29	100	0	P	H
		2488.81	36.3	-17.7	54	31.65	33.05	4.9	33.3	100	0	A	H
	*	2437	98.36	-	-	93.84	32.95	4.85	33.28	200	162	P	V
	*	2437	87.04	-	-	82.52	32.95	4.85	33.28	200	162	A	V
		2388.21	53.83	-20.17	74	49.42	32.86	4.81	33.26	200	162	P	V
		2385.24	39.24	-14.76	54	34.88	32.83	4.79	33.26	200	162	A	V
		2486.38	51.29	-22.71	74	46.69	33.01	4.88	33.29	200	162	P	V
		2488.69	35.95	-18.05	54	31.3	33.05	4.9	33.3	200	162	A	V



802.11n HT20 CH 11 2462MHz	*	2462	95.79	-	-	91.23	32.98	4.87	33.29	107	194	P	H
	*	2462	83.84	-	-	79.28	32.98	4.87	33.29	107	194	A	H
		2483.5	58.4	-15.6	74	53.8	33.01	4.88	33.29	107	194	P	H
		2483.5	39.29	-14.71	54	34.69	33.01	4.88	33.29	107	194	A	H
	*	2462	96.88	-	-	92.32	32.98	4.87	33.29	200	10	P	V
	*	2462	84.99	-	-	80.43	32.98	4.87	33.29	200	10	A	V
		2484.58	59.3	-14.7	74	54.7	33.01	4.88	33.29	200	10	P	V
		2483.62	39.81	-14.19	54	35.21	33.01	4.88	33.29	200	10	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 CH 01 2412MHz		4824	46.86	-27.14	74	38.92	35.17	6.57	33.8	100	125	P	H
		4824	46.85	-27.15	74	38.91	35.17	6.57	33.8	100	161	P	V
802.11n HT20 CH 06 2437MHz		4874	45.79	-28.21	74	37.79	35.18	6.62	33.8	100	161	P	H
		7312	45.16	-28.84	74	34.92	36.2	8.17	34.13	100	91	P	H
		4874	47.34	-26.66	74	39.34	35.18	6.62	33.8	100	51	P	V
		7312	45.77	-28.23	74	35.53	36.2	8.17	34.13	100	105	P	V
802.11n HT20 CH 11 2462MHz		4924	46.86	-27.14	74	38.85	35.19	6.62	33.8	100	104	P	H
		7386	46.23	-27.77	74	35.87	36.24	8.28	34.16	100	159	P	H
		4924	46.15	-27.85	74	38.14	35.19	6.62	33.8	100	84	P	V
		7386	46.06	-27.94	74	35.7	36.24	8.28	34.16	100	205	P	V
Remark	1. Average measurement was not performed if peak level went lower than the average limit. 2. All results are PASS against limit line.												



15C Emission below 1GHz

2.4GHz WIFI 802.11b (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11b LF		34.85	21.6	-18.4	40	39.57	15.1	0.54	33.61	100	150	P	H
		110.51	23.47	-20.03	43.5	44.3	11.8	0.98	33.61	-	-	P	H
		180.35	21.08	-22.42	43.5	45.02	8.4	1.23	33.57	-	-	P	H
		303.54	22.27	-23.73	46	40.95	13.08	1.61	33.37	-	-	P	H
		555.74	23.51	-22.49	46	35.88	18.51	2.13	33.01	-	-	P	H
		779.81	24.93	-21.07	46	35.23	19.87	2.51	32.68	-	-	P	H
		37.76	29.62	-10.38	40	48.97	13.7	0.58	33.63	100	45	P	V
		54.25	25.35	-14.65	40	51.76	6.49	0.68	33.58	-	-	P	V
		173.56	19.72	-23.78	43.5	43.13	8.95	1.21	33.57	-	-	P	V
		370.47	20.68	-25.32	46	37.22	15.05	1.75	33.34	-	-	P	V
		544.1	24.82	-21.18	46	37.35	18.39	2.1	33.02	-	-	P	V
		742.95	23.09	-22.91	46	33.59	19.84	2.45	32.79	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												

**Note symbol**

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency per 15.209(c).
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.