



# FCC RF Test Report

APPLICANT : ZTE CORPORATION  
EQUIPMENT : LTE/CDMA Multi-Mode Digital Mobile Phone  
BRAND NAME : ZTE  
MODEL NAME : Z837VL  
FCC ID : SRQ-Z837VL  
STANDARD : FCC Part 15 Subpart C §15.247  
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Sep. 30, 2016 and testing was completed on Nov. 08, 2016. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



## SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : SRQ-Z837VL

Page Number : 1 of 39

Report Issued Date : Dec. 22, 2016

Report Version : Rev. 01

Report Template No.: BU5-FR15CBT4.0 Version 1.3



# TABLE OF CONTENTS

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION..... 5**

1.1 Applicant ..... 5

1.2 Manufacturer ..... 5

1.3 Product Feature of Equipment Under Test..... 5

1.4 Product Specification of Equipment Under Test..... 5

1.5 Modification of EUT ..... 6

1.6 Testing Location ..... 6

1.7 Applicable Standards..... 7

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST..... 8**

2.1 Descriptions of Test Mode ..... 8

2.2 Test Mode ..... 9

2.3 Connection Diagram of Test System ..... 10

2.4 Support Unit used in test configuration and system ..... 11

2.5 EUT Operation Test Setup ..... 11

2.6 Measurement Results Explanation Example..... 11

**3 TEST RESULT ..... 12**

3.1 6dB and 99% Bandwidth Measurement ..... 12

3.2 Peak Output Power Measurement ..... 17

3.3 Power Spectral Density Measurement ..... 18

3.4 Conducted Band Edges and Spurious Emission Measurement ..... 23

3.5 Radiated Band Edges and Spurious Emission Measurement ..... 28

3.6 AC Conducted Emission Measurement..... 32

3.7 Antenna Requirements ..... 37

**4 LIST OF MEASURING EQUIPMENT..... 38**

**5 UNCERTAINTY OF EVALUATION..... 39**

**APPENDIX A. CONDUCTED TEST RESULTS**

**APPENDIX B. RADIATED SPURIOUS EMISSION**

**APPENDIX C. RADIATED SPURIOUS EMISSION PLOTS**

**APPENDIX D. DUTY CYCLE PLOTS**

**APPENDIX E. SETUP PHOTOGRAPHS**



**SUMMARY OF TEST RESULT**

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Pass	-
3.2	15.247(b)(3)	Peak Output Power	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 5.16 dB at 40.800 MHz for BLE 4.0 Under limit 5.13 dB at 38.910 MHz for BLE 4.2
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 8.74 dB at 1.216 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-



# 1 General Description

## 1.1 Applicant

**ZTE CORPORATION**

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park,  
Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

## 1.2 Manufacturer

**ZTE CORPORATION**

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park,  
Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	LTE/CDMA Multi-Mode Digital Mobile Phone
Brand Name	ZTE
Model Name	Z837VL
FCC ID	SRQ-Z837VL
EUT supports Radios application	CDMA/EV-DO/LTE WLAN 11b/g/n HT20/HT40 Bluetooth BR/EDR/LE
HW Version	Z837VLHVV1.0
SW Version	Z837VLV1.0.0B02
EUT Stage	Identical Prototype

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel(37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	<BLE 4.0> 8.42 dBm (0.0070 W) <BLE 4.2> 8.29 dBm (0.0067 W)
99% Occupied Bandwidth	1.062 MHz
Antenna Type / Gain	PIFA Antenna type with gain -3.00 dBi
Type of Modulation	Bluetooth LE : GFSK



### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

<b>Test Site</b>	SPORTON INTERNATIONAL INC.
<b>Test Site Location</b>	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978
<b>Test Site No.</b>	<b>Sporton Site No.</b>
	TH05-HY

**Note:** The test site complies with ANSI C63.4 2014 requirement.

<b>Test Site</b>	SPORTON INTERNATIONAL (KUNSHAN) INC.
<b>Test Site Location</b>	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C. TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958
<b>Test Site No.</b>	<b>Sporton Site No.</b>
	CO01-KS

**Note:** The test site complies with ANSI C63.4 2014 requirement.

<b>Test Site</b>	SPORTON INTERNATIONAL INC.
<b>Test Site Location</b>	No.58, Aly. 75, Ln. 564, Wenhua 3rd Rd. Guishan Dist, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
<b>Test Site No.</b>	<b>Sporton Site No.</b>
	03CH11-HY

**Note:** The test site complies with ANSI C63.4 2014 requirement.



## 1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05
- ♦ ANSI C63.10-2013

**Remark:** All test items were verified and recorded according to the standards and without any deviation during the test.



## 2 Test Configuration of Equipment Under Test

### 2.1 Descriptions of Test Mode

The RF output power was recorded in the following table:

Channel	Frequency	Bluetooth 4.0 – LE RF Output Power	
		Data Rate / Modulation	
		GFSK	
		1Mbps	
Ch00	2402MHz	8.30 dBm	
Ch19	2440MHz	8.42 dBm	
Ch39	2480MHz	7.61 dBm	

Channel	Frequency	Bluetooth 4.2 – LE RF Output Power	
		Data Rate / Modulation	
		GFSK	
		1Mbps	
Ch00	2402MHz	8.29 dBm	
Ch19	2440MHz	7.84 dBm	
Ch39	2480MHz	7.00 dBm	

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). Pre-scanned tests, X, Y, Z in three orthogonal panels to determine the final configuration (Z plane as worst plane) from all possible combinations.
- b. AC power line Conducted Emission was tested under maximum output power.




## 2.2 Test Mode

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth – LE / GFSK
<b>Conducted TCs</b>	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
<b>Radiated TCs</b>	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
<b>AC Conducted Emission</b>	Mode 1: CDMA BC0 Idle + Bluetooth Link + WLAN link (2.4GHz) + USB Cable (Charging from Adapter 1) + Earphone + Battery 1 Mode 2: CDMA BC0 Idle + Bluetooth Link + WLAN link (2.4GHz) + USB Cable (Charging from Adapter 2) + Earphone + Battery 2 Mode 3: CDMA BC0 Idle + Bluetooth Link + WLAN link (2.4GHz) + USB Cable (Charging from Adapter 3) + Earphone + Battery 2
<b>Remark:</b>	
<ol style="list-style-type: none"> <li>The worst case of conducted emission is mode 2; only the test data of it was reported.</li> <li>For Radiated TCs, The tests were performance with Adapter 1, Battery 1, iPod Earphone, and USB Cable.</li> </ol>	

## 2.3 Connection Diagram of Test System

<Bluetooth – LE Tx Mode>

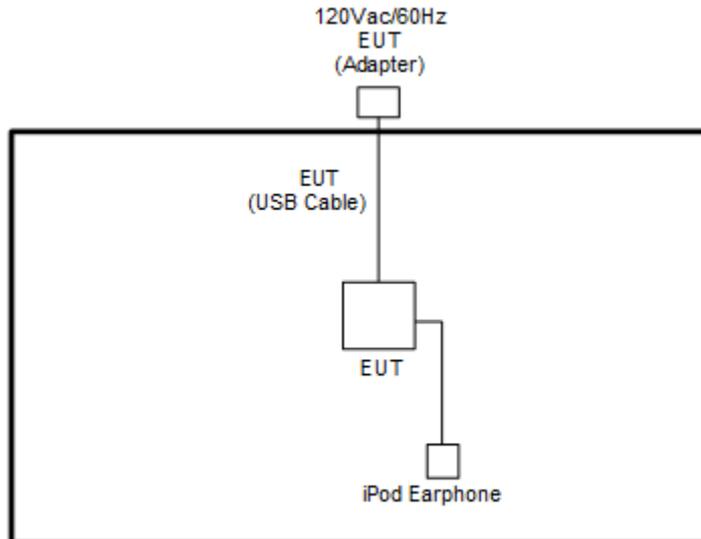

<AC Conducted Emission Mode>

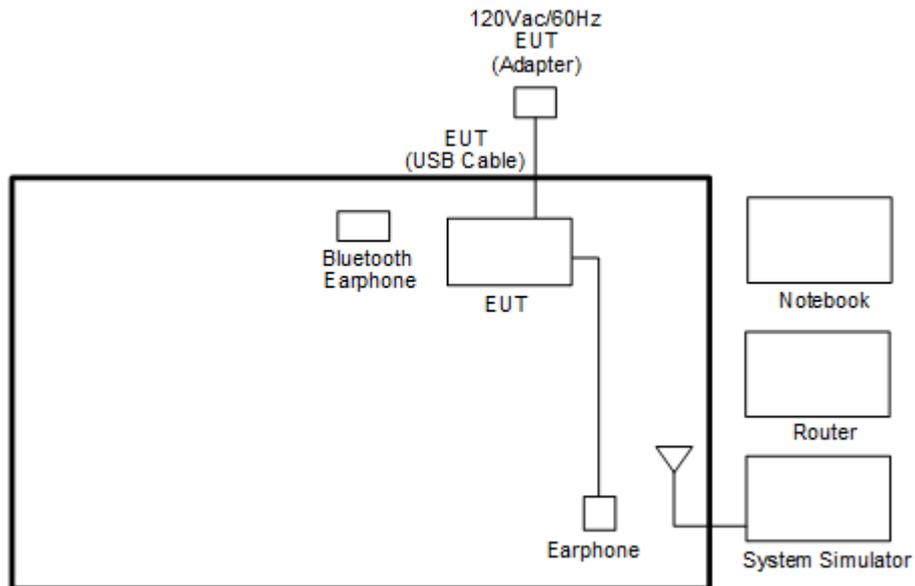



## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	Lenovo	G480	PRC4	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
2.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
3.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
4.	Earphone	Lenovo	LH102	N/A	N/A	Unshielded, 1.2m
5.	Router	LINKSYS	WRT600N	Q87-WRT60 0NV11	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
6.	iPod Earphone	Apple	N/A	Verification	Unshielded, 1.0 m	N/A

## 2.5 EUT Operation Test Setup

For Bluetooth function, programmed RF utility, "QRCT" installed in the notebook make the EUT provide functions like channel selection and power level for continuous transmitting and receiving signals.

## 2.6 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 6dB and 99% Bandwidth Measurement

##### 3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


##### 3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

##### 3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 30kHz and set the Video bandwidth (VBW) = 100kHz.
6. Measure and record the results in the test report.

##### 3.1.4 Test Setup

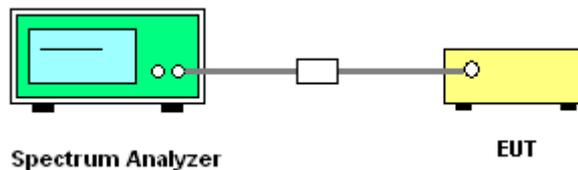




### 3.1.5 Test Result of 6dB Bandwidth

Test data refer to Appendix A.


6 dB Bandwidth Plot on Channel 00

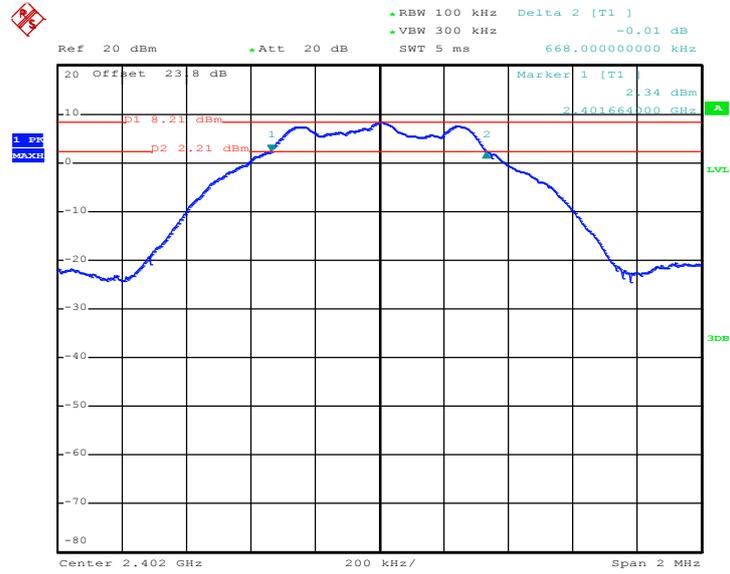

Date: 2.NOV.2016 01:09:24




6 dB Bandwidth Plot on Channel 19

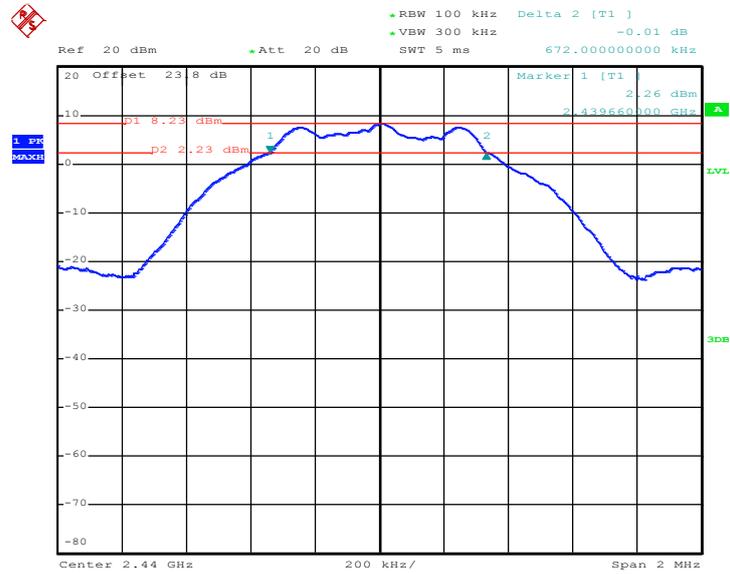

Date: 2.NOV.2016 01:14:03

6 dB Bandwidth Plot on Channel 39

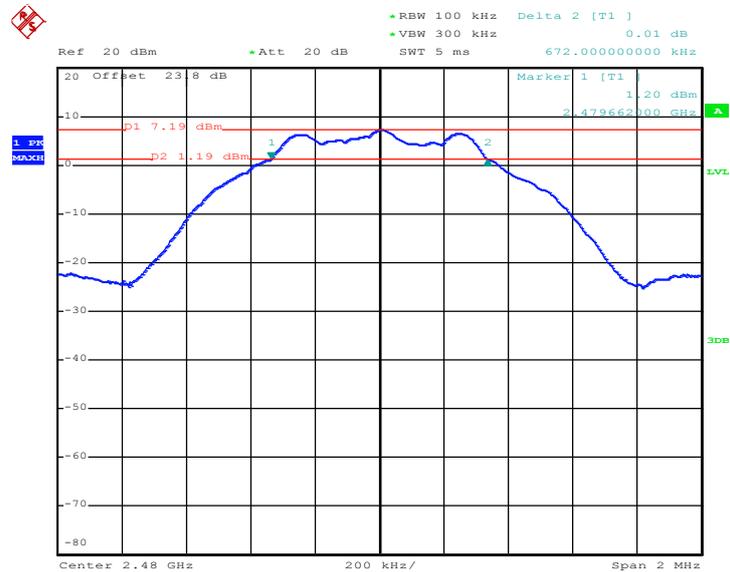


Date: 2.NOV.2016 01:18:21



### 3.1.6 Test Result of 99% Occupied Bandwidth

Test data refer to Appendix A.


99% Bandwidth Plot on Channel 00

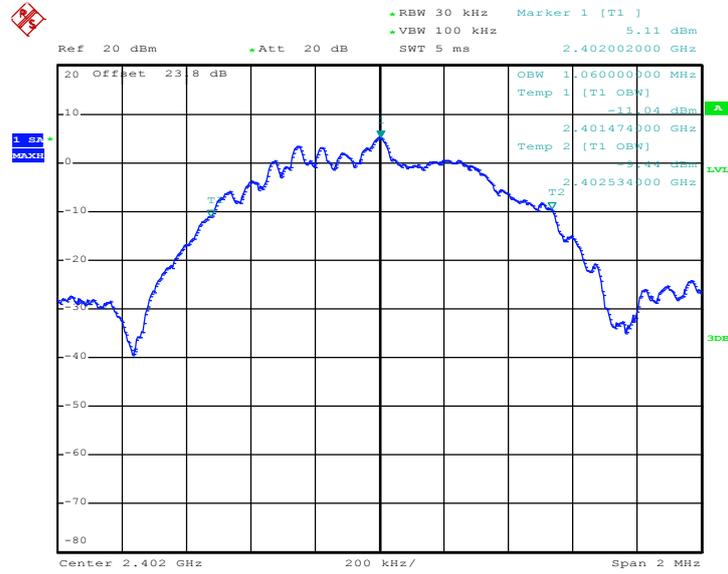

Date: 2.NOV.2016 01:12:15




99% Occupied Bandwidth Plot on Channel 19

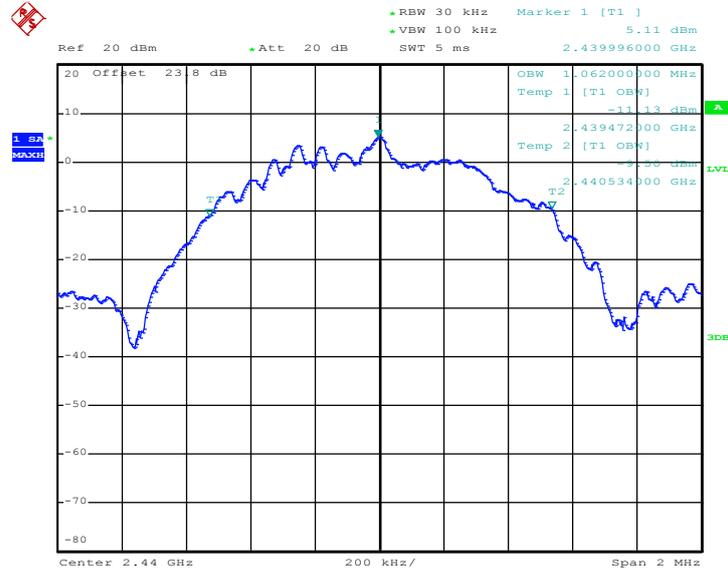

Date: 2.NOV.2016 01:16:04

99% Occupied Bandwidth Plot on Channel 39

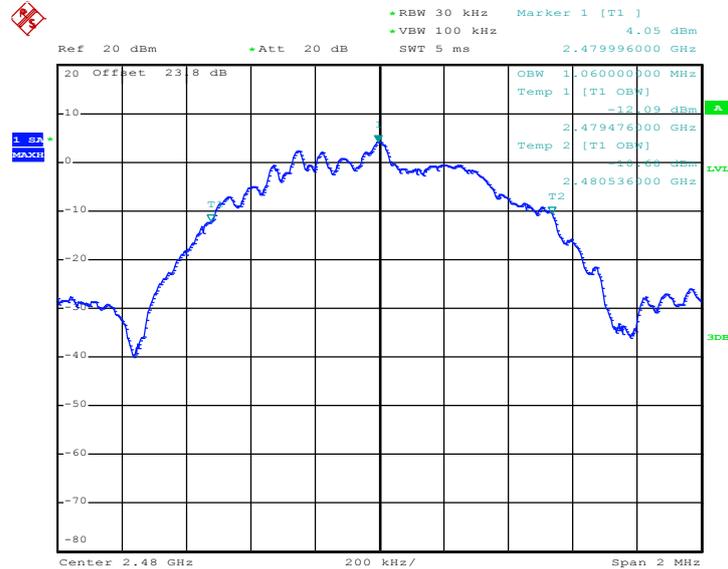

Date: 2.NOV.2016 01:20:00

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

## 3.2 Peak Output Power Measurement

### 3.2.1 Limit of Peak Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


### 3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

### 3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r05 section 9.1.2 PKPM1 Peak power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup

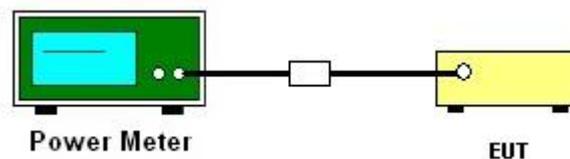

### 3.2.5 Test Result of Peak Output Power

Test data refers to Appendix A.

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


#### 3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

#### 3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

#### 3.3.4 Test Setup

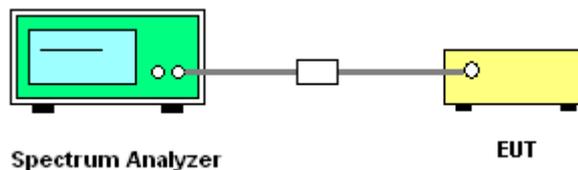




### 3.3.5 Test Result of Power Spectral Density

Test data refers to Appendix A.

### 3.3.6 Test Result of Power Spectral Density Plots (100kHz)


PSD 100kHz Plot on Channel 00

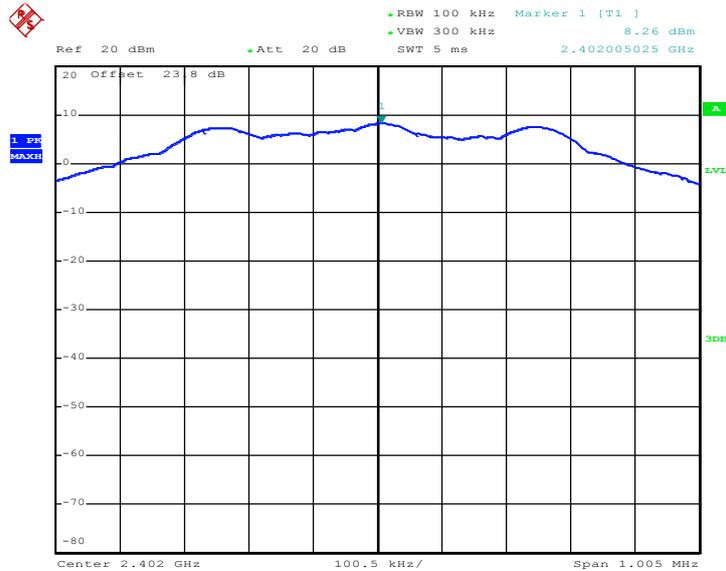

Date: 2.NOV.2016 01:10:34




PSD 100kHz Plot on Channel 19

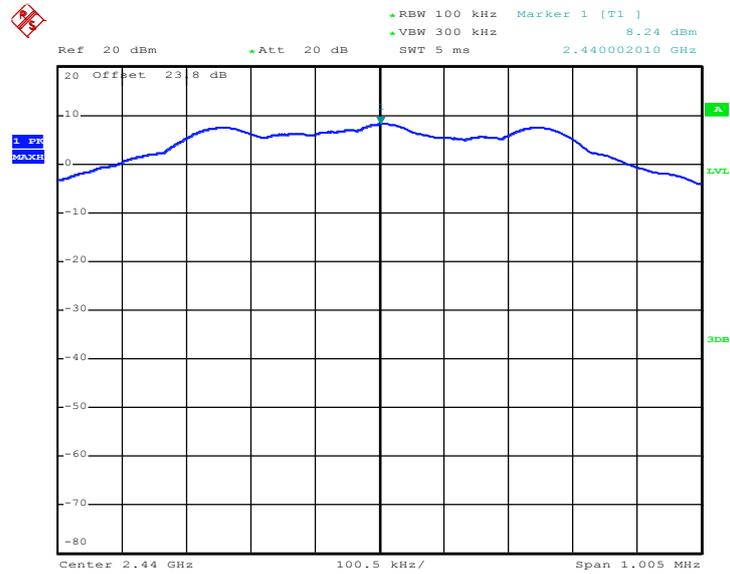

Date: 2.NOV.2016 01:14:53

PSD 100kHz Plot on Channel 39

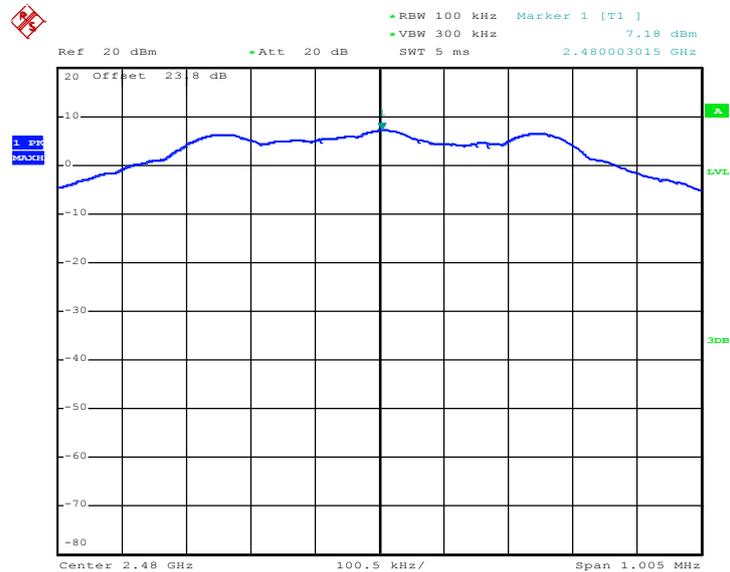


Date: 2.NOV.2016 01:18:59



### 3.3.7 Test Result of Power Spectral Density Plots (3kHz)


PSD 3kHz Plot on Channel 00

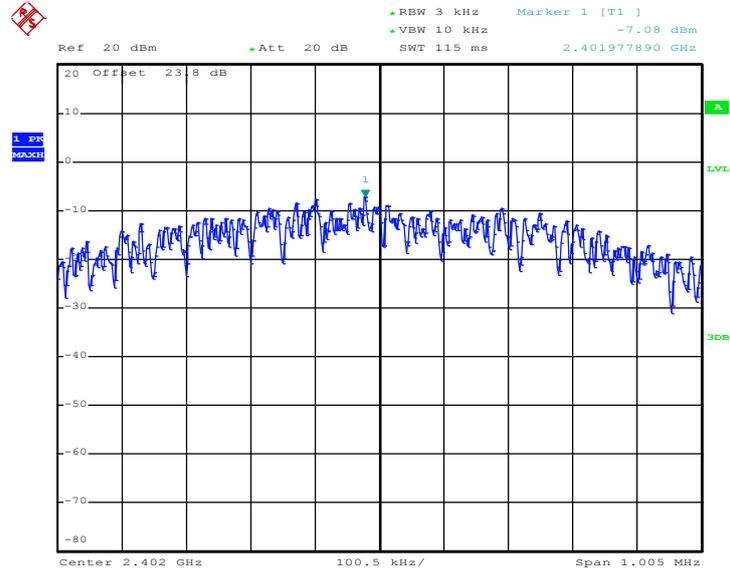

Date: 2.NOV.2016 01:10:15




PSD 3kHz Plot on Channel 19

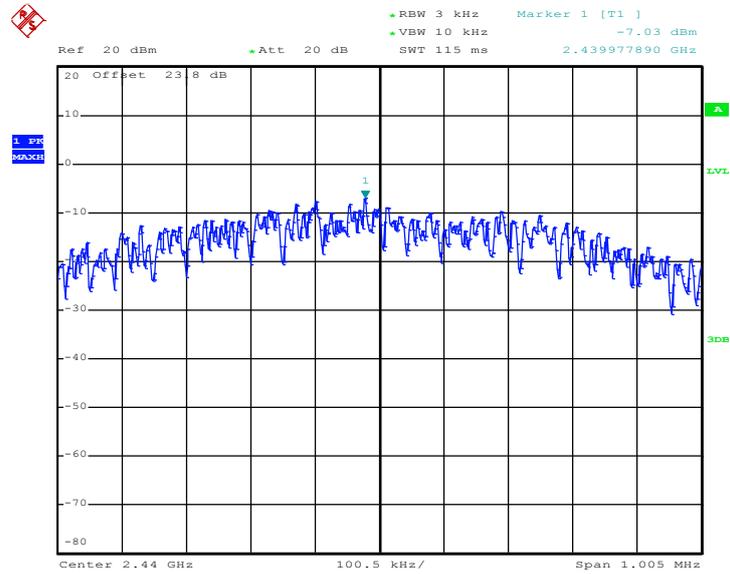

Date: 2.NOV.2016 01:14:25

PSD 3kHz Plot on Channel 39

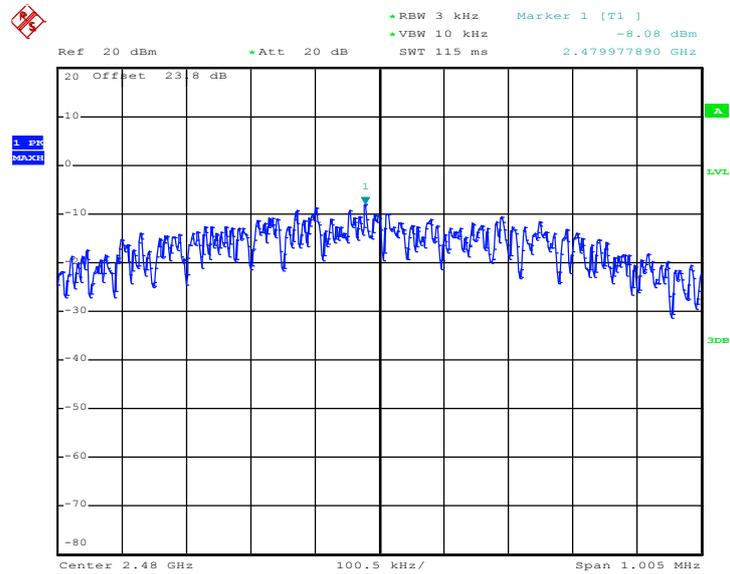

Date: 2.NOV.2016 01:18:42

## 3.4 Conducted Band Edges and Spurious Emission Measurement

### 3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


### 3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

### 3.4.3 Test Procedure

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


### 3.4.4 Test Setup

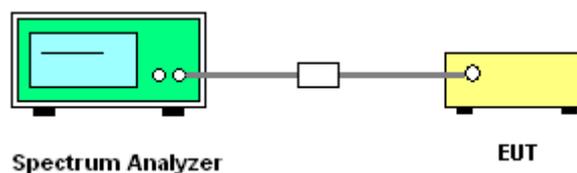




### 3.4.5 Test Result of Conducted Band Edges Plots

#### Low Band Edge Plot on Channel 00

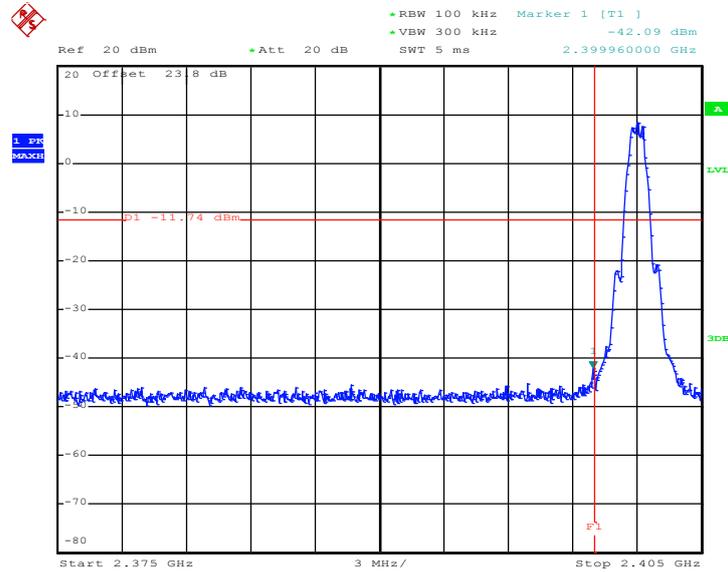

Date: 2.NOV.2016 01:11:00

#### High Band Edge Plot on Channel 39

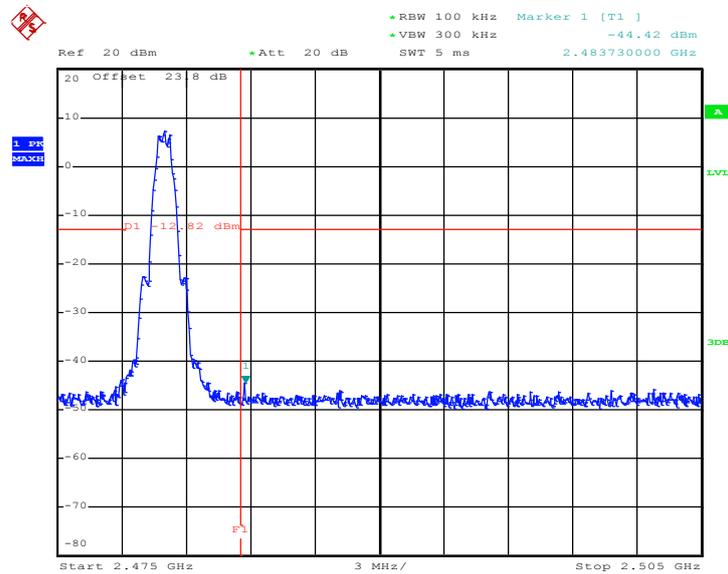


Date: 2.NOV.2016 01:19:21






### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

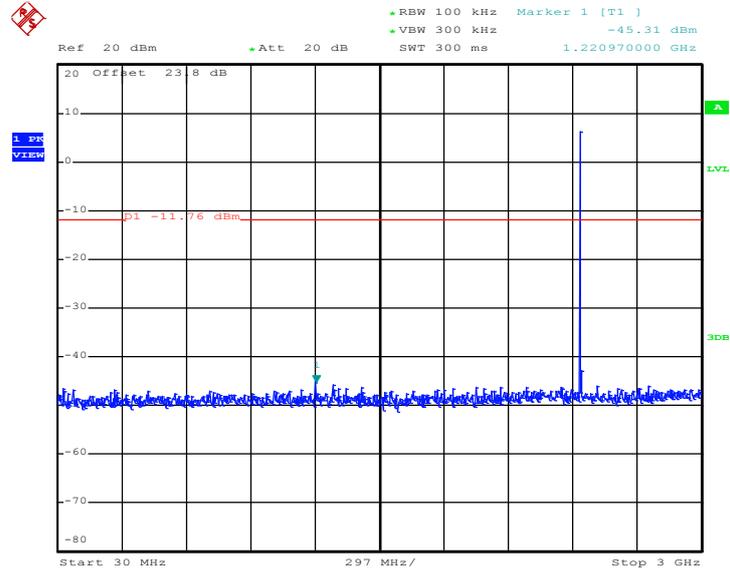

Date: 2.NOV.2016 01:15:25


### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

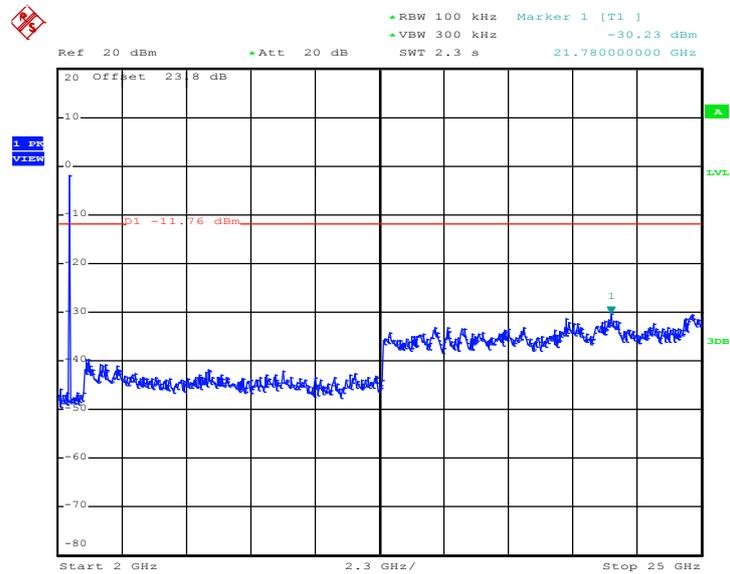

Date: 2.NOV.2016 01:15:34




### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

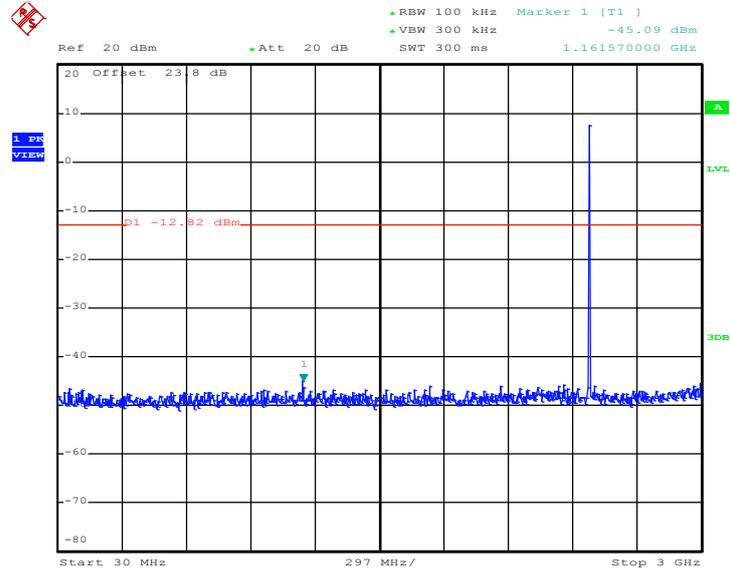

Date: 2.NOV.2016 01:19:34

### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

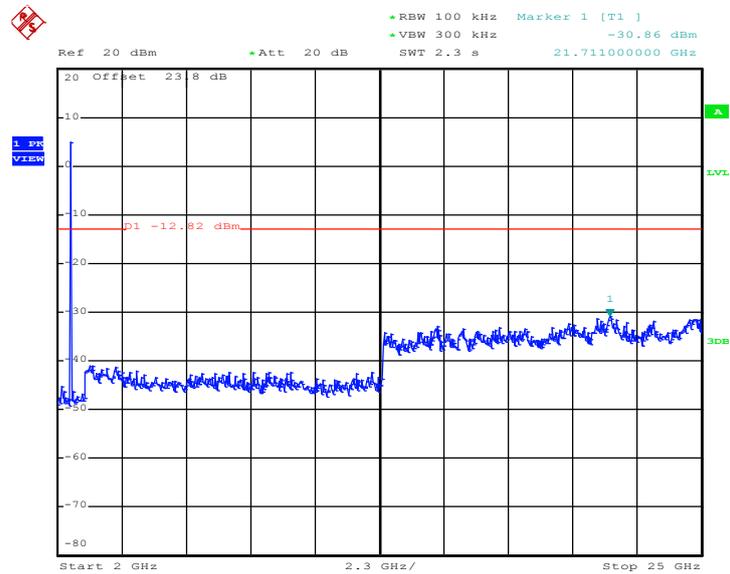

Date: 2.NOV.2016 01:19:42



### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.




### 3.5.3 Test Procedures


1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.  
For average measurement:
    - VBW = 10 Hz, when duty cycle is no less than 98 percent.
    - VBW  $\geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

### 3.5.4 Test Setup


For radiated emissions below 30MHz

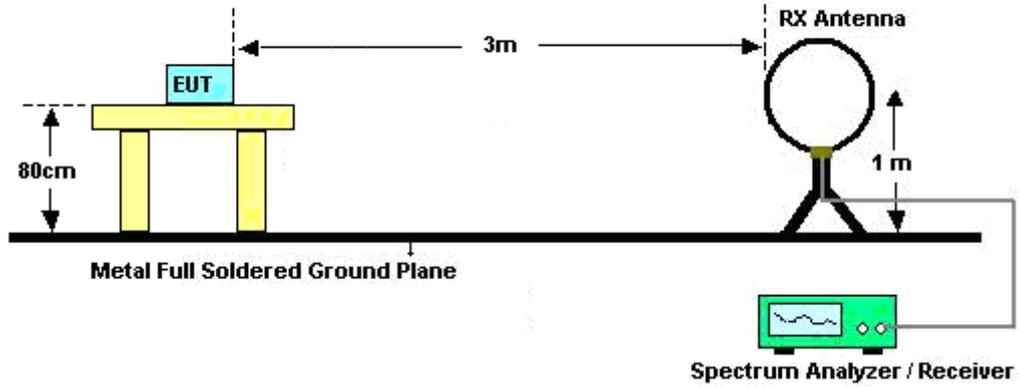

For radiated emissions from 30MHz to 1GHz

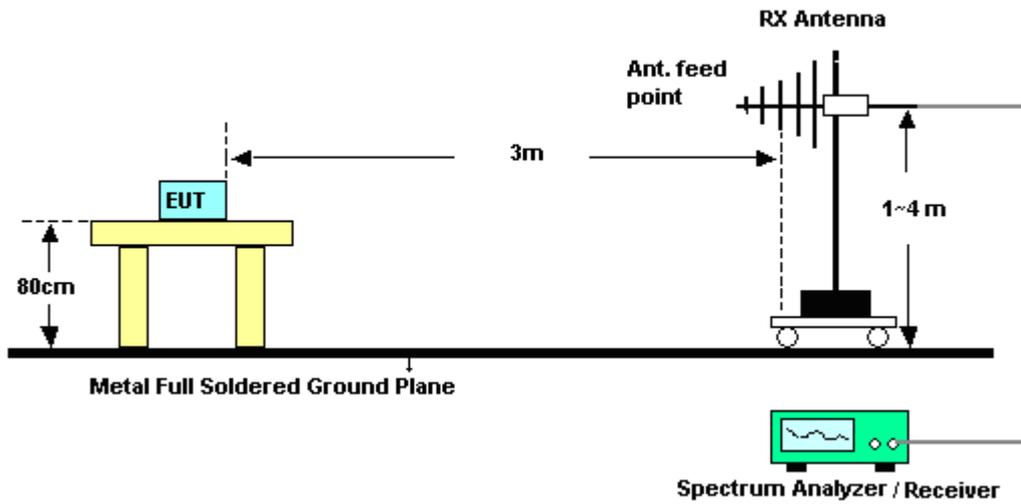

For radiated emissions above 1GHz

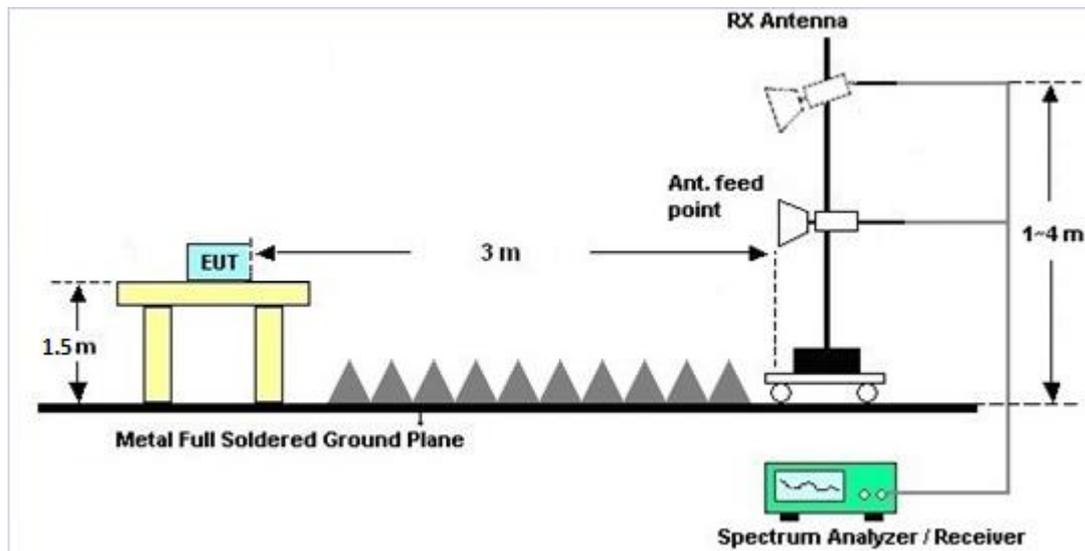

### 3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

### 3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B and C.

### 3.5.7 Duty Cycle

Please refer to Appendix D.

### 3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B and C.



### 3.6 AC Conducted Emission Measurement

#### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

#### 3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


### 3.6.4 Test Setup

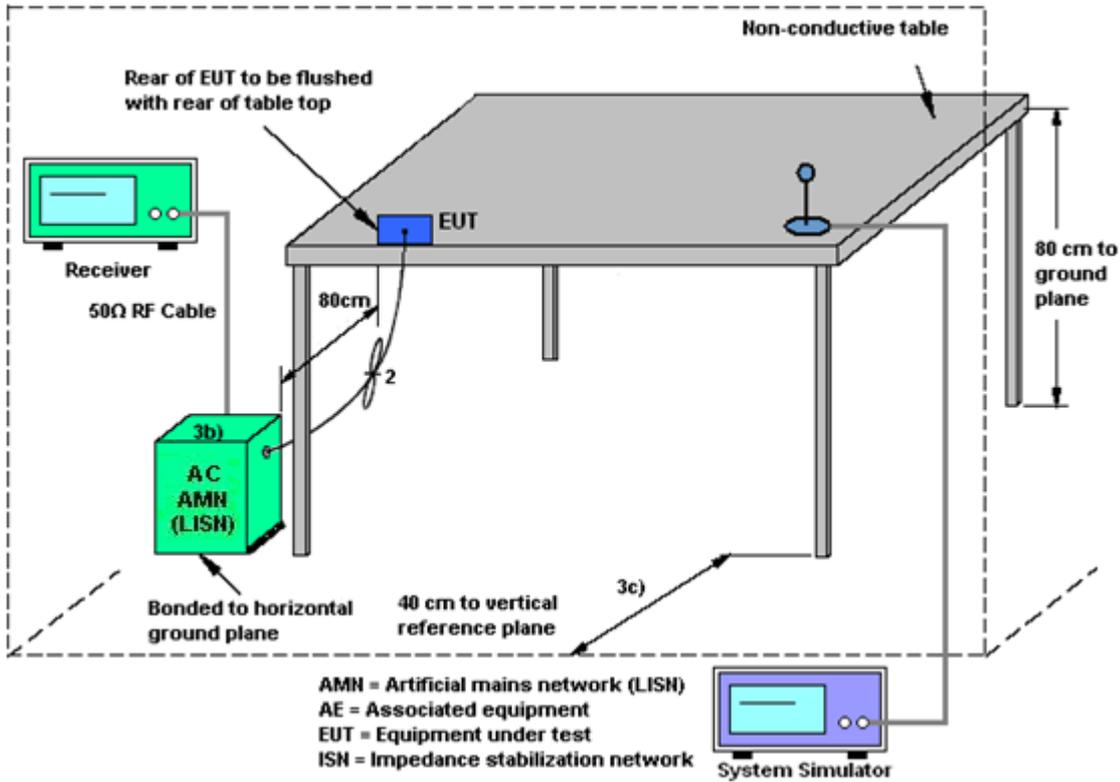



3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 2	Temperature :	20~22°C
Test Engineer :	Morris Li	Relative Humidity :	48~50%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	CDMA BC0 Idle + Bluetooth Link + WLAN link (2.4GHz) + USB Cable (Charging from Adapter 2) + Earphone + Battery 2		

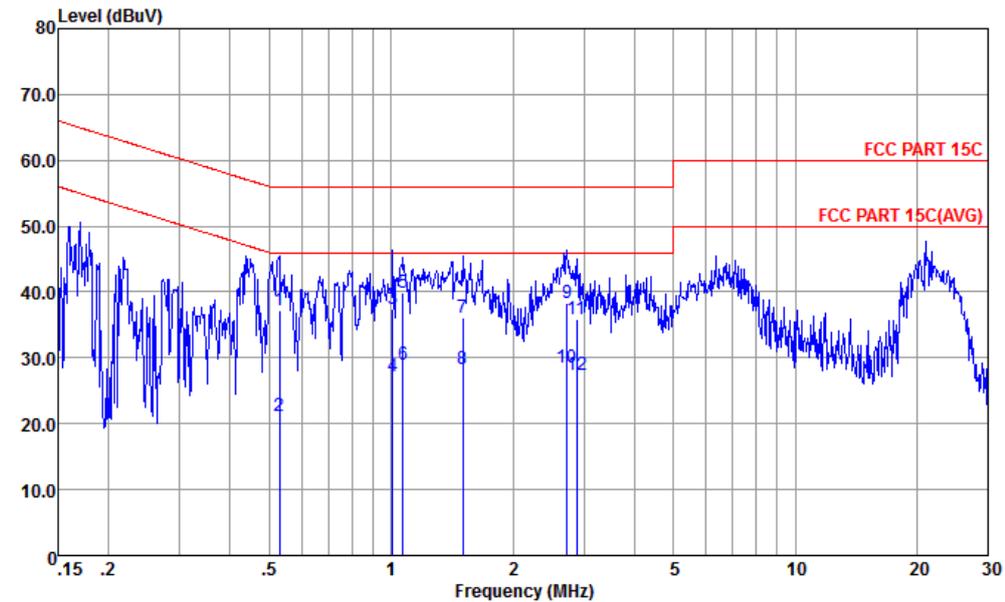


Site : C001-KS

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.529	37.32	-18.68	56.00	26.90	0.23	10.19	QP
2	0.529	21.22	-24.78	46.00	10.80	0.23	10.19	Average
3	1.010	37.34	-18.66	56.00	26.90	0.25	10.19	QP
4	1.010	27.24	-18.76	46.00	16.80	0.25	10.19	Average
5 *	1.071	39.83	-16.17	56.00	29.40	0.24	10.19	QP
6	1.071	28.93	-17.07	46.00	18.50	0.24	10.19	Average
7	1.503	36.20	-19.80	56.00	25.80	0.21	10.19	QP
8	1.503	28.30	-17.70	46.00	17.90	0.21	10.19	Average
9	2.721	38.29	-17.71	56.00	27.90	0.18	10.21	QP
10	2.721	28.59	-17.41	46.00	18.20	0.18	10.21	Average
11	2.884	35.90	-20.10	56.00	25.51	0.18	10.21	QP
12	2.884	27.30	-18.70	46.00	16.91	0.18	10.21	Average



Test Mode :	Mode 2	Temperature :	20~22°C
Test Engineer :	Morris Li	Relative Humidity :	48~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	CDMA BC0 Idle + Bluetooth Link + WLAN link (2.4GHz) + USB Cable (Charging from Adapter 2) + Earphone + Battery 2		

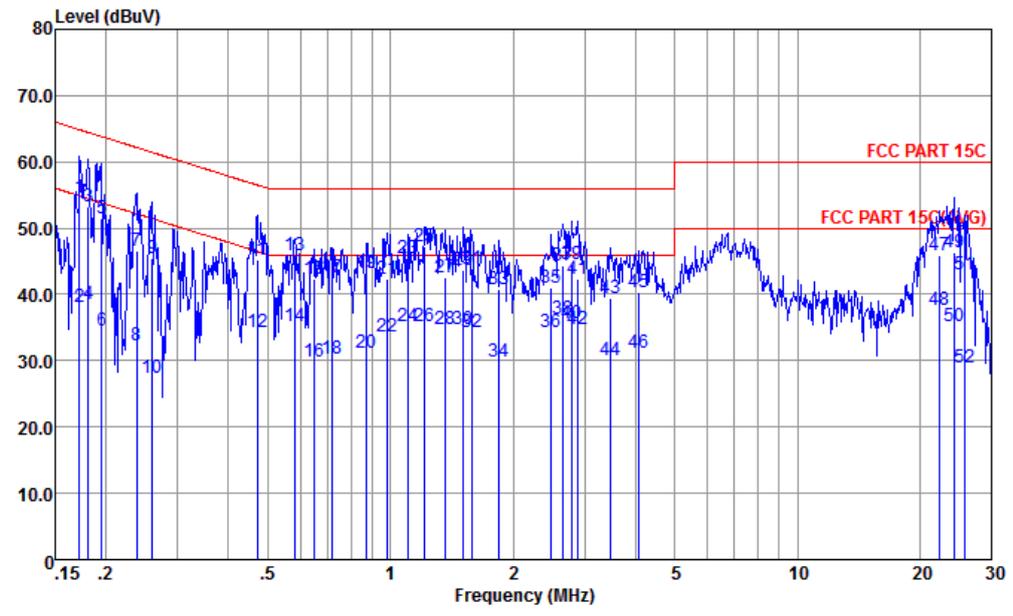

Site : CO01-KS

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.172	54.57	-10.29	64.86	43.91	0.30	10.36	QP
2	0.172	38.17	-16.69	54.86	27.51	0.30	10.36	Average
3	0.181	53.36	-11.10	64.46	42.70	0.31	10.35	QP
4	0.181	38.56	-15.90	54.46	27.90	0.31	10.35	Average
5	0.195	51.45	-12.35	63.80	40.80	0.31	10.34	QP
6	0.195	34.45	-19.35	53.80	23.80	0.31	10.34	Average
7	0.238	46.51	-15.66	62.17	35.90	0.31	10.30	QP
8	0.238	32.41	-19.76	52.17	21.80	0.31	10.30	Average
9	0.260	45.49	-15.93	61.42	34.90	0.31	10.28	QP
10	0.260	27.39	-24.03	51.42	16.80	0.31	10.28	Average
11	0.471	45.31	-11.18	56.49	34.80	0.32	10.19	QP
12	0.471	34.41	-12.08	46.49	23.90	0.32	10.19	Average
13	0.582	45.91	-10.09	56.00	35.40	0.33	10.18	QP
14	0.582	35.21	-10.79	46.00	24.70	0.33	10.18	Average
15	0.647	42.31	-13.69	56.00	31.79	0.34	10.18	QP
16	0.647	29.91	-16.09	46.00	19.39	0.34	10.18	Average



<b>Test Mode :</b>	Mode 2	<b>Temperature :</b>	20~22°C					
<b>Test Engineer :</b>	Morris Li	<b>Relative Humidity :</b>	48~50%					
<b>Test Voltage :</b>	120Vac / 60Hz	<b>Phase :</b>	Neutral					
<b>Function Type :</b>	CDMA BC0 Idle + Bluetooth Link + WLAN link (2.4GHz) + USB Cable (Charging from Adapter 2) + Earphone + Battery 2							
	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
	17	0.716	42.62	-13.38	56.00	32.10	0.34	10.18 QP
	18	0.716	30.22	-15.78	46.00	19.70	0.34	10.18 Average
	19	0.876	43.24	-12.76	56.00	32.70	0.36	10.18 QP
	20	0.876	31.24	-14.76	46.00	20.70	0.36	10.18 Average
	21	0.984	42.36	-13.64	56.00	31.80	0.37	10.19 QP
	22	0.984	33.66	-12.34	46.00	23.10	0.37	10.19 Average
	23	1.106	45.36	-10.64	56.00	34.80	0.37	10.19 QP
	24	1.106	35.26	-10.74	46.00	24.70	0.37	10.19 Average
	25 *	1.216	47.26	-8.74	56.00	36.70	0.37	10.19 QP
	26	1.216	35.26	-10.74	46.00	24.70	0.37	10.19 Average
	27	1.367	42.46	-13.54	56.00	31.90	0.37	10.19 QP
	28	1.367	34.66	-11.34	46.00	24.10	0.37	10.19 Average
	29	1.511	43.76	-12.24	56.00	33.19	0.38	10.19 QP
	30	1.511	34.66	-11.34	46.00	24.09	0.38	10.19 Average
	31	1.585	43.96	-12.04	56.00	33.39	0.38	10.19 QP
	32	1.585	34.36	-11.64	46.00	23.79	0.38	10.19 Average
	33	1.848	40.77	-15.23	56.00	30.20	0.38	10.19 QP
	34	1.848	29.97	-16.03	46.00	19.40	0.38	10.19 Average
	35	2.487	41.08	-14.92	56.00	30.50	0.38	10.20 QP
	36	2.487	34.28	-11.72	46.00	23.70	0.38	10.20 Average
	37	2.650	44.38	-11.62	56.00	33.80	0.37	10.21 QP
	38	2.650	36.28	-9.72	46.00	25.70	0.37	10.21 Average
	39	2.779	44.48	-11.52	56.00	33.90	0.37	10.21 QP
	40	2.779	35.68	-10.32	46.00	25.10	0.37	10.21 Average
	41	2.884	42.39	-13.61	56.00	31.81	0.37	10.21 QP
	42	2.884	34.69	-11.31	46.00	24.11	0.37	10.21 Average
	43	3.472	39.40	-16.60	56.00	28.80	0.37	10.23 QP
	44	3.472	30.10	-15.90	46.00	19.50	0.37	10.23 Average
	45	4.070	40.40	-15.60	56.00	29.80	0.36	10.24 QP
	46	4.070	31.10	-14.90	46.00	20.50	0.36	10.24 Average
	47	22.416	45.86	-14.14	60.00	34.79	0.25	10.82 QP
	48	22.416	37.76	-12.24	50.00	26.69	0.25	10.82 Average
	49	24.271	46.40	-13.60	60.00	35.40	0.24	10.76 QP
	50	24.271	35.20	-14.80	50.00	24.20	0.24	10.76 Average
	51	25.727	43.10	-16.90	60.00	32.10	0.24	10.76 QP
	52	25.727	28.90	-21.10	50.00	17.90	0.24	10.76 Average



## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

### **3.7.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.7.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Agilent	E4416A	GB412923 44	300MHz~40GHz	Jan. 08, 2016	Oct. 03, 2016 ~ Nov. 02, 2016	Jan. 07, 2017	Conducted (TH05-HY)
Power Sensor	Agilent	E9327A	US404415 48	300MHz~40GHz	Jan. 07, 2016	Oct. 03, 2016 ~ Nov. 02, 2016	Jan. 06, 2017	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100057	9kHz-40GHz	Nov. 23, 2015	Oct. 03, 2016 ~ Nov. 02, 2016	Nov. 22, 2016	Conducted (TH05-HY)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 29, 2016	Oct. 31, 2016	Apr. 28, 2017	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2016	Oct. 31, 2016	Oct. 13, 2017	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Oct. 13, 2016	Oct. 31, 2016	Oct. 13, 2017	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000 0811	AC 0V~300V, 45Hz~1000Hz	Oct. 13, 2016	Oct. 31, 2016	Oct. 13, 2017	Conduction (CO01-KS)
Transient limiter	COM-POWER	LIT-153	531035	150kHz~30MHz	Aug. 26, 2016	Oct. 31, 2016	Aug. 25, 2017	Conduction (CO01-KS)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Nov. 20, 2015	Nov. 05, 2016 ~ Nov. 08, 2016	Nov. 19, 2016	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Sep. 02, 2015	Nov. 05, 2016 ~ Nov. 08, 2016	Sep. 01, 2017	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D	35414	30MHz~1GHz	Oct. 15, 2016	Nov. 05, 2016 ~ Nov. 08, 2016	Oct. 14, 2017	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-152 2	1GHz ~ 18GHz	Mar. 30, 2016	Nov. 05, 2016 ~ Nov. 08, 2016	Mar. 31, 2017	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY532700 80	1GHz~26.5GHz	Nov. 19, 2015	Nov. 05, 2016 ~ Nov. 08, 2016	Nov. 18, 2016	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY523502 76	10Hz ~ 44GHz	Mar. 21, 2016	Nov. 05, 2016 ~ Nov. 08, 2016	Mar. 20, 2017	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Nov. 05, 2016 ~ Nov. 08, 2016	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Nov. 05, 2016 ~ Nov. 08, 2016	N/A	Radiation (03CH11-HY)
Preamplifier	MITEQ	TTA0204	1872107	2GHz~40GHz	Feb. 15, 2016	Nov. 05, 2016 ~ Nov. 08, 2016	Feb. 14, 2017	Radiation (03CH11-HY)
EMI Test Receiver	Keysight	N9038A(MXE )	MY554201 70	N/A	Mar. 10, 2016	Nov. 05, 2016 ~ Nov. 08, 2016	Mar. 09, 2017	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170 576	18GHz- 40GHz	Apr. 15, 2016	Nov. 05, 2016 ~ Nov. 08, 2016	Apr. 14, 2017	Radiation (03CH11-HY)



## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.27
---	------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.2
---	-----

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.5
---	-----

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.2
---	-----



## **Appendix A. Conducted Test Results**

**Bluetooth Low Energy**

Test Engineer:	Luffy Lin	Temperature:	21~25	°C
Test Date:	2016/10/03~2016/11/02	Relative Humidity:	51~54	%

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.06	0.67	0.50	Pass
BLE	1Mbps	1	19	2440	1.06	0.67	0.50	Pass
BLE	1Mbps	1	39	2480	1.06	0.67	0.50	Pass

**TEST RESULTS DATA**  
**Peak Power Table**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	8.30	30.00	-3.00	5.30	36.00	Pass
BLE	1Mbps	1	19	2440	8.42	30.00	-3.00	5.42	36.00	Pass
BLE	1Mbps	1	39	2480	7.61	30.00	-3.00	4.61	36.00	Pass

**TEST RESULTS DATA**  
**Average Power Table**  
**(Reporting Only)**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	1Mbps	1	0	2402	2.08	8.07
BLE	1Mbps	1	19	2440	2.08	8.22
BLE	1Mbps	1	39	2480	2.08	7.35

**TEST RESULTS DATA**  
**Peak Power Density**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	8.26	-7.08	-3.00	8.00	Pass
BLE	1Mbps	1	19	2440	8.24	-7.03	-3.00	8.00	Pass
BLE	1Mbps	1	39	2480	7.18	-8.08	-3.00	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.

**Bluetooth Low Energy**

Test Engineer:	Luffy Lin	Temperature:	21~25	°C
Test Date:	2016/10/27	Relative Humidity:	51~54	%

**TEST RESULTS DATA**  
**Average Power Table**  
**(Reporting Only)**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	1Mbps	1	0	2402	2.10	8.06
BLE	1Mbps	1	19	2440	2.10	7.65
BLE	1Mbps	1	39	2480	2.10	6.77



## Appendix B. Radiated Spurious Emission

Test Engineer :	J.C. Liang and Jacky Hung	Temperature :	20~23°C
		Relative Humidity :	58~63%

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)	
BLE CH 00 2402MHz		2385.39	53.48	-20.52	74	51.44	27.14	8.89	33.99	126	336	P	H	
		2386.86	44.18	-9.82	54	42.09	27.19	8.89	33.99	126	336	A	H	
	*	2402	102.62	-	-	100.52	27.19	8.89	33.98	126	336	P	H	
	*	2402	101.71	-	-	99.61	27.19	8.89	33.98	126	336	A	H	
													H	
														H
			2382.555	53.81	-20.19	74	51.77	27.14	8.89	33.99	100	112	P	V
			2383.815	44.35	-9.65	54	42.31	27.14	8.89	33.99	100	112	A	V
	*		2402	106.89	-	-	104.79	27.19	8.89	33.98	100	112	P	V
	*		2402	106.03	-	-	103.93	27.19	8.89	33.98	100	112	A	V
														V
														V
BLE CH 19 2440MHz		2328.2	53.86	-20.14	74	52.13	26.98	8.75	34	321	270	P	H	
		2379.58	44.3	-9.7	54	42.33	27.14	8.82	33.99	321	270	A	H	
	*	2440	102.46	-	-	100.15	27.34	8.94	33.97	321	270	P	H	
	*	2440	101.3	-	-	98.99	27.34	8.94	33.97	321	270	A	H	
			2497.27	54.03	-19.97	74	51.49	27.5	8.98	33.94	321	270	P	H
			2484.81	44.74	-9.26	54	42.26	27.45	8.98	33.95	321	270	A	H
			2371.04	53.72	-20.28	74	51.75	27.14	8.82	33.99	100	113	P	V
			2326.52	44.56	-9.44	54	42.83	26.98	8.75	34	100	113	A	V
	*		2440	107.47	-	-	105.16	27.34	8.94	33.97	100	113	P	V
	*		2440	106.63	-	-	104.32	27.34	8.94	33.97	100	113	A	V
			2499.3	53.79	-20.21	74	51.25	27.5	8.98	33.94	100	113	P	V
			2492.09	44.81	-9.19	54	42.27	27.5	8.98	33.94	100	113	A	V



<b>BLE CH 39 2480MHz</b>	*	2480	103.47	-	-	100.99	27.45	8.98	33.95	213	27	P	H
	*	2480	102.59	-	-	100.11	27.45	8.98	33.95	213	27	A	H
		2483.88	54.35	-19.65	74	51.87	27.45	8.98	33.95	213	27	P	H
		2487.2	45.47	-8.53	54	42.99	27.45	8.98	33.95	213	27	A	H
													H
													H
	*	2480	106.3	-	-	103.82	27.45	8.98	33.95	100	114	P	V
	*	2480	105.23	-	-	102.75	27.45	8.98	33.95	100	114	A	V
		2483.52	56.97	-17.03	74	54.49	27.45	8.98	33.95	100	114	P	V
		2483.68	45.46	-8.54	54	42.98	27.45	8.98	33.95	100	114	A	V
													V
													V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency ( MHz )	Level ( dBµV/m )	Over Limit ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
BLE CH 00 2402MHz		4804	33.3	-40.7	74	42.08	31.66	10.65	51.09	100	0	P	H	
													H	
													H	
													H	
			4804	31.65	-42.35	74	40.43	31.66	10.65	51.09	100	0	P	V
														V
														V
BLE CH 19 2440MHz		4880	32.95	-41.05	74	41.35	31.78	10.88	51.06	100	0	P	H	
		7320	38.18	-35.82	74	38.61	37.29	12.79	50.51	100	0	P	H	
													H	
													H	
			4880	32.97	-41.03	74	41.37	31.78	10.88	51.06	100	0	P	V
			7320	38.44	-35.56	74	38.87	37.29	12.79	50.51	100	0	P	V
														V
BLE CH 39 2480MHz		4960	34.33	-39.67	74	42.3	31.94	11.12	51.03	100	0	P	H	
		7440	38.87	-35.13	74	39.06	37.44	12.88	50.51	100	0	P	H	
													H	
													H	
			4960	33.59	-40.41	74	41.56	31.94	11.12	51.03	100	0	P	V
			7440	38.06	-35.94	74	38.25	37.44	12.88	50.51	100	0	P	V
														V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
2.4GHz BLE LF		32.7	23.36	-16.64	40	29.76	24.14	1.29	31.83	-	-	P	H	
		103.98	21.41	-22.09	43.5	34.87	16.54	1.78	31.78	-	-	P	H	
		162.03	20.61	-22.89	43.5	33.69	16.7	2	31.78	-	-	P	H	
		528.2	26.79	-19.21	46	30.84	24.5	3.38	31.93	-	-	P	H	
		823.6	31.62	-14.38	46	30.45	28.58	4.39	31.8	-	-	P	H	
		955.9	33.82	-12.18	46	29.53	30.59	4.69	30.99	215	310	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
			40.8	34.84	-5.16	40	45.63	19.74	1.29	31.82	211	153	P	V
			63.21	22.18	-17.82	40	40.41	12.05	1.51	31.79	-	-	P	V
			122.61	27.33	-16.17	43.5	39.57	17.76	1.78	31.78	-	-	P	V
			521.9	25.91	-20.09	46	30.05	24.4	3.38	31.92	-	-	P	V
			631.8	28.26	-17.74	46	30.49	26.01	3.8	32.04	-	-	P	V
			901.3	37.69	-8.31	46	35.25	29.23	4.63	31.42	-	-	P	V
														V
														V
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.													



**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =  
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

**Both peak and average measured complies with the limit line, so test result is “PASS”.**



2.4GHz 2400~2483.5MHz

BLE4.2 (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.	
		( MHz )	( dBμV/m )	( dB )	Limit	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
					Line	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
BLE4.2 CH 00 2402MHz		2339.295	54.5	-19.5	74	52.71	27.03	8.75	33.99	362	48	P	H	
		2384.235	44.28	-9.72	54	42.24	27.14	8.89	33.99	362	48	A	H	
	*	2402	105.48	-	-	103.38	27.19	8.89	33.98	362	48	P	H	
	*	2402	104.71	-	-	102.61	27.19	8.89	33.98	362	48	A	H	
													H	
													H	
			2387.385	53.22	-20.78	74	51.13	27.19	8.89	33.99	127	114	P	V
			2389.17	44.25	-9.75	54	42.16	27.19	8.89	33.99	127	114	A	V
	*		2402	106.16	-	-	104.06	27.19	8.89	33.98	127	114	P	V
	*		2402	105.48	-	-	103.38	27.19	8.89	33.98	127	114	A	V
													V	
													V	
BLE4.2 CH 19 2440MHz		2367.68	53.36	-20.64	74	51.44	27.09	8.82	33.99	352	49	P	H	
		2385.6	44.3	-9.7	54	42.21	27.19	8.89	33.99	352	49	A	H	
	*	2440	105.14	-	-	102.83	27.34	8.94	33.97	352	49	P	H	
	*	2440	103.78	-	-	101.47	27.34	8.94	33.97	352	49	A	H	
			2492.16	53.37	-20.63	74	50.83	27.5	8.98	33.94	352	49	P	H
			2490.69	44.53	-9.47	54	42	27.5	8.98	33.95	352	49	A	H
			2373.28	53.7	-20.3	74	51.73	27.14	8.82	33.99	102	111	P	V
			2383.22	44.19	-9.81	54	42.15	27.14	8.89	33.99	102	111	A	V
	*		2440	105.96	-	-	103.65	27.34	8.94	33.97	102	111	P	V
	*		2440	105.24	-	-	102.93	27.34	8.94	33.97	102	111	A	V
			2488.8	54.43	-19.57	74	51.9	27.5	8.98	33.95	102	111	P	V
			2498.53	44.51	-9.49	54	41.97	27.5	8.98	33.94	102	111	A	V



<b>BLE4.2</b>  <b>CH 39</b>  <b>2480MHz</b>	*	2480	103.85	-	-	101.37	27.45	8.98	33.95	338	45	P	H
	*	2480	103.2	-	-	100.72	27.45	8.98	33.95	338	45	A	H
		2483.76	53.84	-20.16	74	51.36	27.45	8.98	33.95	338	45	P	H
		2483.52	45.26	-8.74	54	42.78	27.45	8.98	33.95	338	45	A	H
													H
													H
	*	2480	105.17	-	-	102.69	27.45	8.98	33.95	102	112	P	V
	*	2480	104.44	-	-	101.96	27.45	8.98	33.95	102	112	A	V
		2483.52	54.27	-19.73	74	51.79	27.45	8.98	33.95	102	112	P	V
		2483.6	45.12	-8.88	54	42.64	27.45	8.98	33.95	102	112	A	V
													V
													V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BLE4.2 (Harmonic @ 3m)

BLE	Note	Frequency ( MHz )	Level ( dBµV/m )	Over Limit ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
BLE4.2 CH 00 2402MHz		4804	33.7	-40.3	74	42.48	31.66	10.65	51.09	100	0	P	H	
													H	
													H	
													H	
		4804	33.29	-40.71	74	42.07	31.66	10.65	51.09	100	0	P	V	
														V
														V
BLE4.2 CH 19 2440MHz		4880	34.76	-39.24	74	43.16	31.78	10.88	51.06	100	0	P	H	
		7320	38.43	-35.57	74	38.86	37.29	12.79	50.51	100	0	P	H	
													H	
													H	
		4880	33.25	-40.75	74	41.65	31.78	10.88	51.06	100	0	P	V	
		7320	38.52	-35.48	74	38.95	37.29	12.79	50.51	100	0	P	V	
														V
BLE4.2 CH 39 2480MHz		4960	33.22	-40.78	74	41.19	31.94	11.12	51.03	100	0	P	H	
		7440	38.21	-35.79	74	38.4	37.44	12.88	50.51	100	0	P	H	
													H	
													H	
		4960	33.53	-40.47	74	41.5	31.94	11.12	51.03	100	0	P	V	
		7440	38.01	-35.99	74	38.2	37.44	12.88	50.51	100	0	P	V	
														V
Remark	1. No other spurious found.													
	2. All results are PASS against Peak and Average limit line.													



Emission below 1GHz

2.4GHz BLE4.2 (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
2.4GHz BLE4.2 LF		33.51	24.13	-15.87	40	31.05	23.62	1.29	31.83	-	-	P	H	
		103.17	21.06	-22.44	43.5	34.63	16.43	1.78	31.78	-	-	P	H	
		162.03	20.99	-22.51	43.5	34.07	16.7	2	31.78	-	-	P	H	
		657.7	28.26	-17.74	46	30.22	26.28	3.8	32.04	-	-	P	H	
		772.5	31.24	-14.76	46	31.13	27.97	4.09	31.95	213	315	P	H	
		972.7	35.04	-18.96	54	30.65	30.55	4.69	30.85	-	-	P	H	
														H
														H
														H
														H
														H
														H
			38.91	34.87	-5.13	40	44.54	20.86	1.29	31.82	216	255	P	V
			63.21	23.52	-16.48	40	41.75	12.05	1.51	31.79	-	-	P	V
			122.88	21.9	-21.6	43.5	34.11	17.79	1.78	31.78	-	-	P	V
			526.1	26.08	-19.92	46	30.17	24.46	3.38	31.93	-	-	P	V
			642.3	27.78	-18.22	46	29.9	26.12	3.8	32.04	-	-	P	V
			920.9	33.98	-12.02	46	30.83	29.78	4.63	31.26	-	-	P	V
														V
														V
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.													



**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =  
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

**Both peak and average measured complies with the limit line, so test result is “PASS”.**



## Appendix C. Radiated Spurious Emission Plots

Test Engineer :	J.C. Liang and Jacky Hung	Temperature :	20~23°C
		Relative Humidity :	58~63%





### Note symbol

-L	Low channel location
-R	High channel location







2.4GHz 2400~2483.5MHz





BLE (Band Edge @ 3m)

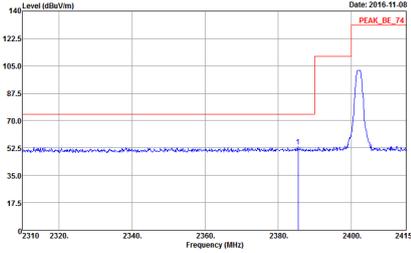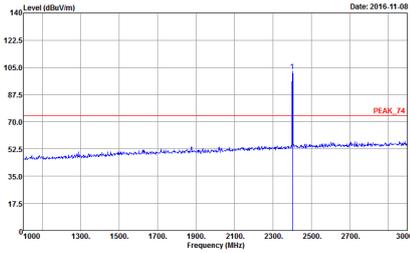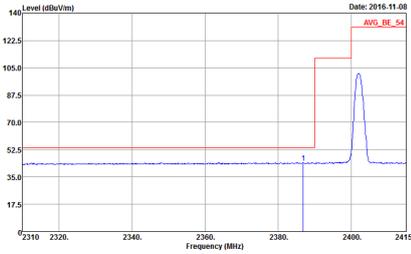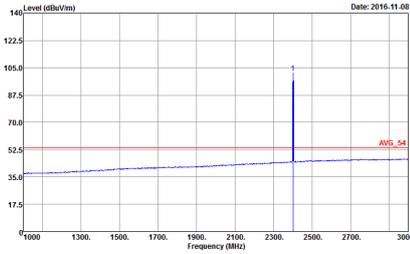BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH00 2402MHz	
1	Horizontal	Fundamental
Peak	 <p>Date: 2016-11-08 PEAK_BE_74</p> <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 693003</p>	 <p>Date: 2016-11-08 PEAK_74</p> <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 693003</p>
Avg.	 <p>Date: 2016-11-08 AVG_BE_54</p> <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 693003</p>	 <p>Date: 2016-11-08 AVG_54</p> <p>Site : 03CH11-HY Condition : AVG_54 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 693003</p>

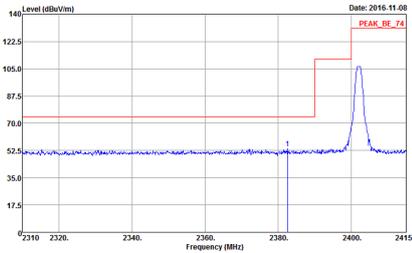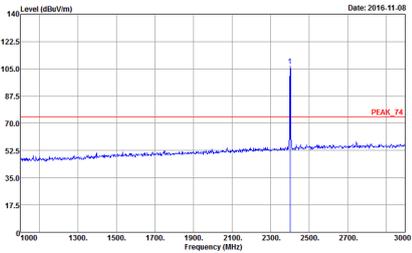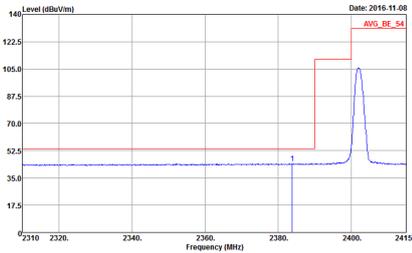
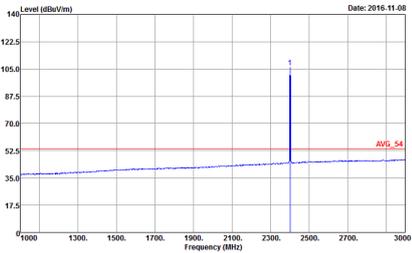


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH00 2402MHz	
1	Vertical	Fundamental
Peak	 <p>Date: 2016-11-08 PEAK_BE_74</p> <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 693003</p>	 <p>Date: 2016-11-08 PEAK_74</p> <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 693003</p>
Avg	 <p>Date: 2016-11-08 AVG_BE_54</p> <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : 693003</p>	 <p>Date: 2016-11-08 AVG_54</p> <p>Site : 03CH11-HY Condition : AVG_54 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : 693003</p>

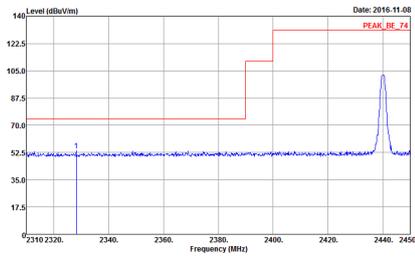
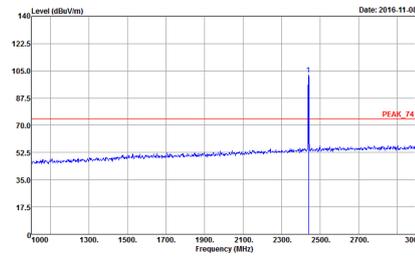
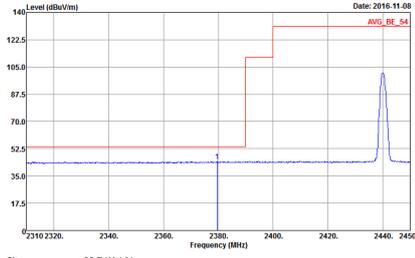
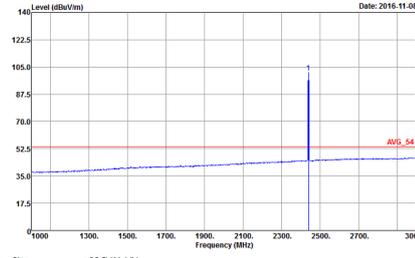


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - L	
1	<p style="text-align: center;"><b>Horizontal</b></p>  <p>Site : 03CH11-HY            Condition : PEAK_BE_74 3m HORN 9120D-HF HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 693003</p>	<p style="text-align: center;"><b>Fundamental</b></p>  <p>Site : 03CH11-HY            Condition : PEAK_74 3m HORN 9120D-HF HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 693003</p>
Avg.	 <p>Site : 03CH11-HY            Condition : AVG_BE_54 3m HORN 9120D-HF HORIZONTAL            RBW:1000.000KHz VBW:3.000KHz SWT:Auto            Detector : Peak            Project : 693003</p>	 <p>Site : 03CH11-HY            Condition : AVG_54 3m HORN 9120D-HF HORIZONTAL            RBW:1000.000KHz VBW:3.000KHz SWT:Auto            Detector : Peak            Project : 693003</p>

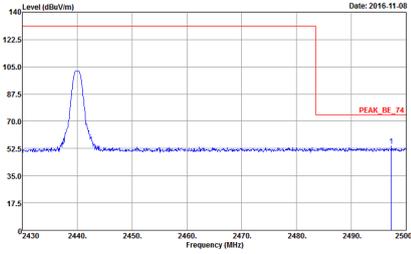
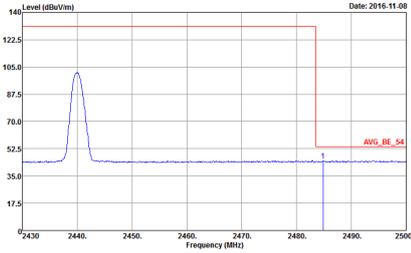


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - R	
1	Horizontal	Fundamental
Peak	 <p>Date: 2016.11.08</p> <p>Site : 03CH11-HY            Condition : PEAK_BE_74 3m HORN 9120D-HF HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 693003</p>	Left blank
Avg.	 <p>Date: 2016.11.08</p> <p>Site : 03CH11-HY            Condition : AVG_BE_54 3m HORN 9120D-HF HORIZONTAL            RBW:1000.000KHz VBW:3.000KHz SWT:Auto            Detector : Peak            Project : 693003</p>	Left blank

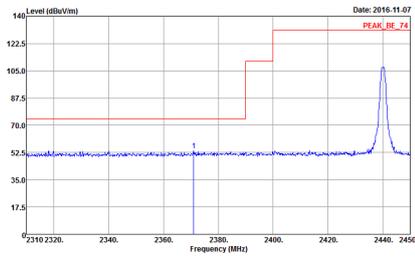
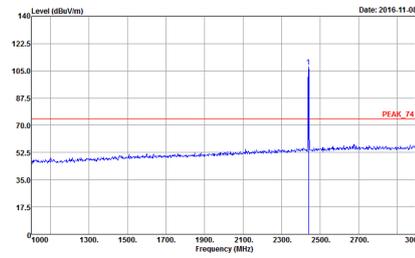
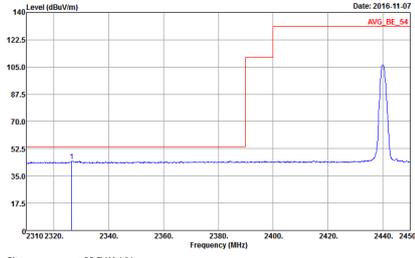
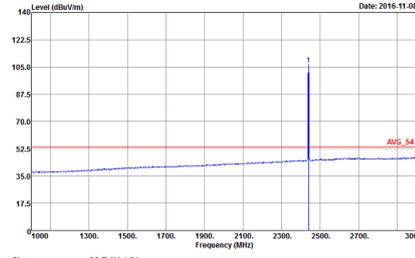


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - L	
1	<p style="text-align: center;"><b>Vertical</b></p>  <p style="text-align: right;">Date: 2016-11-07</p> <p style="text-align: right;">PEAK_BE_74</p> <p>Site : 03CH11-HY            Condition : PEAK_BE_74 3m HORN 9120D-HF VERTICAL            : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 693003</p>	<p style="text-align: center;"><b>Fundamental</b></p>  <p style="text-align: right;">Date: 2016-11-08</p> <p style="text-align: right;">PEAK_74</p> <p>Site : 03CH11-HY            Condition : PEAK_74 3m HORN 9120D-HF VERTICAL            : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 693003</p>
Avg.	 <p style="text-align: right;">Date: 2016-11-07</p> <p style="text-align: right;">AVG_BE_54</p> <p>Site : 03CH11-HY            Condition : AVG_BE_54 3m HORN 9120D-HF VERTICAL            : RBW:1000.000KHz VBW:3.000KHz SWT:Auto            Detector : Peak            Project : 693003</p>	 <p style="text-align: right;">Date: 2016-11-08</p> <p style="text-align: right;">AVG_54</p> <p>Site : 03CH11-HY            Condition : AVG_54 3m HORN 9120D-HF VERTICAL            : RBW:1000.000KHz VBW:3.000KHz SWT:Auto            Detector : Peak            Project : 693003</p>



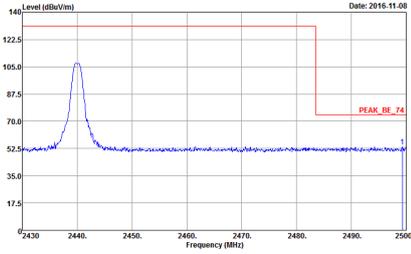
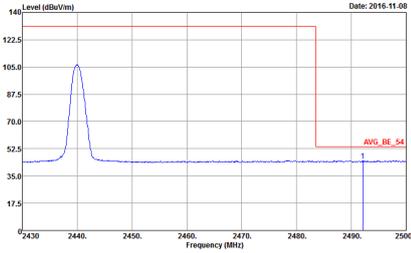


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - R	
1	Vertical	Fundamental
Peak	 <p>Date: 2016.11.08</p> <p>Site : 03CH11-HY  Condition : PEAK_BE_74 3m HORN 9120D-HF VERTICAL  : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto  Detector : Peak  Project : 693003</p>	Left blank
Avg.	 <p>Date: 2016.11.08</p> <p>Site : 03CH11-HY  Condition : AVG_BE_54 3m HORN 9120D-HF VERTICAL  : RBW:1000.000KHz VBW:3.000KHz SWT:Auto  Detector : Peak  Project : 693003</p>	Left blank

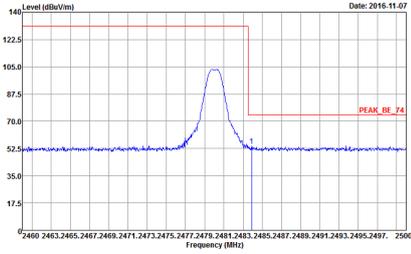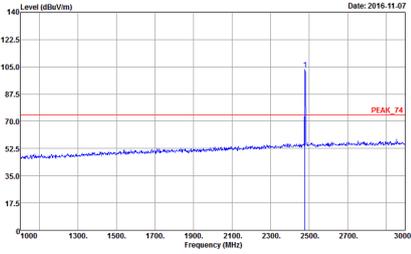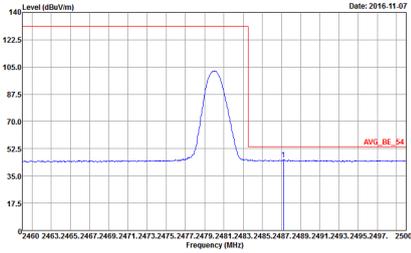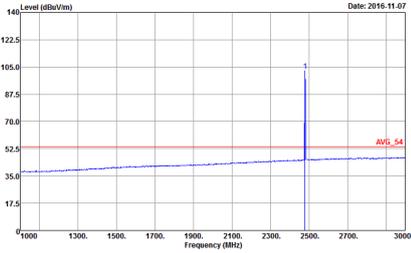

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH39 2480MHz	
1	Horizontal	Fundamental
Peak	 <p>Site : 03CH11-HY            Condition : PEAK_BE_74 3m HORN 9120D-HF HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 693003</p>	 <p>Site : 03CH11-HY            Condition : PEAK_74 3m HORN 9120D-HF HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 693003</p>
Avg.	 <p>Site : 03CH11-HY            Condition : AVG_BE_54 3m HORN 9120D-HF HORIZONTAL            RBW:1000.000KHz VBW:3.000KHz SWT:Auto            Detector : Peak            Project : 693003</p>	 <p>Site : 03CH11-HY            Condition : AVG_54 3m HORN 9120D-HF HORIZONTAL            RBW:1000.000KHz VBW:3.000KHz SWT:Auto            Detector : Peak            Project : 693003</p>

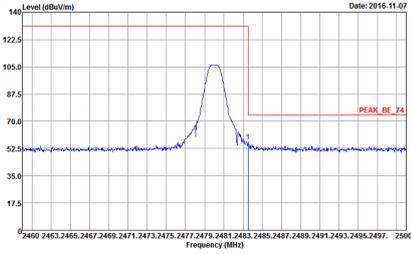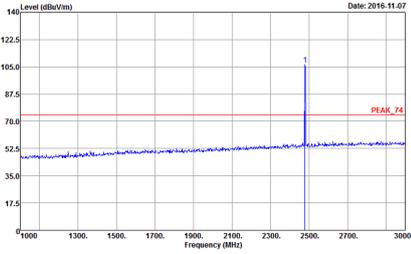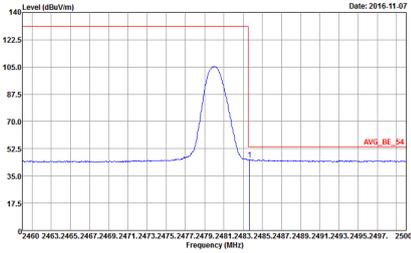
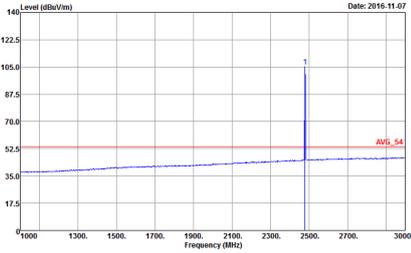


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH39 2480MHz	
1	<p style="text-align: center;"><b>Vertical</b></p>  <p>Level (dBu/m) vs Frequency (MHz) plot showing a peak at approximately 2480 MHz. The peak level is around 105 dBu/m. A red box highlights the peak area, and a red line indicates the peak level. The plot is dated 2016-11-07.</p> <p>Site : 03CH11-HY            Condition : PEAK_BE_74 3m HORN 9120D-HF VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 693003</p>	<p style="text-align: center;"><b>Fundamental</b></p>  <p>Level (dBu/m) vs Frequency (MHz) plot showing a sharp peak at 2480 MHz. The peak level is around 105 dBu/m. A red box highlights the peak area, and a red line indicates the peak level. The plot is dated 2016-11-07.</p> <p>Site : 03CH11-HY            Condition : PEAK_74 3m HORN 9120D-HF VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 693003</p>
Avg.	 <p>Level (dBu/m) vs Frequency (MHz) plot showing the average level of the signal. The average level is around 55 dBu/m. A red box highlights the average level area, and a red line indicates the average level. The plot is dated 2016-11-07.</p> <p>Site : 03CH11-HY            Condition : AVG_BE_54 3m HORN 9120D-HF VERTICAL            RBW:1000.000KHz VBW:3.000KHz SWT:Auto            Detector : Peak            Project : 693003</p>	 <p>Level (dBu/m) vs Frequency (MHz) plot showing the average level of the signal. The average level is around 55 dBu/m. A red box highlights the average level area, and a red line indicates the average level. The plot is dated 2016-11-07.</p> <p>Site : 03CH11-HY            Condition : AVG_54 3m HORN 9120D-HF VERTICAL            RBW:1000.000KHz VBW:3.000KHz SWT:Auto            Detector : Peak            Project : 693003</p>



2.4GHz 2400~2483.5MHz



BLE (Harmonic @ 3m)

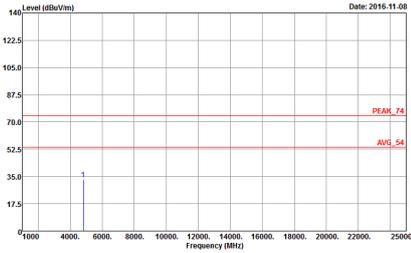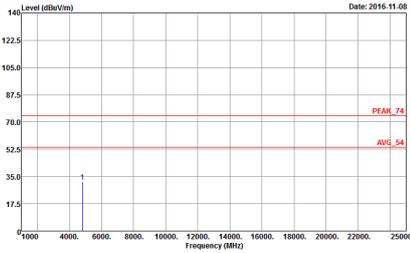BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH00 2402MHz	
1	Horizontal	Vertical
<p>Peak</p> <p>Avg.</p>	 <p>Site : 03CH11-HY            Condition : PEAK_74 3m 9170 SHF HORM_150809 HORIZONTAL            Detector : Peak            Project : 693003</p>	 <p>Site : 03CH11-HY            Condition : PEAK_74 3m 9170 SHF HORM_150809 VERTICAL            Detector : Peak            Project : 693003</p>



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH19 2440MHz	
1	Horizontal	Vertical
<p><b>Peak</b></p> <p><b>Avg.</b></p>	<p>Site : 03CH11-HY            Condition : PEAK_74 3m 9170 SHF HORM_150809 HORIZONTAL            Detector : Peak            Project : 693003</p>	<p>Site : 03CH11-HY            Condition : PEAK_74 3m 9170 SHF HORM_150809 VERTICAL            Detector : Peak            Project : 693003</p>

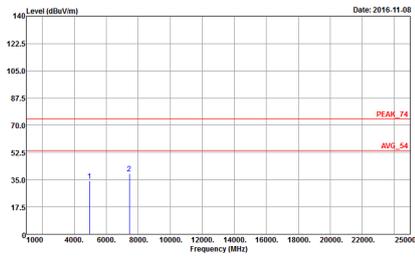
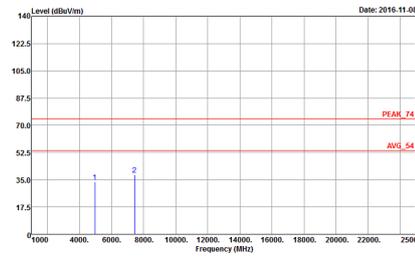


BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH39 2480MHz	
1	Horizontal	Vertical
Peak	 <p>Date: 2016.11.08</p> <p>Site : 03CH11-HY          Condition : PEAK_74 3m 9170 SHF HORM_150809 HORIZONTAL          Detector : Peak          Project : 693003</p>	 <p>Date: 2016.11.08</p> <p>Site : 03CH11-HY          Condition : PEAK_74 3m 9170 SHF HORM_150809 VERTICAL          Detector : Peak          Project : 693003</p>



Emission below 1GHz

2.4GHz BLE (LF)

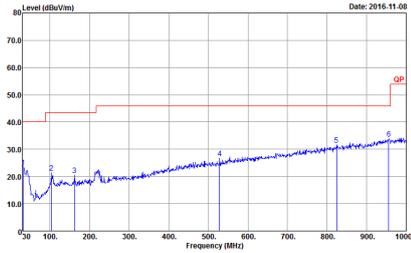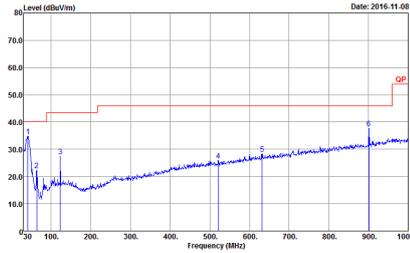BLE	2.4GHz 2400~2483.5MHz	
ANT	BLE LF	
1	Horizontal	Vertical
<p>QP / Peak</p>	 <p>Site : 03CH11-HY Condition : QP 3m BE-LOG 6111D-LF_ETC HORIZONTAL Detector : Peak Project : 693003</p>	 <p>Site : 03CH11-HY Condition : QP 3m BE-LOG 6111D-LF_ETC VERTICAL Detector : Peak Project : 693003</p>







**Note symbol**

-L	Low channel location
-R	High channel location



2.4GHz 2400~2483.5MHz





BLE4.2 (Band Edge @ 3m)

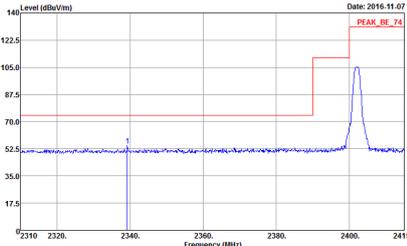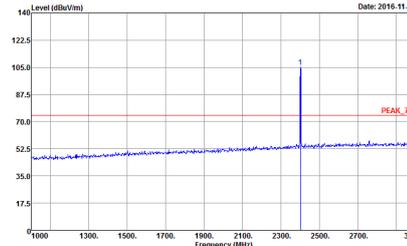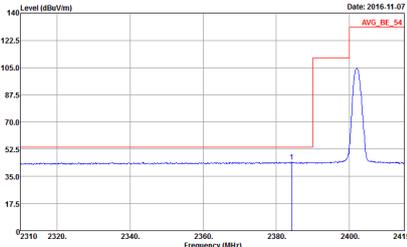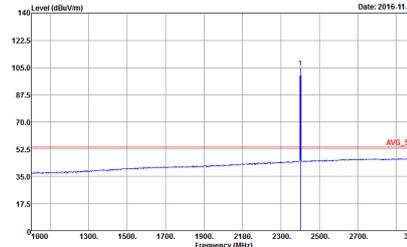BLE4.2	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE4.2 CH00 2402MHz	
1	Horizontal	Fundamental
<p><b>Peak</b></p>	 <p>Site : 03CH11-HY            Condition : PEAK_BE_74 3m HORN 9120D-HF HORIZONTAL            Detector : Peak            Project : 693003</p>	 <p>Site : 03CH11-HY            Condition : PEAK_74 3m HORN 9120D-HF HORIZONTAL            Detector : Peak            Project : 693003</p>
<p><b>Avg.</b></p>	 <p>Site : 03CH11-HY            Condition : AVG_BE_54 3m HORN 9120D-HF HORIZONTAL            Detector : Peak            Project : 693003</p>	 <p>Site : 03CH11-HY            Condition : AVG_54 3m HORN 9120D-HF HORIZONTAL            Detector : Peak            Project : 693003</p>





BLE4.2	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE4.2 CH00 2402MHz	
1	Vertical	Fundamental
<p><b>Peak</b></p>	<p>Site : 03CH11-HY            Condition : PEAK_BE_74 3m HORN 9120D-HF VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 693003</p>	<p>Site : 03CH11-HY            Condition : PEAK_74 3m HORN 9120D-HF VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 693003</p>
<p><b>Avg</b></p>	<p>Site : 03CH11-HY            Condition : AVG_BE_54 3m HORN 9120D-HF VERTICAL            RBW:1000.000KHz VBW:3.000KHz SWT:Auto            Detector : Peak            Project : 693003</p>	<p>Site : 03CH11-HY            Condition : AVG_54 3m HORN 9120D-HF VERTICAL            RBW:1000.000KHz VBW:3.000KHz SWT:Auto            Detector : Peak            Project : 693003</p>

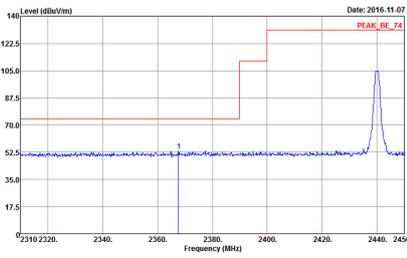
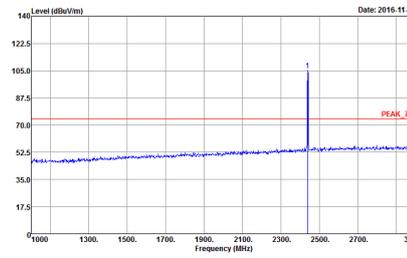
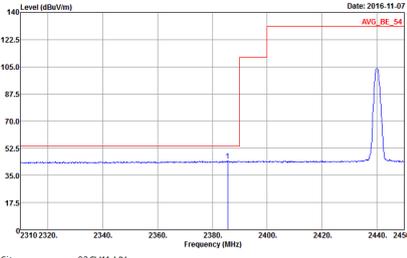
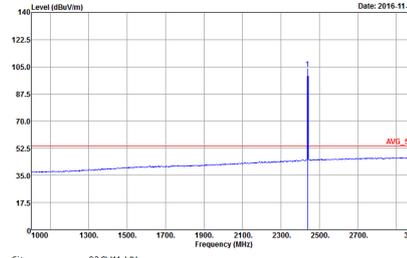


BLE4.2	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE4.2 CH19 2440MHz - L	
1	Horizontal	Fundamental
<p><b>Peak</b></p>	 <p>Date: 2016-11-07 PEAK_BE_74</p> <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 693003</p>	 <p>Date: 2016-11-07 PEAK_74</p> <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 693003</p>
<p><b>Avg.</b></p>	 <p>Date: 2016-11-07 AVG_BE_54</p> <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : 693003</p>	 <p>Date: 2016-11-07 AVG_54</p> <p>Site : 03CH11-HY Condition : AVG_54 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : 693003</p>

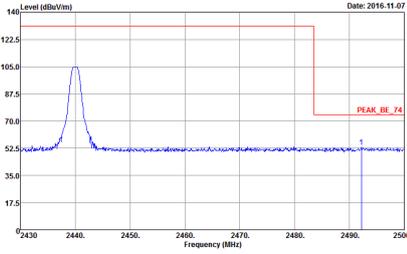
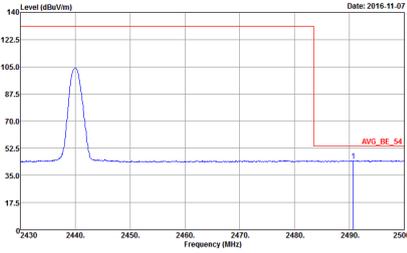


BLE4.2	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE4.2 CH19 2440MHz - R	
1	Horizontal	Fundamental
<b>Peak</b>	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 693003</p>	Left blank
<b>Avg.</b>	 <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : 693003</p>	Left blank

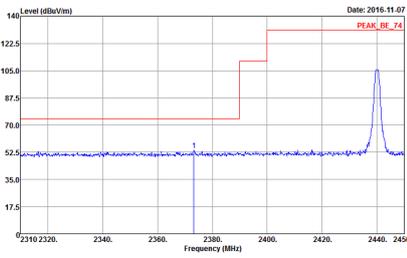
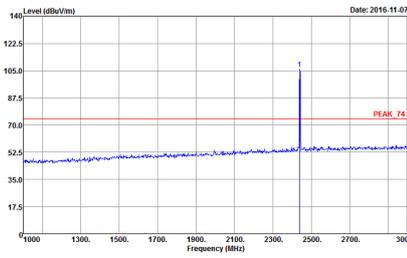
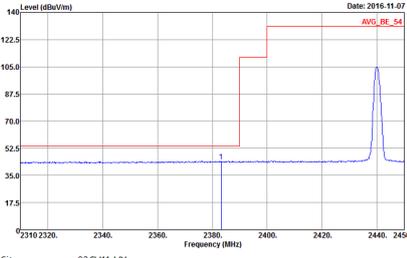
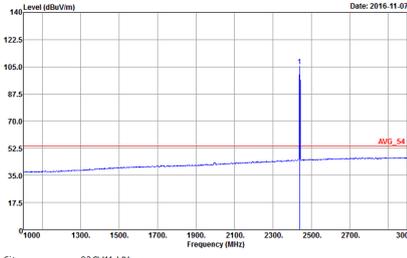


BLE4.2	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE4.2 CH19 2440MHz - L	
1	Vertical	Fundamental
<p><b>Peak</b></p>	 <p>Date: 2016-11-07 PEAK_BE_74</p> <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 693003</p>	 <p>Date: 2016-11-07 PEAK_74</p> <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 693003</p>
<p><b>Avg.</b></p>	 <p>Date: 2016-11-07 AVG_BE_54</p> <p>Site : 03CH11-HY Condition : AVG_BE_54 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : 693003</p>	 <p>Date: 2016-11-07 AVG_54</p> <p>Site : 03CH11-HY Condition : AVG_54 3m HORN 9120D-HF VERTICAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : 693003</p>



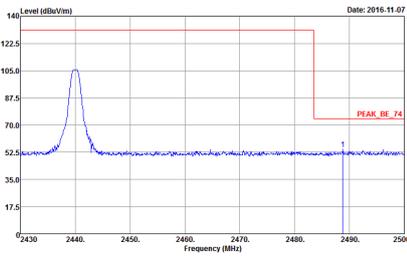
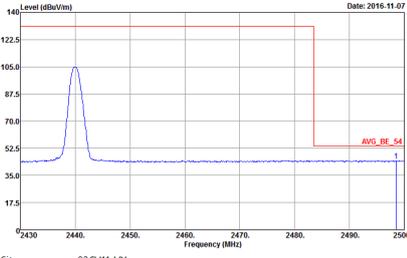


BLE4.2	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE4.2 CH19 2440MHz - R	
1	Vertical	Fundamental
<p><b>Peak</b></p>	 <p>           Site : 03CH11-HY            Condition : PEAK_BE_74 3m HORN 9120D-HF VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 693003         </p>	<p>Left blank</p>
<p><b>Avg.</b></p>	 <p>           Site : 03CH11-HY            Condition : AVG_BE_54 3m HORN 9120D-HF VERTICAL            RBW:1000.000KHz VBW:3.000KHz SWT:Auto            Detector : Peak            Project : 693003         </p>	<p>Left blank</p>

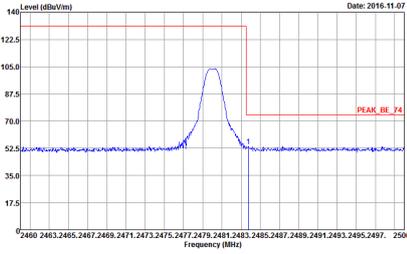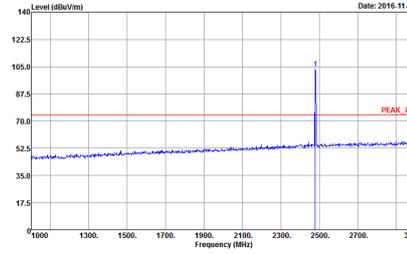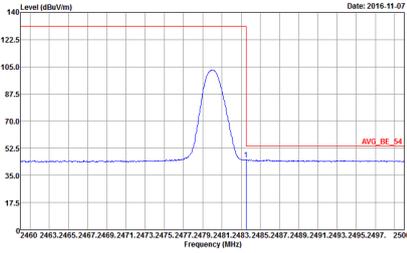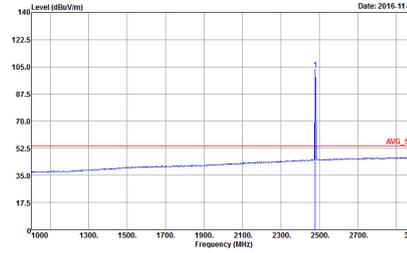

BLE4.2	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE4.2 CH39 2480MHz	
1	Horizontal	Fundamental
<p><b>Peak</b></p>	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing a peak at 2480 MHz. The peak level is approximately 105 dBuV/m. The plot includes a red box around the peak and a red line labeled 'PEAK_BE_74'.</p> <p>Site : 03CH11-HY            Condition : PEAK_BE_74 3m HORN 9120D-HF HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 693003</p>	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing a sharp peak at 2480 MHz. The peak level is approximately 105 dBuV/m. The plot includes a red box around the peak and a red line labeled 'PEAK_74'.</p> <p>Site : 03CH11-HY            Condition : PEAK_74 3m HORN 9120D-HF HORIZONTAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 693003</p>
<p><b>Avg.</b></p>	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing the average spectrum. A peak is visible at 2480 MHz. The plot includes a red box around the peak and a red line labeled 'AVG_BE_54'.</p> <p>Site : 03CH11-HY            Condition : AVG_BE_54 3m HORN 9120D-HF HORIZONTAL            RBW:1000.000KHz VBW:3.000KHz SWT:Auto            Detector : Peak            Project : 693003</p>	 <p>Level (dBuV/m) vs Frequency (MHz) plot showing the average spectrum. A sharp peak is visible at 2480 MHz. The plot includes a red box around the peak and a red line labeled 'AVG_54'.</p> <p>Site : 03CH11-HY            Condition : AVG_54 3m HORN 9120D-HF HORIZONTAL            RBW:1000.000KHz VBW:3.000KHz SWT:Auto            Detector : Peak            Project : 693003</p>

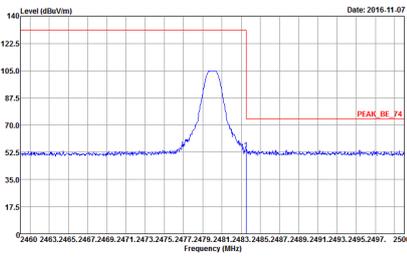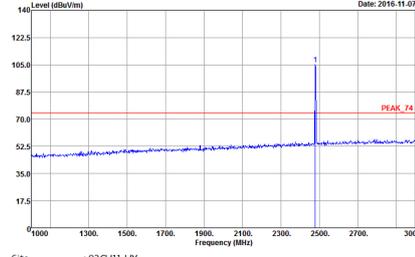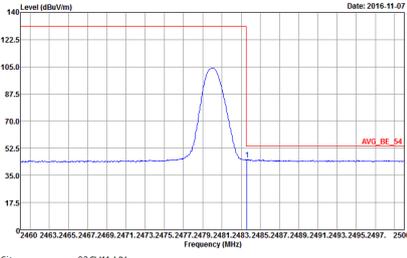
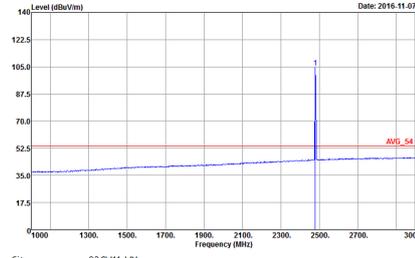


BLE4.2	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE4.2 CH39 2480MHz	
1	Vertical	Fundamental
<p><b>Peak</b></p>	 <p>Date: 2016-11-07</p> <p>Site : 03CH11-HY            Condition : PEAK_BE_74 3m HORN 9120D-HF VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 693003</p>	 <p>Date: 2016-11-07</p> <p>Site : 03CH11-HY            Condition : PEAK_74 3m HORN 9120D-HF VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWT:Auto            Detector : Peak            Project : 693003</p>
<p><b>Avg.</b></p>	 <p>Date: 2016-11-07</p> <p>Site : 03CH11-HY            Condition : AVG_BE_54 3m HORN 9120D-HF VERTICAL            RBW:1000.000KHz VBW:3.000KHz SWT:Auto            Detector : Peak            Project : 693003</p>	 <p>Date: 2016-11-07</p> <p>Site : 03CH11-HY            Condition : AVG_54 3m HORN 9120D-HF VERTICAL            RBW:1000.000KHz VBW:3.000KHz SWT:Auto            Detector : Peak            Project : 693003</p>





2.4GHz 2400~2483.5MHz



BLE4.2 (Harmonic @ 3m)

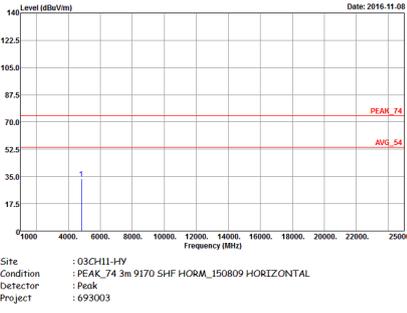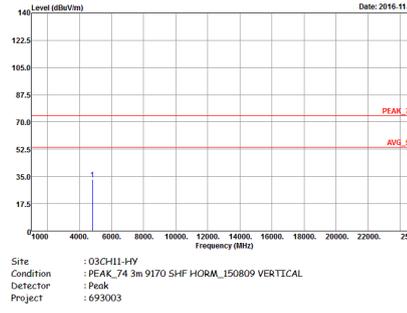BLE4.2	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE4.2 CH00 2402MHz	
1	Horizontal	Vertical
<p><b>Peak</b></p> <p><b>Avg.</b></p>		

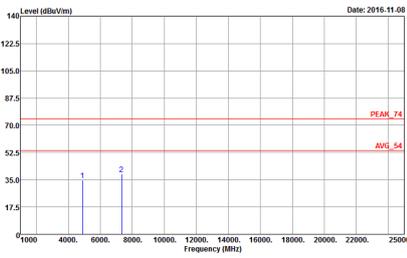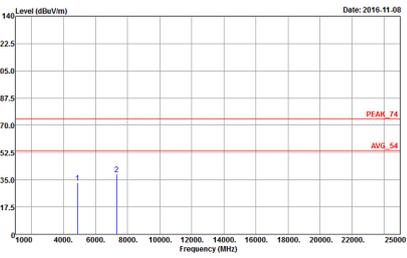

BLE4.2	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE4.2 CH19 2440MHz	
1	Horizontal	Vertical
<p><b>Peak</b></p> <p><b>Avg.</b></p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m 9170 5HF HORM_150809 HORIZONTAL Detector : Peak Project : 693003</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m 9170 5HF HORM_150809 VERTICAL Detector : Peak Project : 693003</p>

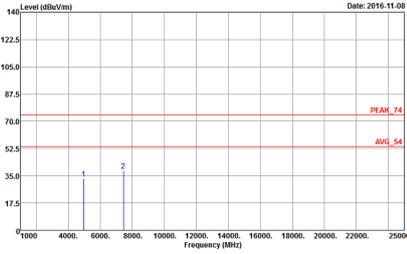
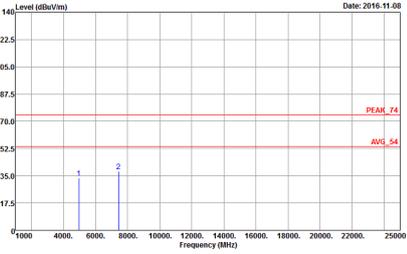


BLE4.2	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE4.2 CH39 2480MHz	
1	Horizontal	Vertical
Peak	 <p>Site : 03CH11-HY          Condition : PEAK_74 3m 9170 5HF HORM_150809 HORIZONTAL          Detector : Peak          Project : 693003</p>	 <p>Site : 03CH11-HY          Condition : PEAK_74 3m 9170 5HF HORM_150809 VERTICAL          Detector : Peak          Project : 693003</p>



Emission below 1GHz

2.4GHz BLE4.2 (LF)

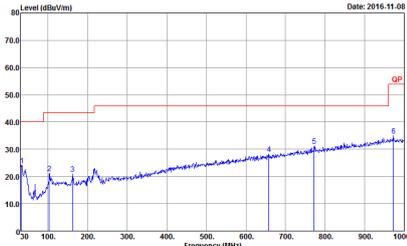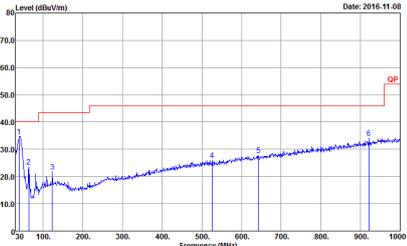
BLE4.2	2.4GHz 2400~2483.5MHz	
ANT	BLE4.2 LF	
1	Horizontal	Vertical
<p>QP / Peak</p>	 <p>Site : 03CH11-HY Condition : QP 3m BE-LOG 6111D-LF_ETC HORIZONTAL Detector : Peak Project : 693003</p>	 <p>Site : 03CH11-HY Condition : QP 3m BE-LOG 6111D-LF_ETC VERTICAL Detector : Peak Project : 693003</p>



### Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
Bluetooth 4.0 – LE	61.91	390	2.56	3kHz

#### Bluetooth 4.0 – LE

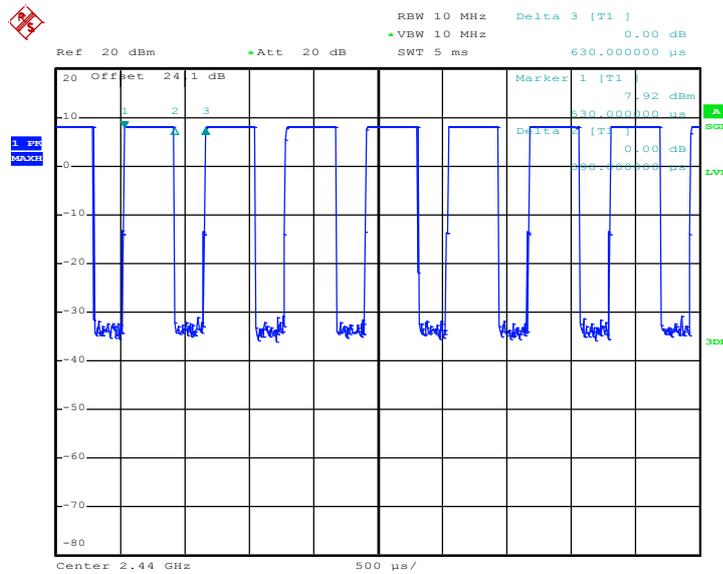


Date: 3.OCT.2016 23:53:19



Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
Bluetooth 4.2 – LE	61.72	387	2.58	3kHz

Bluetooth 4.2 – LE

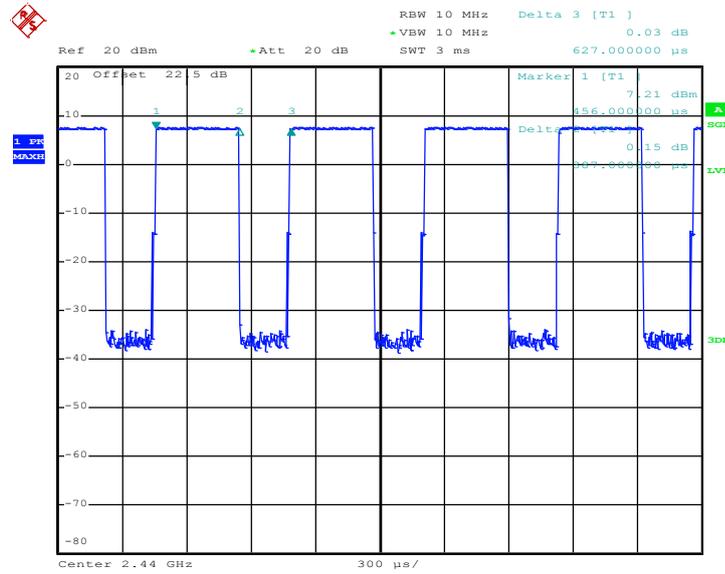

Date: 27.OCT.2016 23:04:25