



FCC RF Test Report

APPLICANT : ZTE CORPORATION
EQUIPMENT : LTE/CDMA Dual-Mode Digital Mobile Phone
BRAND NAME : ZTE
MODEL NAME : Z963VL
FCC ID : SRQ-Z963VL
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure

The product was received on Nov. 09, 2015 and testing was completed on Dec. 02, 2015. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Prepared by: James Huang / Manager

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China

TABLE OF CONTENTS

1	GENERAL DESCRIPTION	5
1.1	Applicant	5
1.2	Manufacturer	5
1.3	Feature of Equipment Under Test	5
1.4	Product Specification of Equipment Under Test.....	6
1.5	Modification of EUT	6
1.6	Testing Location	7
1.7	Applicable Standards.....	7
2	TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1	Carrier Frequency Channel	8
2.2	Pre-Scanned RF Power.....	9
2.3	Test Mode.....	11
2.4	Connection Diagram of Test System.....	13
2.5	Support Unit used in test configuration and system	14
2.6	EUT Operation Test Setup	14
2.7	Measurement Results Explanation Example.....	15
3	TEST RESULT	16
3.1	26dB & 99% Occupied Bandwidth Measurement	16
3.2	Maximum Conducted Output Power Measurement	18
3.3	Power Spectral Density Measurement	20
3.4	Unwanted Radiated Emission Measurement	23
3.5	AC Conducted Emission Measurement.....	27
3.6	Frequency Stability Measurement.....	31
3.7	Automatically Discontinue Transmission	32
3.8	Antenna Requirements	33
4	LIST OF MEASURING EQUIPMENT	34
5	UNCERTAINTY OF EVALUATION	35
APPENDIX A. CONDUCTED TEST RESULTS		
APPENDIX B. RADIATED TEST RESULTS		
APPENDIX C. SETUP PHOTOGRAPHS		



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR5N0901D	Rev. 01	Initial issue of report	Dec. 18, 2015

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	2.1049 15.403(i)	26dB & 99% Bandwidth	-	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	FCC ≤24 dBm (depend on band)	Pass	-
3.3	15.407(a)	Power Spectral Density	FCC ≤11 dBm (depend on band)	Pass	-
3.4	15.407(b)	Unwanted Emissions	≤ -17, -27 dBm (depend on band)&15.209(a)	Pass	Under limit 8.53 dB at 5149.700 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 12.41 dB at 0.530 MHz
3.6	15.407(g)	Frequency Stability	Within Operation Band	Pass	-
3.7	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.8	15.203 & 15.407(a)	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057,
P.R.China

1.2 Manufacturer

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057,
P.R.China

1.3 Feature of Equipment Under Test

Product Feature & Specification	
Equipment	LTE/CDMA Dual-Mode Digital Mobile Phone
Brand Name	ZTE
Model Name	Z963VL
FCC ID	SRQ-Z963VL
EUT supports Radios application	CDMA/EV-DO/LTE/ WLAN 2.4GHz 802.11b/g/n HT20/ WLAN 5GHz 802.11a/n HT20/ WLAN 5GHz 802.11ac VHT20/VHT40/VHT80/ Bluetooth v2.1 + EDR/Bluetooth v4.1 LE
MEID Code	Conducted: 99000674000004 Radiation: 99000674000003 Conduction: 990006740000194
HW Version	Z963VLHWV1.1
SW Version	Z963VLV1.0.0B01
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx/Rx Frequency Range	5180 MHz ~ 5240 MHz
Maximum Output Power to Antenna	802.11a : 12.66 dBm / 0.0185 W 802.11n HT20 : 9.66 dBm / 0.0093 W 802.11ac VHT20 : 9.92 dBm / 0.0098 W 802.11ac VHT40 : 9.91 dBm / 0.0098 W 802.11ac VHT80 : 10.05 dBm / 0.0101 W
99% Occupied Bandwidth	802.11a : 18.78 MHz 802.11n HT20 : 19.48 MHz 802.11ac VHT20: 19.33 MHz 802.11ac VHT40 : 37.06 MHz 802.11ac VHT80 : 75.28 MHz
Antenna Type / Gain	IFA Antenna with gain 0 dBi
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.			
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958			
Test Site No.	Sporton Site No.			FCC Registration No.
	TH01-KS	03CH03-KS	CO01-KS	306251

Note: The test site complies with ANSI C63.4 2014 requirement.

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart E
- FCC KDB 789033 D02 General UNII Test Procedures New Rules v01
- FCC KDB 644545 D03 Guidance for IEEE 802.11ac New Rules v01
- ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5180-5240 MHz Band 1 (U-NII-1)	36	5180	44	5220
	38	5190	46	5230
	40	5200	48	5240
	42	5210		

2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test in the following tables. Final Output Power equals to Measured Output Power adds the duty factor.

5GHz 802.11a RF Output Power (dBm)										
Power vs. Channel			Power vs. MCS Index							
Channel	Frequency (MHz)	MCS Index 6Mbps	Channel	9M bps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
CH 36	5180	12.66	CH 36	12.45	12.32	12.39	12.63	12.28	12.23	12.08
CH 44	5220	12.24								
CH 48	5240	12.48								

5GHz 802.11n HT20 RF Output Power (dBm)										
Power vs. Channel			Power vs. MCS Index							
Channel	Frequency (MHz)	MCS Index MCS0	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 36	5180	9.66	CH 36	9.50	9.60	9.49	9.41	9.47	9.25	9.33
CH 44	5220	9.24								
CH 48	5240	9.61								

WLAN 5GHz 802.11ac VHT20 Average Power (dBm)											
Power vs. Channel			Power vs. MCS Index								
Channel	Frequency (MHz)	MCS Index MCS0	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8
CH 36	5180	9.92	CH 36	9.82	9.70	9.76	9.87	9.85	9.74	9.72	9.75
CH 44	5220	9.40									
CH 48	5240	9.72									



WLAN 5GHz 802.11ac VHT40 Average Power (dBm)												
Power vs. Channel			Power vs. Data Rate									
Channel	Frequency (MHz)	MCS Index	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9
		MCS0										
CH 38	5190	9.91	CH 38	9.77	9.81	9.78	9.73	9.89	9.88	9.87	9.85	9.70
CH 46	5230	9.72										

WLAN 5GHz 802.11ac VHT80 Average Power (dBm)												
Power vs. Channel			Power vs. Data Rate									
Channel	Frequency (MHz)	MCS Index	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9
		MCS0										
CH 42	5210	10.05	CH 42	9.79	9.92	9.83	9.69	10.02	9.91	9.93	9.95	9.99

2.3 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates from the power table described in section 2.2.

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11ac VHT20	MCS0
802.11ac VHT40	MCS0
802.11ac VHT80	MCS0

Test Cases	
AC Conducted Emission	Mode 1 : CDMA2000 BC0 Idle + Bluetooth Link + WLAN (5GHz) Link + Earphone + USB Cable (Charging from Adapter)

Ch. #		Band I : 5180-5240 MHz
		802.11a
L	Low	36
M	Middle	44
H	High	48

Ch. #		Band I : 5180-5240 MHz
		802.11n HT20
L	Low	36
M	Middle	44
H	High	48




Ch. #		Band I : 5180-5240 MHz
		802.11ac VHT20
L	Low	36
M	Middle	44
H	High	48

Ch. #		Band I : 5180-5240 MHz
		802.11ac VHT40
L	Low	38
M	Middle	-
H	High	46


Ch. #		Band I : 5180-5240 MHz
		802.11ac VHT80
L	Low	-
M	Middle	42
H	High	-

2.4 Connection Diagram of Test System


<WLAN5GHz 802.11a/WLAN5GHz 802.11ac VHT40 Tx Mode>

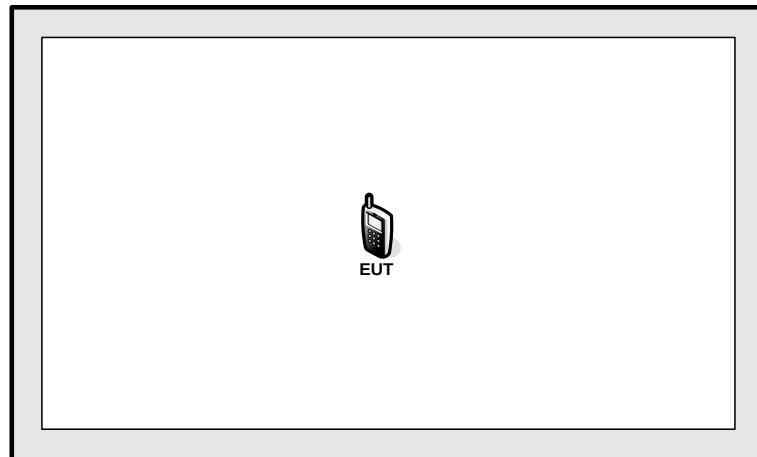

<WLAN5GHz 802.11n HT20/WLAN5GHz 802.11ac VHT20/VHT80 Tx Mode>

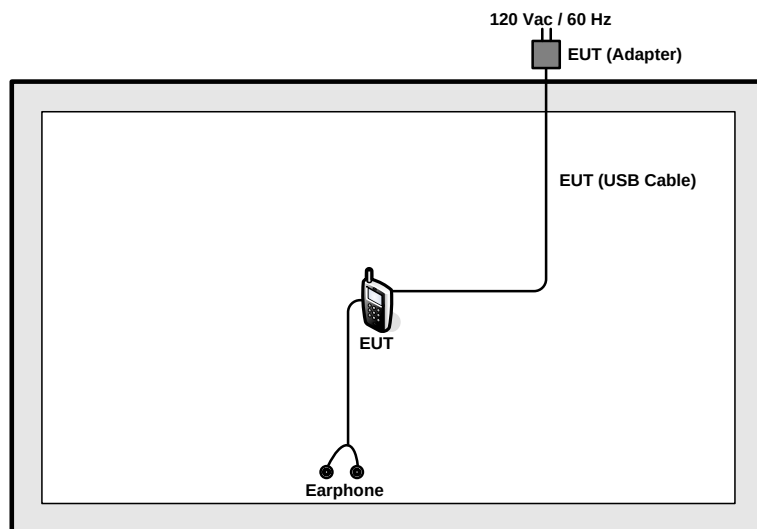

<AC Conducted Emission Mode>

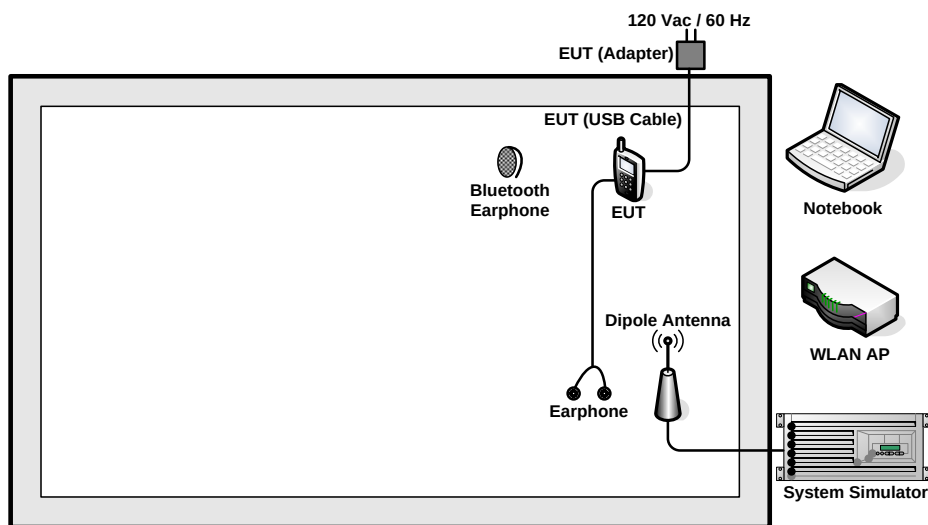

2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	D-Link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8 m
2.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
3.	Notebook	Lenovo	G480	N/A	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Nokia	BH-102	PYAHS-107W	N/A	N/A
5.	Earphone	Lenovo	LH102	N/A	Unshielded,1.2m	N/A
6.	Earphone	Lenovo	SH100	N/A	Unshielded,1.2m	N/A

2.6 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the Notebook under large package sizes transmission.



2.7 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 7.0 dB.

$$\begin{aligned}\text{Offset (dB)} &= \text{RF cable loss(dB)}. \\ &= 7.0 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 26dB & 99% Occupied Bandwidth Measurement

3.1.1 Description of 26dB & 99% Occupied Bandwidth

This section is for reporting purpose only.

There is no restriction limits for bandwidth.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures



1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.
Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.
Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1MHz and set the Video bandwidth (VBW) $\geq 3 * \text{RBW}$.
8. Measure and record the results in the test report.

3.1.4 Test Setup

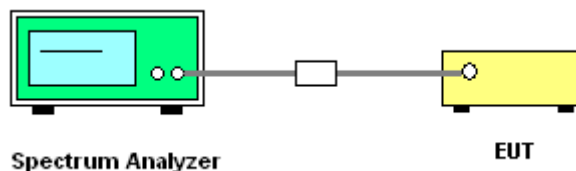

3.1.5 Test Result of 26dB & 99% Occupied Bandwidth Plots

Please refer to Appendix A.

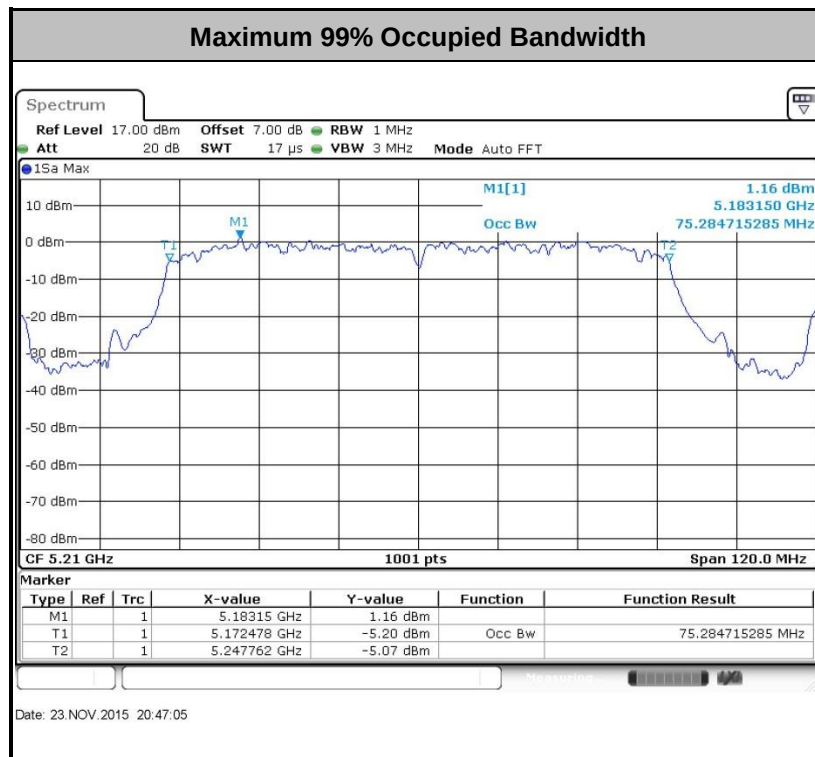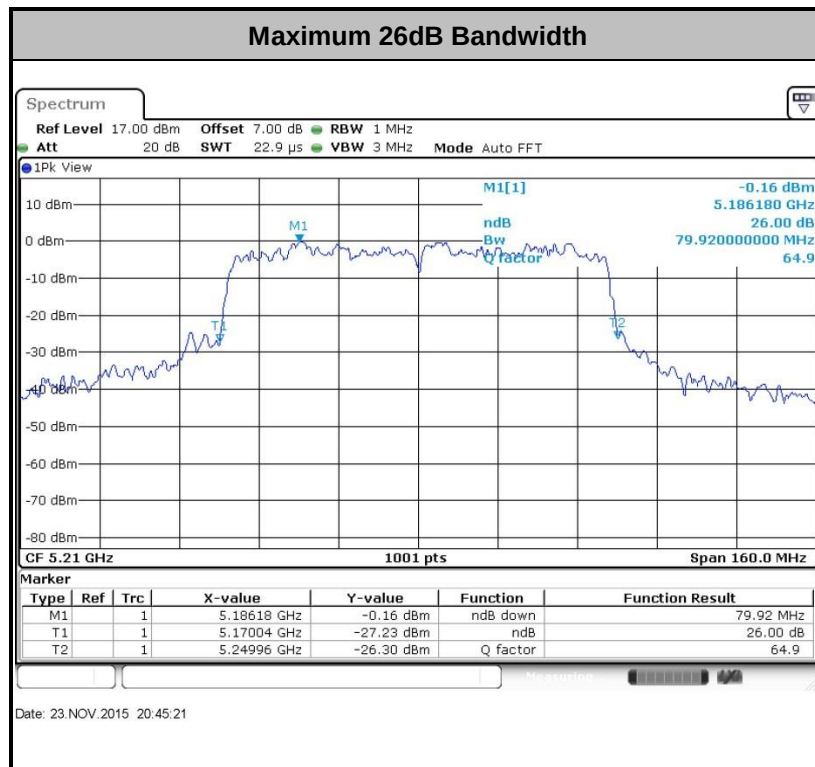

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.2.4 Test Setup

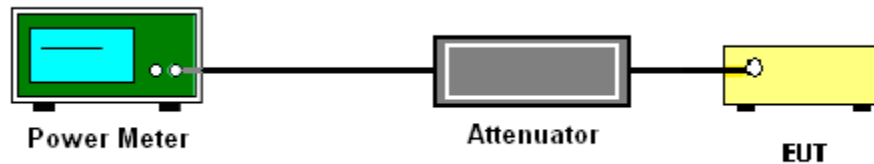

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures


The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.
Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


1. The testing follows Method SA-2 of FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.
 - Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 1 MHz.
 - Set VBW $\geq$ 3 MHz.
 - Number of points in sweep $\geq$ 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

3.3.4 Test Setup

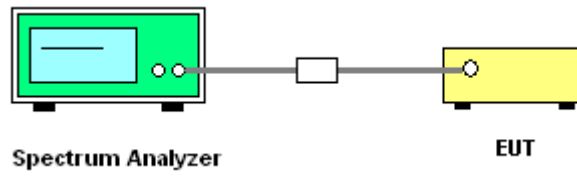

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

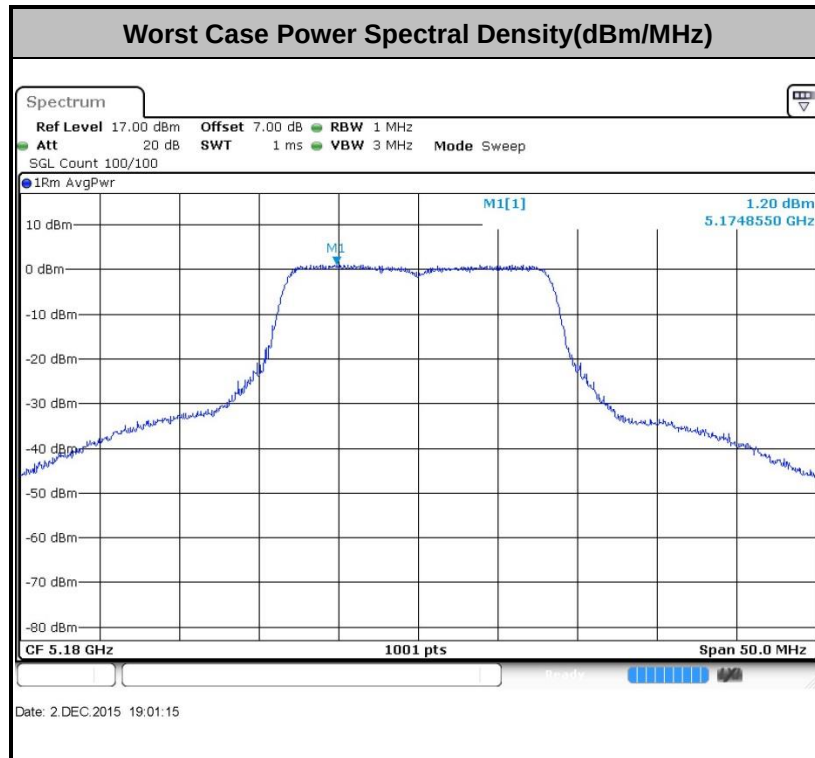

Note: Average Power Density (dB) = Measured value+ Duty Factor

3.4 Unwanted Radiated Emission Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part 15.205.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.
- (2) Unwanted spurious emissions fallen in restricted bands per FCC Part 15.205 shall comply with the general field strength limits set forth in § 15.209 as below table

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \quad \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dBμV/m)
-17	78.3
- 27	68.3

- (3) KDB789033 v01 G)2)c) As specified in 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in 15.407(b)(4)). However, an out-of-band emission that complies with both the average and peak limits of 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz peak emission limit.

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.

Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW $\geq$ 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold

(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz


- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Band	Duty Cycle (%)	T(ms)	1/T(kHz)	VBW Setting
802.11a	87.261	1.370	0.730	1kHz
802.11n HT20	86.505	1.282	0.780	1kHz
802.11n VHT20	83.051	0.980	1.020	3kHz
802.11n VHT40	71.264	0.496	2.016	3kHz
802.11n VHT80	55.310	0.250	4.000	10kHz


2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

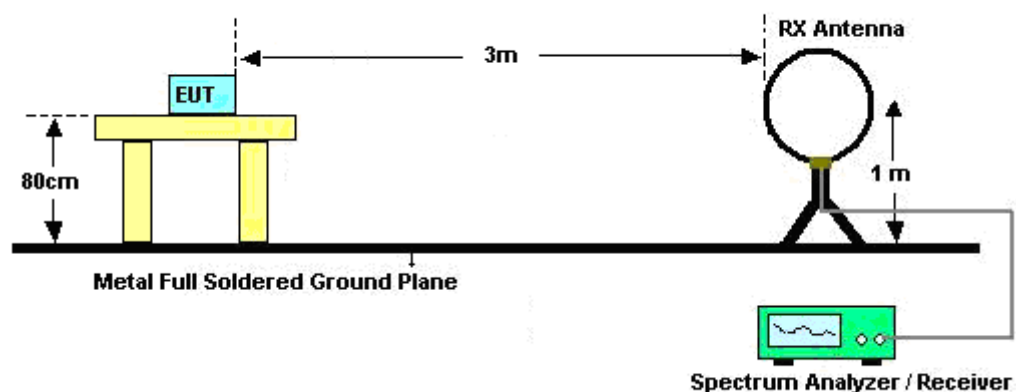

For radiated emissions from 30MHz to 1GHz

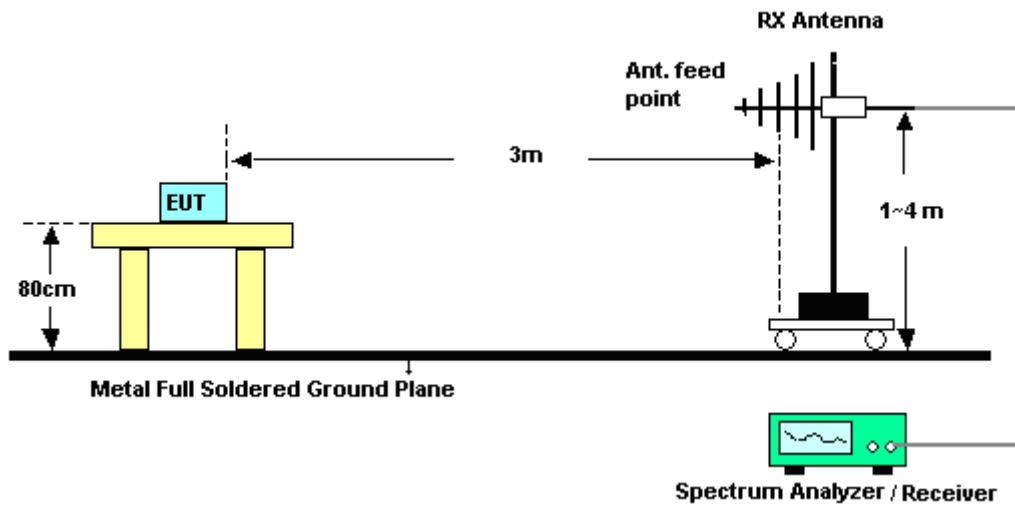

For radiated emissions above 1GHz

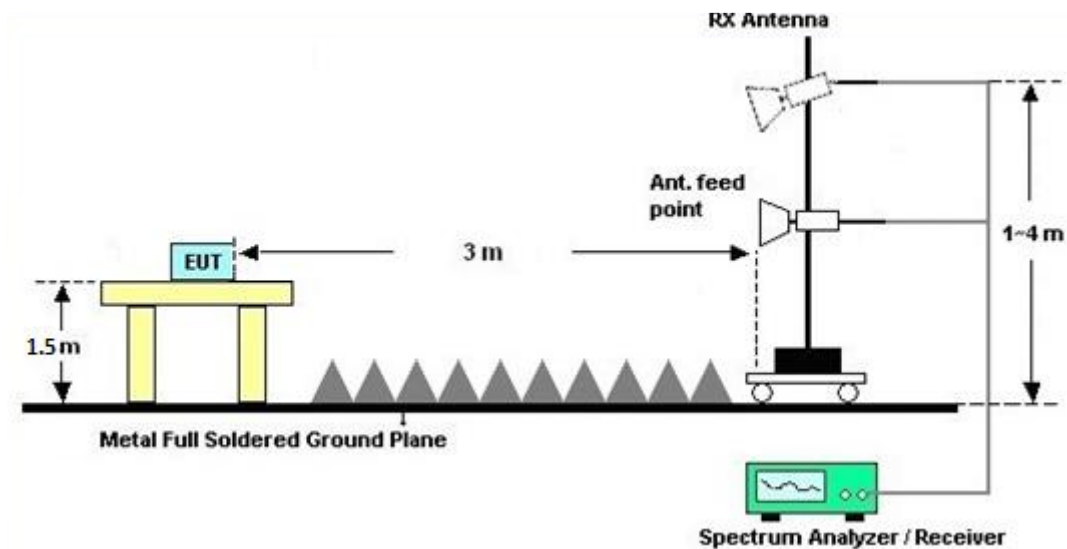

3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.4.6 Test Result of Radiated Band Edges

Please refer to Appendix B.

3.4.7 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.


3.5.4 Test Setup

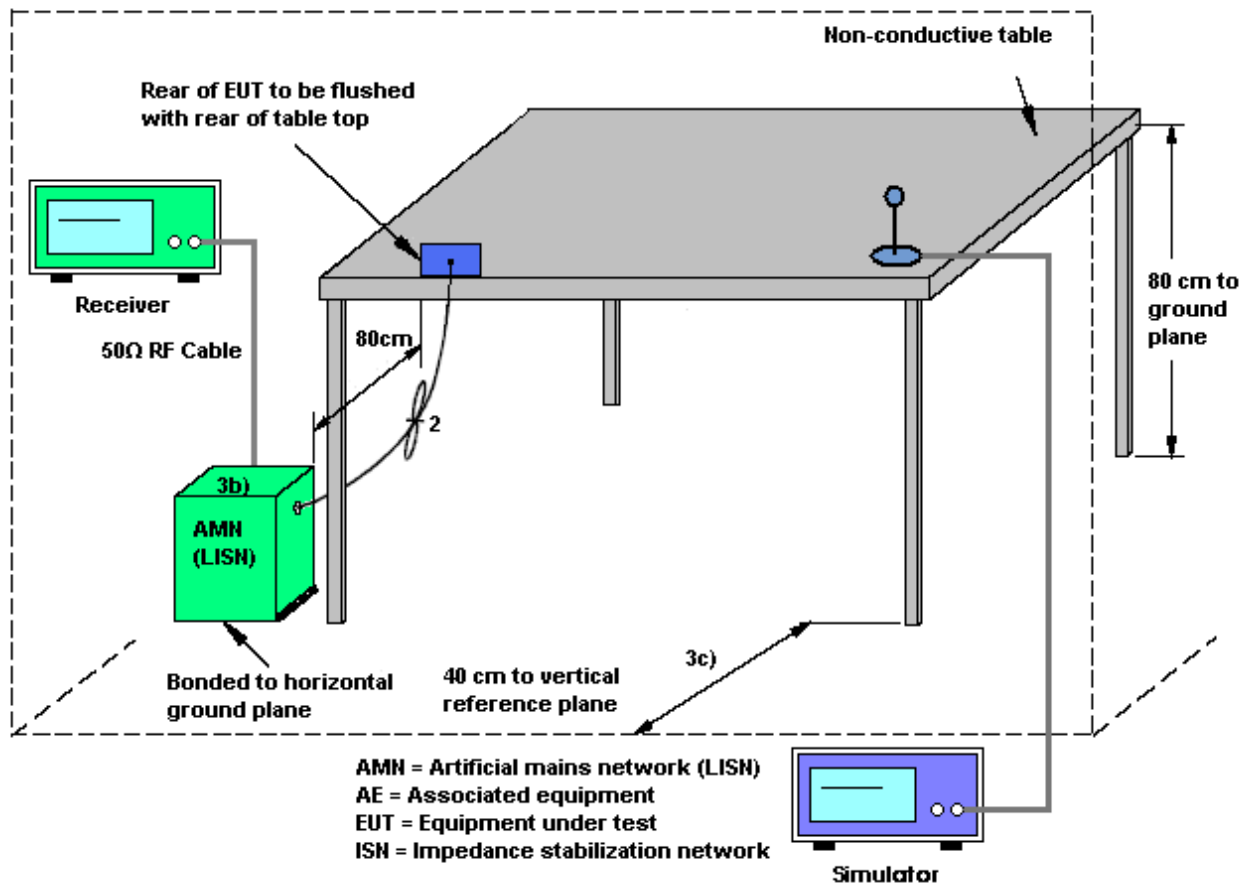



3.5.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	22~24℃
Test Engineer :	Amos Zhang	Relative Humidity :	45~47%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	CDMA2000 BC0 Idle + Bluetooth Link + WLAN (5GHz) Link + Earphone + USB Cable (Charging from Adapter)		

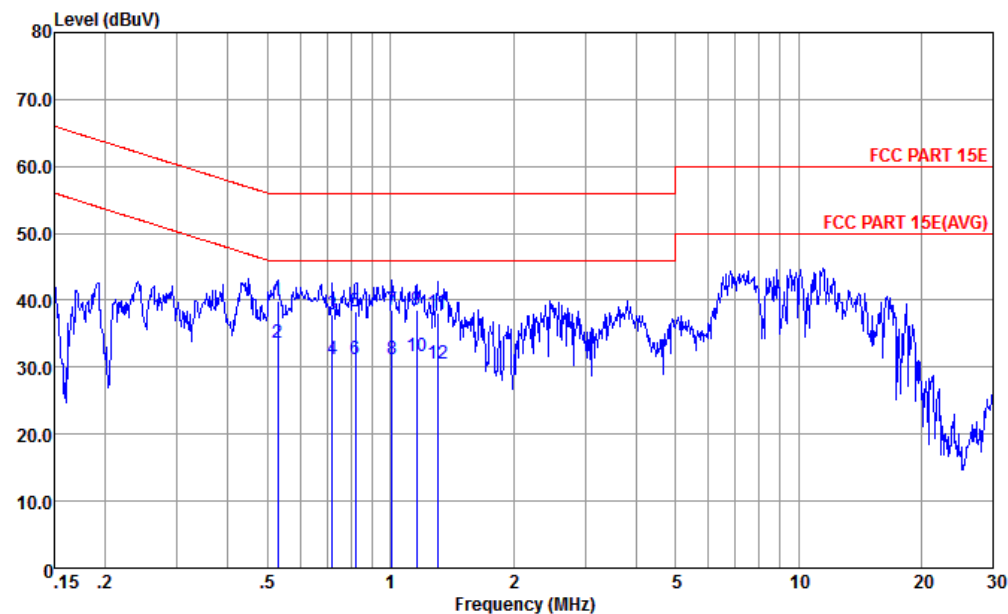


Site : CO01-KS
Condition : FCC PART 15E LISN-L-20151024 LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.53	39.79	-16.21	56.00	29.40	0.23	10.16	QP
2 *	0.53	33.59	-12.41	46.00	23.20	0.23	10.16	Average
3	0.72	37.89	-18.11	56.00	27.50	0.24	10.15	QP
4	0.72	31.19	-14.81	46.00	20.80	0.24	10.15	Average
5	0.82	38.29	-17.71	56.00	27.91	0.24	10.14	QP
6	0.82	31.29	-14.71	46.00	20.91	0.24	10.14	Average
7	1.01	38.59	-17.41	56.00	28.20	0.25	10.14	QP
8	1.01	31.19	-14.81	46.00	20.80	0.25	10.14	Average
9	1.16	38.57	-17.43	56.00	28.19	0.24	10.14	QP
10	1.16	31.67	-14.33	46.00	21.29	0.24	10.14	Average
11	1.30	38.06	-17.94	56.00	27.70	0.22	10.14	QP
12	1.30	30.56	-15.44	46.00	20.20	0.22	10.14	Average



Test Mode :	Mode 1	Temperature :	22~24°C
Test Engineer :	Amos Zhang	Relative Humidity :	45~47%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	CDMA2000 BC0 Idle + Bluetooth Link + WLAN (5GHz) Link + Earphone + USB Cable (Charging from Adapter)		

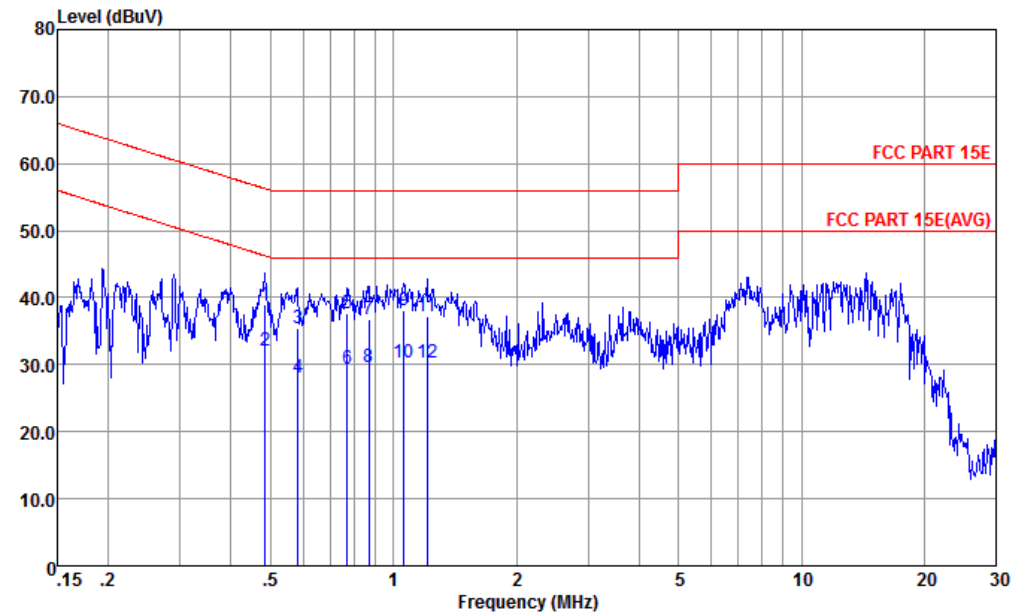

Site : CO01-KS
Condition : FCC PART 15E LISN-N-20151024 NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.48	38.98	-17.29	56.27	28.50	0.32	10.16	QP
2 *	0.48	32.08	-14.19	46.27	21.60	0.32	10.16	Average
3	0.58	35.39	-20.61	56.00	24.90	0.33	10.16	QP
4	0.58	28.19	-17.81	46.00	17.70	0.33	10.16	Average
5	0.77	37.70	-18.30	56.00	27.20	0.35	10.15	QP
6	0.77	29.40	-16.60	46.00	18.90	0.35	10.15	Average
7	0.87	36.80	-19.20	56.00	26.30	0.36	10.14	QP
8	0.87	29.70	-16.30	46.00	19.20	0.36	10.14	Average
9	1.06	38.01	-17.99	56.00	27.50	0.37	10.14	QP
10	1.06	30.41	-15.59	46.00	19.90	0.37	10.14	Average
11	1.21	37.31	-18.69	56.00	26.80	0.37	10.14	QP
12	1.21	30.31	-15.69	46.00	19.80	0.37	10.14	Average

3.6 Frequency Stability Measurement

3.6.1 Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. To ensure emission at the band edge is maintained within the authorized band, those values shall be measured by radiation emissions at upper and lower frequency points, and finally compensated by frequency deviation as procedures below.
2. The EUT was operated at the maximum output power, and connected to the spectrum analyzer, which is set to maximum hold function and peak detector. The peak value of the power envelope was measured and noted. The upper and lower frequency points were respectively measured relatively 10dB lower than the measured peak value.
3. The frequency deviation was calculated by adding the upper frequency point and the lower frequency point divided by two. Those detailed values of frequency deviation are provided in table below.

3.6.4 Test Setup

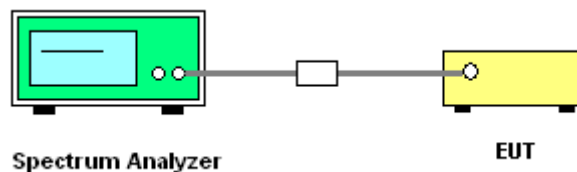

3.6.5 Test Result of Frequency Stability

Please refer to Appendix A.



3.7 Automatically Discontinue Transmission

3.7.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Result of Automatically Discontinue Transmission

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



3.8 Antenna Requirements

3.8.1 Standard Applicable

According to FCC 47 CFR Section 15.407(a)(1)(2), if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.8.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.8.3 Antenna Gain

The antenna gain is less than 6 dBi. Therefore, it is not necessary to reduce maximum output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV30	101338	9kHz~30GHz	May 04, 2015	Nov. 23, 2015~ Dec. 02, 2015	May 03, 2016	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	30MHz~40GHz	Jan. 23, 2015	Nov. 23, 2015~ Dec. 02, 2015	Jan. 22, 2016	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 23, 2015	Nov. 23, 2015~ Dec. 02, 2015	Jan. 22, 2016	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	-40~+150°C	Oct. 24, 2015	Nov. 23, 2015~ Dec. 02, 2015	Oct. 23, 2016	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Max 30dBm	Sep. 10, 2015	Nov. 30, 2015	Sep. 09, 2016	Radiation (03CH03-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz-44GHz	Jun. 05, 2015	Nov. 30, 2015	Jun. 04, 2016	Radiation (03CH03-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 10, 2015	Nov. 30, 2015	Nov. 09, 2016	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6112D	35406	25MHz-2GHz	Jun. 25, 2015	Nov. 30, 2015	Jun. 24, 2016	Radiation (03CH03-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1356	1GHz~18GHz	Jun. 25, 2015	Nov. 30, 2015	Jun. 24, 2016	Radiation (03CH03-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA170249	15GHz ~40GHz	Mar. 03, 2015	Nov. 30, 2015	Mar. 02, 2016	Radiation (03CH03-KS)
Amplifier	Burgeon	BPA-530	102212	0.01MHz-3000MHz	Aug. 10, 2015	Nov. 30, 2015	Aug. 09, 2016	Radiation (03CH03-KS)
Amplifier	MITEQ	TTA1840-35-HG	1887435	18~40GHz	Aug. 27, 2015	Nov. 30, 2015	Aug. 26, 2016	Radiation (03CH03-KS)
high gain Amplifier	MITEQ	AMF-7D-00101800-30-10P	1889560	1GHz-18GHz	Aug. 10, 2015	Nov. 30, 2015	Aug. 09, 2016	Radiation (03CH03-KS)
Amplifier	Agilent	8449B	3008A02370	1GHz~26.5GHz	Oct. 24, 2015	Nov. 30, 2015	Oct. 23, 2016	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Nov. 30, 2015	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Nov. 30, 2015	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Nov. 30, 2015	NCR	Radiation (03CH03-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Max 30dBm	Sep. 10, 2015	Nov. 24, 2015	Sep. 09, 2016	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 24, 2015	Nov. 24, 2015	Oct. 23, 2016	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Oct. 24, 2015	Nov. 24, 2015	Oct. 23, 2016	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 24, 2015	Nov. 24, 2015	Oct. 23, 2016	Conduction (CO01-KS)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.3 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.5 dB
---	--------



Appendix A. Conducted Test Results

Report Number : FR5N0901D

Test Engineer:	Issac Song	Temperature:	24~25	°C
Test Date:	2015/11/23~2015/12/02	Relative Humidity:	49~51	%

TEST RESULTS DATA
26dB and 99% OBW

Band I										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)		
11a	6Mbps	1	36	5180	18.53	24.08	-	22.68		
11a	6Mbps	1	44	5220	18.78	23.58	-	22.74		
11a	6Mbps	1	48	5240	18.23	23.18	-	22.61		
HT20	MCS0	1	36	5180	19.28	23.58	-	22.85		
HT20	MCS0	1	44	5220	19.18	23.98	-	22.83		
HT20	MCS0	1	48	5240	19.48	23.23	-	22.90		
VHT20	MCS0	1	36	5180	19.33	23.83	-	22.86		
VHT20	MCS0	1	44	5220	19.23	23.83	-	22.84		
VHT20	MCS0	1	48	5240	19.13	23.38	-	22.82		
VHT40	MCS0	1	38	5190	36.86	44.24	-	23.01		
VHT40	MCS0	1	46	5230	37.06	43.79	-	23.01		
VHT80	MCS0	1	42	5210	75.28	79.92	-	23.01		

TEST RESULTS DATA
Power Spectral Density

FCC Band I										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)	-	Pass/Fail
11a	6Mbps	1	36	5180	0.59	1.79	11.00	0.00		Pass
11a	6Mbps	1	44	5220	0.59	1.37	11.00	0.00		Pass
11a	6Mbps	1	48	5240	0.59	1.68	11.00	0.00		Pass
HT20	MCS0	1	36	5180	0.63	-1.47	11.00	0.00		Pass
HT20	MCS0	1	44	5220	0.63	-1.77	11.00	0.00		Pass
HT20	MCS0	1	48	5240	0.63	-1.50	11.00	0.00		Pass
VHT20	MCS0	1	36	5180	0.81	-1.58	11.00	0.00		Pass
VHT20	MCS0	1	44	5220	0.81	-1.61	11.00	0.00		Pass
VHT20	MCS0	1	48	5240	0.81	-1.63	11.00	0.00		Pass
VHT40	MCS0	1	38	5190	1.47	-3.94	11.00	0.00		Pass
VHT40	MCS0	1	46	5230	1.47	-4.18	11.00	0.00		Pass
VHT80	MCS0	1	42	5210	2.57	-6.70	11.00	0.00		Pass

TEST RESULTS DATA
Average Power Table

FCC Band I										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)		Pass/Fail
11a	6Mbps	1	36	5180	0.59	12.66	24.00	0.00		Pass
11a	6Mbps	1	44	5220	0.59	12.24	24.00	0.00		Pass
11a	6Mbps	1	48	5240	0.59	12.48	24.00	0.00		Pass
HT20	MCS0	1	36	5180	0.63	9.66	24.00	0.00		Pass
HT20	MCS0	1	44	5220	0.63	9.24	24.00	0.00		Pass
HT20	MCS0	1	48	5240	0.63	9.61	24.00	0.00		Pass
VHT20	MCS0	1	36	5180	0.81	9.92	24.00	0.00		Pass
VHT20	MCS0	1	44	5220	0.81	9.40	24.00	0.00		Pass
VHT20	MCS0	1	48	5240	0.81	9.72	24.00	0.00		Pass
VHT40	MCS0	1	38	5190	1.47	9.91	24.00	0.00		Pass
VHT40	MCS0	1	46	5230	1.47	9.72	24.00	0.00		Pass
VHT80	MCS0	1	42	5210	2.57	10.05	24.00	0.00		Pass

TEST RESULTS DATA
Frequency Stability

Band I										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Center Frequency (MHz)	Frequency Deviation (MHz)	Frequency Stability (ppm)	Temperature (°C)	Voltage (V)	Note
11a	6Mbps	1	36	5180	5179.975	-0.025	-4.83	20	3.6	
11a	6Mbps	1	36	5180	5179.975	-0.025	-4.83	20	4.35	
11a	6Mbps	1	36	5180	5179.975	-0.025	-4.83	20	3.8	
11a	6Mbps	1	36	5180	5180.025	0.025	4.83	-30	3.8	
11a	6Mbps	1	36	5180	5179.950	-0.050	-9.65	50	3.8	



Appendix B. Radiated Test Results

Band 1 - 5150~5250MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 36 5180MHz	*	5186	99.65	-	-	96.14	31.85	8.17	36.51	100	283	P	H
	*	5184	92.83	-	-	89.32	31.85	8.17	36.51	100	283	A	H
		5149.5	51.45	-22.55	74	48.01	31.84	8.13	36.53	100	283	P	H
		5149.85	40.63	-13.37	54	37.19	31.84	8.13	36.53	100	283	A	H
	*	5186	95.89	-	-	92.38	31.85	8.17	36.51	300	59	P	V
	*	5184	88.71	-	-	85.2	31.85	8.17	36.51	300	59	A	V
		5149.3	48.73	-25.27	74	45.29	31.84	8.13	36.53	300	59	P	V
		5127.45	38.6	-15.4	54	35.19	31.84	8.11	36.54	300	59	A	V
802.11a CH 44 5220MHz	*	5216	99.49	-	-	95.93	31.86	8.2	36.5	110	286	P	H
	*	5216	92.31	-	-	88.75	31.86	8.2	36.5	110	286	A	H
	*	5218	94.75	-	-	91.19	31.86	8.2	36.5	337	102	P	V
	*	5214	87.52	-	-	83.96	31.86	8.2	36.5	337	102	A	V
802.11a CH 48 5240MHz	*	5248	99.54	-	-	95.94	31.88	8.22	36.5	100	279	P	H
	*	5244	92.69	-	-	89.09	31.88	8.22	36.5	100	279	A	H
		5350.7	45.68	-28.32	74	41.98	31.91	8.29	36.5	100	279	P	H
		5394.9	36.47	-17.53	54	32.72	31.92	8.33	36.5	100	279	A	H
	*	5236	95.23	-	-	91.65	31.87	8.21	36.5	292	58	P	V
	*	5248	88.05	-	-	84.45	31.88	8.22	36.5	292	58	A	V
		5356.4	46.14	-27.86	74	42.44	31.91	8.29	36.5	292	58	P	V
		5361.7	36.41	-17.59	54	32.69	31.91	8.31	36.5	292	58	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**Band 1 5150~5250MHz****WIFI 802.11a (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 36		10359	50.63	-23.37	74	62.12	38.02	11.59	61.1	105	188	P	H
5180MHz		10359	50.51	-23.49	74	62	38.02	11.59	61.1	302	66	P	V
802.11a CH 44		10440	50.36	-23.64	74	61.74	38.06	11.63	61.07	100	291	P	H
5220MHz		10440	50.69	-23.31	74	62.07	38.06	11.63	61.07	296	53	P	V
802.11a CH 48		10479	50.18	-23.82	74	61.46	38.09	11.67	61.04	100	282	P	H
5240MHz		10479	50.32	-23.68	74	61.6	38.09	11.67	61.04	295	66	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 36 5180MHz	*	5186	99.3	-	-	95.79	31.85	8.17	36.51	100	256	P	H
	*	5176	91.72	-	-	88.21	31.85	8.17	36.51	100	256	A	H
		5149.85	50.82	-23.18	74	47.38	31.84	8.13	36.53	100	256	P	H
		5128.45	41.48	-12.52	54	38.07	31.84	8.11	36.54	100	256	A	H
	*	5184	92.11	-	-	88.6	31.85	8.17	36.51	100	306	P	V
	*	5186	85.13	-	-	81.62	31.85	8.17	36.51	100	306	A	V
		5145.55	47.05	-26.95	74	43.61	31.84	8.13	36.53	100	306	P	V
		5128.25	37.9	-16.1	54	34.49	31.84	8.11	36.54	100	306	A	V
802.11n HT20 CH 44 5220MHz	*	5212	93.72	-	-	90.16	31.86	8.2	36.5	100	114	P	H
	*	5214	86.31	-	-	82.75	31.86	8.2	36.5	100	114	A	H
	*	5212	92.29	-	-	88.73	31.86	8.2	36.5	100	302	P	V
	*	5214	85.48	-	-	81.92	31.86	8.2	36.5	100	302	A	V
802.11n HT20 CH 48 5240MHz	*	5234	98.94	-	-	95.36	31.87	8.21	36.5	100	254	P	H
	*	5234	91.43	-	-	87.85	31.87	8.21	36.5	100	254	A	H
		5367.55	45.15	-28.85	74	41.43	31.91	8.31	36.5	100	254	P	H
		5362.05	36.37	-17.63	54	32.65	31.91	8.31	36.5	100	254	A	H
	*	5246	93.34	-	-	89.74	31.88	8.22	36.5	100	285	P	V
	*	5244	86.42	-	-	82.82	31.88	8.22	36.5	100	285	A	V
		5363.1	45.12	-28.88	74	41.4	31.91	8.31	36.5	100	285	P	V
		5392.55	36.38	-17.62	54	32.64	31.92	8.32	36.5	100	285	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 36 5180MHz		10359	49.48	-24.52	74	60.97	38.02	11.59	61.1	150	0	P	H
		10359	50.71	-23.29	74	62.2	38.02	11.59	61.1	150	360	P	V
802.11n HT20 CH 44 5220MHz		10440	49.72	-24.28	74	61.1	38.06	11.63	61.07	100	0	P	H
		10440	48.72	-25.28	74	60.1	38.06	11.63	61.07	100	360	P	V
802.11n HT20 CH 48 5240MHz		10479	50.25	-23.75	74	61.53	38.09	11.67	61.04	100	0	P	H
		10480	49	-25	74	60.28	38.09	11.67	61.04	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11ac VHT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT20 CH 36 5180MHz	*	5184	97.25	-	-	93.74	31.85	8.17	36.51	100	273	P	H
	*	5188	91.08	-	-	87.57	31.85	8.17	36.51	100	273	A	H
		5148.9	48	-26	74	44.56	31.84	8.13	36.53	100	273	P	H
		5128.1	39.64	-14.36	54	36.23	31.84	8.11	36.54	100	273	A	H
	*	5172	95.12	-	-	91.64	31.85	8.15	36.52	100	242	P	V
	*	5188	88.45	-	-	84.94	31.85	8.17	36.51	100	242	A	V
		5144.95	47.52	-26.48	74	44.08	31.84	8.13	36.53	100	242	P	V
		5127.9	39.34	-14.66	54	35.93	31.84	8.11	36.54	100	242	A	V
802.11ac VHT20 CH 44 5220MHz	*	5220	100.61	-	-	97.05	31.86	8.2	36.5	100	237	P	H
	*	5220	98.14	-	-	94.58	31.86	8.2	36.5	100	237	A	H
	*	5220	95.52	-	-	91.96	31.86	8.2	36.5	100	153	P	V
	*	5220	91.17	-	-	87.61	31.86	8.2	36.5	100	153	A	V
802.11ac VHT20 CH 48 5240MHz	*	5248	97.87	-	-	94.27	31.88	8.22	36.5	100	235	P	H
	*	5248	91.43	-	-	87.83	31.88	8.22	36.5	100	235	A	H
		5386.35	45.64	-28.36	74	41.9	31.92	8.32	36.5	100	235	P	H
		5378.3	36.96	-17.04	54	33.22	31.92	8.32	36.5	100	235	A	H
	*	5236	94.97	-	-	91.39	31.87	8.21	36.5	100	282	P	V
	*	5244	88.33	-	-	84.73	31.88	8.22	36.5	100	282	A	V
		5388.4	45.73	-28.27	74	41.99	31.92	8.32	36.5	100	282	P	V
		5358.65	37.08	-16.92	54	33.38	31.91	8.29	36.5	100	282	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11ac VHT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT20 CH 36 5180MHz		10360	48.56	-25.44	74	60.05	38.02	11.59	61.1	150	360	P	H
		10360	47.8	-26.2	74	59.29	38.02	11.59	61.1	150	360	P	V
802.11ac VHT20 CH 44 5220MHz		10440	50.05	-23.95	74	61.43	38.06	11.63	61.07	150	360	P	H
		10440	49.93	-24.07	74	61.31	38.06	11.63	61.07	150	176	P	V
802.11ac VHT20 CH 48 5240MHz		10480	48.42	-25.58	74	59.7	38.09	11.67	61.04	100	0	P	H
		10479	48.62	-25.38	74	59.9	38.09	11.67	61.04	100	343	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11ac VHT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT40 CH 38 5190MHz	*	5200	93.97	-	-	90.42	31.86	8.19	36.5	100	105	P	H
	*	5202	87.23	-	-	83.68	31.86	8.19	36.5	100	105	A	H
		5147.05	54.07	-19.93	74	50.63	31.84	8.13	36.53	100	105	P	H
		5150	44.72	-9.28	54	41.28	31.84	8.13	36.53	100	105	A	H
	*	5200	90.76	-	-	87.21	31.86	8.19	36.5	324	291	P	V
	*	5200	83.63	-	-	80.08	31.86	8.19	36.5	324	291	A	V
		5147.35	48.18	-25.82	74	44.74	31.84	8.13	36.53	324	291	P	V
		5150	40.03	-13.97	54	36.59	31.84	8.13	36.53	324	291	A	V
802.11ac VHT40 CH 46 5230MHz	*	5242	94.4	-	-	90.8	31.88	8.22	36.5	100	106	P	H
	*	5218	87.37	-	-	83.81	31.86	8.2	36.5	100	106	A	H
		5363.95	45.12	-28.88	74	41.4	31.91	8.31	36.5	100	106	P	H
		5357	36.73	-17.27	54	33.03	31.91	8.29	36.5	100	106	A	H
	*	5226	90.38	-	-	86.8	31.87	8.21	36.5	317	288	P	V
	*	5228	83.18	-	-	79.6	31.87	8.21	36.5	317	288	A	V
		5358.7	45.19	-28.81	74	41.49	31.91	8.29	36.5	317	288	P	V
		5381.2	36.9	-17.1	54	33.16	31.92	8.32	36.5	317	288	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11ac VHT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT40 CH 38 5190MHz		10380	49.54	-24.46	74	61.01	38.03	11.6	61.1	157	68	P	H
		10380	49.83	-24.17	74	61.3	38.03	11.6	61.1	124	74	P	V
802.11ac VHT40 CH 46 5230MHz		10461	49.79	-24.21	74	61.1	38.08	11.66	61.05	132	241	P	H
		10461	50.36	-23.64	74	61.67	38.08	11.66	61.05	315	311	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 42 5210MHz	*	5214	90.7	-	-	87.14	31.86	8.2	36.5	129	319	P	H
	*	5204	84.3	-	-	80.75	31.86	8.19	36.5	129	319	A	H
		5149.25	56.49	-17.51	74	53.05	31.84	8.13	36.53	129	319	P	H
		5149.9	44.46	-9.54	54	41.02	31.84	8.13	36.53	129	319	A	H
		5354.9	46.19	-27.81	74	42.49	31.91	8.29	36.5	129	319	P	H
		5369.25	37.88	-16.12	54	34.16	31.91	8.31	36.5	129	319	A	H
	*	5204	91.26	-	-	87.71	31.86	8.19	36.5	100	303	P	V
	*	5214	85.14	-	-	81.58	31.86	8.2	36.5	100	303	A	V
		5149.85	59.93	-14.07	74	56.49	31.84	8.13	36.53	100	303	P	V
		5149.7	45.47	-8.53	54	42.03	31.84	8.13	36.53	100	303	A	V
		5400	45.24	-28.76	74	41.49	31.92	8.33	36.5	100	303	P	V
		5368.5	37.73	-16.27	54	34.01	31.91	8.31	36.5	100	303	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**Band 1 5150~5250MHz****WIFI 802.11ac VHT80 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80		10419	50.59	-23.41	74	62	38.05	11.62	61.08	102	192	P	H
CH 42 5210MHz		10419	50.06	-23.94	74	61.47	38.05	11.62	61.08	288	331	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz
WIFI 802.11ac VHT80 (LF @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ac VHT80 LF		31.94	19.43	-20.57	40	31.45	18.32	0.68	31.02	152	191	P	H
		87.23	13.94	-26.06	40	32.43	10.88	1.13	30.5	-	-	P	H
		184.23	20.22	-23.28	43.5	37.3	11.67	1.65	30.4	-	-	P	H
		313.24	24.43	-21.57	46	37.64	15.14	2.18	30.53	-	-	P	H
		390.84	21.99	-24.01	46	33.44	16.79	2.44	30.68	-	-	P	H
		916.58	24.61	-21.39	46	28.22	23.07	3.89	30.57	-	-	P	H
		36.79	30.66	-9.34	40	44.41	16.42	0.73	30.9	221	61	P	V
		50.37	29.53	-10.47	40	50.16	9.3	0.85	30.78	-	-	P	V
		181.32	23.34	-20.16	43.5	40.25	11.85	1.64	30.4	-	-	P	V
		284.14	22.8	-23.2	46	36.92	14.37	2.01	30.5	-	-	P	V
		398.6	21.02	-24.98	46	32.27	16.98	2.47	30.7	-	-	P	V
		935.98	24.83	-21.17	46	28.04	23.38	3.94	30.53	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												

**Note symbol**

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.