



FCC SAR TEST REPORT

Report No.: SET2016-05280
Product: LTE/WCDMA/GSM Multi-Mode Digital Mobile Phone
Brand Name: ZTE
Model No.: ZTE BLADE A110; ZTE Blade A110; BLADE A110; Blade A110; Orange Moka; Moka
FCC ID: SRQ-ZTEA110
Applicant: ZTE Corporation
Address: ZTE Plaza, Keji Road South, Shenzhen, China
Issued by: CCIC-SET
Lab Location: Electronic Testing Building, Shahe Road, Xili, Nanshan District, Shenzhen, 518055, P. R. China
Tel: 86 755 26627338 **Fax:** 86 755 26627238
Mail: manager@ccic-set.com **Website:** <http://www.ccic-set.com>

This test report consists of **191** pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.



Test Report

Product: LTE/WCDMA/GSM Multi-Mode Digital Mobile Phone
Model No.: ZTE BLADE A110; ZTE Blade A110; BLADE A110; Blade A110;
 Orange Moka; Moka
Brand Name.....: ZTE
FCC ID.....: SRQ-ZTEA110
Applicant.....: ZTE Corporation
Applicant Address.....: ZTE Plaza, Keji Road South, Shenzhen, China
Manufacturer.....: ZTE Corporation
Manufacturer Address: ZTE Plaza, Keji Road South, Shenzhen, China

Test Standards.....: **47CFR § 2.1093-** Radiofrequency Radiation Exposure Evaluation: Portable Devices;
ANSI C95.1–1992: Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.(IEEE Std C95.1-1991)
IEEE 1528–2013: IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques

Test Result.....: Pass

Tested by: Mei Chun 2016-04-15
 Chun Mei, Test Engineer

Reviewed by.....: Shuangwen Zhang 2016-04-15
 Shuangwen Zhang, Senior EGINEER

Approved by.....: Wu Lian 2016-04-15
 Wu Li'an , Manager



Contents

- 1. **GENERAL CONDITIONS**-----4
- 2. **ADMINISTRATIVE DATA**-----5
 - 2.1. Identification of the Responsible Testing Laboratory-----5
 - 2.2. Identification of the Responsible Testing Location(s)-----5
 - 2.3. Organization Item-----5
 - 2.4. Identification of Applicant-----5
 - 2.5. Identification of Manufacture-----5
- 3. **EQUIPMENT UNDER TEST (EUT)**-----6
- 4. **SAR SUMMAY**-----7
- 5. **Specific Absorption Rate(SAR)**-----8
 - 5.1. Introduction-----8
 - 5.2. SAR Definition-----8
 - 5.3. Phantoms-----9
 - 5.4. Device Holder-----9
 - 5.5. Probe Specification-----10
- 6. **OPERATIONAL CONDITIONS DURING TEST**-----11
 - 6.1. Schematic Test Configuration-----11
 - 6.2. SAR Measurement System-----11
 - 6.3. Equipments and results of validation testing-----14
 - 6.4. SAR measurement procedure-----16
 - 6.5. Antennas position and test position-----17
- 7. **CHARACTERISTICS OF THE TEST**-----18
 - 7.1. Applicable Limit Regulations-----18
 - 7.2. Applicable Measurement Standards-----18
- 8. **LABORATORY ENVIRONMENT**-----19
- 9. **CONDUCTED RF OUTPUT POWER**-----19
- 10. **TEST RESULTS**-----37
- 11. **MEASUREMENT UNCERTAINTY**-----47
- 12. **MAIN TEST INSTRUMENTS**-----50

This Test Report consists of the following Annexes:

Annex A: Test Layout -----	51
Annex B: Sample Photographs -----	60
Annex C: System Performance Check Data and Highest SAR Plots -----	62
Annex D: Calibration Certificate of Probe and Dipoles -----	97



1. GENERAL CONDITIONS

1.1 This report only refers to the item that has undergone the test.

1.2 This report standalone does not constitute or imply by its own an approval of the product by the certification Bodies or competent Authorities.

1.3 This document is only valid if complete; no partial reproduction can be made without written approval of CCIC-SET

1.4 This report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of CCIC-SET and the Accreditation Bodies, if it applies.



2. Administrative Date

2.1. Identification of the Responsible Testing Laboratory

Company Name: CCIC-SET

Department: EMC & RF Department

Address: Electronic Testing Building, Shahe Road, Nanshan District,
ShenZhen, P. R. China

Telephone: +86-755-26629676

Fax: +86-755-26627238

Responsible Test Lab Managers: Mr. Wu Li'an

2.2. Identification of the Responsible Testing Location(s)

Company Name: CCIC-SET

Address: Electronic Testing Building, Shahe Road, Nanshan District,
Shenzhen, P. R. China

2.3. Organization Item

CCIC-SET Report No.: SET2016-05280

CCIC-SET Project Leader: Mr. Li Sixiong

CCIC-SET Responsible for accreditation scope: Mr. Wu Li'an

Start of Testing: 2016-04-07

End of Testing: 2016-04-13

2.4. Identification of Applicant

Company Name: ZTE Corporation

Address: ZTE Plaza, Keji Road South, Shenzhen, China

2.5. Identification of Manufacture

Company Name: ZTE Corporation

Address: ZTE Plaza, Keji Road South, Shenzhen, China

Notes: This data is based on the information by the applicant.

3. Equipment Under Test (EUT)

3.1. Identification of the Equipment under Test

Sample Name: LTE/WCDMA/GSM Multi-Mode Digital Mobile Phone
Model Name: ZTE BLADE A110; ZTE Blade A110; BLADE A110; Blade A110; Orange Moka; Moka
Brand Name: ZTE

Support Band	GSM850MHz/1900MHz/900MHz/1800MHz WCDMA 850MHz/1900MHz, LTE Band2/4/7/28,WIFI, BT
Test Band	GSM 850MHz/ GSM 1900MHz, GPRS 850MHz/ GPRS 1900MHz, WCDMA 850MHz/1900MHz, LTE Band2/4/7/28,WIFI 802.11b
Multislot Class	GPRS: Class 12; EGPRS: Class 12
GPRS Class	Class B
General description: Development Stage	Identical Prototype
Accessories	Power Supply
IMEI NO.	004401783877554
Battery type	3.80V 1600mAh
Antenna type	Inner Antenna
Operation mode	GSM / GPRS /WCDMA / LTE /WIFI
Modulation mode	GSM(GMSK),UMTS(QPSK),LTE(QPSK,16QAM), WIFI(OFDM/DSSS)
Max. RF Power	32.98dBm
Max. SAR Value	Head: 0.942 W/kg; Body-Worn: 1.102 W/kg; Hotspot: 1.102 W/kg (10mm distance)

NOTE:

- a. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
- b. This device supports GPRS operation up to class12 (max.uplin:4, max.downlink:4, total timeslots:5). This device supports EDGE operation up to class12(max.uplin:4, max.downlink:4, total timeslots:5)



4 SAR SUMMARY

Highest Standalone SAR Summary

Exposure Position	Frequency Band	Scaled 1g-SAR(W/kg)	Highest Scaled 1g-SAR(W/kg)
Head	GSM850	0.273	0.942
	GSM1900	0.101	
	WCDMA Band V	0.236	
	WCDMA Band II	0.221	
	LTE Band 2	0.332	
	LTE Band 4	0.359	
	LTE Band 7	0.393	
	LTE Band 28	0.191	
	WIFI	0.942	
Body-worn Accessory (10mm Gap)	GSM850	0.418	1.102
	GSM1900	0.156	
	WCDMA Band V	0.478	
	WCDMA Band II	0.281	
	LTE Band 2	0.479	
	LTE Band 4	1.102	
	LTE Band 7	0.219	
	LTE Band 28	0.422	
	WIFI	0.227	
Hotspot (10mm Gap)	GSM850	0.940	1.102
	GSM1900	0.582	
	WCDMA Band V	0.478	
	WCDMA Band II	0.291	
	LTE Band 2	0.479	
	LTE Band 4	1.102	
	LTE Band 7	0.251	
	LTE Band 28	0.422	
	WIFI	0.255	

Highest Simultaneous SAR Summary

Exposure Position	Frequency Band	Highest Scaled 1g-SAR(W/kg)
Head	WWAN(LTE Band 7)&WIFI	1.335
Body-worn (10mmGap)	WWAN(LTE Band 4)&WIFI	1.329
Hotspot (10mmGap)	WWAN(LTE Band 4)&WIFI	1.329

5 Specific Absorption Rate (SAR)

5.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

5.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\text{SAR} = C \frac{\delta T}{\delta t}$$

where C is the specific heat capacity, δT is the temperature rise and δt the exposure duration, or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

where σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the rms electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

5.3 Phantoms

The phantom used for all tests i.e. for both system checks and device testing, was the twin-headed "SAM Phantom", manufactured by SATIMO. The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region, where shell thickness increases to 6mm).

System checking was performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.




SAM Twin Phantom

5.4 Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SATIMO as an integral part of the COMOSAR test system.

The device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

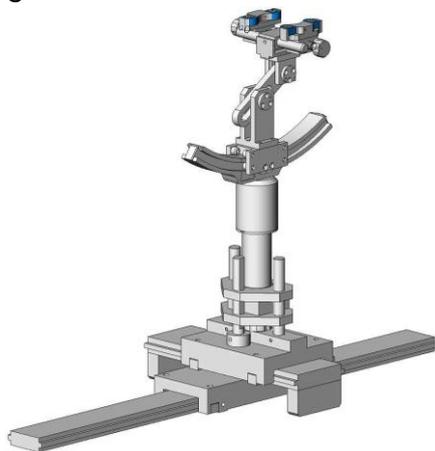

Device holder

5.5 Probe Specification




Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available.
Frequency	700 MHz to 3 GHz; Linearity: ± 0.5 dB (700 MHz to 3 GHz)
Directivity	± 0.25 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic Range	1.5 μ W/g to 100 mW/g; Linearity: ± 0.5 dB
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 5 mm Distance from probe tip to dipole centers: <2.7 mm
Application	General dosimetry up to 3 GHz Dosimetry in strong gradient fields Compliance tests of LTE/WCDMA/GSM Multi-Mode Digital Mobile Phones
Compatibility	COMOSAR

Isotropic E-Field Probe

The isotropic E-Field probe has been fully calibrated and assessed for isotropicity, and boundary effect within a controlled environment. Depending on the frequency for which the probe is calibrated the method utilized for calibration will change.

The E-Field probe utilizes a triangular sensor arrangement as detailed in the diagram below:

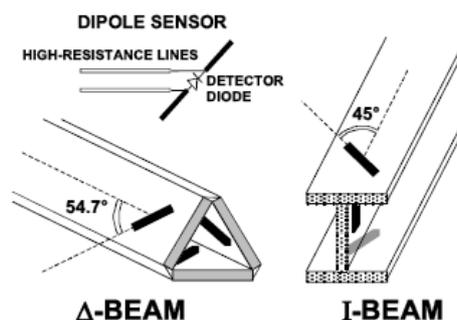

6 OPERATIONAL CONDITIONS DURING TEST

6.1 Schematic Test Configuration

During SAR test, EUT was operating in Traffic Mode (Channel Allocated) at Normal Voltage Condition. A communication link is set up with a System Simulator (SS) by air link, and a call is established. The EUT was commanded to operate at maximum transmitting power.

The EUT should use its internal transmitter. The antenna(s), battery and accessories shall be those specified by the manufacturer. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output. If a wireless link was used, the antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the handset.

The signal transmitted by the simulator to the antenna feeding point should be lower than the output power level of the handset by at least 35 dB

6.2 SAR Measurement System

The SAR measurement system being used is the SATIMO system, the system is controlled remotely from a PC, which contains the software to control the robot and data acquisition equipment. The software also displays the data obtained from test scans.

In operation, the system first does an area (2D) scan at a fixed depth within the liquid from the inside wall of the phantom. When the maximum SAR point has been found, the system will then carry out a 3D scan centred at that point to determine volume averaged SAR level.

6.2.1 Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness Power drifts in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

Table 1: Recommended Dielectric Performance of Tissue

Ingredients (% by weight)	Frequency (MHz)											
	450		835		915		1900		2450		2600	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.46	52.4	41.05	56.0	54.9	40.4	62.7	73.2	55.24	64.49
Salt (Nacl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04	0.5	0.024
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0	0.0	0.0



Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0	0.0	0.0
Triton x-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0	44.45	32.25
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5	39.0	52.5
Conductivity (s/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78	1.96	2.16

MSL/HSL750 (Body and Head liquid for 700 – 800 MHz)

Item	Head Tissue Simulation Liquid HSL750 Muscle(body)Tissue Simulation Liquid MSL750			
H2O	Water, 35 – 58%			
Sucrose	Sugar, white, refined, 40-60%			
NaCl	Sodium Chloride, 0-6%			
Hydroxyethyl-cellulose	Medium Viscosity (CAS# 9004-62-0), <0.3%			
Preventol-D7	Preservative: aqueous preparation, (CAS# 55965-84-9), containing 5-chloro-2-methyl-3(2H)-isothiazolone and 2-methyl-3(2H)-isothiazolone, 0.1-0.7%			
Frequency (MHz)	Head ϵ_r	Head σ (S/m)	Body ϵ_r	Body σ (S/m)
750	41.9	0.89	55.2	0.97

Note: The liquid of 700MHz&2600MHz typical liquid composition is provided by SATIMO.

Table 2 Recommended Tissue Dielectric Parameters

Frequency (MHz)	Head Tissue		Body Tissue	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800-2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00

6.2.2 Simulate liquid

For measurements against the phantom head, the “cheek” and “tilt” position on both the left hand and the right hand sides of the phantom. For body-worn measurements, the EUT was tested against flat phantom representing the user body. The EUT was put on in the belt holder. Stimulate liquid that are used for testing at frequencies of GSM 850MHz/1900MHz, WCDMA850MHz/1900MHz, LTE Band2/4//7/28 and Wi-Fi 2.4GHz, which are made mainly of sugar, salt and water solutions may be left in the phantoms.

Table 3: Dielectric Performance of Head Tissue Simulating Liquid

Temperature: 23.2°C; Humidity: 64%;			
/	Frequency	Permittivity ϵ	Conductivity σ (S/m)
Target value	750MHz	41.9±5%	0.89±5%
Validation value (Apr. 07th, 2016)	750MHz	41.74	0.88
Target value	850MHz	41.5±5%	0.90±5%
Validation value (Apr. 07th, 2016)	850MHz	41.42	0.89
Target value	1800 MHz	40.0±5%	1.40±5%
Validation value (Apr. 09th, 2016)	1800 MHz	39.81	1.39
Target value	1900MHz	40.0±5%	1.40±5%
Validation value (Apr. 09th, 2016)	1900MHz	39.89	1.39
Target value	2450MHz	39.2±5%	1.80±5%
Validation value (Apr.11th, 2016)	2450MHz	39.01	1.79
Target value	2600MHz	39.0±5%	1.96±5%
Validation value (Apr. 11th, 2016)	2600MHz	38.89	1.94


Table 4: Dielectric Performance of Body Tissue Simulating Liquid

Temperature: 23.2°C; Humidity: 64%;			
/	Frequency	Permittivity ϵ	Conductivity σ (S/m)
Target value	750MHz	55.2±5%	0.97±5%
Validation value (Apr. 08th, 2016)	750MHz	55.03	0.95
Target value	850MHz	55.2±5%	0.97±5%
Validation value (Apr. 08th, 2016)	850MHz	55.13	0.97
Target value	1800 MHz	53.3±5%	1.52±5%
Validation value (Apr.10th, 2016)	1800 MHz	53.24	1.51
Target value	1900MHz	53.3±5%	1.52±5%
Validation value (Apr. 10th, 2016)	1900MHz	53.14	1.52
Target value	2450MHz	52.7±5%	1.95±5%
Validation value (Apr. 13th, 2016)	2450MHz	52.56	1.94
Target value	2600MHz	52.5±5%	2.16±5%
Validation value (Apr. 13th, 2016)	2600MHz	52.41	2.15

6.3 Results of validation testing

Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of $\pm 10\%$. The validation results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.

The following procedure, recommended for performing validation tests using box phantoms is based on the procedures described in the IEEE standard P1528. Setup according to the setup diagram below :

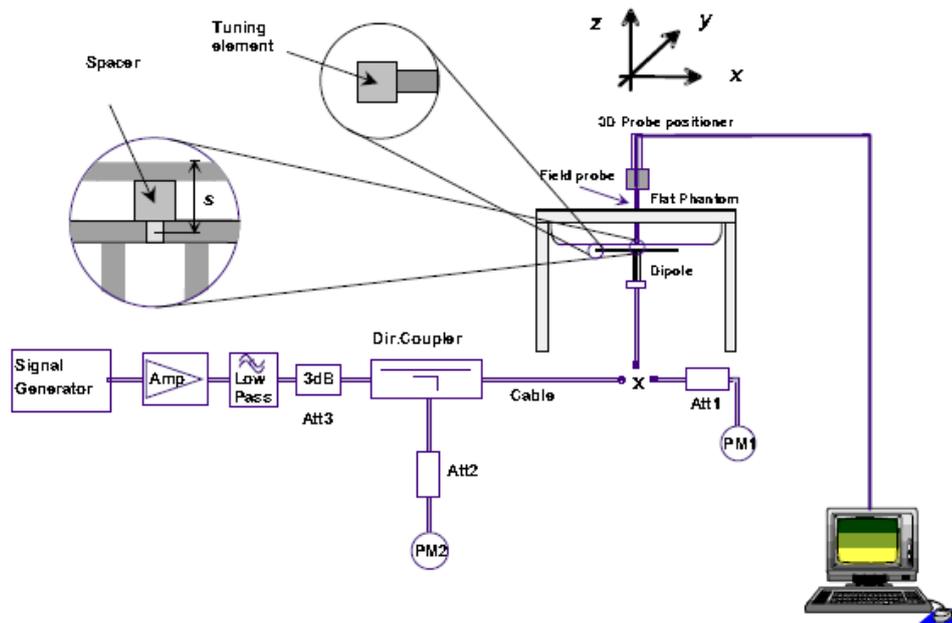

With the SG and Amp and with directional coupler in place, set up the source signal at the relevant frequency and use a power meter to measure the power at the end of the SMA cable that you intend to connect to the balanced dipole. Adjust the SG to make this, say, 0.25W (24 dBm). If this level is too high to read directly with the power meter sensor, insert a calibrated attenuator (e.g. 10 or 20 dB) and make a suitable correction to the power meter reading.

Note 1: In this method, the directional coupler is used for monitoring rather than setting the exact feed power level. If, however, the directional coupler is used for power measurement, you should check the frequency range and power rating of the coupler and measure the coupling factor (referred to output) at the test frequency using a VNA.

Note 2: Remember that the use of a 3dB attenuator (as shown in Figure 8.1 of P1528) means that you need an RF amplifier of 2 times greater power for the same feed power. The other issue is the cable length. You might get up to 1dB of loss per meter of cable, so the cable length after the coupler needs to be quite short.

Note 3: For the validation testing done using CW signals, most power meters are suitable. However, if you are measuring the output of a modulated signal from either a signal generator or a handset, you must ensure that the power meter correctly reads the modulated signals.

The measured 1-gram averaged SAR values of the device against the phantom are provided in Tables 5 and Table 6. The humidity and ambient temperature of test facility were 64% and 23.2°C respectively. The body phantom were full of the body tissue simulating liquid. The EUT was supplied with full-charged battery for each measurement.

The distance between the back of the EUT and the bottom of the flat phantom is 10 mm (taking into account of the IEEE 1528 and the place of the antenna).

Table 5: Head SAR system validation (1g)

Frequency	Duty cycle	Target value (W/kg)	Test value (W/kg)	
			250 mW	1W
750MHz(Apr. 07th, 2016)	1:1	8.67 ± 10%	2.10	8.40
835MHz(Apr. 07th, 2016)	1:1	9.77 ± 10%	2.41	9.64
1800MHz(Apr.09th, 2016)	1:1	38.67 ± 10%	9.47	37.88
1900MHz(Apr.09th, 2016)	1:1	40.37 ± 10%	9.89	39.56
2450MHz(Apr. 11th, 2016)	1:1	53.60 ± 10%	13.18	52.72
2600MHz((Apr.11th, 2016)	1:1	56.19 ± 10%	13.97	55.88

Table 6: Body SAR system validation (1g)


Frequency	Duty cycle	Target value (W/kg)	Test value (W/kg)	
			250 mW	1W
750MHz(Apr. 08th, 2016)	1:1	8.43 ± 10%	2.06	8.24
835MHz(Apr.08th, 2016)	1:1	10.31 ± 10%	2.53	10.12
1800MHz(Apr. 10th, 2016)	1:1	40.07 ± 10%	9.85	39.40
1900MHz(Apr. 10th, 2016)	1:1	40.81 ± 10%	10.14	40.56
2450MHz(Apr.13th, 2016)	1:1	52.66 ± 10%	13.06	52.24
2600MHz((Apr. 13th, 2016)	1:1	57.55 ± 10%	14.08	56.32

* Note: Target value was referring to the measured value in the calibration certificate of reference dipole.

Note: All SAR values are normalized to 1W forward power.

6.4 SAR measurement procedure

The SAR test against the head phantom was carried out as follow:

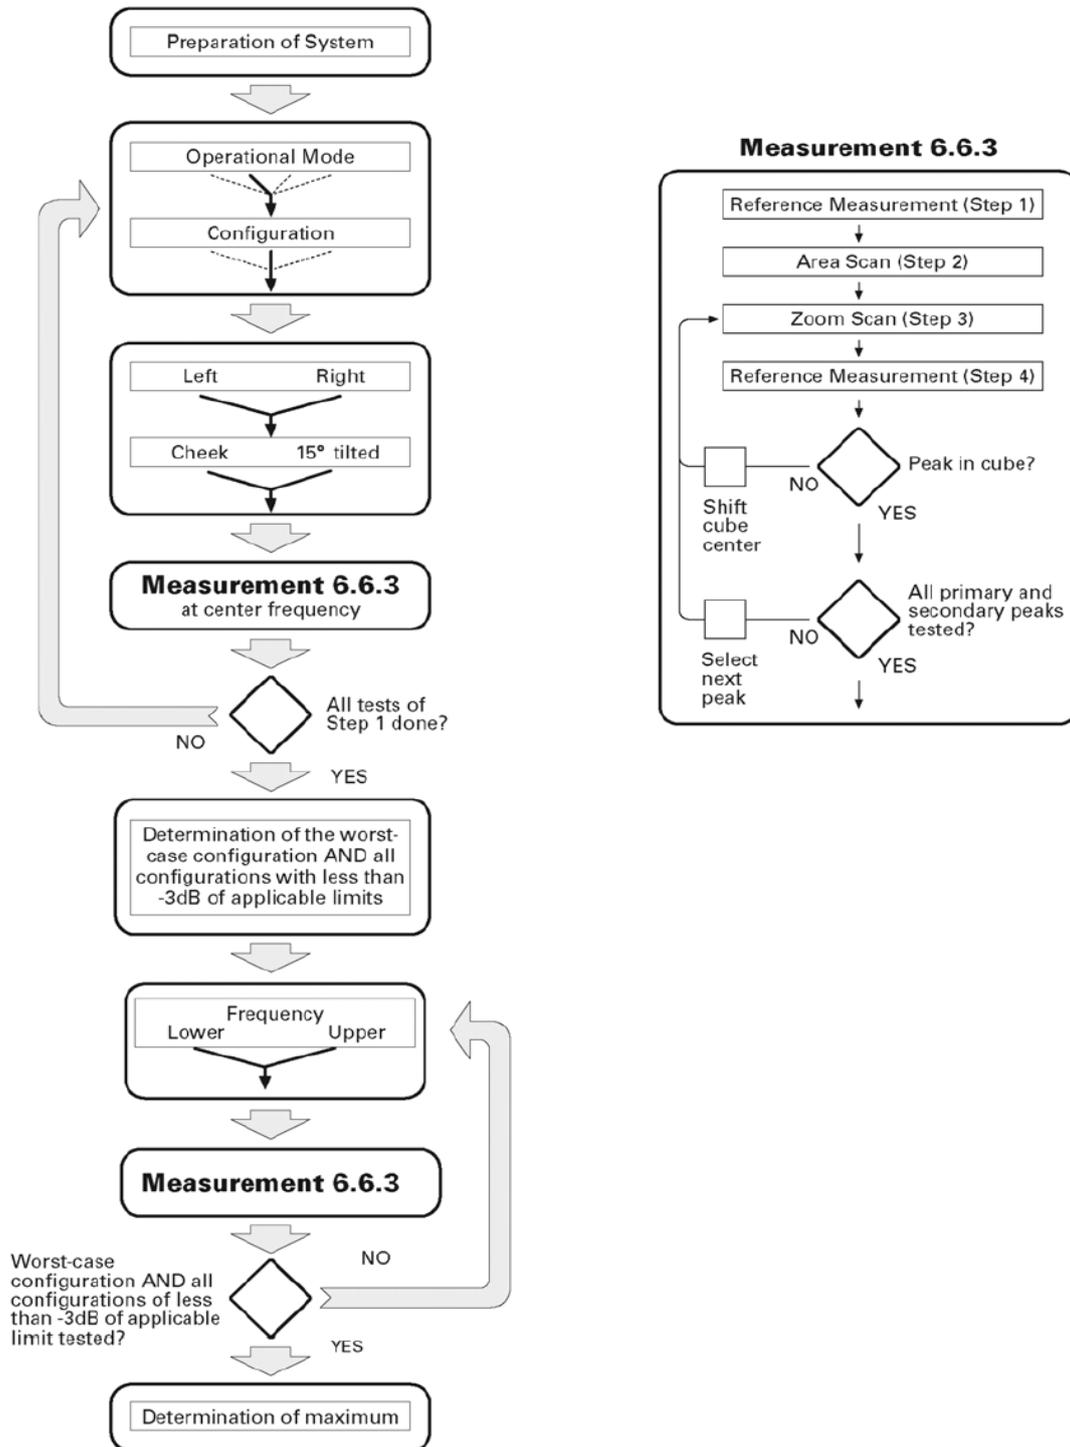

Establish a call with the maximum output power with a base station simulator, the connection between the EUT and the base station simulator is established via air interface.

After an area scan has been done at a fixed distance of 2mm from the surface of the phantom on the source side, a 3D scan is set up around the location of the maximum spot SAR. First, a point within the scan area is visited by the probe and a SAR reading taken at the start of testing. At the end of testing, the probe is returned to the same point and a

second reading is taken. Comparison between these start and end readings enables the power drift during measurement to be assessed.

Above is the scanning procedure flow chart and table from the IEEE p1528 standard. This is the procedure for which all compliant testing should be carried out to ensure that all variations of the device position and transmission behavior are tested.

For body-worn measurement, the EUT was tested under two position: face upward and back upward.

6.5 Transmitting antenna information

The GSM&WCDMA<E&WIFI&BT antennas inside the EUT.





The Body SAR measurement positions of each band are as below:

Antenna	Front	Back	Edge A	Edge B	Edge C	Edge D
WWAN Antenna Body-worn	Yes	Yes	No	No	No	No
WWAN Antenna hotspot	Yes	Yes	No	Yes	Yes	Yes
WIFI Antenna Body-worn	Yes	Yes	No	No	No	No
WIFI Antenna hotspot	Yes	Yes	Yes	No	No	Yes

Note: According to KDB 941225 D06 v02r01, when antenna-to-edge>2.5cm, SAR is not required.

7 CHARACTERISTICS OF THE TEST

7.1 Applicable Limit Regulations

47CFR § 2.1093- Radiofrequency Radiation Exposure Evaluation: Portable Devices;

ANSI C95.1–1992: Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.(IEEE Std C95.1-1991)

IEEE 1528–2013: IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques

It specifies the maximum exposure limit of **1.6 W/kg** as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

7.2 Applicable Measurement Standards

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this is in accordance with the following standards:

FCC 47 CFR Part2 (2.1093)

ANSI/IEEE C95.1-1992

IEEE 1528-2013

FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02

FCC KDB 447498 D01 v06 General RF Exposure Guidance

FCC KDB 648474 D04 v01r03 Handset SAR

FCC KDB 865664 D01 v01r04 SAR Measurement 100MHz to 6GHz

FCC KDB 865664 D02 v01r02 SAR Exposure Reporting

FCC KDB 941225 D01 v03r01 3G SAR Procedures

FCC KDB 941225 D05 v02r05 SAR for LTE Devices

FCC KDB 941225 D06 v02r01 Hotspot Mode

8 LABORATORY ENVIRONMENT

The Ambient Conditions during SAR Test

Temperature	Min. = 22 ° C, Max. = 25 ° C
Atmospheric pressure	Min.=86 kPa, Max.=106 kPa
Relative humidity	Min. = 45%, Max. = 75%
Ground system resistance	< 0.5 Ω

Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards.

9. Conducted RF Output Power

9.1 GSM Conducted Power

GSM Conducted Power

Band		Burst Average Power (dBm)			Frame-Average Power (dBm)		
GSM850	TX Channel	128	190	251	128	190	251
	Frequency(MHz)	824.2	836.4	848.8	824.2	836.4	848.8
	GSM	32.86	32.94	32.98	23.83	23.91	23.95
	GPRS (Slot 1)	32.52	32.54	32.56	23.49	23.51	23.53
	GPRS (Slot 2)	29.43	29.43	29.45	23.41	23.41	23.43
	GPRS (Slot 3)	27.69	27.70	27.70	23.43	23.44	23.44
	GPRS (Slot 4)	26.46	26.46	26.47	23.45	23.45	23.46
	EDGE (Slot 1)	31.98	32.04	32.11	22.95	23.01	23.08
	EDGE (Slot 2)	29.36	29.37	29.41	23.34	23.35	23.39
	EDGE (Slot 3)	27.42	27.49	27.52	23.16	23.23	23.26
	EDGE (Slot 4)	26.16	26.21	26.22	23.15	23.2	23.21
Band		Burst Average Power (dBm)			Frame-Average Power (dBm)		
GSM1900	TX Channel	512	661	810	512	661	810
	Frequency(MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8
	GSM	29.02	29.12	29.15	19.99	20.09	20.12
	GPRS (Slot 1)	28.82	28.9	28.93	19.79	19.87	19.9
	GPRS (Slot 2)	26.41	26.43	26.44	20.39	20.41	20.42
	GPRS (Slot 3)	24.58	24.61	24.62	20.32	20.35	20.36
	GPRS (Slot 4)	23.62	23.64	23.67	20.61	20.63	20.66



EDGE (Slot 1)	28.41	28.38	28.32	19.38	19.35	19.29
EDGE (Slot 2)	26.3	26.33	26.34	20.28	20.31	20.32
EDGE (Slot 3)	24.47	24.51	24.52	20.21	20.25	20.26
EDGE (Slot 4)	23.16	23.21	23.24	20.15	20.2	20.23

Note: Per KDB 447498 D01 v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.

For Head SAR testing, GSM should be evaluated, therefore the EUT was set in GSM Voice for GSM850 and GSM1900 due to its highest frame-average power.

For Body worn SAR testing, GSM should be evaluated, therefore the EUT was set in GSM Voice for GSM850 and GSM 1900 due to its highest frame-average power.

For hotspot mode SAR testing, GPRS and EDGE should be evaluated, therefore the EUT was set in GPRS850 (4Tx slots) and GPRS1900 (4Tx slots) due to its highest frame-average power.

Timeslot consignations

No. Of Slots	Slot 1	Slot 2	Slot 3	Slot 4
Slot Consignation	1Up4Down	2UpDown	3UpDown	4Up1Down
Duty Cycle	1:8	1:4	1:2.67	1:2
Crest Factor	-9.03dB	-6.02dB	-4.26dB	-3.01dB

9.2 WCDMA Conducted output Power

WCDMA conducted output power

Item	band	WCDMA 850			WCDMA 1900		
	ARFCN	4132	4175	4233	9262	9400	9538
	subtest	dBm			dBm		
RMC 12.2kbps	non	22.97	22.92	23.01	22.07	22.28	22.18
HSDPA	1	22.15	22.21	22.18	21.68	21.63	21.56
	2	21.85	21.87	21.81	21.39	21.33	21.37
	3	21.92	21.87	21.91	21.48	21.51	21.55
	4	21.27	21.22	21.25	20.78	20.75	20.81
HSUPA	1	22.09	22.13	22.17	21.81	21.85	21.89
	2	21.69	21.71	21.64	21.44	21.39	21.38
	3	21.81	21.75	21.88	21.65	21.57	21.61
	4	21.66	21.63	21.69	21.54	21.48	21.52
	5	21.17	21.21	21.22	20.75	20.68	20.71

Note:

- WCDMA SAR was tested under PMC 12.2kbps with HSPA Inactive per KDB Publication 941225 D01.HSPA SAR was not requires since the average output power of the HSPA subtests was not more than 0.25dB higher than the RMC level and SAR was less than 1.2W/kg.
- It is expected by the manufacturer that MPR for some HSPA subtests may be up to 2dB more than specified by 3GPP, but also as low as 0dB according to the chipset implementation in this model.

9.2 LTE Conducted peak output Power

LTE Test Configurations

The CMW500 Wide Band Radio Communication Tester was used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR test were performed with the same number of RB and RB offsets transmitting on all frames.

1)Spectrum Plots for RB configurations

A properly configured base station simulator was used for LTE output power measurements and SAR testing. Therefore, spectrum plots for RB configurations were not required to be included in this report.

2)MPR

When MPR is implemented permanently within the UE, regardless of network requirements, only those RB configurations allowed by 3GPP for the channel bandwidth and modulation combinations may be tested with MPR active. Configurations with RB allocations less than the RB thresholds required by 3GPP must be tested without MPR.

The allowed Maximum Power Reduction(MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101:

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth configuration [RB]						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

3)A-MPR LTE procedures for SAR testing

A-MPR(Additional MPR) has been disabled for all SAR tests by using Network Signaling Value of “NS_01” on the base station simulator.

4)LTE procedures for SAR testing

A) Largest channel bandwidth standalone SAR test

requirements i) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.



1. LTE Band 2 Conducted Power Test Verdict:

BW(MHz)	Modulation	RB Size	RB Offset	Power(dBm) Low Ch./Freq.	Power(dBm) Middle Ch./Freq.	Power(dBm) High Ch./Freq.
Channel				18700	18900	19100
Frequency(MHz)				1860	1880	1900
20	QPSK	1	0	22.42	22.41	22.48
20		1	49	22.31	22.37	22.32
20		1	99	22.25	22.28	22.25
20		50	0	21.94	21.80	21.82
20		50	24	21.66	21.68	21.80
20		50	49	21.71	21.73	21.77
20		100	0	21.65	21.64	21.70
20	16QAM	1	0	21.52	21.50	21.54
20		1	49	21.37	21.42	21.43
20		1	99	21.42	21.34	21.39
20		50	0	20.85	20.78	20.84
20		50	24	20.61	20.69	20.75
20		50	49	20.65	20.62	20.64
20		100	0	20.58	20.59	20.56
Channel				18675	18900	19125
Frequency(MHz)				1857.5	1880	1902.5
15	QPSK	1	0	22.38	22.35	22.34
15		1	37	22.34	22.30	22.31
15		1	74	22.30	22.33	22.32
15		36	0	21.78	21.85	21.83
15		36	18	21.68	21.69	21.75
15		36	37	21.63	21.67	21.72
15		75	0	21.60	21.59	21.63
15	16QAM	1	0	21.39	21.35	21.34
15		1	37	21.23	21.30	21.29
15		1	74	21.25	21.27	21.21
15		36	0	20.83	20.81	20.82
15		36	18	20.75	20.72	20.69
15		36	37	20.68	20.74	20.71
15		75	0	20.67	20.62	20.68



BW(MHz)	Modulation	RB Size	RB Offset	Power(dBm) Low Ch./Freq.	Power(dBm) Middle Ch./Freq.	Power(dBm) High Ch./Freq.
Channel				18650	18900	19150
Frequency(MHz)				1855	1880	1905
10	QPSK	1	0	22.34	22.35	22.32
10		1	24	22.29	22.24	22.31
10		1	49	22.30	22.27	22.28
10		25	0	21.81	21.78	21.73
10		25	12	21.69	21.72	21.71
10		25	24	21.73	21.69	21.66
10		50	0	21.61	21.65	21.66
10		16QAM	1	0	21.37	21.41
10	1		24	21.26	21.29	21.31
10	1		49	21.25	21.22	21.28
10	25		0	20.78	20.75	20.74
10	25		12	20.75	20.68	20.72
10	25		24	20.69	20.66	20.71
10	50		0	20.61	20.62	20.62
Channel				18625	18900	19175
Frequency(MHz)				1852.5	1880	1907.5
5	QPSK	1	0	22.31	22.35	22.37
5		1	12	22.34	22.32	22.35
5		1	24	22.29	22.31	22.30
5		12	0	21.81	21.79	21.82
5		12	6	21.72	21.68	21.69
5		12	11	21.71	21.66	21.67
5		25	0	21.64	21.61	21.62
5		16QAM	1	0	21.35	21.32
5	1		12	21.22	21.31	21.28
5	1		24	21.27	21.25	21.29
5	12		0	20.76	20.74	20.71
5	12		6	20.67	20.65	20.63
5	12		11	20.64	20.61	20.65
5	25		0	20.60	20.55	20.57



BW(MHz)	Modulation	RB Size	RB Offset	Power(dBm) Low Ch./Freq.	Power(dBm) Middle Ch./Freq.	Power(dBm) High Ch./Freq.
Channel				18615	18900	19185
Frequency(MHz)				1851.5	1880	1908.5
3	QPSK	1	0	22.33	22.29	22.27
3		1	7	22.27	22.31	22.25
3		1	14	22.30	22.27	22.32
3		8	0	21.75	21.72	21.70
3		8	4	21.68	21.71	21.73
3		8	7	21.64	21.68	21.65
3		15	0	21.71	21.69	21.63
3	16QAM	1	0	21.36	21.34	21.32
3		1	7	21.22	21.27	21.30
3		1	14	21.24	21.28	21.21
3		8	0	20.72	20.71	20.75
3		8	4	20.65	20.57	20.62
3		8	7	20.54	20.59	20.54
3		15	0	20.57	20.52	20.50
Channel				18607	18900	19193
Frequency(MHz)				1850.7	1732.5	1909.3
1.4	QPSK	1	0	22.27	22.31	22.29
1.4		1	2	22.23	22.22	22.26
1.4		1	5	22.21	22.26	22.19
1.4		3	0	21.70	21.69	21.72
1.4		3	1	21.74	21.68	21.73
1.4		3	2	21.64	21.57	21.61
1.4		6	0	21.58	21.56	21.53
1.4	16QAM	1	0	21.29	21.27	21.31
1.4		1	2	21.25	21.22	21.29
1.4		1	5	21.27	21.21	21.24
1.4		3	0	20.75	20.71	20.67
1.4		3	1	20.54	20.58	20.65
1.4		3	2	20.60	20.57	20.53
1.4		6	0	20.48	20.51	20.54



2. LTE Band 4 Conducted Power Test Verdict:

BW(MHz)	Modulation	RB Size	RB Offset	Power(dBm) Low Ch./Freq.	Power(dBm) Middle Ch./Freq.	Power(dBm) High Ch./Freq.
Channel				20050	20175	20300
Frequency(MHz)				1720	1732.5	1745
20	QPSK	1	0	22.31	22.36	22.35
20		1	49	22.29	22.25	22.29
20		1	99	22.28	22.27	22.25
20		50	0	21.82	21.84	21.87
20		50	24	21.81	21.85	21.81
20		50	49	21.78	21.72	21.75
20		100	0	21.71	21.76	21.77
20	16QAM	1	0	21.52	21.58	21.54
20		1	49	21.50	21.45	21.43
20		1	99	21.44	21.45	21.47
20		50	0	20.87	20.79	20.82
20		50	24	20.69	20.77	20.70
20		50	49	20.71	20.65	20.66
20		100	0	20.64	20.68	20.61
Channel				20025	20175	20325
Frequency(MHz)				1717.5	1732.5	1747.5
15	QPSK	1	0	22.33	22.26	22.28
15		1	37	22.26	22.21	22.31
15		1	74	22.30	22.27	22.23
15		36	0	21.85	21.77	21.79
15		36	18	21.78	21.76	21.77
15		36	37	21.76	21.70	21.74
15		75	0	21.68	21.66	21.72
15	16QAM	1	0	21.57	21.51	21.53
15		1	37	21.44	21.45	21.51
15		1	74	21.49	21.45	21.48
15		36	0	20.86	20.83	20.78
15		36	18	20.69	20.73	20.70
15		36	37	20.61	20.71	20.63
15		75	0	20.62	20.64	20.61



BW(MHz)	Modulation	RB Size	RB Offset	Power(dBm) Low Ch./Freq.	Power(dBm) Middle Ch./Freq.	Power(dBm) High Ch./Freq.
Channel				20000	20175	20350
Frequency(MHz)				1715	1732.5	1750
10	QPSK	1	0	22.22	22.29	22.25
10		1	24	22.25	22.24	22.21
10		1	49	22.22	22.19	22.25
10		25	0	21.84	21.76	21.78
10		25	12	21.72	21.75	21.77
10		25	24	21.77	21.70	21.75
10		50	0	21.75	21.72	21.78
10		16QAM	1	0	21.53	21.57
10	1		24	21.51	21.52	21.55
10	1		49	21.48	21.44	21.46
10	25		0	20.85	20.83	20.80
10	25		12	20.78	20.80	20.72
10	25		24	20.72	20.68	20.74
10	50		0	20.69	20.64	20.63
Channel				19975	20175	20375
Frequency(MHz)				1712.5	1732.5	1752.5
5	QPSK	1	0	22.27	22.25	22.19
5		1	12	22.25	22.24	22.23
5		1	24	22.21	22.23	22.25
5		12	0	21.72	21.77	21.72
5		12	6	21.67	21.70	21.68
5		12	11	21.65	21.73	21.67
5		25	0	21.73	21.68	21.69
5		16QAM	1	0	21.47	21.46
5	1		12	21.51	21.47	21.42
5	1		24	21.49	21.51	21.45
5	12		0	20.81	20.79	20.78
5	12		6	20.76	20.82	20.75
5	12		11	20.75	20.74	20.72
5	25		0	20.73	20.68	20.80



BW(MHz)	Modulation	RB Size	RB Offset	Power(dBm) Low Ch./Freq.	Power(dBm) Middle Ch./Freq.	Power(dBm) High Ch./Freq.
Channel				19965	20175	20385
Frequency(MHz)				1711.5	1732.5	1753.5
3	QPSK	1	0	22.19	22.17	22.22
3		1	7	22.16	22.15	22.17
3		1	14	22.19	22.15	22.17
3		8	0	21.77	21.81	21.76
3		8	4	21.80	21.75	21.68
3		8	7	21.78	21.82	21.75
3		15	0	21.75	21.69	21.71
3	16QAM	1	0	21.51	21.52	21.55
3		1	7	21.47	21.45	21.43
3		1	14	21.42	21.40	21.46
3		8	0	20.83	20.85	20.82
3		8	4	20.74	20.78	20.75
3		8	7	20.73	20.75	20.74
3		15	0	20.72	20.66	20.68
Channel				19957	20175	20393
Frequency(MHz)				1710.7	1732.5	1754.3
1.4	QPSK	1	0	22.21	22.11	22.17
1.4		1	2	22.11	22.15	22.09
1.4		1	5	22.15	22.09	22.13
1.4		3	0	21.81	21.78	21.75
1.4		3	1	21.77	21.73	21.78
1.4		3	2	21.76	21.77	21.71
1.4		6	0	21.65	21.66	21.69
1.4	16QAM	1	0	21.52	21.47	21.49
1.4		1	2	21.43	21.44	21.41
1.4		1	5	21.41	21.42	21.44
1.4		3	0	20.85	20.81	20.77
1.4		3	1	20.79	20.73	20.77
1.4		3	2	20.70	20.68	20.67
1.4		6	0	20.69	20.62	20.63



3. LTE Band 7 Conducted Power Test Verdict:

BW(MHz)	Modulation	RB Size	RB Offset	Power(dBm) Low Ch./Freq.	Power(dBm) Middle Ch./Freq.	Power(dBm) High Ch./Freq.
Channel				20850	21100	21350
Frequency(MHz)				2510	2535	2560
20	QPSK	1	0	20.52	20.56	20.54
20		1	49	20.48	20.47	20.43
20		1	99	20.41	20.42	20.45
20		50	0	19.82	19.84	19.87
20		50	24	19.77	19.75	19.81
20		50	49	19.78	19.79	19.75
20		100	0	19.75	19.70	19.73
20	16QAM	1	0	19.50	19.51	19.55
20		1	49	19.49	19.52	19.53
20		1	99	19.48	19.47	19.41
20		50	0	18.90	18.85	18.92
20		50	24	18.89	18.87	18.80
20		50	49	18.84	18.81	18.86
20		100	0	18.80	18.85	18.81
Channel				20825	21100	21375
Frequency(MHz)				2507.5	2535	2562.5
15	QPSK	1	0	20.48	20.52	20.44
15		1	37	20.42	20.49	20.45
15		1	74	20.44	20.42	20.47
15		36	0	19.85	19.79	19.81
15		36	18	19.79	19.78	19.75
15		36	37	19.72	19.76	19.77
15		75	0	19.74	19.76	19.73
15	16QAM	1	0	19.52	19.54	19.49
15		1	37	19.47	19.45	19.48
15		1	74	19.46	19.42	19.43
15		36	0	18.87	18.85	18.89
15		36	18	18.89	18.87	18.85
15		36	37	18.84	18.85	18.86
15		75	0	18.83	18.82	18.81



BW(MHz)	Modulation	RB Size	RB Offset	Power(dBm) Low Ch./Freq.	Power(dBm) Middle Ch./Freq.	Power(dBm) High Ch./Freq.
Channel				20800	21100	21400
Frequency(MHz)				2505	2535	2565
10	QPSK	1	0	20.42	20.46	20.44
10		1	24	20.38	20.39	20.43
10		1	49	20.37	20.38	20.39
10		25	0	19.82	19.83	19.79
10		25	12	19.76	19.77	19.74
10		25	24	19.75	19.73	19.75
10		50	0	19.72	19.75	19.73
10	16QAM	1	0	19.49	19.53	19.55
10		1	24	19.47	19.49	19.48
10		1	49	19.48	19.46	19.45
10		25	0	18.84	18.83	18.86
10		25	12	18.78	18.79	18.74
10		25	24	18.75	18.72	18.76
10		50	0	18.75	18.73	18.71
Channel				20775	21100	21425
Frequency(MHz)				2502.5	2535	2567.5
5	QPSK	1	0	20.39	20.41	20.34
5		1	12	20.38	20.37	20.33
5		1	24	20.37	20.32	20.35
5		12	0	19.78	19.76	19.74
5		12	6	19.73	19.72	19.75
5		12	11	19.71	19.69	19.68
5		25	0	19.69	19.68	19.67
5	16QAM	1	0	19.46	19.47	19.44
5		1	12	19.43	19.39	19.43
5		1	24	19.39	19.37	19.41
5		12	0	18.79	18.82	18.78
5		12	6	18.76	18.76	18.77
5		12	11	18.75	18.71	18.76
5		25	0	18.74	18.75	18.74



4. LTE Band 28 Conducted Power Test Verdict:

BW(MHz)	Modulation	RB Size	RB Offset	Power(dBm) Low Ch./Freq.	Power(dBm) Middle Ch./Freq.	Power(dBm) High Ch./Freq.
Channel				27310	27460	27560
Frequency(MHz)				713	728	738
20	QPSK	1	0	21.38	21.42	21.37
20		1	49	21.27	21.34	21.30
20		1	99	21.31	21.36	21.33
20		50	0	20.87	20.88	20.87
20		50	24	20.79	20.82	20.81
20		50	49	20.75	20.78	20.76
20		100	0	20.66	20.69	20.67
20	16QAM	1	0	20.25	21.32	21.33
20		1	49	20.21	21.25	21.26
20		1	99	20.18	21.12	21.21
20		50	0	20.15	20.75	20.76
20		50	24	20.13	20.73	20.68
20		50	49	20.11	20.71	20.65
20		100	0	20.08	20.65	20.53
Channel				27285	27435	27585
Frequency(MHz)				710.5	725.5	740.5
15	QPSK	1	0	21.12	21.25	20.96
15		1	37	21.08	21.22	20.92
15		1	74	21.05	21.15	20.83
15		36	0	20.33	20.53	20.21
15		36	18	20.23	20.41	20.15
15		36	37	20.21	20.38	20.03
15		75	0	20.13	20.05	19.99
15	16QAM	1	0	20.86	21.16	20.88
15		1	37	20.76	21.13	20.85
15		1	74	20.75	21.11	20.81
15		36	0	20.31	20.58	20.26
15		36	18	20.25	20.45	20.22
15		36	37	20.23	20.43	20.18
15		75	0	20.01	20.21	20.05



BW(MHz)	Modulation	RB Size	RB Offset	Power(dBm) Low Ch./Freq.	Power(dBm) Middle Ch./Freq.	Power(dBm) High Ch./Freq.
Channel				27260	27410	27610
Frequency(MHz)				708	723	743
10	QPSK	1	0	21.22	21.31	21.25
10		1	24	21.18	21.26	21.22
10		1	49	21.15	21.23	21.15
10		25	0	20.33	20.51	20.53
10		25	12	20.21	20.48	20.41
10		25	24	20.18	20.35	20.38
10		50	0	20.05	20.13	20.05
10		16QAM	1	0	21.02	21.22
10	1		24	20.96	21.15	21.18
10	1		49	20.91	21.11	21.15
10	25		0	20.26	20.38	20.61
10	25		12	20.15	20.25	20.52
10	25		24	20.11	20.21	20.42
10	50		0	20.05	20.06	20.26
Channel				27235	27385	27635
Frequency(MHz)				705.5	720.5	745.5
5	QPSK	1	0	20.86	21.05	20.96
5		1	12	20.81	21.03	20.91
5		1	24	20.78	21.01	20.88
5		12	0	20.25	20.56	20.21
5		12	6	20.21	20.41	20.15
5		12	11	20.18	20.35	20.12
5		25	0	20.05	20.21	20.08
5		16QAM	1	0	20.75	20.99
5	1		12	20.71	20.95	20.81
5	1		24	20.65	20.91	20.75
5	12		0	20.11	20.25	20.21
5	12		6	20.05	20.21	20.16
5	12		11	20.01	20.15	20.13
5	25		0	19.88	20.11	20.08



BW(MHz)	Modulation	RB Size	RB Offset	Power(dBm) Low Ch./Freq.	Power(dBm) Middle Ch./Freq.	Power(dBm) High Ch./Freq.
Channel				27225	27375	27654
Frequency(MHz)				704.5	719.5	746.5
3	QPSK	1	0	21.12	21.05	21.09
3		1	7	21.08	21.03	21.05
3		1	14	21.05	21.01	21.03
3		8	0	20.42	20.96	21.01
3		8	4	20.36	20.91	20.96
3		8	7	20.31	20.85	20.91
3		15	0	20.16	20.82	20.86
3	16QAM	1	0	21.06	21.03	21.05
3		1	7	21.03	21.01	21.01
3		1	14	21.01	20.99	20.96
3		8	0	20.26	20.62	20.21
3		8	4	20.11	20.56	20.12
3		8	7	20.06	20.45	20.06
3		15	0	20.01	20.31	20.02

5. WLAN 2.4GHz Band Conducted Power

Channel/Freq.(MHz)	Out Power (dBm) for Data Rates (Mbps)		
	802.11b	802.11g	802.11n(HT20)
1(2412)	17.67	16.53	15.23
6(2437)	18.04	16.89	16.02
11(2462)	16.91	16.36	15.36
Channel/Freq.(MHz)	Out Power (dBm) for Data Rates (Mbps)		
	802.11b		
3(2422)	15.24		
6(2437)	15.85		
9(2452)	15.65		

Bluetooth Output Power

Channel	Frequency (MHz)	BT3.0 Output Power(dBm)		
		GFSK	π /4-DQPSK	8-DPSK
CH 0	2402	7.53	6.20	6.20
CH 39	2441	6.96	5.92	5.94
CH 78	2480	6.41	5.32	5.32
Channel	Frequency (MHz)	BT4.0 Output Power(dBm)		
		GFSK		
CH 0	2402	0.36		
CH 20	2442	0.52		
CH 39	2480	-0.18		



SAR test Exclusion and estimate SAR calculation:

Note:

1. Per KDB 447498 D01v06, the 1-g and 10-g SAR test exclusion thresholds for 100MHz to 6GHz at test separation distances $\leq 50\text{mm}$ are determined by: $[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f} \text{ (GHz)}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR

(1) f(GHz) is the RF channel transmit frequency in GHz

(2) Power and distance are round to the nearest mW and mm before calculation

(3) The result is rounded to one decimal place for comparison

(4) If the test separation distance(antenna-user) is $< 5\text{mm}$, 5mm is used for excluded SAR calculation

(5)

BT3.0 Max Power (dBm)	mW	Test Distance (mm)	Frequency(GHz)	Exclusion Thresholds
8	6.310	5	2.45	1.975

Per KDB 447498 D01v06 exclusion thresholds is $1.975 < 3$, RF exposure evaluation is not required.

BT estimated SAR value = $\text{Exclusion Thresholds} / 7.5 = 1.975 / 7.5 = \mathbf{0.263\text{W/Kg}}$

BT3.0 Max Power (dBm)	mW	Test Distance (mm)	Frequency(GHz)	Exclusion Thresholds
8	6.310	10	2.45	0.988

Per KDB 447498 D01v06 exclusion thresholds is $0.988 < 3$, RF exposure evaluation is not required.

BT estimated SAR value = $\text{Exclusion Thresholds} / 7.5 = 0.988 / 7.5 = \mathbf{0.132\text{W/Kg}}$

BT4.0 Max Power (dBm)	mW	Test Distance (mm)	Frequency(GHz)	Exclusion Thresholds
1.0	1.259	5	2.45	0.394

Per KDB 447498 D01v06 exclusion thresholds is $0.394 < 3$, RF exposure evaluation is not required.

BT estimated SAR value = $\text{Exclusion Thresholds} / 7.5 = 0.197 / 7.5 = \mathbf{0.053\text{W/Kg}}$

BT4.0 Max Power (dBm)	mW	Test Distance (mm)	Frequency(GHz)	Exclusion Thresholds
1.0	1.259	10	2.45	0.248

Per KDB 447498 D01v06 exclusion thresholds is $0.197 < 3$, RF exposure evaluation is not required.

BT estimated SAR value = $\text{Exclusion Thresholds} / 7.5 = 0.197 / 7.5 = \mathbf{0.026\text{W/Kg}}$

The estimated SAR value is used for simultaneous transmission analysis.

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
2. Per KDB447498 D01v06, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is: ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz. When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used.
3. Per KDB941225 D06 v02r01, the DUT Dimension is bigger than 9 cm x 5 cm, so 10mm is chosen as the test separation distance for Hotspot mode. When the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested. As the manufacture required, the separation distance use 5mm for Hotspot mode.
4. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/Kg; if the deviation among the repeated measurement is $\leq 20\%$, and the measured SAR < 1.45 W/Kg, only one repeated measurement is required.
5. Per KDB865664 D02 v01r02, SAR plot is only required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination; Plots are also required when the measured SAR is > 1.5 W/kg, or > 7.0 W/kg for occupational exposure. The published RF exposure KDB procedures may require additional plots; for example, to support SAR to peak location separation ratio test exclusion and/or volume scan post-processing(Refer to appendix D for details).
6. Per KDB941225 D01 v03r01, when multiple slots can be used, the GPRS/EDGE slot configuration with the highest frame-averaged output power was selected for SAR testing.
7. Per KDB941225 D01 v03r01, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.
8. Per KDB248227 D01 v02r02, 802.11g /11n-HT20/11n-HT40 is not required. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/Kg. Thus the SAR can be excluded.



9.3. Scaling Factor calculation

Operation Mode	Channel	Output Power(dBm)	Tune up Power in tolerance(dBm)	Scaling Factor
GSM 850	128	32.86	32.0 ± 1.0	1.033
	190	32.94	32.0 ± 1.0	1.014
	251	32.98	32.0 ± 1.0	1.005
GPRS 850(4Tx)	128	26.46	25.5 ± 1.0	1.009
	190	26.46	25.5 ± 1.0	1.009
	251	26.47	25.5 ± 1.0	1.007
GSM1900	512	29.02	28.5 ± 1.0	1.117
	661	29.12	28.5 ± 1.0	1.091
	810	29.15	28.5 ± 1.0	1.084
GPRS1900(4Tx)	512	23.62	23.0 ± 1.0	1.091
	661	23.64	23.0 ± 1.0	1.086
	810	23.67	23.0 ± 1.0	1.079
WCDMA1900	9262	22.07	21.5 ± 1.0	1.104
	9400	22.28	21.5 ± 1.0	1.052
	9538	22.18	21.5 ± 1.0	1.076
WCDMA850	4132	22.97	22.5 ± 1.0	1.130
	4175	22.92	22.5 ± 1.0	1.143
	4233	23.01	22.5 ± 1.0	1.119
LTE B2 20MHz 1RB#0	18700	22.42	22.0 ± 1.0	1.143
	18900	22.41	22.0 ± 1.0	1.146
	19100	22.48	22.0 ± 1.0	1.127
LTE B2 20MHz 50RB#0	18700	21.94	21.0 ± 1.0	1.014
	18900	21.80	21.0 ± 1.0	1.047
	19100	21.82	21.0 ± 1.0	1.042
LTE B4 20MHz 1RB#0	20050	22.31	21.5 ± 1.0	1.045
	20175	22.36	21.5 ± 1.0	1.033
	20300	22.35	21.5 ± 1.0	1.035
LTE B4 20MHz 50RB#49	20050	21.82	21.0 ± 1.0	1.042
	20175	21.84	21.0 ± 1.0	1.038
	20300	21.87	21.0 ± 1.0	1.030
LTE B7 20MHz 1RB#0	20850	20.52	20.0 ± 1.0	1.117
	21100	20.56	20.0 ± 1.0	1.107
	21350	20.54	20.0 ± 1.0	1.112
LTE B7 20MHz 50RB#24	20850	19.82	19.0 ± 1.0	1.042
	21100	19.84	19.0 ± 1.0	1.038
	21350	19.87	19.0 ± 1.0	1.030
LTE B28 20MHz 1RB#0	27310	21.38	20.5 ± 1.0	1.028
	27460	21.42	20.5 ± 1.0	1.019
	27560	21.37	20.5 ± 1.0	1.030



LTE B28 20MHz 50RB#0	27310	20.87	20.0 ± 1.0	1.030
	27460	20.88	20.0 ± 1.0	1.028
	27560	20.87	20.0 ± 1.0	1.030
WIFI 802.11b	1	17.67	17.5 ± 1.0	1.211
	6	18.04	17.5 ± 1.0	1.112
	11	16.91	17.5 ± 1.0	1.442
BT	0	7.53	7 ± 1.0	1.114

Note: for LTE power tolerance, only QPSK modulation mode was provide here.

Simultaneous SAR

No.	Transmitter Combinations	Scenario Supported or not	Supported for Mobile Hotspot or not
1	GSM(Voice)+GSM(Data)	No	No
2	WCDMA(Voice)+WCDMA(Data)	No	No
3	GSM(Voice)+ WCDMA(Data)	No	No
4	WCDMA(Voice)+GSM(Data)	No	No
5	GSM(Voice)+ WCDMA(Voice)	No	No
6	GSM(Voice)+Wifi	Yes	No
7	WCDMA(Voice) +Wifi	Yes	No
8	GSM(Voice)+ BT	Yes	No
9	WCDMA(Voice) + BT	Yes	No
10	GSM(Data)+wifi	Yes	Yes
11	WCDMA(Data) +wifi	Yes	Yes
12	LTE(Data)+GSM(Voice/Data)	No	No
13	LTE(Data)+WCDMA(Voice/Data)	No	No
14	LTE(Data)+WIFI	Yes	Yes



10 TEST RESULTS

10.1 Summary of SAR Measurement Results

Table 7: SAR Values of GSM 850MHz Band

Temperature: 23.0~23.5°C, humidity: 62~64%.							
Test Positions		Channel /Frequency (MHz)	SAR(W/Kg), 1.6 (1g average)			Plot No.	
			SAR (W/Kg), 1g	Scaled Factor	Scaled SAR(W/Kg) ,1g		
Right Side of Head	Cheek	251/848.8	0.255	1.005	0.256	--	
	Tilt 15 degrees	251/848.8	0.163	1.005	0.164	--	
Left Side of Head	Cheek	251/848.8	0.272	1.005	0.273	1	
	Tilt 15 degrees	251/848.8	0.190	1.005	0.191	--	
Body-worn (10mm Separation)	GSM	Face Upward	251/848.8	0.272	1.005	0.273	--
		Back Upward	251/848.8	0.416	1.005	0.418	2
Hotspot (10mm Separation)	GPRS (4Tx)	Face Upward	251/848.8	0.745	1.007	0.750	--
		Back Upward	251/848.8	0.933	1.007	0.940	3
			251/848.8-R repeat	0.925	1.007	0.931	--
			128/824.2	0.913	1.009	0.921	--
			128/824.2-R repeat	0.911	1.009	0.919	--
			190/836.4	0.922	1.009	0.930	--
			190/836.4-R repeat	0.919	1.009	0.927	--
		Edge B	251/848.8	0.870	1.007	0.876	----
			251/848.8-R repeat	0.930	1.007	0.937	--
			128/824.2	0.870	1.009	0.878	--
			128/824.2-R repeat	0.858	1.009	0.866	--
			190/836.4	0.807	1.009	0.814	--
			190/836.4-R repeat	0.812	1.009	0.819	--
		Edge C	251/848.8	0.162	1.007	0.163	--
		Edge D	251/848.8	0.829	1.007	0.835	--
			251/848.8-R repeat	0.847	1.007	0.853	--
			128/824.2	0.762	1.009	0.769	--
			190/836.4	0.742	1.009	0.749	--

Table 8: SAR Values of GSM1900 MHz Band

Temperature: 23.0~23.5°C, humidity: 62~64%.

Test Positions		Channel /Frequency (MHz)	SAR(W/Kg), 1.6 (1g average)			Plot No.	
			SAR (W/Kg),1g	Scaled Factor	Scaled SAR(W/Kg) ,1g		
Right Side of Head	Cheek	810/1909.8	0.093	1.084	0.101	4	
	Tilt 15 degrees	810/1909.8	0.057	1.084	0.062	--	
Left Side of Head	Cheek	810/1909.8	0.080	1.084	0.087	--	
	Tilt 15 degrees	810/1909.8	0.026	1.084	0.028	--	
Body-worn (10mm Separation)	GSM	Face Upward	810/1909.8	0.142	1.084	0.154	--
		Back Upward	810/1909.8	0.144	1.084	0.156	5
Hotspot (10mm Separation)	GPRS (4Tx)	Face Upward	810/1909.8	0.165	1.079	0.178	--
		Back Upward	810/1909.8	0.189	1.079	0.204	--
		Edge B	810/1909.8	0.065	1.079	0.070	--
		Edge C	810/1909.8	0.539	1.079	0.582	6
		Edge D	810/1909.8	0.045	1.079	0.049	--

Table 9: SAR Values of WCDMA850

Temperature: 23.0~23.5°C, humidity: 62~64%.

Test Positions		Channel /Frequency (MHz)	SAR(W/Kg), 1.6 (1g average)			Plot No.
			SAR (W/Kg), 1g	Scaled Factor	Scaled SAR(W/Kg),1g	
Right Side of Head	Cheek	4233/846.6	0.211	1.119	0.236	7
	Tilt 15 degrees	4233/846.6	0.185	1.119	0.207	--
Left Side of Head	Cheek	4233/846.6	0.198	1.119	0.222	--
	Tilt 15 degrees	4233/846.6	0.156	1.119	0.175	--
Body-worn (10mm Separation)	Face Upward	4233/846.6	0.288	1.119	0.322	--
	Back Upward	4233/846.6	0.427	1.119	0.478	8
Hotspot (10mm Separation)	Face Upward	4233/846.6	0.288	1.119	0.322	--
	Back Upward	4233/846.6	0.427	1.119	0.478	8
	Edge B	4233/846.6	0.249	1.119	0.279	--
	Edge C	4233/846.6	0.041	1.119	0.046	--
	Edge D	4233/846.6	0.270	1.119	0.304	--

Table 10: SAR Values of WCDMA1900

Temperature: 23.0~23.5°C, humidity: 62~64%.

Test Positions		Channel /Frequency (MHz)	SAR(W/Kg), 1.6 (1g average)			Plot No.
			SAR (W/Kg), 1g	Scaled Factor	Scaled SAR(W/Kg),1g	
Right Side of Head	Cheek	9400/1880	0.210	1.052	0.221	9
	Tilt 15 degrees	9400/1880	0.106	1.052	0.112	--
Left Side of Head	Cheek	9400/1880	0.120	1.052	0.126	--
	Tilt 15 degrees	9400/1880	0.062	1.052	0.065	--
Body-worn (10mm Separation)	Face Upward	9400/1880	0.223	1.052	0.235	--
	Back Upward	9400/1880	0.267	1.052	0.281	10
Hotspot (10mm Separation)	Face Upward	9400/1880	0.223	1.052	0.235	--
	Back Upward	9400/1880	0.267	1.052	0.281	--
	Edge B	9400/1880	0.081	1.052	0.085	--
	Edge C	9400/1880	0.277	1.052	0.291	11
	Edge D	9400/1880	0.054	1.052	0.057	--



Table 11: SAR Values of LTE Band 2, 20MHz, QPSK

Temperature: 23.0~23.5°C, humidity: 62~64%.						
Test Positions	Channel /Frequency (MHz)	SAR(W/Kg), 1.6 (1g average)			Plot No.	
		SAR (W/Kg),1g	Scaled Factor	Scaled SAR(W/Kg),1g		
1RB #0						
Right Side of Head	Cheek	19100/1900	0.295	1.127	0.332	12
	Tilt 15 degrees	19100/1900	0.159	1.127	0.179	--
Left Side of Head	Cheek	19100/1900	0.294	1.127	0.331	--
	Tilt 15 degrees	19100/1900	0.137	1.127	0.154	--
Body (10mm Separation) Body-worn	Face Upward	19100/1900	0.373	1.127	0.420	--
	Back Upward	19100/1900	0.425	1.127	0.479	13
Body (10mm Separation) Hotspot	Face Upward	19100/1900	0.373	1.127	0.420	--
	Back Upward	19100/1900	0.425	1.127	0.479	13
	Edge B	19100/1900	0.146	1.127	0.165	--
	Edge C	19100/1900	0.323	1.127	0.364	--
	Edge D	19100/1900	0.086	1.127	0.097	--
50%RB #0						
Right Side of Head	Cheek	18700/1860	0.285	1.014	0.289	--
	Tilt 15 degrees	18700/1860	0.146	1.014	0.148	--
Left Side of Head	Cheek	18700/1860	0.288	1.014	0.292	--
	Tilt 15 degrees	18700/1860	0.126	1.014	0.128	--
Body (10mm Separation) Body-worn	Face Upward	18700/1860	0.366	1.014	0.371	--
	Back Upward	18700/1860	0.421	1.014	0.427	--
Body (10mm Separation) Hotspot	Face Upward	18700/1860	0.366	1.014	0.371	--
	Back Upward	18700/1860	0.421	1.014	0.427	--
	Edge B	18700/1860	0.144	1.014	0.146	--
	Edge C	18700/1860	0.318	1.014	0.322	--
	Edge D	18700/1860	0.081	1.014	0.082	--



Table 12: SAR Values of LTE Band 4 , 20MHz, QPSK

Temperature: 23.0~23.5°C, humidity: 62~64%.						
Test Positions	Channel /Frequency (MHz)	SAR(W/Kg), 1.6 (1g average)			Plot No.	
		SAR (W/Kg),1g	Scaled Factor	Scaled SAR(W/Kg), 1g		
1RB #0						
Right Side of Head	Cheek	20175/1732.5	0.348	1.033	0.359	14
	Tilt 15 degrees	20175/1732.5	0.221	1.033	0.228	--
Left Side of Head	Cheek	20175/1732.5	0.322	1.033	0.333	--
	Tilt 15 degrees	20175/1732.5	0.168	1.033	0.174	--
Body (10mm Separation) Body-worn	Face Upward	20175/1732.5	0.533	1.033	0.551	--
	Back Upward	20175/1732.5	1.062	1.033	1.097	15
		20175/1732.5-Repeat	1.025	1.033	1.059	--
		20050/1720	1.055	1.045	1.102	--
		20050/1720-Repeat	1.036	1.045	1.083	--
		20300/1745	0.881	1.035	0.912	--
		20300/1745-Repeat	0.875	1.035	0.906	--
Body (10mm Separation) Hotspot	Face Upward	20175/1732.5	0.533	1.033	0.551	--
	Back Upward	20175/1732.5	1.062	1.033	1.097	15
		20175/1732.5-Repeat	1.025	1.033	1.059	--
		20050/1720	1.055	1.045	1.102	--
		20050/1720-Repeat	1.036	1.045	1.083	--
		20300/1745	0.881	1.035	0.912	--
		20300/1745-Repeat	0.875	1.035	0.906	--
	Edge B	20175/1732.5	0.131	1.033	0.135	--
	Edge C	20175/1732.5	0.280	1.033	0.289	--
	Edge D	20175/1732.5	0.086	1.033	0.089	--
50%RB #49						
Right Side of Head	Cheek	20300/1745	0.335	1.030	0.345	--
	Tilt 15 degrees	20300/1745	0.211	1.030	0.217	--
Left Side of Head	Cheek	20300/1745	0.313	1.030	0.322	--
	Tilt 15 degrees	20300/1745	0.149	1.030	0.153	--
Body (10mm Separation) Body-worn	Face Upward	20300/1745	0.452	1.030	0.466	--
	Back Upward	20300/1745	0.777	1.030	0.800	--



Body (10mm Separation) Hotspot	Face Upward	20300/1745	0.452	1.030	0.466	--
	Back Upward	20300/1745	0.777	1.030	0.800	--
	Edge B	20300/1745	0.112	1.030	0.115	--
	Edge C	20300/1745	0.253	1.030	0.261	--
	Edge D	20300/1745	0.042	1.030	0.043	--

Table 13: SAR Values of LTE Band 7,20MHz, QPSK

Temperature: 23.0~23.5°C, humidity: 62~64%.						
Test Positions	Channel /Frequency (MHz)	SAR(W/Kg), 1.6 (1g average)			Plot No.	
		SAR (W/Kg),1g	Scaled Factor	Scaled SAR(W/Kg),1g		
1RB #0						
Right Side of Head	Cheek	21100/2535	0.355	1.107	0.393	16
	Tilt 15 degrees	21100/2535	0.168	1.107	0.186	--
Left Side of Head	Cheek	21100/2535	0.204	1.107	0.226	--
	Tilt 15 degrees	21100/2535	0.138	1.107	0.153	--
Body (10mm Separation) Body-worn	Face Upward	21100/2535	0.100	1.107	0.111	--
	Back Upward	21100/2535	0.198	1.107	0.219	17
Body (10mm Separation) Hotspot	Face Upward	21100/2535	0.100	1.107	0.111	--
	Back Upward	21100/2535	0.198	1.107	0.219	--
	Edge B	21100/2535	0.227	1.107	0.251	18
	Edge C	21100/2535	0.191	1.107	0.211	--
	Edge D	21100/2535	0.028	1.107	0.031	--
50%RB #24						
Right Side of Head	Cheek	21350/2560	0.336	1.030	0.346	--
	Tilt 15 degrees	21350/2560	0.158	1.030	0.163	--
Left Side of Head	Cheek	21350/2560	0.186	1.030	0.192	--
	Tilt 15 degrees	21350/2560	0.112	1.030	0.115	--
Body (10mm Separation) Body-worn	Face Upward	21350/2560	0.081	1.030	0.083	--
	Back Upward	21350/2560	0.168	1.030	0.173	--
Body (10mm Separation) Hotspot	Face Upward	21350/2560	0.081	1.030	0.083	--
	Back Upward	21350/2560	0.168	1.030	0.173	--
	Edge B	21350/2560	0.211	1.030	0.217	--
	Edge C	21350/2560	0.133	1.030	0.137	--
	Edge D	21350/2560	0.025	1.030	0.026	--



Table 14: SAR Values of LTE Band 28,20MHz, QPSK

Temperature: 23.0~23.5°C, humidity: 62~64%.						
Test Positions	Channel /Frequency (MHz)	SAR(W/Kg), 1.6 (1g average)			Plot No.	
		SAR (W/Kg),1g	Scaled Factor	Scaled SAR(W/Kg),1g		
1RB #0						
Right Side of Head	Cheek	27460/728	0.187	1.019	0.191	19
	Tilt 15 degrees	27460/728	0.162	1.019	0.165	--
Left Side of Head	Cheek	27460/728	0.177	1.019	0.180	--
	Tilt 15 degrees	27460/728	0.144	1.019	0.147	--
Body (10mm Separation) Body-worn	Face Upward	27460/728	0.221	1.019	0.225	--
	Back Upward	27460/728	0.414	1.019	0.422	20
Body (10mm Separation) Hotspot	Face Upward	27460/728	0.221	1.019	0.225	--
	Back Upward	27460/728	0.414	1.019	0.422	20
	Edge B	27460/728	0.092	1.019	0.094	--
	Edge C	27460/728	0.052	1.019	0.053	--
	Edge D	27460/728	0.085	1.019	0.087	--
50%RB #0						
Right Side of Head	Cheek	27460/728	0.176	1.028	0.181	--
	Tilt 15 degrees	27460/728	0.151	1.028	0.155	--
Left Side of Head	Cheek	27460/728	0.164	1.028	0.169	--
	Tilt 15 degrees	27460/728	0.136	1.028	0.140	--
Body (10mm Separation) Body-worn	Face Upward	27460/728	0.211	1.028	0.217	--
	Back Upward	27460/728	0.400	1.028	0.411	--
Body (10mm Separation) Hotspot	Face Upward	27460/728	0.211	1.028	0.217	--
	Back Upward	27460/728	0.400	1.028	0.411	--
	Edge B	27460/728	0.085	1.028	0.087	--
	Edge C	27460/728	0.044	1.028	0.045	--
	Edge D	27460/728	0.076	1.028	0.078	--

Table 15: SAR Values of Wi-Fi 802.11b

Test Positions		Channel /Frequency (MHz)	SAR(W/Kg), 1.6 (1g average)			Plot No.
			SAR(W/Kg) 1g	Scaled Factor	Scaled SAR(W/Kg) ,1g	
Right Side of Head	Cheek	1/2412	0.704	1.211	0.853	--
		1/2412 Repeat	0.702	1.211	0.850	--
		6/2437	0.768	1.112	0.854	21
		6/2437 Repeat	0.765	1.112	0.851	--
		11/2462	0.653	1.442	0.942	--
		11/2462 Repeat	0.653	1.442	0.942	--
	Tilt 15 degrees	6/2437	0.523	1.112	0.582	--
Left Side of Head	Cheek	6/2437	0.397	1.112	0.441	--
	Tilt 15 degrees	6/2437	0.172	1.112	0.191	--
Body-worn (10mm Separation)	Face Upward	6/2437	0.191	1.112	0.212	--
	Back Upward	6/2437	0.204	1.112	0.227	22
Hotspot (10mm Separation)	Face Upward	6/2437	0.191	1.112	0.212	--
	Back Upward	6/2437	0.204	1.112	0.227	22
	Edge A	6/2437	0.229	1.112	0.255	--
	Edge D	6/2437	0.122	1.112	0.136	--

Note: When the 1-g SAR for the mid-band channel or the channel with the Highest output power satisfy the following conditions, testing of the other channels in the band is not required.(Per KDB 447498 D01 General RF Exposure Guidance v06)

- ≤ 0.8 W/kg, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg, when the transmission band is ≥ 200 MHz



10.2 Simultaneous Transmissions Analysis

Localized Specific Absorption Rate (SAR) of this portable wireless device has been measured in all cases requested by the relevant standards cited in Clause 6 of this report. Maximum localized SAR is **below** exposure limits specified in the relevant standards.

Test Position		Right Cheek	Right Title	Left Cheek	Left Tilt
Head MAX 1-g SAR(W/Kg)	GSM850	0.256	0.164	0.273	0.191
	GSM1900	0.101	0.062	0.087	0.028
	WCDMA850	0.236	0.207	0.222	0.175
	WCDMA1900	0.221	0.112	0.126	0.065
	LTE Band2	0.332	0.179	0.331	0.154
	LTE Band4	0.359	0.228	0.333	0.174
	LTE Band7	0.393	0.186	0.226	0.153
	LTE Band28	0.191	0.165	0.180	0.147
	WIFI 802.11b	0.942	0.582	0.441	0.191
	BT	0.263	0.263	0.263	0.263
BT Simultaneous Σ 1-g SAR(W/Kg)		0.656	0.491	0.596	0.454
WiFi Simultaneous Σ 1-g SAR(W/Kg)		1.335	0.810	0.774	0.382

Simultaneous Tx Combination of GSM/WCDMA/LTE and BT/WIFI (Head).

Test Position		Face	Back	Edge A	Edge B	Edge C	Edge D
Body-worn 10mm separation MAX 1-g SAR(W/Kg)	GSMS850	0.273	0.418	--	--	--	--
	GSM1900	0.154	0.156	--	--	--	--
	WCDMA850	0.322	0.478	--	--	--	--
	WCDMA1900	0.235	0.281	--	--	--	--
	LTE Band2	0.420	0.479	--	--	--	--
	LTE Band4	0.551	1.102	--	--	--	--
	LTE Band7	0.111	0.219	--	--	--	--
	LTE Band28	0.225	0.422	--	--	--	--
	WIFI 802.11b	0.212	0.227	--	--	--	--
	BT	0.132	0.132	--	--	--	--
BT Simultaneous Σ 1-g SAR(W/Kg)		0.683	1.234	--	--	--	--
WiFi Simultaneous Σ 1-g SAR(W/Kg)		0.763	1.329	--	--	--	--

Simultaneous Tx Combination of GSM/WCDMA/LTE and BT/WIFI (Body).



Test Position		Face	Back	Edge A	Edge B	Edge C	Edge D
Hotspot 10mm separation MAX 1-g SAR(W/Kg)	GPRS850	0.750	0.940	--	0.937	0.163	0.853
	GPRS1900	0.178	0.204	--	0.070	0.582	0.049
	WCDMA 850	0.322	0.478	--	0.279	0.046	0.304
	WCDMA 1900	0.235	0.281	--	0.085	0.291	0.057
	LTE Band2	0.420	0.479	--	0.165	0.364	0.097
	LTE Band4	0.551	1.102	--	0.135	0.289	0.089
	LTE Band7	0.111	0.219	--	0.251	0.211	0.031
	LTE Band28	0.225	0.422	--	0.094	0.053	0.087
	WIFI 802.11b	0.212	0.227	0.255	--	--	0.136
	BT	*0.132	*0.132	*0.132	--	--	*0.132
BT Simultaneous Σ 1-g SAR(W/Kg)		0.882	1.234	--	0.937	0.582	0.985
WiFi Simultaneous Σ 1-g SAR(W/Kg)		0.962	1.329	--	0.937	0.582	0.989

Simultaneous Tx Combination of GSM/WCDMA/LTE and WIFI (Body).

The estimated SAR value with * Signal

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required

11 Measurement Uncertainty

No.	Uncertainty Component	Type	Uncertainty Value (%)	Probability Distribution	k	ci	Standard Uncertainty (%) $u_i(\%)$	Degree of freedom v_{eff} or v_i
Measurement System								
1	– Probe Calibration	B	5.8	N	1	1	5.8	∞
2	– Axial isotropy	B	3.5	R	$\sqrt{3}$	0.5	1.43	∞
3	– Hemispherical Isotropy	B	5.9	R	$\sqrt{3}$	0.5	2.41	∞
4	– Boundary Effect	B	1	R	$\sqrt{3}$	1	0.58	∞
5	– Linearity	B	4.7	R	$\sqrt{3}$	1	2.71	∞
6	– System Detection Limits	B	1.0	R	$\sqrt{3}$	1	0.58	∞
7	Modulation response	B	3	N	1	1	3.00	
8	– Readout Electronics	B	0.5	N	1	1	0.50	∞
9	– Response Time	B	1.4	R	$\sqrt{3}$	1	0.81	∞
10	– Integration Time	B	3.0	R	$\sqrt{3}$	1	1.73	∞
11	– RF Ambient Conditions	B	3.0	R	$\sqrt{3}$	1	1.73	∞
12	– Probe Position Mechanical tolerance	B	1.4	R	$\sqrt{3}$	1	0.81	∞
13	– Probe Position with respect to Phantom Shell	B	1.4	R	$\sqrt{3}$	1	0.81	∞
14	– Extrapolation, Interpolation and Integration Algorithms for Max. SAR evaluation	B	2.3	R	$\sqrt{3}$	1	1.33	∞
Uncertainties of the DUT								
15	– Position of the DUT	A	2.6	N	$\sqrt{3}$	1	2.6	5
16	– Holder of the DUT	A	3	N	$\sqrt{3}$	1	3.0	5



17	- Output Power Variation -SAR drift measurement	B	5.0	R	$\sqrt{3}$	1	2.89	∞
Phantom and Tissue Parameters								
18	- Phantom Uncertainty(shape and thickness tolerances)	B	4	R	$\sqrt{3}$	1	2.31	∞
19	Uncertainty in SAR correction for deviation(in permittivity and conductivity)	B	2	N	1	1	2.00	
20	- Liquid Conductivity Target -tolerance	B	2.5	R	$\sqrt{3}$	0.6	1.95	∞
21	- Liquid Conductivity -measurement Uncertainty)	B	4	N	$\sqrt{3}$	1	0.92	9
22	- Liquid Permittivity Target tolerance	B	2.5	R	$\sqrt{3}$	0.6	1.95	∞
23	- Liquid Permittivity -measurement uncertainty	B	5	N	$\sqrt{3}$	1	1.15	∞
Combined Standard Uncertainty				RSS			10.63	
Expanded uncertainty (Confidence interval of 95 %)				K=2			21.26	

System Check Uncertainty

No.	Uncertainty Component	Type	Uncertainty Value (%)	Probability Distribution	k	ci	Standard Uncertainty (%) $u_i(\%)$	Degree of freedom v_{eff} or v_i
Measurement System								
1	- Probe Calibration	B	5.8	N	1	1	5.8	∞
2	- Axial isotropy	B	3.5	R	$\sqrt{3}$	0.5	1.43	∞
3	- Hemispherical Isotropy	B	5.9	R	$\sqrt{3}$	0.5	2.41	∞
4	- Boundary Effect	B	1	R	$\sqrt{3}$	1	0.58	∞
5	- Linearity	B	4.7	R	$\sqrt{3}$	1	2.71	∞
6	- System Detection Limits	B	1	R	$\sqrt{3}$	1	0.58	∞
7	Modulation response	B	0	N	1	1	0.00	



8	– Readout Electronics	B	0.5	N	1	1	0.50	∞
9	– Response Time	B	0.00	R	$\sqrt{3}$	1	0.00	∞
10	– Integration Time	B	1.4	R	$\sqrt{3}$	1	0.81	∞
11	– RF Ambient Conditions	B	3.0	R	$\sqrt{3}$	1	1.73	∞
12	– Probe Position Mechanical tolerance	B	1.4	R	$\sqrt{3}$	1	0.81	∞
13	– Probe Position with respect to Phantom Shell	B	1.4	R	$\sqrt{3}$	1	0.81	∞
14	– Extrapolation, Interpolation and Integration Algorithms for Max. SAR evaluation	B	2.3	R	$\sqrt{3}$	1	1.33	∞
Uncertainties of the DUT								
15	Deviation of experimental source from numerical source	A	4	N	1	1	4.00	5
16	Input Power and SAR drift measurement	A	5	R	$\sqrt{3}$	1	2.89	5
17	Dipole Axis to Liquid Distance	B	2	R	$\sqrt{3}$	1	1.2	∞
Phantom and Tissue Parameters								
18	– Phantom Uncertainty(shape and thickness tolerances)	B	4	R	$\sqrt{3}$	1	2.31	∞
19	Uncertainty in SAR correction for deviation(in permittivity and conductivity)	B	2	N	1	1	2.00	
20	– Liquid Conductivity Target –tolerance	B	2.5	R	$\sqrt{3}$	0.6	1.95	∞
21	– Liquid Conductivity –measurement Uncertainty)	B	4	N	$\sqrt{3}$	1	0.92	9
22	– Liquid Permittivity Target tolerance	B	2.5	R	$\sqrt{3}$	0.6	1.95	∞
23	– Liquid Permittivity –measurement uncertainty	B	5	N	$\sqrt{3}$	1	1.15	∞
Combined Standard Uncertainty				RSS			10.15	
Expanded uncertainty (Confidence interval of 95 %)				K=2			20.29	

**12 MAIN TEST INSTRUMENTS**

EQUIPMENT	TYPE	Series No.	Calibration Date	calibration period
System Simulator	E5515C	GB 47200710	2015/06/10	1 Year
System Simulator	CMW500	130805	2015/08/10	1 Year
SAR Probe	SATIMO	SN_0413_EP166	2015/08/10	1 Year
SAR Probe	SATIMO	SN09/13 EP169	2015/05/04	1 Year
Dipole	SID750	SN 23/15 DIP 0G750-378	2015/06/01	1Year
Dipole	SID835	SN09/13 DIP0G835-217	2014/08/28	2 Year
Dipole	SID1800	SN09/13 DIP1G800-216	2014/08/28	2 Year
Dipole	SID1900	SN09/13 DIP1G900-218	2014/08/28	2 Year
Dipole	SID2450	SN09/13 DIP2G450-220	2014/08/28	2 Year
Dipole	SID2600	SN32/14 DIP2G600-338	2014/08/12	2 Year
Vector Network Analyzer	ZVB8	A0802530	2015/06/08	1 Year
Signal Generator	SMR27	A0304219	2015/06/08	1 Year
Power Meter	NRP2	A140401673	2016/03/09	1 Year
Power Sensor	NPR-Z11	1138.3004.02-114072-nq	2016/03/09	1 Year
Amplifier	Nucletudes	143060	2016/03/09	1 Year
Directional Coupler	DC6180A	305827	2016/03/09	1 Year
Power Meter	NRVS	A0802531	2016/03/09	1 Year
Power Sensor	NRV-Z4	100069	2016/03/09	1 Year
Multimeter	Keithley-2000	4014020	2016/03/09	1 Year



ANNEX A

of

CCIC-SET

CONFORMANCE TEST REPORT FOR

HUMAN EXPOSURE TO ELECTROMAGNETIC FIELDS

SET2016-05280

LTE/WCDMA/GSM Multi-Mode Digital Mobile Phone

Type Name: ZTE BLADE A110; ZTE Blade A110; BLADE A110; Blade A110;
Orange Moka; Moka

Hardware Version: MBV1.0

Software Version: OPS_AU_S_P635A60V1.0.0B03

TEST SETUP

This Annex consists of 9 pages

Date of Report: 2016-01-04

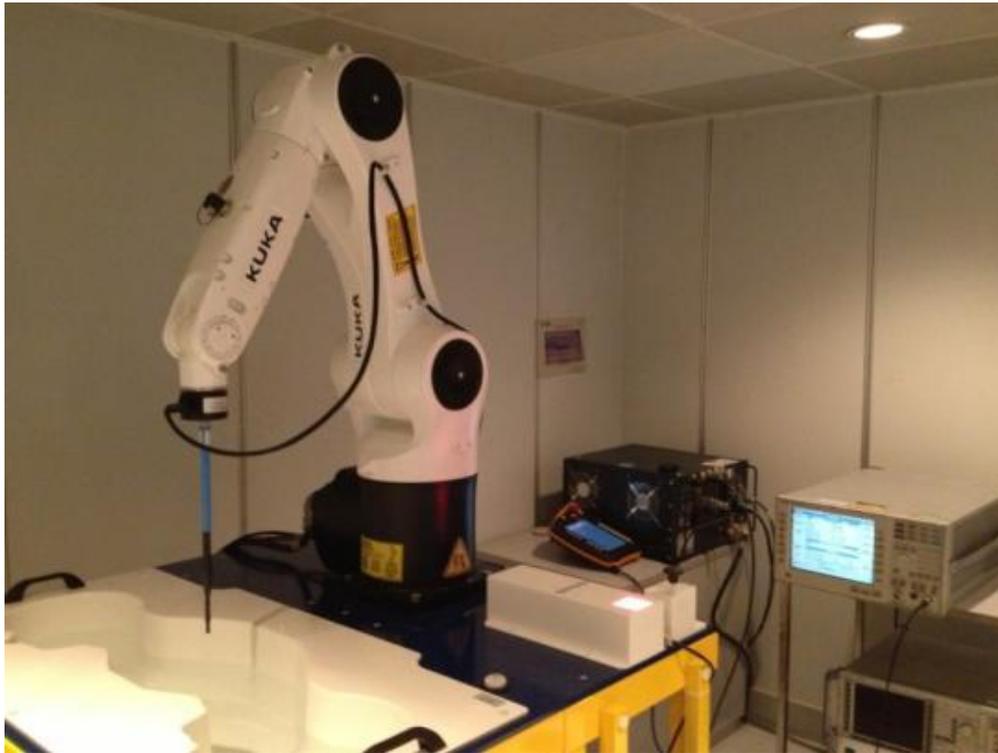


Fig.1 COMO SAR Test System

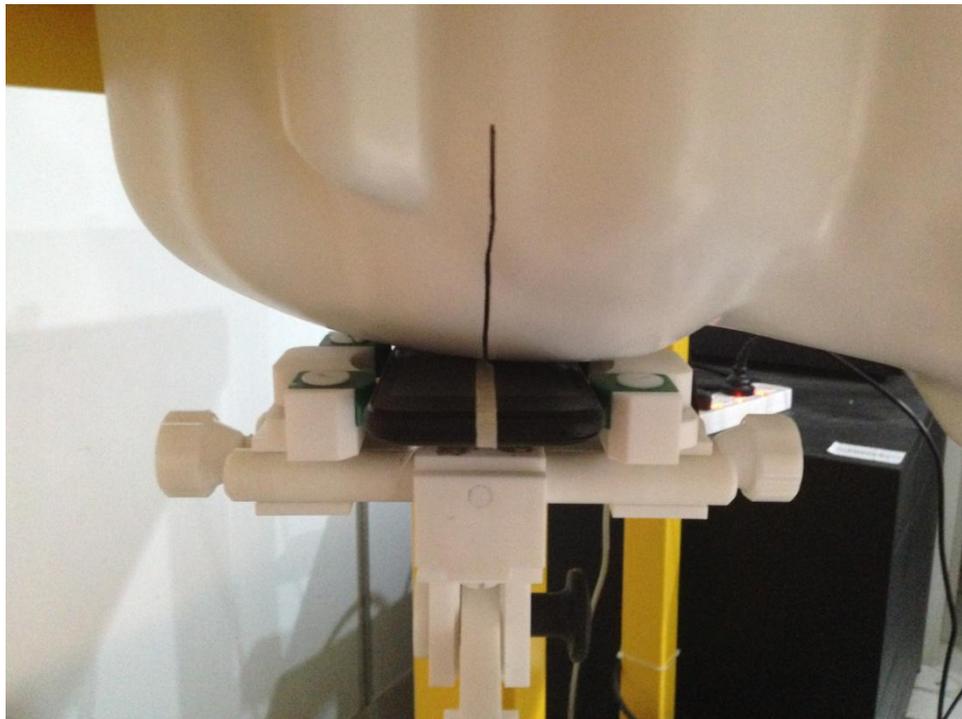


Fig.2 Right_Cheek

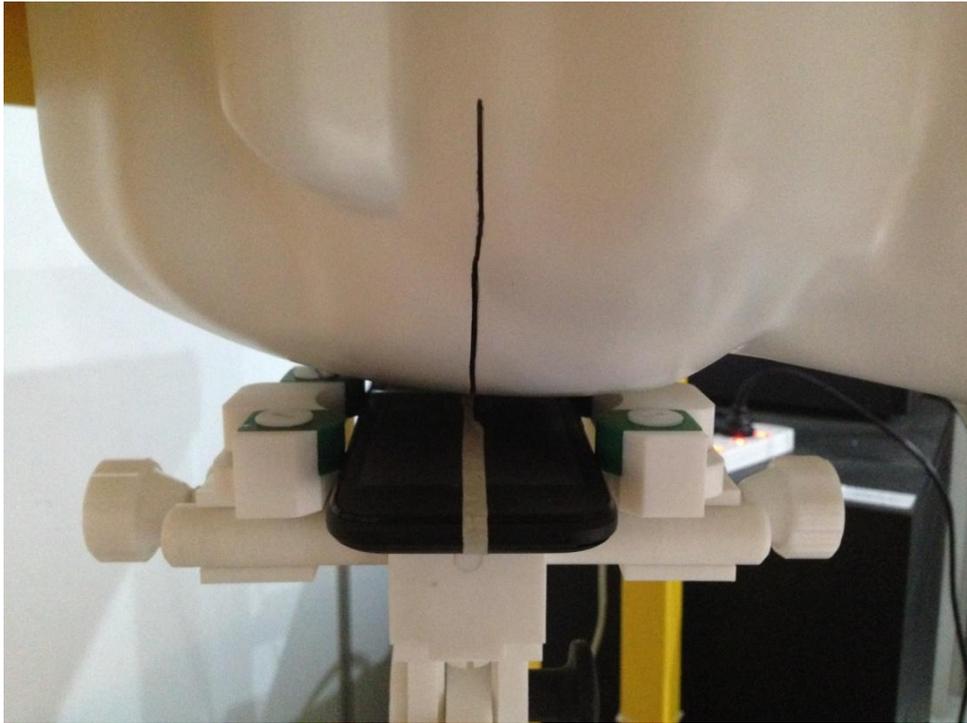


Fig.3 Right_Tilt

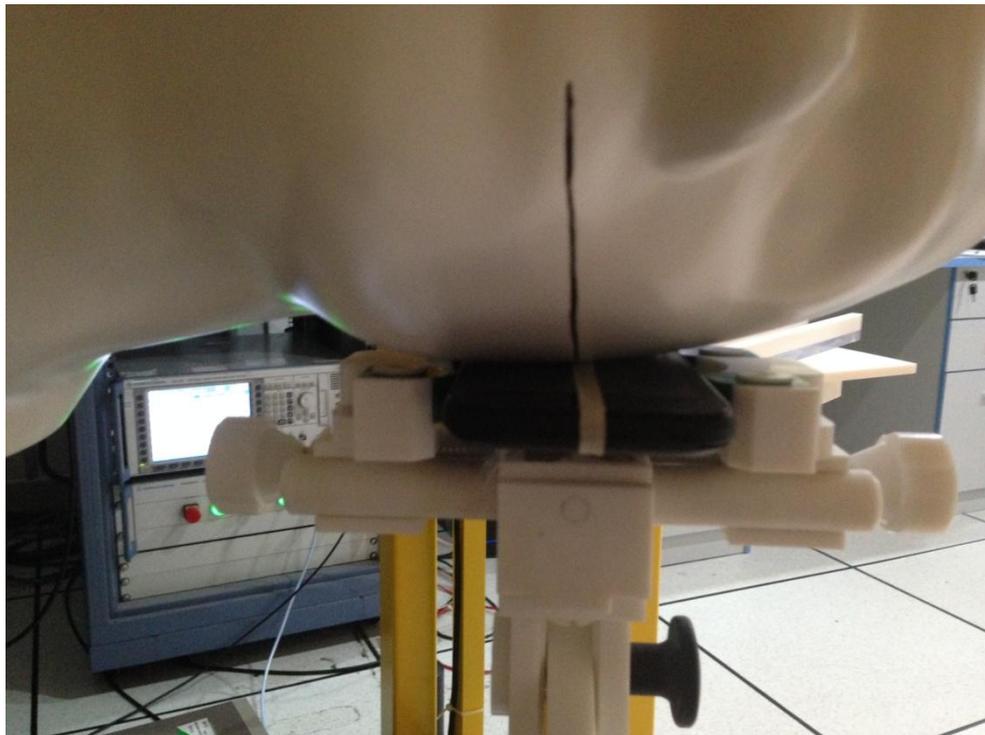


Fig.4 Left Cheek

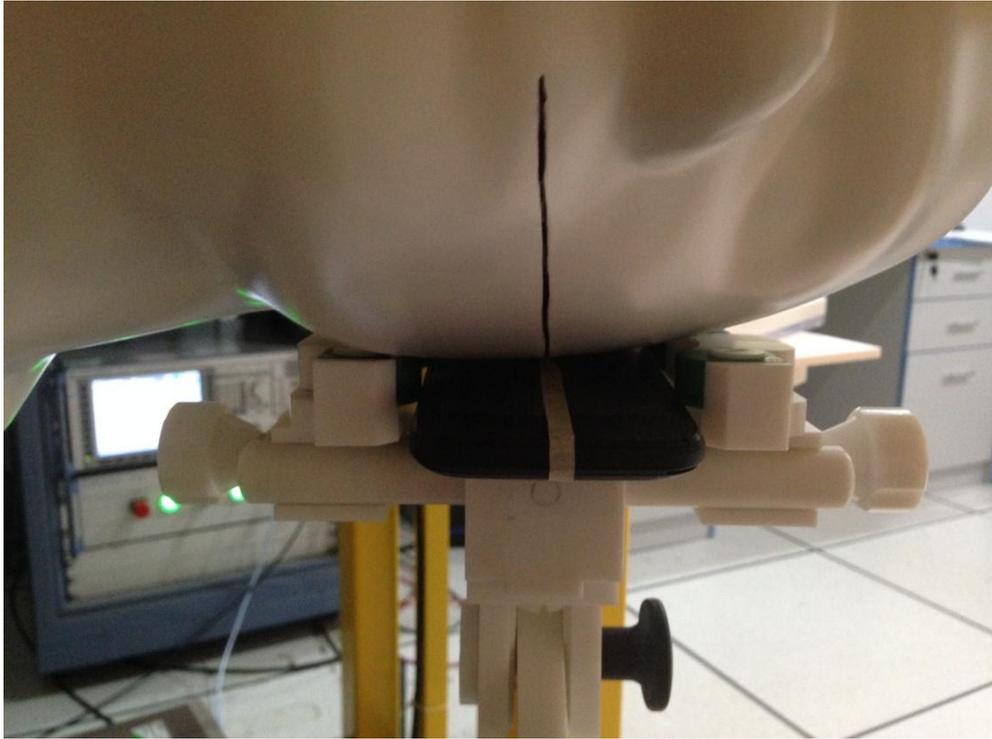


Fig.5 Left_Tilt



Fig.6 Body (Back upside,10mm separation)



Fig.7 Body (Face upside,10mm separation)



Fig.8 Body Edge A(UP,10mm separation)



Fig.9 Body Edge B(UP,10mm separation)



Fig.10 Body Edge C(UP,10mm separation)



Fig.11 Body Edge D(Right upside,10mm separation)



Fig.12 Head Liquid of 700-835MHz(15cm)



Fig.13 Body Liquid of 700-835MHz(15cm)



Fig.14 Head Liquid of 1900MHz(15cm)



Fig.15 Body Liquid of 1900MHz(15cm)



Fig.16 Head Liquid of 2450-2600MHz(15cm)



Fig.17 Body Liquid of 2450-2600MHz(15cm)



ANNEX B

of

CCIC-SET

CONFORMANCE TEST REPORT FOR

HUMAN EXPOSURE TO ELECTROMAGNETIC FIELDS

SET2016-05280

LTE/WCDMA/GSM Multi-Mode Digital Mobile Phone

Type Name: ZTE BLADE A110; ZTE Blade A110; BLADE A110; Blade A110;
Orange Moka; Moka

Hardware Version: MBV1.0


Software Version: OPS_AU_S_P635A60V1.0.0B03

Sample Photographs

This Annex consists of 2 pages

Date of Report: 2016-04-15

1. Appearance

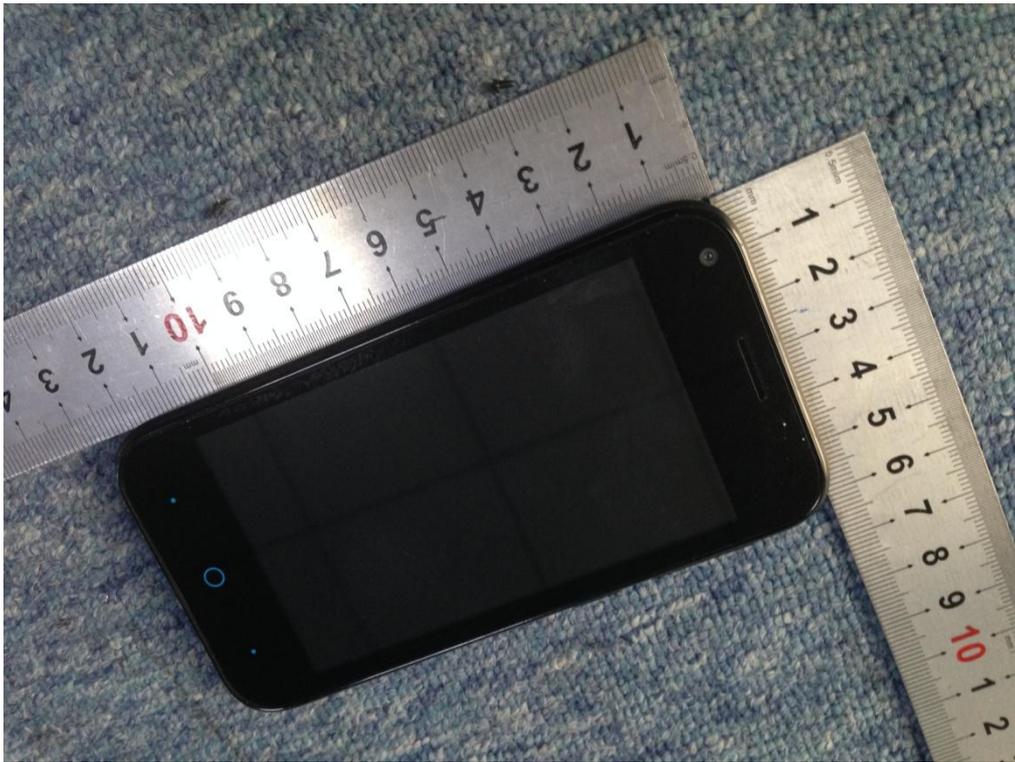

Appearance and size (obverse)



Appearance and size (reverse)



ANNEX C

of

CCIC-SET

CONFORMANCE TEST REPORT FOR

HUMAN EXPOSURE TO ELECTROMAGNETIC FIELDS

SET2016-05280

LTE/WCDMA/GSM Multi-Mode Digital Mobile Phone

Type Name: ZTE BLADE A110; ZTE Blade A110; BLADE A110; Blade A110;
Orange Moka; Moka

Hardware Version: MBV1.0

Software Version: OPS_AU_S_P635A60V1.0.0B03

System Performance Check Data and Highest SAR Plots

This Annex consists of 35 pages

Date of Report: 2016-04-15

System Performance Check (Head, 750MHz)

Type: Validation measurement

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement:07/04/2016

Measurement duration: 21 minutes 24 seconds


A. Experimental conditions.

Phantom File	dx=8mm dy=8mm
Phantom	5x5x7,dx=8mm dy=8mm dz=5mm
Device Position	
Band	750MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR

E-Field Probe	SATIMO SN_09/13_EP169
Frequency (MHz)	750
Relative permittivity (real part)	41.74
Relative permittivity	21.12
Conductivity (S/m)	0.88
Power drift (%)	0.23
Ambient Temperature:	23.2 °C
Liquid Temperature:	23.5 °C
ConvF:	5.26
Duty factor:	1:1

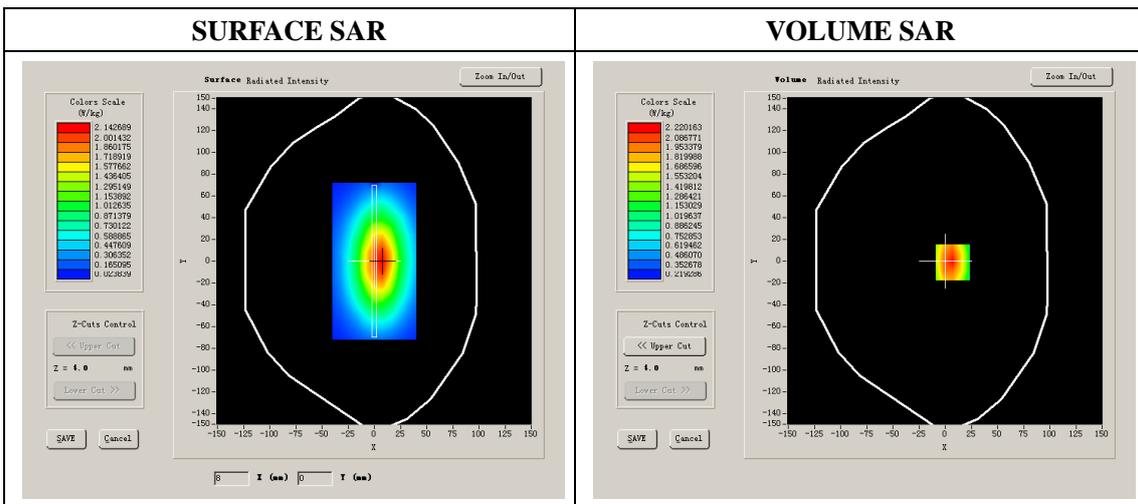

Maximum location: X=7.00, Y=-1.00

SAR 10g (W/Kg)	1.130384
SAR 1g (W/Kg)	2.102433

System Performance Check (Head, 835MHz)

Type: Validation measurement

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 07/04/2016

Measurement duration: 21 minutes 24 seconds


A. Experimental conditions.

Phantom File	dx=8mm dy=8mm
Phantom	5x5x7,dx=8mm dy=8mm dz=5mm
Device Position	
Band	850MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR

E-Field Probe	SATIMO SN_04/13_EP166
Frequency (MHz)	850
Relative permittivity (real part)	41.42
Relative permittivity	19.19
Conductivity (S/m)	0.89
Power drift (%)	0.38
Ambient Temperature:	23.2 °C
Liquid Temperature:	23.5 °C
ConvF:	5.69
Duty factor:	1:1

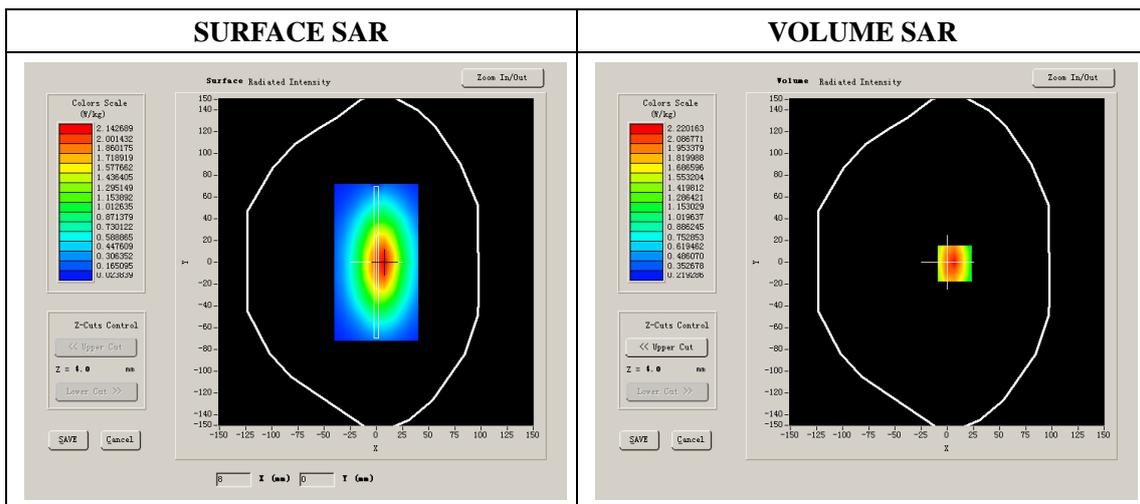

Maximum location: X=7.00, Y=-1.00

SAR 10g (W/Kg)	1.810736
SAR 1g (W/Kg)	2.406475

System Performance Check (Head, 1800MHz)

Type: Validation measurement

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 09/03/2016

Measurement duration: 21 minutes 33seconds


A. Experimental conditions.

Phantom File	dx=8mm dy=8mm
Phantom	5x5x7,dx=8mm dy=8mm dz=5mm
Device Position	
Band	1800MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR

E-Field Probe	SATIMO SN_04/13_EP166
Frequency (MHz)	1800
Relative permittivity (real part)	39.81
Relative permittivity	19.20
Conductivity (S/m)	1.39
Power drift (%)	-1.22
Ambient Temperature:	22.2 °C
Liquid Temperature:	22.5 °C
ConvF:	4.75
Duty factor:	1:1

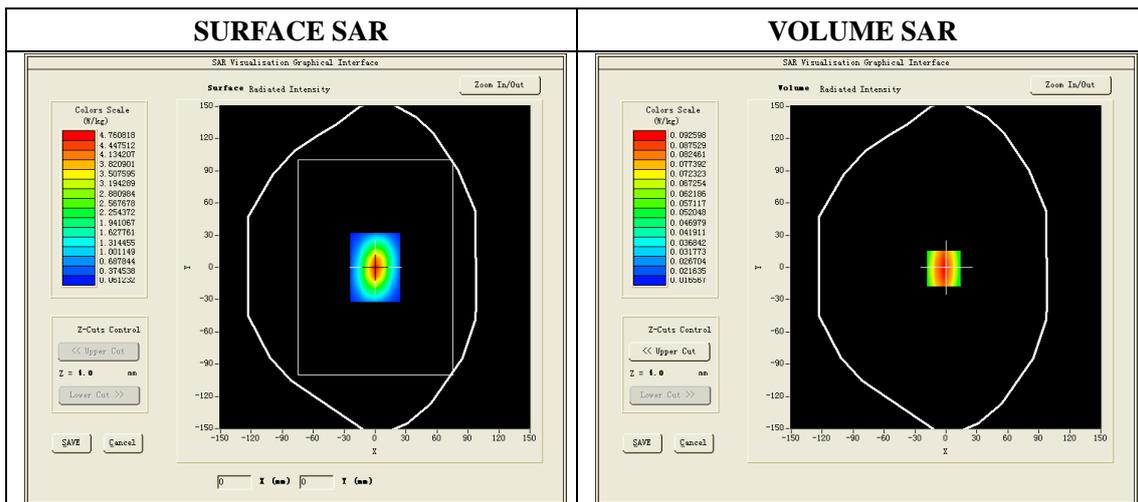

Maximum location: X=6.00, Y=0.00

SAR 10g (W/Kg)	4.985621
SAR 1g (W/Kg)	9.473627

System Performance Check (Head, 1900MHz)

Type: Validation measurement

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 09/04/2016

Measurement duration: 22 minutes 21seconds


A. Experimental conditions.

Phantom File	dx=8mm dy=8mm
Phantom	5x5x7,dx=8mm dy=8mm dz=5mm
Device Position	
Band	1900MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR

E-Field Probe	SATIMO SN_04/13_EP166
Frequency (MHz)	1900
Relative permittivity (real part)	39.89
Relative permittivity	13.17
Conductivity (S/m)	1.39
Power drift (%)	1.36
Ambient Temperature:	22.2 °C
Liquid Temperature:	22.5 °C
ConvF:	5.25
Duty factor:	1:1

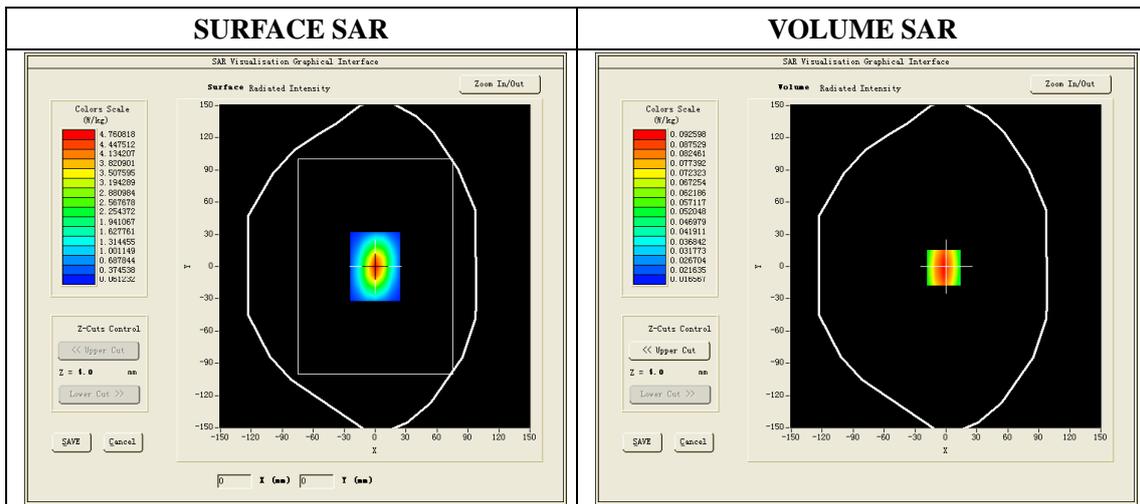

Maximum location: X=6.00, Y=0.00

SAR 10g (W/Kg)	5.164893
SAR 1g (W/Kg)	9.890464

System Performance Check (Head, 2450MHz)

Type: Phone measurement

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=5mm dy=5mm dz=4mm

Date of measurement:11/04/2016

Measurement duration: 21 minutes 20 seconds


A. Experimental conditions.

Phantom File	dx=8mm dy=8mm
Phantom	7x7x8,dx=5mm dy=5mm dz=4mm
Device Position	Dipole
Band	2450MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR

E-Field Probe	SATIMO SN_04/13_EP166
Frequency (MHz)	2450
Relative permittivity (real part)	39.01
Relative permittivity	13.15
Conductivity (S/m)	1.79
Power Drift (%)	-0.39
ConvF:	4.93
Duty factor:	1:1

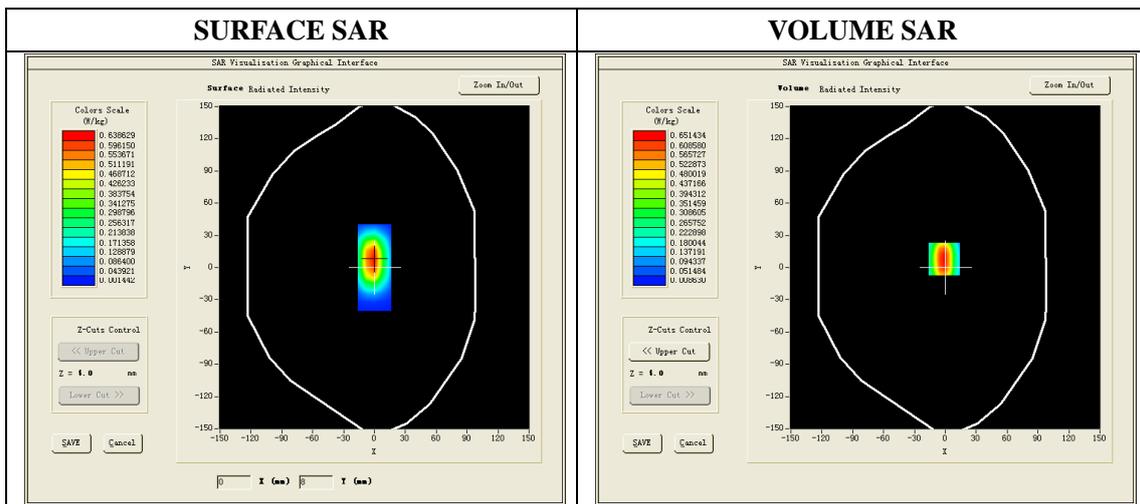

Maximum location: X=0.00, Y=8.00

SAR 10g (W/Kg)	5.920963
SAR 1g (W/Kg)	13.183253

System Performance Check (Head, 2600MHz)

Type: Phone measurement

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=5mm, dy=5mm, dz=4mm

Date of measurement: 13/04/2016

Measurement duration: 22 minutes 25 seconds


A. Experimental conditions.

Phantom File	dx=8mm dy=8mm
Phantom	7x7x8,dx=5mm dy=5mm dz=4mm
Device Position	Dipole
Band	2600MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR

E-Field Probe	SATIMO SN_04/13_EP166
Frequency (MHz)	2600
Relative permittivity (real part)	38.89
Relative permittivity	13.15
Conductivity (S/m)	1.94
Power drift (%)	-0.37
Ambient Temperature:	22.2°C
Liquid Temperature:	22.5°C
Crest factor:	1:1
ConvF:	5.08

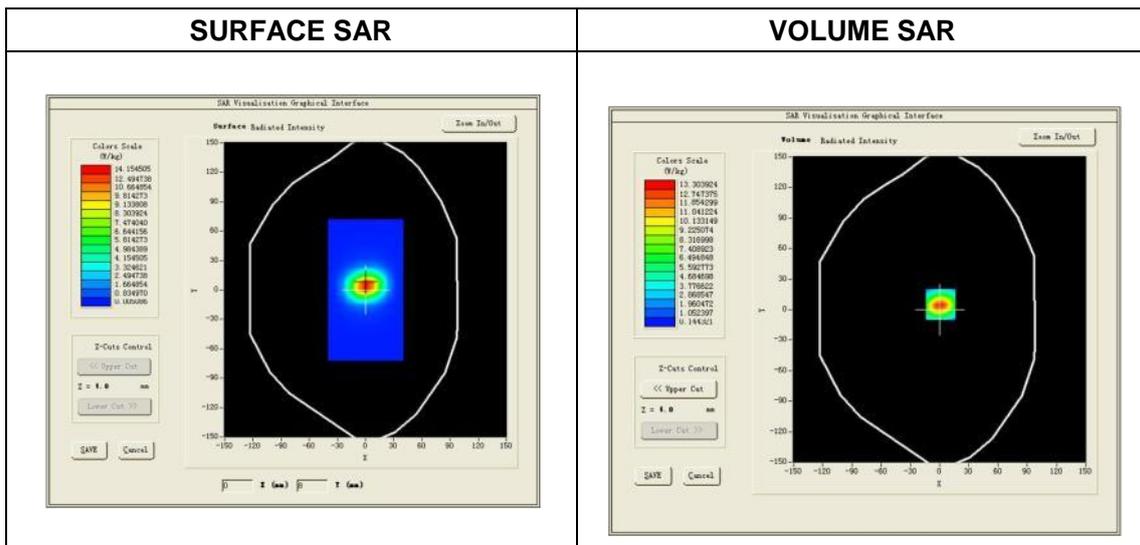

Maximum location: X=1.00, Y=5.00

SAR 10g (W/Kg)	5.960435
SAR 1g (W/Kg)	13.970441



System Performance Check (Body, 750MHz)

Type: Validation measurement

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 08/04/2016

Measurement duration: 20 minutes 12 seconds


A. Experimental conditions.

Phantom File	dx=8mm dy=8mm
Phantom	5x5x7,dx=8mm dy=8mm dz=5mm
Device Position	Dipole
Band	750MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR

E-Field Probe	SATIMO SN_09/13_EP169
Frequency (MHz)	750
Relative permittivity (real part)	55.03
Relative permittivity	23.04
Conductivity (S/m)	0.95
Power drift (%)	2.08
Ambient Temperature:	22.2 °C
Liquid Temperature:	22.5 °C
ConvF:	5.41
Duty factor:	1:1

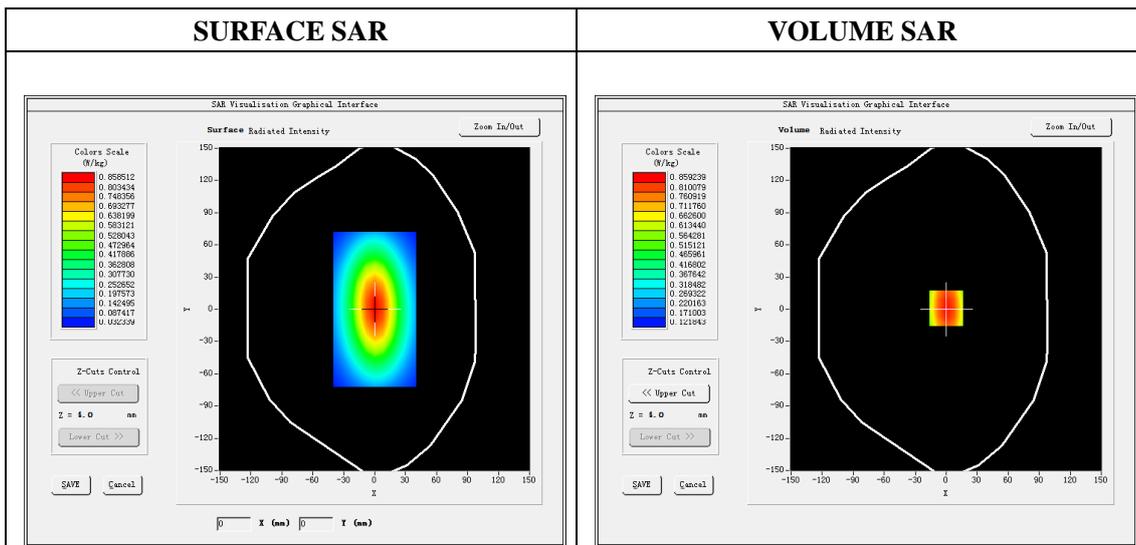

Maximum location: X=0.00, Y=1.00

SAR 10g (W/Kg)	0.998564
SAR 1g (W/Kg)	2.063257

System Performance Check (Body, 835MHz)

Type: Validation measurement

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 08/04/2016

Measurement duration: 21 minutes 26seconds


A. Experimental conditions.

Phantom File	dx=8mm dy=8mm
Phantom	5x5x7,dx=8mm dy=8mm dz=5mm
Device Position	Dipole
Band	835MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR

E-Field Probe	SATIMO SN_04/13_EP166
Frequency (MHz)	850
Relative permittivity (real part)	55.13
Relative permittivity	20.54
Conductivity (S/m)	0.97
Power drift (%)	2.37
Ambient Temperature:	22.2 °C
Liquid Temperature:	22.5 °C
ConvF:	5.82
Duty factor:	1:1

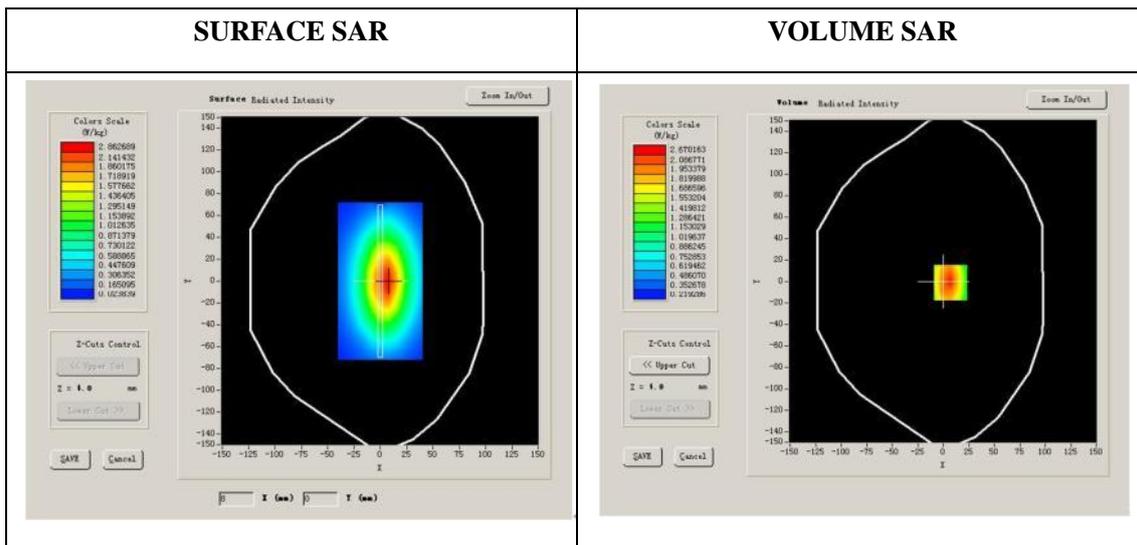

Maximum location: X=7.00, Y=-1.00

SAR 10g (W/Kg)	1.642753
SAR 1g (W/Kg)	2.530352

System Performance Check (Body, 1800MHz)

Type: Phone measurement

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 10/03/2016

Measurement duration: 20 minutes 03 seconds


A. Experimental conditions.

Phantom File	dx=8mm dy=8mm
Phantom	5x5x7,dx=8mm dy=8mm dz=5mm
Device Position	Dipole
Band	1800MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR

E-Field Probe	SATIMO SN_04/13_EP166
Frequency (MHz)	1800
Relative permittivity (real part)	53.24
Relative permittivity	15.10
Conductivity (S/m)	1.51
Power drift (%)	1.01
Ambient Temperature:	22.2 °C
Liquid Temperature:	22.6 °C
ConvF:	4.96
Crest factor:	1:1

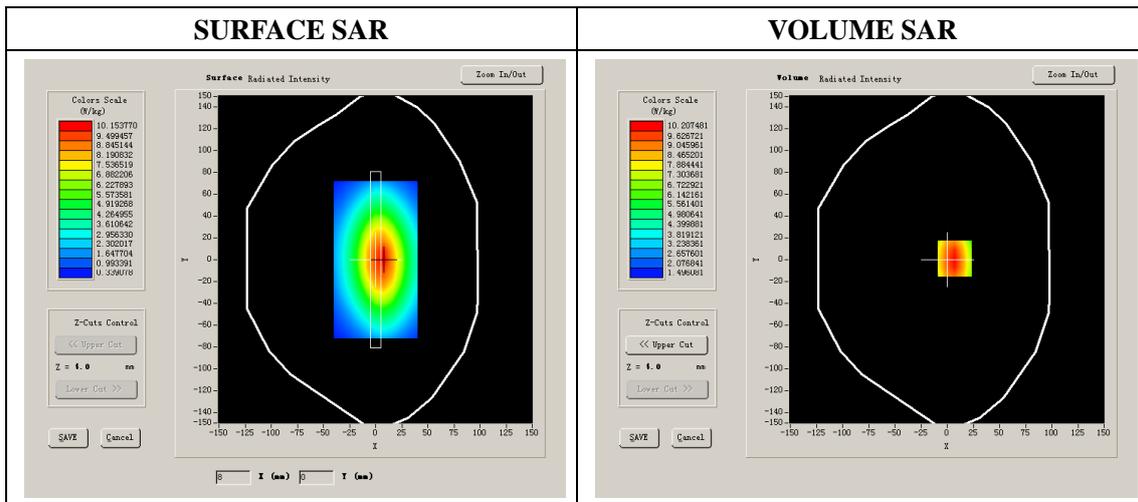

Maximum location: X=7.00, Y=1.00

SAR 10g (W/Kg)	5.020324
SAR 1g (W/Kg)	9.853687

System Performance Check (Body, 1900MHz)

Type: Validation measurement

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 10/04/2016

Measurement duration: 21 minutes 48 seconds


A. Experimental conditions.

Phantom File	dx=8mm dy=8mm
Phantom	5x5x7,dx=8mm dy=8mm dz=5mm
Device Position	Dipole
Band	1900MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR

E-Field Probe	SATIMO SN_04/13_EP166
Frequency (MHz)	1900
Relative permittivity (real part)	53.14
Relative permittivity	14.40
Conductivity (S/m)	1.52
Power Drift (%)	-2.32
Ambient Temperature:	22.1 °C
Liquid Temperature:	22.6 °C
ConvF:	5.43
Duty factor:	1:1

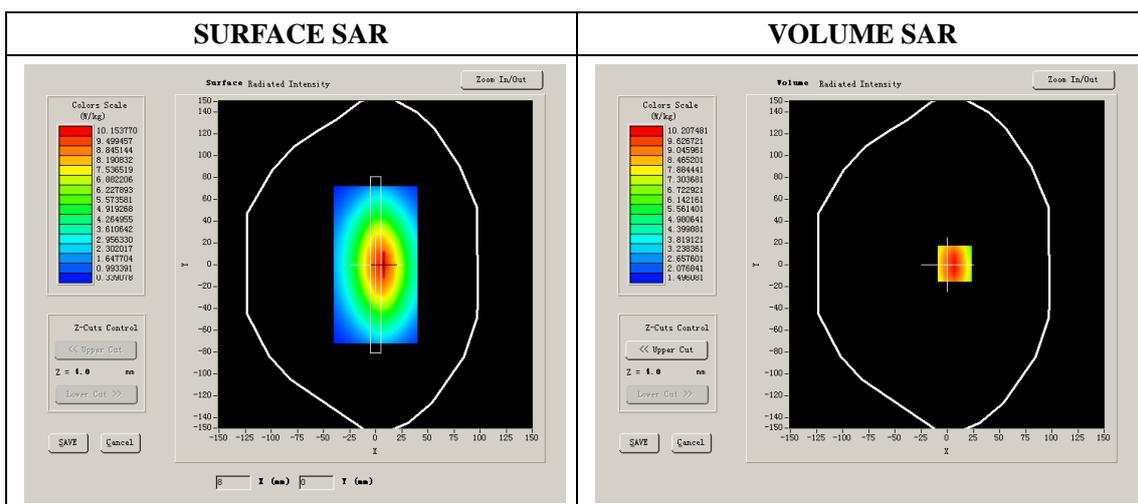

Maximum location: X=1.00, Y=6.00

SAR 10g (W/Kg)	5.280463
SAR 1g (W/Kg)	10.137484

System Performance Check (Body, 2450MHz)

Type: Phone measurement

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=5mm, dy=5mm, dz=4mm

Date of measurement: 13/04/2016

Measurement duration: 22 minutes 23 seconds


A. Experimental conditions.

Phantom File	dx=8mm dy=8mm
Phantom	7x7x8,dx=5mm dy=5mm dz=4mm
Device Position	Dipole
Band	2450MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR

E-Field Probe	SATIMO SN_04/13_EP166
Frequency (MHz)	2450
Relative permittivity (real part)	52.56
Relative permittivity	14.25
Conductivity (S/m)	1.94
Power Drift (%)	2.75
Duty factor:	1:1
ConvF:	5.09

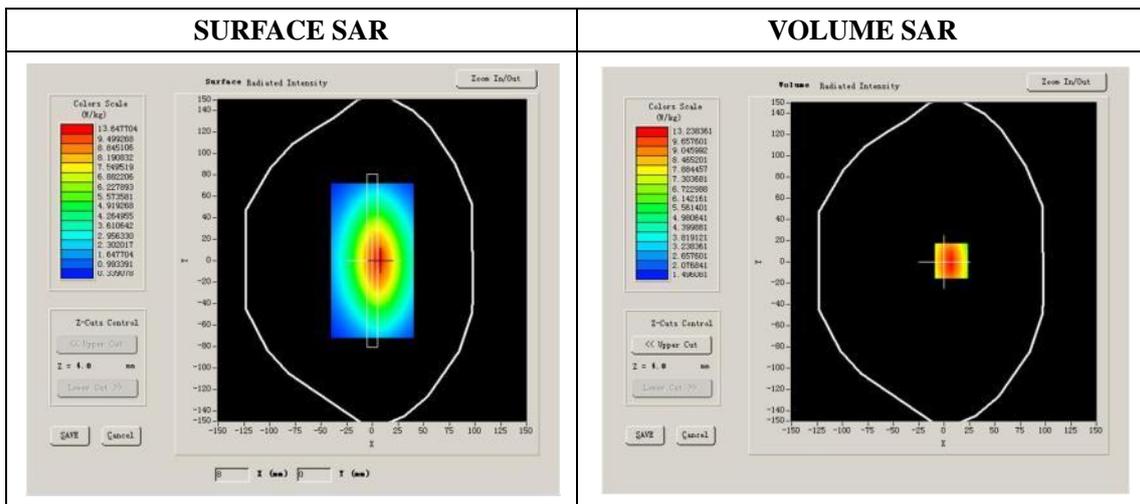

Maximum location: X=0.00, Y=8.00

SAR 10g (W/Kg)	6.065630
SAR 1g (W/Kg)	13.063351

System Performance Check (Body, 2600MHz)

Type: Phone measurement

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=5mm, dy=5mm, dz=4mm

Date of measurement: 13/04/2016

Measurement duration: 22 minutes 28 seconds


A. Experimental conditions.

Phantom File	dx=8mm dy=8mm
Phantom	7x7x8,dx=5mm dy=5mm dz=4mm
Device Position	Dipole
Band	2600MHz
Channels	
Signal	CW

B. SAR Measurement Results

Band SAR

E-Field Probe	SATIMO SN_04/13_EP166
Frequency (MHz)	2600
Relative permittivity (real part)	52.41
Relative permittivity	14.88
Conductivity (S/m)	2.15
Power drift (%)	-3.56
Ambient Temperature:	22.2°C
Liquid Temperature:	22.5°C
Crest factor:	1:1
ConvF:	5.22

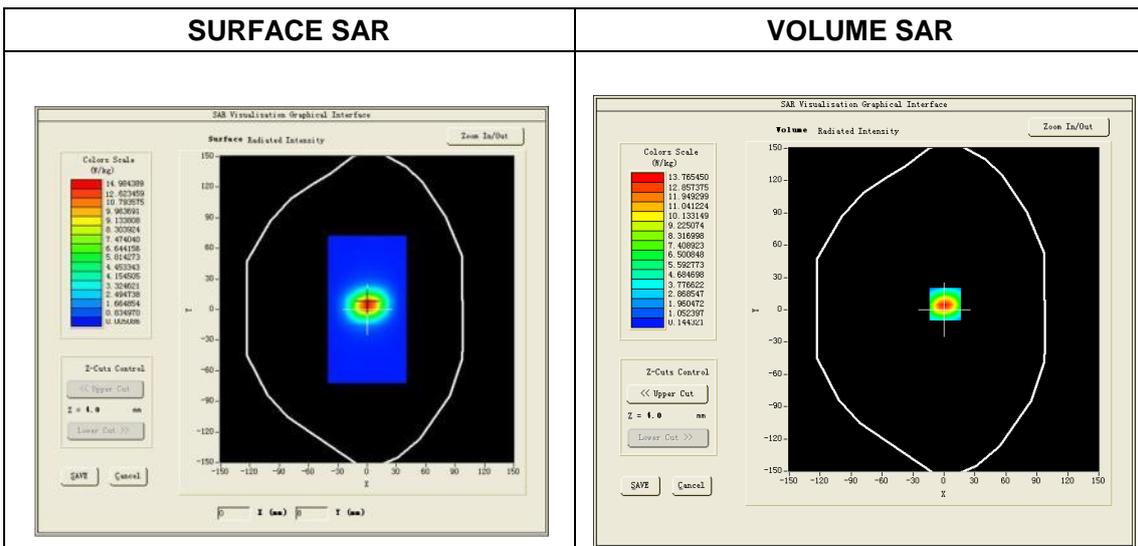

Maximum location: X=1.00, Y=4.00

SAR 10g (W/Kg)	5.990671
SAR 1g (W/Kg)	14.080432

Plot 1: GSM850, Left Cheek, High


Type: Phone measurement
 Date of measurement: 07/04/2016
 Measurement duration: 6 minutes 12 seconds
 Mobile Phone IMEI number: --

A. Experimental conditions.

Area Scan	dx=8mm dy=8mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	GSM850
Channels	251
Signal	GSM (Duty cycle: 1:8)

B. SAR Measurement Results

E-Field Probe	SATIMO SN_04/13_EP166
Frequency (MHz)	848.8
Relative permittivity (real part)	41.42
Relative permittivity (imaginary part)	19.19
Conductivity (S/m)	0.89
Variation (%)	-3.74
ConvF:	5.69

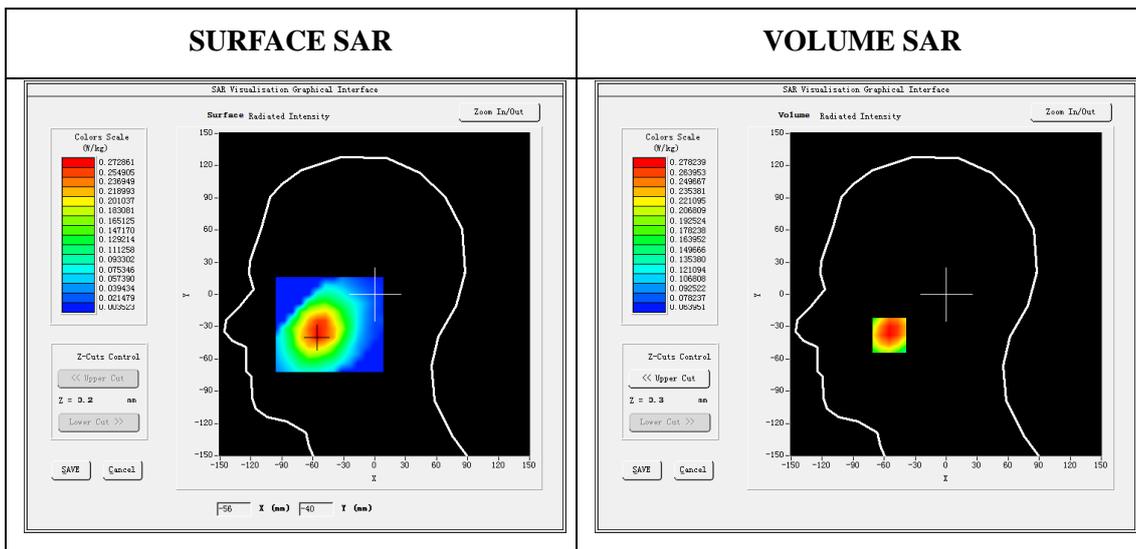

Maximum location: X=-55.00, Y=-38.00
 SAR Peak: 0.31 W/kg

SAR 10g (W/Kg)	0.213301
SAR 1g (W/Kg)	0.271569

Plot 2: GSM850, Back-Worn, High


Type: Phone measurement
 Date of measurement: 08/04/2016
 Measurement duration: 7 minutes 12 seconds
 Mobile Phone IMEI number: --

A. Experimental conditions.

Area Scan	dx=8mm dy=8mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back
Band	GSM850
Channels	251
Signal	GSM(Duty cycle: 1:8)

B. SAR Measurement Results

E-Field Probe	SATIMO SN_04/13_EP166
Frequency (MHz)	848.8
Relative permittivity (real part)	55.13
Relative permittivity (imaginary part)	20.54
Conductivity (S/m)	0.97
Variation (%)	-4.71
ConvF:	5.82

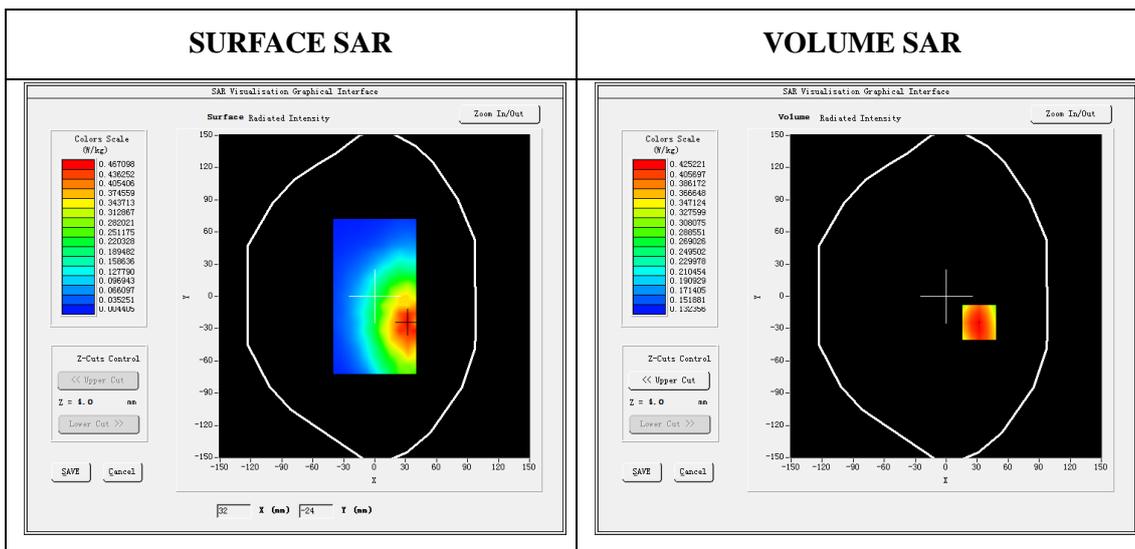

Maximum location: X=32.00, Y=-24.00
 SAR Peak: 0.49W/kg

SAR 10g (W/Kg)	0.330600
SAR 1g (W/Kg)	0.416491

Plot 3: GPRS850, Back, High, Hotspot


Type: Phone measurement
 Date of measurement: 08/04/2016
 Measurement duration: 7 minutes 15 seconds
 Mobile Phone IMEI number: --

A. Experimental conditions.

Area Scan	dx=8mm dy=8mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back
Band	GSPRS850_4Tx
Channels	251
Signal	GPRS(Duty cycle: 1:2)

B. SAR Measurement Results

E-Field Probe	SATIMO SN_04/13_EP166
Frequency (MHz)	848.8
Relative permittivity (real part)	55.13
Relative permittivity (imaginary part)	20.54
Conductivity (S/m)	0.97
Variation (%)	-2.26
ConvF:	5.82

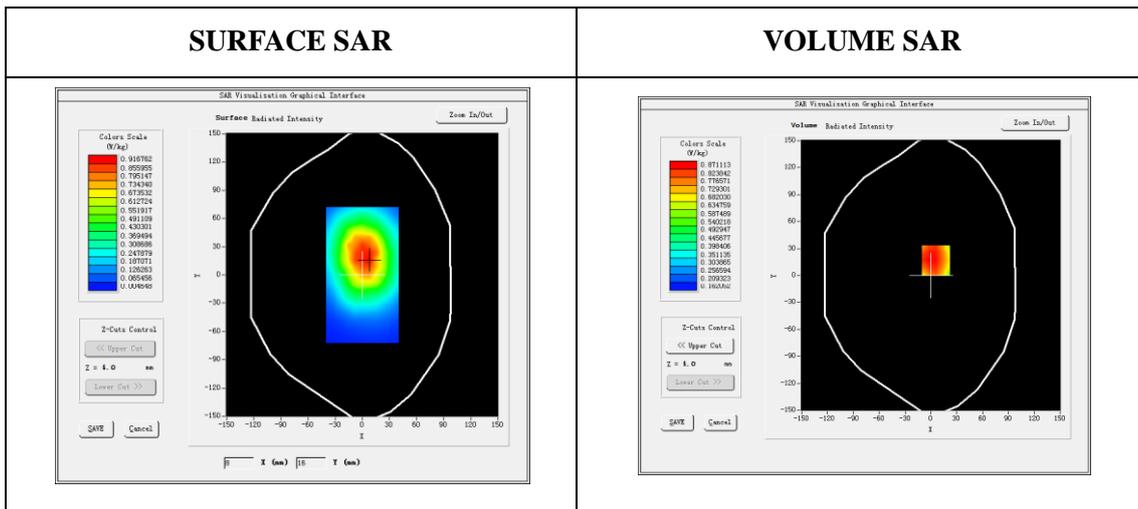

Maximum location: X=4.00, Y=28.00

SAR 10g (W/Kg)	0.606107
SAR 1g (W/Kg)	0.932645

Plot 4: GSM1900, Right Cheek, High


Type: Phone measurement
 Date of measurement: 09/04/2016
 Measurement duration: 6 minutes 16 seconds
 Mobile Phone IMEI number: --

A. Experimental conditions.

Area Scan	dx=8mm dy=8mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	GSM1900
Channels	810
Signal	GSM (Duty cycle: 1:8)

B. SAR Measurement Results

E-Field Probe	SATIMO SN_04/13_EP166
Frequency (MHz)	1909.8
Relative permittivity (real part)	39.89
Relative permittivity (imaginary part)	13.17
Conductivity (S/m)	1.39
Variation (%)	-3.49
ConvF:	5.25

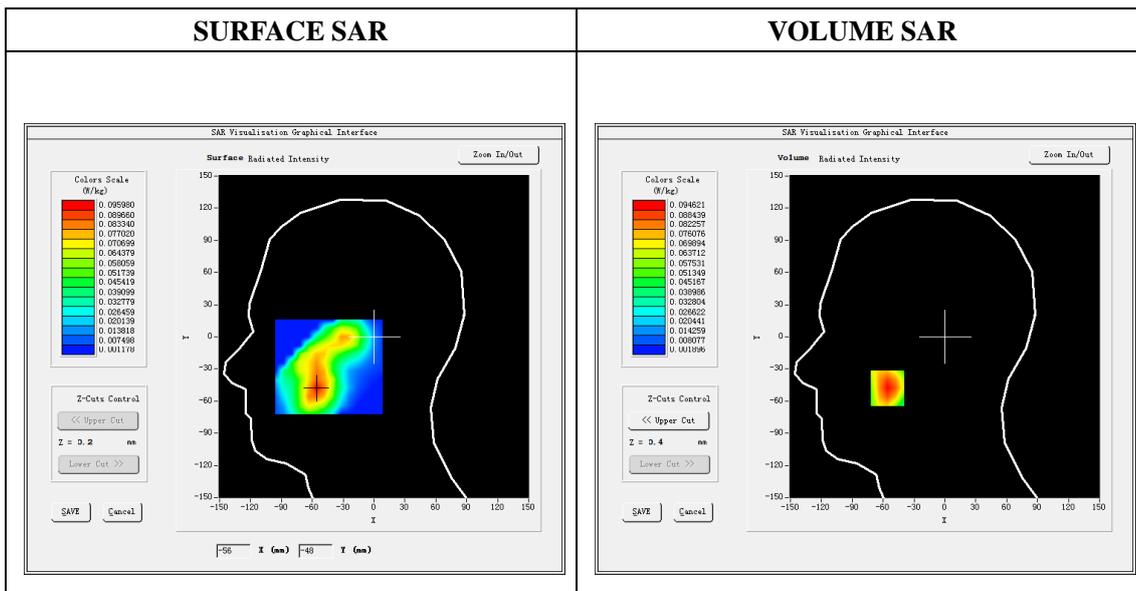

Maximum location: X=-56.00, Y=-48.00
 SAR Peak: 0.16 W/kg

SAR 10g (W/Kg)	0.048136
SAR 1g (W/Kg)	0.092870

Plot 5: GSM1900, Back, High


Type: Phone measurement
 Date of measurement: 10/04/2016
 Measurement duration: 6 minutes 21 seconds
 Mobile Phone IMEI number: --

A. Experimental conditions.

Area Scan	dx=8mm dy=8mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back
Band	GSM1900
Channels	810
Signal	GSM (Duty cycle: 1:8)

B. SAR Measurement Results

E-Field Probe	SATIMO SN_04/13_EP166
Frequency (MHz)	1909.8
Relative permittivity (real part)	53.14
Relative permittivity (imaginary part)	14.40
Conductivity (S/m)	1.52
Variation (%)	2.14
ConvF:	5.43

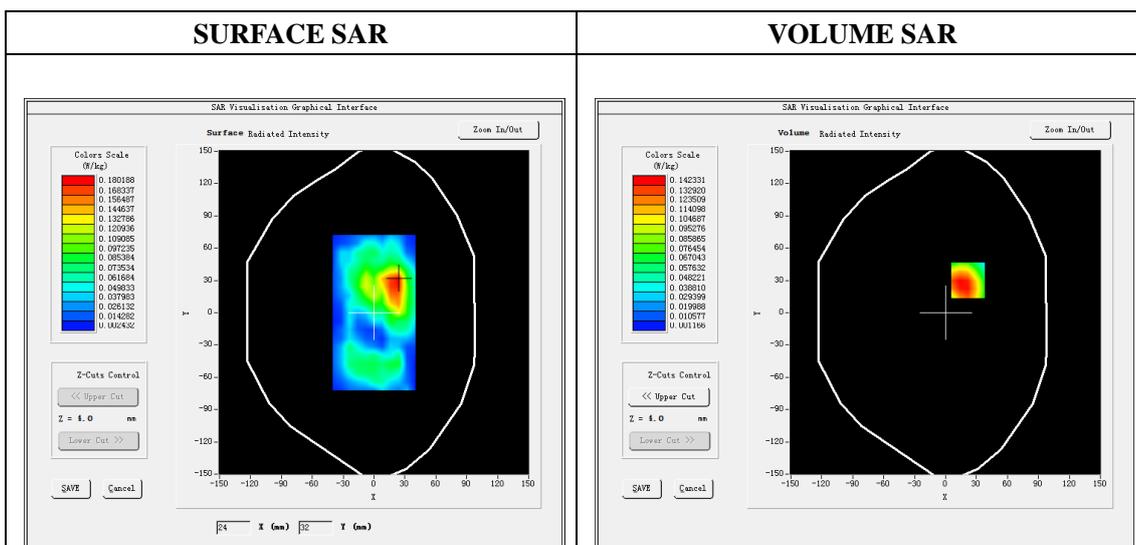

Maximum location: X=22.00, Y=30.00
SAR Peak: 0.26 W/kg

SAR 10g (W/Kg)	0.072102
SAR 1g (W/Kg)	0.144440

Plot 6: GPRS1900, Edge C, High


Type: Phone measurement
 Date of measurement: 10/04/2016
 Measurement duration: 6 minutes 23 seconds
 Mobile Phone IMEI number: --

A. Experimental conditions.

Area Scan	dx=8mm dy=8mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Edge C
Band	GPRS1900_4Tx
Channels	810
Signal	GPRS (Duty cycle: 1:2)

B. SAR Measurement Results

E-Field Probe	SATIMO SN_04/13_EP166
Frequency (MHz)	1909.8
Relative permittivity (real part)	53.14
Relative permittivity (imaginary part)	14.40
Conductivity (S/m)	1.52
Variation (%)	0.73
ConvF:	5.43

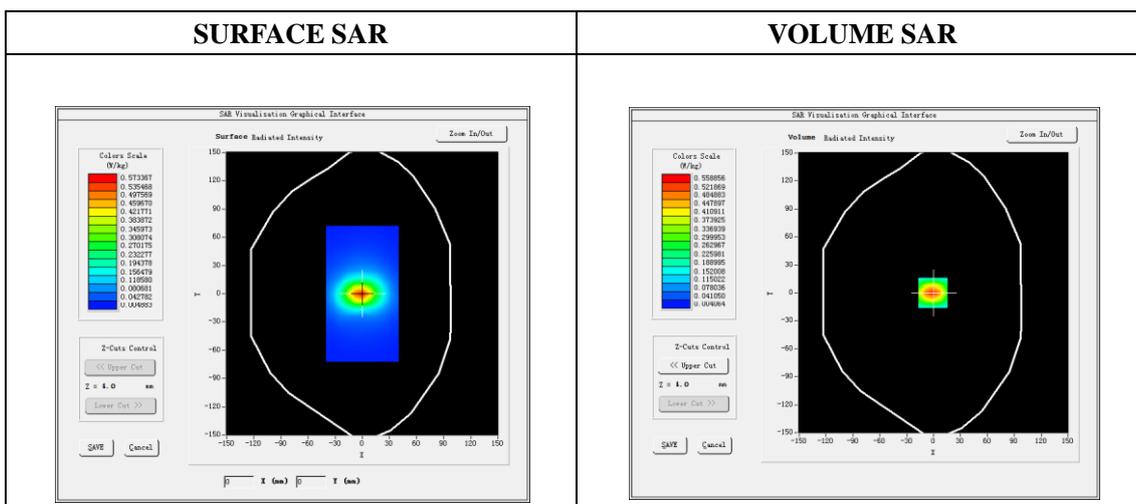

Maximum location: X=4.00, Y=19.00
 SAR Peak: 0.49 W/kg

SAR 10g (W/Kg)	0.237181
SAR 1g (W/Kg)	0.539468

Plot 7: WCDMA850, Right Cheek, High


Type: Phone measurement
 Date of measurement: 07/04/2016
 Measurement duration: 6 minutes 06seconds
 Mobile Phone IMEI number: --

A. Experimental conditions.

Area Scan	dx=8mm dy=8mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	Band5_WCDMA850
Channels	4233
Signal	WCDMA (Duty cycle: 1:1)

B. SAR Measurement Results

E-Field Probe	SATIMO SN_04/13_EP166
Frequency (MHz)	846.6
Relative permittivity (real part)	41.42
Relative permittivity (imaginary part)	19.19
Conductivity (S/m)	0.89
Variation (%)	-0.13
ConvF:	5.69

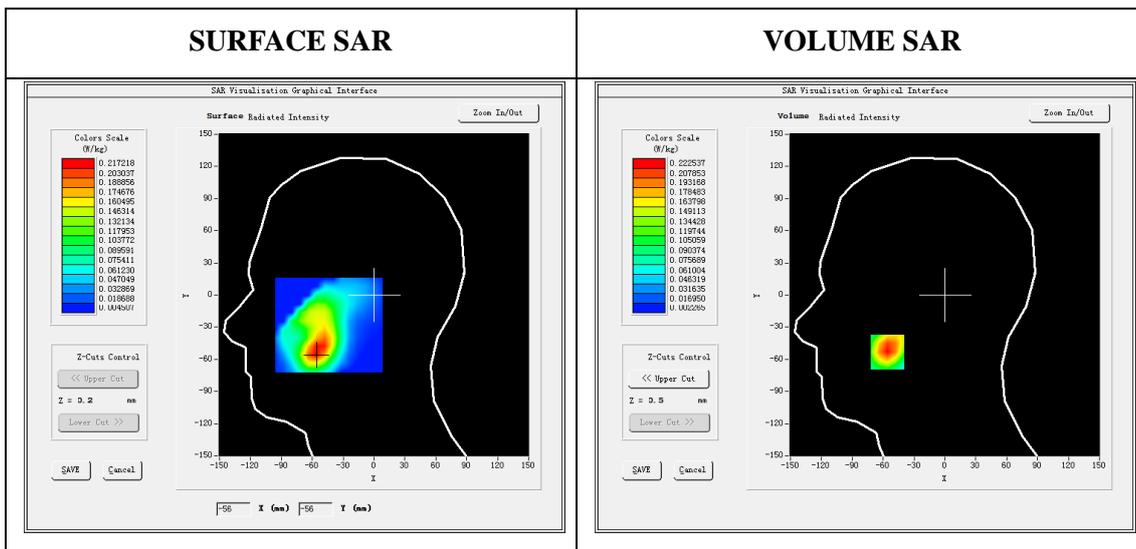

Maximum location: X=-56.00, Y=-53.00

SAR Peak: 0.39 W/kg

SAR 10g (W/Kg)	0.104398
SAR 1g (W/Kg)	0.210495

Plot 8: WCDMA850, Back Upward(Body-worn, hotspot), High


Type: Phone measurement
 Date of measurement:08/04/2016
 Measurement duration: 7 minutes 16 seconds
 Mobile Phone IMEI number: --

A. Experimental conditions.

Area Scan	dx=8mm dy=8mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back
Band	Band5_WCDMA850
Channels	4233
Signal	WCDMA (Duty cycle: 1:1)

B. SAR Measurement Results

E-Field Probe	SATIMO SN_04/13_EP166
Frequency (MHz)	846.6
Relative permittivity (real part)	55.13
Relative permittivity (imaginary part)	20.54
Conductivity (S/m)	0.97
Variation (%)	-1.79
ConvF:	5.82

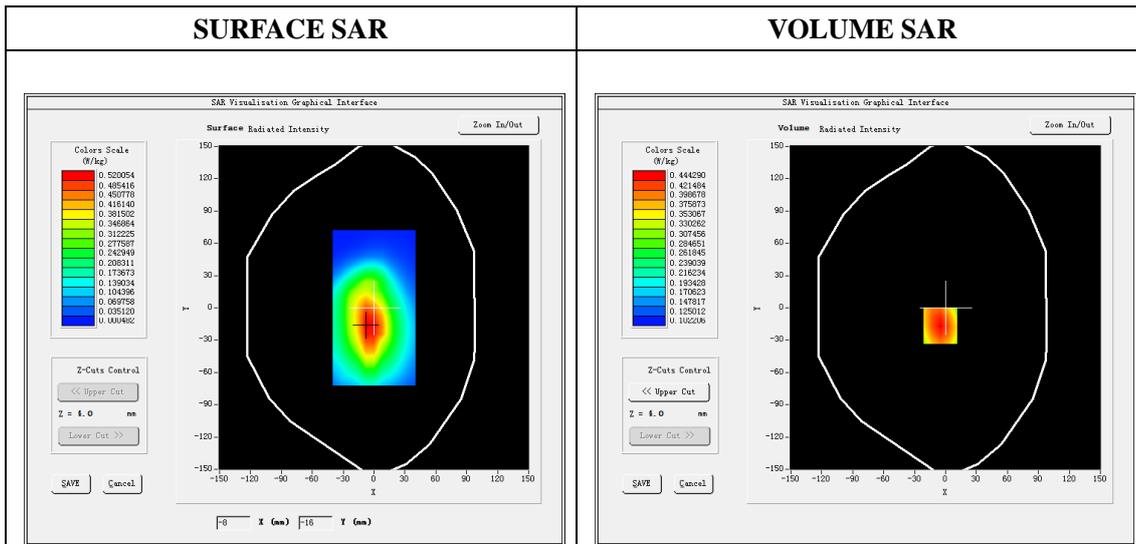

**Maximum location: X=-5.00, Y=-17.00
 SAR Peak: 0.56 W/kg**

SAR 10g (W/Kg)	0.308332
SAR 1g (W/Kg)	0.427080

Plot 9: WCDMA1900, Right Cheek, Middle


Type: Phone measurement
 Date of measurement: 09/04/2016
 Measurement duration: 7 minutes 07 seconds
 Mobile Phone IMEI number: --

A. Experimental conditions.

Area Scan	dx=8mm dy=8mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Right head
Band	Cheek
Channels	9400
Signal	WCDMA (Duty cycle: 1:1)

B. SAR Measurement Results

E-Field Probe	SATIMO SN_04/13_EP166
Frequency (MHz)	1880.0
Relative permittivity (real part)	39.89
Relative permittivity (imaginary)	13.17
Conductivity (S/m)	1.39
Variation (%)	-1.89
ConvF:	5.25

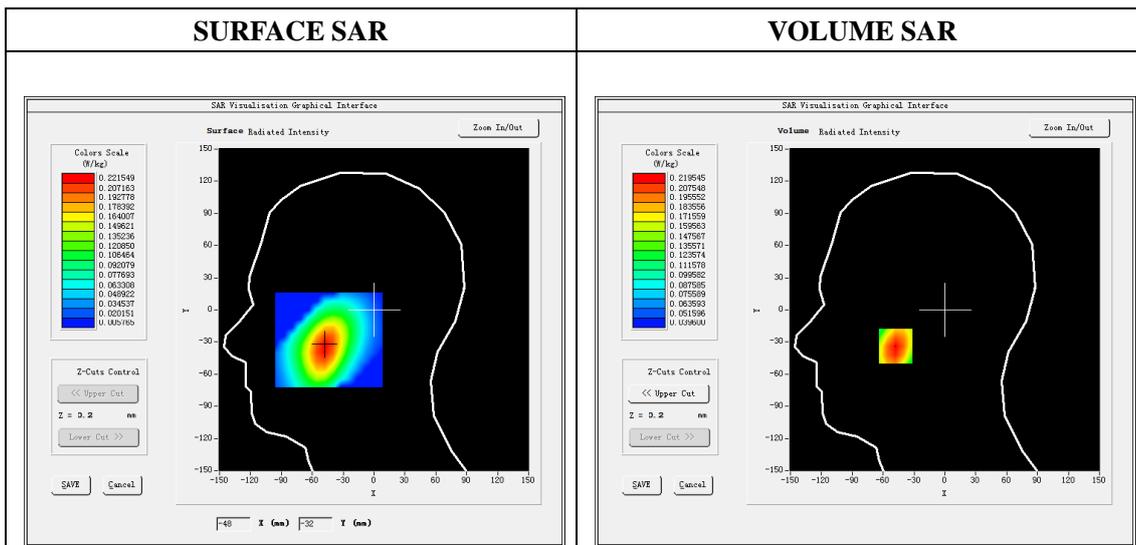

Maximum location: X=-48.00, Y=-34.00

SAR Peak: 0.26 W/kg

SAR 10g (W/Kg)	0.153243
SAR 1g (W/Kg)	0.210753

Plot 10: WCDMA1900, Back, Middle


Type: Phone measurement
 Date of measurement: 10/04/2016
 Measurement duration: 7 minutes 03 seconds
 Mobile Phone IMEI number: --

A. Experimental conditions.

Area Scan	dx=8mm dy=8mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back
Band	Band2_WCDMA1900
Channels	9400
Signal	WCDMA (Duty cycle: 1:1)

B. SAR Measurement Results

E-Field Probe	SATIMO SN_04/13_EP166
Frequency (MHz)	1880.0
Relative permittivity (real part)	53.14
Relative permittivity (imaginary)	14.40
Conductivity (S/m)	1.52
Variation (%)	-3.45
ConvF:	5.43

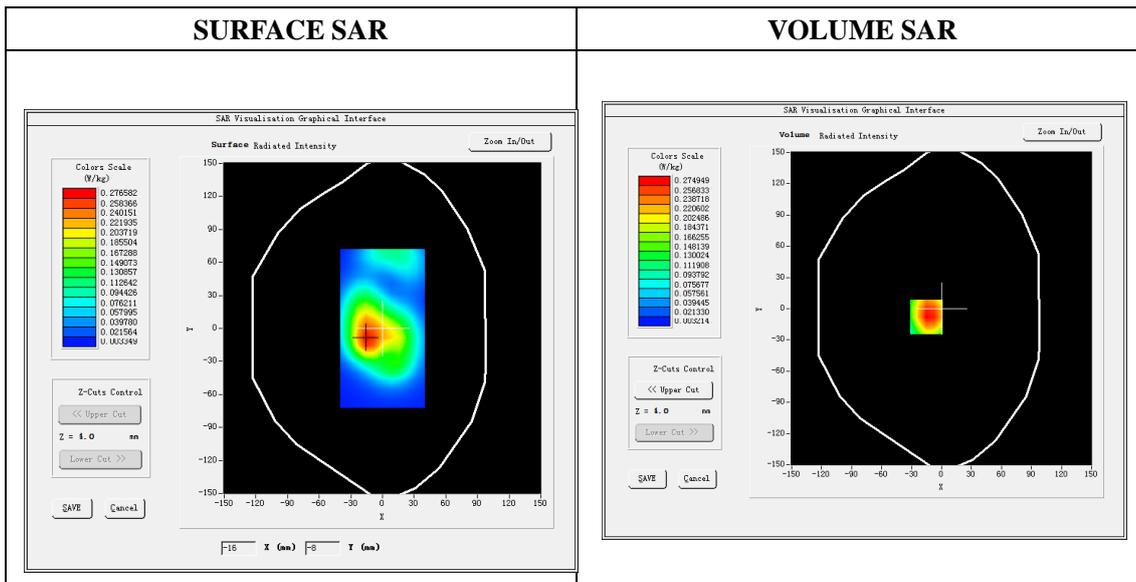

Maximum location: X=4.00, Y=12.00
 SAR Peak: 1.87 W/kg

SAR 10g (W/Kg)	0.134405
SAR 1g (W/Kg)	0.266940

Plot 11: WCDMA1900, Edge C, Low


Type: Phone measurement
 Date of measurement: 10/04/2016
 Measurement duration: 7 minutes 01 seconds
 Mobile Phone IMEI number: --

A. Experimental conditions.

Area Scan	dx=8mm dy=8mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back
Band	Band2_WCDMA1900
Channels	9262
Signal	WCDMA (Duty cycle: 1:1)

B. SAR Measurement Results

E-Field Probe	SATIMO SN_04/13_EP166
Frequency (MHz)	1852.4
Relative permittivity (real part)	53.14
Relative permittivity (imaginary)	14.40
Conductivity (S/m)	1.52
Variation (%)	0.57
ConvF:	5.43

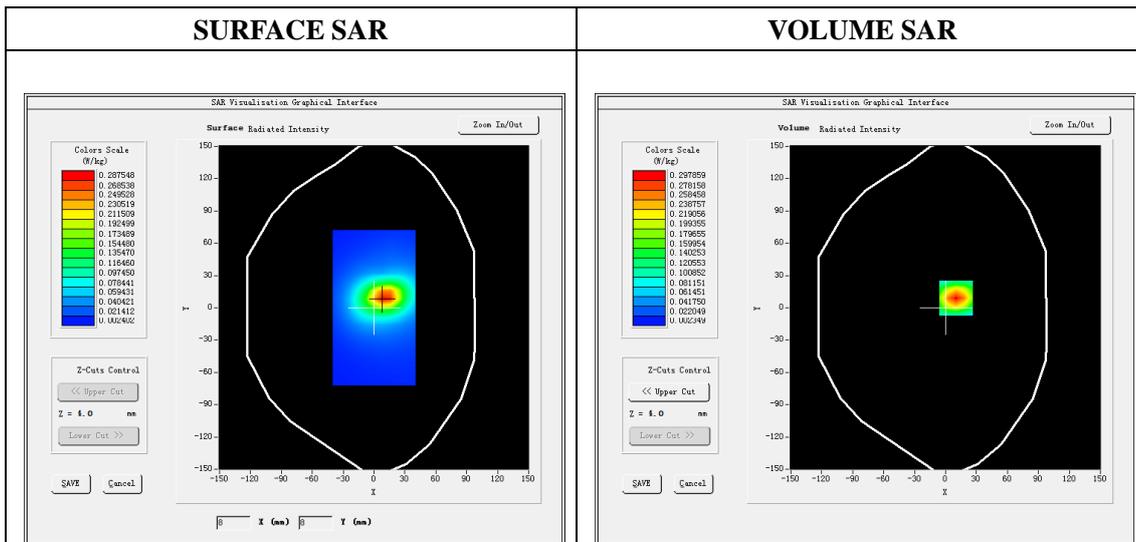

Maximum location: X=10.00, Y=9.00
 SAR Peak: 0.55W/kg

SAR 10g (W/Kg)	0.125533
SAR 1g (W/Kg)	0.277268

Plot 12: LTE Band2, 20MHz, Right Cheek, High


Type: Phone measurement
 Date of measurement: 09/04/2016
 Measurement duration: 7 minutes 02 seconds
 Mobile Phone IMEI number: --

A. Experimental conditions.

Area Scan	dx=8mm dy=8mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Right head
Band	Cheek
Channels	19100
Signal	LTE (Duty cycle: 1:1)

B. SAR Measurement Results

E-Field Probe	SATIMO SN_04/13_EP166
Frequency (MHz)	1900
Relative permittivity (real part)	53.14
Relative permittivity (imaginary)	14.40
Conductivity (S/m)	1.52
Variation (%)	0.42
ConvF:	5.25

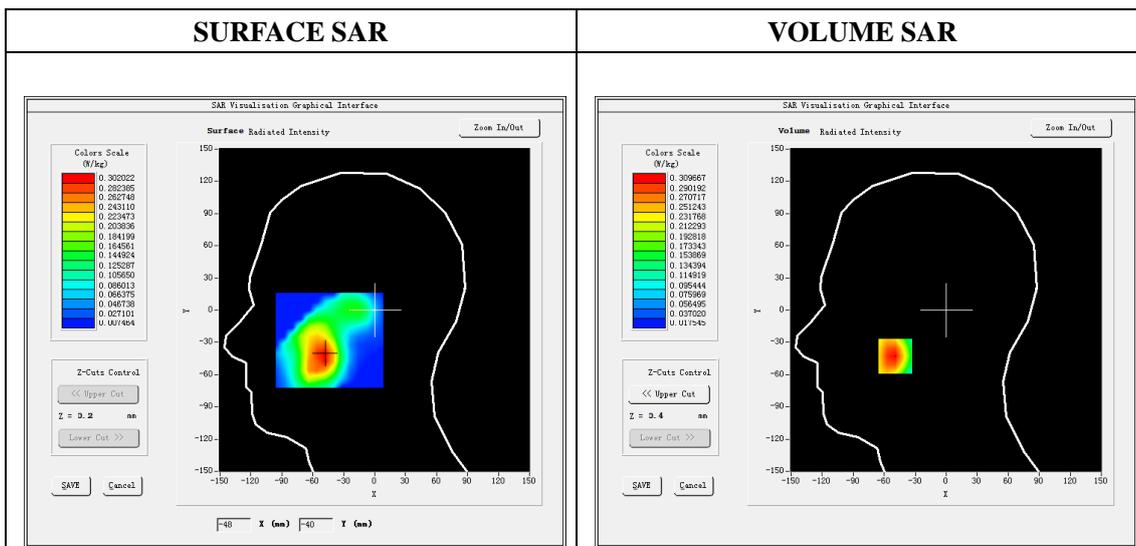

Maximum location: X=-49.00, Y=-43.00

SAR 10g (W/Kg)	0.182160
SAR 1g (W/Kg)	0.295500