



# FCC RF Test Report

**APPLICANT** : ZTE CORPORATION  
**EQUIPMENT** : WCDMA/LTE Multi-Mode Digital Mobile Phone  
**BRAND NAME** : ZTE  
**MODEL NAME** : A1R  
**FCC ID** : SRQ-ZTEA1R  
**STANDARD** : FCC Part 15 Subpart E §15.407  
**CLASSIFICATION** : (NII) Unlicensed National Information Infrastructure

The product testing was completed on Aug. 18, 2015. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



**SPORTON INTERNATIONAL (KUNSHAN) INC.**  
**No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China**



## TABLE OF CONTENTS

<b>1</b>	<b>GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1	Applicant .....	5
1.2	Manufacturer .....	5
1.3	Feature of Equipment Under Test .....	5
1.4	Product Specification of Equipment Under Test.....	5
1.5	Modification of EUT .....	6
1.6	Testing Location .....	6
1.7	Applicable Standards.....	6
<b>2</b>	<b>TEST CONFIGURATION OF EQUIPMENT UNDER TEST .....</b>	<b>7</b>
2.1	Carrier Frequency and Channel .....	7
2.2	Pre-Scanned RF Power.....	8
2.3	Test Mode.....	9
2.4	Connection Diagram of Test System.....	10
2.5	Support Unit used in test configuration and system.....	11
2.6	EUT Operation Test Setup .....	11
2.7	Measurement Results Explanation Example.....	11
<b>3</b>	<b>TEST RESULT.....</b>	<b>12</b>
3.1	6dB Bandwidth Measurement .....	12
3.2	Maximum Conducted Output Power Measurement .....	14
3.3	Power Spectral Density Measurement .....	15
3.4	Unwanted Emissions Measurement.....	18
3.5	AC Conducted Emission Measurement.....	22
3.6	Frequency Stability Measurement.....	26
3.7	Automatically Discontinue Transmission .....	27
3.8	Antenna Requirements.....	28
<b>4</b>	<b>LIST OF MEASURING EQUIPMENT .....</b>	<b>29</b>
<b>5</b>	<b>UNCERTAINTY OF EVALUATION .....</b>	<b>30</b>
	<b>APPENDIX A. CONDUCTED TEST RESULTS</b>	
	<b>APPENDIX B. RADIATED TEST RESULTS</b>	
	<b>APPENDIX C. SETUP PHOTOGRAPHS</b>	



**SUMMARY OF TEST RESULT**

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.403(i)	RSS-247 Section 6	6dB Bandwidth	> 500kHz	Pass	-
3.2	15.407(a)	RSS-247 Section 6	Maximum Conducted Output Power	≤ 30 dBm	Pass	-
3.3	15.407(a)	RSS-247 Section 6	Power Spectral Density	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	RSS-247 Section 6	Unwanted Emissions	≤ -17, -27 dBm/MHz &15.209(a)	Pass	Under limit 8.51 dB at 34.850 MHz
3.5	15.207	RSS-Gen 8.8	AC Conducted Emission	15.207(a)	Pass	Under limit 8.60 dB at 0.490 MHz
3.6	15.407(g)	-	Frequency Stability	Within Operation Band	Pass	-
3.7	15.407(c)	RSS-247 6.4(2)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.8	15.203 & 15.407(a)	N/A	Antenna Requirement	N/A	Pass	-



# 1 General Description

## 1.1 Applicant

**ZTE CORPORATION**

ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

## 1.2 Manufacturer

**ZTE CORPORATION**

ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

## 1.3 Feature of Equipment Under Test

Product Feature	
<b>Equipment</b>	WCDMA/LTE Multi-Mode Digital Mobile Phone
<b>Brand Name</b>	ZTE
<b>Model Name</b>	A1R
<b>FCC ID</b>	SRQ-ZTEA1R
<b>EUT supports Radios application</b>	GSM/GPRS/EGPRS/WCDMA/HSPA/HSPA+(Downlink Only)/ DC-HSDPA/LTE/NFC WLAN2.4GHz 802.11b/g/n HT20 WLAN5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth v2.1+EDR/Bluetooth v4.0 LE
<b>HW Version</b>	wsjB
<b>SW Version</b>	A1RV1.0.0B02
<b>EUT Stage</b>	Production Unit

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
<b>Tx/Rx Channel Frequency Range</b>	5725 MHz ~ 5850 MHz
<b>Maximum Output Power</b>	802.11ac VHT20: 11.13 dBm / 0.0130 W 802.11ac VHT40: 10.74 dBm / 0.0119 W 802.11ac VHT80: 11.05 dBm / 0.0127 W
<b>Type of Modulation</b>	802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
<b>Antenna Type / Gain</b>	IFA Antenna with gain 0.3 dBi



### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6 Testing Location

<b>Test Site</b>	SPORTON INTERNATIONAL (KUNSHAN) INC.			
<b>Test Site Location</b>	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958			
<b>Test Site No.</b>	<b>Sporton Site No.</b>			<b>FCC/IC Registration No.</b>
	TH01-KS	03CH02-KS	CO01-KS	418269/4086E

**Note:** The test site complies with ANSI C63.4 2009 requirement.

### 1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v01
- ♦ ANSI C63.10-2013
- ♦ IC RSS-247 Issue 1
- ♦ IC RSS-Gen Issue 4

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. FCC permits the use of the 1.5 meter table as an alternative in C63.10-2013 through inquiry tracking number 961829.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y/Z plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

### 2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz Band 4 (U-NII-3)	149	5745	157	5785
	<b>151</b>	<b>5755</b>	<b>159</b>	<b>5795</b>
	153	5765	161	5805
	155	5775	165	5825

**Note:** The above Frequency and Channel in boldface were 802.11n HT40.



## 2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test in the following tables. Final Output Power equals to Measured Output Power adds the duty factor.

WLAN 5GHz 802.11ac VHT20 Average Power (dBm)											
Power vs. Channel			Power vs. Data Rate								
Channel	Frequency (MHz)	MCS Index	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8
		MCS0									
CH 149	5745	11.13									
CH 157	5785	10.88	CH 149	11.09	10.97	11.03	11.00	11.12	11.10	11.08	10.99
CH 165	5825	10.90									

WLAN 5GHz 802.11ac VHT40 Average Power (dBm)												
Power vs. Channel			Power vs. Data Rate									
Channel	Frequency (MHz)	MCS Index	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9
		MCS0										
CH 151	5755	10.74										
CH 159	5795	10.49	CH 151	10.72	10.61	10.56	10.61	10.60	10.67	10.58	10.57	10.65

WLAN 5GHz 802.11n-HT80 Average Power (dBm)												
Power vs. Channel			Power vs. Data Rate									
Channel	Frequency (MHz)	MCS Index	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9
		MCS0										
CH 155	5775	11.05	CH 155	11.00	10.99	10.93	10.83	10.95	10.98	11.03	11.01	10.89



### 2.3 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates from the power table described in section 2.2.


Modulation	Data Rate
802.11ac VHT20	MCS0
802.11ac VHT40	MCS0
802.11ac VHT80	MCS0

<b>AC Conducted Emission</b>	Mode 1 : GSM850 Idle + Bluetooth Link + WLAN (5GHz) Link + Earphone + USB Cable (Charging from Adapter)
<b>Remark:</b>	For Radiated TCs, the tests were performed with adapter, earphone and USB cable.


Ch. #	Band IV : 5725-5850 MHz		
	802.11ac VHT20	802.11ac VHT40	802.11ac VHT80
L Low	149	151	-
M Middle	157	-	155
H High	165	159	-

## 2.4 Connection Diagram of Test System

### <WLAN Tx Mode>

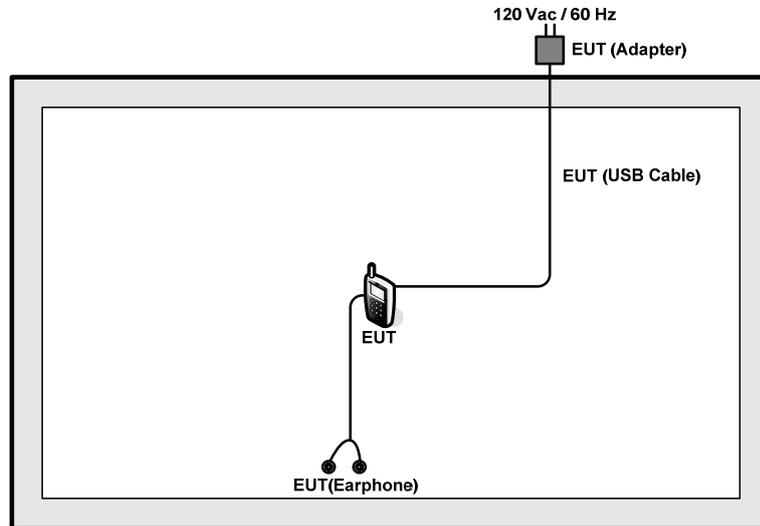

### <AC Conducted Emission Mode>

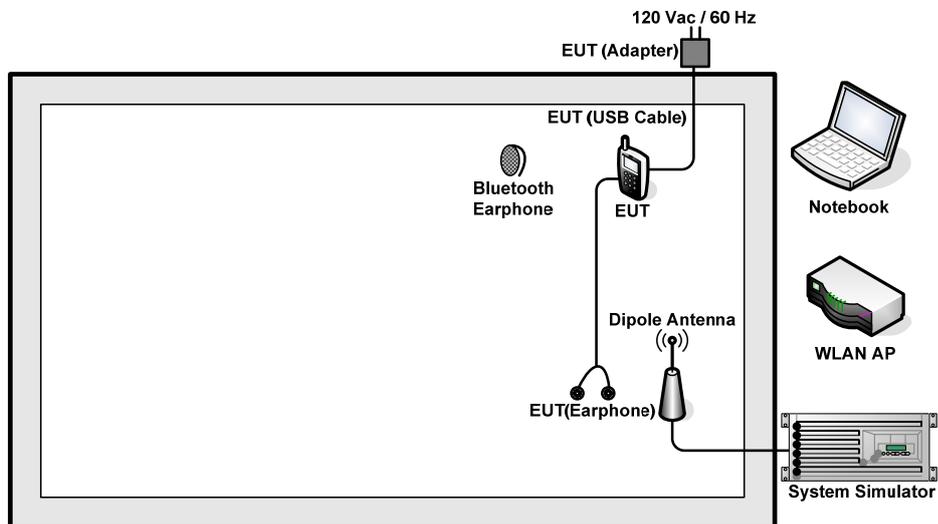

## 2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	LINKSYS	WRT600N	Q87-WRT600NV11	N/A	Unshielded, 1.8 m
2.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
3.	Notebook	Lenovo	G480	PRC4	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Nokia	BH-102	PYAHS-107W	N/A	N/A

## 2.6 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

## 2.7 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss.

*Offset = RF cable loss.*

Following shows an offset computation example with cable loss 7.0 dB.

$$\begin{aligned} \text{Offset (dB)} &= \text{RF cable loss (dB)} \\ &= 7.0 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 6dB Bandwidth Measurement

##### 3.1.1 Description of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.  
Section C) Emission bandwidth for the band 5.725-5.85GHz
2. Set RBW = 100kHz.
3. Set the VBW  $\geq 3 \times$  RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.


##### 3.1.4 Test Setup





### 3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

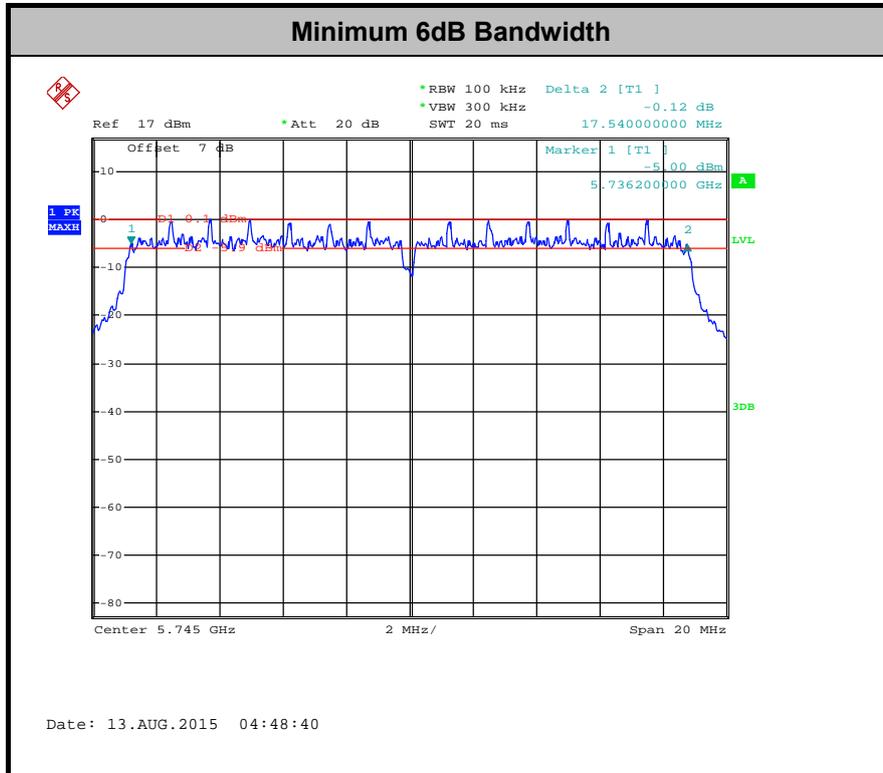

**Note:** The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

## 3.2 Maximum Conducted Output Power Measurement

### 3.2.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


### 3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor,  $10 \log(1/x)$ , where  $x$  is the duty cycle.

### 3.2.4 Test Setup

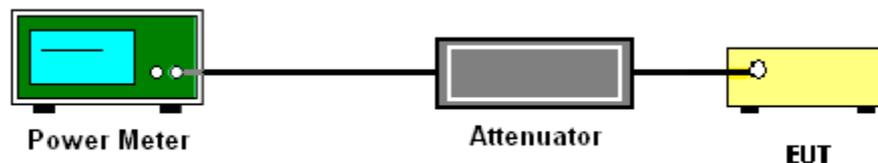

### 3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01. Section F) Maximum power spectral density.


##### # Method SA-2 #

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

1. The testing follows Method SA-2 of FCC KDB 789033 D01 General UNII Test Procedures v01r03.
  - Measure the duty cycle.
  - Set span to encompass the entire emission bandwidth (EBW) of the signal.
  - Set RBW = 300 kHz.
  - Set VBW  $\geq$  1 MHz.
  - Number of points in sweep  $\geq$  2 Span / RBW.
  - Sweep time = auto.
  - Detector = RMS
  - Trace average at least 100 traces in power averaging mode.
  - Add  $10 \log(500\text{kHz}/\text{RBW})$  to the test result.
  - Add  $10 \log(1/x)$ , where  $x$  is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add  $10 \log(1/0.25) = 6$  dB if the duty cycle is 25 percent.

2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.


### 3.3.4 Test Setup

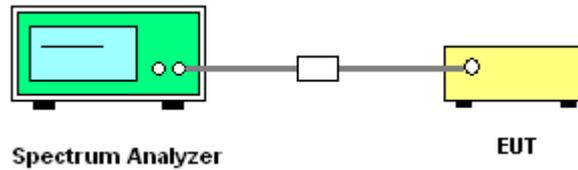



### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

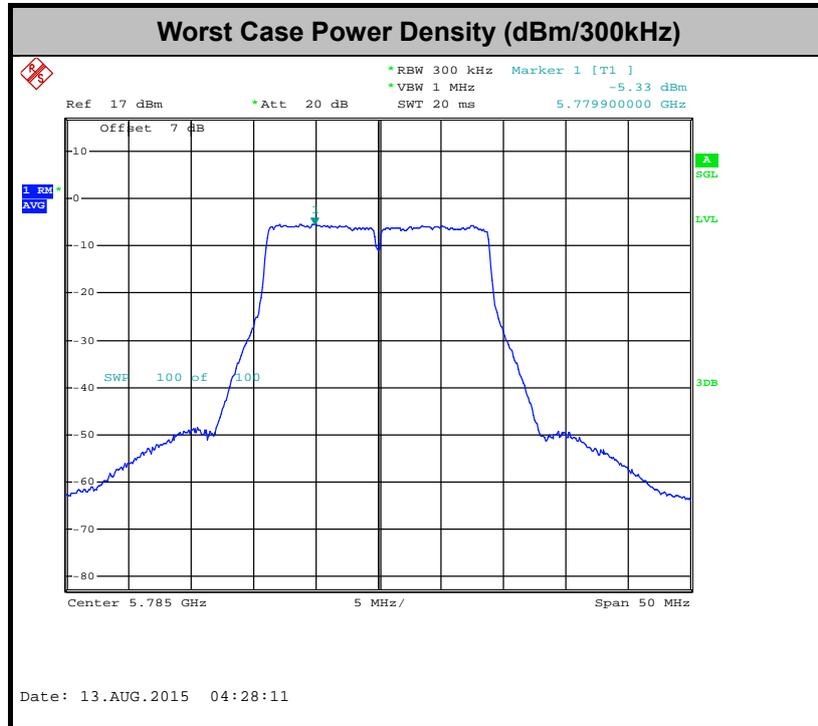



### 3.4 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part15.205.

#### 3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5725-5850 MHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17 dBm/MHz (78.3dBμV/m); for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27 dBm/MHz (68.3dBμV/m).
- (2) Unwanted spurious emissions fallen in restricted bands per FCC Part15.205 shall comply with the general field strength limits set forth in § 15.209 as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

**Note:** The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dBμV/m)
-17	78.3
- 27	68.3

- (3) KDB789033 v01r03 H)2)c)(i) As specified in 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in 15.407(b)(4)). However, an out-of-band emission that complies with both the average and peak limits of 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz peak emission limit.



### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01. Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW ≥ 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold

(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz


- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- $VBW \geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Band	Duty Cycle (%)	T(ms)	1/T(kHz)	VBW Setting
802.11n VHT20	96.42	0.98	1.03	3kHz
802.11n VHT40	93.17	0.49	2.02	3kHz
802.11n VHT80	85.93	0.25	4.04	10kHz


2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

### 3.4.4 Test Setup


For radiated emissions below 30MHz

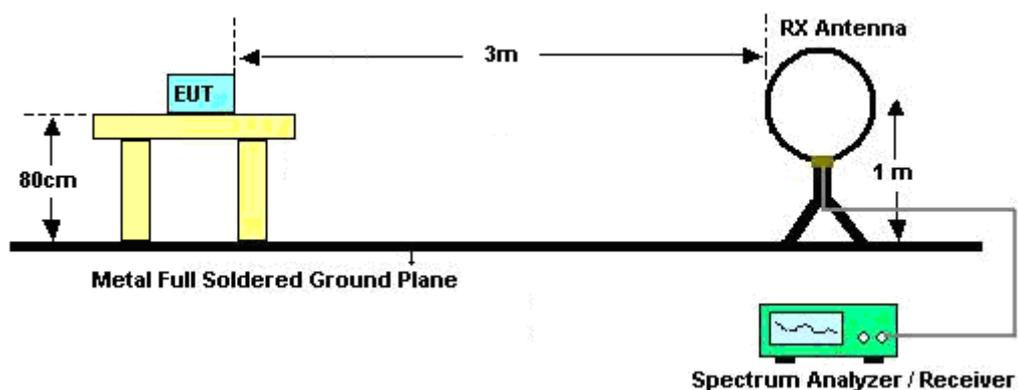

For radiated emissions from 30MHz to 1GHz

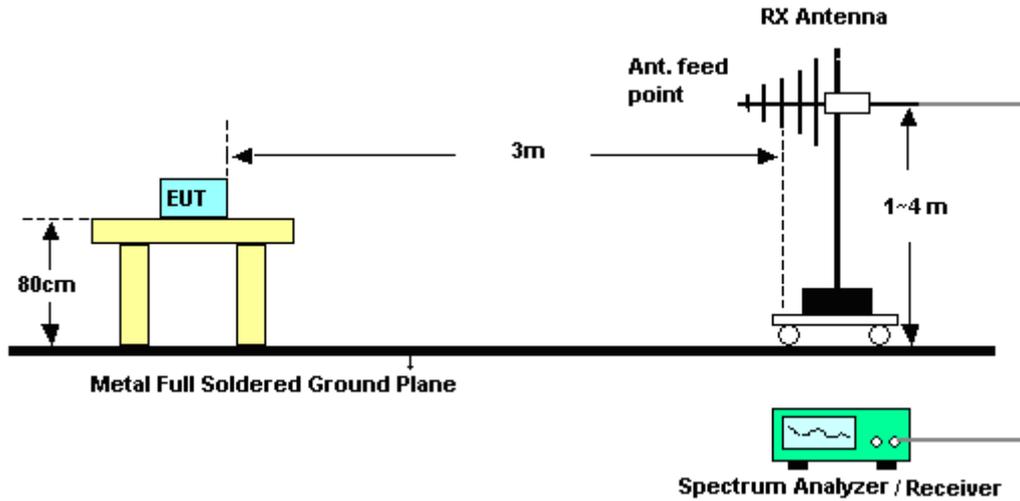

For radiated emissions above 1GHz

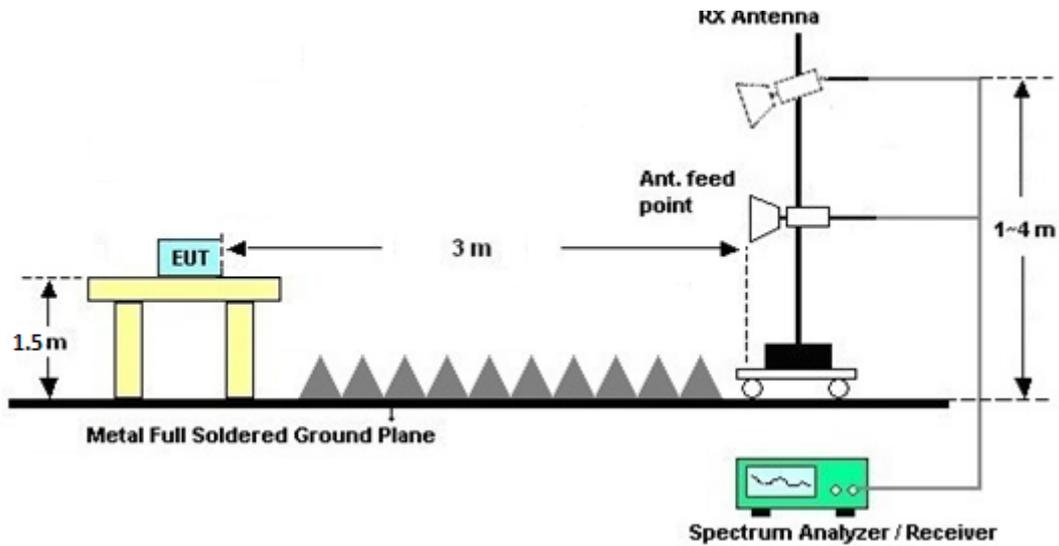

### 3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

### 3.4.6 Test Result of Radiated Band Edges

Please refer to Appendix B.

### 3.4.7 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B.



### 3.5 AC Conducted Emission Measurement

#### 3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.


### 3.5.4 Test Setup

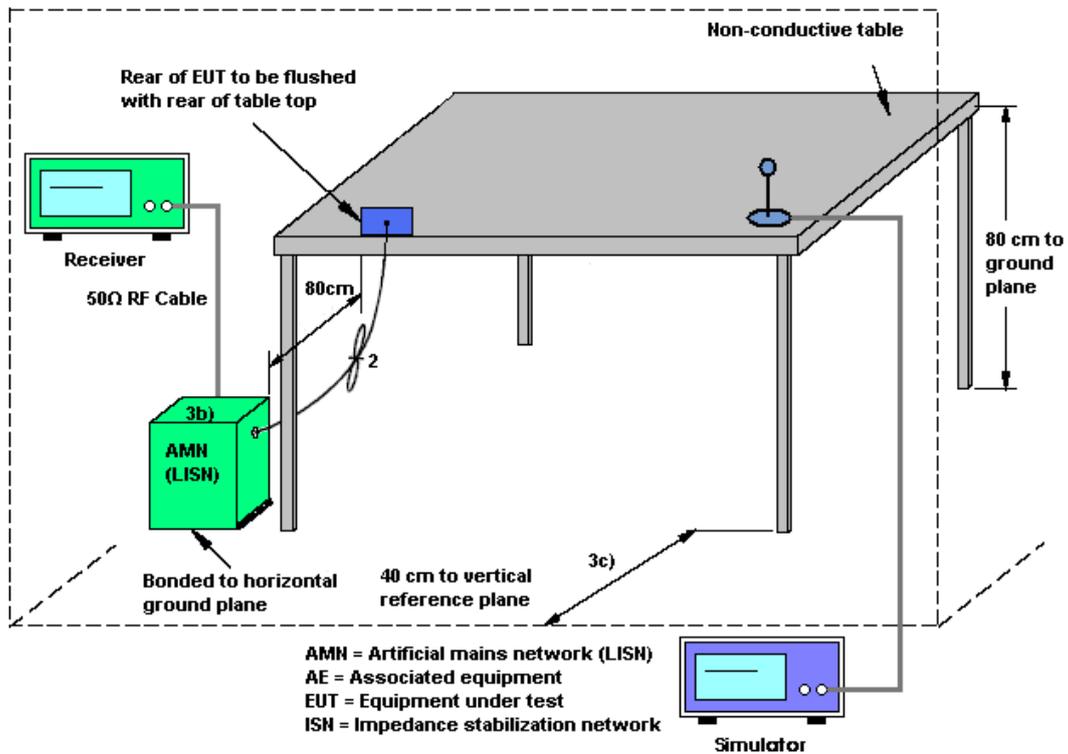



3.5.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	22~24°C
Test Engineer :	Eko Guan	Relative Humidity :	44~46%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN (5GHz) Link + Earphone + USB Cable (Charging from Adapter)		

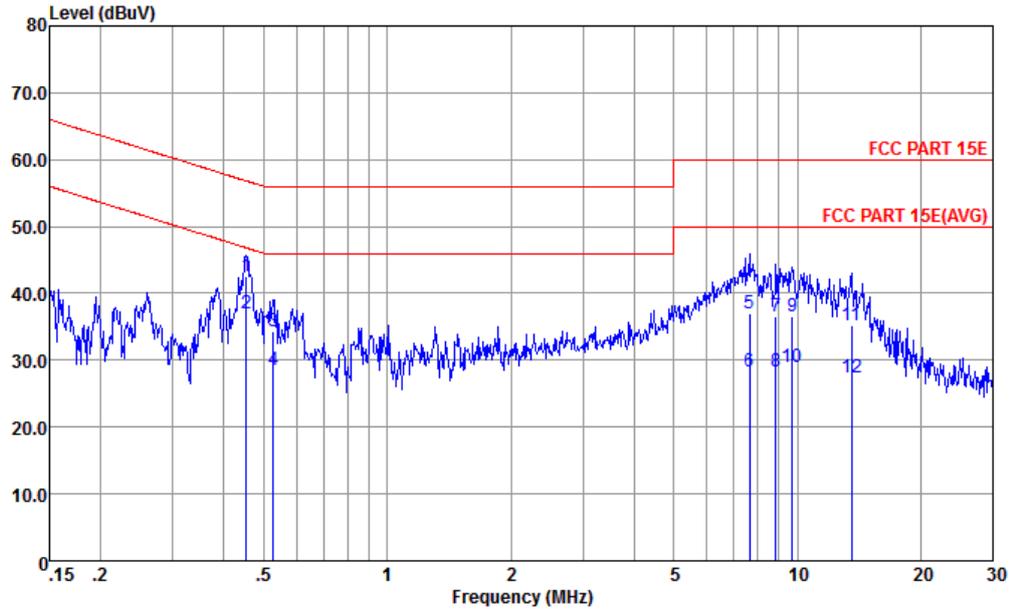


Site : CO01-KS  
Condition : FCC PART 15E LISN-L20140306 LINE

mode : Mode 1

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.45	42.67	-14.13	56.80	31.81	0.24	10.62	QP
2 *	0.45	36.97	-9.83	46.80	26.11	0.24	10.62	Average
3	0.53	34.43	-21.57	56.00	23.60	0.20	10.63	QP
4	0.53	28.53	-17.47	46.00	17.70	0.20	10.63	Average
5	7.65	36.93	-23.07	60.00	25.80	0.20	10.93	QP
6	7.65	28.33	-21.67	50.00	17.20	0.20	10.93	Average
7	8.87	36.45	-23.55	60.00	25.30	0.20	10.95	QP
8	8.87	28.35	-21.65	50.00	17.20	0.20	10.95	Average
9	9.71	36.46	-23.54	60.00	25.30	0.20	10.96	QP
10	9.71	28.96	-21.04	50.00	17.80	0.20	10.96	Average
11	13.55	35.28	-24.72	60.00	24.10	0.20	10.98	QP
12	13.55	27.38	-22.62	50.00	16.20	0.20	10.98	Average



Test Mode :	Mode 1	Temperature :	22~24°C
Test Engineer :	Eko Guan	Relative Humidity :	44~46%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN (5GHz) Link + Earphone + USB Cable (Charging from Adapter)		

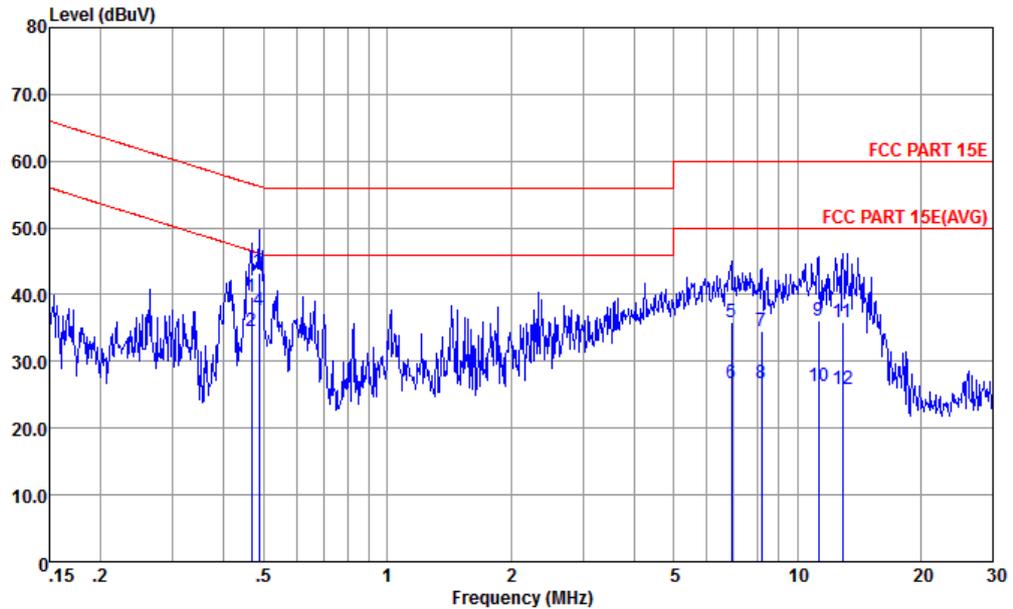

Site : CO01-KS  
 Condition : FCC PART 15E LISN-N20140306 NEUTRAL

mode : Mode 1

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.47	39.75	-16.83	56.58	28.80	0.33	10.62	QP
2	0.47	34.45	-12.13	46.58	23.50	0.33	10.62	Average
3	0.49	43.13	-13.10	56.23	32.20	0.31	10.62	QP
4 *	0.49	37.63	-8.60	46.23	26.70	0.31	10.62	Average
5	6.91	35.92	-24.08	60.00	24.80	0.20	10.92	QP
6	6.91	26.72	-23.28	50.00	15.60	0.20	10.92	Average
7	8.19	34.64	-25.36	60.00	23.50	0.20	10.94	QP
8	8.19	26.84	-23.16	50.00	15.70	0.20	10.94	Average
9	11.26	35.99	-24.01	60.00	24.80	0.22	10.97	QP
10	11.26	26.39	-23.61	50.00	15.20	0.22	10.97	Average
11	12.92	35.85	-24.15	60.00	24.60	0.27	10.98	QP
12	12.92	25.75	-24.25	50.00	14.50	0.27	10.98	Average

## 3.6 Frequency Stability Measurement

### 3.6.1 Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.


### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.6.3 Test Procedures

1. To ensure emission at the band edge is maintained within the authorized band, those values shall be measured by radiation emissions at upper and lower frequency points, and finally compensated by frequency deviation as procedures below.
2. The EUT was operated at the maximum output power, and connected to the spectrum analyzer, which is set to maximum hold function and peak detector. The peak value of the power envelope was measured and noted. The upper and lower frequency points were respectively measured relatively 10dB lower than the measured peak value.
3. The frequency deviation was calculated by adding the upper frequency point and the lower frequency point divided by two. Those detailed values of frequency deviation are provided in table below.

### 3.6.4 Test Setup

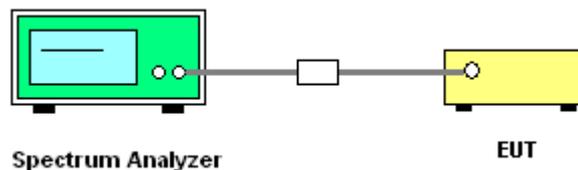

### 3.6.5 Test Result of Frequency Stability

Please refer to Appendix A.



## **3.7 Automatically Discontinue Transmission**

### **3.7.1 Limit of Automatically Discontinue Transmission**

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

### **3.7.2 Measuring Instruments**

The measuring equipment is listed in the section 4 of this test report.

### **3.7.3 Test Result of Automatically Discontinue Transmission**

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



## **3.8 Antenna Requirements**

### **3.8.1 Standard Applicable**

According to FCC 47 CFR Section 15.407(a)(1)(2) ,if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### **3.8.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.8.3 Antenna Gain**

The antenna gain is less than 6 dBi. Therefore, it is not necessary to reduce maximum output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Oct. 28, 2014	Aug. 13, 2015~ Aug. 18, 2015	Oct. 27, 2015	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	30MHz~40GHz	Jan. 23, 2015	Aug. 13, 2015~ Aug. 18, 2015	Jan. 22, 2016	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 23, 2015	Aug. 13, 2015~ Aug. 18, 2015	Jan. 22, 2016	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	-40~+150°C	Oct. 25, 2014	Aug. 13, 2015~ Aug. 18, 2015	Oct. 24, 2015	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz; Max 30dBm	Sep. 29, 2014	Aug. 14, 2015	Sep. 28, 2015	Radiation (03CH02-KS)
Spectrum Analyzer	R&S	FSV40	101040	10kHz~40GHz; Max 30dBm	Sep. 25, 2014	Aug. 14, 2015	Sep. 24, 2015	Radiation (03CH02-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 13, 2014	Aug. 14, 2015	Nov. 12, 2015	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6112D	37879	30MHz~2GHz	Sep. 13, 2014	Aug. 14, 2015	Sep. 12, 2015	Radiation (03CH02-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Nov. 08, 2014	Aug. 14, 2015	Nov. 07, 2015	Radiation (03CH02-KS)
Active Horn Antenna	com-power	AHA-118	701030	1GHz~18GHz	Nov. 08, 2014	Aug. 14, 2015	Nov. 07, 2015	Radiation (03CH02-KS)
SHF-EHF Horn	com-power	AH-840	101070	18GHz~40GHz	Sep. 04, 2014	Aug. 14, 2015	Sep. 03, 2015	Radiation (03CH02-KS)
Amplifier	com-power	PA-103A	161069	1kHz~1000MHz / 32 dB	May 04, 2015	Aug. 14, 2015	May 03, 2016	Radiation (03CH02-KS)
Amplifier	Agilent	8449B	3008A02384	1GHz~26.5GHz Gain 30dB	Oct. 28, 2014	Aug. 14, 2015	Oct. 27, 2015	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	6160100024 73	N/A	NCR	Aug. 14, 2015	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Aug. 14, 2015	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Aug. 14, 2015	NCR	Radiation (03CH02-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz	May 04, 2015	Jul. 28, 2015	May 03, 2016	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 25, 2014	Jul. 28, 2015	Oct. 24, 2015	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Oct. 25, 2014	Jul. 28, 2015	Oct. 24, 2015	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP0000008 11	AC 0V~300V, 45Hz~1000Hz	Oct. 25, 2014	Jul. 28, 2015	Oct. 24, 2015	Conduction (CO01-KS)



## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.3dB
---	-------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.1dB
---	-------



## **Appendix A. Conducted Test Results**

Test Engineer:	Issac Song	Temperature:	21~25	°C
Test Date:	2015/8/13~2015/8/18	Relative Humidity:	51~54	%

**TEST RESULTS DATA**  
**6dB**

Band IV							
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	6 dB Bandwidth (MHz)	FCC 6dB Bandwidth Limit (MHz)	Pass/Fail
VHT20	MCS0	1	149	5745	17.54	0.5	Pass
VHT20	MCS0	1	157	5785	17.54	0.5	Pass
VHT20	MCS0	1	165	5825	17.56	0.5	Pass
VHT40	MCS0	1	151	5755	35.12	0.5	Pass
VHT40	MCS0	1	159	5795	35.12	0.5	Pass
VHT80	MCS0	1	155	5775	73.92	0.5	Pass

**TEST RESULTS DATA**  
**Average Power Table**

FCC Band IV										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)		Pass/Fail
VHT20	MCS0	1	149	5745	0.16	11.13	30.00	0.30		Pass
VHT20	MCS0	1	157	5785	0.16	10.88	30.00	0.30		Pass
VHT20	MCS0	1	165	5825	0.16	10.90	30.00	0.30		Pass
VHT40	MCS0	1	151	5755	0.31	10.74	30.00	0.30		Pass
VHT40	MCS0	1	159	5795	0.31	10.49	30.00	0.30		Pass
VHT80	MCS0	1	155	5775	0.66	11.05	30.00	0.30		Pass

**TEST RESULTS DATA**  
**Power Spectral Density**

Band IV										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	10log (500kHz /RBW) Factor (dB)	Average Power Density (dBm/500kHz)	Average PSD Limit (dBm/500kHz)	DG (dBi)	Pass/Fail
VHT20	MCS0	1	149	5745	0.16	2.22	-3.06	30.00	0.30	Pass
VHT20	MCS0	1	157	5785	0.16	2.22	-2.95	30.00	0.30	Pass
VHT20	MCS0	1	165	5825	0.16	2.22	-3.27	30.00	0.30	Pass
VHT40	MCS0	1	151	5755	0.31	2.22	-6.01	30.00	0.30	Pass
VHT40	MCS0	1	159	5795	0.31	2.22	-6.06	30.00	0.30	Pass
VHT80	MCS0	1	155	5775	0.66	2.22	-7.80	30.00	0.30	Pass

**TEST RESULTS DATA**  
**Frequency Stability**

Band IV										
Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	Center Frequency (MHz)	Frequency Deviation (MHz)	Frequency Stability (ppm)	Temperature (°C)	Voltage (V)	Note
VHT20	6Mbps	1	149	5745	5744.950	-0.050	-8.70	20	3.6	
VHT20	6Mbps	1	149	5745	5745.000	0.000	0.00	20	4.2	
VHT20	6Mbps	1	149	5745	5744.950	-0.050	-8.70	20	3.8	
VHT20	6Mbps	1	149	5745	5744.950	-0.050	-8.70	-30	3.8	
VHT20	6Mbps	1	149	5745	5744.950	-0.050	-8.70	50	3.8	



## Appendix B. Radiated Spurious Emission

### Band 4 5725~5850MHz

#### WIFI 802.11ac VHT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11ac VHT20 CH 149 5745MHz	*	5740	94.21	-	-	87.83	35.19	7.48	36.29	150	23	P	H
	*	5738	84.79	-	-	78.41	35.19	7.48	36.29	150	23	A	H
		5706.04	51.14	-17.16	68.3	44.8	35.16	7.45	36.27	150	23	P	H
		5724.52	53.55	-24.75	78.3	47.18	35.18	7.47	36.28	150	23	P	H
	*	5740	94.01	-	-	87.63	35.19	7.48	36.29	150	0	P	V
	*	5740	84.28	-	-	77.9	35.19	7.48	36.29	150	0	A	V
		5707.4	51.53	-16.77	68.3	45.19	35.16	7.45	36.27	150	0	P	V
	5724.44	53.91	-24.39	78.3	47.54	35.18	7.47	36.28	150	0	P	V	
802.11ac VHT20 CH 157 5785MHz	*	5780	94.6	-	-	88.18	35.22	7.51	36.31	150	149	P	H
	*	5780	84.35	-	-	77.93	35.22	7.51	36.31	150	149	A	H
	*	5780	95.4	-	-	88.98	35.22	7.51	36.31	174	169	P	V
	*	5778	85.32	-	-	78.9	35.22	7.51	36.31	174	169	A	V
802.11ac VHT20 CH 165 5825MHz	*	5820	94.93	-	-	88.44	35.27	7.57	36.35	160	117	P	H
	*	5820	85.21	-	-	78.72	35.27	7.57	36.35	160	117	A	H
		5854.96	51.61	-26.69	78.3	45.07	35.3	7.61	36.37	160	117	P	H
		5876.96	52.03	-16.27	68.3	45.48	35.3	7.63	36.38	160	117	P	H
	*	5830	93.9	-	-	87.41	35.27	7.57	36.35	150	135	P	V
	*	5832	84.66	-	-	78.17	35.27	7.57	36.35	150	135	A	V
		5855.2	51.18	-27.12	78.3	44.64	35.3	7.61	36.37	150	135	P	V
	5878.32	51.95	-16.35	68.3	45.4	35.3	7.63	36.38	150	135	P	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**Band 4 5725~5850MHz**  
**WIFI 802.11ac VHT20 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT20 CH 149 5745MHz		11490	49.01	-24.99	74	36.28	38.99	10.77	37.03	150	235	P	H
		11490	47.79	-26.21	74	35.06	38.99	10.77	37.03	150	228	P	V
802.11ac VHT20 CH 157 5785MHz		11571	48.35	-25.65	74	35.5	39.06	10.8	37.01	150	218	P	H
		11571	48.54	-25.46	74	35.69	39.06	10.8	37.01	150	198	P	V
802.11ac VHT20 CH 165 5825MHz		11649	49.38	-24.62	74	36.43	39.11	10.83	36.99	150	261	P	H
		11649	50.25	-23.75	74	37.3	39.11	10.83	36.99	150	185	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**Band 4 5725~5850MHz**  
**WIFI 802.11ac VHT40 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11ac VHT40 CH 151 5755MHz	*	5752	93.04	-	-	86.63	35.21	7.5	36.3	216	129	P	H
	*	5744	83.01	-	-	76.63	35.19	7.48	36.29	216	129	A	H
		5712.2	53.36	-14.94	68.3	47.02	35.16	7.45	36.27	216	129	P	H
		5723.88	58.06	-20.24	78.3	51.69	35.18	7.47	36.28	216	129	P	H
	*	5744	93.27	-	-	86.89	35.19	7.48	36.29	243	75	P	V
	*	5744	83.2	-	-	76.82	35.19	7.48	36.29	243	75	A	V
		5713.88	54.48	-13.82	68.3	48.14	35.16	7.45	36.27	243	75	P	V
	5724.76	60.01	-18.29	78.3	53.64	35.18	7.47	36.28	243	75	P	V	
802.11ac VHT40 CH 159 5795MHz	*	5786	93.4	-	-	86.95	35.24	7.53	36.32	161	152	P	H
	*	5784	84.26	-	-	77.84	35.22	7.51	36.31	161	152	A	H
		5852	50.83	-27.47	78.3	44.32	35.28	7.59	36.36	161	152	P	H
		5866.56	51.56	-16.74	68.3	45.02	35.3	7.61	36.37	161	152	P	H
	*	5782	94.53	-	-	88.11	35.22	7.51	36.31	210	148	P	V
	*	5786	84.79	-	-	78.34	35.24	7.53	36.32	210	148	A	V
		5858.64	50.74	-27.56	78.3	44.2	35.3	7.61	36.37	210	148	P	V
	5875.36	51.66	-16.64	68.3	45.11	35.3	7.63	36.38	210	148	P	V	
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**Band 4 5725~5850MHz**  
**WIFI 802.11ac VHT40 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11ac VHT40 CH 151		11511	48.4	-25.6	74	35.66	39	10.77	37.03	150	183	P	H
5755MHz		11511	48.23	-25.77	74	35.49	39	10.77	37.03	150	221	P	V
802.11ac VHT40 CH 159		11589	48.11	-25.89	74	35.24	39.07	10.81	37.01	150	336	P	H
5795MHz		11589	48.2	-25.8	74	35.33	39.07	10.81	37.01	150	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**Band 4 5725~5850MHz**  
**WIFI 802.11ac VHT80 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11ac VHT80 CH 155 5775MHz	*	5756	91.68	-	-	85.27	35.21	7.5	36.3	150	64	P	H
	*	5756	82.09	-	-	75.68	35.21	7.5	36.3	150	64	A	H
		5714.84	56.41	-11.89	68.3	50.07	35.16	7.45	36.27	150	64	P	H
		5724.36	58.03	-20.27	78.3	51.66	35.18	7.47	36.28	150	64	P	H
		5853.36	51.34	-26.96	78.3	44.83	35.28	7.59	36.36	150	64	P	H
		5880.32	51.9	-16.4	68.3	45.35	35.3	7.63	36.38	150	64	P	H
	*	5748	91.89	-	-	85.51	35.19	7.48	36.29	150	195	P	V
	*	5750	82.13	-	-	75.75	35.19	7.48	36.29	150	195	A	V
		5705.88	56.69	-11.61	68.3	50.35	35.16	7.45	36.27	150	195	P	V
		5724.6	56.99	-21.31	78.3	50.62	35.18	7.47	36.28	150	195	P	V
	5857.04	51.85	-26.45	78.3	45.31	35.3	7.61	36.37	150	195	P	V	
	5887.28	52.67	-15.63	68.3	46.12	35.3	7.63	36.38	150	195	P	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80		11550	47.9	-26.1	74	35.09	39.04	10.79	37.02	150	58	P	H
CH 155 5775MHz		11550	48.51	-25.49	74	35.7	39.04	10.79	37.02	150	212	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

5GHz WIFI 802.11ac VHT20 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
5GHz 802.11ac VHT20 LF		48.43	20.59	-19.41	40	45.13	9.49	0.91	34.94			P	H
		105.66	25.6	-17.9	43.5	47.6	12	1.33	35.33			P	H
		153.19	24.13	-19.37	43.5	46.37	11.09	1.6	34.93			P	H
		216.24	31.93	-14.07	46	54.98	10.05	1.92	35.02	100	164	P	H
		297.72	29.09	-16.91	46	48.16	13.42	2.27	34.76			P	H
		335.55	28.74	-17.26	46	47.05	14.28	2.4	34.99			P	H
		34.85	31.27	-8.73	40	48.16	17.6	0.78	35.27			P	V
		48.43	31.28	-8.72	40	55.82	9.49	0.91	34.94	133	0	P	V
		68.8	22.24	-17.76	40	49.13	6.92	1.07	34.88			P	V
		101.78	19.05	-24.45	43.5	41.02	12.07	1.3	35.34			P	V
		219.15	27.57	-18.43	46	50.47	10.17	1.93	35			P	V
	421.88	28.54	-17.46	46	44.36	16.55	2.71	35.08			P	V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Emission below 1GHz

5GHz WIFI 802.11ac VHT40 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
5GHz 802.11ac VHT40 LF		30	19.77	-20.23	40	35.16	19.1	0.73	35.22			P	H
		120.21	26.31	-17.19	43.5	48.4	11.74	1.42	35.25			P	H
		173.56	19.59	-23.91	43.5	42.49	10.35	1.7	34.95			P	H
		250.19	30.95	-15.05	46	52.34	11.4	2.08	34.87	146	231	P	H
		288.02	23.41	-22.59	46	42.95	13.01	2.23	34.78			P	H
		380.17	24.25	-21.75	46	41.28	15.57	2.57	35.17			P	H
		32.91	24.06	-15.94	40	40.35	18.2	0.76	35.25			P	V
		51.34	24.57	-15.43	40	50.32	8.51	0.94	35.2	100	184	P	V
		175.5	17.37	-26.13	43.5	40.33	10.28	1.71	34.95			P	V
		252.13	27.1	-18.9	46	48.4	11.48	2.08	34.86			P	V
		385.99	27.12	-18.88	46	43.96	15.76	2.59	35.19			P	V
	530.52	24.03	-21.97	46	37.63	17.85	3.07	34.52			P	V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Emission below 1GHz

5GHz WIFI 802.11ac VHT80 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
5GHz 802.11ac VHT80 LF		30	22.99	-17.01	40	38.38	19.1	0.73	35.22			P	H
		106.63	25.81	-17.69	43.5	47.81	11.98	1.34	35.32			P	H
		220.12	32.01	-13.99	46	54.86	10.21	1.94	35	154	269	P	H
		288.02	28.3	-17.7	46	47.84	13.01	2.23	34.78			P	H
		335.55	27.82	-18.18	46	46.13	14.28	2.4	34.99			P	H
		428.67	28.31	-17.69	46	43.96	16.66	2.73	35.04			P	H
		34.85	31.49	-8.51	40	48.38	17.6	0.78	35.27	100	165	P	V
		47.46	30.22	-9.78	40	54.35	9.82	0.9	34.85			P	V
		68.8	21.72	-18.28	40	48.61	6.92	1.07	34.88			P	V
		219.15	27.82	-18.18	46	50.72	10.17	1.93	35			P	V
		345.25	26.96	-19.04	46	45.08	14.49	2.44	35.05			P	V
	425.76	27.92	-18.08	46	43.64	16.62	2.72	35.06			P	V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- 1. Level(dBμV/m) =  
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- 2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

- 1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
- 2. Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

- 1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
- 2. Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.