



RF TEST REPORT

Applicant ZTE Corporation

FCC ID SQR-ZTEBLADEA0621

Product LTE/WCDMA/GSM (GPRS) Multi-Mode Digital
Mobile Phone

Model ZTE BLADE A0621, ZTE Blade A0621, ZTE
blade A0621, BLADE A0621, Blade A6, blade A0621
ZTE BLADE A6, ZTE Blade A6, ZTE blade A6,
BLADE A6, Blade A6, blade A6

Report No. RXA1706-0195RF04

Issue Date July 26, 2017

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 15C (2017)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Performed by: Xianqing Li

Approved by: Kai Xu

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000

Table of Contents

1	Test Laboratory	4
1.1	Notes of the Test Report	4
1.2	Test facility	4
1.3	Testing Location	5
2	General Description of Equipment under Test	6
2.1	Applied Standards	8
3	Information about the FHSS characteristics	9
3.1	Pseudorandom Frequency Hopping Sequence	9
3.2	Equal Hopping Frequency Use	10
3.3	System Receiver Input Bandwidth	10
4	Test Information	11
4.1	Test Mode	11
4.2	Peak Power Output –Conducted	12
4.3	Occupied Bandwidth (20dB)	16
4.4	Frequency Separation	20
4.5	Time of Occupancy (Dwell Time)	22
4.6	Band Edge Compliance	24
4.7	Spurious Radiated Emissions in the Restricted Band	27
4.8	Number of hopping Frequency	30
4.9	Spurious RF Conducted Emissions	32
4.10	Radiates Emission	35
4.11	Conducted Emission	62
5	Main Test Instruments	65
	ANNEX A: EUT Appearance and Test Setup	66
A.1	EUT Appearance	66
A.2	Test Setup	69

Summary of Measurement Results

Number	Summary of measurements of results	Clause in FCC rules	Verdict
1	Peak Power Output -Conducted	15.247(b)(1)	PASS
2	Occupied Bandwidth (20dB)	15.247(a)(1)	PASS
3	Frequency Separation	15.247(a)(1)	PASS
4	Time of Occupancy (Dwell Time)	15.247(a)(1)(iii)	PASS
5	Band Edge Compliance	15.247(d)	PASS
6	Spurious Radiated Emissions in the restricted band	15.247(d),15.205,15.209	PASS
7	Number of Hopping Frequency	15.247(a)(1)(iii)	PASS
8	Spurious RF Conducted Emissions	15.247(d)	PASS
9	Radiates Emission	15.247(d),15.205,15.209	PASS
10	AC Power Line Conducted Emission	15.207	PASS
Date of Testing: June 21, 2017 ~ July 6, 2017			

1 Test Laboratory

1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above. This report must not be used by the client to claim product certification, approval, or endorsement by any government agencies.

1.2 Test facility

CNAS (accreditation number: L2264)

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

FCC (recognition number is 428261)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

IC (recognition number is 8510A)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement.

VCCI (recognition number is C-4595, T-2154, R-4113, G-10766)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Japan to perform electromagnetic emission measurement.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

1.3 Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2 General Description of Equipment under Test

Client Information

Applicant	ZTE Corporation
Applicant address	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China
Manufacturer	ZTE Corporation
Manufacturer address	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

General information

EUT Description			
Model:	ZTE BLADE A0621, ZTE Blade A0621, ZTE blade A0621, BLADE A0621, Blade A6, blade A0621 ZTE BLADE A6, ZTE Blade A6, ZTE blade A6, BLADE A6, Blade A6, blade A6		
IMEI:	865529030009429		
HW Version:	u6jA		
SW Version:	GEN_ES_A0621_V1.0		
Power Supply:	Battery/AC adapter		
Antenna Type:	Internal Antenna		
Antenna Connector:	A permanently attached antenna (meet with the standard FCC Part 15.203 requirement)		
Antenna Gain:	-6.67 dBi for 2402MHz		
	-7.02 dBi for 2441MHz		
	-7.02 dBi for 2480MHz		
Test Mode(s):	Basic Rate	Enhanced Data Rate(EDR)	
Modulation Type:	Frequency Hopping Spread Spectrum (FHSS)		
	GFSK	π/4 DQPSK	8DPSK
Packet Type: (Maximum Payload)	DH5	2DH5	3DH5
Max. Conducted Power	5.088dBm		
Tested Frequency Range(s):	2400 ~ 2483.5 MHz		
EUT Accessory			
Adapter 1	Manufacturer: RUIJING Model: STC-A521A-Z Input power: 100-240V AC 50/60Hz 0.4A Output power: 5V DC 2.1A		
Adapter 2	Manufacturer: SALCOMP		



	Model: STC-A521A-Z Input power: 100-240V AC 50/60Hz 0.4A Output power: 5V DC 2.1A
Battery	Manufacturer: SCUD (Fujian) Electronics Co., LTD Model: Li3849T44P8h906450 Power Rating: DC 3.85V, 4870mAh, Li-ion
Earphone 1	Manufacturer: FDC Model: 500002757304
Earphone 2	Manufacturer: SANGFAI ELECTRICAL MANUFACTURE LIMITED odel: SF-880KM-53
USB Cable 1	Manufacturer: LUXSHARE-ICT 100cm Cable, Shielded
USB Cable 2	Manufacturer: Yi Hu Xing Electronic Co., Ltd 98cm Cable, Shielded
Remark: 1. The information of the EUT is declared by the manufacturer. 2. There is more than one Adapter, each one should be applied throughout the compliance test respectively, however, only the worst case (Adapter 1) will be recorded in this report.	



2.1 Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards

- **FCC CFR47 Part 15C (2017) Radio Frequency Devices**
- **ANSI C63.10 (2013)**
- **DA00-705 Filing and Frequency Measurement Guidelines For Frequency Hopping Spread Spectrum System (2000).**


3 Information about the FHSS characteristics

3.1 Pseudorandom Frequency Hopping Sequence

Frequency Hopping Systems. A spread spectrum system in which the carrier is modulated with the coded information in a conventional manner causing a conventional spreading of the RF energy about the frequency carrier. The frequency of the carrier is not fixed but changes at fixed intervals under the direction of a coded sequence. The wide RF bandwidth needed by such a system is not required by spreading of the RF energy about the carrier but rather to accommodate the range of frequencies to which the carrier frequency can hop. The test of a frequency hopping system is that the near term distribution of hops appears random, the long term distribution appears evenly distributed over the hop set, and sequential hops are randomly distributed in both direction and magnitude of change in the hop set.

The selection scheme chooses a segment of 32 hop frequencies spanning about 64 MHz and visits these hops in a pseudo-random order. Next, a different 32-hop segment is chosen, etc. In the page, master page response, slave page response, page scan, inquiry, inquiry response and inquiry scan hopping sequences, the same 32-hop segment is used all the time (the segment is selected by the address; different devices will have different paging segments).

When the basic channel hopping sequence is selected, the output constitutes a pseudo-random sequence that slides through the 79 hops. The principle is depicted in the figure below.

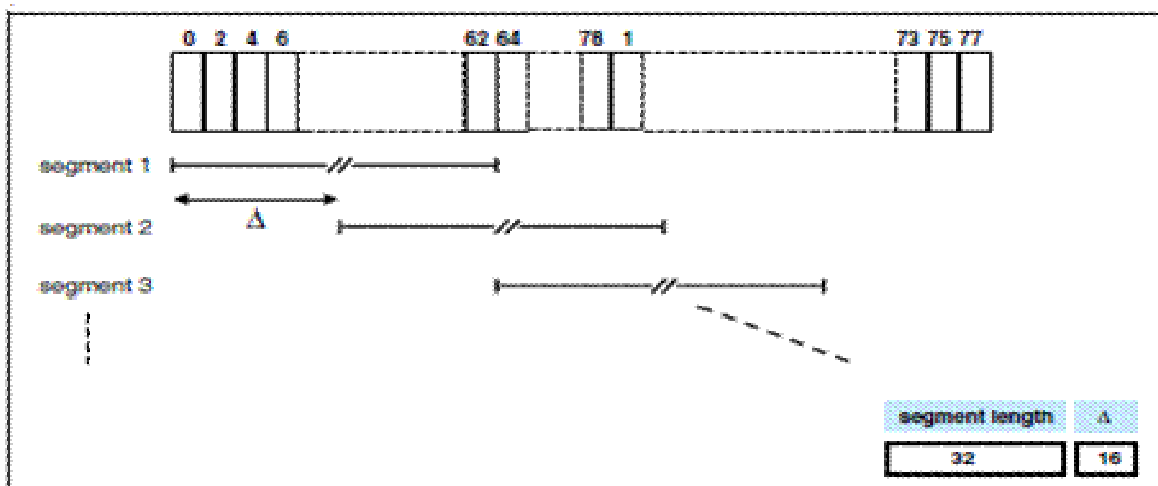

Hop selection scheme in CONNECTION state.

Pseudorandom Frequency Hopping Sequence Table as below:

Channel: 08, 24, 40, 56, 40, 56, 72, 09, 01, 09, 33, 41, 33, 41, 65, 73, 53, 69, 06, 22, 04, 20, 36, 52, 38, 46, 70, 78, 68, 76, 21, 29, 10, 26, 42, 58, 44, 60, 76, 13, 03, 11, 35, 43, 37, 45, 69, 77, 55, 71, 08, 24, 08, 24, 40, 56, 40, 48, 72, 01, 72, 01, 25, 33, 12, 28, 44, 60, 42, 58, 74, 11, 05, 13, 37, 45, etc.

Each frequency used equally on the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.



3.2 Equal Hopping Frequency Use

All Bluetooth units participating in the Pico net are time and hop-synchronized to the channel. Each new transmission event begins on the next channel in the hopping sequence after the final channel used in the previous transmission event.

3.3 System Receiver Input Bandwidth

Each channel bandwidth is 1MHz. The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

4 Test Information

4.1 Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.

Test Modes		
Band	Radiated Test Cases	Conducted Test Cases
BT	3DH5 8DPSK (Channel 0/39/78)	DH5 GFSK(Channel 0/39/78) 2DH5 $\pi/4$ -DQPSK(Channel 0/39/78) 3DH5 8DPSK(Channel 0/39/78)

Note: The maximum RF output power levels are 3DH5 for 8DPSK modulation, For RSE and CSE, only the maximum RF output power is chosen.

4.2 Peak Power Output –Conducted


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

During the process of the testing, The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss. The EUT is controlled by the Bluetooth test set to ensure max power transmission with proper modulation. The peak detector is used. RBW is set to 2 MHz; VBW is set to 6 MHz. These measurements have been tested at following channels: 0, 39, and 78.

Test Setup

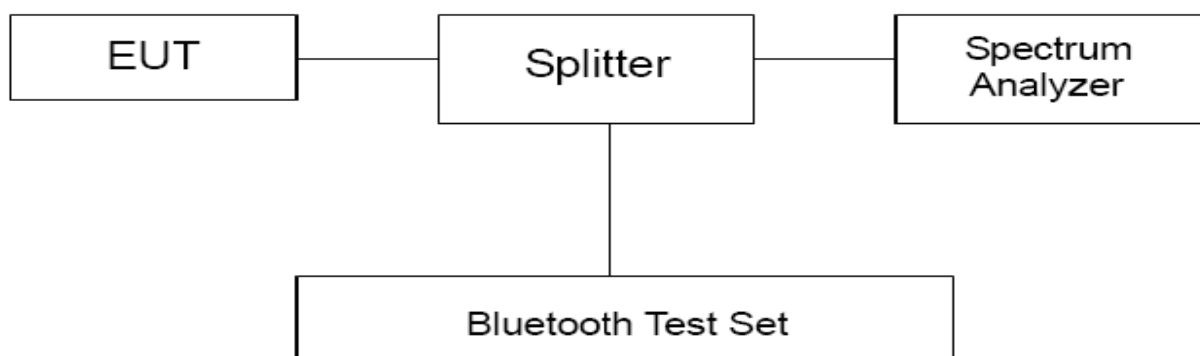

Limits

Rule Part 15.247 (b) (1) specifies that " For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts."

Peak Output Power	$\leq 0.125W$ (21dBm)
-------------------	-----------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U=0.44$ dB.


**Test Results**

Channel	Frequency (MHz)	Peak Output Power (dBm)			Conclusion
		DH5	2DH5	3DH5	
0	2402	3.545	4.492	4.944	PASS
39	2441	3.643	4.638	5.088	PASS
78	2480	3.235	4.135	4.560	PASS

Note: The measured power density (dBm) has the offset with cable loss already.




BT DH5 CH0, Carrier frequency (MHz): 2402

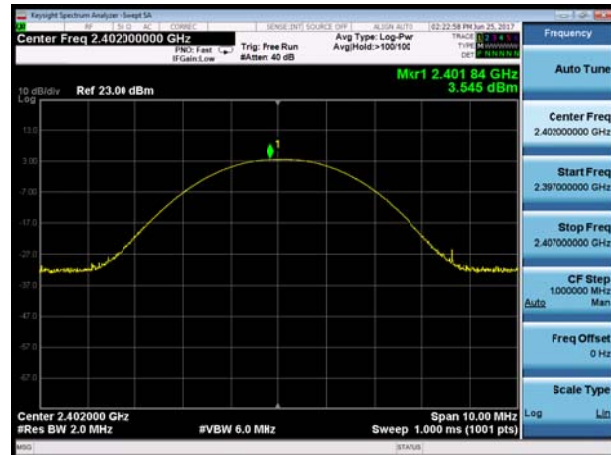


BT 2DH5 CH0, Carrier frequency (MHz): 2402




BT DH5 CH39, Carrier frequency (MHz): 2441

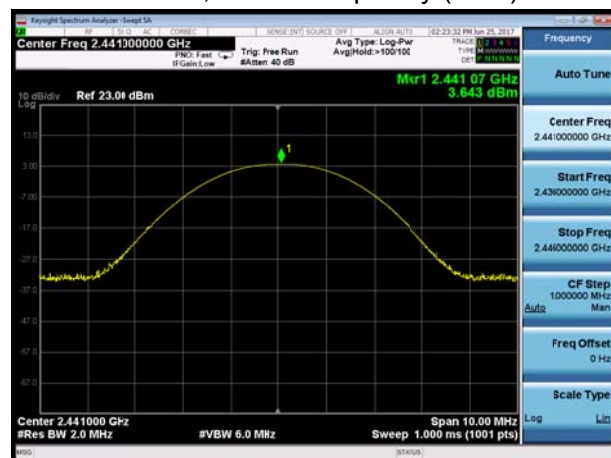


BT 2DH5 CH39, Carrier frequency (MHz): 2441

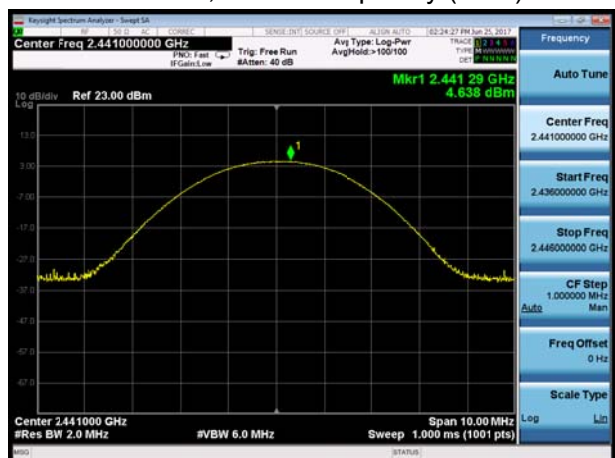

BT DH5 CH78, Carrier frequency (MHz): 2480

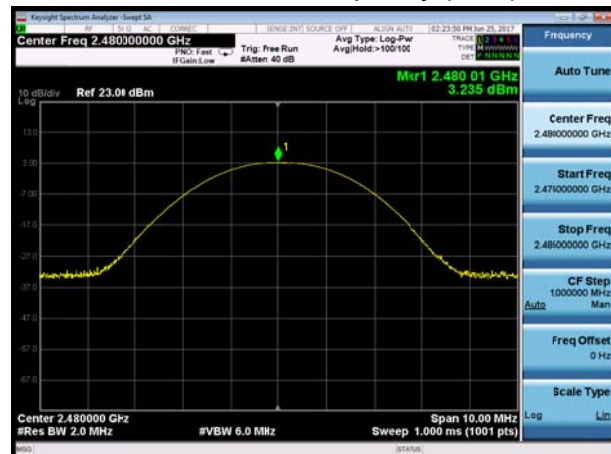

BT 2DH5 CH78, Carrier frequency (MHz): 2480

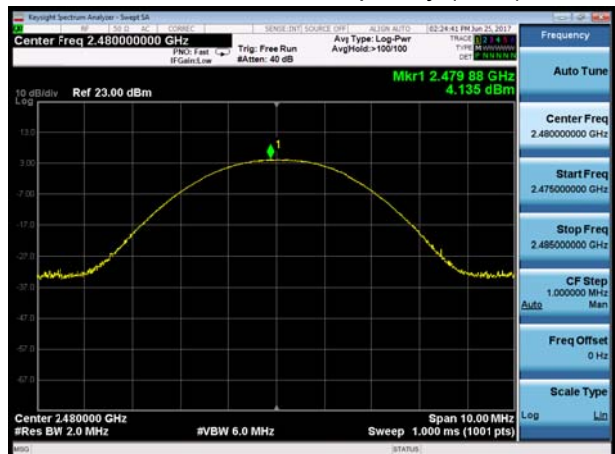




BT 3DH5 CH0, Carrier frequency (MHz): 2402



BT 3DH5 CH39, Carrier frequency (MHz): 2441



BT 3DH5 CH78, Carrier frequency (MHz): 2480

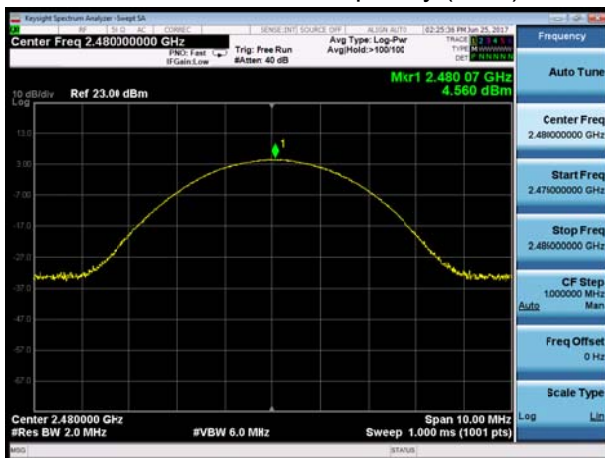

4.3 Occupied Bandwidth (20dB)


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss. The occupied bandwidth is measured using spectrum analyzer. RBW is set to 30kHz and VBW is set to 100kHz on spectrum analyzer. -20dB occupied bandwidths are recorded.

Test Setup

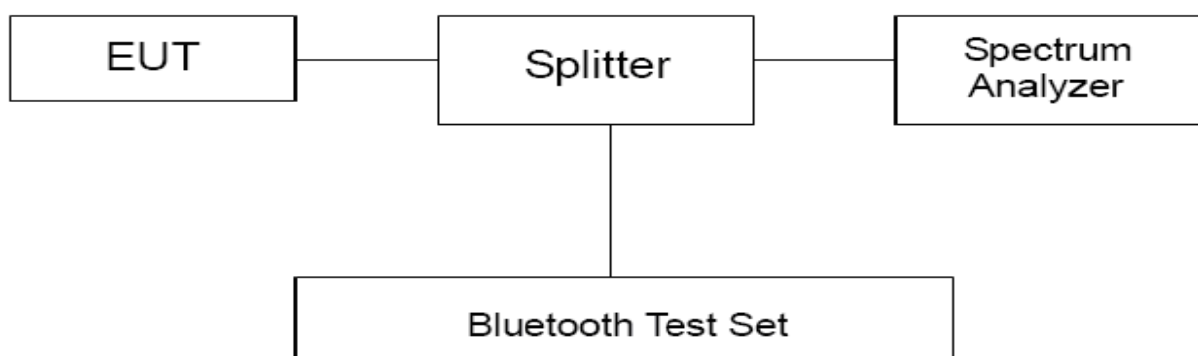

Limits

No specific occupied bandwidth requirements in part 15.247(a) (1).

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U=936$ Hz.

**Test Results**


Mode	Channel	Frequency (MHz)	20dB Bandwidth(kHz)
DH5	0	2402	940.9
DH5	39	2441	940.9
DH5	78	2480	939.2
2DH5	0	2402	1280
2DH5	39	2441	1278
2DH5	78	2480	1297
3DH5	0	2402	1270
3DH5	39	2441	1274
3DH5	78	2480	1277




BT DH5 CH0, Carrier frequency (MHz): 2402




BT 2DH5 CH0, Carrier frequency (MHz): 2402

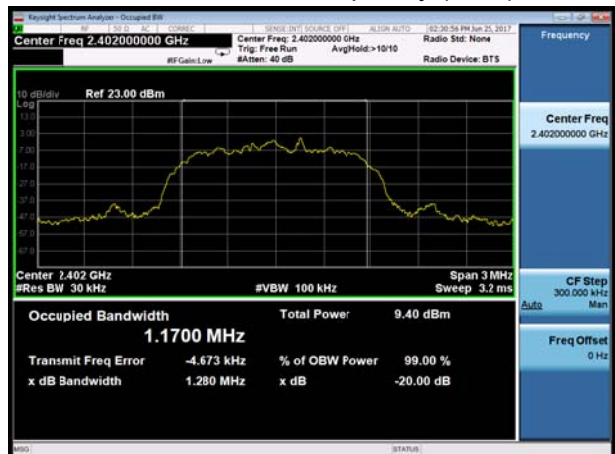

BT DH5 CH39, Carrier frequency (MHz): 2441

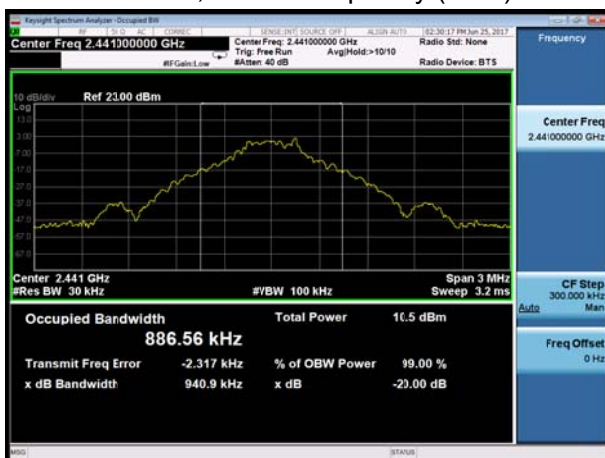


BT 2DH5 CH39, Carrier frequency (MHz): 2441

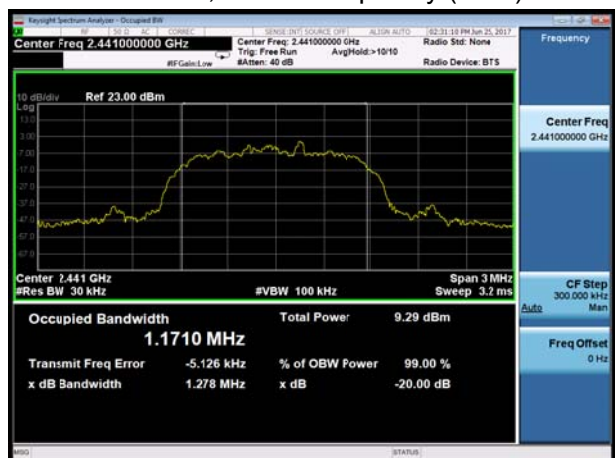

BT DH5 CH78, Carrier frequency (MHz): 2480



BT 2DH5 CH78, Carrier frequency (MHz): 2480

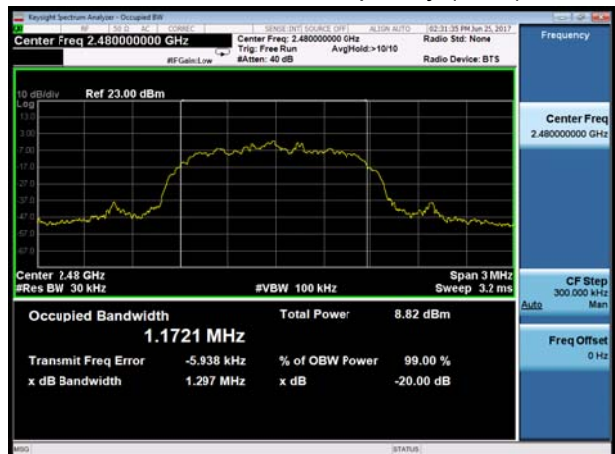





BT 3DH5 CH0, Carrier frequency (MHz): 2402



BT 3DH5 CH39, Carrier frequency (MHz): 2441

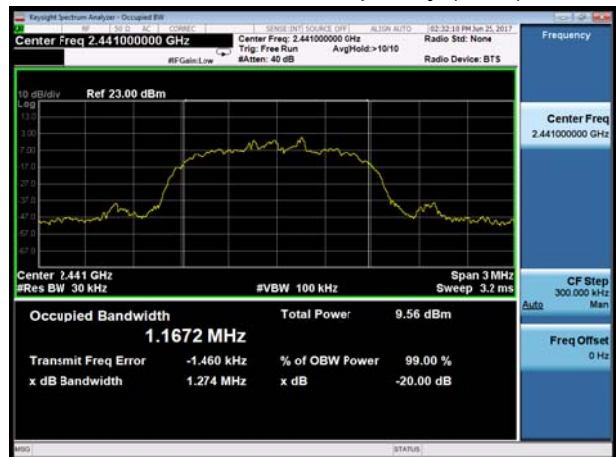

BT 3DH5 CH78, Carrier frequency (MHz): 2480

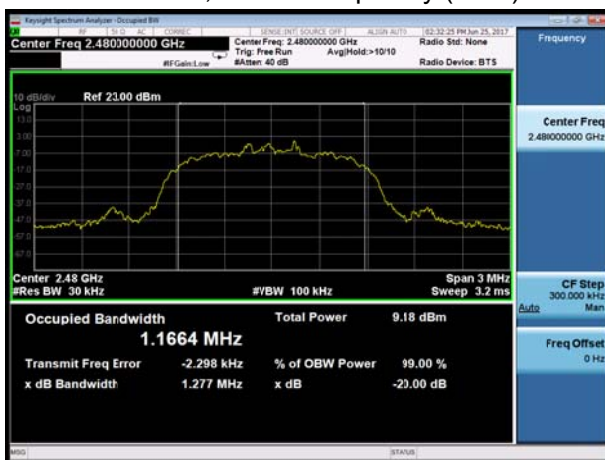

4.4 Frequency Separation


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss. RBW is set to 30 kHz and VBW is set to 100 kHz on spectrum analyzer. Set EUT on Hopping on mode.

Test setup

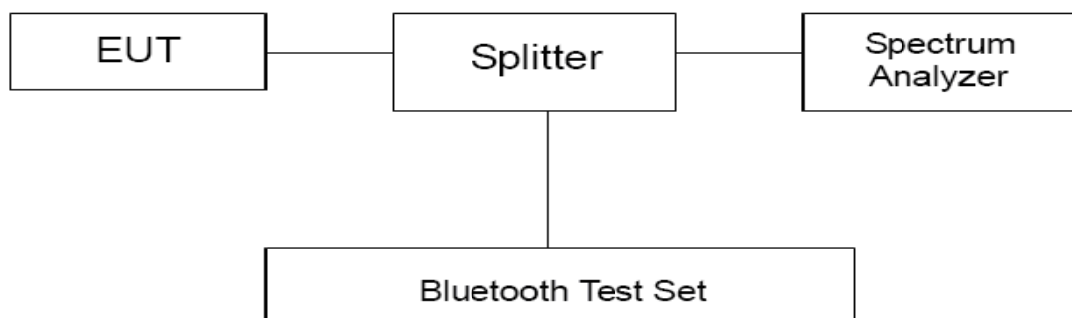

Limits

Rule Part 15.247(a)(1) specifies that “Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. ”

Note: The value of two-thirds of 20 dB bandwidth is always greater than 25 kHz.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U=936$ Hz.

Test Results:

Packet type	Carrier frequency (MHz)	Carrier frequency separation(kHz)	20dB Bandwidth(kHz)	Limit (kHz)	Conclusion
DH5	2441	999	940.9	627.3	PASS
2DH5	2441	1005	1278	852	PASS
3DH5	2441	990	1274	849.3	PASS

Note: The limit is two-thirds of 20 dB bandwidth.

BT DH5 CH39, Carrier frequency (MHz): 2441



BT 2DH5 CH39, Carrier frequency (MHz): 2441



BT 3DH5 CH39, Carrier frequency (MHz): 2441



4.5 Time of Occupancy (Dwell Time)

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa


Methods of Measurement

The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss. RBW is set to 1MHz and VBW is set to 3MHz on spectrum analyzer. The dwell time is calculated by:

Dwell time = time slot length * hop rate * 0.4s with:

The selected EUT Packet type uses a slot type of 5-Tx&1-Rx and a hopping rate of 1600(ch*hop/s) for all channels. So the final hopping rate for all channel is $1600/6=266.67(\text{ch*hop/s})$

Test Setup

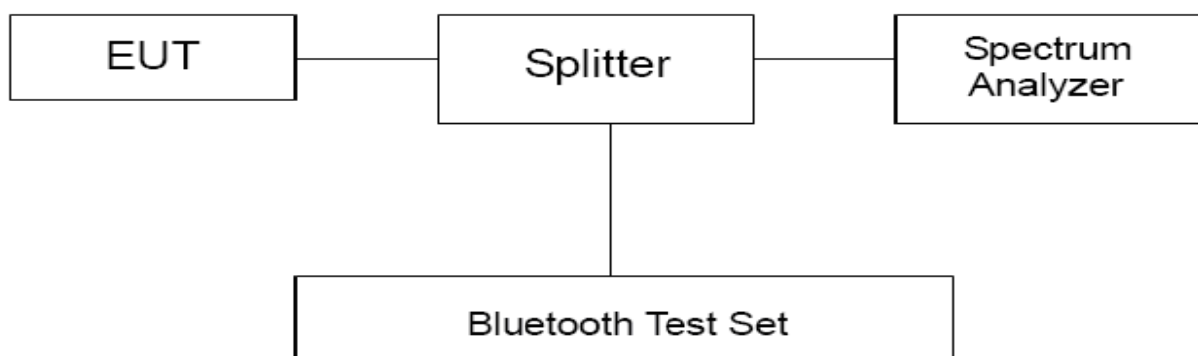

Limits

Rule Part15.247(a) specifies that " Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed."

Dwell time	$\leq 400\text{ms}$
------------	---------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$.


Requirements	Uncertainty					
Dwell Time	DH5	$U=0.70\text{ms}$	2DH5	$U=0.70\text{ms}$	3DH5	$U=0.70\text{ms}$

Test Results:


Channel 39					
Packet type	hop rate (1/s)	Time slot length(ms)	Dwell time (ms)	Limit (ms)	Conclusion
DH5	266.67	2.870	306.14	400	PASS
2DH5	266.67	2.880	307.20	400	PASS
3DH5	266.67	2.880	307.20	400	PASS

Note: Dwell time = time slot length * hop rate * 0.4s


BT DH5 CH39, Carrier frequency (MHz): 2441

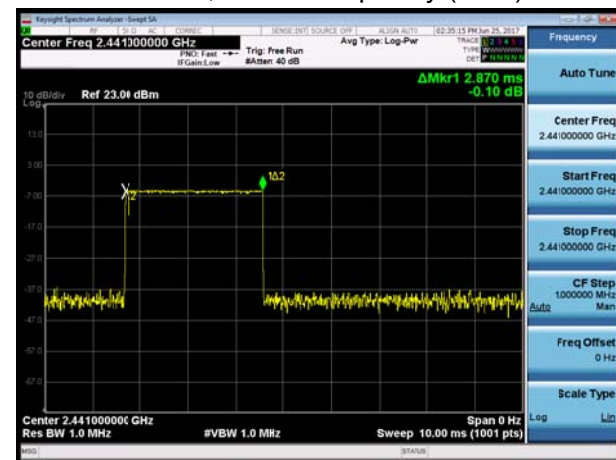

BT 2DH5 CH39, Carrier frequency (MHz): 2441

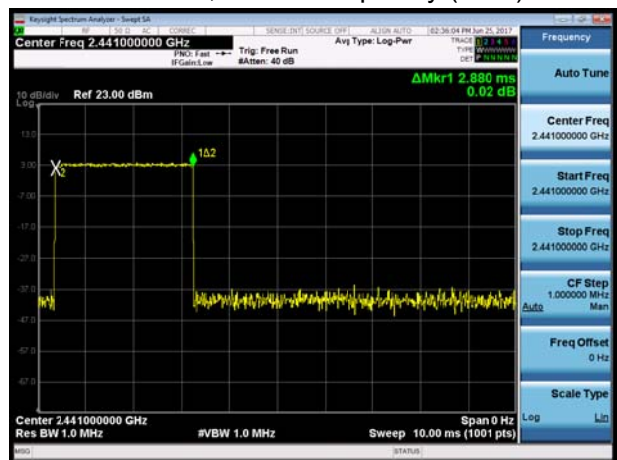

BT 3DH5 CH39, Carrier frequency (MHz): 2441

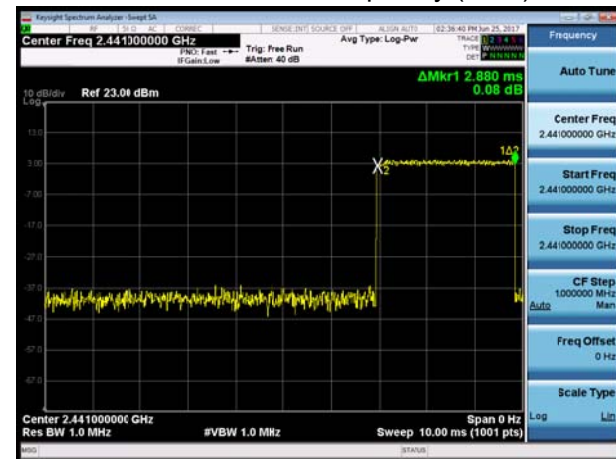

4.6 Band Edge Compliance


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss. The lowest and highest channels were measured. The peak detector is used. RBW is set to 100 kHz and VBW is set to 300 kHz on spectrum analyzer. EUT test for Hopping On mode and Hopping Off mode.

Test Setup

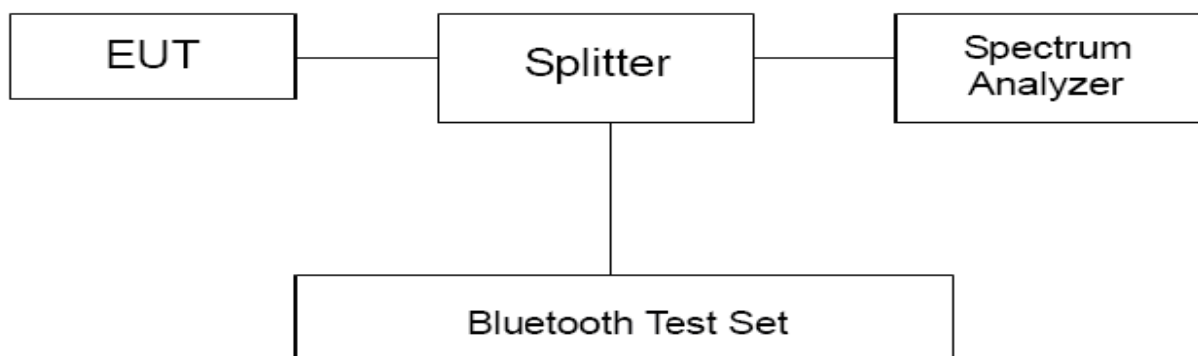

Limits

Rule Part 15.247(d) specifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.”

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.


Frequency	Uncertainty
2GHz-3GHz	1.407 dB




Test Results

Hopping On


BT DH5 CH0, Carrier frequency (MHz): 2402

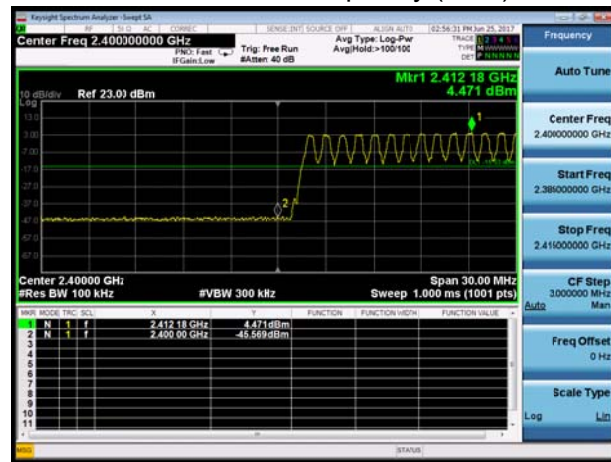


BT DH5 CH78, Carrier frequency (MHz): 2480

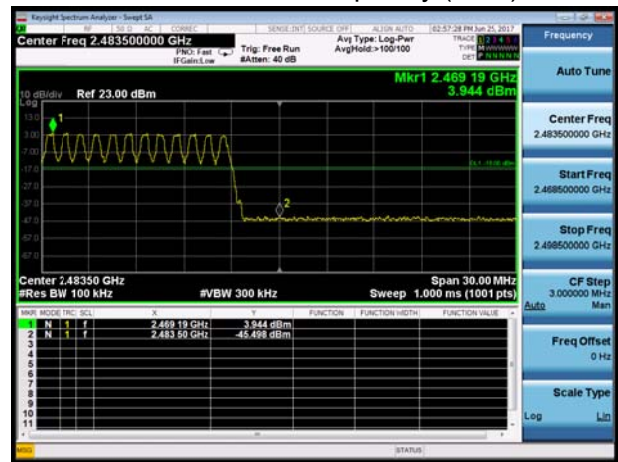


BT 2DH5 CH0, Carrier frequency (MHz): 2402

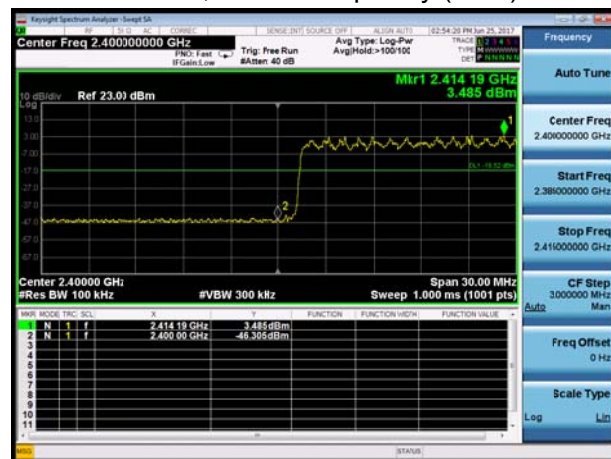


BT 2DH5 CH78, Carrier frequency (MHz): 2480

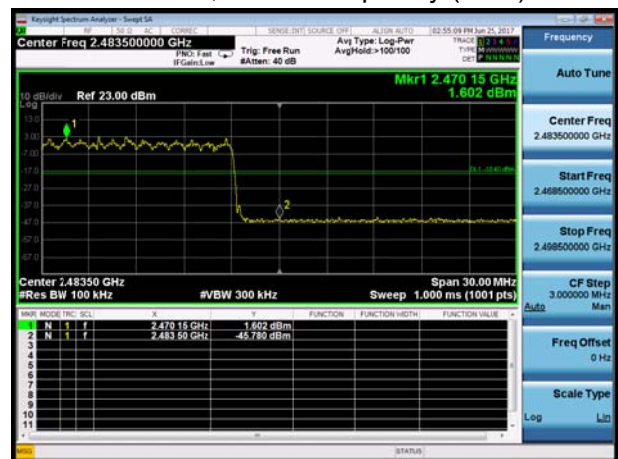

BT 3DH5 CH0, Carrier frequency (MHz): 2402

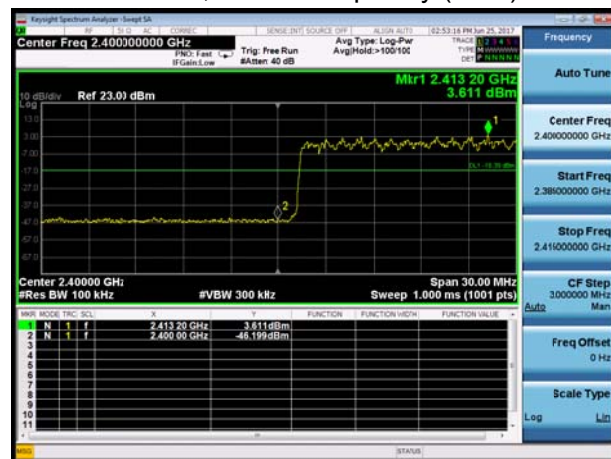


BT 3DH5 CH78, Carrier frequency (MHz): 2480

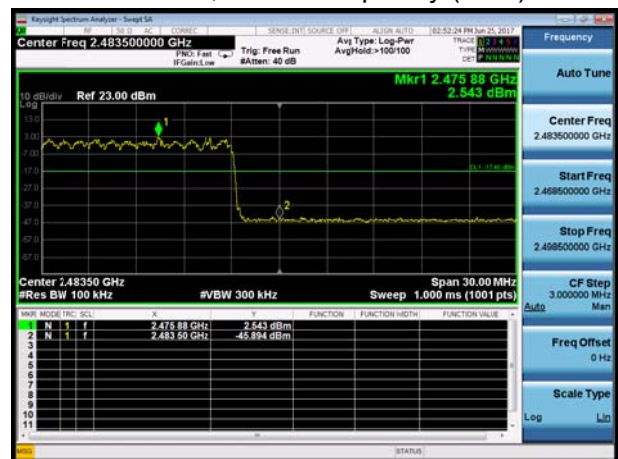




Hopping Off


BT DH5 CH0, Carrier frequency (MHz): 2402

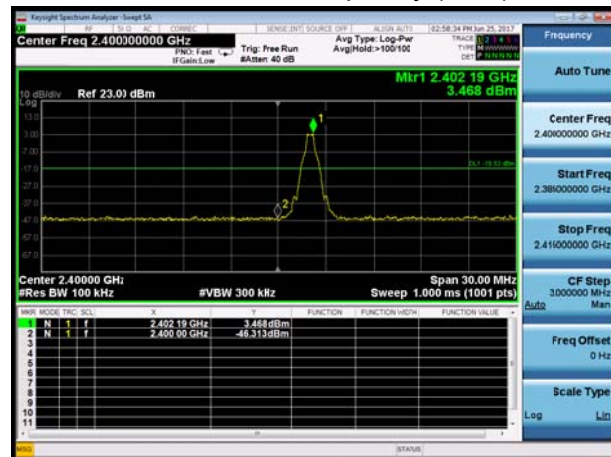


BT DH5 CH78, Carrier frequency (MHz): 2480

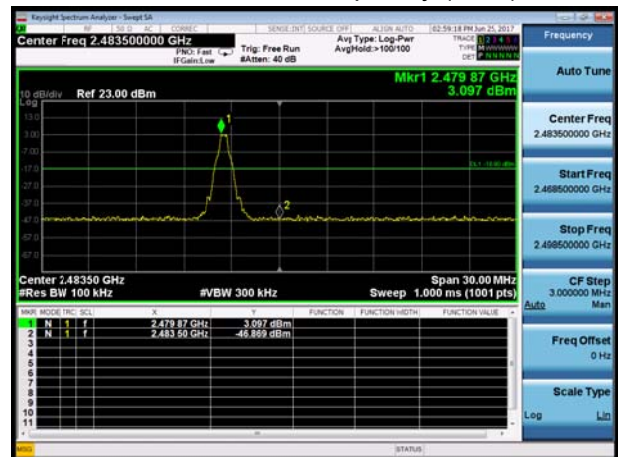


BT 2DH5 CH0, Carrier frequency (MHz): 2402

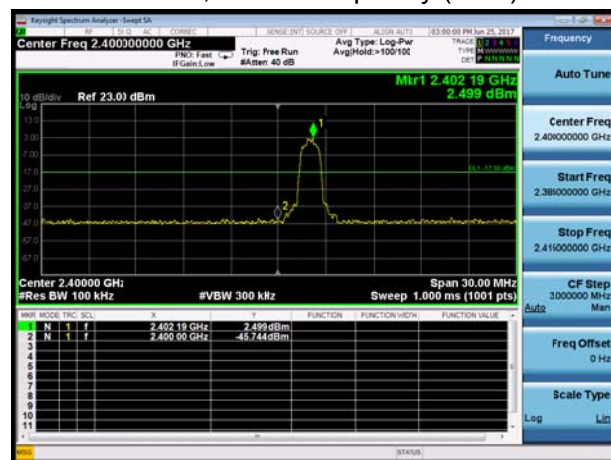


BT 2DH5 CH78, Carrier frequency (MHz): 2480

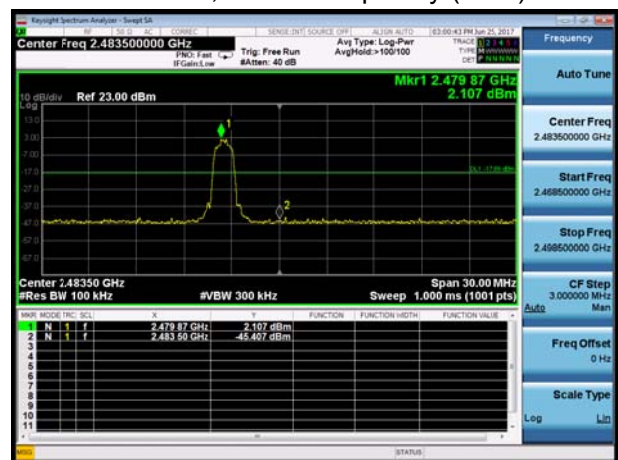

BT 3DH5 CH0, Carrier frequency (MHz): 2402

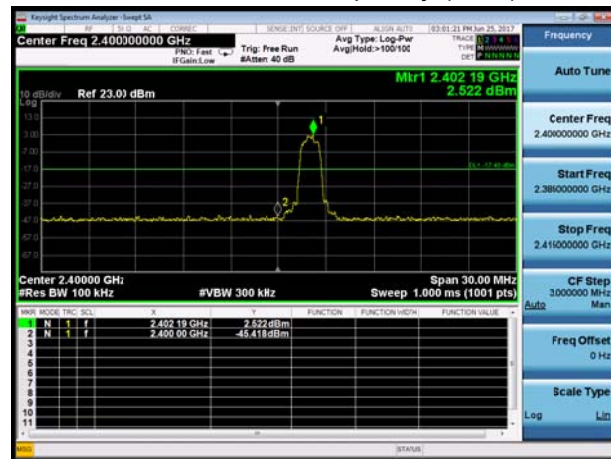

BT 3DH5 CH78, Carrier frequency (MHz): 2480

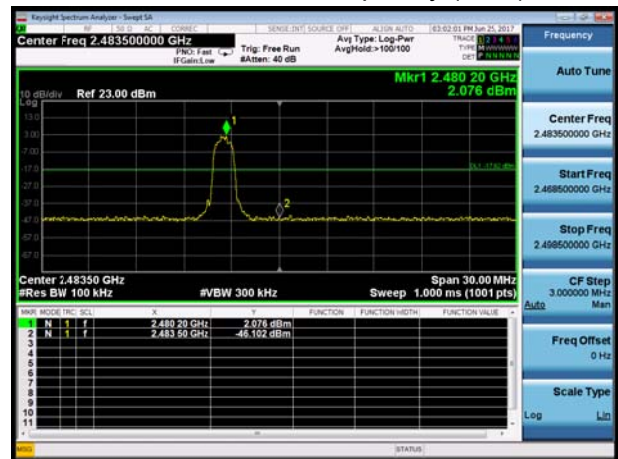

4.7 Spurious Radiated Emissions in the Restricted Band

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.


Set the spectrum analyzer in the following:

- (a) PEAK: RBW=1MHz; VBW=3MHz / Sweep=AUTO
 - (b) The dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a “duty cycle correction factor”, derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit.
- If the emission is pulsed, modify the unit for continuous operation; use the settings shown above, then correct the reading by subtracting the peak- average correction factor, derived from the appropriate duty cycle calculation.

This setting method can refer to **DA00-705**.

The test is in transmitting mode. The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis) and docking mode. The worst emission was found in stand-up position (Y axis) and the worst case was recorded.

Test setup

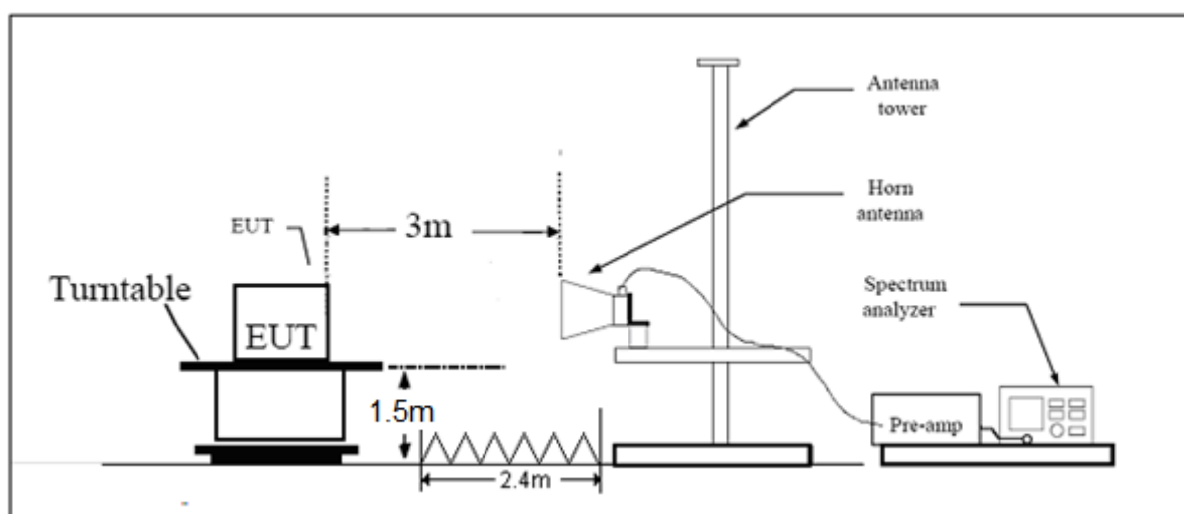

Note: Area side: 2.4mX3.6m

Limits

Spurious Radiated Emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

Limit in restricted band

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above960	500	54

§15.35(b)

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

Peak Limit=74dBuV/m

Average Limit=54dBuV/m


Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 3.55$ dB.




Test Results:


DH5-Channel 0: Peak

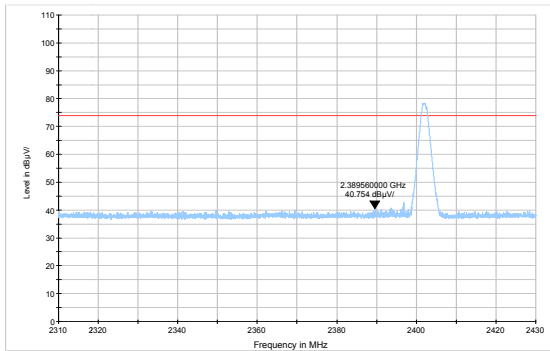


DH5-Channel 0: Average

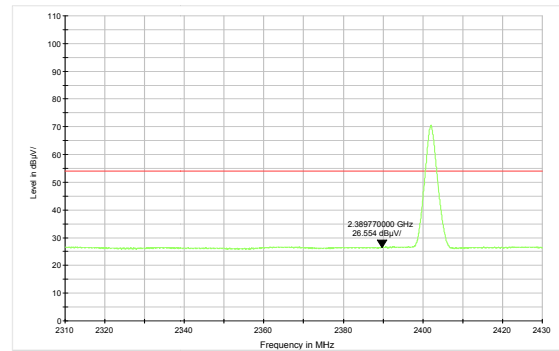


DH5-Channel 78: Peak

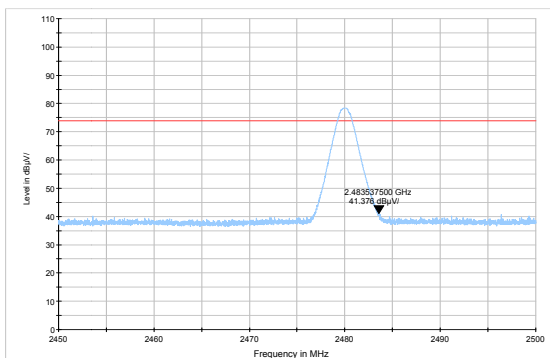


DH5-Channel 78: Average

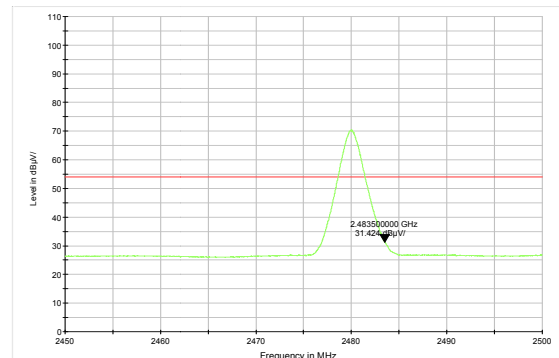


3DH5-Channel 0: Peak

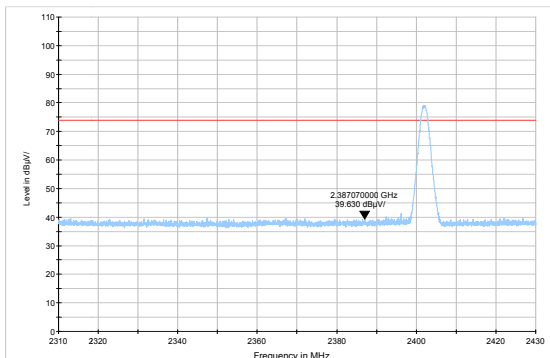


3DH5-Channel 0: Average

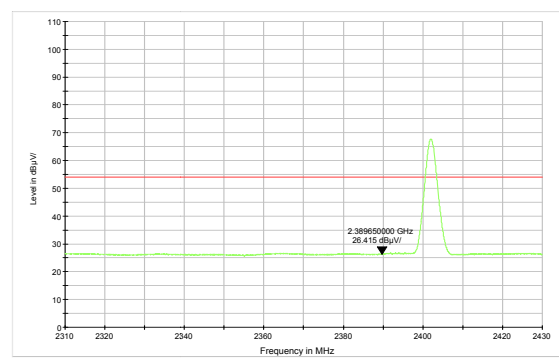

3DH5-Channel 78: Peak

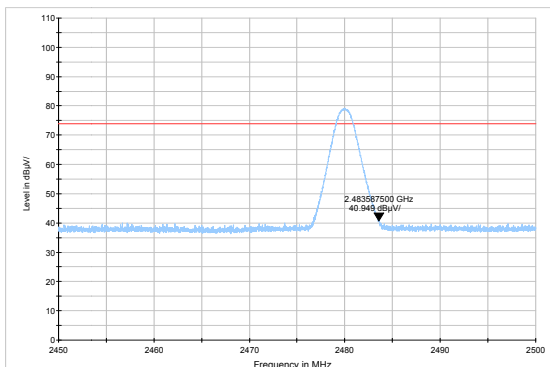

3DH5-Channel 78: Average

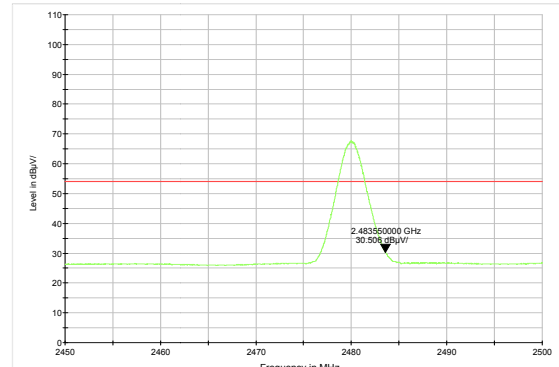

4.8 Number of hopping Frequency


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss. RBW is set to 1MHz and VBW is set to 1 MHz on spectrum analyzer. Set EUT on Hopping on mode.

Test setup

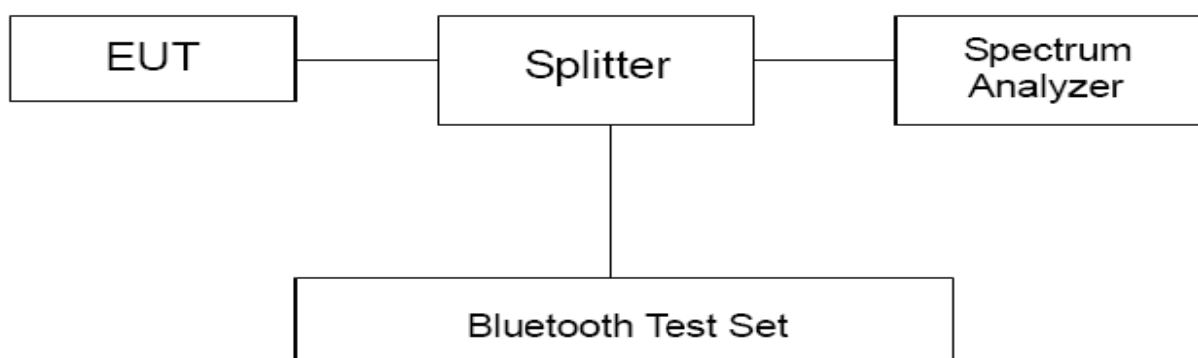

Limits

Rule Part 15.247(a) (1) (iii) specifies that” Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.”


Limits	≥ 15 channels
--------	---------------




Test Results:

	Number of hopping channels	conclusion
DH5	79	PASS
2DH5	79	PASS
3DH5	79	PASS


DH5 2400 MHz – 2483.5 MHz

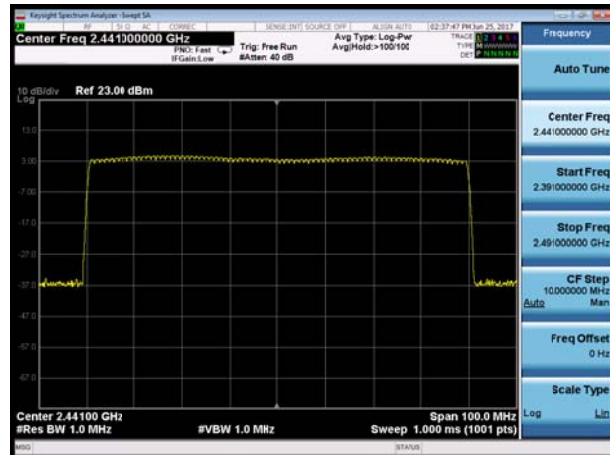

2DH5 2400 MHz – 2483.5 MHz

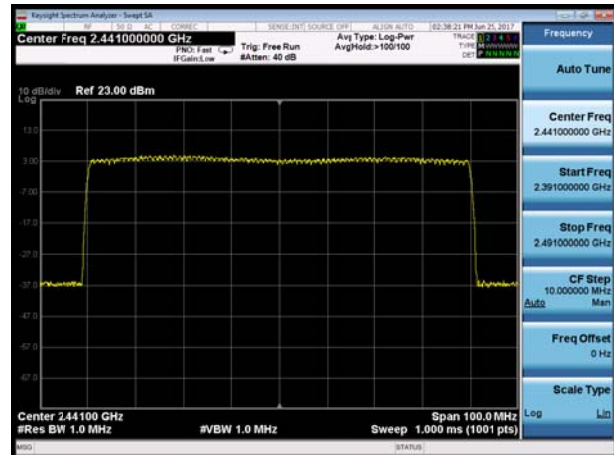

3DH5 2400 MHz – 2483.5 MHz

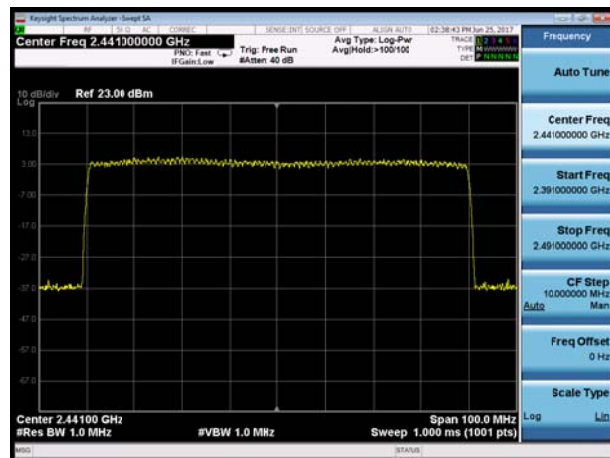

4.9 Spurious RF Conducted Emissions

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to the spectrum analyzer and Bluetooth test set via a power splitter with a known loss. The spectrum analyzer scans from 30MHz to the 10th harmonic of the carrier. The peak detector is used. Set RBW 100kHz and VBW 300 kHz, Sweep is set to ATUO.

The test is in transmitting mode.

Test setup

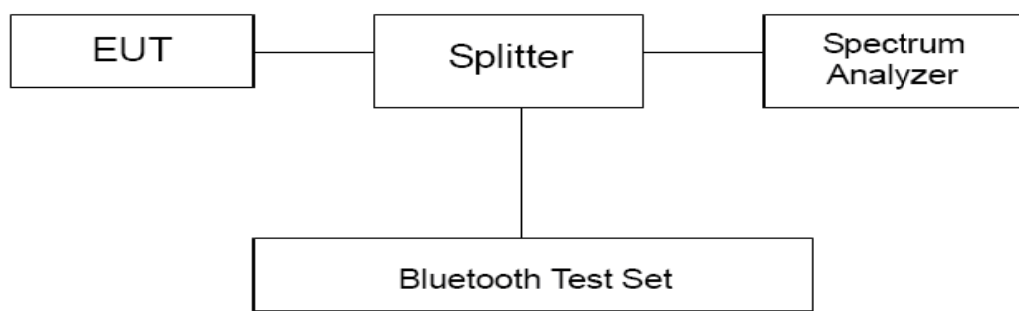

Limits

Rule Part 15.247(d) pacifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.”

Mode	Carrier frequency (MHz)	Reference value (dBm)	Limit
DH5	2402	2.089	-17.911
	2441	2.421	-17.579
	2480	1.030	-18.970
EDR (3DH5)	2402	-1.773	-21.773
	2441	-8.144	-28.144
	2480	-1.356	-21.356


Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.


Frequency	Uncertainty
100kHz-2GHz	0.684 dB
2GHz-26GHz	1.407 dB

**Test Results:**


GFSK-CH0 30MHz to 18GHz

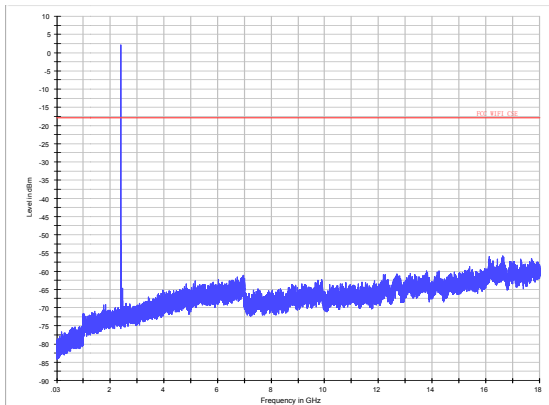


GFSK-CH0 18GHz to 26.5GHz

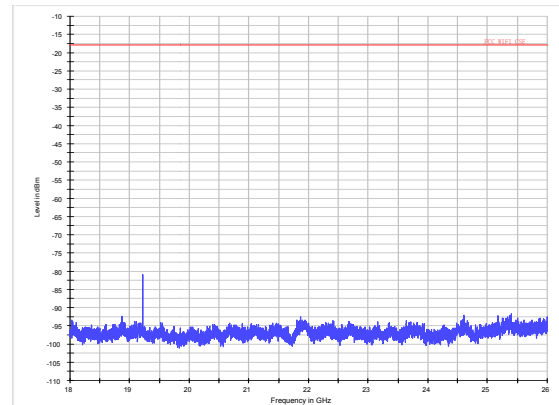


GFSK-CH39 30MHz to 18GHz

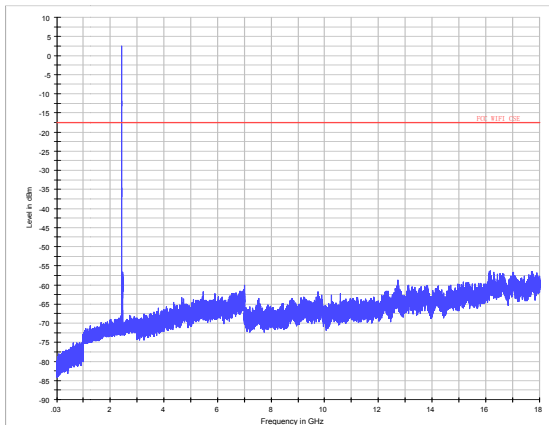


GFSK-CH39 18GHz to 26.5GHz

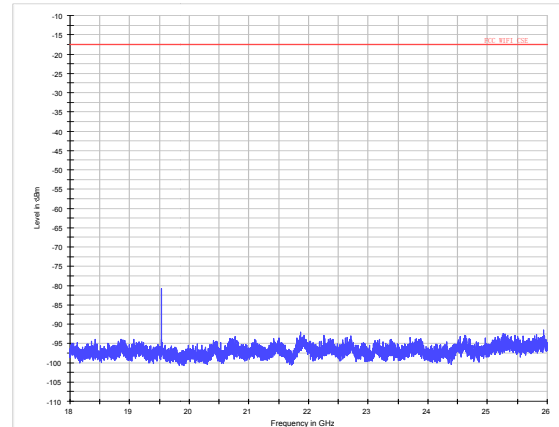


GFSK-CH78 30MHz to 18GHz

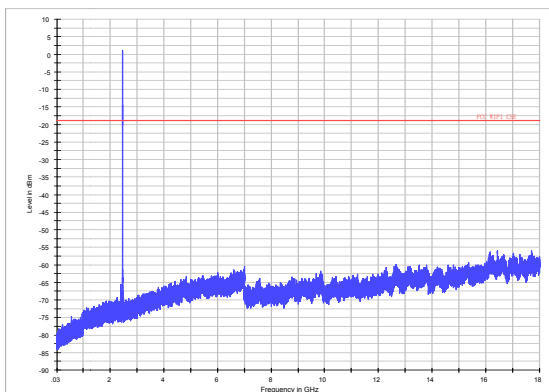


GFSK-CH78 18GHz to 26.5GHz

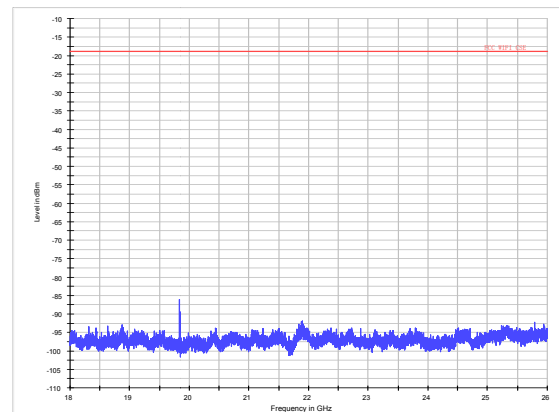


EDR-CH0 30MHz to 18GHz

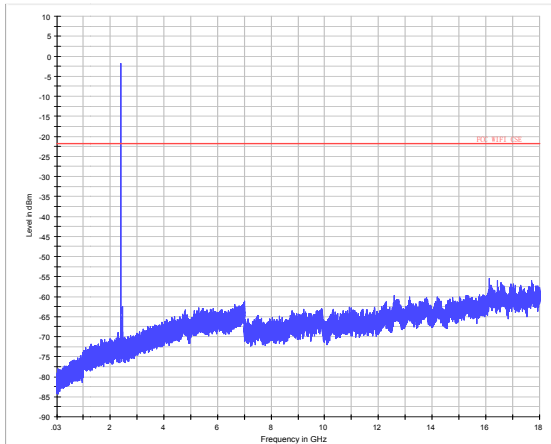


EDR-CH0 18GHz to 26.5GHz

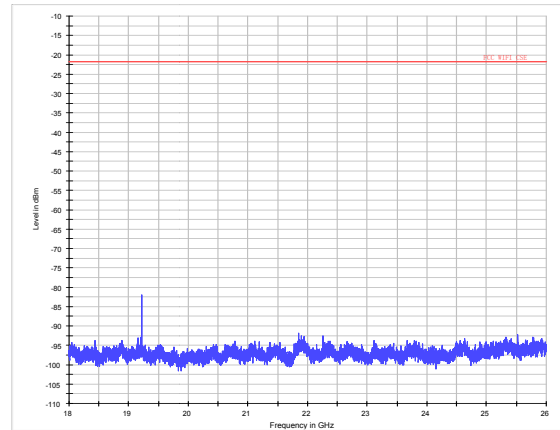


EDR-CH39 30MHz to 18GHz

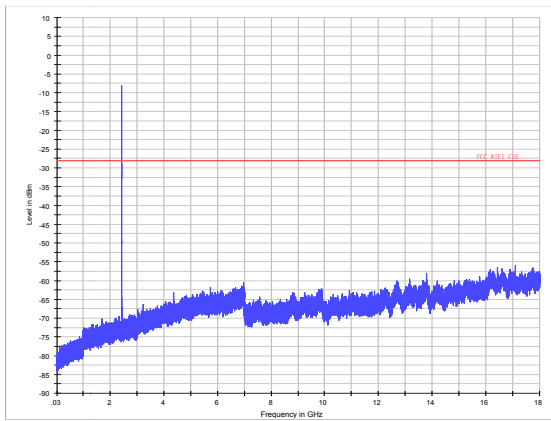


EDR-CH39 18GHz to 26.5GHz

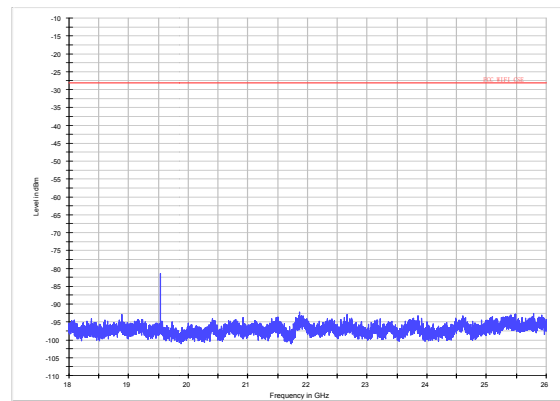

EDR-CH78 30MHz to 18GHz

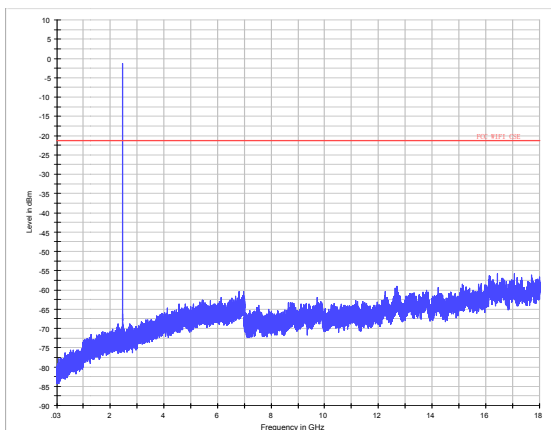

EDR-CH78 18GHz to 26.5GHz

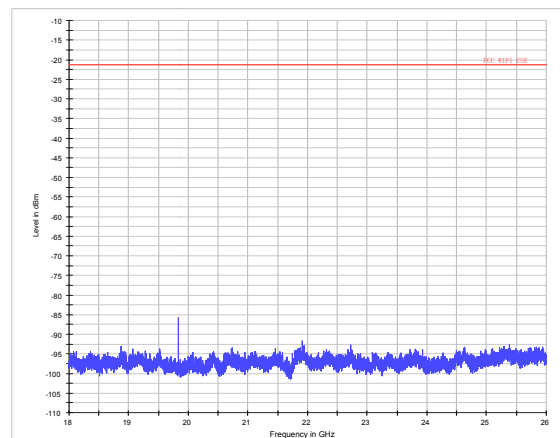

4.10 Radiates Emission

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The test set-up was made in accordance to the general provisions of ANSI C63.10-2013. The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The radiated emissions measurements were made in a typical installation configuration.

Sweep the whole frequency band through the range from 9 kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

During the test, below 30MHz, the center of the loop shall be 1 meters; above 30MHz, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.

Set the spectrum analyzer in the following:

Below 1GHz (detector: Peak and Quasi-Peak)

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz(detector: Peak):

(a) PEAK: RBW=1MHz VBW=3MHz/ Sweep=AUTO


(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded. Then this mode was measured in the following mode: EUT with cradle and EUT without cradle. The worst emission was found in EUT with cradle mode and the worst case was recorded.


The test is in transmitting mode.

Test setup


9KHz ~ 30MHz

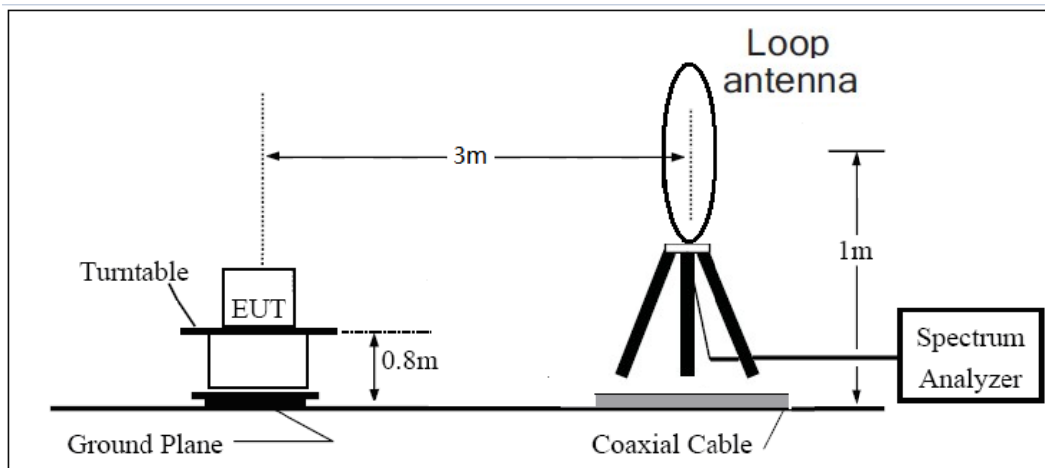

30MHz ~ 1GHz

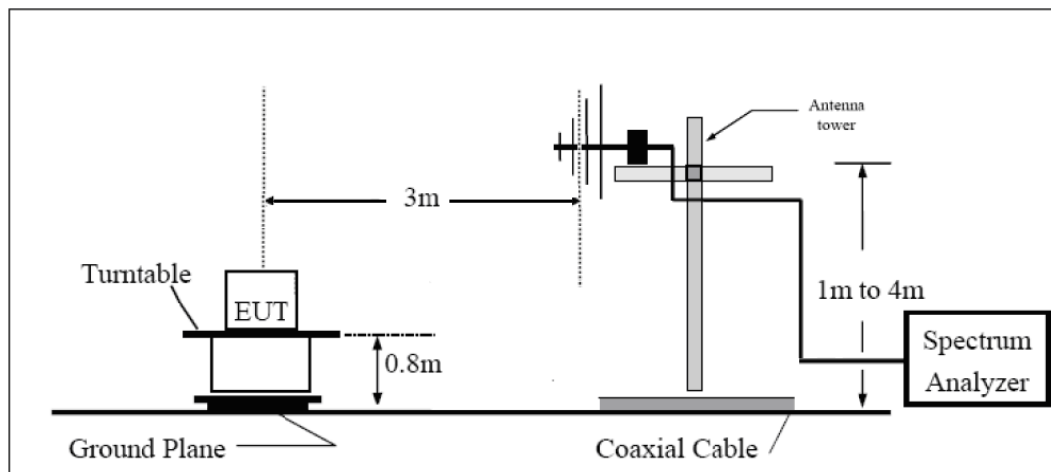

Above 1GHz

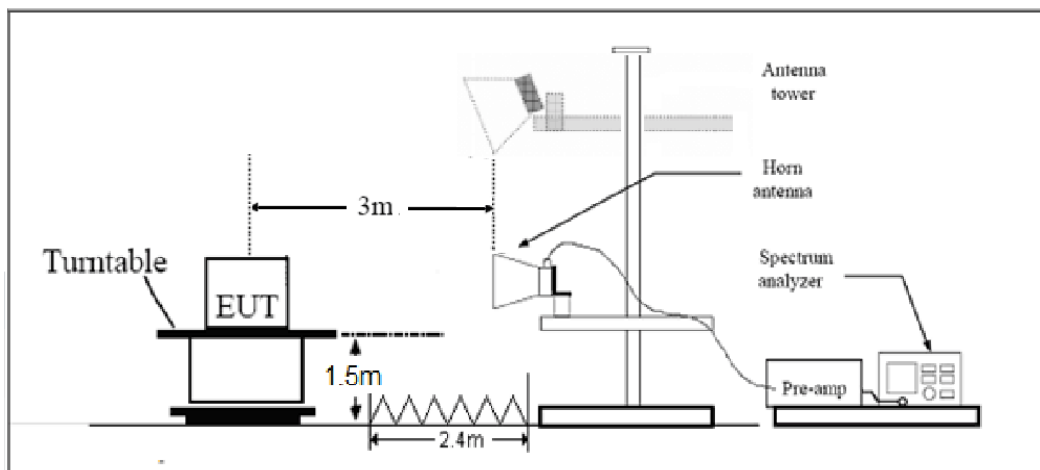

Limits

Rule Part 15.247(d) specifies that “In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).”

Limit in restricted band

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
0.009–0.490	2400/F(kHz)	/
0.490–1.705	24000/F(kHz)	/
1.705–30.0	30	/
30-88	100	40
88-216	150	43.5
216-960	200	46
Above960	500	54

§15.35(b)

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.


Frequency	Uncertainty
9KHz-30MHz	3.55 dB
30MHz-200MHz	4.19 dB
200MHz-1GHz	3.63 dB
Above 1GHz	3.68 dB

Test result

Sweep from 9 kHz to 30MHz, and the emissions more than 20 dB below the permissible value are not reported.

The following graphs display the maximum values of horizontal and vertical by software.

For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.

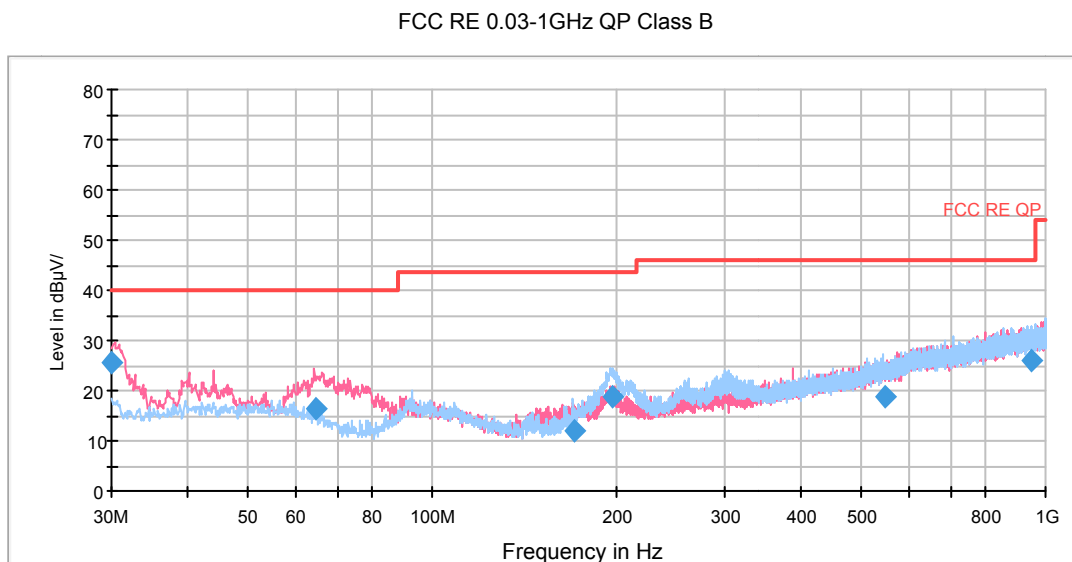


Radiates Emission from 30MHz to 1GHz

Note: This graph displays the maximum values of horizontal and vertical by software

Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
30.000000	25.5	114.0	V	144.0	37.6	-12.1	14.5	40.0
64.793750	16.6	100.0	V	117.0	27.4	-10.8	23.4	40.0
170.442500	12.0	125.0	H	323.0	22.3	-10.3	31.5	43.5
196.591250	18.8	125.0	H	0.0	30.7	-11.9	24.7	43.5
545.912500	18.6	100.0	H	246.0	40.2	-21.6	27.4	46.0
947.057500	25.9	100.0	H	11.0	53.1	-27.2	20.1	46.0

FCC RE 1G-18GHz PK+AV Class B

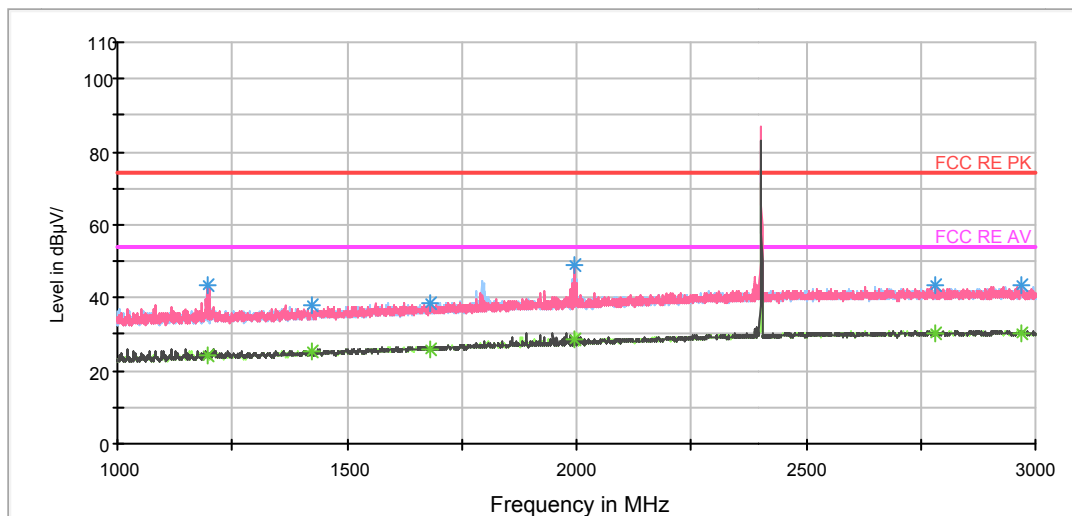

Radiates Emission from 1GHz to 3GHz


Note: The signal beyond the limit is carrier.

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1197.750000	43.6	100.0	H	0.0	51.8	-8.2	30.4	74
1423.750000	37.8	100.0	V	38.0	44.7	-6.9	36.2	74
1682.250000	38.8	100.0	V	353.0	44.2	-5.4	35.2	74
1994.250000	49.1	100.0	V	254.0	52.7	-3.6	24.9	74
2781.750000	43.2	100.0	V	0.0	43.7	-0.5	30.8	74
2969.500000	43.6	100.0	V	2.0	43.9	-0.3	30.4	74

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1197.750000	24.2	100.0	H	0.0	32.4	-8.2	29.8	54
1423.750000	25.3	100.0	H	0.0	32.2	-6.9	28.7	54
1682.250000	25.9	100.0	H	183.0	31.3	-5.4	28.1	54
1994.250000	28.5	100.0	V	254.0	32.1	-3.6	25.5	54
2781.750000	30.2	100.0	H	294.0	30.7	-0.5	23.8	54
2969.500000	30.4	100.0	H	156.0	30.7	-0.3	23.6	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

FCC RE 1G-18GHz PK+AV Class B

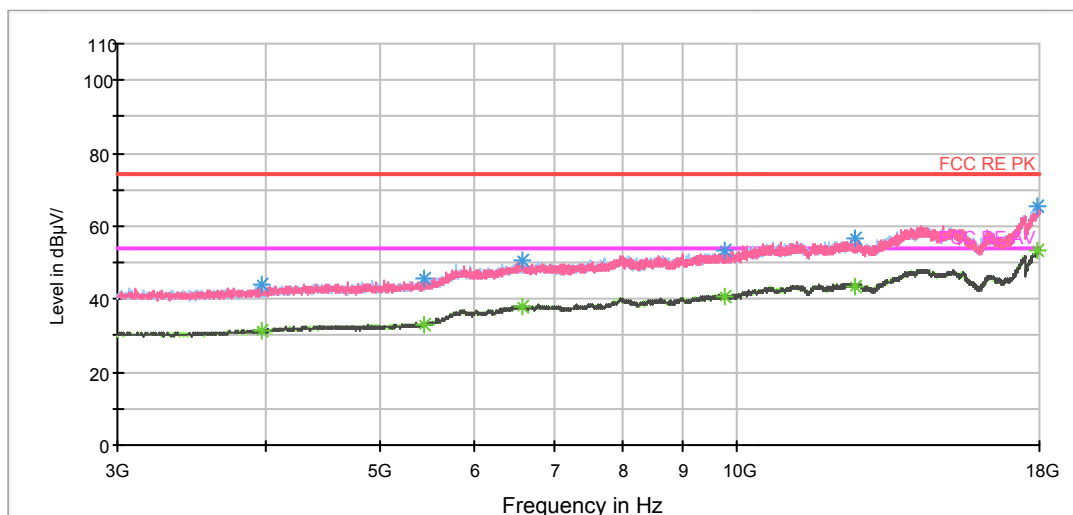


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3973.125000	43.9	100.0	H	300.0	43.3	0.6	30.1	74
5441.250000	45.4	100.0	V	201.0	42.9	2.5	28.6	74
6598.125000	50.6	100.0	V	116.0	43.2	7.4	23.4	74
9781.875000	53.3	100.0	V	116.0	41.9	11.4	20.7	74
12556.875000	56.5	100.0	H	130.0	41.7	14.8	17.5	74
17960.625000	65.5	100.0	V	187.0	40.3	25.2	8.5	74

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3973.125000	31.4	100.0	H	300.0	30.8	0.6	22.6	54
5441.250000	33.2	100.0	V	201.0	30.7	2.5	20.8	54
6598.125000	38.1	100.0	V	116.0	30.7	7.4	15.9	54
9781.875000	40.9	100.0	V	116.0	29.5	11.4	13.1	54
12556.875000	43.3	100.0	H	130.0	28.5	14.8	10.7	54
17960.625000	53.6	100.0	V	187.0	28.4	25.2	0.4	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 18-26.5GHz PK+AV

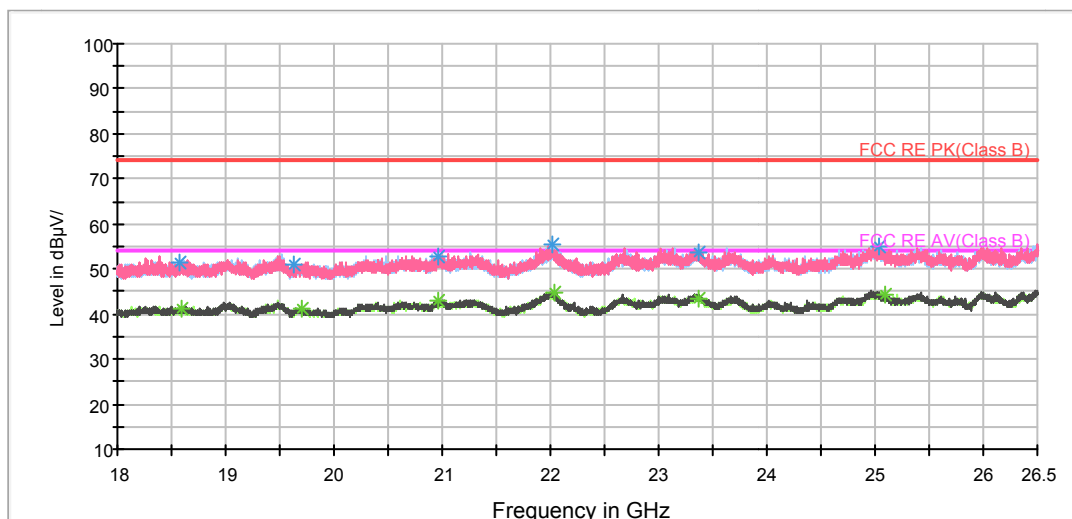

Radiates Emission from 18GHz to 26.5GHz


Frequency (MHz)	Peak (dBuV/m)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
18583.312500	51.4	V	13.0	51.2	0.2	22.6	74
19625.625000	50.8	V	4.0	51.1	-0.3	23.2	74
20955.875000	53.0	V	53.0	55.2	-2.2	21.0	74
22025.812500	55.7	H	250.0	57.1	-1.4	18.3	74
23374.125000	53.5	H	250.0	53.6	-0.1	20.5	74
25039.062500	54.8	V	217.0	53.8	1.0	19.2	74

Frequency (MHz)	Average (dBuV/m)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
18600.312500	41.2	H	198.0	41.0	0.2	12.8	54
19701.062500	41.3	H	158.0	41.9	-0.6	12.7	54
20964.375000	43.2	V	82.0	45.3	-2.1	10.8	54
22036.437500	44.8	H	228.0	46.2	-1.4	9.2	54
23367.750000	43.5	H	250.0	43.6	-0.1	10.5	54
25084.750000	44.4	V	183.0	43.5	0.9	9.6	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)




FCC RE 0.03-1GHz QP Class B

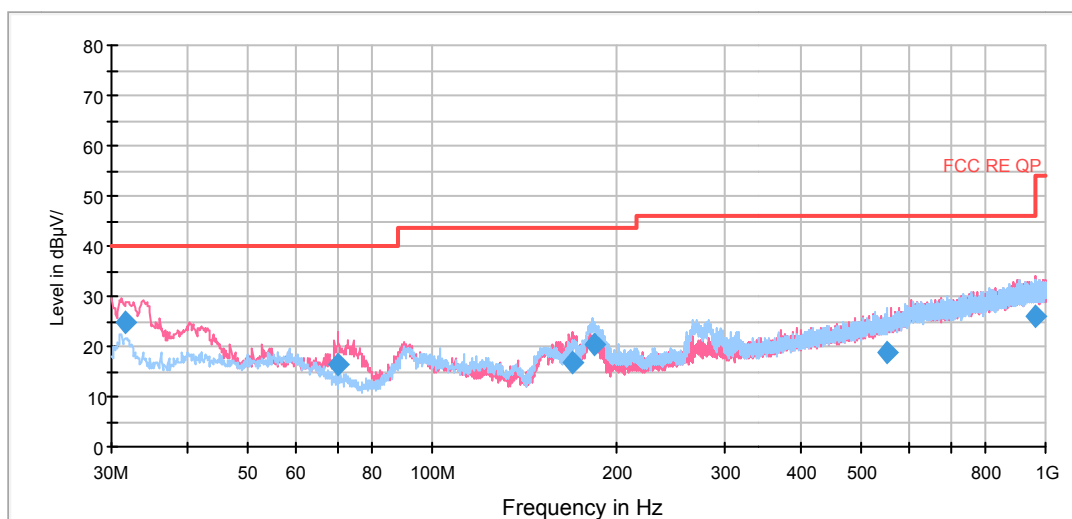

Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
31.532500	25.0	100.0	V	93.0	37.0	-12.0	15.0	40.0
69.975000	16.3	100.0	V	292.0	24.9	-8.6	23.7	40.0
169.680000	16.7	100.0	V	57.0	27.1	-10.4	26.8	43.5
183.418750	20.3	100.0	H	99.0	31.5	-11.2	23.2	43.5
551.981250	18.8	125.0	H	22.0	40.4	-21.6	27.2	46.0
959.586250	26.2	100.0	H	237.0	53.6	-27.4	19.8	46.0

FCC RE 1G-18GHz PK+AV Class B

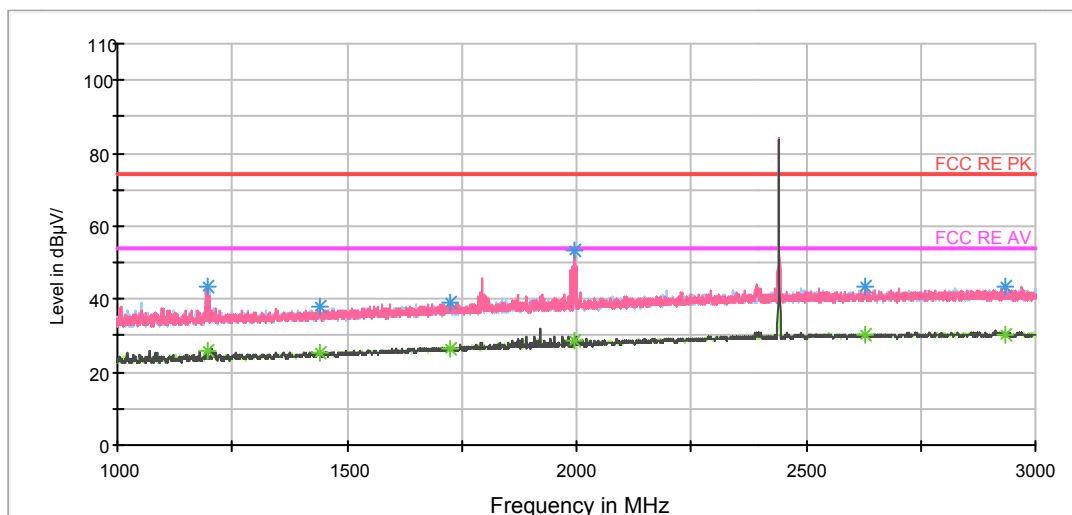


Radiates Emission from 1GHz to 3GHz
Note: The signal beyond the limit is carrier.

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1195.500000	43.7	100.0	V	154.0	51.9	-8.2	30.3	74
1440.000000	38.0	100.0	H	265.0	44.7	-6.7	36.0	74
1722.750000	38.9	100.0	V	0.0	44.0	-5.1	35.1	74
1994.000000	53.2	100.0	V	235.0	56.8	-3.6	20.8	74
2630.000000	43.3	100.0	H	0.0	44.0	-0.7	30.7	74
2936.500000	43.4	100.0	V	182.0	43.9	-0.5	30.6	74

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1195.500000	25.8	100.0	V	154.0	34.0	-8.2	28.2	54
1440.000000	25.1	100.0	V	195.0	31.8	-6.7	28.9	54
1722.750000	26.5	100.0	H	347.0	31.6	-5.1	27.5	54
1994.000000	28.7	100.0	V	235.0	32.3	-3.6	25.3	54
2630.000000	30.2	100.0	V	6.0	30.9	-0.7	23.8	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

FCC RE 1G-18GHz PK+AV Class B

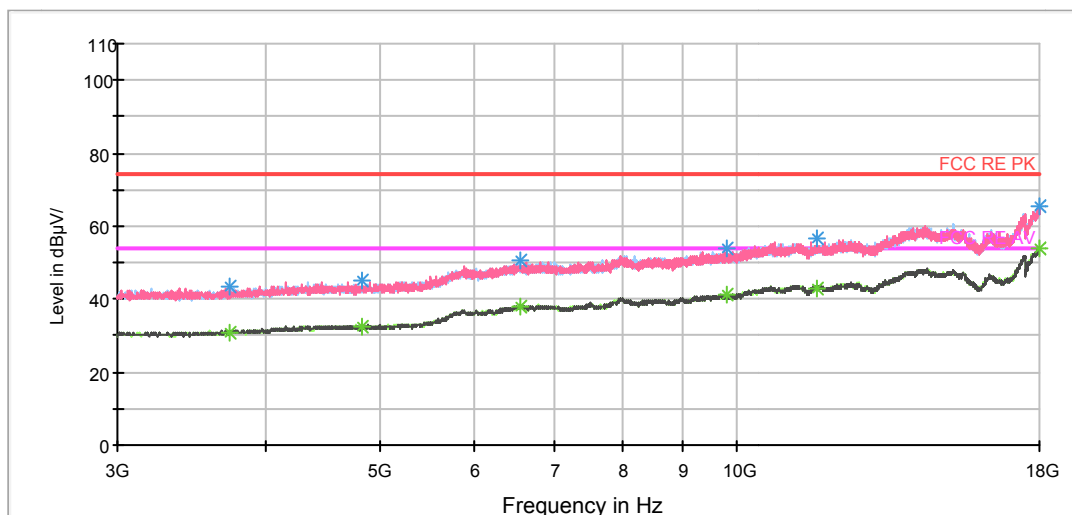


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3731.250000	43.5	100.0	V	14.0	43.0	0.5	30.5	74
4822.500000	44.9	100.0	V	188.0	43.3	1.6	29.1	74
6568.125000	50.8	100.0	H	0.0	43.4	7.4	23.2	74
9789.375000	53.8	100.0	H	329.0	42.4	11.4	20.2	74
11700.000000	56.4	100.0	H	316.0	43.1	13.3	17.6	74
17994.375000	65.3	100.0	H	0.0	39.5	25.8	8.7	74

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3731.250000	30.9	100.0	H	0.0	30.4	0.5	23.1	54
4822.500000	32.3	100.0	H	353.0	30.7	1.6	21.7	54
6568.125000	38.0	100.0	H	0.0	30.6	7.4	16.0	54
9789.375000	41.1	100.0	V	1.0	29.7	11.4	12.9	54
11700.000000	43.0	100.0	H	316.0	29.7	13.3	11.0	54
17994.375000	53.7	100.0	H	0.0	27.9	25.8	0.3	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 18-26.5GHz PK+AV

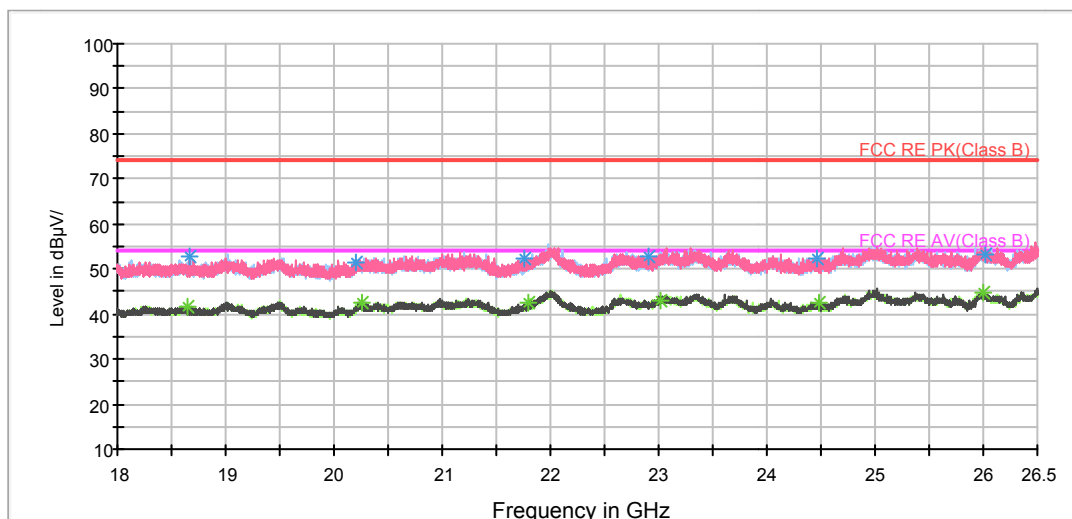


Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
18659.812500	52.6	H	98.0	52.5	0.1	21.4	74
20202.562500	51.4	V	4.0	52.7	-1.3	22.6	74
21762.312500	52.1	H	45.0	54.4	-2.3	21.9	74
22911.937500	52.7	V	166.0	52.9	-0.2	21.3	74
24455.750000	52.4	V	14.0	52.7	-0.3	21.6	74
26010.187500	53.4	V	73.0	52.5	0.9	20.6	74

Frequency (MHz)	Average (dBuV/m)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
18639.625000	41.5	H	109.0	41.4	0.1	12.5	54
20259.937500	42.7	H	210.0	43.8	-1.1	11.3	54
21788.875000	42.6	V	190.0	44.7	-2.1	11.4	54
23018.187500	42.9	H	210.0	42.9	0.0	11.1	54
24478.062500	42.3	H	210.0	42.6	-0.3	11.7	54
26002.750000	44.8	V	53.0	43.9	0.9	9.2	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


RE 0.03-1GHz QP Class B

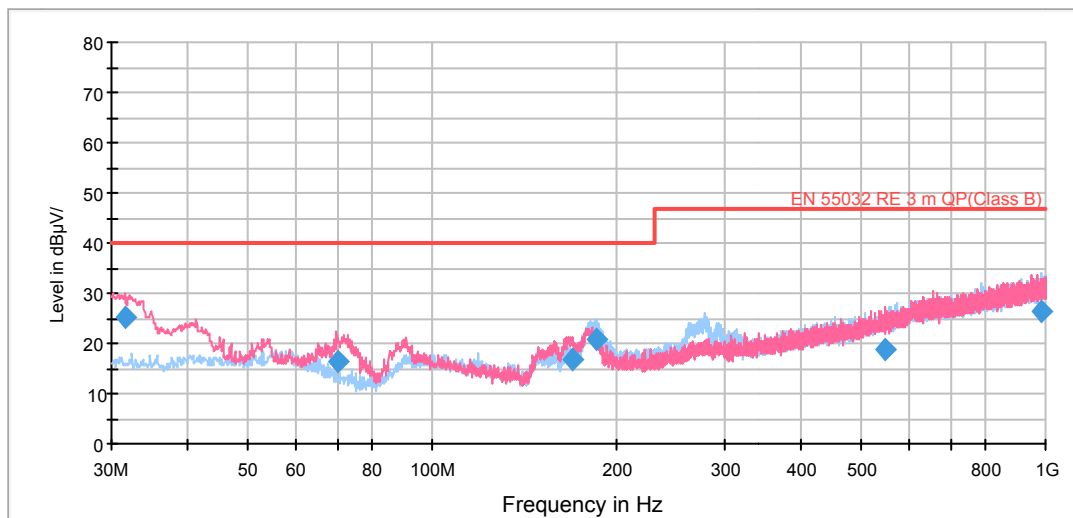

Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
31.576250	25.3	100.0	V	83.0	37.3	-12.0	14.7	40.0
70.411250	16.4	100.0	V	297.0	25.0	-8.6	23.6	40.0
169.275000	16.9	100.0	V	47.0	27.3	-10.4	23.1	40.0
184.797500	20.9	113.0	H	94.0	32.1	-11.2	19.1	40.0
548.943750	18.7	114.0	V	258.0	40.2	-21.5	28.3	47.0
987.707500	26.4	125.0	H	121.0	54.0	-27.6	20.6	47.0

FCC RE 1G-18GHz PK+AV Class B

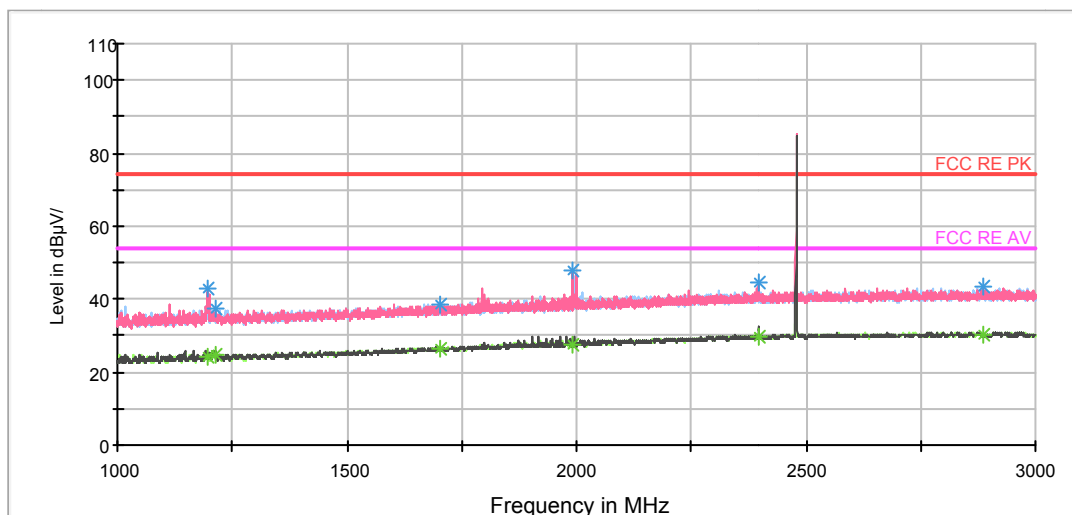

Radiates Emission from 1GHz to 3GHz


Note: The signal beyond the limit is carrier.

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1197.500000	42.8	100.0	V	0.0	51.0	-8.2	31.2	74
1213.500000	37.5	100.0	V	227.0	45.6	-8.1	36.5	74
1702.250000	38.7	100.0	V	0.0	44.0	-5.3	35.3	74
1991.500000	47.9	100.0	V	241.0	51.5	-3.6	26.1	74
2396.750000	44.6	100.0	V	95.0	45.9	-1.3	29.4	74
2885.000000	43.5	100.0	V	187.0	44.0	-0.5	30.5	74

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1197.500000	24.1	100.0	V	0.0	32.3	-8.2	29.9	54
1213.500000	24.9	100.0	V	227.0	33.0	-8.1	29.1	54
1702.250000	26.2	100.0	H	137.0	31.5	-5.3	27.8	54
1991.500000	27.4	100.0	V	241.0	31.0	-3.6	26.6	54
2396.750000	29.8	100.0	V	95.0	31.1	-1.3	24.2	54
2885.000000	30.3	100.0	V	187.0	30.8	-0.5	23.7	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

FCC RE 1G-18GHz PK+AV Class B

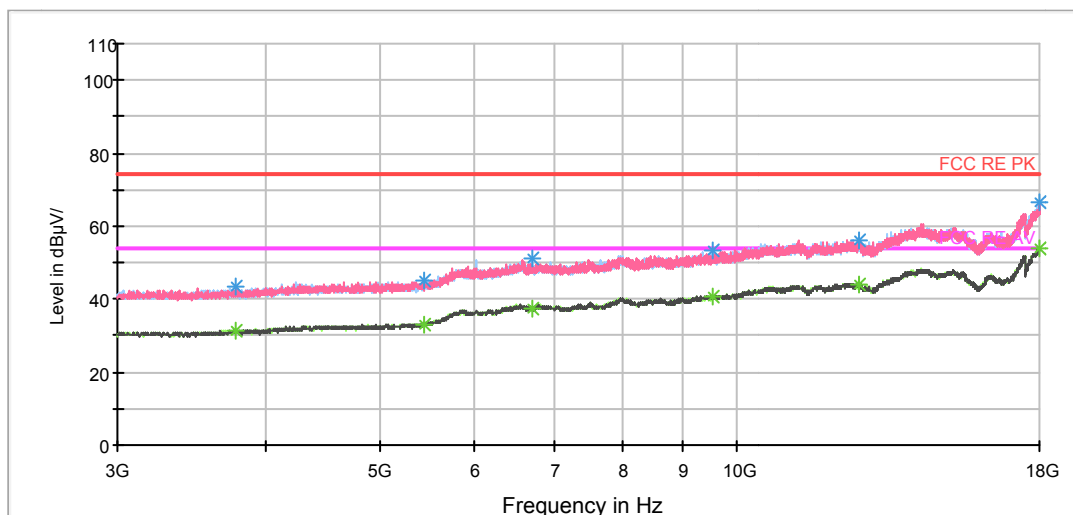


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3781.875000	43.6	100.0	V	0.0	43.2	0.4	30.4	74
5443.125000	45.2	100.0	H	267.0	42.7	2.5	28.8	74
6729.375000	50.9	100.0	H	239.0	43.9	7.0	23.1	74
9536.250000	53.4	100.0	H	359.0	42.3	11.1	20.6	74
12658.125000	56.3	100.0	H	354.0	41.4	14.9	17.7	74
17986.875000	66.5	100.0	V	187.0	40.8	25.7	7.5	74

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3781.875000	31.2	100.0	V	0.0	30.8	0.4	22.8	54
5443.125000	33.2	100.0	H	267.0	30.7	2.5	20.8	54
6729.375000	37.4	100.0	H	239.0	30.4	7.0	16.6	54
9536.250000	40.8	100.0	H	359.0	29.7	11.1	13.2	54
12658.125000	43.8	100.0	H	354.0	28.9	14.9	10.2	54
17986.875000	53.7	100.0	H	40.0	28.0	25.7	0.3	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 18-26.5GHz PK+AV

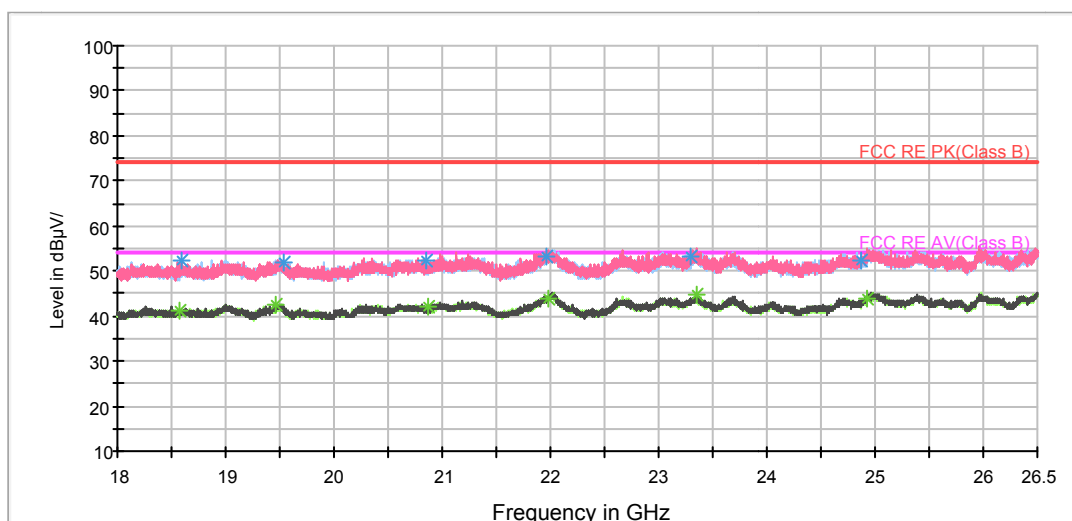


Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
18596.062500	52.3	V	0.0	52.1	0.2	21.7	74
19531.062500	51.7	V	71.0	51.7	0.0	22.3	74
20853.875000	52.1	H	248.0	54.3	-2.2	21.9	74
21964.187500	53.3	H	35.0	54.5	-1.2	20.7	74
23288.062500	53.3	V	0.0	53.4	-0.1	20.7	74
24875.437500	52.5	V	0.0	52.0	0.5	21.5	74

Frequency (MHz)	Average (dBuV/m)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
18571.625000	41.0	H	139.0	40.8	0.2	13.0	54
19456.687500	42.4	V	0.0	42.4	0.0	11.6	54
20867.687500	42.2	H	228.0	44.5	-2.3	11.8	54
21979.062500	44.0	H	159.0	45.3	-1.3	10.0	54
23346.500000	44.8	V	120.0	44.8	0.0	9.2	54
24926.437500	43.9	H	250.0	43.2	0.7	10.1	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


FCC RE 0.03-1GHz QP Class B

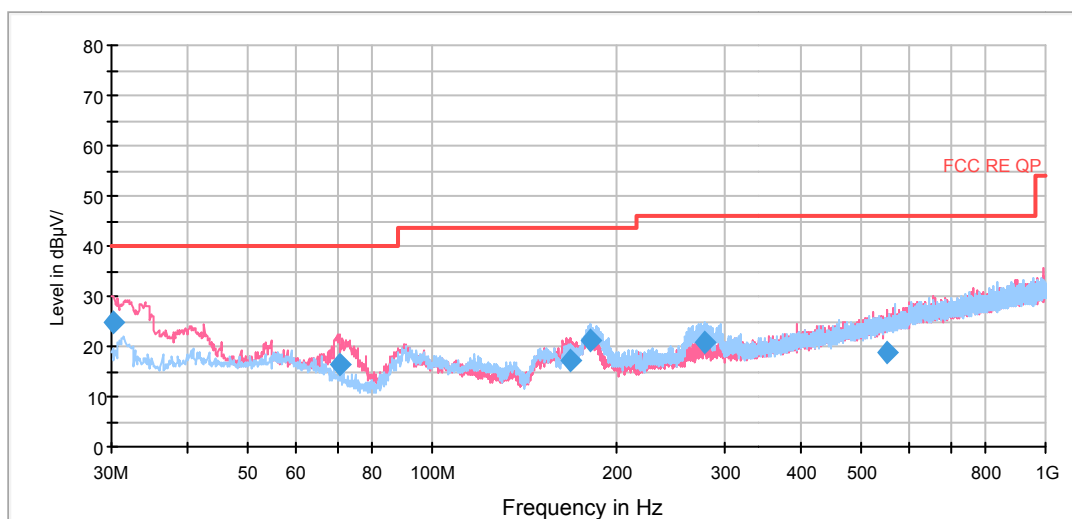

Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
30.160000	24.9	100.0	V	83.0	37.0	-12.1	15.1	40.0
70.612500	16.4	100.0	V	0.0	25.0	-8.6	23.6	40.0
167.738750	17.3	100.0	V	37.0	27.6	-10.3	26.2	43.5
181.123750	21.3	194.0	H	101.0	32.4	-11.1	22.2	43.5
278.920000	21.0	114.0	H	265.0	36.2	-15.2	25.0	46.0
551.981250	18.7	100.0	V	204.0	40.3	-21.6	27.3	46.0

FCC RE 1G-18GHz PK+AV Class B

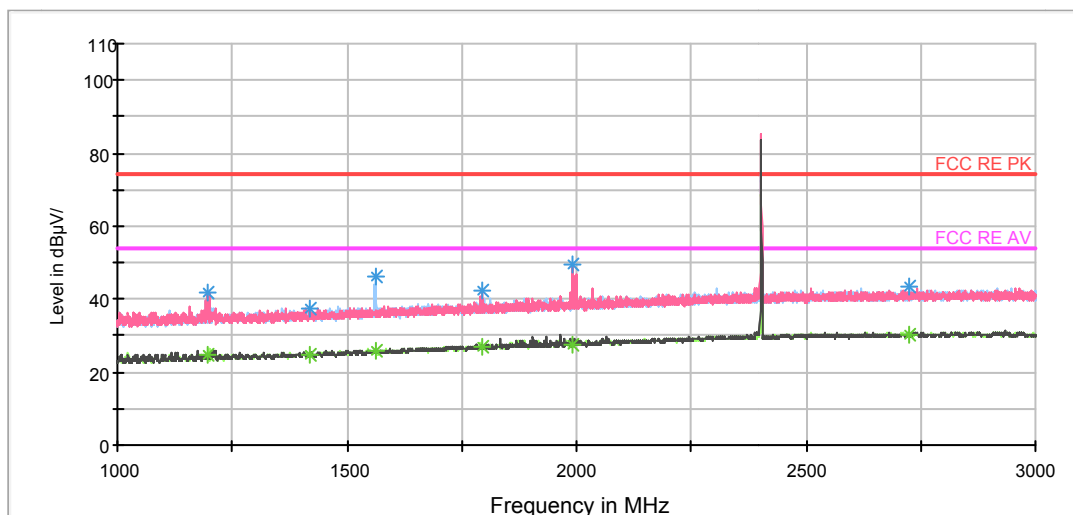


Radiates Emission from 1GHz to 3GHz
Note: The signal beyond the limit is carrier.

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1195.500000	42.0	100.0	V	0.0	50.2	-8.2	32.0	74
1420.250000	37.5	100.0	V	173.0	44.4	-6.9	36.5	74
1564.750000	46.2	100.0	H	304.0	52.3	-6.1	27.8	74
1796.250000	42.4	100.0	V	20.0	47.1	-4.7	31.6	74
1990.750000	49.2	100.0	V	306.0	52.8	-3.6	24.8	74
2726.750000	43.3	100.0	H	329.0	43.8	-0.5	30.7	74

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1195.500000	24.8	100.0	V	0.0	33.0	-8.2	29.2	54
1420.250000	25.0	100.0	V	173.0	31.9	-6.9	29.0	54
1564.750000	25.8	100.0	H	304.0	31.9	-6.1	28.2	54
1796.250000	26.8	100.0	V	20.0	31.5	-4.7	27.2	54
1990.750000	27.7	100.0	V	306.0	31.3	-3.6	26.3	54
2726.750000	30.4	100.0	V	0.0	30.9	-0.5	23.6	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

FCC RE 1G-18GHz PK+AV Class B

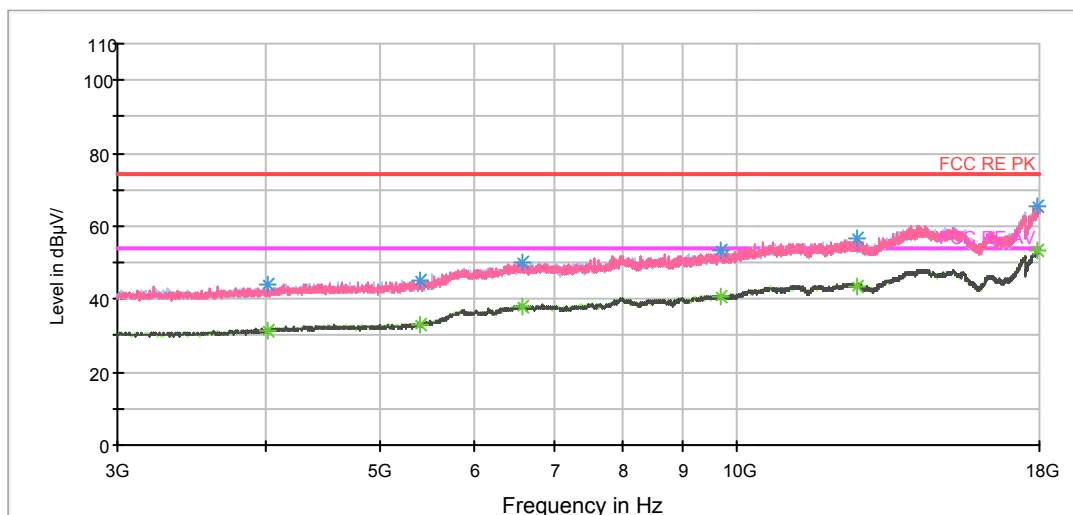


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
4014.375000	44.0	100.0	H	0.0	43.3	0.7	30.0	74
5407.500000	45.2	100.0	V	84.0	42.9	2.3	28.8	74
6586.875000	50.3	100.0	H	246.0	42.8	7.5	23.7	74
9678.750000	53.4	100.0	H	147.0	42.3	11.1	20.6	74
12630.000000	56.8	100.0	H	315.0	42.0	14.8	17.2	74
17960.625000	65.4	100.0	H	353.0	40.2	25.2	8.6	74

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
4014.375000	31.2	100.0	H	0.0	30.5	0.7	22.8	54
5407.500000	33.0	100.0	H	287.0	30.7	2.3	21.0	54
6586.875000	38.2	100.0	H	246.0	30.7	7.5	15.8	54
9678.750000	40.8	100.0	H	147.0	29.7	11.1	13.2	54
12630.000000	43.5	100.0	H	315.0	28.7	14.8	10.5	54
17960.625000	53.4	100.0	H	353.0	28.2	25.2	0.6	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 18-26.5GHz PK+AV

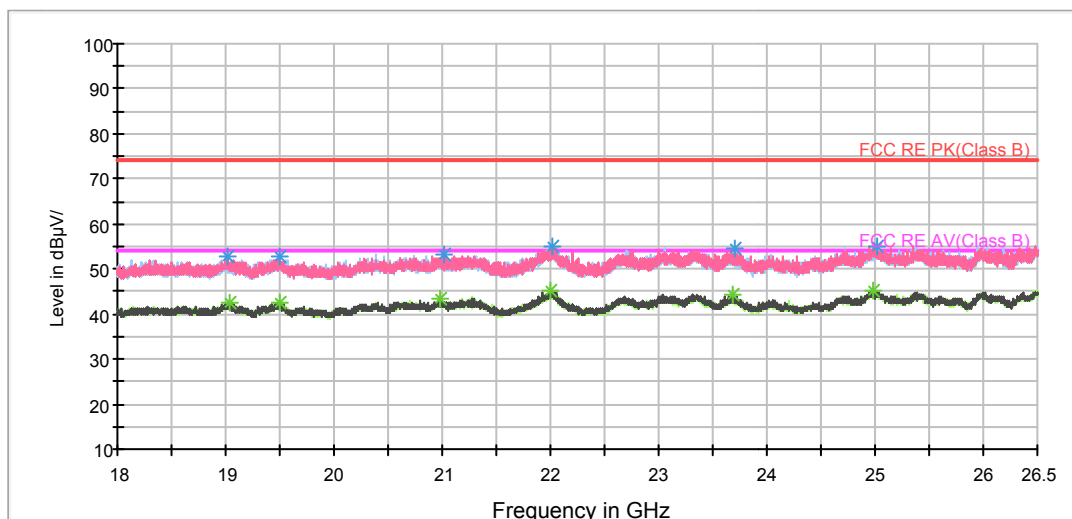


Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
19012.562500	52.9	V	0.0	53.1	-0.2	21.1	74
19494.937500	53.0	H	161.0	52.9	0.1	21.0	74
21013.250000	53.4	V	57.0	55.3	-1.9	20.6	74
22013.062500	55.1	H	211.0	56.4	-1.3	18.9	74
23698.187500	54.6	V	88.0	55.3	-0.7	19.4	74
25024.187500	55.1	H	231.0	54.1	1.0	18.9	74

Frequency (MHz)	Average (dBuV/m)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
19043.375000	42.4	V	0.0	42.7	-0.3	11.6	54
19492.812500	42.6	V	28.0	42.5	0.1	11.4	54
20975.000000	43.5	H	249.0	45.6	-2.1	10.5	54
22001.375000	45.0	H	249.0	46.3	-1.3	9.0	54
23683.312500	44.1	V	158.0	44.7	-0.6	9.9	54
24975.312500	45.0	V	0.0	44.0	1.0	9.0	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


FCC RE 0.03-1GHz QP Class B

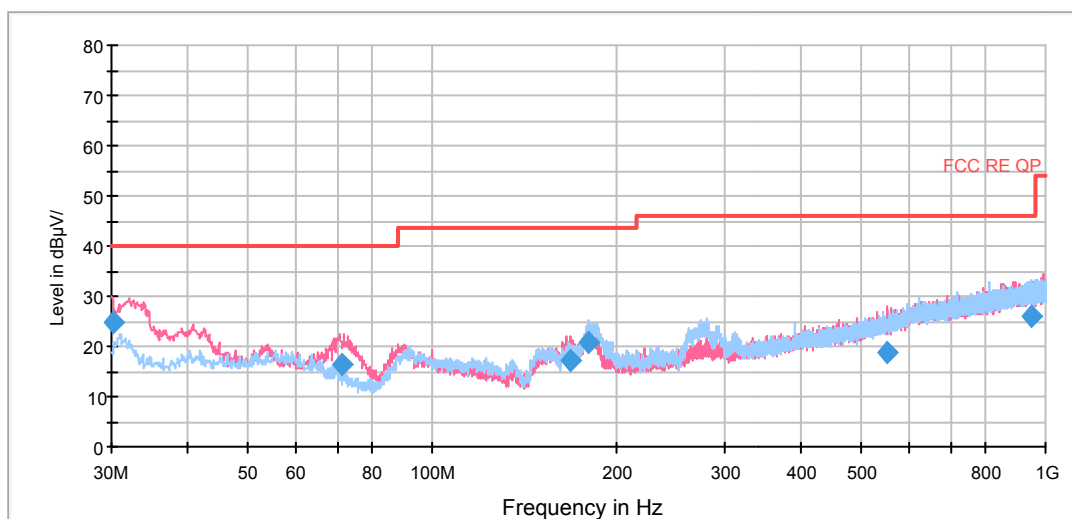

Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
30.160000	24.9	100.0	V	100.0	37.0	-12.1	15.1	40.0
71.271250	16.5	114.0	V	320.0	25.1	-8.6	23.5	40.0
167.985000	17.3	100.0	V	35.0	27.7	-10.4	26.2	43.5
179.620000	20.7	189.0	H	94.0	31.7	-11.0	22.8	43.5
553.641250	18.8	114.0	V	171.0	40.5	-21.7	27.2	46.0
949.643750	26.0	189.0	H	183.0	53.1	-27.1	20.0	46.0

FCC RE 1G-18GHz PK+AV Class B

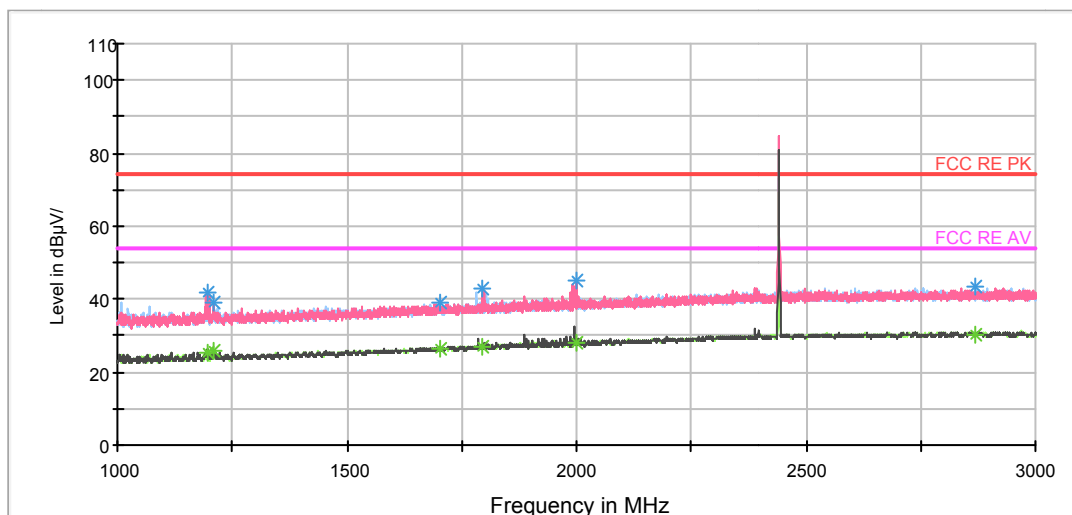


Radiates Emission from 1GHz to 3GHz
Note: The signal beyond the limit is carrier.

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1197.250000	41.7	100.0	V	168.0	49.9	-8.2	32.3	74
1210.250000	39.0	100.0	V	235.0	47.1	-8.1	35.0	74
1702.500000	39.0	100.0	H	262.0	44.3	-5.3	35.0	74
1795.750000	43.0	100.0	H	0.0	47.7	-4.7	31.0	74
1998.500000	44.9	100.0	V	221.0	48.5	-3.6	29.1	74
2871.000000	43.5	100.0	H	222.0	43.9	-0.4	30.5	74

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1197.250000	25.2	100.0	V	168.0	33.4	-8.2	28.8	54
1210.250000	25.8	100.0	V	235.0	33.9	-8.1	28.2	54
1702.500000	26.4	100.0	V	129.0	31.7	-5.3	27.6	54
1795.750000	26.8	100.0	V	0.0	31.5	-4.7	27.2	54
1998.500000	28.1	100.0	V	221.0	31.7	-3.6	25.9	54
2871.000000	30.2	100.0	H	222.0	30.6	-0.4	23.8	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

FCC RE 1G-18GHz PK+AV Class B

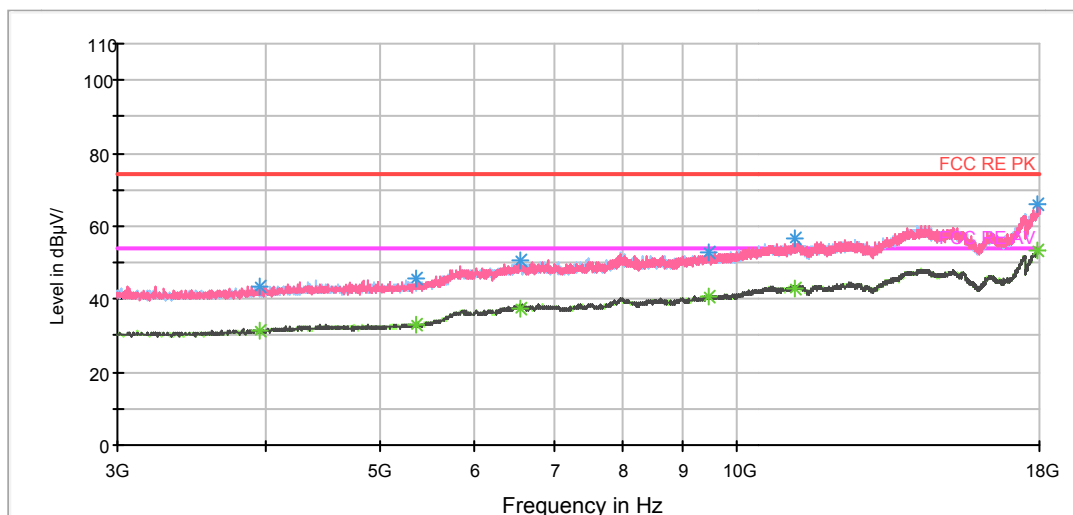


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3948.750000	43.6	100.0	V	0.0	43.2	0.4	30.4	74
5358.750000	45.4	100.0	H	42.0	43.2	2.2	28.6	74
6566.250000	50.5	100.0	V	0.0	43.2	7.3	23.5	74
9463.125000	52.8	100.0	H	204.0	41.7	11.1	21.2	74
11180.625000	56.6	100.0	V	2.0	43.4	13.2	17.4	74
17960.625000	66.1	100.0	H	162.0	40.9	25.2	7.9	74

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3948.750000	31.2	100.0	V	0.0	30.8	0.4	22.8	54
5358.750000	33.0	100.0	H	42.0	30.8	2.2	21.0	54
6566.250000	37.7	100.0	H	89.0	30.4	7.3	16.3	54
9463.125000	40.4	100.0	H	204.0	29.3	11.1	13.6	54
11180.625000	43.2	100.0	V	2.0	30.0	13.2	10.8	54
17960.625000	53.4	100.0	H	162.0	28.2	25.2	0.6	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 18-26.5GHz PK+AV

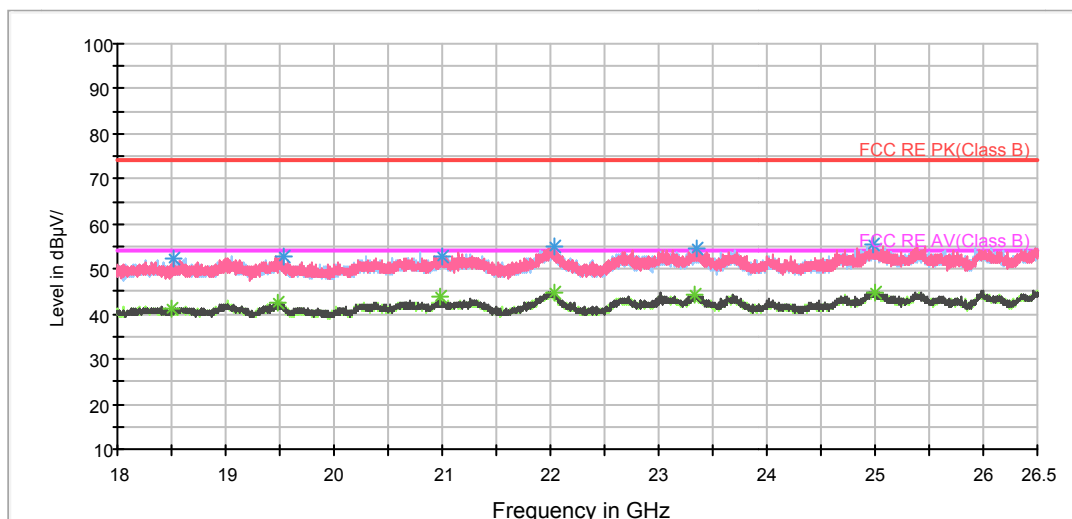

Radiates Emission from 18GHz to 26.5GHz


Frequency (MHz)	Peak (dBuV/m)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
18513.187500	52.2	V	90.0	51.9	0.3	21.8	74
19527.875000	52.9	H	164.0	52.9	0.0	21.1	74
20996.250000	53.0	V	42.0	55.0	-2.0	21.0	74
22038.562500	55.1	H	250.0	56.5	-1.4	18.9	74
23346.500000	54.4	H	242.0	54.4	0.0	19.6	74
24983.812500	55.7	V	22.0	54.7	1.0	18.3	74

Frequency (MHz)	Average (dBuV/m)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
18491.937500	41.4	V	61.0	41.0	0.4	12.6	54
19486.437500	42.3	H	174.0	42.2	0.1	11.7	54
20985.625000	43.9	V	205.0	45.9	-2.0	10.1	54
22033.250000	44.9	H	203.0	46.3	-1.4	9.1	54
23339.062500	44.1	V	61.0	44.1	0.0	9.9	54
24995.500000	44.8	V	141.0	43.7	1.1	9.2	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)




FCC RE 0.03-1GHz QP Class B

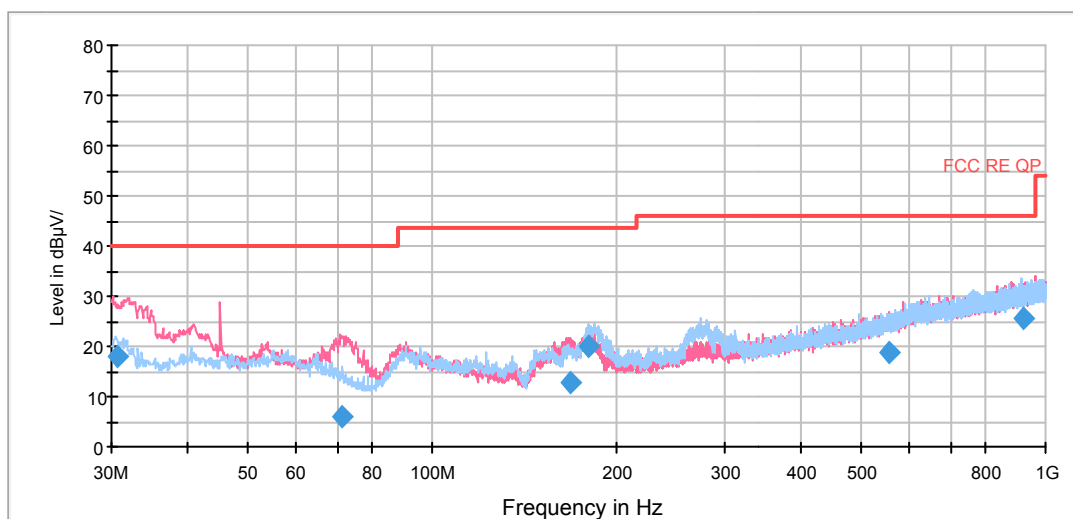

Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
30.720000	18.2	100.0	V	87.0	30.3	-12.1	21.8	40.0
71.542500	6.0	100.0	V	8.0	14.6	-8.6	34.0	40.0
167.896250	12.9	100.0	V	28.0	23.2	-10.3	30.6	43.5
180.346250	20.1	189.0	H	98.0	31.0	-10.9	23.4	43.5
554.932500	18.9	175.0	V	0.0	40.7	-21.8	27.1	46.0
917.305000	25.6	175.0	H	117.0	52.6	-27.0	20.4	46.0

FCC RE 1G-18GHz PK+AV Class B

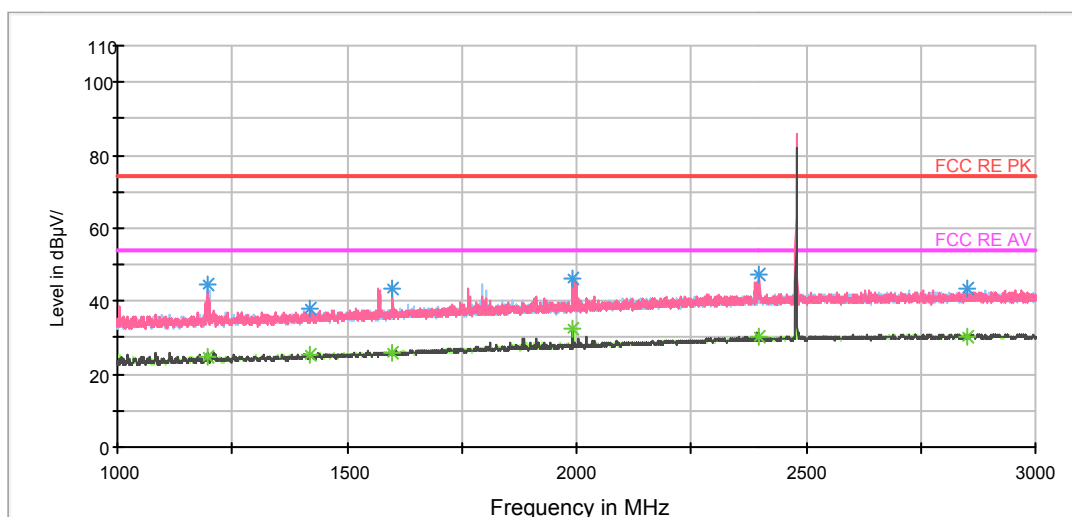


Radiates Emission from 1GHz to 3GHz
Note: The signal beyond the limit is carrier.

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1194.500000	44.6	100.0	H	0.0	52.8	-8.2	29.4	74
1421.250000	37.8	100.0	V	184.0	44.7	-6.9	36.2	74
1599.750000	43.3	100.0	V	0.0	49.1	-5.8	30.7	74
1991.500000	46.4	100.0	V	238.0	50.0	-3.6	27.6	74
2399.500000	47.4	100.0	V	306.0	48.7	-1.3	26.6	74
2851.000000	43.3	100.0	H	351.0	43.9	-0.6	30.7	74

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1194.500000	24.7	100.0	H	0.0	32.9	-8.2	29.3	54
1421.250000	25.1	100.0	H	0.0	32.0	-6.9	28.9	54
1599.750000	25.7	100.0	H	0.0	31.5	-5.8	28.3	54
1991.500000	32.3	100.0	V	238.0	35.9	-3.6	21.7	54
2399.500000	30.0	100.0	V	306.0	31.3	-1.3	24.0	54
2851.000000	30.5	100.0	V	63.0	31.1	-0.6	23.5	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

FCC RE 1G-18GHz PK+AV Class B

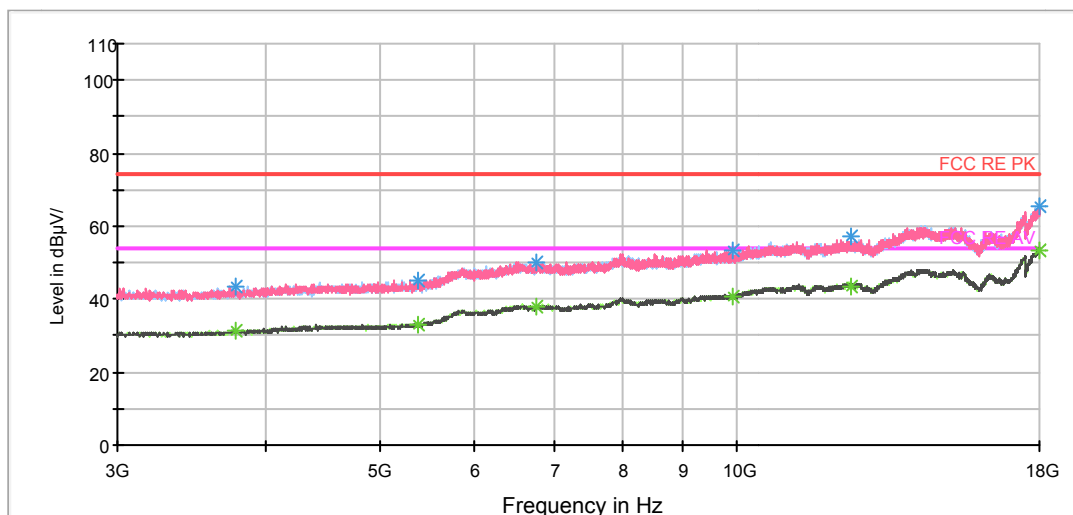


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3781.875000	43.3	100.0	H	302.0	42.9	0.4	30.7	74
5388.750000	45.4	100.0	V	257.0	43.0	2.4	28.6	74
6781.875000	50.2	100.0	V	8.0	42.9	7.3	23.8	74
9901.875000	53.6	100.0	H	55.0	42.2	11.4	20.4	74
12465.000000	57.4	100.0	H	274.0	42.7	14.7	16.6	74
17986.875000	65.5	100.0	V	0.0	39.8	25.7	8.5	74

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3781.875000	31.2	100.0	H	302.0	30.8	0.4	22.8	54
5388.750000	33.0	100.0	H	302.0	30.6	2.4	21.0	54
6781.875000	37.9	100.0	H	157.0	30.6	7.3	16.1	54
9901.875000	40.8	100.0	H	55.0	29.4	11.4	13.2	54
12465.000000	43.6	100.0	V	0.0	28.9	14.7	10.4	54
17986.875000	53.4	100.0	H	23.0	27.7	25.7	0.6	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 18-26.5GHz PK+AV

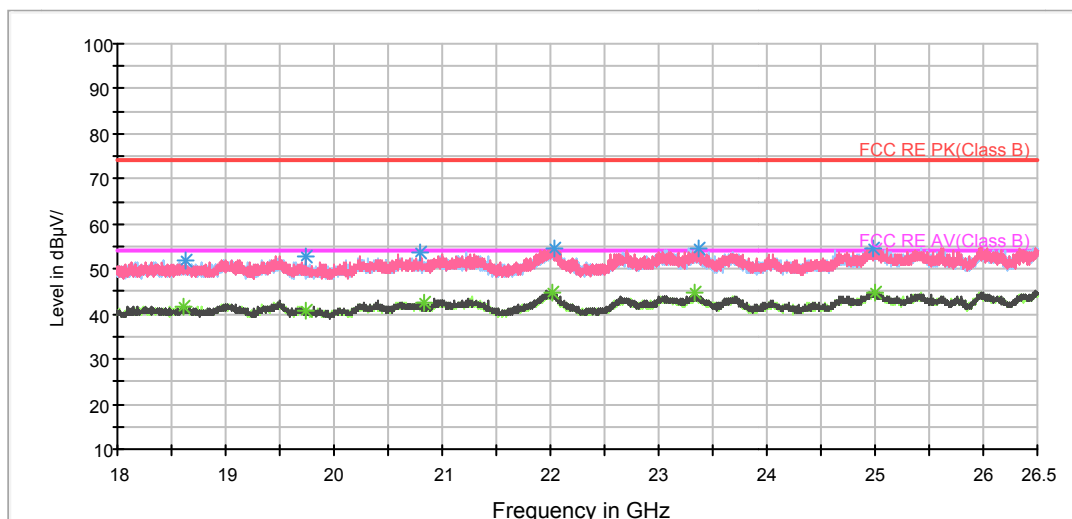

Radiates Emission from 18GHz to 26.5GHz

Frequency (MHz)	Peak (dBuV/m)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
18633.250000	51.7	V	164.0	51.6	0.1	22.3	74
19742.500000	52.9	V	92.0	53.6	-0.7	21.1	74
20805.000000	53.5	V	4.0	55.5	-2.0	20.5	74
22032.187500	54.6	V	0.0	56.0	-1.4	19.4	74
23366.687500	54.7	H	219.0	54.8	-0.1	19.3	74
24983.812500	54.6	V	73.0	53.6	1.0	19.4	74

Frequency (MHz)	Average (dBuV/m)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
18604.562500	41.5	H	148.0	41.4	0.1	12.5	54
19749.937500	40.6	H	219.0	41.3	-0.7	13.4	54
20827.312500	42.5	V	0.0	44.6	-2.1	11.5	54
22009.875000	44.6	H	179.0	45.9	-1.3	9.4	54
23332.687500	44.8	H	250.0	44.8	0.0	9.2	54
24999.750000	45.0	V	23.0	43.9	1.1	9.0	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

4.11 Conducted Emission

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.10-2013. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz. The measurement result should include both L line and N line.

The test is in transmitting mode.

Test Setup

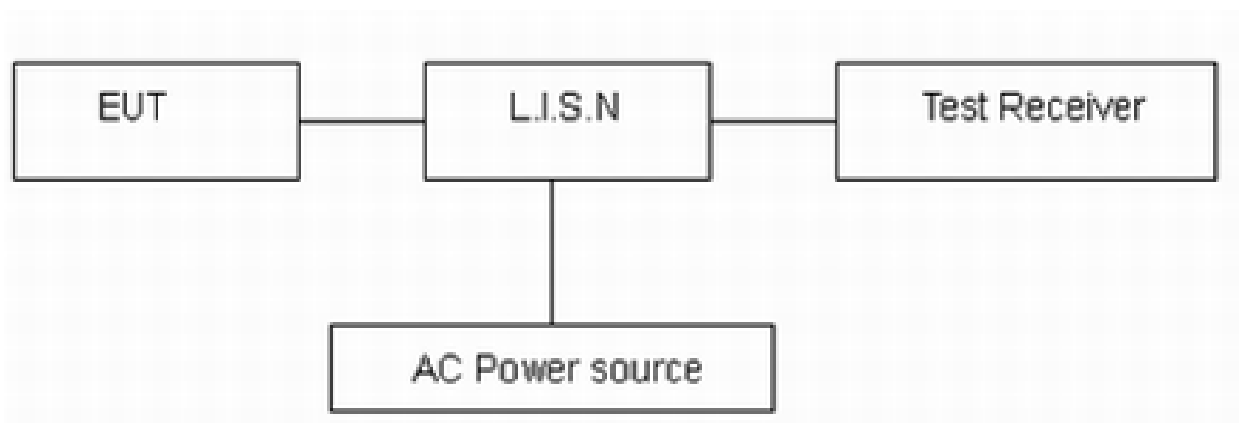

Note: AC Power source is used to 120V/60Hz.

Limits

Frequency (MHz)	Conducted Limits(dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46 *
0.5 - 5	56	46
5 - 30	60	50
*: Decreases with the logarithm of the frequency.		

Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U=2.69$ dB.



Test Results:

Following plots, Blue trace uses the peak detection, Green trace uses the average detection.


Basic Rate-CH0 L Line

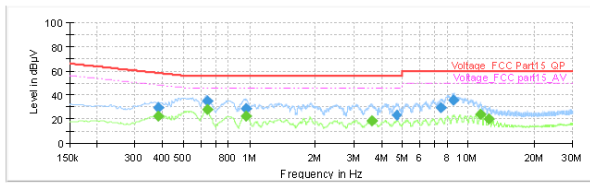

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.384000	---	22.78	48.19	25.41	1000.0	9.000	L1	ON	19.2
0.384000	29.31	---	58.19	28.88	1000.0	9.000	L1	ON	19.2
0.640500	---	26.18	46.00	17.82	1000.0	9.000	L1	ON	19.3
0.640500	35.22	---	56.00	20.78	1000.0	9.000	L1	ON	19.3
0.560000	---	22.52	46.00	23.48	1000.0	9.000	L1	ON	19.2
0.560000	28.86	---	56.00	27.14	1000.0	9.000	L1	ON	19.2
3.590250	---	18.84	46.00	27.16	1000.0	9.000	L1	ON	19.1
4.706250	23.54	---	56.00	32.46	1000.0	9.000	L1	ON	19.1
7.478250	29.79	---	60.00	30.21	1000.0	9.000	L1	ON	19.2
8.553750	35.90	---	60.00	24.10	1000.0	9.000	L1	ON	19.2
11.393250	---	23.81	50.00	26.19	1000.0	9.000	L1	ON	19.4
12.419250	---	20.21	50.00	29.79	1000.0	9.000	L1	ON	19.4


Basic Rate-CH0 N Line

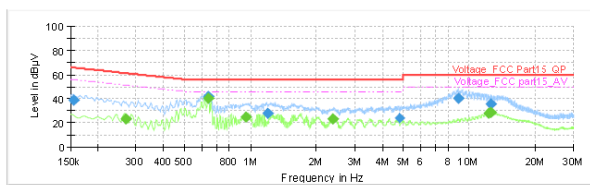

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.154500	38.67	---	65.75	27.09	1000.0	9.000	N	ON	19.1
0.269250	---	23.62	51.14	27.52	1000.0	9.000	N	ON	19.1
0.638250	42.19	---	56.00	13.81	1000.0	9.000	N	ON	19.3
0.640500	---	40.51	46.00	5.49	1000.0	9.000	N	ON	19.3
0.951000	---	25.16	46.00	20.84	1000.0	9.000	N	ON	19.2
1.203000	27.70	---	56.00	28.30	1000.0	9.000	N	ON	19.2
2.384250	---	23.37	46.00	22.63	1000.0	9.000	N	ON	19.0
4.784750	24.14	---	56.00	31.86	1000.0	9.000	N	ON	19.1
8.884500	40.65	---	60.00	19.35	1000.0	9.000	N	ON	19.2
12.221250	---	28.21	50.00	21.79	1000.0	9.000	N	ON	19.4
12.549750	35.39	---	60.00	24.61	1000.0	9.000	N	ON	19.4
12.574500	---	28.68	50.00	21.32	1000.0	9.000	N	ON	19.4


Basic Rate-CH39 L Line

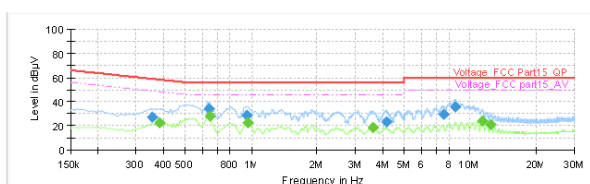

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.357000	27.07	---	58.80	31.73	1000.0	9.000	L1	ON	19.2
0.384000	---	22.77	48.19	25.43	1000.0	9.000	L1	ON	19.2
0.638250	33.98	---	56.00	22.02	1000.0	9.000	L1	ON	19.3
0.647250	---	28.00	46.00	18.00	1000.0	9.000	L1	ON	19.3
0.951000	28.61	---	56.00	27.39	1000.0	9.000	L1	ON	19.2
0.960000	---	22.46	46.00	23.54	1000.0	9.000	L1	ON	19.2
3.585750	---	18.85	46.00	27.15	1000.0	9.000	L1	ON	19.1
4.148250	23.52	---	56.00	32.48	1000.0	9.000	L1	ON	19.1
7.545750	29.39	---	60.00	30.61	1000.0	9.000	L1	ON	19.2
9.515500	35.98	---	60.00	24.02	1000.0	9.000	L1	ON	19.2
11.380250	---	23.70	50.00	26.30	1000.0	9.000	L1	ON	19.4
12.363000	---	20.82	50.00	29.18	1000.0	9.000	L1	ON	19.4


Basic Rate-CH39 N Line

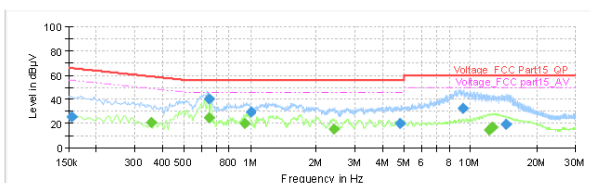

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.154500	25.70	---	65.75	40.05	1000.0	9.000	N	ON	19.1
0.354750	---	21.19	48.85	27.66	1000.0	9.000	N	ON	19.2
0.645000	---	24.73	46.00	21.27	1000.0	9.000	N	ON	19.3
0.647250	40.25	---	56.00	15.75	1000.0	9.000	N	ON	19.3
0.937500	---	20.00	46.00	26.00	1000.0	9.000	N	ON	19.2
1.002750	29.73	---	56.00	26.27	1000.0	9.000	N	ON	19.2
2.395500	---	15.48	46.00	30.52	1000.0	9.000	N	ON	19.0
4.807500	20.02	---	56.00	35.98	1000.0	9.000	N	ON	19.1
9.490500	32.22	---	60.00	27.78	1000.0	9.000	N	ON	19.3
12.111000	---	14.70	50.00	35.30	1000.0	9.000	N	ON	19.4
12.513750	---	16.75	50.00	33.25	1000.0	9.000	N	ON	19.4
14.446500	19.49	---	60.00	40.51	1000.0	9.000	N	ON	19.5


Basic Rate-CH78 L Line

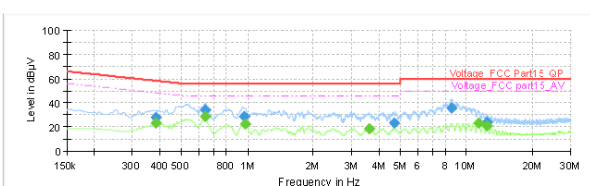

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.391750	27.94	---	58.24	30.30	1000.0	9.000	L1	ON	19.2
0.384000	---	23.03	48.19	25.16	1000.0	9.000	L1	ON	19.2
0.638250	33.90	---	56.00	22.10	1000.0	9.000	L1	ON	19.3
0.640500	---	28.42	46.00	17.58	1000.0	9.000	L1	ON	19.3
0.982250	28.57	---	56.00	27.43	1000.0	9.000	L1	ON	19.2
0.989000	---	22.29	46.00	23.71	1000.0	9.000	L1	ON	19.2
3.597000	---	18.83	46.00	27.17	1000.0	9.000	L1	ON	19.1
4.661250	23.46	---	56.00	32.54	1000.0	9.000	L1	ON	19.1
8.495250	35.34	---	60.00	24.66	1000.0	9.000	L1	ON	19.2
11.316750	---	23.54	50.00	26.46	1000.0	9.000	L1	ON	19.4
12.372000	---	21.03	50.00	28.97	1000.0	9.000	L1	ON	19.4
12.392250	23.90	---	60.00	36.10	1000.0	9.000	L1	ON	19.4

Basic Rate-CH78 N Line

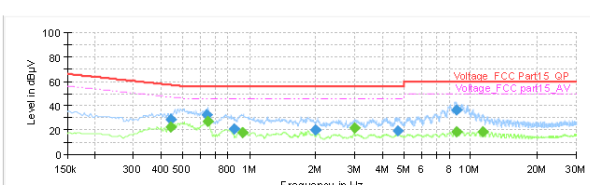


Final Result

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.444750	---	22.40	46.97	24.57	1000.0	9.000	N	ON	19.2
0.444750	26.85	---	56.97	28.12	1000.0	9.000	N	ON	19.2
0.640500	32.61	---	56.00	23.39	1000.0	9.000	N	ON	19.3
0.647250	---	26.81	46.00	19.19	1000.0	9.000	N	ON	19.3
0.854250	20.96	---	56.00	35.04	1000.0	9.000	N	ON	19.2
0.933000	---	17.54	46.00	28.46	1000.0	9.000	N	ON	19.2
1.982750	20.49	---	56.00	35.51	1000.0	9.000	N	ON	19.1
2.985000	---	21.99	46.00	24.01	1000.0	9.000	N	ON	19.1
4.686000	19.67	---	56.00	36.33	1000.0	9.000	N	ON	19.1
8.610000	36.22	---	60.00	23.78	1000.0	9.000	N	ON	19.3
8.610000	---	18.39	50.00	31.61	1000.0	9.000	N	ON	19.3
11.287500	---	18.85	50.00	31.15	1000.0	9.000	N	ON	19.4




EDR-CH0 L Line

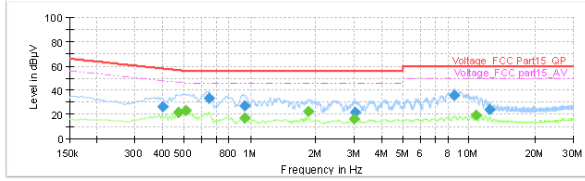

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.399750	26.38	---	57.86	31.47	1000.0	9.000	L1	ON	19.2
0.474000	---	21.62	46.44	24.82	1000.0	9.000	L1	ON	19.2
0.507750	---	23.13	46.00	22.87	1000.0	9.000	L1	ON	19.2
0.647250	33.31	---	56.00	22.69	1000.0	9.000	L1	ON	19.3
0.935250	27.20	---	56.00	28.80	1000.0	9.000	L1	ON	19.2
0.937500	---	16.88	46.00	29.12	1000.0	9.000	L1	ON	19.2
1.844250	---	22.45	46.00	23.55	1000.0	9.000	L1	ON	19.2
3.007500	---	15.98	46.00	30.02	1000.0	9.000	L1	ON	19.1
3.027750	22.06	---	56.00	33.94	1000.0	9.000	L1	ON	19.1
8.587500	35.56	---	60.00	24.44	1000.0	9.000	L1	ON	19.2
10.790250	---	19.31	50.00	30.69	1000.0	9.000	L1	ON	19.4
12.399000	23.86	---	60.00	36.14	1000.0	9.000	L1	ON	19.4


EDR-CH0 N Line

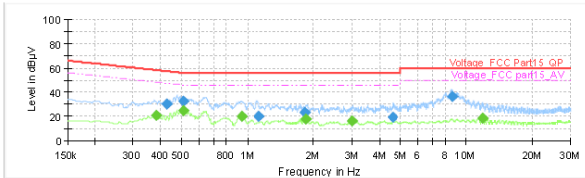

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.394000	---	21.08	48.19	27.12	1000.0	9.000	N	ON	19.2
0.429000	30.19	---	57.27	27.09	1000.0	9.000	N	ON	19.2
0.507750	---	24.69	46.00	21.31	1000.0	9.000	N	ON	19.2
0.607750	32.40	---	56.00	23.60	1000.0	9.000	N	ON	19.2
0.935250	---	19.98	46.00	26.02	1000.0	9.000	N	ON	19.2
1.128750	20.19	---	56.00	35.81	1000.0	9.000	N	ON	19.2
1.837500	23.14	---	56.00	32.86	1000.0	9.000	N	ON	19.2
1.844250	---	17.91	46.00	28.09	1000.0	9.000	N	ON	19.2
3.005250	---	16.00	46.00	30.00	1000.0	9.000	N	ON	19.1
4.573500	19.15	---	56.00	36.85	1000.0	9.000	N	ON	19.1
8.605500	36.23	---	60.00	23.77	1000.0	9.000	N	ON	19.3
11.881500	---	18.67	50.00	31.33	1000.0	9.000	N	ON	19.4


EDR-CH39 L Line

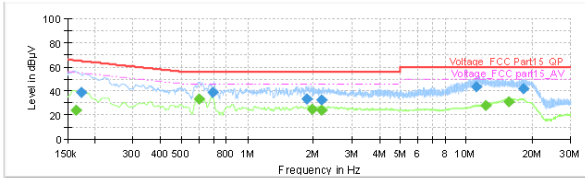

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.153500	---	23.82	55.28	31.47	1000.0	9.000	L1	ON	19.1
0.172500	38.70	---	64.84	26.14	1000.0	9.000	L1	ON	19.2
0.602250	---	33.55	46.00	12.45	1000.0	9.000	L1	ON	19.3
0.630000	38.40	---	56.00	17.60	1000.0	9.000	L1	ON	19.3
1.864500	33.72	---	56.00	22.28	1000.0	9.000	L1	ON	19.2
1.981500	---	24.50	46.00	21.50	1000.0	9.000	L1	ON	19.1
2.170500	32.30	---	56.00	23.70	1000.0	9.000	L1	ON	19.1
2.181750	---	23.95	46.00	22.05	1000.0	9.000	L1	ON	19.1
11.150250	43.20	---	60.00	16.80	1000.0	9.000	L1	ON	19.4
12.275250	---	28.01	50.00	21.99	1000.0	9.000	L1	ON	19.4
15.598500	---	30.95	50.00	19.05	1000.0	9.000	L1	ON	19.4
18.233250	41.85	---	60.00	18.15	1000.0	9.000	L1	ON	19.5


EDR-CH39 N Line

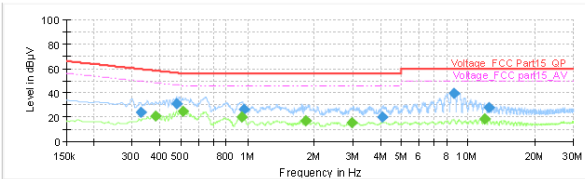

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.330000	23.87	---	59.45	35.58	1000.0	9.000	N	ON	19.2
0.384000	---	21.21	48.19	26.98	1000.0	9.000	N	ON	19.2
0.476250	31.30	---	56.40	25.10	1000.0	9.000	N	ON	19.2
0.507750	---	24.99	46.00	21.01	1000.0	9.000	N	ON	19.2
0.942000	---	20.11	46.00	25.89	1000.0	9.000	N	ON	19.2
0.957750	26.11	---	56.00	29.89	1000.0	9.000	N	ON	19.2
1.839750	---	16.89	46.00	29.11	1000.0	9.000	N	ON	19.2
2.976000	---	15.36	46.00	30.64	1000.0	9.000	N	ON	19.1
4.081750	19.84	---	56.00	36.16	1000.0	9.000	N	ON	19.1
8.598750	39.37	---	60.00	20.63	1000.0	9.000	N	ON	19.3
11.910750	---	18.65	50.00	31.35	1000.0	9.000	N	ON	19.4
12.437250	28.10	---	60.00	31.90	1000.0	9.000	N	ON	19.4


EDR-CH78 L Line

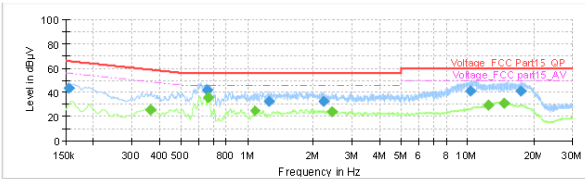

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.154500	43.75	---	65.75	22.00	1000.0	9.000	L1	ON	19.1
0.361500	---	25.34	48.69	23.36	1000.0	9.000	L1	ON	19.2
0.634000	41.60	---	56.00	14.40	1000.0	9.000	L1	ON	19.3
0.635000	---	35.75	46.00	10.25	1000.0	9.000	L1	ON	19.3
1.083750	---	24.63	46.00	21.37	1000.0	9.000	L1	ON	19.2
1.259250	32.51	---	56.00	23.49	1000.0	9.000	L1	ON	19.2
2.217750	32.61	---	56.00	23.39	1000.0	9.000	L1	ON	19.1
2.429250	---	23.94	46.00	22.06	1000.0	9.000	L1	ON	19.0
10.317250	40.77	---	60.00	19.23	1000.0	9.000	L1	ON	19.4
12.437750	---	29.84	50.00	20.16	1000.0	9.000	L1	ON	19.4
14.336500	---	30.88	50.00	19.12	1000.0	9.000	L1	ON	19.5
17.407500	41.20	---	60.00	18.72	1000.0	9.000	L1	ON	19.6

EDR-CH78 N Line

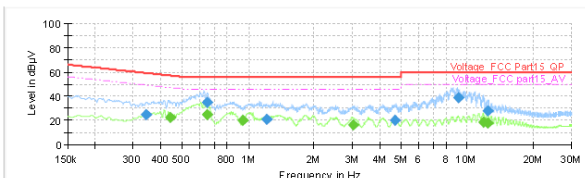

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.343500	25.17	---	59.12	33.95	1000.0	9.000	N	ON	19.2
0.444750	---	22.45	46.97	24.52	1000.0	9.000	N	ON	19.2
0.645000	---	24.99	46.00	21.01	1000.0	9.000	N	ON	19.3
0.649500	34.97	---	56.00	21.03	1000.0	9.000	N	ON	19.3
0.937500	---	20.06	46.00	25.94	1000.0	9.000	N	ON	19.2
1.225500	20.95	---	56.00	35.05	1000.0	9.000	N	ON	19.2
3.012000	---	15.97	46.00	30.03	1000.0	9.000	N	ON	19.1
4.701750	20.23	---	56.00	35.77	1000.0	9.000	N	ON	19.1
9.073500	38.85	---	60.00	21.15	1000.0	9.000	N	ON	19.3
11.850000	---	18.48	50.00	31.52	1000.0	9.000	N	ON	19.4
12.351750	28.14	---	60.00	31.86	1000.0	9.000	N	ON	19.4
12.423750	---	17.92	50.00	32.08	1000.0	9.000	N	ON	19.4

5 Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Time
BT Base Station Simulator	R&S	CBT	100271	2017-05-14	2018-05-13
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2017-02-18	2020-02-17
EMI Test Receiver	R&S	ESCS30	100138	2016-12-16	2017-12-15
Artificial main network	R&S	ENV216	101171	2016-12-16	2019-12-15
Signal Analyzer	R&S	FSV30	100815	2016-12-16	2017-12-15
EMI Test Receiver	R&S	ESCI	100948	2017-05-20	2018-05-19
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-201	2014-12-06	2017-12-05
Double Ridged Waveguide Horn Antenna	R&S	HF907	100126	2014-12-06	2017-12-05
Power Splitter	Hua Xiang	SHX-GF2-2-13	10120101	NA	NA
Spectrum Analyzer	Agilent	N9010A	MY47191109	2017-05-20	2018-05-19
Standard Gain Horn	ETS-Lindgren	3160-09	00102644	2015-01-30	2018-01-29
RF Cable	Agilent	SMA 15cm	0001	2017-02-06	2017-08-05

*****END OF REPORT *****

ANNEX A: EUT Appearance and Test Setup

A.1 EUT Appearance




Front Side




Back Side


a: EUT

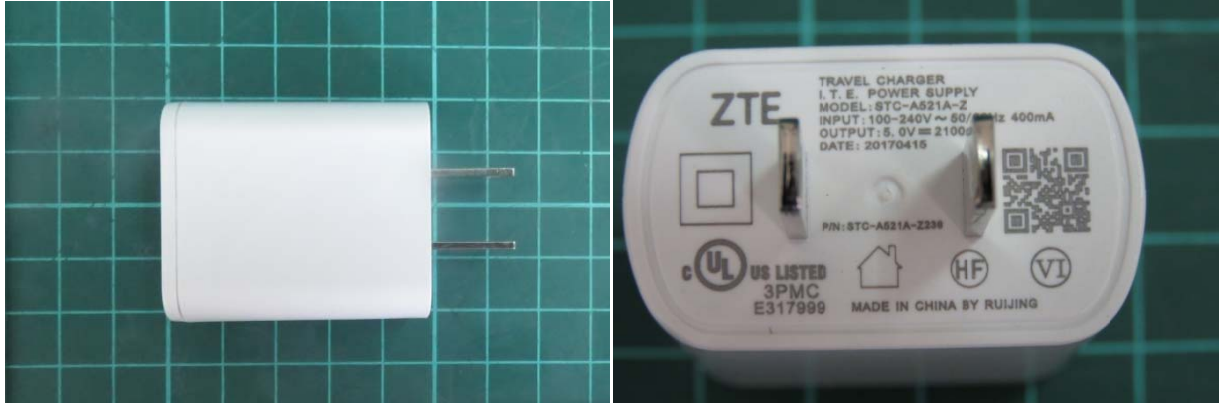


Adapter 1

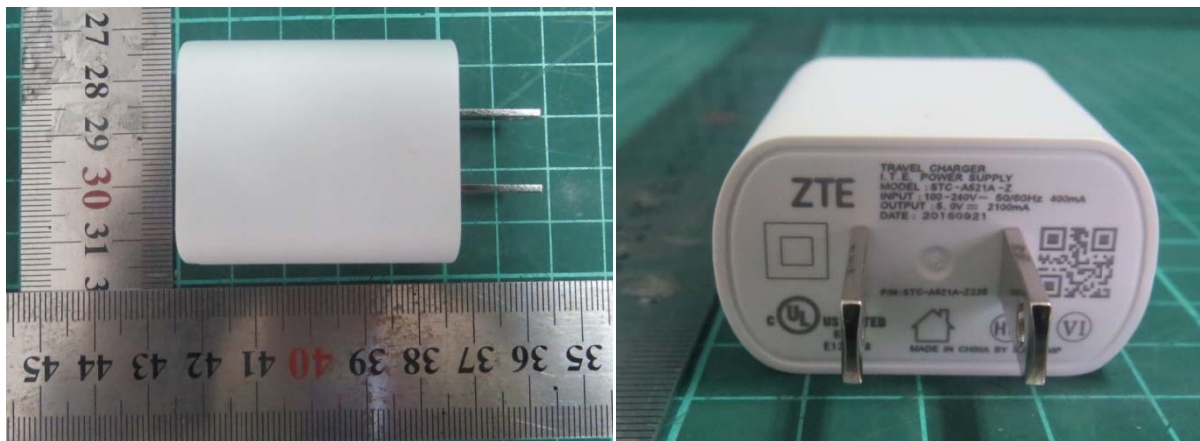

Adapter 2
b : Adapter

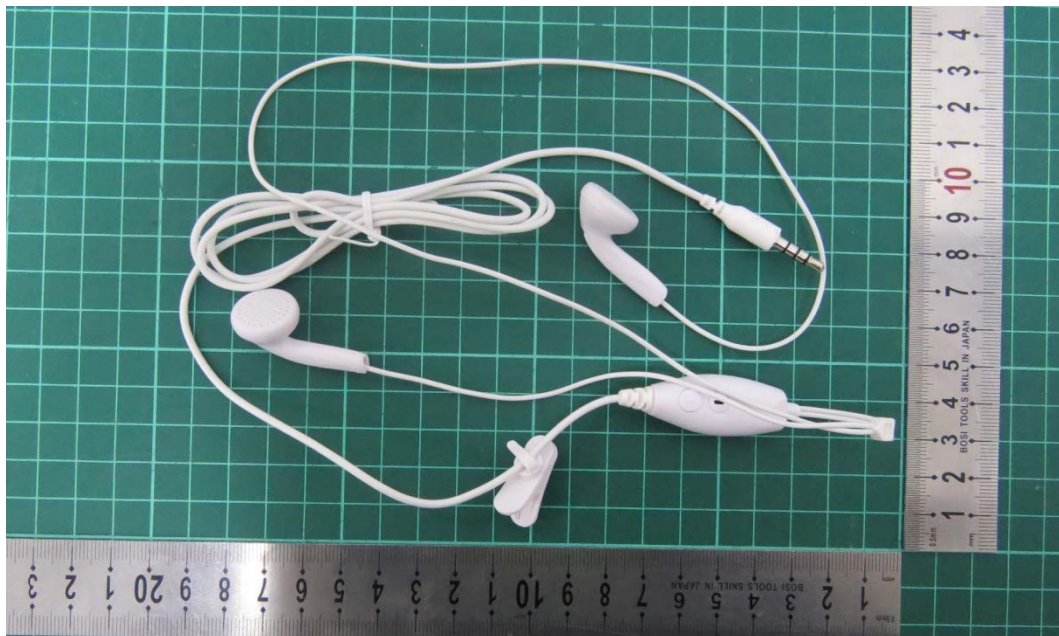

Earphone 1

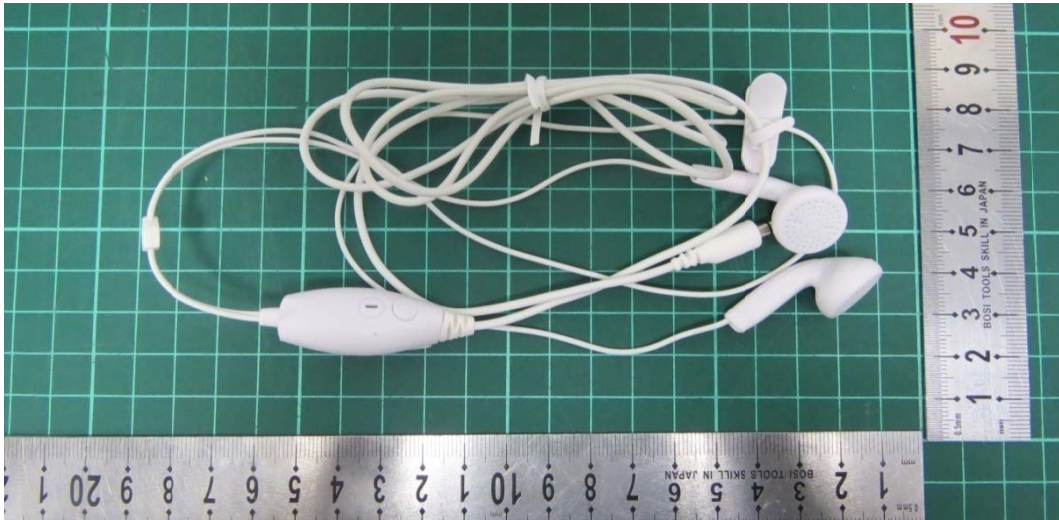

Earphone 2
c : Earphone




USB Cable 1




USB Cable 2
d : USB Cable

Picture 1 EUT and Accessory

A.2 Test Setup

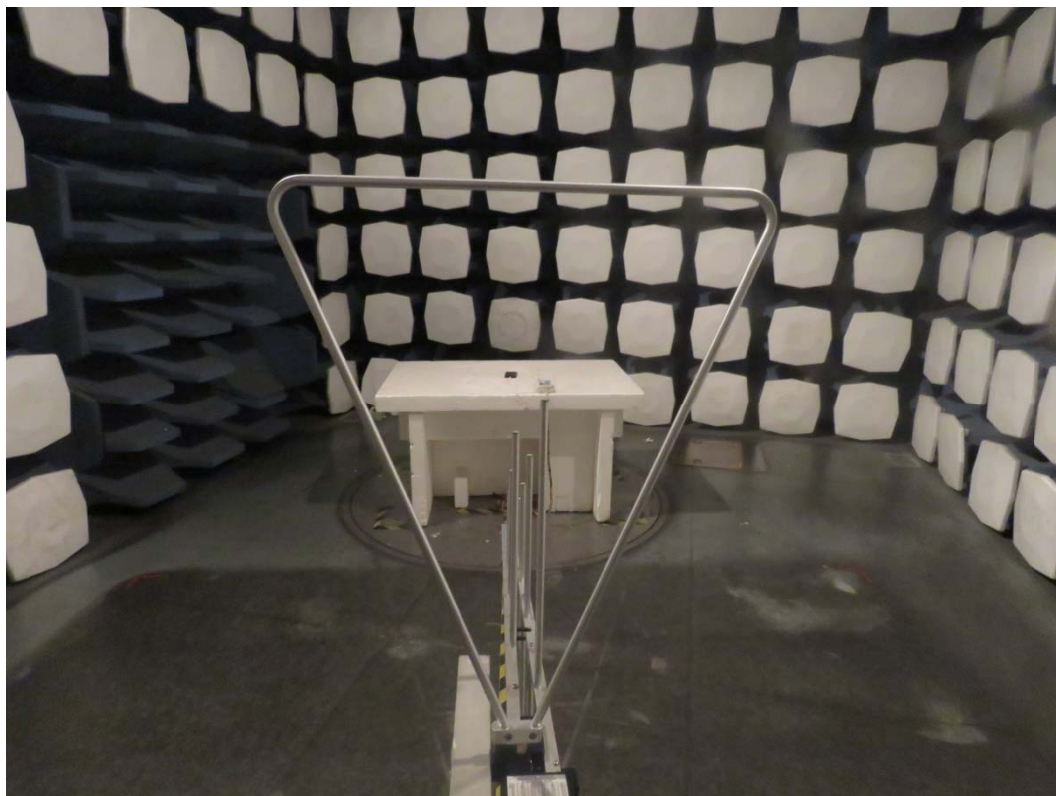

Below 1GHz

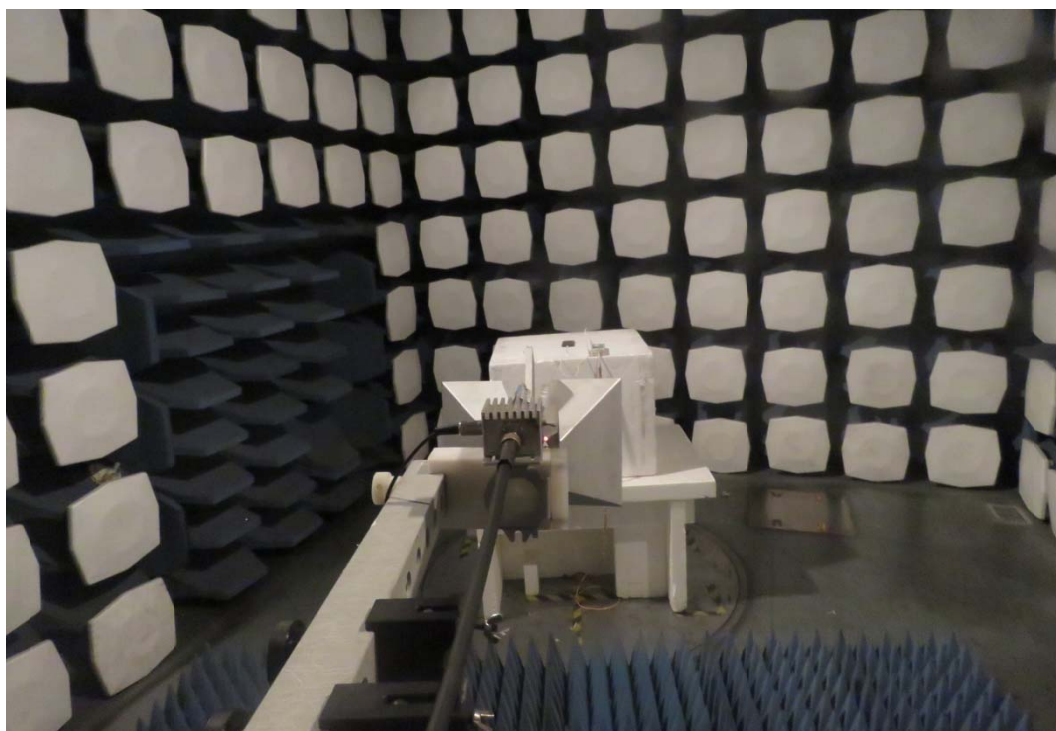

Above 1GHz

Picture 2 Radiated Emission Test Setup



Picture 3 Conducted Emission Test Setup