

FCC RF Test Report


APPLICANT : ZTE CORPORATION
EQUIPMENT : CDMA 1x-EVDO Digital Mobile Phone
BRAND NAME : ZTE
MODEL NAME : ZTE N800
FCC ID : SRQ-ZTEN800
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on May 23, 2013 and completely tested on Jun. 15, 2013. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.



Reviewed by: Joseph Lin / Manager



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant..... 5

 1.2 Manufacturer..... 5

 1.3 Feature of Equipment Under Test 5

 1.4 Product Specification of Equipment Under Test..... 5

 1.5 Testing Site..... 6

 1.6 Applied Standards 6

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 7

 2.1 Carrier Frequency Channel 7

 2.2 Pre-Scanned RF Power..... 8

 2.3 Test Mode..... 9

 2.4 Connection Diagram of Test System..... 10

 2.5 Support Unit used in test configuration and system 11

 2.6 RF Utility 11

 2.7 Measurement Results Explanation Example..... 12

3 TEST RESULT..... 13

 3.1 6dB Bandwidth Measurement 13

 3.2 Output Power Measurement..... 20

 3.3 Power Spectral Density Measurement 23

 3.4 Conducted Band Edges and Spurious Emission Measurement 35

 3.5 Radiated Band Edges and Spurious Emission Measurement 48

 3.6 AC Conducted Emission Measurement..... 73

 3.7 Antenna Requirements..... 77

4 LIST OF MEASURING EQUIPMENT 78

5 UNCERTAINTY OF EVALUATION 79

APPENDIX A. PHOTOGRAPHS OF EUT

APPENDIX B. SETUP PHOTOGRAPHS

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges	15.209(a) & 15.247(d)	Pass	Under limit 0.71 dB at 2389.740 MHz
		Radiated Spurious Emission			
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 8.78 dB at 0.510 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-

1 General Description

1.1 Applicant

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.2 Manufacturer

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	CDMA 1x-EVDO Digital Mobile Phone
Brand Name	ZTE
Model Name	ZTE N800
FCC ID	SRQ-ZTEN800
EUT supports Radios application	CDMA/EV-DO/WLAN 11bgn/Bluetooth 3.0/4.0
HW Version	cyeA
SW Version	N800V1.0.0B01
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx/Rx Frequency Range	2412 MHz ~ 2462 MHz
Number of Channels	11
Carrier Frequency of Each Channel	2412+(n-1)*5 MHz; n=1~11
Maximum Output Power to Antenna	802.11b : 17.31 dBm (0.0538 W) 802.11g : 21.22 dBm (0.1324 W) 802.11n HT20 : 20.49 dBm (0.1119 W)
Antenna Type	PIFA Antenna type with gain 3.00 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Testing Site

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.			
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C. TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958			
Test Site No.	Sporton Site No.			FCC/IC Registration No.
	TH01-KS	CO01-KS	03CH01-KS	149928/4086E-1

The test site complies with ANSI C63.4 2003 requirement.

1.6 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01
- ♦ ANSI C63.10-2009

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 KHz to 30 MHz) and radiated emission (9 KHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		

2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and antenna configurations as following table and the highest power data rates were chosen for full test in the following tables.

Channel	Frequency	2.4GHz 802.11b RF Power (dBm)			
		DSSS Data Rate			
		1 Mbps	2 Mbps	5.5 Mbps	11 Mbps
CH 01	2412 MHz	17.31	17.21	17.23	17.14
CH 06	2437 MHz	17.15	17.17	17.26	17.17
CH 11	2462 MHz	17.21	17.12	17.18	17.24

Channel	Frequency	2.4GHz 802.11g RF Power (dBm)							
		OFDM Data Rate							
		6 Mbps	9 Mbps	12 Mbps	18 Mbps	24 Mbps	36 Mbps	48 Mbps	54 Mbps
CH 01	2412 MHz	21.22	20.55	20.68	20.62	20.78	20.85	20.67	20.98
CH 06	2437 MHz	20.76	20.86	21.09	21.01	20.94	21.07	21.22	20.97
CH 11	2462 MHz	21.16	21.04	21.19	21.19	21.04	21.08	21.05	21.12

Channel	Frequency	2.4GHz 802.11n HT20 RF Power (dBm)							
		OFDM Data Rate							
		6.5 Mbps	13 Mbps	19.5 Mbps	26 Mbps	39 Mbps	52 Mbps	58.5 Mbps	65 Mbps
CH 01	2412 MHz	20.49	20.35	20.41	20.29	20.17	20.44	20.13	20.16
CH 06	2437 MHz	20.01	20.08	20.06	20.03	20.23	20.23	20.25	20.15
CH 11	2462 MHz	20.39	20.45	20.43	20.31	20.31	20.17	20.33	20.23


2.3 Test Mode

Final results of test modes, data rates and test channels are shown as following table.


Test Cases				
	Test Items	Mode	Data Rate	Test Channel
Conducted TCs	6dB BW Power Spectral Density	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	6.5 Mbps	1/6/11
	Output Power	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	6.5 Mbps	1/6/11
	Conducted Band Edge	802.11b	1 Mbps	1/11
		802.11g	6 Mbps	1/11
		802.11n HT20	6.5 Mbps	1/11
Conducted Spurious Emission	802.11b	1 Mbps	1/6/11	
	802.11g	6 Mbps	1/6/11	
	802.11n HT20	6.5 Mbps	1/6/11	
Radiated TCs	Radiated Band Edge	802.11b	1 Mbps	1/11
		802.11g	6 Mbps	1/11
		802.11n HT20	6.5 Mbps	1/11
	Radiated Spurious Emission	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	6.5 Mbps	1/6/11
AC Conducted Emission	Mode 1 : CDMA2000 BC0 Idle + Bluetooth Link + WLAN Link + USB Cable (Charing from Adapter)			

2.4 Connection Diagram of Test System

<WLAN Tx Mode>

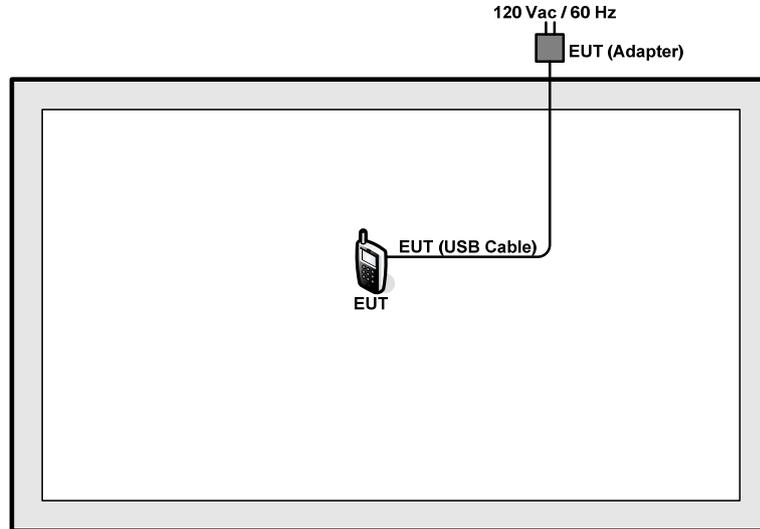

<AC Conducted Emission Mode>

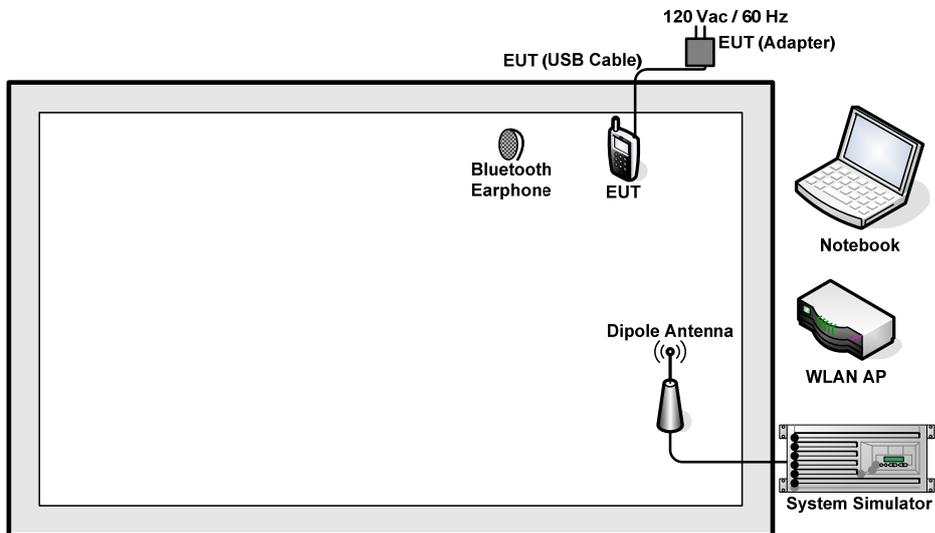

2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	D-Link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8 m
3.	DC Power Supply	GWINSTEK	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
4.	Notebook	DELL	P08S	QDS-BRCM1030	N/A	AC I/P: Unshielded, 0.9 m DC O/P: Shielded, 1.8 m
5.	Bluetooth Earphone	Nokia	BH-106	QTLBH-106	N/A	N/A

2.6 RF Utility

For WLAN function, programmed RF utility, "FCC Test" installed in the notebook make the EUT provides functions like channel selection and power level for continuous transmitting and receiving signals.



2.7 Measurement Results Explanation Example

For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and 10dB attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and 10dB attenuator factor.

Offset = RF cable loss + attenuator factor.

Following table shows an offset computation example with cable loss 5.6 dB.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 5.6 + 10 = 15.6 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB Bandwidth Measurement

3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 KHz.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 D01 DTS Meas. Guidance v03r01.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 KHz.
5. Measure and record the results in the test report.

3.1.4 Test Setup

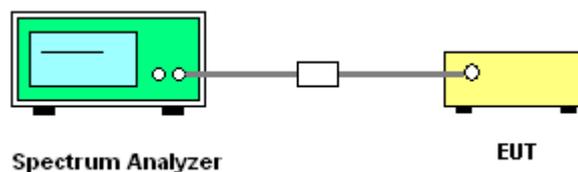




3.1.5 Test Result of 6dB Bandwidth

Test Mode :	802.11b	Temperature :	23~24°C
Test Engineer :	Adonis Li	Relative Humidity :	47~48%

Channel	Frequency (MHz)	802.11b 6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
01	2412	8.52	0.5	Pass
06	2437	8.04	0.5	Pass
11	2462	8.08	0.5	Pass


6 dB Bandwidth Plot on 802.11b Channel 01

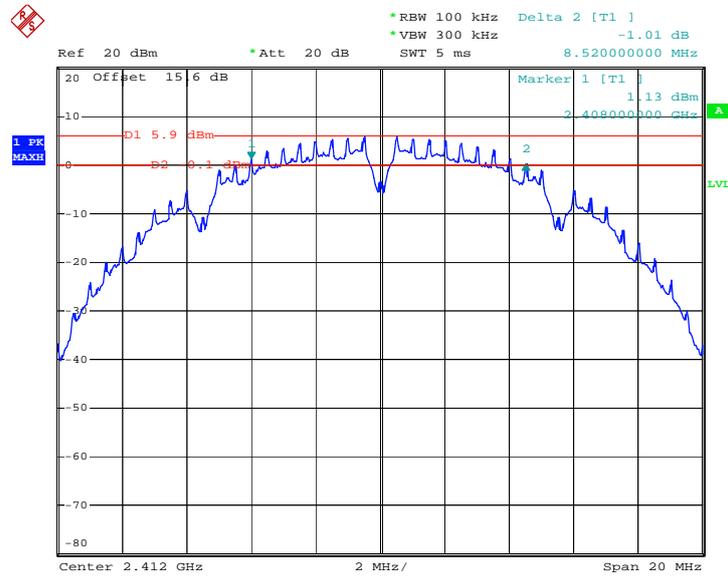

Date: 29.MAY.2013 14:02:27




6 dB Bandwidth Plot on 802.11b Channel 06

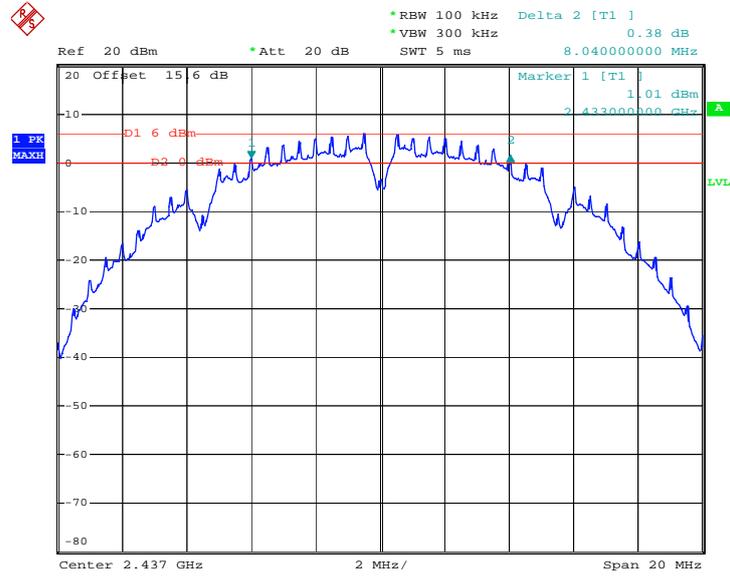

Date: 29.MAY.2013 14:05:29

6 dB Bandwidth Plot on 802.11b Channel 11

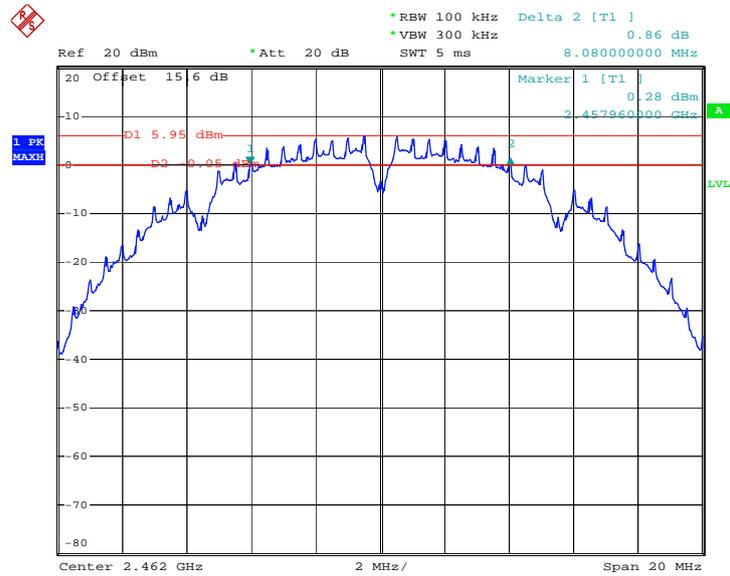


Date: 29.MAY.2013 14:11:29



Test Mode :	802.11g	Temperature :	23~24°C
Test Engineer :	Adonis Li	Relative Humidity :	47~48%

Channel	Frequency (MHz)	802.11g 6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
01	2412	16.38	0.5	Pass
06	2437	16.36	0.5	Pass
11	2462	16.36	0.5	Pass


6 dB Bandwidth Plot on 802.11g Channel 01

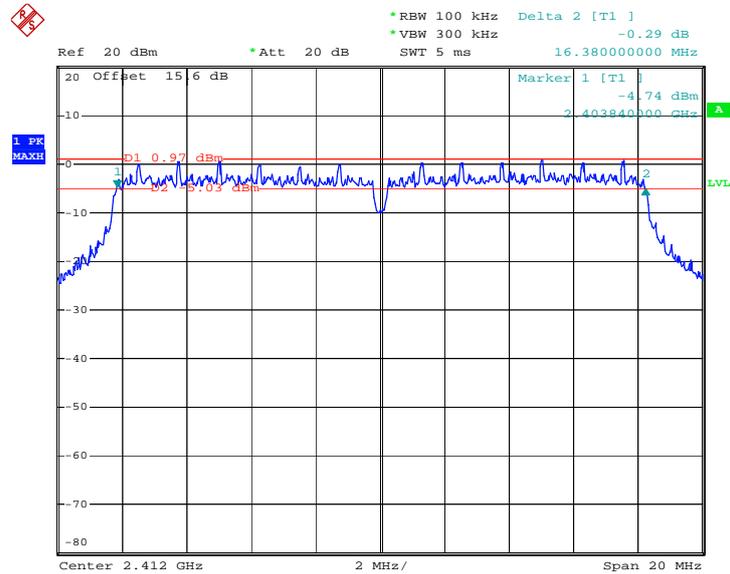

Date: 15.JUN.2013 18:04:01




6 dB Bandwidth Plot on 802.11g Channel 06

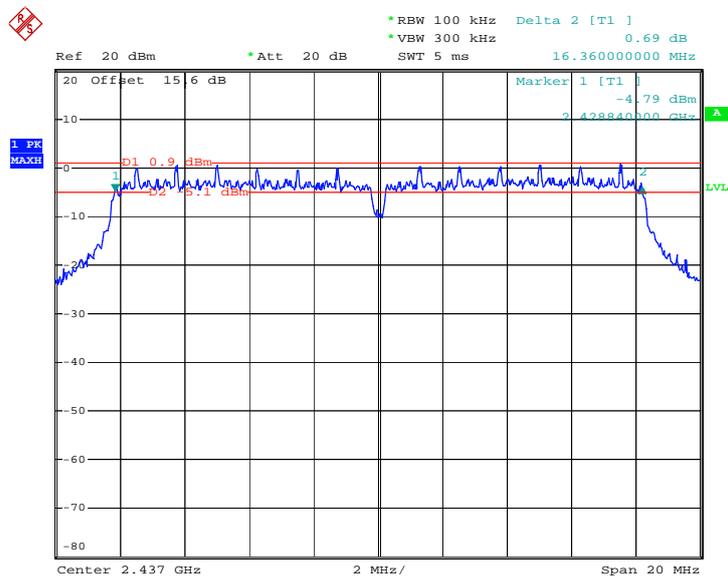

Date: 15.JUN.2013 16:52:58


6 dB Bandwidth Plot on 802.11g Channel 11

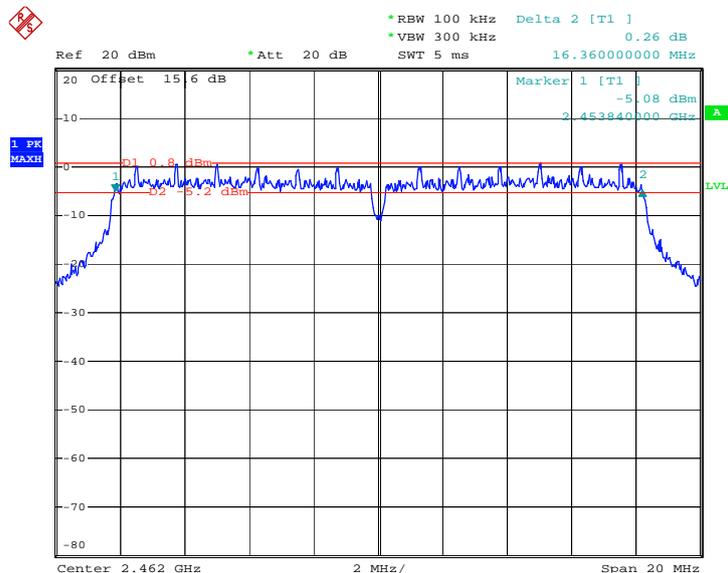

Date: 15.JUN.2013 17:14:08




6 dB Bandwidth Plot on 802.11n HT20 Channel 06

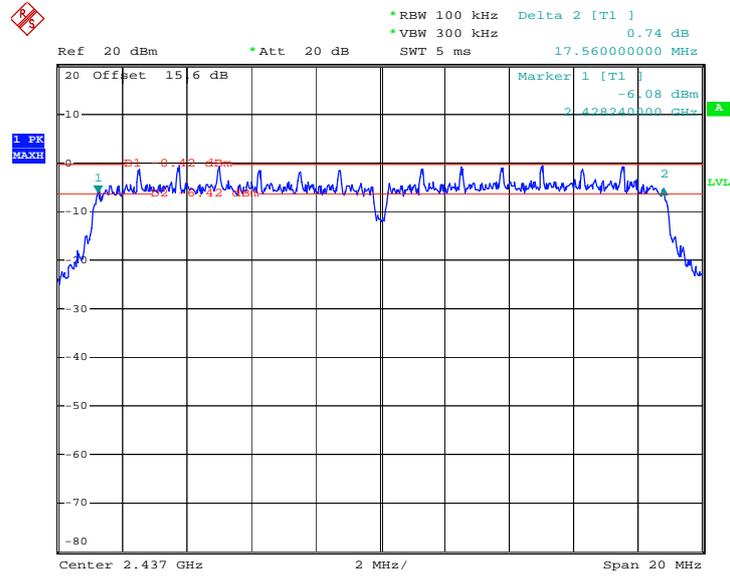

Date: 15.JUN.2013 17:24:12

6 dB Bandwidth Plot on 802.11n HT20 Channel 11

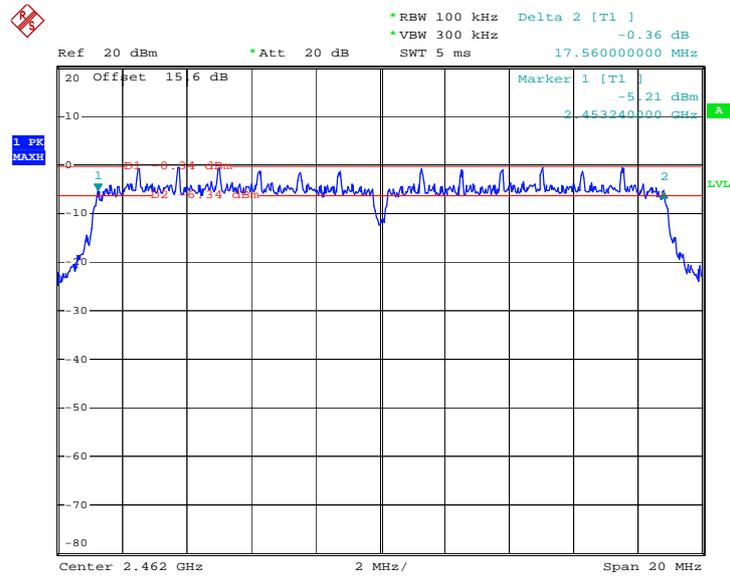

Date: 15.JUN.2013 17:27:21

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 D01 DTS Meas. Guidance v03r01.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

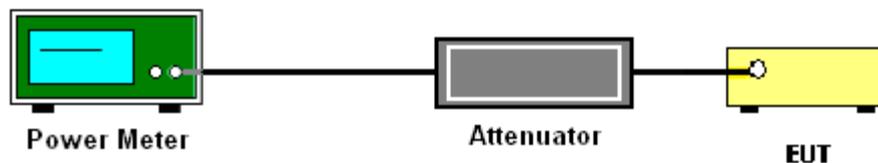

3.2.5 Test Result of Peak Output Power

Test Mode :	802.11b	Temperature :	23~24°C
Test Engineer :	Adonis Li	Relative Humidity :	47~48%

Channel	Frequency (MHz)	802.11b Peak Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	17.31	30	Pass
06	2437	17.15	30	Pass
11	2462	17.21	30	Pass

Test Mode :	802.11g	Temperature :	23~24°C
Test Engineer :	Adonis Li	Relative Humidity :	47~48%

Channel	Frequency (MHz)	802.11g Peak Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	21.22	30	Pass
06	2437	20.76	30	Pass
11	2462	21.16	30	Pass

Test Mode :	802.11n HT20	Temperature :	23~24°C
Test Engineer :	Adonis Li	Relative Humidity :	47~48%

Channel	Frequency (MHz)	2.4GHz 802.11n HT20 Peak Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	20.49	30	Pass
06	2437	20.01	30	Pass
11	2462	20.39	30	Pass

3.2.6 Test Result of Average output Power (Reporting Only)

Test Mode :	802.11b	Temperature :	23~24°C
Test Engineer :	Adonis Li	Relative Humidity :	47~48%
Duty Cycle:	97.67%	Duty Factor:	0.10dB

Channel	Frequency (MHz)	802.11b Average Output Power (dBm)
01	2412	14.61
06	2437	14.49
11	2462	14.51

Test Mode :	802.11g	Temperature :	23~24°C
Test Engineer :	Adonis Li	Relative Humidity :	47~48%
Duty Cycle:	87.42%	Duty Factor:	0.58dB

Channel	Frequency (MHz)	802.11g Average Output Power (dBm)
01	2412	11.83
06	2437	11.55
11	2462	11.53

Test Mode :	802.11n HT20	Temperature :	23~24°C
Test Engineer :	Adonis Li	Relative Humidity :	47~48%
Duty Cycle:	86.68%	Duty Factor:	0.62dB

Channel	Frequency (MHz)	802.11n HT20 Average Output Power (dBm)
01	2412	11.03
06	2437	10.54
11	2462	10.82

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3KHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Option 1 of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup

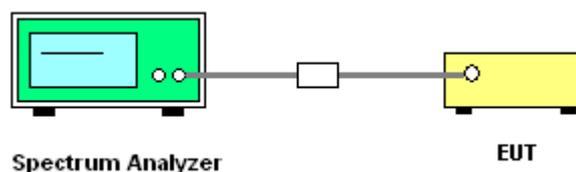

3.3.5 Test Result of Power Spectral Density

Test Mode :	802.11b	Temperature :	23~24°C
Test Engineer :	Adonis Li	Relative Humidity :	47~48%

Channel	Frequency (MHz)	802.11b Power Density		Max. Limits (dBm/3KHz)	Pass/Fail
		PSD/100KHz (dBm)	PSD/3KHz (dBm)		
01	2412	5.91	-8.32	8	Pass
06	2437	5.62	-7.88	8	Pass
11	2462	5.42	-7.79	8	Pass

Test Mode :	802.11g	Temperature :	23~24°C
Test Engineer :	Adonis Li	Relative Humidity :	47~48%

Channel	Frequency (MHz)	802.11g Power Density		Max. Limits (dBm/3KHz)	Pass/Fail
		PSD/100KHz (dBm)	PSD/3KHz (dBm)		
01	2412	0.60	-13.91	8	Pass
06	2437	0.58	-13.97	8	Pass
11	2462	0.38	-13.91	8	Pass

Test Mode :	802.11n HT20	Temperature :	23~24°C
Test Engineer :	Adonis Li	Relative Humidity :	47~48%

Channel	Frequency (MHz)	802.11n HT20 Power Density		Max. Limits (dBm/3KHz)	Pass/Fail
		PSD/100KHz (dBm)	PSD/3KHz (dBm)		
01	2412	-0.75	-14.22	8	Pass
06	2437	-0.63	-15.23	8	Pass
11	2462	-0.62	-15.78	8	Pass


Note:

1. Measured power density (dBm) has offset with cable loss.
2. The Measured power density (dBm)/ 100KHz is reference level and used as 20dBc down for Conducted Band Edges and Conducted Spurious Emission limit line.



3.3.6 Test Result of Power Spectral Density Plots (100kHz)

PSD 100kHz Plot on 802.11b Channel 01

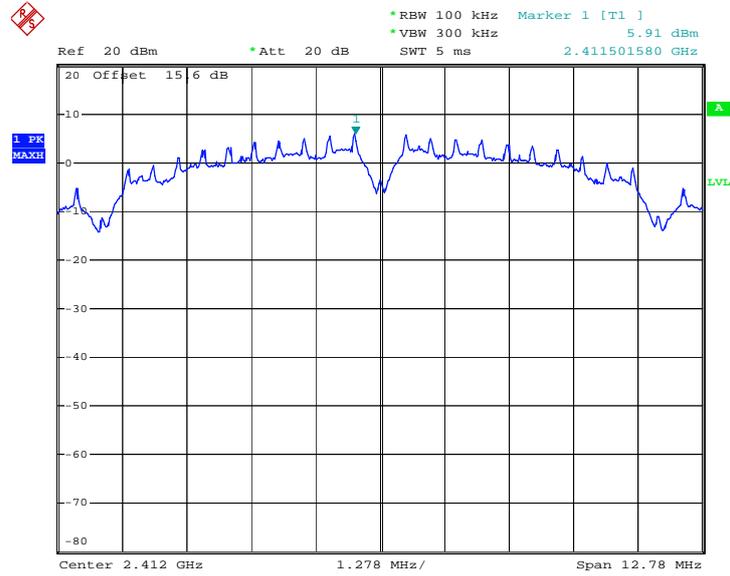

Date: 29.MAY.2013 14:02:59


PSD 100kHz Plot on 802.11b Channel 06



Date: 29.MAY.2013 14:06:01




PSD 100kHz Plot on 802.11b Channel 11

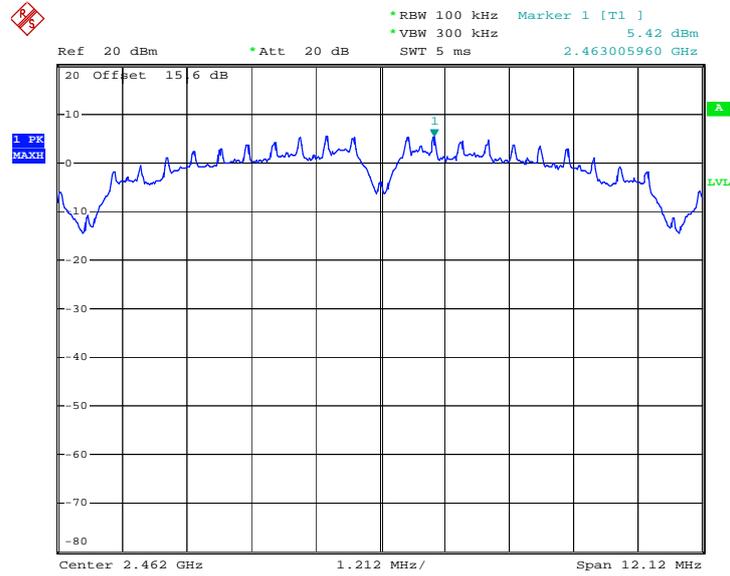

Date: 29.MAY.2013 14:12:01


PSD 100kHz Plot on 802.11g Channel 01

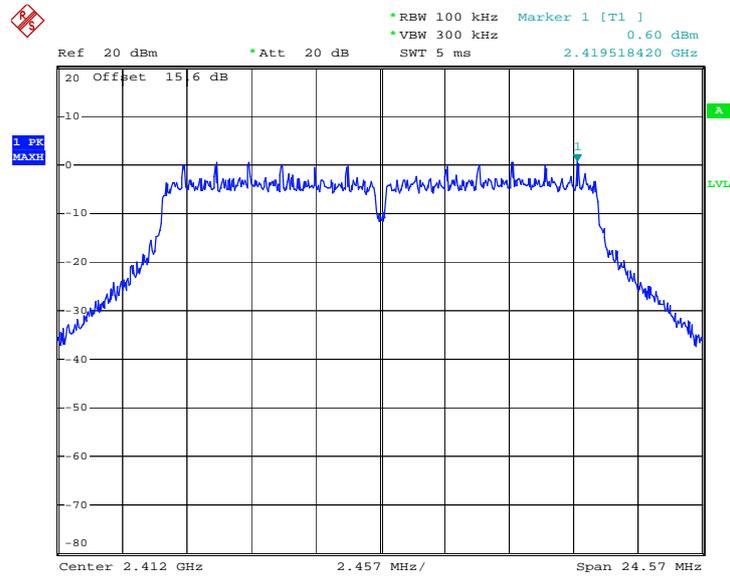

Date: 15.JUN.2013 18:04:34




PSD 100kHz Plot on 802.11g Channel 06

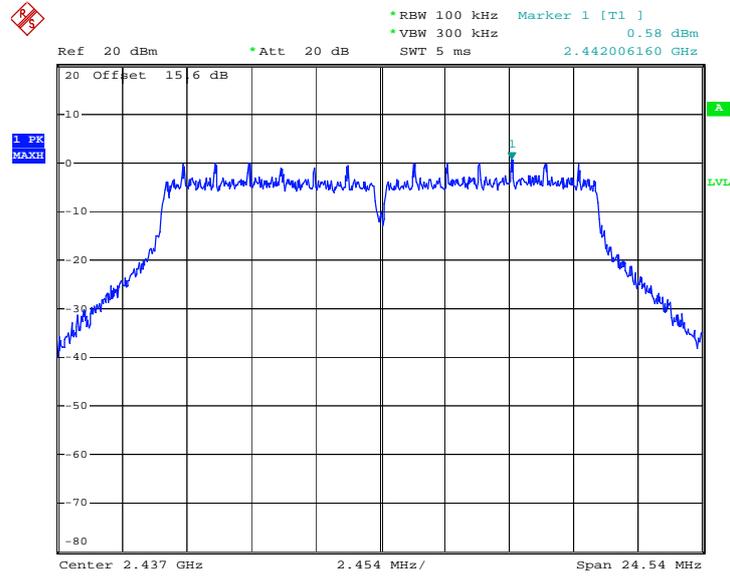

Date: 15.JUN.2013 16:53:33


PSD 100kHz Plot on 802.11g Channel 11

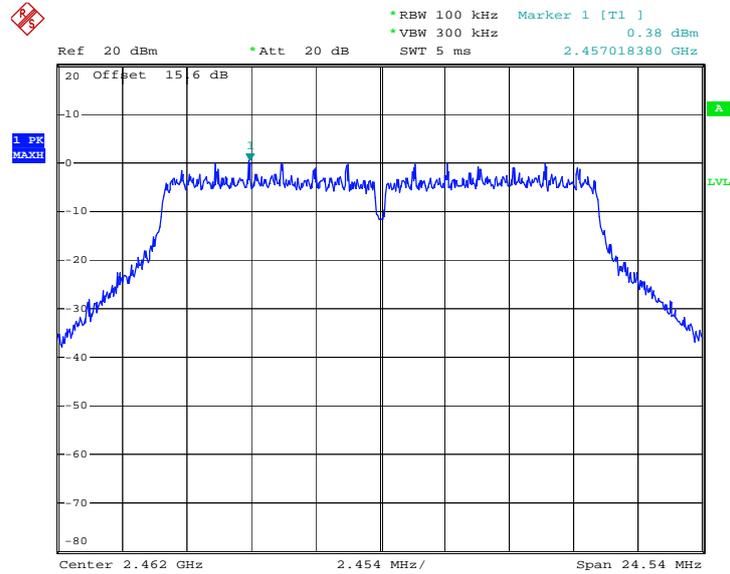

Date: 15.JUN.2013 17:14:41




PSD 100kHz Plot on 802.11n HT20 Channel 01

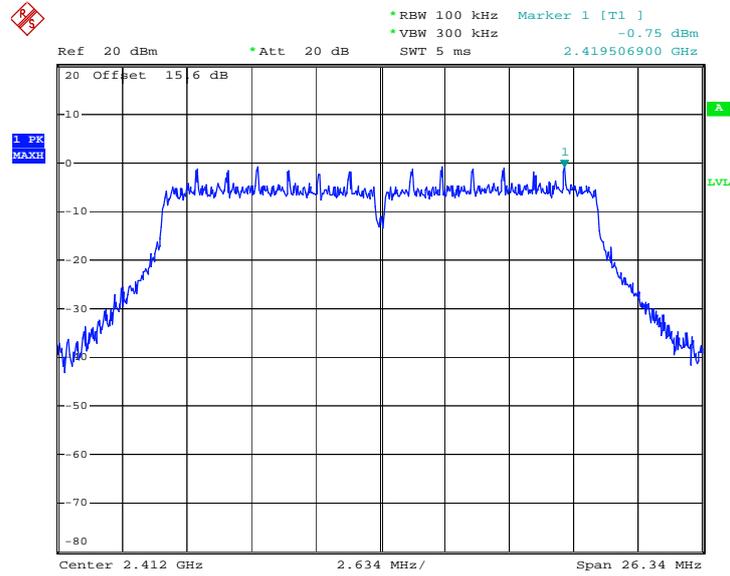

Date: 15.JUN.2013 17:19:51


PSD 100kHz Plot on 802.11n HT20 Channel 06

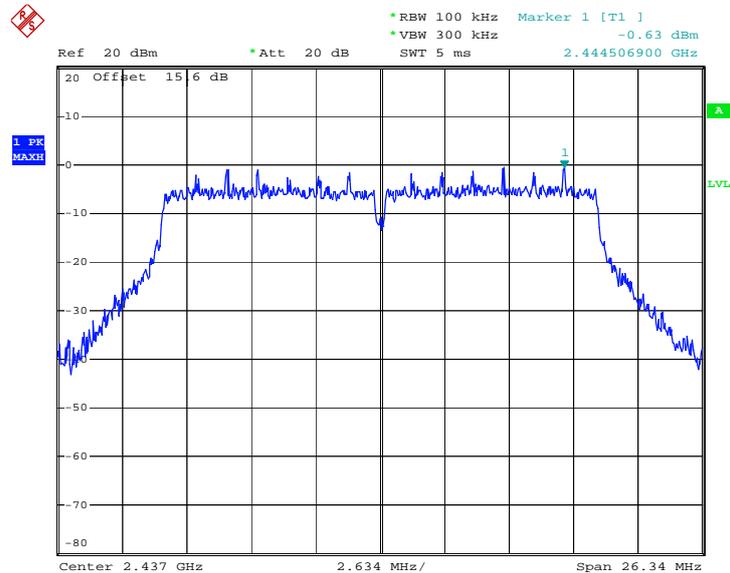

Date: 15.JUN.2013 17:24:45




PSD 100kHz Plot on 802.11n HT20 Channel 11

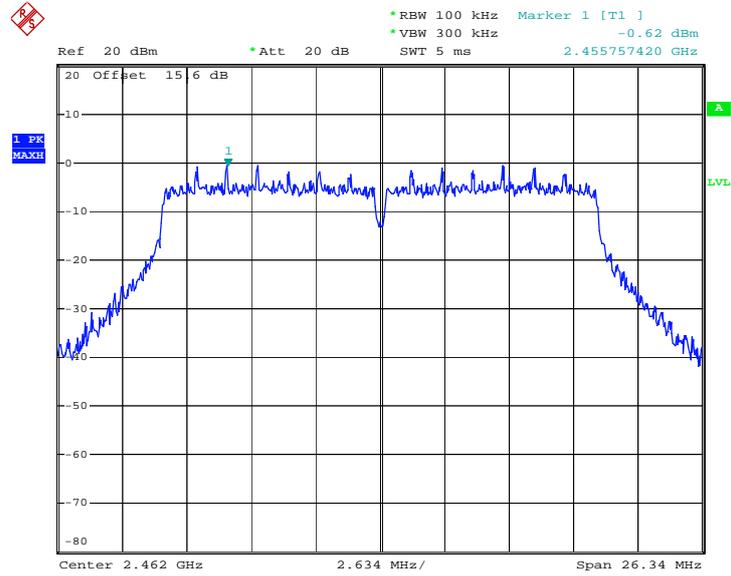

Date: 15.JUN.2013 17:27:54


3.3.7 Test Result of Power Spectral Density Plots (3kHz)

PSD 3kHz Plot on 802.11b Channel 01

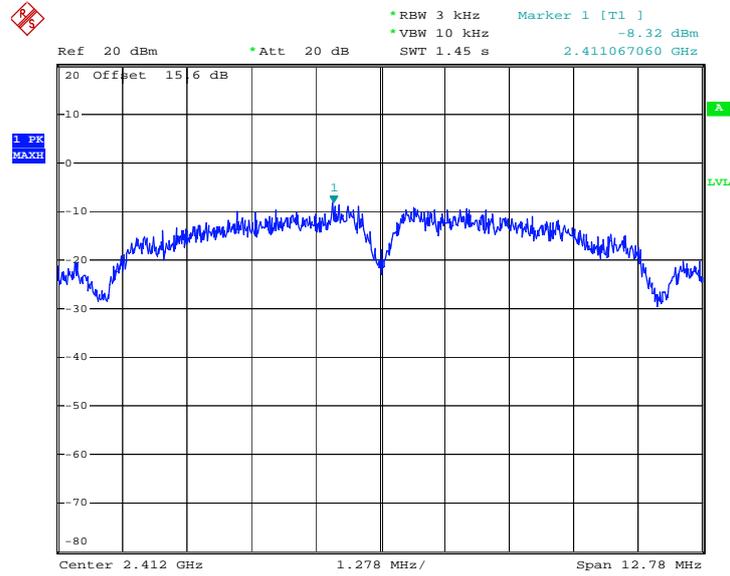

Date: 29.MAY.2013 14:02:48


PSD 3kHz Plot on 802.11b Channel 06

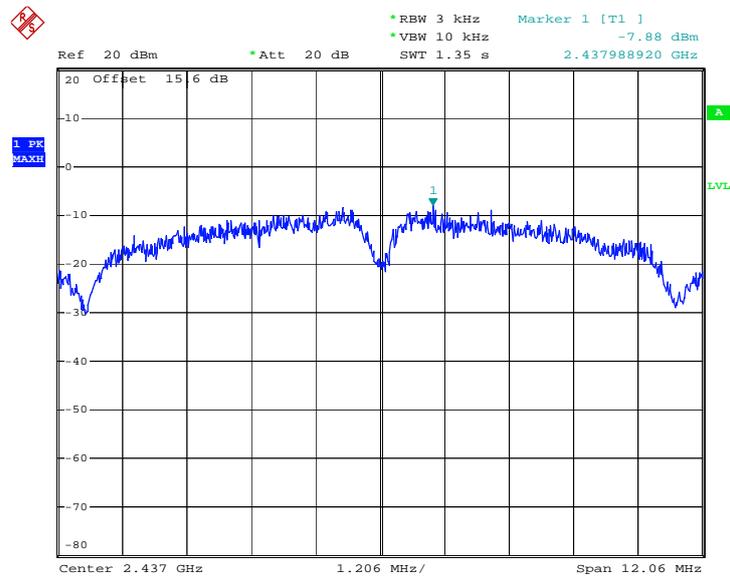

Date: 29.MAY.2013 14:05:51




PSD 3kHz Plot on 802.11b Channel 11

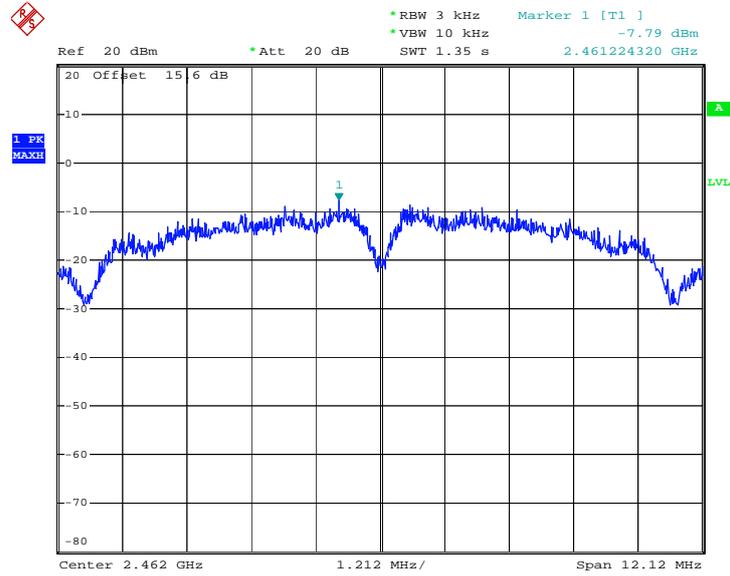

Date: 29.MAY.2013 14:11:51


PSD 3kHz Plot on 802.11g Channel 01

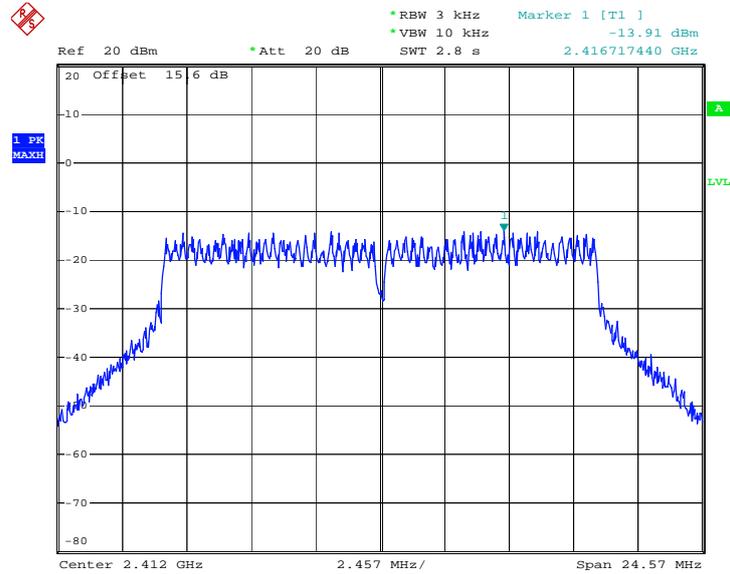

Date: 15.JUN.2013 18:04:24




PSD 3kHz Plot on 802.11g Channel 06

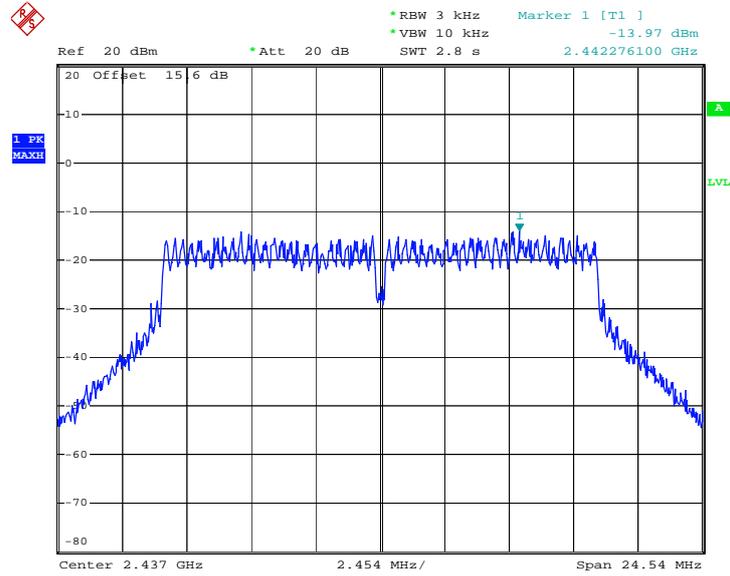

Date: 15.JUN.2013 16:53:23


PSD 3kHz Plot on 802.11g Channel 11

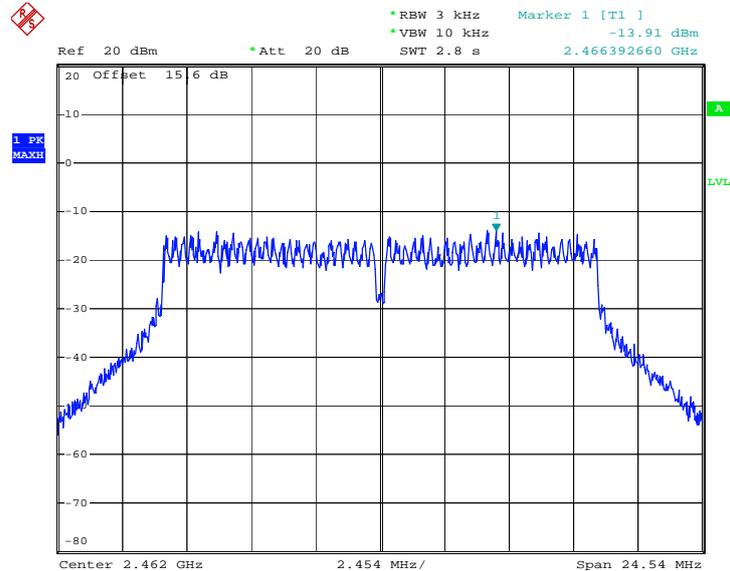

Date: 15.JUN.2013 17:14:31




PSD 3kHz Plot on 802.11n HT20 Channel 01

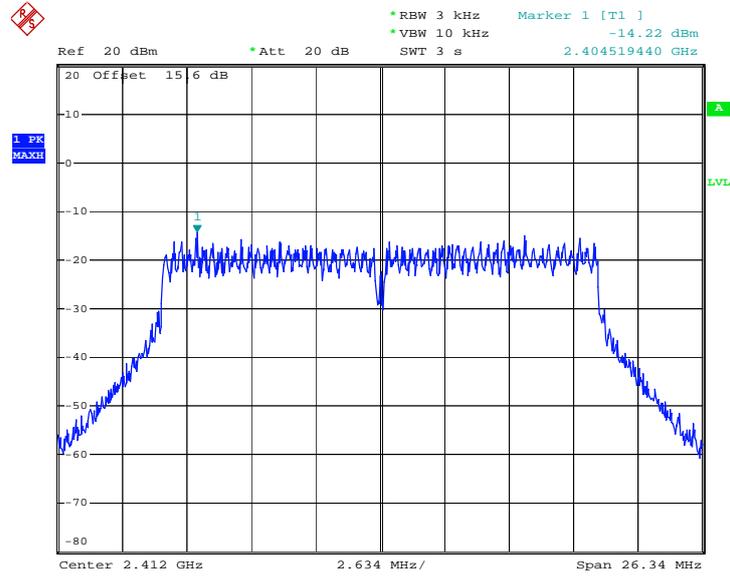

Date: 15.JUN.2013 17:19:41


PSD 3kHz Plot on 802.11n HT20 Channel 06

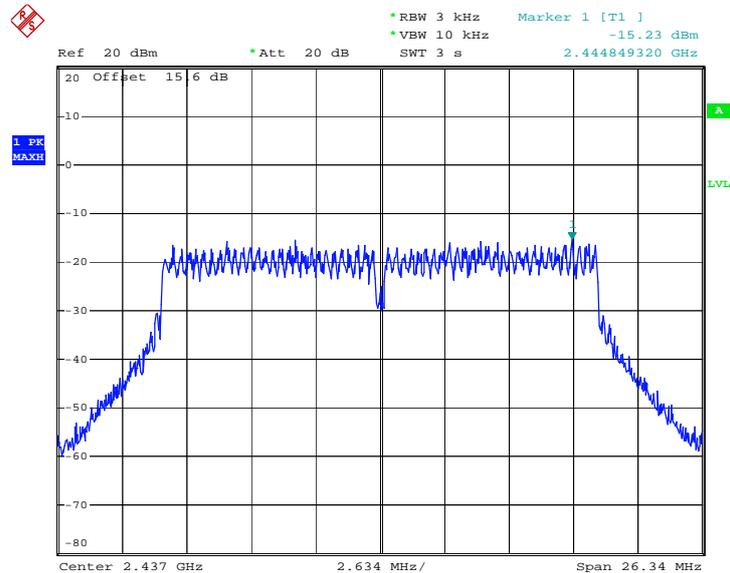

Date: 15.JUN.2013 17:24:35



PSD 3kHz Plot on 802.11n HT20 Channel 11

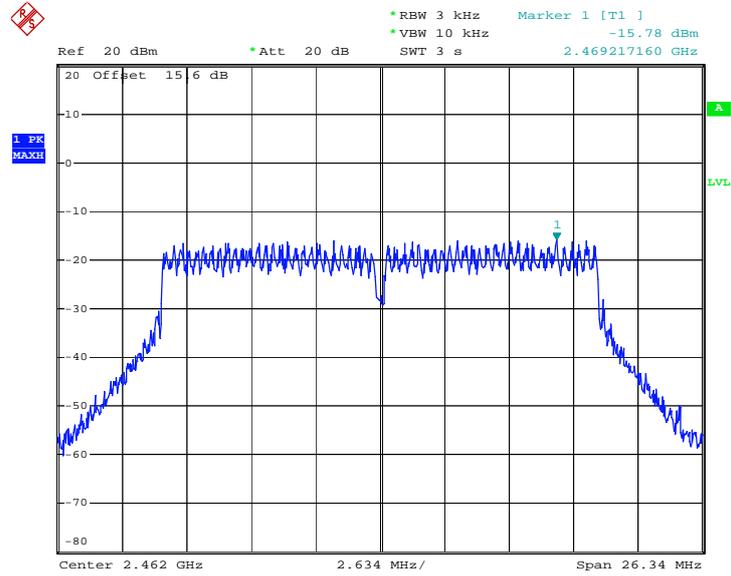

Date: 15.JUN.2013 17:27:44

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).


3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

3.4.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 D01 DTS Meas. Guidance v03r01.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 KHz, VBW=300 KHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz, when maximum peak conducted output power procedure is used. The attenuation is set to 30dB, when maximum conducted output power procedure is used.
5. Measure and record the results in the test report.

3.4.4 Test Setup

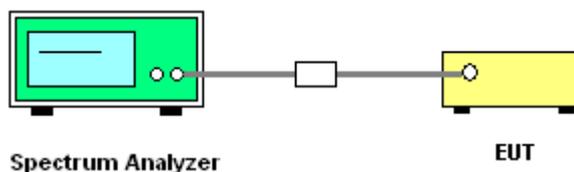




3.4.5 Test Plots of Conducted Band Edges


Test Mode :	802.11b	Temperature :	23~24°C
Test Band :	Low and High	Relative Humidity :	47~48%
Test Channel :	01 and 11	Test Engineer :	Adonis Li

Low Band Edge Plot on 802.11b Channel 01

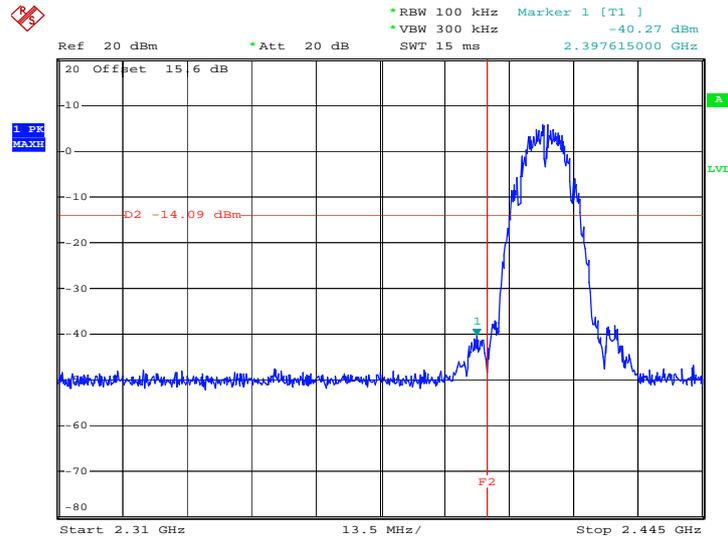

Date: 29.MAY.2013 14:03:14

High Band Edge Plot on 802.11b Channel 11

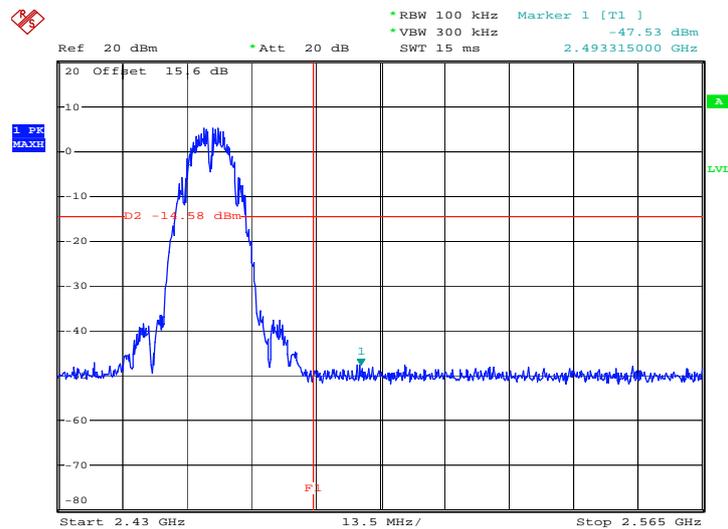


Date: 29.MAY.2013 14:12:16




Test Mode :	802.11g	Temperature :	23~24°C
Test Band :	Low and High	Relative Humidity :	47~48%
Test Channel :	01 and 11	Test Engineer :	Adonis Li

Low Band Edge Plot on 802.11g Channel 01

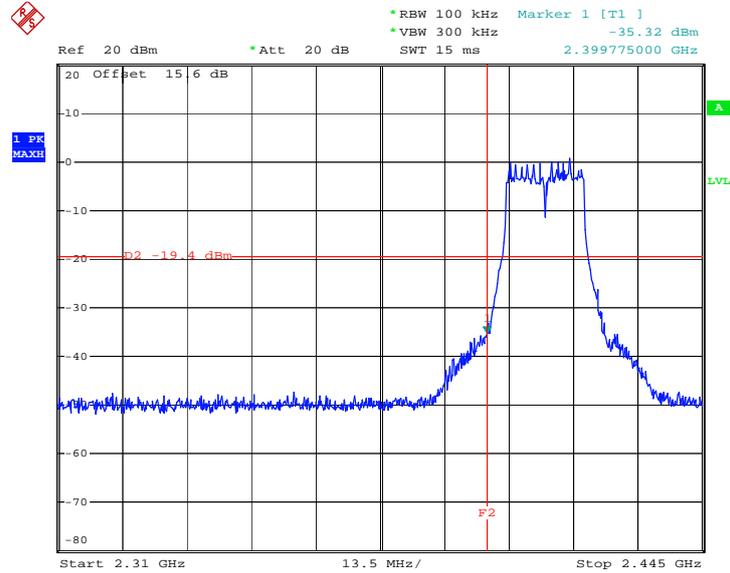

Date: 15.JUN.2013 18:04:49

High Band Edge Plot on 802.11g Channel 11

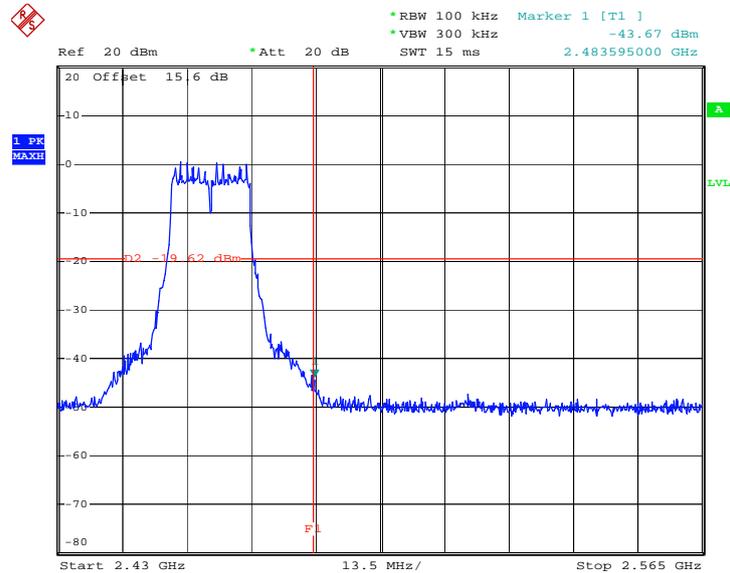


Date: 15.JUN.2013 17:14:56




Test Mode :	802.11n HT20	Temperature :	23~24°C
Test Band :	Low and High	Relative Humidity :	47~48%
Test Channel :	01 and 11	Test Engineer :	Adonis Li

Low Band Edge Plot on 802.11n HT20 Channel 01

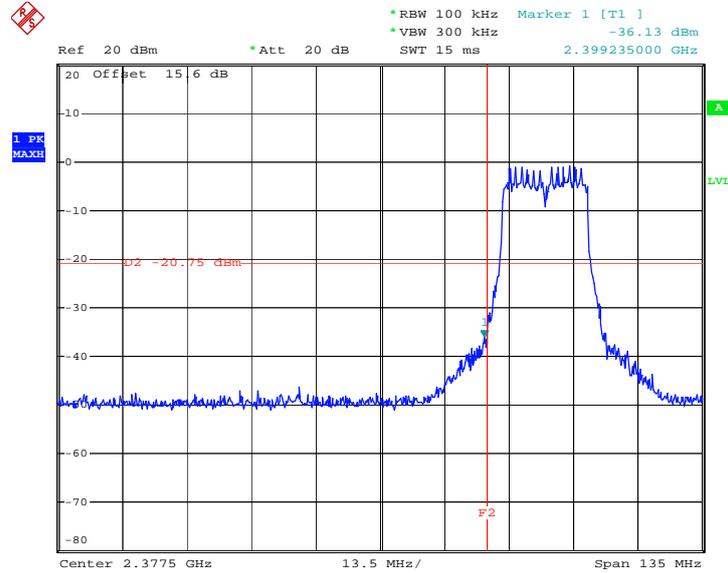

Date: 15.JUN.2013 17:22:52

High Band Edge Plot on 802.11n HT20 Channel 11

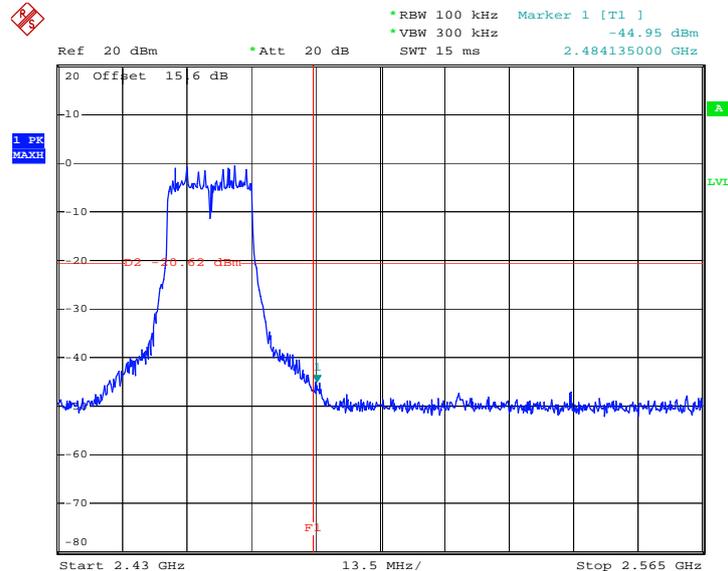


Date: 15.JUN.2013 17:28:09

3.4.6 Test Plots of Spurious Emission

Test Mode :	802.11b	Temperature :	23~24°C
Test Band :	30MHz-3GHz and 2G-25GHz	Relative Humidity :	47~48%
Test Channel :	01, 06, 11	Test Engineer :	Adonis Li

802.11b 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 01

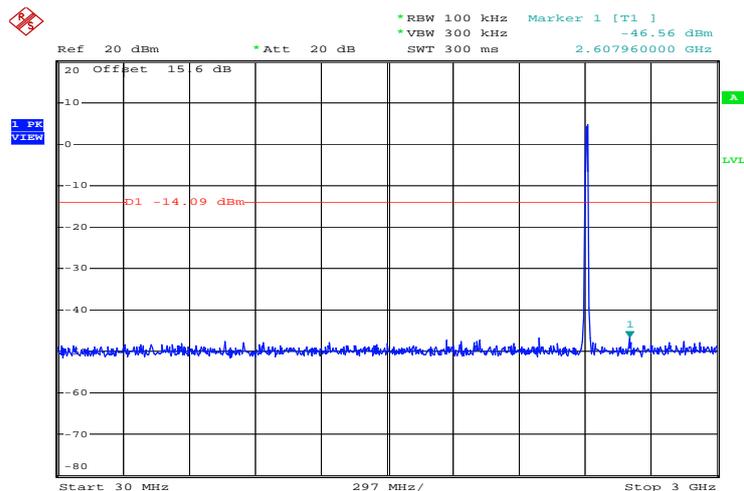

Date: 29.MAY.2013 14:03:34

802.11b 2 GHz~25 GHz

Conducted Spurious Emission Plot on Channel 01

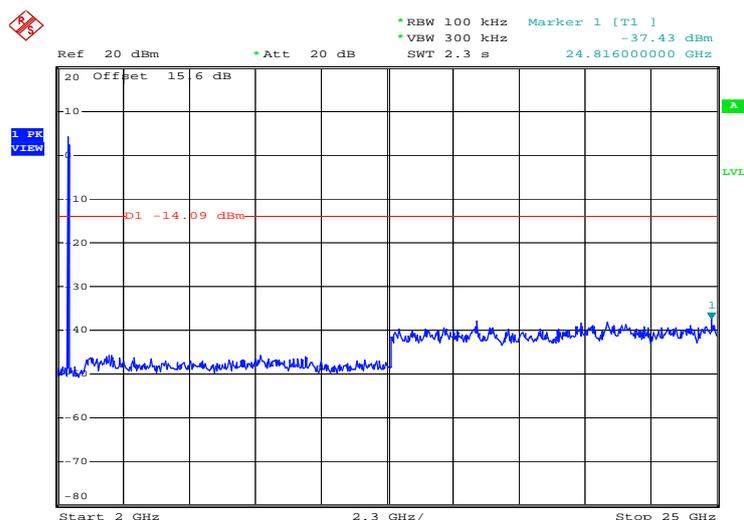


Date: 29.MAY.2013 14:03:54



802.11b 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 11

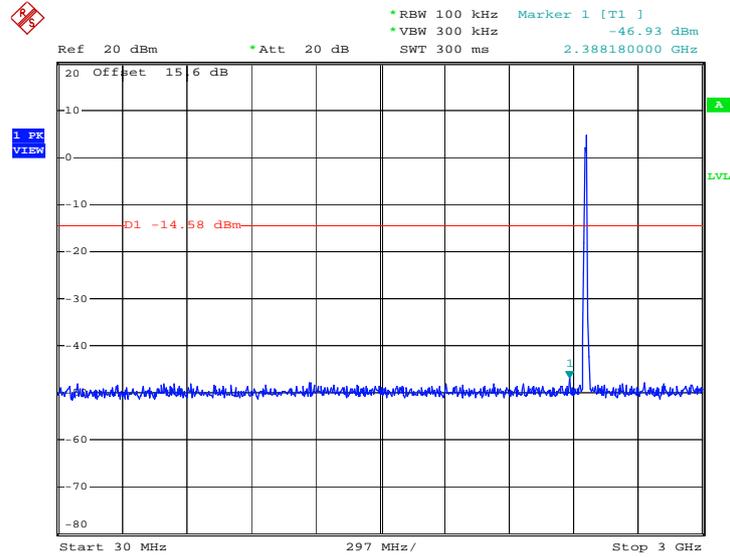

Date: 29.MAY.2013 14:12:37

802.11b 2 GHz~25 GHz

Conducted Spurious Emission Plot on Channel 11

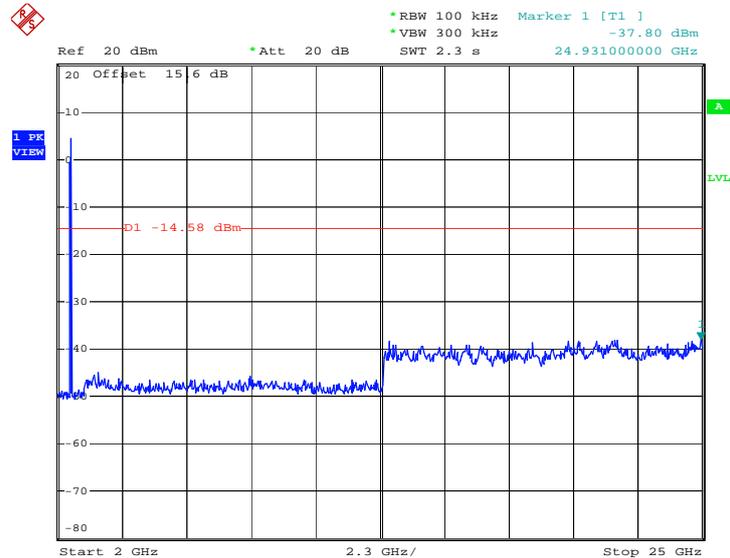


Date: 29.MAY.2013 14:12:56



Test Mode :	802.11g	Temperature :	23~24°C
Test Band :	30MHz-3GHz and 2G-25GHz	Relative Humidity :	47~48%
Test Channel :	01, 06, 11	Test Engineer :	Adonis Li

802.11g 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 01

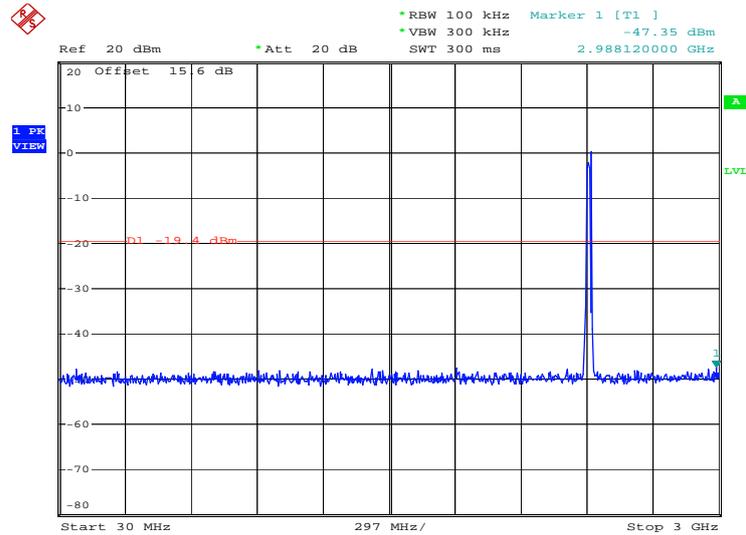

Date: 15.JUN.2013 18:05:09

802.11g 2 GHz~25 GHz

Conducted Spurious Emission Plot on Channel 01

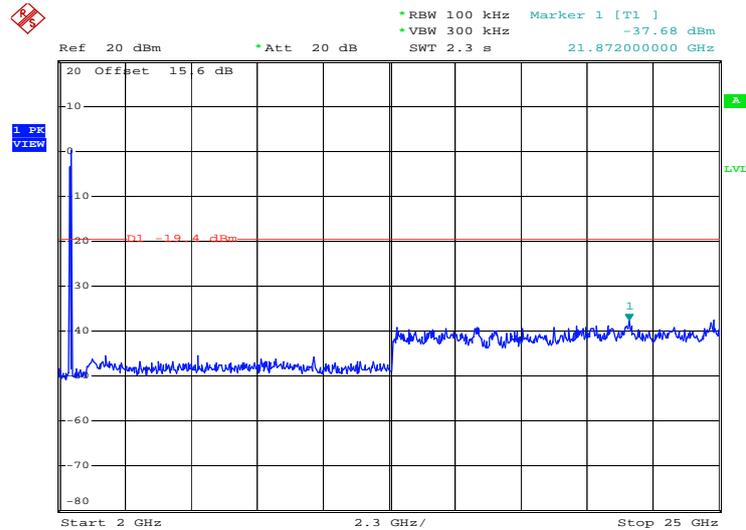


Date: 15.JUN.2013 18:05:29



802.11g 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 06

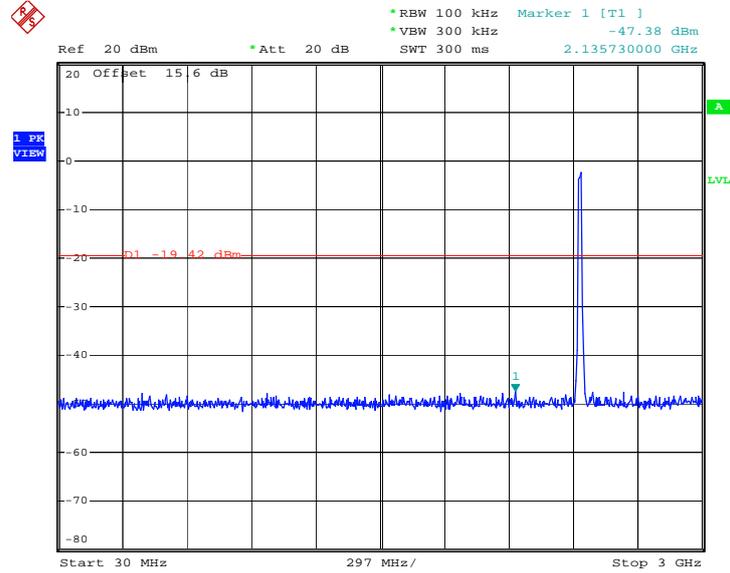

Date: 15.JUN.2013 16:53:55

802.11g 2 GHz~25 GHz

Conducted Spurious Emission Plot on Channel 06

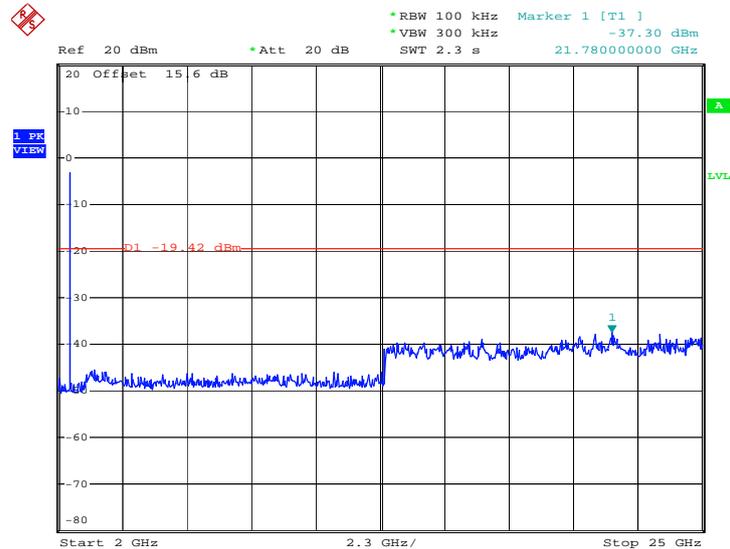


Date: 15.JUN.2013 16:54:14



802.11g 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 11

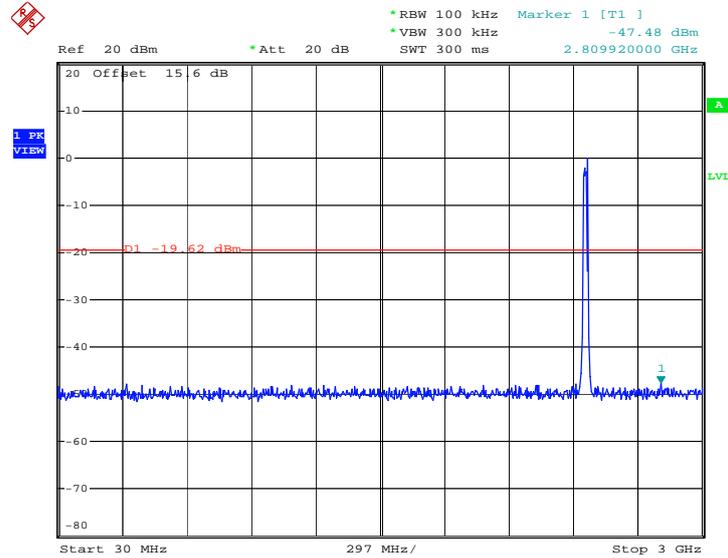

Date: 15.JUN.2013 17:15:17

802.11g 2 GHz~25 GHz

Conducted Spurious Emission Plot on Channel 11

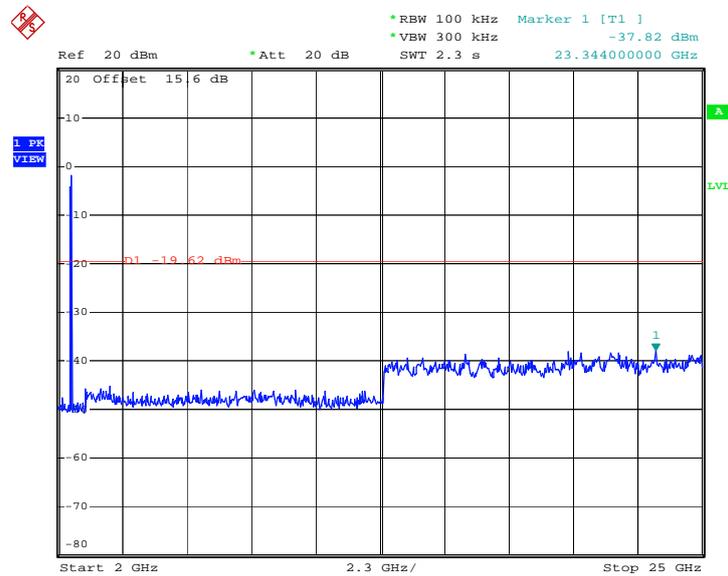


Date: 15.JUN.2013 17:15:36



Test Mode :	802.11n HT20	Temperature :	23~24°C
Test Band :	30MHz-3GHz and 2G-25GHz	Relative Humidity :	47~48%
Test Channel :	01, 06, 11	Test Engineer :	Adonis Li

802.11n HT20 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 01

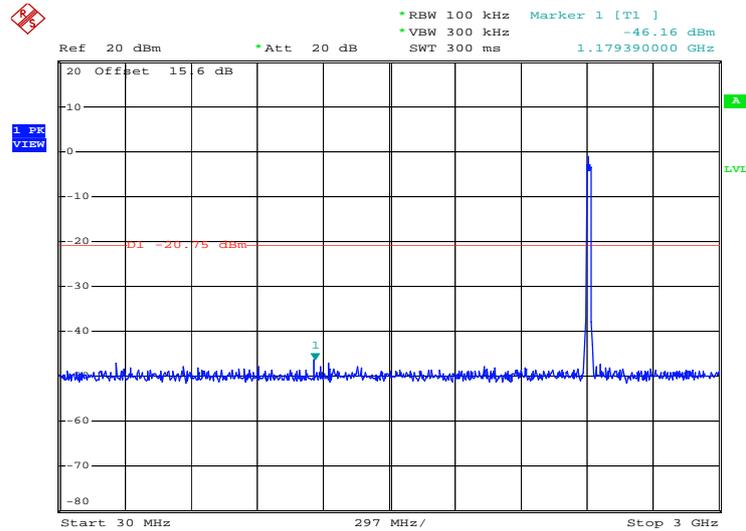

Date: 15.JUN.2013 17:20:26

802.11n HT20 2 GHz~25 GHz

Conducted Spurious Emission Plot on Channel 01

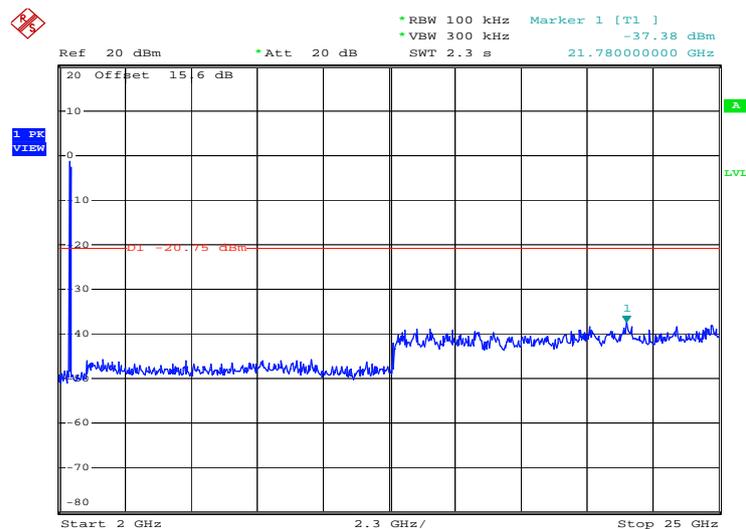


Date: 15.JUN.2013 17:20:46



802.11n HT20 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 06

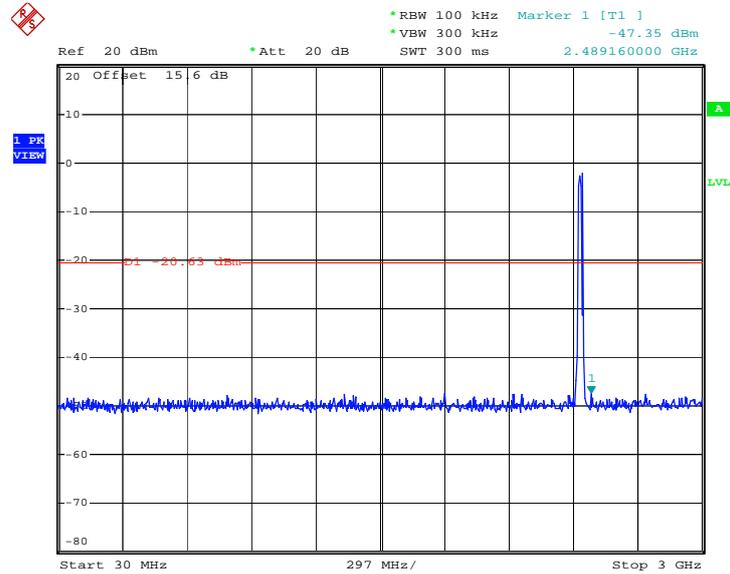

Date: 15.JUN.2013 17:26:10

802.11n HT20 2 GHz~25 GHz

Conducted Spurious Emission Plot on Channel 06

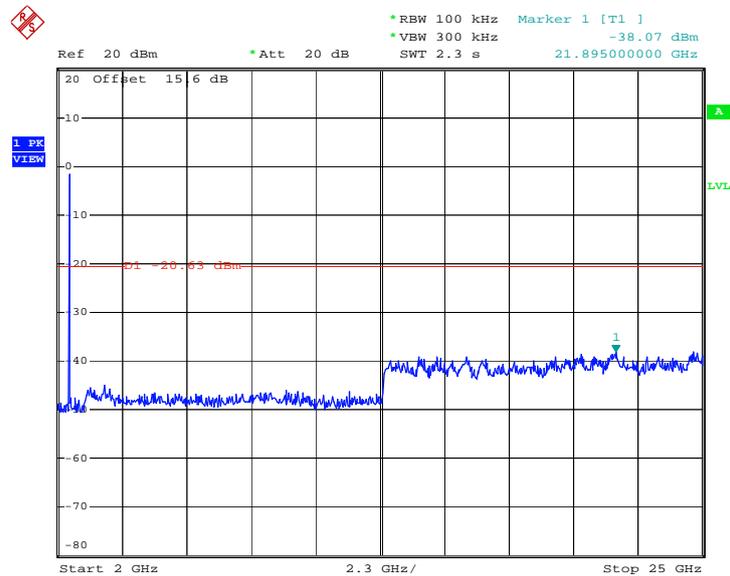


Date: 15.JUN.2013 17:26:30



802.11n HT20 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 11

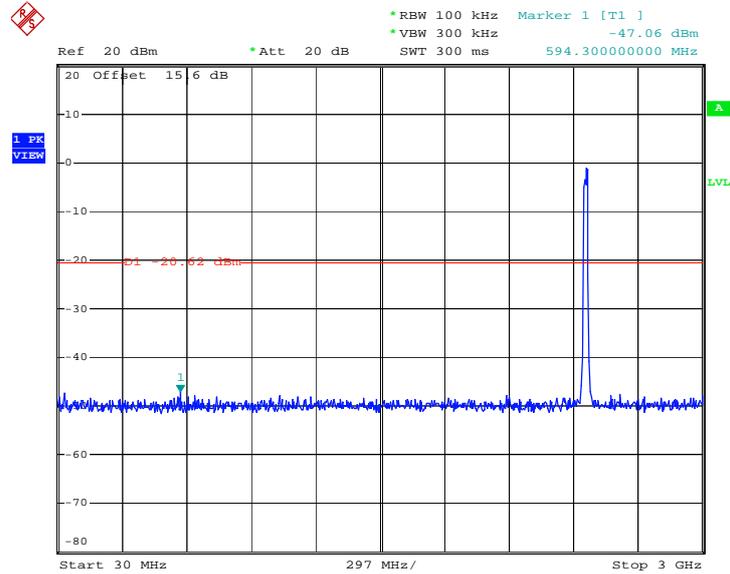

Date: 15.JUN.2013 17:29:36

802.11n HT20 2 GHz~25 GHz

Conducted Spurious Emission Plot on Channel 11

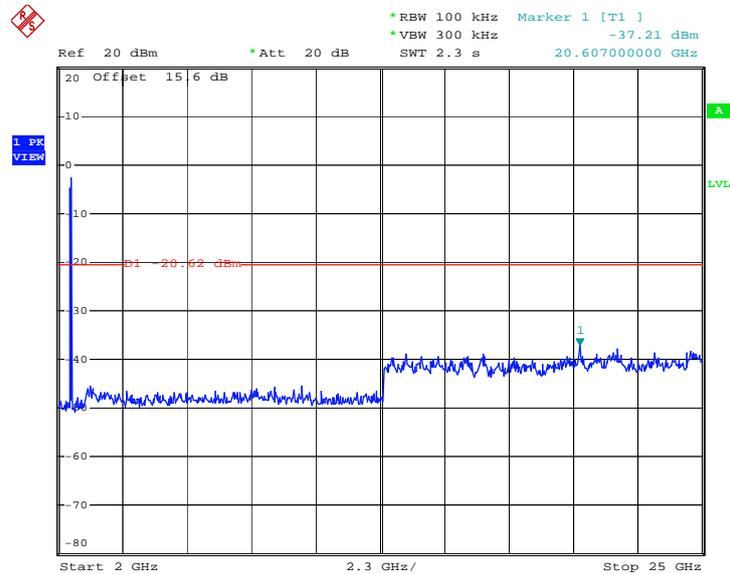

Date: 15.JUN.2013 17:29:56



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 KHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(KHz)	300
0.490 – 1.705	24000/F(KHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Test Procedures


1. The testing follows the guidelines in ANSI C63. 10-2009
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 KHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, $VBW = 3$ MHz for $f \geq 1$ GHz for peak measurement.
 For average measurement:
 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Band	Duty Cycle(%)	T(ms)	1/T(KHz)	VBW Setting
802.11b	97.67	8.400	0.119	300Hz
802.11g	87.42	1.390	0.719	1KHz
2.4G 802.11n HT20	86.68	1.302	0.768	1KHz


Note: For average measurement with duty cycle < 98%, use reduced VBW measurement method 4.2.3.2.3 in ANSI C63.10.

3.5.4 Test Setup


For radiated emissions below 30MHz

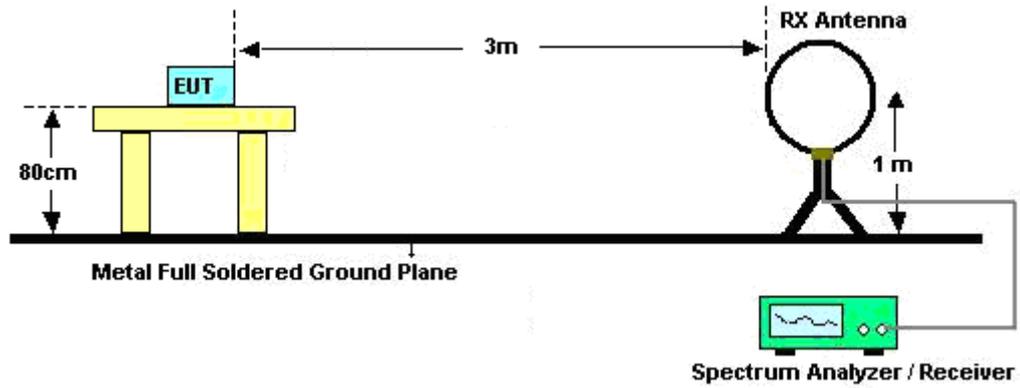

For radiated emissions from 30MHz to 1GHz

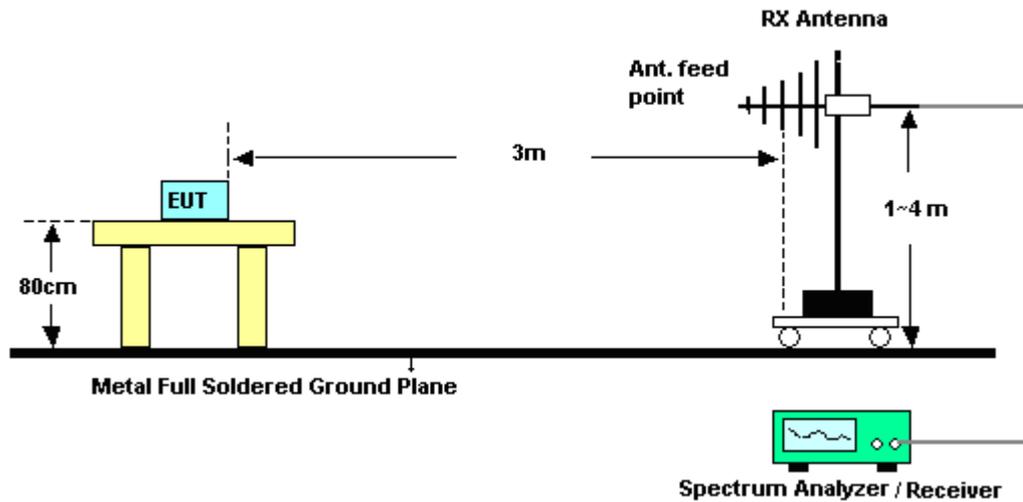

For radiated emissions above 1GHz

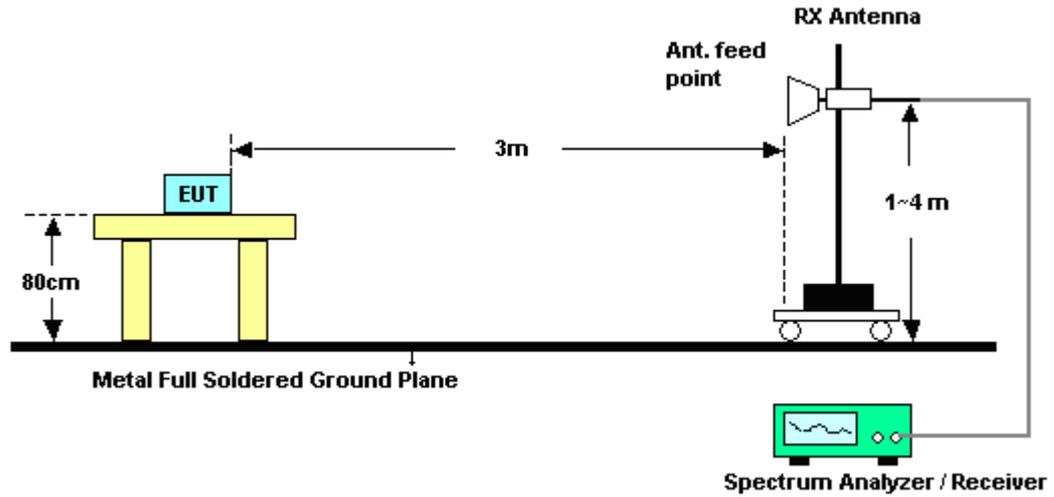

3.5.5 Test Results of Radiated Spurious Emission (9 KHz ~ 30 MHz)

The low frequency, which started from 9 KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.



3.5.6 Test Result of Radiated Band Edges

Test Mode :	802.11b	Temperature :	21~22°C
Test Band :	Low	Relative Humidity :	40~41%
Test Channel :	01	Test Engineer :	Jun Liu

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2339.52	58.57	-15.43	74	54.42	32.78	2.88	31.51	190	136	Peak
2356.53	41.46	-12.54	54	37.28	32.81	2.88	31.51	190	136	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2339.97	58.22	-15.78	74	54.07	32.78	2.88	31.51	100	128	Peak
2388.12	43.83	-10.17	54	39.58	32.86	2.9	31.51	100	128	Average

Test Mode :	802.11b	Temperature :	21~22°C
Test Band :	High	Relative Humidity :	40~41%
Test Channel :	11	Test Engineer :	Jun Liu

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2490.01	57.61	-16.39	74	53.11	33.05	2.96	31.51	180	134	Peak
2485.84	41.35	-12.65	54	36.89	33.01	2.96	31.51	180	134	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2489.95	57.18	-16.82	74	52.68	33.05	2.96	31.51	119	120	Peak
2486.02	41.34	-12.66	54	36.88	33.01	2.96	31.51	119	120	Average



Test Mode :	802.11g	Temperature :	21~22°C
Test Band :	Low	Relative Humidity :	40~41%
Test Channel :	01	Test Engineer :	Jun Liu

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.92	68.82	-5.18	74	64.56	32.86	2.91	31.51	193	157	Peak
2390	45.95	-8.05	54	41.69	32.86	2.91	31.51	193	157	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.83	72.14	-1.86	74	67.88	32.86	2.91	31.51	100	107	Peak
2390	50.82	-3.18	54	46.56	32.86	2.91	31.51	100	107	Average

Test Mode :	802.11g	Temperature :	21~22°C
Test Band :	High	Relative Humidity :	40~41%
Test Channel :	11	Test Engineer :	Jun Liu

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	72.32	-1.68	74	67.86	33.01	2.96	31.51	181	151	Peak
2483.5	48.95	-5.05	54	44.49	33.01	2.96	31.51	181	151	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	73.03	-0.97	74	68.57	33.01	2.96	31.51	100	127	Peak
2483.5	50.41	-3.59	54	45.95	33.01	2.96	31.51	100	127	Average



Test Mode :	802.11n HT20	Temperature :	21~22°C
Test Band :	Low	Relative Humidity :	40~41%
Test Channel :	01	Test Engineer :	Jun Liu

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.47	69.43	-4.57	74	65.18	32.86	2.9	31.51	185	151	Peak
2390	48.23	-5.77	54	43.97	32.86	2.91	31.51	185	151	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.74	73.29	-0.71	74	69.04	32.86	2.9	31.51	100	117	Peak
2390	50.37	-3.63	54	46.11	32.86	2.91	31.51	100	117	Average

Test Mode :	802.11n HT20	Temperature :	21~22°C
Test Band :	High	Relative Humidity :	40~41%
Test Channel :	11	Test Engineer :	Jun Liu

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.68	72.13	-1.87	74	67.67	33.01	2.96	31.51	178	128	Peak
2483.5	49.78	-4.22	54	45.32	33.01	2.96	31.51	178	128	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2484.91	72.77	-1.23	74	68.31	33.01	2.96	31.51	123	116	Peak
2483.5	51.17	-2.83	54	46.71	33.01	2.96	31.51	123	116	Average



3.5.7 Test Result of Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Note: Below 1GHz for radiated emission measurement, pre-scanned all test modes and only choose the worst case mode was recorded in the report.

Test Mode :	802.11b	Temperature :	21~22°C
Test Channel :	01	Relative Humidity :	40~41%
Test Engineer :	Jun Liu	Polarization :	Horizontal
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. 2399 MHz and 7236 MHz are not within restricted bands and their limit lines 20dB below the highest emission level. For example, 109.54dBuV/m - 20dB = 89.54dBuV/m. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2399	66.29	-23.25	89.54	62.03	32.86	2.91	31.51	190	136	Peak
2412	109.54	-	-	105.25	32.89	2.91	31.51	186	132	Peak
2412	104.85	-	-	100.56	32.89	2.91	31.51	186	132	Average
4824	50.11	-23.89	74	42.24	35.17	4.23	31.53	100	125	Peak
7236	53.4	-36.14	89.54	42.78	36.18	5.39	30.95	100	56	Peak



Test Mode :	802.11b	Temperature :	21~22°C
Test Channel :	01	Relative Humidity :	40~41%
Test Engineer :	Jun Liu	Polarization :	Vertical
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. 2399 MHz and 7236 MHz are not within restricted bands and their limit lines 20dB below the highest emission level. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2399	67.97	-22.88	90.85	63.71	32.86	2.91	31.51	100	128	Peak
2412	110.85	-	-	106.56	32.89	2.91	31.51	100	118	Peak
2412	106.09	-	-	101.8	32.89	2.91	31.51	100	118	Average
4824	49.71	-24.29	74	41.84	35.17	4.23	31.53	100	46	Peak
7236	52.97	-37.88	90.85	42.35	36.18	5.39	30.95	100	122	Peak



Test Mode :	802.11b	Temperature :	21~22°C
Test Channel :	06	Relative Humidity :	40~41%
Test Engineer :	Jun Liu	Polarization :	Horizontal
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	108.88	-	-	104.51	32.95	2.93	31.51	118	140	Peak
2437	104.15	-	-	99.78	32.95	2.93	31.51	118	140	Average
4874	50.09	-23.91	74	42.17	35.18	4.26	31.52	100	12	Peak
7311	53.3	-20.7	74	42.6	36.2	5.44	30.94	100	49	Peak



Test Mode :	802.11b	Temperature :	21~22°C
Test Channel :	06	Relative Humidity :	40~41%
Test Engineer :	Jun Liu	Polarization :	Vertical
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	110.37	-	-	106	32.95	2.93	31.51	100	121	Peak
2437	105.8	-	-	101.43	32.95	2.93	31.51	100	121	Average
4874	50.88	-23.12	74	42.96	35.18	4.26	31.52	100	79	Peak
7311	53.17	-20.83	74	42.47	36.2	5.44	30.94	100	126	Peak



Test Mode :	802.11b	Temperature :	21~22°C
Test Channel :	11	Relative Humidity :	40~41%
Test Engineer :	Jun Liu	Polarization :	Horizontal
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	106.82	-	-	102.41	32.98	2.94	31.51	152	126	Peak
2462	102.39	-	-	97.98	32.98	2.94	31.51	152	126	Average
4924	50.67	-23.33	74	42.71	35.19	4.28	31.51	100	125	Peak
7440	52.3	-21.7	74	41.38	36.27	5.57	30.92	100	163	Peak



Test Mode :	802.11b	Temperature :	21~22°C
Test Channel :	11	Relative Humidity :	40~41%
Test Engineer :	Jun Liu	Polarization :	Vertical
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	108.94	-	-	104.53	32.98	2.94	31.51	100	121	Peak
2462	104.23	-	-	99.82	32.98	2.94	31.51	100	121	Average
4924	50.14	-23.86	74	42.18	35.19	4.28	31.51	100	167	Peak
7440	52.54	-21.46	74	41.62	36.27	5.57	30.92	100	135	Peak



Test Mode :	802.11g	Temperature :	21~22°C
Test Channel :	01	Relative Humidity :	40~41%
Test Engineer :	Jun Liu	Polarization :	Horizontal
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. 2399 MHz and 7236 MHz are not within restricted bands and their limit lines 20dB below the highest emission level. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2399	78.24	-8.23	86.47	73.98	32.86	2.91	31.51	193	157	Peak
2412	106.47	-	-	102.18	32.89	2.91	31.51	175	124	Peak
2412	95.07	-	-	90.78	32.89	2.91	31.51	175	124	Average
4824	50.77	-23.23	74	42.9	35.17	4.23	31.53	100	62	Peak
7236	52.88	-33.59	86.47	42.26	36.18	5.39	30.95	100	92	Peak



Test Mode :	802.11g	Temperature :	21~22°C
Test Channel :	01	Relative Humidity :	40~41%
Test Engineer :	Jun Liu	Polarization :	Vertical
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. 2399 MHz and 7236 MHz are not within restricted bands and their limit lines 20dB below the highest emission level. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2399	81.43	-9.28	90.71	77.17	32.86	2.91	31.51	100	107	Peak
2412	110.71	-	-	106.42	32.89	2.91	31.51	100	107	Peak
2412	100.31	-	-	96.02	32.89	2.91	31.51	100	107	Average
4824	50.5	-23.5	74	42.63	35.17	4.23	31.53	100	19	Peak
7236	52.72	-37.99	90.71	42.1	36.18	5.39	30.95	100	37	Peak



Test Mode :	802.11g	Temperature :	21~22°C
Test Channel :	06	Relative Humidity :	40~41%
Test Engineer :	Jun Liu	Polarization :	Horizontal
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	108.97	-	-	104.6	32.95	2.93	31.51	100	125	Peak
2437	103.07	-	-	98.7	32.95	2.93	31.51	100	125	Average
4874	50.34	-23.66	74	42.42	35.18	4.26	31.52	100	16	Peak
7311	52.99	-21.01	74	42.29	36.2	5.44	30.94	100	164	Peak



Test Mode :	802.11g	Temperature :	21~22°C
Test Channel :	06	Relative Humidity :	40~41%
Test Engineer :	Jun Liu	Polarization :	Vertical
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	111.11	-	-	106.74	32.95	2.93	31.51	100	97	Peak
2437	99.59	-	-	95.22	32.95	2.93	31.51	100	97	Average
4874	50.13	-23.87	74	42.21	35.18	4.26	31.52	100	64	Peak
7311	52.95	-21.05	74	42.25	36.2	5.44	30.94	100	39	Peak



Test Mode :	802.11g	Temperature :	21~22°C
Test Channel :	11	Relative Humidity :	40~41%
Test Engineer :	Jun Liu	Polarization :	Horizontal
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	107.2	-	-	102.79	32.98	2.94	31.51	190	151	Peak
2462	95.92	-	-	91.51	32.98	2.94	31.51	190	151	Average
4924	50.58	-23.42	74	42.62	35.19	4.28	31.51	100	26	Peak
7386	52.81	-21.19	74	41.99	36.24	5.51	30.93	100	91	Peak



Test Mode :	802.11g	Temperature :	21~22°C
Test Channel :	11	Relative Humidity :	40~41%
Test Engineer :	Jun Liu	Polarization :	Vertical
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	107.67	-	-	103.26	32.98	2.94	31.51	100	73	Peak
2462	96.73	-	-	92.32	32.98	2.94	31.51	100	73	Average
4924	50.85	-23.15	74	42.89	35.19	4.28	31.51	100	64	Peak
7386	52.55	-21.45	74	41.73	36.24	5.51	30.93	100	62	Peak



Test Mode :	802.11n HT20	Temperature :	21~22°C
Test Channel :	01	Relative Humidity :	40~41%
Test Engineer :	Jun Liu	Polarization :	Horizontal
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. 2399 MHz and 7236 MHz are not within restricted bands and their limit lines 20dB below the highest emission level. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
30	22.82	-17.18	40	38.05	18	0.34	33.57	100	26	Peak
225.94	18.1	-27.9	46	40.14	10.59	0.87	33.5	-	-	Peak
543.13	21.2	-24.8	46	34.53	18.37	1.33	33.03	-	-	Peak
674.08	22.83	-23.17	46	35.18	19.09	1.48	32.92	-	-	Peak
783.69	22.07	-23.93	46	33.25	19.86	1.63	32.67	-	-	Peak
943.74	22.5	-23.5	46	32.48	20.71	1.75	32.44	-	-	Peak
2399	79.3	-5.88	85.18	75.04	32.86	2.91	31.51	185	151	Peak
2412	105.18	-	-	100.89	32.89	2.91	31.51	100	164	Peak
2412	94.82	-	-	90.53	32.89	2.91	31.51	100	164	Average
4824	49.82	-24.18	74	41.95	35.17	4.23	31.53	100	269	Peak
7236	53.51	-31.67	85.18	42.89	36.18	5.39	30.95	100	64	Peak



Test Mode :	802.11n HT20	Temperature :	21~22°C
Test Channel :	01	Relative Humidity :	40~41%
Test Engineer :	Jun Liu	Polarization :	Vertical
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. 2399 MHz and 7236 MHz are not within restricted bands and their limit lines 20dB below the highest emission level. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
36.79	28.84	-11.16	40	47.89	14.19	0.38	33.62	100	261	Peak
110.51	20.01	-23.49	43.5	41.22	11.8	0.6	33.61	-	-	Peak
341.37	17.29	-28.71	46	35.26	14.3	1.09	33.36	-	-	Peak
441.28	20.91	-25.09	46	36.68	16.26	1.19	33.22	-	-	Peak
617.82	21.09	-24.91	46	33.93	18.69	1.42	32.95	-	-	Peak
751.68	21.92	-24.08	46	33.21	19.9	1.59	32.78	-	-	Peak
2399	81.03	-7.82	88.85	76.77	32.86	2.91	31.51	100	117	Peak
2412	108.85	-	-	104.56	32.89	2.91	31.51	100	103	Peak
2412	98.25	-	-	93.96	32.89	2.91	31.51	100	103	Average
4824	50.19	-23.81	74	42.32	35.17	4.23	31.53	100	168	Peak
7236	52.59	-36.26	88.85	41.97	36.18	5.39	30.95	100	169	Peak



Test Mode :	802.11n HT20	Temperature :	21~22°C
Test Channel :	06	Relative Humidity :	40~41%
Test Engineer :	Jun Liu	Polarization :	Horizontal
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	105.3	-	-	100.93	32.95	2.93	31.51	181	131	Peak
2437	94.29	-	-	89.92	32.95	2.93	31.51	181	131	Average
4874	50.46	-23.54	74	42.54	35.18	4.26	31.52	100	64	Peak
7311	52.73	-21.27	74	42.03	36.2	5.44	30.94	100	49	Peak



Test Mode :	802.11n HT20	Temperature :	21~22°C
Test Channel :	06	Relative Humidity :	40~41%
Test Engineer :	Jun Liu	Polarization :	Vertical
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	108.92	-	-	104.55	32.95	2.93	31.51	100	94	Peak
2437	98.85	-	-	94.48	32.95	2.93	31.51	100	94	Average
4874	50.41	-23.59	74	42.49	35.18	4.26	31.52	100	263	Peak
7311	52.78	-21.22	74	42.08	36.2	5.44	30.94	100	22	Peak



Test Mode :	802.11n HT20	Temperature :	21~22°C
Test Channel :	11	Relative Humidity :	40~41%
Test Engineer :	Jun Liu	Polarization :	Horizontal
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	106.28	-	-	101.87	32.98	2.94	31.51	115	145	Peak
2462	96.01	-	-	91.6	32.98	2.94	31.51	115	145	Average
4924	50.24	-23.76	74	42.28	35.19	4.28	31.51	100	46	Peak
7386	52.67	-21.33	74	41.85	36.24	5.51	30.93	100	92	Peak



Test Mode :	802.11n HT20	Temperature :	21~22°C
Test Channel :	11	Relative Humidity :	40~41%
Test Engineer :	Jun Liu	Polarization :	Vertical
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	106.63	-	-	102.22	32.98	2.94	31.51	100	105	Peak
2462	94.42	-	-	90.01	32.98	2.94	31.51	100	105	Average
4924	50.07	-23.93	74	42.11	35.19	4.28	31.51	100	37	Peak
7386	53.34	-20.66	74	42.52	36.24	5.51	30.93	100	37	Peak

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 KHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

See list of measuring instruments of this test report.

3.6.3 Test Procedures

1. The testing follows the guidelines in ANSI C63.10-2009.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 KHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.


3.6.4 Test Setup

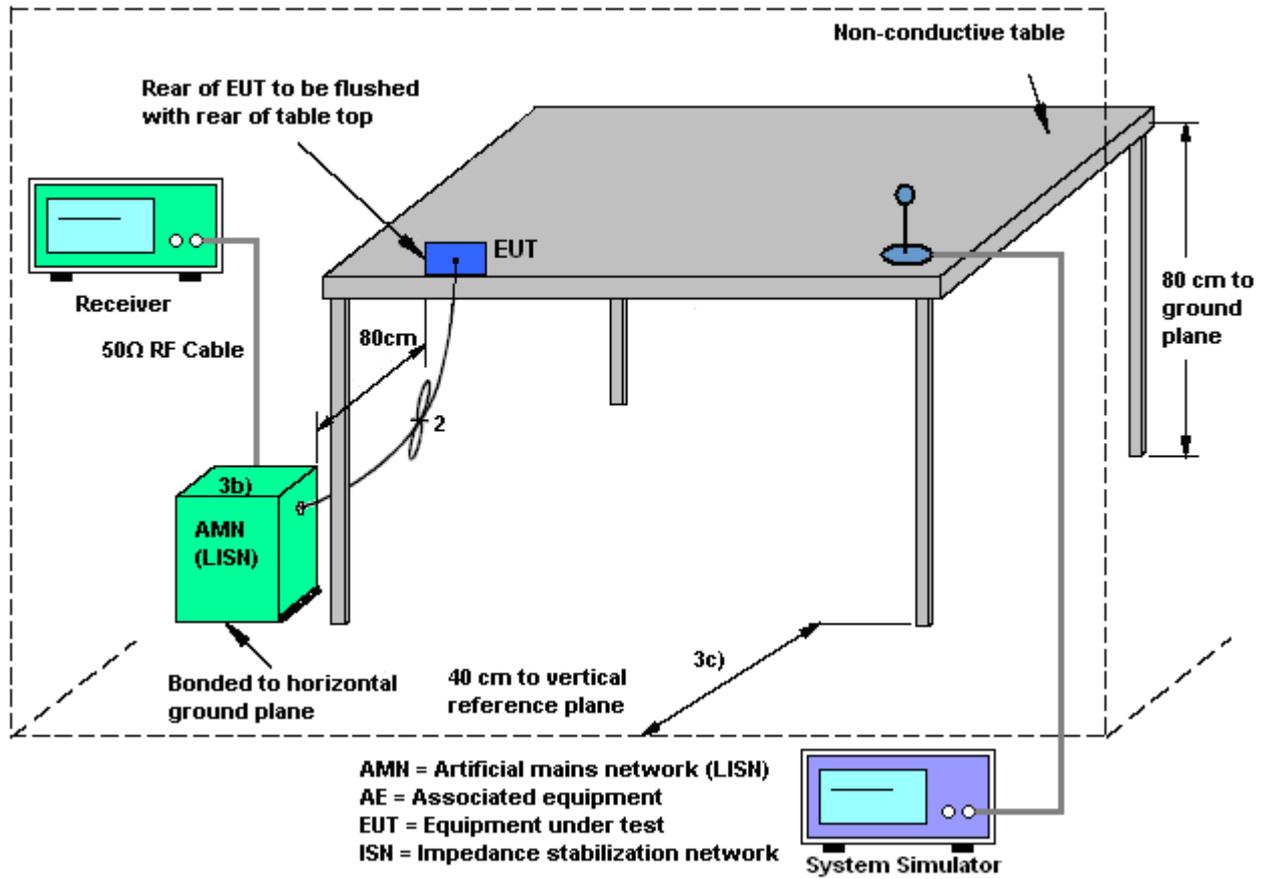



3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	19~20°C
Test Engineer :	Tom Wang	Relative Humidity :	39~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	CDMA2000 BC0 Idle + Bluetooth Link + WLAN Link + USB Cable (Charing from Adapter)		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

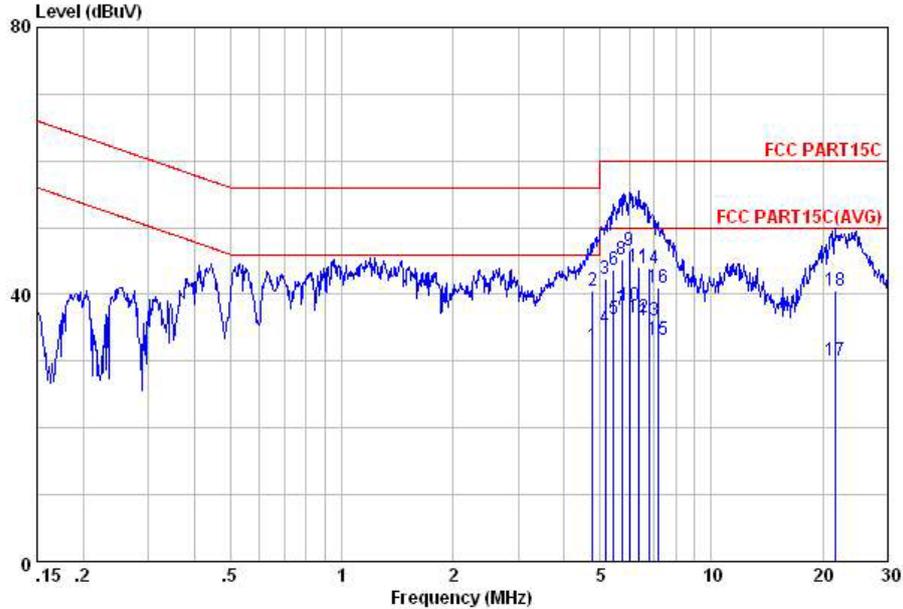


Site : C001-KS
 Condition: FCC PART15C LISN-L20130306 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	4.77	32.32	-13.68	46.00	21.87	0.20	10.25	Average
2	4.77	40.52	-15.48	56.00	30.07	0.20	10.25	QP
3	5.17	42.42	-17.58	60.00	31.96	0.20	10.26	QP
4	5.17	34.92	-15.08	50.00	24.46	0.20	10.26	Average
5	5.45	36.33	-13.67	50.00	25.86	0.20	10.27	Average
6	5.45	43.73	-16.27	60.00	33.26	0.20	10.27	QP
7	5.71	37.64	-12.36	50.00	27.16	0.20	10.28	Average
8	5.71	45.14	-14.86	60.00	34.66	0.20	10.28	QP
9	5.99	46.65	-13.35	60.00	36.16	0.20	10.29	QP
10	5.99	38.25	-11.75	50.00	27.76	0.20	10.29	Average
11	6.39	44.17	-15.83	60.00	33.67	0.20	10.30	QP
12	6.39	36.57	-13.43	50.00	26.07	0.20	10.30	Average
13	6.81	36.09	-13.91	50.00	25.57	0.20	10.32	Average
14	6.81	43.89	-16.11	60.00	33.37	0.20	10.32	QP
15	7.18	33.20	-16.80	50.00	22.67	0.20	10.33	Average
16	7.18	40.90	-19.10	60.00	30.37	0.20	10.33	QP
17	21.60	30.08	-19.92	50.00	19.63	0.10	10.35	Average
18	21.60	40.58	-19.42	60.00	30.13	0.10	10.35	QP



Test Mode :	Mode 1	Temperature :	19~20°C
Test Engineer :	Tom Wang	Relative Humidity :	39~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	CDMA2000 BC0 Idle + Bluetooth Link + WLAN Link + USB Cable (Charing from Adapter)		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

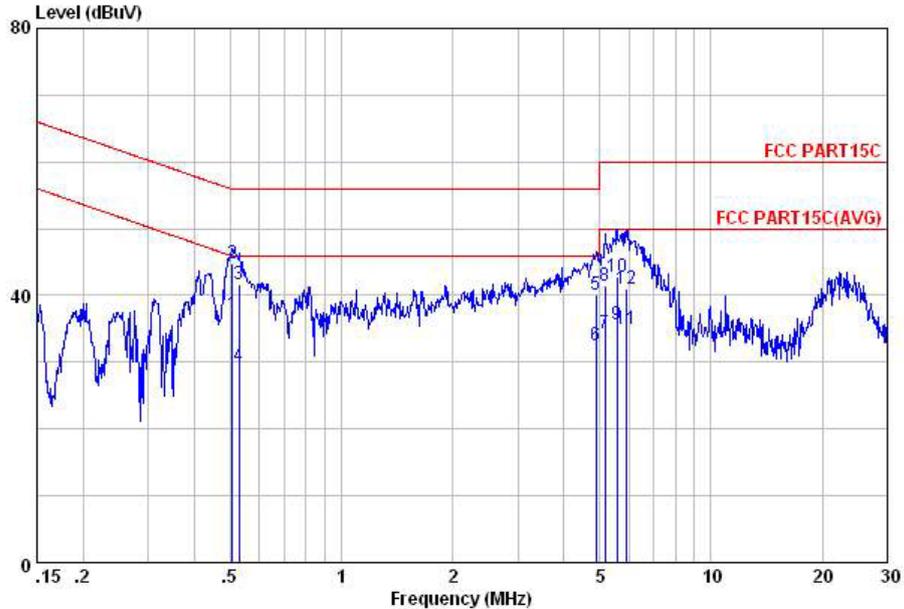

Site : C001-KS
 Condition: FCC PART15C LISN-N20130306 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.51	37.22	-8.78	46.00	26.30	0.30	10.62	Average
2	0.51	44.82	-11.18	56.00	33.90	0.30	10.62	QP
3	0.53	41.61	-14.39	56.00	30.69	0.29	10.63	QP
4	0.53	29.51	-16.49	46.00	18.59	0.29	10.63	Average
5	4.87	40.05	-15.95	56.00	29.00	0.20	10.85	QP
6	4.87	32.55	-13.45	46.00	21.50	0.20	10.85	Average
7	5.17	34.25	-15.75	50.00	23.20	0.20	10.85	Average
8	5.17	41.45	-18.55	60.00	30.40	0.20	10.85	QP
9	5.56	35.76	-14.24	50.00	24.70	0.20	10.86	Average
10	5.56	42.86	-17.14	60.00	31.80	0.20	10.86	QP
11	5.93	34.88	-15.12	50.00	23.80	0.20	10.88	Average
12	5.93	41.08	-18.92	60.00	30.00	0.20	10.88	QP



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.7.2 Antenna Connected Construction

Non-standard connector used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Dec. 29, 2012	May 29, 2013~ Jun. 15, 2013	Dec. 28, 2013	Conducted (TH01-KS)
Power Meter	Agilent	E4416A	MY45101555	N/A	Aug. 22, 2012	May 29, 2013~ Jun. 15, 2013	Aug. 21, 2013	Conducted (TH01-KS)
Power Sensor	Agilent	E9327A	MY44421198	N/A	Aug. 22, 2012	May 29, 2013~ Jun. 15, 2013	Aug. 21, 2013	Conducted (TH01-KS)
DC Power Supply	GWINSTEK	GPS-3030D	E1884515	N/A	Aug. 22, 2012	May 29, 2013~ Jun. 15, 2013	Aug. 21, 2013	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	N/A	Dec. 29, 2012	May 29, 2013~ Jun. 15, 2013	Dec. 28, 2013	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESCI	100534	9kHz~3GHz	Nov. 08, 2012	Jun. 09, 2013	Nov. 07, 2013	Radiation (03CH01-KS)
Spectrum Analyzer	R&S	FSP30	100400	9kHz~30GHz	Jun. 01, 2013	Jun. 09, 2013	May 31, 2014	Radiation (03CH01-KS)
Bilog Antenna	SCHAFFNER	CBL6112D	23182	25MHz~2GHz	Dec. 07, 2012	Jun. 09, 2013	Dec. 06, 2013	Radiation (03CH01-KS)
HFH2-Z2 Loop Antenna	R&S	HFH2-Z2	100321	9KHZ-30MHZ	Oct. 22, 2012	Jun. 09, 2013	Oct. 21, 2013	Radiation (03CH01-KS)
Double Ridge Horn Antenna	ETS-Lindgren	1908/7/13	00075957	1GHz~18GHz	Dec. 07, 2012	Jun. 09, 2013	Dec. 06, 2013	Radiation (03CH01-KS)
Amplifier	com-power	PA-103A	161069	1MHz~1GHz	Jun. 01, 2013	Jun. 09, 2013	May 31, 2014	Radiation (03CH01-KS)
Amplifier	Agilent	8449B	3008A02370	1GHz~26.5GHz	Dec. 29, 2012	Jun. 09, 2013	Dec. 28, 2013	Radiation (03CH01-KS)
Active Horn Antenna	com-power	AHA-118	701023	1GHz~18GHz	Nov. 07, 2012	Jun. 09, 2013	Nov. 06, 2013	Radiation (03CH01-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	9170249	15GHz~40GHz	Nov. 23, 2012	Jun. 09, 2013	Nov. 22, 2013	Radiation (03CH01-KS)
Turn Table	MF	MF7802	N/A	0 ~ 360 degree	N/A	N/A	N/A	Radiation (03CH01-KS)
Antenna Mast	MF	MF7802	N/A	1 m - 4 m	N/A	N/A	N/A	Radiation (03CH01-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz	Jun. 01, 2013	Jun. 08, 2013	May 31, 2014	Conduction (CO01-KS)
LISN (for auxiliary equipment)	MessTec	AN3016	60103	9kHz~30MHz	Dec. 29, 2012	Jun. 08, 2013	Dec. 28, 2013	Conduction (CO01-KS)
LISN (for auxiliary equipment)	MessTec	AN3016	60105	9kHz~30MHz	Dec. 29, 2012	Jun. 08, 2013	Dec. 28, 2013	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	N/A	Nov. 15, 2012	Jun. 08, 2013	Nov. 14, 2013	Conduction (CO01-KS)
System Simulator	R&S	CMU200	837587/066	2G Full-Band	Dec. 29, 2012	Jun. 08, 2013	Dec. 28, 2013	Conduction (CO01-KS)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.26
---	------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.54
---	------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.72
---	------



Appendix A. Photographs of EUT

Please refer to Sporton report number EP352301 as below.