



FCC RF Test Report

APPLICANT : ZTE CORPORATION
EQUIPMENT : LTE/CDMA Mutil-Mode Digital Mobile Phone
BRAND NAME : ZTE
MODEL NAME : N9132
FCC ID : SRQ-ZTEN9132
STANDARD : FCC 47 CFR Part 2, 22(H), 24(E)
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Aug. 17, 2015 and testing was completed on Sep. 14, 2015. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-C-2004 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION..... 5

 1.1 Applicant..... 5

 1.2 Manufacturer 5

 1.3 Product Feature of Equipment Under Test 5

 1.4 Product Specification subjective to this standard..... 6

 1.5 Modification of EUT 7

 1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator 7

 1.7 Testing Location 8

 1.8 Applicable Standards 8

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST..... 9

 2.1 Test Mode..... 9

 2.2 Connection Diagram of Test System 11

 2.3 Support Unit used in test configuration 12

 2.4 Measurement Results Explanation Example 12

3 TEST RESULT..... 13

 3.1 Conducted Output Power Measurement..... 13

 3.2 Peak-to-Average Ratio 16

 3.3 Effective Radiated Power and Effective Isotropic Radiated Power Measurement 34

 3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement..... 38

 3.5 Band Edge Measurement..... 65

 3.6 Conducted Spurious Emission Measurement..... 82

 3.7 Field Strength of Spurious Radiation Measurement 91

 3.8 Frequency Stability Measurement..... 101

4 LIST OF MEASURING EQUIPMENT..... 107

5 UNCERTAINTY OF EVALUATION..... 108

APPENDIX A. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	§2.1046	Conducted Output Power	N/A	PASS	-
3.2	§24.232(d)	Peak-to-Average Ratio	<13 dB	PASS	-
3.3	§22.913(a)(2)	Effective Radiated Power	< 7 Watts	PASS	-
	§24.232(c)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-
3.4	§2.1049	Occupied Bandwidth	N/A	PASS	-
3.5	§2.1051 §22.917(a) §24.238(a)	Band Edge Measurement	< 43+10log ₁₀ (P[Watts])	PASS	-
3.6	§2.1051 §22.917(a) §24.238(a)	Conducted Spurious Emission	< 43+10log ₁₀ (P[Watts])	PASS	-
3.7	§2.1053 §22.917(a) §24.238(a)	Field Strength of Spurious Radiation	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 28.53 dB at 7521.000 MHz
3.8	§2.1055 §22.355	Frequency Stability for Temperature & Voltage	< 2.5 ppm for Part 22 Within Authorized Band	PASS	-
	§2.1055 §24.235				



1 General Description

1.1 Applicant

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P. R. China

1.2 Manufacturer

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P. R. China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	LTE/CDMA Mutil-Mode Digital Mobile Phone
Brand Name	ZTE
Model Name	N9132
FCC ID	SRQ-ZTEN9132
EUT supports Radios application	CDMA/EV-DO/GSM/GPRS/EGPRS WCDMA/HSPA/HSPA+(Downlink Only)/LTE WLAN 2.4GHz 802.11b/g/n HT20/HT40 Bluetooth v3.0 + EDR/Bluetooth v4.0 LE
IMEI Code	Conducted: 990006080001054 EIRP/ERP: 867232020015658 Radiation: 990006080008682
HW Version	cvzA
SW Version	N9132V1.0.0B01
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
Tx Frequency	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz CDMA2000 BC0: 824.70 MHz ~ 848.31 MHz CDMA2000 BC1: 1851.25 MHz ~ 1908.75 MHz
Rx Frequency	GSM850: 869.2 MHz ~ 893.8 MHz GSM1900: 1930.2 MHz ~ 1989.8 MHz WCDMA Band V: 871.4 MHz ~ 891.6 MHz WCDMA Band II: 1932.4 MHz ~ 1987.6 MHz CDMA2000 BC0: 869.70 MHz ~ 893.31 MHz CDMA2000 BC1: 1931.25 MHz ~ 1988.75 MHz
Maximum Output Power to Antenna	GSM850 : 31.65 dBm GSM1900 : 28.39 dBm WCDMA Band V : 22.80 dBm WCDMA Band II : 21.97 dBm CDMA2000 BC0 : 23.85 dBm CDMA2000 BC1 : 23.10 dBm
Antenna Type	LDS Antenna
Type of Modulation	GSM: GMSK GPRS: GMSK EDGE: GMSK / 8PSK WCDMA : QPSK (Uplink) HSDPA : QPSK (Uplink) HSUPA : QPSK (Uplink) HSPA+ : 16QAM (Downlink Only) CDMA2000 : QPSK CDMA2000 1xEV-DO : QPSK/8PSK



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

FCC Rule	System	Type of Modulation	Maximum ERP/EIRP (W)	Frequency Tolerance (ppm)	Emission Designator
Part 22	GSM850 GSM	GMSK	1.7047	0.0610 ppm	244KGXW
Part 22	GSM850 EDGE class 8	8PSK	0.4975	0.0466 ppm	244KG7W
Part 22	WCDMA Band V RMC 12.2Kbps	QPSK	0.1978	0.0777 ppm	4M14F9W
Part 22	CDMA2000 BC0 1xRTT	QPSK	0.2282	0.0550 ppm	1M28F9W
Part 24	GSM1900 GSM	GMSK	1.5195	0.0144 ppm	246KGXW
Part 24	GSM1900 EDGE class 8	8PSK	0.8361	0.0202 ppm	246KG7W
Part 24	WCDMA Band II RMC 12.2Kbps	QPSK	0.4603	0.0277 ppm	4M16F9W
Part 24	CDMA2000 BC1 1xRTT	QPSK	0.5689	0.0186 ppm	1M28F9W



1.7 Testing Location

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.		
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958		
Test Site No.	Sporton Site No.		FCC/IC Registration No.
	TH01-KS	03CH02-KS	418269/4086E

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC 47 CFR Part 2, 22(H), 24(E)
- ANSI / TIA / EIA-603-C-2004
- FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 9000 MHz for GSM850, WCDMA Band V, and CDMA2000 BC0.
2. 30 MHz to 19000 MHz for GSM1900, WCDMA Band II, and CDMA2000 BC1.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes		
Band	Radiated TCs	Conducted TCs
GSM 850	<ul style="list-style-type: none"> ■ GSM Link ■ EDGE class 8 Link 	<ul style="list-style-type: none"> ■ GSM Link ■ EDGE class 8 Link
GSM 1900	<ul style="list-style-type: none"> ■ GSM Link ■ EDGE class 8 Link 	<ul style="list-style-type: none"> ■ GSM Link ■ EDGE class 8 Link
WCDMA Band V	<ul style="list-style-type: none"> ■ RMC 12.2Kbps Link 	<ul style="list-style-type: none"> ■ RMC 12.2Kbps Link
WCDMA Band II	<ul style="list-style-type: none"> ■ RMC 12.2Kbps Link 	<ul style="list-style-type: none"> ■ RMC 12.2Kbps Link
CDMA2000 BC0	<ul style="list-style-type: none"> ■ 1xRTT Link Mode 	<ul style="list-style-type: none"> ■ 1xRTT Link Mode
CDMA2000 BC1	<ul style="list-style-type: none"> ■ 1xRTT Link Mode 	<ul style="list-style-type: none"> ■ 1xRTT Link Mode

Note: The maximum power levels are chosen to test as the worst case configuration as follows:

- GSM mode for GMSK modulation,
 - EDGE multi-slot class 8 mode for 8PSK modulation,
 - RMC 12.2Kbps mode for WCDMA band V,
 - RMC 12.2Kbps mode for WCDMA band II,
 - 1xRTT RC3 SO32(+ F-SCH) mode for CDMA2000 BC0,
 - 1xRTT RC1 SO55 mode for CDMA2000 BC1.
- Only these modes were used for all tests.



Conducted Power Measurement Results:


Conducted Power (*Unit: dBm)						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880.0	1909.8
GSM	31.65	31.43	31.51	28.39	28.30	28.25
GPRS class 8	31.64	31.42	31.50	28.37	28.28	28.23
GPRS class 10	29.71	29.13	29.48	26.99	27.04	27.02
EGPRS class 8	26.36	26.30	26.24	25.01	24.95	24.95
EGPRS class 10	24.84	24.85	24.79	24.57	24.52	24.53

Conducted Power (*Unit: dBm)						
Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4182	4233	9262	9400	9538
Frequency	826.4	836.4	846.6	1852.4	1880.0	1907.6
AMR12.2K	22.75	22.71	22.79	21.95	21.87	21.83
RMC 12.2K	22.77	22.72	22.80	21.97	21.87	21.85
HSDPA Subtest-1	22.38	22.51	22.50	21.56	21.48	21.42
HSDPA Subtest-2	22.49	22.51	22.53	21.52	21.45	21.40
HSDPA Subtest-3	22.05	22.11	22.10	21.62	21.56	21.48
HSDPA Subtest-4	22.12	22.10	22.04	21.65	21.55	21.44
HSUPA Subtest-1	21.75	22.05	22.04	21.25	21.16	21.10
HSUPA Subtest-2	21.34	21.43	21.41	20.78	21.37	20.91
HSUPA Subtest-3	21.51	21.05	21.03	21.32	21.08	21.29
HSUPA Subtest-4	21.49	21.63	21.59	21.89	21.67	21.90
HSUPA Subtest-5	21.84	21.93	21.90	21.75	21.76	21.71


Conducted Power (*Unit: dBm)						
Band	CDMA2000 BC0			CDMA2000 BC1		
Channel	1013	384	777	25	600	1175
Frequency	824.7	836.52	848.31	1851.25	1880	1908.75
1xRTT RC1 SO55	23.74	23.62	23.60	23.07	23.07	23.10
1xRTT RC3 SO55	23.80	23.72	23.69	22.99	22.99	23.05
1xRTT RC3 SO32(+ F-SCH)	23.85	23.78	23.72	23.04	23.02	23.08
1xRTT RC3 SO32(+SCH)	23.84	23.79	23.70	23.01	22.98	23.04
1xEV-DO RTAP 153.6kbps	23.81	23.73	23.71	23.06	23.02	23.08
1xEV-DO RETAP 4096Bits	23.79	23.73	23.68	23.01	23.00	23.05

2.2 Connection Diagram of Test System

For GSM/WCDMA Band:

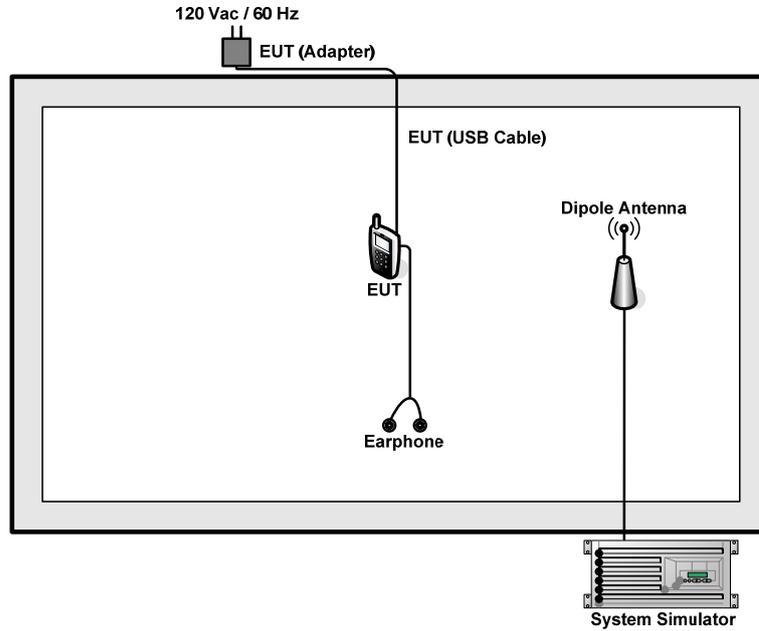

For CDMA Band:

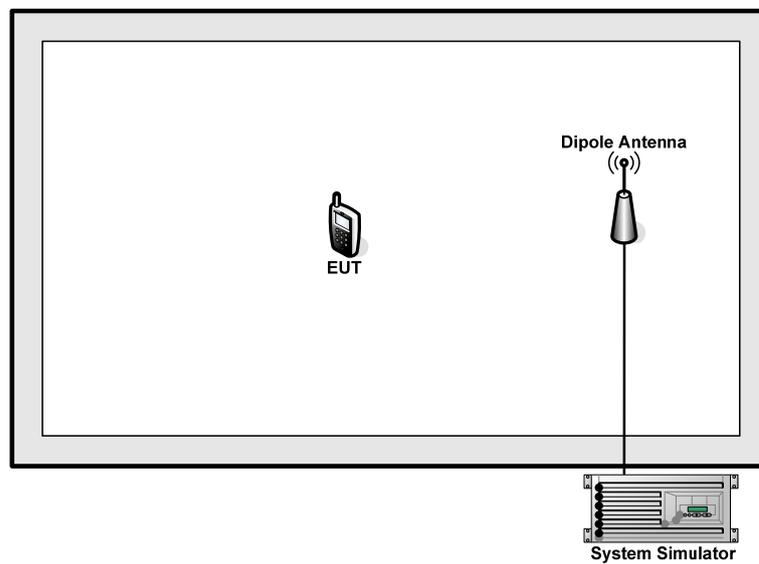



2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	GW	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
3.	Earphone	Lenovo	SH100	N/A	N/A	N/A

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 5.2 dB and a 10dB attenuator.

Example :

$$\begin{aligned} \text{Offset}(dB) &= \text{RF cable loss}(dB) + \text{attenuator factor}(dB). \\ &= 5.2 + 10 = 15.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 Conducted Output Power Measurement

3.1.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.

3.1.4 Test Setup

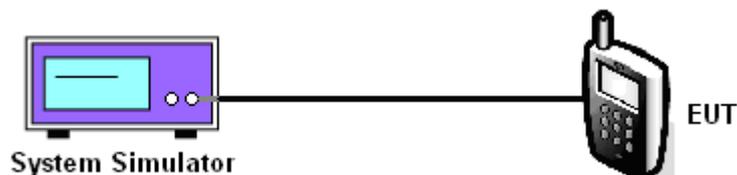



3.1.5 Test Result of Conducted Output Power

Cellular Band									
Modes	GSM850 (GSM)			GSM850 (EDGE class 8)			WCDMA Band V (RMC 12.2Kbps)		
Channel	128 (Low)	189 (Mid)	251 (High)	128 (Low)	189 (Mid)	251 (High)	4132 (Low)	4182 (Mid)	4233 (High)
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8	826.4	836.4	846.6
Conducted Power (dBm)	31.65	31.43	31.51	26.36	26.30	26.24	22.77	22.72	22.80

PCS Band									
Modes	GSM1900 (GSM)			GSM1900 (EDGE class 8)			WCDMA Band II (RMC 12.2Kbps)		
Channel	512 (Low)	661 (Mid)	810 (High)	512 (Low)	661 (Mid)	810 (High)	9262 (Low)	9400 (Mid)	9538 (High)
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8	1852.4	1880	1907.6
Conducted Power (dBm)	28.39	28.30	28.25	25.01	24.95	24.95	21.97	21.87	21.85



CDMA2000 BC0			
Test Mode	CDMA 2000 1xRTT		
Test Status	RC3+SO32		
Channel	1013 (Low)	384 (Mid)	777 (High)
Frequency (MHz)	824.70	836.52	848.31
Conducted Power (dBm)	23.85	23.78	23.72

CDMA2000 BC1			
Test Mode	CDMA 2000 1xRTT		
Test Status	RC1+SO55		
Channel	25 (Low)	600 (Mid)	1175 (High)
Frequency (MHz)	1851.25	1880.00	1908.75
Conducted Power (dBm)	23.07	23.07	23.10

Note: maximum burst average power for GSM, and maximum average power for WCDMA and CDMA2000.

3.2 Peak-to-Average Ratio

3.2.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 5.7.1.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. For GSM/EGPRS operating modes:
 - a. Set EUT in maximum power output.
 - b. Set the RBW = 1MHz, VBW = 3MHz, Peak detector on spectrum analyzer for first trace.
 - c. Set the RBW = 1MHz, VBW = 3MHz, RMS detector on spectrum analyzer for second trace.
 - d. The wanted burst signal is triggered by spectrum analyzer, and measured respectively the peak level and Mean level without burst-off time, after system simulator has synchronized with the spectrum analyzer.
4. For UMTS operating modes:
 - a. Set the CCDF (Complementary Cumulative Distribution Function) option on the spectrum analyzer.
 - b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

3.2.4 Test Setup

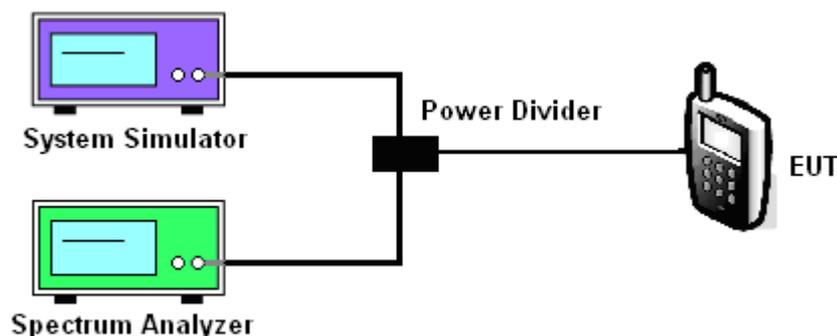

3.2.5 Test Result of Peak-to-Average Ratio

Cellular Band									
Modes	GSM850 (GSM)			GSM850 (EDGE class 8)			WCDMA Band V (RMC 12.2Kbps)		
Channel	128 (Low)	189 (Mid)	251 (High)	128 (Low)	189 (Mid)	251 (High)	4132 (Low)	4182 (Mid)	4233 (High)
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8	826.4	836.4	846.6
Peak-to-Average Ratio (dB)	0.30	0.31	0.32	2.59	2.55	2.54	3.08	3.12	3.16

PCS Band									
Modes	GSM1900 (GSM)			GSM1900 (EDGE class 8)			WCDMA Band II (RMC 12.2Kbps)		
Channel	512 (Low)	661 (Mid)	810 (High)	512 (Low)	661 (Mid)	810 (High)	9262 (Low)	9400 (Mid)	9538 (High)
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8	1852.4	1880	1907.6
Peak-to-Average Ratio (dB)	0.29	0.30	0.31	2.75	2.76	2.66	2.88	2.96	2.92

CDMA2000 BC0			
Modes	CDMA 2000 1xRTT		
Channel	1013 (Low)	384 (Mid)	777 (High)
Frequency (MHz)	824.70	836.52	848.31
Peak-to-Average Ratio (dB)	3.84	3.88	3.80


CDMA2000 BC1			
Modes	CDMA 2000 1xRTT		
Channel	25 (Low)	600 (Mid)	1175 (High)
Frequency (MHz)	1851.25	1880	1908.75
Peak-to-Average Ratio (dB)	3.12	3.00	2.76



3.2.6 Test Result (Plots) of Peak-to-Average Ratio


Band :	GSM 850	Test Mode :	GSM Link (GMSK)
---------------	---------	--------------------	-----------------

Peak-to-Average Ratio on Channel 128 (824.2 MHz)

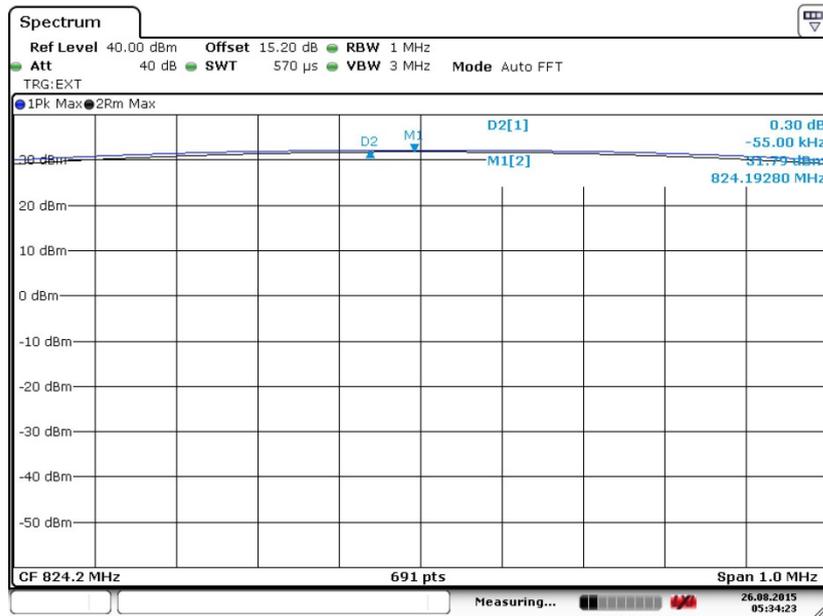

Date: 26.AUG.2015 05:34:23


Peak-to-Average Ratio on Channel 189 (836.4 MHz)

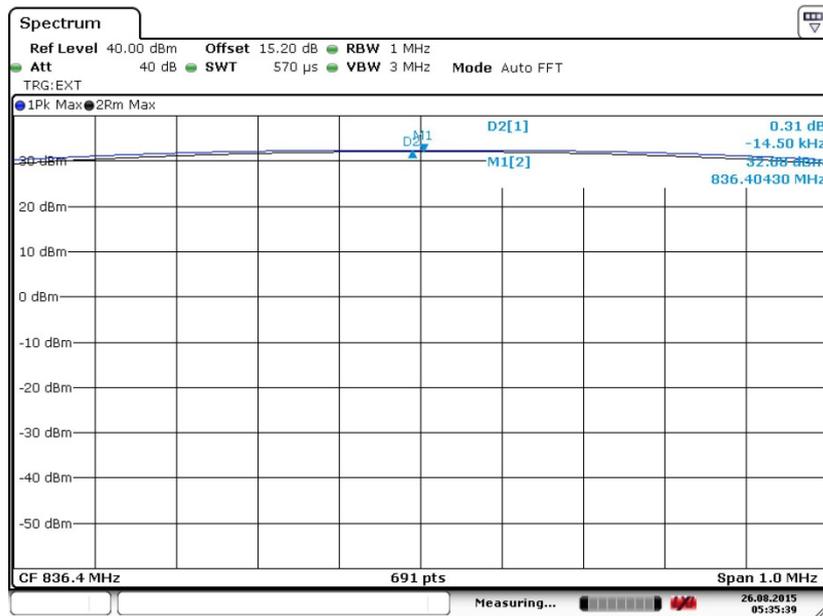

Date: 26.AUG.2015 05:35:40



Peak-to-Average Ratio on Channel 251 (848.8 MHz)

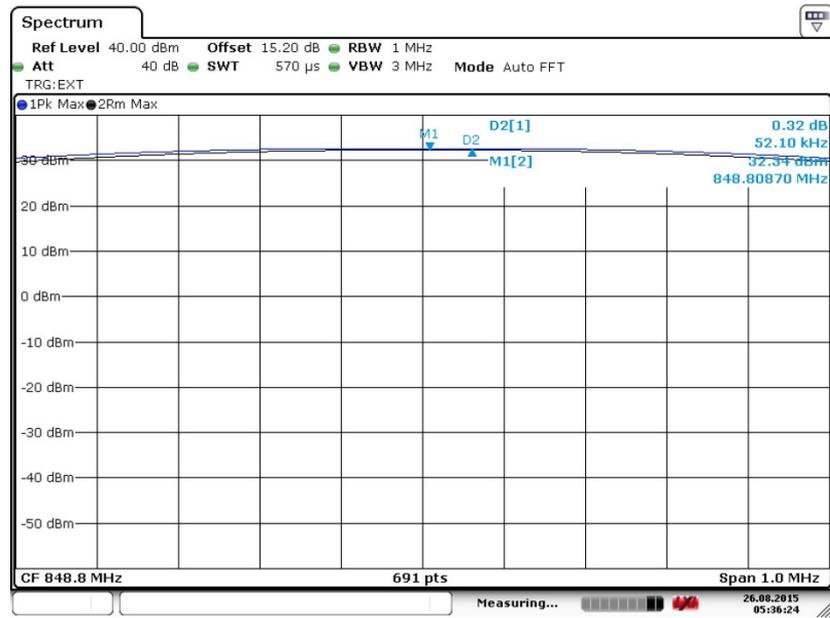


Date: 26.AUG.2015 05:36:24




Band :	GSM 850	Test Mode :	EDGE class 8 Link (8PSK)
---------------	---------	--------------------	--------------------------

Peak-to-Average Ratio on Channel 128 (824.2 MHz)

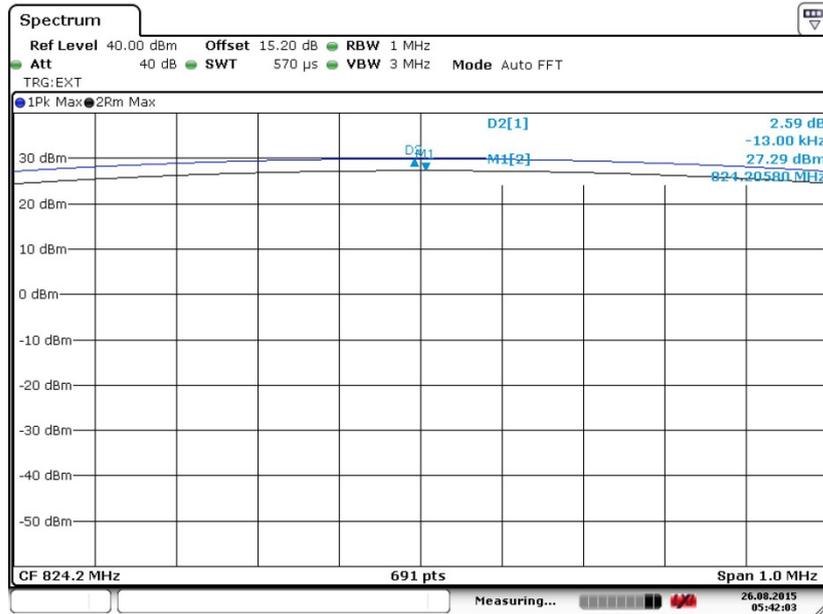


Peak-to-Average Ratio on Channel 189 (836.4 MHz)

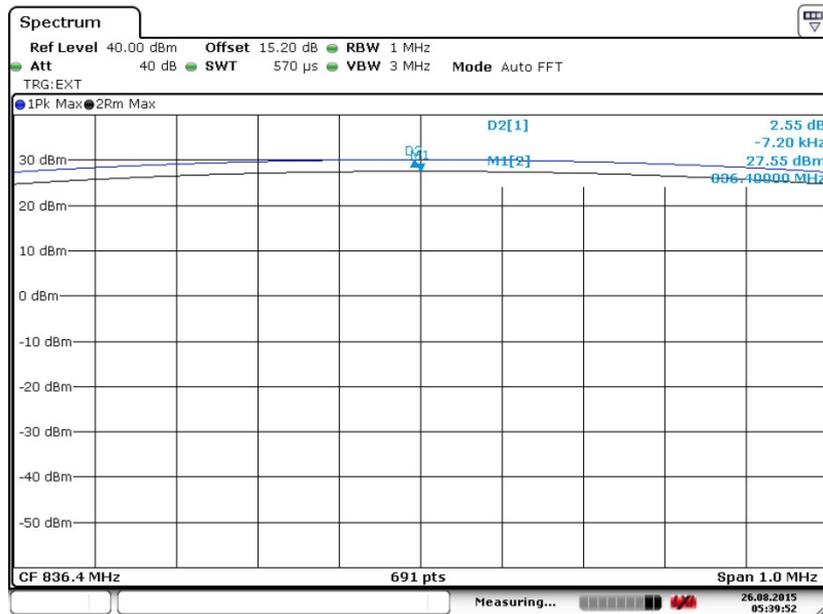



Peak-to-Average Ratio on Channel 251 (848.8 MHz)

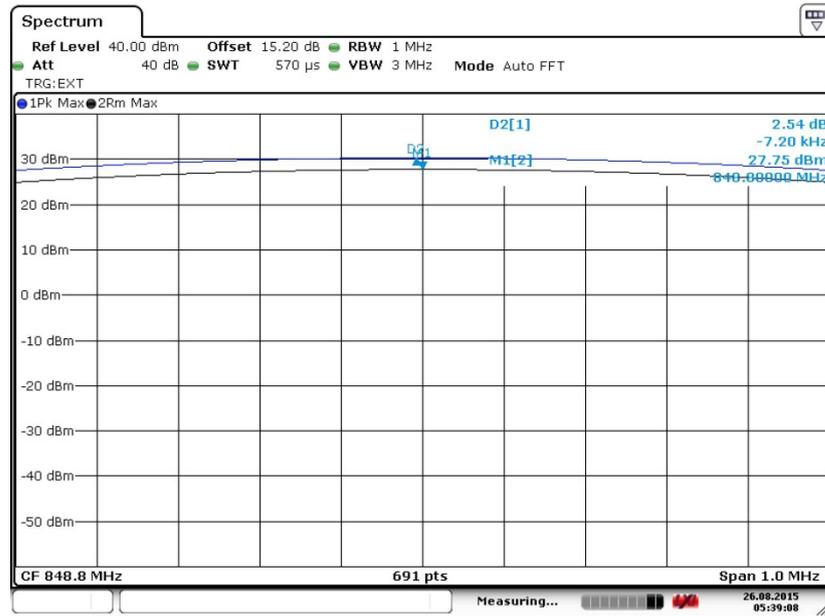


Date: 26.AUG.2015 05:39:08




Band :	GSM 1900	Test Mode :	GSM Link (GMSK)
--------	----------	-------------	-----------------

Peak-to-Average Ratio on Channel 512 (1850.2 MHz)

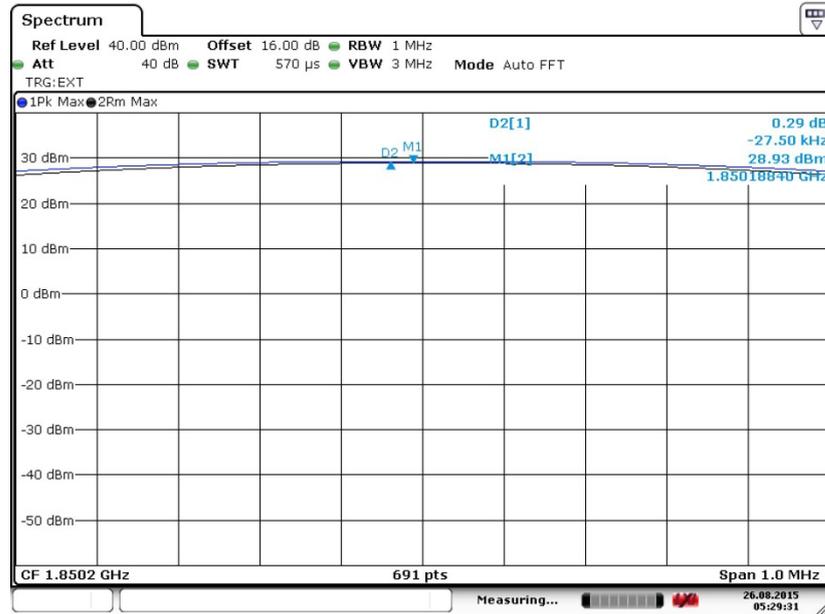

Date: 26.AUG.2015 05:29:32


Peak-to-Average Ratio on Channel 661 (1880.0 MHz)

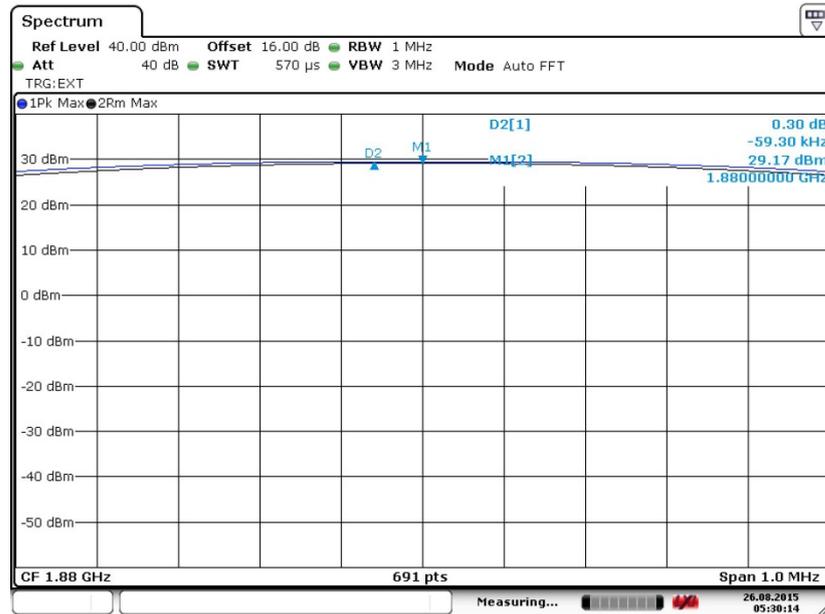

Date: 26.AUG.2015 05:30:14



Peak-to-Average Ratio on Channel 810 (1909.8 MHz)

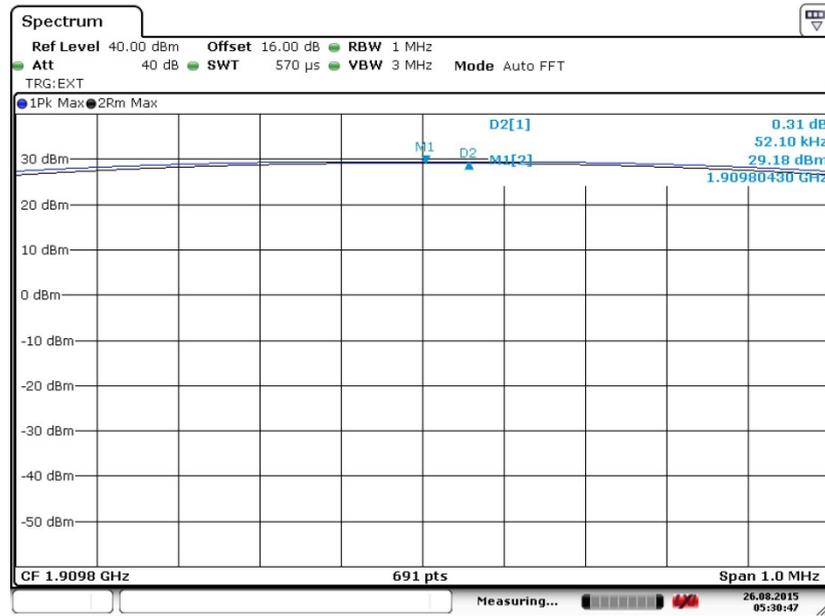


Date: 26.AUG.2015 05:30:47




Band :	GSM 1900	Test Mode :	EDGE class 8 Link (8PSK)
---------------	----------	--------------------	--------------------------

Peak-to-Average Ratio on Channel 512 (1850.2 MHz)

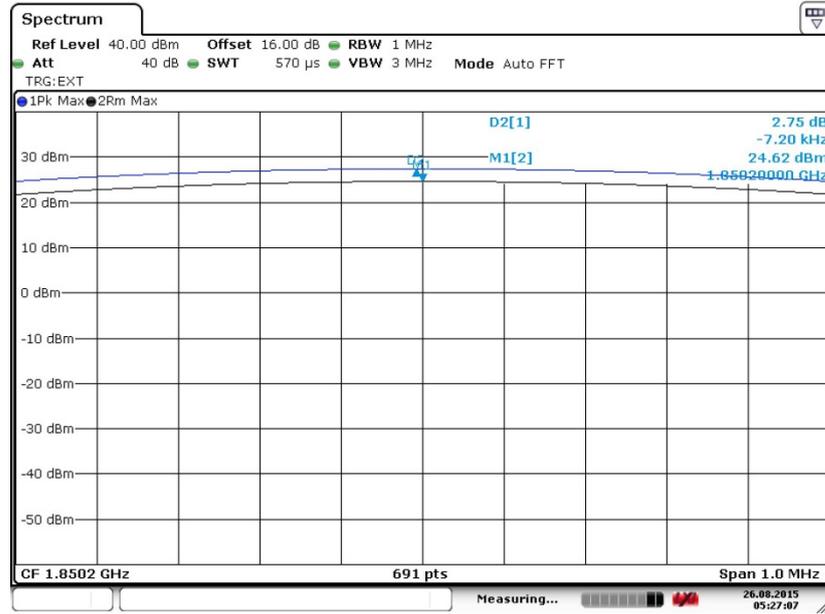

Date: 26.AUG.2015 05:27:07


Peak-to-Average Ratio on Channel 661 (1880.0 MHz)

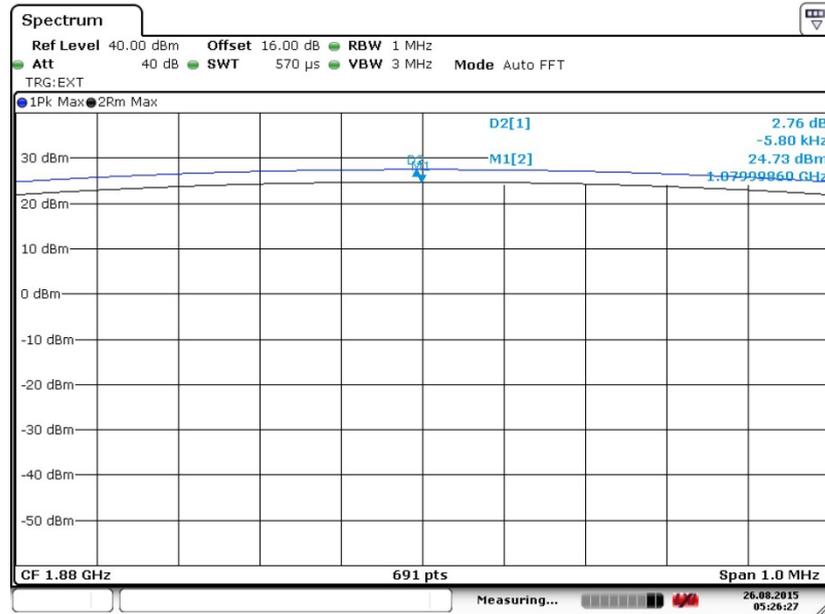

Date: 26.AUG.2015 05:26:27



Peak-to-Average Ratio on Channel 810 (1909.8 MHz)

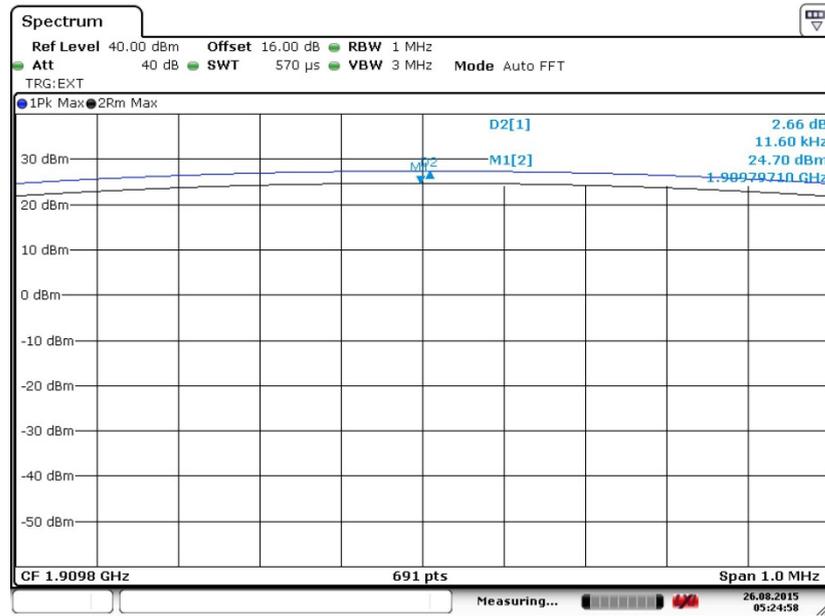


Date: 26.AUG.2015 05:24:58



Band :	WCDMA Band V	Test Mode :	RMC 12.2Kbps Link (QPSK)
---------------	--------------	--------------------	--------------------------

Peak-to-Average Ratio on Channel 4132 (826.4 MHz)

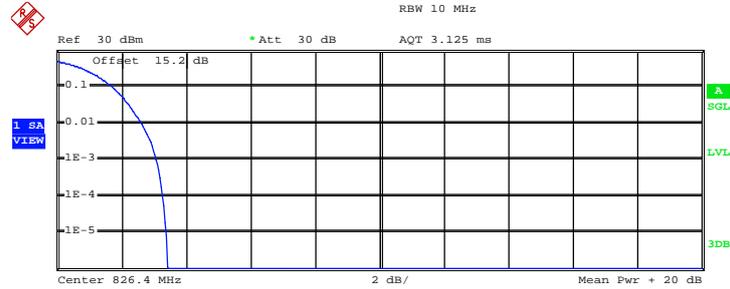


Complementary Cumulative Distribution Function (100000 samples)

Trace 1

Mean	23.12 dBm
Peak	26.54 dBm
Crest	3.42 dB
10 %	1.72 dB
1 %	2.64 dB
.1 %	3.08 dB
.01 %	3.28 dB

Date: 26.AUG.2015 02:56:34

Peak-to-Average Ratio on Channel 4182 (836.4 MHz)

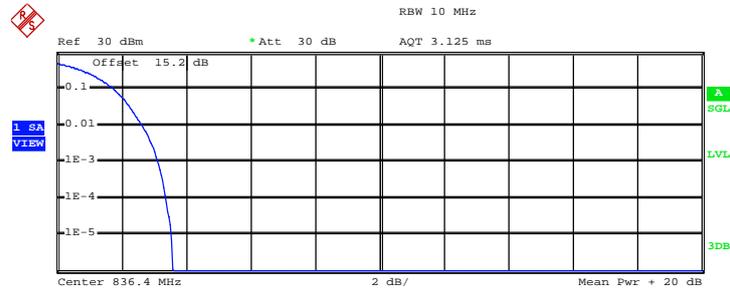

Complementary Cumulative Distribution Function (100000 samples)


Trace 1

Mean	23.25 dBm
Peak	26.82 dBm
Crest	3.58 dB
10 %	1.76 dB
1 %	2.64 dB
.1 %	3.12 dB
.01 %	3.40 dB

Date: 26.AUG.2015 02:57:23



Peak-to-Average Ratio on Channel 4233 (846.6 MHz)

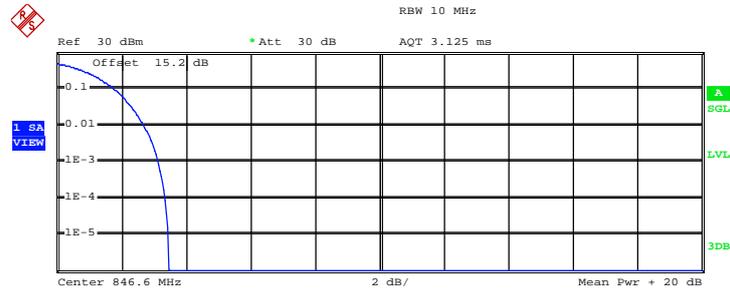

Complementary Cumulative Distribution Function (100000 samples)

Trace 1


Mean	23.35 dBm
Peak	26.82 dBm
Crest	3.47 dB
10 %	1.76 dB
1 %	2.68 dB
.1 %	3.16 dB
.01 %	3.36 dB

Date: 26.AUG.2015 02:58:20



Band :	WCDMA Band II	Test Mode :	RMC 12.2Kbps Link (QPSK)
---------------	---------------	--------------------	--------------------------

Peak-to-Average Ratio on Channel 9262 (1852.4 MHz)

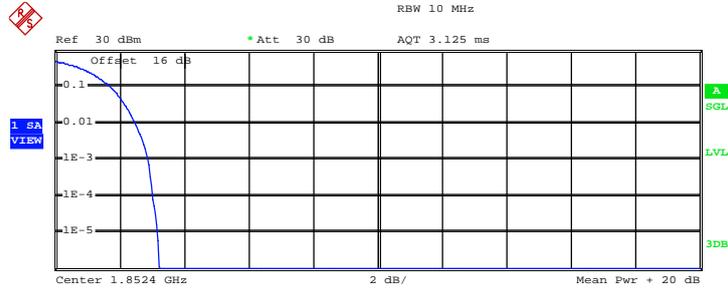


Complementary Cumulative Distribution Function (100000 samples)

Trace 1

Mean	23.30 dBm
Peak	26.54 dBm
Crest	3.24 dB
10 %	1.72 dB
1 %	2.52 dB
.1 %	2.88 dB
.01 %	3.04 dB

Date: 26.AUG.2015 03:44:46

Peak-to-Average Ratio on Channel 9400 (1880.0 MHz)

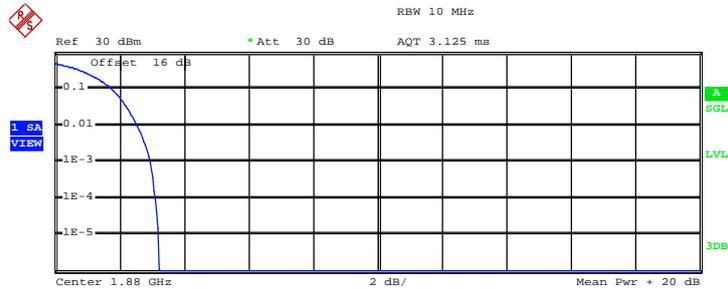

Complementary Cumulative Distribution Function (100000 samples)


Trace 1

Mean	23.47 dBm
Peak	26.68 dBm
Crest	3.22 dB
10 %	1.76 dB
1 %	2.56 dB
.1 %	2.96 dB
.01 %	3.12 dB

Date: 26.AUG.2015 03:43:53



Peak-to-Average Ratio on Channel 9538 (1907.6 MHz)

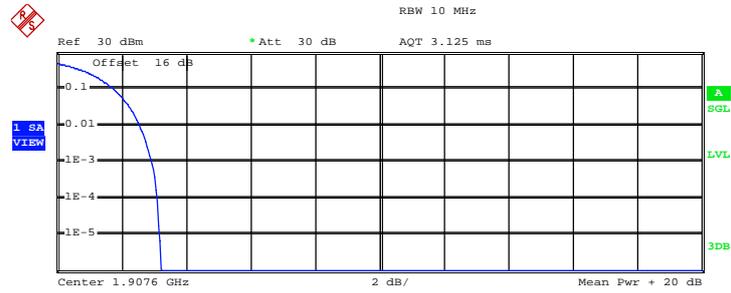

Complementary Cumulative Distribution Function (100000 samples)

Trace 1


Mean	23.61 dBm
Peak	26.82 dBm
Crest	3.22 dB
10 %	1.76 dB
1 %	2.56 dB
.1 %	2.92 dB
.01 %	3.12 dB

Date: 26.AUG.2015 03:42:41




Band :	CDMA2000 BC0	Test Mode :	1xRTT Link (QPSK)
---------------	--------------	--------------------	-------------------

Peak-to-Average Ratio on Channel 1013 (824.70 MHz)

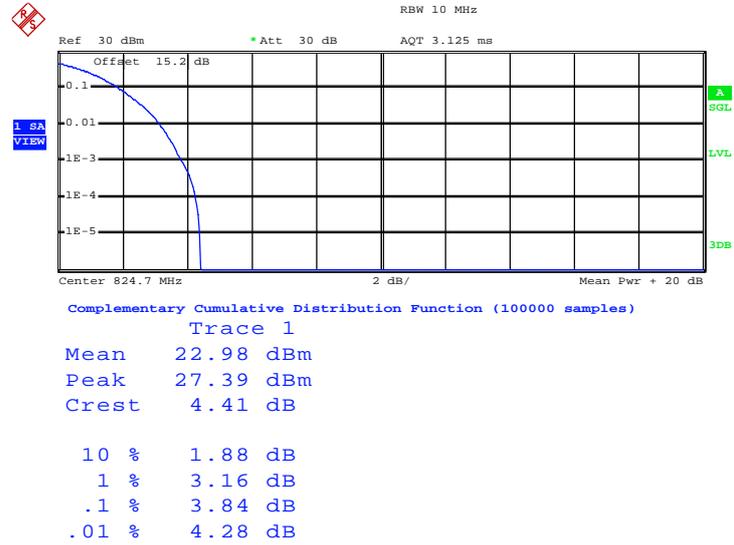

Date: 7.SEP.2015 07:16:07


Peak-to-Average Ratio on Channel 384 (836.52 MHz)

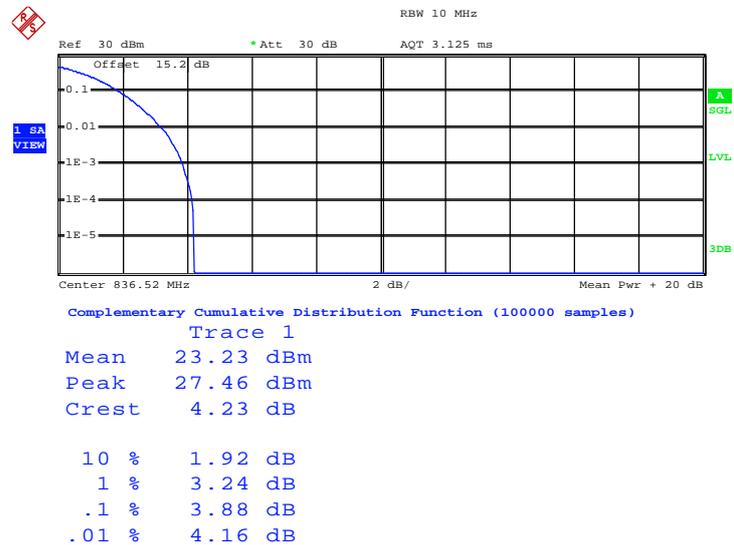

Date: 7.SEP.2015 07:16:48



Peak-to-Average Ratio on Channel 777 (848.31 MHz)

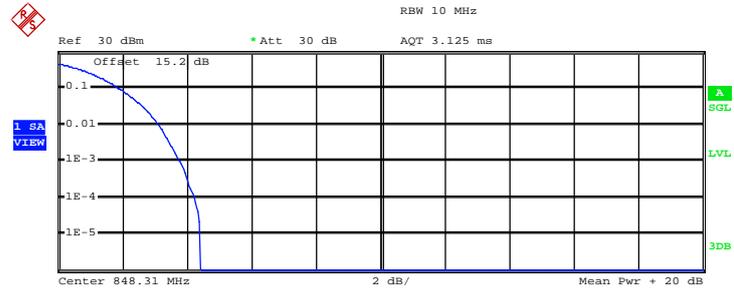

Complementary Cumulative Distribution Function (100000 samples)

Trace 1
 Mean 22.89 dBm
 Peak 27.32 dBm
 Crest 4.43 dB


10 %	1.92 dB
1 %	3.12 dB
.1 %	3.80 dB
.01 %	4.24 dB

Date: 7.SEP.2015 07:17:30




Band :	CDMA2000 BC1	Test Mode :	1xRTT Link (QPSK)
---------------	--------------	--------------------	-------------------

Peak-to-Average Ratio on Channel 25 (1851.25 MHz)

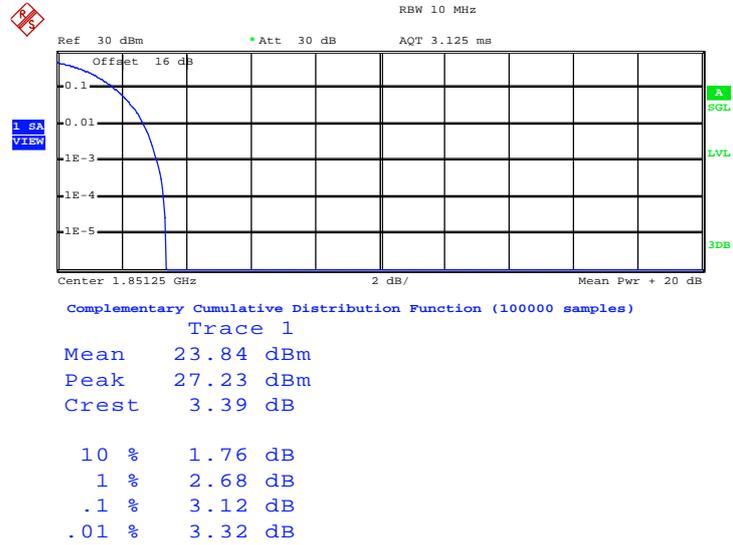

Date: 28.AUG.2015 14:58:18


Peak-to-Average Ratio on Channel 600 (1880 MHz)

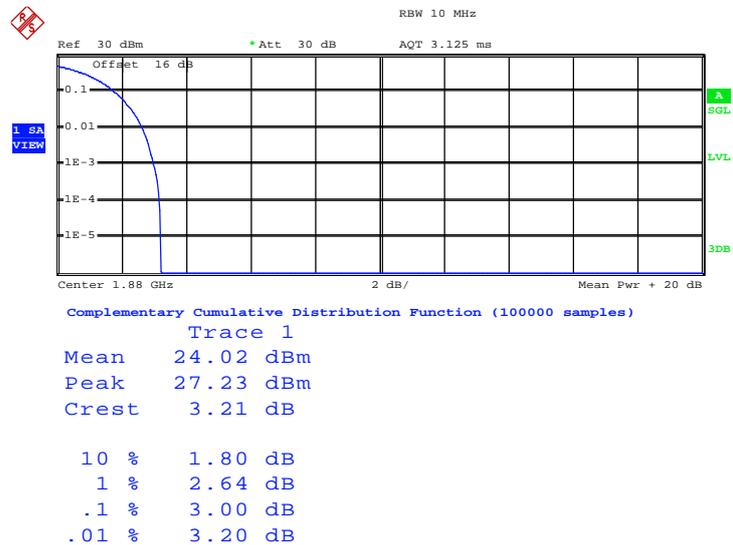

Date: 28.AUG.2015 14:57:34



Peak-to-Average Ratio on Channel 1175 (1908.75 MHz)

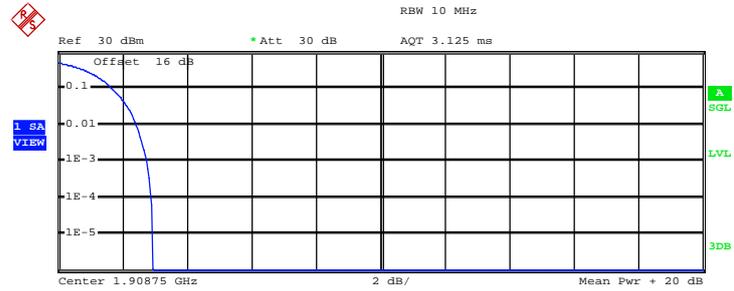

Complementary Cumulative Distribution Function (100000 samples)

Trace 1
 Mean 24.08 dBm
 Peak 27.02 dBm
 Crest 2.95 dB

10 %	1.68 dB
1 %	2.44 dB
.1 %	2.76 dB
.01 %	2.92 dB

Date: 28.AUG.2015 14:56:51



3.3 Effective Radiated Power and Effective Isotropic Radiated Power Measurement

3.3.1 Description of the ERP/EIRP Measurement

The substitution method, in ANSI / TIA / EIA-603-C-2004, was used for ERP/EIRP measurement, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v02r02. The ERP of mobile transmitters must not exceed 7 Watts and the EIRP of mobile transmitters are limited to 2 Watts.

3.3.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 5.2.1. (for CDMA/WCDMA), Section 5.2.2.2 (for GSM/GPRS/EDGE) and ANSI / TIA-603-C-2004 Section 2.2.17.
2. The EUT was placed on a non-conductive rotating platform 0.8 meters high in a semi-anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with RMS detector per section 5. of KDB 971168 D01.
3. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power. The maximum emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
4. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to TIA/EIA-603-C. The EUT was replaced by the substitution antenna at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP was calculated with the correction factor, $EIRP = LVL + \text{Correction factor}$ and $ERP = EIRP - 2.15$. Take the record of the output power at substitution antenna.

	GSM/GPRS/EDGE	CDMA2000/EV-DO	WCDMA/HSPA
SPAN	500kHz	3MHz	10MHz
RBW	10kHz	30kHz	100kHz
VBW	30kHz	100kHz	300kHz
Detector	RMS	RMS	RMS
Trace	Average	Average	Average
Average Type	Power	Power	Power
Sweep Count	100	100	100

3.3.4 Test Setup

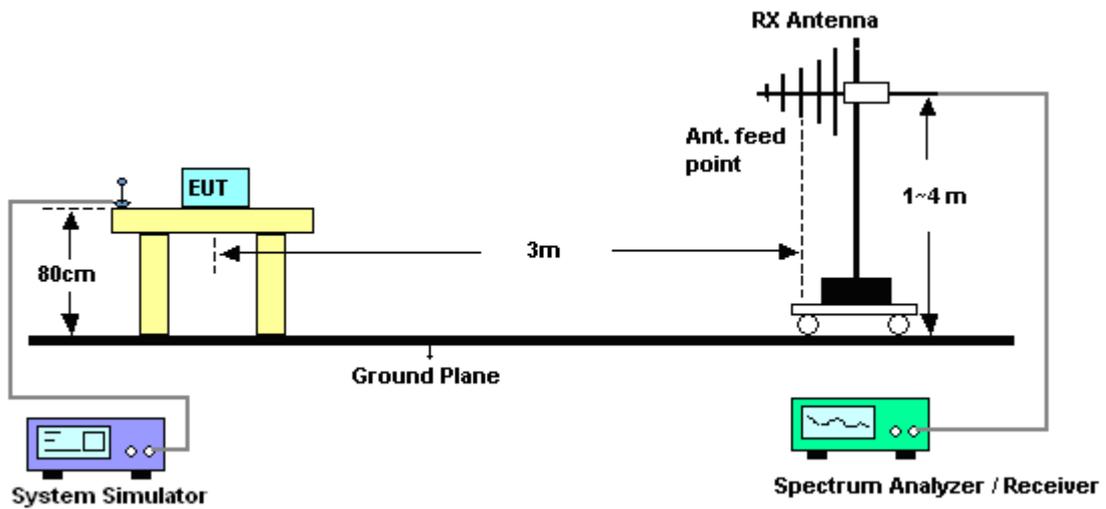



3.3.5 Test Result of ERP

GSM850 (GSM) Radiated Power ERP					
Channel	Frequency (MHz)	Horizontal		Vertical	
		ERP(dBm)	ERP(W)	ERP(dBm)	ERP(W)
Lowest	824.2	31.50	1.4137	19.27	0.0844
Middle	836.4	32.32	1.7047	18.46	0.0701
Highest	848.8	32.21	1.6637	18.25	0.0668
Limit	ERP < 7W	Result		PASS	

GSM850 (EDGE class 8) Radiated Power ERP					
Channel	Frequency (MHz)	Horizontal		Vertical	
		ERP(dBm)	ERP(W)	ERP(dBm)	ERP(W)
Lowest	824.2	25.62	0.3650	13.02	0.0201
Middle	836.4	26.67	0.4644	12.31	0.0170
Highest	848.8	26.97	0.4975	12.49	0.0178
Limit	ERP < 7W	Result		PASS	

WCDMA Band V (RMC 12.2Kbps) Radiated Power ERP					
Channel	Frequency (MHz)	Horizontal		Vertical	
		ERP(dBm)	ERP(W)	ERP(dBm)	ERP(W)
Lowest	826.4	22.15	0.1642	10.06	0.0101
Middle	836.4	22.86	0.1931	9.30	0.0085
Highest	846.6	22.96	0.1978	8.79	0.0076
Limit	ERP < 7W	Result		PASS	

CDMA2000 BC0 1xRTT_RC3+SO32 Radiated Power ERP					
Channel	Frequency (MHz)	Horizontal		Vertical	
		ERP(dBm)	ERP(W)	ERP(dBm)	ERP(W)
Lowest	824.70	23.56	0.2269	7.29	0.0054
Middle	836.52	23.58	0.2282	8.66	0.0073
Highest	848.31	23.12	0.2051	10.64	0.0116
Limit	ERP < 7W	Result		PASS	



3.3.6 Test Result of EIRP

GSM1900 (GSM) Radiated Power EIRP					
Channel	Frequency (MHz)	Horizontal		Vertical	
		ERP(dBm)	ERP(W)	ERP(dBm)	ERP(W)
Lowest	1850.2	31.73	1.4884	26.93	0.4928
Middle	1880.0	31.30	1.3505	27.23	0.5284
Highest	1909.8	31.82	1.5195	27.84	0.6083
Limit	EIRP < 2W	Result		PASS	

GSM1900 (EDGE class 8) Radiated Power EIRP					
Channel	Frequency (MHz)	Horizontal		Vertical	
		ERP(dBm)	ERP(W)	ERP(dBm)	ERP(W)
Lowest	1850.2	28.62	0.7276	23.77	0.2384
Middle	1880.0	28.93	0.7816	24.69	0.2948
Highest	1909.8	29.22	0.8361	25.05	0.3202
Limit	EIRP < 2W	Result		PASS	

WCDMA Band II (RMC 12.2Kbps) Radiated Power EIRP					
Channel	Frequency (MHz)	Horizontal		Vertical	
		ERP(dBm)	ERP(W)	ERP(dBm)	ERP(W)
Lowest	1852.4	26.31	0.4275	21.38	0.1374
Middle	1880.0	26.21	0.4174	22.12	0.1628
Highest	1907.6	26.63	0.4603	22.46	0.1762
Limit	EIRP < 2W	Result		PASS	

CDMA2000 BC1 1xRTT_RC1+SO55 Radiated Power EIRP					
Channel	Frequency (MHz)	Horizontal		Vertical	
		ERP(dBm)	ERP(W)	ERP(dBm)	ERP(W)
Lowest	1851.25	26.58	0.4553	21.67	0.1470
Middle	1880.00	26.74	0.4718	22.49	0.1773
Highest	1908.75	27.55	0.5689	23.46	0.2218
Limit	EIRP < 2W	Result		PASS	

3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.4.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 4.2.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of the EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The 99% occupied bandwidth were measured, set RBW= 1% of span, VBW= 3*RBW, sample detector, trace maximum hold.
5. The 26dB bandwidth were measured, set RBW= 1% of EBW, VBW= 3*RBW, peak detector, trace maximum hold.

3.4.4 Test Setup

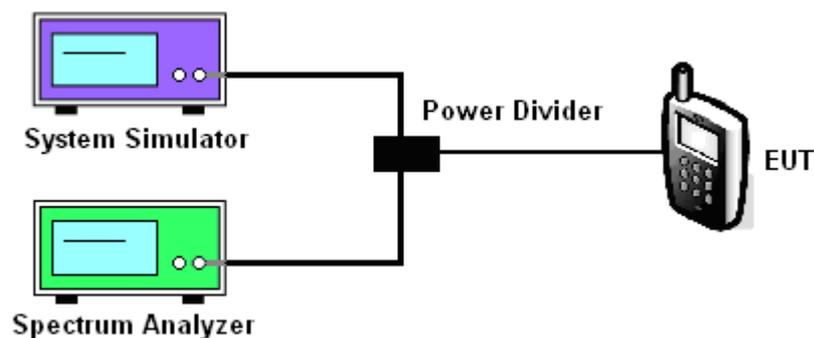



3.4.5 Test Result of Occupied Bandwidth and 26dB Bandwidth

Cellular Band						
Modes	GSM850 (GSM)			GSM850 (EDGE class 8)		
Channel	128 (Low)	189 (Mid)	251 (High)	128 (Low)	189 (Mid)	251 (High)
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8
99% OBW (kHz)	244.00	244.00	244.00	244.00	244.00	242.00
26dB BW (kHz)	312.00	312.00	314.00	304.00	312.00	312.00

PCS Band						
Modes	GSM1900 (GSM)			GSM1900 (EDGE class 8)		
Channel	512 (Low)	661 (Mid)	810 (High)	512 (Low)	661 (Mid)	810 (High)
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8
99% OBW (kHz)	244.00	246.00	244.00	246.00	244.00	244.00
26dB BW (kHz)	316.00	314.00	316.00	314.00	310.00	308.00

Cellular Band			
Modes	WCDMA Band V (RMC 12.2Kbps)		
Channel	4132 (Low)	4182 (Mid)	4233 (High)
Frequency (MHz)	826.4	836.4	846.6
99% OBW (MHz)	4.14	4.14	4.14
26dB BW (MHz)	4.72	4.74	4.70

PCS Band			
Modes	WCDMA Band II (RMC 12.2Kbps)		
Channel	9262 (Low)	9400 (Mid)	9538 (High)
Frequency (MHz)	1852.4	1880	1907.6
99% OBW (MHz)	4.16	4.16	4.16
26dB BW (MHz)	4.76	4.74	4.74



CDMA2000 BC0			
Test Mode	CDMA 2000 1xRTT		
Test Status	RC3+SO32		
Channel	1013 (Low)	384 (Mid)	777 (High)
Frequency (MHz)	824.70	836.52	848.31
99% OBW (MHz)	1.28	1.27	1.28
26dB BW (MHz)	1.42	1.42	1.42


CDMA2000 BC1			
Test Mode	CDMA 2000 1xRTT		
Test Status	RC1+SO55		
Channel	25 (Low)	600 (Mid)	1175 (High)
Frequency (MHz)	1851.25	1880.00	1908.75
99% OBW (MHz)	1.28	1.28	1.28
26dB BW (MHz)	1.44	1.44	1.44



3.4.6 Test Result (Plots) of Occupied Bandwidth and 26dB Bandwidth


Band :	GSM 850	Test Mode :	GSM Link (GMSK)
--------	---------	-------------	-----------------

99% Occupied Bandwidth Plot on Channel 128 (824.2 MHz)

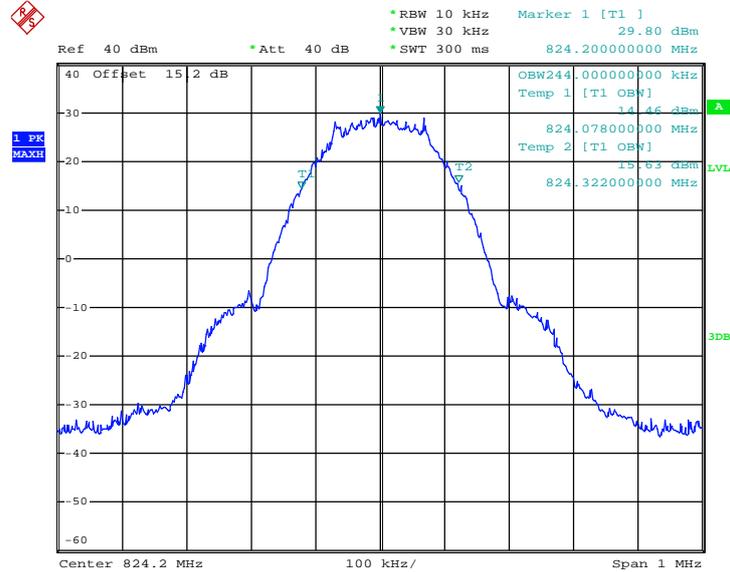

Date: 26.AUG.2015 01:50:02


26dB Bandwidth Plot on Channel 128 (824.2 MHz)

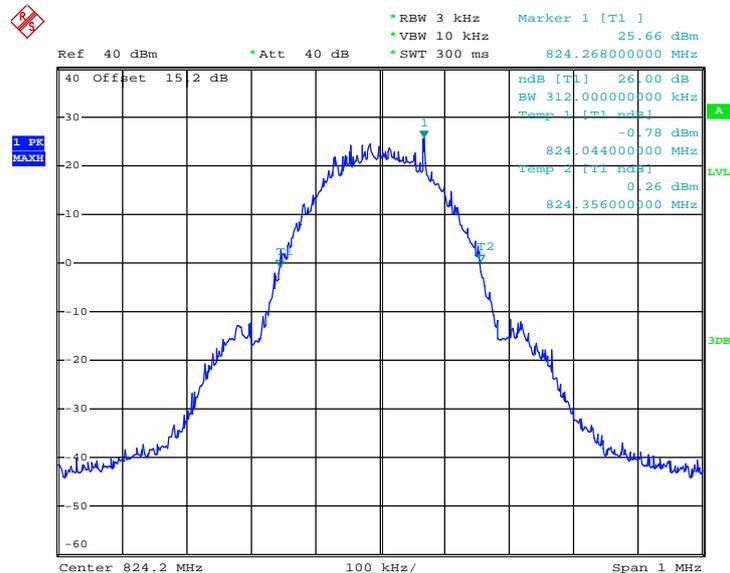

Date: 26.AUG.2015 01:29:50




99% Occupied Bandwidth Plot on Channel 189 (836.4 MHz)

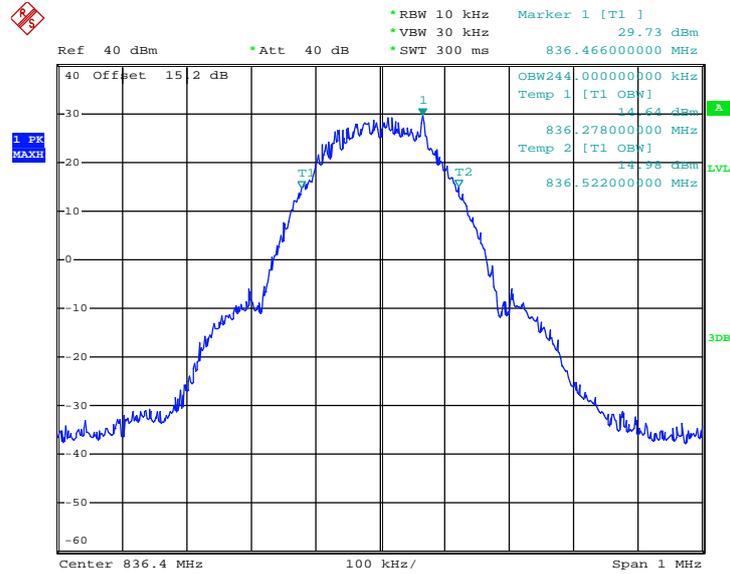

Date: 26.AUG.2015 01:41:34


26dB Bandwidth Plot on Channel 189 (836.4 MHz)

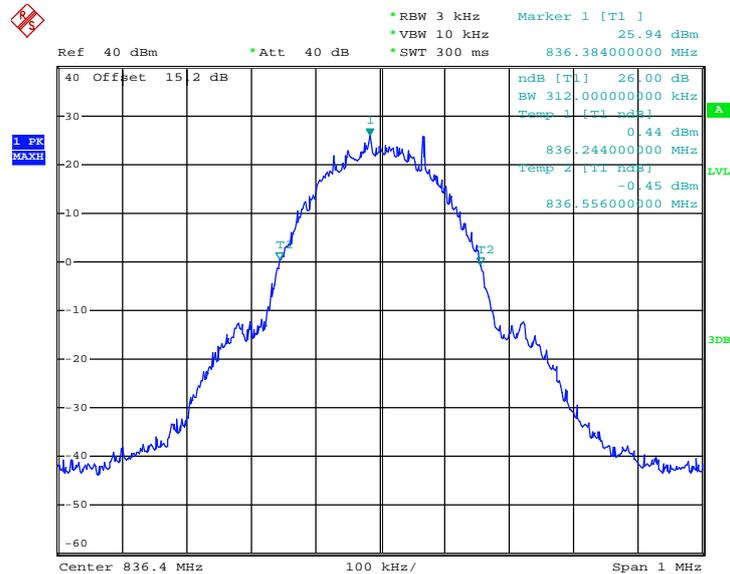

Date: 26.AUG.2015 01:31:54




99% Occupied Bandwidth Plot on Channel 251 (848.8 MHz)

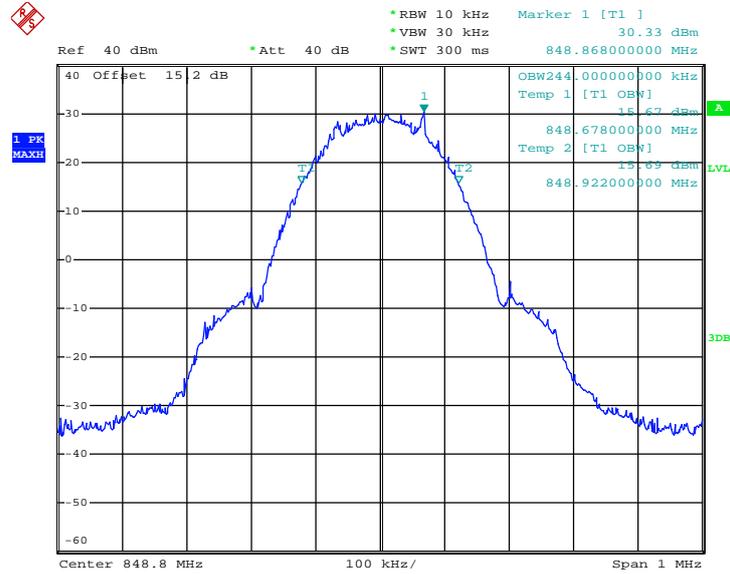

Date: 26.AUG.2015 01:38:01

26dB Bandwidth Plot on Channel 251 (848.8 MHz)

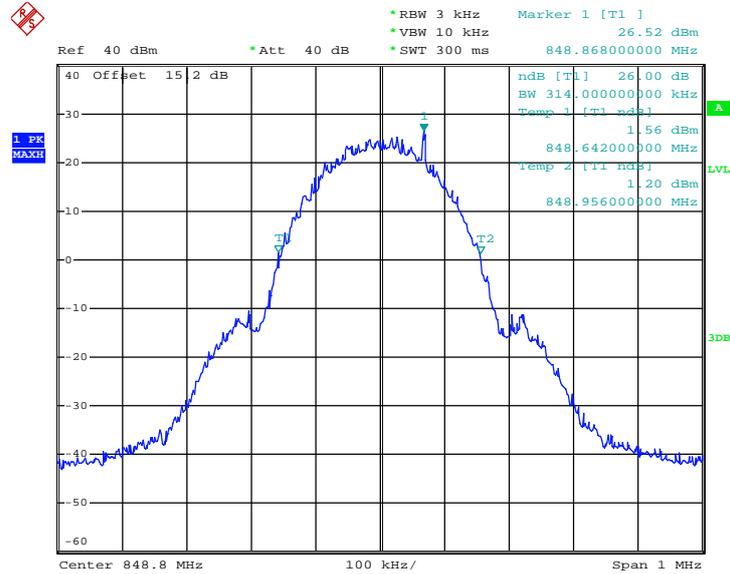


Date: 26.AUG.2015 01:35:58




Band :	GSM 850	Test Mode :	EDGE class 8 Link (8PSK)
---------------	---------	--------------------	--------------------------

99% Occupied Bandwidth Plot on Channel 128 (824.2 MHz)

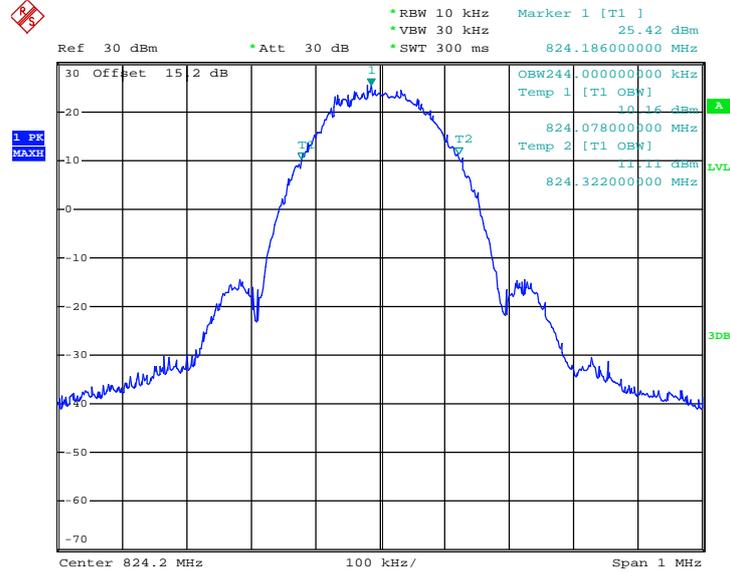

Date: 26.AUG.2015 02:36:40


26dB Bandwidth Plot on Channel 128 (824.2 MHz)

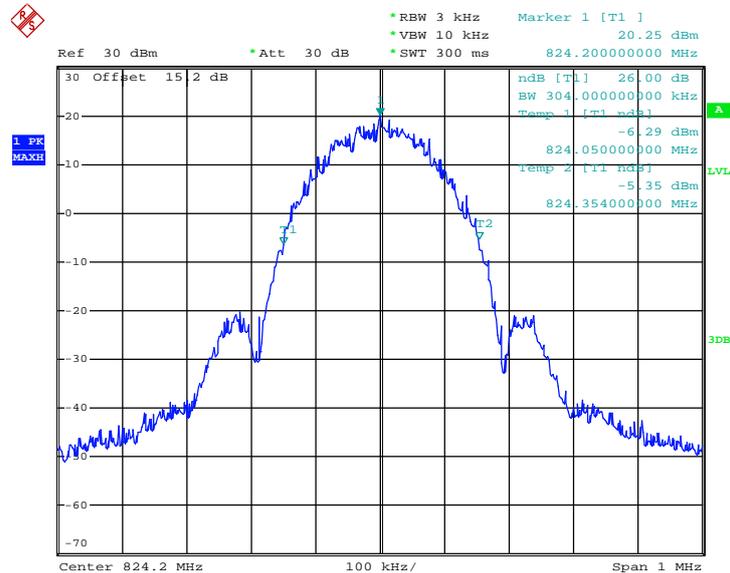

Date: 26.AUG.2015 02:10:13




99% Occupied Bandwidth Plot on Channel 189 (836.4 MHz)

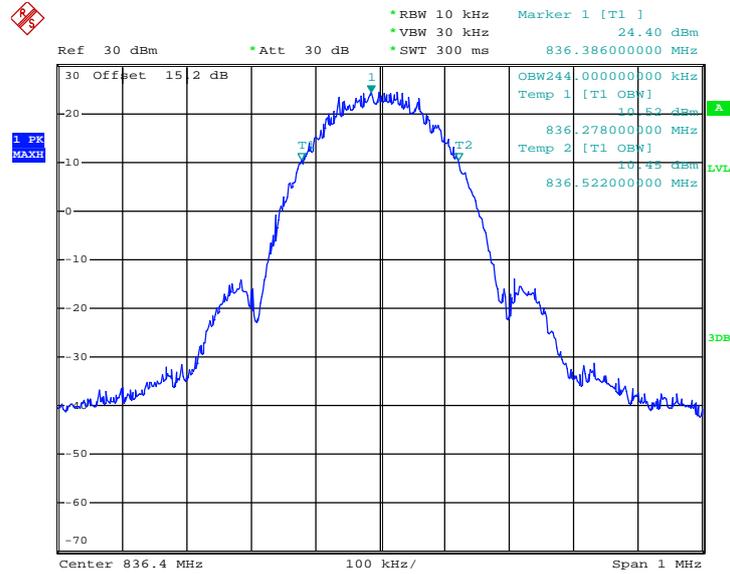

Date: 26.AUG.2015 02:20:09


26dB Bandwidth Plot on Channel 189 (836.4 MHz)

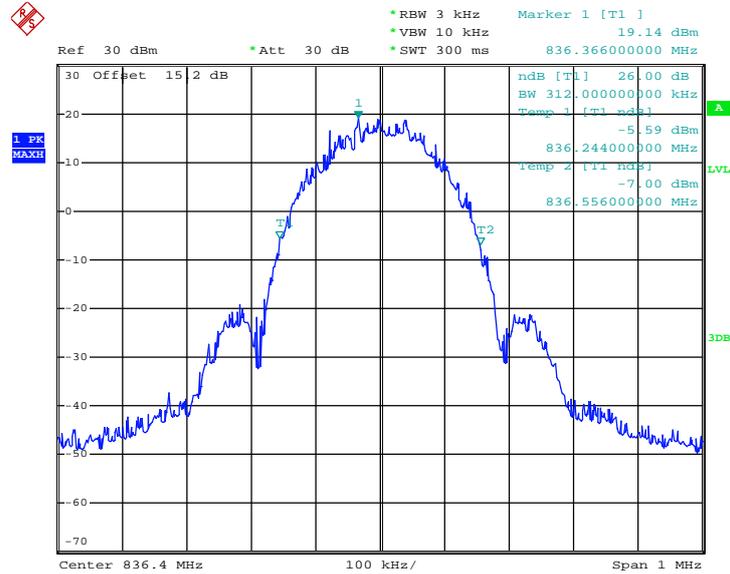

Date: 26.AUG.2015 02:11:16




99% Occupied Bandwidth Plot on Channel 251 (848.8 MHz)

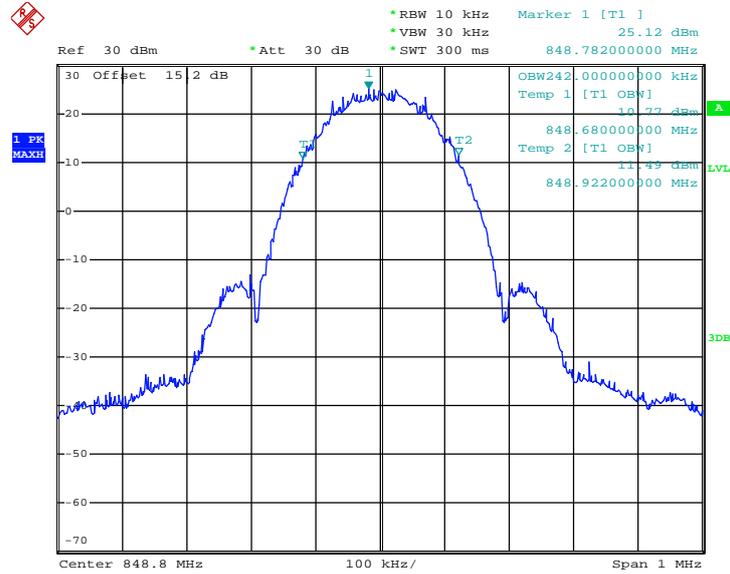

Date: 26.AUG.2015 02:15:19


26dB Bandwidth Plot on Channel 251 (848.8 MHz)

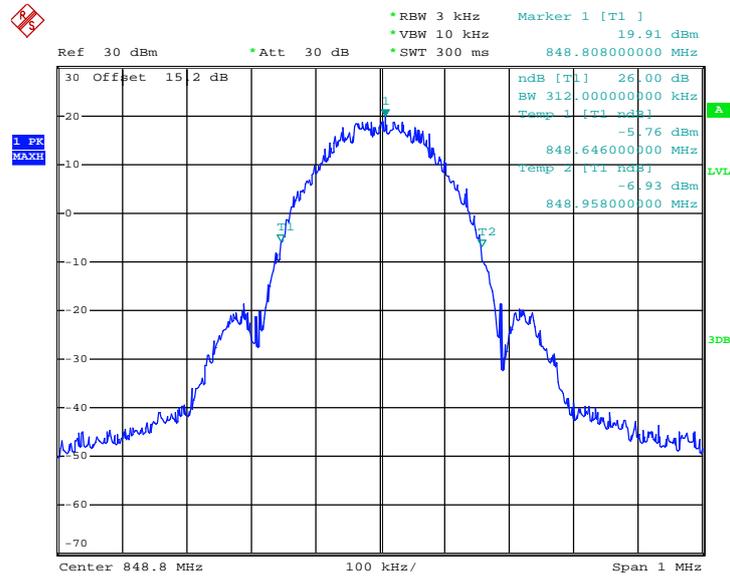

Date: 26.AUG.2015 02:12:43




99% Occupied Bandwidth Plot on Channel 661 (1880.0 MHz)

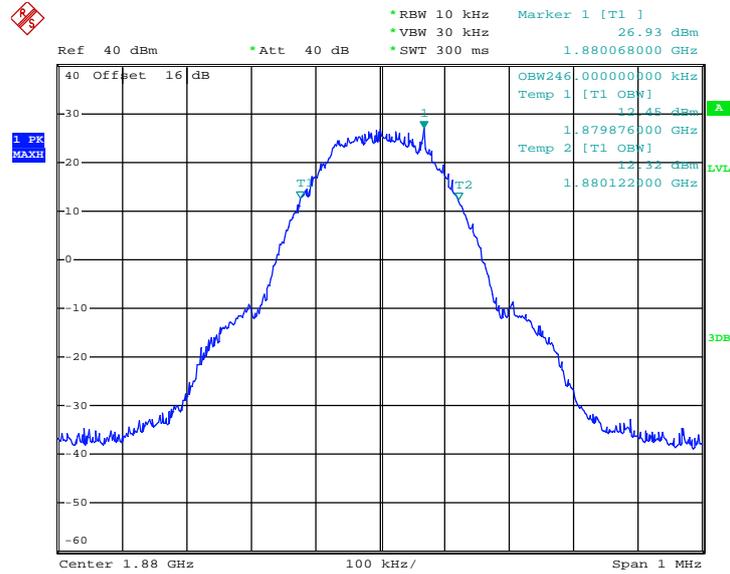

Date: 26.AUG.2015 04:10:57


26dB Bandwidth Plot on Channel 661 (1880.0 MHz)

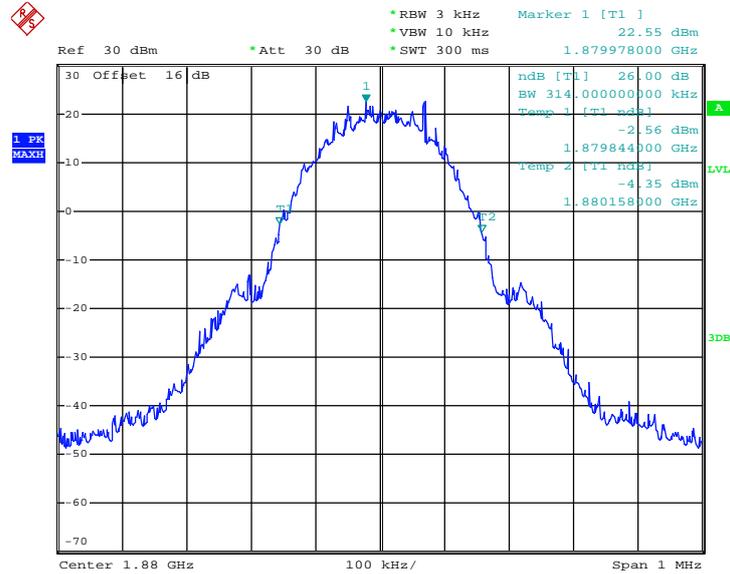

Date: 26.AUG.2015 04:02:53




99% Occupied Bandwidth Plot on Channel 810 (1909.8 MHz)

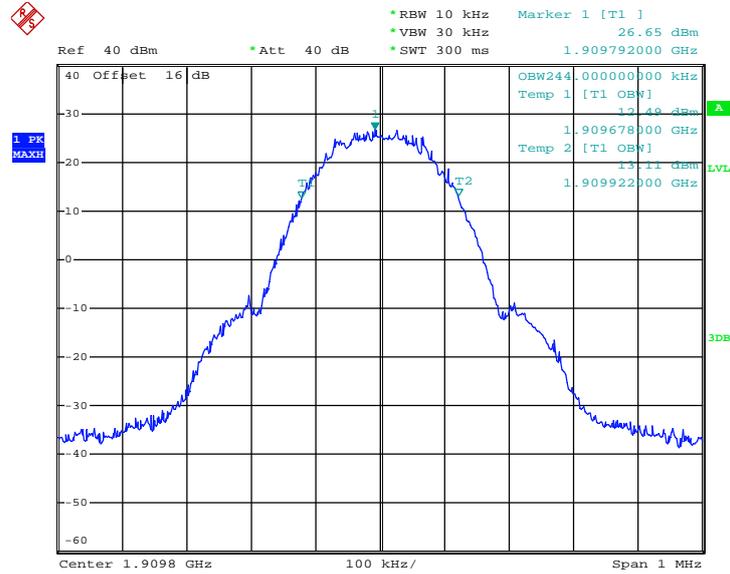

Date: 26.AUG.2015 04:23:16

26dB Bandwidth Plot on Channel 810 (1909.8 MHz)

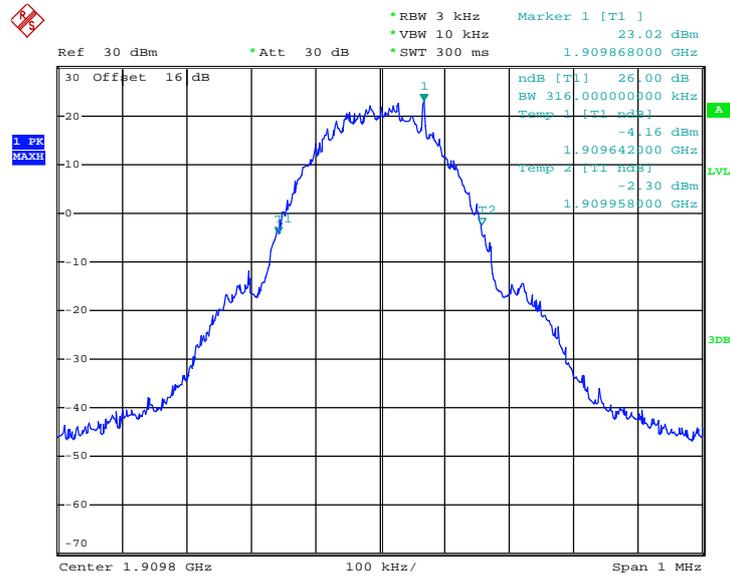


Date: 26.AUG.2015 04:06:05




Band :	GSM 1900	Test Mode :	EDGE class 8 Link (8PSK)
--------	----------	-------------	--------------------------

99% Occupied Bandwidth Plot on Channel 512 (1850.2 MHz)

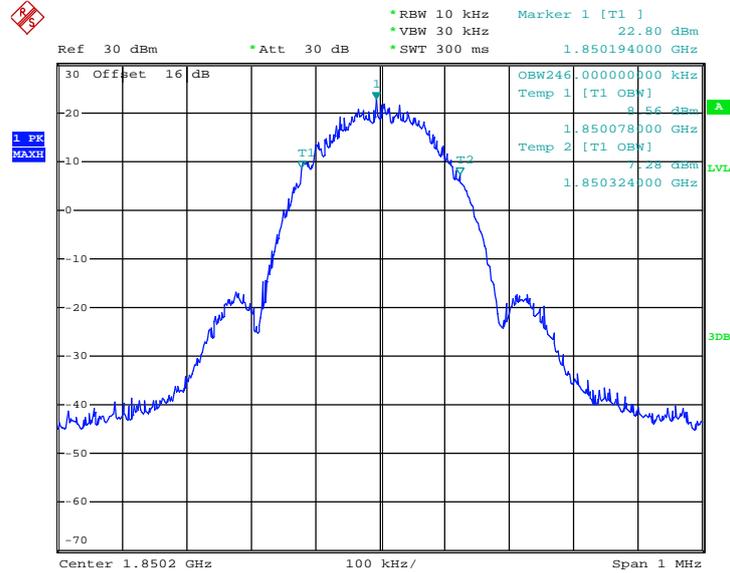

Date: 26.AUG.2015 04:55:21


26dB Bandwidth Plot on Channel 512 (1850.2 MHz)

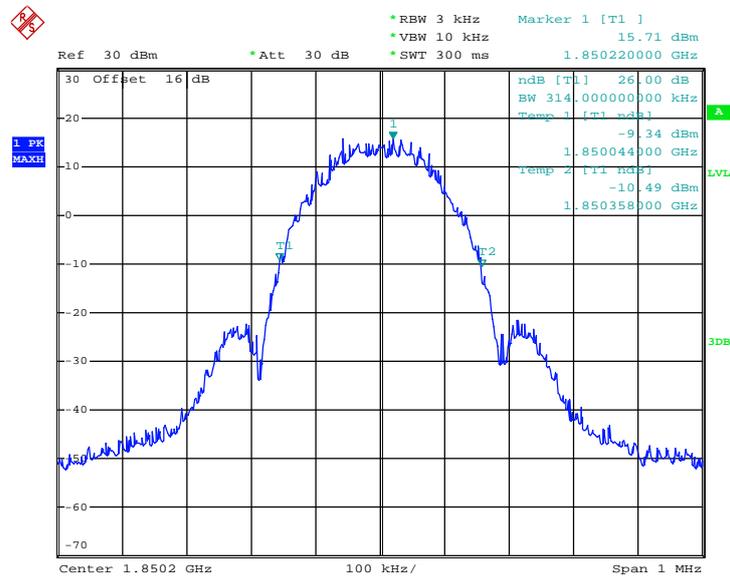

Date: 26.AUG.2015 04:41:26




99% Occupied Bandwidth Plot on Channel 661 (1880.0 MHz)

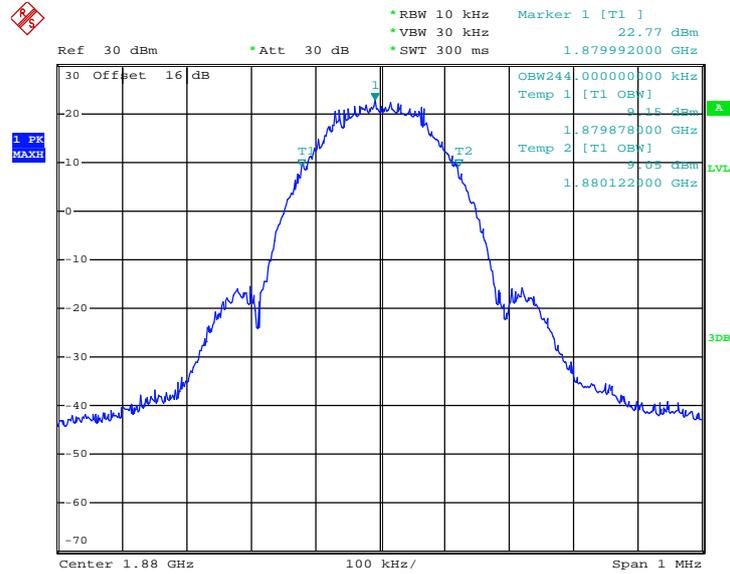

Date: 26.AUG.2015 04:54:47


26dB Bandwidth Plot on Channel 661 (1880.0 MHz)

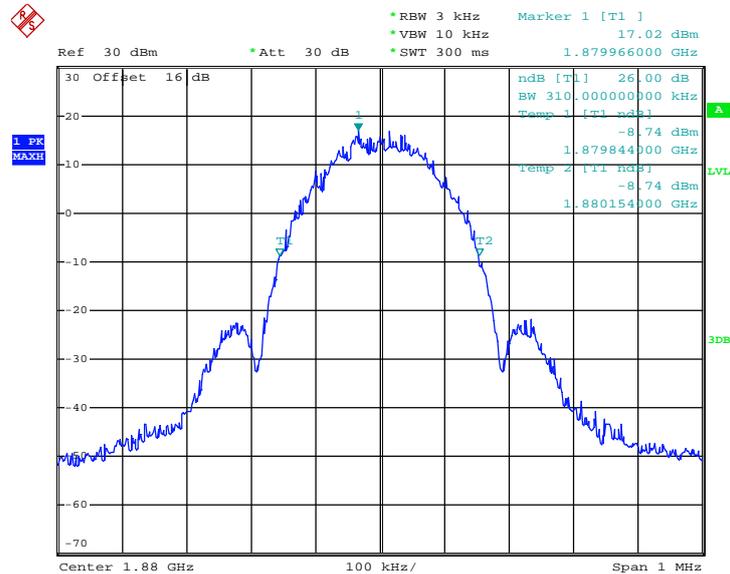

Date: 26.AUG.2015 04:42:40




99% Occupied Bandwidth Plot on Channel 810 (1909.8 MHz)

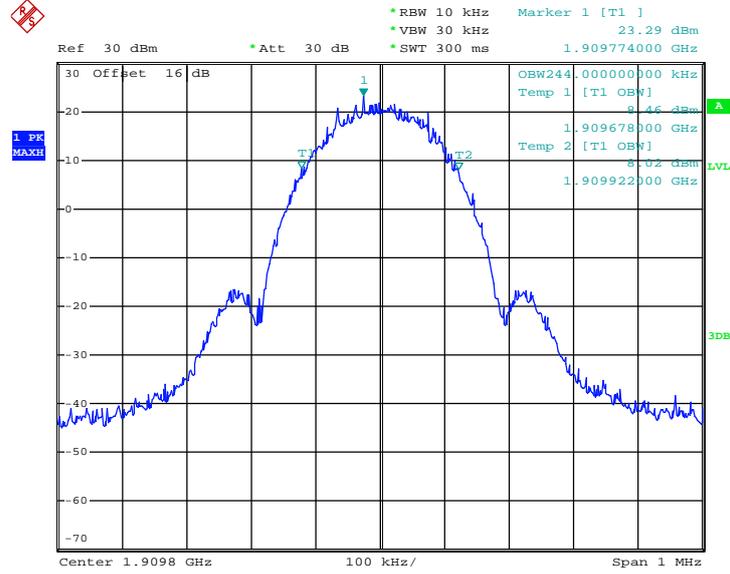

Date: 26.AUG.2015 04:48:44

26dB Bandwidth Plot on Channel 810 (1909.8 MHz)

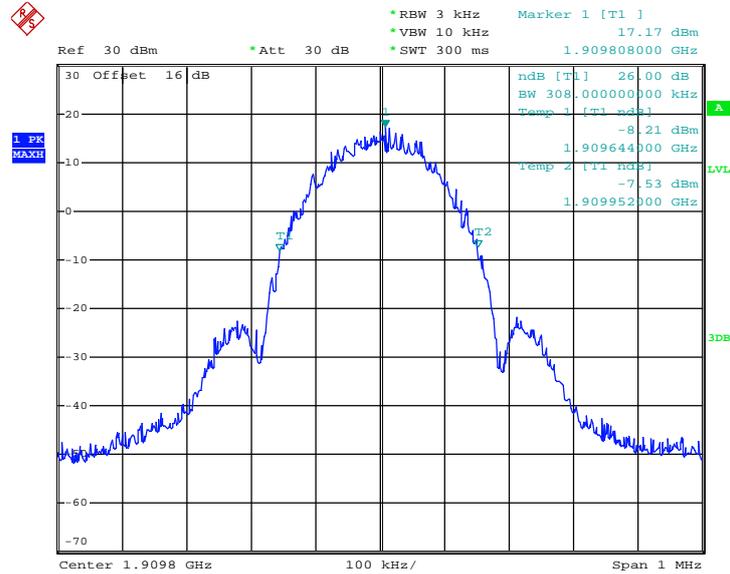


Date: 26.AUG.2015 04:43:40




Band :	WCDMA Band V	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	--------------	-------------	--------------------------

99% Occupied Bandwidth Plot on Channel 4132 (826.4 MHz)

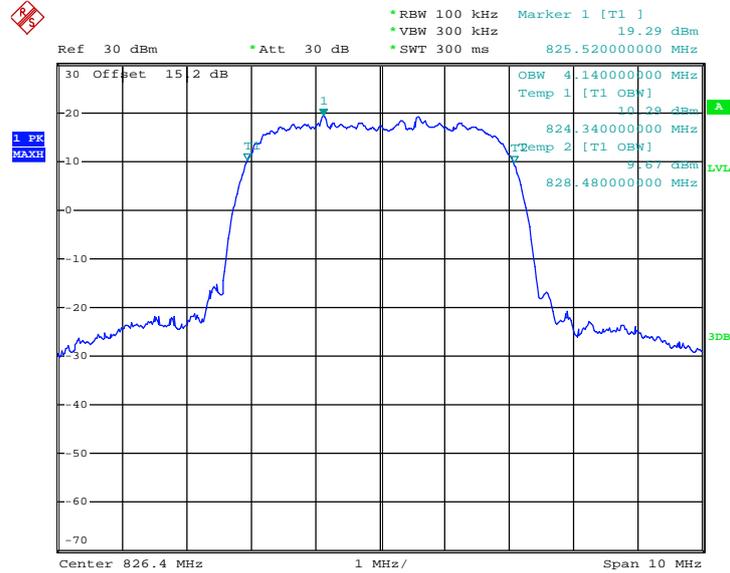

Date: 26.AUG.2015 02:47:29


26dB Bandwidth Plot on Channel 4132 (826.4 MHz)

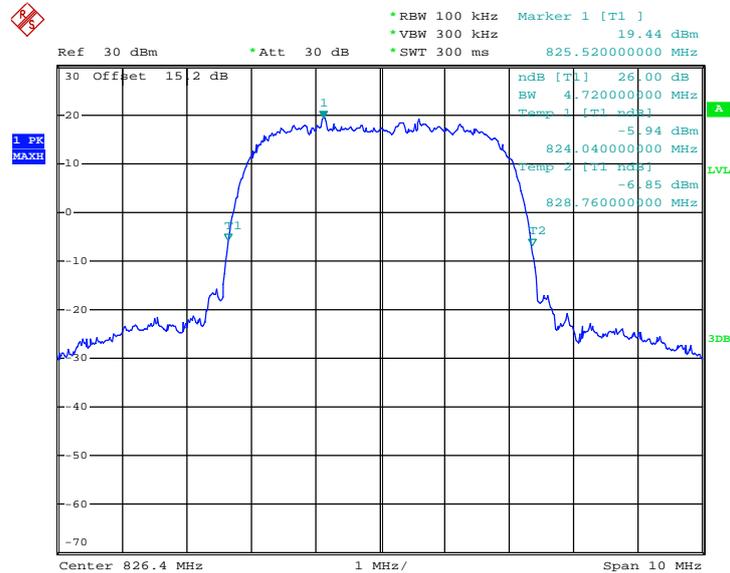

Date: 26.AUG.2015 02:53:36




99% Occupied Bandwidth Plot on Channel 4182 (836.4 MHz)

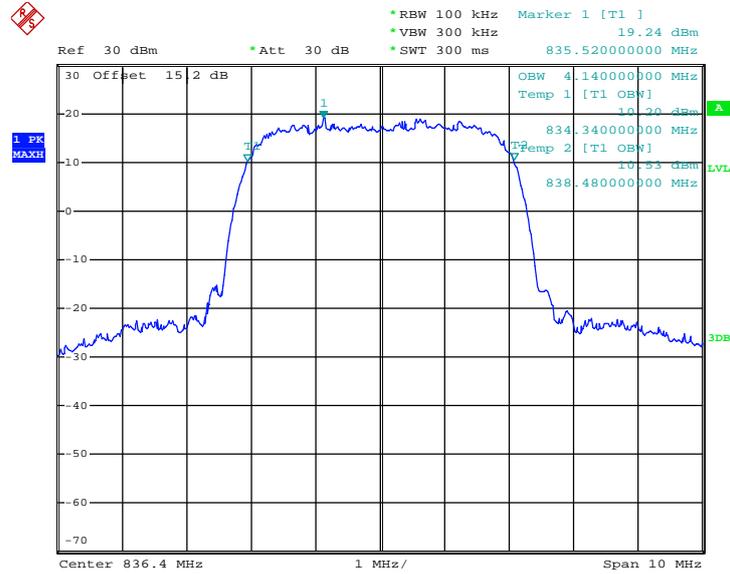

Date: 26.AUG.2015 02:49:19


26dB Bandwidth Plot on Channel 4182 (836.4 MHz)

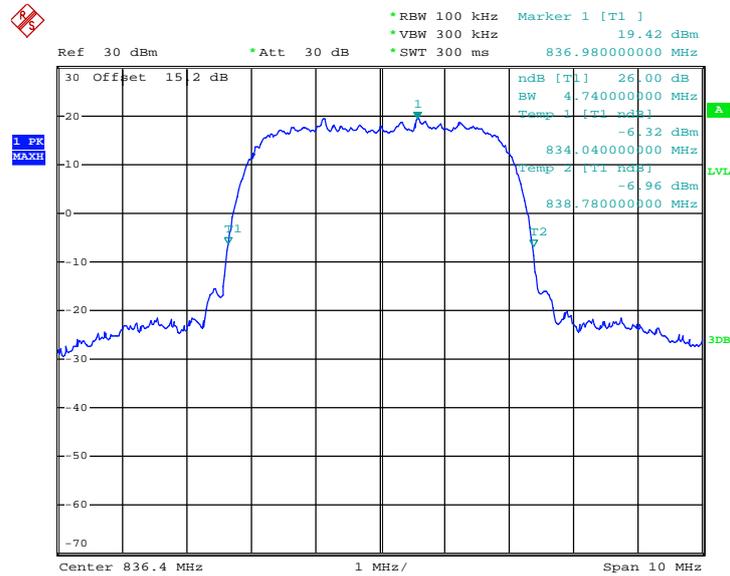

Date: 26.AUG.2015 02:53:00




99% Occupied Bandwidth Plot on Channel 4233 (846.6 MHz)

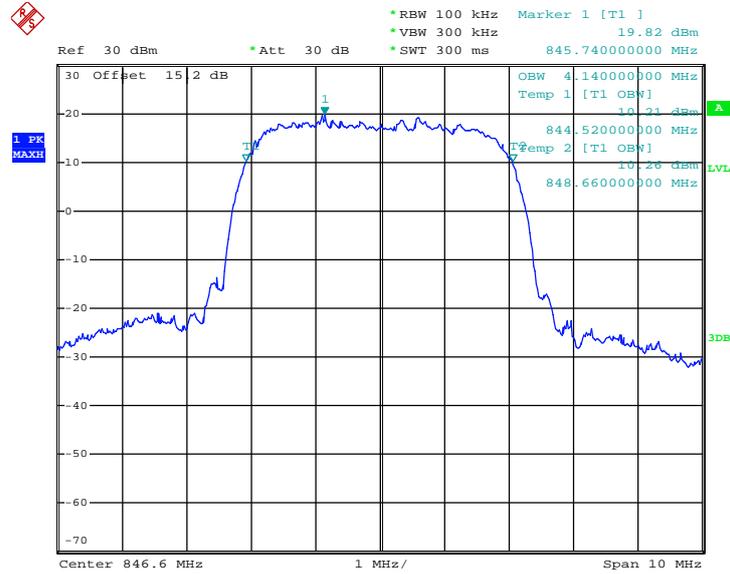

Date: 26.AUG.2015 02:50:04

26dB Bandwidth Plot on Channel 4233 (846.6 MHz)

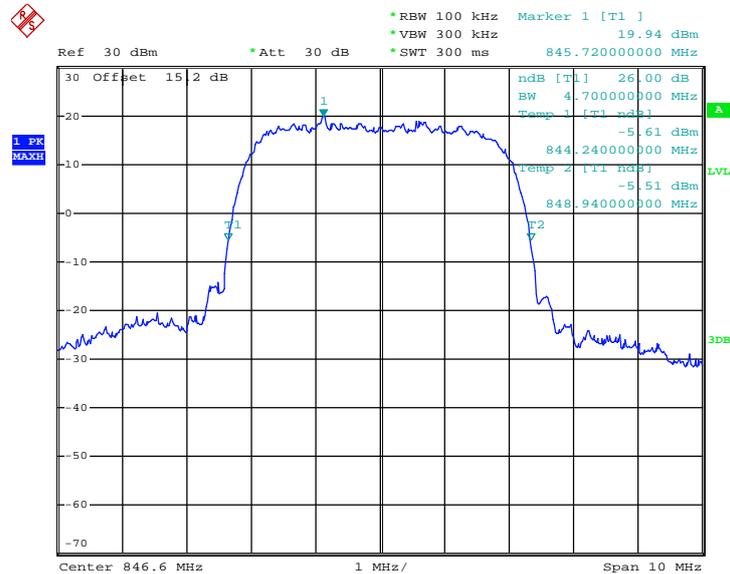


Date: 26.AUG.2015 02:51:54




Band :	WCDMA Band II	Test Mode :	RMC 12.2Kbps Link (QPSK)
---------------	---------------	--------------------	--------------------------

99% Occupied Bandwidth Plot on Channel 9262 (1852.4 MHz)

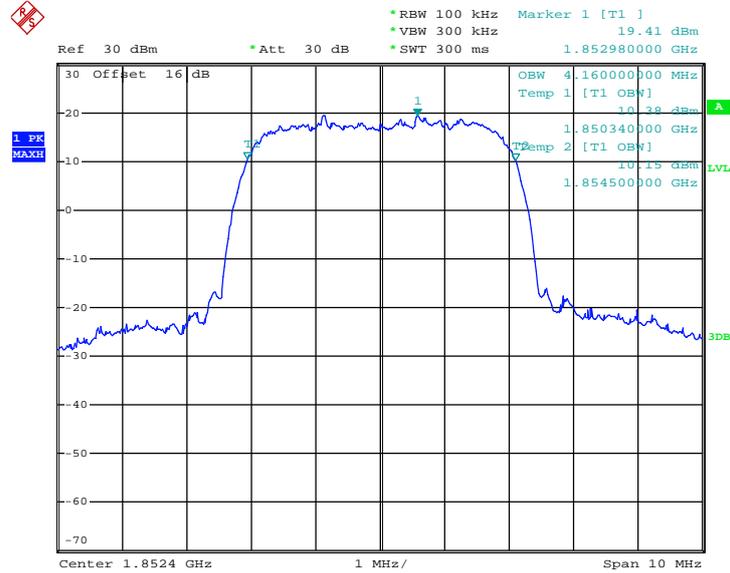

Date: 26.AUG.2015 03:37:39


26dB Bandwidth Plot on Channel 9262 (1852.4 MHz)

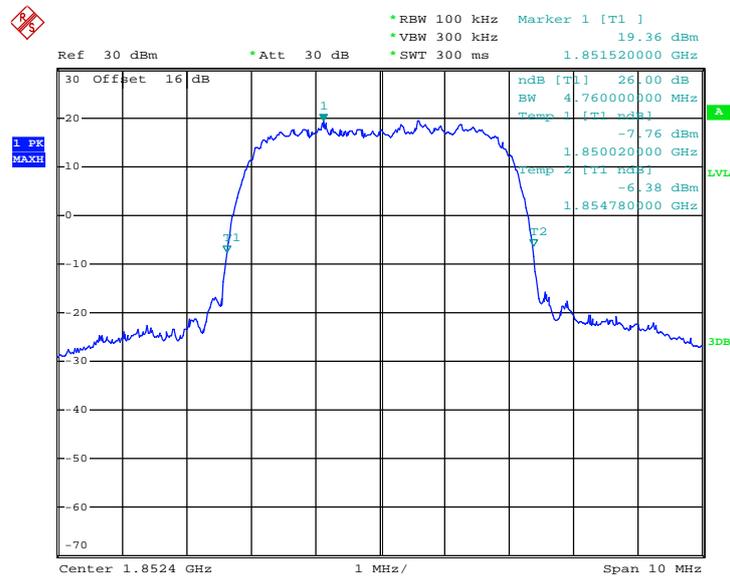

Date: 26.AUG.2015 03:21:18




99% Occupied Bandwidth Plot on Channel 9400 (1880.0 MHz)

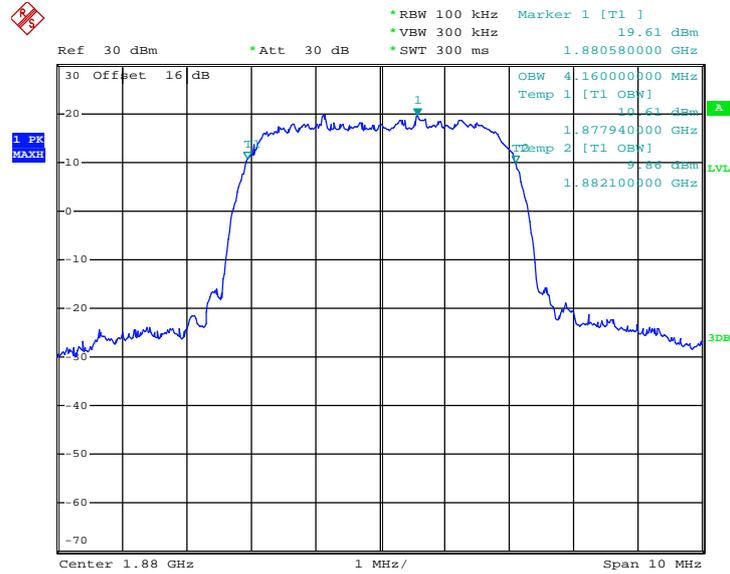

Date: 26.AUG.2015 03:39:38


26dB Bandwidth Plot on Channel 9400 (1880.0 MHz)

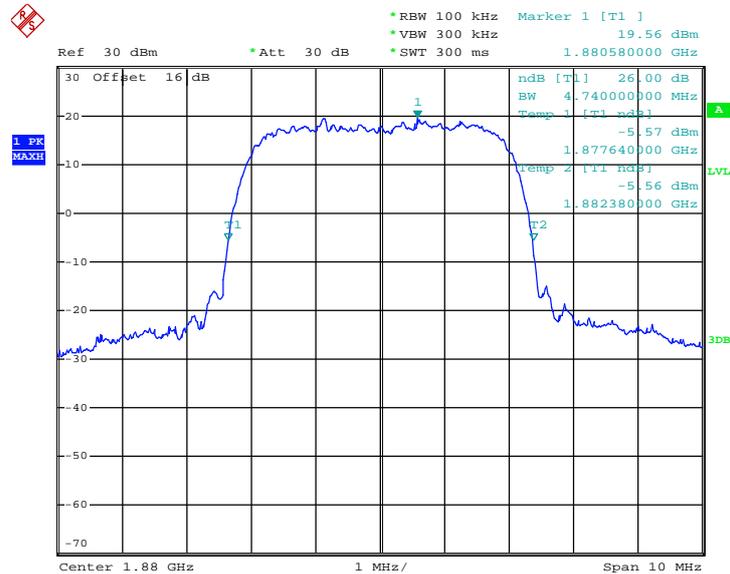

Date: 26.AUG.2015 03:20:40




99% Occupied Bandwidth Plot on Channel 9538 (1907.6 MHz)

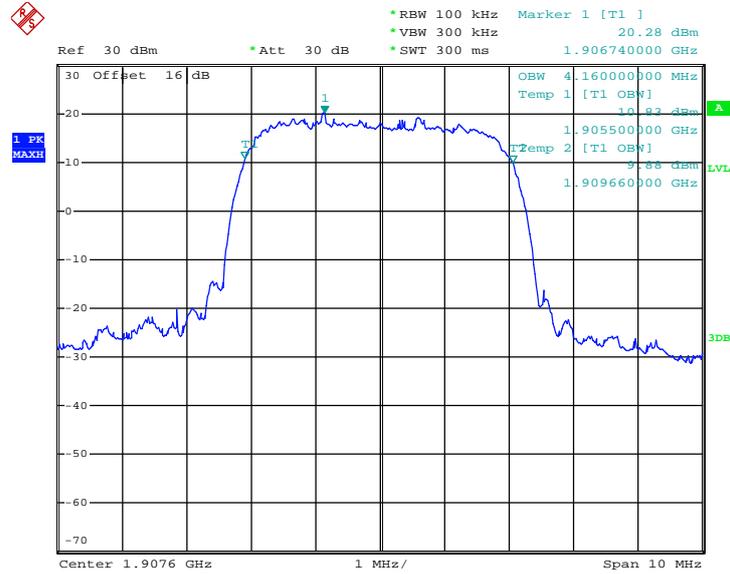

Date: 26.AUG.2015 03:40:15

26dB Bandwidth Plot on Channel 9538 (1907.6 MHz)

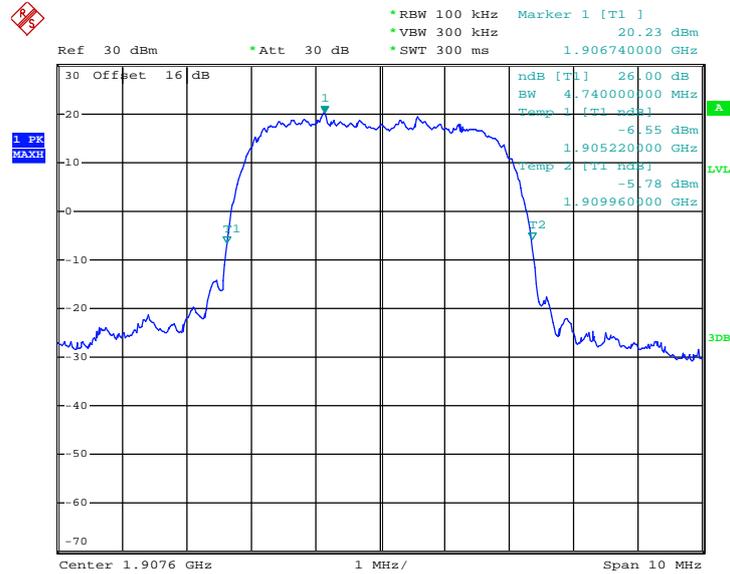


Date: 26.AUG.2015 03:19:49




Band :	CDMA2000 BC0	Test Mode :	1xRTT_RC3+SO32 (QPSK)
--------	--------------	-------------	-----------------------

99% Occupied Bandwidth Plot on Channel 1013 (824.7 MHz)

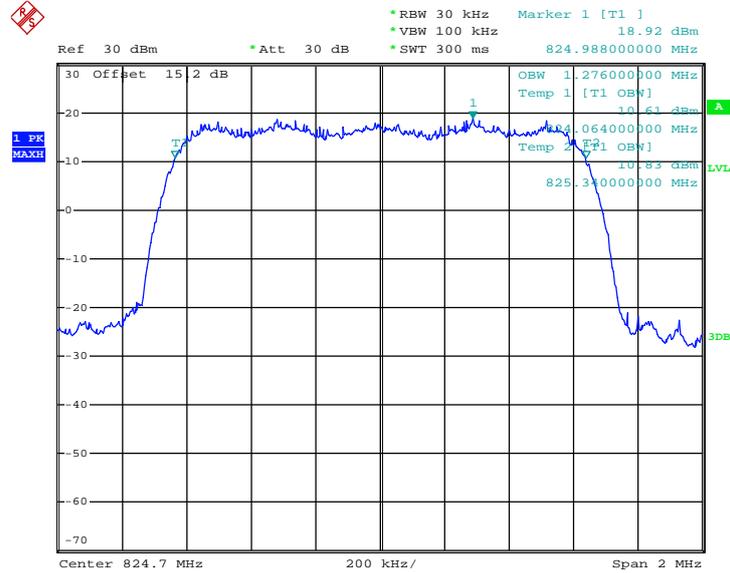

Date: 7.SEP.2015 07:13:51


26dB Bandwidth Plot on Channel 1013 (824.7 MHz)

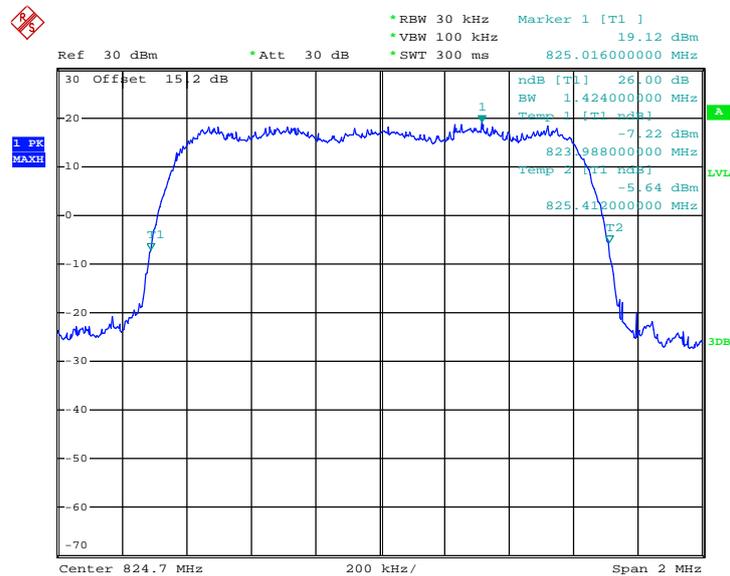

Date: 7.SEP.2015 07:07:50




99% Occupied Bandwidth Plot on Channel 384 (836.52 MHz)

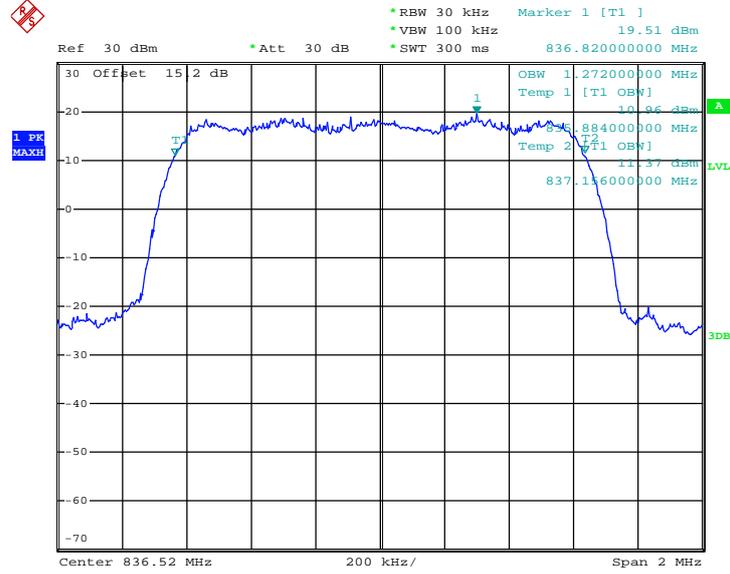

Date: 7.SEP.2015 07:13:17


26dB Bandwidth Plot on Channel 384 (836.52 MHz)

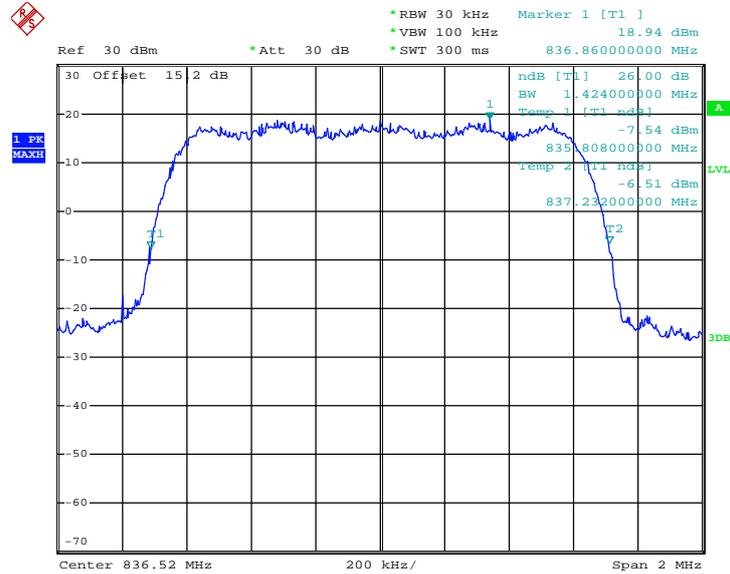

Date: 7.SEP.2015 07:08:31




99% Occupied Bandwidth Plot on Channel 777 (848.31 MHz)

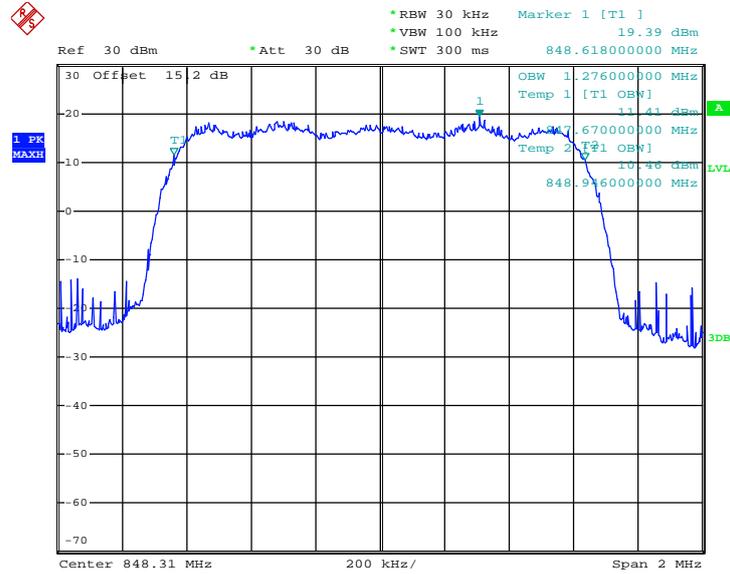

Date: 7.SEP.2015 07:09:44

26dB Bandwidth Plot on Channel 777 (848.31 MHz)

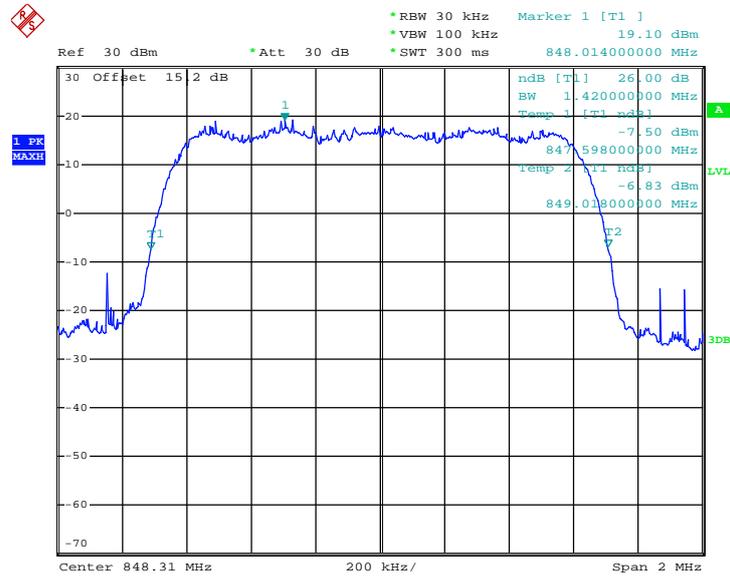


Date: 7.SEP.2015 07:09:10




Band :	CDMA2000 BC1	Test Mode :	1xRTT_RC1+SO55 (QPSK)
--------	--------------	-------------	-----------------------

99% Occupied Bandwidth Plot on Channel 25 (1851.25 MHz)

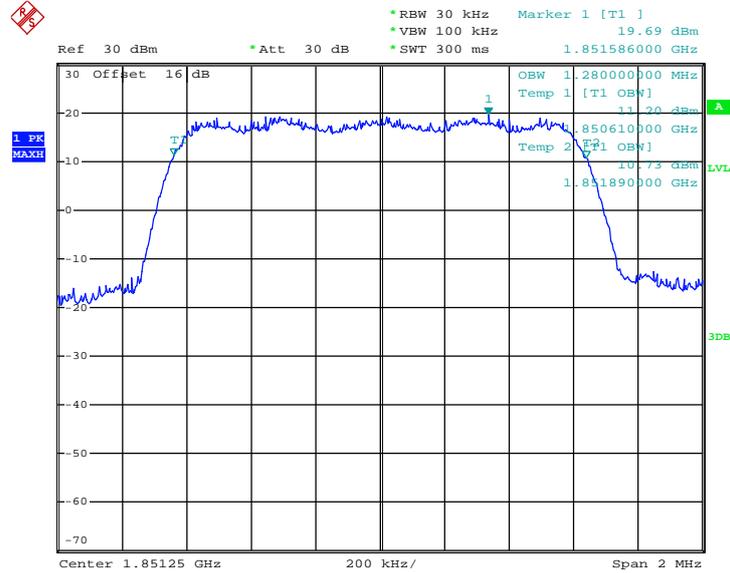

Date: 28.AUG.2015 14:50:26


26dB Bandwidth Plot on Channel 25 (1851.25 MHz)

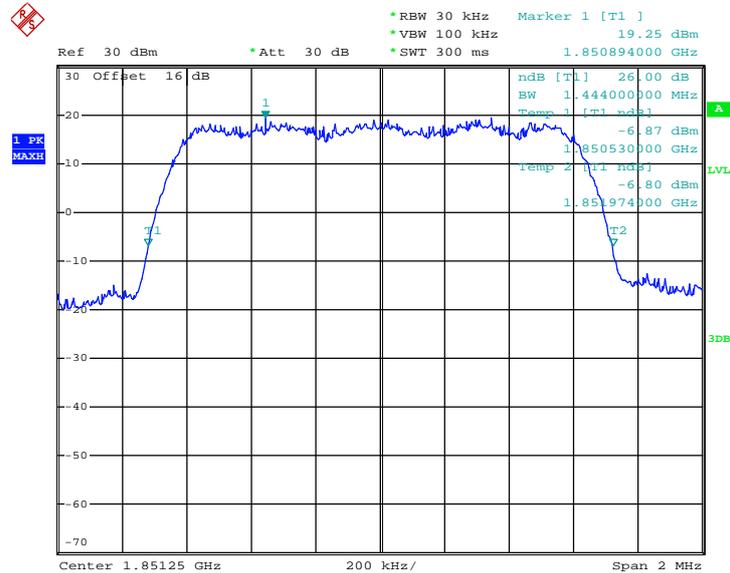

Date: 28.AUG.2015 14:49:36




99% Occupied Bandwidth Plot on Channel 600 (1880.0 MHz)

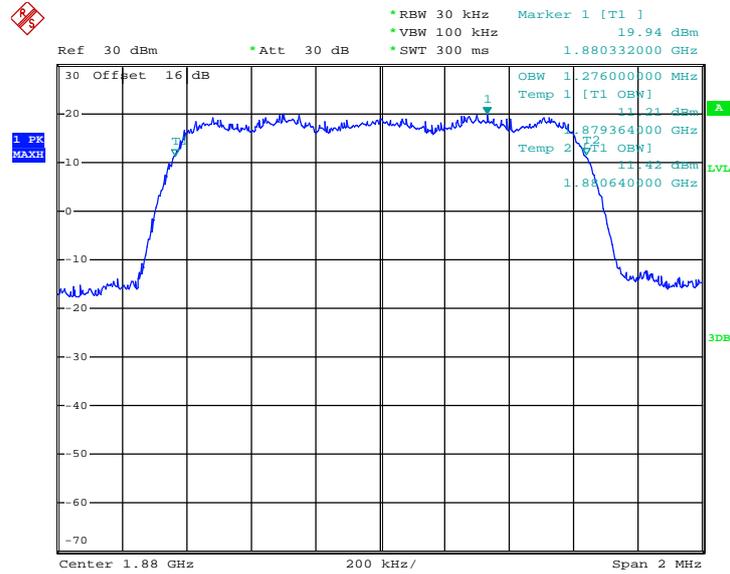

Date: 28.AUG.2015 14:53:10


26dB Bandwidth Plot on Channel 600 (1880.0 MHz)

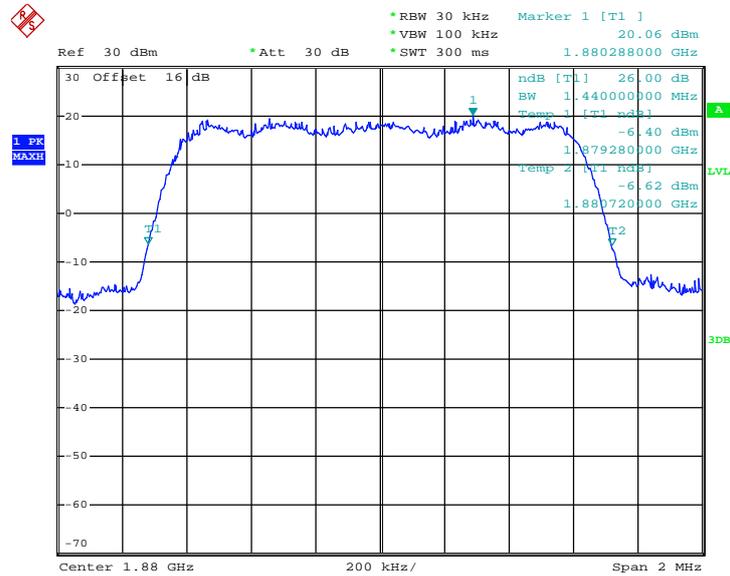

Date: 28.AUG.2015 14:49:00




99% Occupied Bandwidth Plot on Channel 1175 (1908.75 MHz)

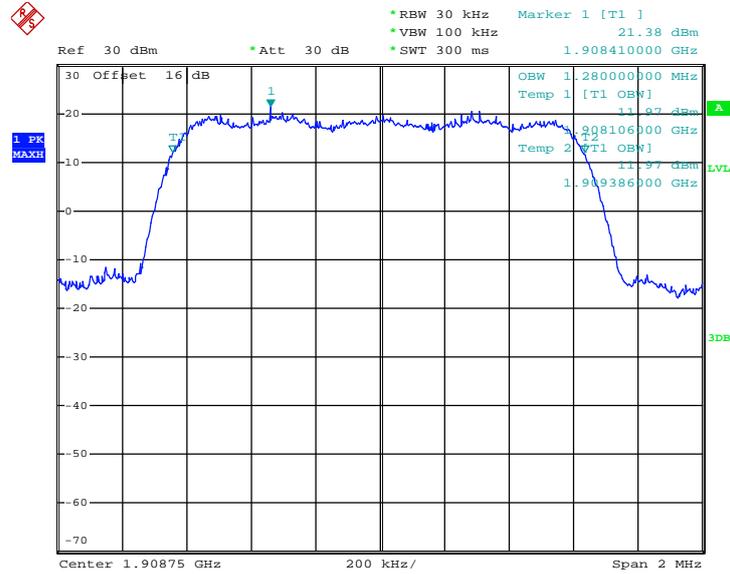

Date: 28.AUG.2015 14:54:30

26dB Bandwidth Plot on Channel 1175 (1908.75 MHz)

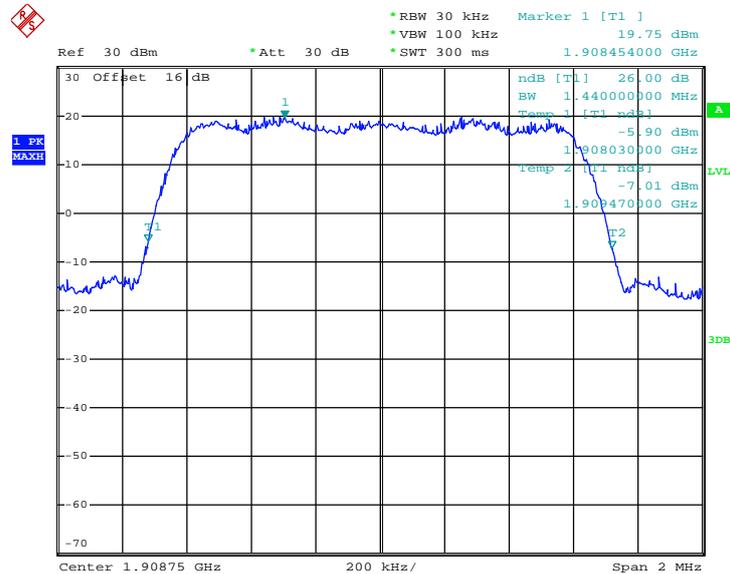

Date: 28.AUG.2015 14:48:12

3.5 Band Edge Measurement

3.5.1 Description of Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The band edges of low and high channels for the highest RF powers were measured.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}.$

3.5.4 Test Setup

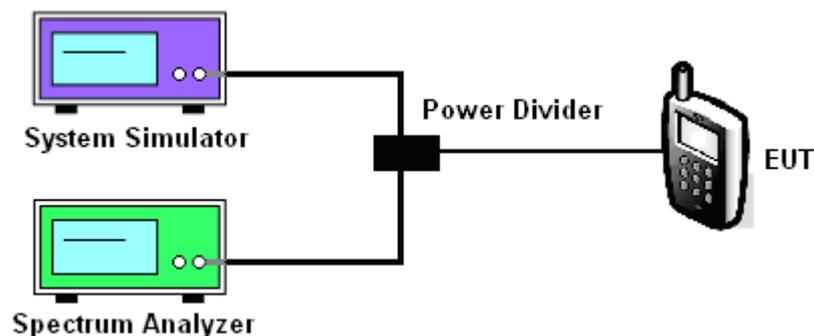




3.5.5 Test Result (Plots) of Conducted Band Edge

Band :	GSM850	Test Mode :	GSM Link (GMSK)
--------	--------	-------------	-----------------

Lower Band Edge Plot on Channel 128 (824.2 MHz)

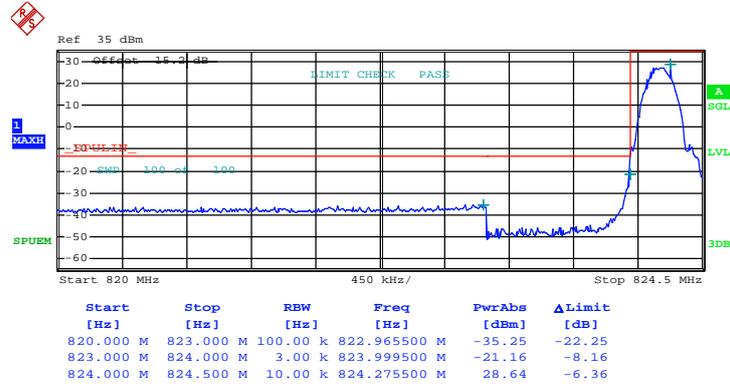


Date: 26.AUG.2015 01:58:10



Band :	GSM850	Test Mode :	GSM Link (GMSK)
--------	--------	-------------	-----------------

Higher Band Edge Plot on Channel 251 (848.8 MHz)

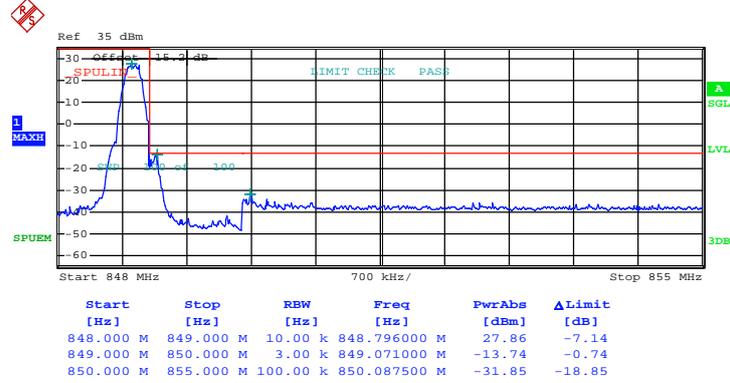


Date: 26.AUG.2015 02:00:17



Band :	GSM850	Test Mode :	EDGE class 8 Link (8PSK)
--------	--------	-------------	--------------------------

Lower Band Edge Plot on Channel 128 (824.2 MHz)

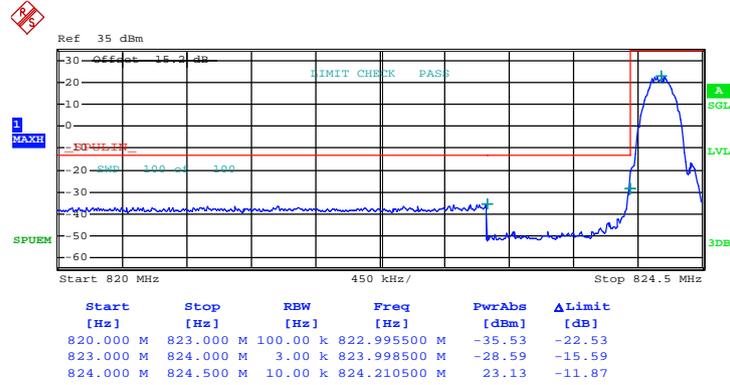


Date: 26.AUG.2015 02:06:44



Band :	GSM850	Test Mode :	EDGE class 8 Link (8PSK)
--------	--------	-------------	--------------------------

Higher Band Edge Plot on Channel 251 (848.8 MHz)

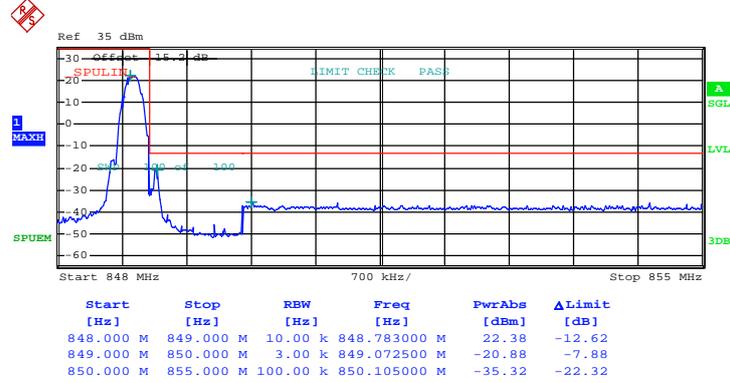


Date: 26.AUG.2015 02:03:31



Band :	GSM1900	Test Mode :	GSM Link (GMSK)
--------	---------	-------------	-----------------

Lower Band Edge Plot on Channel 512 (1850.2 MHz)

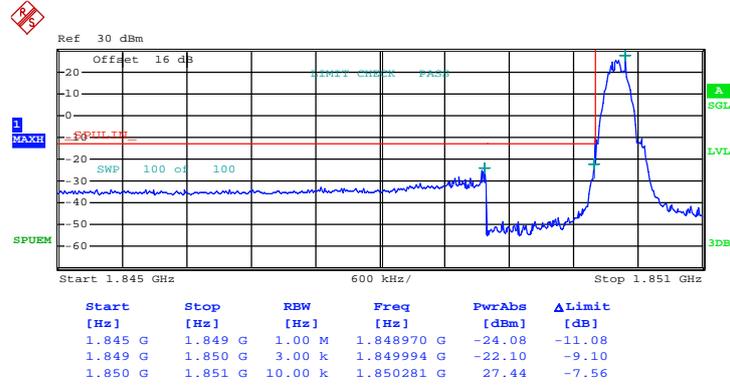


Date: 26.AUG.2015 04:29:56



Band :	GSM1900	Test Mode :	GSM Link (GMSK)
--------	---------	-------------	-----------------

Higher Band Edge Plot on Channel 810 (1909.8 MHz)

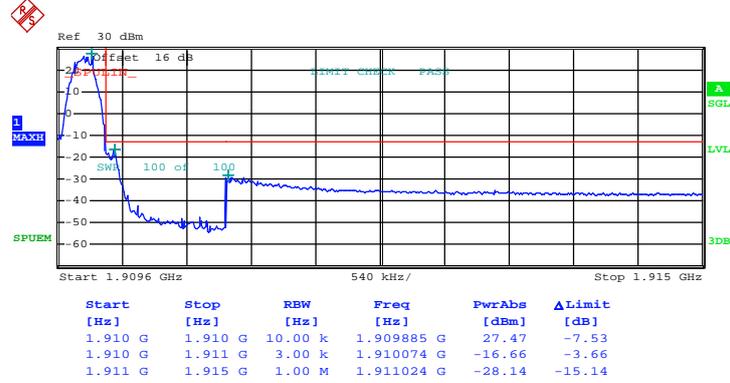


Date: 26.AUG.2015 04:32:09



Band :	GSM1900	Test Mode :	EDGE class 8 Link (8PSK)
--------	---------	-------------	--------------------------

Lower Band Edge Plot on Channel 512 (1850.2 MHz)

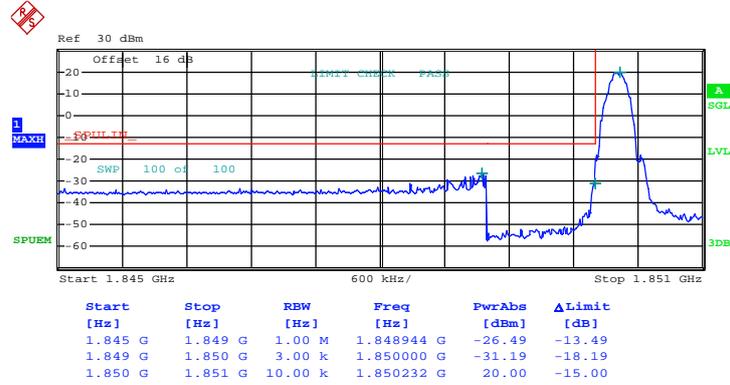


Date: 26.AUG.2015 04:39:19



Band :	GSM1900	Test Mode :	EDGE class 8 Link (8PSK)
--------	---------	-------------	--------------------------

Higher Band Edge Plot on Channel 810 (1909.8 MHz)

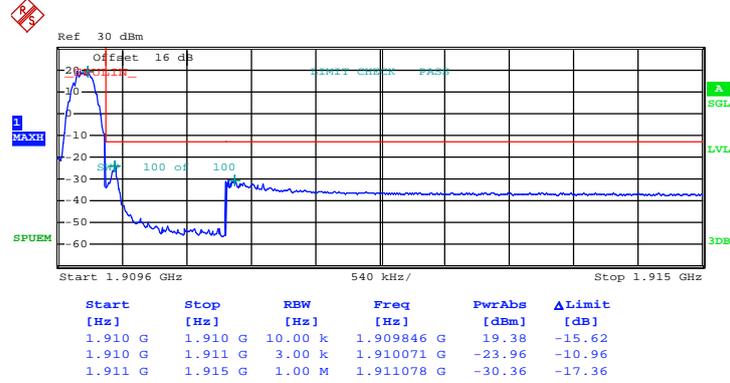


Date: 26.AUG.2015 04:36:59



Band :	WCDMA Band V	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	--------------	-------------	--------------------------

Lower Band Edge Plot on Channel 4132 (826.4 MHz)

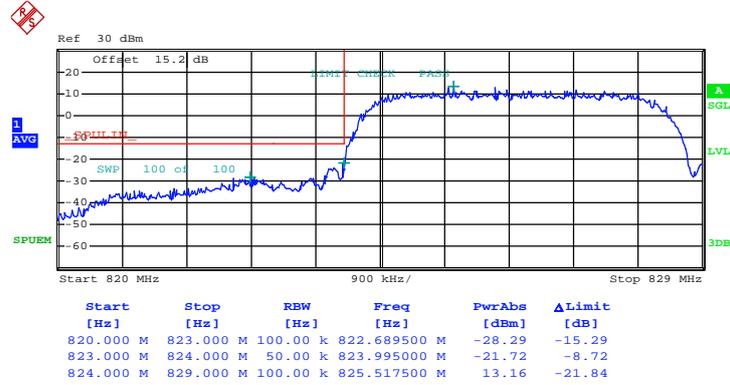


Date: 26.AUG.2015 03:05:19



Band :	WCDMA Band V	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	--------------	-------------	--------------------------

Higher Band Edge Plot on Channel 4233 (846.6 MHz)

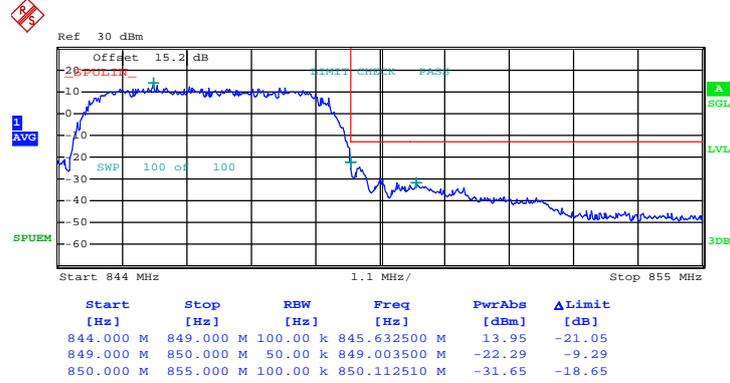


Date: 26.AUG.2015 03:10:45



Band :	WCDMA Band II	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	---------------	-------------	--------------------------

Lower Band Edge Plot on Channel 9262 (1852.4 MHz)

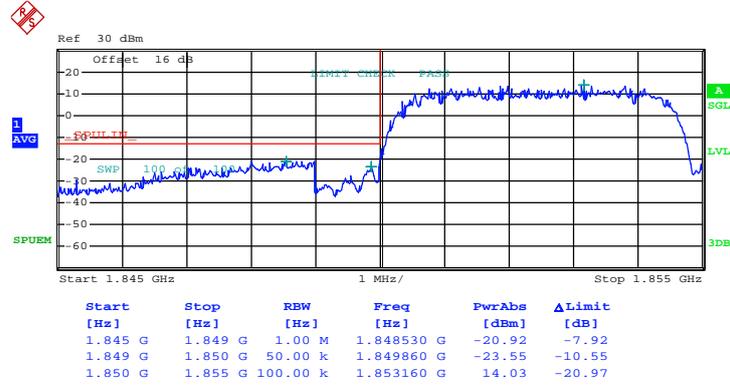


Date: 26.AUG.2015 03:15:57



Band :	WCDMA Band II	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	---------------	-------------	--------------------------

Higher Band Edge Plot on Channel 9538 (1907.6 MHz)

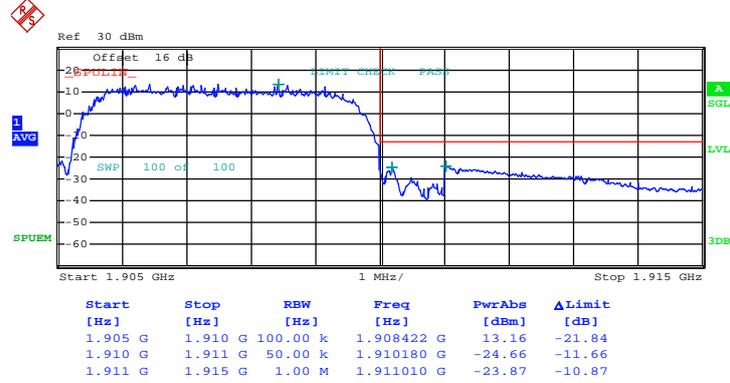


Date: 26.AUG.2015 03:18:16



Band :	CDMA2000 BC0	Test Mode :	1xRTT_RC3+SO32 QPSK)
--------	--------------	-------------	----------------------

Lower Band Edge Plot on Channel 1013 (824.7 MHz)

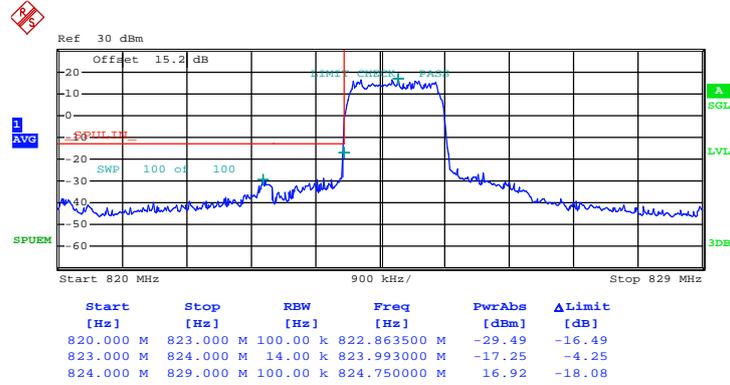

Date: 7.SEP.2015 06:10:13



Band :	CDMA2000 BC0	Test Mode :	1xRTT_RC3+SO32 QPSK)
--------	--------------	-------------	----------------------

Higher Band Edge Plot on Channel 777 (848.31 MHz)




Date: 7.SEP.2015 07:04:42



Band :	CDMA2000 BC1	Test Mode :	1xRTT_RC1+SO55 (QPSK)
---------------	--------------	--------------------	-----------------------

Lower Band Edge Plot on Channel 25 (1851.25 MHz)

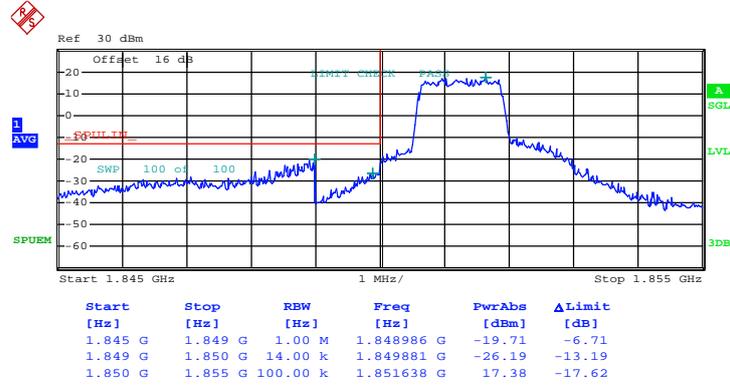


Date: 28.AUG.2015 14:35:07



Band :	CDMA2000 BC1	Test Mode :	1xRTT_RC1+SO55 (QPSK)
--------	--------------	-------------	-----------------------

Higher Band Edge Plot on Channel 1175 (1908.75 MHz)

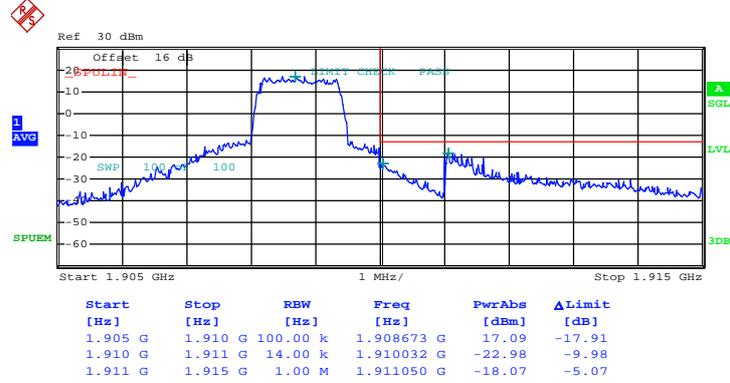

Date: 28.AUG.2015 14:45:01

3.6 Conducted Spurious Emission Measurement

3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13\text{dBm}$.

3.6.4 Test Setup

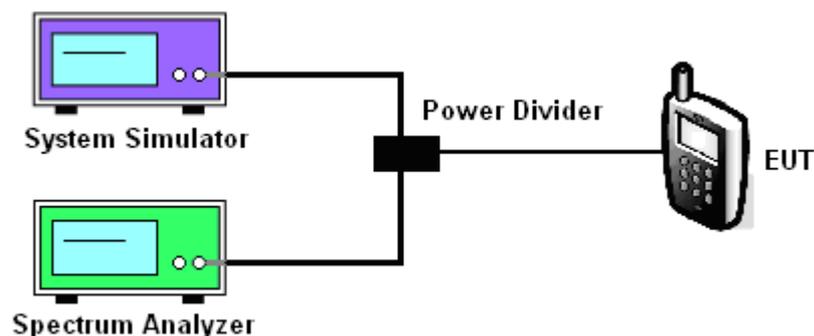




3.6.5 Test Result (Plots) of Conducted Spurious Emission

Band :	GSM850	Channel :	CH189
Test Mode :	GSM Link (GMSK)	Frequency :	836.4 MHz

Conducted Spurious Emission Plot between 30MHz ~ 9GHz

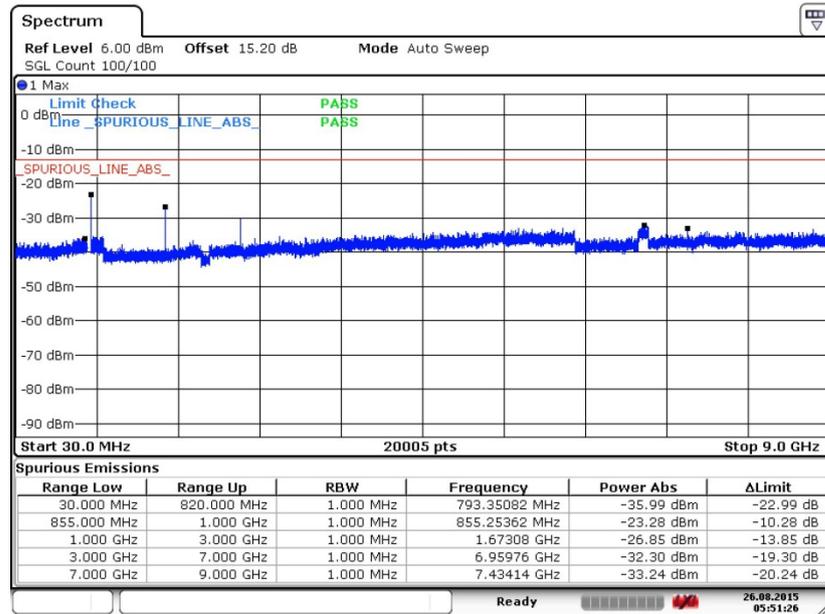


Date: 26 AUG 2015 05:51:27



Band :	GSM850	Channel :	CH189
Test Mode :	EDGE class 8 Link (8PSK)	Frequency :	836.4 MHz

Conducted Spurious Emission Plot between 30MHz ~ 9GHz

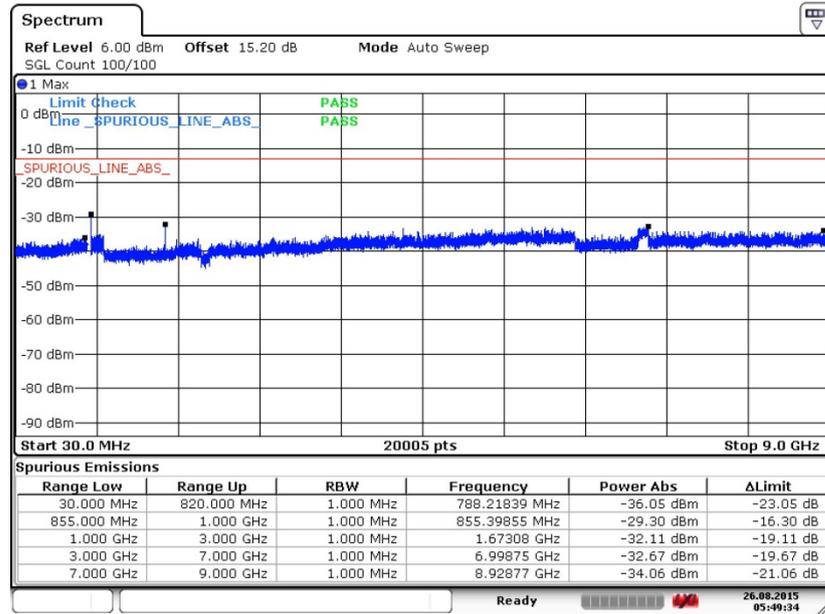


Date: 26 AUG 2015 05:49:34



Band :	GSM1900	Channel :	CH661
Test Mode :	GSM Link (GMSK)	Frequency :	1880.0 MHz

Conducted Spurious Emission Plot between 30MHz ~ 19.1GHz

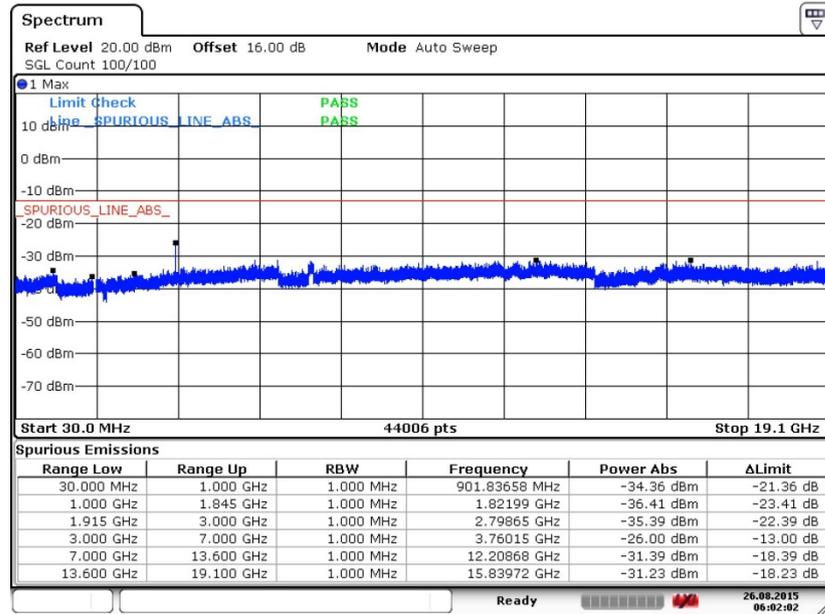


Date: 26 AUG 2015 06:02:02



Band :	GSM1900	Channel :	CH661
Test Mode :	EDGE class 8 Link (8PSK)	Frequency :	1880.0 MHz

Conducted Spurious Emission Plot between 30MHz ~ 19.1GHz

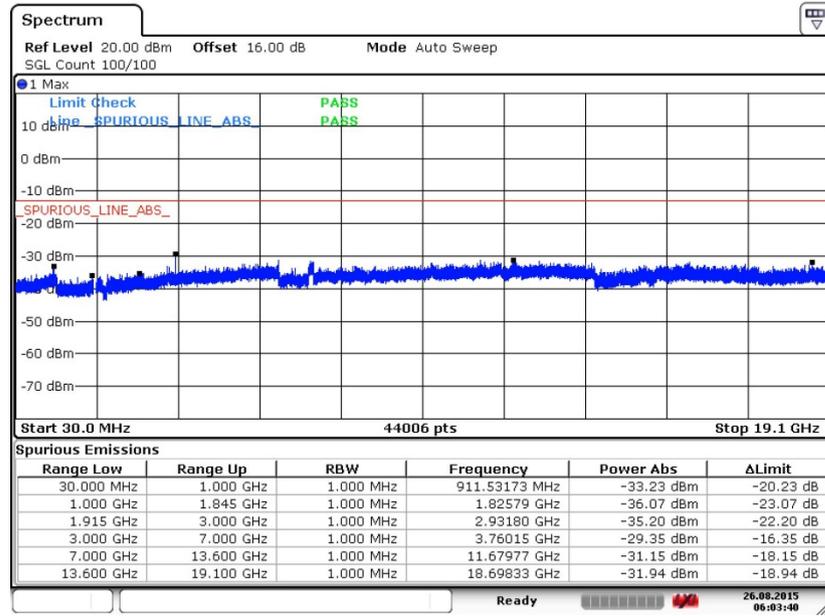


Date: 26 AUG 2015 06:03:41



Band :	WCDMA Band V	Channel :	CH4182
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	836.4 MHz

Conducted Spurious Emission Plot between 30MHz ~ 9GHz

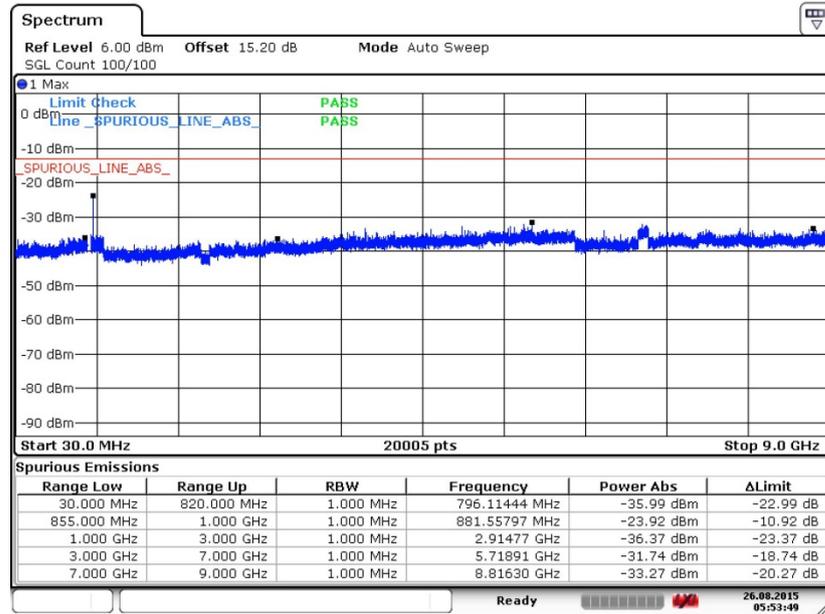


Date: 26 AUG 2015 05:53:50



Band :	WCDMA Band II	Channel :	CH9400
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	1880.0 MHz

Conducted Spurious Emission Plot between 30MHz ~ 19.1GHz

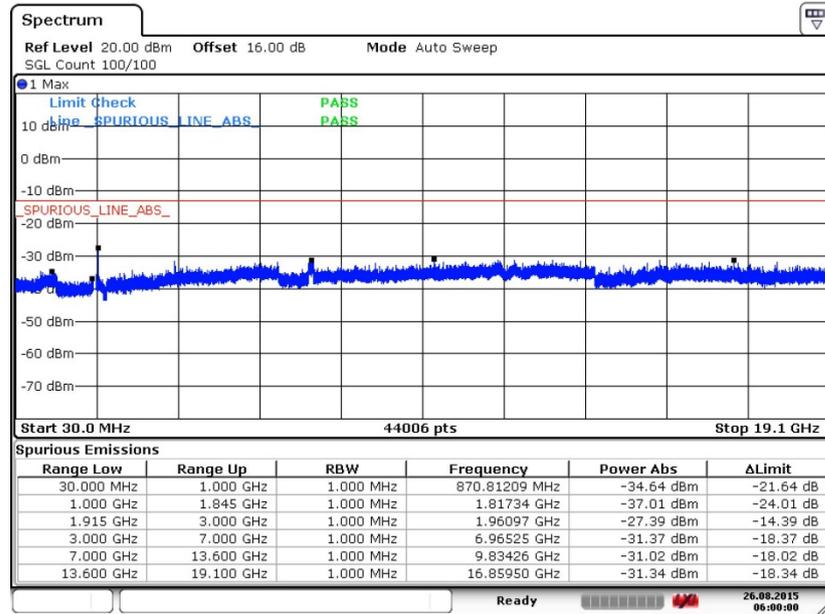


Date: 26 AUG.2015 06:00:01



Band :	CDMA2000 BC0	Channel :	CH384
Test Mode :	1xRTT_RC3+SO32 (QPSK)	Frequency :	836.52 MHz

Conducted Spurious Emission Plot between 30MHz ~ 9GHz

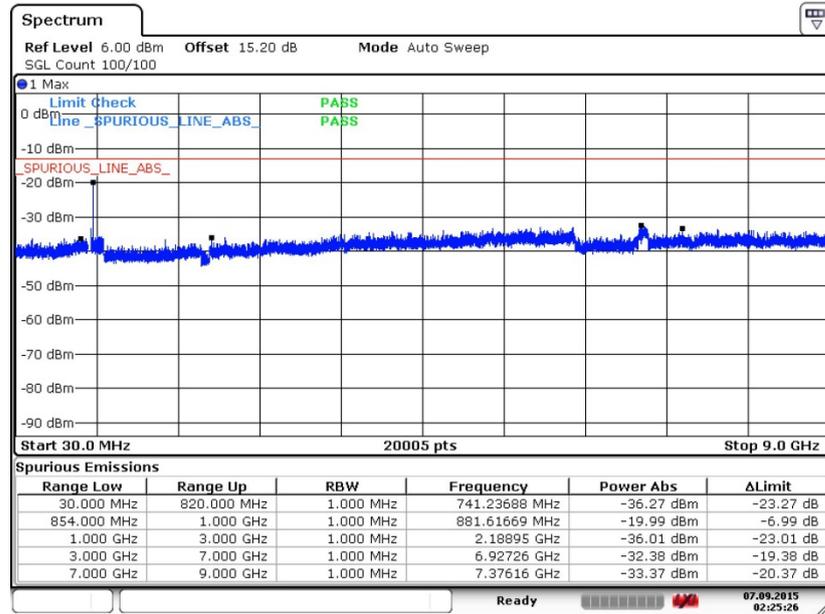


Date: 7.SEP.2015 02:25:26



Band :	CDMA2000 BC1	Channel :	CH600
Test Mode :	1xRTT_RC1+SO55 (QPSK)	Frequency :	1880.0 MHz

Conducted Spurious Emission Plot between 30MHz ~ 19.1GHz

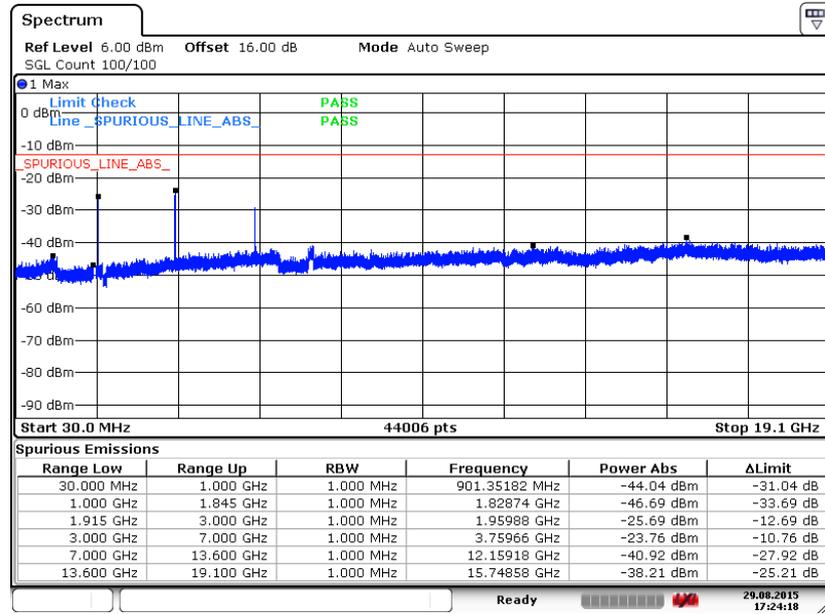

Date: 29 AUG 2015 17:24:19



3.7 Field Strength of Spurious Radiation Measurement

3.7.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

3.7.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Procedures


1. The testing follows FCC KDB 971168 v02r02 Section 5.8 and ANSI / TIA-603-C-2004 Section 2.2.12.
2. The EUT was placed on a rotatable wooden table 0.8 meters above the ground.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
9. Taking the record of output power at antenna port.
10. Repeat step 7 to step 8 for another polarization.
11. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
12. $ERP \text{ (dBm)} = EIRP - 2.15$
13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
14. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}.$

3.7.4 Test Setup

For radiated emissions from 30MHz to 1GHz

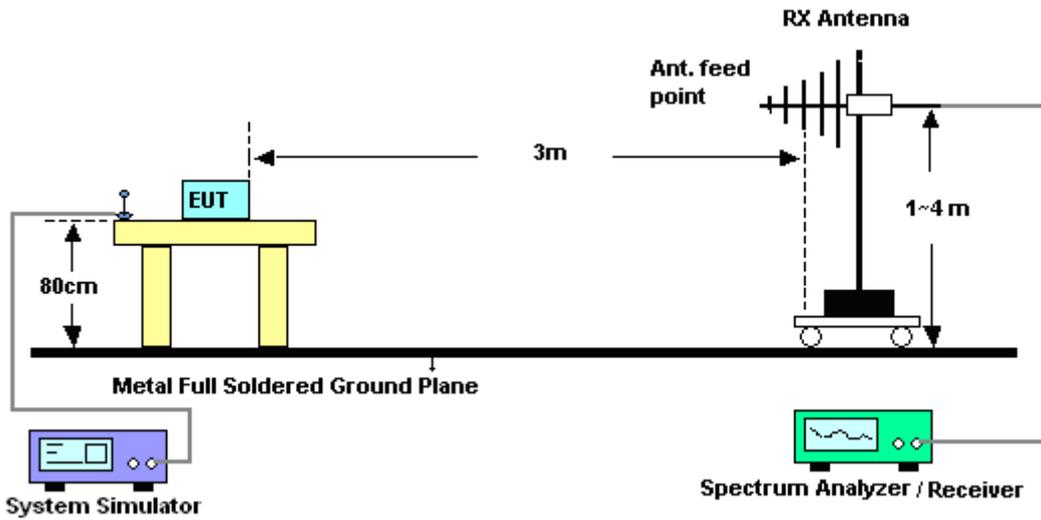

For radiated emissions above 1GHz

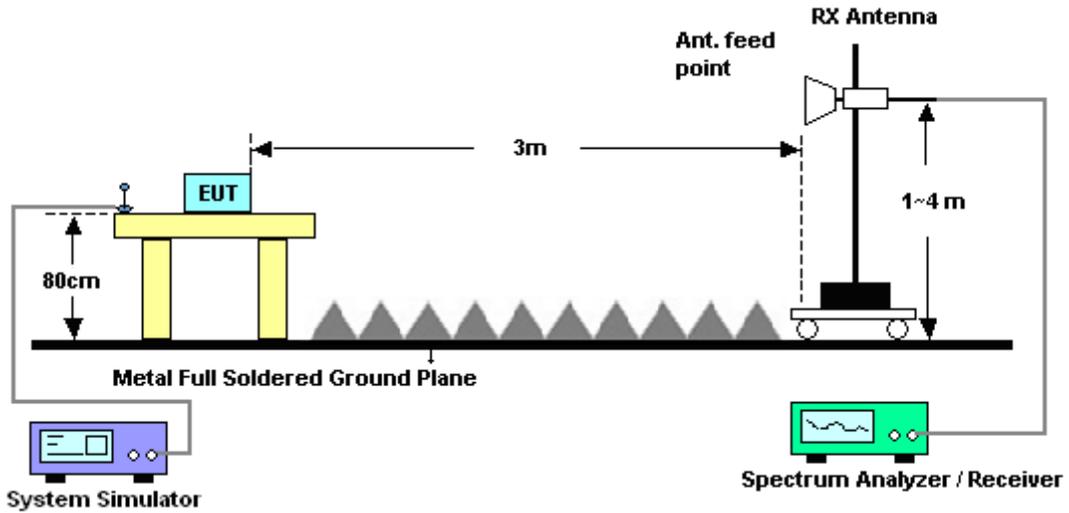



3.7.5 Test Result of Field Strength of Spurious Radiated

Band :	GSM850					Temperature :	21~22°C		
Test Mode :	GSM Link (GMSK)					Relative Humidity :	41~42%		
Test Engineer :	Jack Wang					Polarization :	Horizontal		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-56.42	-13	-43.42	-58.60	-58.31	1.86	5.90	H	Pass
2508	-54.61	-13	-41.61	-63.64	-56.95	2.31	6.80	H	Pass
3345	-52.68	-13	-39.68	-65.31	-55.08	2.85	7.40	H	Pass

Band :	GSM850					Temperature :	21~22°C		
Test Mode :	GSM Link (GMSK)					Relative Humidity :	41~42%		
Test Engineer :	Jack Wang					Polarization :	Vertical		
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-60.12	-13	-47.12	-58.98	-62.01	1.86	5.90	V	Pass
2508	-52.30	-13	-39.30	-63.27	-54.64	2.31	6.80	V	Pass
3348	-52.08	-13	-39.08	-66.06	-54.48	2.85	7.40	V	Pass



Band :	GSM850			Temperature :	21~22°C				
Test Mode :	EDGE class 8 Link (8PSK)			Relative Humidity :	41~42%				
Test Engineer :	Jack Wang			Polarization :	Horizontal				
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-57.63	-13	-44.63	-59.81	-59.52	1.86	5.90	H	Pass
2508	-55.32	-13	-42.32	-64.35	-57.66	2.31	6.80	H	Pass
3345	-53.21	-13	-40.21	-65.84	-55.61	2.85	7.40	H	Pass

Band :	GSM850			Temperature :	21~22°C				
Test Mode :	EDGE class 8 Link (8PSK)			Relative Humidity :	41~42%				
Test Engineer :	Jack Wang			Polarization :	Vertical				
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-60.23	-13	-47.23	-59.09	-62.12	1.86	5.90	V	Pass
2508	-53.19	-13	-40.19	-64.16	-55.53	2.31	6.80	V	Pass
3345	-52.20	-13	-39.20	-66.18	-54.60	2.85	7.40	V	Pass



Band :	GSM1900				Temperature :	21~22°C			
Test Mode :	GSM Link (GMSK)				Relative Humidity :	41~42%			
Test Engineer :	Jack Wang				Polarization :	Horizontal			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-51.44	-13	-38.44	-65.64	-56.04	3	7.60	H	Pass
5640	-48.30	-13	-35.30	-62.09	-54.56	3.84	10.10	H	Pass
7521	-41.53	-13	-28.53	-61.31	-49.03	4.43	11.93	H	Pass

Band :	GSM1900				Temperature :	21~22°C			
Test Mode :	GSM Link (GMSK)				Relative Humidity :	41~42%			
Test Engineer :	Jack Wang				Polarization :	Vertical			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3759	-52.23	-13	-39.23	-64.72	-56.83	3	7.60	V	Pass
5640	-49.96	-13	-36.96	-62.37	-56.22	3.84	10.10	V	Pass
7521	-43.97	-13	-30.97	-61.76	-51.47	4.43	11.93	V	Pass



Band :	GSM1900				Temperature :	21~22°C			
Test Mode :	EDGE class 8 Link (8PSK)				Relative Humidity :	41~42%			
Test Engineer :	Jack Wang				Polarization :	Horizontal			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3759	-51.34	-13	-38.34	-65.54	-55.94	3	7.60	H	Pass
5640	-47.55	-13	-34.55	-61.34	-53.81	3.84	10.10	H	Pass
7521	-41.60	-13	-28.60	-61.38	-49.10	4.43	11.93	H	Pass

Band :	GSM1900				Temperature :	21~22°C			
Test Mode :	EDGE class 8 Link (8PSK)				Relative Humidity :	41~42%			
Test Engineer :	Jack Wang				Polarization :	Vertical			
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3759	-53.48	-13	-40.48	-65.97	-58.08	3	7.60	V	Pass
5640	-48.77	-13	-35.77	-61.18	-55.03	3.84	10.10	V	Pass
7521	-44.50	-13	-31.50	-62.29	-52.00	4.43	11.93	V	Pass



Band :	WCDMA Band V		Temperature :	21~22°C					
Test Mode :	RMC 12.2Kbps Link (QPSK)		Relative Humidity :	41~42%					
Test Engineer :	Jack Wang		Polarization :	Horizontal					
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-56.53	-13	-43.53	-58.71	-58.42	1.86	5.90	H	Pass
2508	-54.59	-13	-41.59	-63.62	-56.93	2.31	6.80	H	Pass
3345	-54.01	-13	-41.01	-66.64	-56.41	2.85	7.40	H	Pass

Band :	WCDMA Band V		Temperature :	21~22°C					
Test Mode :	RMC 12.2Kbps Link (QPSK)		Relative Humidity :	41~42%					
Test Engineer :	Jack Wang		Polarization :	Vertical					
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-60.93	-13	-47.93	-59.79	-62.82	1.86	5.90	V	Pass
2508	-53.22	-13	-40.22	-64.19	-55.56	2.31	6.80	V	Pass
3345	-51.62	-13	-38.62	-65.60	-54.02	2.85	7.40	V	Pass



Band :	WCDMA Band II		Temperature :	21~22°C					
Test Mode :	RMC 12.2Kbps Link (QPSK)		Relative Humidity :	41~42%					
Test Engineer :	Jack Wang		Polarization :	Horizontal					
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3759	-51.33	-13	-38.33	-65.53	-55.93	3	7.60	H	Pass
5640	-48.00	-13	-35.00	-61.79	-54.26	3.84	10.10	H	Pass
7521	-43.04	-13	-30.04	-62.82	-50.54	4.43	11.93	H	Pass

Band :	WCDMA Band II		Temperature :	21~22°C					
Test Mode :	RMC 12.2Kbps Link (QPSK)		Relative Humidity :	41~42%					
Test Engineer :	Jack Wang		Polarization :	Vertical					
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3759	-53.05	-13	-40.05	-65.54	-57.65	3	7.60	V	Pass
5640	-49.46	-13	-36.46	-61.87	-55.72	3.84	10.10	V	Pass
7521	-44.84	-13	-31.84	-62.63	-52.34	4.43	11.93	V	Pass



Band :	CDMA2000 BC0	Temperature :	22~23°C						
Test Mode :	1xRTT_RC3+SO32 (QPSK)	Relative Humidity :	40~41%						
Test Engineer :	Nick Su	Polarization :	Horizontal						
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-56.98	-13	-43.98	-59.16	-58.87	1.86	5.90	H	Pass
2508	-54.85	-13	-41.85	-63.88	-57.19	2.31	6.80	H	Pass
3345	-51.71	-13	-38.71	-64.34	-54.11	2.85	7.40	H	Pass

Band :	CDMA2000 BC0	Temperature :	22~23°C						
Test Mode :	1xRTT_RC3+SO32 (QPSK)	Relative Humidity :	40~41%						
Test Engineer :	Nick Su	Polarization :	Vertical						
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-60.48	-13	-47.48	-59.34	-62.37	1.86	5.90	V	Pass
2508	-52.94	-13	-39.94	-63.91	-55.28	2.31	6.80	V	Pass
3345	-52.06	-13	-39.06	-66.04	-54.46	2.85	7.40	V	Pass



Band :	CDMA2000 BC1	Temperature :	22~23°C						
Test Mode :	1xRTT_RC1+SO55 (QPSK)	Relative Humidity :	40~41%						
Test Engineer :	Nick Su	Polarization :	Horizontal						
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3759	-50.37	-13	-37.37	-64.57	-54.97	3	7.60	H	Pass
5640	-47.17	-13	-34.17	-60.96	-53.43	3.84	10.10	H	Pass
7521	-42.95	-13	-29.95	-62.73	-50.45	4.43	11.93	H	Pass

Band :	CDMA2000 BC1	Temperature :	22~23°C						
Test Mode :	1xRTT_RC1+SO55 (QPSK)	Relative Humidity :	40~41%						
Test Engineer :	Nick Su	Polarization :	Vertical						
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3759	-42.95	-13	-29.95	-65.83	-47.55	3	7.60	V	Pass
5640	-49.14	-13	-36.14	-61.55	-55.40	3.84	10.10	V	Pass
7521	-44.50	-13	-31.50	-62.29	-52.00	4.43	11.93	V	Pass



3.8 Frequency Stability Measurement

3.8.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.8.3 Test Procedures for Temperature Variation

1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C steps up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.8.4 Test Procedures for Voltage Variation

1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
2. The EUT was placed in a temperature chamber at $25\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.

3.8.5 Test Setup

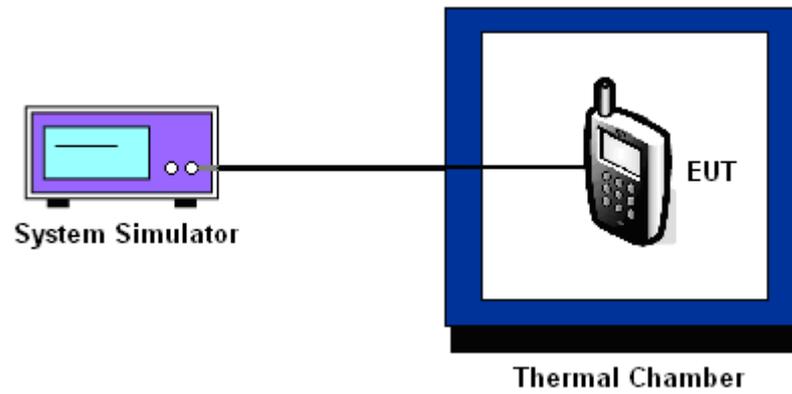



3.8.6 Test Result of Temperature Variation

Band :	GSM 850	Channel :	189
Limit (ppm) :	2.5	Frequency :	836.4 MHz

Temperature (°C)	GSM	EDGE class 8	Result
	Deviation (ppm)	Deviation (ppm)	
50	0.0574	0.0442	PASS
40	0.0108	0.0466	
30	0.0012	0.0096	
20(Ref.)	0.0000	0.0000	
10	0.0395	0.0048	
0	0.0275	0.0215	
-10	0.0132	0.0359	
-20	0.0263	0.0347	
-30	0.0610	0.0227	

Band :	GSM 1900	Channel :	661
Limit (ppm) :	within authorized band	Frequency :	1880.0 MHz

Temperature (°C)	GSM	EDGE class 8	Result
	Deviation (ppm)	Deviation (ppm)	
50	0.0128	0.0202	PASS
40	0.0011	0.0144	
30	0.0101	0.0165	
20(Ref.)	0.0000	0.0000	
10	0.0138	0.0005	
0	0.0032	0.0096	
-10	0.0090	0.0048	
-20	0.0117	0.0117	
-30	0.0005	0.0101	

Note: The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



Band :	WCDMA Band V	Channel :	4182
Limit (ppm) :	2.5	Frequency :	836.4 MHz

Temperature (°C)	RMC 12.2Kbps	Result
	Deviation (ppm)	
50	0.0693	PASS
40	0.0777	
30	0.0179	
20(Ref.)	0.0000	
10	0.0155	
0	0.0466	
-10	0.0335	
-20	0.0586	
-30	0.0251	

Band :	WCDMA Band II	Channel :	9400
Limit (ppm) :	within authorized band	Frequency :	1880.0 MHz

Temperature (°C)	RMC 12.2Kbps	Result
	Deviation (ppm)	
50	0.0277	PASS
40	0.0266	
30	0.0229	
20(Ref.)	0.0000	
10	0.0074	
0	0.0154	
-10	0.0021	
-20	0.0149	
-30	0.0048	

Note: The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



Band :	CDMA2000 BC0 1xRTT_RC3+SO32	Channel :	384
Limit (ppm) :	2.5	Frequency :	836.52 MHz

Temperature (°C)	Deviation (ppm)	Result
50	0.0108	PASS
40	0.0084	
30	0.0550	
20(Ref.)	0.0000	
10	0.0526	
0	0.0012	
-10	0.0406	
-20	0.0048	
-30	0.0490	

Band :	CDMA2000 BC1 1xRTT_RC1+SO55	Channel :	600
Limit (ppm) :	within authorized band	Frequency :	1880.0 MHz

Temperature (°C)	Deviation (ppm)	Result
50	0.0053	PASS
40	0.0021	
30	0.0186	
20(Ref.)	0.0000	
10	0.0170	
0	0.0016	
-10	0.0165	
-20	0.0005	
-30	0.0149	

Note: The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



3.8.7 Test Result of Voltage Variation

Band & Channel	Mode	Voltage (Volt)	Deviation (ppm)	Limit (ppm)	Result
GSM 850 CH189	GSM	4.35	0.0155	2.5	PASS
		3.80	0.0478		
		BEP	0.0155		
	EDGE class 8	4.35	0.0239		
		3.80	0.0060		
		BEP	0.0203		
GSM 1900 CH661	GSM	4.35	0.0037	(Note 3.)	
		3.80	0.0144		
		BEP	0.0053		
	EDGE class 8	4.35	0.0021		
		3.80	0.0074		
		BEP	0.0128		
WCDMA Band V CH4182	RMC 12.2Kbps	4.35	0.0299	2.5	
		3.80	0.0502		
		BEP	0.0646		
WCDMA Band II CH9400	RMC 12.2Kbps	4.35	0.0085	(Note 3.)	
		3.80	0.0011		
		BEP	0.0160		
CDMA2000 BC0 CH384	1xRTT RC3+SO32	4.35	0.0024	2.5	
		3.80	0.0096		
		BEP	0.0394		
CDMA2000 BC1 CH600	1xRTT RC1+SO55	4.35	0.0032	(Note 3.)	
		3.80	0.0027		
		BEP	0.0154		

Note:

1. Normal Voltage = 3.80V.
2. Battery End Point (BEP) = 3.60 V.
3. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Oct. 28, 2014	Aug. 26, 2015~ Sep. 07, 2015	Oct. 27, 2015	Conducted (TH01-KS)
Spectrum Analyzer	R&S	FSV30	101338	9kHz~30GHz	May 04, 2015	Aug. 26, 2015~ Sep. 07, 2015	May 03, 2016	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	-40~+150°C	Oct. 25, 2014	Aug. 26, 2015~ Sep. 07, 2015	Oct. 24, 2015	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Max 30dBm	Sep. 10, 2015	Sep. 12, 2015~ Sep. 14, 2015	Sep. 09, 2016	Radiation (03CH02-KS)
Spectrum Analyzer	R&S	FSV40	101040	10kHz~40GHz;Ma x 30dBm	Sep. 10, 2015	Sep. 12, 2015~ Sep. 14, 2015	Sep. 09, 2016	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6112D	37879	30MHz-2GHz	Sep. 12, 2015	Sep. 12, 2015~ Sep. 14, 2015	Sep. 11, 2016	Radiation (03CH02-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Nov. 08, 2014	Sep. 12, 2015~ Sep. 14, 2015	Nov. 07, 2015	Radiation (03CH02-KS)
Active Horn Antenna	com-power	AHA-118	701030	1GHz~18GHz	Nov. 08, 2014	Sep. 12, 2015~ Sep. 14, 2015	Nov. 07, 2015	Radiation (03CH02-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA170249	15GHz ~40GHz	Mar. 03, 2015	Sep. 12, 2015~ Sep. 14, 2015	Mar. 02, 2016	Radiation (03CH02-KS)
Amplifier	com-power	PA-103A	161069	1kHz ~1000MHz / 32 dB	May 04, 2015	Sep. 12, 2015~ Sep. 14, 2015	May 03, 2016	Radiation (03CH02-KS)
Amplifier	Agilent	8449B	3008A02384	1-26.5GHz Gain 30dB	Oct. 28, 2014	Sep. 12, 2015~ Sep. 14, 2015	Oct. 27, 2015	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	61601000247 3	N/A	NCR	Sep. 12, 2015~ Sep. 14, 2015	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Sep. 12, 2015~ Sep. 14, 2015	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Sep. 12, 2015~ Sep. 14, 2015	NCR	Radiation (03CH02-KS)



5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1dB
---	-------