


# FCC Test Report

**APPLICANT** : ZTE CORPORATION  
**EQUIPMENT** : CDMA/LTE Multi-mode Digital Mobile Phone  
**BRAND NAME** : ZTE  
**MODEL NAME** : ZTE N9515  
**FCC ID** : SRQ-ZTEN9515  
**STANDARD** : FCC 47 CFR FCC Part 15 Subpart B  
**CLASSIFICATION** : Certification


The product was received on May 09, 2014 and testing was completed on Jun. 11, 2014. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2003 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.



---

Reviewed by: Louis Wu / Manager



---

Approved by: Jones Tsai / Manager



**SPORTON INTERNATIONAL (KUNSHAN) INC.**  
**No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.**

## TABLE OF CONTENTS

|                                                              |    |
|--------------------------------------------------------------|----|
| REVISION HISTORY .....                                       | 3  |
| SUMMARY OF TEST RESULT .....                                 | 4  |
| 1. GENERAL DESCRIPTION .....                                 | 5  |
| 1.1. Applicant.....                                          | 5  |
| 1.2. Manufacturer .....                                      | 5  |
| 1.3. Product Feature of Equipment Under Test .....           | 5  |
| 1.4. Product Specification subjective to this standard.....  | 6  |
| 1.5. Modification of EUT .....                               | 7  |
| 1.6. Test Location.....                                      | 7  |
| 1.7. Applicable Standards .....                              | 7  |
| 2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST .....          | 8  |
| 2.1. Test Mode .....                                         | 8  |
| 2.2. Connection Diagram of Test System .....                 | 10 |
| 2.3. Support Unit used in test configuration and system..... | 11 |
| 2.4. EUT Operation Test Setup.....                           | 11 |
| 3. TEST RESULT .....                                         | 12 |
| 3.1. Test of AC Conducted Emission Measurement .....         | 12 |
| 3.2. Test of Radiated Emission Measurement .....             | 18 |
| 4. LIST OF MEASURING EQUIPMENT .....                         | 22 |
| 5. UNCERTAINTY OF EVALUATION .....                           | 23 |
| APPENDIX A. SETUP PHOTOGRAPHS                                |    |

## REVISION HISTORY

| REPORT NO. | VERSION | DESCRIPTION             | ISSUED DATE   |
|------------|---------|-------------------------|---------------|
| FC450908   | Rev. 01 | Initial issue of report | Jul. 08, 2014 |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |

## SUMMARY OF TEST RESULT

| Report Section | FCC Rule | Description           | Limit           | Result | Remark                                                     |
|----------------|----------|-----------------------|-----------------|--------|------------------------------------------------------------|
| 3.1            | 15.107   | AC Conducted Emission | < 15.107 limits | PASS   | Under limit<br>14.43 dB at<br>0.150 MHz                    |
| 3.2            | 15.109   | Radiated Emission     | < 15.109 limits | PASS   | Under limit<br>1.19 dB at<br>480.080 MHz<br>for Quasi-Peak |

## 1. General Description

### 1.1. Applicant

**ZTE CORPORATION**

ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057,  
P.R.China

### 1.2. Manufacturer

**ZTE CORPORATION**

ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057,  
P.R.China

### 1.3. Product Feature of Equipment Under Test

| Product Feature                 |                                                                                                                         |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| Equipment                       | CDMA/LTE Multi-mode Digital Mobile Phone                                                                                |
| Brand Name                      | ZTE                                                                                                                     |
| Model Name                      | ZTE N9515                                                                                                               |
| FCC ID                          | SRQ-ZTEN9515                                                                                                            |
| EUT supports Radios application | CDMA/EV-DO/LTE/<br>WLAN 2.4GHz 802. 11b/g/n HT20/<br>WLAN 5GHz 802. 11a/n HT20/<br>Bluetooth v3.0+EDR/Bluetooth v4.0 LE |
| HW Version                      | cwcA                                                                                                                    |
| SW Version                      | N9515V1.0.0B01                                                                                                          |
| EUT Stage                       | Identical Prototype                                                                                                     |

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.4. Product Specification subjective to this standard

| Product Specification subjective to this standard |                                                                                                                                                                                                                                                                                                                                                                                                     |
|---------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Tx Frequency</b>                               | CDMA2000 BC0 : 824.70 MHz ~ 848.31 MHz<br>CDMA2000 BC1 : 1851.25 MHz ~ 1908.75 MHz<br>CDMA2000 BC10 : 817.9 MHz ~ 823.1 MHz<br>LTE Band 25 : 1850.7MHz ~ 1914.3 MHz<br>LTE Band 26 : 814.7 MHz ~ 848.3 MHz<br>LTE Band 41 : 2498.5 MHz ~ 2687.5 MHz<br>802.11b/g/n: 2412 MHz ~ 2462 MHz<br>802.11a/n: 5180 MHz ~ 5240 MHz; 5745 MHz ~ 5805 MHz<br>Bluetooth: 2402 MHz ~ 2480 MHz                    |
| <b>Rx Frequency</b>                               | CDMA2000 BC0 : 869.70 MHz ~ 893.31 MHz<br>CDMA2000 BC1 : 1931.25 MHz ~ 1988.75 MHz<br>CDMA2000 BC10 : 862.9 MHz ~ 868.1 MHz<br>LTE Band 25 : 1930.7MHz ~ 1994.3 MHz<br>LTE Band 26 : 859.7MHz ~ 893.3MHz<br>LTE Band 41 : 2498.5 MHz ~ 2687.5 MHz<br>802.11b/g/n: 2412 MHz ~ 2462 MHz<br>802.11a/n: 5180 MHz ~ 5240 MHz; 5745 MHz ~ 5805 MHz<br>Bluetooth: 2402 MHz ~ 2480 MHz<br>GPS : 1.57542 GHz |
| <b>Antenna Type</b>                               | WWAN : Dipole Antenna<br>WLAN : Dipole Antenna<br>Bluetooth : Dipole Antenna<br>GPS : IFA Antenna                                                                                                                                                                                                                                                                                                   |
| <b>Type of Modulation</b>                         | CDMA2000 : QPSK<br>CDMA2000 1xEV-DO : QPSK/8PSK<br>LTE: QPSK / 16QAM<br>802.11b : DSSS (DBPSK / DQPSK / CCK)<br>802.11a/g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)<br>Bluetooth V4.0 LE : GFSK<br>Bluetooth (1Mbps) : GFSK<br>Bluetooth (2Mbps) : $\pi/4$ -DQPSK<br>Bluetooth (3Mbps) : 8-DPSK<br>GPS : BPSK                                                                                          |

## 1.5. Modification of EUT

No modifications are made to the EUT during all test items.

## 1.6. Test Location

|                    |                                                            |           |                      |
|--------------------|------------------------------------------------------------|-----------|----------------------|
| Test Site          | SPORTON INTERNATIONAL (KUNSHAN) INC.                       |           |                      |
| Test Site Location | No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C. |           |                      |
|                    | TEL: +86-0512-5790-0158                                    |           |                      |
|                    | FAX: +86-0512-5790-0958                                    |           |                      |
| Test Site No.      | Sporton Site No.                                           |           | FCC Registration No. |
|                    | CO01-KS                                                    | 03CH01-KS | 149928               |

## 1.7. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC 47 CFR FCC Part 15 Subpart B
- ♦ ANSI C63.4-2003

**Remark:** All test items were verified and recorded according to the standards and without any deviation during the test.

## 2. Test Configuration of Equipment Under Test

### 2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

The following tables are showing the test modes as the worst cases and recorded in this report.

| Item | EUT Configuration                                                  | Test Condition |           |           |
|------|--------------------------------------------------------------------|----------------|-----------|-----------|
|      |                                                                    | EMI AC         | EMI RE<1G | EMI RE≥1G |
| 1.   | Charging Mode (EUT with adapter)                                   | ☒              | ☒         | Note 1    |
| 2.   | Data application transferred mode<br>(EUT connected with notebook) | ☒              | ☒         | ☒         |

#### Abbreviations:

- EMI AC: AC conducted emissions
- EMI RE ≥ 1G: EUT radiated emissions ≥ 1GHz
- EMI RE < 1G: EUT radiated emissions < 1GHz


**Note 1:** Testing for this mode is not required or not the worst case.

**Remark:** For signal above 1GHz, the worst case was test item 2.




| Test Items                                                                                                                                                                                                                                                                                                                                                                     | EUT Configure Mode | Function Type                                                                                                                                                                                                                                                                                                                                                 |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| AC Conducted Emission                                                                                                                                                                                                                                                                                                                                                          | 1/2                | Mode 1: CDMA2000 BC0 Idle + Bluetooth Idle + WLAN 2.4GHz Idle + USB Cable (Charging from Adapter) + Camera<br><Fig.1><br>Mode 2: CDMA2000 BC1 Idle + Bluetooth Idle + WLAN 5GHz Idle + USB Cable (Charging from Adapter) + MPEG4<Fig.1><br>Mode 3: LTE Band 25 Idle + Bluetooth Idle + WLAN 2.4GHz Idle + USB Cable (Data Link with Notebook) + GPS Rx<Fig.2> |
| Radiated Emissions < 1GHz                                                                                                                                                                                                                                                                                                                                                      | 1/2                | Mode 1: CDMA2000 BC0 Idle + Bluetooth Idle + WLAN 2.4GHz Idle + USB Cable (Charging from Adapter) + Camera<br><Fig.1><br>Mode 2: CDMA2000 BC1 Idle + Bluetooth Idle + WLAN 5GHz Idle + USB Cable (Charging from Adapter) + MPEG4<Fig.1><br>Mode 3: LTE Band 25 Idle + Bluetooth Idle + WLAN 2.4GHz Idle + USB Cable (Data Link with Notebook) + GPS Rx<Fig.2> |
| Radiated Emissions $\geq$ 1GHz                                                                                                                                                                                                                                                                                                                                                 | 2                  | Mode 1: LTE Band 25 Idle + Bluetooth Idle + WLAN 2.4GHz Idle + USB Cable (Data Link with Notebook) + GPS Rx<Fig.2>                                                                                                                                                                                                                                            |
| <b>Remark:</b> <ol style="list-style-type: none"> <li>The worst case of AC is mode 1; and the USB Link mode of AC is mode 3, the test data of these modes are reported.</li> <li>The worst case of RE &lt; 1G is mode 3; only the test data of this mode is reported.</li> <li>Link with Notebook means data application transferred mode between EUT and Notebook.</li> </ol> |                    |                                                                                                                                                                                                                                                                                                                                                               |

## 2.2. Connection Diagram of Test System

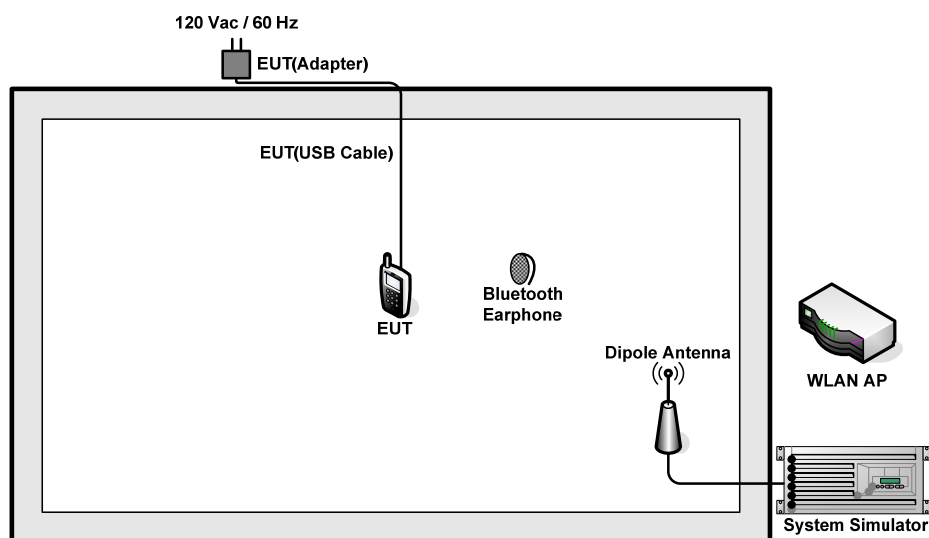

<Fig.1>

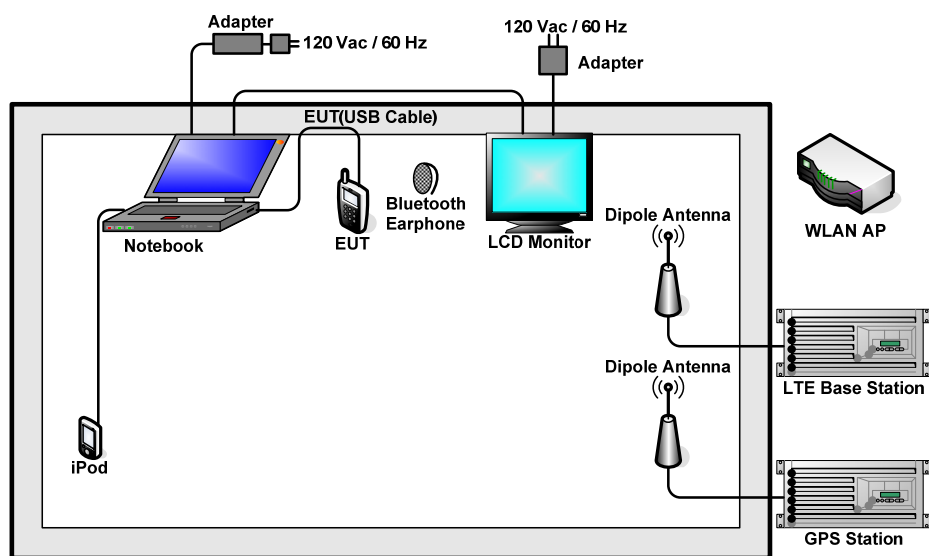

<Fig.2>

## 2.3. Support Unit used in test configuration and system

| Item | Equipment          | Trade Name | Model Name | FCC ID      | Data Cable        | Power Cord                                                 |
|------|--------------------|------------|------------|-------------|-------------------|------------------------------------------------------------|
| 1.   | System Simulator   | R&S        | CMU 200    | N/A         | N/A               | Unshielded, 1.8 m                                          |
| 2.   | LTE Base Station   | R&S        | CMW 500    | N/A         | N/A               | Unshielded, 1.8 m                                          |
| 3.   | LTE Base Station   | Anritsu    | MT8820C    | N/A         | N/A               | Unshielded, 1.8 m                                          |
| 4.   | GPS Station        | ADIVIC     | MP9000     | N/A         | N/A               | Unshielded, 1.8 m                                          |
| 5.   | WLAN AP            | D-Link     | DIR-855    | KA2DIR855A2 | N/A               | Unshielded, 1.8 m                                          |
| 6.   | Bluetooth Earphone | Lenovo     | LBH301     | N/A         | N/A               | N/A                                                        |
| 7.   | Bluetooth Earphone | Lenovo     | LBH505     | N/A         | N/A               | N/A                                                        |
| 8.   | Notebook           | Lenovo     | G480       | N/A         | N/A               | AC I/P:<br>Unshielded, 1.8 m<br>DC O/P:<br>Shielded, 1.8 m |
| 9.   | LCD Monitor        | Dell       | IN1930MWc  | FCC DoC     | Shielded, 1.2 m   | Unshielded, 1.8 m                                          |
| 10.  | LCD Monitor        | Lenovo     | L197WA     | FCC DoC     | N/A               | Unshielded, 1.8 m                                          |
| 11.  | iPod               | Apple      | A1199      | FCC DoC     | Unshielded, 1.2 m | N/A                                                        |

## 2.4. EUT Operation Test Setup

The EUT was in CDMA2000 and LTE idle mode during the testing. The EUT was synchronized to the BCCH, and was in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between notebook and EUT via USB cable.
2. Turn on GPS function to make the EUT receive continuous signals from GPS station.
3. Execute "Video player" to play MPEG4 files.
4. Turn on camera to capture images.

### 3. Test Result

#### 3.1. Test of AC Conducted Emission Measurement

##### 3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

| Frequency of emission<br>(MHz) | Conducted limit (dBuV) |           |
|--------------------------------|------------------------|-----------|
|                                | Quasi-peak             | Average   |
| 0.15-0.5                       | 66 to 56*              | 56 to 46* |
| 0.5-5                          | 56                     | 46        |
| 5-30                           | 60                     | 50        |

\*Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedure


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

### 3.1.4 Test Setup

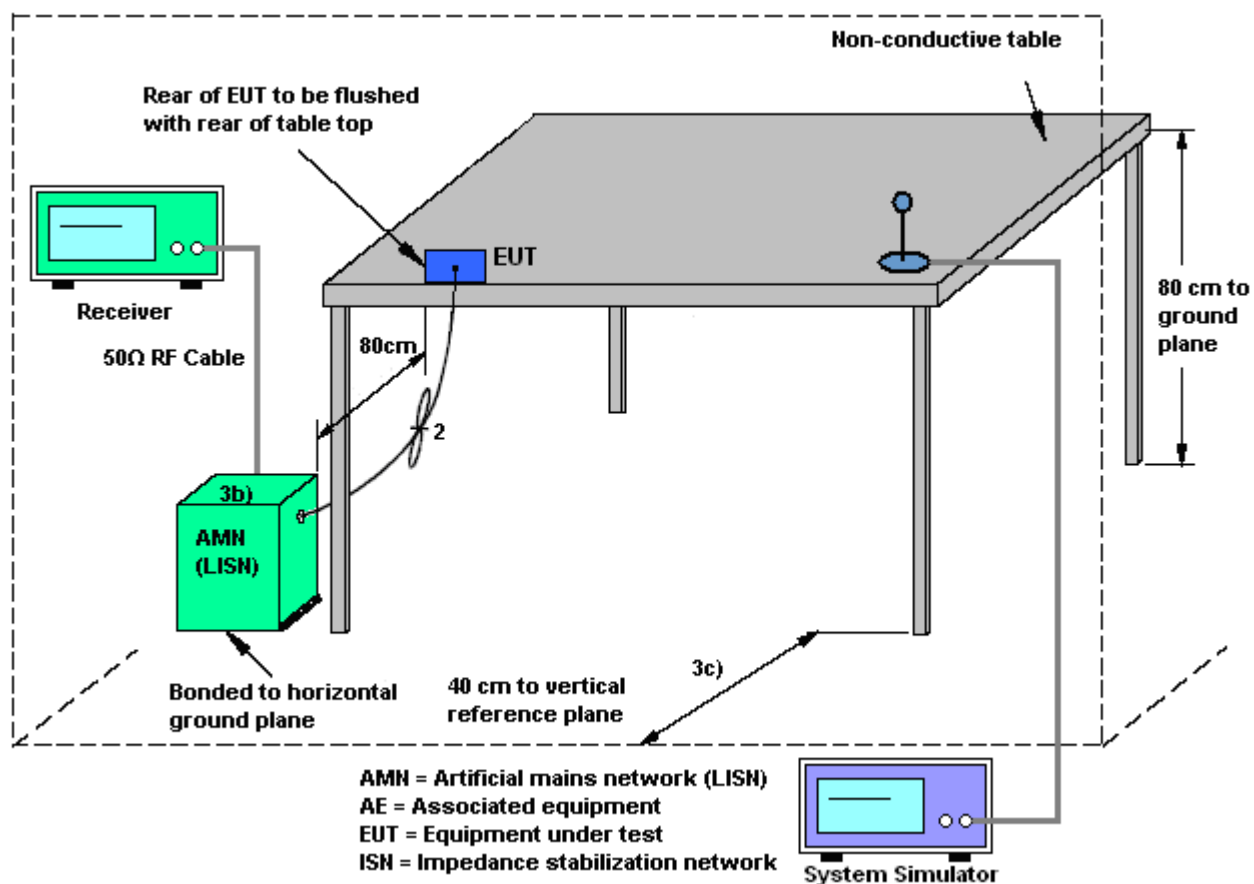

### 3.1.5 Test Result of AC Conducted Emission


|                        |                                                                                                    |                            |        |
|------------------------|----------------------------------------------------------------------------------------------------|----------------------------|--------|
| <b>Test Mode :</b>     | Mode 1                                                                                             | <b>Temperature :</b>       | 22~24℃ |
| <b>Test Engineer :</b> | Eligah Wang                                                                                        | <b>Relative Humidity :</b> | 37~39% |
| <b>Test Voltage :</b>  | 120Vac / 60Hz                                                                                      | <b>Phase :</b>             | Line   |
| <b>Function Type :</b> | CDMA2000 BC0 Idle + Bluetooth Idle + WLAN 2.4GHz Idle + USB Cable (Charging from Adapter) + Camera |                            |        |

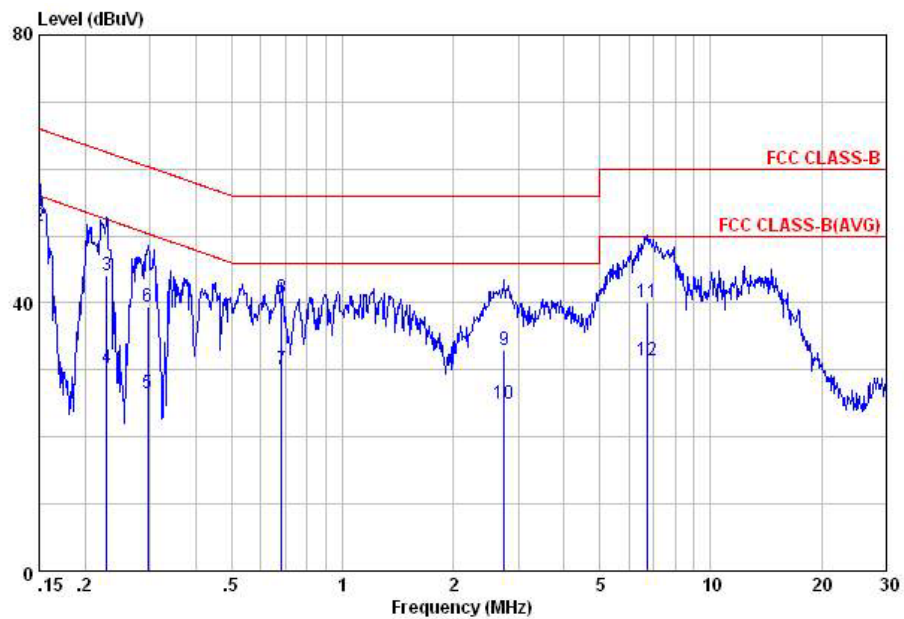

Site : C001-KS  
Condition: FCC CLASS-B LISN-L20130306 LINE  
Project : (FC) 450908  
mode : Mode 1

|    | Freq | Level | Over   | Limit | Read  | LISN   | Cable | Remark  |
|----|------|-------|--------|-------|-------|--------|-------|---------|
|    | MHz  | dBuV  | Limit  | Line  | Level | Factor | Loss  |         |
|    |      |       | dB     | dBuV  | dBuV  | dB     | dB    |         |
| 1  | 0.15 | 39.57 | -16.43 | 56.00 | 26.90 | 1.95   | 10.72 | Average |
| 2  | 0.15 | 51.57 | -14.43 | 66.00 | 38.90 | 1.95   | 10.72 | QP      |
| 3  | 0.23 | 44.07 | -18.41 | 62.48 | 32.60 | 0.93   | 10.54 | QP      |
| 4  | 0.23 | 30.37 | -22.11 | 52.48 | 18.90 | 0.93   | 10.54 | Average |
| 5  | 0.30 | 26.41 | -23.96 | 50.37 | 15.30 | 0.71   | 10.40 | Average |
| 6  | 0.30 | 39.41 | -20.96 | 60.37 | 28.30 | 0.71   | 10.40 | QP      |
| 7  | 0.68 | 30.01 | -15.99 | 46.00 | 19.60 | 0.20   | 10.21 | Average |
| 8  | 0.68 | 40.71 | -15.29 | 56.00 | 30.30 | 0.20   | 10.21 | QP      |
| 9  | 2.75 | 32.94 | -23.06 | 56.00 | 22.61 | 0.12   | 10.21 | QP      |
| 10 | 2.75 | 24.94 | -21.06 | 46.00 | 14.61 | 0.12   | 10.21 | Average |
| 11 | 6.70 | 40.11 | -19.89 | 60.00 | 29.60 | 0.20   | 10.31 | QP      |
| 12 | 6.70 | 31.41 | -18.59 | 50.00 | 20.90 | 0.20   | 10.31 | Average |


|                        |                                                                                                    |                            |         |
|------------------------|----------------------------------------------------------------------------------------------------|----------------------------|---------|
| <b>Test Mode :</b>     | Mode 1                                                                                             | <b>Temperature :</b>       | 22~24℃  |
| <b>Test Engineer :</b> | Eligah Wang                                                                                        | <b>Relative Humidity :</b> | 37~39%  |
| <b>Test Voltage :</b>  | 120Vac / 60Hz                                                                                      | <b>Phase :</b>             | Neutral |
| <b>Function Type :</b> | CDMA2000 BC0 Idle + Bluetooth Idle + WLAN 2.4GHz Idle + USB Cable (Charging from Adapter) + Camera |                            |         |

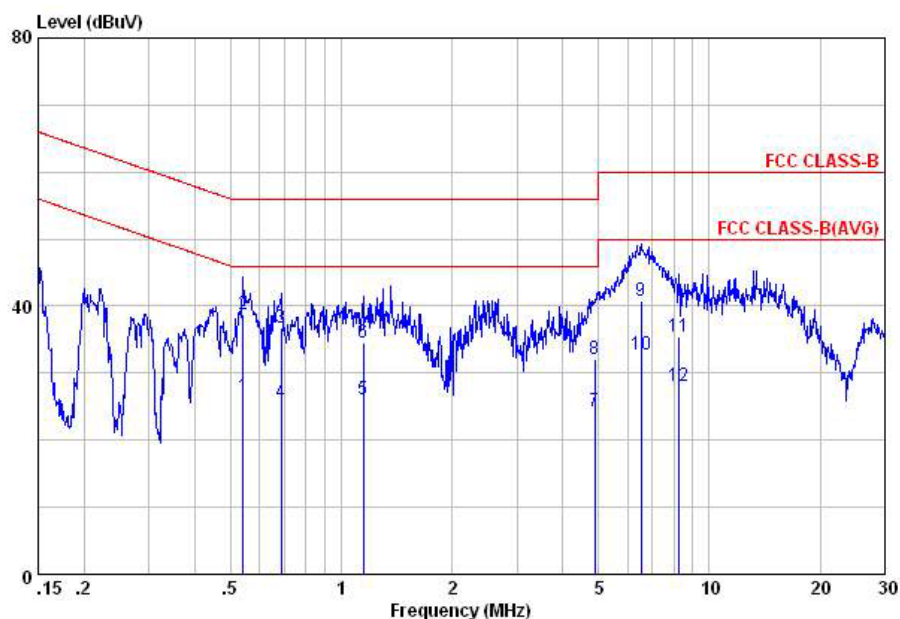

Site : C001-KS  
 Condition: FCC CLASS-B LISN-N20130306 NEUTRAL  
 Project : (FC) 450908  
 mode : Mode 1

|    | Freq | Level | Over   | Limit | Read  | LISN   | Cable |         |
|----|------|-------|--------|-------|-------|--------|-------|---------|
|    | MHz  | dBuV  | Limit  | Line  | Level | Factor | Loss  | Remark  |
|    |      |       | dB     | dBuV  | dBuV  | dB     | dB    |         |
| 1  | 0.54 | 26.44 | -19.56 | 46.00 | 15.90 | 0.28   | 10.26 | Average |
| 2  | 0.54 | 38.84 | -17.16 | 56.00 | 28.30 | 0.28   | 10.26 | QP      |
| 3  | 0.69 | 36.72 | -19.28 | 56.00 | 26.31 | 0.20   | 10.21 | QP      |
| 4  | 0.69 | 25.72 | -20.28 | 46.00 | 15.31 | 0.20   | 10.21 | Average |
| 5  | 1.15 | 26.18 | -19.82 | 46.00 | 15.90 | 0.10   | 10.18 | Average |
| 6  | 1.15 | 34.58 | -21.42 | 56.00 | 24.30 | 0.10   | 10.18 | QP      |
| 7  | 4.87 | 24.36 | -21.64 | 46.00 | 13.90 | 0.20   | 10.26 | Average |
| 8  | 4.87 | 32.06 | -23.94 | 56.00 | 21.60 | 0.20   | 10.26 | QP      |
| 9  | 6.52 | 40.81 | -19.19 | 60.00 | 30.30 | 0.20   | 10.31 | QP      |
| 10 | 6.52 | 32.81 | -17.19 | 50.00 | 22.30 | 0.20   | 10.31 | Average |
| 11 | 8.28 | 35.44 | -24.56 | 60.00 | 24.90 | 0.20   | 10.34 | QP      |
| 12 | 8.28 | 28.14 | -21.86 | 50.00 | 17.60 | 0.20   | 10.34 | Average |

|                        |                                                                                                     |                            |        |
|------------------------|-----------------------------------------------------------------------------------------------------|----------------------------|--------|
| <b>Test Mode :</b>     | Mode 3                                                                                              | <b>Temperature :</b>       | 22~24℃ |
| <b>Test Engineer :</b> | Eligah Wang                                                                                         | <b>Relative Humidity :</b> | 37~39% |
| <b>Test Voltage :</b>  | 120Vac / 60Hz                                                                                       | <b>Phase :</b>             | Line   |
| <b>Function Type :</b> | LTE Band 25 Idle + Bluetooth Idle + WLAN 2.4GHz Idle + USB Cable (Data Link with Notebook) + GPS Rx |                            |        |

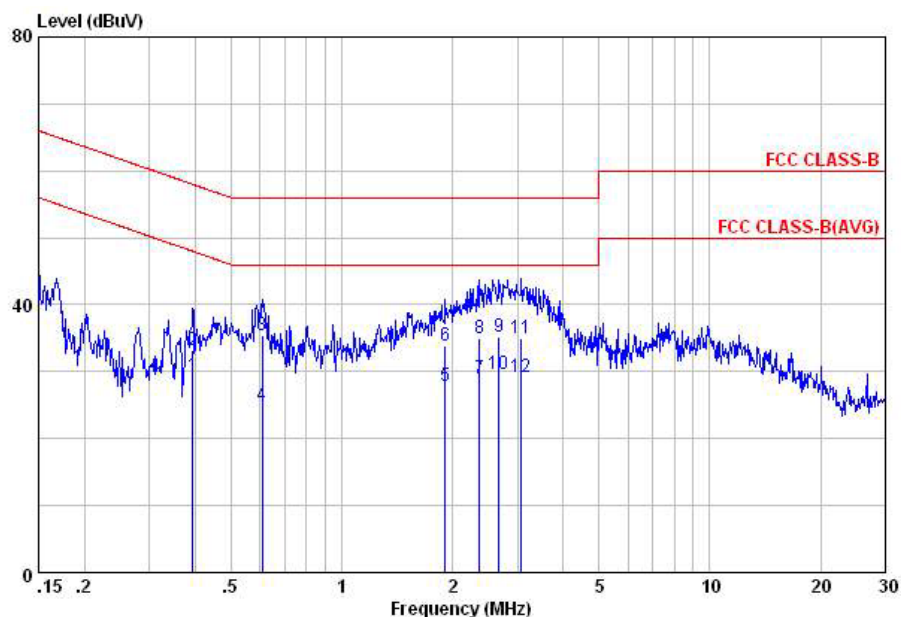


Site : C001-KS  
 Condition: FCC CLASS-B LISN-L20130306 LINE  
 Project : (FC) 450908  
 mode : Mode 3

|    | Freq | Level | Over   | Limit | Read  | LISN   | Cable | Remark  |
|----|------|-------|--------|-------|-------|--------|-------|---------|
|    | MHz  | dBuV  | Limit  | Line  | Level | Factor | Loss  |         |
|    |      |       | dB     | dBuV  | dBuV  | dB     | dB    |         |
| 1  | 0.39 | 29.51 | -18.48 | 47.99 | 18.90 | 0.33   | 10.28 | Average |
| 2  | 0.39 | 33.21 | -24.78 | 57.99 | 22.60 | 0.33   | 10.28 | QP      |
| 3  | 0.61 | 35.34 | -20.66 | 56.00 | 24.90 | 0.20   | 10.24 | QP      |
| 4  | 0.61 | 25.04 | -20.96 | 46.00 | 14.60 | 0.20   | 10.24 | Average |
| 5  | 1.91 | 27.89 | -18.11 | 46.00 | 17.60 | 0.10   | 10.19 | Average |
| 6  | 1.91 | 33.89 | -22.11 | 56.00 | 23.60 | 0.10   | 10.19 | QP      |
| 7  | 2.37 | 28.91 | -17.09 | 46.00 | 18.60 | 0.11   | 10.20 | Average |
| 8  | 2.37 | 34.91 | -21.09 | 56.00 | 24.60 | 0.11   | 10.20 | QP      |
| 9  | 2.68 | 35.23 | -20.77 | 56.00 | 24.90 | 0.12   | 10.21 | QP      |
| 10 | 2.68 | 29.63 | -16.37 | 46.00 | 19.30 | 0.12   | 10.21 | Average |
| 11 | 3.07 | 34.97 | -21.03 | 56.00 | 24.61 | 0.14   | 10.22 | QP      |
| 12 | 3.07 | 29.27 | -16.73 | 46.00 | 18.91 | 0.14   | 10.22 | Average |



|                        |                                                                                                     |                            |         |
|------------------------|-----------------------------------------------------------------------------------------------------|----------------------------|---------|
| <b>Test Mode :</b>     | Mode 3                                                                                              | <b>Temperature :</b>       | 22~24°C |
| <b>Test Engineer :</b> | Eligah Wang                                                                                         | <b>Relative Humidity :</b> | 37~39%  |
| <b>Test Voltage :</b>  | 120Vac / 60Hz                                                                                       | <b>Phase :</b>             | Neutral |
| <b>Function Type :</b> | LTE Band 25 Idle + Bluetooth Idle + WLAN 2.4GHz Idle + USB Cable (Data Link with Notebook) + GPS Rx |                            |         |

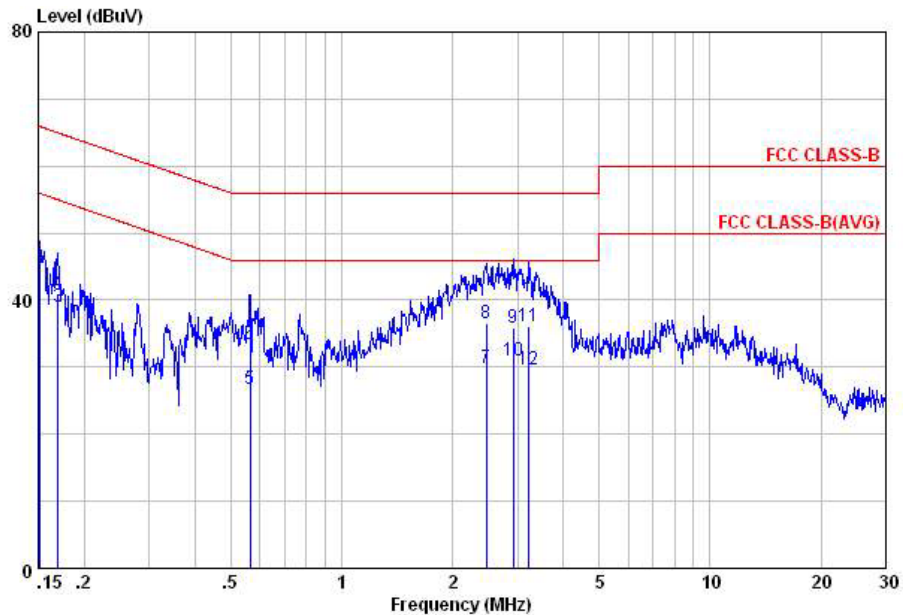

Site : C001-KS  
 Condition: FCC CLASS-B LISN-N20130306 NEUTRAL  
 Project : (FC) 450908  
 mode : Mode 3

|    | Freq | Level | Over   | Limit | Read  | LISN   | Cable |         |
|----|------|-------|--------|-------|-------|--------|-------|---------|
|    | MHz  | dBuV  | Limit  | Line  | Level | Factor | Loss  | Remark  |
|    | MHz  | dBuV  | dB     | dBuV  | dBuV  | dB     | dB    |         |
| 1  | 0.15 | 37.40 | -18.56 | 55.96 | 24.79 | 1.89   | 10.72 | Average |
| 2  | 0.15 | 44.90 | -21.06 | 65.96 | 32.29 | 1.89   | 10.72 | QP      |
| 3  | 0.17 | 38.99 | -16.00 | 54.99 | 26.80 | 1.55   | 10.64 | Average |
| 4  | 0.17 | 41.09 | -23.90 | 64.99 | 28.90 | 1.55   | 10.64 | QP      |
| 5  | 0.56 | 26.82 | -19.18 | 46.00 | 16.30 | 0.27   | 10.25 | Average |
| 6  | 0.56 | 33.32 | -22.68 | 56.00 | 22.80 | 0.27   | 10.25 | QP      |
| 7  | 2.47 | 29.92 | -16.08 | 46.00 | 19.61 | 0.11   | 10.20 | Average |
| 8  | 2.47 | 36.62 | -19.38 | 56.00 | 26.31 | 0.11   | 10.20 | QP      |
| 9  | 2.92 | 35.95 | -20.05 | 56.00 | 25.60 | 0.13   | 10.22 | QP      |
| 10 | 2.92 | 30.95 | -15.05 | 46.00 | 20.60 | 0.13   | 10.22 | Average |
| 11 | 3.21 | 36.18 | -19.82 | 56.00 | 25.80 | 0.15   | 10.23 | QP      |
| 12 | 3.21 | 29.68 | -16.32 | 46.00 | 19.30 | 0.15   | 10.23 | Average |

## 3.2. Test of Radiated Emission Measurement

### 3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency<br>(MHz) | Field Strength<br>(microvolts/meter) | Measurement Distance<br>(meters) |
|--------------------|--------------------------------------|----------------------------------|
| 30 – 88            | 100                                  | 3                                |
| 88 – 216           | 150                                  | 3                                |
| 216 – 960          | 200                                  | 3                                |
| Above 960          | 500                                  | 3                                |

### 3.2.2. Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

### 3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dB $\mu$ V/m) = 20 log Emission level ( $\mu$ V/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

### 3.2.4. Test Setup of Radiated Emission


For radiated emissions from 30MHz to 1GHz

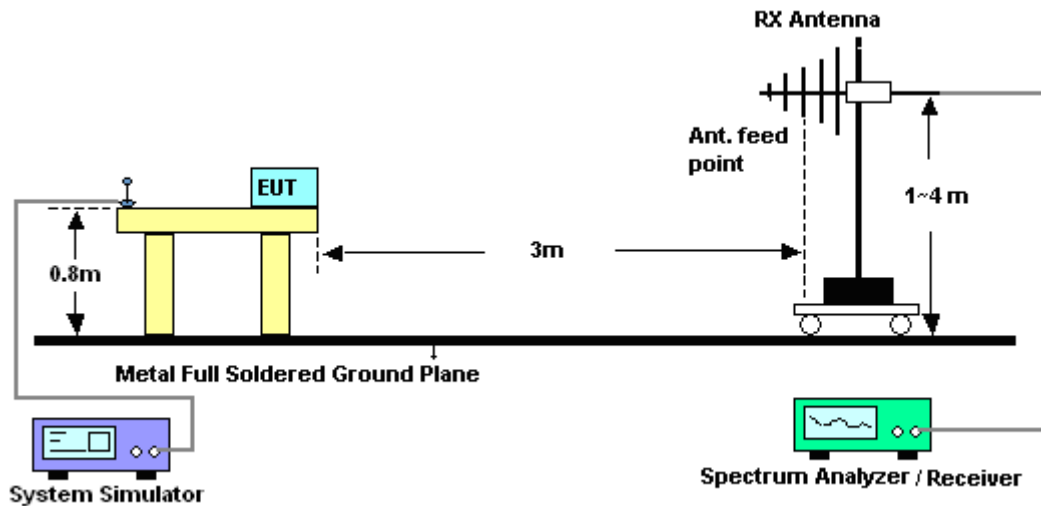


For radiated emissions above 1GHz

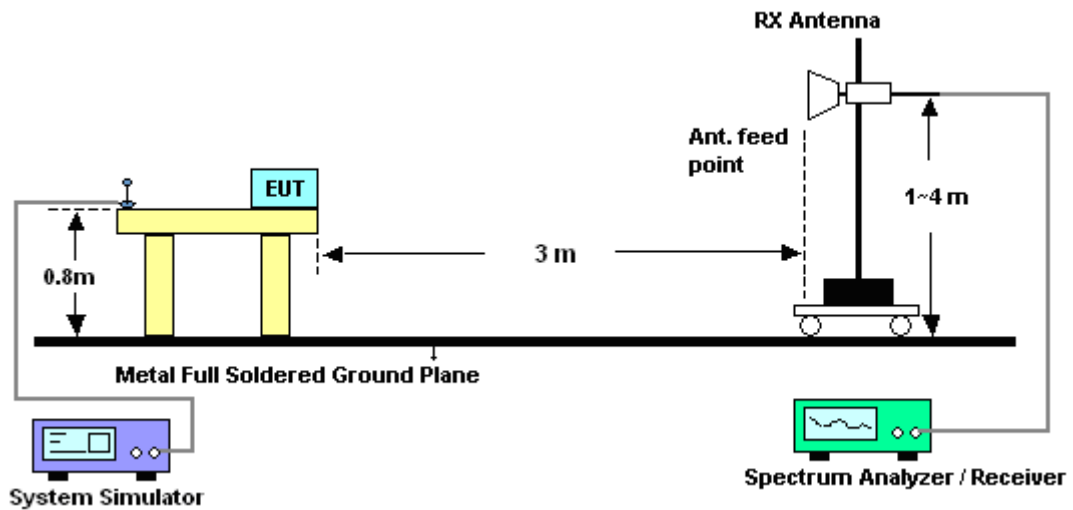

### 3.2.5. Test Result of Radiated Emission

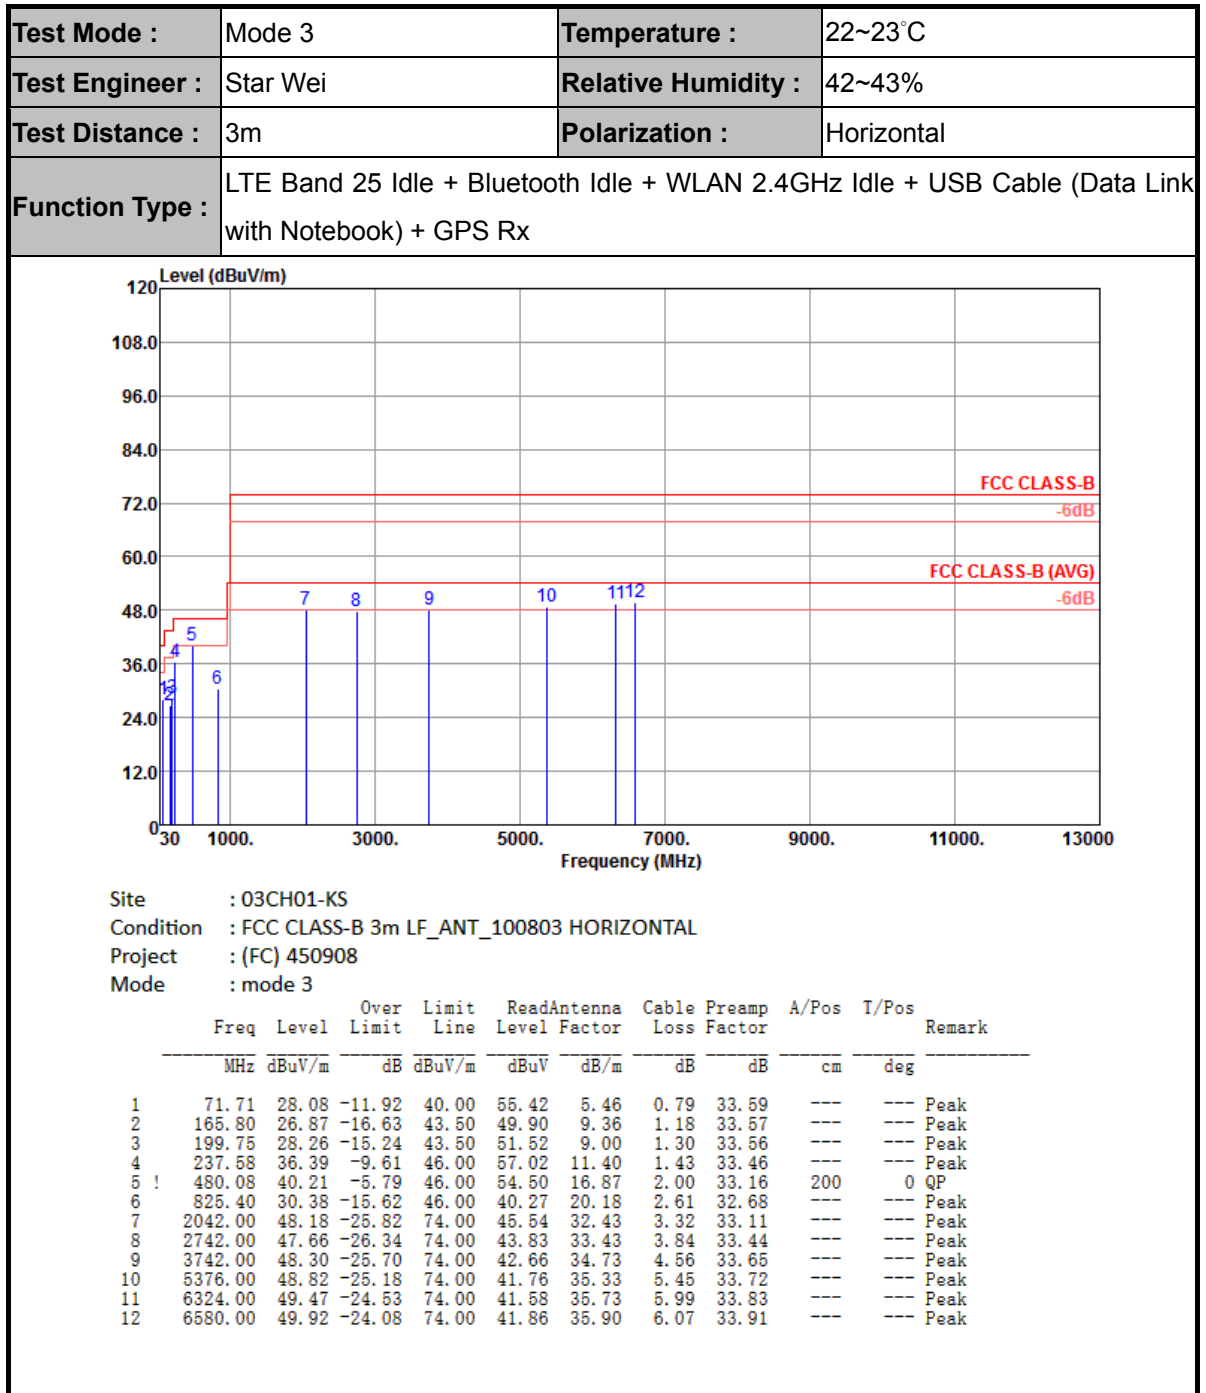

|                        |                                                                                                     |                            |          |
|------------------------|-----------------------------------------------------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | Mode 3                                                                                              | <b>Temperature :</b>       | 22~23°C  |
| <b>Test Engineer :</b> | Star Wei                                                                                            | <b>Relative Humidity :</b> | 42~43%   |
| <b>Test Distance :</b> | 3m                                                                                                  | <b>Polarization :</b>      | Vertical |
| <b>Function Type :</b> | LTE Band 25 Idle + Bluetooth Idle + WLAN 2.4GHz Idle + USB Cable (Data Link with Notebook) + GPS Rx |                            |          |

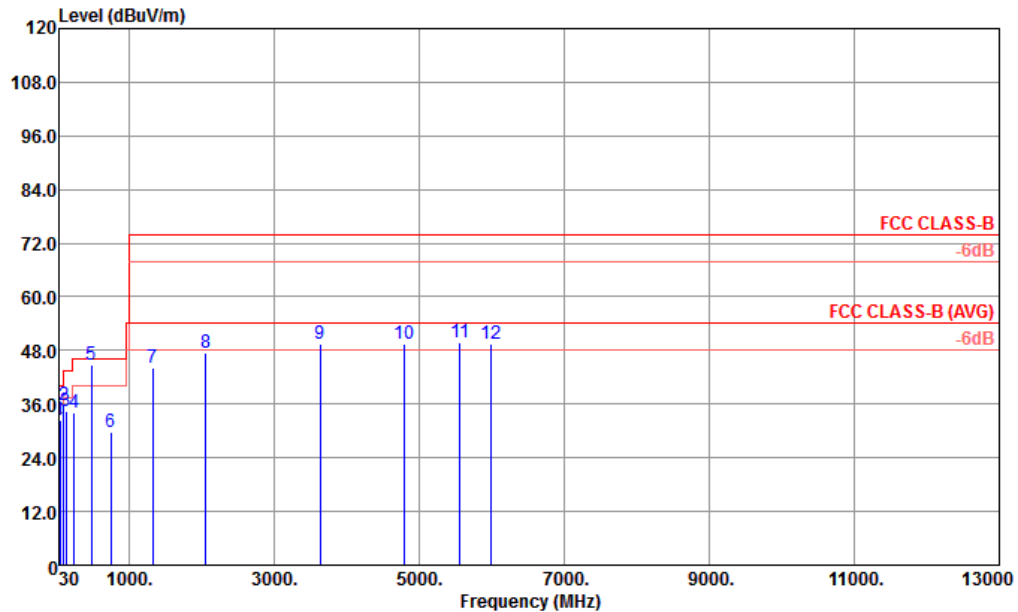

Site : 03CH01-KS  
Condition : FCC CLASS-B 3m LF\_ANT\_100803 VERTICAL  
Project : (FC) 450908  
Mode : mode 3

|    | Freq    | Level  | Over   | Limit | ReadAntenna | Cable  | Preamp | A/Pos  | I/Pos | Remark |
|----|---------|--------|--------|-------|-------------|--------|--------|--------|-------|--------|
|    | MHz     | dBuV/m | Limit  | Line  | Level       | Factor | Loss   | Factor | cm    | deg    |
| 1  | 42.61   | 32.48  | -7.52  | 40.00 | 55.01       | 10.48  | 0.62   | 33.63  | ---   | Peak   |
| 2  | 98.87   | 35.64  | -7.86  | 43.50 | 58.01       | 10.33  | 0.92   | 33.62  | ---   | Peak   |
| 3  | 128.94  | 34.31  | -9.19  | 43.50 | 55.15       | 11.71  | 1.04   | 33.59  | ---   | Peak   |
| 4  | 237.58  | 34.15  | -11.85 | 46.00 | 54.78       | 11.40  | 1.43   | 33.46  | ---   | Peak   |
| 5  | 480.08  | 44.81  | -1.19  | 46.00 | 59.10       | 16.87  | 2.00   | 33.16  | 130   | 312 QP |
| 6  | 749.74  | 29.80  | -16.20 | 46.00 | 40.22       | 19.90  | 2.46   | 32.78  | ---   | Peak   |
| 7  | 1320.00 | 44.01  | -29.99 | 74.00 | 45.12       | 29.52  | 2.71   | 33.34  | ---   | Peak   |
| 8  | 2060.00 | 47.47  | -26.53 | 74.00 | 44.81       | 32.45  | 3.33   | 33.12  | ---   | Peak   |
| 9  | 3634.00 | 49.31  | -24.69 | 74.00 | 43.88       | 34.59  | 4.52   | 33.68  | ---   | Peak   |
| 10 | 4790.00 | 49.32  | -24.68 | 74.00 | 42.73       | 35.17  | 5.22   | 33.80  | ---   | Peak   |
| 11 | 5562.00 | 49.84  | -24.16 | 74.00 | 42.59       | 35.44  | 5.51   | 33.70  | ---   | Peak   |
| 12 | 5988.00 | 49.60  | -24.40 | 74.00 | 41.82       | 35.60  | 5.88   | 33.70  | ---   | Peak   |

## 4. List of Measuring Equipment

| Instrument                           | Manufacturer | Model No. | Serial No.       | Characteristics            | Calibration Date | Test Date     | Due Date      | Remark                |
|--------------------------------------|--------------|-----------|------------------|----------------------------|------------------|---------------|---------------|-----------------------|
| EMI Receiver                         | R&S          | ESCI7     | 100768           | 9kHz~7GHz;                 | May 04, 2014     | Jun. 11, 2014 | May 03, 2015  | Conduction (CO01-KS)  |
| AC LISN                              | MessTec      | AN3016    | 060103           | 9kHz~30MHz                 | Dec. 10, 2013    | Jun. 11, 2014 | Dec. 09, 2014 | Conduction (CO01-KS)  |
| AC LISN<br>(for auxiliary equipment) | MessTec      | AN3016    | 060105           | 9kHz~30MHz                 | Dec. 10, 2013    | Jun. 11, 2014 | Dec. 09, 2014 | Conduction (CO01-KS)  |
| AC Power Source                      | Chroma       | 61602     | ABP0000008<br>11 | AC 0V~300V,<br>45Hz~1000Hz | Nov. 12, 2013    | Jun. 11, 2014 | Nov. 11, 2014 | Conduction (CO01-KS)  |
| EMI Test Receiver                    | R&S          | ESCI      | 100534           | 9kHz~3GHz                  | Nov. 05, 2013    | Jun. 11, 2014 | Nov. 04, 2014 | Radiation (03CH01-KS) |
| Spectrum Analyzer                    | R&S          | FSP40     | 100319           | 9kHz~40GHz                 | Dec. 28, 2013    | Jun. 11, 2014 | Dec. 27, 2014 | Radiation (03CH01-KS) |
| Bilog Antenna                        | SCHAFFNER    | CBL6112D  | 23182            | 25MHz~2GHz                 | Jan. 08, 2014    | Jun. 11, 2014 | Jan. 07, 2015 | Radiation (03CH01-KS) |
| Double Ridge Horn Antenna            | ETS-Lindgren | 3117      | 75959            | 1GHz~18GHz                 | Jan. 08, 2014    | Jun. 11, 2014 | Jan. 07, 2015 | Radiation (03CH01-KS) |
| Active Horn Antenna                  | com-power    | AHA-118   | 701030           | 1GHz~18GHz                 | Nov. 18, 2013    | Jun. 11, 2014 | Nov. 17, 2014 | Radiation (03CH01-KS) |
| SHF-EHF Horn                         | Schwarzbeck  | BBHA 9170 | BBHA170249       | 15GHz~40GHz                | Mar. 10, 2014    | Jun. 11, 2014 | Mar. 09, 2015 | Radiation (03CH01-KS) |
| Amplifier                            | com-power    | PA-103A   | 161073           | 1MHz~1GHz                  | May 04, 2014     | Jun. 11, 2014 | May 03, 2015  | Radiation (03CH01-KS) |
| Amplifier                            | Agilent      | 8449B     | 3008A02371       | 1GHz~26.5GHz               | Dec. 10, 2013    | Jun. 11, 2014 | Dec. 09, 2014 | Radiation (03CH01-KS) |
| AC Power Source                      | Chroma       | 61601     | F104090004       | N/A                        | NCR              | Jun. 11, 2014 | NCR           | Radiation (03CH01-KS) |
| Turn Table                           | MF           | MF7802    | N/A              | 0~360 degree               | NCR              | Jun. 11, 2014 | NCR           | Radiation (03CH01-KS) |
| Antenna Mast                         | MF           | MF7802    | N/A              | 1 m~4 m                    | NCR              | Jun. 11, 2014 | NCR           | Radiation (03CH01-KS) |

## 5. Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

|                                                                          |     |
|--------------------------------------------------------------------------|-----|
| Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2U_c(y)$ ) | 2.3 |
|--------------------------------------------------------------------------|-----|

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

|                                                                          |     |
|--------------------------------------------------------------------------|-----|
| Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2U_c(y)$ ) | 2.5 |
|--------------------------------------------------------------------------|-----|