

FCC RF Test Report


APPLICANT : ZTE CORPORATION
EQUIPMENT : GSM (GPRS) Dual-Mode Digital
Mobile Phone
BRAND NAME : ZTE
MODEL NAME : ZTE R28
FCC ID : SRQ-ZTER28
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DSS) Spread Spectrum Transmitter

The product was received on Aug. 19, 2014 and testing was completed on Sep. 22, 2014. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.



Reviewed by: Joseph Lin / Supervisor



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION.....	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification subjective to this standard	6
1.5 Modification of EUT	6
1.6 Testing Location	6
1.7 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	7
2.1 Descriptions of Test Mode	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	11
3 TEST RESULT	12
3.1 Number of Channel Measurement	12
3.2 Hopping Channel Separation Measurement	14
3.3 Dwell Time Measurement.....	21
3.4 20dB Bandwidth Measurement	24
3.5 Peak Output Power Measurement	31
3.6 Conducted Band Edges Measurement	33
3.7 Conducted Spurious Emission Measurement	40
3.8 Radiated Band Edges and Spurious Emission Measurement	50
3.9 AC Conducted Emission Measurement.....	63
3.10 Antenna Requirements.....	67
4 LIST OF MEASURING EQUIPMENT.....	68
5 UNCERTAINTY OF EVALUATION.....	69
APPENDIX A. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR481902	Rev. 01	Initial issue of report	Sep. 24, 2014

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)	Number of Channels	$\geq 15\text{Chs}$	Pass	-
3.2	15.247(a)(1)	Hopping Channel Separation	$\geq 2/3$ of 20dB BW	Pass	-
3.3	15.247(a)(1)	Dwell Time of Each Channel	$\leq 0.4\text{sec}$ in 31.6sec period	Pass	-
3.4	15.247(a)(1)	20dB Bandwidth	NA	Pass	-
3.5	15.247(b)(1)	Peak Output Power	$\leq 125\text{ mW}$	Pass	-
3.6	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
3.7	15.247(d)	Conducted Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.8	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 1.82 dB at 2483.530 MHz
3.9	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 6.61 dB at 1.640 MHz
3.10	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.2 Manufacturer

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	GSM (GPRS) Dual-Mode Digital Mobile Phone
Brand Name	ZTE
Model Name	ZTE R28
FCC ID	SRQ-ZTER28
EUT supports Radios application	GSM/GPRS/Bluetooth v3.0 + EDR
HW Version	V1.3
SW Version	ZTE R28-MTK6260-V20a-20140910-Vodafone-DE
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	79
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78
Maximum Output Power to Antenna	Bluetooth BR(1Mbps) : 7.88 dBm (0.00614 W) Bluetooth EDR (2Mbps) : 7.25 dBm (0.00531 W) Bluetooth EDR (3Mbps) : 7.36 dBm (0.00545 W)
Antenna Type	Dipole Antenna with gain 1 dBi
Type of Modulation	Bluetooth BR (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth EDR (3Mbps) : 8-DPSK

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.			
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C. TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958			
Test Site No.	Sporton Site No.			FCC Registration No.
	TH01-KS	03CH01-KS	CO01-KS	149928

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC Public Notice DA 00-705
- ♦ ANSI C63.4-2003

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

2.1 Descriptions of Test Mode

Preliminary tests were performed in different data rates and recorded the RF output power in the following table:

Channel	Frequency	Bluetooth RF Output Power		
		Data Rate / Modulation		
		GFSK	$\pi/4$ -DQPSK	8-DPSK
		1Mbps	2Mbps	3Mbps
Ch00	2402MHz	7.28 dBm	6.61 dBm	6.85 dBm
Ch39	2441MHz	7.72 dBm	7.12 dBm	7.36 dBm
Ch78	2480MHz	7.88 dBm	7.25 dBm	7.14 dBm

Remark:

1. All the test data for each data rate were verified, but only the worst case was reported.
 2. The data rate was set in 1Mbps for all the test items due to the highest RF output power.
- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). Pre-scanned tests, X, Y, Z in three orthogonal panels, and different data rates were conducted to determine the final configuration (X plane as worst plane) from all possible combinations, and the worst mode of radiated spurious emissions is Bluetooth 1Mbps mode, and recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.


2.2 Test Mode

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth BR 1Mbps GFSK	Bluetooth EDR 2Mbps $\pi/4$ -DQPSK	Bluetooth EDR 3Mbps 8-DPSK
Conducted Test Cases	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz	Mode 4: CH00_2402 MHz Mode 5: CH39_2441 MHz Mode 6: CH78_2480 MHz	Mode 7: CH00_2402 MHz Mode 8: CH39_2441 MHz Mode 9: CH78_2480 MHz
Radiated Test Cases	Bluetooth BR 1Mbps GFSK		
	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz		
AC Conducted Emission	Mode 1 :GSM850 Idle + Bluetooth Link + Earphone + USB Cable (Charging from Adapter)		
Remark:			
1. For radiated test cases, the worst mode data rate 1Mbps was reported only, because this data rate has the highest RF output power at preliminary tests , and no other significantly frequencies found in conducted spurious emission.			
2. For Radiated Test Cases, The tests were performance with Adapter, Earphone, and USB Cable.			

2.3 Connection Diagram of Test System

<Bluetooth Tx Mode>

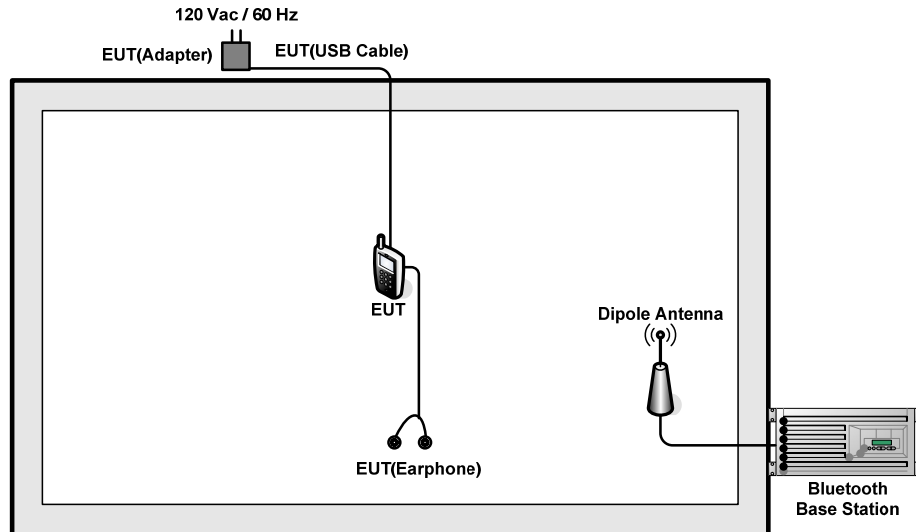

<AC Conducted Emission Mode>

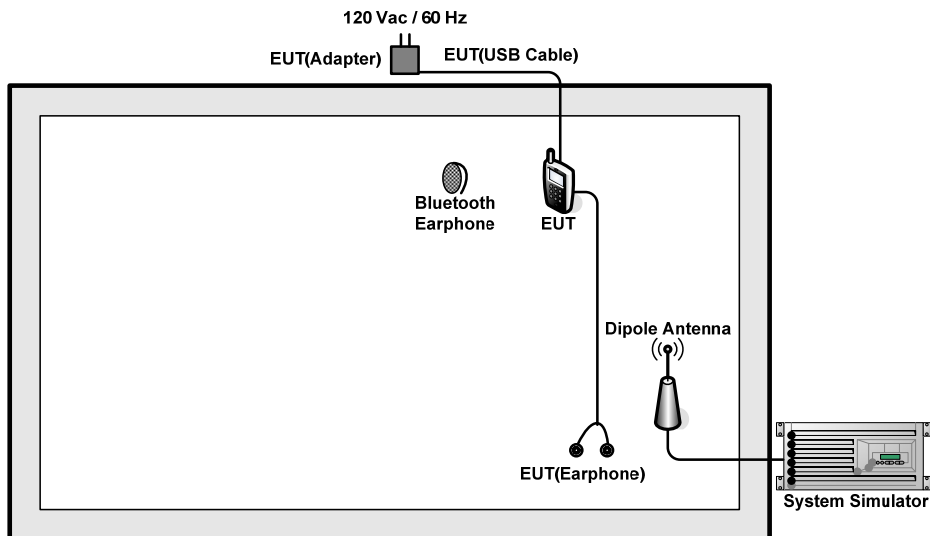



2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	Bluetooth Base Station	R&S	CBT	N/A	N/A	Unshielded, 1.8 m
3.	Bluetooth Earphone	Lenovo	LBH505	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For Bluetooth function, the engineering test program was provided and enabled to make EUT connect with Bluetooth base station to continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 6.0 dB.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} \\ &= 6.0 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation; RBW $\geq$ 1% of the span; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.

3.1.4 Test Setup

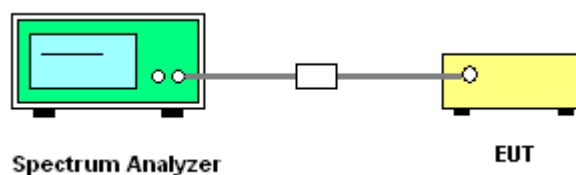


3.1.5 Test Result of Number of Hopping Frequency


Test Mode :	1Mbps	Temperature :	24~25°C
Test Engineer :	Issac Wang	Relative Humidity :	49~51%
Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
79	20	> 15	Pass



Number of Hopping Channel Plot on Channel 00 - 78

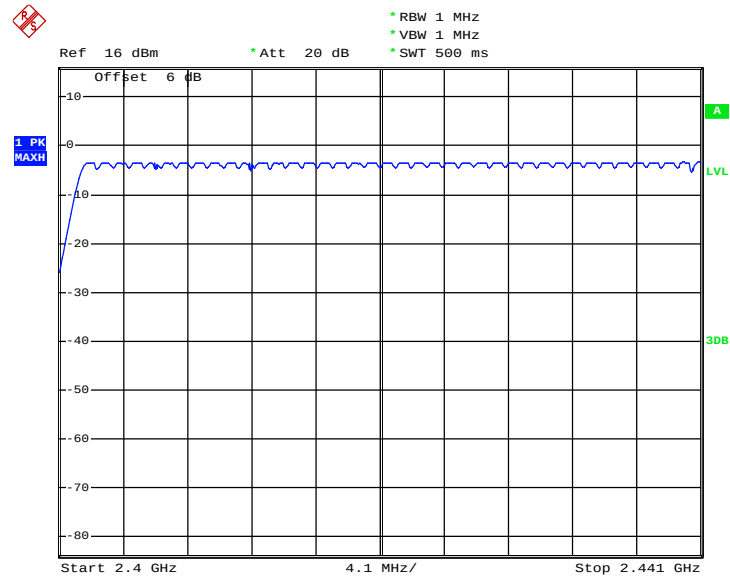

Date: 9.SEP.2014 16:43:32

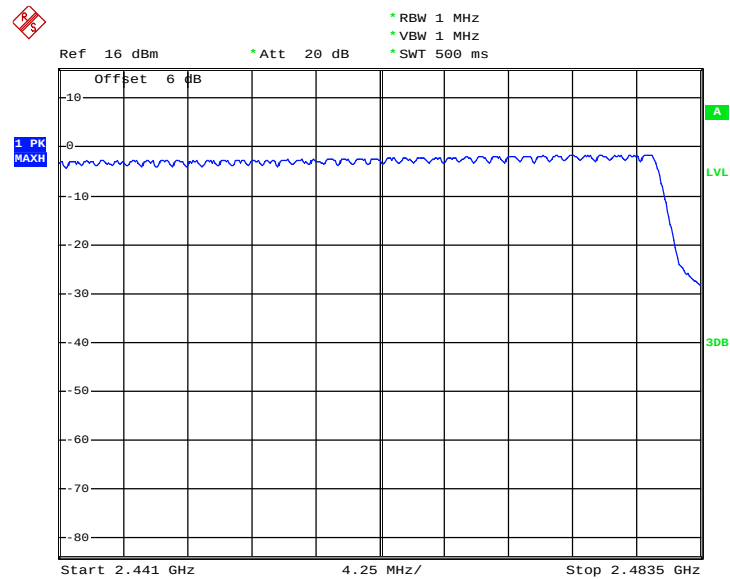

Date: 9.SEP.2014 16:37:21

3.2 Hopping Channel Separation Measurement

3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels; $RBW \geq 1\%$ of the span;
 $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.2.4 Test Setup

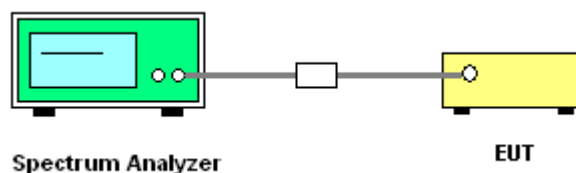




3.2.5 Test Result of Hopping Channel Separation

Test Mode :	1Mbps	Temperature :	24~25°C
Test Engineer :	Issac Wang	Relative Humidity :	49~51%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.6480	Pass
39	2441	1.002	0.6440	Pass
78	2480	1.008	0.6960	Pass


Channel Separation Plot on Channel 00 - 01

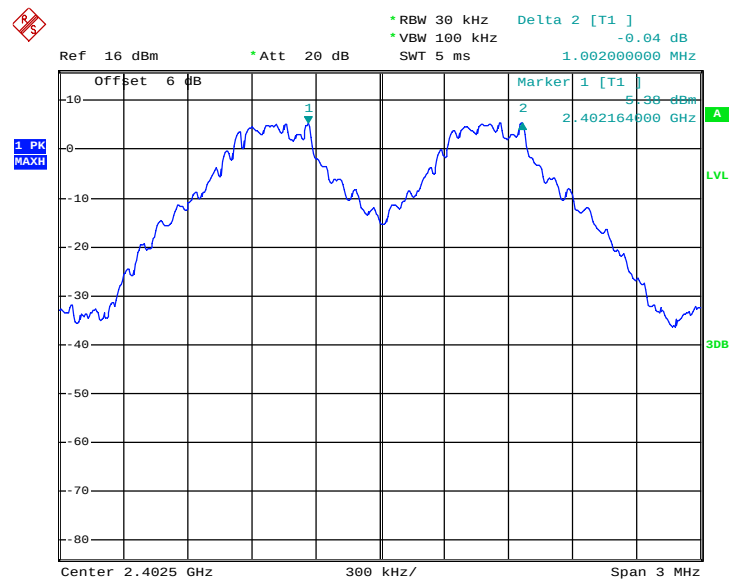

Date: 9.SEP.2014 12:27:13




Channel Separation Plot on Channel 39 - 40

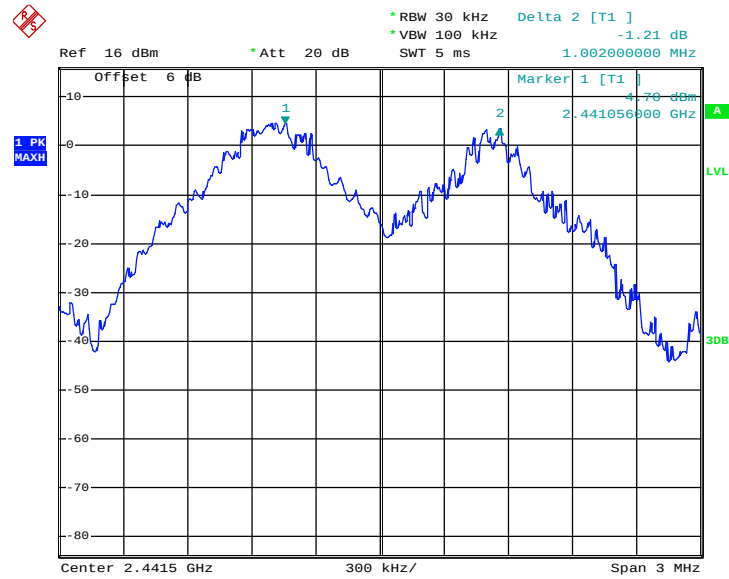

Date: 9.SEP.2014 12:32:38

Channel Separation Plot on Channel 77 - 78

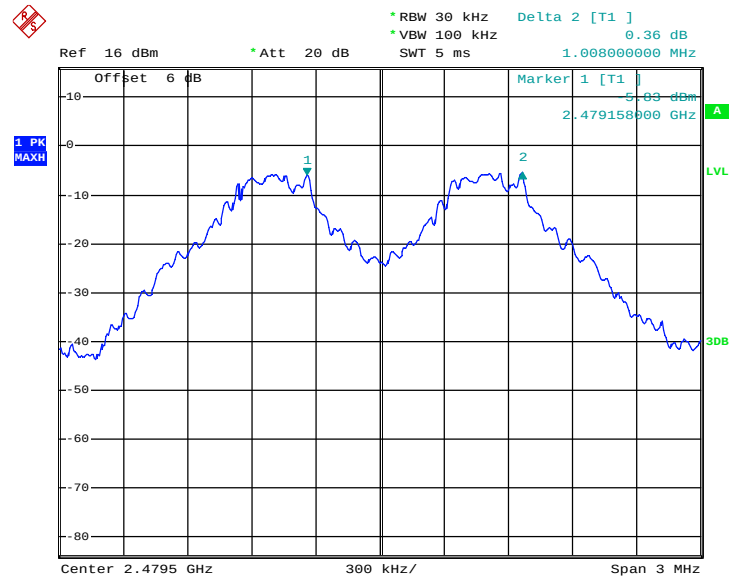


Date: 9.SEP.2014 12:36:49



Test Mode :	2Mbps	Temperature :	24~25°C
Test Engineer :	Issac Wang	Relative Humidity :	49~51%


Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.8400	Pass
39	2441	1.008	0.8360	Pass
78	2480	1.002	0.8360	Pass

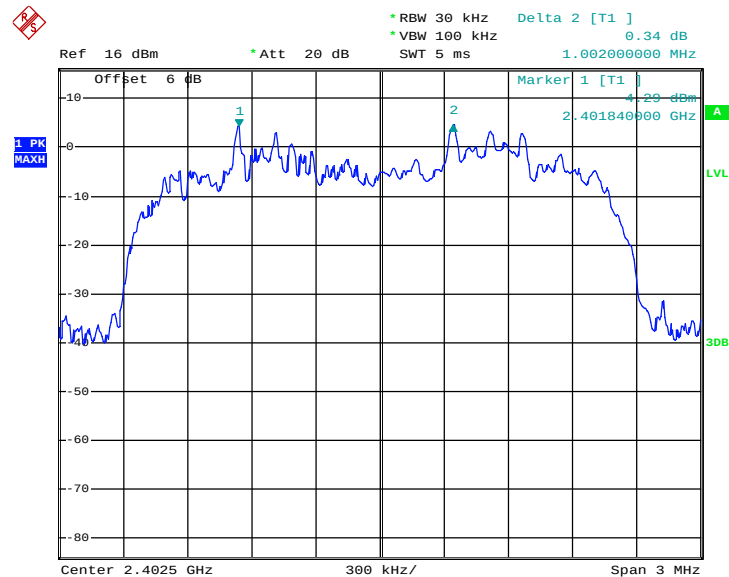Channel Separation Plot on Channel 00 - 01

Date: 9.SEP.2014 12:51:51




Channel Separation Plot on Channel 39 - 40

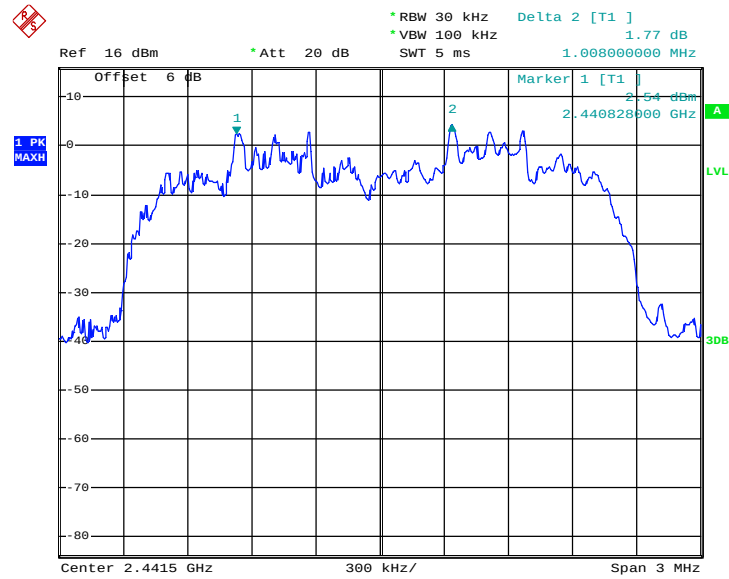

Date: 9.SEP.2014 12:44:06

Channel Separation Plot on Channel 77 - 78

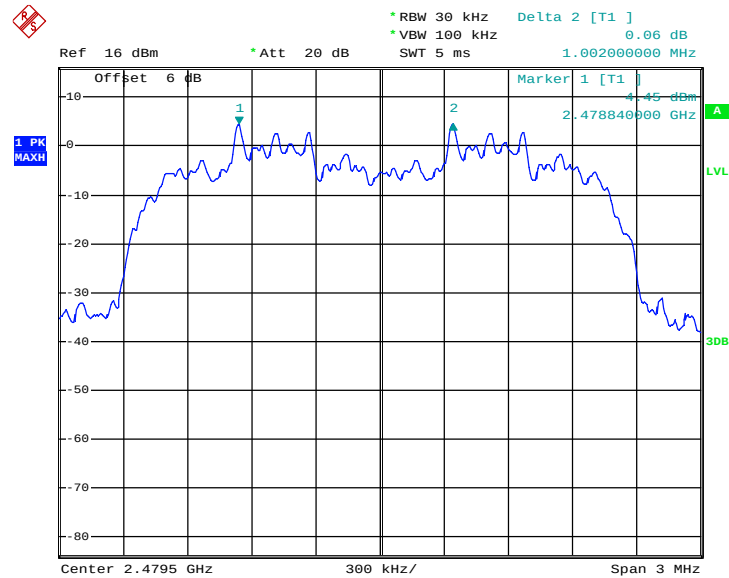


Date: 9.SEP.2014 12:38:19



Test Mode :	3Mbps	Temperature :	24~25°C
Test Engineer :	Issac Wang	Relative Humidity :	49~51%


Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.8440	Pass
39	2441	1.002	0.8440	Pass
78	2480	1.002	0.8440	Pass

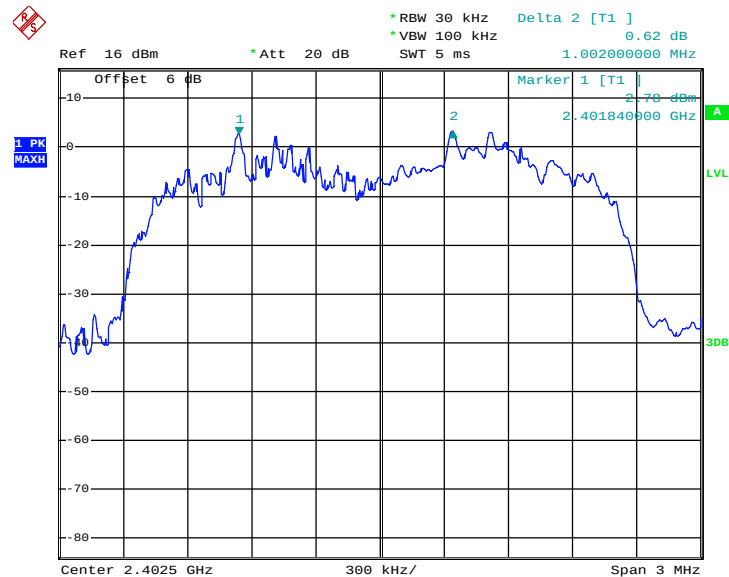Channel Separation Plot on Channel 00 - 01

Date: 9.SEP.2014 12:55:11




Channel Separation Plot on Channel 39 - 40

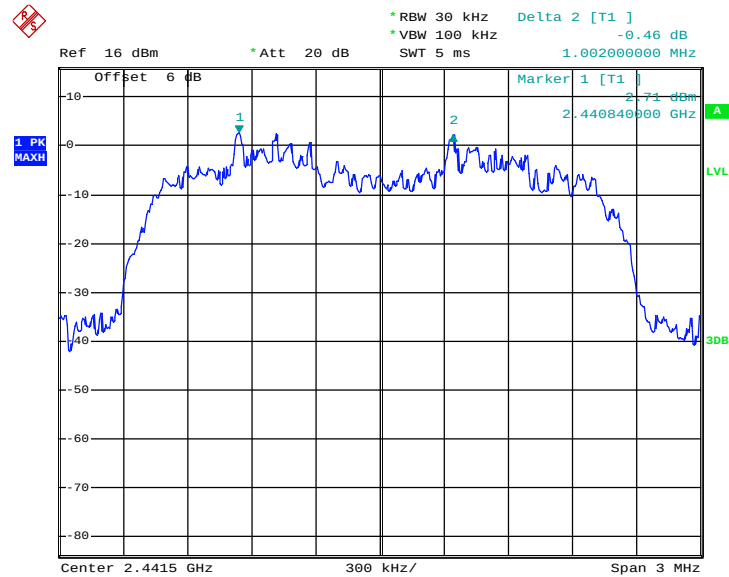

Date: 9.SEP.2014 13:00:47

Channel Separation Plot on Channel 77 - 78

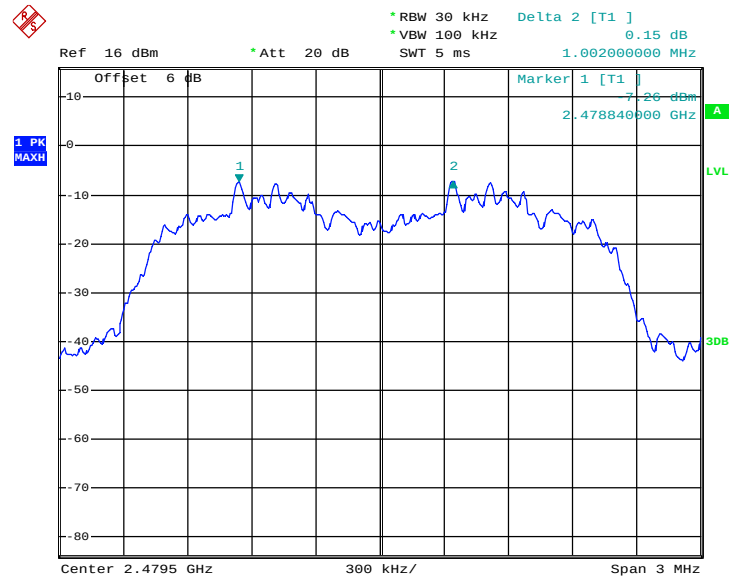

Date: 9.SEP.2014 13:02:07

3.3 Dwell Time Measurement

3.3.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW $\geq$ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.3.4 Test Setup

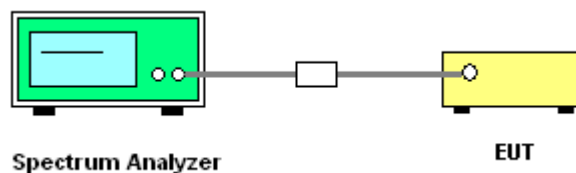

3.3.5 Test Result of Dwell Time

Test Mode :	DH5	Temperature :	24~25℃
Test Engineer :	Issac Wang	Relative Humidity :	49~51%


Mode	Hopping Channel Number	Hops Over Occupancy Time(hops)	Package Transfer Time (msec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Normal	79	106.67	2.898	0.31	0.4	Pass
AFH	20	53.33	2.898	0.15	0.4	Pass

Remark:

1. In normal mode, hopping rate is 1600 hops/s with 6 slots in 79 hopping channels.
With channel hopping rate $(1600 / 6 / 79)$ in Occupancy Time Limit (0.4×79) (s),
Hops Over Occupancy Time comes to $(1600 / 6 / 79) \times (0.4 \times 79) = 106.67$ hops.
2. In AFH mode, hopping rate is 800 hops/s with 6 slots in 20 hopping channels.
With channel hopping rate $(800 / 6 / 20)$ in Occupancy Time Limit (0.4×20) (s),
Hops Over Occupancy Time comes to $(800 / 6 / 20) \times (0.4 \times 20) = 53.33$ hops.
3. Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time



Package Transfer Time Plot

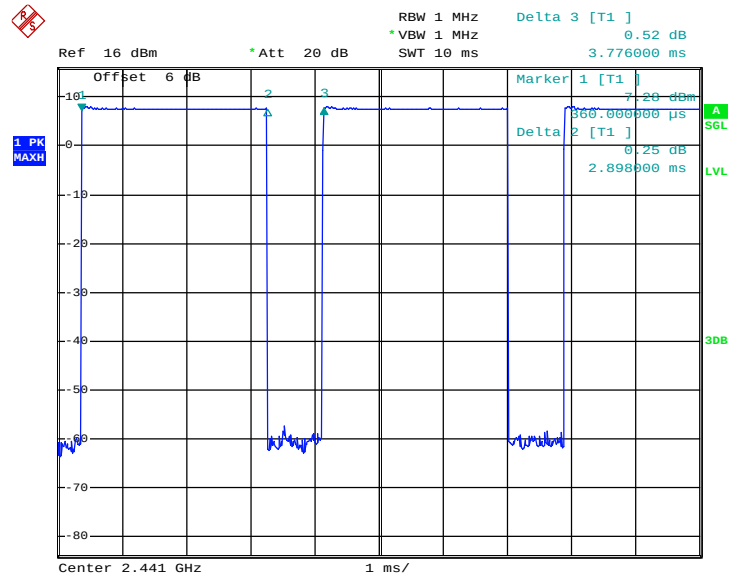

Date: 4.SEP.2014 02:03:52

3.4 20dB Bandwidth Measurement

3.4.1 Limit of 20dB Bandwidth

Reporting only


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel;
RBW $\geq$ 1% of the 20 dB bandwidth; VBW $\geq$ RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
5. Measure and record the results in the test report.

3.4.4 Test Setup

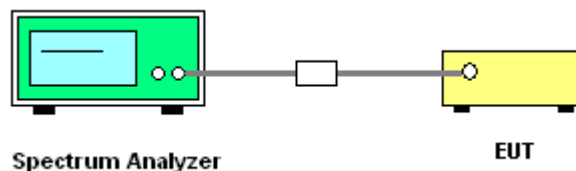




3.4.5 Test Result of 20dB Bandwidth

Test Mode :	1Mbps	Temperature :	24~25°C
Test Engineer :	Issac Wang	Relative Humidity :	49~51%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	0.964
39	2441	0.964
78	2480	0.968


20 dB Bandwidth Plot on Channel 00

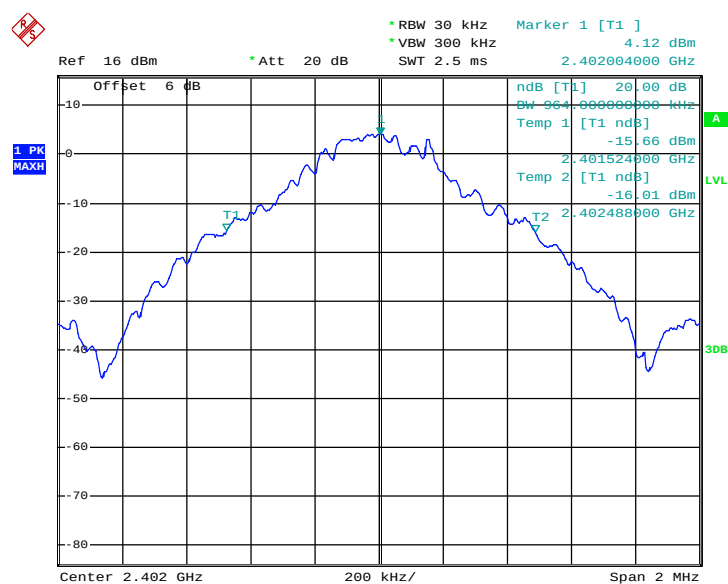

Date: 10.SEP.2014 02:17:26




20 dB Bandwidth Plot on Channel 39

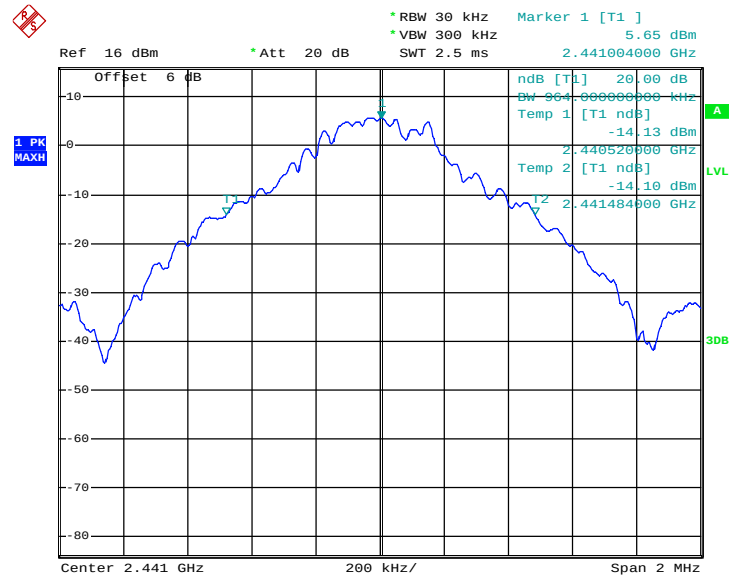

Date: 10.SEP.2014 02:17:48

20 dB Bandwidth Plot on Channel 78

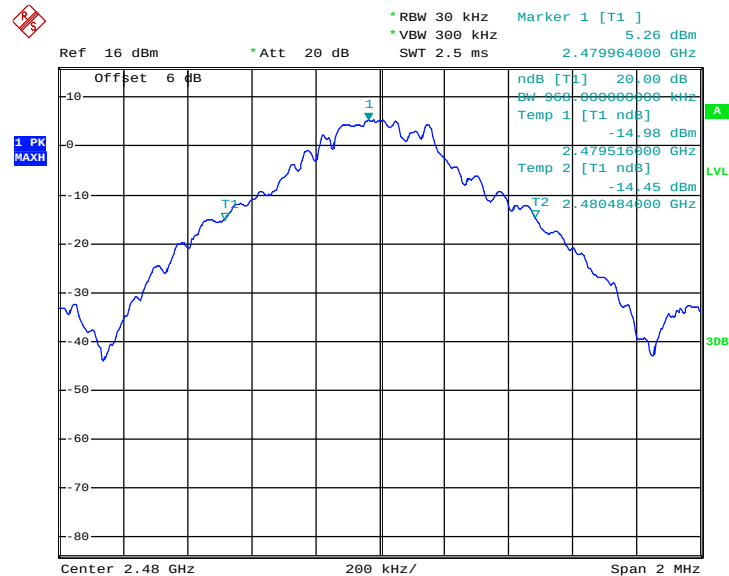


Date: 10.SEP.2014 02:18:15



Test Mode :	2Mbps	Temperature :	24~25°C
Test Engineer :	Issac Wang	Relative Humidity :	49~51%


Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.260
39	2441	1.254
78	2480	1.254

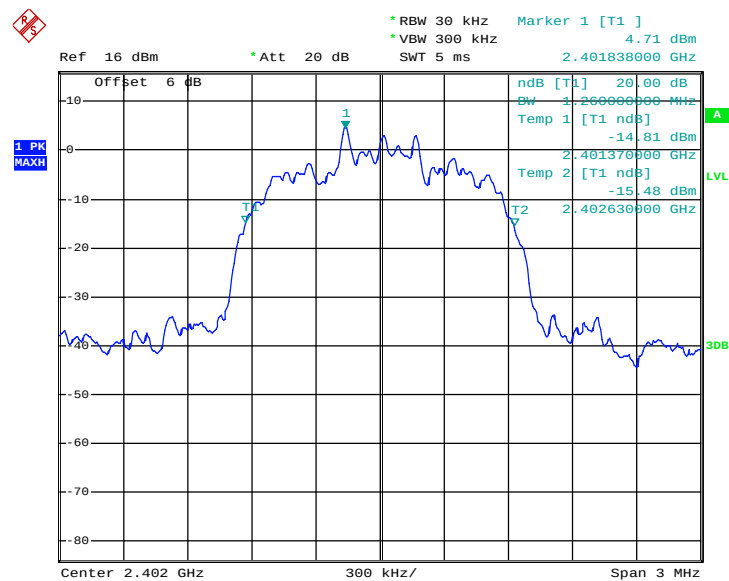20 dB Bandwidth Plot on Channel 00

Date: 9.SEP.2014 11:17:41




20 dB Bandwidth Plot on Channel 39

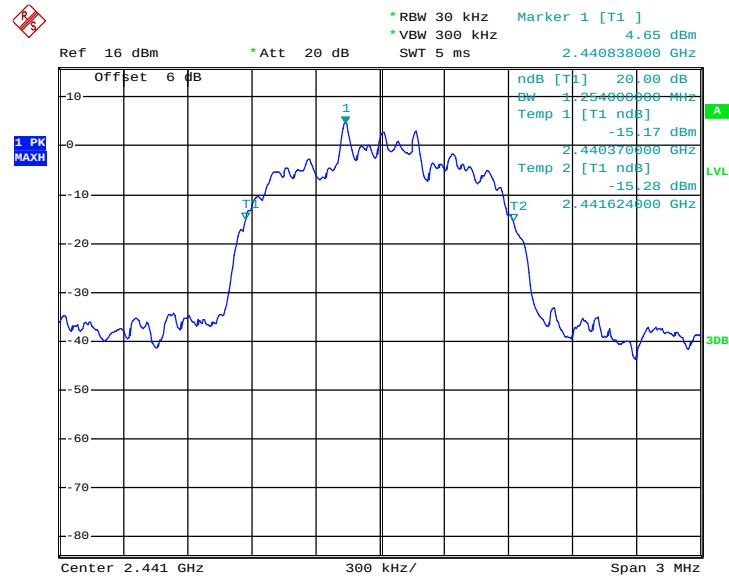

Date: 9.SEP.2014 11:18:34

20 dB Bandwidth Plot on Channel 78

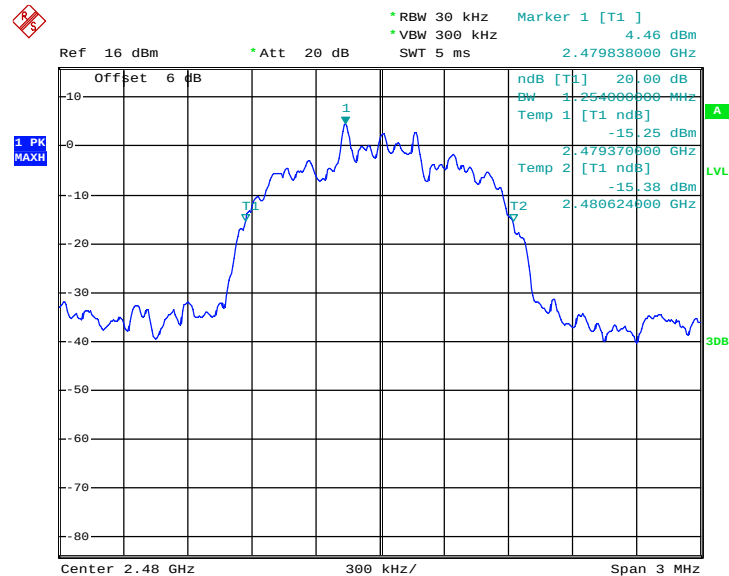


Date: 9.SEP.2014 11:19:32



Test Mode :	3Mbps	Temperature :	24~25°C
Test Engineer :	Issac Wang	Relative Humidity :	49~51%


Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.266
39	2441	1.266
78	2480	1.266

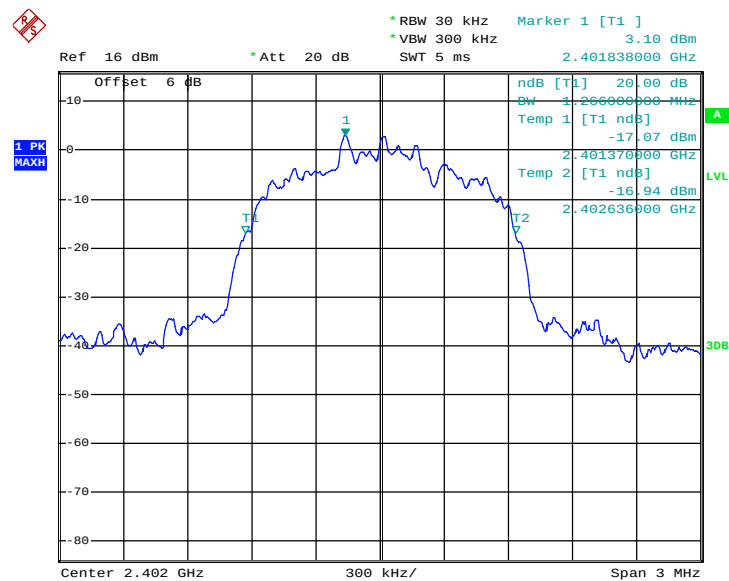20 dB Bandwidth Plot on Channel 00

Date: 9.SEP.2014 11:16:27




20 dB Bandwidth Plot on Channel 39

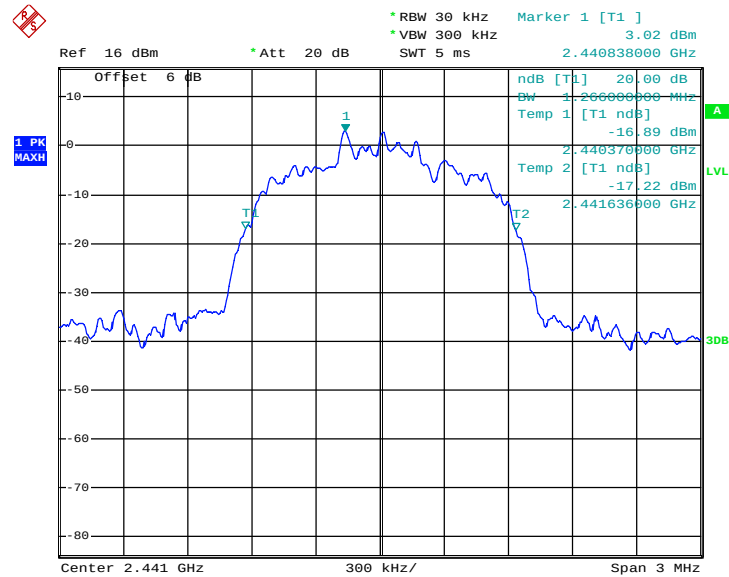

Date: 9.SEP.2014 11:15:30

20 dB Bandwidth Plot on Channel 78

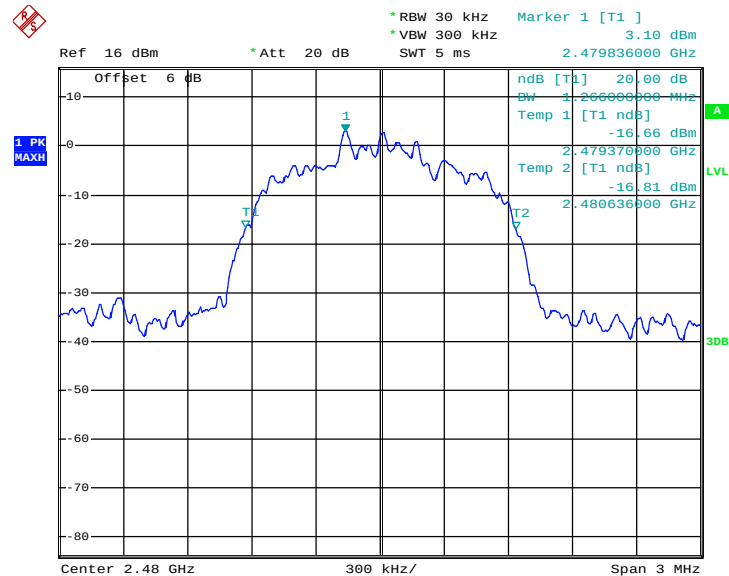

Date: 9.SEP.2014 11:14:08

3.5 Peak Output Power Measurement

3.5.1 Limit of Peak Output Power

Section 15.247 (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

3.5.4 Test Setup

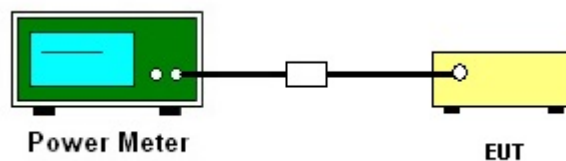

3.5.5 Test Result of Peak Output Power

Test Mode :	1Mbps	Temperature :	24~25°C
Test Engineer :	Issac Wang	Relative Humidity :	49~51%

Channel	Frequency (MHz)	RF Power (dBm)		
		GFSK	Max. Limits (dBm)	Pass/Fail
		1 Mbps		
00	2402	7.28	20.97	Pass
39	2441	7.72	20.97	Pass
78	2480	7.88	20.97	Pass

Test Mode :	2Mbps	Temperature :	24~25°C
Test Engineer :	Issac Wang	Relative Humidity :	49~51%

Channel	Frequency (MHz)	RF Power (dBm)		
		$\pi/4$ -DQPSK	Max. Limits (dBm)	Pass/Fail
		2 Mbps		
00	2402	6.61	20.97	Pass
39	2441	7.12	20.97	Pass
78	2480	7.25	20.97	Pass

Test Mode :	3Mbps	Temperature :	24~25°C
Test Engineer :	Issac Wang	Relative Humidity :	49~51%

Channel	Frequency (MHz)	RF Power (dBm)		
		8-DPSK	Max. Limits (dBm)	Pass/Fail
		3 Mbps		
00	2402	6.85	20.97	Pass
39	2441	7.36	20.97	Pass
78	2480	7.14	20.97	Pass

3.6 Conducted Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The testing follows the guidelines in Band-edge Compliance of RF Conducted Emissions of FCC Public Notice DA 00-705 Measurement Guidelines.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 100kHz ($\geq 1\%$ span=10MHz), VBW = 300kHz ($\geq$ RBW). Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2. and 3.
5. Measure and record the results in the test report.

3.6.4 Test Setup

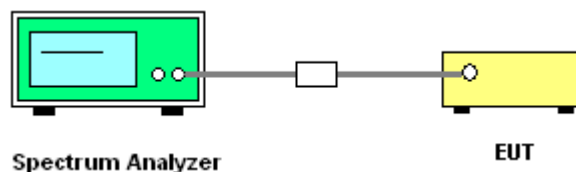




3.6.5 Test Result of Conducted Band Edges


Test Mode :	1Mbps	Temperature :	24~25°C
Test Channel :	00 and 78	Relative Humidity :	49~51%
		Test Engineer :	Issac Wang

Low Band Edge Plot on Channel 00

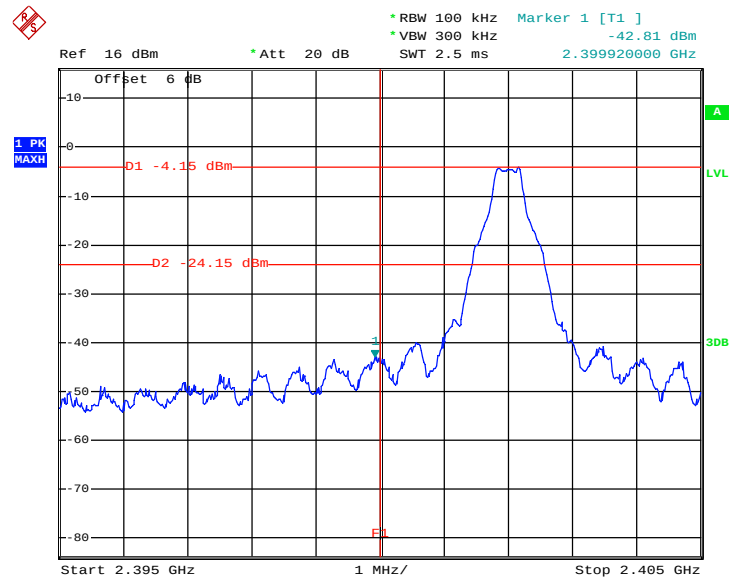

Date: 9.SEP.2014 11:55:23


High Band Edge Plot on Channel 78

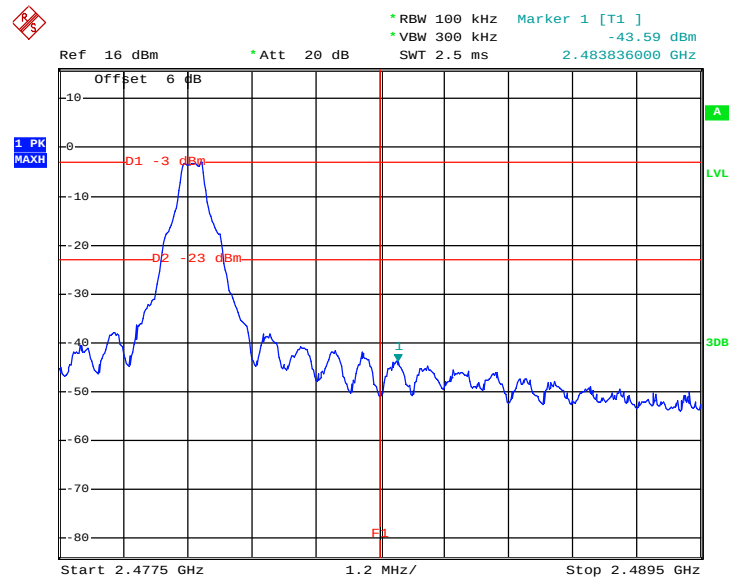


Date: 9.SEP.2014 12:00:09



Test Mode :	2Mbps	Temperature :	24~25°C
Test Channel :	00 and 78	Relative Humidity :	49~51%
		Test Engineer :	Issac Wang

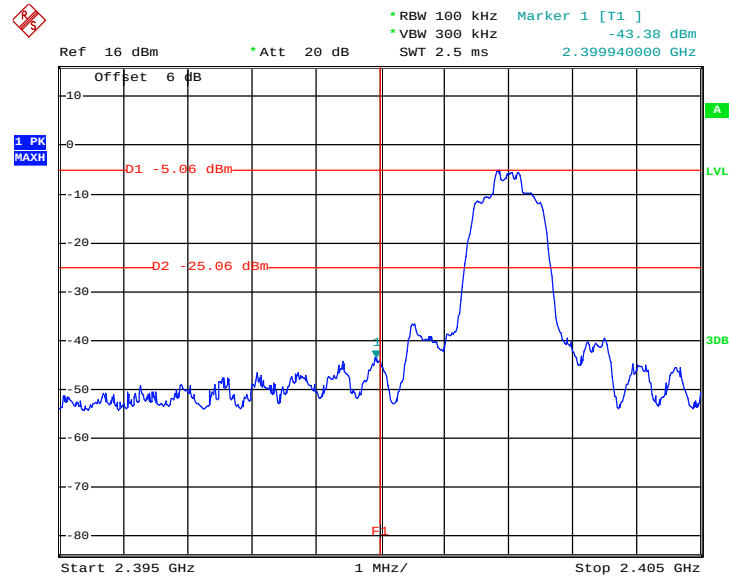Low Band Edge Plot on Channel 00


Date: 9.SEP.2014 12:10:20

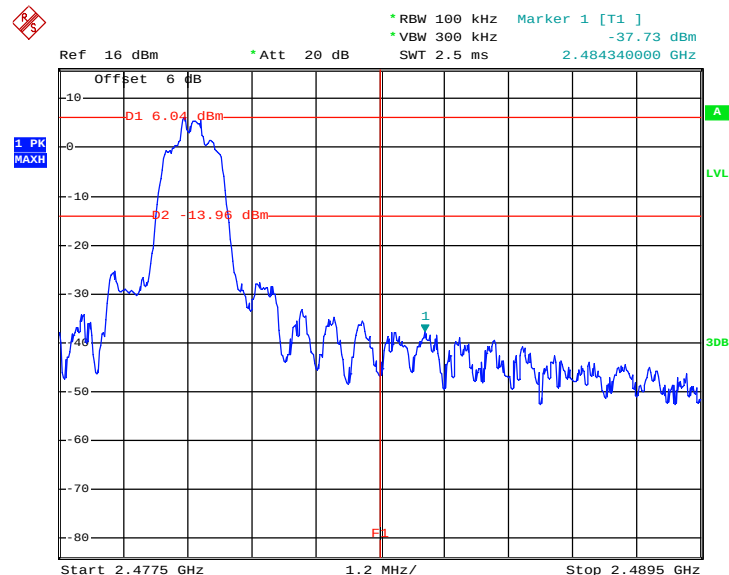High Band Edge Plot on Channel 78


Date: 9.SEP.2014 12:06:33



Test Mode :	3Mbps	Temperature :	24~25°C
Test Channel :	00 and 78	Relative Humidity :	49~51%
		Test Engineer :	Issac Wang

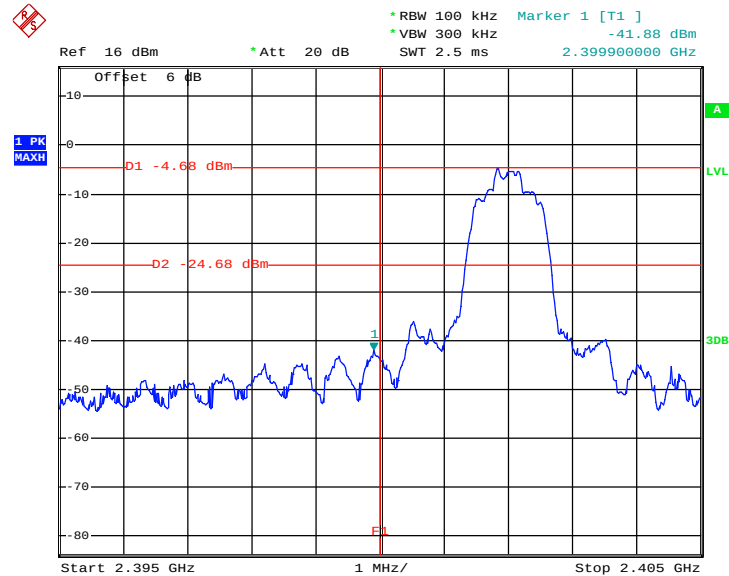Low Band Edge Plot on Channel 00

Date: 9.SEP.2014 12:18:25

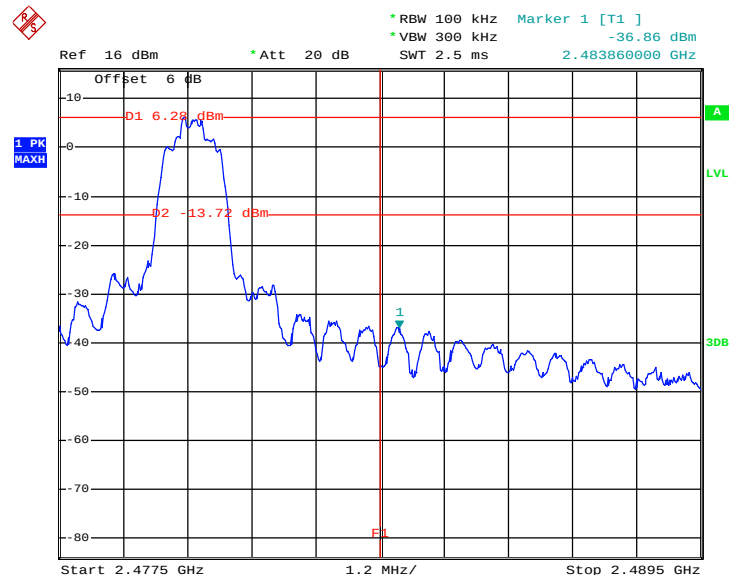
High Band Edge Plot on Channel 78

Date: 9.SEP.2014 12:15:33

3.6.6 Test Result of Conducted Hopping Mode Band Edges


Test Mode :	1Mbps	Temperature :	24~25℃
Test Engineer :	Issac Wang	Relative Humidity :	49~51%

1Mbps Hopping Mode Low Band Edge Plot

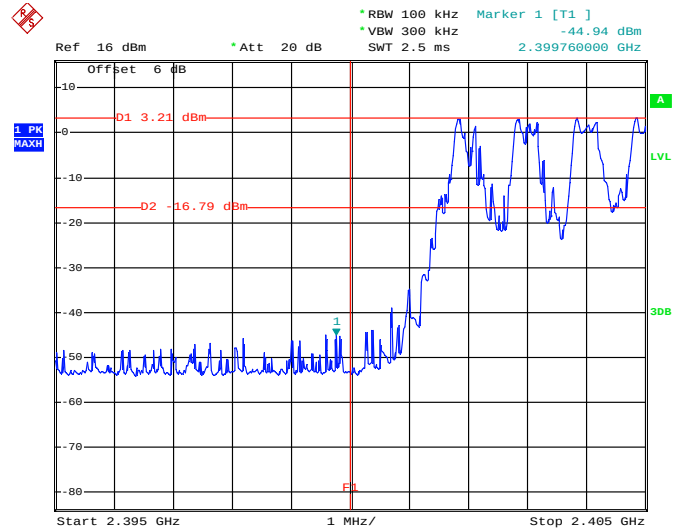

Date: 22.SEP.2014 19:29:10


1Mbps Hopping Mode High Band Edge Plot

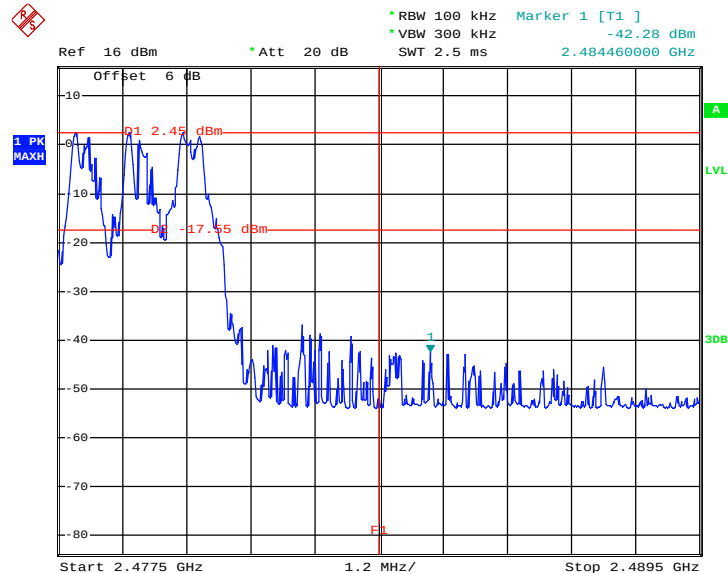


Date: 22.SEP.2014 19:45:14



Test Mode :	2Mbps	Temperature :	24~25°C
Test Engineer :	Issac Wang	Relative Humidity :	49~51%

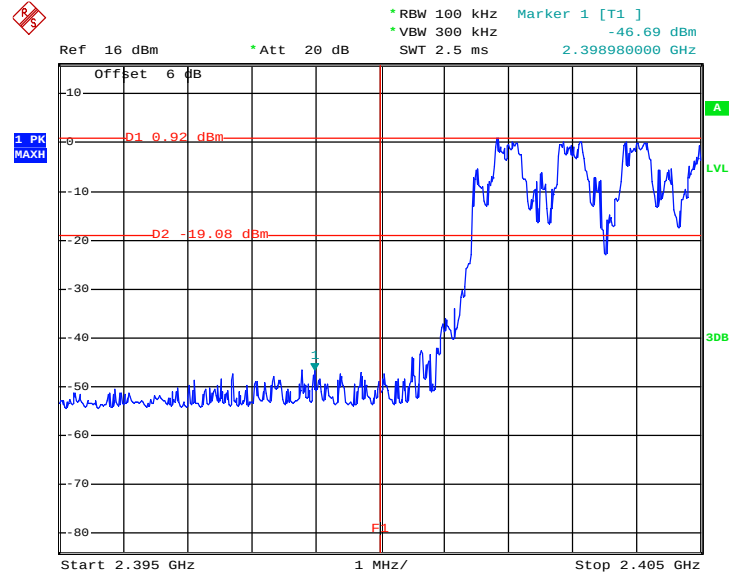2Mbps Hopping Mode Low Band Edge Plot


Date: 22.SEP.2014 20:02:51

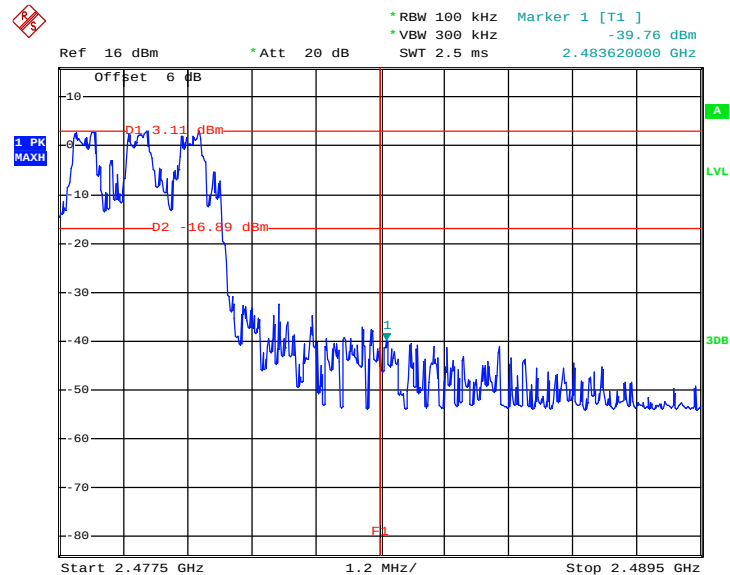2Mbps Hopping Mode High Band Edge Plot


Date: 22.SEP.2014 19:41:38



Test Mode :	3Mbps	Temperature :	24~25°C
Test Engineer :	Issac Wang	Relative Humidity :	49~51%

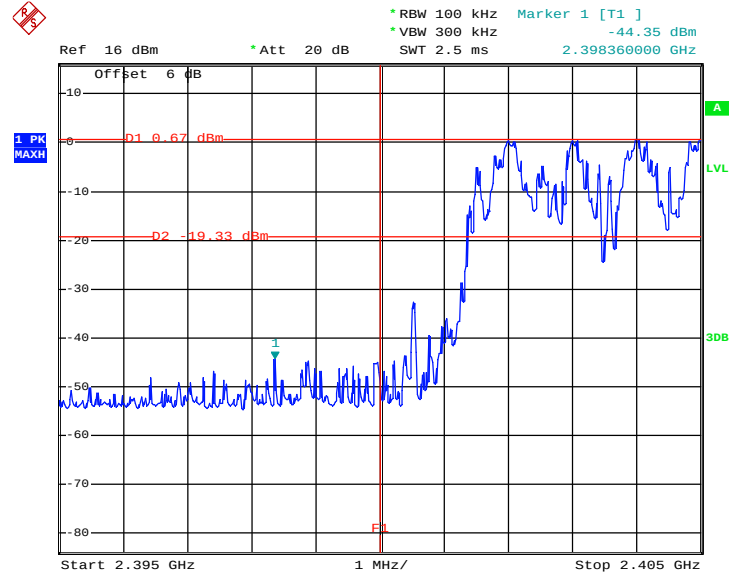3Mbps Hopping Mode Low Band Edge Plot

Date: 22.SEP.2014 19:58:51

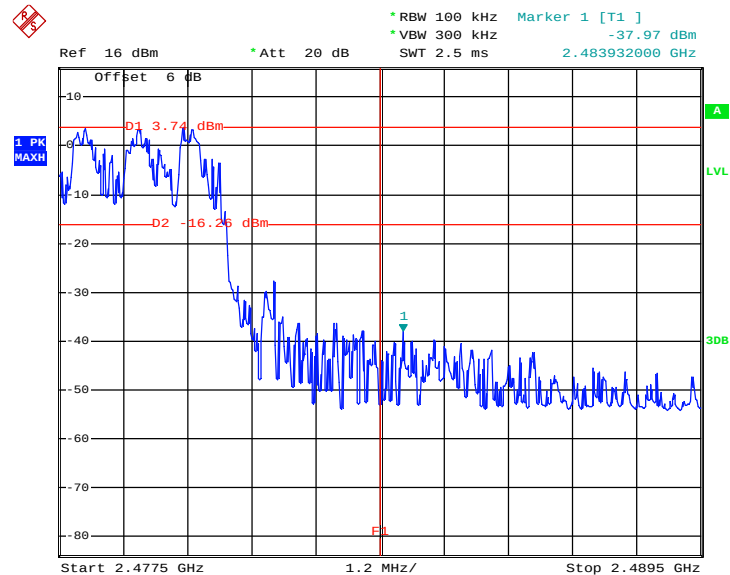3Mbps Hopping Mode High Band Edge Plot

Date: 22.SEP.2014 19:55:32

3.7 Conducted Spurious Emission Measurement

3.7.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Procedure

1. The testing follows the guidelines in Spurious RF Conducted Emissions of FCC Public Notice DA 00-705 Measurement Guidelines
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.7.4 Test Setup

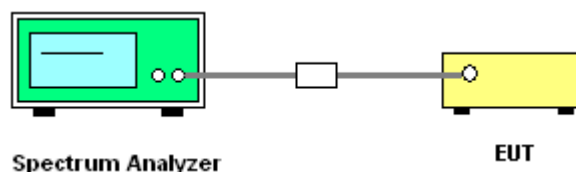




3.7.5 Test Result of Conducted Spurious Emission


Test Mode :	1Mbps	Temperature :	24~25°C
Test Channel :	00	Relative Humidity :	49~51%
		Test Engineer :	Issac Wang

1Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz

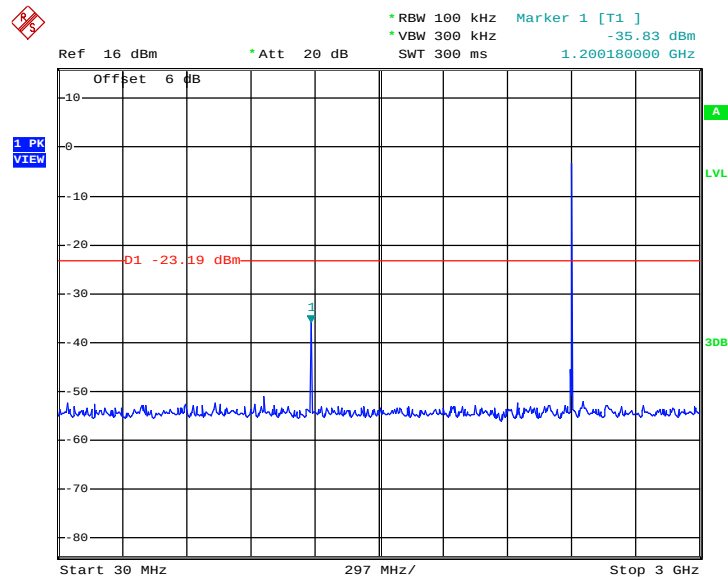

Date: 9.SEP.2014 15:10:47


1Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

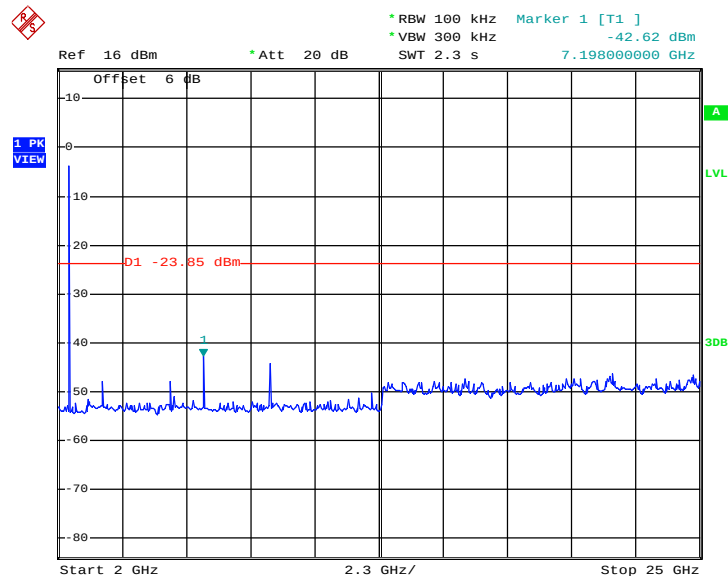


Date: 9.SEP.2014 15:12:16



Test Mode :	1Mbps	Temperature :	24~25°C
Test Channel :	39	Relative Humidity :	49~51%
		Test Engineer :	Issac Wang

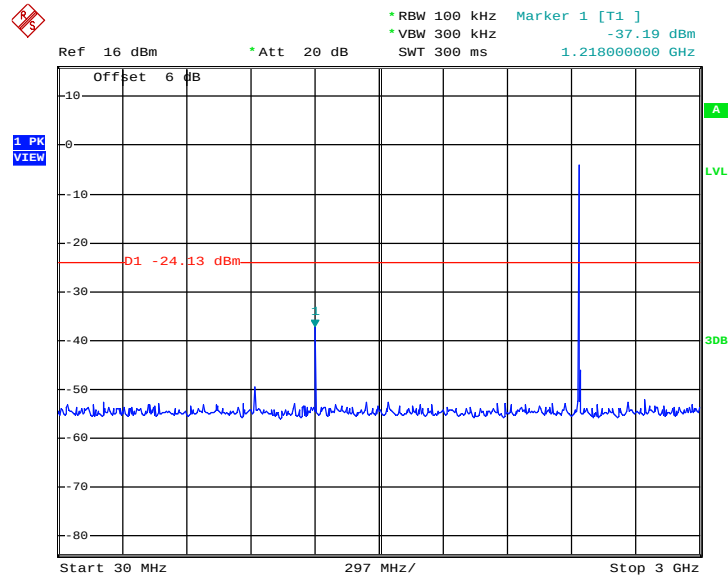1Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz


Date: 9.SEP.2014 15:15:46

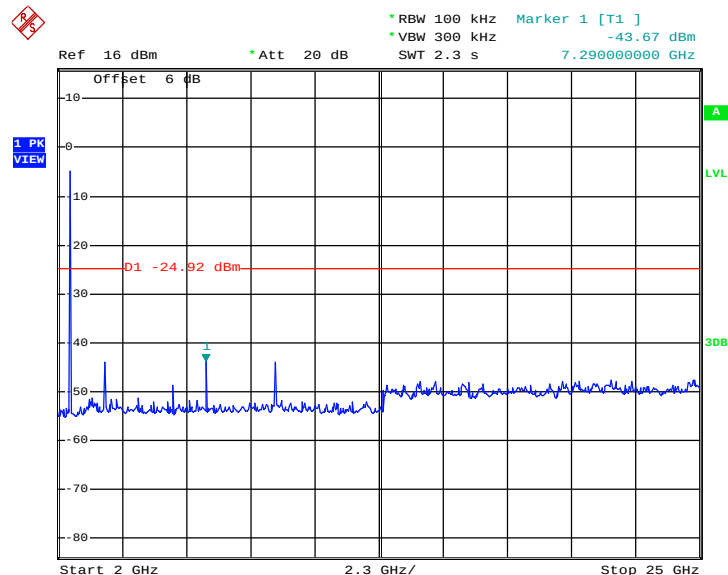1Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz


Date: 9.SEP.2014 15:14:10



Test Mode :	1Mbps	Temperature :	24~25°C
Test Channel :	78	Relative Humidity :	49~51%
		Test Engineer :	Issac Wang

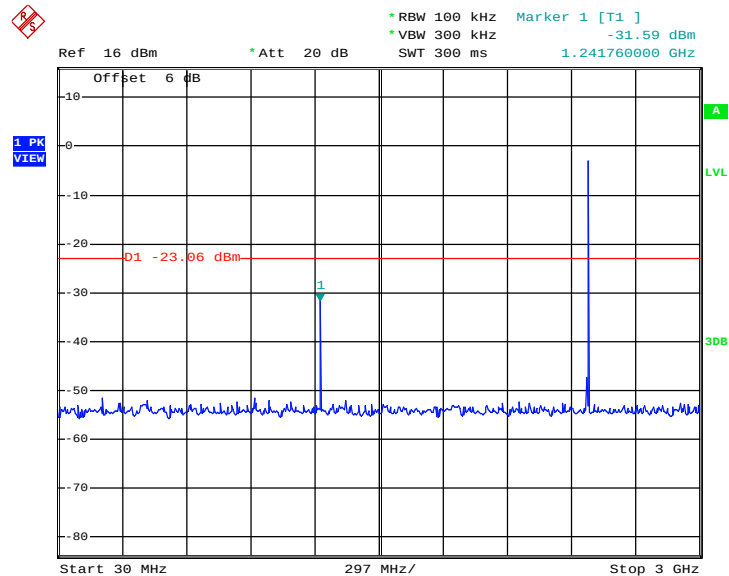1Mbps CSE Plot on Ch 78 between 30MHz ~ 3 GHz


Date: 9.SEP.2014 15:19:06

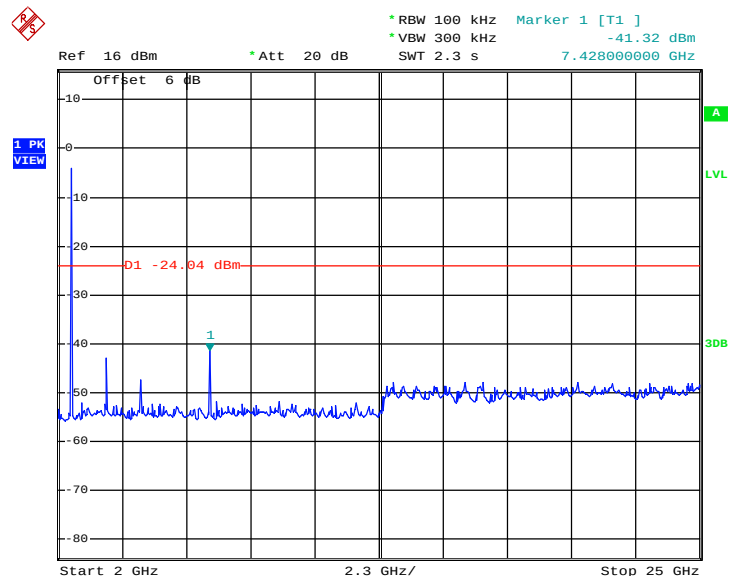1Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz


Date: 9.SEP.2014 15:21:36



Test Mode :	2Mbps	Temperature :	24~25°C
Test Channel :	00	Relative Humidity :	49~51%
		Test Engineer :	Issac Wang

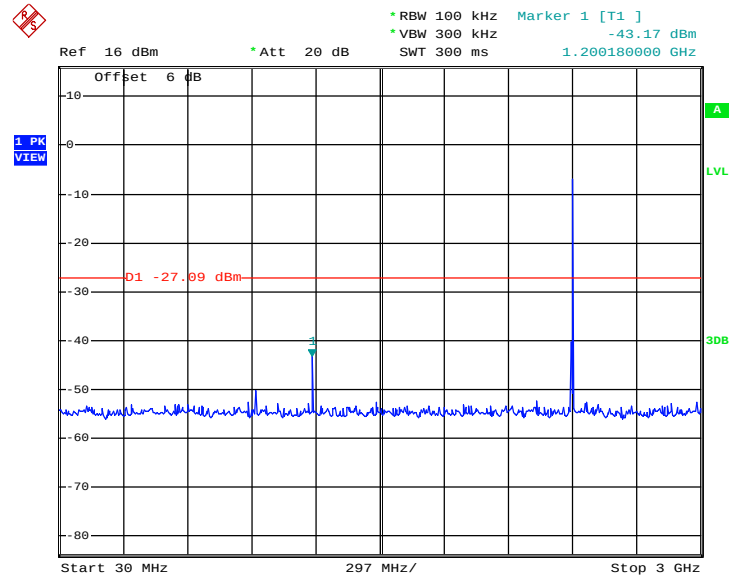2Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz


Date: 9.SEP.2014 14:56:08

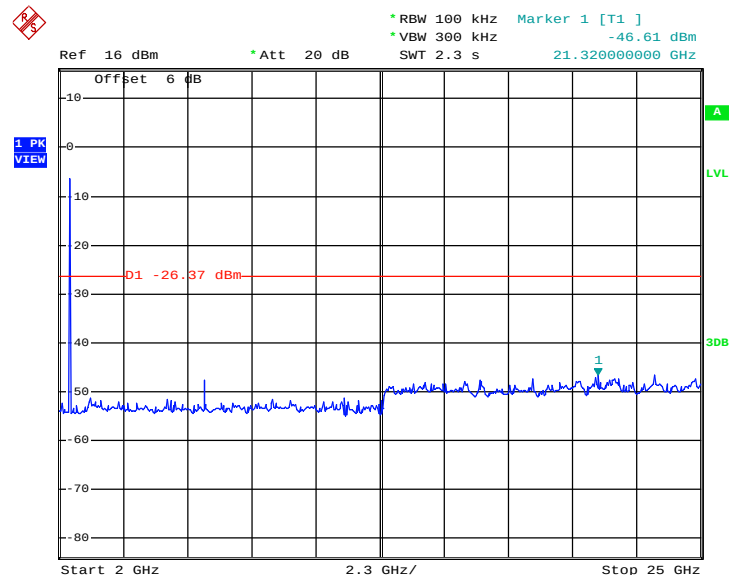2Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz


Date: 9.SEP.2014 14:52:44



Test Mode :	2Mbps	Temperature :	24~25°C
Test Channel :	39	Relative Humidity :	49~51%
		Test Engineer :	Issac Wang

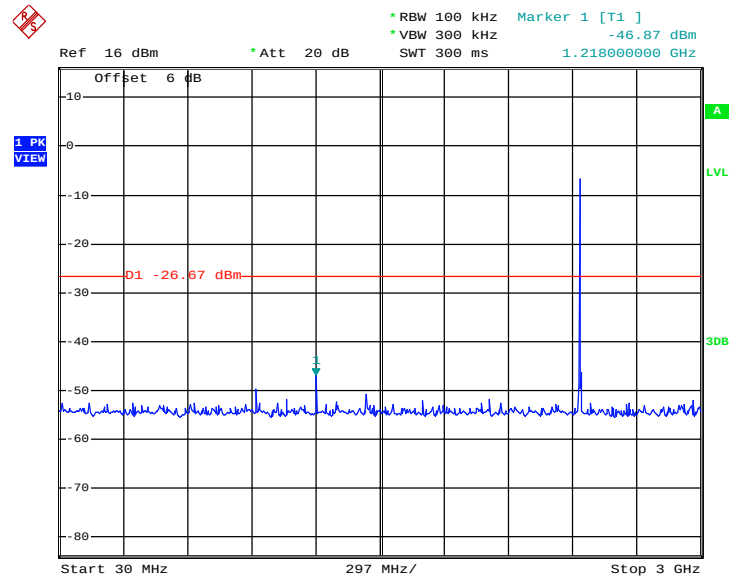2Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz


Date: 9.SEP.2014 14:59:42

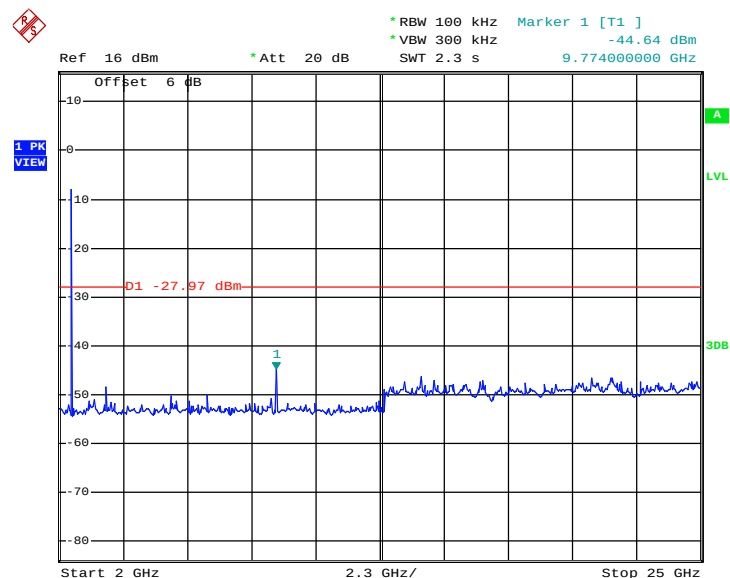2Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz


Date: 9.SEP.2014 15:04:26



Test Mode :	2Mbps	Temperature :	24~25°C
Test Channel :	78	Relative Humidity :	49~51%
		Test Engineer :	Issac Wang

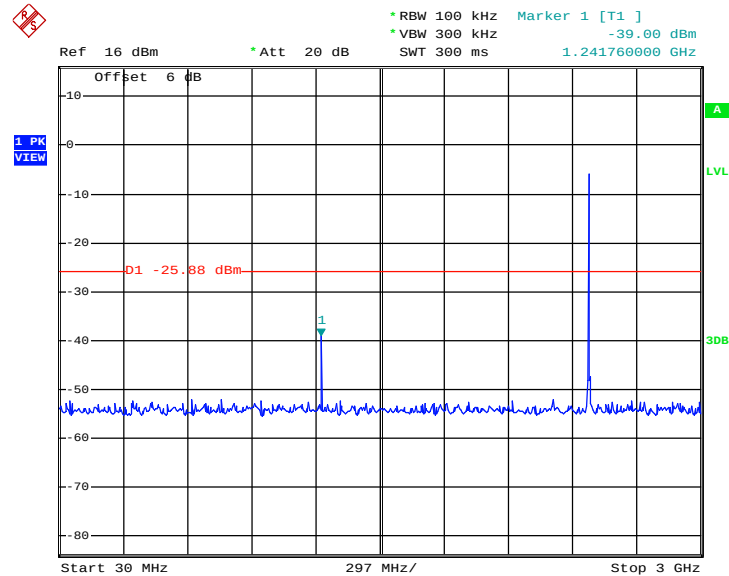2Mbps CSE Plot on Ch 78 between 30MHz ~ 3 GHz


Date: 9.SEP.2014 15:08:14

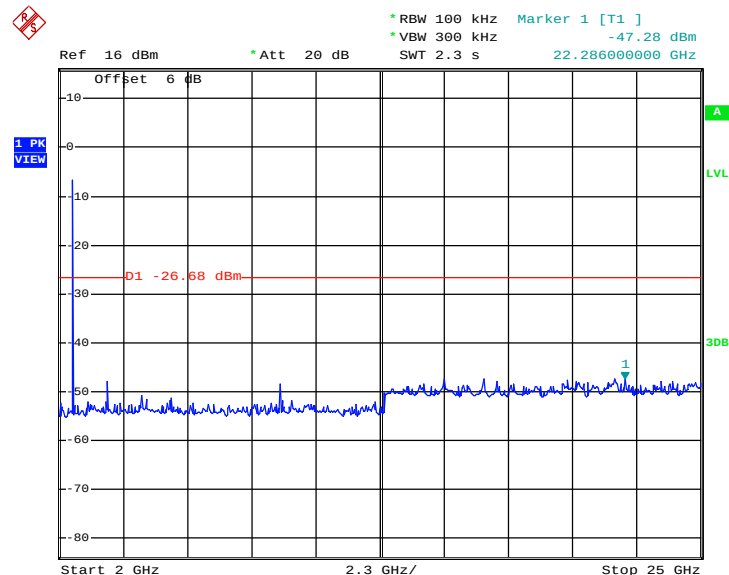2Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz


Date: 9.SEP.2014 15:06:13



Test Mode :	3Mbps	Temperature :	24~25°C
Test Channel :	00	Relative Humidity :	49~51%
		Test Engineer :	Issac Wang

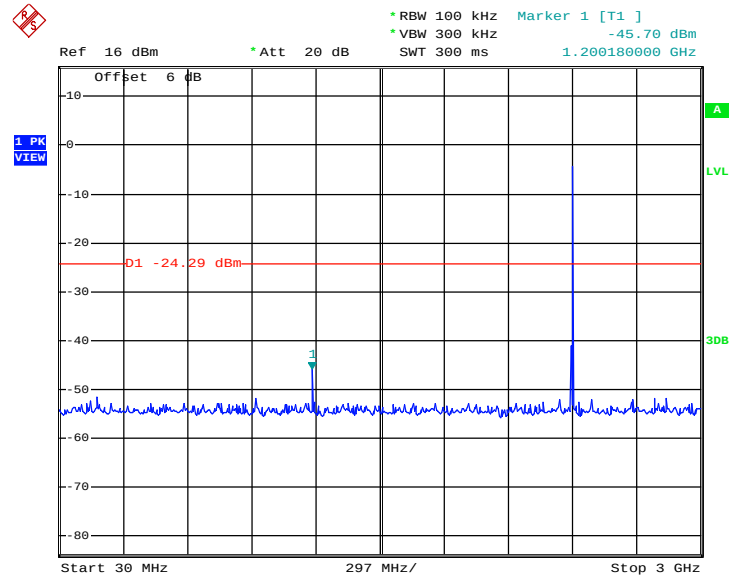3Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz


Date: 9.SEP.2014 14:48:10

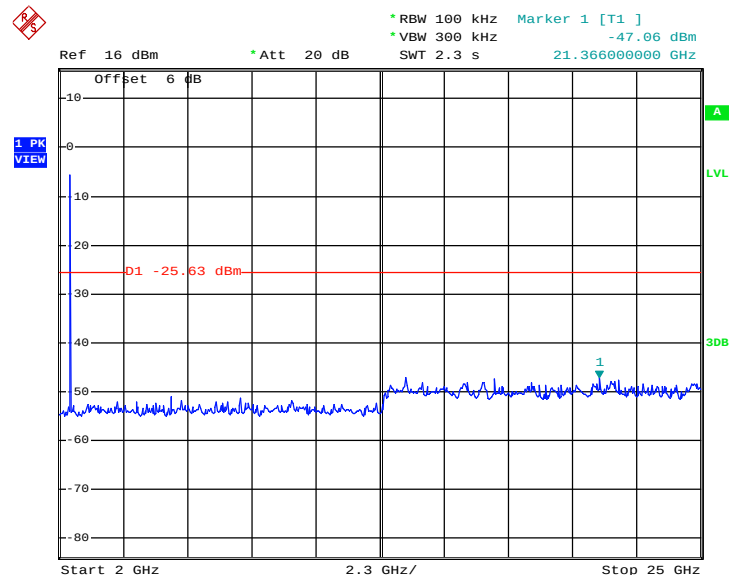3Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz


Date: 9.SEP.2014 14:50:28



Test Mode :	3Mbps	Temperature :	24~25°C
Test Channel :	39	Relative Humidity :	49~51%
		Test Engineer :	Issac Wang

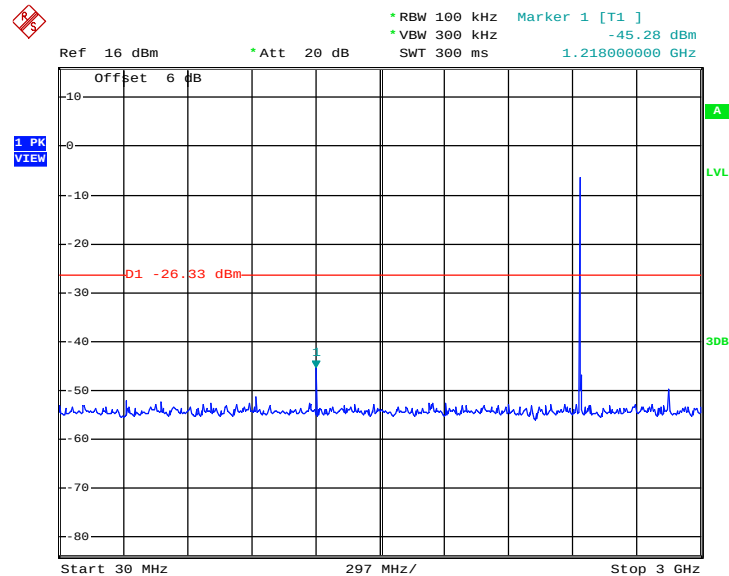3Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz


Date: 9.SEP.2014 14:33:28

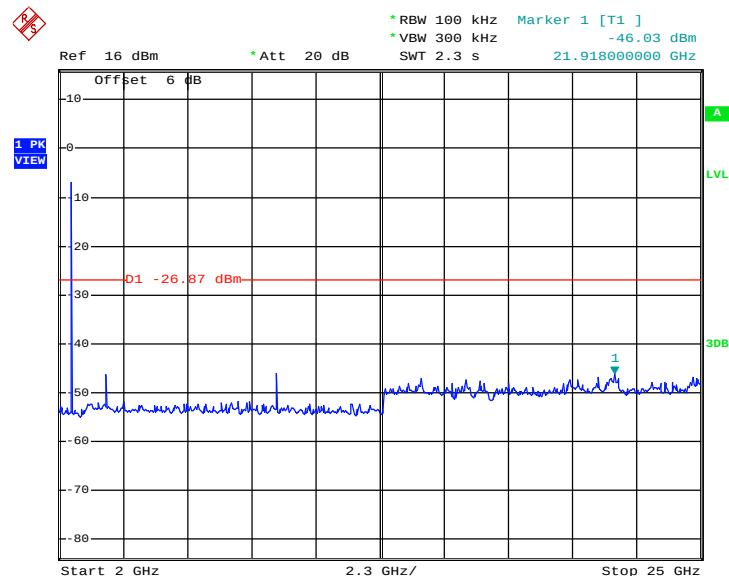3Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz


Date: 9.SEP.2014 14:38:44



Test Mode :	3Mbps	Temperature :	24~25°C
Test Channel :	78	Relative Humidity :	49~51%
		Test Engineer :	Issac Wang

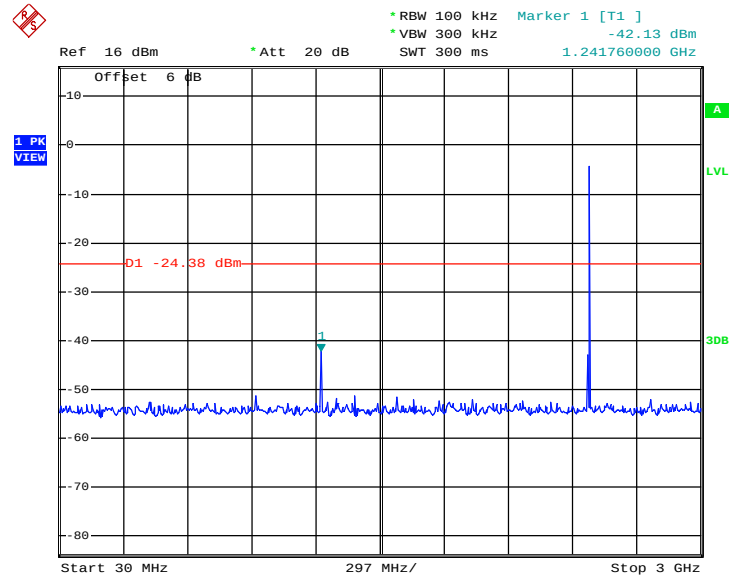3Mbps CSE Plot on Ch 78 between 30MHz ~ 3 GHz

Date: 9.SEP.2014 14:46:36

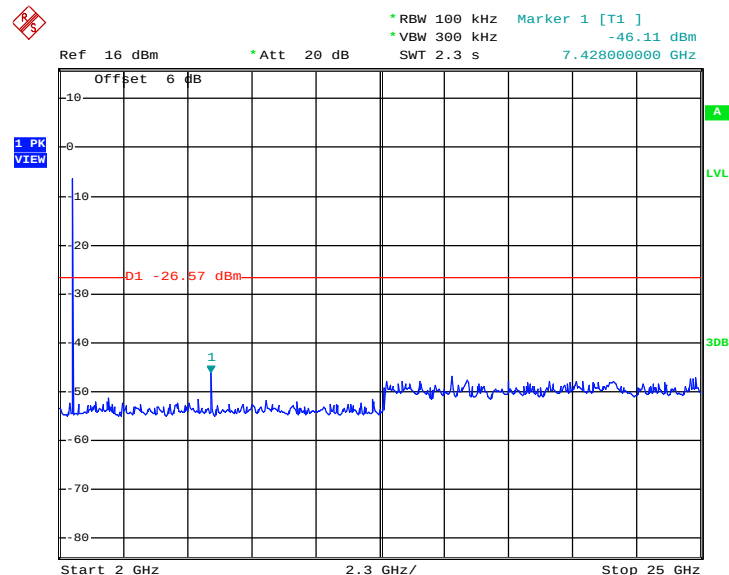3Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

Date: 9.SEP.2014 14:43:03

3.8 Radiated Band Edges and Spurious Emission Measurement

3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.8.3 Test Procedures

1. The testing follows the guidelines in Spurious Radiated Emissions of FCC Public Notice DA 00-705 Measurement Guidelines.
2. The EUT was placed on a turntable with 0.8 meter above ground.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz, RBW=1MHz for $f > 1$ GHz ; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
On time = $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$
Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + $20 * \log(\text{Duty cycle})$
7. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.79dB) derived from $20 \log(\text{dwell time}/100\text{ms})$. This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

3.8.4 Test Setup


For radiated emissions below 30MHz

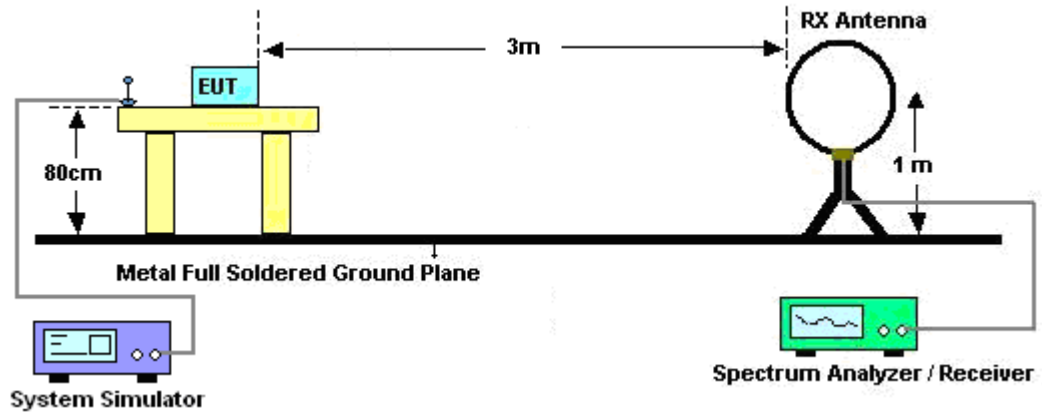

For radiated emissions from 30MHz to 1GHz

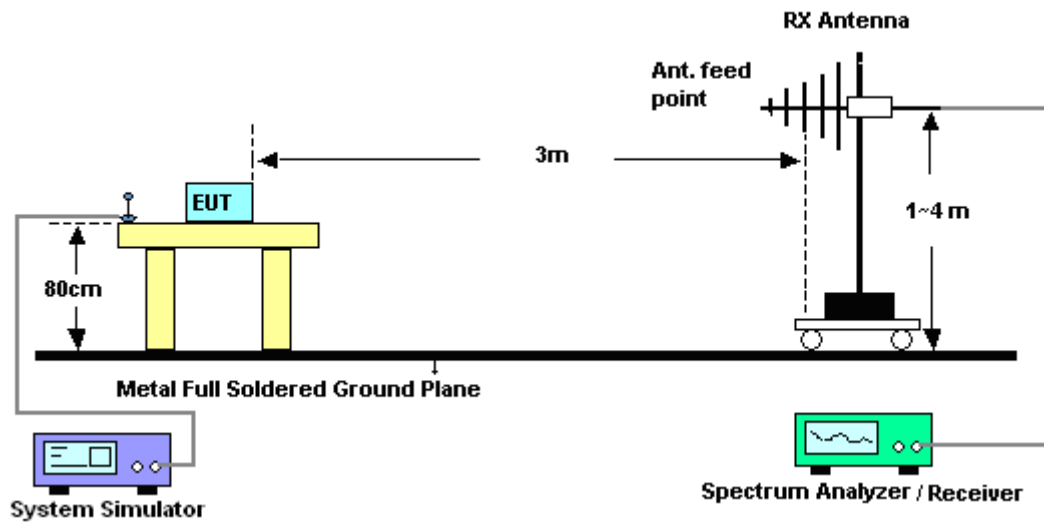

For radiated emissions above 1GHz

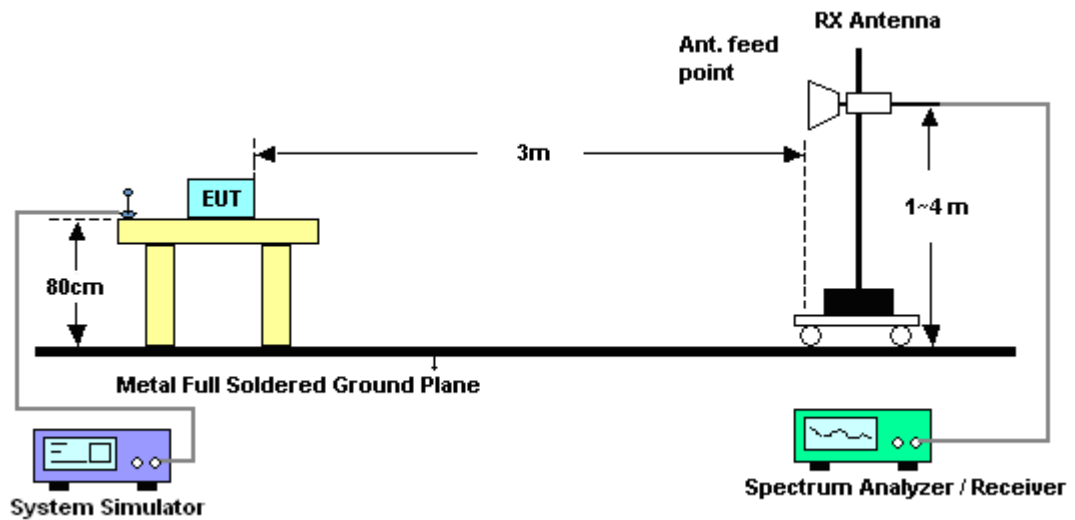


3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.


3.8.6 Duty cycle correction factor for average measurement

DH5 on time (One Pulse) Plot on Channel 39

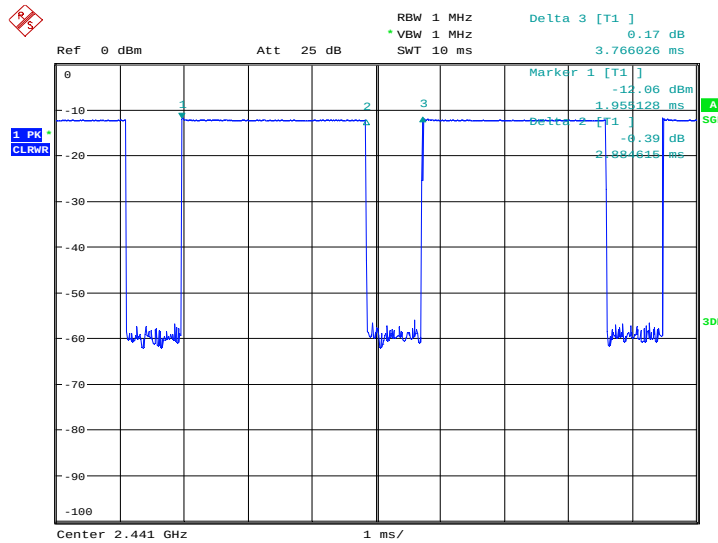

Date: 10.SEP.2014 06:40:30

DH5 on time (Count Pulses) Plot on Channel 39

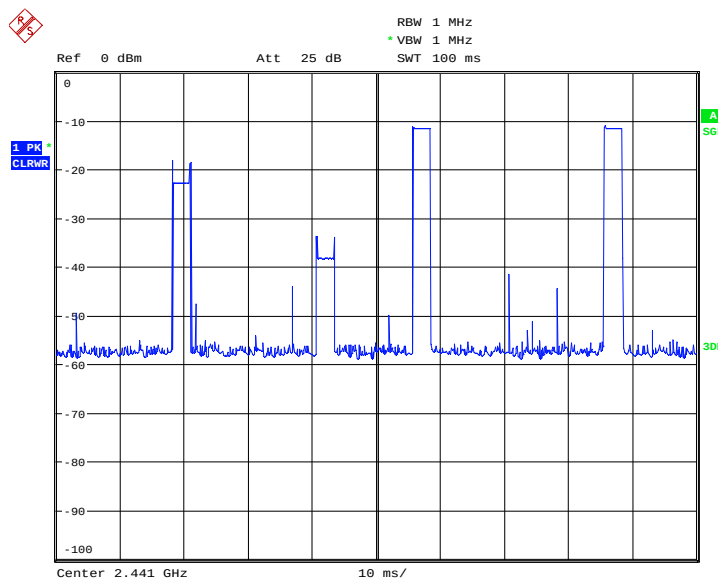

Date: 10.SEP.2014 06:43:34

Note:

1. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.88 / 100 = 5.76 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.79 \text{ dB}$
3. DH5 has the highest duty cycle worst case and is reported.

Duty Cycle Correction Factor Consideration for AFH mode:

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the period to have DH5 packet completing one hopping sequence is

$$2.88 \text{ ms} \times 20 \text{ channels} = 57.6 \text{ ms}$$

There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period. $[100\text{ms} / 57.6\text{ms}] = 2 \text{ hops}$

Thus, the maximum possible ON time:

$$2.88 \text{ ms} \times 2 = 5.76 \text{ ms}$$

Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

$$20 \times \log(5.76 \text{ ms}/100\text{ms}) = -24.79 \text{ dB}$$



3.8.7 Test Result of Radiated Spurious at Band Edges

Test Mode :	1Mbps	Temperature :	21~22°C
Test Channel :	00	Relative Humidity :	44~45%
		Test Engineer :	Gavin Zhang

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.83	55.47	-18.53	74	56.9	32.01	2.64	36.08	112	13	Peak
2389.83	30.68	-23.32	54	-	-	-	-	-	-	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2387.4	50.18	-23.82	74	51.61	32.01	2.64	36.08	105	238	Peak
2387.4	25.39	-28.61	54	-	-	-	-	-	-	Average

Test Mode :	1Mbps	Temperature :	21~22°C
Test Channel :	78	Relative Humidity :	44~45%
		Test Engineer :	Gavin Zhang

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.53	72.18	-1.82	74	72.95	32.34	2.68	35.79	117	0	Peak
2483.53	47.39	-6.61	54	-	-	-	-	-	-	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.68	67.21	-6.79	74	67.98	32.34	2.68	35.79	103	29	Peak
2483.68	42.42	-11.58	54	-	-	-	-	-	-	Average

Note: Average Emission Level = Peak Emission Level + duty cycle correction factor(-24.79dB)

3.8.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Note: Pre-scanned all test modes and only choose the worst case mode recorded in the test report for radiated spurious emission below 1GHz.

Test Mode :	1Mbps	Temperature :	21~22°C
Test Channel :	00	Relative Humidity :	44~45%
Test Engineer :	Gavin Zhang	Polarization :	Horizontal
Remark :	2402 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2402	96.84	-	-	98.26	32.01	2.65	36.08	112	13	Peak
2402	72.05	-	-	-	-	-	-	112	13	Average
4804	62.3	-11.7	74	60.91	34.2	3.78	36.59	155	80	Peak
4804	37.51	-16.49	54	-	-	-	-	155	80	Average
7206	65.3	-8.7	74	63.38	35.7	4.68	38.46	158	354	Peak
7206	40.51	-13.49	54	-	-	-	-	158	354	Average

Note: 1. Other harmonics are lower than background noise.

2. Average Emission Level = Peak Emission Level + duty cycle correction factor(-24.79)



Test Mode :	1Mbps	Temperature :	21~22°C
Test Channel :	00	Relative Humidity :	44~45%
Test Engineer :	Gavin Zhang	Polarization :	Vertical
Remark :	2402 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2402	88.69	-	-	90.11	32.01	2.65	36.08	105	238	Peak
2402	63.9	-	-	-	-	-	-	105	238	Average
4804	62.1	-11.9	74	60.71	34.2	3.78	36.59	102	23	Peak
4804	37.31	-16.69	54	-	-	-	-	102	23	Average
7206	65.9	-8.1	74	63.98	35.7	4.68	38.46	133	270	Peak
7206	41.11	-12.89	54	-	-	-	-	133	270	Average

Note: 1. Other harmonics are lower than background noise.

2. Average Emission Level = Peak Emission Level + duty cycle correction factor(-24.79)



Test Mode :	1Mbps	Temperature :	21~22°C
Test Channel :	39	Relative Humidity :	44~45%
Test Engineer :	Gavin Zhang	Polarization :	Horizontal
Remark :	2441 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2441	93.52	-	-	94.56	32.21	2.66	35.91	142	63	Peak
2441	68.73	-	-	-	-	-	-	142	63	Average
4882	57.13	-16.87	74	55.99	34.2	3.78	36.84	175	274	Peak
4882	32.34	-21.66	54	-	-	-	-	175	274	Average
7323	65.84	-8.16	74	64.29	35.73	4.74	38.92	114	351	Peak
7323	41.05	-12.95	54	-	-	-	-	114	351	Average

Note: 1. Other harmonics are lower than background noise.

2. Average Emission Level = Peak Emission Level + duty cycle correction factor(-24.79)



Test Mode :	1Mbps	Temperature :	21~22°C
Test Channel :	39	Relative Humidity :	44~45%
Test Engineer :	Gavin Zhang	Polarization :	Vertical
Remark :	2441 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2441	90.3	-	-	91.34	32.21	2.66	35.91	100	230	Peak
2441	65.51	-	-	-	-	-	-	100	230	Average
4882	59.19	-14.81	74	58.05	34.2	3.78	36.84	100	25	Peak
4882	34.4	-19.6	54	-	-	-	-	100	25	Average
7323	63.95	-10.05	74	62.4	35.73	4.74	38.92	164	254	Peak
7323	39.16	-14.84	54	-	-	-	-	164	254	Average

Note: 1. Other harmonics are lower than background noise.

2. Average Emission Level = Peak Emission Level + duty cycle correction factor(-24.79)



Test Mode :	1Mbps	Temperature :	21~22°C
Test Channel :	78	Relative Humidity :	44~45%
Test Engineer :	Gavin Zhang	Polarization :	Horizontal
Remark :	2480 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
30	22.11	-17.89	40	36.58	18	0.19	32.66	100	118	Peak
48.43	19.61	-20.39	40	43.58	8.35	0.31	32.63	-	-	Peak
53.28	17.31	-22.69	40	42.96	6.65	0.31	32.61	-	-	Peak
94.99	20.6	-22.9	43.5	42.92	9.85	0.43	32.6	-	-	Peak
159.98	20.02	-23.48	43.5	42.15	9.6	0.82	32.55	-	-	Peak
489.78	20.92	-25.08	46	34.58	17.3	1.23	32.19	-	-	Peak
2480	98.74	-	-	99.52	32.34	2.67	35.79	117	0	Peak
2480	73.95	-	-	-	-	-	-	117	0	Average
4960	60.63	-13.37	74	59.8	34.2	3.78	37.15	102	89	Peak
4960	35.84	-18.16	54	-	-	-	-	102	89	Average
7440	67.43	-6.57	74	65.76	35.78	4.8	38.91	103	346	Peak
7440	42.64	-11.36	54	-	-	-	-	103	346	Average

Note: 1. Other harmonics are lower than background noise.

2. Average Emission Level = Peak Emission Level + duty cycle correction factor(-24.79)



Test Mode :	1Mbps	Temperature :	21~22°C
Test Channel :	78	Relative Humidity :	44~45%
Test Engineer :	Gavin Zhang	Polarization :	Vertical
Remark :	2480 MHz is fundamental signal which can be ignored.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
30	28.81	-11.19	40	43.28	18	0.19	32.66	-	-	Peak
54.25	30.5	-9.5	40	56.39	6.4	0.31	32.6	125	68	Peak
85.29	23.81	-16.19	40	47.84	8	0.6	32.63	-	-	Peak
158.04	14.58	-28.92	43.5	36.67	9.64	0.82	32.55	-	-	Peak
225.94	22.83	-23.17	46	45.38	9.14	0.8	32.49	-	-	Peak
274.44	19.88	-26.12	46	39	12.5	0.82	32.44	-	-	Peak
2480	92.48	-	-	93.26	32.34	2.67	35.79	103	29	Peak
2480	67.69	-	-	-	-	-	-	103	29	Average
4960	60.82	-13.18	74	59.99	34.2	3.78	37.15	100	15	Peak
4960	36.03	-17.97	54	-	-	-	-	100	15	Average
7440	64.2	-9.8	74	62.53	35.78	4.8	38.91	152	118	Peak
7440	39.41	-14.59	54	-	-	-	-	152	118	Average

Note: 1. Other harmonics are lower than background noise.

2. Average Emission Level = Peak Emission Level + duty cycle correction factor(-24.79)

3.9 AC Conducted Emission Measurement

3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.9.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.9.3 Test Procedures


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.9.4 Test Setup

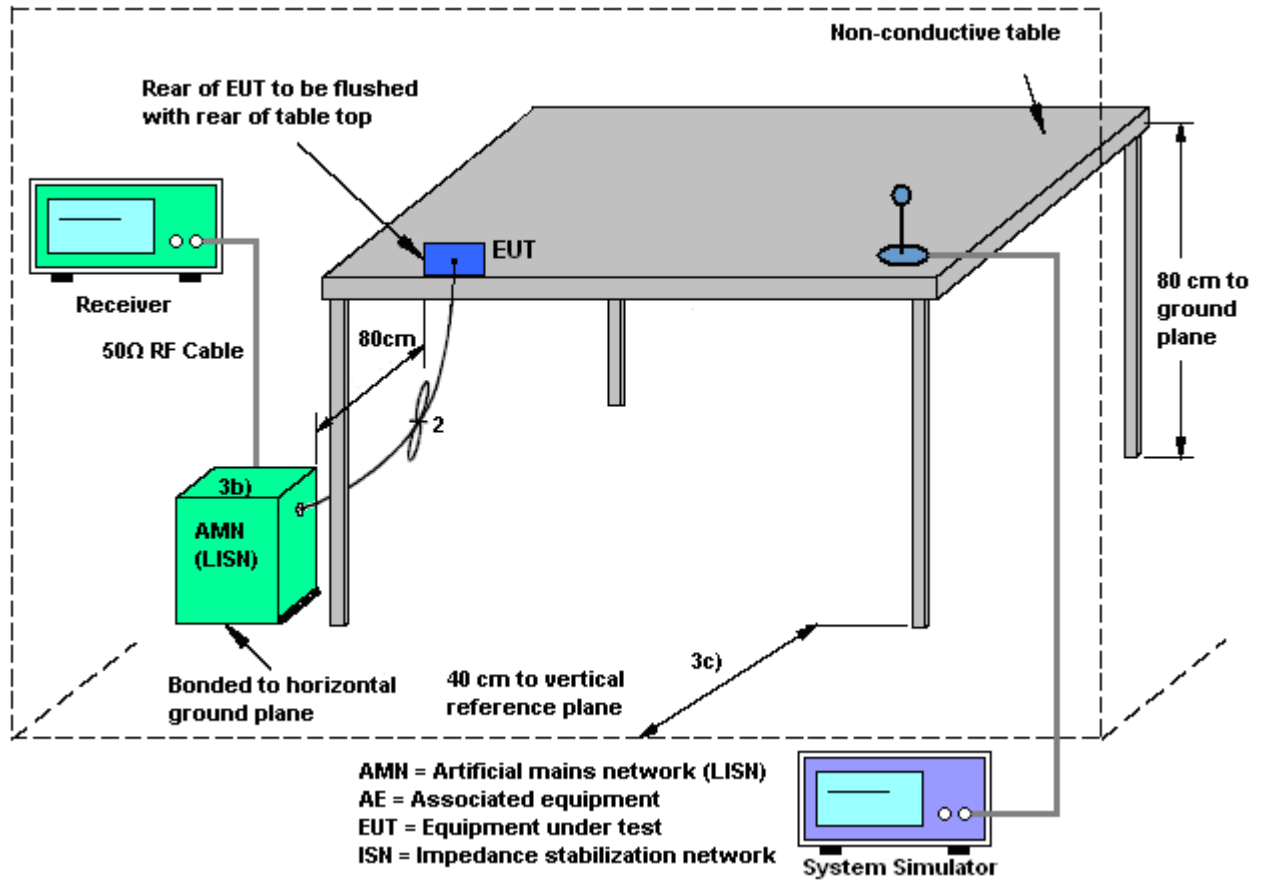

3.9.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	22~24℃
Test Engineer :	Eligah Wang	Relative Humidity :	42~44%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + Earphone + USB Cable (Charging from Adapter)		

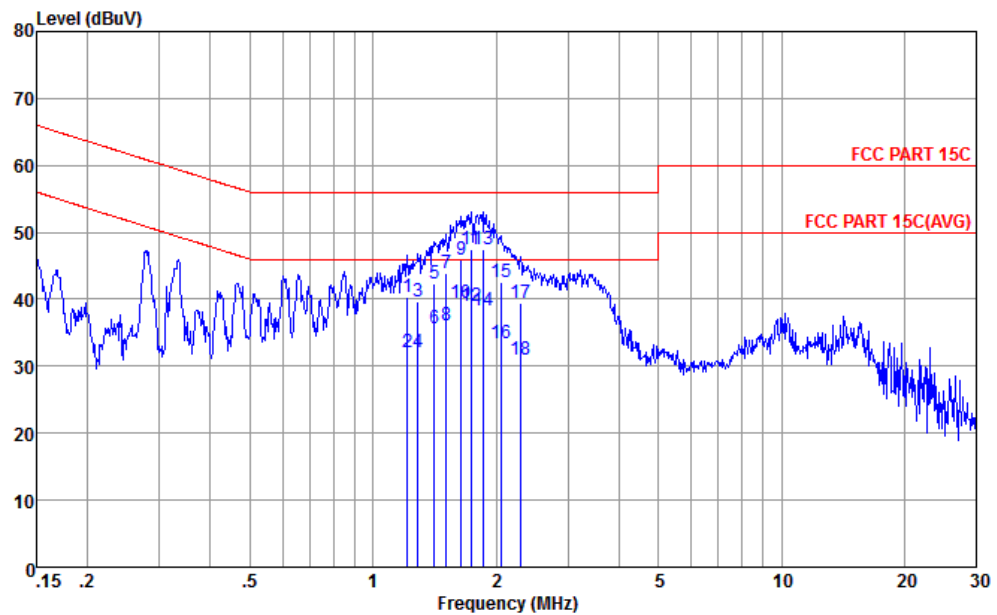


Site : CO01-KS
Condition : FCC PART 15C LISN-L20130306 LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	1.22	40.38	-15.62	56.00	30.10	0.10	10.18	QP
2	1.22	32.08	-13.92	46.00	21.80	0.10	10.18	Average
3	1.29	39.68	-16.32	56.00	29.40	0.10	10.18	QP
4	1.29	31.98	-14.02	46.00	21.70	0.10	10.18	Average
5	1.41	42.38	-13.62	56.00	32.10	0.10	10.18	QP
6	1.41	35.58	-10.42	46.00	25.30	0.10	10.18	Average
7	1.51	43.89	-12.11	56.00	33.60	0.10	10.19	QP
8	1.51	36.09	-9.91	46.00	25.80	0.10	10.19	Average
9	1.64	45.99	-10.01	56.00	35.70	0.10	10.19	QP
10	1.64	39.39	-6.61	46.00	29.10	0.10	10.19	Average
11	1.73	47.49	-8.51	56.00	37.20	0.10	10.19	QP
12	1.73	38.89	-7.11	46.00	28.60	0.10	10.19	Average
13	1.86	47.39	-8.61	56.00	37.10	0.10	10.19	QP
14	1.86	38.39	-7.61	46.00	28.10	0.10	10.19	Average
15	2.05	42.59	-13.41	56.00	32.30	0.10	10.19	QP
16	2.05	33.39	-12.61	46.00	23.10	0.10	10.19	Average
17	2.30	39.41	-16.59	56.00	29.10	0.11	10.20	QP
18	2.30	30.91	-15.09	46.00	20.60	0.11	10.20	Average



Test Mode :	Mode 1	Temperature :	22~24℃
Test Engineer :	Eligah Wang	Relative Humidity :	42~44%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + Earphone + USB Cable (Charging from Adapter)		

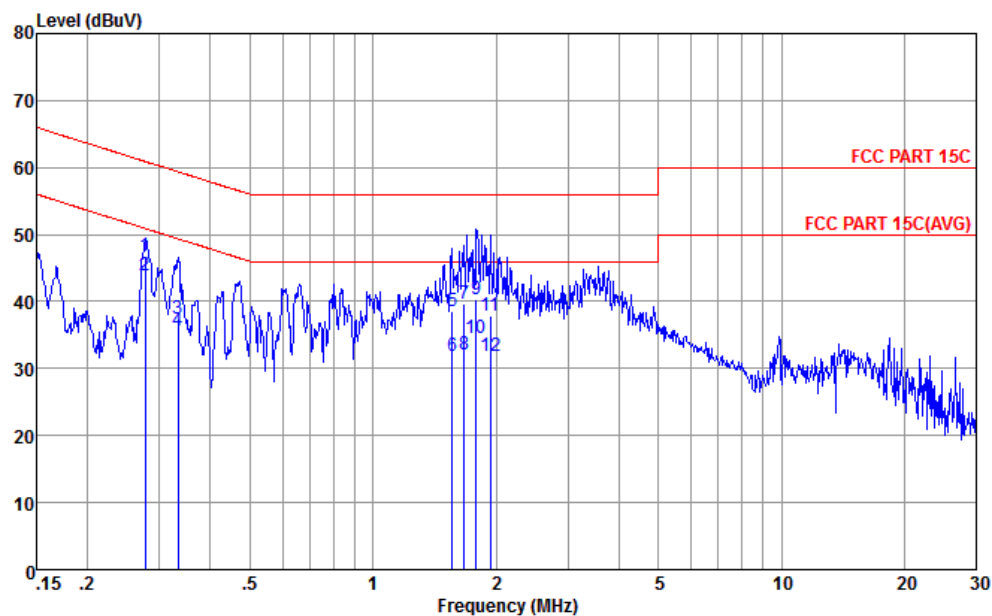

Site : CO01-KS
Condition : FCC PART 15C LISN-N20130306 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.28	46.86	-14.04	60.90	35.60	0.82	10.44	QP
2	0.28	43.96	-6.94	50.90	32.70	0.82	10.44	Average
3	0.33	37.50	-21.85	59.35	26.60	0.56	10.34	QP
4	0.33	35.70	-13.65	49.35	24.80	0.56	10.34	Average
5	1.56	38.59	-17.41	56.00	28.30	0.10	10.19	QP
6	1.56	31.89	-14.11	46.00	21.60	0.10	10.19	Average
7	1.67	39.59	-16.41	56.00	29.30	0.10	10.19	QP
8	1.67	32.09	-13.91	46.00	21.80	0.10	10.19	Average
9	1.79	40.39	-15.61	56.00	30.10	0.10	10.19	QP
10	1.79	34.59	-11.41	46.00	24.30	0.10	10.19	Average
11	1.94	37.89	-18.11	56.00	27.60	0.10	10.19	QP
12	1.94	31.89	-14.11	46.00	21.60	0.10	10.19	Average



3.10 Antenna Requirements

3.10.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.10.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Dec. 28, 2013	Sep. 04, 2014~ Sep. 22, 2014	Dec. 27, 2014	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	30MHz~40GHz	Feb. 27, 2014	Sep. 04, 2014~ Sep. 22, 2014	Feb. 26, 2015	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Feb. 27, 2014	Sep. 04, 2014~ Sep. 22, 2014	Feb. 26, 2015	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESCI	100534	9kHz~3GHz	Nov. 05, 2013	Sep. 10, 2014	Nov. 04, 2014	Radiation (03CH01-KS)
Spectrum Analyzer	R&S	FSP30	101399	9kHz~30GHz	May 04, 2014	Sep. 10, 2014	May 03, 2015	Radiation (03CH01-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 09, 2013	Sep. 10, 2014	Oct. 08, 2014	Radiation (03CH01-KS)
Bilog Antenna	SCHAFFNER	CBL6112D	23182	25MHz~2GHz	Jan. 08, 2014	Sep. 10, 2014	Jan. 07, 2015	Radiation (03CH01-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75959	1GHz~18GHz	Jan. 08, 2014	Sep. 10, 2014	Jan. 07, 2015	Radiation (03CH01-KS)
Active Horn Antenna	com-power	AHA-118	701030	1GHz~18GHz	Nov. 18, 2013	Sep. 10, 2014	Nov. 17, 2014	Radiation (03CH01-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA1702 49	15GHz~40GHz	Mar. 10, 2014	Sep. 10, 2014	Mar. 09, 2015	Radiation (03CH01-KS)
Amplifier	com-power	PA-103A	161073	1MHz~1GHz	May 04, 2014	Sep. 10, 2014	May 03, 2015	Radiation (03CH01-KS)
Amplifier	Agilent	8449B	3008A023 71	1GHz~26.5GHz	Dec. 10, 2013	Sep. 10, 2014	Dec. 09, 2014	Radiation (03CH01-KS)
AC Power Source	Chroma	61601	F1040900 04	N/A	NCR	Sep. 10, 2014	NCR	Radiation (03CH01-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Sep. 10, 2014	NCR	Radiation (03CH01-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Sep. 10, 2014	NCR	Radiation (03CH01-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	May 04, 2014	Aug. 28, 2014	May 03, 2015	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Dec. 10, 2013	Aug. 28, 2014	Dec. 09, 2014	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Dec. 10, 2013	Aug. 28, 2014	Dec. 09, 2014	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000 0811	AC 0V~300V, 45Hz~1000Hz	Nov. 12, 2013	Aug. 28, 2014	Nov. 11, 2014	Conduction (CO01-KS)

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.3
---	-----

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.5
---	-----